

DFS Test Report

Applicant : D-Link Corporation

Product Name : BE9500 Wi-Fi 7 Smart Mesh Router
Wi-Fi 7 BE9500 Mesh Router

Trade Name : D-Link

Model Number : M95

Applicable Standard : FCC 47 CFR PART 15 SUBPART E
ANSI C63.10:2013

Received Date : Jul. 02, 2024

Test Period : Sep. 25, 2024 ~ Oct. 16, 2024

Issued Date : Nov. 19, 2024

Issued by

Eurofins E&E Wireless Taiwan Co., Ltd.
No. 140-1, Changan Street, Bade District,
Taoyuan City 334025, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

Bade test site :

Test Firm Registration Number: 226252

Test Firm Designation Number: TW0010

Wugu test site :

Test Firm Registration Number: 191812

Test Firm Designation Number: TW0034

Note:

- 1.The test results are valid only for samples provided by customers and under the test conditions described in this report.
- 2.This report shall not be reproduced except in full, without the written approval of Eurofins E&E Wireless Taiwan Co., Ltd.
- 3.The relevant information is provided by customers in this test report. According to the correctness, appropriateness or completeness of the information provided by the customer, if there is any doubt or error in the information which affects the validity of the test results, the laboratory does not take the responsibility.

Revision History

Rev.	Issued Date	Description	Revised By
00	Nov. 19, 2024	Initial Issue	Snow Wang

Verification of Compliance

Applicant : D-Link Corporation

Product Name : BE9500 Wi-Fi 7 Smart Mesh Router
Wi-Fi 7 BE9500 Mesh Router

Trade Name : D-Link

Model Number : M95

FCC ID : KA2M95A1

Applicable Standard : FCC 47 CFR PART 15 SUBPART E
ANSI C63.10:2013

Test Result : Complied

Performing Lab. : Eurofins E&E Wireless Taiwan Co., Ltd.
No. 140-1, Changan Street, Bade District,
Taoyuan City 334025, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190
Taiwan Accreditation Foundation accreditation number: 1330



Eurofins E&E Wireless Taiwan Co., Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by Eurofins E&E Wireless Taiwan Co., Ltd. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By : _____

TABLE OF CONTENTS

1	General Information	5
1.1.	Summary of Test Result	5
1.2.	Testing Location	6
1.3.	Test Site Environment.....	6
2	EUT Description.....	7
3	Test Methodology	9
3.1.	Mode of Operation.....	9
3.2.	EUT Test Step	9
3.3.	Test Instruments	9
4	Dynamic Frequency Selection	10
4.1.	Limits	10
4.2.	Test and Measurement System	14
5	Test Results	17
5.1.	Radar Waveforms and Traffic.....	17
5.2.	Channel Loading	33
5.3.	Channel Availability Check Time.....	37
5.4.	Channel Move Time and Channel Closing Transmission Time.....	40
5.5.	Non-Occupancy Period	43
5.6.	U-NII Detection Bandwidth	44
5.7.	Statistical Performance check	47

Appendix A. Test Setup Photographs

1 General Information

1.1. Summary of Test Result

Standard	Item	Result	Remark
15.407(h)(2)	Channel Availability Check Time	PASS	---
15.407(h)(2)	Channel Move Time	PASS	---
15.407(h)(2)	Channel Closing Transmission Time	PASS	---
15.407(h)(2)	Non-Occupancy Period	PASS	---
15.407(h)(2)	Non-Associated Test	N/A	---
15.407(h)(2)	U-NII Detection Bandwidth	PASS	---
15.407(h)(2)	Statistical Performance check	PASS	---

Decision Rule

- ☒ Uncertainty is not included.
- ☐ Uncertainty is included.

Standard	Description
CFR47, Part 15, Subpart E	Unlicensed National Information Infrastructure Devices
Canada RSS-247 Issue 3	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
ANSI C63. 10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB789033: D02	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E
KDB 662911 D01 v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)

1.2. Testing Location

Lab Name: Eurofins E&E Wireless Taiwan Co., Ltd.

Site Address: ☐ No. 140-1, Changan Street, Bade District, Taoyuan City 334025, Taiwan (R.O.C.)

Site Address: ☒ No. 2, Wuquan 5th Rd. Wugu Dist., New Taipei City, Taiwan (R.O.C.)

1.3. Test Site Environment

Items	Required (IEC 60068-1)	Interval(*)
Temperature (°C)	15-35	20-30
Humidity (%RH)	25-75	45-75

(*)The measurement ambient temperature is within this range.

2 EUT Description

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity.

Applicant	D-Link Corporation 14420 Myford Road Suite 100 Irvine California United States 92606				
Product Name	BE9500 Wi-Fi 7 Smart Mesh Router Wi-Fi 7 BE9500 Mesh Router				
Product Name different description	Different product name is for marketing purpose. No physical difference.				
Trade Name	D-Link				
Model Number	M95				
FCC ID	KA2M95A1				
Operate Frequency	Frequency Band			Frequency Range (MHz)	
	802.11a	U-NII Band 2-A		5260 – 5320	
		U-NII Band 2-C		5500 – 5700	
	802.11n HT20/ 802.11ac VHT20/ 802.11ax HE20/ 802.11be EHT20	U-NII Band 2-A		5260 – 5320	
		U-NII Band 2-C		5500 – 5700	
	802.11n HT40/ 802.11ac VHT40/ 802.11ax HE40/ 802.11be EHT40	U-NII Band 2-A		5270 – 5310	
		U-NII Band 2-C		5510 – 5670	
	802.11ac VHT80/ 802.11ax HE80/ 802.11be EHT80	U-NII Band 2-A		5290	
		U-NII Band 2-C		5530 – 5610	
	802.11ac VHT160/ 802.11ax HE160/ 802.11be EHT160	U-NII Band 2-A		5250	
		U-NII Band 2-C		5570	
	Modulation Type	OFDM/OFDMA			
Antenna information	ANT	Model Number	Type	Max. Gain (dBi)	
	ANT-0 (ANT 2)	C3859-M95-EVT1-DUAL2	Dipole Antenna	U-NII Band 2-A	1.89
				U-NII Band 2-C	2.29
	ANT-1 (ANT 1)	C3859-M95-EVT1-DUAL1	Dipole Antenna	U-NII Band 2-A	1.07
U-NII Band 2-C				2.19	
Antenna Delivery	802.11a: 2TX (CDD) 802.11n / ac / ax / be: 2TX (MIMO/Beamforming on)				
Operate Temp. Range	0 ~ +40 °C				
EUT Power Rating	12 Vdc				

Items	Description	
Communication Mode	☒ IP Based (Load Based)	☐ Frame Based
TPC Function	☒ With TPC	☐ Without TPC
Weather Band (5600 ~ 5650 MHz)	☒ With 5600 ~ 5650 MHz	☐ Without 5600 ~ 5650 MHz
Beamforming Function	☒ With Beamforming	☐ Without Beamforming
Equipment Type	☐ Outdoor access point (point-to-point)	
	☐ Outdoor access point (point-to-multipoint)	
	☒ Indoor access point	
	☐ Fixed point-to-point access points	
	☐ Client devices	
Operating mode	☒ Master	
	☐ Client with radar detection	
	☒ Client without radar detection	
	☐ Ad-Hoc	
	☐ Bridge	
	☐ MESH	

Note : DFS controls (hardware or software) related to radar detection are NOT accessible to the user.

Manufacturer statement confirming that information regarding the parameters of the detected Radar Waveforms is not available to the end user.

3 Test Methodology

The tests documented in this report were performed in accordance with ANSI C63.10-2013, FCC CFR 47 Part 2, FCC CFR 47 Part 15.

The tests documented in this report were performed in accordance with FCC KDB request:

- FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02
- FCC KDB 905462 D03 UNII Clients Without Radar Detection New Rules v01r02

3.1. Mode of Operation

Decision of Test Eurofins has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
802.11be EHT20
802.11be EHT40
802.11be EHT80
802.11be EHT160

3.2. EUT Test Step

1.	Setup the EUT shown on 3.2.
2.	Turn on the power of all equipment.
3.	Turn on Wi-Fi function link to Access Point.
4.	The EUT is operated in the normal mode to the purposes of measurement.

3.3. Test Instruments

For Conducted

Test Period: Sep. 25, 2024 ~ Oct. 16, 2024

Testing Engineer: An Wu

Test Site		RF02-WG				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
☒	Spectrum Analyzer (10 Hz~26.5 GHz)	Keysight	N9010B	MY63460164	Mar. 8, 2024	1 year
☒	Spectrum Analyzer (10 Hz~44 GHz)	R&S	FSV3044	101255	Nov. 30, 2023	1 year
☒	Signal Generator	R&S	SMM100A	101740	Jan. 26, 2024	1 year

Note: N.C.R. = No Calibration Request.

4 Dynamic Frequency Selection

4.1. Limits

§15.407 (h) and FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02 Compliance measurement procedures for unlicensed-national information infrastructure devcies operating in the 5250-5350 MHz and 5470-5725 MHz bands incorporating dynamic frequency selection.

Table 1: Applicability of DFS Requirements Prior to Use of a Channel			
Requirement	Operational Mode		
	Master	Client (without Radar Detection)	Client (with Radar Detection)
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation		
Requirement	Operational Mode	
	Master Device or Client With Radar Detection	Client without Radar Detection
DFS Detection Threshold	Yes	Not required
Channel Closing Transmission Time	Yes	Yes
Channel Move Time	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	Master Device or Client With Radar Detection	Client without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required
Note : Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in all 20 MHz channel blocks and a null frequencies between the bonded 20 MHz channel blocks		

Table 3: DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection

Maximum Transmit Power	U-NII Band 2-Aalue (See Notes 1,2 and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and Power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note 3: EIRP is based on the highest antenna gain. For MIMO devices refer to FCC KDB Publication 662911 D01.	

Table 4: DFS Response Requirement U-NII Band 2-Aalues

Parameter	U-NII Band 2-Aalue
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100 % of the U-NII 99 % transmission power bandwidth. See Note 3.
Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions. Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.	

Table 5: Short Pulse Radar Test Waveforms					
Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A	Roundup $\left\lceil \left(\frac{1}{360} \right) \cdot \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\rceil$	60 %	30
2	1-5	150-230	23-29	60 %	30
3	6-10	200-500	16-18	60 %	30
4	11-20	200-500	12-16	60 %	30
Aggregate (Radar Types 1-4)				80 %	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

Table 5a: Pulse Repetition Intervals U-NII Band 2-Aalues for Test A

Pulse Repetition Frequency Number	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)
1	1930.5	518
2	1858.7	538
3	1792.1	558
4	1730.1	578
5	1672.2	598
6	1618.1	618
7	1567.4	638
8	1519.8	658
9	1474.9	678
10	1432.7	698
11	1392.8	718
12	1355	738
13	1319.3	758
14	1285.3	778
15	1253.1	798
16	1222.5	818
17	1193.3	838
18	1165.6	858
19	1139	878
20	1113.6	898
21	1089.3	918
22	1066.1	938
23	326.2	3066

Table 6 – Long Pulse Radar Test Signal

Radar Waveform	Bursts	Pulses per Burst	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Minimum Percentage of Successful Detection	Minimum Trials
5	8-20	1-3	50-100	5-20	1000-2000	80 %	30


Table 7 – Frequency Hopping Radar Test Signal

Radar Waveform	Pulse Width (μsec)	PRI (μsec)	Burst Length (ms)	Pulses per Hop	Hopping Rate (kHz)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	300	9	0.333	70 %	30

4.2. Test and Measurement System

4.2.1. Setup for Master with injection at the Master

Example Radiated Setup where UUT is a Master and Radar Test Waveforms are injected into the Master

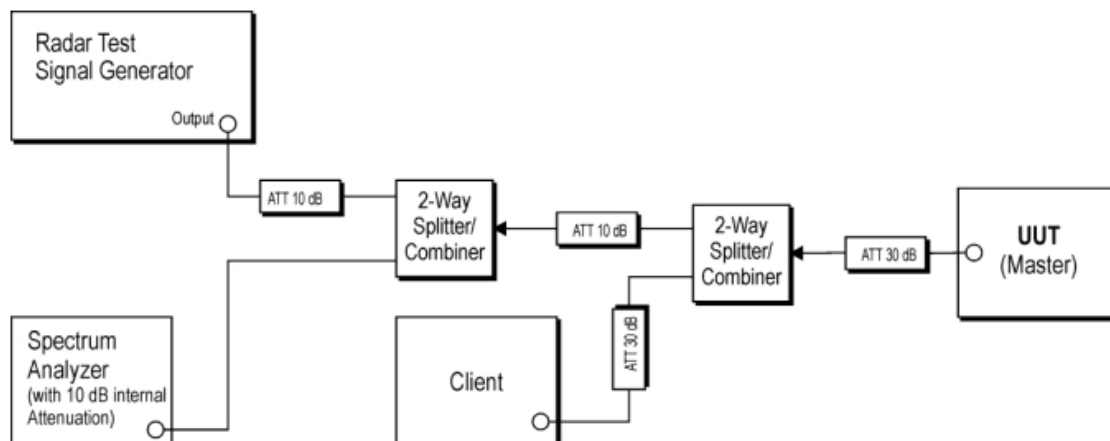


Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model No.	ID
1.	Access Point	D-Link	M95	FCC ID:KA2M95A1

4.2.2. Setup for Client with injection at the Master

Example Radiated Setup where UUT is a Client and Radar Test Waveforms are injected into the Master

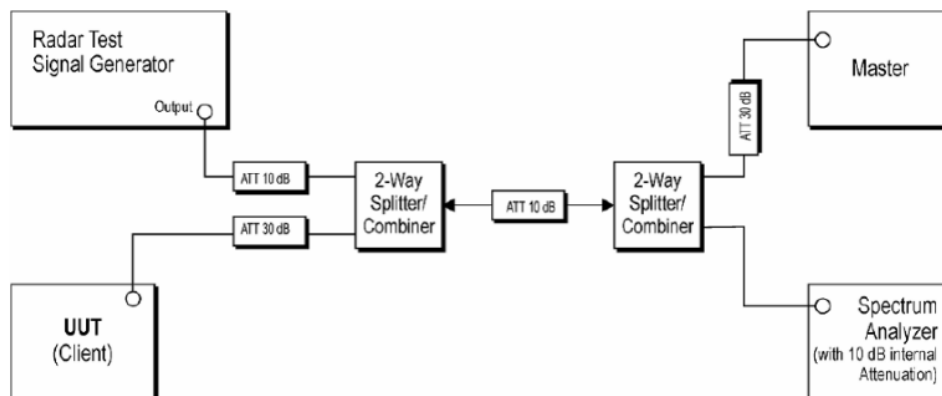

Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model No.	ID
1.	Access Point	D-Link	M95	FCC ID:KA2M95A1

4.2.3. System Calibration

The short pulse types 0,1,2, 3 and 4, and the long pulse type 5 parameters are randomized at run-time. The hopping type 6 pulse parameters are fixed while the hopping sequence is based on the May 2014 NTIA Hopping Frequency List. The initial starting point randomized at run-time and each subsequent starting point is incremented by 475. Each frequency in the 100-length segment is compared to the boundaries of the EUT Detection Bandwidth and the software creates a hopping burst pattern in accordance with Section 7.4.1.3 Method #2 Simulated Frequency Hopping Radar Waveform Generating Subsystem of FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02. The frequency of the signal generator is incremented in 1 MHz steps from FL to FH for each successive trial. This incremental sequence is repeated as required to generate a minimum of 30 total trials and to maintain a uniform frequency distribution over the entire Detection Bandwidth.

The signal monitoring equipment consists of a spectrum analyzer. The aggregate ON time is calculated by multiplying the number of bins above a threshold during a particular observation period by the dwell time per bin, with the analyzer set to peak detection and max hold.

4.2.4. System Calibration

The Interference Radar Detection Threshold Level is (-63 dBm). The above equipment setup was used to calibrate the radiated Radar Waveform. A vector signal generator was utilized to establish the test signal level for each radar type. During this process there were replace 50 ohm terminal form Master and Client device and no transmissions by either the Master or Client Device. The spectrum analyzer was switched to the zero span (Time Domain) at the frequency of the Radar Waveform generator. Peak detection was used. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (U-NII Band 2-ABW) were set to at least 3 MHz.

The vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was (-63 dBm). Capture the spectrum analyzer plots on short pulse radar types, long pulse radar type and hopping radar waveform.



4.2.5. Adjustment of Displayed Traffic Level



A link is established between the Master and Slave and the distance between the units is adjusted as needed to provide a suitable received level at the Master and Slave devices. Software to ping the client is permitted to simulate data transfer but must have random ping intervals. The monitoring antenna is adjusted so that the WLAN traffic level, as displayed on the spectrum analyzer, is at lower amplitude than the radar detection threshold.


5 Test Results



5.1. Radar Waveforms and Traffic

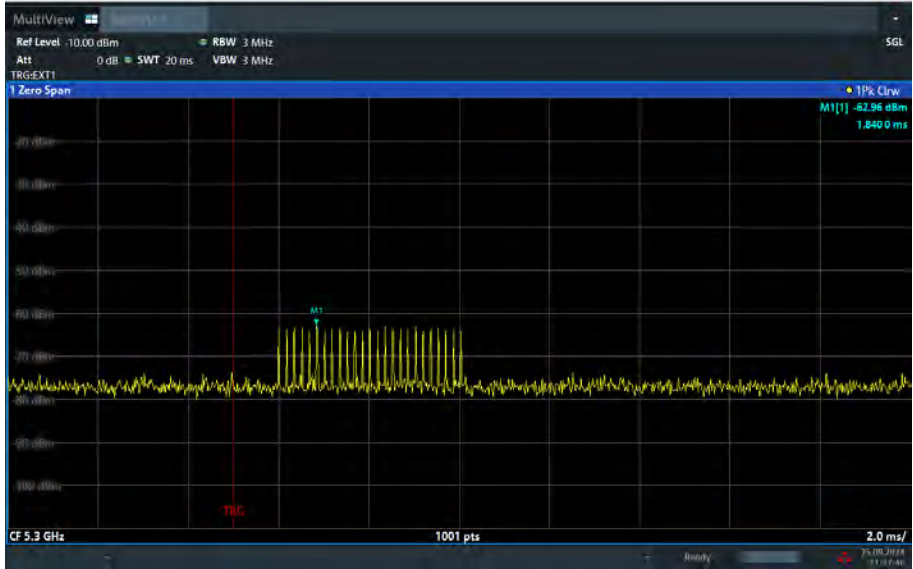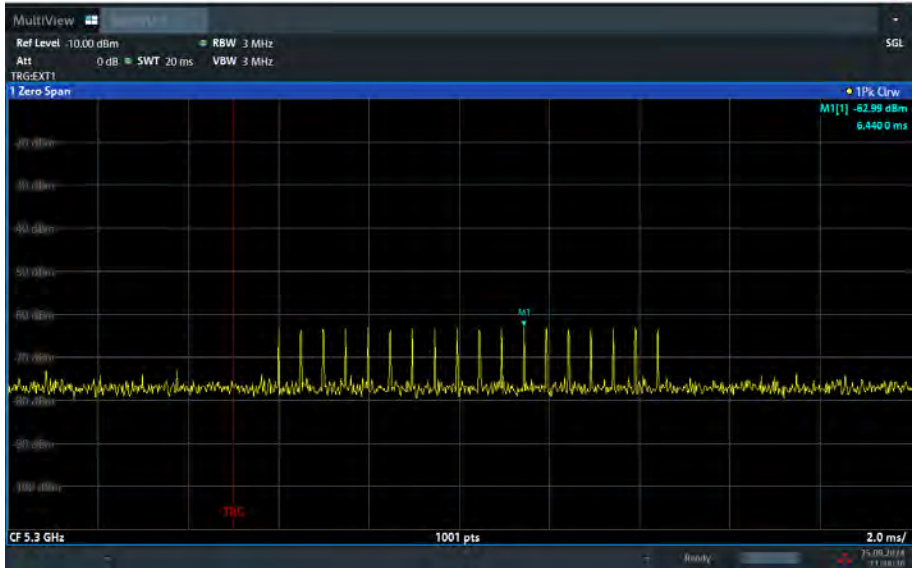




802.11be EHT20_ 5300 MHz	
Short Pulse Radar Type 2	
Short Pulse Radar Type 3	

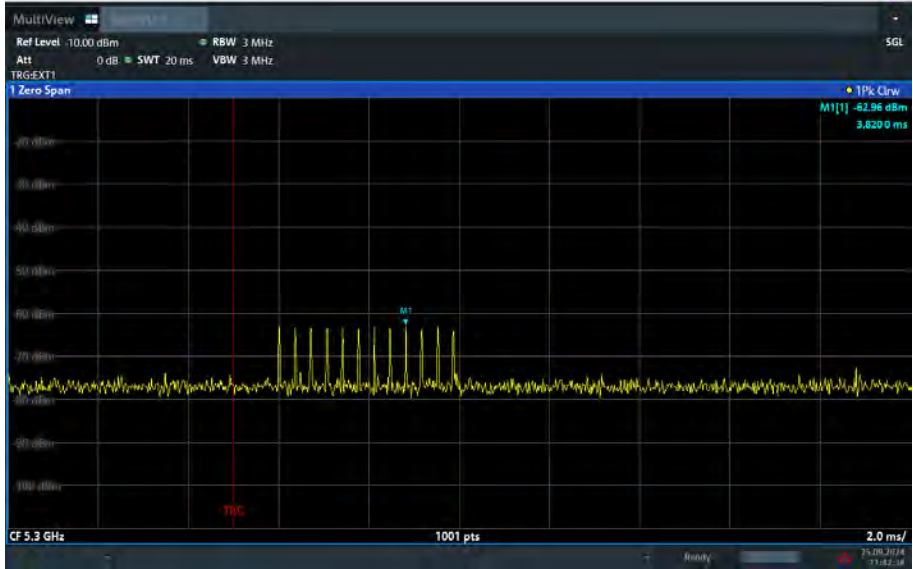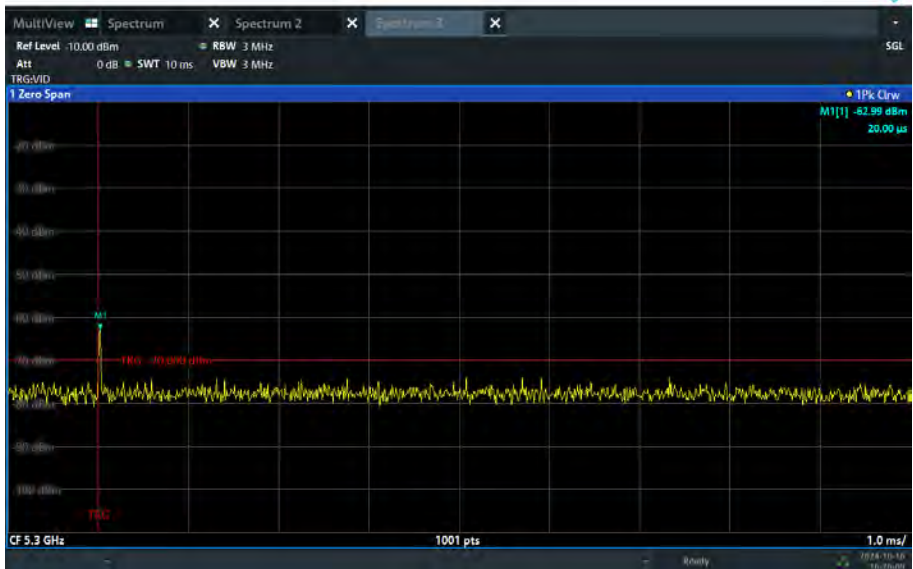
802.11be EHT20_ 5300 MHz	
Short Pulse Radar Type 4	 MultiView Spectrum Ref Level: -10.00 dBm RBW: 3 MHz Att: 0 dB SWT: 20 ms VBW: 3 MHz TRG: EXT1 1 Zero Span M1[1] -62.96 dBm 3.620 ms CF 5.3 GHz 1001 pts 2.0 ms/
Long Pulse Radar Type 5	 MultiView Spectrum Ref Level: -10.00 dBm RBW: 3 MHz Att: 0 dB SWT: 10 ms VBW: 3 MHz TRG: VID 1 Zero Span M1[1] -62.99 dBm 20.00 ms CF 5.3 GHz 1001 pts 1.0 ms/

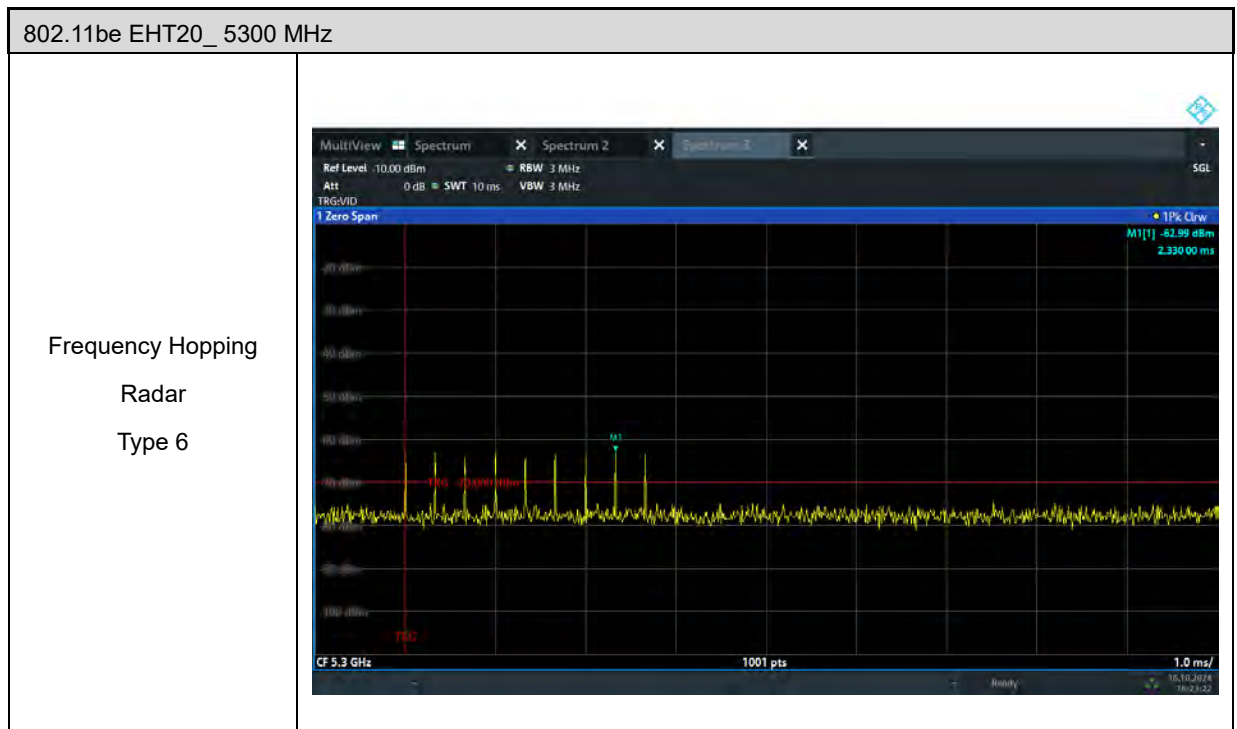

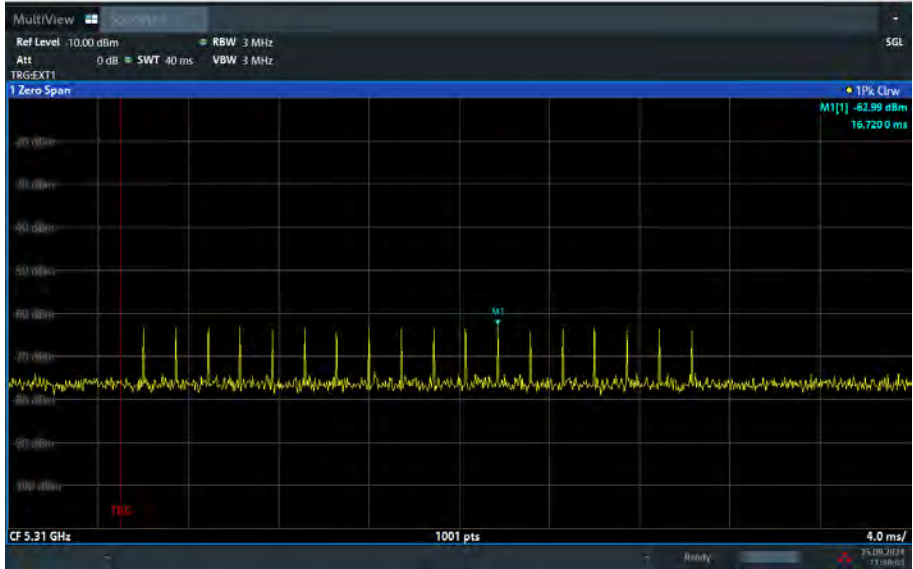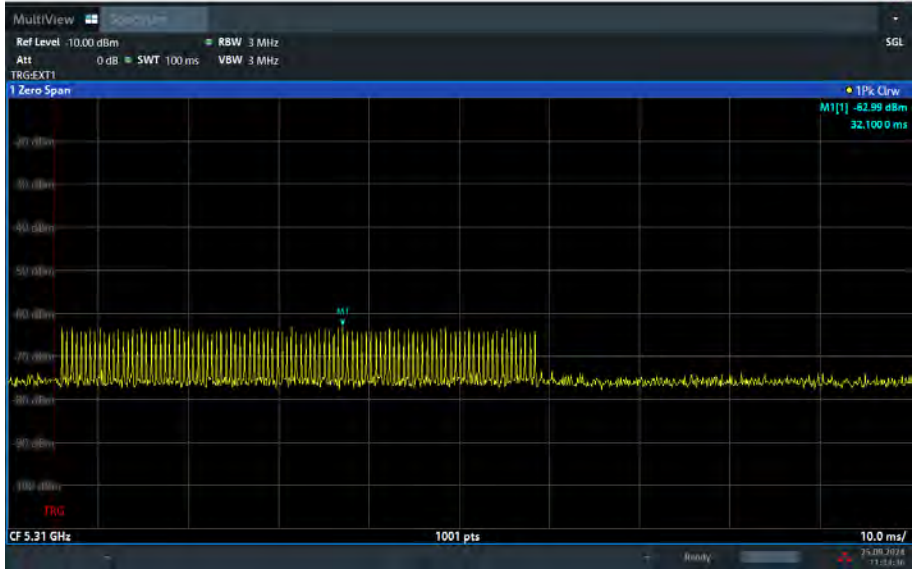802.11be EHT40_ 5310 MHz	
Short Pulse Radar Type 0	
Short Pulse Radar Type 1	


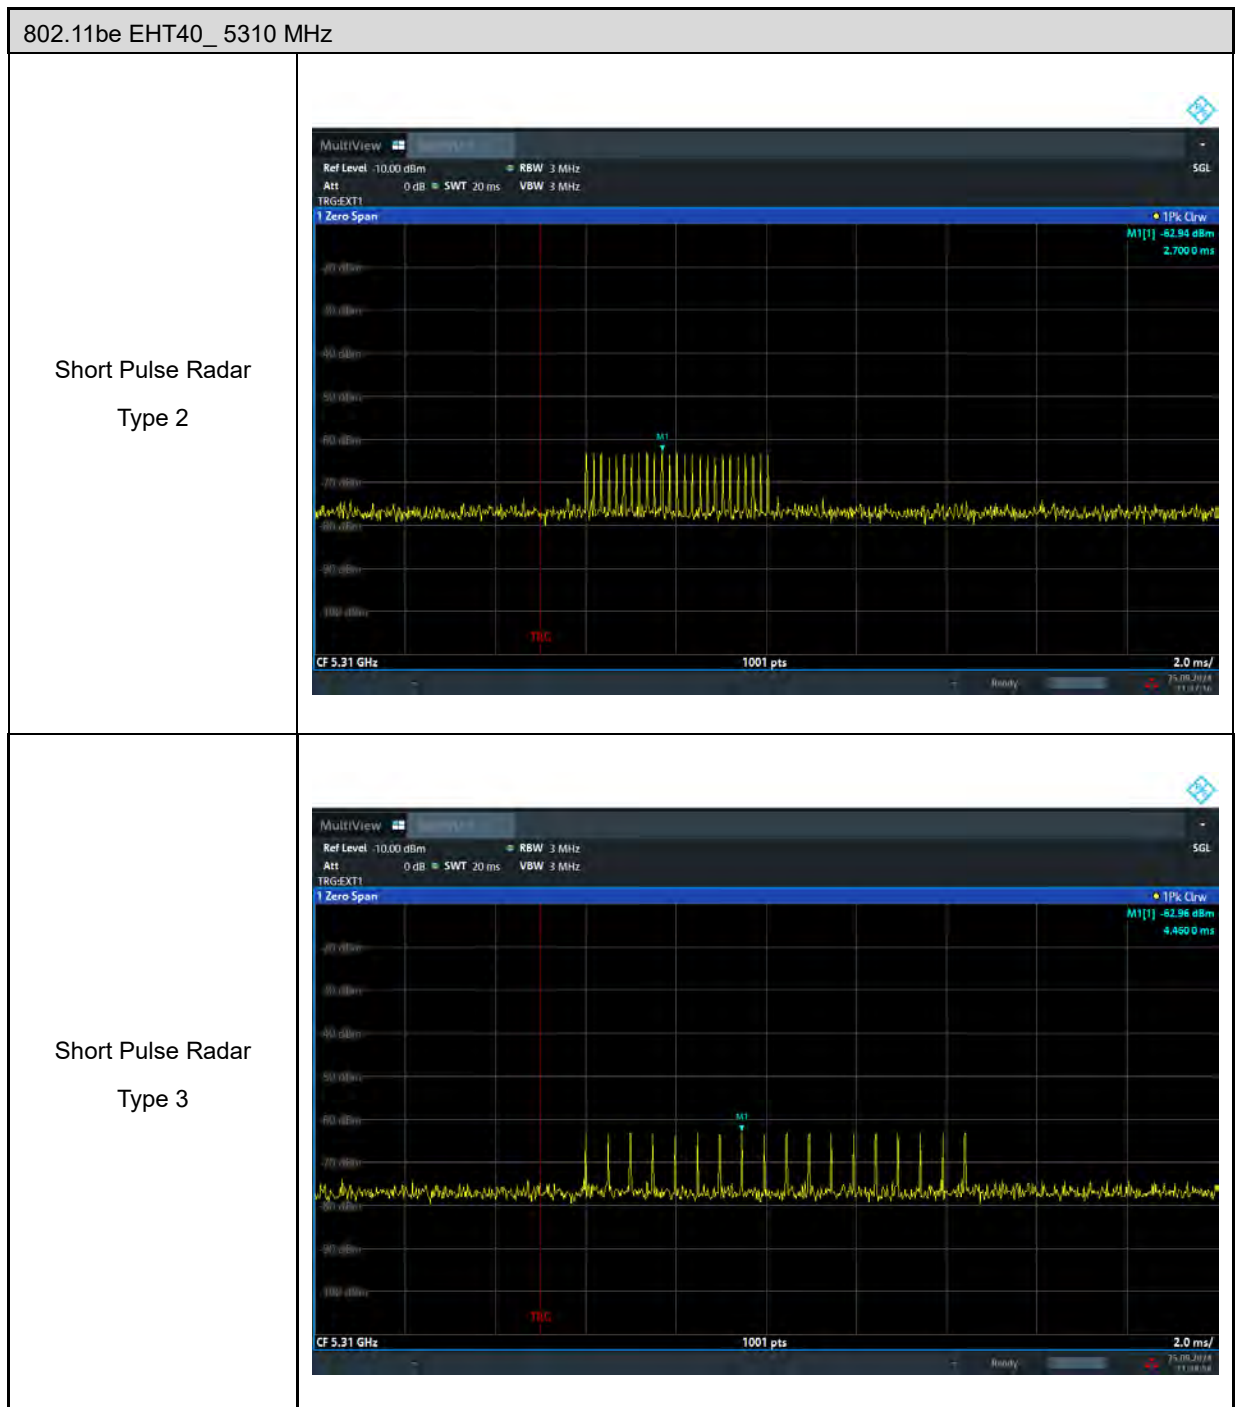


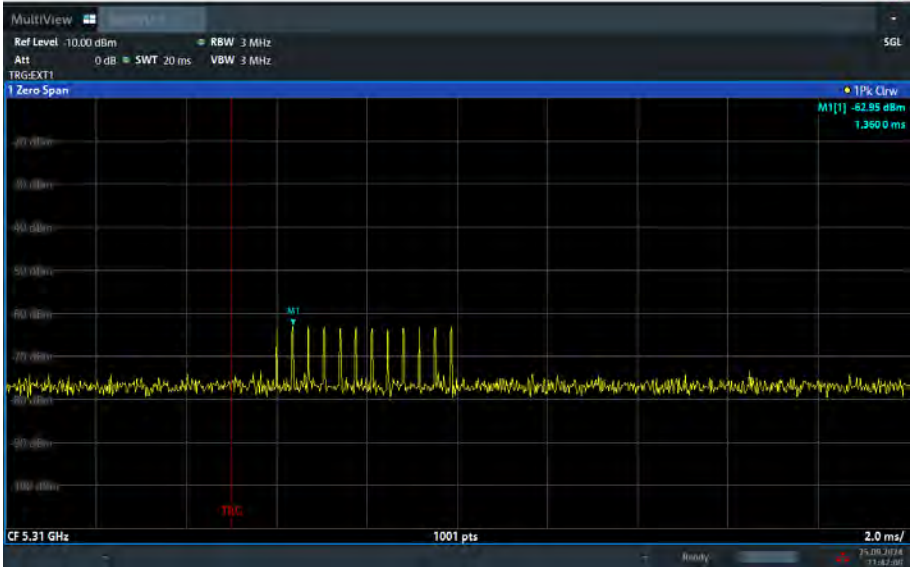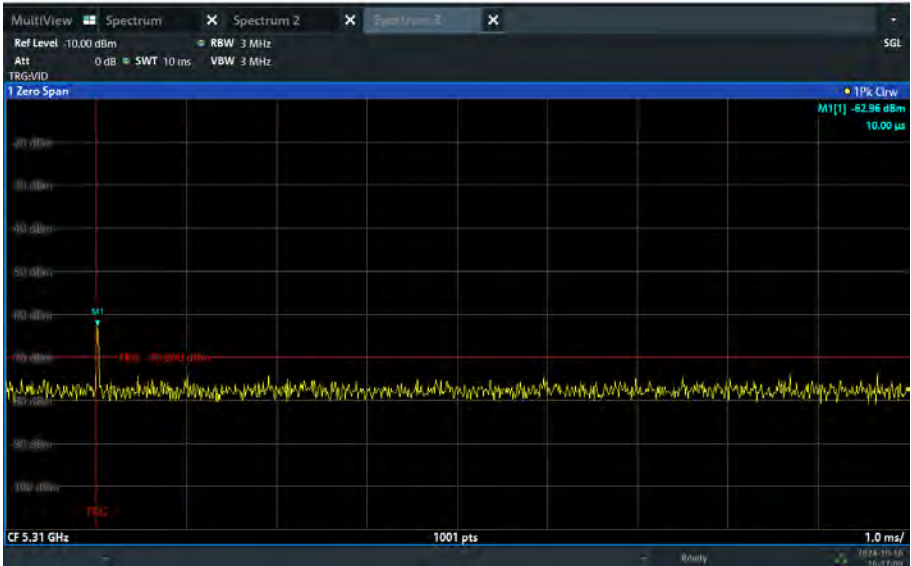
802.11be EHT40_ 5310 MHz	
Short Pulse Radar Type 4	
Long Pulse Radar Type 5	


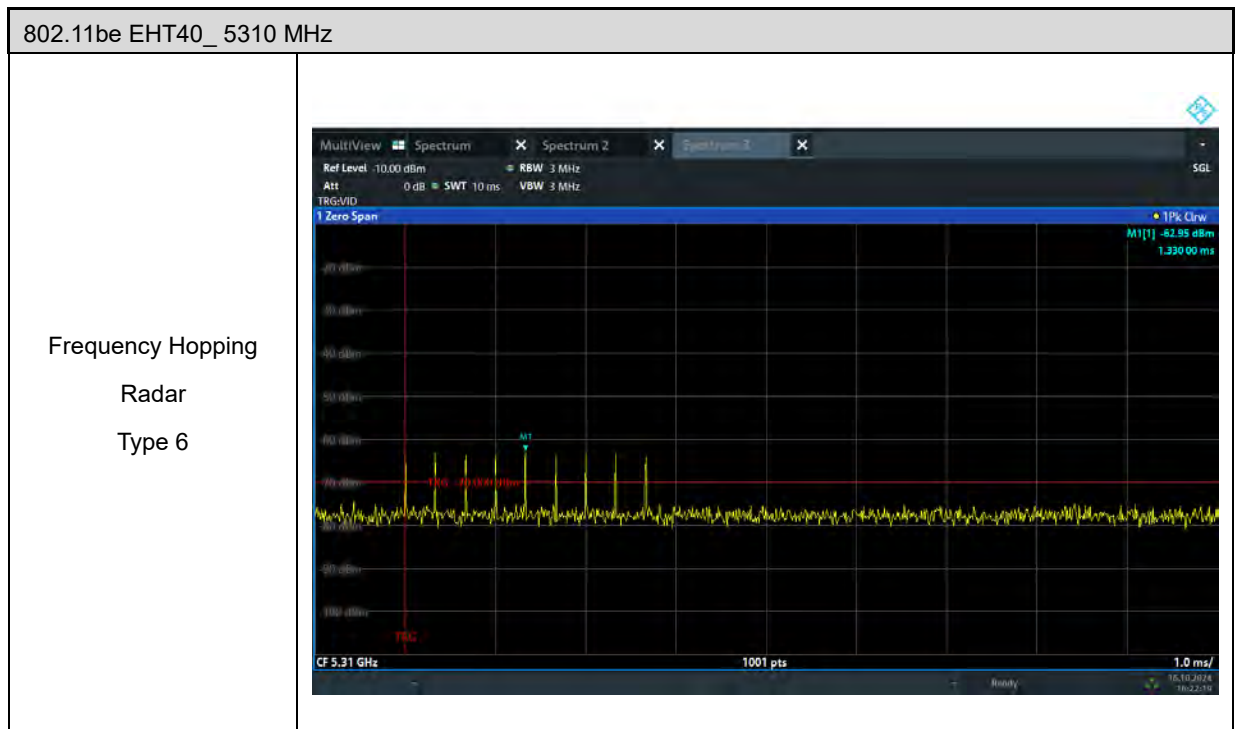






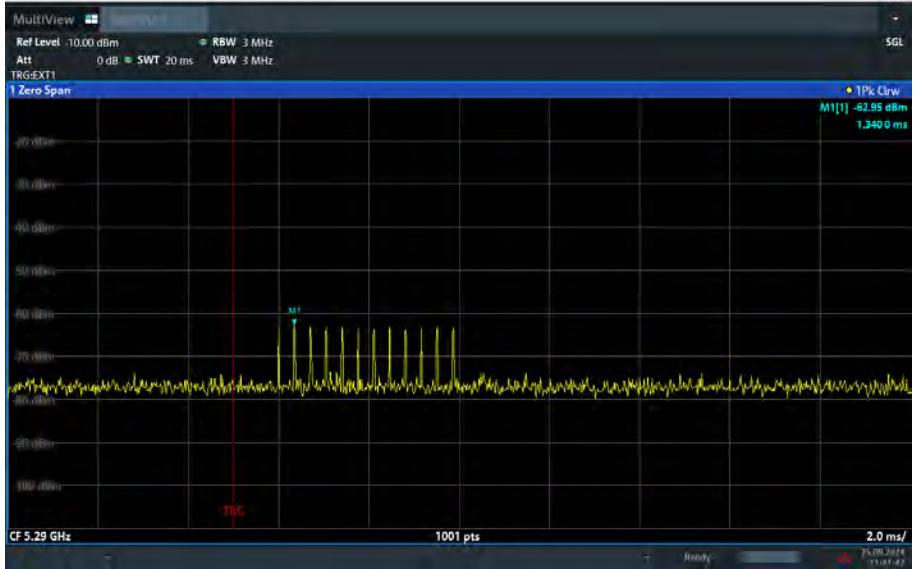
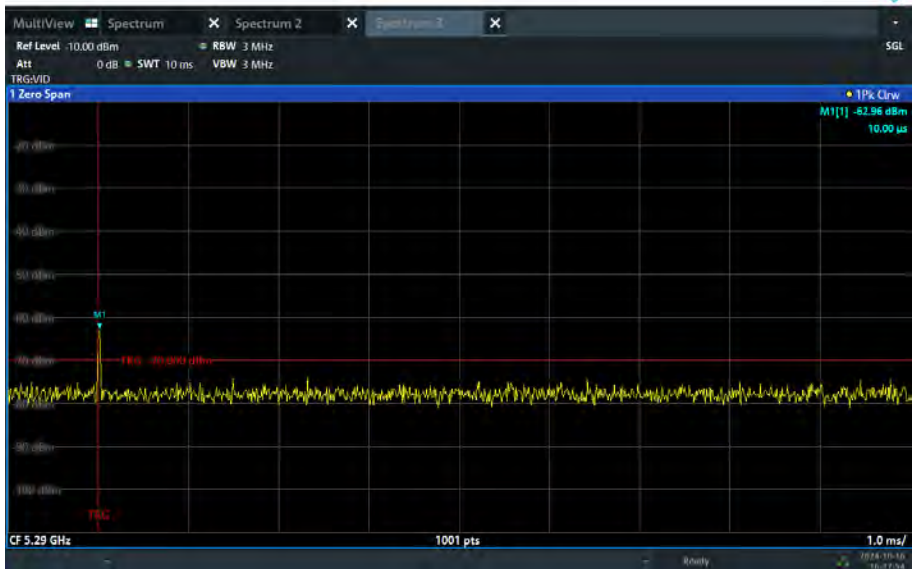




802.11be EHT80_ 5290 MHz	
Short Pulse Radar Type 4	
Long Pulse Radar Type 5	

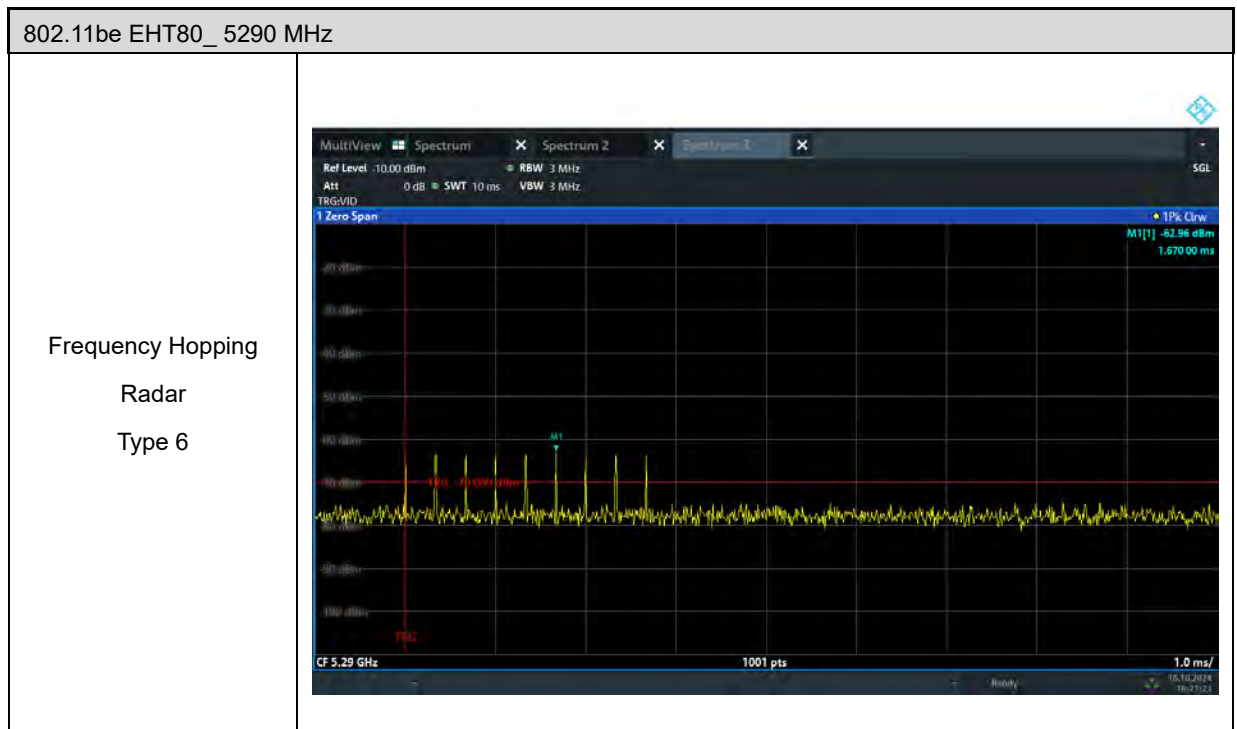

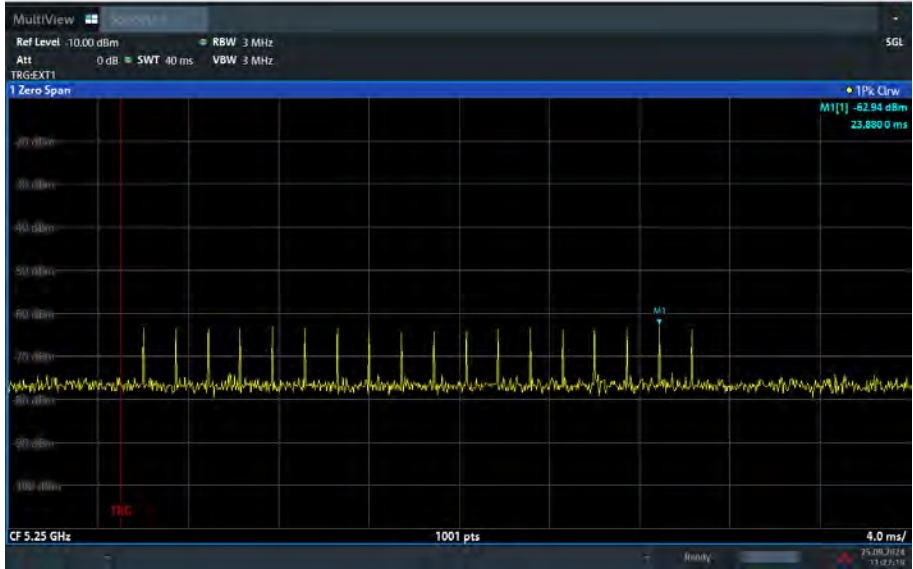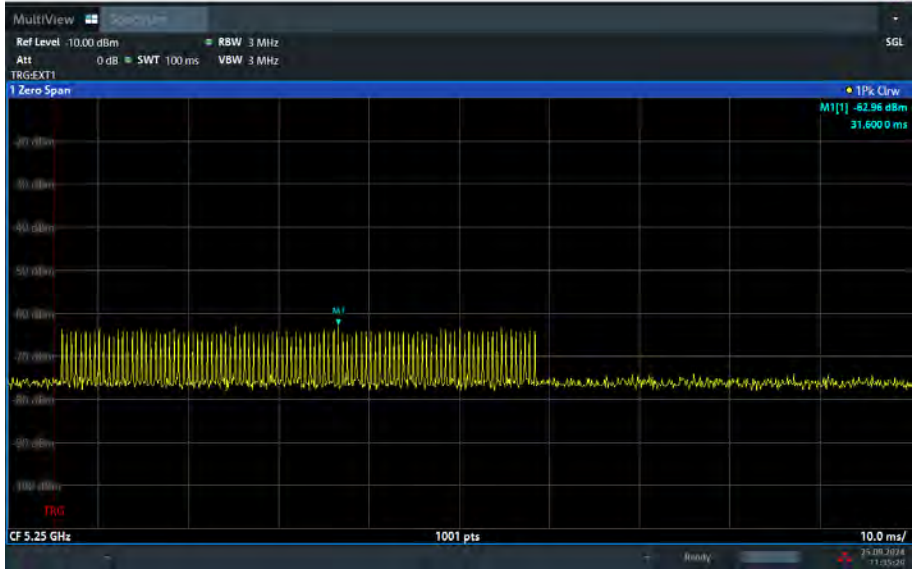802.11be EHT160_ 5250 MHz	
Short Pulse Radar Type 0	
Short Pulse Radar Type 1	

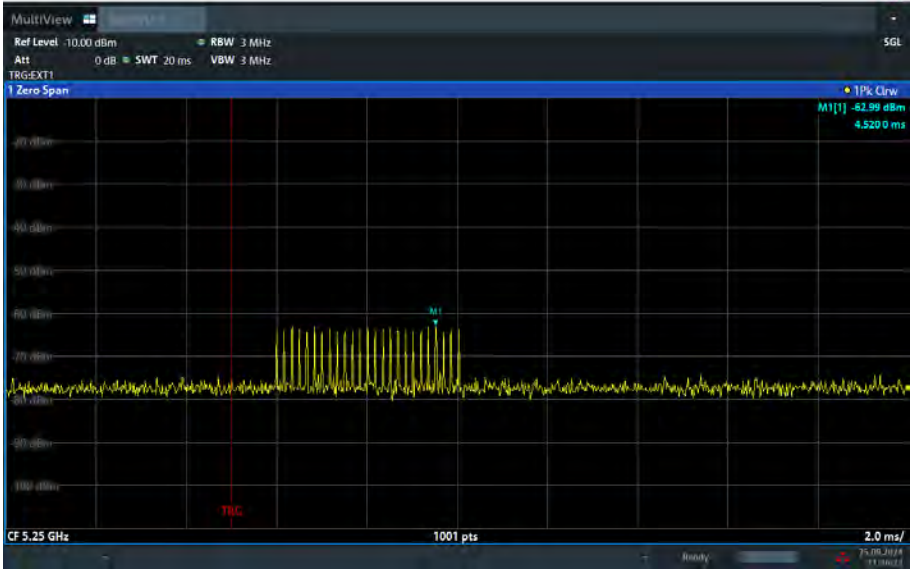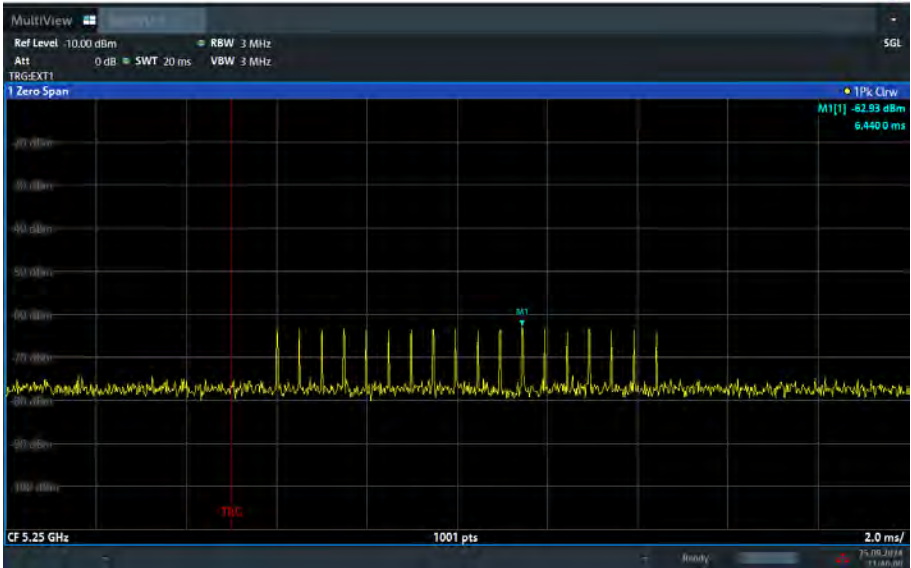
802.11be EHT160_ 5250 MHz	
Short Pulse Radar Type 2	
Short Pulse Radar Type 3	

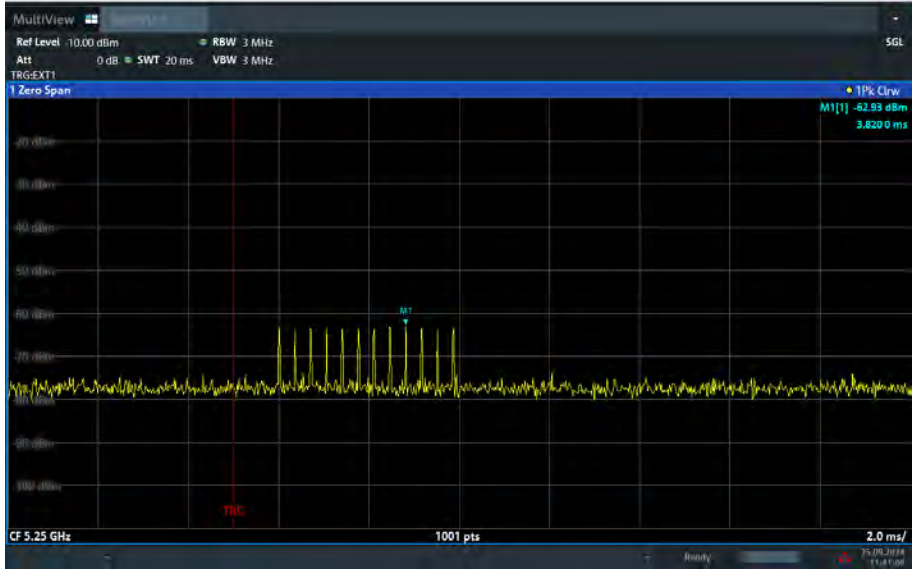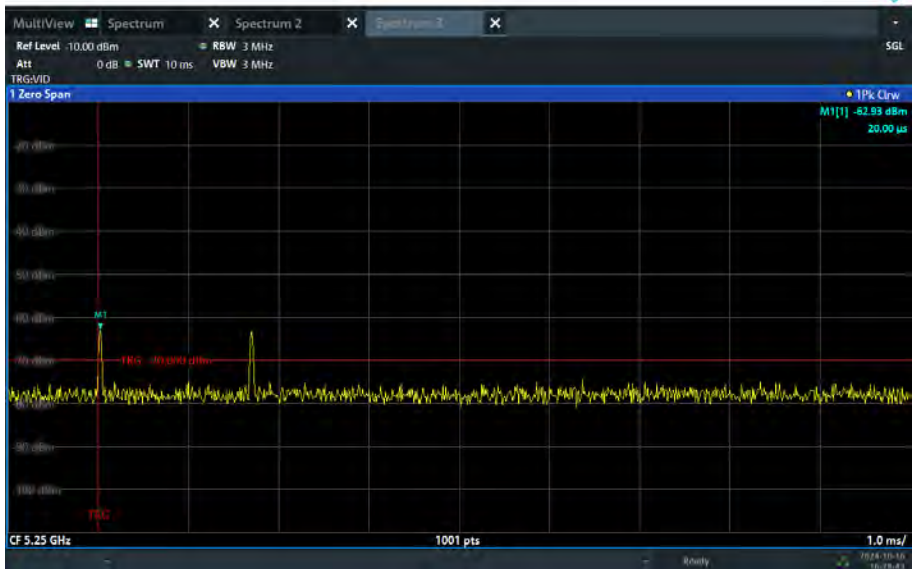802.11be EHT160_ 5250 MHz	
Short Pulse Radar Type 4	
Long Pulse Radar Type 5	

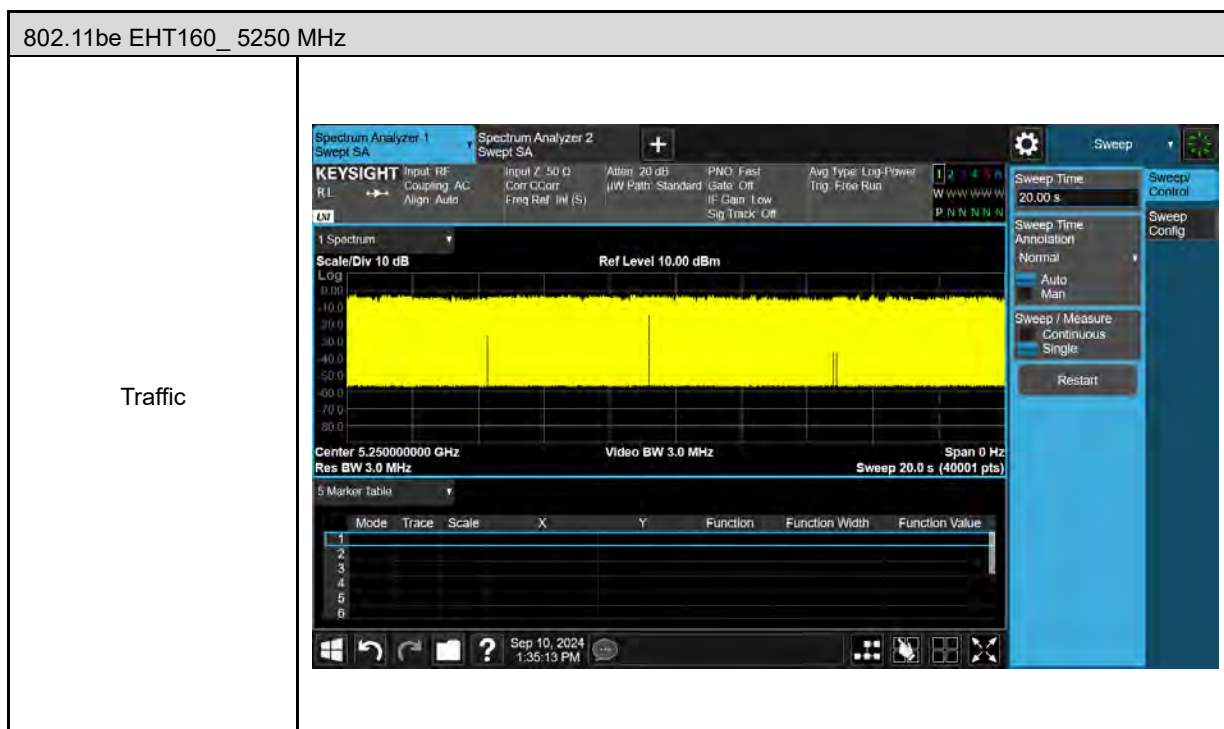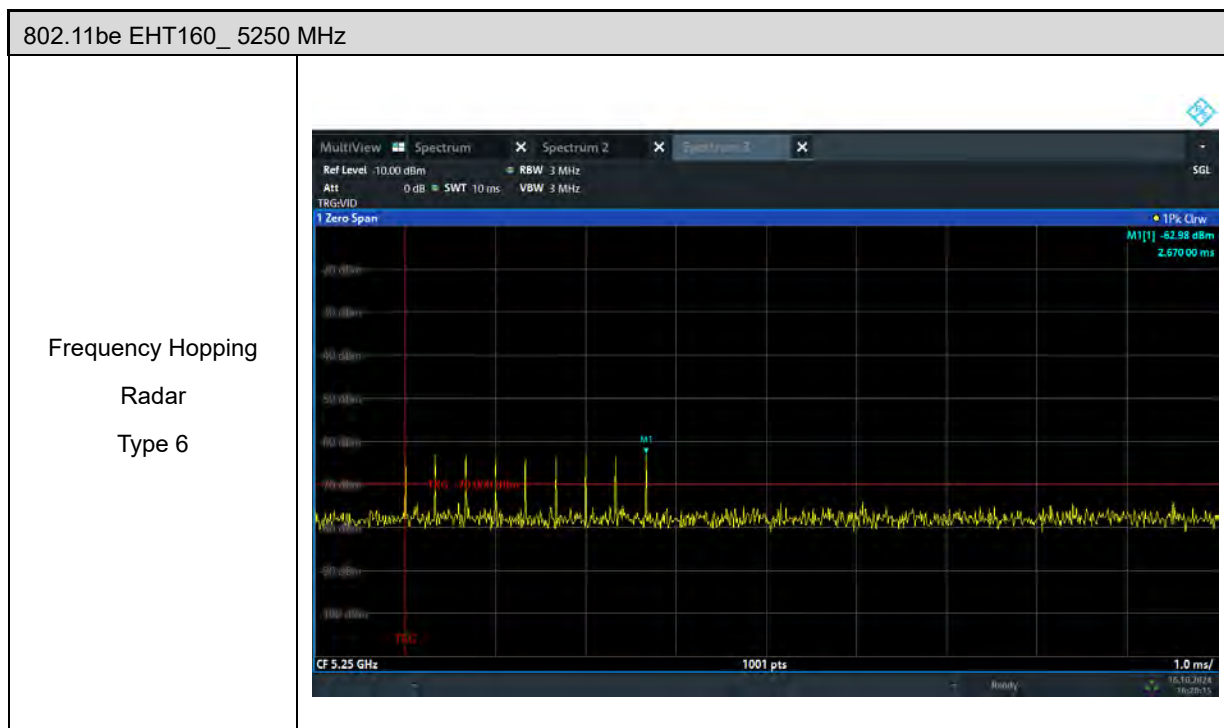


5.2. Channel Loading

■ Duty cycle $\geq 17\%$

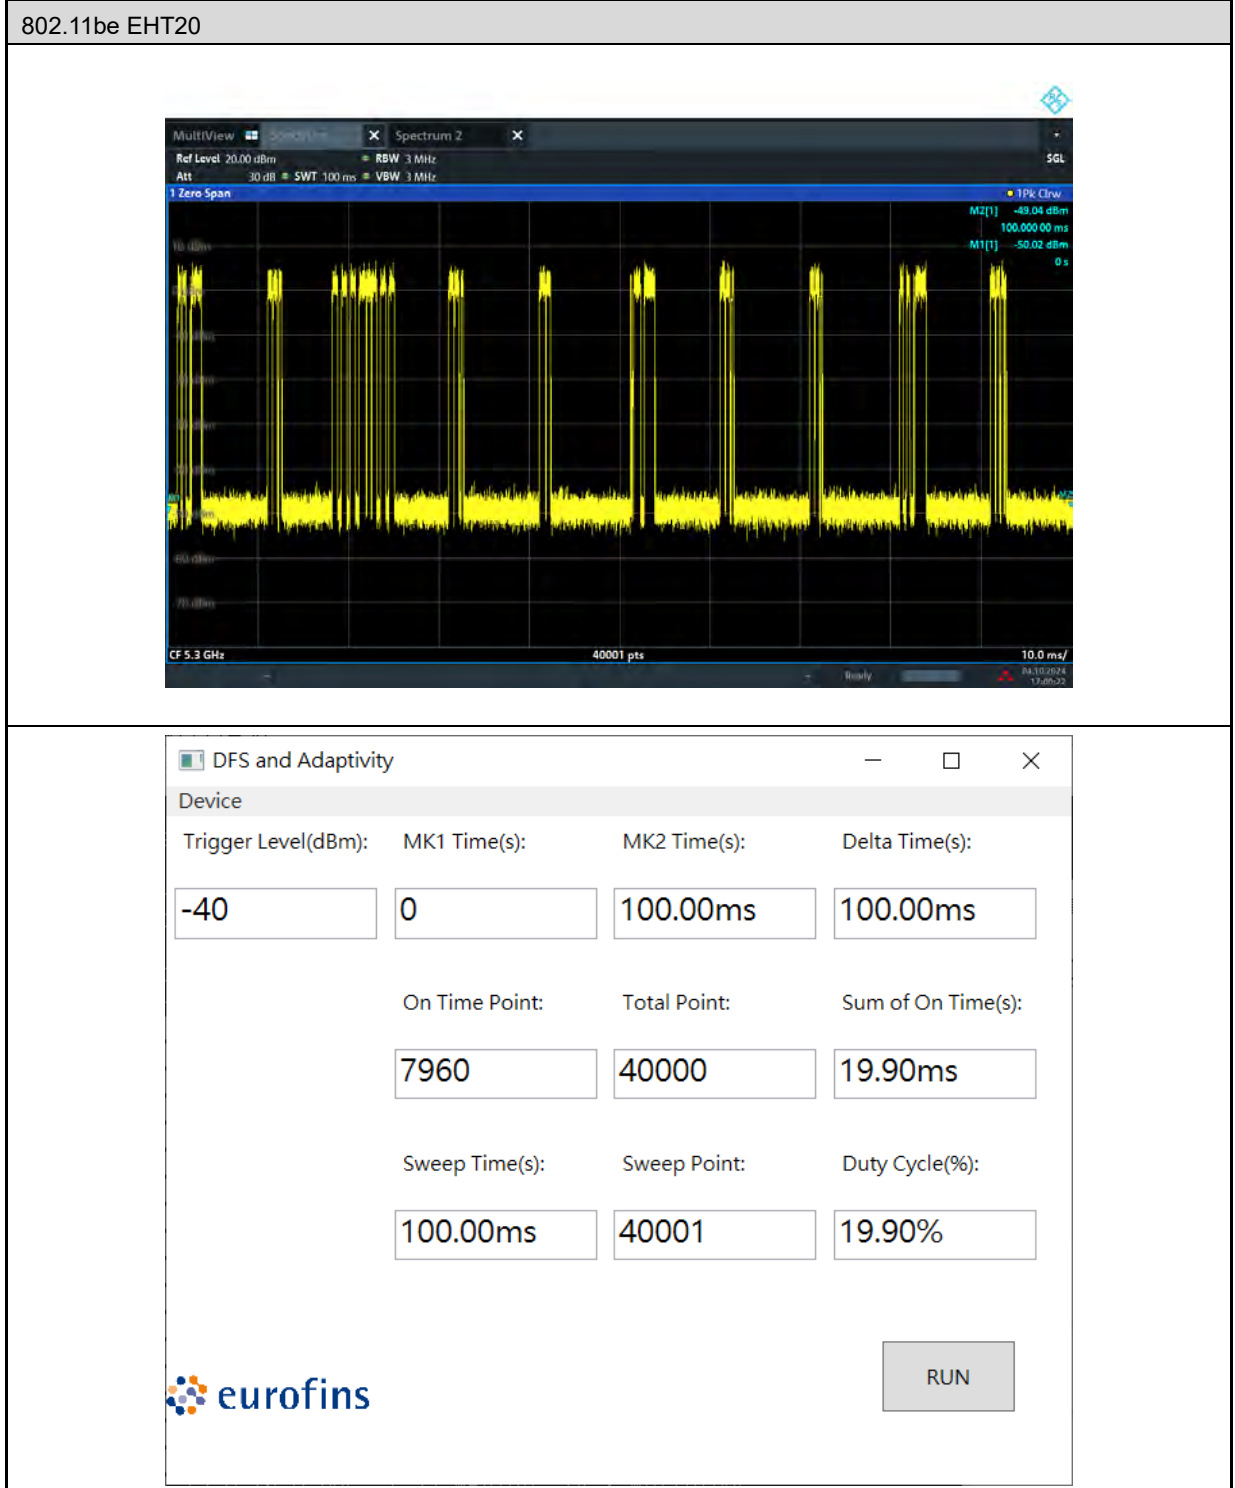

802.11be EHT40

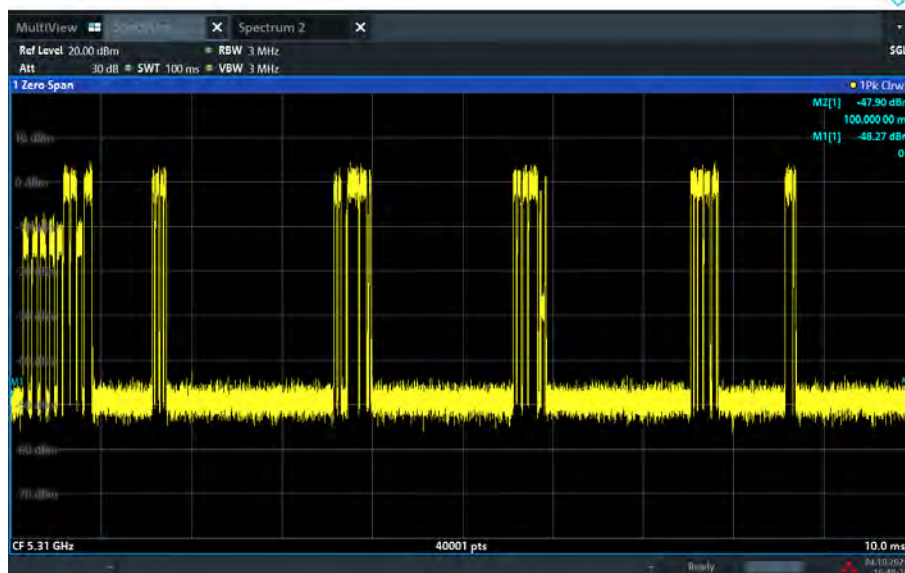

DFS and Adaptivity


Device

Trigger Level(dBm):	MK1 Time(s):	MK2 Time(s):	Delta Time(s):
-40	0	100.00ms	100.00ms
On Time Point: Total Point: Sum of On Time(s):			
7164		40000	17.91ms
Sweep Time(s): Sweep Point: Duty Cycle(%):			
100.00ms		40001	17.91%

eurofins

RUN

802.11be EHT80

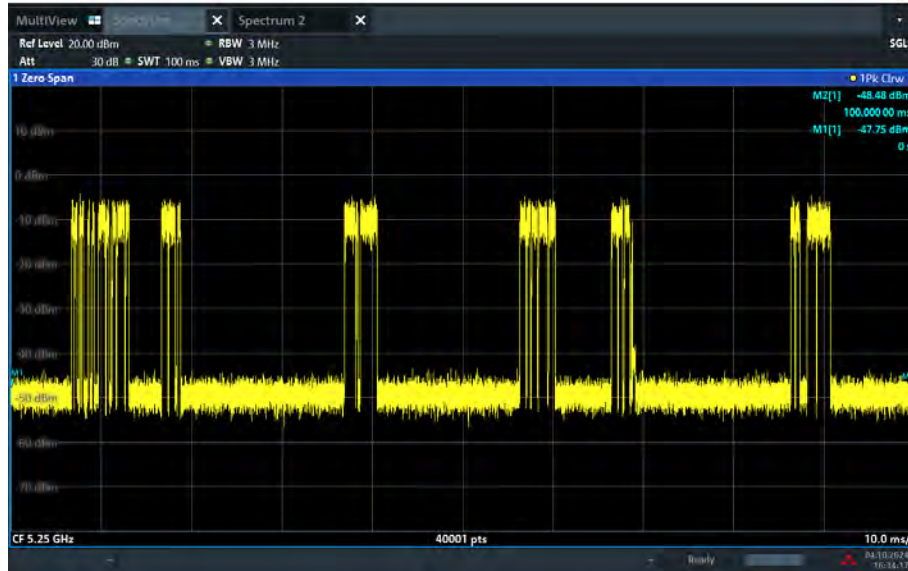

DFS and Adaptivity


Device

Trigger Level(dBm):	MK1 Time(s):	MK2 Time(s):	Delta Time(s):
-40	0	100.00ms	100.00ms
On Time Point:		Total Point:	Sum of On Time(s):
7319		40000	18.30ms
Sweep Time(s):	Sweep Point:	Duty Cycle(%):	
100.00ms	40001	18.30%	

eurofins

RUN

802.11be EHT160

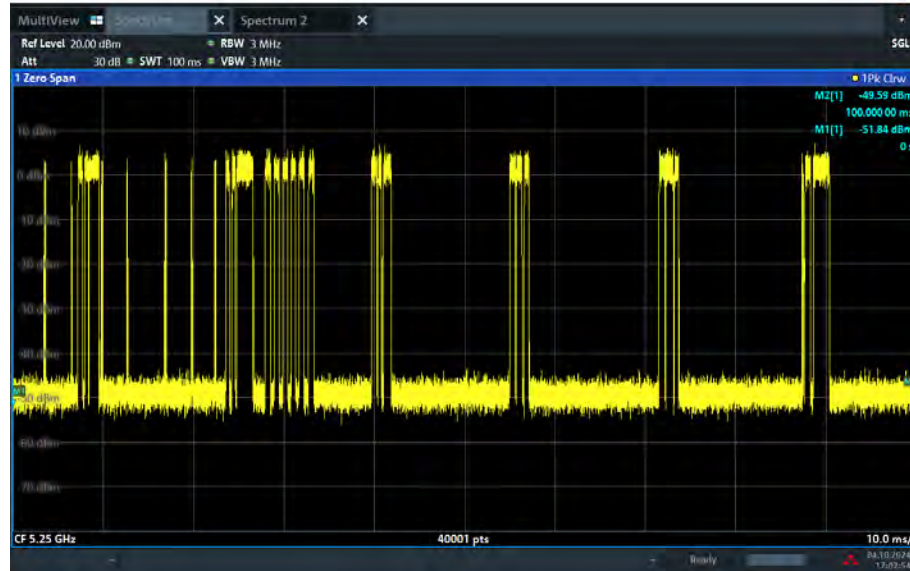

DFS and Adaptivity

Device

Trigger Level(dBm):	MK1 Time(s):	MK2 Time(s):	Delta Time(s):
-40	0	100.00ms	100.00ms
On Time Point: Total Point: Sum of On Time(s):			
7270		40000	18.18ms
Sweep Time(s): Sweep Point: Duty Cycle(%):			
100.00ms		40001	18.17%

euofins

RUN

5.3. Channel Availability Check Time

5.3.1. Procedure to Determine Initial Power-Up Cycle Time

A link was established on channel then the EUT was rebooted. The time from the cessation of traffic to the re-initialization of traffic was measured as the time required for the EUT to complete the total power-up cycle. The time to complete the initial power-up period is 60 seconds less than this total power-up time.

5.3.2. Procedure for Timing Of Radar Burst

With a link established on channel, the EUT was rebooted. A radar signal was triggered within 0 to 6 seconds after the initial power-up period, and transmissions on the channel were monitored on the spectrum analyzer.

The Non-Occupancy list was cleared. With a link established on channel, the EUT was rebooted. A radar signal was triggered within 54 to 60 seconds after the initial power-up period, and transmissions on the channel were monitored on the spectrum analyzer.

5.3.3. Qualitative Results


Timing of Radar Burst	Display on Control Computer	Spectrum Analyzer Display
No Radar Triggered	EUT marks Channel as active	Transmissions begin on channel after completion of the initial power-up cycle and the CAC
Within 0 to 6 second window	EUT indicates radar detected	No transmissions on channel
Within 54 to 60 second window	EUT indicates radar detected	No transmissions on channel

802.11be EHT160_ 5250 MHz

Initial Channel
Availability Check



Initial Channel
Availability Check
Begin

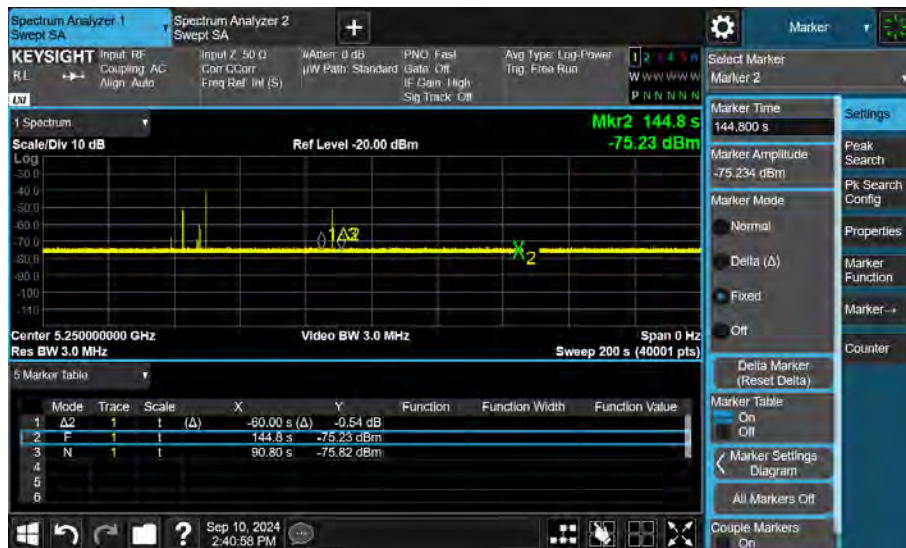

802.11be EHT160_ 5250 MHz

Initial Channel
 Availability Check
 End



5.4. Channel Move Time and Channel Closing Transmission Time

5.4.1. Reporting Notes

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse.
This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time = (Number of analyzer bins showing transmission) * (dwell time per bin)

The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.


Results

Frequency (MHz)	Radar Type	Channel Move Time (msec)		Limit (sec)
		Master	Client	
5250	Type 0	499.5	829.5	10

Frequency (MHz)	Radar Type	Aggregate Channel Closing Transmission Time (msec)		Limit (msec)
		Master	Client	
5250	Type 0	8.5	35	60

Master

802.11be EHT160_ 5250 MHz

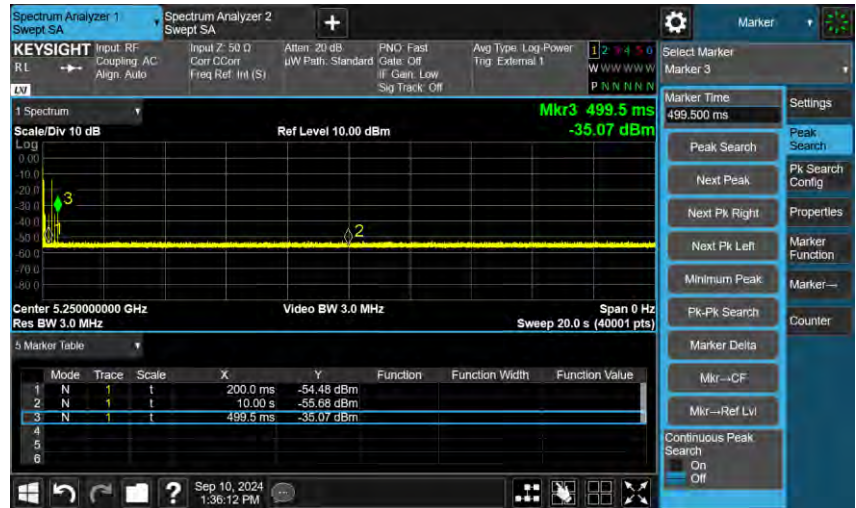

Channel Move and
Closing Time

DFS and Adaptivity


Device

Trigger Level(dBm):	MK1 Time(s):	MK2 Time(s):	Delta Time(s):
-50	200.00ms	10000.00ms	9800.00ms
On Time Point:	Total Point:	Sum of On Time(s):	
17	19600	8.50ms	
Sweep Time(s):	Sweep Point:	Duty Cycle(%)	
20000.00ms	40001	0.09%	

euofins

RUN


Client

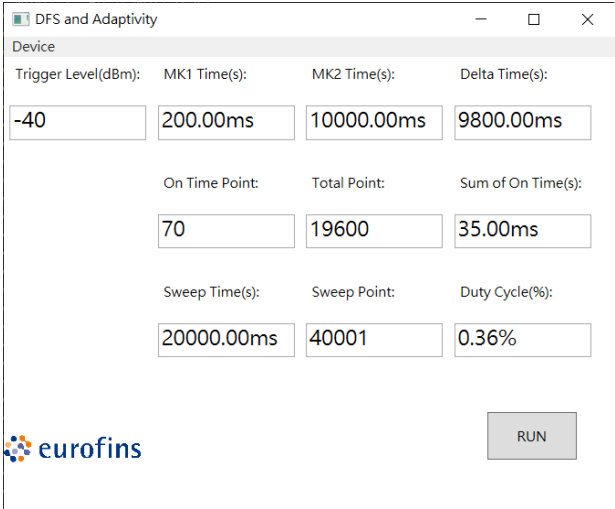802.11be EHT160_ 5250 MHz	
Channel Move and Closing Time	
	


5.5. Non-Occupancy Period

802.11be EHT160_ 5250 MHz

Master

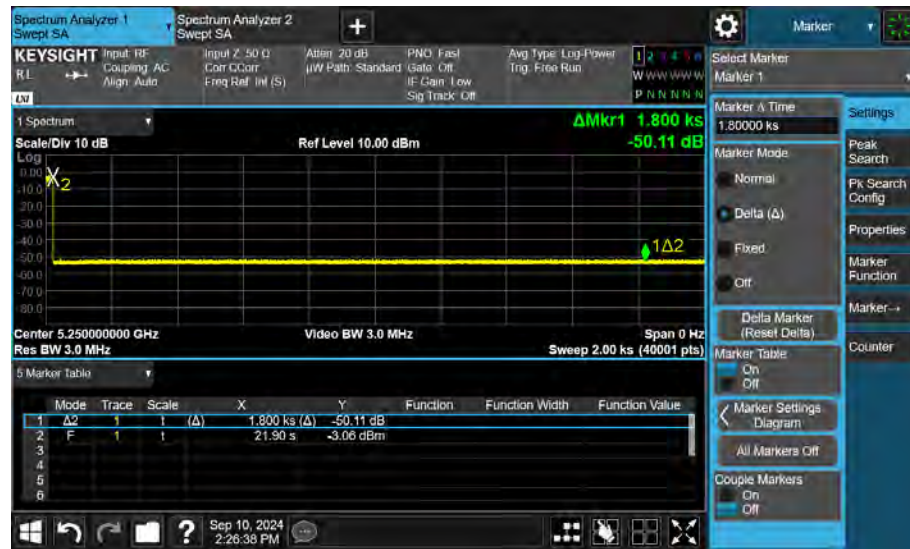

Client

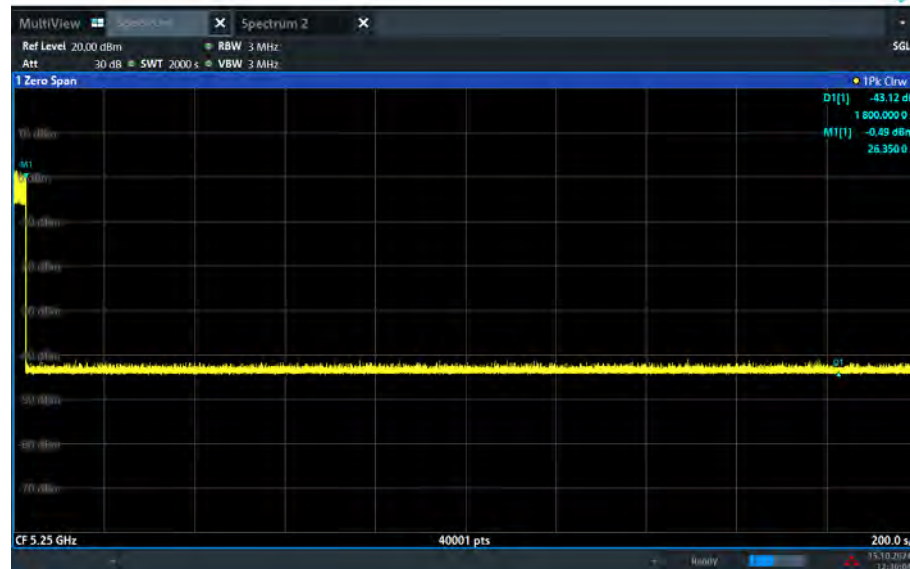

Note: Non-Occupancy Period time is 30 minute during which a Channel will not be utilized after a Radar Waveform is detected on that Channel.

5.6. U-NII Detection Bandwidth

■ Test Results

Test Mode						
802.11be EHT20						
Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99 % Power Bandwidth (MHz)	Ratio of Detection BW to 99 % Power BW (%)	Minimum Limit (%)
5300	5290	5310	20	19.0784405	104.83	≥ 100

Test Mode						
802.11be EHT40						
Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99 % Power Bandwidth (MHz)	Ratio of Detection BW to 99 % Power BW (%)	Minimum Limit (%)
5310	5530	5570	40	38.7293865	103.28	≥ 100

Test Mode						
802.11be EHT80						
Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99 % Power Bandwidth (MHz)	Ratio of Detection BW to 99 % Power BW (%)	Minimum Limit (%)
5290	5250	5330	80	77.5572828	103.15	≥ 100

Test Mode						
802.11be EHT160						
Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99 % Power Bandwidth (MHz)	Ratio of Detection BW to 99 % Power BW (%)	Minimum Limit (%)
5250	5250	5330	80	78.3288107	102.13	≥ 100

Test Graphs

802.11be EHT20_ 5300 MHz



802.11be EHT40_ 5310 MHz



802.11be EHT80_ 5290 MHz



802.11be EHT160_ 5250 MHz



5.7. Statistical Performance check

■ Test Results

Test Mode		802.11be EHT20					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5300	Type1	Table 5a	1	26	4	86.67%	≥ 60%
	Type2	Random	Random	27	3	90.00%	≥ 60%
	Type3	Random	Random	26	4	86.67%	≥ 60%
	Type4	Random	Random	27	3	90.00%	≥ 60%
	Type1~4					88.33%	≥ 80%
	Type5	Random	Random	29	1	96.67%	≥ 80%
	Type6	Hopping	1	30	0	100.00%	≥ 70%

Test Mode		802.11be EHT40					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5310	Type1	Table 5a	1	28	2	93.33%	≥ 60%
	Type2	Random	Random	27	3	90.00%	≥ 60%
	Type3	Random	Random	26	4	86.67%	≥ 60%
	Type4	Random	Random	25	5	83.33%	≥ 60%
	Type1~4					88.33%	≥ 80%
	Type5	Random	Random	27	3	90.00%	≥ 80%
	Type6	Hopping	1	30	0	100.00%	≥ 70%

Test Mode		802.11be EHT80					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5290	Type1	Table 5a	1	28	2	93.33%	≥ 60%
	Type2	Random	Random	26	4	86.67%	≥ 60%
	Type3	Random	Random	28	2	93.33%	≥ 60%
	Type4	Random	Random	26	4	86.67%	≥ 60%
	Type1~4					90.00%	≥ 80%
	Type5	Random	Random	25	5	83.33%	≥ 80%
	Type6	Hopping	1	30	0	100.00%	≥ 70%

Test Mode		802.11be EHT160					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5250	Type1	Table 5a	1	26	4	86.67%	≥ 60%
	Type2	Random	Random	25	5	83.33%	≥ 60%
	Type3	Random	Random	27	3	90.00%	≥ 60%
	Type4	Random	Random	26	4	86.67%	≥ 60%
	Type1~4					86.67%	≥ 80%
	Type5	Random	Random	26	4	86.67%	≥ 80%
	Type6	Hopping	1	30	0	100.00%	≥ 70%

Test Mode		802.11be EHT20				
Frequency		5300 MHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5300	1	798	67	1253	1
2	5300	1	558	95	1792	1
3	5300	1	578	92	1730	1
4	5300	1	878	61	1139	1
5	5300	1	918	58	1089	1
6	5300	1	578	92	1730	1
7	5300	1	718	74	1393	1
8	5300	1	798	67	1253	0
9	5300	1	538	99	1859	0
10	5300	1	878	61	1139	1
11	5300	1	738	72	1355	1
12	5300	1	678	78	1475	1
13	5300	1	718	74	1393	1
14	5300	1	938	57	1066	1
15	5300	1	558	95	1792	1
16	5300	1	3018	18	331	1
17	5300	1	2069	26	483	1
18	5300	1	2131	25	469	1
19	5300	1	2817	19	355	1
20	5300	1	673	79	1486	1
21	5300	1	1742	31	574	1
22	5300	1	1353	40	739	0
23	5300	1	2231	24	448	1
24	5300	1	1882	29	531	0
25	5300	1	1865	29	536	1
26	5300	1	760	70	1316	1
27	5300	1	1020	52	980	1
28	5300	1	699	76	1431	1
29	5300	1	603	88	1658	1
30	5300	1	2961	18	338	1
Detection Percentage (%)						86.67

Test Mode		802.11be EHT20				
Frequency		5300 MHz				
Radar Signal		Type 2				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5300	2.20	190.70	28	5244	1
2	5300	3.50	181.70	23	5504	1
3	5300	2.50	194.60	23	5139	0
4	5300	3.50	177.20	25	5643	1
5	5300	3.10	217.60	24	4596	1
6	5300	4.60	200.10	25	4998	0
7	5300	4.60	160.90	29	6215	1
8	5300	1.20	210.60	27	4748	1
9	5300	1.10	164.70	24	6072	1
10	5300	4.30	207.70	23	4815	1
11	5300	4.90	200.30	27	4993	1
12	5300	3.20	178.40	26	5605	0
13	5300	3.30	197.40	28	5066	1
14	5300	4.60	204.40	24	4892	1
15	5300	2.50	158.50	28	6309	1
16	5300	3.90	175.20	28	5708	1
17	5300	3.40	226.90	26	4407	1
18	5300	3.30	185.30	26	5397	1
19	5300	4.80	159.70	27	6262	1
20	5300	3.30	156.90	28	6373	1
21	5300	2.10	198.80	23	5030	1
22	5300	3.10	189.40	25	5280	1
23	5300	2.10	218.50	25	4577	1
24	5300	2.80	200.30	29	4993	1
25	5300	1.90	214.30	27	4666	1
26	5300	1.80	170.20	23	5875	1
27	5300	2.70	208.50	25	4796	1
28	5300	1.30	182.70	23	5473	1
29	5300	1.60	229.80	24	4352	1
30	5300	2.90	184.50	29	5420	1
Detection Percentage (%)						90.00

Test Mode		802.11be EHT20				
Frequency		5300 MHz				
Radar Signal		Type 3				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5300	7.50	302.80	18	3302.51	1
2	5300	6.20	356.80	16	2802.69	1
3	5300	7.60	276.80	16	3612.72	1
4	5300	8.00	469.10	18	2131.74	1
5	5300	6.40	333.50	16	2998.50	1
6	5300	9.50	469.70	16	2129.02	0
7	5300	9.00	460.30	17	2172.50	1
8	5300	9.60	380.80	18	2626.05	1
9	5300	6.80	489.90	18	2041.23	1
10	5300	7.80	347.30	17	2879.36	1
11	5300	7.90	430.00	16	2325.58	1
12	5300	7.50	268.20	17	3728.56	0
13	5300	7.90	271.00	18	3690.04	1
14	5300	6.40	310.80	18	3217.50	1
15	5300	8.50	393.60	18	2540.65	1
16	5300	7.10	291.40	17	3431.71	1
17	5300	9.20	307.20	16	3255.21	1
18	5300	8.50	381.20	16	2623.29	1
19	5300	7.20	495.80	16	2016.94	1
20	5300	6.60	223.90	16	4466.28	1
21	5300	6.90	441.90	18	2262.96	0
22	5300	9.30	211.60	18	4725.90	1
23	5300	7.00	445.10	18	2246.69	1
24	5300	8.80	408.50	17	2447.98	1
25	5300	7.30	283.00	16	3533.57	1
26	5300	9.30	466.20	17	2145.00	1
27	5300	6.30	213.00	17	4694.84	1
28	5300	6.70	394.60	18	2534.21	0
29	5300	7.60	293.50	18	3407.16	1
30	5300	6.00	402.10	17	2486.94	1
Detection Percentage (%)						86.67

Test Mode		802.11be EHT20				
Frequency		5300 MHz				
Radar Signal		Type 4				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5300	16.20	407.60	13	2453	1
2	5300	15.10	394.70	15	2534	1
3	5300	13.50	270.10	13	3702	1
4	5300	16.80	463.90	13	2156	1
5	5300	18.00	463.30	16	2158	1
6	5300	11.40	298.00	14	3356	1
7	5300	16.30	208.90	12	4787	1
8	5300	17.70	238.60	12	4191	1
9	5300	16.30	214.90	13	4653	0
10	5300	13.40	460.60	12	2171	1
11	5300	16.50	243.20	15	4112	1
12	5300	18.10	278.20	16	3595	1
13	5300	15.00	246.20	15	4062	1
14	5300	13.50	436.00	15	2294	1
15	5300	15.60	271.10	13	3689	1
16	5300	14.70	432.20	15	2314	1
17	5300	12.90	218.60	16	4575	0
18	5300	16.10	303.50	15	3295	1
19	5300	17.60	425.00	14	2353	1
20	5300	12.60	491.00	15	2037	1
21	5300	16.40	263.10	14	3801	1
22	5300	11.70	408.50	12	2448	1
23	5300	16.80	363.40	13	2752	1
24	5300	16.80	416.00	12	2404	1
25	5300	11.50	217.80	14	4591	1
26	5300	13.80	493.30	13	2027	1
27	5300	19.60	441.60	14	2264	0
28	5300	11.70	211.30	16	4733	1
29	5300	14.00	204.70	12	4885	1
30	5300	15.10	477.60	15	2094	1
Detection Percentage (%)						90.00

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
1	5295	1	55.4	13	1081.2	3	1
	5298	2	82.8	19	1638.0	2	
	5293	3	78.5	8	1527.3	2	
	5298	4	78.4	20	1177.3	1	
	5293	5	62.7	7	1696.3	3	
	5295	6	65.7	13	1687.0	1	
	5294	7	68.2	9	1591.9	2	
	5293	8	91.9	8	1563.1	1	
	5294	9	91.4	9	1526.1	1	
	5297	10	76.2	18	1322.8	2	
	5292	11	84.2	6	1332.1	3	
2	5296	1	65.2	16	1232.9	2	1
	5297	2	79.2	18	1967.9	1	
	5296	3	97.3	16	1924.2	3	
	5298	4	55.9	19	1058.1	1	
	5293	5	61.9	8	1131.5	2	
	5292	6	96.4	6	1370.0	2	
	5294	7	76.3	9	1287.7	3	
	5296	8	68.1	16	1562.8	2	
	5292	9	94.4	5	1195.8	1	
	5297	10	89.3	17	1401.3	3	
	5295	11	71.8	12	1411.6	1	
	5294	12	79.2	10	1065.9	2	
3	5296	1	66.2	14	1248.9	2	1
	5297	2	65.8	17	1302.1	1	
	5293	3	57.4	8	1145.7	2	
	5297	4	98.4	17	1459.0	3	
	5294	5	83.2	10	1658.0	1	
	5296	6	74.8	14	1753.0	3	
	5297	7	61.8	17	1613.8	3	
	5293	8	85.0	7	1505.1	2	
	5298	9	69.1	19	1490.4	1	
	5294	10	95.8	11	1263.6	2	
	5292	11	72.0	5	1128.2	3	
	5296	12	90.3	16	1566.2	3	
	5297	13	73.3	17	1242.5	3	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
4	5296	1	78.0	14	1841.4	1	1
	5296	2	81.2	15	1170.9	3	
	5293	3	90.6	7	1611.1	2	
	5298	4	91.5	19	1626.7	2	
	5295	5	73.1	13	1632.0	3	
	5298	6	97.8	19	1101.4	2	
	5294	7	75.3	10	1935.7	3	
	5296	8	94.6	14	1724.4	1	
	5296	9	59.7	16	1817.5	1	
5	5296	1	91.7	15	1017.8	1	1
	5292	2	95.9	6	1813.0	3	
	5296	3	93.6	15	1757.0	1	
	5295	4	91.3	13	1963.4	1	
	5296	5	90.1	16	1987.9	2	
	5294	6	58.3	10	1867.3	1	
	5298	7	60.2	19	1248.2	2	
	5295	8	60.8	12	1522.1	1	
	5298	9	93.8	19	1826.5	3	
	5293	10	67.5	7	1060.0	1	
	5293	11	97.9	7	1997.8	3	
	5294	12	90.9	9	1144.9	1	
	5292	13	83.4	6	1172.5	1	
	5295	14	87.2	12	1171.3	2	
	5293	15	70.2	8	1803.2	2	
6	5297	1	67.9	18	1099.6	3	1
	5296	2	74.9	16	1433.8	2	
	5298	3	91.9	19	1065.9	3	
	5295	4	80.9	12	1023.2	1	
	5293	5	66.4	7	1139.2	2	
	5293	6	66.4	8	1941.1	3	
	5295	7	81.5	12	1877.6	3	
	5297	8	63.7	17	1140.1	1	
	5293	9	85.3	7	1897.1	1	
	5293	10	54.9	8	1943.4	2	
	5296	11	92.6	15	1757.5	3	
	5294	12	90.2	11	1518.4	1	
	5294	13	59.3	10	1098.9	2	
	5295	14	99.9	12	1346.0	3	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
7	5296	1	80.0	15	1025.6	1	1
	5298	2	80.6	19	1154.6	2	
	5294	3	54.8	9	1889.1	1	
	5294	4	82.5	10	1402.6	1	
	5298	5	83.7	19	1922.8	3	
	5295	6	83.9	12	1721.6	2	
	5298	7	53.1	19	1314.6	1	
	5296	8	54.3	16	1844.5	2	
	5296	9	77.8	15	1724.0	2	
	5294	10	66.8	9	1004.7	1	
	5293	11	61.1	8	1523.4	2	
	5295	12	88.1	13	1798.7	1	
	5294	13	87.9	11	1642.6	2	
	5295	14	85.4	13	1480.7	1	
	5297	15	64.7	17	1937.9	1	
	5297	16	73.9	17	1460.4	3	
	5295	17	73.4	12	1865.0	3	
8	5292	1	94.5	6	1998.9	2	1
	5296	2	88.2	16	1962.4	3	
	5297	3	60.8	18	1680.9	2	
	5298	4	74.6	19	1034.0	3	
	5296	5	73.3	16	1799.1	1	
	5298	6	62.2	19	1207.6	2	
	5295	7	62.4	12	1665.2	1	
	5297	8	59.0	17	1701.9	2	
	5294	9	52.5	10	1729.0	3	
	5296	10	90.9	14	1221.7	3	
	5293	11	62.3	8	1879.0	1	
	5296	12	56.0	16	1351.0	3	
	5294	13	50.4	11	1269.4	2	
	5296	14	64.5	15	1298.8	3	
	5296	15	57.9	16	1627.2	1	
	5294	16	53.1	9	1745.6	1	
	5298	17	53.5	19	1621.1	1	
	5295	18	96.9	12	1175.9	1	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
9	5296	1	56.2	14	1604.0	1	1
	5297	2	83.9	18	1169.4	3	
	5294	3	68.8	9	1839.3	2	
	5297	4	64.8	17	1428.5	1	
	5296	5	81.7	15	1062.2	2	
	5295	6	76.3	13	1009.9	2	
	5297	7	68.6	17	1737.9	1	
	5294	8	65.4	11	1122.2	2	
	5292	9	65.1	5	1168.9	3	
	5292	10	76.2	6	1635.7	2	
	5294	11	79.1	11	1787.8	3	
	5296	12	54.2	14	1960.3	3	
	5293	13	73.6	7	1245.6	2	
	5296	14	56.2	14	1965.6	2	
	5298	15	89.8	20	1078.9	2	
	5294	16	61.6	11	1108.1	2	
	5296	17	98.2	16	1071.8	2	
	5294	18	55.6	10	1399.2	3	
	5295	19	82.3	13	1836.3	1	
10	5295	1	53.3	13	1231.9	3	1
	5294	2	90.9	10	1605.6	2	
	5298	3	71.0	20	1097.5	2	
	5292	4	85.2	6	1194.1	2	
	5293	5	91.0	7	1467.2	3	
	5296	6	90.0	15	1211.1	2	
	5293	7	91.5	7	1235.0	3	
	5294	8	60.2	9	1530.9	1	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
11	5300	1	79.3	13	1935.9	2	1
	5300	2	72.3	12	1825.8	2	
	5300	3	95.5	16	1948.0	3	
	5300	4	81.4	11	1971.0	3	
	5300	5	76.1	11	1569.0	2	
	5300	6	73.1	6	1257.9	3	
	5300	7	84.9	9	1734.9	3	
	5300	8	58.7	11	1486.4	1	
	5300	9	74.5	18	1937.5	2	
	5300	10	74.2	12	1424.8	3	
	5300	11	85.3	10	1587.6	2	
	5300	12	77.2	10	1343.3	2	
	5300	13	71.4	17	1158.0	2	
	5300	14	68.6	6	1545.1	2	
	5300	15	56.4	8	1126.7	3	
	5300	16	76.9	9	1929.1	1	
12	5300	1	97.4	6	1677.1	3	0
	5300	2	86.7	10	1136.7	3	
	5300	3	63.7	19	1426.4	3	
	5300	4	85.4	6	1124.1	3	
	5300	5	52.8	18	1923.8	1	
	5300	6	97.8	19	1968.6	2	
	5300	7	72.2	9	1038.8	1	
	5300	8	91.4	18	1841.0	3	
	5300	9	84.1	14	1752.3	2	
	5300	10	94.8	7	1218.0	3	
	5300	11	78.7	17	1488.4	1	
	5300	12	98.8	15	1125.4	2	
	5300	13	67.9	9	1736.4	1	
	5300	14	84.9	16	1695.9	2	
	5300	15	85.6	18	1474.3	3	
	5300	16	72.4	19	1290.0	3	
	5300	17	52.1	17	1312.6	3	
	5300	18	66.4	10	1220.0	1	
	5300	19	92.9	14	1158.1	1	
	5300	20	56.6	17	1909.1	3	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
13	5300	1	52.4	5	1346.7	3	1
	5300	2	81.0	19	1609.7	1	
	5300	3	62.3	10	1273.6	3	
	5300	4	98.6	19	1428.2	3	
	5300	5	77.6	16	1642.5	1	
	5300	6	69.1	9	1298.6	3	
	5300	7	69.3	16	1093.5	1	
	5300	8	92.7	6	1984.0	3	
	5300	9	58.8	18	1756.7	3	
	5300	10	59.9	13	1970.7	3	
14	5300	1	80.1	9	1499.6	3	1
	5300	2	92.6	10	1191.0	3	
	5300	3	66.2	5	1601.7	1	
	5300	4	59.6	10	1587.9	1	
	5300	5	65.2	10	1646.0	3	
	5300	6	75.4	14	1156.2	3	
	5300	7	95.4	18	1644.1	2	
	5300	8	90.8	14	1992.8	1	
	5300	9	60.9	10	1828.4	2	
	5300	10	87.2	18	1742.0	3	
	5300	11	86.7	6	1187.7	2	
	5300	12	61.7	11	1868.9	3	
	5300	13	81.0	16	1404.3	2	
	5300	14	96.5	5	1281.2	1	
	5300	15	96.3	14	1948.9	1	
	5300	16	78.1	6	1690.7	3	
	5300	17	90.7	16	1242.2	3	
	5300	18	76.8	11	1771.1	1	
	5300	19	94.1	6	1895.3	2	
	5300	20	76.0	15	1049.9	2	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
15	5300	1	73.1	13	1973.7	2	1
	5300	2	95.7	6	1199.5	1	
	5300	3	95.4	18	1273.1	3	
	5300	4	59.9	8	1651.0	3	
	5300	5	56.0	19	1328.2	1	
	5300	6	73.0	11	1742.9	1	
	5300	7	66.1	9	1956.8	2	
	5300	8	92.6	5	1264.2	3	
	5300	9	95.4	6	1524.4	1	
	5300	10	54.8	11	1221.9	2	
	5300	11	91.8	12	1987.5	2	
	5300	12	73.5	17	1616.3	3	
	5300	13	68.7	19	1365.3	3	
	5300	14	99.5	14	1379.6	3	
	5300	15	99.1	20	1106.9	2	
	5300	16	95.2	5	1807.9	3	
	5300	17	73.0	13	1361.0	1	
	5300	18	52.9	20	1787.6	1	
	5300	19	76.0	14	1730.2	1	
16	5300	1	89.7	6	1933.3	3	1
	5300	2	75.3	14	1529.1	1	
	5300	3	78.3	10	1526.3	2	
	5300	4	81.4	19	1298.0	2	
	5300	5	89.9	18	1033.0	3	
	5300	6	63.3	7	1645.0	2	
	5300	7	97.1	14	1302.6	3	
	5300	8	67.6	18	1806.6	2	
	5300	9	98.6	13	1477.9	3	
	5300	10	56.7	17	1668.4	1	
	5300	11	50.9	7	1895.9	2	
	5300	12	85.5	6	1773.7	2	
	5300	13	94.2	18	1045.4	1	
	5300	14	61.2	18	1855.5	3	
	5300	15	54.3	10	1873.7	2	
	5300	16	84.6	6	1563.2	1	
	5300	17	52.0	16	1640.7	1	
	5300	18	53.4	13	1362.8	1	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
17	5300	1	56.0	14	1900.1	1	1
	5300	2	97.1	20	1369.8	1	
	5300	3	97.7	19	1565.7	3	
	5300	4	64.7	20	1689.4	1	
	5300	5	82.4	7	1179.9	1	
	5300	6	55.9	17	1998.4	3	
	5300	7	90.9	8	1994.3	1	
	5300	8	91.1	8	1218.8	3	
	5300	9	87.0	10	1351.6	2	
	5300	10	72.2	8	1922.9	1	
	5300	11	54.9	17	1672.4	2	
	5300	12	73.7	13	1293.6	2	
	5300	13	53.8	18	1699.3	1	
	5300	14	85.0	20	1437.2	1	
	5300	15	55.8	14	1250.2	3	
	5300	16	92.5	6	1544.0	2	
	5300	17	60.8	19	1430.0	2	
18	5300	1	73.8	13	1555.4	2	1
	5300	2	54.8	8	1326.3	1	
	5300	3	74.4	17	1479.6	2	
	5300	4	83.1	18	1963.3	2	
	5300	5	89.3	10	1155.6	2	
	5300	6	51.9	18	1070.7	1	
	5300	7	94.1	14	1929.7	1	
	5300	8	72.4	19	1430.5	2	
	5300	9	75.0	20	1860.9	2	
	5300	10	88.2	6	1236.6	2	
	5300	11	93.8	13	1079.0	3	
	5300	12	69.8	15	1649.0	1	
	5300	13	54.3	9	1512.7	2	
	5300	14	87.8	17	1338.6	1	
	5300	15	54.4	12	1260.5	1	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
19	5300	1	51.0	13	1036.0	2	1
	5300	2	86.1	11	1281.3	1	
	5300	3	66.5	9	1424.5	1	
	5300	4	63.2	19	1084.5	3	
	5300	5	92.0	6	1859.8	3	
	5300	6	63.7	13	1189.1	2	
	5300	7	60.2	9	1807.9	1	
	5300	8	94.1	7	1506.9	2	
	5300	9	51.0	20	1920.9	3	
	5300	10	84.0	9	1617.4	2	
	5300	11	70.9	17	1998.4	3	
	5300	12	66.1	16	1739.9	2	
	5300	13	86.8	14	1018.5	3	
	5300	14	65.2	17	1731.0	2	
20	5300	1	79.9	11	1406.3	2	1
	5300	2	83.6	8	1961.1	2	
	5300	3	66.2	18	1059.2	1	
	5300	4	79.4	13	1409.6	2	
	5300	5	74.4	6	1545.1	1	
	5300	6	73.5	11	1350.1	1	
	5300	7	66.3	13	1054.9	3	
	5300	8	53.1	10	1990.9	1	
	5300	9	62.6	15	1839.7	3	
	5300	10	52.7	7	1859.9	1	
21	5307	1	99.0	8	1447.0	3	1
	5303	2	70.3	18	1052.3	3	
	5306	3	71.0	10	1691.4	3	
	5308	4	91.9	6	1159.4	2	
	5305	5	91.2	13	1471.2	1	
	5303	6	59.0	18	1580.1	3	
	5306	7	94.7	11	1478.9	3	
	5304	8	65.3	16	1548.9	1	
	5304	9	70.5	15	1380.4	1	
	5305	10	89.1	12	1931.3	2	
	5306	11	76.2	11	1919.0	2	
	5306	12	94.9	10	1748.2	2	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
22	5304	1	99.3	15	1838.5	2	1
	5306	2	51.1	11	1247.9	2	
	5307	3	57.0	7	1182.3	2	
	5303	4	50.9	18	1739.5	1	
	5304	5	85.1	16	1594.6	3	
	5303	6	57.1	18	1785.3	3	
	5304	7	63.0	16	1976.0	2	
	5304	8	71.5	15	1473.2	1	
	5303	9	87.4	18	1764.0	2	
23	5305	1	76.5	13	1891.5	2	1
	5308	2	52.6	6	1901.4	1	
	5304	3	73.5	14	1524.5	1	
	5307	4	91.7	7	1564.4	1	
	5303	5	83.4	17	1142.0	2	
	5307	6	82.6	8	1582.3	2	
	5308	7	88.5	6	1616.6	2	
	5304	8	66.9	14	1529.5	3	
	5306	9	74.1	11	1859.8	1	
	5305	10	81.8	13	1967.9	2	
	5306	11	58.3	9	1458.3	2	
	5305	12	84.3	12	1888.0	3	
	5307	13	84.2	7	1553.4	3	
	5303	14	87.2	18	1914.6	3	
	5307	15	54.2	7	1793.6	1	
24	5304	1	51.7	16	1829.1	3	1
	5307	2	87.5	8	1468.5	1	
	5305	3	85.0	13	1097.8	1	
	5304	4	80.6	15	1157.4	1	
	5307	5	96.2	7	1954.1	3	
	5306	6	84.6	11	1193.1	3	
	5306	7	50.1	10	1009.7	3	
	5307	8	95.3	8	1315.7	2	
	5304	9	83.5	16	1346.7	1	
	5308	10	67.4	5	1198.7	3	
	5305	11	76.0	12	1486.0	2	
	5305	12	72.6	12	1523.8	3	
	5302	13	63.3	19	1232.9	3	
	5304	14	61.1	15	1146.7	3	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
25	5302	1	82.5	20	1040.3	2	1
	5304	2	74.9	15	1858.5	3	
	5303	3	85.8	18	1230.7	1	
	5307	4	99.5	7	1201.6	2	
	5302	5	91.7	20	1482.7	1	
	5307	6	98.8	8	1358.8	3	
	5306	7	57.3	9	1207.5	3	
	5305	8	69.4	12	1699.7	1	
	5304	9	91.8	16	1684.0	3	
	5303	10	83.9	17	1404.9	2	
	5306	11	77.7	11	1034.6	3	
	5306	12	98.3	9	1414.9	2	
	5307	13	57.1	8	1081.5	2	
	5306	14	61.1	9	1229.8	1	
	5304	15	55.7	15	1406.9	2	
	5303	16	55.3	17	1014.3	1	
	5306	17	67.9	10	1274.2	1	
	5308	18	58.0	6	1548.9	1	
26	5306	1	53.2	9	1434.0	2	1
	5307	2	88.1	7	1605.4	1	
	5302	3	54.9	20	1793.4	1	
	5304	4	51.1	16	1267.1	2	
	5304	5	80.0	14	1024.0	1	
	5308	6	79.1	6	1576.2	1	
	5304	7	73.9	15	1988.0	1	
	5308	8	97.0	6	1835.7	1	
	5306	9	90.6	11	1579.0	1	
	5306	10	71.3	9	1395.2	3	
	5306	11	67.3	10	1441.1	2	
	5303	12	60.8	17	1655.1	1	
	5303	13	71.8	18	1343.7	3	
	5304	14	69.6	14	1831.7	3	
	5306	15	61.3	11	1528.1	1	
	5304	16	53.6	14	1449.0	3	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
27	5305	1	74.6	13	1151.2	1	1
	5305	2	98.4	12	1026.0	2	
	5306	3	61.5	10	1622.9	2	
	5306	4	76.1	11	1030.4	2	
	5303	5	61.1	17	1069.0	2	
	5302	6	76.3	19	1095.5	1	
	5307	7	95.0	7	1366.6	1	
	5307	8	93.5	7	1768.5	1	
	5307	9	95.2	8	1077.7	3	
	5308	10	65.1	6	1123.5	3	
	5303	11	94.3	18	1064.0	2	
	5307	12	76.1	7	1126.5	3	
	5306	13	65.6	11	1335.7	1	
	5304	14	55.2	16	1727.8	1	
	5302	15	83.6	19	1654.3	2	
	5304	16	61.9	15	1148.1	3	
	5306	17	75.7	10	1871.2	1	
	5304	18	95.4	16	1810.1	2	
	5308	19	54.9	6	1371.1	3	
	5307	20	70.2	7	1914.6	3	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
28	5302	1	75.4	19	1319.1	1	1
	5304	2	87.5	14	1671.2	2	
	5303	3	55.5	18	1380.6	2	
	5303	4	67.0	17	1434.5	2	
	5306	5	69.6	9	1067.0	1	
	5307	6	61.9	8	1319.4	2	
	5304	7	56.9	16	1375.4	3	
	5302	8	73.6	19	1976.8	1	
	5304	9	88.9	15	1992.8	3	
	5305	10	78.4	12	1351.6	3	
	5307	11	84.5	8	1539.3	1	
	5307	12	75.0	8	1164.3	1	
	5302	13	81.4	20	1184.1	2	
	5304	14	82.4	16	1534.4	2	
	5306	15	85.0	11	1477.0	1	
	5302	16	92.0	20	1023.3	3	
	5304	17	87.0	16	1208.1	1	
	5307	18	92.5	8	1437.9	2	
	5304	19	50.2	14	1056.6	2	
	5306	20	91.7	11	1491.9	2	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
29	5307	1	84.0	8	1243.8	1	1
	5302	2	66.9	19	1465.7	1	
	5306	3	74.6	11	1966.7	1	
	5308	4	76.6	5	1544.2	3	
	5304	5	77.7	14	1895.1	1	
	5305	6	79.0	12	1973.4	1	
	5306	7	61.2	9	1486.9	2	
	5305	8	58.8	12	1100.5	3	
	5304	9	95.6	14	1719.5	2	
	5308	10	92.2	5	1487.5	3	
	5303	11	57.8	18	1433.5	2	
	5304	12	53.7	16	1152.1	3	
	5303	13	57.7	18	1464.9	2	
	5305	14	87.0	12	1204.2	3	
	5304	15	87.5	15	1530.8	3	
	5307	16	82.9	7	1104.9	3	
	5303	17	71.2	18	1884.7	3	
30	5304	1	96.2	16	1648.9	1	1
	5302	2	96.5	20	1045.7	1	
	5302	3	79.6	20	1598.7	2	
	5303	4	91.1	18	1462.1	3	
	5304	5	74.0	16	1835.8	3	
	5306	6	89.1	10	1578.0	1	
	5304	7	60.4	14	1860.1	3	
	5307	8	60.3	8	1258.9	1	
	5307	9	87.7	7	1463.3	1	
	5306	10	71.7	9	1441.0	2	
	5308	11	81.7	6	1814.4	3	
	5306	12	97.8	11	1336.5	2	
	5303	13	96.7	18	1038.5	2	
	5302	14	97.2	19	1870.1	2	
Detection Percentage (%)							96.67

Test Mode		802.11be EHT20				
Frequency		5300 MHz				
Radar Signal		Type 6				
Trial #	Pulse Width (us)	PRI (us)	Pulses / Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	1=Detection ; 0=No Detection
1	1	333	9	0.333	300	1
2	1	333	9	0.333	300	1
3	1	333	9	0.333	300	1
4	1	333	9	0.333	300	1
5	1	333	9	0.333	300	1
6	1	333	9	0.333	300	1
7	1	333	9	0.333	300	1
8	1	333	9	0.333	300	1
9	1	333	9	0.333	300	1
10	1	333	9	0.333	300	1
11	1	333	9	0.333	300	1
12	1	333	9	0.333	300	1
13	1	333	9	0.333	300	1
14	1	333	9	0.333	300	1
15	1	333	9	0.333	300	1
16	1	333	9	0.333	300	1
17	1	333	9	0.333	300	1
18	1	333	9	0.333	300	1
19	1	333	9	0.333	300	1
20	1	333	9	0.333	300	1
21	1	333	9	0.333	300	1
22	1	333	9	0.333	300	1
23	1	333	9	0.333	300	1
24	1	333	9	0.333	300	1
25	1	333	9	0.333	300	1
26	1	333	9	0.333	300	1
27	1	333	9	0.333	300	1
28	1	333	9	0.333	300	1
29	1	333	9	0.333	300	1
30	1	333	9	0.333	300	1
Detection Percentage (%)						100.00

Test Mode		802.11be EHT40				
Frequency		5310 MHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5310	1	678	78	1475	1
2	5310	1	818	65	1222	1
3	5310	1	898	59	1114	1
4	5310	1	618	86	1618	1
5	5310	1	758	70	1319	1
6	5310	1	698	76	1433	1
7	5310	1	838	63	1193	1
8	5310	1	798	67	1253	1
9	5310	1	678	78	1475	1
10	5310	1	658	81	1520	1
11	5310	1	838	63	1193	1
12	5310	1	798	67	1253	1
13	5310	1	878	61	1139	1
14	5310	1	518	102	1931	1
15	5310	1	778	68	1285	1
16	5310	1	839	63	1192	0
17	5310	1	2139	25	468	1
18	5310	1	2507	22	399	1
19	5310	1	1358	39	736	0
20	5310	1	1481	36	675	1
21	5310	1	916	58	1092	1
22	5310	1	905	59	1105	1
23	5310	1	2148	25	466	1
24	5310	1	1670	32	599	1
25	5310	1	1278	42	782	1
26	5310	1	1826	29	548	1
27	5310	1	786	68	1272	1
28	5310	1	2680	20	373	1
29	5310	1	1377	39	726	1
30	5310	1	2724	20	367	1
Detection Percentage (%)						93.33

Test Mode		802.11be EHT40				
Frequency		5310 MHz				
Radar Signal		Type 2				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5310	2.40	200.20	23	4995	0
2	5310	2.90	190.20	25	5258	1
3	5310	4.40	157.40	23	6353	1
4	5310	2.50	153.10	27	6532	1
5	5310	1.30	222.30	27	4498	1
6	5310	4.70	153.60	26	6510	1
7	5310	1.10	221.60	24	4513	0
8	5310	3.70	159.30	23	6277	1
9	5310	2.80	157.40	26	6353	1
10	5310	4.90	207.00	26	4831	1
11	5310	1.60	224.70	29	4450	1
12	5310	2.90	171.70	23	5824	1
13	5310	3.70	168.10	29	5949	1
14	5310	4.70	213.60	26	4682	1
15	5310	4.60	196.10	28	5099	1
16	5310	1.50	228.30	29	4380	1
17	5310	1.10	203.20	29	4921	1
18	5310	1.50	228.10	23	4384	1
19	5310	3.70	208.50	26	4796	1
20	5310	1.40	182.60	24	5476	1
21	5310	4.60	184.70	29	5414	1
22	5310	3.80	188.80	26	5297	1
23	5310	3.50	155.60	24	6427	1
24	5310	2.60	216.20	29	4625	1
25	5310	2.40	204.50	25	4890	1
26	5310	3.00	201.20	23	4970	0
27	5310	4.00	223.90	25	4466	1
28	5310	3.70	176.60	28	5663	1
29	5310	2.70	226.80	27	4409	1
30	5310	4.90	222.60	23	4492	1
Detection Percentage (%)						90.00

Test Mode		802.11be EHT40				
Frequency		5310 MHz				
Radar Signal		Type 3				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5310	8.90	326.20	18	3065.60	1
2	5310	6.60	250.50	18	3992.02	1
3	5310	8.70	289.90	16	3449.47	1
4	5310	7.60	206.30	16	4847.31	0
5	5310	7.00	427.90	16	2336.99	1
6	5310	8.60	317.00	17	3154.57	1
7	5310	9.30	346.90	18	2882.68	1
8	5310	9.70	477.30	18	2095.12	0
9	5310	6.40	463.90	18	2155.64	1
10	5310	8.70	269.70	16	3707.82	1
11	5310	7.10	298.60	17	3348.96	1
12	5310	7.80	356.50	17	2805.05	1
13	5310	9.70	336.70	16	2970.00	1
14	5310	9.60	234.60	18	4262.57	1
15	5310	6.40	325.80	16	3069.37	1
16	5310	7.30	414.00	16	2415.46	1
17	5310	9.90	280.00	17	3571.43	1
18	5310	8.50	309.80	18	3227.89	1
19	5310	6.50	382.70	16	2613.01	1
20	5310	6.30	216.40	17	4621.07	1
21	5310	6.40	461.60	18	2166.38	1
22	5310	6.90	291.00	18	3436.43	1
23	5310	8.60	311.60	18	3209.24	0
24	5310	8.60	394.30	16	2536.14	1
25	5310	6.80	303.40	16	3295.98	1
26	5310	7.10	396.00	16	2525.25	0
27	5310	6.50	399.60	18	2502.50	1
28	5310	6.50	272.00	17	3676.47	1
29	5310	9.00	305.40	16	3274.39	1
30	5310	8.50	285.80	17	3498.95	1
Detection Percentage (%)						86.67

Test Mode		802.11be EHT40				
Frequency		5310 MHz				
Radar Signal		Type 4				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5310	19.50	332.50	14	3008	1
2	5310	17.90	224.20	13	4460	1
3	5310	12.90	213.60	16	4682	1
4	5310	17.80	365.50	16	2736	0
5	5310	17.90	253.10	16	3951	1
6	5310	18.70	482.90	12	2071	1
7	5310	19.50	272.80	13	3666	1
8	5310	12.40	274.70	14	3640	1
9	5310	14.90	489.10	13	2045	1
10	5310	18.40	465.60	13	2148	1
11	5310	16.60	346.50	14	2886	1
12	5310	14.90	410.70	14	2435	1
13	5310	13.30	440.80	16	2269	1
14	5310	14.90	207.20	15	4826	1
15	5310	19.70	294.70	16	3393	0
16	5310	11.40	240.30	14	4161	1
17	5310	17.40	228.40	13	4378	1
18	5310	11.10	405.70	14	2465	1
19	5310	14.10	345.60	14	2894	1
20	5310	13.50	497.20	14	2011	1
21	5310	12.80	240.10	14	4165	1
22	5310	18.00	241.70	16	4137	1
23	5310	18.00	423.70	12	2360	0
24	5310	15.10	369.30	16	2708	0
25	5310	12.10	366.00	13	2732	1
26	5310	18.20	440.80	12	2269	1
27	5310	11.60	444.50	12	2250	1
28	5310	11.50	306.40	15	3264	1
29	5310	19.70	213.60	15	4682	0
30	5310	19.20	412.00	12	2427	1
Detection Percentage (%)						83.33

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
1	5294.5	1	70.3	10	1205.1	3	1
	5294.5	2	92.5	11	1347.3	2	
	5292.5	3	53.1	5	1611.5	2	
	5295.5	4	77.0	12	1172.1	3	
	5294.5	5	95.8	9	1003.2	1	
	5296.5	6	91.2	16	1763.9	1	
	5297.5	7	86.8	17	1505.3	1	
	5296.5	8	62.0	14	1762.6	3	
	5295.5	9	88.6	12	1533.1	2	
	5296.5	10	85.6	16	1994.9	1	
	5292.5	11	79.3	6	1051.7	3	
2	5292.5	1	83.8	5	1979.3	2	1
	5295.5	2	99.3	12	1936.0	1	
	5292.5	3	81.0	6	1702.9	1	
	5293.5	4	87.7	7	1475.6	2	
	5296.5	5	62.4	15	1780.9	1	
	5296.5	6	86.8	14	1309.1	3	
	5298.5	7	89.0	19	1604.5	2	
	5298.5	8	82.5	20	1341.3	1	
	5295.5	9	66.9	13	1511.0	2	
	5294.5	10	99.4	11	1709.2	3	
	5296.5	11	98.0	14	1125.1	2	
	5293.5	12	75.6	7	1992.4	1	
3	5296.5	1	61.9	15	1252.0	3	1
	5297.5	2	95.8	17	1645.7	1	
	5294.5	3	69.1	9	1780.5	1	
	5296.5	4	63.9	14	1532.8	1	
	5295.5	5	87.1	12	1649.3	1	
	5296.5	6	79.7	14	1062.3	1	
	5296.5	7	81.4	16	1772.1	1	
	5292.5	8	62.4	6	1908.7	3	
	5296.5	9	62.4	14	1065.1	2	
	5293.5	10	91.7	7	1968.0	3	
	5297.5	11	89.9	18	1781.4	2	
	5296.5	12	73.8	14	1890.5	1	
	5297.5	13	68.8	18	1205.7	3	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
4	5293.5	1	85.2	8	1166.3	3	1
	5292.5	2	57.4	6	1166.3	3	
	5294.5	3	73.1	11	1886.8	3	
	5294.5	4	66.7	11	1855.4	1	
	5293.5	5	57.6	8	1502.4	2	
	5294.5	6	87.4	11	1145.4	3	
	5296.5	7	93.8	16	1908.2	1	
	5295.5	8	68.9	12	1640.5	2	
	5294.5	9	89.4	11	1531.2	1	
5	5293.5	1	61.7	8	1290.6	1	1
	5296.5	2	55.1	15	1651.4	2	
	5298.5	3	91.0	19	1679.0	2	
	5293.5	4	62.9	7	1788.5	3	
	5293.5	5	63.5	7	1270.8	1	
	5296.5	6	72.4	16	1634.7	2	
	5292.5	7	81.6	6	1744.9	2	
	5294.5	8	54.0	9	1563.5	3	
	5293.5	9	86.5	7	1772.3	3	
	5295.5	10	75.6	13	1056.8	2	
	5294.5	11	53.8	10	1705.9	3	
	5294.5	12	85.0	10	1552.1	3	
	5295.5	13	88.8	12	1466.4	1	
	5295.5	14	94.6	12	1693.8	1	
	5294.5	15	88.5	10	1195.8	1	
6	5293.5	1	86.1	7	1539.7	3	1
	5297.5	2	75.9	18	1637.0	2	
	5293.5	3	54.2	7	1973.5	1	
	5293.5	4	76.3	7	1370.4	2	
	5294.5	5	58.3	10	1904.6	3	
	5294.5	6	65.5	11	1938.2	1	
	5292.5	7	84.6	5	1412.8	3	
	5293.5	8	70.9	8	1592.5	2	
	5294.5	9	68.8	11	1896.1	1	
	5295.5	10	91.7	12	1326.7	1	
	5294.5	11	76.2	10	1992.4	2	
	5296.5	12	55.9	16	1486.6	3	
	5293.5	13	61.2	7	1096.2	3	
	5295.5	14	63.1	13	1391.9	2	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
7	5295.5	1	55.9	13	1841.7	2	1
	5293.5	2	79.4	7	1546.2	2	
	5296.5	3	53.6	15	1635.9	2	
	5293.5	4	66.7	8	1988.4	1	
	5297.5	5	65.8	18	1432.0	1	
	5296.5	6	80.0	14	1435.4	2	
	5296.5	7	76.0	15	1105.7	2	
	5293.5	8	76.2	7	1670.4	3	
	5298.5	9	82.8	20	1515.5	3	
	5294.5	10	98.3	10	1128.0	3	
	5294.5	11	80.4	10	1349.1	2	
	5293.5	12	79.1	7	1345.3	1	
	5293.5	13	51.5	8	1962.2	3	
	5293.5	14	63.8	8	1909.2	3	
	5297.5	15	98.6	18	1602.9	1	
	5297.5	16	91.5	18	1045.2	2	
	5296.5	17	94.4	16	1661.5	2	
8	5295.5	1	60.4	12	1604.2	3	1
	5297.5	2	81.0	18	1298.6	3	
	5294.5	3	77.5	9	1323.6	1	
	5294.5	4	58.7	11	1255.1	2	
	5293.5	5	89.0	7	1908.8	3	
	5294.5	6	52.0	9	1884.8	2	
	5296.5	7	56.9	14	1856.5	1	
	5293.5	8	86.0	8	1427.0	1	
	5295.5	9	99.8	12	1332.4	2	
	5294.5	10	65.0	11	1587.7	1	
	5294.5	11	65.7	11	1544.7	1	
	5296.5	12	72.5	15	1437.6	2	
	5297.5	13	80.1	17	1523.6	3	
	5296.5	14	62.4	14	1491.4	1	
	5296.5	15	74.2	14	1500.8	3	
	5294.5	16	78.8	9	1199.6	1	
	5297.5	17	99.0	18	1955.5	1	
	5295.5	18	55.5	13	1615.8	2	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
9	5293.5	1	50.0	8	1769.3	2	1
	5297.5	2	51.7	17	1240.9	2	
	5294.5	3	58.8	11	1678.4	2	
	5292.5	4	73.5	6	1310.6	2	
	5297.5	5	97.9	17	1740.7	1	
	5293.5	6	88.8	7	1741.4	3	
	5294.5	7	57.4	11	1387.1	1	
	5295.5	8	55.5	12	1621.5	1	
	5297.5	9	81.7	17	1558.3	3	
	5293.5	10	75.2	7	1987.2	1	
	5297.5	11	59.3	17	1674.2	1	
	5294.5	12	52.3	11	1176.8	3	
	5297.5	13	64.7	18	1325.7	1	
	5294.5	14	65.2	10	1115.6	2	
	5296.5	15	88.8	15	1905.7	1	
	5294.5	16	65.2	11	1684.9	3	
	5294.5	17	95.1	10	1780.9	3	
	5296.5	18	78.3	16	1476.0	2	
	5294.5	19	86.0	9	1966.9	3	
10	5294.5	1	81.5	10	1632.3	2	1
	5295.5	2	52.9	13	1935.4	1	
	5297.5	3	92.1	18	1370.2	3	
	5295.5	4	97.4	12	1999.2	2	
	5297.5	5	81.8	18	1638.3	1	
	5297.5	6	54.2	18	1868.9	3	
	5296.5	7	63.5	16	1065.1	2	
	5293.5	8	94.8	7	1318.8	2	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
11	5310	1	76.9	17	1154.7	2	1
	5310	2	63.4	13	1928.9	3	
	5310	3	63.5	14	1899.1	1	
	5310	4	53.8	11	1955.3	1	
	5310	5	63.2	11	1838.3	3	
	5310	6	72.3	6	1865.8	2	
	5310	7	98.0	12	1243.5	1	
	5310	8	58.7	19	1816.6	3	
	5310	9	64.6	18	1692.9	2	
	5310	10	95.4	6	1937.8	3	
	5310	11	53.3	9	1491.0	3	
	5310	12	93.2	6	1226.6	3	
	5310	13	54.2	6	1971.7	3	
	5310	14	88.3	12	1415.3	3	
	5310	15	67.4	6	1743.0	2	
	5310	16	89.2	16	1881.6	3	
12	5310	1	96.5	18	1849.5	2	1
	5310	2	65.3	11	1088.4	2	
	5310	3	89.4	8	1713.5	1	
	5310	4	90.3	5	1246.6	1	
	5310	5	93.3	15	1531.9	2	
	5310	6	75.2	14	1180.7	1	
	5310	7	85.1	6	1187.7	3	
	5310	8	83.9	16	1600.3	3	
	5310	9	69.1	10	1836.6	1	
	5310	10	56.5	12	1621.2	1	
	5310	11	95.3	10	1305.6	2	
	5310	12	92.4	6	1461.1	1	
	5310	13	87.4	10	1260.9	2	
	5310	14	52.0	8	1109.0	3	
	5310	15	63.3	7	1811.5	3	
	5310	16	72.5	16	1028.4	1	
	5310	17	72.2	17	1536.3	2	
	5310	18	70.8	9	1202.4	2	
	5310	19	66.2	17	1275.0	3	
	5310	20	92.0	20	1611.4	2	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
13	5310	1	80.9	13	1941.7	3	1
	5310	2	98.0	6	1133.9	1	
	5310	3	96.0	11	1500.2	2	
	5310	4	77.8	19	1301.8	2	
	5310	5	94.4	17	1925.0	3	
	5310	6	91.4	11	1054.0	3	
	5310	7	56.7	15	1665.1	3	
	5310	8	54.0	19	1932.3	3	
	5310	9	94.0	11	1688.9	3	
	5310	10	68.8	17	1249.8	1	
14	5310	1	61.6	9	1630.0	3	0
	5310	2	68.8	17	1735.0	2	
	5310	3	95.3	8	1232.5	2	
	5310	4	79.2	15	1054.6	2	
	5310	5	86.4	14	1021.4	3	
	5310	6	80.0	8	1849.9	3	
	5310	7	80.8	5	1764.0	3	
	5310	8	61.2	16	1290.2	2	
	5310	9	79.0	8	1770.0	1	
	5310	10	77.2	12	1894.3	3	
	5310	11	95.2	19	1664.4	1	
	5310	12	52.2	14	1055.2	1	
	5310	13	55.4	9	1407.5	2	
	5310	14	87.2	6	1501.8	1	
	5310	15	56.2	6	1766.8	3	
	5310	16	85.8	13	1339.4	3	
	5310	17	67.5	7	1603.9	1	
	5310	18	96.2	15	1969.8	1	
	5310	19	80.3	6	1349.0	2	
	5310	20	69.5	12	1378.4	2	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
15	5310	1	62.8	6	1359.7	2	1
	5310	2	74.4	17	1166.6	2	
	5310	3	94.5	14	1901.1	2	
	5310	4	88.0	12	1320.4	2	
	5310	5	81.4	12	1058.6	3	
	5310	6	56.5	14	1041.7	1	
	5310	7	65.5	13	1169.8	2	
	5310	8	62.6	13	1748.4	1	
	5310	9	90.0	19	1652.2	3	
	5310	10	51.3	11	1921.8	2	
	5310	11	81.0	12	1501.4	2	
	5310	12	58.9	5	1134.9	3	
	5310	13	85.7	12	1707.7	3	
	5310	14	61.2	10	1779.9	2	
	5310	15	95.4	13	1195.8	3	
	5310	16	64.5	15	1212.0	1	
	5310	17	74.9	14	1753.5	2	
	5310	18	84.7	18	1495.6	3	
	5310	19	95.2	10	1781.1	2	
16	5310	1	63.8	10	1566.9	2	0
	5310	2	67.6	10	1535.4	3	
	5310	3	89.8	12	1490.7	2	
	5310	4	88.6	20	1291.5	2	
	5310	5	89.8	9	1945.7	2	
	5310	6	81.4	8	1552.2	1	
	5310	7	86.8	13	1107.0	1	
	5310	8	84.0	12	1499.5	3	
	5310	9	72.3	10	1601.4	2	
	5310	10	99.4	15	1212.4	2	
	5310	11	77.8	18	1918.8	2	
	5310	12	80.4	11	1585.1	1	
	5310	13	65.5	8	1204.9	1	
	5310	14	74.2	16	1365.1	2	
	5310	15	70.0	7	1788.0	1	
	5310	16	86.7	10	1006.3	2	
	5310	17	78.5	11	1125.6	1	
	5310	18	65.2	9	1761.9	2	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
17	5310	1	54.7	6	1529.8	1	1
	5310	2	58.6	11	1808.6	3	
	5310	3	95.6	11	1691.3	2	
	5310	4	54.0	18	1201.2	2	
	5310	5	91.6	16	1785.8	3	
	5310	6	52.9	17	1628.1	1	
	5310	7	53.8	19	1878.8	1	
	5310	8	63.3	19	1226.1	3	
	5310	9	86.4	19	1130.8	1	
	5310	10	81.0	10	1238.5	2	
	5310	11	52.9	9	1603.9	1	
	5310	12	58.1	6	1985.6	3	
	5310	13	99.0	16	1313.1	3	
	5310	14	50.3	9	1342.7	1	
	5310	15	76.0	11	1047.7	1	
	5310	16	73.4	10	1107.8	1	
	5310	17	95.3	17	1395.8	3	
18	5310	1	67.7	9	1170.0	2	1
	5310	2	97.5	11	1487.5	2	
	5310	3	66.9	18	1200.1	3	
	5310	4	74.2	7	1123.4	2	
	5310	5	73.8	11	1584.2	3	
	5310	6	63.3	5	1599.9	2	
	5310	7	94.5	6	1096.3	2	
	5310	8	62.9	12	1029.9	1	
	5310	9	50.2	12	1044.0	3	
	5310	10	67.2	19	1285.7	3	
	5310	11	54.7	11	1439.1	3	
	5310	12	52.3	10	1640.9	2	
	5310	13	60.2	18	1032.5	3	
	5310	14	58.3	14	1671.4	3	
	5310	15	70.4	15	1777.4	2	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
19	5310	1	70.6	7	1819.7	1	0
	5310	2	67.1	7	1092.6	1	
	5310	3	87.3	14	1489.4	3	
	5310	4	75.9	15	1040.6	2	
	5310	5	67.8	8	1440.6	1	
	5310	6	75.4	11	1764.6	1	
	5310	7	99.3	6	1595.7	1	
	5310	8	72.0	11	1043.3	3	
	5310	9	63.3	16	1822.5	3	
	5310	10	65.3	12	1815.9	2	
	5310	11	93.9	16	1705.7	3	
	5310	12	62.6	17	1222.7	2	
	5310	13	93.2	12	1793.5	3	
	5310	14	80.5	9	1036.9	2	
20	5310	1	88.0	12	1042.9	1	1
	5310	2	90.1	13	1668.8	2	
	5310	3	76.3	9	1338.4	2	
	5310	4	54.8	14	1451.6	2	
	5310	5	82.4	7	1101.7	1	
	5310	6	58.5	10	1196.4	2	
	5310	7	55.8	11	1812.6	2	
	5310	8	70.2	15	1915.0	3	
	5310	9	72.4	9	1280.3	1	
	5310	10	92.1	19	1469.9	3	
21	5325.5	1	69.7	11	1463.0	2	1
	5325.5	2	87.3	11	1900.8	2	
	5326.5	3	73.5	8	1584.1	1	
	5325.5	4	99.1	10	1716.8	1	
	5327.5	5	53.3	5	1096.0	2	
	5327.5	6	69.8	5	1785.4	3	
	5323.5	7	88.4	14	1149.4	3	
	5322.5	8	74.9	17	1911.1	3	
	5322.5	9	76.5	18	1724.9	2	
	5324.5	10	80.7	13	1008.4	2	
	5323.5	11	92.8	15	1635.2	1	
	5323.5	12	94.3	15	1419.7	2	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
22	5323.5	1	68.7	15	1159.1	1	1
	5325.5	2	53.6	9	1003.8	1	
	5327.5	3	88.2	5	1089.9	3	
	5325.5	4	66.5	10	1267.5	3	
	5327.5	5	85.1	5	1546.2	3	
	5325.5	6	91.5	10	1422.2	2	
	5321.5	7	70.3	19	1040.5	1	
	5321.5	8	90.3	19	1111.1	2	
	5323.5	9	71.6	15	1059.1	2	
23	5323.5	1	57.6	16	1166.0	3	1
	5321.5	2	71.4	19	1594.2	3	
	5325.5	3	57.4	9	1452.8	3	
	5326.5	4	68.2	8	1398.8	2	
	5322.5	5	72.4	18	1515.6	1	
	5323.5	6	56.7	15	1017.4	3	
	5323.5	7	63.4	14	1322.5	2	
	5325.5	8	96.8	9	1264.1	2	
	5325.5	9	90.2	10	1630.9	1	
	5323.5	10	76.1	15	1147.5	1	
	5325.5	11	66.8	11	1387.6	3	
	5325.5	12	61.0	11	1668.8	3	
	5321.5	13	86.7	19	1828.3	3	
	5323.5	14	74.2	16	1528.6	3	
	5325.5	15	94.7	10	1347.4	3	
24	5326.5	1	74.7	7	1698.3	3	1
	5324.5	2	94.7	13	1340.3	1	
	5323.5	3	75.8	15	1933.2	3	
	5325.5	4	95.7	11	1182.6	3	
	5321.5	5	76.1	20	1836.5	1	
	5325.5	6	57.6	9	1725.4	1	
	5325.5	7	69.5	9	1931.9	3	
	5327.5	8	59.6	6	1083.1	1	
	5324.5	9	59.0	13	1432.1	1	
	5325.5	10	99.2	9	1147.2	3	
	5322.5	11	72.1	18	1511.5	2	
	5327.5	12	56.9	5	1606.8	1	
	5325.5	13	91.7	10	1805.4	3	
	5321.5	14	53.8	19	1409.2	3	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
25	5325.5	1	97.2	11	1755.1	2	1
	5322.5	2	60.1	17	1905.8	1	
	5326.5	3	65.4	7	1332.2	3	
	5324.5	4	50.3	13	1333.2	3	
	5325.5	5	53.1	11	1251.3	2	
	5323.5	6	88.8	15	1029.5	2	
	5321.5	7	73.5	19	1930.7	3	
	5325.5	8	92.0	9	1303.7	2	
	5324.5	9	69.9	13	1649.0	2	
	5323.5	10	74.0	16	1148.0	1	
	5327.5	11	88.8	6	1534.7	1	
	5323.5	12	82.1	16	1860.1	1	
	5323.5	13	72.6	14	1549.3	1	
	5324.5	14	88.6	12	1436.7	1	
	5325.5	15	83.3	10	1172.8	3	
	5325.5	16	73.6	10	1447.7	2	
	5323.5	17	76.2	15	1167.0	1	
	5325.5	18	74.1	10	1396.8	1	
26	5322.5	1	68.0	18	1453.2	3	1
	5325.5	2	88.6	11	1048.3	2	
	5323.5	3	91.3	14	1417.3	3	
	5326.5	4	89.1	8	1025.3	1	
	5324.5	5	77.5	12	1689.0	2	
	5323.5	6	67.7	16	1501.0	1	
	5326.5	7	80.3	8	1019.8	3	
	5322.5	8	70.0	18	1516.7	2	
	5324.5	9	86.0	13	1663.3	3	
	5324.5	10	99.8	12	1065.5	1	
	5322.5	11	60.1	18	1999.7	3	
	5322.5	12	55.5	18	1872.6	1	
	5325.5	13	66.1	9	1693.4	2	
	5323.5	14	50.0	16	1522.1	2	
	5325.5	15	83.5	10	1734.6	1	
	5326.5	16	81.7	7	1242.8	1	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
27	5325.5	1	88.0	11	1484.9	3	1
	5324.5	2	77.9	13	1804.7	2	
	5325.5	3	71.4	10	1960.1	1	
	5322.5	4	85.7	17	1009.0	2	
	5325.5	5	85.0	10	1208.4	2	
	5321.5	6	86.1	19	1262.2	1	
	5323.5	7	58.9	16	1031.0	2	
	5323.5	8	62.3	16	1616.5	1	
	5323.5	9	81.0	15	1254.4	1	
	5324.5	10	58.4	12	1059.4	2	
	5327.5	11	58.1	6	1704.5	3	
	5325.5	12	78.9	10	1681.2	3	
	5323.5	13	82.9	16	1449.9	3	
	5323.5	14	97.2	14	1676.9	2	
	5325.5	15	52.8	11	1984.6	2	
	5326.5	16	70.2	8	1175.2	1	
	5327.5	17	53.1	6	1958.1	2	
	5322.5	18	61.8	18	1957.3	3	
	5322.5	19	73.3	18	1160.9	2	
	5321.5	20	90.3	19	1588.8	1	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
28	5324.5	1	67.9	13	1479.1	1	1
	5323.5	2	82.6	14	1907.1	3	
	5321.5	3	50.3	19	1773.6	2	
	5322.5	4	89.8	17	1936.5	3	
	5323.5	5	61.6	16	1628.8	2	
	5327.5	6	97.6	6	1953.2	3	
	5322.5	7	92.5	18	1896.8	1	
	5325.5	8	74.2	10	1397.5	2	
	5323.5	9	96.7	14	1534.9	1	
	5323.5	10	73.7	14	1828.5	1	
	5323.5	11	99.2	15	1712.1	1	
	5322.5	12	74.6	17	1054.6	3	
	5322.5	13	70.7	18	1162.1	3	
	5326.5	14	86.6	8	1144.9	3	
	5323.5	15	85.0	14	1535.8	1	
	5323.5	16	84.7	15	1744.0	1	
	5324.5	17	97.1	13	1263.4	2	
	5323.5	18	52.2	16	1663.1	2	
	5321.5	19	78.2	19	1154.3	2	
	5327.5	20	84.3	5	1706.7	1	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
29	5322.5	1	90.2	17	1798.6	1	1
	5323.5	2	83.6	15	1409.1	1	
	5321.5	3	60.2	19	1735.6	3	
	5326.5	4	58.3	7	1573.9	1	
	5326.5	5	93.6	7	1884.7	2	
	5326.5	6	64.2	7	1142.8	3	
	5326.5	7	62.3	8	1956.6	1	
	5325.5	8	63.7	9	1955.5	2	
	5323.5	9	61.7	14	1755.9	1	
	5323.5	10	93.1	15	1241.2	2	
	5323.5	11	75.4	14	1691.0	2	
	5324.5	12	57.4	13	1661.3	2	
	5324.5	13	91.5	12	1774.5	1	
	5326.5	14	98.5	8	1638.1	3	
	5322.5	15	52.1	17	1445.8	1	
	5322.5	16	75.6	17	1467.7	3	
	5322.5	17	90.3	18	1943.4	1	
30	5326.5	1	58.4	7	1535.2	3	1
	5326.5	2	71.6	7	1264.3	2	
	5325.5	3	64.2	10	1115.7	3	
	5325.5	4	60.4	9	1717.8	2	
	5327.5	5	98.2	5	1050.9	3	
	5324.5	6	76.7	12	1158.3	2	
	5327.5	7	84.8	5	1639.8	1	
	5324.5	8	67.5	13	1376.8	2	
	5327.5	9	67.5	6	1294.6	1	
	5325.5	10	81.8	11	1490.6	3	
	5326.5	11	90.6	7	1953.2	1	
	5322.5	12	63.7	17	1704.5	3	
	5323.5	13	76.7	15	1187.4	1	
	5325.5	14	91.3	10	1893.3	2	
Detection Percentage (%)							90.00

Test Mode		802.11be EHT40				
Frequency		5310 MHz				
Radar Signal		Type 6				
Trial #	Pulse Width (us)	PRI (us)	Pulses / Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	1=Detection ; 0=No Detection
1	1	333	9	0.333	300	1
2	1	333	9	0.333	300	1
3	1	333	9	0.333	300	1
4	1	333	9	0.333	300	1
5	1	333	9	0.333	300	1
6	1	333	9	0.333	300	1
7	1	333	9	0.333	300	1
8	1	333	9	0.333	300	1
9	1	333	9	0.333	300	1
10	1	333	9	0.333	300	1
11	1	333	9	0.333	300	1
12	1	333	9	0.333	300	1
13	1	333	9	0.333	300	1
14	1	333	9	0.333	300	1
15	1	333	9	0.333	300	1
16	1	333	9	0.333	300	1
17	1	333	9	0.333	300	1
18	1	333	9	0.333	300	1
19	1	333	9	0.333	300	1
20	1	333	9	0.333	300	1
21	1	333	9	0.333	300	1
22	1	333	9	0.333	300	1
23	1	333	9	0.333	300	1
24	1	333	9	0.333	300	1
25	1	333	9	0.333	300	1
26	1	333	9	0.333	300	1
27	1	333	9	0.333	300	1
28	1	333	9	0.333	300	1
29	1	333	9	0.333	300	1
30	1	333	9	0.333	300	1
Detection Percentage (%)						100.00

Test Mode		802.11be EHT80				
Frequency		5290 MHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5290	1	638	83	1567	1
2	5290	1	798	67	1253	0
3	5290	1	778	68	1285	1
4	5290	1	938	57	1066	1
5	5290	1	598	89	1672	1
6	5290	1	758	70	1319	1
7	5290	1	858	62	1166	0
8	5290	1	818	65	1222	1
9	5290	1	858	62	1166	1
10	5290	1	778	68	1285	1
11	5290	1	858	62	1166	1
12	5290	1	558	95	1792	1
13	5290	1	638	83	1567	1
14	5290	1	838	63	1193	1
15	5290	1	658	81	1520	1
16	5290	1	1948	28	513	1
17	5290	1	2912	19	343	1
18	5290	1	2363	23	423	1
19	5290	1	2382	23	420	1
20	5290	1	931	57	1074	1
21	5290	1	2550	21	392	1
22	5290	1	1036	51	965	1
23	5290	1	2894	19	346	1
24	5290	1	2092	26	478	1
25	5290	1	1324	40	755	1
26	5290	1	1521	35	657	1
27	5290	1	1225	44	816	1
28	5290	1	1545	35	647	1
29	5290	1	2024	27	494	1
30	5290	1	2263	24	442	1
Detection Percentage (%)						93.33

Test Mode		802.11be EHT80				
Frequency		5290 MHz				
Radar Signal		Type 2				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5290	1.50	194.90	29	5131	1
2	5290	1.50	202.90	24	4929	1
3	5290	1.80	175.10	29	5711	1
4	5290	1.30	222.70	26	4490	1
5	5290	3.40	175.50	26	5698	1
6	5290	2.80	184.30	23	5426	1
7	5290	1.30	178.20	25	5612	1
8	5290	2.90	165.90	27	6028	1
9	5290	4.10	157.50	27	6349	0
10	5290	3.00	158.20	25	6321	1
11	5290	3.80	212.40	29	4708	1
12	5290	4.30	229.80	23	4352	1
13	5290	1.70	211.20	26	4735	1
14	5290	1.90	189.10	29	5288	1
15	5290	2.80	179.10	25	5583	1
16	5290	4.50	156.60	25	6386	1
17	5290	3.40	168.30	29	5942	1
18	5290	2.40	159.60	27	6266	1
19	5290	1.50	208.30	23	4801	1
20	5290	1.90	183.20	29	5459	1
21	5290	2.80	163.30	28	6124	0
22	5290	3.70	191.20	24	5230	1
23	5290	5.00	220.70	24	4531	1
24	5290	4.70	195.30	28	5120	1
25	5290	1.50	216.30	27	4623	1
26	5290	4.40	215.00	25	4651	1
27	5290	1.70	167.60	24	5967	1
28	5290	3.10	222.60	27	4492	0
29	5290	1.30	162.10	25	6169	0
30	5290	2.40	176.20	23	5675	1
Detection Percentage (%)						86.67

Test Mode		802.11be EHT80				
Frequency		5290 MHz				
Radar Signal		Type 3				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5290	6.80	361.50	16	2766.25	1
2	5290	6.20	202.40	17	4940.71	1
3	5290	8.10	306.70	18	3260.52	0
4	5290	8.10	237.30	18	4214.08	1
5	5290	7.30	401.90	18	2488.18	1
6	5290	6.90	221.90	16	4506.53	1
7	5290	9.20	326.30	16	3064.66	1
8	5290	9.40	201.80	17	4955.40	0
9	5290	10.00	251.90	18	3969.83	1
10	5290	7.50	488.20	16	2048.34	1
11	5290	9.00	232.20	17	4306.63	1
12	5290	7.30	365.80	18	2733.73	1
13	5290	9.20	382.20	17	2616.43	1
14	5290	6.80	306.80	16	3259.45	1
15	5290	7.20	343.90	16	2907.82	1
16	5290	6.60	328.80	16	3041.36	1
17	5290	9.80	346.00	17	2890.17	1
18	5290	9.40	437.90	17	2283.63	1
19	5290	9.40	480.60	18	2080.73	1
20	5290	7.40	297.20	17	3364.74	1
21	5290	6.00	372.20	18	2686.73	1
22	5290	7.50	366.60	18	2727.77	1
23	5290	9.50	228.00	16	4385.96	1
24	5290	7.50	443.80	16	2253.27	1
25	5290	7.60	247.10	17	4046.94	1
26	5290	7.00	270.10	16	3702.33	1
27	5290	7.10	284.90	17	3510.00	1
28	5290	9.00	301.60	18	3315.65	1
29	5290	10.00	238.50	16	4192.87	1
30	5290	9.80	374.20	17	2672.37	1
Detection Percentage (%)						93.33

Test Mode		802.11be EHT80				
Frequency		5290 MHz				
Radar Signal		Type 4				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5290	19.70	380.30	14	2630	1
2	5290	16.50	444.30	14	2251	1
3	5290	12.40	329.10	15	3039	1
4	5290	19.70	282.10	15	3545	1
5	5290	18.00	477.40	13	2095	0
6	5290	18.30	445.50	13	2245	1
7	5290	14.80	398.90	15	2507	1
8	5290	16.60	237.60	14	4209	0
9	5290	11.70	350.10	15	2856	1
10	5290	15.60	468.50	13	2134	1
11	5290	12.10	257.80	12	3879	1
12	5290	19.00	319.50	14	3130	0
13	5290	12.50	404.10	15	2475	1
14	5290	14.60	401.50	12	2491	1
15	5290	16.10	349.40	13	2862	1
16	5290	18.40	206.10	15	4852	1
17	5290	17.60	241.20	14	4146	1
18	5290	16.60	203.10	13	4924	1
19	5290	14.50	478.20	15	2091	1
20	5290	11.90	431.90	12	2315	1
21	5290	12.00	364.10	13	2746	1
22	5290	19.70	227.60	14	4394	1
23	5290	14.60	496.50	16	2014	1
24	5290	13.50	410.40	13	2437	1
25	5290	11.10	297.30	12	3364	1
26	5290	14.30	478.30	12	2091	1
27	5290	20.00	232.80	14	4296	0
28	5290	19.20	217.10	12	4606	1
29	5290	18.30	366.20	12	2731	1
30	5290	16.40	398.70	16	2508	1
Detection Percentage (%)						86.67

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
1	5254	1	60.3	7	1916.4	1	0
	5257	2	63.5	14	1337.1	3	
	5257	3	80.0	15	1881.4	3	
	5255	4	61.3	11	1188.5	1	
	5257	5	81.7	14	1589.8	2	
	5257	6	93.1	14	1550.2	1	
	5254	7	94.8	7	1614.5	1	
	5258	8	67.0	18	1689.0	1	
	5257	9	83.2	15	1261.3	2	
	5255	10	85.2	9	1258.8	3	
	5257	11	56.4	15	1611.8	1	
2	5258	1	99.9	17	1486.9	1	1
	5254	2	59.2	7	1102.6	2	
	5255	3	89.3	10	1443.0	3	
	5257	4	90.1	15	1762.3	1	
	5255	5	65.3	9	1097.2	2	
	5259	6	97.1	19	1006.3	1	
	5258	7	81.8	17	1799.3	2	
	5258	8	50.1	18	1263.8	1	
	5258	9	88.3	18	1166.6	3	
	5259	10	83.0	19	1839.7	1	
	5258	11	71.5	18	1945.9	3	
	5258	12	71.0	18	1909.2	2	
3	5253	1	52.2	6	1722.6	1	1
	5258	2	55.2	18	1396.7	3	
	5258	3	65.8	17	1586.4	1	
	5257	4	64.5	14	1856.2	2	
	5255	5	76.7	9	1424.0	3	
	5259	6	74.1	19	1880.7	2	
	5253	7	80.9	5	1260.4	2	
	5257	8	54.8	14	1587.9	1	
	5254	9	65.5	8	1791.5	2	
	5258	10	81.3	17	1960.1	2	
	5256	11	82.0	12	1145.2	2	
	5254	12	82.3	8	1040.7	1	
	5253	13	59.0	5	1924.3	3	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
4	5259	1	71.2	19	1438.4	2	1
	5258	2	67.0	18	1189.3	2	
	5253	3	88.4	6	1654.0	3	
	5257	4	93.3	14	1675.5	3	
	5253	5	88.3	5	1402.5	1	
	5257	6	77.1	14	1990.0	3	
	5255	7	81.7	9	1791.2	3	
	5258	8	68.2	17	1889.2	3	
	5256	9	71.4	12	1679.9	1	
5	5253	1	74.6	6	1392.2	2	1
	5256	2	97.7	13	1745.2	2	
	5256	3	53.7	12	1964.1	1	
	5254	4	83.3	8	1513.5	2	
	5255	5	74.8	11	1594.6	2	
	5257	6	77.4	15	1598.1	2	
	5259	7	63.4	20	1472.8	2	
	5259	8	94.2	19	1745.0	3	
	5253	9	60.2	5	1068.2	3	
	5258	10	93.5	18	1866.8	3	
	5257	11	60.0	14	1529.7	1	
	5257	12	99.8	14	1810.0	1	
	5258	13	64.4	18	1270.3	2	
	5257	14	63.8	15	1433.4	1	
	5253	15	81.4	6	1592.4	1	
6	5255	1	95.3	11	1815.9	2	1
	5256	2	93.9	13	1870.2	2	
	5259	3	54.9	20	1459.8	2	
	5255	4	59.9	11	1709.7	1	
	5257	5	76.8	15	1353.6	3	
	5255	6	99.7	11	1967.8	3	
	5253	7	99.0	6	1203.4	3	
	5258	8	92.7	18	1700.5	1	
	5258	9	93.4	17	1800.9	1	
	5253	10	77.8	5	1779.7	3	
	5259	11	91.3	19	1090.1	2	
	5255	12	93.7	11	1215.6	2	
	5257	13	56.5	15	1253.5	3	
	5255	14	81.2	11	1325.8	1	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
7	5259	1	58.7	20	1794.1	3	1
	5258	2	50.7	18	1774.2	1	
	5258	3	78.7	18	1055.1	1	
	5258	4	73.6	18	1806.8	2	
	5257	5	99.6	14	1901.2	2	
	5258	6	80.9	18	1509.8	2	
	5257	7	62.6	16	1135.7	1	
	5255	8	89.3	11	1095.6	3	
	5256	9	97.9	13	1434.7	3	
	5254	10	89.9	8	1506.6	1	
	5258	11	66.6	17	1934.0	2	
	5256	12	79.2	12	1584.7	2	
	5256	13	89.8	13	1186.7	2	
	5254	14	95.7	7	1151.9	2	
	5256	15	89.7	12	1143.6	2	
	5259	16	50.2	20	1241.0	2	
	5256	17	59.8	13	1702.6	1	
8	5257	1	76.9	16	1440.4	2	1
	5254	2	91.1	7	1396.0	2	
	5258	3	94.1	17	1712.7	3	
	5256	4	72.4	12	1678.4	2	
	5256	5	79.6	13	1738.5	3	
	5257	6	65.1	14	1717.1	1	
	5255	7	56.9	9	1268.3	2	
	5254	8	64.7	7	1262.6	1	
	5259	9	60.8	19	1933.1	3	
	5257	10	86.7	16	1092.5	1	
	5253	11	58.3	6	1670.2	1	
	5255	12	82.1	10	1632.5	3	
	5258	13	86.1	17	1953.9	3	
	5255	14	63.1	10	1534.3	1	
	5255	15	58.2	10	1469.1	2	
	5255	16	75.0	9	1239.6	2	
	5253	17	75.6	6	1630.1	2	
	5258	18	55.4	17	1599.0	2	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
9	5258	1	76.9	17	1472.7	2	1
	5255	2	54.8	10	1074.1	2	
	5253	3	96.6	6	1308.7	3	
	5256	4	73.2	12	1886.0	1	
	5254	5	93.2	8	1081.3	3	
	5257	6	62.0	15	1476.7	1	
	5259	7	56.0	19	1621.1	1	
	5257	8	50.7	14	1016.8	1	
	5259	9	87.3	20	1119.6	1	
	5257	10	56.7	15	1310.4	3	
	5255	11	83.8	11	1357.8	3	
	5259	12	85.8	20	1561.1	2	
	5255	13	81.4	10	1401.5	1	
	5256	14	64.7	12	1420.7	3	
	5257	15	76.0	14	1915.7	1	
	5256	16	90.1	12	1708.0	3	
	5256	17	72.7	13	1432.8	3	
	5254	18	61.5	8	1615.1	1	
	5256	19	90.5	12	1280.4	3	
10	5257	1	59.7	14	1731.6	3	1
	5254	2	61.9	7	1792.8	2	
	5254	3	61.3	8	1027.2	2	
	5255	4	76.1	11	1139.5	2	
	5254	5	99.5	7	1241.2	1	
	5253	6	58.5	6	1032.6	2	
	5254	7	62.4	7	1679.9	3	
	5257	8	94.1	15	1413.4	2	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
11	5290	1	53.7	13	1749.3	1	1
	5290	2	92.9	17	1526.4	2	
	5290	3	84.7	17	1422.0	3	
	5290	4	71.7	10	1767.4	1	
	5290	5	88.3	12	1664.6	2	
	5290	6	81.2	9	1294.1	1	
	5290	7	84.1	13	1835.2	1	
	5290	8	50.5	14	1760.7	1	
	5290	9	89.4	12	1330.7	1	
	5290	10	82.4	17	1421.9	1	
	5290	11	65.1	11	1923.3	3	
	5290	12	70.7	19	1413.4	2	
	5290	13	76.6	7	1532.5	1	
	5290	14	90.0	13	1714.9	2	
	5290	15	65.3	7	1716.8	2	
	5290	16	80.4	14	1368.6	1	
12	5290	1	50.6	5	1863.2	2	1
	5290	2	92.0	16	1169.8	3	
	5290	3	84.3	12	1396.3	3	
	5290	4	63.8	14	1742.8	2	
	5290	5	99.6	17	1285.0	3	
	5290	6	57.7	16	1892.9	3	
	5290	7	73.3	20	1159.8	2	
	5290	8	71.1	18	1152.9	3	
	5290	9	66.5	13	1021.3	2	
	5290	10	80.1	12	1260.5	3	
	5290	11	85.9	18	1945.0	1	
	5290	12	53.1	8	1647.5	2	
	5290	13	65.3	14	1198.7	2	
	5290	14	59.5	20	1436.1	2	
	5290	15	73.7	10	1887.0	1	
	5290	16	74.8	14	1154.4	2	
	5290	17	59.7	13	1110.3	2	
	5290	18	80.3	16	1115.3	2	
	5290	19	93.1	18	1843.3	2	
	5290	20	85.7	17	1371.8	2	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
13	5290	1	69.2	10	1886.5	1	1
	5290	2	95.5	16	1707.3	1	
	5290	3	65.9	18	1032.0	3	
	5290	4	82.4	14	1345.8	2	
	5290	5	80.7	12	1989.1	3	
	5290	6	55.7	9	1427.7	2	
	5290	7	99.4	9	1099.3	1	
	5290	8	95.7	6	1050.4	1	
	5290	9	87.7	10	1884.0	2	
	5290	10	94.8	14	1573.1	1	
14	5290	1	65.8	16	1249.3	3	1
	5290	2	79.0	10	1808.0	3	
	5290	3	89.3	8	1458.1	1	
	5290	4	78.9	8	1732.8	3	
	5290	5	54.1	19	1989.1	3	
	5290	6	76.0	6	1676.1	1	
	5290	7	81.5	19	1081.7	1	
	5290	8	94.8	16	1481.7	3	
	5290	9	91.3	15	1260.7	3	
	5290	10	84.4	11	1142.2	3	
	5290	11	89.6	19	1709.9	1	
	5290	12	75.3	8	1457.5	2	
	5290	13	95.7	16	1550.7	3	
	5290	14	69.9	18	1391.7	2	
	5290	15	89.3	14	1050.9	1	
	5290	16	78.1	10	1560.1	1	
	5290	17	73.0	18	1537.9	1	
	5290	18	87.1	7	1550.6	2	
	5290	19	71.4	6	1899.8	3	
	5290	20	62.8	7	1878.1	1	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
15	5290	1	83.9	16	1680.3	2	1
	5290	2	97.2	5	1070.7	1	
	5290	3	61.4	18	1566.1	1	
	5290	4	67.5	12	1718.6	1	
	5290	5	55.6	17	1475.0	3	
	5290	6	70.4	18	1771.6	2	
	5290	7	63.5	20	1936.9	3	
	5290	8	76.9	6	1253.2	3	
	5290	9	99.3	14	1012.8	1	
	5290	10	88.6	8	1874.1	2	
	5290	11	97.4	11	1736.6	1	
	5290	12	84.0	6	1370.3	3	
	5290	13	58.8	19	1556.7	3	
	5290	14	53.0	6	1787.5	1	
	5290	15	55.7	7	1041.5	3	
	5290	16	65.2	6	1621.7	3	
	5290	17	62.2	19	1460.3	1	
	5290	18	65.7	17	1844.8	1	
	5290	19	93.7	6	1799.5	3	
16	5290	1	94.8	7	1338.2	1	0
	5290	2	81.2	8	1744.0	1	
	5290	3	94.3	7	1063.7	2	
	5290	4	79.6	7	1283.6	1	
	5290	5	66.2	18	1165.4	3	
	5290	6	92.1	6	1289.5	2	
	5290	7	58.8	14	1031.6	1	
	5290	8	86.6	18	1750.5	2	
	5290	9	88.9	16	1632.1	3	
	5290	10	91.7	10	1669.4	1	
	5290	11	52.5	8	1988.8	3	
	5290	12	93.6	16	1493.2	3	
	5290	13	95.7	19	1164.4	1	
	5290	14	61.7	9	1146.5	2	
	5290	15	59.6	18	1385.7	3	
	5290	16	61.1	18	1532.2	1	
	5290	17	81.7	8	1760.7	3	
	5290	18	50.3	5	1472.1	2	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
17	5290	1	70.6	12	1037.0	3	0
	5290	2	91.1	7	1886.9	3	
	5290	3	79.8	20	1033.9	3	
	5290	4	65.7	15	1650.4	2	
	5290	5	90.9	9	1242.7	1	
	5290	6	68.4	15	1334.8	3	
	5290	7	57.0	19	1815.0	3	
	5290	8	76.7	13	1756.1	1	
	5290	9	96.6	8	1598.6	3	
	5290	10	89.3	9	1913.9	1	
	5290	11	55.4	7	1164.8	2	
	5290	12	67.7	10	1234.5	3	
	5290	13	91.3	11	1397.4	1	
	5290	14	69.8	6	1847.3	1	
	5290	15	84.0	10	1190.4	3	
	5290	16	68.9	10	1857.9	1	
	5290	17	72.0	10	1080.8	1	
18	5290	1	63.7	9	1127.5	1	1
	5290	2	62.2	16	1338.4	2	
	5290	3	84.7	15	1071.5	1	
	5290	4	99.8	16	1945.8	2	
	5290	5	76.4	5	1662.9	3	
	5290	6	62.9	17	1962.6	3	
	5290	7	86.3	11	1877.6	2	
	5290	8	63.8	6	1917.1	3	
	5290	9	93.4	13	1100.4	3	
	5290	10	64.5	6	1875.9	1	
	5290	11	98.0	17	1332.1	3	
	5290	12	60.3	19	1200.6	1	
	5290	13	83.2	6	1967.7	3	
	5290	14	73.5	11	1947.1	1	
	5290	15	99.6	8	1875.6	1	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
19	5290	1	62.9	14	1820.3	3	1
	5290	2	71.2	19	1348.1	3	
	5290	3	82.1	7	1633.3	3	
	5290	4	94.5	15	1451.6	3	
	5290	5	56.9	7	1782.1	1	
	5290	6	65.9	11	1902.0	3	
	5290	7	87.5	8	1004.2	3	
	5290	8	59.8	10	1016.6	2	
	5290	9	78.2	18	1210.3	3	
	5290	10	87.7	8	1741.0	3	
	5290	11	58.2	9	1817.5	3	
	5290	12	55.6	12	1037.7	3	
	5290	13	67.4	8	1783.4	1	
	5290	14	64.2	15	1920.7	3	
20	5290	1	89.4	11	1918.1	2	1
	5290	2	95.2	8	1534.9	2	
	5290	3	87.1	13	1903.9	2	
	5290	4	61.8	19	1717.0	2	
	5290	5	74.3	10	1152.7	3	
	5290	6	56.0	16	1671.7	1	
	5290	7	67.0	10	1984.2	2	
	5290	8	74.8	20	1296.7	3	
	5290	9	97.3	12	1289.9	3	
	5290	10	98.0	12	1576.0	2	
21	5325	1	80.1	11	1233.4	3	1
	5321	2	99.6	19	1061.3	2	
	5322	3	92.9	17	1886.2	2	
	5323	4	60.0	15	1110.1	2	
	5323	5	58.7	15	1750.0	2	
	5324	6	92.4	13	1337.6	2	
	5323	7	52.5	15	1889.5	3	
	5323	8	80.5	14	1336.8	2	
	5324	9	90.4	13	1297.4	1	
	5324	10	92.4	12	1118.9	1	
	5321	11	71.1	19	1184.5	2	
	5323	12	73.8	16	1566.3	3	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
22	5321	1	96.3	19	1392.3	1	1
	5326	2	58.2	8	1457.1	3	
	5325	3	83.4	10	1908.0	3	
	5324	4	50.1	13	1577.3	1	
	5322	5	83.9	17	1629.1	3	
	5325	6	56.6	11	1296.8	2	
	5325	7	59.4	9	1631.2	2	
	5327	8	95.6	6	1152.6	2	
	5324	9	51.7	12	1528.7	2	
23	5325	1	51.5	9	1490.3	3	1
	5325	2	62.1	9	1871.9	3	
	5322	3	88.5	17	1042.4	2	
	5322	4	75.3	18	1282.1	3	
	5324	5	63.4	13	1602.8	2	
	5327	6	54.3	5	1691.5	2	
	5326	7	80.5	8	1092.1	2	
	5325	8	70.4	10	1209.1	2	
	5326	9	51.2	8	1516.9	1	
	5322	10	70.9	18	1607.3	3	
	5322	11	75.1	17	1896.8	1	
	5321	12	90.1	20	1266.7	3	
	5326	13	51.3	8	1166.8	1	
	5325	14	99.7	11	1792.9	2	
	5321	15	60.3	19	1350.9	1	
24	5325	1	64.4	10	1187.6	1	0
	5323	2	71.2	16	1032.8	2	
	5324	3	67.1	12	1039.8	1	
	5324	4	69.0	12	1767.2	1	
	5326	5	94.2	7	1160.1	1	
	5326	6	61.8	7	1287.7	3	
	5325	7	61.5	11	1896.0	1	
	5326	8	71.8	7	1796.5	3	
	5324	9	75.7	12	1393.5	2	
	5323	10	86.7	16	1217.2	3	
	5324	11	56.0	13	1002.0	2	
	5323	12	79.1	15	1725.0	2	
	5326	13	77.8	8	1209.8	2	
	5321	14	68.6	19	1265.7	2	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
25	5324	1	73.3	12	1234.4	3	1
	5323	2	96.5	14	1870.7	1	
	5321	3	69.5	19	1906.5	3	
	5322	4	85.5	17	1497.5	1	
	5327	5	59.3	5	1674.3	3	
	5324	6	97.3	12	1714.7	2	
	5323	7	73.9	16	1752.2	2	
	5321	8	55.9	19	1497.4	2	
	5324	9	56.8	13	1271.0	2	
	5327	10	66.3	5	1411.5	2	
	5327	11	73.9	6	1193.8	2	
	5323	12	93.3	16	1586.7	2	
	5321	13	86.2	19	1073.1	3	
	5327	14	85.7	6	1304.1	1	
	5321	15	56.1	20	1412.0	2	
	5323	16	84.2	16	1525.6	1	
	5322	17	78.3	17	1197.9	3	
	5325	18	72.0	11	1875.8	1	
26	5325	1	77.3	9	1916.3	3	0
	5321	2	79.3	20	1079.2	1	
	5327	3	95.9	6	1232.8	3	
	5325	4	94.9	11	1939.2	3	
	5324	5	66.0	12	1499.1	2	
	5327	6	59.4	5	1739.8	2	
	5322	7	86.7	18	1060.3	2	
	5323	8	72.8	14	1267.4	3	
	5321	9	56.8	20	1830.3	1	
	5326	10	74.5	8	1989.9	2	
	5323	11	53.3	15	1618.8	3	
	5324	12	53.8	13	1048.4	2	
	5325	13	51.5	10	1451.3	1	
	5325	14	78.6	11	1170.9	2	
	5322	15	51.7	17	1485.6	2	
	5323	16	90.0	14	1919.2	2	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
27	5327	1	79.2	6	1434.9	1	1
	5325	2	59.6	10	1080.0	3	
	5326	3	73.9	7	1286.7	3	
	5323	4	80.8	14	1168.1	1	
	5326	5	93.8	7	1619.8	2	
	5325	6	78.0	10	1488.4	3	
	5322	7	86.6	17	1893.9	3	
	5325	8	52.9	11	1941.2	3	
	5321	9	93.9	20	1661.8	2	
	5324	10	57.7	12	1631.0	1	
	5323	11	78.6	15	1724.3	3	
	5327	12	80.0	6	1062.1	1	
	5323	13	97.3	16	1341.9	1	
	5323	14	64.7	16	1503.7	3	
	5322	15	69.9	17	1552.1	3	
	5323	16	80.3	15	1914.1	3	
	5325	17	56.6	10	1607.4	2	
	5322	18	55.4	17	1448.8	3	
	5323	19	68.2	14	1291.6	2	
	5325	20	93.9	10	1304.1	1	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
28	5327	1	61.4	5	1338.5	2	1
	5326	2	90.9	7	1715.3	2	
	5327	3	64.6	5	1728.0	1	
	5323	4	65.4	14	1264.3	3	
	5325	5	55.5	11	1209.2	3	
	5325	6	95.3	11	1869.4	1	
	5324	7	82.8	13	1623.3	3	
	5322	8	78.1	17	1064.6	2	
	5323	9	82.6	15	1826.8	3	
	5325	10	57.6	11	1637.5	1	
	5322	11	70.4	18	1004.6	3	
	5324	12	76.1	12	1326.9	3	
	5325	13	58.9	10	1022.4	3	
	5325	14	74.6	9	1147.5	2	
	5322	15	96.7	18	1019.0	1	
	5322	16	61.6	18	1455.4	3	
	5322	17	95.4	18	1059.8	3	
	5323	18	52.4	15	1604.1	2	
	5323	19	95.6	16	1473.3	3	
	5323	20	51.5	16	1810.9	3	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
29	5323	1	71.3	16	1854.6	3	1
	5324	2	92.5	13	1474.9	2	
	5321	3	75.3	19	1164.3	2	
	5322	4	87.6	18	1545.1	1	
	5327	5	57.6	6	1957.7	2	
	5325	6	56.3	9	1562.6	2	
	5325	7	52.0	11	1089.7	1	
	5321	8	55.7	20	1659.7	1	
	5322	9	77.2	17	1193.6	2	
	5324	10	64.6	12	1510.7	2	
	5326	11	98.9	8	1583.6	1	
	5325	12	64.3	10	1783.9	2	
	5322	13	80.8	18	1004.5	2	
	5324	14	58.5	12	1544.1	2	
	5325	15	99.3	9	1661.9	1	
	5322	16	82.5	18	1314.8	3	
	5327	17	77.5	6	1972.3	1	
30	5327	1	98.4	6	1842.8	1	1
	5325	2	67.3	11	1314.5	3	
	5326	3	68.6	8	1323.9	1	
	5323	4	52.2	15	1108.5	3	
	5322	5	87.6	18	1286.7	2	
	5326	6	87.9	7	1144.5	3	
	5321	7	53.3	19	1647.0	3	
	5326	8	87.5	7	1274.8	2	
	5321	9	88.3	20	1145.3	1	
	5322	10	52.6	18	1901.7	2	
	5325	11	93.5	9	1558.6	2	
	5323	12	97.7	14	1835.9	3	
	5323	13	69.3	16	1332.3	1	
	5321	14	59.3	19	1050.3	3	
Detection Percentage (%)							83.33

Test Mode		802.11be EHT80				
Frequency		5290 MHz				
Radar Signal		Type 6				
Trial #	Pulse Width (us)	PRI (us)	Pulses / Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	1=Detection ; 0=No Detection
1	1	333	9	0.333	300	1
2	1	333	9	0.333	300	1
3	1	333	9	0.333	300	1
4	1	333	9	0.333	300	1
5	1	333	9	0.333	300	1
6	1	333	9	0.333	300	1
7	1	333	9	0.333	300	1
8	1	333	9	0.333	300	1
9	1	333	9	0.333	300	1
10	1	333	9	0.333	300	1
11	1	333	9	0.333	300	1
12	1	333	9	0.333	300	1
13	1	333	9	0.333	300	1
14	1	333	9	0.333	300	1
15	1	333	9	0.333	300	1
16	1	333	9	0.333	300	1
17	1	333	9	0.333	300	1
18	1	333	9	0.333	300	1
19	1	333	9	0.333	300	1
20	1	333	9	0.333	300	1
21	1	333	9	0.333	300	1
22	1	333	9	0.333	300	1
23	1	333	9	0.333	300	1
24	1	333	9	0.333	300	1
25	1	333	9	0.333	300	1
26	1	333	9	0.333	300	1
27	1	333	9	0.333	300	1
28	1	333	9	0.333	300	1
29	1	333	9	0.333	300	1
30	1	333	9	0.333	300	1
Detection Percentage (%)						100.00

Test Mode		802.11be EHT160				
Frequency		5250 MHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5250	1	718	74	1393	1
2	5250	1	938	57	1066	1
3	5250	1	538	99	1859	0
4	5250	1	638	83	1567	1
5	5250	1	838	63	1193	1
6	5250	1	778	68	1285	1
7	5250	1	858	62	1166	1
8	5250	1	738	72	1355	1
9	5250	1	638	83	1567	1
10	5250	1	818	65	1222	1
11	5250	1	3066	18	326	0
12	5250	1	758	70	1319	1
13	5250	1	678	78	1475	0
14	5250	1	838	63	1193	1
15	5250	1	738	72	1355	1
16	5250	1	1048	51	954	1
17	5250	1	2606	21	384	1
18	5250	1	2546	21	393	1
19	5250	1	2317	23	432	1
20	5250	1	1285	42	778	0
21	5250	1	1338	40	747	1
22	5250	1	613	87	1631	1
23	5250	1	1686	32	593	1
24	5250	1	2185	25	458	1
25	5250	1	2826	19	354	1
26	5250	1	2704	20	370	1
27	5250	1	2945	18	340	1
28	5250	1	659	81	1517	1
29	5250	1	1490	36	671	1
30	5250	1	2284	24	438	1
Detection Percentage (%)						86.67

Test Mode		802.11be EHT160				
Frequency		5250 MHz				
Radar Signal		Type 2				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5250	4.50	163.00	29	6135	0
2	5250	4.00	195.10	26	5126	1
3	5250	2.40	213.50	27	4684	1
4	5250	4.70	179.30	25	5577	1
5	5250	3.80	156.80	27	6378	1
6	5250	2.70	166.30	29	6013	1
7	5250	3.60	196.90	25	5079	1
8	5250	1.90	185.00	29	5405	0
9	5250	4.70	185.30	27	5397	1
10	5250	4.20	155.40	24	6435	1
11	5250	3.80	181.80	27	5501	1
12	5250	4.80	186.90	25	5350	1
13	5250	4.90	208.60	28	4794	1
14	5250	1.90	163.10	27	6131	1
15	5250	2.70	170.20	29	5875	1
16	5250	1.30	157.40	27	6353	1
17	5250	4.40	226.30	25	4419	1
18	5250	3.70	175.50	29	5698	1
19	5250	2.10	229.50	24	4357	1
20	5250	3.40	201.60	26	4960	0
21	5250	2.60	216.50	24	4619	1
22	5250	2.10	160.60	25	6227	1
23	5250	1.40	160.70	29	6223	0
24	5250	4.50	214.90	24	4653	1
25	5250	1.40	200.20	23	4995	1
26	5250	1.70	216.50	23	4619	1
27	5250	2.50	204.60	26	4888	1
28	5250	1.70	193.90	23	5157	1
29	5250	2.20	224.40	23	4456	1
30	5250	3.00	194.10	24	5152	0
Detection Percentage (%)						83.33

Test Mode		802.11be EHT160				
Frequency		5250 MHz				
Radar Signal		Type 3				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5250	8.30	329.80	17	3032.14	1
2	5250	9.50	271.70	16	3680.53	1
3	5250	8.90	428.50	18	2333.72	1
4	5250	7.10	238.60	18	4191.11	1
5	5250	8.20	452.00	17	2212.39	1
6	5250	7.70	355.80	18	2810.57	1
7	5250	8.00	382.40	18	2615.06	1
8	5250	7.60	250.40	18	3993.61	1
9	5250	9.70	243.80	16	4101.72	0
10	5250	7.30	235.10	16	4253.51	1
11	5250	7.90	454.60	17	2199.74	1
12	5250	7.70	499.10	16	2003.61	0
13	5250	6.80	380.80	17	2626.05	1
14	5250	9.20	239.00	16	4184.10	1
15	5250	7.70	334.80	16	2986.86	1
16	5250	7.80	497.20	17	2011.26	1
17	5250	6.40	440.80	18	2268.60	1
18	5250	7.00	459.30	18	2177.23	1
19	5250	8.50	323.90	16	3087.37	1
20	5250	9.40	415.20	16	2408.48	1
21	5250	7.90	448.40	18	2230.15	1
22	5250	9.30	469.30	17	2130.83	0
23	5250	6.50	291.10	18	3435.25	1
24	5250	8.10	257.50	18	3883.50	1
25	5250	8.60	493.80	17	2025.11	1
26	5250	6.40	313.00	17	3194.89	1
27	5250	9.80	360.90	17	2770.85	1
28	5250	8.70	258.90	17	3862.50	1
29	5250	8.20	294.30	18	3397.89	1
30	5250	7.00	317.00	18	3154.57	1
Detection Percentage (%)						90.00

Test Mode		802.11be EHT160				
Frequency		5250 MHz				
Radar Signal		Type 4				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5250	19.00	365.60	12	2735	1
2	5250	15.50	336.20	15	2974	1
3	5250	16.10	449.60	12	2224	1
4	5250	18.40	444.60	14	2249	1
5	5250	19.20	220.30	12	4539	0
6	5250	11.30	320.50	13	3120	1
7	5250	16.60	274.40	15	3644	1
8	5250	13.60	454.50	13	2200	1
9	5250	11.30	329.80	13	3032	1
10	5250	13.70	423.10	14	2364	1
11	5250	13.90	383.70	15	2606	1
12	5250	15.50	237.70	13	4207	1
13	5250	12.00	407.90	16	2452	1
14	5250	11.10	410.30	13	2437	1
15	5250	13.40	450.70	14	2219	1
16	5250	15.30	478.30	13	2091	1
17	5250	13.80	369.20	12	2709	1
18	5250	18.40	404.30	13	2473	1
19	5250	19.10	330.70	12	3024	1
20	5250	18.30	479.30	13	2086	0
21	5250	17.50	362.60	14	2758	0
22	5250	19.70	317.40	15	3151	1
23	5250	12.40	260.80	15	3834	1
24	5250	12.60	230.80	16	4333	1
25	5250	15.10	375.00	14	2667	0
26	5250	12.10	263.30	13	3798	1
27	5250	12.20	213.90	12	4675	1
28	5250	20.00	245.80	12	4068	1
29	5250	15.70	275.90	12	3625	1
30	5250	19.30	361.40	15	2767	1
Detection Percentage (%)						86.67

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
1	5212.5	1	87.0	6	1238.9	1	1
	5216.5	2	80.2	15	1073.7	2	
	5215.5	3	78.2	12	1033.0	1	
	5213.5	4	82.2	8	1891.9	3	
	5214.5	5	73.7	9	1417.0	2	
	5212.5	6	58.9	6	1268.8	1	
	5213.5	7	67.3	8	1676.6	1	
	5214.5	8	69.0	10	1303.6	1	
	5215.5	9	52.9	12	1561.2	3	
	5214.5	10	97.3	9	1914.8	2	
	5217.5	11	70.6	18	1208.8	2	
2	5218.5	1	76.5	19	1292.0	2	1
	5216.5	2	84.9	14	1531.6	1	
	5217.5	3	65.5	18	1429.2	1	
	5214.5	4	84.6	10	1174.6	2	
	5218.5	5	71.9	20	1342.4	1	
	5216.5	6	73.4	14	1479.6	2	
	5212.5	7	68.4	6	1351.3	2	
	5213.5	8	76.2	7	1740.1	1	
	5213.5	9	97.9	8	1310.2	2	
	5218.5	10	55.7	19	1991.5	3	
	5215.5	11	59.1	12	1011.1	2	
	5214.5	12	58.0	10	1318.2	2	
3	5216.5	1	55.3	14	1181.1	3	1
	5217.5	2	93.5	18	1071.0	3	
	5218.5	3	88.6	19	1504.4	1	
	5216.5	4	87.6	15	1646.6	3	
	5215.5	5	72.8	13	1699.7	2	
	5212.5	6	71.3	6	1152.3	3	
	5214.5	7	57.9	10	1271.7	3	
	5215.5	8	91.0	12	1027.4	1	
	5218.5	9	59.5	19	1973.1	2	
	5213.5	10	90.5	8	1833.8	2	
	5216.5	11	67.2	15	1029.8	3	
	5216.5	12	73.7	16	1334.0	3	
	5217.5	13	68.2	17	1569.7	1	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
4	5213.5	1	98.2	7	1269.8	3	1
	5214.5	2	68.7	10	1075.0	1	
	5214.5	3	65.4	11	1275.9	2	
	5216.5	4	91.3	15	1849.0	3	
	5214.5	5	54.7	10	1892.6	1	
	5213.5	6	50.7	8	1432.8	3	
	5217.5	7	50.3	17	1054.2	1	
	5216.5	8	93.0	15	1568.8	3	
	5216.5	9	58.6	15	1182.4	2	
5	5218.5	1	81.3	19	1188.1	3	1
	5212.5	2	62.1	5	1819.7	3	
	5213.5	3	54.0	8	1601.3	3	
	5212.5	4	88.5	5	1220.3	2	
	5215.5	5	55.9	12	1348.4	2	
	5217.5	6	72.5	18	1268.5	2	
	5214.5	7	50.3	9	1931.5	1	
	5214.5	8	95.0	9	1389.4	1	
	5214.5	9	76.7	9	1783.0	3	
	5215.5	10	82.5	13	1170.8	1	
	5217.5	11	62.9	18	1277.8	1	
	5216.5	12	53.1	16	1414.3	2	
	5212.5	13	81.1	6	1773.6	3	
	5212.5	14	88.1	5	1969.7	3	
	5216.5	15	57.9	16	1949.6	2	
6	5218.5	1	95.8	19	1184.8	3	1
	5218.5	2	56.9	19	1567.6	1	
	5215.5	3	98.1	12	1391.2	3	
	5218.5	4	87.5	19	1047.0	2	
	5215.5	5	55.2	13	1196.2	3	
	5214.5	6	59.2	9	1878.0	2	
	5213.5	7	56.4	8	1852.9	3	
	5214.5	8	53.1	9	1204.3	2	
	5214.5	9	98.5	11	1625.1	1	
	5218.5	10	55.1	19	1561.8	1	
	5216.5	11	64.7	15	1399.6	3	
	5215.5	12	58.7	13	1040.1	2	
	5216.5	13	58.2	16	1775.6	1	
	5218.5	14	63.9	19	1557.9	2	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
7	5218.5	1	70.6	19	1383.6	1	1
	5217.5	2	84.1	18	1844.9	1	
	5215.5	3	93.0	13	1798.4	2	
	5213.5	4	67.0	7	1922.4	3	
	5213.5	5	50.4	7	1665.5	2	
	5214.5	6	56.5	11	1407.3	2	
	5213.5	7	62.0	8	1724.7	2	
	5217.5	8	70.4	17	1913.0	3	
	5213.5	9	98.3	7	1806.4	2	
	5212.5	10	93.9	6	1653.5	1	
	5216.5	11	53.3	15	1727.1	3	
	5214.5	12	87.8	10	1526.0	3	
	5214.5	13	91.7	9	1338.7	3	
	5212.5	14	68.4	6	1044.2	3	
	5216.5	15	75.2	16	1968.0	3	
	5217.5	16	89.7	18	1009.4	2	
	5216.5	17	63.0	16	1264.9	1	
8	5212.5	1	95.5	6	1610.0	2	0
	5214.5	2	84.3	10	1791.6	3	
	5215.5	3	95.5	12	1318.3	3	
	5216.5	4	78.2	14	1747.6	2	
	5216.5	5	86.2	15	1853.1	1	
	5213.5	6	78.1	8	1608.0	2	
	5217.5	7	85.5	18	1042.9	1	
	5218.5	8	88.0	19	1141.9	1	
	5214.5	9	77.9	10	1882.1	3	
	5212.5	10	70.0	6	1766.8	3	
	5215.5	11	69.6	13	1511.9	1	
	5216.5	12	93.0	15	1193.6	1	
	5216.5	13	62.9	14	1563.1	1	
	5212.5	14	99.1	6	1545.6	3	
	5215.5	15	65.9	13	1288.6	2	
	5212.5	16	54.9	5	1832.3	2	
	5215.5	17	61.6	13	1278.1	3	
	5216.5	18	78.5	15	1651.3	3	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
9	5218.5	1	76.3	19	1576.2	3	1
	5215.5	2	76.1	12	1474.1	2	
	5217.5	3	77.8	18	1275.0	1	
	5214.5	4	55.9	11	1651.6	3	
	5216.5	5	69.0	16	1498.2	1	
	5218.5	6	64.8	20	1729.3	2	
	5214.5	7	68.9	11	1620.8	1	
	5213.5	8	66.8	7	1614.1	2	
	5215.5	9	77.8	12	1882.1	1	
	5217.5	10	88.6	17	1947.9	3	
	5213.5	11	88.5	8	1739.5	1	
	5216.5	12	60.7	14	1493.7	1	
	5213.5	13	91.7	8	1165.6	3	
	5215.5	14	68.0	13	1764.5	3	
	5215.5	15	88.2	13	1715.8	2	
	5217.5	16	89.2	17	1459.6	2	
	5218.5	17	68.2	19	1930.8	2	
	5218.5	18	74.0	19	1323.8	3	
	5216.5	19	50.5	14	1747.5	2	
10	5214.5	1	86.2	9	1204.4	1	1
	5214.5	2	70.6	10	1629.2	3	
	5214.5	3	64.5	10	1844.0	3	
	5214.5	4	89.1	10	1174.9	3	
	5214.5	5	57.1	11	1094.4	2	
	5217.5	6	79.9	18	1088.7	2	
	5213.5	7	91.3	7	1712.7	1	
	5216.5	8	73.8	15	1435.3	1	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
11	5250	1	95.4	19	1608.5	1	1
	5250	2	65.2	19	1594.9	3	
	5250	3	82.4	10	1564.2	1	
	5250	4	83.6	20	1919.1	2	
	5250	5	77.0	9	1992.9	1	
	5250	6	84.0	9	1773.1	3	
	5250	7	56.2	20	1481.9	3	
	5250	8	59.5	17	1380.6	3	
	5250	9	57.1	8	1805.1	2	
	5250	10	88.6	10	1567.1	1	
	5250	11	63.6	15	1534.4	2	
	5250	12	96.7	7	1479.7	2	
	5250	13	54.8	14	1382.4	1	
	5250	14	73.9	20	1096.0	1	
	5250	15	71.1	7	1532.7	3	
	5250	16	95.2	14	1172.2	1	
12	5250	1	71.5	6	1530.4	1	1
	5250	2	66.5	12	1478.3	1	
	5250	3	97.9	14	1271.8	1	
	5250	4	63.9	14	1834.3	3	
	5250	5	87.7	9	1281.4	2	
	5250	6	80.0	12	1995.0	2	
	5250	7	85.6	6	1765.2	1	
	5250	8	86.9	11	1260.0	3	
	5250	9	63.7	12	1181.0	1	
	5250	10	63.3	12	1553.7	2	
	5250	11	65.9	5	1229.3	3	
	5250	12	69.9	9	1345.2	3	
	5250	13	89.1	8	1035.8	1	
	5250	14	94.8	5	1116.8	2	
	5250	15	58.0	18	1526.7	2	
	5250	16	72.6	18	1040.3	2	
	5250	17	63.6	10	1179.7	1	
	5250	18	85.3	8	1521.9	2	
	5250	19	61.6	17	1251.6	2	
	5250	20	57.6	13	1258.0	1	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
13	5250	1	66.7	10	1228.8	1	1
	5250	2	98.0	12	1182.5	3	
	5250	3	94.1	7	1460.2	2	
	5250	4	66.4	14	1984.5	3	
	5250	5	51.9	8	1177.4	2	
	5250	6	96.8	8	1013.2	2	
	5250	7	67.2	18	1972.5	1	
	5250	8	52.5	8	1638.9	1	
	5250	9	55.9	17	1572.9	1	
	5250	10	85.5	19	1058.6	1	
14	5250	1	68.7	12	1873.2	3	0
	5250	2	76.8	10	1209.1	3	
	5250	3	66.2	19	1160.6	3	
	5250	4	57.1	10	1123.6	2	
	5250	5	84.1	5	1490.4	3	
	5250	6	56.1	13	1966.7	2	
	5250	7	91.5	20	1102.8	2	
	5250	8	66.9	12	1963.0	1	
	5250	9	89.1	17	1581.8	3	
	5250	10	85.2	9	1118.0	3	
	5250	11	53.0	8	1009.8	2	
	5250	12	87.6	18	1065.6	3	
	5250	13	70.1	19	1596.9	2	
	5250	14	95.2	14	1801.4	1	
	5250	15	68.6	10	1310.0	1	
	5250	16	66.3	15	1548.4	2	
	5250	17	92.6	13	1367.0	3	
	5250	18	92.0	9	1253.3	3	
	5250	19	71.2	19	1931.5	2	
	5250	20	96.2	16	1317.3	1	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
15	5250	1	76.6	9	1643.8	2	0
	5250	2	77.0	16	1947.2	1	
	5250	3	83.6	9	1960.5	1	
	5250	4	62.3	15	1496.9	2	
	5250	5	91.2	15	1666.9	3	
	5250	6	91.0	17	1355.9	3	
	5250	7	99.0	15	1005.8	1	
	5250	8	95.8	18	1273.1	2	
	5250	9	84.0	15	1505.5	2	
	5250	10	80.1	15	1193.4	1	
	5250	11	55.1	7	1276.8	2	
	5250	12	76.6	10	1333.0	2	
	5250	13	50.6	14	1344.9	1	
	5250	14	52.4	18	1075.7	2	
	5250	15	58.1	5	1926.2	1	
	5250	16	58.3	14	1316.3	1	
	5250	17	76.3	6	1835.5	1	
	5250	18	71.7	7	1761.0	1	
	5250	19	88.3	16	1383.6	3	
16	5250	1	89.4	15	1527.5	3	1
	5250	2	62.0	9	1188.4	1	
	5250	3	61.0	7	1088.6	1	
	5250	4	95.7	11	1830.3	2	
	5250	5	95.8	9	1606.8	3	
	5250	6	52.0	18	1679.1	3	
	5250	7	96.5	18	1348.5	1	
	5250	8	50.6	19	1978.4	3	
	5250	9	91.3	13	1800.1	3	
	5250	10	89.6	10	1321.6	3	
	5250	11	76.2	8	1214.4	1	
	5250	12	75.3	10	1159.7	1	
	5250	13	86.6	12	1456.2	1	
	5250	14	68.2	14	1895.9	3	
	5250	15	69.2	16	1446.6	1	
	5250	16	71.9	12	1640.1	3	
	5250	17	75.7	10	1277.2	3	
	5250	18	82.7	11	1161.9	3	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
17	5250	1	97.0	18	1629.8	1	1
	5250	2	82.0	8	1128.5	2	
	5250	3	83.2	6	1374.7	2	
	5250	4	76.7	11	1887.4	2	
	5250	5	96.0	7	1908.8	3	
	5250	6	95.1	16	1673.7	2	
	5250	7	90.7	16	1134.3	2	
	5250	8	55.9	19	1878.4	1	
	5250	9	67.1	12	1160.5	1	
	5250	10	76.9	5	1689.3	3	
	5250	11	51.1	12	1054.1	2	
	5250	12	84.8	6	1644.7	3	
	5250	13	84.7	8	1867.1	3	
	5250	14	73.7	11	1355.6	2	
	5250	15	65.0	8	1417.2	1	
	5250	16	64.1	10	1438.6	2	
	5250	17	50.7	12	1973.5	3	
18	5250	1	96.3	8	1694.7	2	1
	5250	2	95.9	8	1589.5	1	
	5250	3	50.9	13	1044.9	3	
	5250	4	98.1	15	1098.2	1	
	5250	5	68.8	20	1236.7	2	
	5250	6	86.3	14	1517.4	1	
	5250	7	69.7	18	1992.9	1	
	5250	8	94.0	20	1315.9	1	
	5250	9	59.0	20	1208.2	3	
	5250	10	61.1	17	1154.9	2	
	5250	11	68.9	11	1315.1	2	
	5250	12	82.9	18	1753.9	3	
	5250	13	84.5	7	1851.2	2	
	5250	14	66.9	11	1619.4	2	
	5250	15	57.2	20	1917.5	2	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
19	5250	1	54.3	16	1713.0	2	1
	5250	2	77.5	17	1033.6	2	
	5250	3	65.5	7	1332.6	3	
	5250	4	68.4	14	1620.9	1	
	5250	5	78.0	14	1770.6	3	
	5250	6	72.2	6	1012.9	2	
	5250	7	94.5	12	1302.4	1	
	5250	8	97.3	8	1414.1	1	
	5250	9	89.0	13	1017.1	1	
	5250	10	97.4	11	1442.6	3	
	5250	11	82.4	6	1637.2	2	
	5250	12	70.4	10	1551.0	1	
	5250	13	89.7	10	1401.5	2	
	5250	14	51.8	11	1611.6	1	
20	5250	1	67.5	17	1243.9	1	1
	5250	2	98.0	8	1308.6	2	
	5250	3	69.8	15	1488.4	1	
	5250	4	80.1	6	1855.1	2	
	5250	5	54.1	18	1666.8	1	
	5250	6	78.6	6	1143.4	1	
	5250	7	79.5	12	1977.6	3	
	5250	8	62.3	13	1185.7	3	
	5250	9	86.4	5	1100.1	1	
	5250	10	89.1	13	1564.5	3	
21	5287.5	1	64.3	5	1615.4	3	1
	5286.5	2	99.7	7	1958.1	1	
	5281.5	3	93.1	19	1138.8	2	
	5285.5	4	93.9	10	1129.3	3	
	5287.5	5	91.3	6	1305.1	3	
	5285.5	6	77.5	9	1679.1	1	
	5281.5	7	78.4	19	1818.8	2	
	5285.5	8	93.9	10	1035.0	2	
	5282.5	9	99.8	18	1200.5	3	
	5284.5	10	51.6	12	1970.5	2	
	5286.5	11	85.9	7	1595.6	3	
	5281.5	12	54.0	19	1736.1	2	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
22	5287.5	1	87.2	6	1304.3	1	1
	5286.5	2	82.6	7	1019.1	2	
	5283.5	3	60.6	14	1444.3	3	
	5283.5	4	55.2	15	1167.1	3	
	5287.5	5	73.8	6	1185.6	1	
	5283.5	6	52.4	15	1424.7	2	
	5285.5	7	81.0	9	1238.4	3	
	5282.5	8	56.1	18	1538.5	3	
	5282.5	9	84.0	18	1403.4	2	
23	5287.5	1	93.8	6	1064.2	3	1
	5282.5	2	71.2	17	1104.4	2	
	5285.5	3	89.8	10	1182.8	1	
	5282.5	4	86.1	17	1009.6	2	
	5285.5	5	71.4	9	1125.5	3	
	5283.5	6	81.9	15	1916.7	1	
	5286.5	7	64.1	7	1118.3	2	
	5282.5	8	63.6	18	1889.2	2	
	5285.5	9	80.0	10	1755.7	3	
	5284.5	10	81.4	12	1468.8	3	
	5282.5	11	53.4	18	1870.8	2	
	5286.5	12	80.0	7	1974.6	1	
	5282.5	13	78.5	18	1302.7	3	
	5287.5	14	86.7	6	1856.6	1	
	5284.5	15	83.4	12	1210.8	2	
24	5282.5	1	93.9	18	1990.4	2	1
	5287.5	2	63.6	6	1645.3	2	
	5285.5	3	97.3	11	1234.1	1	
	5283.5	4	71.3	15	1270.4	3	
	5281.5	5	65.5	19	1059.5	2	
	5285.5	6	84.8	11	1814.2	2	
	5284.5	7	65.1	13	1538.8	3	
	5283.5	8	88.8	16	1649.3	3	
	5282.5	9	70.3	18	1981.0	2	
	5282.5	10	55.0	17	1467.3	1	
	5283.5	11	87.0	14	1900.8	2	
	5285.5	12	61.8	11	1678.8	3	
	5286.5	13	75.3	8	1189.2	2	
	5281.5	14	82.3	19	1659.8	3	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
25	5286.5	1	84.7	7	1781.1	3	0
	5282.5	2	85.6	18	1948.2	3	
	5284.5	3	82.8	13	1240.2	3	
	5285.5	4	81.2	11	1600.2	3	
	5283.5	5	59.7	14	1289.9	2	
	5285.5	6	95.4	11	1161.8	3	
	5284.5	7	93.2	13	1087.0	1	
	5282.5	8	52.8	17	1717.8	3	
	5286.5	9	50.9	7	1573.1	2	
	5285.5	10	83.9	11	1994.2	3	
	5281.5	11	65.6	19	1096.2	1	
	5282.5	12	54.0	18	1112.1	1	
	5286.5	13	99.0	7	1446.6	2	
	5284.5	14	97.0	13	1526.3	3	
	5287.5	15	71.5	5	1007.7	1	
	5286.5	16	79.4	8	1478.1	1	
	5284.5	17	79.6	12	1708.0	1	
	5282.5	18	68.3	17	1713.0	3	
26	5283.5	1	75.3	14	1383.1	3	1
	5286.5	2	58.6	7	1262.2	1	
	5286.5	3	78.9	7	1917.5	3	
	5283.5	4	52.6	14	1853.8	3	
	5285.5	5	66.4	11	1825.3	2	
	5281.5	6	62.6	20	1144.0	2	
	5284.5	7	57.3	13	1888.9	3	
	5283.5	8	61.4	14	1530.6	3	
	5282.5	9	83.9	18	1649.5	2	
	5286.5	10	59.6	8	1644.2	3	
	5283.5	11	69.7	16	1158.5	3	
	5285.5	12	81.8	10	1928.4	3	
	5286.5	13	63.4	7	1455.0	2	
	5287.5	14	91.0	6	1305.0	2	
	5281.5	15	54.2	19	1839.0	3	
	5284.5	16	54.4	13	1020.7	1	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
27	5283.5	1	56.4	14	1401.5	1	1
	5282.5	2	59.0	18	1355.6	1	
	5286.5	3	99.4	8	1892.3	3	
	5287.5	4	57.9	6	1281.3	3	
	5281.5	5	63.0	19	1806.1	2	
	5283.5	6	61.5	14	1356.9	1	
	5287.5	7	99.1	6	1185.7	2	
	5282.5	8	90.0	17	1057.4	3	
	5284.5	9	58.1	13	1217.9	2	
	5282.5	10	93.3	18	1469.6	3	
	5283.5	11	72.2	16	1194.4	3	
	5282.5	12	99.8	17	1902.9	1	
	5286.5	13	66.2	7	1956.5	2	
	5285.5	14	53.6	11	1987.3	1	
	5284.5	15	68.2	13	1870.4	3	
	5284.5	16	87.5	12	1891.6	3	
	5285.5	17	50.3	10	1877.2	3	
	5281.5	18	60.6	19	1953.5	2	
	5285.5	19	74.2	10	1819.2	2	
	5286.5	20	53.7	7	1084.4	2	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
28	5283.5	1	65.3	14	1693.2	2	1
	5285.5	2	85.9	11	1647.1	3	
	5282.5	3	94.2	18	1392.9	2	
	5285.5	4	61.4	9	1118.8	3	
	5281.5	5	94.7	19	1480.6	2	
	5281.5	6	99.4	20	1674.4	2	
	5286.5	7	84.4	8	1510.3	3	
	5282.5	8	59.3	18	1581.1	1	
	5283.5	9	57.8	16	1959.5	2	
	5287.5	10	86.5	6	1443.5	2	
	5283.5	11	86.9	15	1779.7	3	
	5284.5	12	70.5	12	1730.0	3	
	5282.5	13	57.3	17	1782.7	3	
	5284.5	14	87.6	13	1093.7	3	
	5283.5	15	68.5	15	1586.4	1	
	5283.5	16	55.8	16	1841.1	3	
	5282.5	17	93.6	17	1996.2	1	
	5281.5	18	75.2	20	1727.8	2	
	5283.5	19	92.1	14	1695.8	3	
	5287.5	20	52.5	6	1198.6	1	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
29	5285.5	1	65.0	11	1693.7	3	1
	5284.5	2	51.8	13	1485.5	3	
	5283.5	3	95.9	15	1680.4	3	
	5285.5	4	75.8	10	1811.3	1	
	5282.5	5	66.9	17	1120.0	3	
	5285.5	6	72.9	11	1108.4	2	
	5282.5	7	76.9	18	1802.2	2	
	5287.5	8	83.6	6	1007.6	1	
	5287.5	9	99.2	5	1110.4	2	
	5282.5	10	68.2	18	1229.0	3	
	5283.5	11	76.1	15	1635.0	3	
	5284.5	12	72.0	13	1624.2	2	
	5284.5	13	55.1	13	1852.5	2	
	5286.5	14	94.1	7	1039.3	1	
	5281.5	15	97.3	20	1121.1	2	
	5286.5	16	97.4	8	1194.3	3	
	5281.5	17	55.0	19	1566.3	1	
30	5283.5	1	96.8	15	1733.5	2	1
	5284.5	2	97.4	12	1448.5	3	
	5285.5	3	78.6	10	1670.4	3	
	5283.5	4	85.0	14	1721.8	3	
	5285.5	5	69.6	11	1613.3	2	
	5286.5	6	54.1	7	1903.0	1	
	5282.5	7	64.1	18	1626.8	2	
	5282.5	8	60.6	18	1612.6	2	
	5285.5	9	75.6	10	1579.3	2	
	5282.5	10	77.2	18	1264.2	1	
	5287.5	11	77.5	5	1361.1	1	
	5281.5	12	67.3	19	1945.0	1	
	5283.5	13	99.4	15	1472.7	1	
	5287.5	14	86.2	6	1272.0	1	
Detection Percentage (%)							86.67

Test Mode		802.11be EHT160				
Frequency		5250 MHz				
Radar Signal		Type 6				
Trial #	Pulse Width (us)	PRI (us)	Pulses / Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	1=Detection ; 0=No Detection
1	1	333	9	0.333	300	1
2	1	333	9	0.333	300	1
3	1	333	9	0.333	300	1
4	1	333	9	0.333	300	1
5	1	333	9	0.333	300	1
6	1	333	9	0.333	300	1
7	1	333	9	0.333	300	1
8	1	333	9	0.333	300	1
9	1	333	9	0.333	300	1
10	1	333	9	0.333	300	1
11	1	333	9	0.333	300	1
12	1	333	9	0.333	300	1
13	1	333	9	0.333	300	1
14	1	333	9	0.333	300	1
15	1	333	9	0.333	300	1
16	1	333	9	0.333	300	1
17	1	333	9	0.333	300	1
18	1	333	9	0.333	300	1
19	1	333	9	0.333	300	1
20	1	333	9	0.333	300	1
21	1	333	9	0.333	300	1
22	1	333	9	0.333	300	1
23	1	333	9	0.333	300	1
24	1	333	9	0.333	300	1
25	1	333	9	0.333	300	1
26	1	333	9	0.333	300	1
27	1	333	9	0.333	300	1
28	1	333	9	0.333	300	1
29	1	333	9	0.333	300	1
30	1	333	9	0.333	300	1
Detection Percentage (%)						100.00

---END---