



JAPAN QUALITY ASSURANCE ORGANIZATION

SHIKATSU BRANCH, CHUBU Testing Center

53-1, Yamaura, Yakushiji, Shikatsu-cho, Nishikasugai-gun, Aichi 481-0005 Japan

Phone. +81-568-23-0023 / Facsimile. +81-568-23-0116

Issue Date : April 01, 2005

Page 1 of 28

EMI TEST REPORT

JQA File No. : 50-40473

Model/Type No. : R-820JSF

Type of Equipment : Household Microwave Oven

Regulation applied : FCC Rules and Regulations Part 18

FCC ID : APYDMR0152

Applicant : Sharp Corporation, Reliability Control Group

Address : 22-22 Nagaike-Cho, Abeno-Ku,
Osaka 545-8522, Japan

Manufacturer : Sharp Appliances (Thailand) Ltd.

Address : 64 Moo 5, Tambol Bangsamuk, Amphur Bangpakong,
Chachoengsao, Province, Thailand

Received date of EUT : February 17, 2005

Final Judgment : Passed

TEST RESULT IN THIS REPORT are obtained in used of equipments that is traceable to National Institute of Advanced Industrial Science and Technology (AIST) of Japan and National Institute of Information and Communications Technology (NICT) of Japan.

THE TEST RESULTS only responds to the test sample.

THIS REPORT should not be reproduced, except in full, without the approval of the JQA Chubu Testing Center.



TABLE OF CONTENTS

| | Page |
|---|----------------|
| 1 . Documentation | |
| 1.1 General Information | <u>3</u> |
| 1.2 Test Regulation | <u>3</u> |
| 1.3 Test Conditions | <u>4 - 10</u> |
| 1.4 EUT Modifications / Deviation of Method | <u>11</u> |
| 1.5 Test Results / Uncertainty | <u>12 - 13</u> |
| 1.6 Summary | <u>14</u> |
| 1.7 Configuration of EUT / Operation of EUT | <u>15 - 16</u> |
| 1.8 Preliminary Test and Test Set-up(Drawings & Photographs) | <u>17 - 22</u> |
| 2 . Test Data | |
| 2.1 RF Power Output | <u>23</u> |
| 2.2 ISM Frequency | <u>24</u> |
| 2.3 AC Power Line Conducted Emission 150kHz - 30MHz | <u>25</u> |
| 2.4 Radiated Emission (Magnetic Field) 9 KHz - 30 MHz | <u>26</u> |
| 2.5 Radiated Emission (Electric Field) 30 MHz -1000 MHz | <u>27</u> |
| 2.6 Radiated Emission (Electric Field) 1 GHz - 24.5GHz | <u>28</u> |



JQA File No. : 50-40473
Model No. : R-820JSF
Regulation : CFR 47 FCC Rules Part 18

FCC ID : APYDMR0152
Issue Date : April 01, 2005
Page 3 of 28

1.1 GENERAL INFORMATION

1.1.1 Test Facility :

- 1) Test Facility located at Chubu Testing Center SHIKATSU Branch :
An anechoic Chamber (3 m and 10 m, on common plane) and a shielded Room
Date of Listing : September 11, 2002
FCC filing No.: 31040/SIT 1300F2
- 2) Chubu Testing Center SHIKATSU Branch is recognized under the National Voluntary Laboratory Accreditation Program for satisfactory compliance established in Title 15, Part 285 Code of Federal Regulations.
NVLAP Lab Code : 200190-0

1.1.2 Description of the Equipment Under Test :

- 1) Type of Equipment : Household Microwave Oven
- 2) Model/Type No. : R-820JSF
- 3) Type of Magnetron : 2M167B
- 4) Category : ISM Frequency Device
- 5) EUT Authorization : Certification
- 6) FCC ID : APYDMR0152
- 7) Product Type : Prototype
- 8) Serial No. : N/A
- 9) Date of manufacturer : February, 2005
- 10) Trade Name : SHARP
- 11) Fundamental Frequency : 4.0, 2450.0 MHz
Generated in the EUT
- 12) Highest Frequency : 2450.0 MHz
Used in the EUT
- 13) Power Rating : 120VAC 60Hz 1-Phase
- 14) Rated Power Output : 900 W
- 15) EUT Grounding : Grounded at the plug end of the power line cord.

1.1.3 Definitions for symbols used in this test report :

- Black box indicates that the listed condition, Regulation or equipment is applicable for this report.
- Blank box indicates that the listed condition, Regulation or equipment is not applicable for this report.

1.2 TEST REGULATION

FCC Rules and Regulations Part 18 Subpart A, B and C(October 1, 2002).

Test Procedure :

The test was performed according to the procedures in FCC/OET MP-5(1986).



JQA File No. : 50-40473
Model No. : R-820JSF
Regulation : CFR 47 FCC Rules Part 18

FCC ID : APYDMR0152
Issue Date : April 01, 2005
Page 4 of 28

1.3 TEST CONDITIONS

1.3.1 The measurement of the RF Power Output
was performed in the following test site.

Test Location :

KITA KANSAI Testing Center
7-7, Ishimaru, 1-Chome, Mino-Shi, Osaka, 562-0027, JAPAN

Used Test Instruments :

| Type | Model No. | Manufacturer | Serial No. | Last Cal. | Interval |
|------------------------|-----------|--------------|------------|-------------|----------|
| - Clamp on Power Meter | 3167 | HIOKI | 08011116 | Jun, 2004 | 1 Year |
| - Stop Watch | 8N5502 | SEIKO | Q47097355 | July, 2004 | 1 Year |
| - Digital Thermometer | 2455 | YOKOGAWA | Q47097361 | March, 2004 | 1 Year |

Environmental Conditions :

Temperature: 29.0 Humidity: 60.0 %



JQA File No. : 50-40473
Model No. : R-820JSF
Regulation : CFR 47 FCC Rules Part 18

FCC ID : APYDMR0152
Issue Date : April 01, 2005
Page 5 of 28

1.3.2 The measurement of the ISM Frequency

was performed for line voltage variation 80% to 125% of normal rated voltage, in the following test site.

Test Location :

Chubu Testing Center SHIKATSU Branch
53-1, Yamaura, Yakushiji, Shikatsu-cho, Nishikasugai-gun, Aichi 481-0005, JAPAN

- Anechoic Chamber No.2

Used Test Instruments :

| Type | Model No. | Manufacturer | Serial No. | Last Cal. | Interval |
|---------------------|-----------|-----------------|------------|------------|----------|
| - Spectrum Analyzer | 8566B | Hewlett Packard | 2937A06026 | July, 2004 | 1 Year |
| - Horn Antenna | 3160-03 | EMCO | 9911-1065 | May, 2004 | 1 Year |
| - RF Cable | - | Hewlett Packard | A-2 | May, 2004 | 1 Year |

Environmental Conditions :

Temperature: 24.0 Humidity: 40.0 %

1.3.3 The measurement of the AC Power Line Conducted Emission
was performed in the following test site.**Test Location :**

Chubu Testing Center SHIKATSU Branch
53-1, Yamaura, Yakushiji, Shikatsu-cho, Nishikasugai-gun, Aichi 481-0005, JAPAN

- Anechoic Chamber No.1
- Shielded Room

Used Test Instruments :

| Type | Model No. | Manufacturer | Serial No. | Last Cal. | Interval |
|------------------------|-----------|---------------------|------------|-----------|----------|
| - Field Strength Meter | ESH 2 | Rohde & Schwarz | 864125/007 | May, 2004 | 1 Year |
| - LISN(for EUT) | KNW-407 | Kyoritsu Electrical | 8-901-20 | Jun, 2004 | 1 Year |
| - RF Cable | 3D-2W | Fujikura | S-A | May, 2004 | 1 Year |
| - RF Cable | 3D-2W | Fujikura | S-B | May, 2004 | 1 Year |
| - 50ohm Termination | CT01 | TME | No.1 | May, 2004 | 1 Year |

Environmental Conditions :

Temperature: 20.0 Humidity: 34.0 %



1.3.4 The measurement of the Radiated Emission(Magnetic Field)

was performed in the frequency range of 9 kHz - 30 MHz, in the following test site.

Test Location :

Chubu Testing Center SHIKATSU Branch
53-1, Yamaura, Yakushiji, Shikatsu-cho, Nishikasugai-gun, Aichi 481-0005, JAPAN

- Anechoic Chamber No.1

Used Test Instruments :

| Type | Model No. | Manufacturer | Serial No. | Last Cal. | Interval |
|------------------------|-----------|-----------------|------------|-------------|----------|
| - Field Strength Meter | ESH 2 | Rohde & Schwarz | 864125/007 | May, 2004 | 1 Year |
| - Loop Antenna | 6502 | EMCO | 8811-2249 | April, 2004 | 1 Year |
| - RF Cable | 3D-2W | Fujikura | S-A | May, 2004 | 1 Year |

Environmental Conditions :

Temperature: 20.0 Humidity: 40.0 %

1.3.5 The measurement of the Radiated Emission(Electric Field)

was performed horizontal and vertical polarization, in frequency range 30MHz - 1000MHz, in the following test site.

Test Location :

Chubu Testing Center SHIKATSU Branch
53-1, Yamaura, Yakushiji, Shikatsu-cho, Nishikasugai-gun, Aichi 481-0005, JAPAN

- Anechoic Chamber No.1 (3 meters)
- Anechoic Chamber No.1 (10 meters)

Validation of Site Attenuation :

- 1) Last Confirmed Date : May 04, 2004
- 2) Interval : 1 Year

Used Test Instruments :

| Type | Model No. | Manufacturer | Serial No. | Last Cal. | Interval |
|------------------------|-----------|-----------------|------------|--------------|----------|
| - Field Strength Meter | ESCS30 | Rohde & Schwarz | 130201095 | March, 2004 | 1 Year |
| - Biconical Antenna | BBA9106 | Schwarzbeck | ANT-5-004 | August, 2004 | 1 Year |
| - Log-periodic Antenna | UHALP9107 | Schwarzbeck | ANT-5-002 | August, 2004 | 1 Year |
| - RF Cable | 5D-2W | Fujikura | A-3 | May, 2004 | 1 Year |
| - RF Cable | 106-02 | SUHNER | A-10-2 | May, 2004 | 1 Year |

Environmental Conditions :

Temperature: 20.0 Humidity: 40.0 %

1.3.6 The measurement of the Radiated Emission(Electric Field)

was performed horizontal and vertical polarization, in frequency range
1GHz - 26GHz, in the following test site.

Test Location :

Frequency Range:1GHz - 18GHz

Chubu Testing Center SHIKATSU Branch

53-1, Yamaura, Yakushiji, Shikatsu-cho, Nishikasugai-gun, Aichi 481-0005, JAPAN

- Anechoic Chamber No.2

Frequency Range:18Hz - 26GHz

KITA-KANSAI Testing Center

7-7, Ishimaru, 1-Chome, Mino-shi, Osaka 562-0072, JAPAN

- Anechoic Chamber

Used Test Instruments :

| Type | Model No. | Manufacturer | Serial No. | Last Cal. | Interval |
|---------------------|----------------|----------------------|------------|-----------------|----------|
| - Spectrum Analyzer | 8566B | Hewlett Packard | 2937A06026 | July, 2004 | 1 Year |
| - Spectrum Analyzer | E4446A | Agilent Technologies | US4430038 | October, 2004 | 1 Year |
| - Horn Antenna | 3160-01 | EMCO | 9908-1032 | May, 2004 | 1 Year |
| - Horn Antenna | 3160-02 | EMCO | 9901-1047 | May, 2004 | 1 Year |
| - Horn Antenna | 3160-03 | EMCO | 9911-1065 | May, 2004 | 1 Year |
| - Horn Antenna | 3160-04 | EMCO | 9911-1059 | May, 2004 | 1 Year |
| - Horn Antenna | 3160-05 | EMCO | 9911-1073 | May, 2004 | 1 Year |
| - Horn Antenna | 3160-06 | EMCO | 9910-1051 | May, 2004 | 1 Year |
| - Horn Antenna | 3160-07 | EMCO | 9911-1123 | May, 2004 | 1 Year |
| - Horn Antenna | 3160-08 | EMCO | 9912-1036 | May, 2004 | 1 Year |
| - Horn Antenna | 3160-09 | EMCO | 9808-1117 | December, 2003 | 2 Year |
| - Attenuator | 8493C | Hewlett Packard | 2708A07046 | December, 2004 | 1 Year |
| - Attenuator | 54-10 | Lucas Weinschel | E6164 | November, 2004 | 1 Year |
| - Attenuator | 54-10 | Lucas Weinschel | C8599 | November, 2004 | 1 Year |
| - PR AMP | DWT-12013 | DBS Microwave | 003 | September, 2004 | 1 Year |
| - PR AMP | DWT-18037 | DBS Microwave | 006 | September, 2004 | 1 Year |
| - PR AMP | ALN-22093545-1 | Wise Wave | 10939-01R | February, 2005 | 1 Year |
| - RF Cable | SUCOFLEX102 | HUBER+SUHNER | 14445/2 | February, 2005 | 1 Year |
| - RF Cable | - | Hewlett Packard | A-0.5 | May, 2004 | 1 Year |
| - RF Cable | - | Hewlett Packard | A-2 | May, 2004 | 1 Year |

Environmental Conditions :

Chubu Testing Center SHIKATSU Branch
Temperature: 24.0 Humidity: 40.0 %

KITA-KANSAI Testing Center
Temperature: 20.0 Humidity: 30.0 %



JQA File No. : 50-40473
Model No. : R-820JSF
Regulation : CFR 47 FCC Rules Part 18

FCC ID : APYDMR0152
Issue Date : April 01, 2005
Page 11 of 28

1.4 EUT Modification / Deviation of Test Method

EUT Modification :

- No modifications were conducted by JQA to achieve compliance to Limits.
- To achieve compliance to Limits, the following change(s) were made by JQA during the compliance test.

The modification will be implemented in all production models of this equipment.

Applicant : N/A

Date :

Type Name :

Position :

RESPONSIBLE PARTY

Responsible Party of Test Item(Product)

Responsible party : N/A

Contact Person :

Signatory

Deviation of Test Method :

- No deviations from the test method.
- It was employed the with following deviations from the test method.



JQA File No. : 50-40473
Model No. : R-820JSF
Regulation : CFR 47 FCC Rules Part 18

FCC ID : APYDMR0152
Issue Date : April 01, 2005
Page 12 of 28

1.5 TEST RESULTS

RF Power Output

Measurement Results (Calorimetric method) 605.9 W

Applied Limits of Radiated Emission 27.5 uV/m at 300 m
10.0 uV/m at 1600 m

Remarks : _____

ISM Frequency 2.4 GHz - 2.5 GHz

The requirements are - PASSED - NOT PASSED

Worst(lowest/highest)range 2456.4 MHz - 2472.2 MHz
Against 2450 MHz \pm 50 MHz

Remarks : _____

AC Power Line Conducted Emissions 150 kHz - 30 MHz

The requirements are - PASSED - NOT PASSED

Minimum limit margin 10.9 dB at 0.70 MHz

Maximum limit exceeding dB at MHz

Uncertainty of measurement results +2.3 dB(2) -2.3 dB(2)

Remarks : _____

Radiated Emissions (Magnetic Field) 9 KHz - 30 MHz

| | | |
|------------------------------------|-------------|--------------|
| The requirements are | - PASSED | - NOT PASSED |
| Minimum limit margin | - dB at | - MHz |
| Maximum limit exceeding | dB at | MHz |
| Uncertainty of measurement results | +2.9 dB(2) | -2.9 dB(2) |

Remarks : The spectrum was scanned from 9 KHz to 30 MHz and all emissions were found to be less than the maximum sensitivity of used test instrument.

Radiated Emissions (Electric Field) 30 MHz - 1000 MHz

| | | |
|------------------------------------|-------------|--------------|
| The requirements are | - PASSED | - NOT PASSED |
| Minimum limit margin | - dB at | - MHz |
| Antenna height Position | m | |
| EUT Position (CCW) | degree | |
| Maximum limit exceeding | dB at | MHz |
| Uncertainty of measurement results | +3.3 dB(2) | -3.3 dB(2) |

Remarks : The spectrum was scanned from 30 MHz to 1000 MHz and all emissions were found to be less than the maximum sensitivity of used test instrument.

Radiated Emissions (Electric Field) 1 GHz - 24.5 GHz

| | | |
|------------------------------------|-------------|--------------|
| The requirements are | - PASSED | - NOT PASSED |
| Minimum limit margin | 8.2 dB at | 17294.6 MHz |
| EUT Position (CCW) | 0 degree | |
| Maximum limit exceeding | dB at | MHz |
| Uncertainty of measurement results | +2.6 dB(2) | -2.6 dB(2) |

Remarks : _____

1.6 SUMMARY**GENERAL REMARKS :**

The EUT was tested according to the requirements of FCC Rules and Regulations Part 18 Subpart A, B and C (October 1, 2002) under the test configuration, as shown in page 15 and 16.

The conclusion for the test items of which are required by the applied regulation is indicated under the final judgment.

FINAL JUDGMENT :

The "as received" sample;

- - fulfill the test requirements of the regulation mentioned on page 3.
- - fulfill the test requirements of the regulation mentioned on page 3, but with certain qualifications.
- - doesn't fulfill the test regulation mentioned on page 3.

Begin of testing : February 17, 2005

End of testing : March 16, 2005

- JAPAN QUALITY ASSURANCE ORGANIZATION -

Approved Signatory :

Approved by:

Issued by:



Yatsuhiko Onomatsu
Manager

EMC Div. SHIKATSU Branch
JQA Chubu Testing Center



Shinichi Yokoi
Assistant Manager
EMC Div. SHIKATSU Branch
JQA Chubu Testing Center

1.7 CONFIGURATION OF EUT / OPERATION OF EUT

1.7.1 Test Configuration

The Equipment Under Test (EUT) consists of :

| Description | Manufacturer | Model No. | FCC ID | Serial No. |
|--------------------------|----------------------------------|-----------|------------|------------|
| Household Microwave Oven | Sharp Appliances (Thailand) Ltd. | R-820JSF | APYDMR0152 | N/A |

The measurement was carried out with the following equipment connected :

None

1.7.2 Port description of the interconnecting cable of the EUT

None

1.7.3 Operation of the EUT :

Power Supply Voltage : 120VAC 60Hz 1-Phase

Operating mode :

The EUT was operated during the measurement under following load condition according to Sec. 4.1 in FCC/OET MP-5(1986).


- 1) RF Power Output Measurement
1000 ml of water, with the beaker located in the center of the removable turntable.
- 2) ISM Frequency Measurement
1000 ml of water, with the beaker located in the center of the removable turntable.
- 3) Conducted Emissions Measurement
1000 ml of water, with the beaker located in the center of the removable turntable.
- 4) Radiated Emission Measurement(radiation on second and third harmonics)
Two loads, one of 700 ml and the other of 300 ml, of water are used. Each load is tested both with the beaker located in the center of the removable turntable and with it in the right front center.
- 5) Radiated Emission Measurement(all other radiation)
700 ml of water, with the beaker located in the center of the removable turntable.

Type of Magnetron : 2M167B by Matsushita Electronic Ind. Corp.

1.7.4 The generated and operating frequency in the EUT :

4.0, 2450.0 MHz

1.7.5 EUT arrangement :

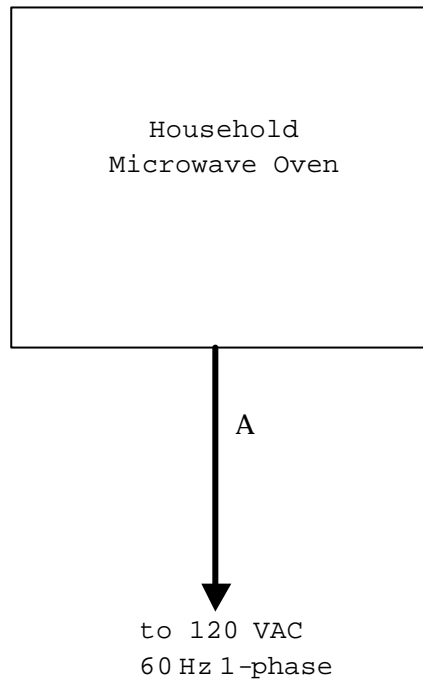

1.7.6 Type of Interference Cable(s) and the AC Power Cord used with the EUT:

| Cable No. | Description | Shielded | Ferrite core | Length | Connector |
|-----------|----------------|----------|--------------|--------|--------------|
| A | AC power cable | No | No | 1.1 m | Non-metallic |

1.8 PRELIMINARY TEST and TEST SET-UP (Drawing and Photograph)


AC Power Line Conducted Emissions 150 kHz - 30 MHz :

According to description of CISPR11, The AC Power Line preliminary conducted emissions measurement were carried out.

The preliminary conducted measurements were performed using the spectrum analyzer to observe the emission characteristics of the EUT.

The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions. These configurations were used for final AC power line conducted emissions measurements.

Shielded Enclosure

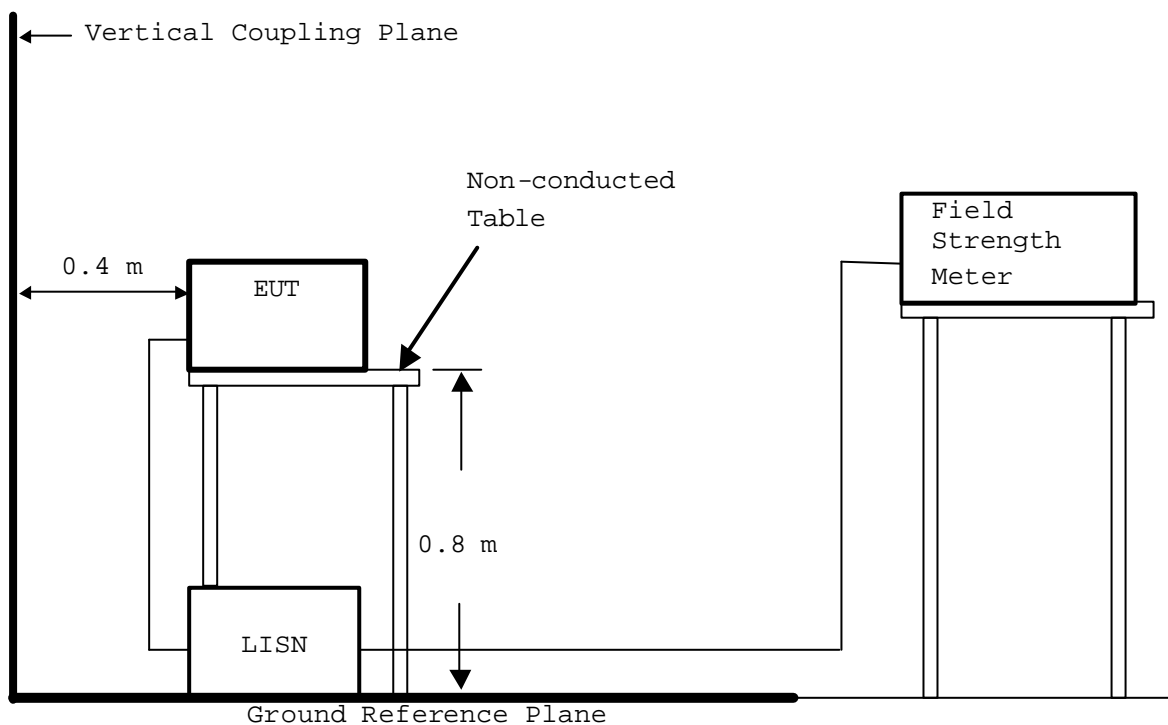

Magnetic Field Radiation Emissions 9 kHz - 30 MHz :

The preliminary test was performed according to the description of FCC/OET MP-5(1986) Sec.5.1 (Preliminary Radiated Emissions Test) and Sec.5.2 (Equipment Configurations).

The preliminary test was carried out to investigate the frequency of the emission that has the highest amplitude relative to the limits within normal operating modes, cable positions, and a typical system configuration.

In order to find out to the maximum emission, the preliminary test and a final test were performed in accordance with the following steps.

Step 1: One operation mode of the test system was setting.

Step 2: In order to investigate the frequencies of maximum emissions, the loop antenna position was approached to the EUT and the significant frequency of the emission's circumstance from the test system were investigated.


These data were recorded in the specified frequency band (9 kHz - 30 MHz).

Step 3: Using a test receiver and a loop antenna, the emissions' circumstance from the test system was measured in accordance with FCC/OET MP-5(1986) Sec.5.6 (Final Radiated Emissions Test) at each frequency which was found the higher emission referred to level vs. frequency on the list and which was measured by the loop antenna.

Step 4: Return to step 1, if the other operation mode was possible to be setting.

Step 5: The worst result was reported arranging data of which was obtained and performed by one or plural operation modes as the final test. At the worst point that the highest amplitude relative to the limit the repeatability of the level was reconfirmed. The photographs of the test system setup worst point were taken and recorded.

Anechoic Chamber

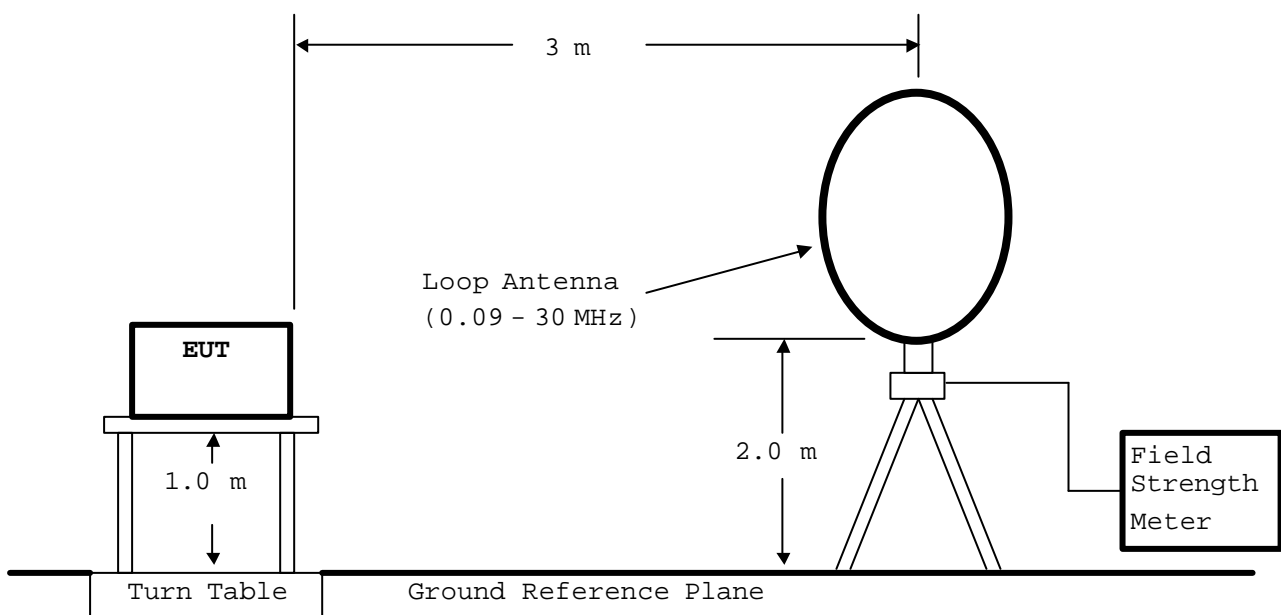

Radiated Emissions 30 MHz - 1000 MHz :

The preliminary test was performed according to the description of FCC/OET MP-5(1986) Sec.5.1 (Preliminary Radiated Emissions Test) and Sec.5.2 (Equipment Configurations).

The preliminary test was carried out to investigate the frequency of the emission that has the highest amplitude relative to the limits within normal operating modes, cable positions, and a typical system configuration.

In order to find out to the maximum emission, the preliminary test and a final test were performed in accordance with the following steps.

Step 1: One operation mode of the test system was setting.


Step 2: Using a test receiver and a test antenna probe, the significant frequency of the emission's circumstance from the test system were investigated. These data were recorded every one to 22 divided bands in the specified frequency band (30 MHz - 1000 MHz).

Step 3: Using a test receiver and a resonant tuned dipole antenna, the emission's Circumstance from the test system was measured in accordance with FCC/OET MP-5(1986) Sec.5.6 (Final Radiated Emissions Tests) at each frequency which was found the higher emission referred to level vs. frequency on the list and which was measured by the resonant tuned dipole antenna.

Step 4: Return to step 1, if the other operation mode was possible to be setting.

Step 5: The worst result was reported arranging data of which was obtained and performed by one or plural operation modes as the final test.

Anechoic Chamber

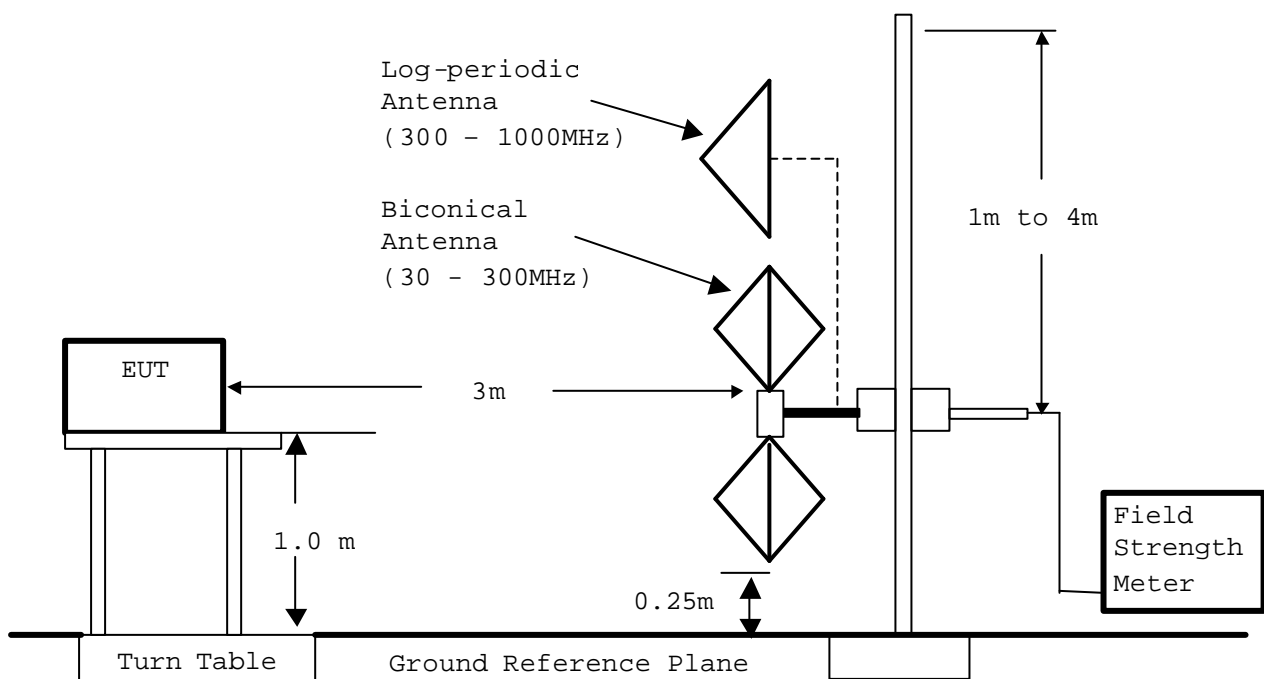

Radiated Emissions 1.0 GHz - 24.5 GHz :

The preliminary test was performed according to the description of FCC/OET MP-5(1986) Sec.5.1(Preliminary Radiated Emissions Test) and Sec.5.2(Equipment

Configurations). The preliminary test was carried out to investigate the frequency of the emission that has the highest amplitude relative to the limits within normal operating modes, cable positions, and a typical system configuration.

In order to find out to the maximum emission, the preliminary test and a final test were performed in accordance with the following steps.

Step 1: One operation mode of the test system was setting.

Step 2: In order to investigate the frequencies of maximum emissions, the horn antenna position was approached to the EUT and the significant frequency of the emission's circumstance from the test system were investigated.


These data were recorded in the specified frequency band(1 GHz - 24.5 GHz).

Step 3: The emissions' circumstance from the test system was measured in according with FCC/OET MP-5(1986) Sec.5.6 (Final Radiated Emissions Test) at each frequency which was found the higher emission referred to level vs. frequency on the list and which was measured in the specified distance using the horn antenna.

Step 4: Return to step 1, if the other operation mode was possible to be setting.

Step 5: The worst result was reported arranging data of which was obtained and performed by one or plural operation modes as the final test. At the worst point that the highest amplitude relative to the limit the repeatability of the level was reconfirmed. The photographs of the test system setup worst point were taken and recorded.

Anechoic Chamber

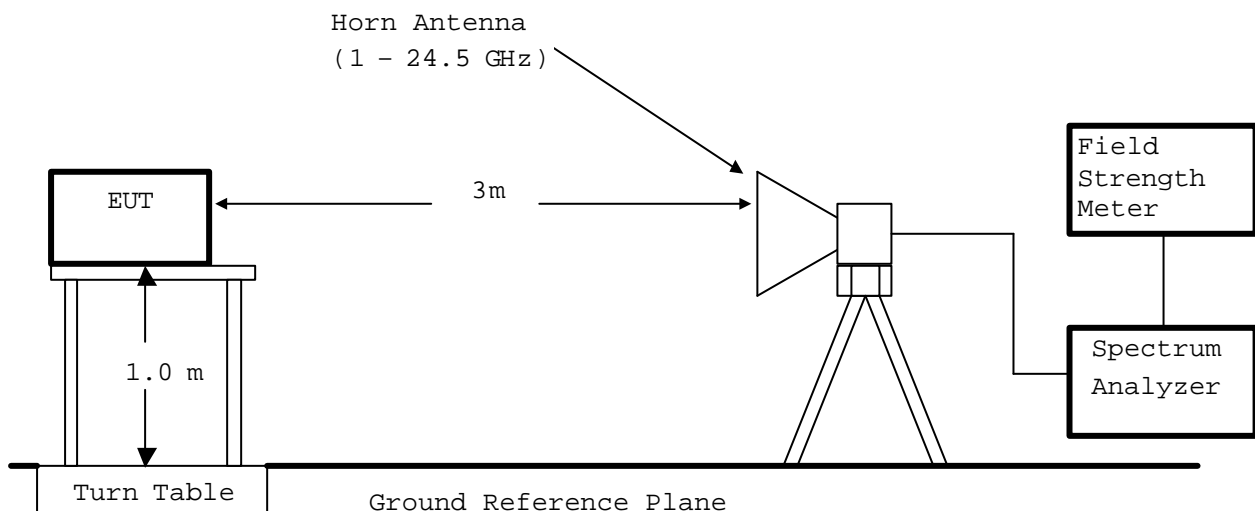

TEST SET-UP (Photograph)

Conducted Emissions

- Front View -



- Side View -



Radiated Emissions

- Front View -



- Rear View -



2. TEST DATA

2.1 RF Power Output Measurement

Date : February 17, 2005
 Temp.: 29.0 °C Humi.: 60.0 %

The power output was measured by the calorimetric method, computing the power output from the observed temperature rise of the load over a period of time.

Load(water) : 1000 ml
 Measurement time : 47.0 sec. (calculated by the rated RF power output)

| No. | Water temperature[°C] | | RF Power Output *) [W] |
|---------|------------------------------|-----------------------------|---------------------------|
| | t ₁ (before test) | t ₂ (after test) | |
| 1 | 9.5 | 16.3 | 607.7 |
| 2 | 10.3 | 17.0 | 598.7 |
| 3 | 9.7 | 16.5 | 607.7 |
| 4 | 10.3 | 17.1 | 607.7 |
| 5 | 10.5 | 17.3 | 607.7 |
| Average | | | 605.9 |

$$*) \text{RF Power Output [W]} = 4.2 \times 1000 \times (t_2 - t_1) / 47.0$$

Results of RF power output : 605.9 W

The limit of the radiated emission at 300m : $25 \times \sqrt{605.9/500} = 27.5 \text{ (uV/m)}$

The AC power input to the oven is measured to determine if the oven is operating in accordance with the manufacturer's specifications.

Rated AC power input : AC 120 V × 12.5 A = 1500.0 VA
 Measured AC power input: AC 120 V × 13.1 A = 1572.0 VA

Tested by : 
 Yatsuhiko Onomatsu



2.2 ISM Frequency Measurement

Date : March 16, 2005
Temp.: 24.0 °C Humi.: 40.0 %

The maximum frequency deviation was measured at -26dB with respect to the Maximum level.

| Maximum Frequency Deviation [MHz] | | Voltage |
|-----------------------------------|-----------------|----------------|
| Lower Frequency | Upper Frequency | Variation |
| 2456.4 | 2472.2 | 96.0 V (80%) |
| 2460.0 | 2471.2 | 120.0 V (100%) |
| 2458.7 | 2470.3 | 150.0 V (125%) |

Remarks: Setup of Spectrum Analyzer

Detector Function : Peak
Resolution Bandwidth : 10 KHz
Video Bandwidth : 10 KHz
Sweet Time : 20 ms
Span : 100 MHz

Tested by :


Yatsuhiko Onomatsu

2.3 AC Power Line Conducted Emissions 150 kHz - 30 MHz

Date : March 8, 2005
 Temp : 20°C Humi : 34%

| Frequency MHz | Correction | Meter Reading | | | | Limits | | Results | | Margins | | |
|------------------|--------------|---------------|--------|-------|-------|--------|--------|---------|--------|---------|----|--|
| | Factor dB | VA-QP | VA-AV | VB-QP | VB-AV | QP | AV | QP | AV | QP | AV | |
| | | | dB(μV) | | | | dB(μV) | | dB(μV) | | dB | |
| 0.15 | 0.3 | 52.0 | - | 51.0 | - | 66.0 | 56.0 | 52.3 | - | 13.7 | - | |
| 0.20 | 0.2 | 50.0 | - | 50.0 | - | 63.6 | 53.6 | 50.2 | - | 13.4 | - | |
| 0.30 | 0.1 | 46.0 | - | 46.0 | - | 60.2 | 50.2 | 46.1 | - | 14.1 | - | |
| 0.50 | 0.1 | 42.0 | - | 43.0 | - | 56.0 | 46.0 | 43.1 | - | 12.9 | - | |
| 0.70 | 0.1 | 44.0 | - | 45.0 | - | 56.0 | 46.0 | 45.1 | - | 10.9 | - | |
| 1.00 | 0.0 | 44.0 | - | 42.0 | - | 56.0 | 46.0 | 44.0 | - | 12.0 | - | |
| 1.50 | 0.0 | 39.0 | - | 40.0 | - | 56.0 | 46.0 | 40.0 | - | 16.0 | - | |
| 2.00 | 0.0 | 27.0 | - | 26.0 | - | 56.0 | 46.0 | 27.0 | - | 29.0 | - | |
| 3.00 | 0.1 | 29.0 | - | 30.0 | - | 56.0 | 46.0 | 30.1 | - | 25.9 | - | |
| 5.00 | 0.1 | 18.0 | - | 18.0 | - | 56.0 | 46.0 | 18.1 | - | 37.9 | - | |
| 7.00 | 0.1 | <0.0 | - | <0.0 | - | 60.0 | 50.0 | <0.1 | - | - | - | |
| 10.00 | 0.2 | <0.0 | - | <0.0 | - | 60.0 | 50.0 | <0.2 | - | - | - | |
| 13.00 | 0.3 | <0.0 | - | <0.0 | - | 60.0 | 50.0 | <0.3 | - | - | - | |
| 16.05 | 0.3 | 11.6 | - | 12.4 | - | 60.0 | 50.0 | 12.7 | - | 47.3 | - | |
| 20.06 | 0.4 | 28.1 | - | 28.3 | - | 60.0 | 50.0 | 28.7 | - | 31.3 | - | |
| 24.08 | 0.5 | 18.4 | - | 18.7 | - | 60.0 | 50.0 | 19.2 | - | 40.8 | - | |
| 28.09 | 0.5 | 15.8 | - | 16.2 | - | 60.0 | 50.0 | 16.7 | - | 43.3 | - | |
| 30.00 | 0.6 | <0.0 | - | <0.0 | - | 60.0 | 50.0 | <0.6 | - | - | - | |

Notes:

- 1) Test Location : Shielded Room
- 2) The spectrum was checked from 0.15MHz to 30MHz
- 3) The symbol of "<" means "or less".
- 4) The symbol of "-" means "Not applicable".
- 5) The correction factor contains the LISN factor and the cable(2.0m length) loss.
- 6) A sample calculation was made at 0.70 MHz

Correction Factor + Meter Reading
 0.1 + 45.0 = 45.1 dB(μV)
- 7) Setting of the measuring instrument :
 - a) Detector Function : CISPR Quasi-Peak
IF Bandwidth : 9kHz
 - b) Detector Function : Average
IF Bandwidth : 10kHz

Tested by :


 Yatsuhiko Onomatsu

2.4 Magnetic Field Radiated Emissions Measurement 9 kHz - 30 MHz

Date : March 13, 2005
 Temp. : 20.0 °C Humi. : 40.0 %

| Frequency (MHz) | Correction Factor (dB) | Meter Reading at 3m (dB/V/m) | Limits | | Result | | Margin (dB) |
|--------------------|------------------------------|------------------------------------|--------|-------|--------|---------|----------------|
| | | | 300m | 1600m | 300m | 1600m | |
| | | | (uV/m) | | (uV/m) | | |
| 0.01 | 19.7 | <40.0 | 27.5 | 10.0 | <0.10 | <0.0034 | - |
| 0.10 | 10.8 | <40.0 | 27.5 | 10.0 | <0.03 | <0.0012 | - |
| 0.15 | 10.7 | <40.0 | 27.5 | 10.0 | <0.03 | <0.0012 | - |
| 1.00 | 10.4 | <40.0 | 27.5 | 10.0 | <0.03 | <0.0012 | - |
| 5.00 | 10.8 | <40.0 | 27.5 | 10.0 | <0.03 | <0.0012 | - |
| 10.00 | 10.3 | <40.0 | 27.5 | 10.0 | <0.03 | <0.0012 | - |
| 20.00 | 9.8 | <40.0 | 27.5 | 10.0 | <0.03 | <0.0012 | - |
| 30.00 | 8.1 | <40.0 | 27.5 | 10.0 | <0.03 | <0.0012 | - |

- Notes : 1) Test Location : Anechoic Chamber No.1
 2) Distance measurement : 3m
 3) The spectrum was checked from 9 KHz to 30 MHz.
 4) The symbol of "<" means "or less".
 5) The correction factor contains the antenna factor and the cable(2.0m) loss.
 6) A sample calculation was mad at 0.01 MHz.

Correction Factor = 19.7 (dB)
 Conversion Factor = -80.0 (dB) [40dB/decade]
 Meter Reading = 40.0 (dB/uV)

Result = -20.3 (dB/uV/m) = 0.1 (uV/m)

- 7) Setting of measurement instrument
 Detector Function : Average
 IF Bandwidth : 10 KHz - 150 KHz : 200 Hz
 150 KHz - 30 MHz : 10 kHz

Tested by :


 Yatsuhiko Onomatsu

2.5 Electromagnetic Field Radiated Emissions Measurement 30 MHz - 1000 MHz

Date : March 13, 2004
 Temp. : 20.0 °C Humi. : 40.0 %

| Frequency (MHz) | Correction Factor (dB) | Meter Reading at 3m (dB/V/m) | | Limits | | Result(Highest) | | Margin (dB) |
|--------------------|------------------------------|---------------------------------|-------|----------------|-------|-----------------|--------|----------------|
| | | Hori. | Vert. | 300m (uV/m) | 1600m | 300m (uV/m) | 1600m | |
| 30.0 | 18.9 | <-6.0 | <-6.0 | 27.5 | 10.0 | <0.044 | <0.008 | - |
| 70.0 | 7.1 | <-6.0 | <-6.0 | 27.5 | 10.0 | <0.011 | <0.002 | - |
| 100.0 | 10.8 | <-6.0 | <-6.0 | 27.5 | 10.0 | <0.017 | <0.003 | - |
| 200.0 | 19.7 | <-6.0 | <-6.0 | 27.5 | 10.0 | <0.048 | <0.009 | - |
| 300.0 | 22.1 | <-6.0 | <-6.0 | 27.5 | 10.0 | <0.064 | <0.012 | - |
| 500.0 | 23.4 | <-6.0 | <-6.0 | 27.5 | 10.0 | <0.074 | <0.014 | - |
| 700.0 | 26.5 | <-6.0 | <-6.0 | 27.5 | 10.0 | <0.106 | <0.020 | - |
| 1000.0 | 31.1 | <-6.0 | <-6.0 | 27.5 | 10.0 | <0.180 | <0.034 | - |

Notes : 1) Test Location : Anechoic Chamber No.1
 2) Distance measurement : 3m
 3) The spectrum was checked from 30 to 1000 MHz.
 4) The symbol of "<" means "or less".
 5) The correction factor contains the antenna factor and the cable(22.0 m) loss.
 6) A sample calculation was mad at **30.0** MHz.
 Correction Factor = 18.9 (dB)
 Conversion Factor = -40.0 (dB) [20dB/decade]
 Meter Reading = -6.0 (dB/uV)

 Result = -27.1 (dB/uV/m) = 0.044 (uV/m)

7) Setting of measurement instrument
 Detector Function : Average
 IF Bandwidth : 120 KHz

Tested by :


 Yatsuhiko Onomatsu

2.6 Electromagnetic Field Radiated Emissions Measurement 1 GHz - 24.5 GHz

Date : March 16, 2005

Temp.: 24.0 °C Humi.: 40.0 %

| Frequency (MHz) | Correction Factor (dB) | Meter Reading at 3m (dB/V/m) | | Limits | | Result (Highest) | | Margin (dB) |
|--------------------|------------------------------|---------------------------------|-------|----------------|-------|------------------|-------|----------------|
| | | Hori. | Vert. | 300m (uV/m) | 1600m | 300m (uV/m) | 1600m | |
| 2400.0 | 22.6 | <40.0 | <40.0 | 27.5 | 10.0 | <13.49 | <2.53 | - |
| 2500.0 | 22.6 | <40.0 | <40.0 | 27.5 | 10.0 | <13.49 | <2.53 | - |
| 4378.4 | -16.3 | 70.2 | 69.4 | 27.5 | 10.0 | 4.95 | 0.93 | 14.9 |
| 4933.2 | -16.0 | 70.4 | 69.6 | 27.5 | 10.0 | 5.25 | 0.98 | 14.4 |
| 7391.5 | -12.6 | 66.9 | 60.2 | 27.5 | 10.0 | 5.19 | 0.97 | 20.9 |
| 7662.4 | -12.5 | 60.4 | 58.4 | 27.5 | 10.0 | 2.48 | 0.47 | 25.0 |
| 9139.5 | -8.7 | 52.5 | 50.8 | 27.5 | 10.0 | 1.55 | 0.29 | 15.7 |
| 9860.8 | -7.3 | 60.4 | 58.4 | 27.5 | 10.0 | 4.52 | 0.85 | 19.2 |
| 12321.3 | -5.8 | 55.4 | 50.1 | 27.5 | 10.0 | 3.02 | 0.57 | 19.1 |
| 14794.3 | -2.0 | 51.7 | 50.8 | 27.5 | 10.0 | 3.05 | 0.57 | 5.9 |
| 17294.6 | 0.2 | 62.7 | 60.4 | 27.5 | 10.0 | 13.96 | 2.62 | 17.7 |

Date : February 25, 2005

Temp.: 20.0 °C Humi.: 30.0 %

| Frequency (MHz) | Correction Factor (dB) | Meter Reading at 3m (dB/V/m) | | Limits | | Result (Highest) | | Margin (dB) |
|--------------------|------------------------------|---------------------------------|-------|----------------|-------|------------------|-------|----------------|
| | | Hori. | Vert. | 300m (uV/m) | 1600m | 300m (uV/m) | 1600m | |
| 19682.0 | 9.5 | 41.6 | 41.6 | 27.5 | 10.0 | 3.59 | 0.67 | 17.7 |
| 22149.0 | 9.5 | 45.6 | 41.6 | 27.5 | 10.0 | 5.69 | 1.07 | 13.7 |
| 24607.0 | 9.3 | 39.6 | 39.6 | 27.5 | 10.0 | 2.79 | 0.52 | 19.9 |

Notes : 1) Test Location : Chubu Testing Center SHIKATSU Branch Anechoic Chamber No.2
 KITA-KANSAI Testing Center Anechoic Chamber

2) Distance measurement : 3m

3) The spectrum was checked from 1 to 24.5 GHz.

4) The symbol of "<" means "or less".

5) The correction factor contains the antenna factor , cable(2.5 m) loss, and AMP gain.

6) A sample calculation was mad at 17294.6 MHz.

Correction Factor = 0.2 (dB)

Conversion Factor = -40.0 (dB) [20dB/decade]

Meter Reading = 62.7 (dB/uV)

Result = 22.9 (dB/uV/m) = 13.96 (uV/m)

7) Setting of measurement instrument

Spectrum Analyzer

Detector Function : Peak Average

Resolution Bandwidth : 1 MHz 3 MHz

Video Bandwidth : 1 MHz 3 MHz

Span : 0 Hz 0 Hz

Field Strength Meter *)

SCALE : LINER

Detector Function : Average

IF Bandwidth : 1 MHz

*) For the average measurement method, it is made measurement using a test receiver and spectrum analyzer.

Tested by :

Y. Onomatsu
 Tatsuhiko Onomatsu