



Appendix A. Test Result of AC Power Line Conducted Emission

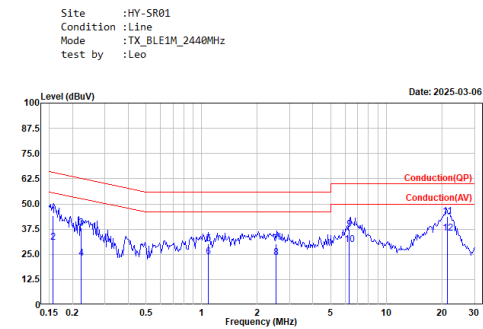

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	dBuV	dB	dBuV	dB	
1	0.157	44.22	65.63	-21.41	34.58	9.64	QP
2	0.157	30.93	55.63	-24.70	21.29	9.64	Average
3	0.223	37.98	62.71	-24.73	28.34	9.64	QP
4	0.223	23.13	52.71	-29.58	13.49	9.64	Average
5	1.087	30.26	56.00	-25.74	20.56	9.70	QP
6	1.087	23.59	46.00	-22.41	13.89	9.70	Average
7	2.537	30.29	56.00	-25.71	20.44	9.85	QP
8	2.537	23.26	46.00	-22.74	13.41	9.85	Average
9	6.309	37.25	60.00	-22.75	27.10	10.15	QP
10	6.309	29.90	50.00	-20.10	19.75	10.15	Average
11	21.322	43.71	60.00	-16.29	33.85	9.86	QP
12	21.322	35.36	50.00	-14.64	25.50	9.86	Average

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

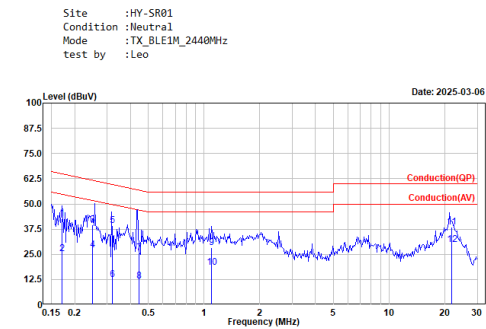


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	dBuV	dB	dBuV	dB	
1	0.171	42.78	64.93	-22.15	33.16	9.62	QP
2	0.171	25.31	54.93	-29.62	15.69	9.62	Average
3	0.249	39.80	61.79	-21.99	30.17	9.63	QP
4	0.249	27.34	51.79	-24.45	17.71	9.63	Average
5	0.321	39.35	59.66	-20.33	29.73	9.62	QP
6	0.321	12.40	49.68	-37.28	2.78	9.62	Average
7	0.447	25.57	56.93	-31.36	15.94	9.63	QP
8	0.447	11.87	46.93	-35.06	2.24	9.63	Average
9	1.096	28.24	56.00	-27.76	18.56	9.68	QP
10	1.096	18.63	46.00	-27.37	8.95	9.68	Average
11	21.798	38.44	60.00	-21.56	28.46	9.98	QP
12	21.798	29.90	50.00	-20.10	19.92	9.98	Average

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line


Appendix B. Test Result of 6dB Bandwidth

Modulation	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
		Ant. 1		
GFSK (1Mbps)	2402	0.70	>0.50	Pass
	2440	0.71	>0.50	Pass
	2480	0.72	>0.50	Pass


GFSK/1MHz/1M/2402MHz/Ch0/Ant.1

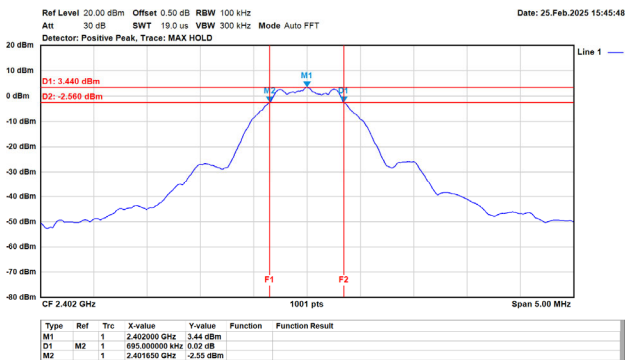

GFSK/1MHz/1M/2440MHz/Ch19/Ant.1

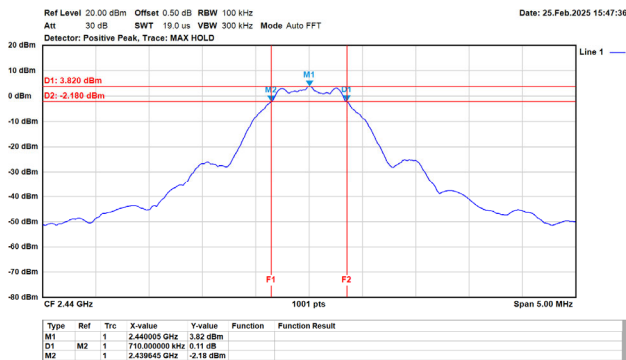

GFSK/1MHz/1M/2480MHz/Ch39/Ant.1

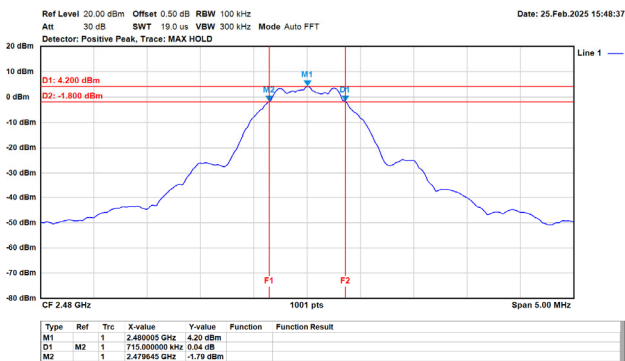


Appendix C. Test Result of Maximum Peak Conducted Output Power

Modulation	Frequency (MHz)	Maximum Conducted Output Power (dBm)	Limit (dBm)	Result
		Ant. 1		
GFSK (1Mbps)	2402	3.72	30.00	Pass
	2440	4.11	30.00	Pass
	2480	4.66	30.00	Pass


Appendix D. Test Result of Power Spectral Density

Modulation	Frequency (MHz)	Power Spectral Density (dBm / 3kHz)	Limit (dBm / 3kHz)	Result
		Ant. 1		
GFSK (1Mbps)	2402	-11.66	8.00	Pass
	2440	-11.62	8.00	Pass
	2480	-11.29	8.00	Pass


GFSK/1MHz/1M/2402MHz/Ch0/Ant. 1

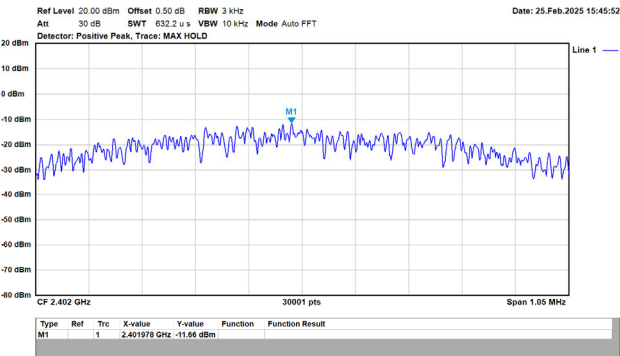

GFSK/1MHz/1M/2440MHz/Ch19/Ant. 1

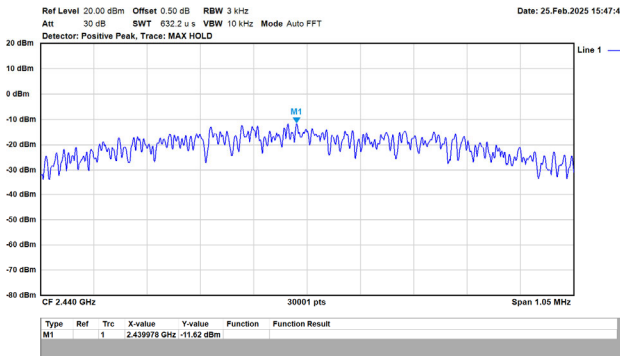



GFSK/1MHz/1M/2480MHz/Ch39/Ant. 1

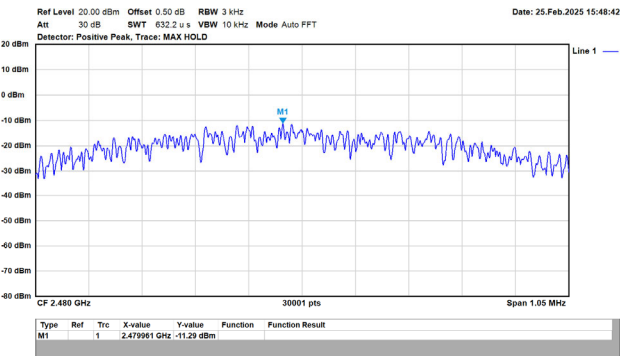

Appendix E. Test Result of Antenna Port Conducted Emission


Modulation	Measurement Level Δ (dB)	Result
GFSK (1 Mbps)	> 20	PASS

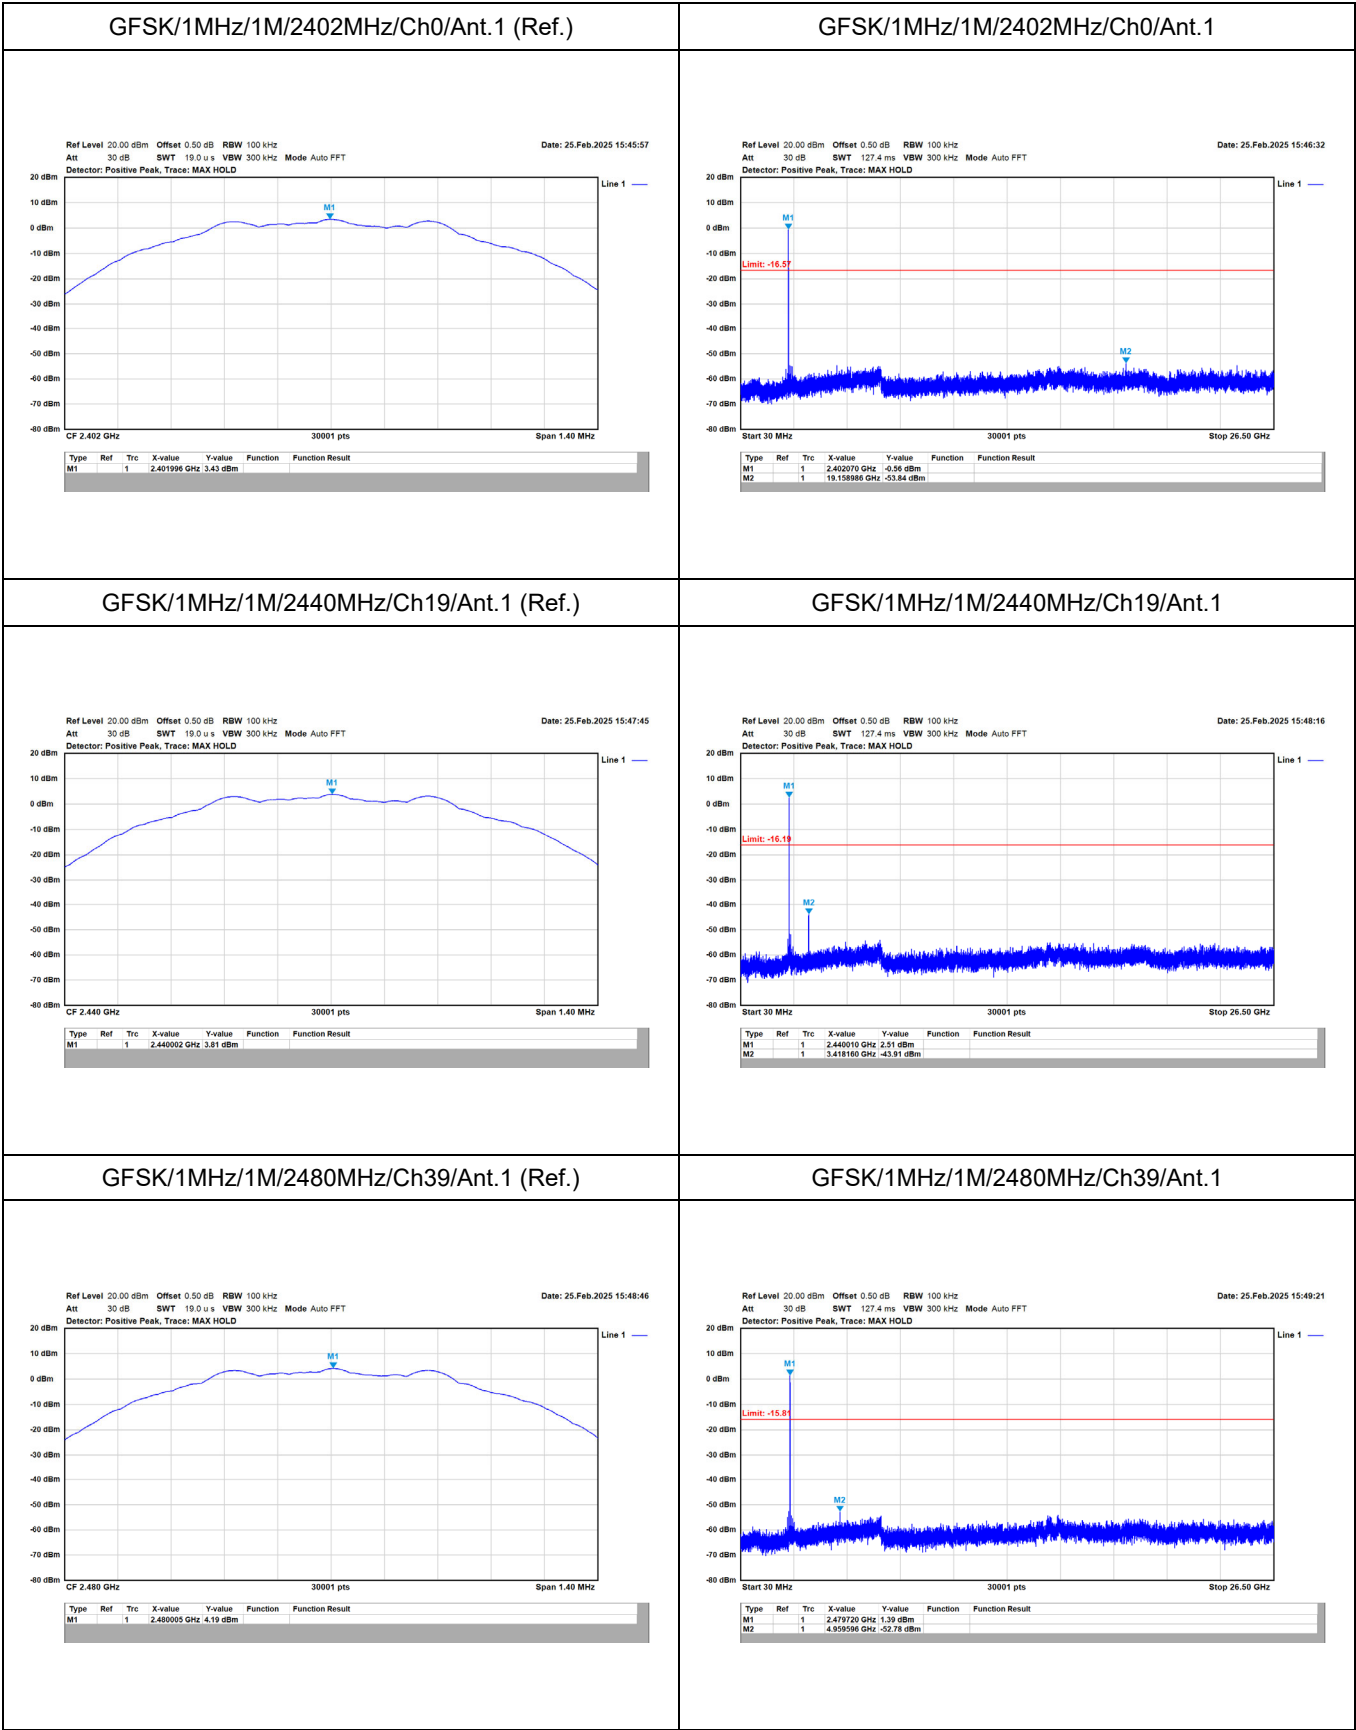

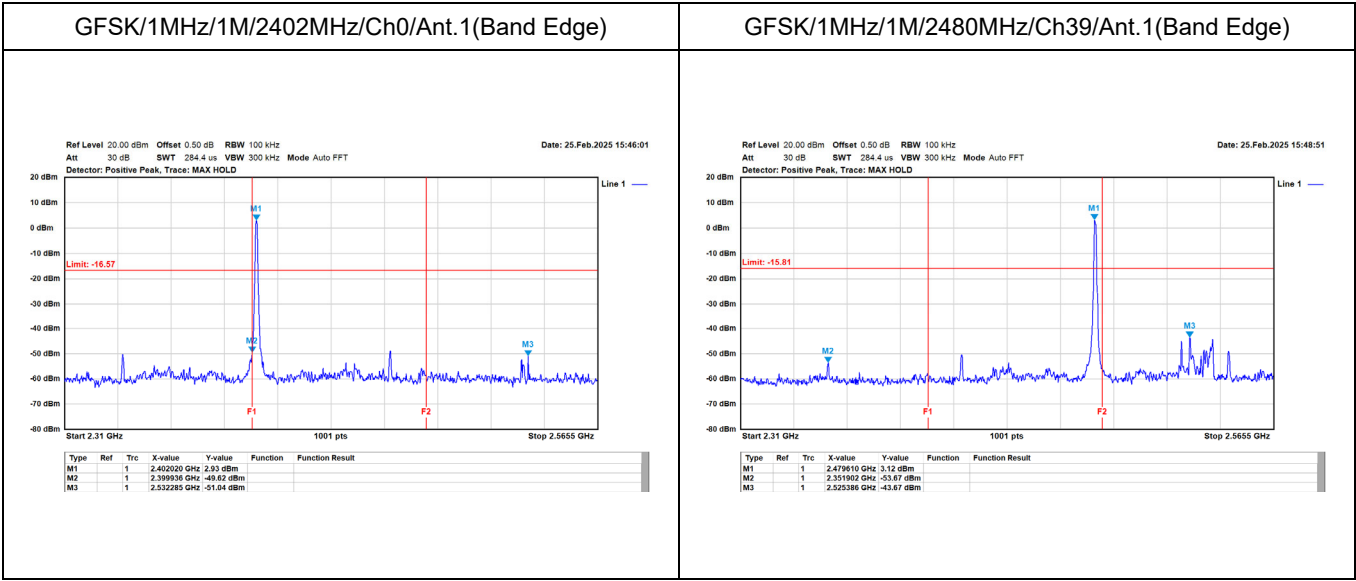

Appendix F. Test Result of Radiated Emission

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BLE1M_2402MHz
Test by :Caster

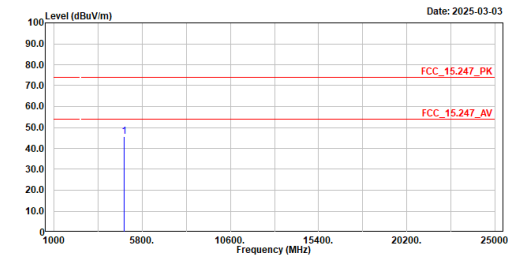


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	4804.000	45.54	74.00	-28.46	52.80	-7.26	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BLE1M_2402MHz
Test by :Caster

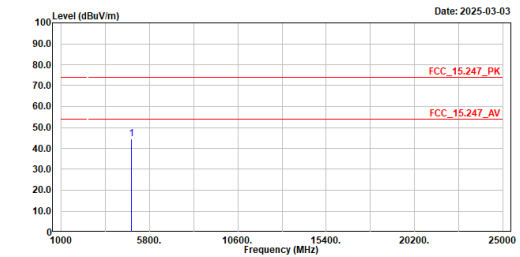


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	4804.000	44.47	74.00	-29.53	51.73	-7.26	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BLE1M_2440MHz
Test by :Caster

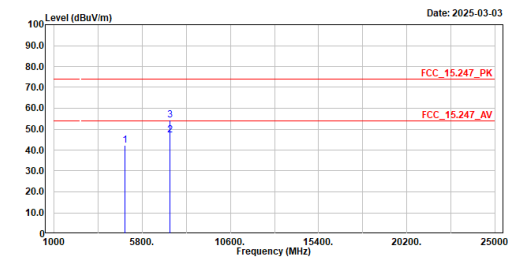


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	4880.000	42.33	74.00	-31.67	49.23	-6.90	Peak
2	7320.000	47.17	54.00	-6.83	47.50	-0.33	Average
3	7320.000	54.24	74.00	-19.76	54.57	-0.33	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BLE1M_2440MHz
Test by :Caster

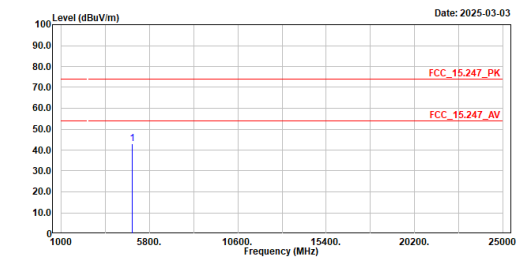


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	4880.000	43.11	74.00	-30.89	50.01	-6.90	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BLE1M_2480MHz
Test by :Caster

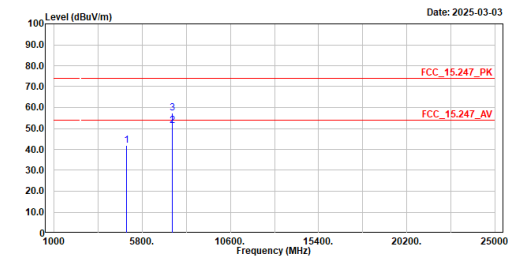


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4960.000	41.78	74.00	-32.22	48.39	-6.61	Peak
2	7440.000	51.15	54.00	-2.85	51.20	-0.05	Average
3	7440.000	57.25	74.00	-16.75	57.30	-0.05	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BLE1M_2480MHz
Test by :Caster

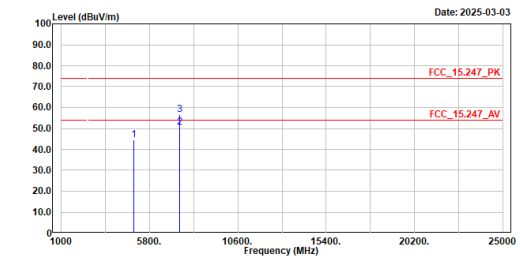


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4960.000	44.43	74.00	-29.57	51.04	-6.61	Peak
2	7440.000	50.39	54.00	-3.61	50.44	-0.05	Average
3	7440.000	56.78	74.00	-17.22	56.83	-0.05	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BLE1M_2440MHz
Test by :Peter

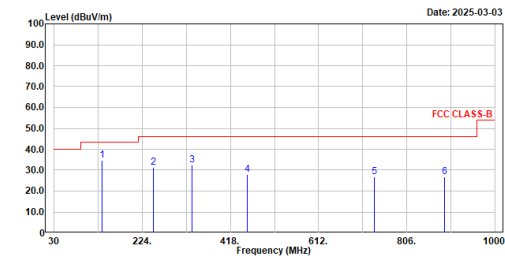


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	135.730	34.90	43.50	-8.60	59.74	-24.84	QP
2	248.250	31.26	46.00	-14.74	56.21	-24.95	QP
3	333.610	32.54	46.00	-13.46	54.56	-22.02	QP
4	455.830	27.84	46.00	-18.16	46.59	-18.75	QP
5	734.220	26.75	46.00	-19.25	40.10	-13.35	QP
6	889.420	26.75	46.00	-19.25	38.45	-11.70	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BLE1M_2440MHz
Test by :Peter

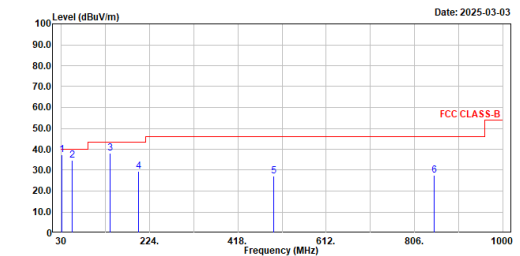


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	31.940	37.18	40.00	-2.82	62.16	-24.98	QP
2	54.250	34.53	40.00	-5.47	58.27	-23.74	QP
3	137.670	38.05	43.50	-5.45	62.71	-24.66	QP
4	199.750	29.49	43.50	-14.01	56.35	-26.86	QP
5	497.540	27.07	46.00	-18.93	45.17	-18.10	QP
6	849.650	27.68	46.00	-18.32	39.62	-11.94	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_BLE1M_2402MHz
Test by :Caster

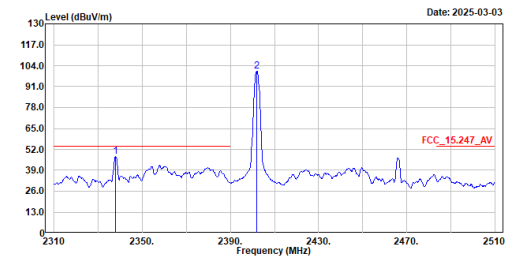


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	2338.000	47.55	54.00	-6.45	41.46	6.09	Average
2	2402.000	100.57	-----	-----	94.53	6.04	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_BLE1M_2402MHz
Test by :Caster

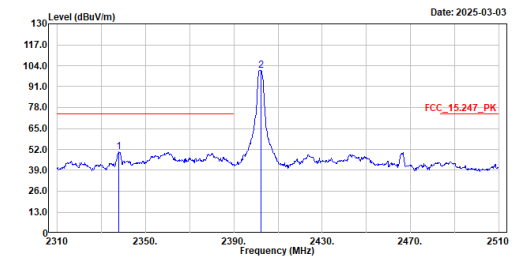


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	2338.000	50.41	74.00	-23.59	44.32	6.09	Peak
2	2402.400	101.13	-----	-----	95.09	6.04	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_BLE1M_2402MHz
Test by :Caster

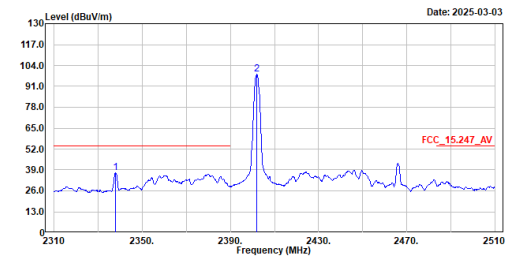


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	2338.000	37.33	54.00	-16.67	31.24	6.09	Average
2	2402.000	98.40	-----	-----	92.36	6.04	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_BLE1M_2402MHz
Test by :Caster

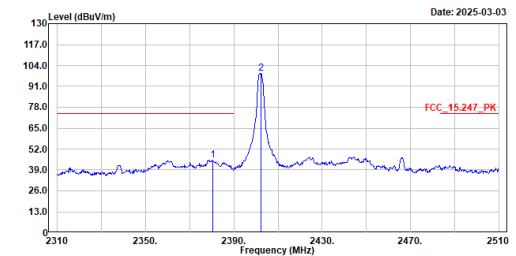


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	2338.400	45.27	74.00	-28.73	39.15	6.12	Peak
2	2402.200	98.98	-----	-----	92.94	6.04	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_BLE1M_2480MHz
Test by :Caster

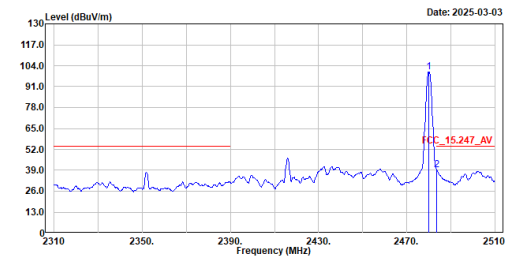


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	2480.000	100.25	-----	-----	94.22	6.03	Average
2	2483.600	39.02	54.00	-14.98	32.95	6.07	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_BLE1M_2480MHz
Test by :Caster

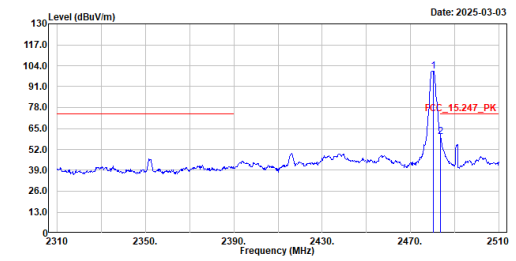


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	2480.400	100.80	-----	-----	94.77	6.03	Peak
2	2483.600	59.81	74.00	-14.19	53.74	6.07	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BLE1M_2480MHz
Test by :Caster

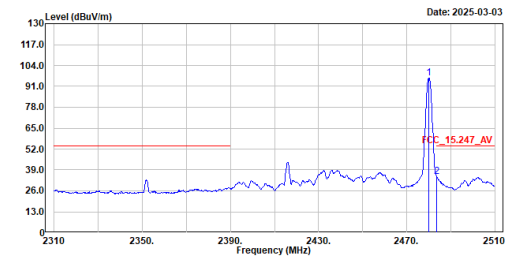


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	2480.000	95.99	-----	-----	89.96	6.03	Average
2	2483.600	34.84	54.00	-19.16	28.77	6.07	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BLE1M_2480MHz
Test by :Caster

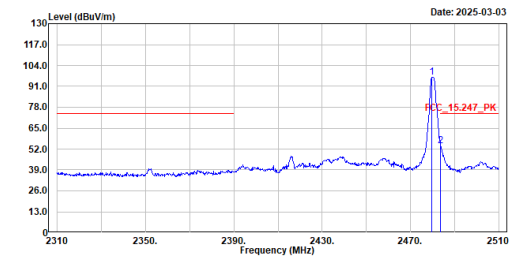

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	2479.800	96.51	-----	-----	90.48	6.03	Peak
2	2483.600	54.04	74.00	-19.96	47.97	6.07	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.