

10. Measurement of radiated disturbance

Above 30 MHz Electric Field strength was measured in accordance with FCC PART 15.205, 15.209. The test setup was made according to ANSI C 63.10 (2013) Semi-anechoic chamber, which allows a 3 m distance measurement. The EUT was placed in the center of styrofoam turntable. The height of this table was 0.8 m. The measurement was conducted with both horizontal and vertical antenna polarization. The turntable has fully rotated. For further description of the configuration refer to the picture of the test setup.

10.1 Measurement equipments

Equipment Name	Type	Manufacturer	Serial No.	Next Calibration date
TEST Receiver	ESCI7	ROHDE & SCHWARZ	100916	19-Jul-22
Logbicon Antenna	VULB 9168	SCHWARZBECK	193	9-Dec-23
Turn Table	DT3000-2t	Innco System GmbH	N/A	–
Antenna Mast	MA4000-EP	Innco System GmbH	N/A	–
PREAMPLIFIER	8449B	HP	3008A00581	20-Jul-22
Horn Antenna	BBHA9120D	SCHWARZBECK	469	3-Dec-22
TEST Receiver	ESU	ROHDE & SCHWARZ	100529	19-Jul-22
Turn Table	DT1500-S	Innco System GmbH	N/A	–
Antenna Mast	MA4000-EP	Innco System GmbH	N/A	–
Horn Antenna	BBHA 9170	SCHWARZBECK	752	22-Jul-22
Antenna Master & Turn table controller	C02000-P	Innco System GmbH	CO2000/642 /28051111/L	–

10.2 Environmental Condition

Below 1 GHz –Test Place : 10 m Semi-anechoic chamber

BT Basic Rate Mode

Temperature (°C) : 23.6 °C
Humidity (% R.H.) : 44.5 % R.H.

BT EDR Mode

Temperature (°C) : 23.4 °C
Humidity (% R.H.) : 43.0 % R.H.

Above 1 GHz–Test Place : 3 m Semi-anechoic chamber

BT Basic Rate Mode

Temperature (°C) : 23.1 °C
Humidity (% R.H.) : 46.0 % R.H.

BT EDR Mode

Temperature (°C) : 23.4 °C
Humidity (% R.H.) : 47.5 % R.H.

10.3 Test Data for Bluetooth (Basic Rate)

Left_BDR

Measurement Distance : 3 m

Frequency (MHz)	Reading (dB μ W)	Position (V/H)	Height (m)	Correction Factor		Result Value		
				Ant Factor (dB)	Cable (dB)	Limit (dB μ W/m)	Result (dB μ W/m)	Margin (dB)
30.90	5.92	V	1.4	12.01	0.76	40.00	18.70	21.30
73.60	6.78	V	1.8	11.75	1.16	40.00	19.69	20.31
133.70	6.42	V	1.6	11.56	1.59	43.50	19.57	23.93
248.00	10.64	H	1.6	11.77	2.27	46.00	24.67	21.33
441.80	2.88	V	1.4	17.02	2.97	46.00	22.88	23.12
901.90	4.69	H	1.6	23.56	4.62	46.00	32.86	13.14
Remark	H : Horizontal, V : Vertical Bluetooth (Basic Rate , 38 CH , 2 440 MHz) *CL = Cable Loss (In case of below 1 000 MHz) *The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection at frequency below 1 GHz. *Result Value = Reading + Ant Factor + Cable loss *Margin = Limit - Result							

Test Data for Bluetooth (EDR)

Left_EDR

Measurement Distance : 3 m

Frequency (MHz)	Reading (dB μ V)	Position (V/H)	Height (m)	Correction Factor		Result Value		
				Ant Factor (dB)	Cable (dB)	Limit (dB μ V/m)	Result (dB μ V/m)	Margin (dB)
31.30	8.46	V	1.0	12.02	0.81	40.00	21.29	18.71
39.00	3.64	H	1.0	12.35	0.90	40.00	16.89	23.11
103.30	8.04	H	1.3	8.77	1.54	43.50	18.35	25.15
114.10	13.43	V	1.4	9.98	1.62	43.50	25.03	18.47
224.00	11.34	V	1.6	10.20	2.35	46.00	23.89	22.11
627.30	4.74	H	1.8	20.33	4.05	46.00	29.12	16.88
Remark	H : Horizontal, V : Vertical Bluetooth (EDR , 38 CH , 2 440 MHz)							
	*CL = Cable Loss(In case of below 1 000 MHz)							
	*The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection at frequency below 1 GHz.							
	*Result Value = Reading + Ant Factor + Cable loss							
	*Margin = Limit - Result							

Test Data for Bluetooth (Basic Rate)

Right_BDR

Measurement Distance : 3 m

Frequency (MHz)	Reading (dB μ V)	Position (V/H)	Height (m)	Correction Factor		Result Value		
				Ant Factor (dB)	Cable (dB)	Limit (dB μ V/m)	Result (dB μ V/m)	Margin (dB)
30.80	7.82	V	1.4	12.01	0.76	40.00	20.59	19.41
74.30	6.17	V	1.8	11.76	1.16	40.00	19.09	20.91
113.30	14.10	V	1.6	9.96	1.47	43.50	25.53	17.97
255.30	6.20	H	1.6	11.82	2.30	46.00	20.32	25.68
349.40	3.52	H	1.4	14.49	2.63	46.00	20.64	25.36
645.00	4.47	H	1.6	20.55	3.82	46.00	28.84	17.16
Remark	H : Horizontal, V : Vertical Bluetooth (Basic Rate , 38 CH , 2 440 MHz) *CL = Cable Loss (In case of below 1 000 MHz) *The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection at frequency below 1 GHz. *Result Value = Reading + Ant Factor + Cable loss *Margin = Limit - Result							

Test Data for Bluetooth (EDR)

Right_EDR


Measurement Distance : 3 m

Frequency (MHz)	Reading (dB μ V)	Position (V/H)	Height (m)	Correction Factor		Result Value		
				Ant Factor (dB)	Cable (dB)	Limit (dB μ V/m)	Result (dB μ V/m)	Margin (dB)
30.20	7.73	V	1.0	12.00	0.76	40.00	20.49	19.51
46.70	1.96	H	1.0	13.42	0.94	40.00	16.32	23.68
72.80	6.74	V	1.3	11.74	1.15	40.00	19.63	20.37
100.10	16.61	V	1.4	8.70	1.39	43.50	26.70	16.80
651.50	3.91	H	1.6	20.60	3.85	46.00	28.36	17.64
846.50	5.79	H	1.8	22.97	4.45	46.00	33.20	12.80
Remark	H : Horizontal, V : Vertical Bluetooth (EDR , 38 CH , 2 440 MHz) *CL = Cable Loss(In case of below 1 000 MHz) *The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection at frequency below 1 GHz. *Result Value = Reading + Ant Factor + Cable loss *Margin = Limit - Result							

Restricted Band Edges for BT(Basic Rate)


Band Edges(CH Middle) Left_BDR

Polarity:Horizontal

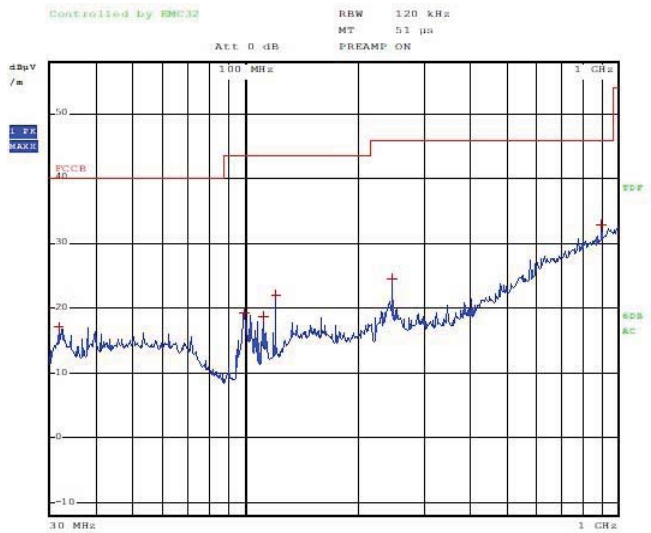

ESTR-22-00164

Polarity:Vertical

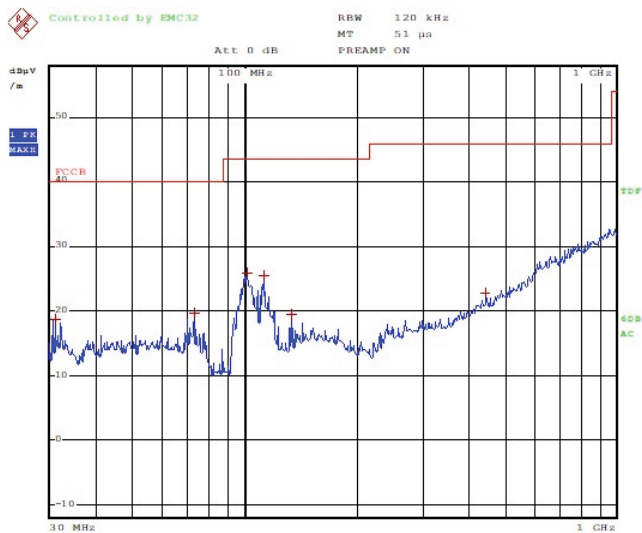


ESTR-22-00164

Restricted Band Edges for BT(EDR)


Band Edges(CH Middle) Left_EDR

Polarity:Horizontal

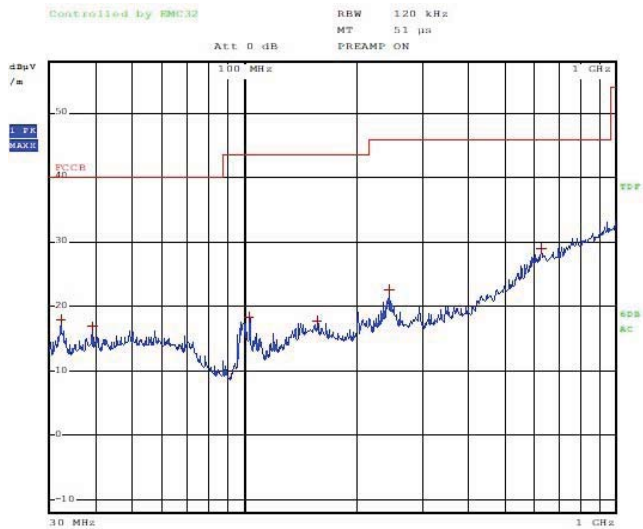

ESTR-22-00164

Polarity:Vertical

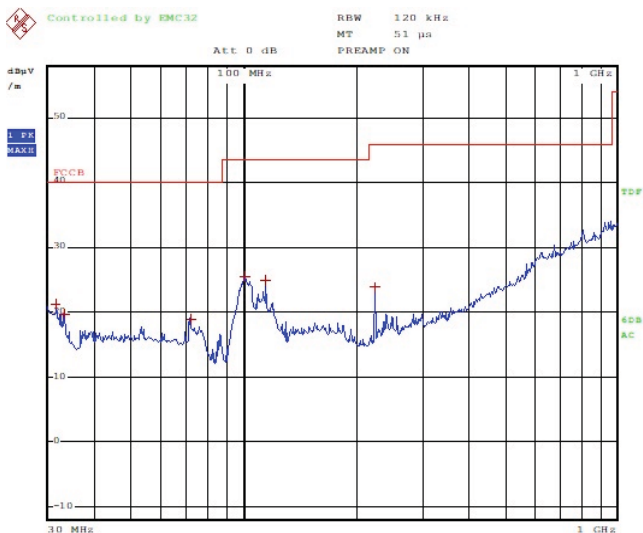


ESTR-22-00164

Restricted Band Edges for BT(Basic Rate)


Band Edges(CH Middle) Right_BDR

Polarity:Horizontal

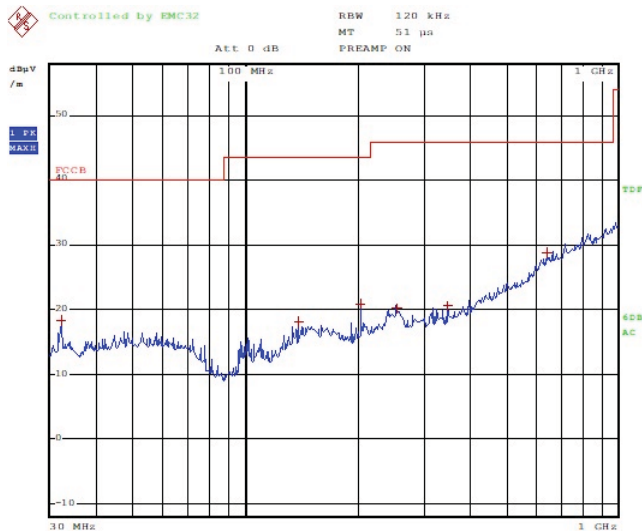

ESTR-22-00164

Polarity:Vertical

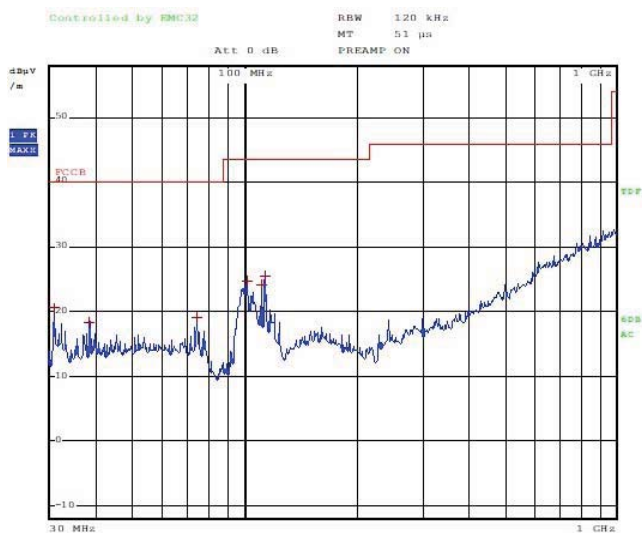


ESTR-22-00164

Restricted Band Edges for BT(EDR)


Band Edges(CH Middle) Right_EDR

Polarity:Horizontal

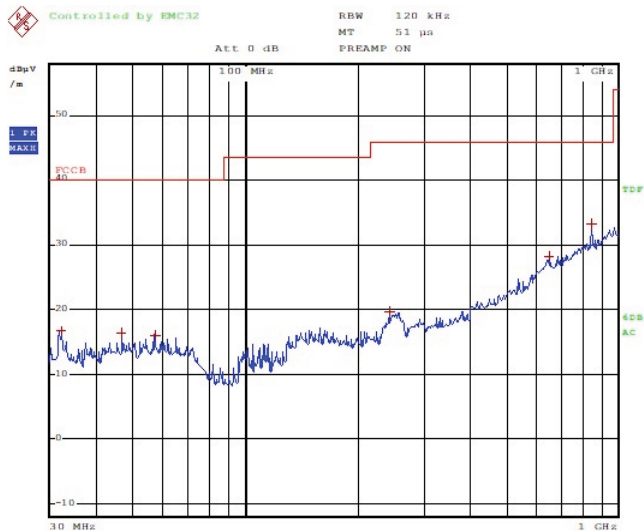

ESTR-22-00164

Polarity:Vertical

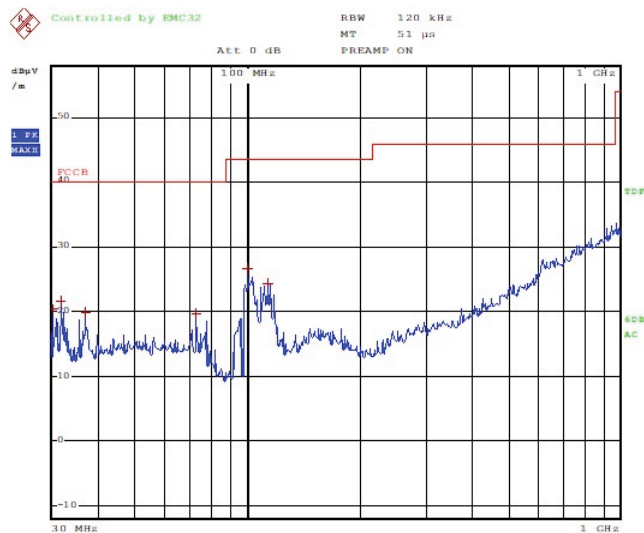


ESTR-22-00164

10.4 Test Data for Bluetooth(Basic Rate)

Left_BDR


Measurement Distance : 3 m

Frequency (MHz)	Reading (dBμW)	Position (V/H)	Height (m)	Correction Factor		Duty Cycle Correction (dB)	Result Value		
				Ant Factor (dB)	Cable (dB)		Limit (dBμW/m)	Result (dBμW/m)	Margin (dB)
PEAK(RBW:1 MHz VBW:3 MHz)									
2390.00	48.52	H	1.5	27.54	-28.39		74.00	47.67	26.33
2390.00	52.75	V	1.5	27.54	-28.39		74.00	51.90	22.10
4804.00	32.48	H	1.5	31.30	-25.75		74.00	38.03	35.97
4804.00	34.24	V	1.5	31.30	-25.75		74.00	39.79	34.21
Average (RBW:1 MHz VBW:3 MHz)									
2390.00	35.46	H	1.5	27.54	-28.39	1.04	54.00	35.65	18.35
2390.00	35.33	V	1.5	27.54	-28.39	1.04	54.00	35.52	18.48
4804.00	24.58	H	1.5	31.30	-25.75	1.04	54.00	31.17	22.83
4804.00	24.42	V	1.5	31.30	-25.75	1.04	54.00	31.01	22.99
Remark	H : Horizontal, V : Vertical TEST MODE : Bluetooth Basic Rate-CH0 (2 402 MHz) *This test was radiated up to 26.5 GHz but no noise was measured. *The TX signal wasn't detected from 3th harmonics. *Result Value = Reading + Ant Factor + Cable loss - Amplifier Gain + Duty Cycle Correction Factor *Margin = Limit - Result *The resolution bandwidth and video bandwidth of spectrum analyzer is 1 MHz and 1 kHz for average detection at frequency above 1 GHz. FYI : Duty Cycle Correction Factor (79 channel hopping) a. Time to cycle through all channels= Δ t= τ [ms] x 79 channels = 295.934 ms, where τ = pulse width b. 100 ms/ Δ t [ms] = H → Round up to next highest integer, H ' =1 c. Worst Case Dwell Time = τ [ms] x H ' = 3.746 ms d. Duty Cycle Correction = 20log (Worst Case Dwell Time/ 100ms) dB = -28.528 dB								

Test Data for Bluetooth(Basic Rate)

Left_BDR



Measurement Distance : 3 m

Frequency (MHz)	Reading (dB μ V)	Position (V/H)	Height (m)	Correction Factor		Duty Cycle Correction (dB)	Result Value		
				Ant Factor (dB)	Cable (dB)		Limit (dB μ V/m)	Result (dB μ V/m)	Margin (dB)
PEAK(RBW:1 MHz VBW:3 MHz)									
4880.00	35.12	H	1.5	31.30	-25.67		74.00	40.75	33.25
4880.00	35.34	V	1.5	31.30	-25.67		74.00	40.97	33.03
Average (RBW:1 MHz VBW:3 MHz)									
4880.00	27.05	H	1.5	31.30	-25.67	1.04	54.00	33.72	20.28
4880.00	26.99	V	1.5	31.30	-25.67	1.04	54.00	33.66	20.34
Remark	H : Horizontal, V : Vertical TEST MODE : Bluetooth Basic Rate-CH38 (2 440 MHz) *This test was radiated up to 26.5 GHz but no noise was measured. *The TX signal wasn't detected from 3th harmonics. *Result Value = Reading + Ant Factor + Cable loss - Amplifier Gain + Duty Cycle Correction Factor *Margin = Limit - Result *The resolution bandwidth and video bandwidth of spectrum analyzer is 1 MHz and 1 kHz for average detection at frequency above 1 GHz. FYI : Duty Cycle Correction Factor (79 channel hopping) a. Time to cycle through all channels= $\Delta t = \tau$ [ms] x 79 channels = 295.934 ms, where τ = pulse width b. 100 ms/ Δt [ms] = H $\rightarrow$ Round up to next highest integer, H ' =1 c. Worst Case Dwell Time = τ [ms] x H ' = 3.746 ms d. Duty Cycle Correction = 20log (Worst Case Dwell Time/ 100ms) dB = -28.528 dB								

Test Data for Bluetooth(Basic Rate)

Left_BDR

Measurement Distance : 3 m


Frequency (MHz)	Reading (dBμV)	Position (V/H)	Height (m)	Correction Factor		Duty Cycle Correction (dB)	Result Value		
				Ant Factor (dB)	Cable (dB)		Limit (dBμV/m)	Result (dBμV/m)	Margin (dB)
PEAK(RBW:1 MHz VBW:3 MHz)									
2483.50	63.22	H	1.5	27.42	-28.28		74.00	62.36	11.64
2483.50	57.80	V	1.7	27.42	-28.28		74.00	56.94	17.06
4960.00	46.38	H	1.5	31.48	-25.59		74.00	52.27	21.73
4960.00	44.71	V	1.7	31.48	-25.59		74.00	50.60	23.40
Average (RBW:1 MHz VBW:3 MHz)									
2483.50	52.90	H	1.5	27.42	-28.28	1.04	54.00	53.08	0.92
2483.50	36.84	V	1.7	27.42	-28.28	1.04	54.00	37.02	16.98
4960.00	37.58	H	1.5	31.48	-25.59	1.04	54.00	44.51	9.49
4960.00	27.81	V	1.7	31.48	-25.59	1.04	54.00	34.74	19.26
Remark	H : Horizontal, V : Vertical TEST MODE : Bluetooth Basic Rate-CH78 (2 480 MHz)								
	*This test was radiated up to 26.5 GHz but no noise was measured.								
	*The TX signal wasn't detected from 3th harmonics.								
	*Result Value = Reading + Ant Factor + Cable loss - Amplifier Gain + Duty Cycle Correction Factor								
	*Margin = Limit - Result								
	*The resolution bandwidth and video bandwidth of spectrum analyzer is 1 MHz and 1 kHz for average detection at frequency above 1 GHz.								
	FYI : Duty Cycle Correction Factor (79 channel hopping)								
	a. Time to cycle through all channels= Δ t= τ [ms] x 79 channels = 295.934 ms, where τ = pulse width								
	b. 100 ms/ Δt [ms] = H → Round up to next highest integer, H ' =1								
	c. Worst Case Dwell Time = τ [ms] x H ' = 3.746 ms								
	d. Duty Cycle Correction = 20log (Worst Case Dwell Time/ 100ms) dB = -28.528 dB								

Restricted Band Edges for BT(Basic Rate)

Band Edges(CH Low)

Detector mode:Peak


Polarity:Horizontal

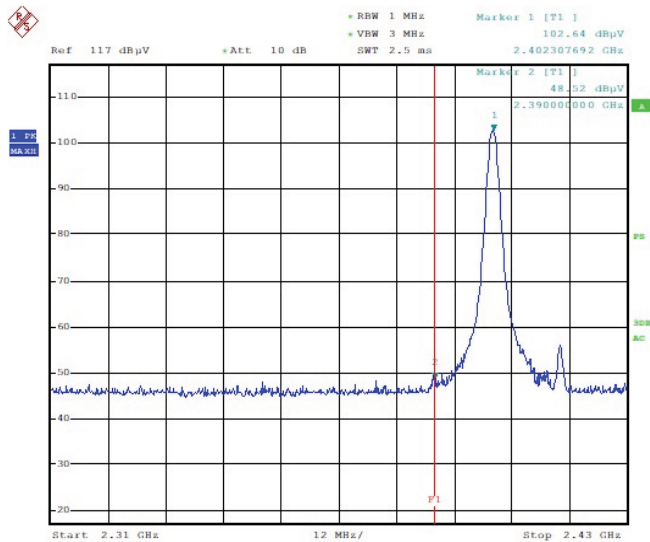

ESTR-22-00164

Detector mode:Average

Polarity:Horizontal

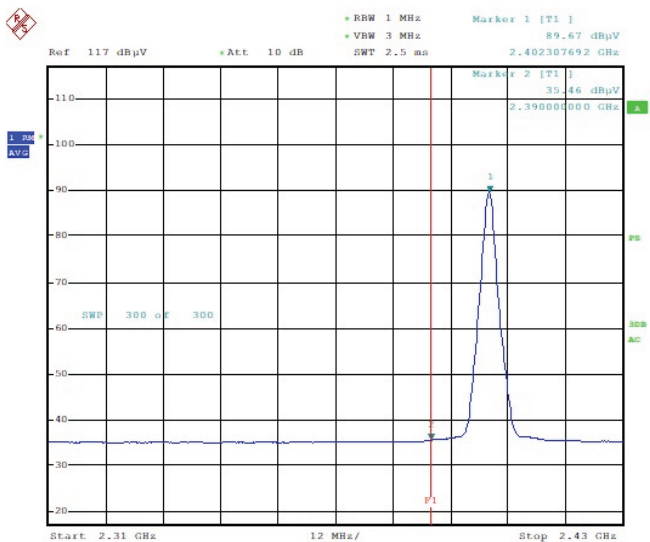


ESTR-22-00164

Band Edges(CH Low)

Detector mode:Peak


Polarity:Vertical

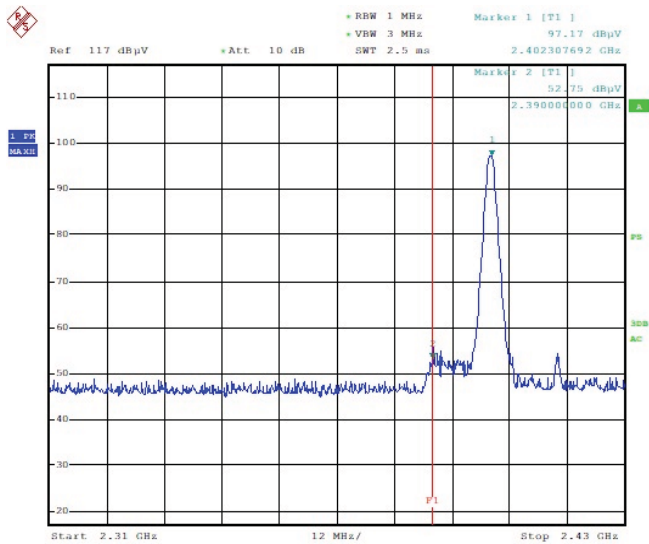

ESTR-22-00164

Detector mode:Average

Polarity:Vertical

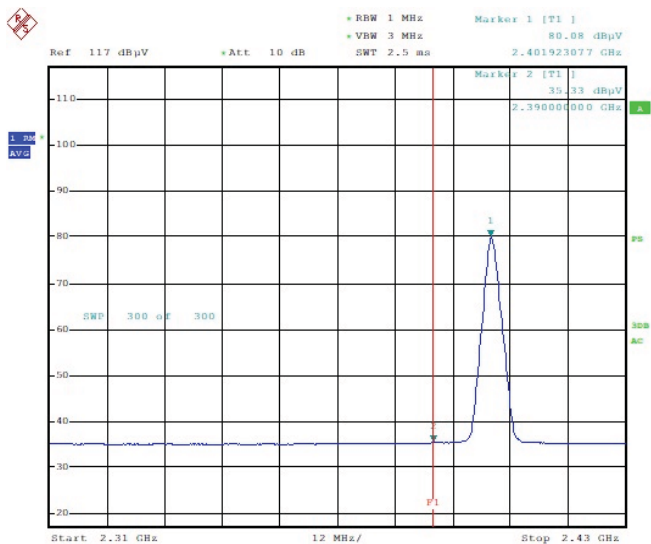


ESTR-22-00164

Band Edges(CH High)

Detector mode:Peak


Polarity:Horizontal

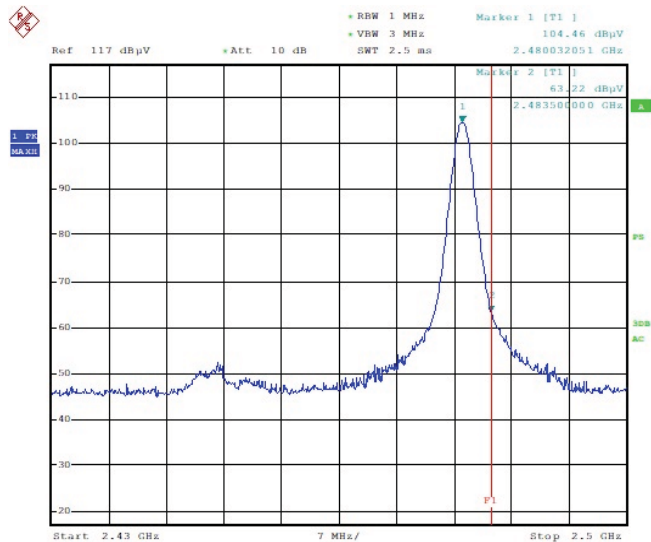

ESTR-22-00164

Detector mode:Average

Polarity:Horizontal

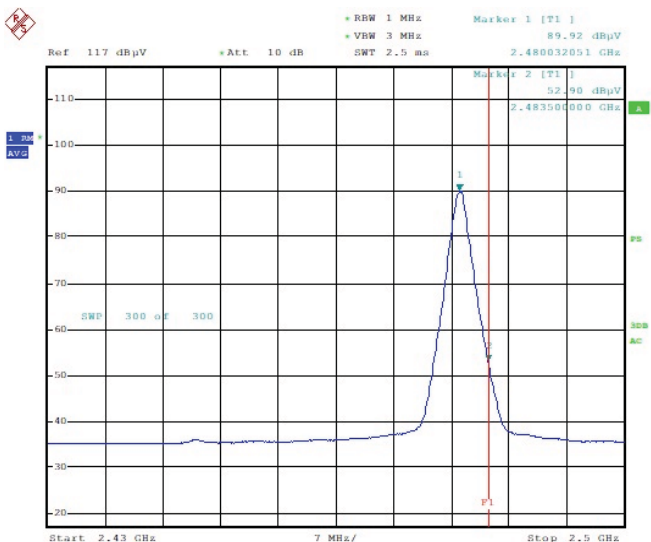


ESTR-22-00164

Band Edges(CH High)

Detector mode:Peak


Polarity:Vertical

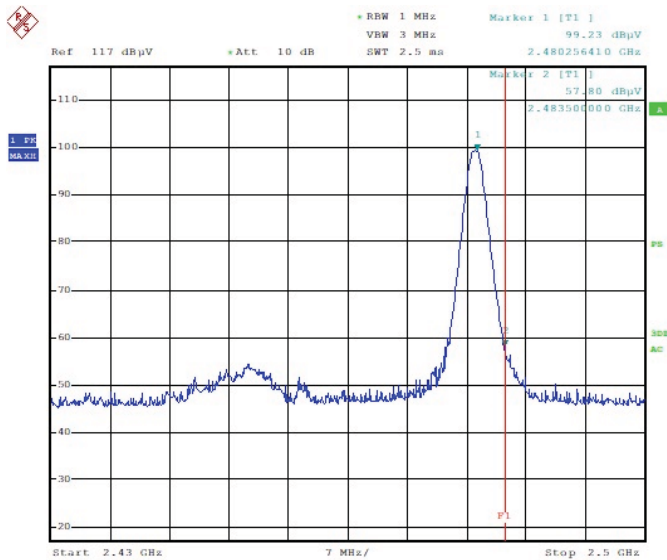

ESTR-22-00164

Detector mode:Average

Polarity:Vertical

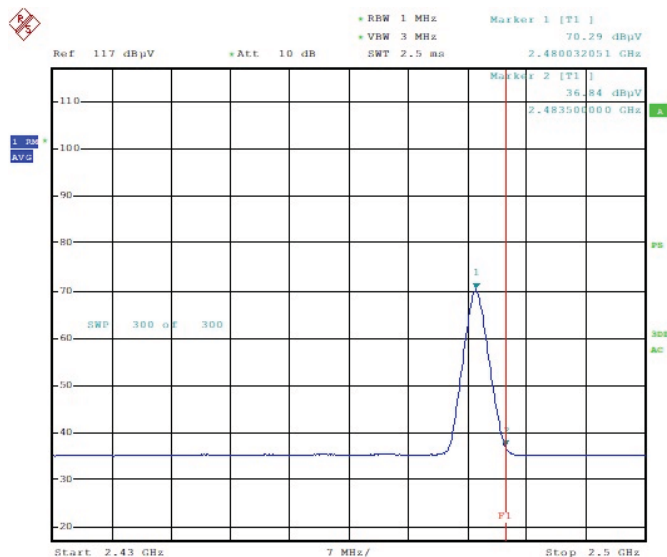


ESTR-22-00164

Restricted Band Edges for BT(Basic Rate)


Band Edges(CH Low)

Polarity:Horizontal

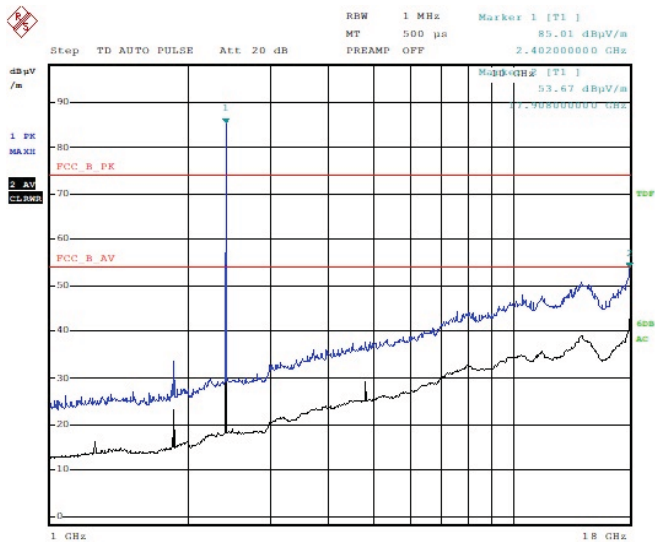

ESTR-22-00164


Polarity:Vertical

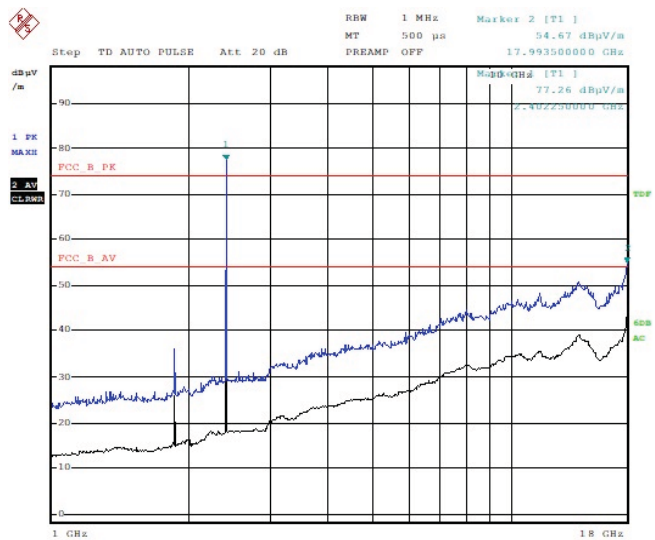

ESTR-22-00164


Band Edges(CH Middle)

Polarity:Horizontal

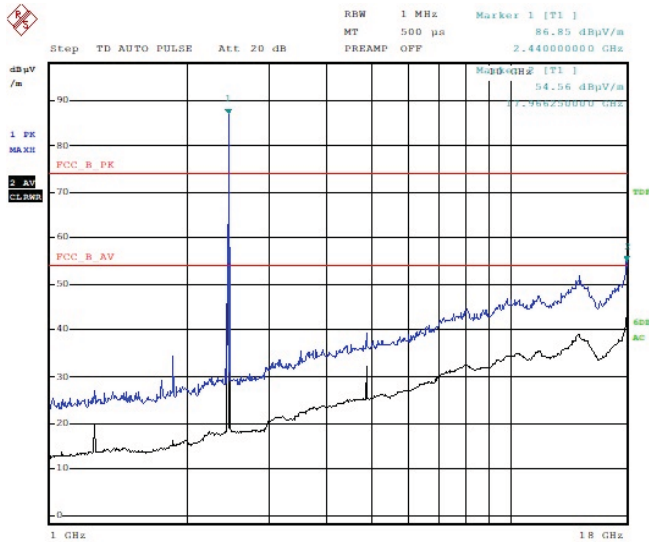

ESTR-22-00164


Polarity:Vertical

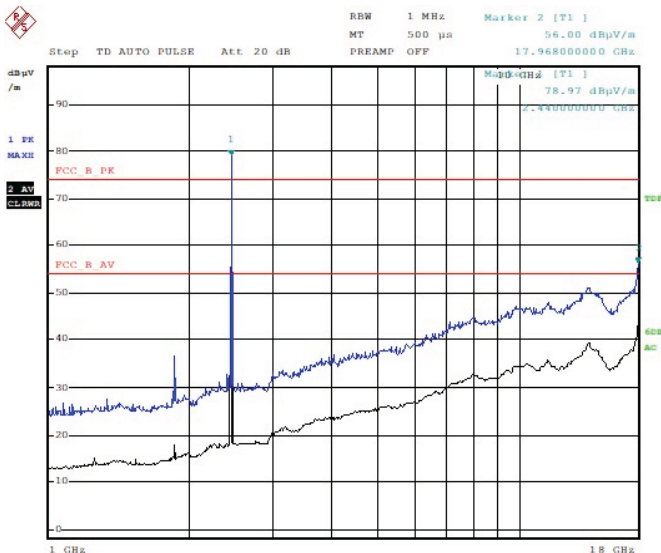

ESTR-22-00164


Band Edges(CH High)

Polarity:Horizontal

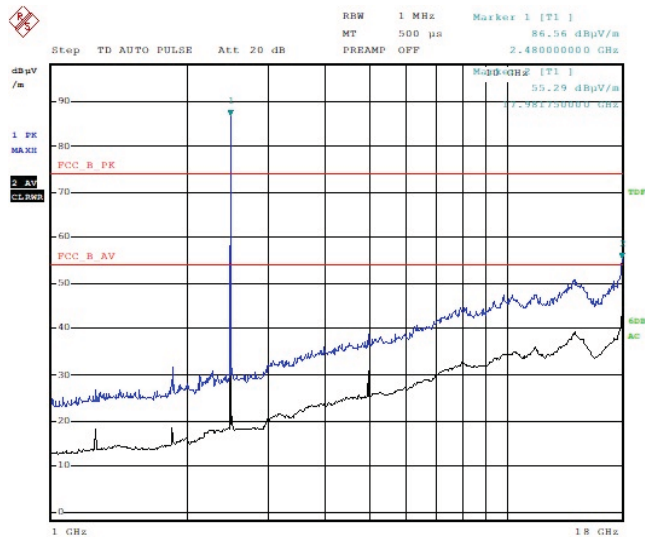

ESTR-22-00164

Polarity:Vertical

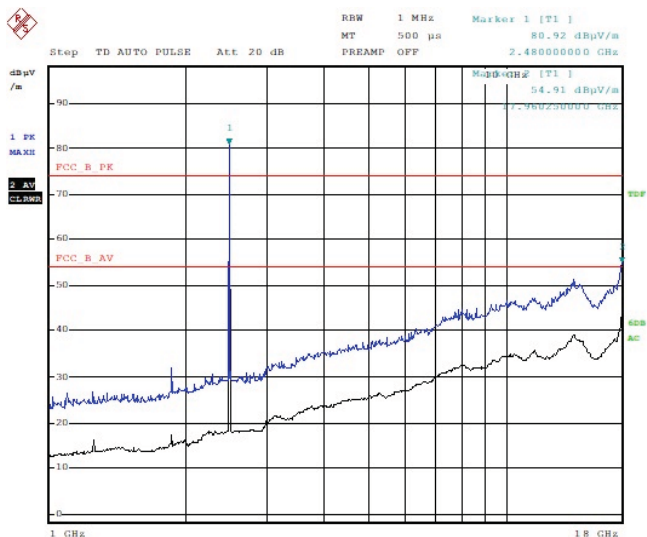

ESTR-22-00164

Test Data for Bluetooth(EDR)

Left_EDR

Measurement Distance : 3 m

Frequency (MHz)	Reading (dBμV)	Position (V/H)	Height (m)	Correction Factor		Duty Cycle Correction (dB)	Result Value		
				Ant Factor (dB)	Cable (dB)		Limit (dBμV/m)	Result (dBμV/m)	Margin (dB)
PEAK(RBW:1 MHz VBW:3 MHz)									
2390.00	47.06	H	1.6	27.54	-28.39		74.00	46.21	27.79
2390.00	47.60	V	1.5	27.54	-28.39		74.00	46.75	27.25
4804.00	33.61	H	1.6	31.30	-25.75		74.00	39.16	34.84
4804.00	33.68	V	1.5	31.30	-25.75		74.00	39.23	34.77
Average (RBW:1 MHz VBW:3 MHz)									
2390.00	35.40	H	1.6	27.54	-28.39	1.06	54.00	35.61	18.39
2390.00	35.32	V	1.5	27.54	-28.39	1.06	54.00	35.53	18.47
4804.00	26.91	H	1.6	31.30	-25.75	1.06	54.00	33.52	20.48
4804.00	26.84	V	1.5	31.30	-25.75	1.06	54.00	33.45	20.55
Remark	H : Horizontal, V : Vertical TEST MODE : Bluetooth EDR-CH0 (2 402 MHz) *This test was radiated up to 26.5 GHz but no noise was measured. *The TX signal wasn't detected from 3th harmonics. *Result Value = Reading + Ant Factor + Cable loss – Amplifier Gain + Duty Cycle Correction Factor *Margin = Limit – Result *The resolution bandwidth and video bandwidth of spectrum analyzer is 1 MHz and 1 kHz for average detection at frequency above 1 GHz.								
	FYI : Duty Cycle Correction Factor (79 channel hopping) a. Time to cycle through all channels= Δ t= τ [ms] x 79 channels = 296.25 ms, where τ = pulse width b. 100 ms/ Δt [ms] = H → Round up to next highest integer, H ´ =1 c. Worst Case Dwell Time = τ [ms] x H ´ = 3.79ms d. Duty Cycle Correction = 20log (Worst Case Dwell Time/ 100ms) dB = – 28.427 dB								

Test Data for Bluetooth(EDR)

Left_EDR

Measurement Distance : 3 m

Frequency (MHz)	Reading (dBμV)	Position (V/H)	Height (m)	Correction Factor		Duty Cycle Correction (dB)	Result Value		
				Ant Factor (dB)	Cable (dB)		Limit (dBμV/m)	Result (dBμV/m)	Margin (dB)
PEAK(RBW:1 MHz VBW:3 MHz)									
4880.00	32.65	H	1.5	31.30	-25.67		74.00	38.28	35.72
4880.00	32.69	V	1.7	31.30	-25.67		74.00	38.32	35.68
Average (RBW:1 MHz VBW:3 MHz)									
4880.00	26.97	H	1.5	31.30	-25.67	1.06	54.00	33.66	20.34
4880.00	26.88	V	1.7	31.30	-25.67	1.06	54.00	33.57	20.43
Remark	H : Horizontal, V : Vertical TEST MODE : Bluetooth EDR-CH38 (2 440 MHz) *This test was radiated up to 26.5 GHz but no noise was measured. *The TX signal wasn't detected from 3th harmonics. *Result Value = Reading + Ant Factor + Cable loss - Amplifier Gain + Duty Cycle Correction Factor *Margin = Limit - Result *The resolution bandwidth and video bandwidth of spectrum analyzer is 1 MHz and 1 kHz for average detection at frequency above 1 GHz.								
	FYI : Duty Cycle Correction Factor (79 channel hopping) a. Time to cycle through all channels= Δ t= τ [ms] x 79 channels = 296.25 ms, where τ = pulse width b. 100 ms/ Δt [ms] = H → Round up to next highest integer, H ' =1 c. Worst Case Dwell Time = τ [ms] x H ' = 3.79ms d. Duty Cycle Correction = 20log (Worst Case Dwell Time/ 100ms) dB = - 28.427 dB								

Test Data for Bluetooth(EDR)

Left_EDR

Measurement Distance : 3 m


Frequency (MHz)	Reading (dBμV)	Position (V/H)	Height (m)	Correction Factor		Duty Cycle Correction (dB)	Result Value		
				Ant Factor (dB)	Cable (dB)		Limit (dBμV/m)	Result (dBμV/m)	Margin (dB)
PEAK(RBW:1 MHz VBW:3 MHz)									
2483.50	61.17	H	1.5	27.42	-28.28		74.00	60.31	13.69
2483.50	57.23	V	1.7	27.42	-28.28		74.00	56.37	17.63
4960.00	48.69	H	1.5	31.48	-25.59		74.00	54.58	19.42
4960.00	47.32	V	1.7	31.48	-25.59		74.00	53.21	20.79
Average (RBW:1 MHz VBW:3 MHz)									
2483.50	40.11	H	1.5	27.42	-28.28	1.06	54.00	40.31	13.69
2483.50	44.04	V	1.7	27.42	-28.28	1.06	54.00	44.24	9.76
4960.00	32.34	H	1.5	31.48	-25.59	1.06	54.00	39.29	14.71
4960.00	33.61	V	1.7	31.48	-25.59	1.06	54.00	40.56	13.44
Remark	H : Horizontal, V : Vertical TEST MODE : Bluetooth EDR-CH78 (2 480 MHz) *This test was radiated up to 26.5 GHz but no noise was measured. *The TX signal wasn't detected from 3th harmonics. *Result Value = Reading + Ant Factor + Cable loss - Amplifier Gain + Duty Cycle Correction Factor *Margin = Limit - Result *The resolution bandwidth and video bandwidth of spectrum analyzer is 1 MHz and 1 kHz for average detection at frequency above 1 GHz.								
	FYI : Duty Cycle Correction Factor (79 channel hopping) a. Time to cycle through all channels= Δ t= τ [ms] x 79 channels = 296.25 ms, where τ = pulse width b. 100 ms/ Δ t [ms] = H → Round up to next highest integer, H ´ =1 c. Worst Case Dwell Time = τ [ms] x H ´ = 3.79ms d. Duty Cycle Correction = 20log (Worst Case Dwell Time/ 100ms) dB = - 28.427 dB								

Restricted Band Edges for BT(EDR)

Band Edges(CH Low)

Detector mode:Peak


Polarity:Horizontal

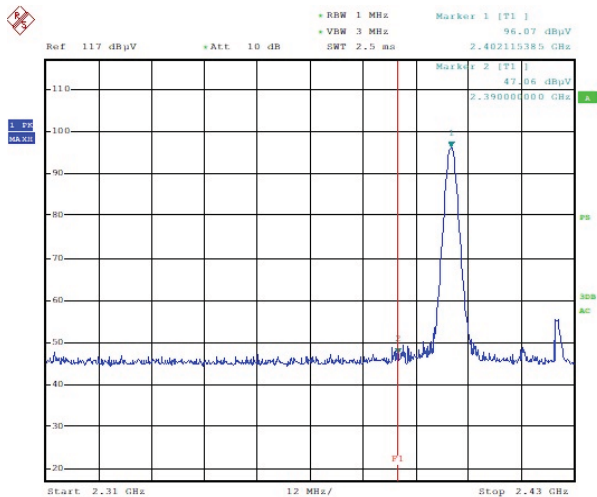

ESTR-22-00164

Detector mode:Average

Polarity:Horizontal

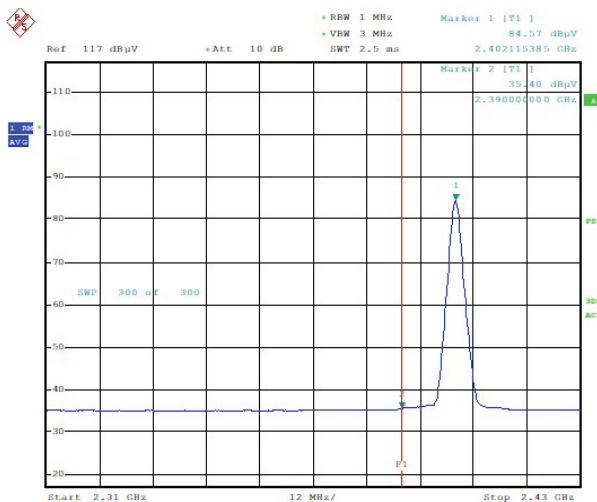


ESTR-22-00164

Band Edges(CH Low)

Detector mode:Peak


Polarity:Vertical

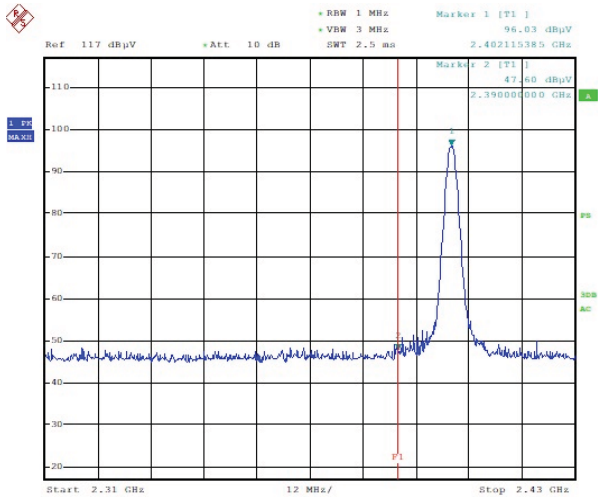

ESTR-22-00164

Detector mode:Average

Polarity:Vertical

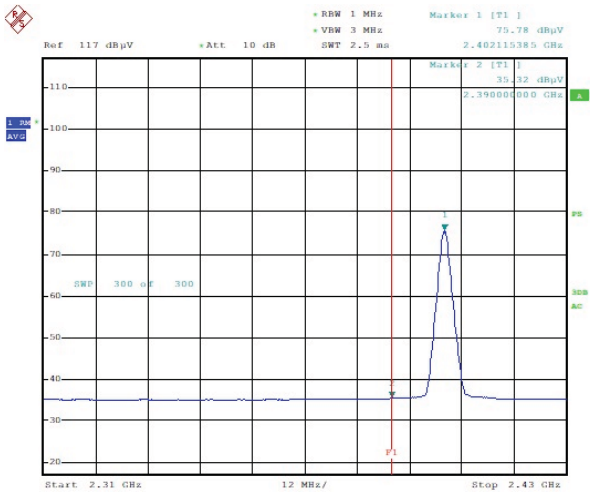

ESTR-22-00164




Estech
your best partner

Band Edges(CH High)

Detector mode:Peak


Polarity:Horizontal

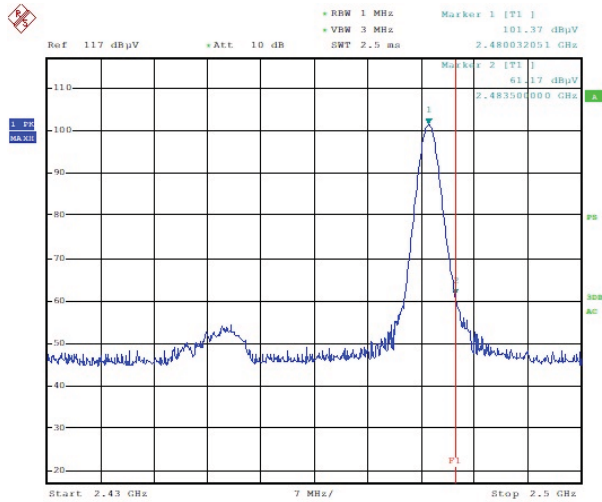

ESTR-22-00164

Detector mode:Average

Polarity:Horizontal

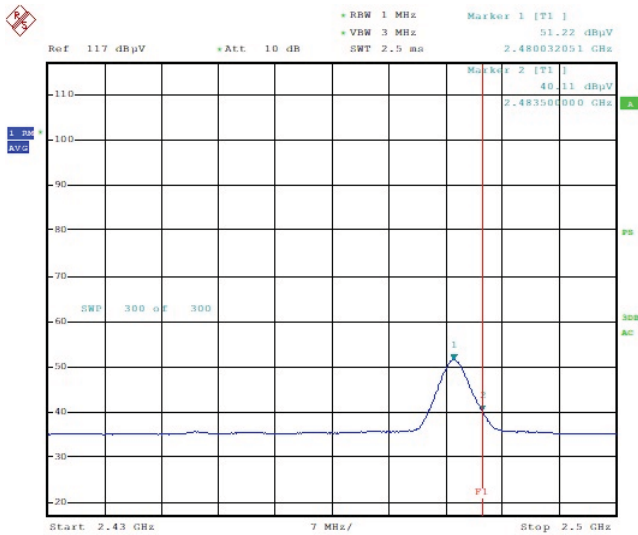


ESTR-22-00164

Band Edges(CH High)

Detector mode:Peak


Polarity:Vertical

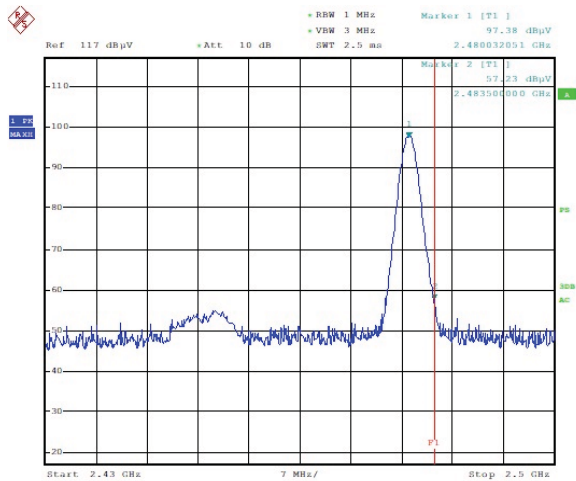

ESTR-22-00164

Detector mode:Average

Polarity:Vertical

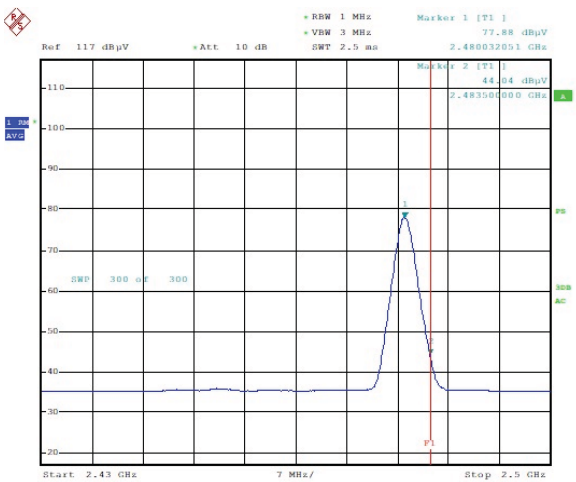


ESTR-22-00164

Restricted Band Edges for BT(EDR)


Band Edges(CH Low)

Polarity:Horizontal

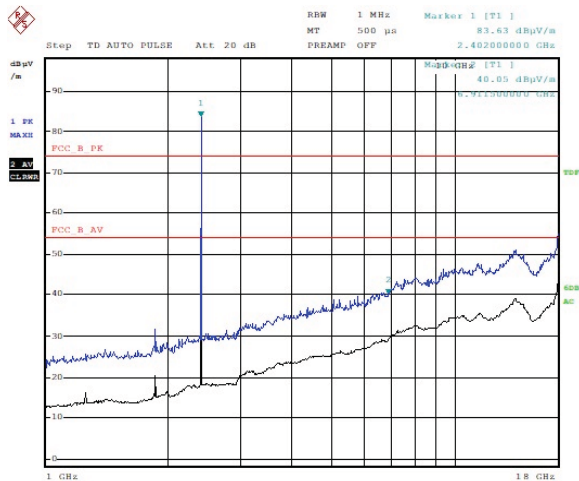

ESTR-22-00164


Polarity:Vertical

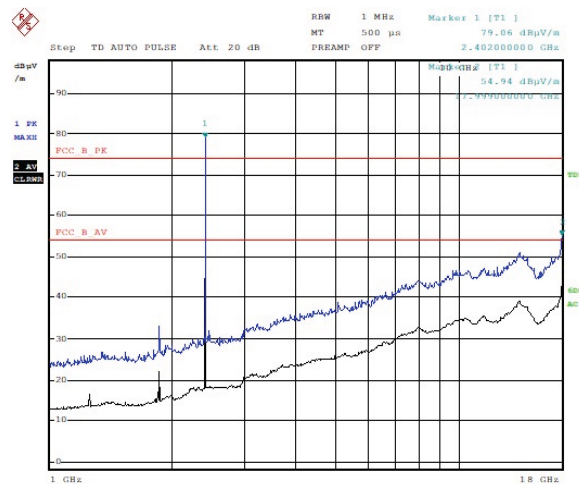

ESTR-22-00164


Band Edges(CH Middle)

Polarity:Horizontal

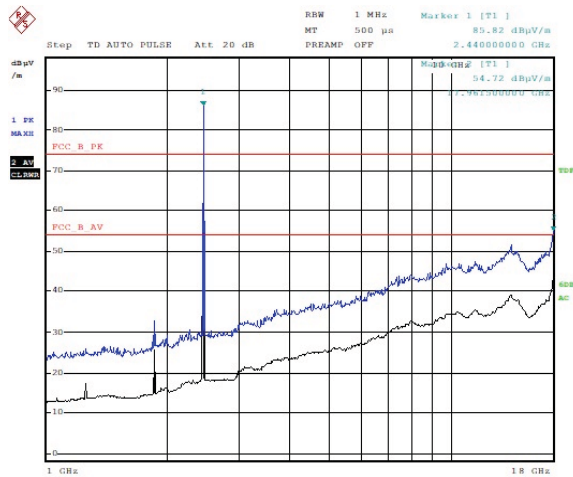

ESTR-22-00164


Polarity:Vertical

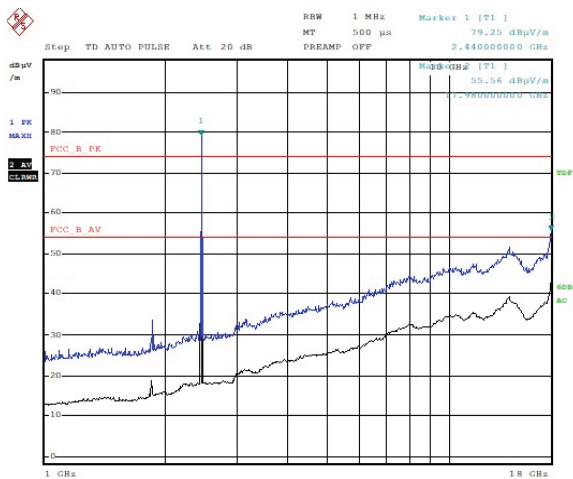

ESTR-22-00164


Band Edges(CH High)

Polarity:Horizontal

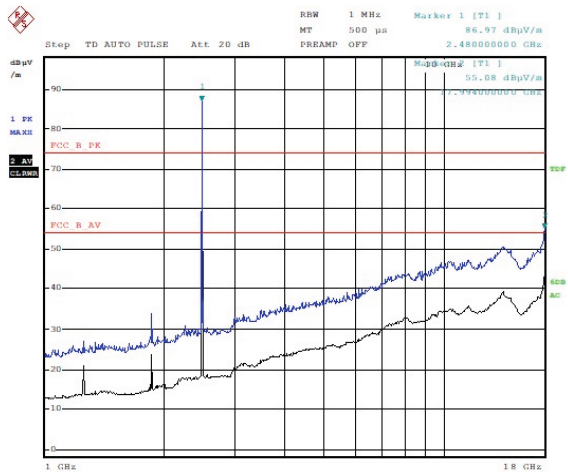

ESTR-22-00164

Polarity:Vertical

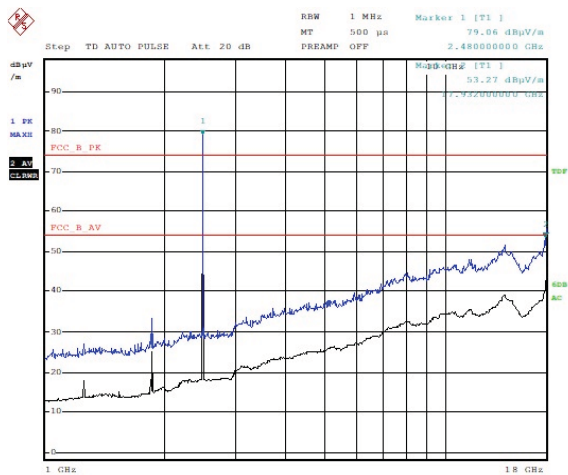

ESTR-22-00164

Test Data for Bluetooth(Basic Rate)

Right_BDR

Measurement Distance : 3 m

Frequency (MHz)	Reading (dBμW)	Position (V/H)	Height (m)	Correction Factor		Duty Cycle Correction (dB)	Result Value		
				Ant Factor (dB)	Cable (dB)		Limit (dBμW/m)	Result (dBμW/m)	Margin (dB)
PEAK(RBW:1 MHz VBW:3 MHz)									
2390.00	52.41	H	1.5	27.89	-29.82		74.00	50.48	23.52
2390.00	46.81	V	1.5	27.89	-29.82		74.00	44.88	29.12
4804.00	38.52	H	1.5	31.30	-25.75		74.00	44.07	29.93
4804.00	34.12	V	1.5	31.30	-25.75		74.00	39.67	34.33
Average (RBW:1 MHz VBW:3 MHz)									
2390.00	35.85	H	1.5	27.89	-29.82	1.04	54.00	34.96	19.04
2390.00	35.53	V	1.5	27.89	-29.82	1.04	54.00	34.64	19.36
4804.00	26.21	H	1.5	31.30	-25.75	1.04	54.00	32.80	21.20
4804.00	26.15	V	1.5	31.30	-25.75	1.04	54.00	32.74	21.26
Remark	H : Horizontal, V : Vertical TEST MODE : Bluetooth Basic Rate-CH0 (2 402 MHz)								
	*This test was radiated up to 26.5 GHz but no noise was measured. *The TX signal wasn't detected from 3th harmonics. *Result Value = Reading + Ant Factor + Cable loss - Amplifier Gain + Duty Cycle Correction Factor *Margin = Limit - Result *The resolution bandwidth and video bandwidth of spectrum analyzer is 1 MHz and 1 kHz for average detection at frequency above 1 GHz. FYI : Duty Cycle Correction Factor (79 channel hopping) a. Time to cycle through all channels= Δ t= τ [ms] x 79 channels = 295.934 ms, where τ = pulse width b. 100 ms/ Δ t [ms] = H → Round up to next highest integer, H ' =1 c. Worst Case Dwell Time = τ [ms] x H ' = 3.746 ms d. Duty Cycle Correction = 20log (Worst Case Dwell Time/ 100ms) dB = -28.528 dB								

Test Data for Bluetooth(Basic Rate)

Right_BDR


Measurement Distance : 3 m

Frequency (MHz)	Reading (dBμV)	Position (V/H)	Height (m)	Correction Factor		Duty Cycle Correction (dB)	Result Value		
				Ant Factor (dB)	Cable (dB)		Limit (dBμV/m)	Result (dBμV/m)	Margin (dB)
PEAK(RBW:1 MHz VBW:3 MHz)									
4880.00	35.12	H	1.5	31.30	-25.67		74.00	40.75	33.25
4880.00	35.34	V	1.5	31.30	-25.67		74.00	40.97	33.03
Average (RBW:1 MHz VBW:3 MHz)									
4880.00	27.05	H	1.5	31.30	-25.67	1.04	54.00	33.72	20.28
4880.00	26.99	V	1.5	31.30	-25.67	1.04	54.00	33.66	20.34
Remark	H : Horizontal, V : Vertical TEST MODE : Bluetooth Basic Rate-CH38 (2 440 MHz)								
	*This test was radiated up to 26.5 GHz but no noise was measured.								
	*The TX signal wasn't detected from 3th harmonics.								
	*Result Value = Reading + Ant Factor + Cable loss - Amplifier Gain + Duty Cycle Correction Factor								
	*Margin = Limit - Result								
	*The resolution bandwidth and video bandwidth of spectrum analyzer is 1 MHz and 1 kHz for average detection at frequency above 1 GHz.								
	FYI : Duty Cycle Correction Factor (79 channel hopping)								
	a. Time to cycle through all channels= Δ t= τ [ms] x 79 channels = 295.934 ms, where τ = pulse width								
	b. 100 ms/ Δ t [ms] = H → Round up to next highest integer, H ´=1								
	c. Worst Case Dwell Time = τ [ms] x H ´ = 3.746 ms								
	d. Duty Cycle Correction = 20log (Worst Case Dwell Time/ 100ms) dB = -28.528 dB								

Test Data for Bluetooth(Basic Rate)

Right_BDR

Measurement Distance : 3 m


Frequency (MHz)	Reading (dBμV)	Position (V/H)	Height (m)	Correction Factor		Duty Cycle Correction (dB)	Result Value		
				Ant Factor (dB)	Cable (dB)		Limit (dBμV/m)	Result (dBμV/m)	Margin (dB)
PEAK(RBW:1 MHz VBW:3 MHz)									
2483.50	64.58	H	1.5	27.48	-29.75		74.00	62.31	11.69
2483.50	62.98	V	1.7	27.48	-29.75		74.00	60.71	13.29
4960.00	49.12	H	1.5	31.48	-25.59		74.00	55.01	18.99
4960.00	48.12	V	1.7	31.48	-25.59		74.00	54.01	19.99
Average (RBW:1 MHz VBW:3 MHz)									
2483.50	43.93	H	1.5	27.48	-29.75	1.04	54.00	42.70	11.30
2483.50	50.60	V	1.7	27.48	-29.75	1.04	54.00	49.37	4.63
4960.00	37.23	H	1.5	31.48	-25.59	1.04	54.00	44.16	9.84
4960.00	41.47	V	1.7	31.48	-25.59	1.04	54.00	48.40	5.60
Remark	H : Horizontal, V : Vertical TEST MODE : Bluetooth Basic Rate-CH78 (2 480 MHz) *This test was radiated up to 26.5 GHz but no noise was measured. *The TX signal wasn't detected from 3th harmonics. *Result Value = Reading + Ant Factor + Cable loss - Amplifier Gain + Duty Cycle Correction Factor *Margin = Limit - Result *The resolution bandwidth and video bandwidth of spectrum analyzer is 1 MHz and 1 kHz for average detection at frequency above 1 GHz. FYI : Duty Cycle Correction Factor (79 channel hopping) a. Time to cycle through all channels= Δ t= τ [ms] x 79 channels = 295.934 ms, where τ = pulse width b. 100 ms/ Δt [ms] = H → Round up to next highest integer, H ' =1 c. Worst Case Dwell Time = τ [ms] x H ' = 3.746 ms d. Duty Cycle Correction = 20log (Worst Case Dwell Time/ 100ms) dB = -28.528 dB								

Restricted Band Edges for BT(Basic Rate)

Band Edges(CH Low)

Detector mode:Peak


Polarity:Horizontal

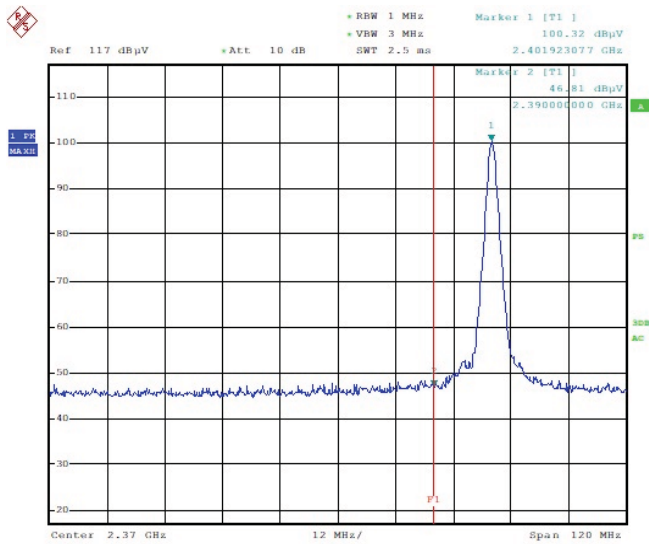

ESTR-22-00164

Detector mode:Average

Polarity:Horizontal

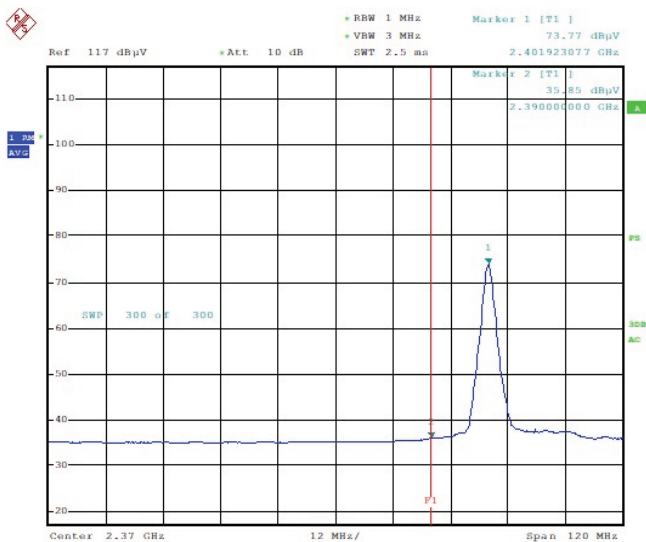

ESTR-22-00164




Estech
your best partner

Band Edges(CH Low)

Detector mode:Peak


Polarity:Vertical

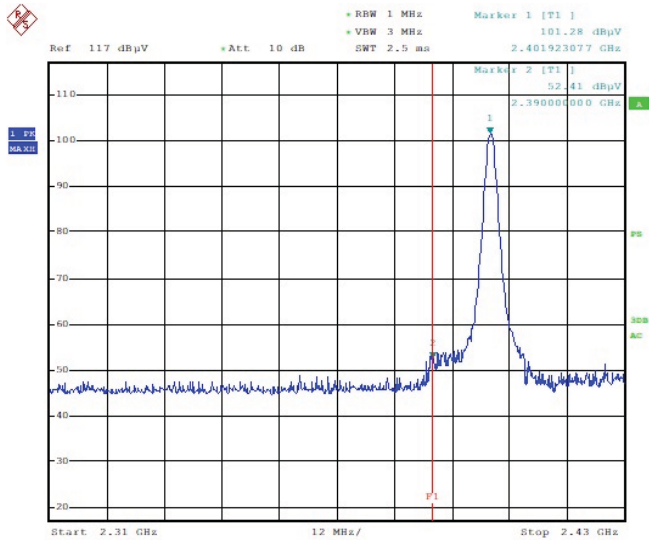

ESTR-22-00164

Detector mode:Average

Polarity:Vertical

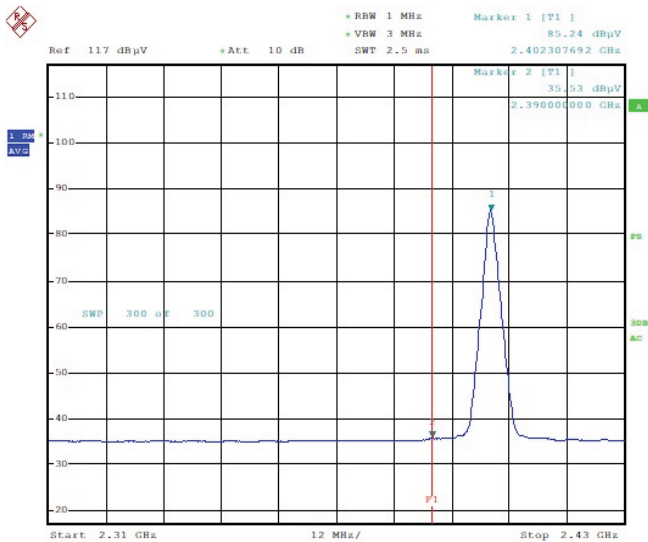


ESTR-22-00164

Band Edges(CH High)

Detector mode:Peak


Polarity:Horizontal

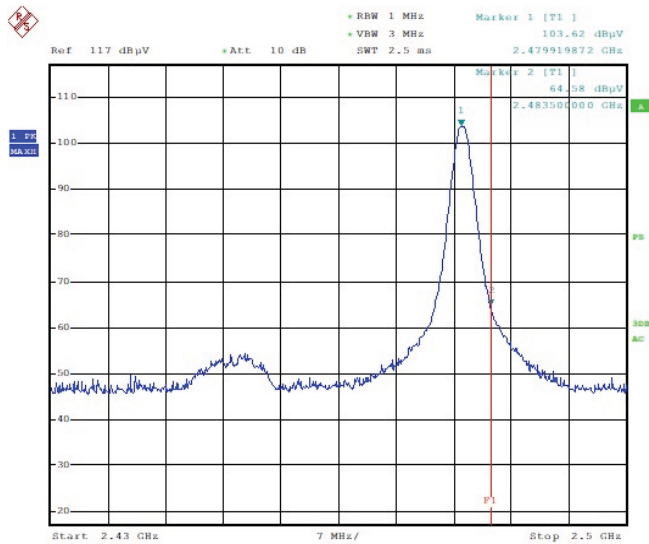

ESTR-22-00164

Detector mode:Average

Polarity:Horizontal

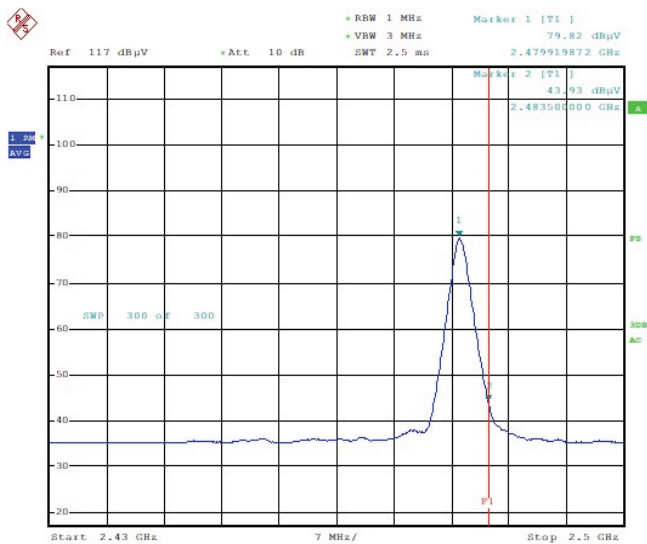

ESTR-22-00164




Estech
your best partner

Band Edges(CH High)

Detector mode:Peak


Polarity:Vertical

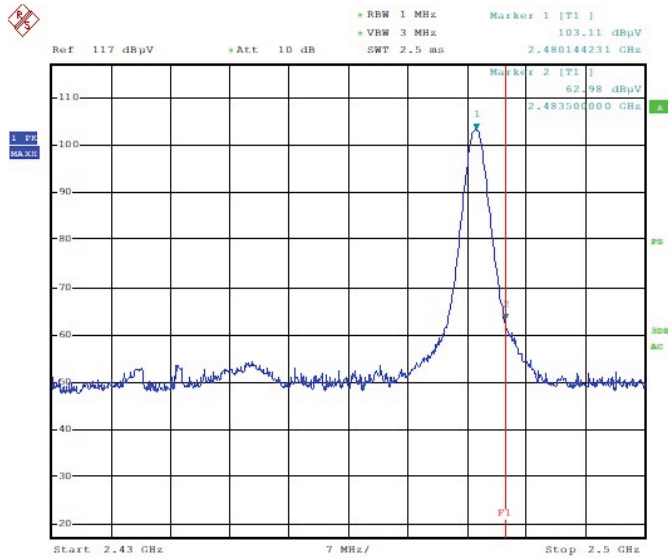

ESTR-22-00164

Detector mode:Average

Polarity:Vertical

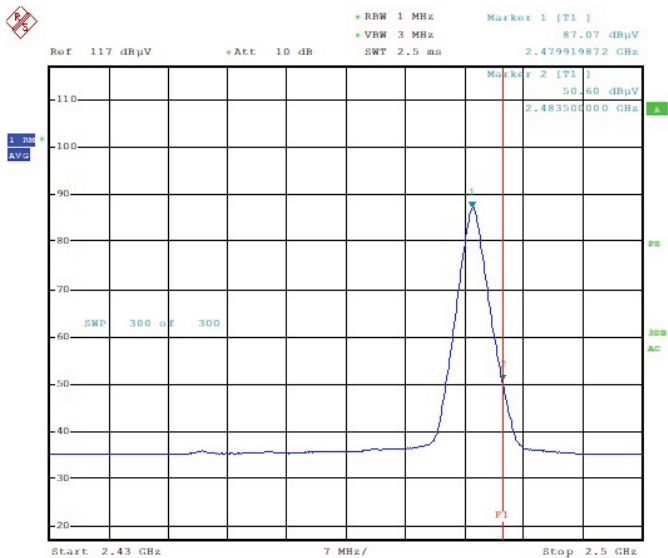


ESTR-22-00164

Restricted Band Edges for BT(Basic Rate)


Band Edges(CH Low)

Polarity:Horizontal

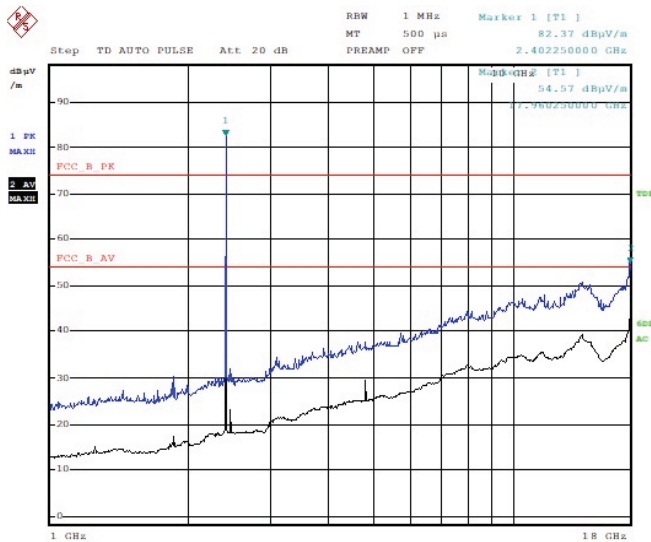

ESTR-22-00164

Polarity:Vertical

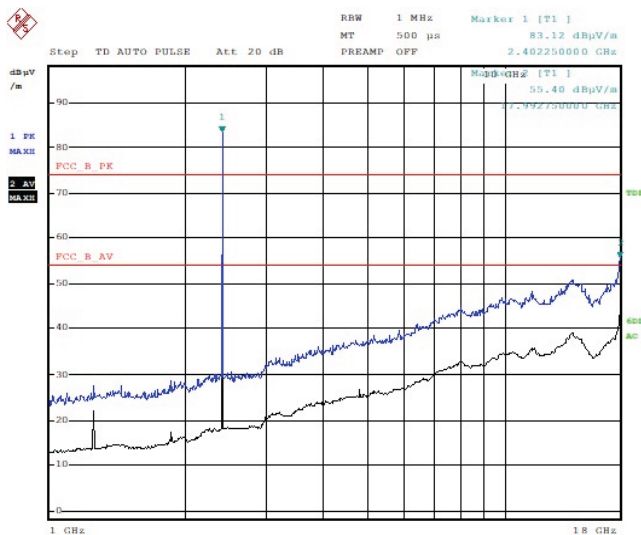


ESTR-22-00164



Estech
your best partner


Band Edges(CH Middle)

Polarity:Horizontal

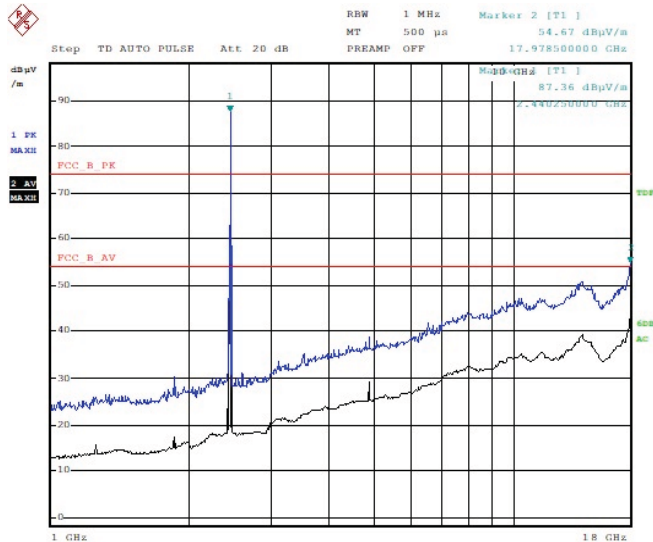

ESTR-22-00164


Polarity:Vertical

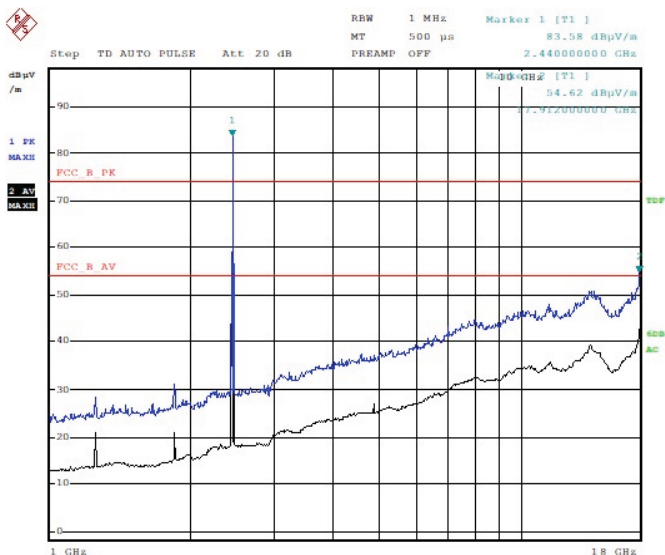

ESTR-22-00164


Band Edges(CH High)

Polarity:Horizontal

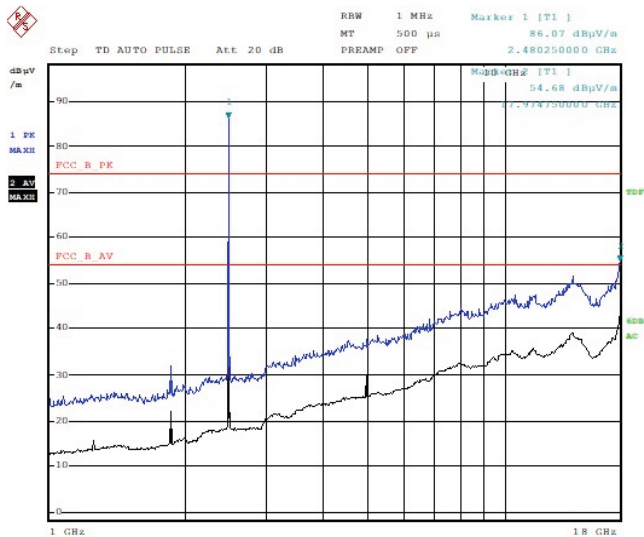

ESTR-22-00164

Polarity:Vertical

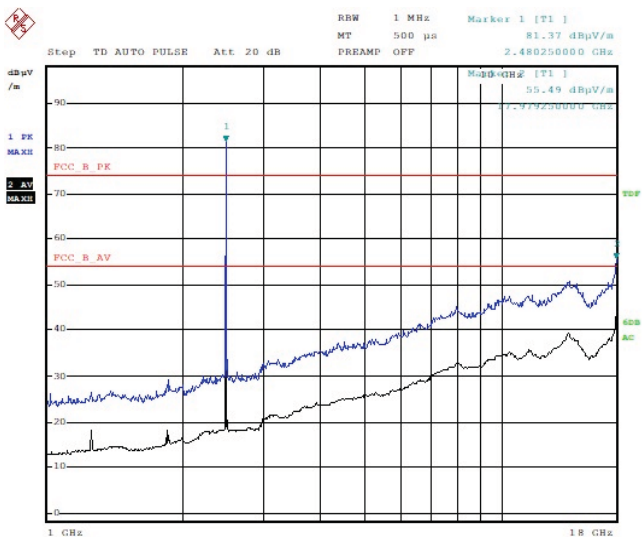

ESTR-22-00164

Test Data for Bluetooth(EDR)

Right_EDR

Measurement Distance : 3 m

Frequency (MHz)	Reading (dBμV)	Position (V/H)	Height (m)	Correction Factor		Duty Cycle Correction (dB)	Result Value		
				Ant Factor (dB)	Cable (dB)		Limit (dBμV/m)	Result (dBμV/m)	Margin (dB)
PEAK(RBW:1 MHz VBW:3 MHz)									
2390.00	47.49	H	1.6	27.54	-28.39		74.00	46.64	27.36
2390.00	55.81	V	1.5	27.54	-28.39		74.00	54.96	19.04
4804.00	37.25	H	1.6	31.30	-25.75		74.00	42.80	31.20
4804.00	42.36	V	1.5	31.30	-25.75		74.00	47.91	26.09
Average (RBW:1 MHz VBW:3 MHz)									
2390.00	35.91	H	1.6	27.54	-28.39	1.06	54.00	36.12	17.88
2390.00	35.59	V	1.5	27.54	-28.39	1.06	54.00	35.80	18.20
4804.00	27.12	H	1.6	31.30	-25.75	1.06	54.00	33.73	20.27
4804.00	26.66	V	1.5	31.30	-25.75	1.06	54.00	33.27	20.73
Remark	H : Horizontal, V : Vertical TEST MODE : Bluetooth EDR-CH0 (2 402 MHz) *This test was radiated up to 26.5 GHz but no noise was measured. *The TX signal wasn't detected from 3th harmonics. *Result Value = Reading + Ant Factor + Cable loss – Amplifier Gain + Duty Cycle Correction Factor *Margin = Limit – Result *The resolution bandwidth and video bandwidth of spectrum analyzer is 1 MHz and 1 kHz for average detection at frequency above 1 GHz.								
	FYI : Duty Cycle Correction Factor (79 channel hopping) a. Time to cycle through all channels= Δ t= τ [ms] x 79 channels = 296.25 ms, where τ = pulse width b. 100 ms/ Δ t [ms] = H → Round up to next highest integer, H ´ =1 c. Worst Case Dwell Time = τ [ms] x H ´ = 3.79ms d. Duty Cycle Correction = 20log (Worst Case Dwell Time/ 100ms) dB = – 28.427 dB								

Test Data for Bluetooth(EDR)

Right_EDR

Measurement Distance : 3 m

Frequency (MHz)	Reading (dBμV)	Position (V/H)	Height (m)	Correction Factor		Duty Cycle Correction (dB)	Result Value		
				Ant Factor (dB)	Cable (dB)		Limit (dBμV/m)	Result (dBμV/m)	Margin (dB)
PEAK(RBW:1 MHz VBW:3 MHz)									
4880.00	37.10	H	1.5	31.30	-25.67		74.00	42.73	31.27
4880.00	36.99	V	1.7	31.30	-25.67		74.00	42.62	31.38
Average (RBW:1 MHz VBW:3 MHz)									
4880.00	27.63	H	1.5	31.30	-25.67	1.06	54.00	34.32	19.68
4880.00	27.29	V	1.7	31.30	-25.67	1.06	54.00	33.98	20.02
Remark	H : Horizontal, V : Vertical TEST MODE : Bluetooth EDR-CH38 (2 440 MHz) *This test was radiated up to 26.5 GHz but no noise was measured. *The TX signal wasn't detected from 3th harmonics. *Result Value = Reading + Ant Factor + Cable loss - Amplifier Gain + Duty Cycle Correction Factor *Margin = Limit - Result *The resolution bandwidth and video bandwidth of spectrum analyzer is 1 MHz and 1 kHz for average detection at frequency above 1 GHz.								
	FYI : Duty Cycle Correction Factor (79 channel hopping) a. Time to cycle through all channels= Δ t= τ [ms] x 79 channels = 296.25 ms, where τ = pulse width b. 100 ms/ Δt [ms] = H → Round up to next highest integer, H ' =1 c. Worst Case Dwell Time = τ [ms] x H ' = 3.79ms d. Duty Cycle Correction = 20log (Worst Case Dwell Time/ 100ms) dB = - 28.427 dB								

Test Data for Bluetooth(EDR)

Right_EDR

Measurement Distance : 3 m


Frequency (MHz)	Reading (dBμV)	Position (V/H)	Height (m)	Correction Factor		Duty Cycle Correction (dB)	Result Value		
				Ant Factor (dB)	Cable (dB)		Limit (dBμV/m)	Result (dBμV/m)	Margin (dB)
PEAK(RBW:1 MHz VBW:3 MHz)									
2483.50	63.86	H	1.5	27.42	-28.28		74.00	63.00	11.00
2483.50	60.44	V	1.7	27.42	-28.28		74.00	59.58	14.42
4960.00	48.63	H	1.5	31.48	-25.59		74.00	54.52	19.48
4960.00	46.19	V	1.7	31.48	-25.59		74.00	52.08	21.92
Average (RBW:1 MHz VBW:3 MHz)									
2483.50	52.64	H	1.5	27.42	-28.28	1.06	54.00	52.84	1.16
2483.50	50.37	V	1.7	27.42	-28.28	1.06	54.00	50.57	3.43
4960.00	39.93	H	1.5	31.48	-25.59	1.06	54.00	46.88	7.12
4960.00	37.18	V	1.7	31.48	-25.59	1.06	54.00	44.13	9.87
Remark	H : Horizontal, V : Vertical TEST MODE : Bluetooth EDR-CH78 (2 480 MHz) *This test was radiated up to 26.5 GHz but no noise was measured. *The TX signal wasn't detected from 3th harmonics. *Result Value = Reading + Ant Factor + Cable loss - Amplifier Gain + Duty Cycle Correction Factor *Margin = Limit - Result *The resolution bandwidth and video bandwidth of spectrum analyzer is 1 MHz and 1 kHz for average detection at frequency above 1 GHz.								
	FYI : Duty Cycle Correction Factor (79 channel hopping) a. Time to cycle through all channels= Δ t= τ [ms] x 79 channels = 296.25 ms, where τ = pulse width b. 100 ms/ Δ t [ms] = H → Round up to next highest integer, H ´ =1 c. Worst Case Dwell Time = τ [ms] x H ´ = 3.79ms d. Duty Cycle Correction = 20log (Worst Case Dwell Time/ 100ms) dB = - 28.427 dB								

Restricted Band Edges for BT(EDR)

Band Edges(CH Low)


Detector mode:Peak

Polarity:Horizontal

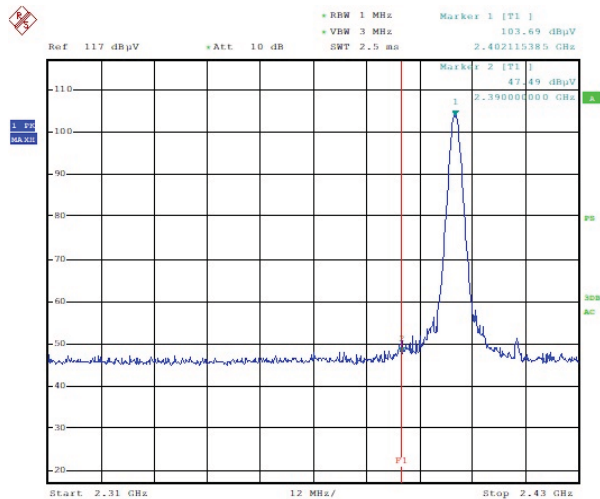

Detector mode:Average


Polarity:Horizontal

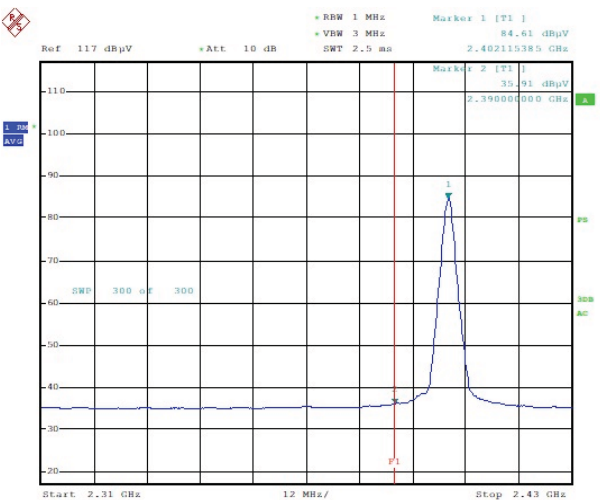

Band Edges(CH Low)


Detector mode:Peak

Polarity:Vertical

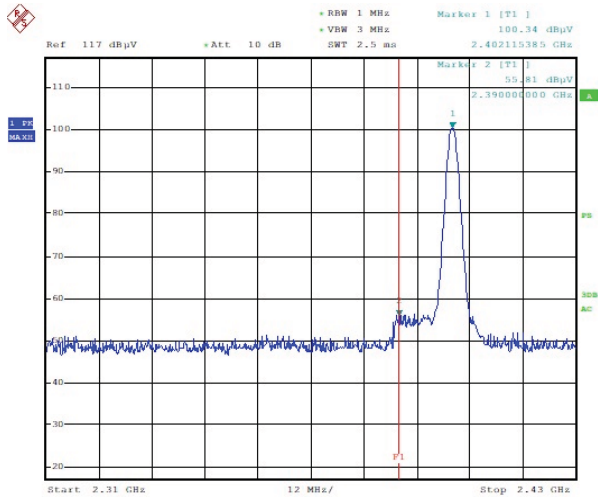

Detector mode:Average


Polarity:Vertical

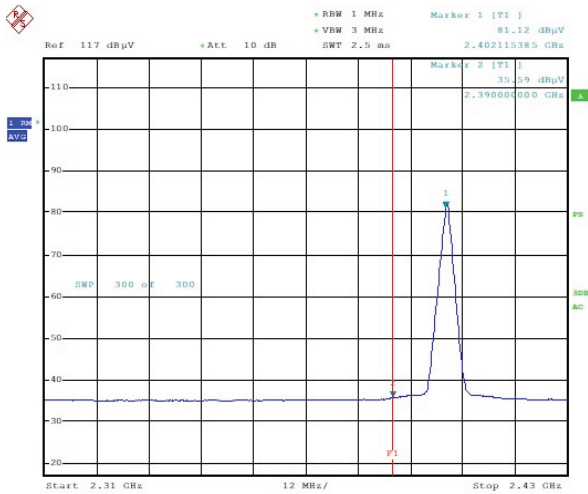

Band Edges(CH High)


Detector mode:Peak

Polarity:Horizontal

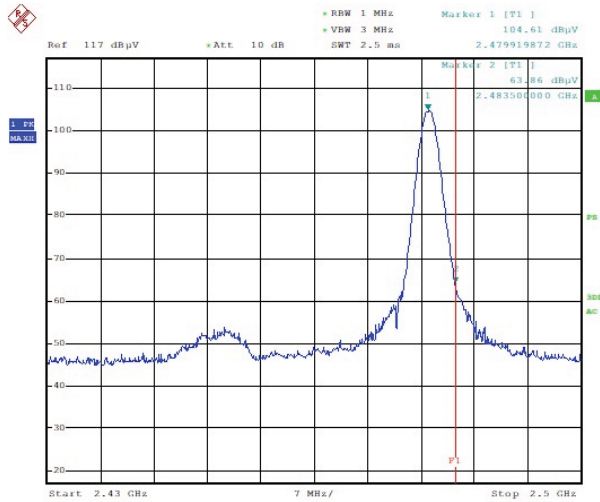

Detector mode:Average


Polarity:Horizontal

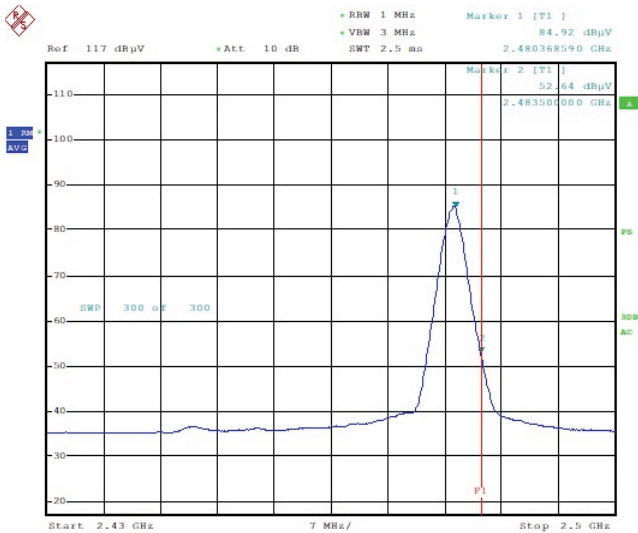

Band Edges(CH High)

Detector mode:Peak


Polarity:Vertical

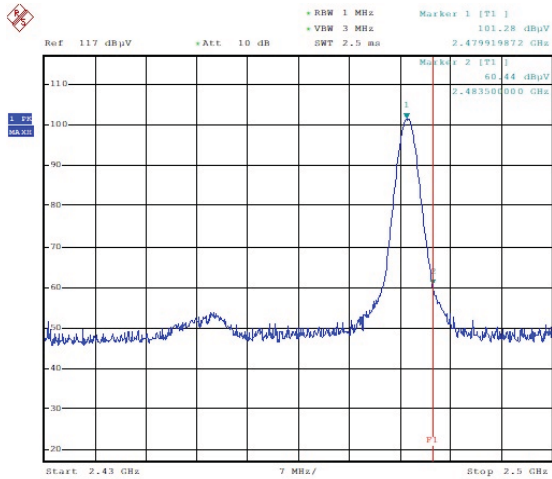

ESTR-22-00164

Detector mode:Average

Polarity:Vertical

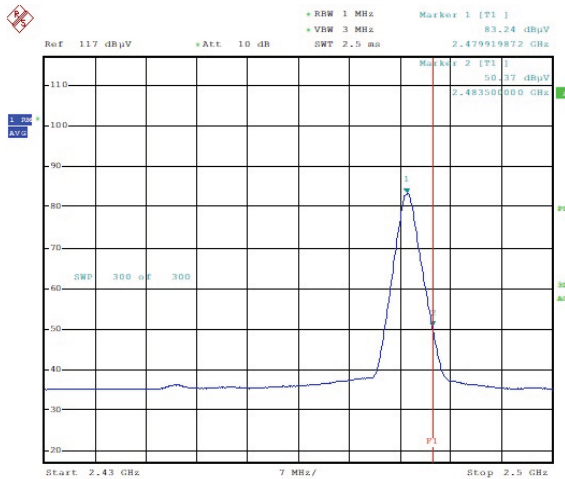


ESTR-22-00164

Restricted Band Edges for BT(EDR Rate)


Band Edges(CH Low)

Polarity:Horizontal

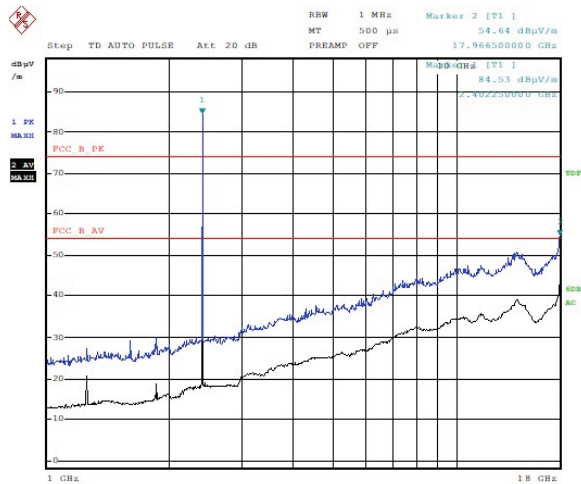

ESTR-22-00164


Polarity:Vertical

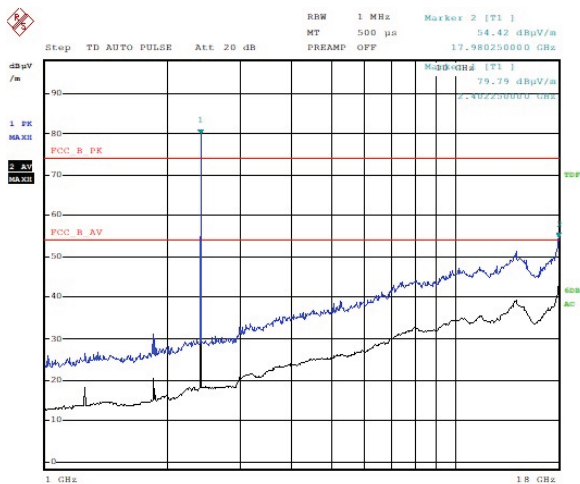

ESTR-22-00164


Band Edges(CH Middle)

Polarity:Horizontal

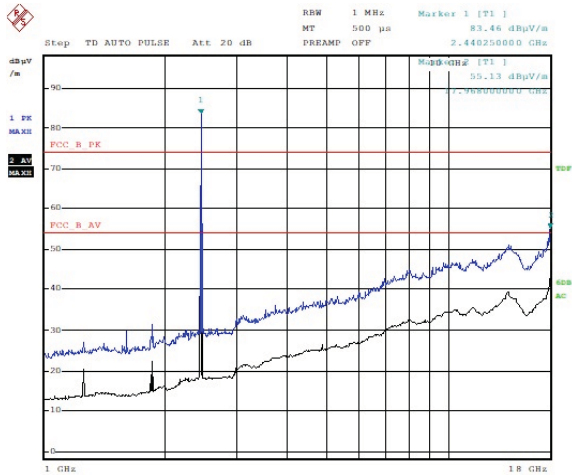

ESTR-22-00164


Polarity:Vertical

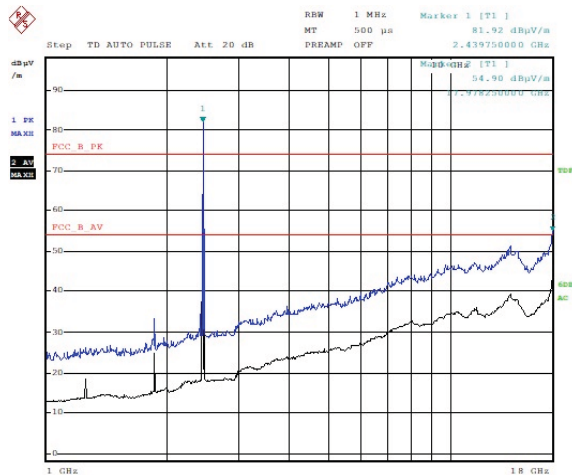

ESTR-22-00164


Band Edges(CH High)

Polarity:Horizontal

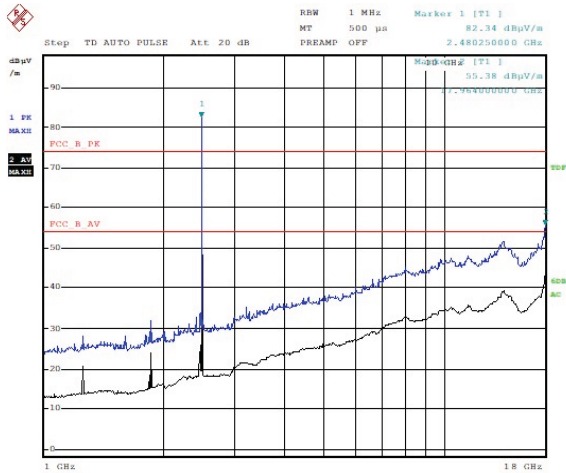

ESTR-22-00164

Polarity:Vertical

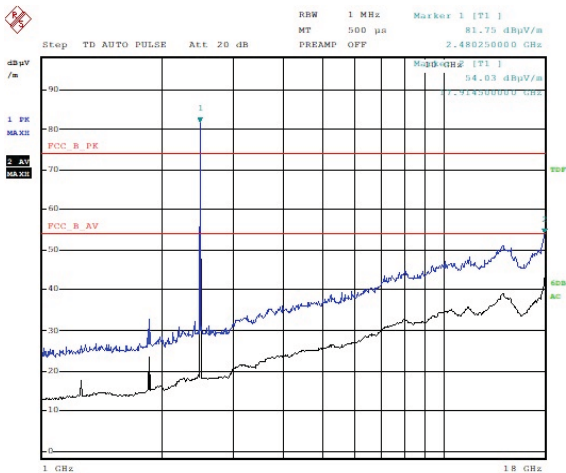

ESTR-22-00164

11. Measurement of conducted disturbance

The continuous disturbance voltage of AC Mains in the frequency from 0.15 MHz to 30 MHz was measured in accordance to FCC PART 15.207. The test setup was made according to ANSI C 63.4 (2009) in a shielded room. The EUT was placed on a non-conductive table at least 0.8 m above the ground plan. A grounded vertical reference plane was positioned in a distance of 0.4 m from the EUT. The distance from the EUT to other metal surfaces was at least 0.8 m. The EUT was only earthen by its power cord through the line impedance stabilizing network. The power cord has been bundled to a length of 1.0 m. The test receiver with Quasi Peak detector complies with CISPR 16.

11.1 Measurement equipments

Equipment Name	Type	Manufacturer	Serial No.	Next Calibration date
TEST RECEIVER	ESPI	Rohde & Schwarz	100005	19-Jul-22
LISN	ESH3-Z5	Rohde & Schwarz	836679/025	19-Jul-22
Pulse Limiter	ESH3Z2	Rohde & Schwarz	NONE	19-Jul-22

11.2 Environmental Condition

Test Place : Shielded Room

BT Basic Mode

Temperature (°C) : 21.5 °C

Humidity (% R.H.) : 46.5 % R.H.

BT EDR Mode

Temperature (°C) : 21.5 °C

Humidity (% R.H.) : 46.5 % R.H.



11.3 Test Data for Bluetooth (Basic Rate)

Frequency (MHz)	Correction Factor		Line (H/N)	Quasi-peak Value			Average Value		
	Lisn (dB)	Cable (dB)		Limit (dB μ V)	Reading (dB μ V)	Result (dB μ V)	Limit (dB μ V)	Reading (dB μ V)	Result (dB)
N/A									
Remark	H : Hot Line, N : Neutral Line TEST MODE : *Correction Factor = Lisn + Cable *Result = Correction Factor + Reading								

11.3-1 Test Data for Bluetooth (EDR)

Frequency (MHz)	Correction Factor		Line (H/N)	Quasi-peak Value			Average Value		
	Lisn (dB)	Cable (dB)		Limit (dB μ W)	Reading (dB μ W)	Result (dB μ W)	Limit (dB μ W)	Reading (dB μ W)	Result (dB)
N/A									
Remark	H : Hot Line, N : Neutral Line TEST MODE : *Correction Factor = Lisn + Cable *Result = Correction Factor + Reading								