

Page 1 of 93

# Table of Contents

|                                                            |    |
|------------------------------------------------------------|----|
| Report Revision History .....                              | 3  |
| 1.0 General Information.....                               | 4  |
| 2.0 Summary of Test Results .....                          | 5  |
| 3.0 Measurement Uncertainty .....                          | 6  |
| 4.0 Equipment List.....                                    | 7  |
| 5.0 Test Condition.....                                    | 9  |
| 5.1. Transmitter Test Conditions .....                     | 9  |
| 6.0 Transmitter Test Parameters .....                      | 10 |
| 6.1. RF Output Power .....                                 | 10 |
| 6.1.1. Test Setup.....                                     | 10 |
| 6.1.2. Test Result .....                                   | 10 |
| 6.2. Frequency Stability .....                             | 11 |
| 6.2.1. Test Setup.....                                     | 11 |
| 6.2.2. Test Result .....                                   | 12 |
| 6.2.3. Test Limit.....                                     | 13 |
| 6.3. Audio Frequency Response .....                        | 14 |
| 6.3.1. Test Setup.....                                     | 14 |
| 6.3.2. Test Result .....                                   | 15 |
| 6.3.3. Test Limit.....                                     | 16 |
| 6.4. Audio Low Pass Filter Response .....                  | 17 |
| 6.4.1. Test Setup.....                                     | 17 |
| 6.4.2. Test Result .....                                   | 18 |
| 6.4.3. Test Limit.....                                     | 19 |
| 6.5. Modulation Limiting .....                             | 20 |
| 6.5.1. Test Setup.....                                     | 20 |
| 6.5.2. Test Result .....                                   | 21 |
| 6.5.3. Test Limit.....                                     | 21 |
| 6.6. Occupied Bandwidth.....                               | 22 |
| 6.6.1. Test Setup (Analog) .....                           | 22 |
| 6.6.2. Test Result (Analog).....                           | 23 |
| 6.6.3. Test Setup (Digital).....                           | 26 |
| 6.6.4. Test Result (Digital).....                          | 27 |
| 6.6.5. Test Limit.....                                     | 33 |
| 6.7. Band Edge Conducted Spurious Emission (Part 22) ..... | 34 |
| 6.7.1. Test Setup (Analog) .....                           | 34 |
| 6.7.2. Test Result (Analog).....                           | 35 |
| 6.7.3. Test Setup (Digital).....                           | 36 |
| 6.7.4. Test Result (Digital).....                          | 37 |
| 6.7.5. Test Limit.....                                     | 37 |
| 6.8. Transient Frequency Behavior .....                    | 38 |
| 6.8.1. Test Setup.....                                     | 38 |
| 6.8.2. Test Result .....                                   | 39 |
| 6.8.3. Test Limit.....                                     | 42 |

|         |                                      |    |
|---------|--------------------------------------|----|
| 6.9.    | Adjacent Channel Power.....          | 43 |
| 6.9.1.  | Test Setup (Analog) .....            | 43 |
| 6.9.2.  | Test Result .....                    | 43 |
| 6.9.3.  | Test Setup (Digital).....            | 44 |
| 6.9.4.  | Test Result .....                    | 44 |
| 6.10.   | Conducted Spurious Emission .....    | 47 |
| 6.10.1. | Test Setup.....                      | 47 |
| 6.10.2. | Test Result (Analog) .....           | 48 |
| 6.10.3. | Test Result (Digital).....           | 60 |
| 6.10.4. | Test Limit.....                      | 72 |
| 6.11.   | Radiated Spurious Emission .....     | 73 |
| 6.11.1. | Test Setup.....                      | 73 |
| 6.11.2. | Test Result (Analog) .....           | 74 |
| 6.11.3. | Test Result (Digital).....           | 82 |
| 6.11.4. | Test Limit.....                      | 90 |
| 6.12.   | Effective Radiated Power (ERP) ..... | 91 |
| 6.12.1. | Test Setup.....                      | 91 |
| 6.12.2. | Test Result .....                    | 91 |
| 6.12.3. | Test Limit.....                      | 91 |
| 6.13.   | GNSS (EIRP for 1559 - 1610MHz).....  | 92 |
| 6.13.1. | Test Setup.....                      | 92 |
| 6.13.1. | Test Result .....                    | 92 |
| 6.13.2. | Test Limit.....                      | 93 |

## Report Revision History

| Revision History | Description                      | Date       | Originator     |
|------------------|----------------------------------|------------|----------------|
| Rev. A           | Initial Report                   | 9-Aug-2018 | Khor Wei Loong |
| Rev. B           | Amended on Section 6.10 and 6.11 | 7-Sep-2018 | Khor Wei Loong |

## **1.0 General Information**

### **EUT Description:**

|                        |                         |
|------------------------|-------------------------|
| <b>Technologies</b>    | Land Mobile Radio (LMR) |
| <b>Modulation Type</b> | Analog, 4FSK            |

### **General Description of Applied Standards**

The EUT is a RF Product. According to the specifications of the manufacturer, the EUT is to comply with the requirements of the following standards:

**ANSI C63.4-2014**

**ANSI C63.26-2015**

## 2.0 Summary of Test Results

| FCC General Rules Part (47CFR)         | ISED General Rules Part | Test Item                             | Result | Remark                                                                                                            |
|----------------------------------------|-------------------------|---------------------------------------|--------|-------------------------------------------------------------------------------------------------------------------|
| 2.1046, 22.565, 74.461, 74.534         | RSS-119                 | RF Power Output                       | Pass   | -                                                                                                                 |
| 2.1055, 90.213, 22.355, 74.464, 74.561 | -                       | Frequency Stability                   | Pass   | -                                                                                                                 |
| 2.1047, 74.463                         | RSS-119                 | Audio Frequency Response              | Pass   | -                                                                                                                 |
| 2.1047, 74.463                         | RSS-119                 | Audio Low Pass Filter Response        | Pass   | -                                                                                                                 |
| 2.1047, 74.463                         | RSS-119                 | Modulation limiting                   | Pass   | -                                                                                                                 |
| 2.1049, 90.210, 22.359, 74.462, 74.535 | RSS-119                 | Occupied Bandwidth                    | Pass   | 16K0F3E – 14.9986kHz<br>11K0F3E – 9.98321kHz<br>8K10F1D – 7.6974kHz<br>8K10F1E – 7.7431kHz<br>8K10F1W – 7.8612kHz |
| -                                      | -                       | Band Edge Conducted Spurious Emission | Pass   | -                                                                                                                 |
| 90.214                                 | -                       | Transient Frequency Behavior          | Pass   | -                                                                                                                 |
| -                                      | -                       | Adjacent Channel Power                | NA     | -                                                                                                                 |
| 2.1053,90.210, 22.359,74.461, 74.861   | RSS-119                 | Conducted Spurious Emissions          | Pass   | Highest Spur Level<br>-20.02dBm                                                                                   |
| 2.1053,90.210, 22.359,74.461, 74.861   | RSS-119                 | Radiated Spurious Emission            | Pass   | Highest Radiated Emission Level<br>-40.22dBm                                                                      |
| -                                      | -                       | GNSS (EIRP for 1559 – 1610MHz)        | NA     | -                                                                                                                 |
| -                                      | -                       | Effective Radiated Power (ERP)        | NA     | -                                                                                                                 |

NA → Not Applicable

### 3.0 Measurement Uncertainty

| Measurement                               | Frequency           | Expanded Uncertainty<br>(k=1.96) (±) |
|-------------------------------------------|---------------------|--------------------------------------|
| AC Power Line Conducted Spurious Emission | 150KHz ~ 30MHz      | 3.43                                 |
| Radiated Emissions up to 1 GHz            | 30MHz ~ 200MHz      | 5.01                                 |
|                                           | 200MHz ~<br>1000MHz | 5.01                                 |
| Radiated Emissions above 1 GHz            | 1GHz ~ 18GHz        | 5.01                                 |
|                                           | 18GHz ~ 25GHz       | 5.01                                 |

## 4.0 Equipment List

### FCC Analog ATE#1: (SW version: 2.4.5 & FCC\_Frequency Stability 1.0.3 rev.)

| Description         | Model  | Serial Number | Calibration Date | Calibration Due Date |
|---------------------|--------|---------------|------------------|----------------------|
| Audio Analyzer      | 8903B  | 3011A10475    | 9-Jul-18         | 9-Jul-19             |
| SIGNAL GENERATOR    | 2042   | 203001/904    | 8-Mar-18         | 9-Mar-19             |
| MODULATION ANALYZER | 8901B  | 3538A03696    | 3-Apr-18         | 3-Apr-19             |
| DSA                 | 36570A | MY42506781    | 6-Jul-18         | 6-Jul-19             |
| POWER SENSOR        | E9031A | MY41498969    | 17-Apr-18        | 17-Apr-19            |
| POWER METER         | E4416A | MY45101016    | 16-Jan-18        | 16-Jan-19            |
| POWER SUPPLY        | 6031A  | 2430A00146    | 09-Apr-18        | 09-Apr-19            |
| CHAMBER             | SH-641 | 92009188      | 3-Apr-18         | 3-Apr-19             |
| SWITCH CONTROL UNIT | 3499B  | CN40150337    | CNR              | CNR                  |

### FCC Transient ATE #1: (SW version: FCC Transient ATE\_R1.1.1)

| Description               | Model    | Serial Number | Calibration Date | Calibration Due Date |
|---------------------------|----------|---------------|------------------|----------------------|
| POWER SUPPLY              | 6032A    | 2818A03549    | 11-May-17        | 3-Aug-18             |
| POWER SENSOR              | E4412A   | MY50290007    | 11-Oct-17        | 11-Oct-18            |
| POWER METER               | E4416A   | GB41293240    | 2-Mar-18         | 2-Mar-19             |
| ATTENUATORS/SWITCH DRIVER | 11713A   | 2508A10141    | CNR              | CNR                  |
| STEP ATTENUATOR/11dB      | 8494G    | MY42143006    | 16-Apr-18        | 16-Apr-19            |
| STEP ATTENUATOR/110dB     | 8496G    | MY421430125   | 16-Apr-18        | 16-Apr-19            |
| OSCILLOSCOPE              | MSO8104A | MY45002372    | 26-Jun-18        | 26-Jun-19            |
| AUDIO ANALYZER            | 8903B    | 3729A17409    | 18-Jul-18        | 18-Jul-19            |
| AUDIO ANALYZER            | 8903B    | 3413A14586    | 5-Dec-17         | 5-Dec-18             |
| MODULATION ANALYZER       | 8901B    | 3403A04772    | 31-Mar-18        | 31-Mar-19            |
| SIGNAL GENERATOR          | 8657A    | 3039A3205     | 5-Jul-18         | 5-Jul-19             |
| SPECTRUM ANALYZER         | E4440A   | MY46185415    | 16-Aug-17        | 16-Aug-19            |
| SWITCH CONTROL UNIT       | 3488A    | 2719A36210    | CNR              | CNR                  |

### CONDUCTED SPUR EMISSION ATE # 1 (SW version: Conducted Spur ATE\_rev 1.23.01)

| Description                  | Model   | Serial Number | Calibration Date | Calibration Due Date |
|------------------------------|---------|---------------|------------------|----------------------|
| SWITCH CONTROL UNIT          | 3488A   | 2719A32735    | CNR              | CNR                  |
| PSA Series Spectrum Analyzer | E4445A  | MY46181732    | 16-Feb-17        | 16-Feb-19            |
| POWER SUPPLY                 | 6032A   | 3232A08203    | 9-Apr-18         | 9-Apr-19             |
| HIGH PASS FILTER SWITCH BOX  | -       | CS001         | 5-Jul-18         | 5-Jul-19             |
| Vector Signal Generator      | SMU200A | 103537        | 22-Jul-17        | 22-Jul-20            |

### EMC Chamber 1

| DESCRIPTION                | MODEL                        | SERIAL NUMBER | CALIBRATION DATE | CALIBRATION DUE DATE |
|----------------------------|------------------------------|---------------|------------------|----------------------|
| DRG HORN FREQ.             | SAS-571                      | 719           | 18-Jul-17        | 18-Jul-19            |
| DRG HORN FREQ.             | SAS-571                      | 720           | 2-Mar-17         | 2-Mar-19             |
| POWER SUPPLY               | 6032A                        | MY41001736    | 16-May-18        | 16-May-19            |
| MICROWAVE SIGNAL GENERATOR | SMP04                        | 100127        | 19-Jul-17        | 18-Jul-19            |
| EMI TEST RECEIVER          | ESIB26                       | 100336        | 13-Jul-17        | 12-Jul-19            |
| SIGNAL ANALYZER            | FSV40                        | 101103        | 18-Jul-17        | 17-Jul-19            |
| 5m Semi-anechoic Chamber   | S800-HX                      | J2308         | CNR              | CNR                  |
| BILOG ANTENNA              | CBL6112D                     | 25224         | 22-Jul-17        | 22-Jul-19            |
| BILOG ANTENNA              | CBL6112B                     | 2964          | 16-Feb-18        | 16-Feb-20            |
| BROAD-BAND HORN ANTENNA    | BBHA9170                     | BBHA9170255   | 7-Nov-17         | 7-Nov-18             |
| DATA LOGGER                | SDL500                       | A.016776      | 18-Mar-17        | 18-Mar-19            |
| LOOP ANTENNA               | 6502                         | 208416        | 27-Jul-17        | 27-Jul-19            |
| SYSTEM CONTROLLER          | SC104V                       | 050806-1      | CNR              | CNR                  |
| TURNTABLE FLUSH MOUNT 2M   | FM2011                       | NA            | CNR              | CNR                  |
| ANTENNA POSITIONING TOWER  | TLT2                         | NA            | CNR              | CNR                  |
| 18 - 40GHz PREAMPLIFIER    | Miteq Hi Gain Sucoflex       | 002           | CNR              | CNR                  |
| PREAMPLIFIER               | PAM-0118P                    | 361           | CNR              | CNR                  |
| Test Software              | EMC FCC IC Bluetooth RE Test |               |                  |                      |
| Version                    | EMC_FCC_RE_v1.5.1            |               |                  |                      |

**CNR → Calibration Not Require**

## 5.0 Test Condition

### 5.1. Transmitter Test Conditions


| Test Item,<br>(Channel Spacing)                                               | Power<br>(W) | Modulation   | Test Frequency<br>(MHz)         | Tested By        |
|-------------------------------------------------------------------------------|--------------|--------------|---------------------------------|------------------|
| RF Output Power                                                               | Low & Max    | Analog       | 406.2, 450.65, 459.125, 467.775 | Khor Wei Loong   |
| Frequency Stability                                                           | Max          | Analog       | 467.775                         | Khor Wei Loong   |
| Audio Frequency Response<br>(12.5kHz / 25kHz)                                 | Max          | Analog       | 467.775                         | Khor Wei Loong   |
| Audio Low Pass Filter Response<br>(12.5kHz / 25kHz)                           | Max          | Analog       | 467.775                         | Khor Wei Loong   |
| Modulation limiting<br>(12.5kHz / 25kHz)                                      | Max          | Analog       | 467.775                         | Khor Wei Loong   |
| Occupied Bandwidth<br>(12.5kHz)                                               | Max          | Analog, 4FSK | 406.2, 450.65, 459.125, 467.775 | Khor Wei Loong   |
| Band Edge Conducted Spurious Emissions (Part 22)<br>(12.5kHz / 20kHz / 25kHz) | Max          | Analog, 4FSK | 459.025, 459.65                 | Khor Wei Loong   |
| Transient Frequency Behavior<br>(UHF & VHF Band)<br>(12.5kHz / 25kHz)         | Max          | Analog       | 467.775                         | Khor Wei Loong   |
| Adjacent Channel Power<br>(700MHz Band)<br>(12.5kHz)                          | Max          | Analog       | NA                              | NA               |
| Conducted Spurious Emissions-<br>(12.5kHz / 25kHz)                            | Low / Max    | Analog, 4FSK | 406.2, 450.65, 459.125, 467.775 | Khor Wei Loong   |
| Radiated Spurious Emission<br>(12.5kHz / 25kHz)                               | Low / Max    | Analog, 4FSK | 406.2, 450.65, 459.125, 467.775 | Nazrin & Qawiman |
| GNSS (EIRP for 1559 - 1610MHz)<br>(12.5kHz / 25kHz)                           | Max          | Analog       | NA                              | NA               |
| Effective Radiated Power (ERP)<br>(12.5kHz / 25kHz)                           | Max          | Analog       | NA                              | NA               |

NA → Not Applicable

## 6.0 Transmitter Test Parameters

### 6.1. RF Output Power

#### 6.1.1. Test Setup

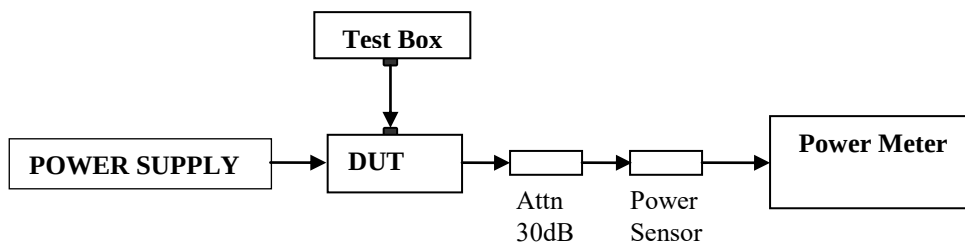


- 1) The DUT transmitter connected to Power Meter using the 30 dB attenuator and power sensor with above setup.
- 2) Path loss for the measurement included.
- 3) All the measurement was done at low, mid, high frequency for each band.
- 4) Record the power into the test report.

#### 6.1.2. Test Result

| Temperature     | 25°C          |             |               |             | Remarks |
|-----------------|---------------|-------------|---------------|-------------|---------|
| Voltage (V)     | 13.2V         |             |               |             |         |
| Frequency (MHz) | Low Power (W) | Current (A) | Max Power (W) | Current (A) |         |
| 406.2           | 1.03          | 2.33        | 29.3          | 8.75        |         |
| 450.65          | 0.99          | 2.21        | 28.9          | 8.66        |         |
| 459.125         | 0.99          | 2.21        | 28.8          | 7.98        |         |
| 467.775         | 1             | 2.14        | 29            | 8.35        |         |

## 6.2. Frequency Stability

### 6.2.1. Test Setup

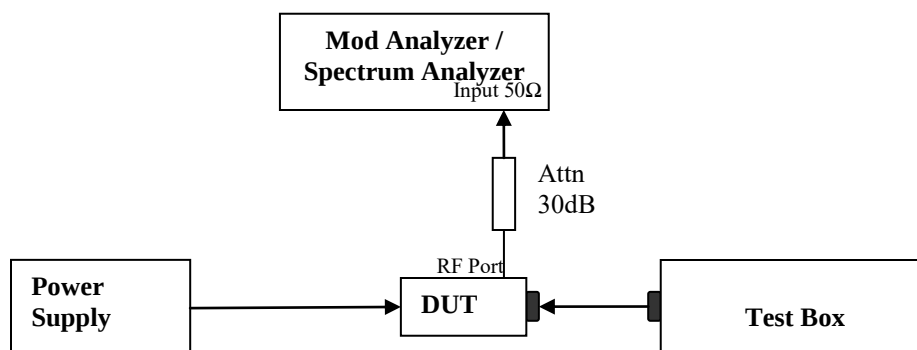


- 1) The DUT transmitter output port was connected to Modulation / Spectrum Analyzer.
- 2) Path loss for the measurement included.
- 3) Transmit the DUT and record the freq in  $MCF_{MHz}$ .
- 4) Test in 2 conditions:
  - Temperature: The frequency of the transmitter was measured from -30°C to 50°C.
  - Supply Voltage:
    - Mobile: The frequency of the transmitter was measured from 85% to 115% of the nominal operating input voltage.
    - Portable: The frequency of the transmitter was measured from nominal  $\pm x\%$  as specified by the manufacturer
- 5) Calculate the ppm frequency error by the following:


$$ppm\ error = \left( \frac{MCF_{MHz}}{ACF_{MHz}} - 1 \right) * 10^6$$

Where:  $MCF_{MHz}$  is the Measured Carrier Frequency in MHz  
 $ACF_{MHz}$  is the Assigned Carrier Frequency in MHz

## 6.2.2. Test Result

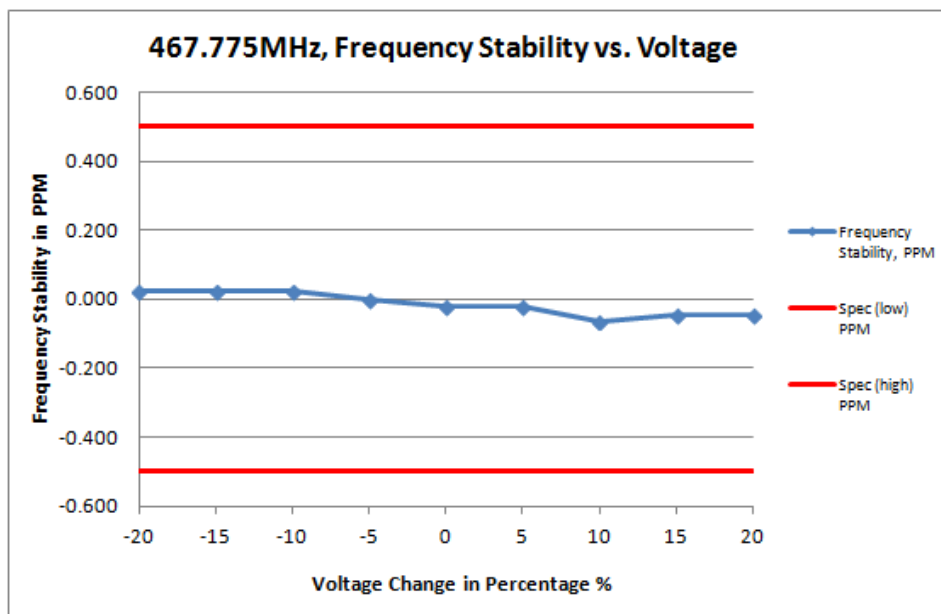

| Frequency / Channel Spacing | 467.775MHz / 12.5kHz |                |                          |                |                 |
|-----------------------------|----------------------|----------------|--------------------------|----------------|-----------------|
| Temperature, °C             | 25                   |                |                          |                |                 |
| Voltage %                   | Voltage, V           | Frequency, MHz | Frequency Stability, PPM | Spec (low) PPM | Spec (high) PPM |
| -20                         | 10.560               | 467.775010     | 0.021                    | -0.500         | 0.500           |
| -15                         | 11.220               | 467.775010     | 0.021                    | -0.500         | 0.500           |
| -10                         | 11.880               | 467.775010     | 0.021                    | -0.500         | 0.500           |
| -5                          | 12.540               | 467.775000     | 0.000                    | -0.500         | 0.500           |
| 0                           | 13.200               | 467.774990     | -0.021                   | -0.500         | 0.500           |
| 5                           | 13.860               | 467.774990     | -0.021                   | -0.500         | 0.500           |
| 10                          | 14.520               | 467.774970     | -0.064                   | -0.500         | 0.500           |
| 15                          | 15.180               | 467.774980     | -0.043                   | -0.500         | 0.500           |
| 20                          | 15.840               | 467.774980     | -0.043                   | -0.500         | 0.500           |

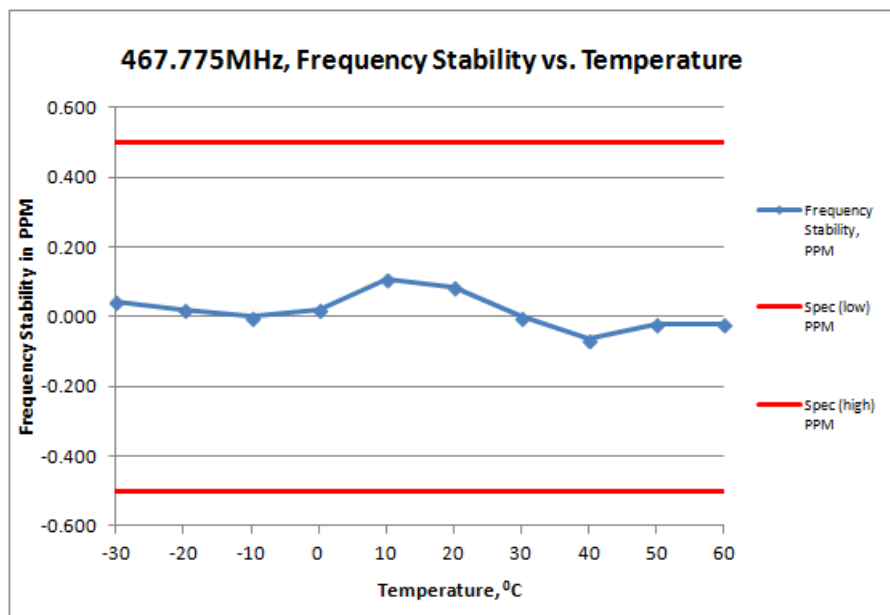


| Frequency / Channel Spacing | 467.775MHz / 12.5kHz |                          |                |                 |
|-----------------------------|----------------------|--------------------------|----------------|-----------------|
| Voltage, V                  | 13.2                 |                          |                |                 |
| Temperature, °C             | Frequency, MHz       | Frequency Stability, PPM | Spec (low) PPM | Spec (high) PPM |
| -30                         | 467.775020           | 0.043                    | -0.500         | 0.500           |
| -20                         | 467.775010           | 0.021                    | -0.500         | 0.500           |
| -10                         | 467.775000           | 0.000                    | -0.500         | 0.500           |
| 0                           | 467.775010           | 0.021                    | -0.500         | 0.500           |
| 10                          | 467.775050           | 0.107                    | -0.500         | 0.500           |
| 20                          | 467.775040           | 0.086                    | -0.500         | 0.500           |
| 30                          | 467.775000           | 0.000                    | -0.500         | 0.500           |
| 40                          | 467.774970           | -0.064                   | -0.500         | 0.500           |
| 50                          | 467.774990           | -0.021                   | -0.500         | 0.500           |
| 60                          | 467.774990           | -0.021                   | -0.500         | 0.500           |

### 6.2.3. Test Limit

As per manufacturer declared spec +/- 0.5ppm



## 6.3. Audio Frequency Response

### 6.3.1. Test Setup

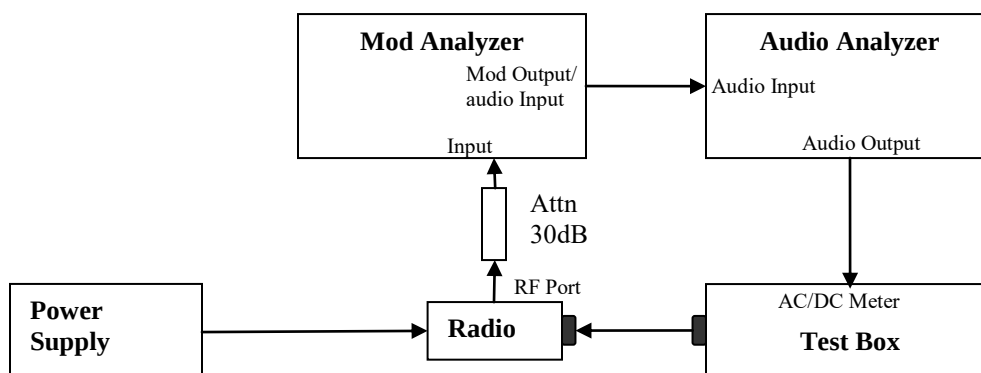


- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Path loss for the measurement included.
- 3) Set the audio bandwidth filter to 15 kHz and 50 kHz.
- 4) Transmit the radio and set the audio analyzer to 1 kHz audio frequency and 20% of the Full rated system deviation.
- 5) On audio analyzer, set the rated level as reference to zero.
- 6) Vary the audio frequency from 300 Hz to 3 kHz. Record the change in dB on the audio analyzer.

### 6.3.2. Test Result

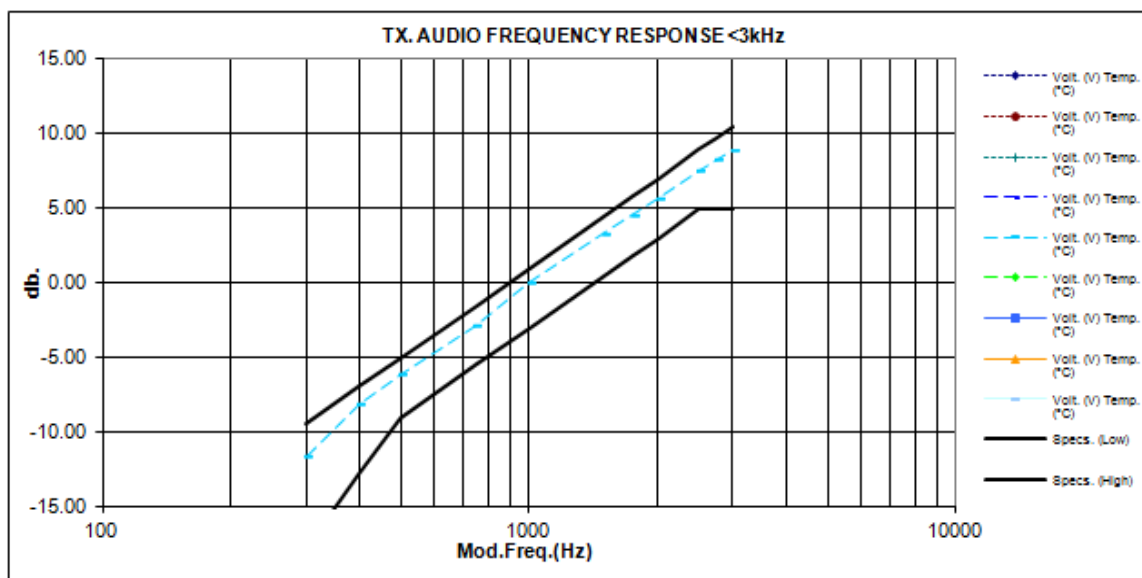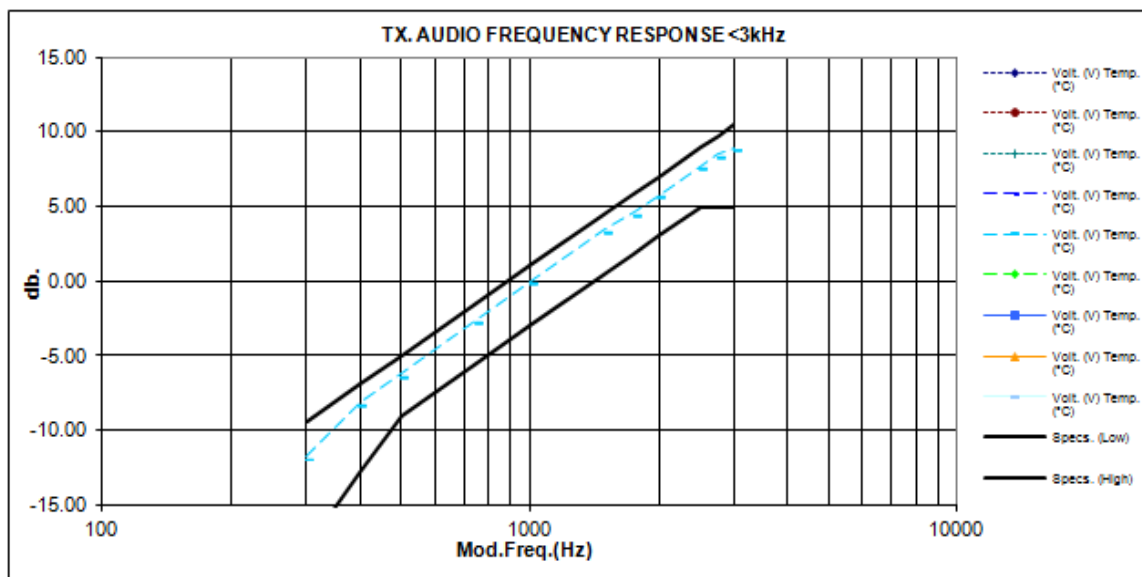

### 6.3.3. Test Limit

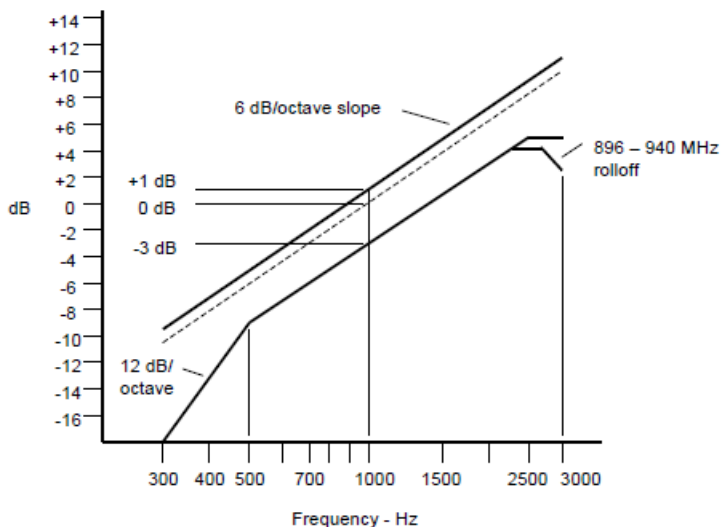


Note:

- o There are additional 6 dB per octave attenuation is allowed from 2.5KHz to 3KHz in equipment 25MHz to 869MHz radio.
- o Additional 6 dB per octave attenuation is allowed from 2.3KHz to 2.7KHz & additional 12 dB per octave attenuation is allowed from 2.7KHz to 3KHz in equipment 896MHz to 940MHz radio.



## 6.4. Audio Low Pass Filter Response

### 6.4.1. Test Setup

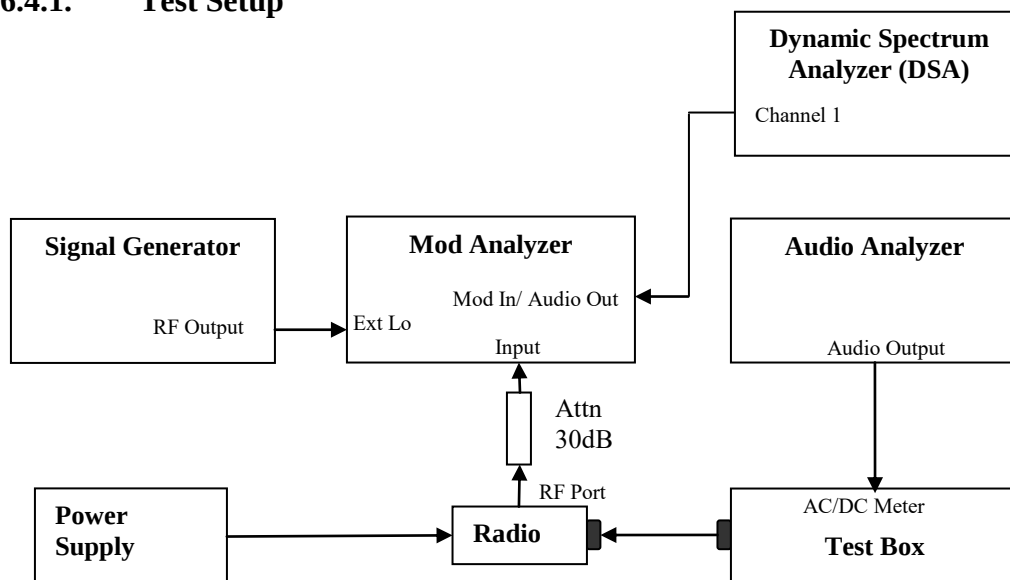


- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Path loss for the measurement included.
- 3) Press 23.1SPCL on modulation analyzer to enable the external LO from Sigen.
- 4) Set the Sigen frequency to  $F_c + 1.5$  MHz, RF output level to 0dBm without modulation.
- 5) Transmit the radio and set the audio analyzer to 1 kHz audio frequency and 60% of the Full rated system deviation.
- 6) Up the amplitude by 20dB.
- 7) On DSA, get the reference point to 0dB.
- 8) Vary the frequency on audio analyzer from 3 kHz to 20 kHz, record the audio tone from DSA.

## 6.4.2. Test Result

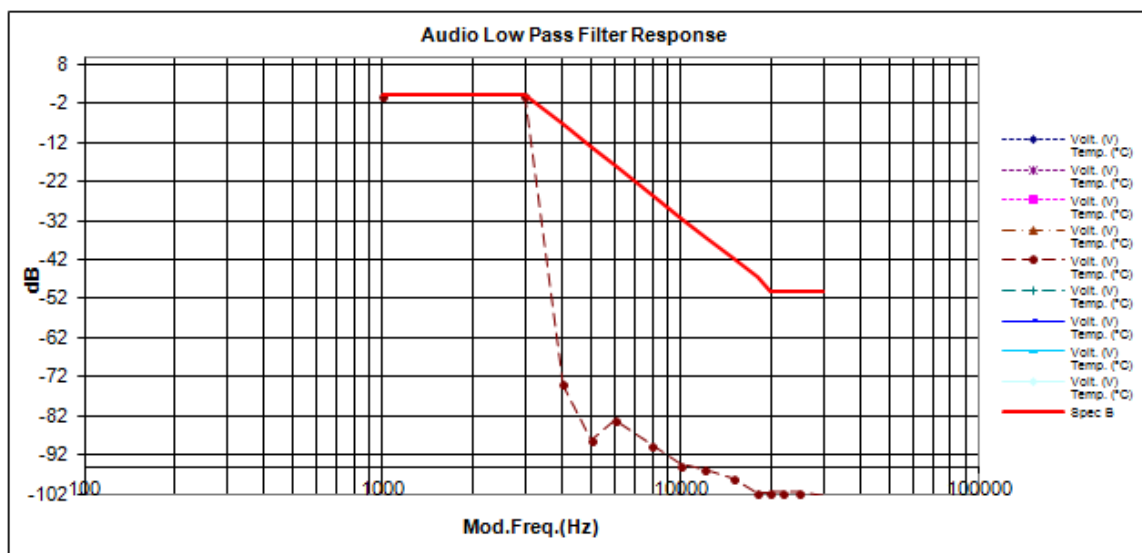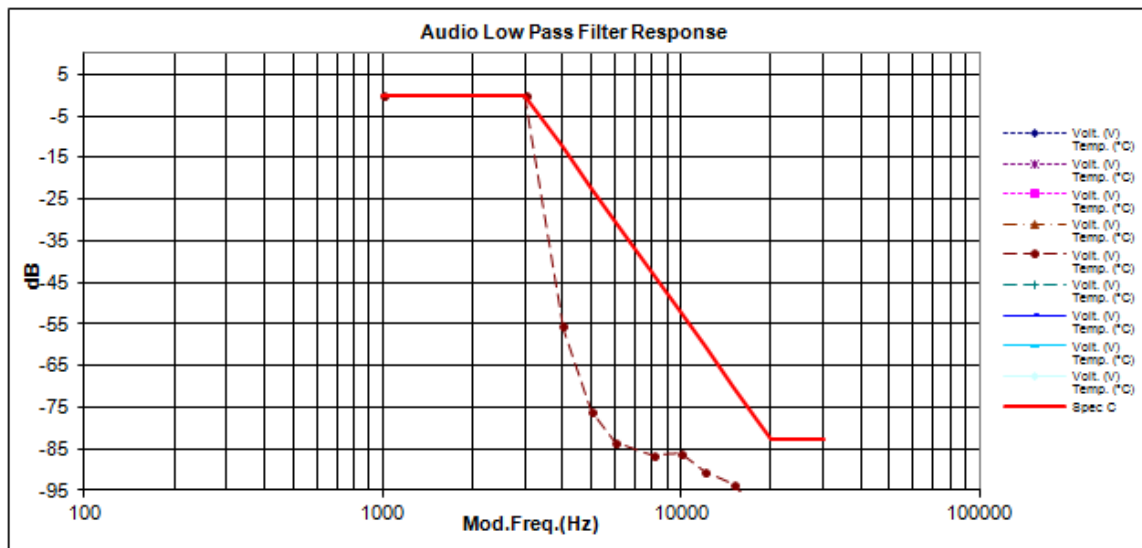

### 6.4.3. Test Limit

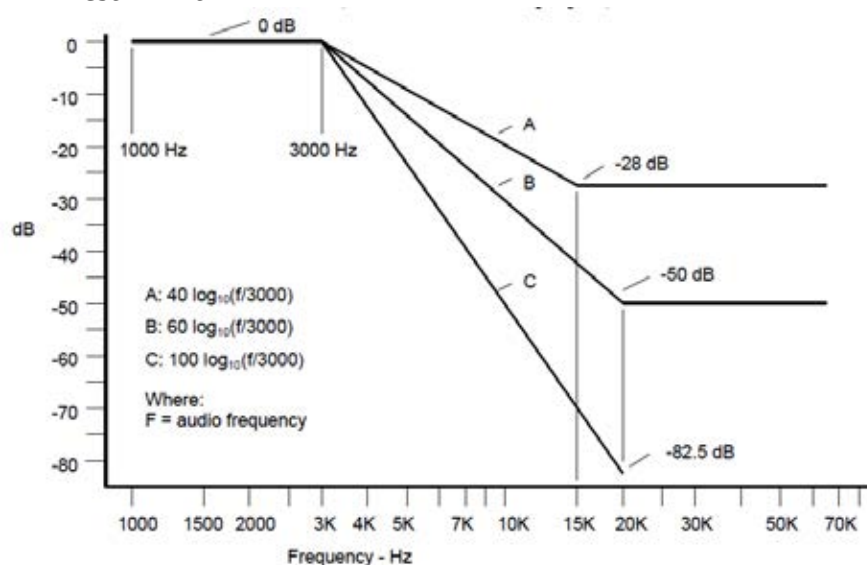

For audio frequencies above 3000 Hz, the audio response of the post limiter low-pass filter shall meet or exceed the following requirements:

- a) For equipment operating on 20, 25 or 30 kHz channel bandwidth in the 25 MHz to 174 MHz range:

At frequencies from 3000 Hz through 15,000 Hz the attenuation shall be greater than the attenuation at 1000 Hz by at least:  $40 \log_{10}(f/3000)$  dB

where:  $f$  is the audio frequency in Hz.

At frequencies above 15,000 Hz, the attenuation shall be greater than the attenuation at 1000 Hz, by at least: 28 dB.

- b) For equipment operating with 25 kHz bandwidth channels between 406 and 512 MHz through 896 MHz, and between 929 MHz through 930 MHz:

At frequencies from 3000 Hz through 20,000 Hz, the attenuation shall be greater than the attenuation at 1000 Hz by at least:  $60 \log_{10}(f/3000)$  dB

where:  $f$  is the audio frequency in Hz.

At frequencies above 20,000 Hz the attenuation shall be greater than the attenuation at 1000 Hz by at least: 50 dB.


- c) For equipment operating on channels between 896 MHz through 901 MHz, between 935 MHz through 940 MHz, and 12.5 or 15 kHz spaced channels in the frequency range 138-174 MHz and 406-512 MHz.

At frequencies from 3000 Hz through 20,000 Hz the attenuation shall be greater than the attenuation at 1000 Hz by at least:  $100 \log_{10}(f/3000)$  dB

where:  $f$  is the audio frequency in Hz.



## 6.5. Modulation Limiting

### 6.5.1. Test Setup

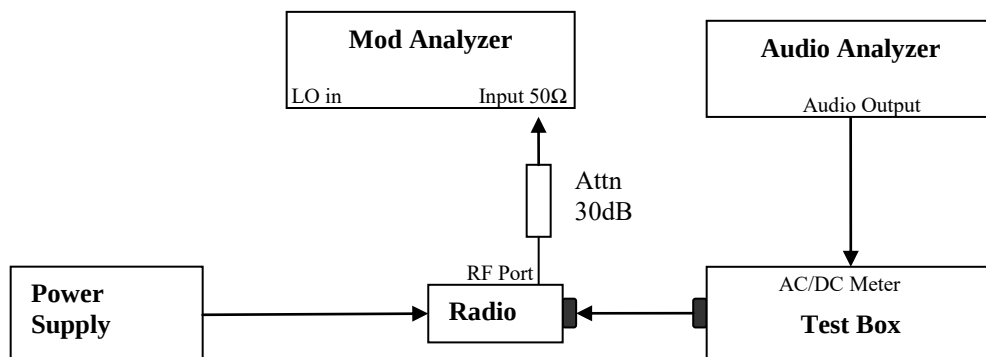

- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Path loss for the measurement included.
- 3) Set the audio bandwidth filter to 15 kHz.
- 4) Transmit the radio and set the audio analyzer to 1 kHz audio frequency and 60% of the Full rated system deviation.
- 5) Record the frequency deviation as 0dB input level at 1kHz audio frequency.
- 6) Repeat the step and record the frequency deviation from -20 dB to 20dB by 5 dB increments and different audio freq 300 Hz, 2.5 kHz and 3 kHz.

### 6.5.2. Test Result

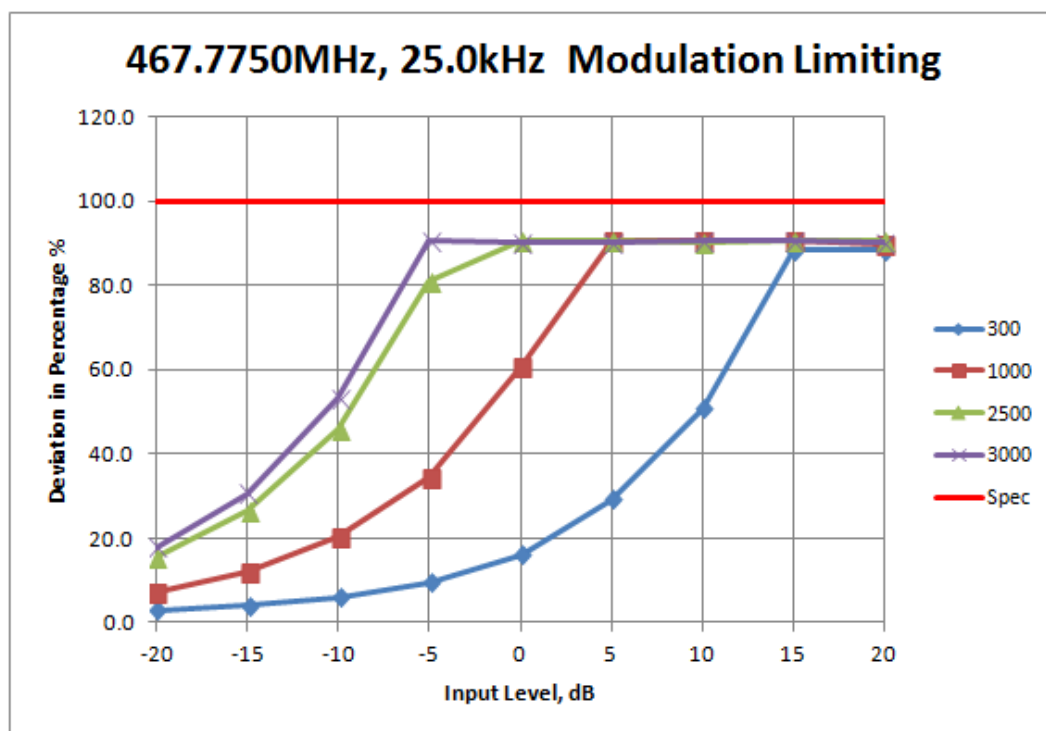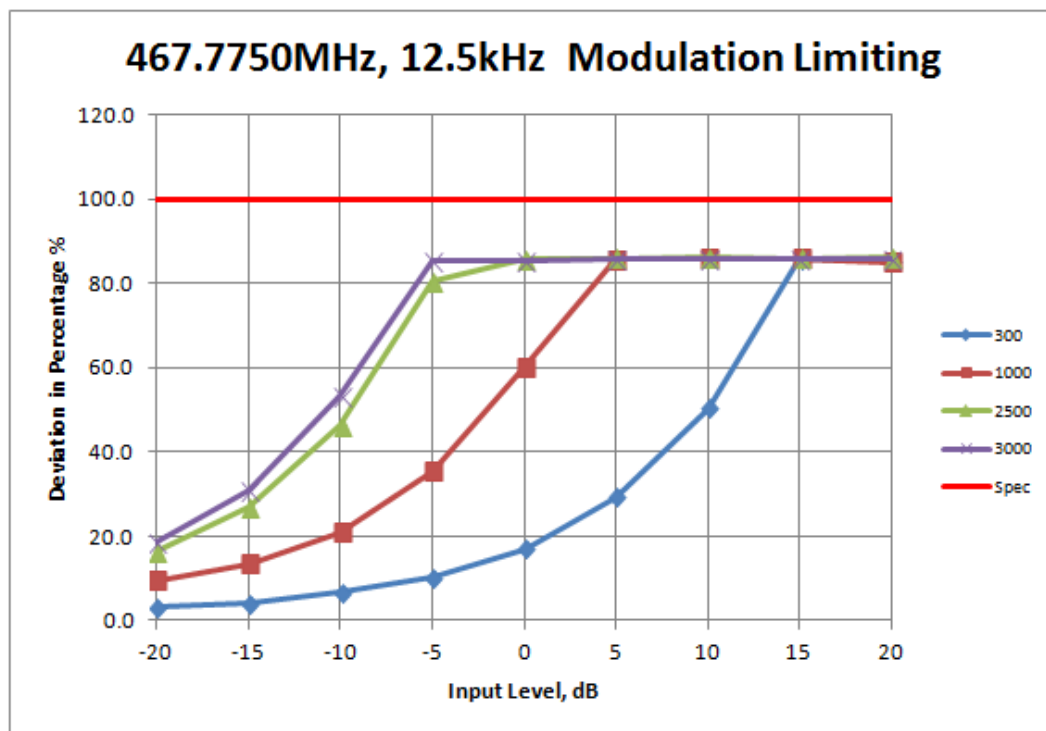


### 6.5.3. Test Limit

Modulation Limiting shall not exceed 100 percent.

## 6.6. Occupied Bandwidth



### 6.6.1. Test Setup (Analog)


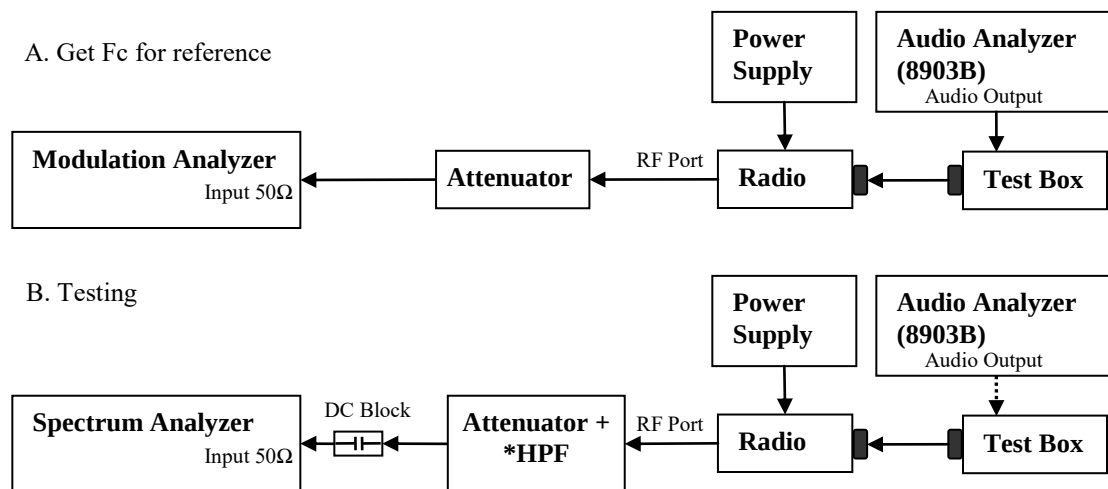




- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Set the audio bandwidth filter to 15 kHz low pass filter and 50 kHz high pass filter.
- 3) Transmit the radio and set the audio analyzer to 2.5 kHz audio frequency and 50% of the rated deviation. Up the amplitude by 16 dB. Dekey the DUT.
- 4) Path loss for the measurement included.
- 5) Select the Occupied Bandwidth measurement for 99% Emissions Bandwidth Measurement.
- 6) Key in the Fc and Resolution Bandwidth (1 ~ 5 % of emission designator).
- 7) Transmit the DUT and record the occupied Bandwidth frequency.
- 8) Preset the spectrum analyzer for sideband spectrum measurement.
- 9) Set the span and Resolution Bandwidth (according to FCC/ ISED standard).
- 10) Save the screen shot as modulated signal
- 11) Remove the audio tone from audio analyzer to capture unmodulated signal.

\* Only HPF added for Mask 80.211 measurement with attenuator.


## 6.6.2. Test Result (Analog)

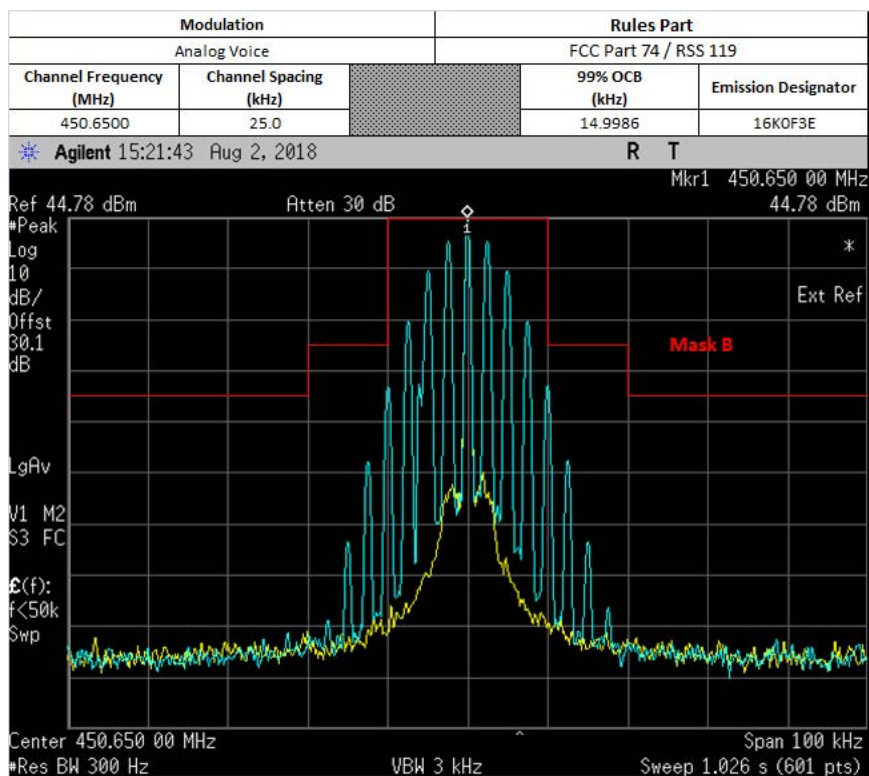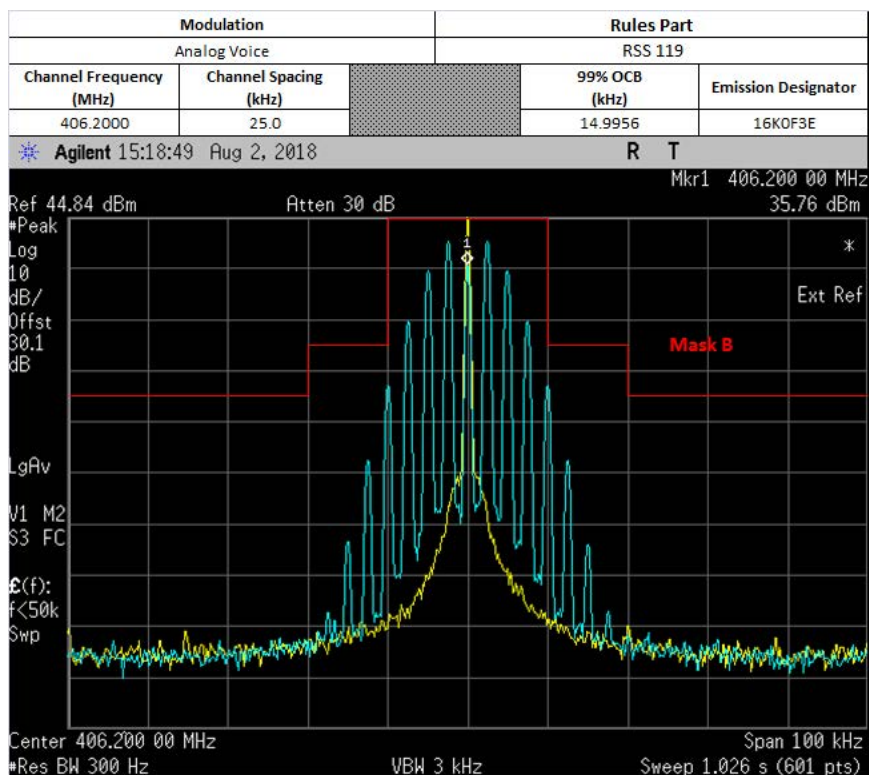

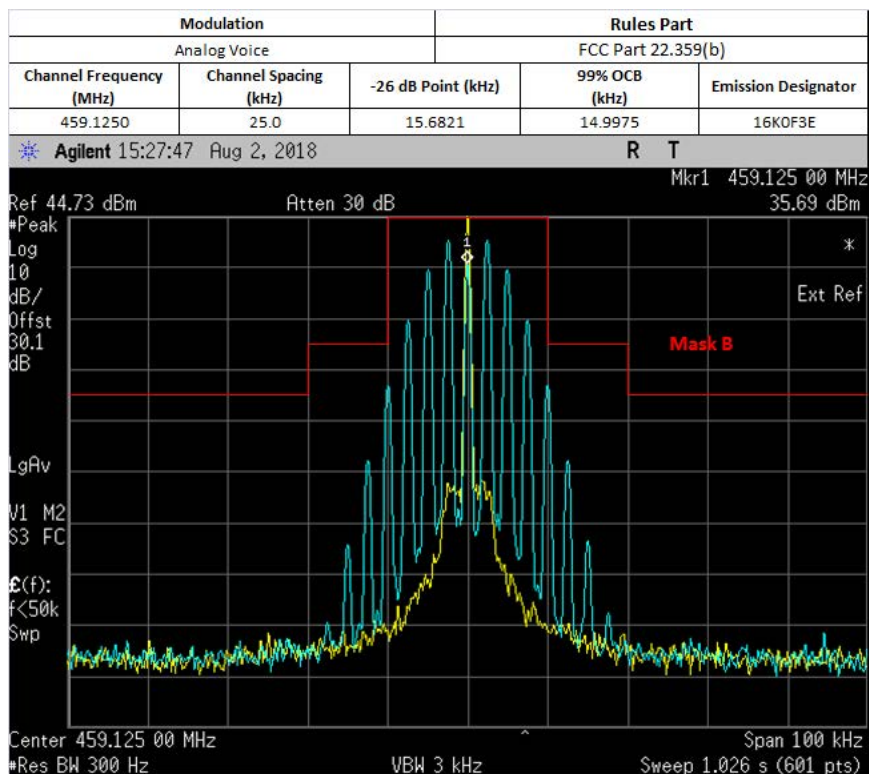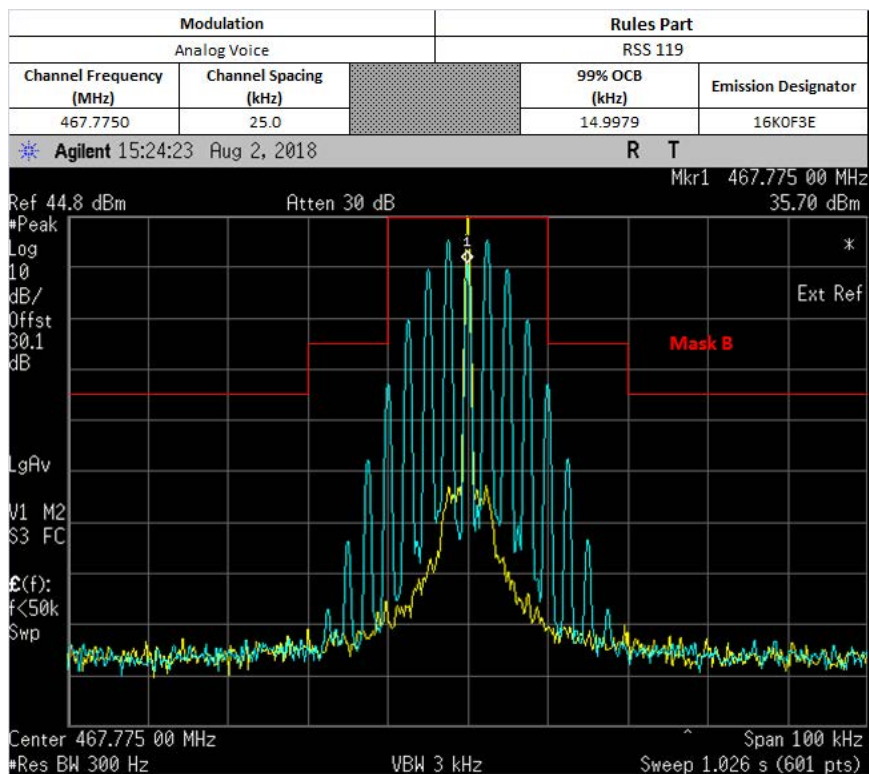

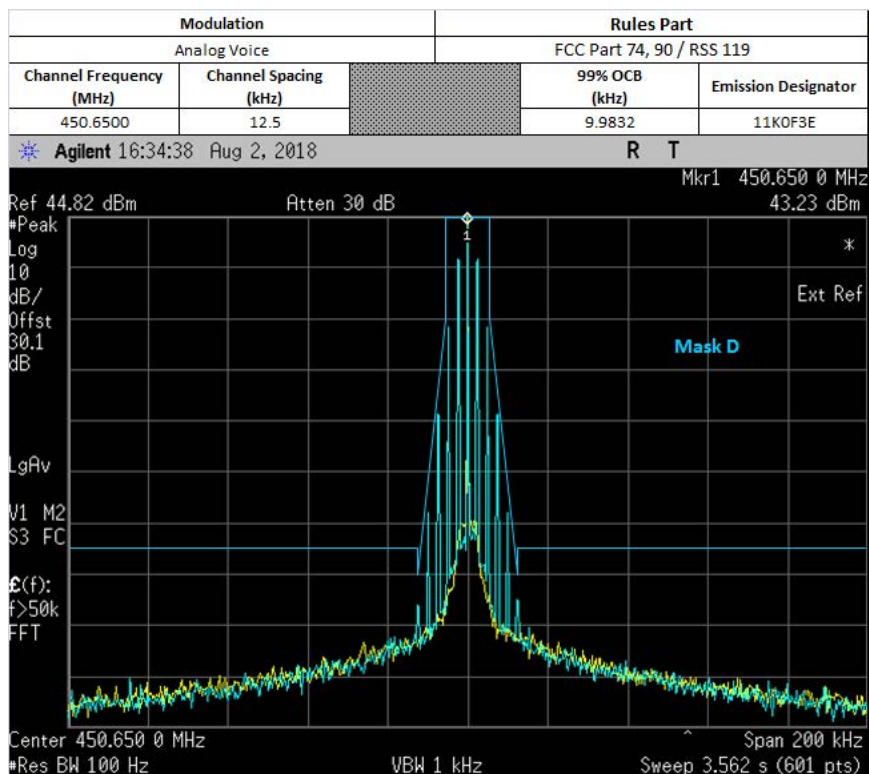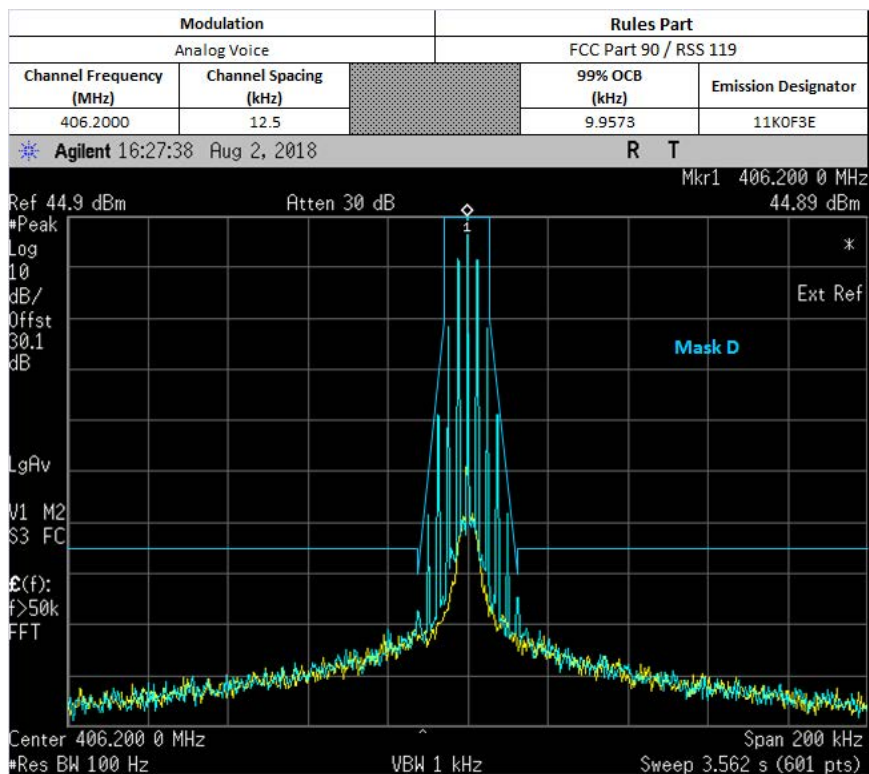

### 6.6.3. Test Setup (Digital)


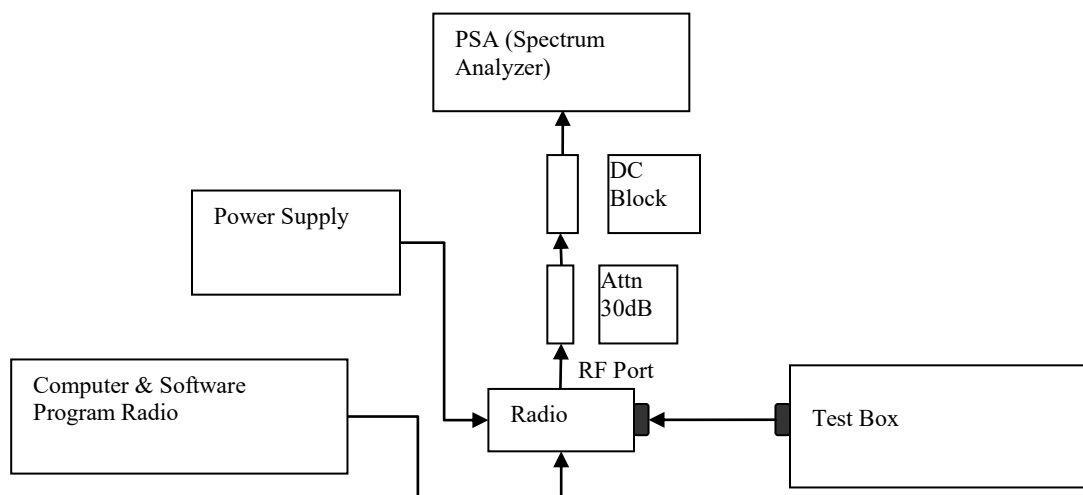




- 1) Program and set radio to operate in desire test frequency and digital mode with modulation. (\*4FSK, C4FM or other digital modulation form).
- 2) Path loss for the measurement included.
- 3) Select the Occupied Bandwidth measurement for 99% Emissions Bandwidth Measurement.
- 4) Key in the Fc and Resolution Bandwidth (1 ~ 5 % of emission designator).
- 5) Transmit the DUT and record the occupied Bandwidth frequency.
- 6) Preset the spectrum analyzer for modulation emission spectrum measurement.
- 7) Set the span and Resolution Bandwidth (according to FCC/ ISED standard).
- 8) Capture the screen shot as modulated signal.



**\*Note:**



- For Digital Modulation, 12.5 kHz Data F1D & FXD would be the same. Therefore only measurements with F1D modulation shown below.
- For Digital Modulation, 12.5 kHz Data F1E & FXE would be the same. Therefore only measurements with F1E modulation shown below.



## 6.6.4. Test Result (Digital)

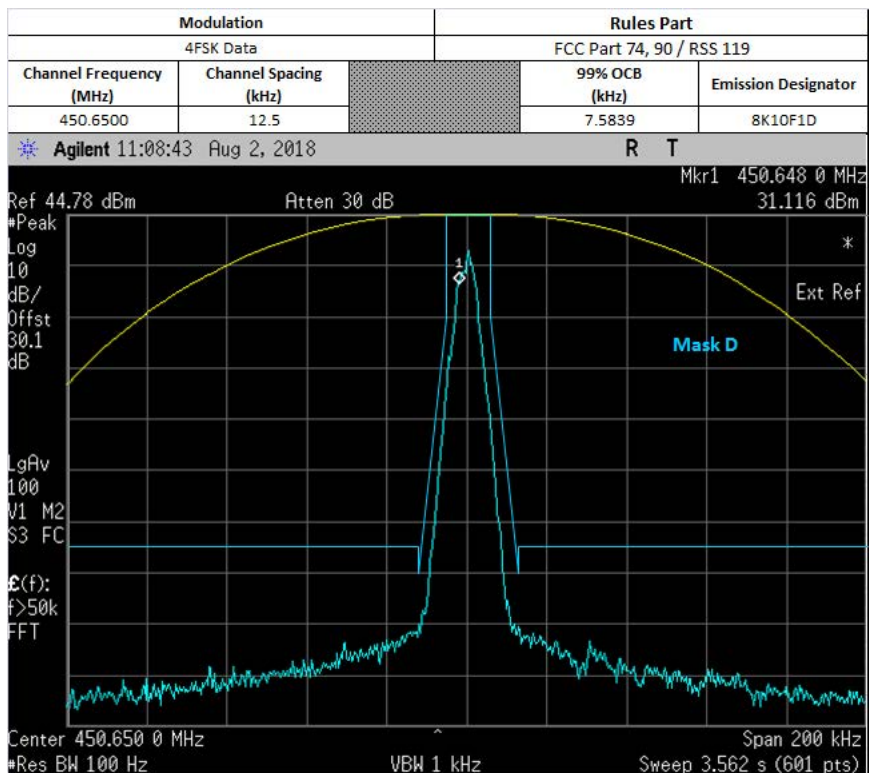
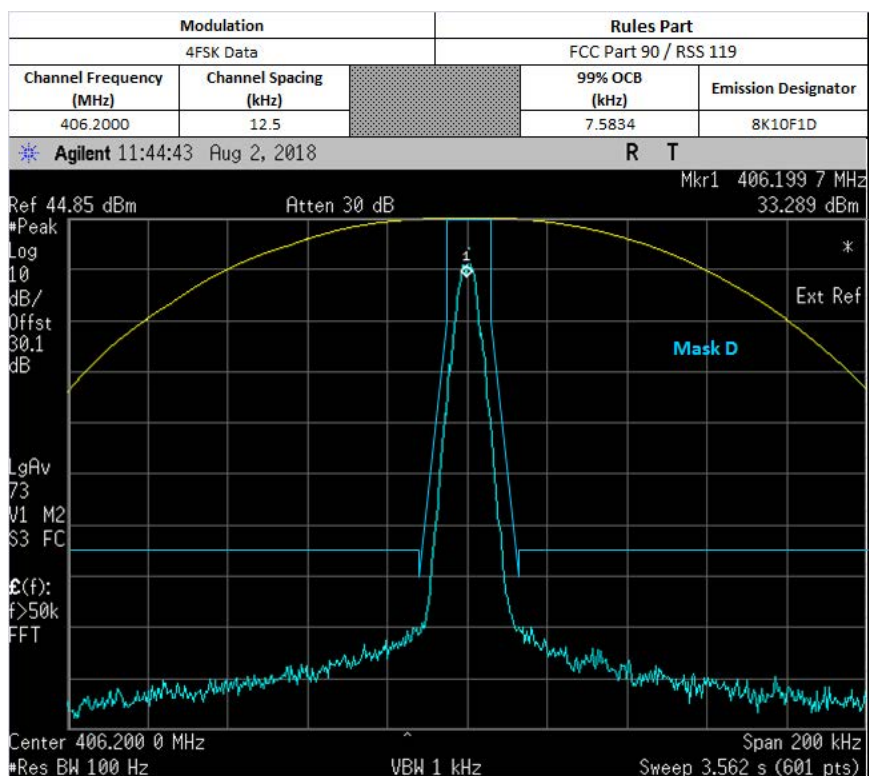


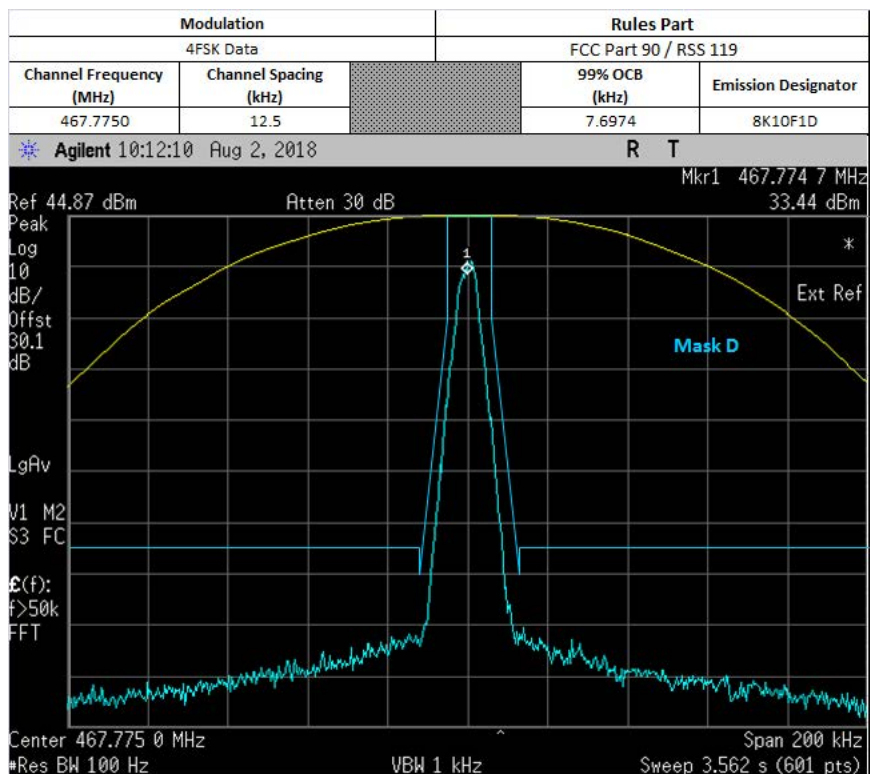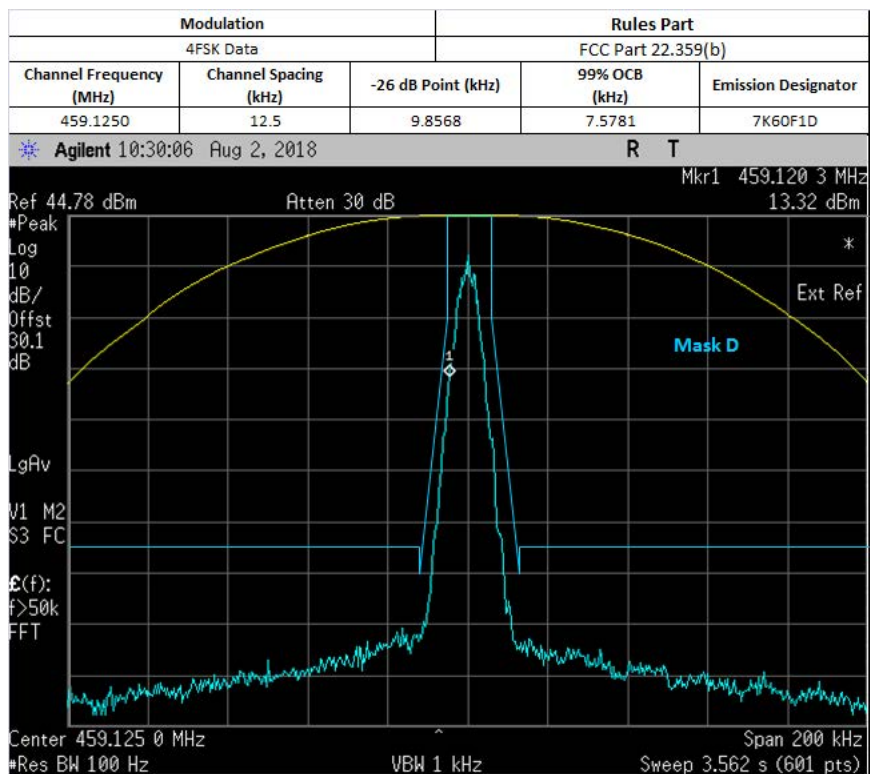

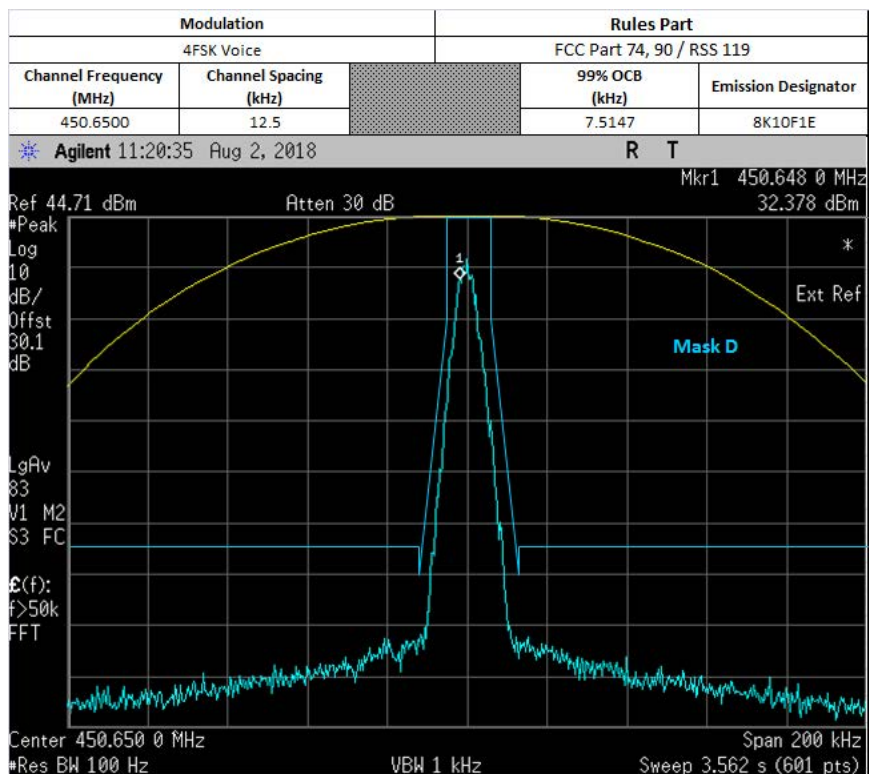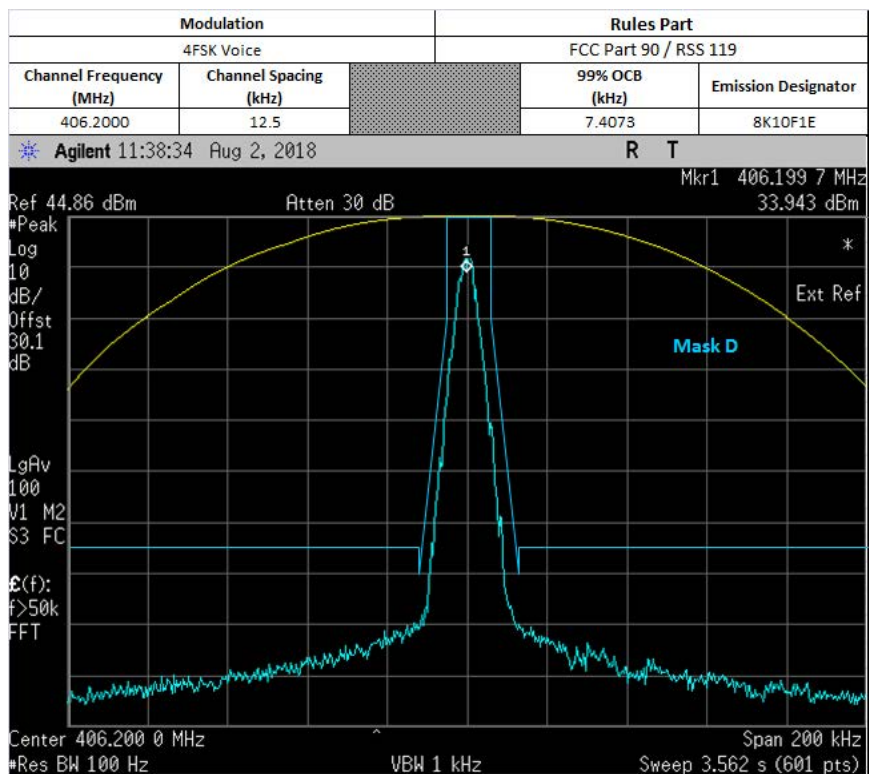

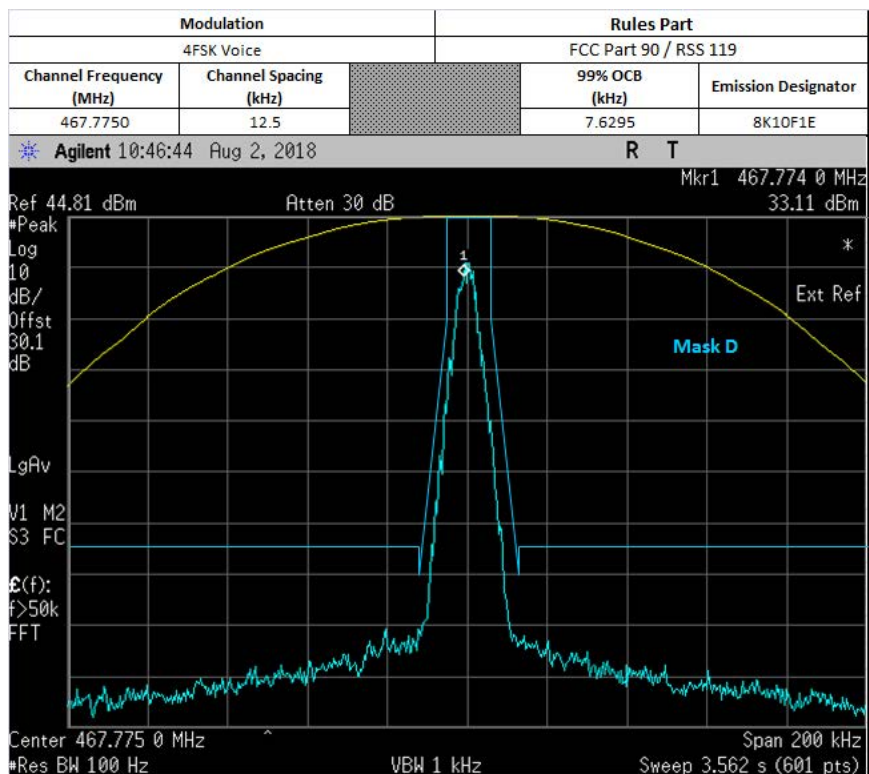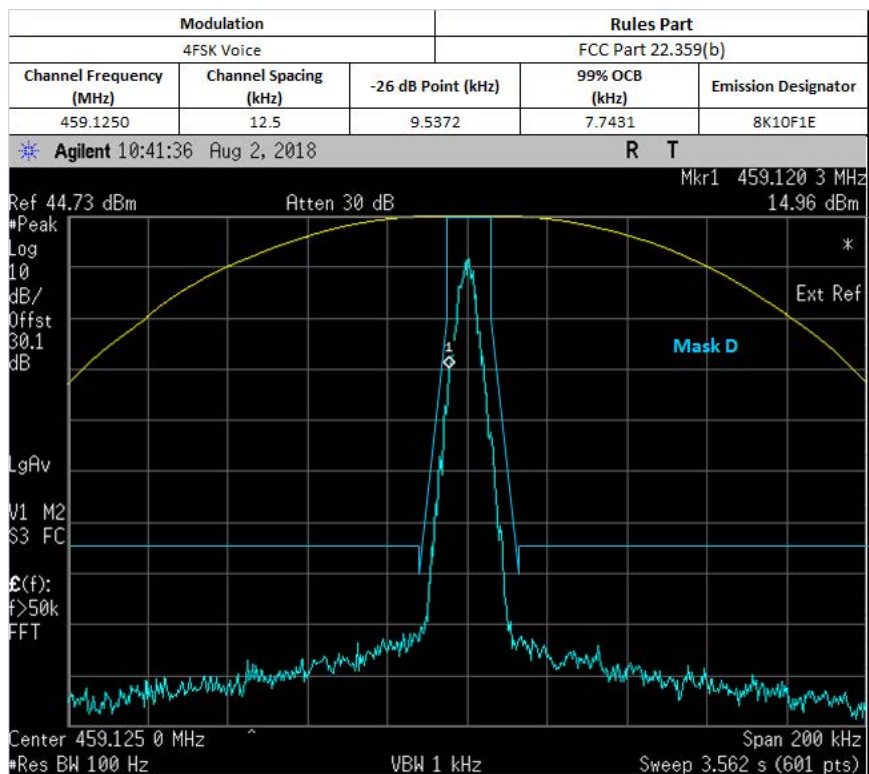

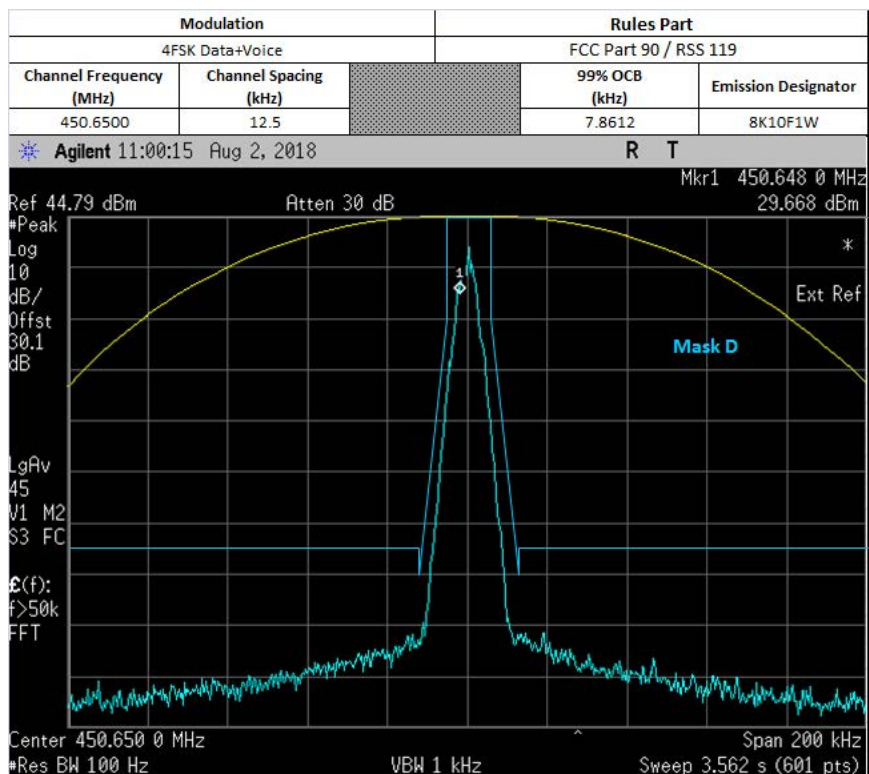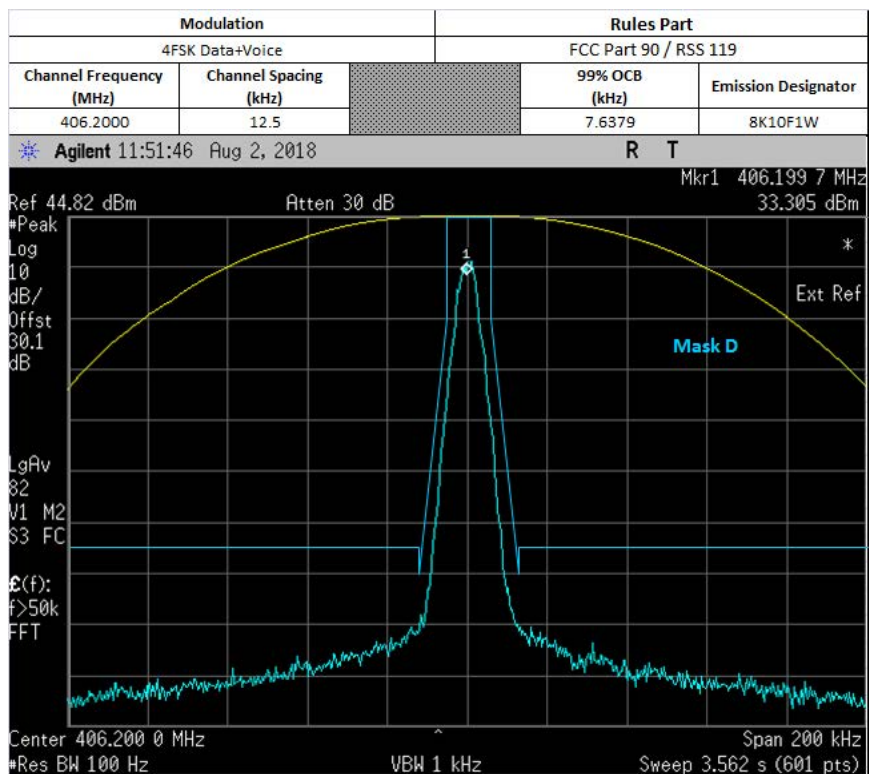

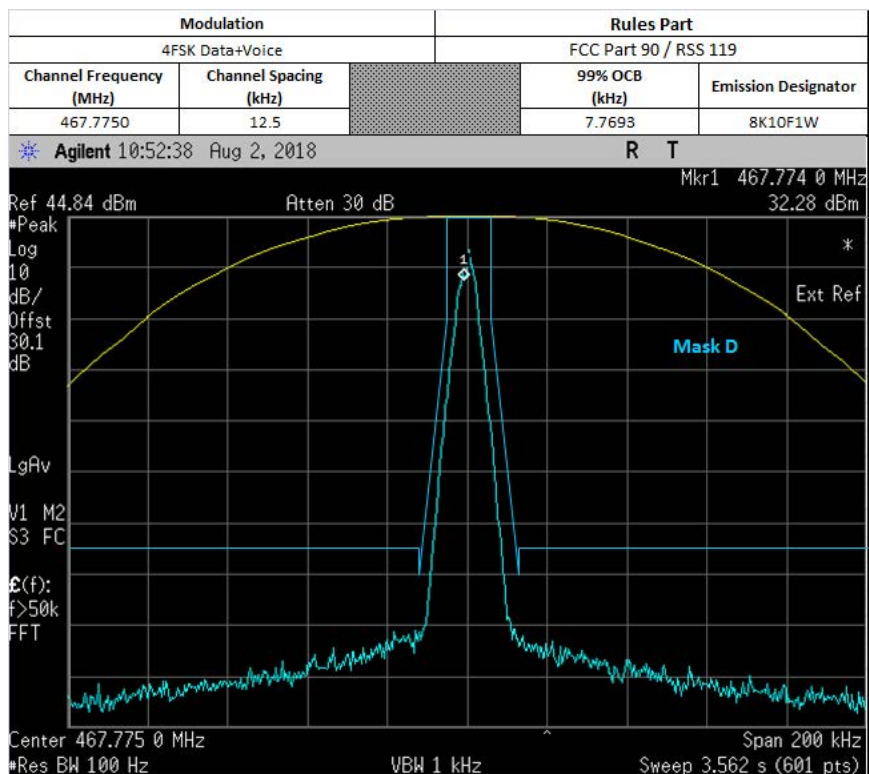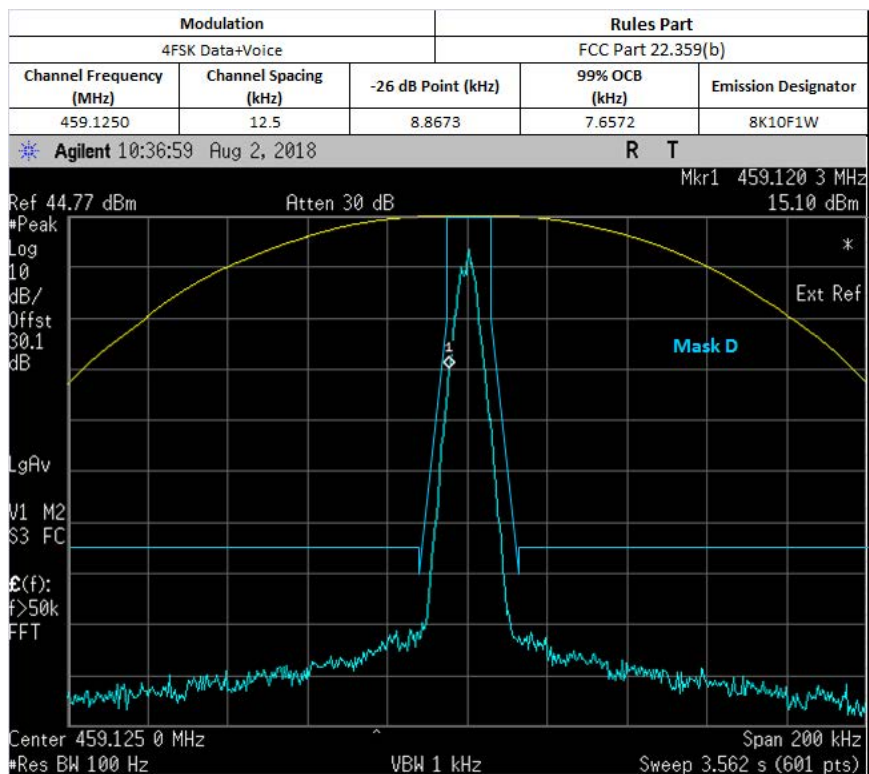


**6.6.5. Test Limit**

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

## 6.7. Band Edge Conducted Spurious Emission (Part 22)

### 6.7.1. Test Setup (Analog)

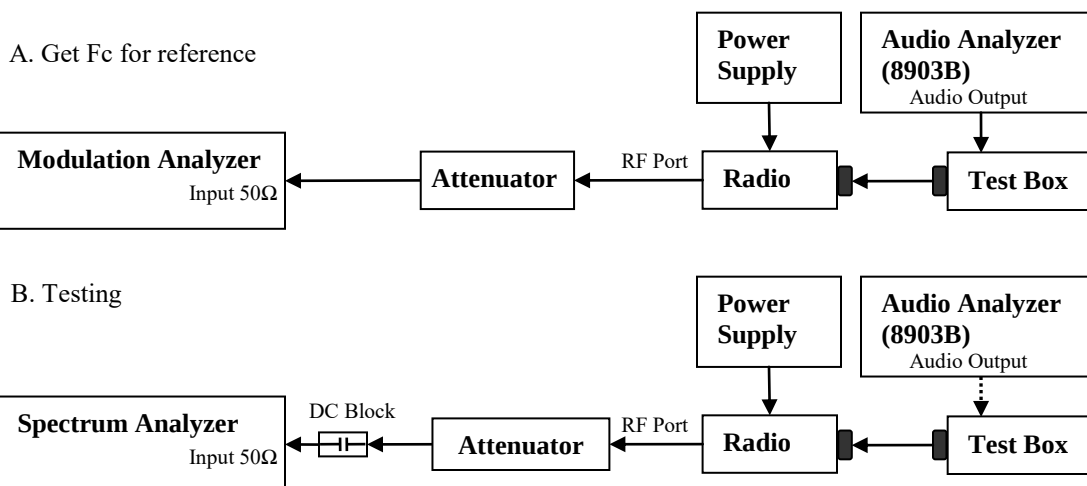



- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Set the audio bandwidth filter to 15 kHz low pass filter and 50 kHz high pass filter.
- 3) Transmit the radio and set the audio analyzer to 2.5 kHz audio frequency and 50% of the rated deviation. Up the amplitude by 16 dB. Dekey the DUT.
- 4) Path loss for the measurement included.
- 5) Select the Occupied Bandwidth measurement for 99% and 26dB Emissions Bandwidth Measurement.
- 6) Key in the Fc and Resolution Bandwidth.
- 7) Transmit the DUT and record the occupied Bandwidth frequencies.
- 8) Preset the spectrum analyzer for band edge measurement.
- 9) The band edges of lowest and highest channels were measured.
- 10) Key in the Lowest and highest channel frequency, span is 60 kHz and Resolution Bandwidth is at least 1% of Emission Bandwidth.
- 11) Save the screen shot as modulated signal.
- 12) Remove the audio tone from audio analyzer to capture unmodulated signal.

\*Note:



- For emission designator ending with F3E, 16K0F3E is the worst case and therefore only 16K0F3E will be shown.

## 6.7.2. Test Result (Analog)


### Max Power

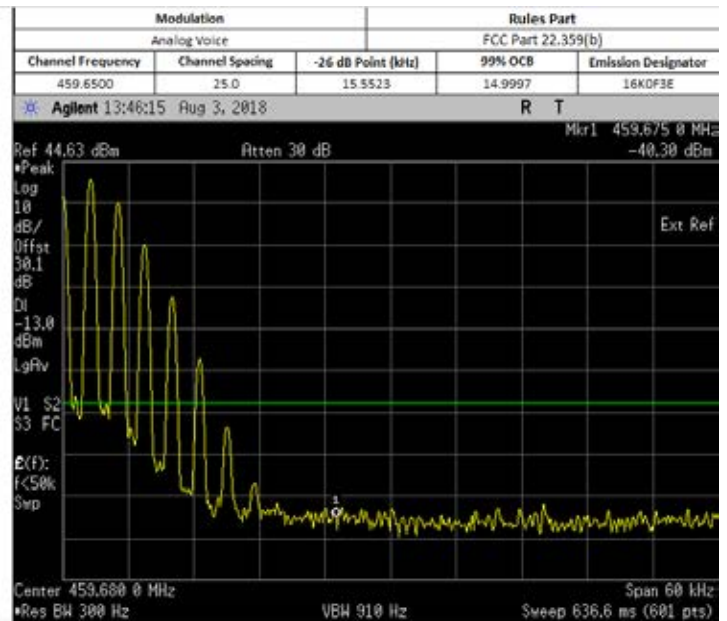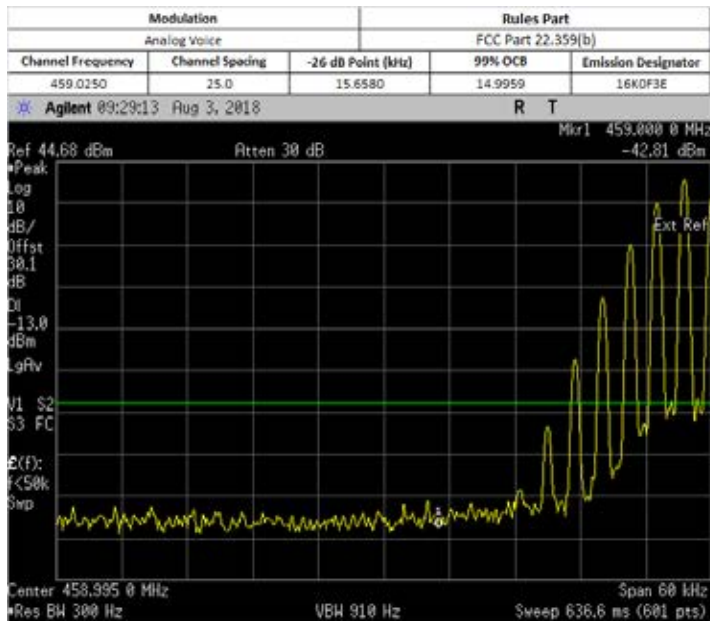

### Low Power

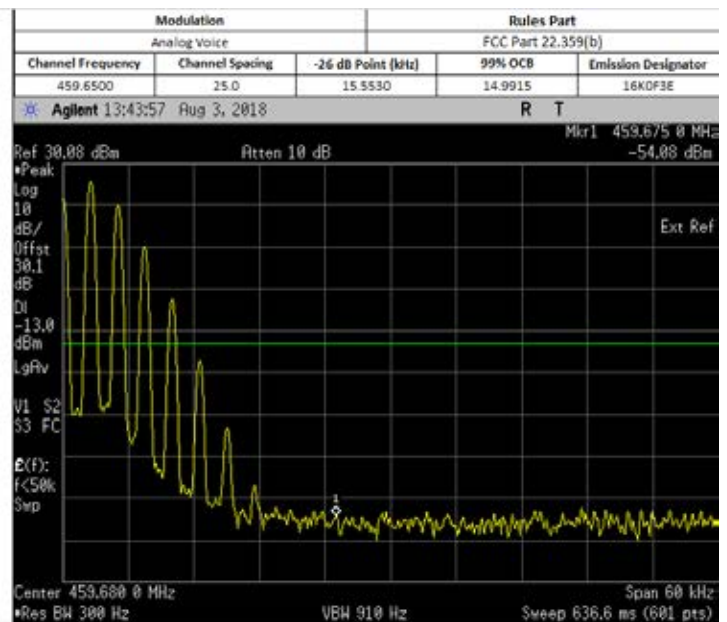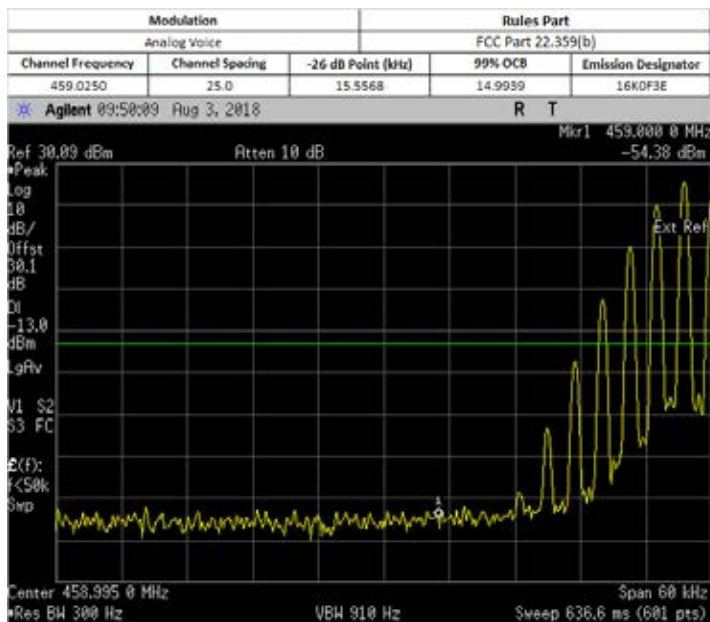

### 6.7.3. Test Setup (Digital)

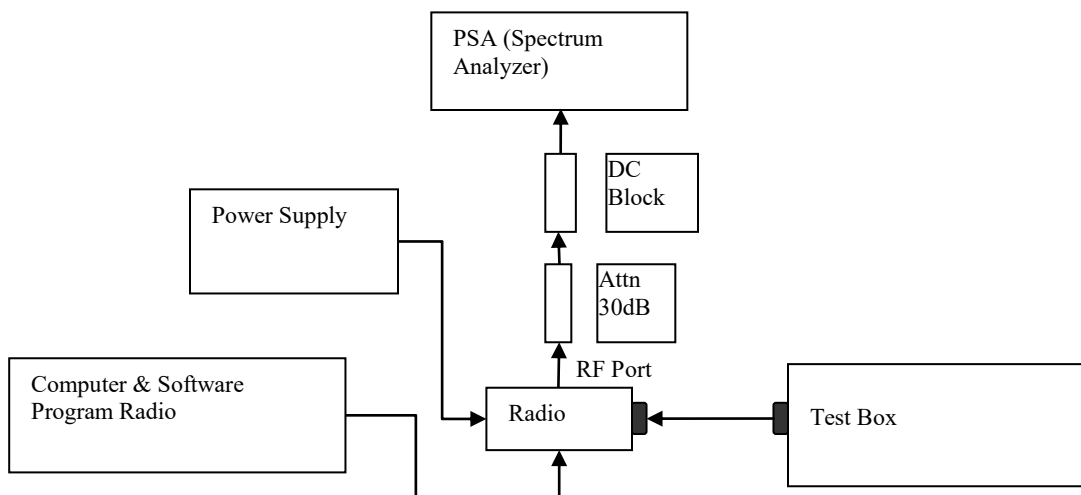



- 1) Program and set radio to operate in desire test frequency and digital mode with modulation. (\*4FSK, C4FM or other digital modulation form).
- 2) Path loss for the measurement included.
- 3) Select the Occupied Bandwidth measurement for 99% and 26dB Emissions Bandwidth Measurement.
- 4) Key in the Fc and Resolution Bandwidth.
- 5) Transmit radio record the occupied Bandwidth frequencies.
- 6) Preset the spectrum analyzer for band edge measurement.
- 7) Key in the lowest and highest channels frequency, span is 60 kHz and Resolution Bandwidth is at least 1% of Emission Bandwidth.
- 8) Save the screen shot.

\*Note:



- All digital modulation modes utilize the same high deviation test pattern, and they are therefore identical. Hence, only F1D plots will be shown.

## 6.7.4. Test Result (Digital)

### Max Power

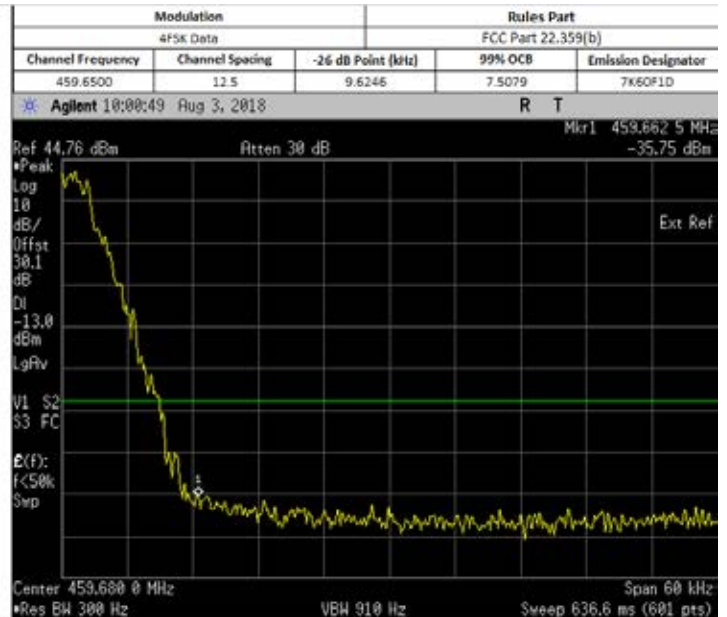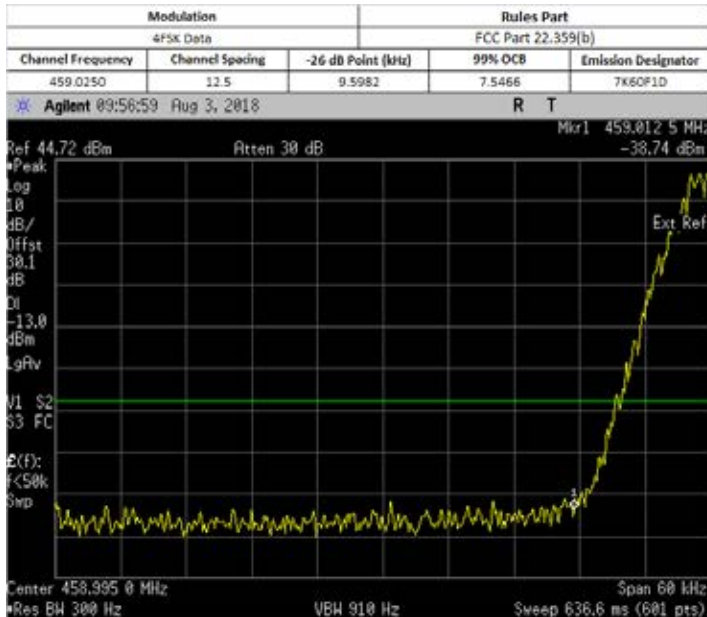

### Low Power

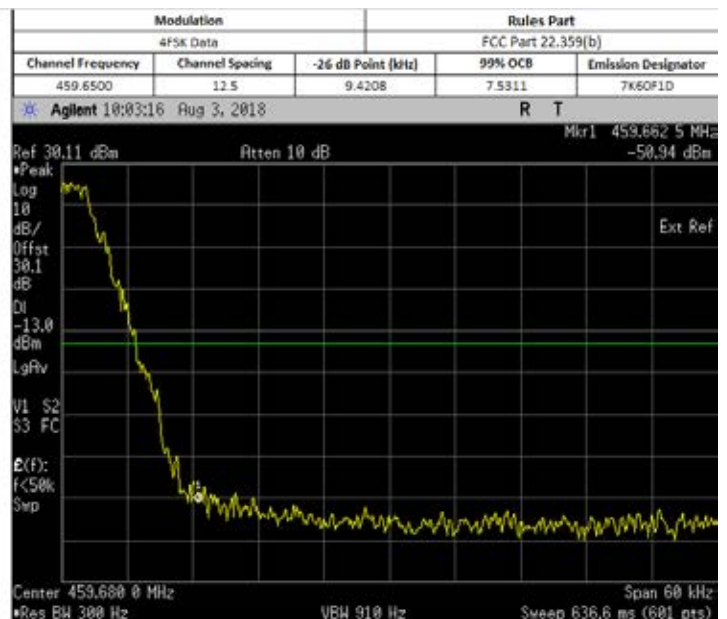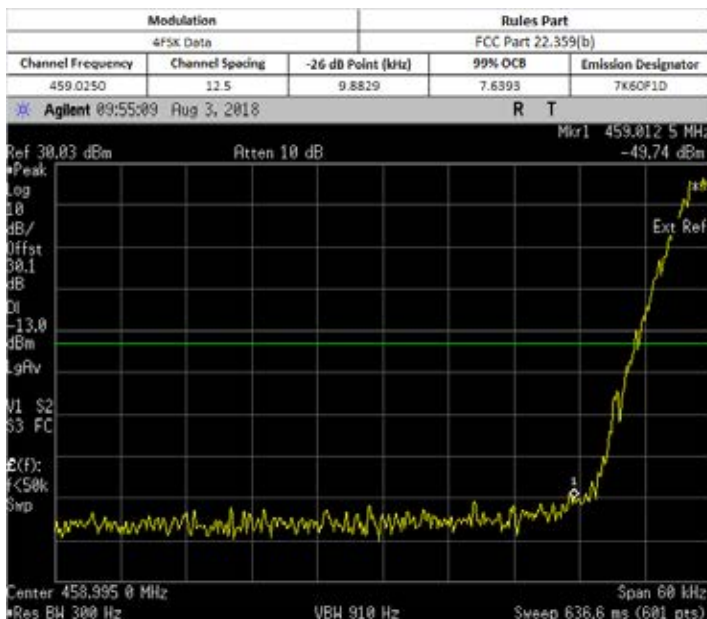


## 6.7.5. Test Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.



## 6.8. Transient Frequency Behavior



### 6.8.1. Test Setup


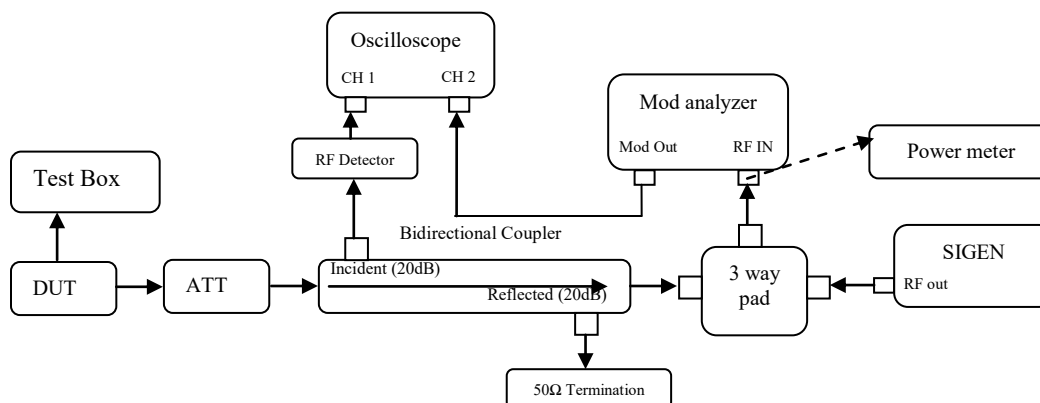


- 1) Connect the setup as figure above.
- 2) Path loss for the measurement included.
- 3) Set on Siggen with the assigned center frequency, internal 1 kHz FM tone.  
FM Deviation: Analog 25kHz Channel Spacing = 25 kHz  
Analog 12.5 kHz Channel Spacing = 12.5 kHz  
C4FM = 12.5 kHz
- 4) Turn on 50 kHz high pass filter and 15 kHz low pass filter on modulation analyzer.
- 5) Supply sufficient attenuation ATT to provide the output power of  $\leq -11\text{dBm}$  into power meter when DUT is keying up.
- 6) Note the power level on power meter and dekey the DUT.
- 7) Adjust the amplitude of the signal generator to the level power meter, maintained the amplitude throughout the rest of the measurement.
- 8) Connect the output to modulation analyzer.
- 9) Reduce 30dB attenuation and transmit the radio to get the trigger line.
- 10) Capture the screen shot for key-up (rising edge) and de-key (falling edge) mode.

6.8.2. Test Result

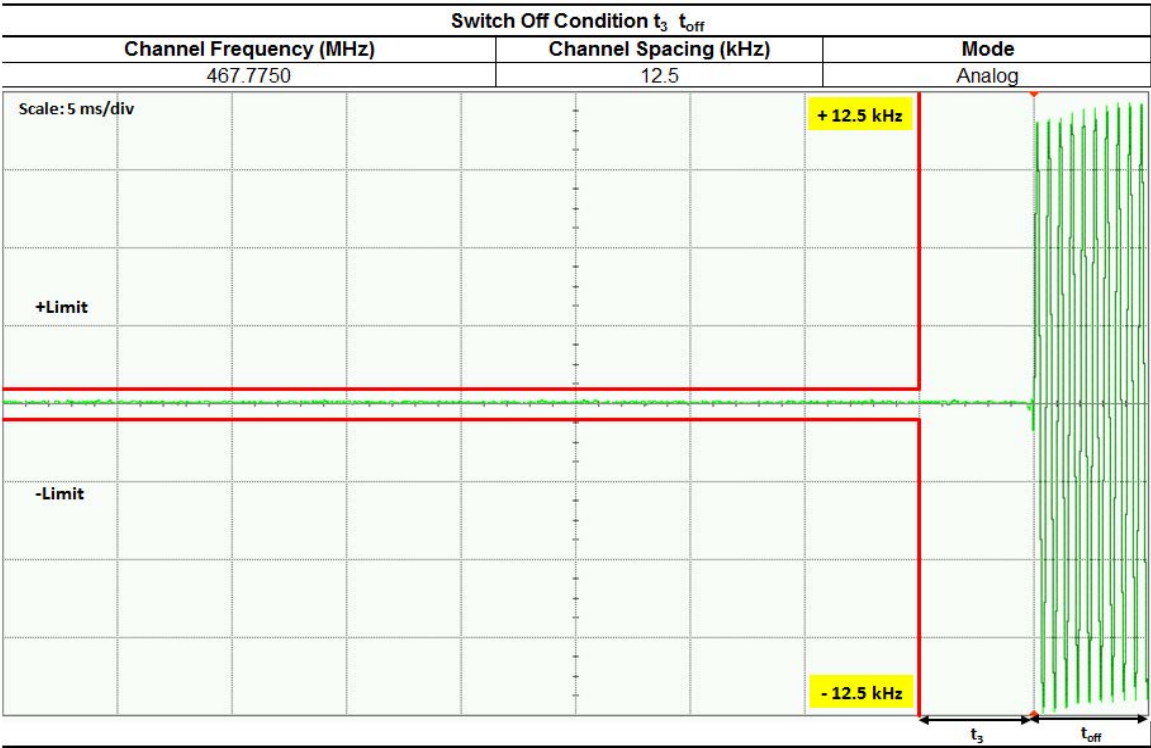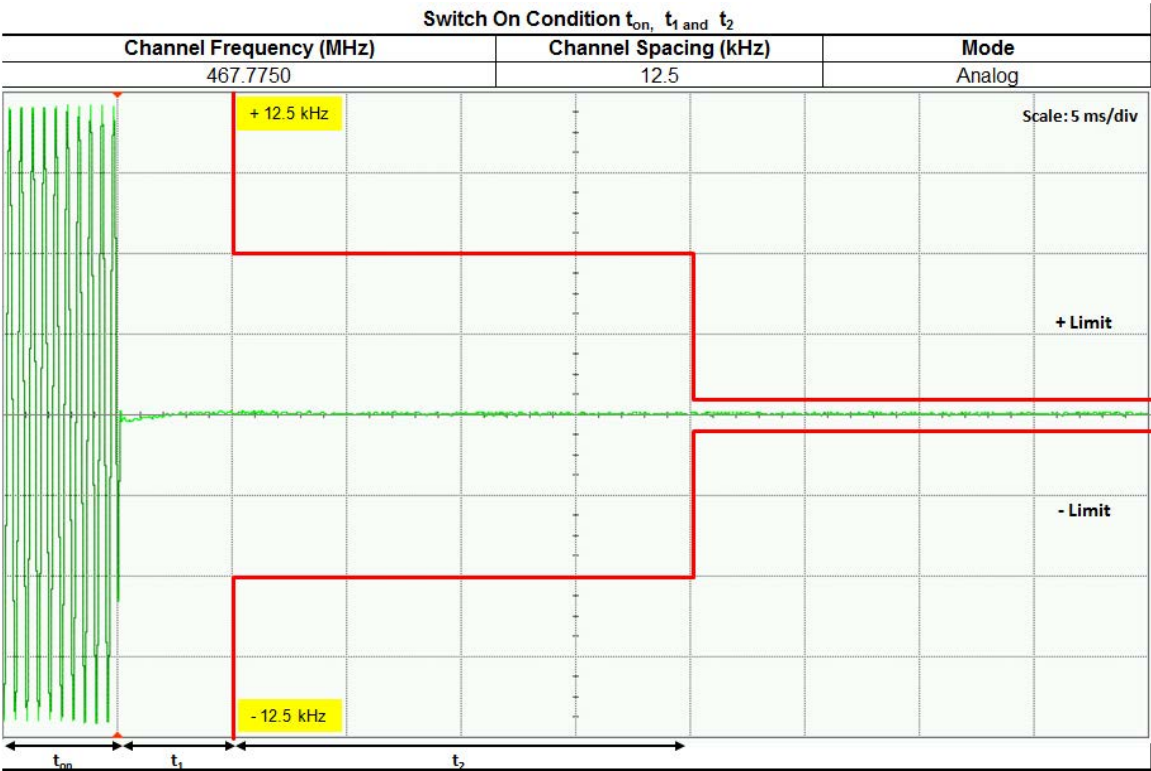

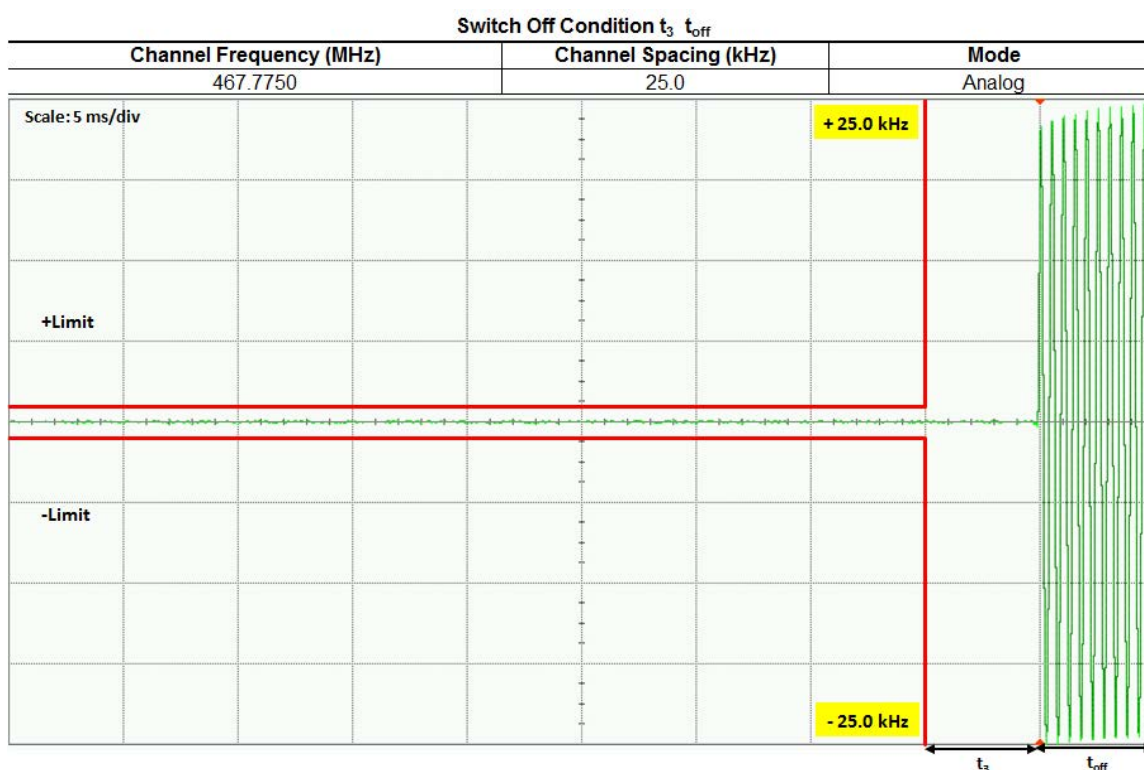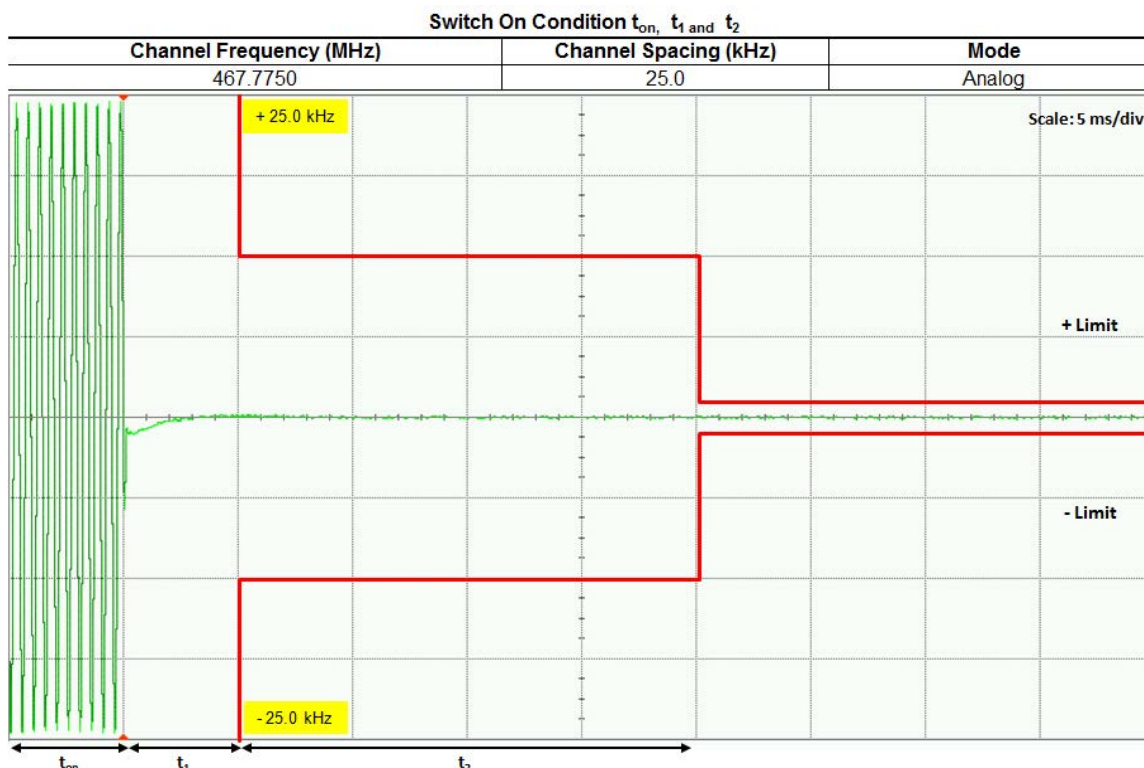

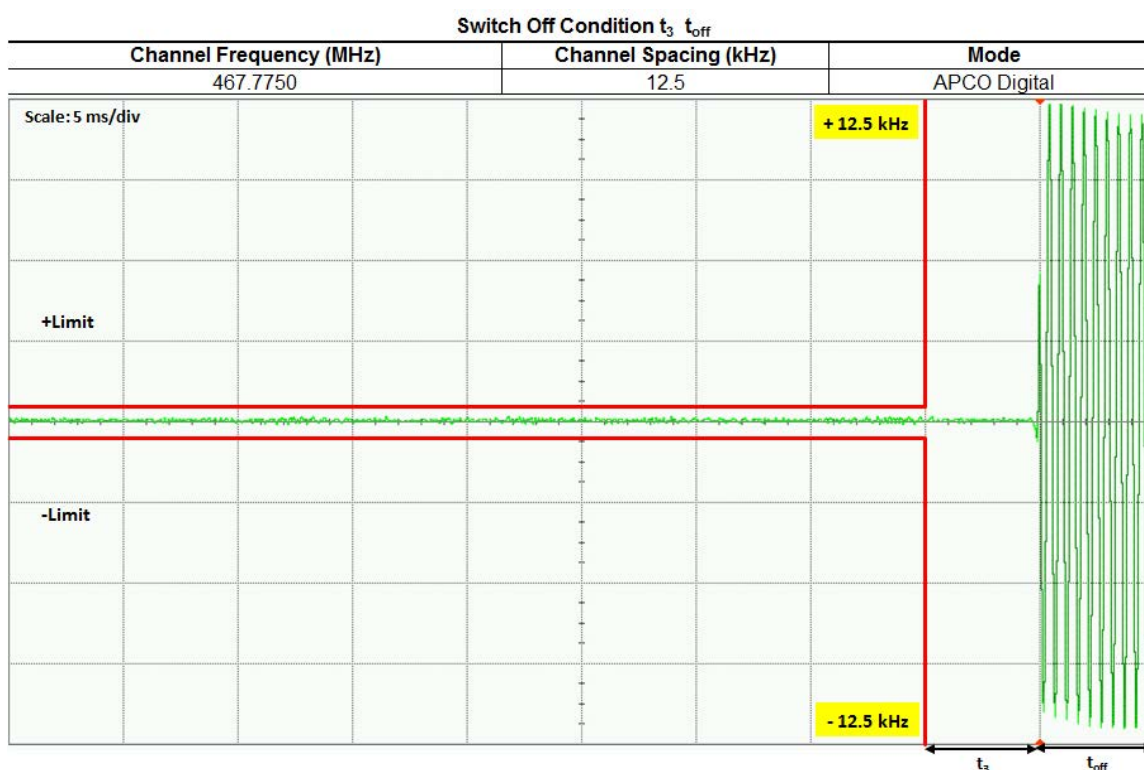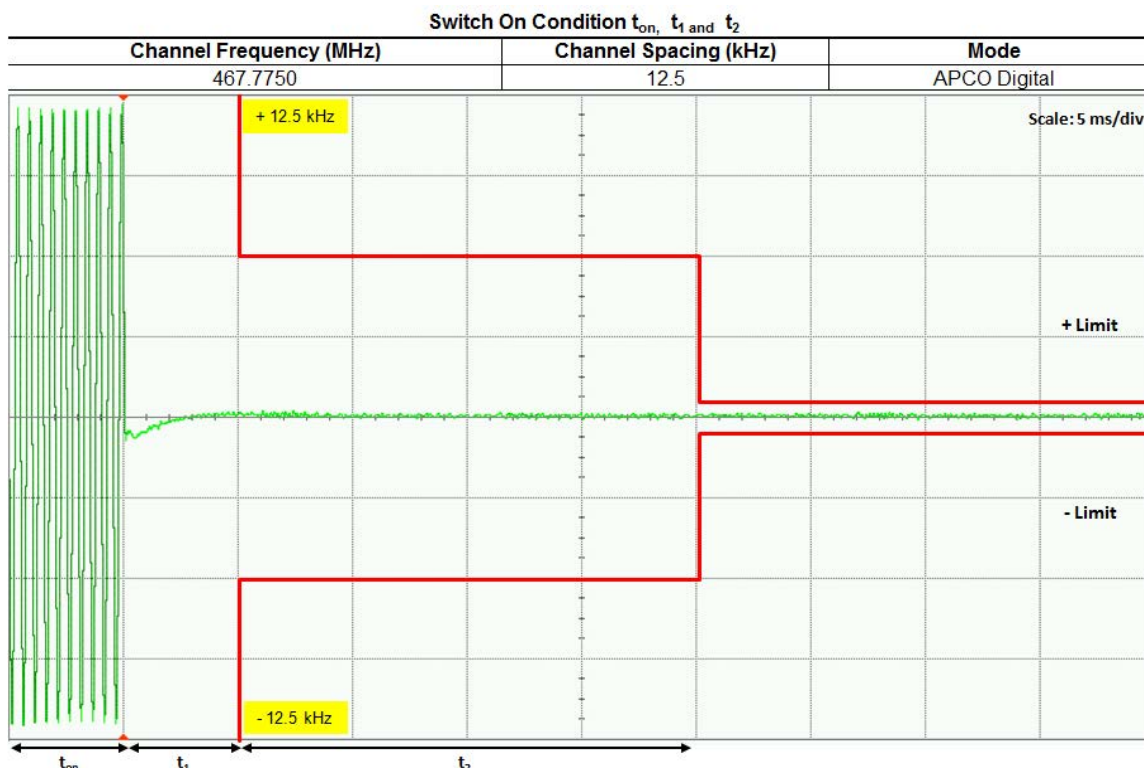

### 6.8.3. Test Limit

Transmitters designed to operate in the 150-174 MHz and 421-512 MHz frequency bands must maintain transient frequencies within the maximum frequency difference limits during the time intervals indicated:

| Time intervals <sup>1 2</sup>                                                       | Maximum frequency difference <sup>3</sup> | All equipment  |                |
|-------------------------------------------------------------------------------------|-------------------------------------------|----------------|----------------|
|                                                                                     |                                           | 150 to 174 MHz | 421 to 512 MHz |
| Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels   |                                           |                |                |
| t <sub>1</sub> <sup>4</sup>                                                         | ±25.0 kHz                                 | 5.0 ms         | 10.0 ms        |
| t <sub>2</sub>                                                                      | ±12.5 kHz                                 | 20.0 ms        | 25.0 ms        |
| t <sub>3</sub> <sup>4</sup>                                                         | ±25.0 kHz                                 | 5.0 ms         | 10.0 ms        |
| Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels |                                           |                |                |
| t <sub>1</sub> <sup>4</sup>                                                         | ±12.5 kHz                                 | 5.0 ms         | 10.0 ms        |
| t <sub>2</sub>                                                                      | ±6.25 kHz                                 | 20.0 ms        | 25.0 ms        |
| t <sub>3</sub> <sup>4</sup>                                                         | ±12.5 kHz                                 | 5.0 ms         | 10.0 ms        |
| Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels |                                           |                |                |
| t <sub>1</sub> <sup>4</sup>                                                         | ±6.25 kHz                                 | 5.0 ms         | 10.0 ms        |
| t <sub>2</sub>                                                                      | ±3.125 kHz                                | 20.0 ms        | 25.0 ms        |
| t <sub>3</sub> <sup>4</sup>                                                         | ±6.25 kHz                                 | 5.0 ms         | 10.0 ms        |

<sup>1</sup>  $t_{on}$  is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.

$t_1$  is the time period immediately following  $t_{on}$ .

$t_2$  is the time period immediately following  $t_1$ .

$t_3$  is the time period from the instant when the transmitter is turned off until  $t_{off}$ .

$t_{off}$  is the instant when the 1 kHz test signal starts to rise.


<sup>2</sup> During the time from the end of  $t_2$  to the beginning of  $t_3$ , the frequency difference must not exceed the limits specified in §90.213.

<sup>3</sup> Difference between the actual transmitter frequency and the assigned transmitter frequency.

<sup>4</sup> If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

## 6.9. Adjacent Channel Power

### 6.9.1. Test Setup (Analog)

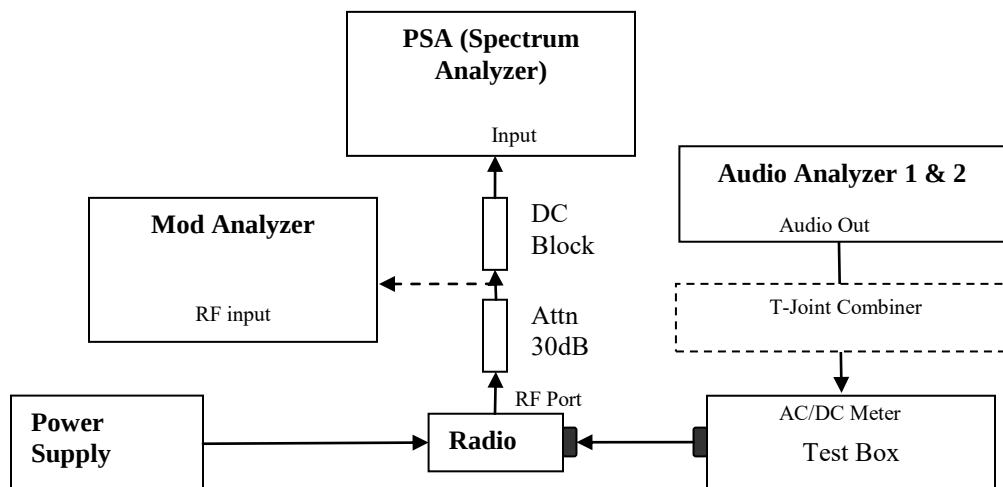


- 1) The DUT transmitter output port was connected to modulation analyzer.
- 2) Transmit the radio and turn on 1<sup>st</sup> audio analyzer with audio frequency 650Hz, 50% rated deviation, and record the amplitude value as AmpT1.
- 3) Turn off Audio analyzer 1 and turn on audio analyzer 2, set the audio frequency to 2.2 kHz and 50% deviation. Record the amplitude as AmpT2.
- 4) Turn both audio analyzers ON and up 10dB amplitude level.
- 5) Connect the output to PSA and set to assigned center frequency.
- 6) Set Span, Resolution Bandwidth and Video Bandwidth per rules part.
- 7) Transmit the radio and record the Adjacent Channel Power value in dBc.

### 6.9.2. Test Result

**NA → Not Applicable**

### 6.9.3. Test Setup (Digital)

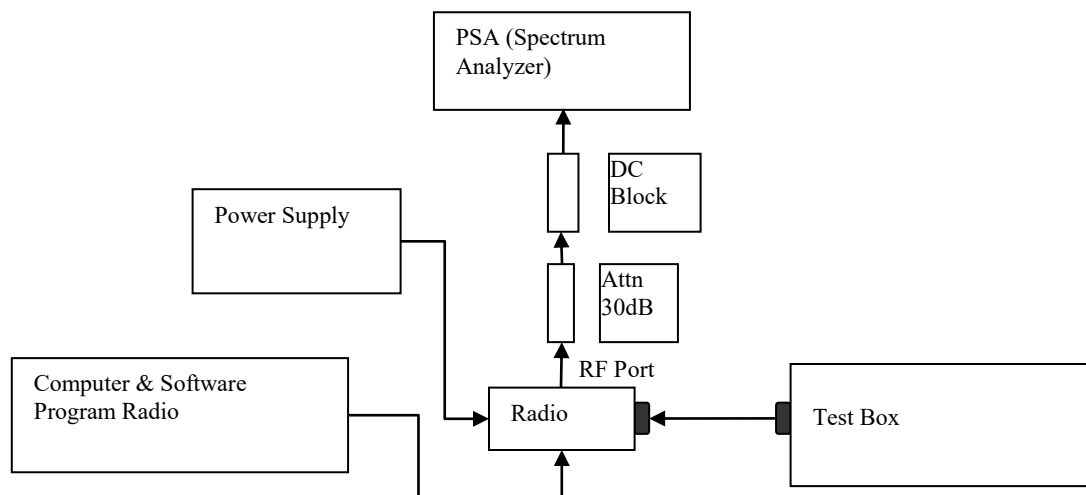

- 1) Program and set radio to operate in desire test frequency and digital mode with modulation. (4FSK, C4FM or other digital modulation form).
- 2) Prepare setup as per picture.
- 3) Turn on the ACP Measurement – Press Measure, ACP.
- 4) Set Span, Resolution Bandwidth and Video Bandwidth as per rules part.
- 5) Transmit the radio and record the Adjacent Channel Power value in dBc.

### 6.9.4. Test Result

**NA → Not Applicable**

# Test Limit

## 12.5 kHz MOBILE TRANSMITTER ACP REQUIREMENTS

| Offset from center frequency (kHz) | Measurement bandwidth (kHz) | Maximum ACP relative (dBc) |
|------------------------------------|-----------------------------|----------------------------|
| 9.375                              | 6.25                        | -40                        |
| 15.625                             | 6.25                        | -60                        |
| 21.875                             | 6.25                        | -60                        |
| 37.50                              | 25.00                       | -60                        |
| 62.50                              | 25.00                       | -65                        |
| 87.50                              | 25.00                       | -65                        |
| 150.00                             | 100                         | -65                        |
| 250.00                             | 100                         | -65                        |
| 350.00                             | 100                         | -65                        |
| >400 to 12 MHz                     | 30 (s)                      | -75                        |
| 12 MHz to paired receive band      | 30 (s)                      | -75                        |
| In the paired receive band         | 30 (s)                      | -100                       |

## 25 kHz MOBILE TRANSMITTER ACP REQUIREMENTS

| Offset from center frequency (kHz) | Measurement bandwidth (kHz) | Maximum ACP relative (dBc) |
|------------------------------------|-----------------------------|----------------------------|
| 15.625                             | 6.25                        | -40                        |
| 21.875                             | 6.25                        | -60                        |
| 37.50                              | 25                          | -60                        |
| 62.50                              | 25                          | -65                        |
| 87.50                              | 25                          | -65                        |
| 150.00                             | 100                         | -65                        |
| 250.00                             | 100                         | -65                        |
| 350.00                             | 100                         | -65                        |
| >400 kHz to 12 MHz                 | 30 (s)                      | -75                        |
| 12 MHz to paired receive band      | 30 (s)                      | -75                        |
| In the paired receive band         | 30 (s)                      | -100                       |

### 12.5 kHz BASE TRANSMITTER ACP REQUIREMENTS


| Offset from center frequency (kHz) | Measurement bandwidth (kHz) | Maximum ACP (dBc) |
|------------------------------------|-----------------------------|-------------------|
| 9.375                              | 6.25                        | -40               |
| 15.625                             | 6.25                        | -60               |
| 21.875                             | 6.25                        | -60               |
| 37.5                               | 25                          | -60               |
| 62.5                               | 25                          | -65               |
| 87.5                               | 25                          | -65               |
| 150                                | 100                         | -65               |
| 250                                | 100                         | -65               |
| 350.00                             | 100                         | -65               |
| >400 kHz to 12 MHz                 | 30 (s)                      | -80               |
| 12 MHz to paired receive band      | 30 (s)                      | -80               |
| In the paired receive band         | 30 (s)                      | <sup>1</sup> -85  |

### 25 kHz BASE TRANSMITTER ACP REQUIREMENTS

| Offset from center frequency (kHz) | Measurement bandwidth (kHz) | Maximum ACP (dBc) |
|------------------------------------|-----------------------------|-------------------|
| 15.625                             | 6.25                        | -40               |
| 21.875                             | 6.25                        | -60               |
| 37.5                               | 25                          | -60               |
| 62.5                               | 25                          | -65               |
| 87.5                               | 25                          | -65               |
| 150                                | 100                         | -65               |
| 250                                | 100                         | -65               |
| 350                                | 100.00                      | -65               |
| >400 kHz to 12 MHz                 | 30 (s)                      | -80               |
| 12 MHz to paired receive band      | 30 (s)                      | -80               |
| In the paired receive band         | 30 (s)                      | <sup>1</sup> -85  |

## 6.10. Conducted Spurious Emission


### 6.10.1. Test Setup

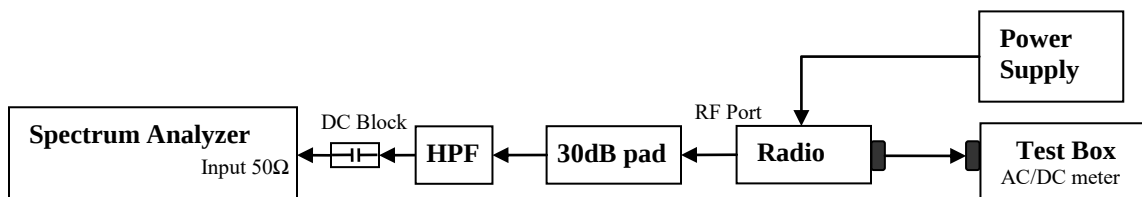

- 1) The DUT transmitter output port was connected to Spectrum Analyzer with above setup.
- 2) Program and set radio to operate in desire test frequency and mode. (Analog / digital modulation form).
- 3) Path loss for the measurement included.
- 4) Set the PSA Resolution Bandwidth as per rules part.
- 5) Set the Ref offset from the pathloss offset calibration file.
- 6) Adjust the center frequency of the spectrum analyzer for incremental coverage of the range from:
  - a. 9 KHz to  $F_c - \text{Test Bandwidth}$
  - b.  $F_c + \text{Test Bandwidth}$  to  $2F_c - 5\text{MHz}$ .
- 7) Key up the DUT, Peak Search the highest Spur and record the levels of spurious emissions
- 8) Dekey the DUT.
- 9) Turn On High Pass Filter path and Key up the DUT.
- 10) Adjust the PSA Freq for incremental coverage of range from  $2F_c$  to  $10F_c$
- 11) Key up the DUT and record the highest spur levels of spurious emissions.


## 6.10.2. Test Result (Analog)

**Analog: 406.2 MHz, 25.0kHz Channel Spacing, Max Power  
(Not For FCC Review)**

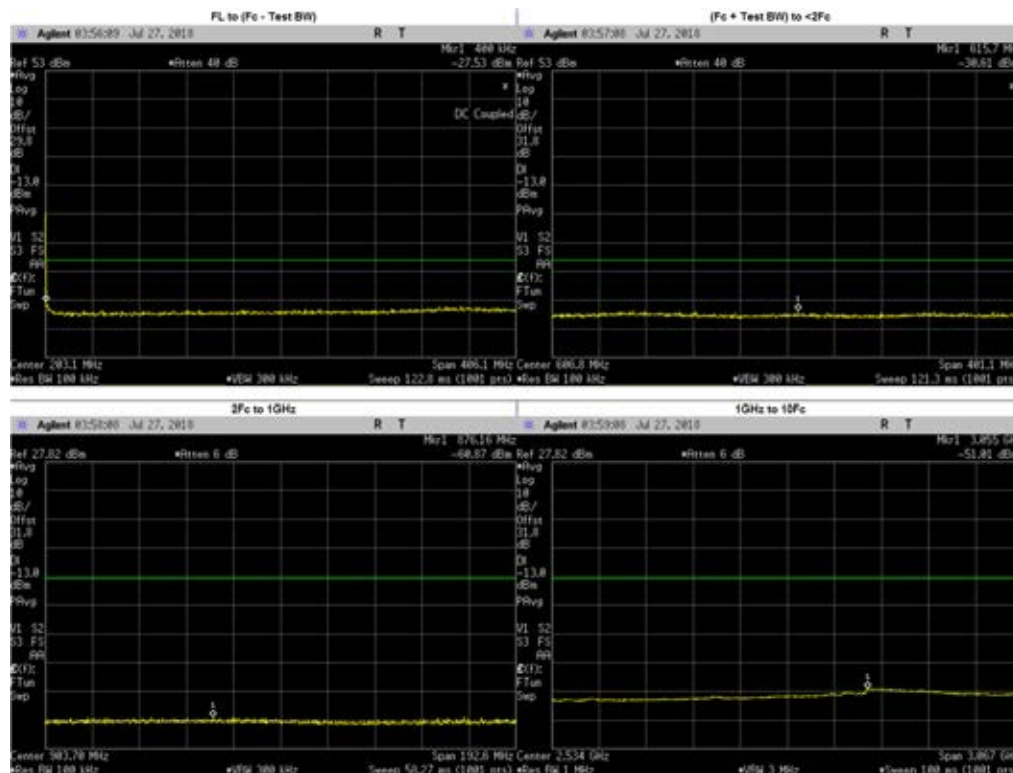


| Frequency Range        | Highest Spur Frequency (MHz) | Spurious Level (dBm) | Failing Limit (dBm) | Results |
|------------------------|------------------------------|----------------------|---------------------|---------|
| FL to (Fc - Test BW)   | 358.6265                     | -27.48               | -13                 | PASS    |
| (Fc + Test BW) to <2Fc | 615.6530                     | -30.61               | -13                 | PASS    |
| 2Fc to 1GHz            | 876.1582                     | -60.87               | -13                 | PASS    |
|                        | 812.4000                     | -62.16               | -13                 | PASS    |
| 1GHz to 10Fc           | 3054.8900                    | -51.01               | -13                 | PASS    |
|                        | 1218.6000                    | -55.16               | -13                 | PASS    |
|                        | 1624.8000                    | -54.87               | -13                 | PASS    |
|                        | 2031.0000                    | -54.42               | -13                 | PASS    |
|                        | 2437.2000                    | -54.06               | -13                 | PASS    |
|                        | 2843.4000                    | -53.32               | -13                 | PASS    |
|                        | 3249.6000                    | -51.88               | -13                 | PASS    |
|                        | 3655.8000                    | -53.07               | -13                 | PASS    |
|                        | 4062.0000                    | -52.87               | -13                 | PASS    |

**Analog: 406.2 MHz, 25.0kHz Channel Spacing, Low Power**  
**(Not For FCC Review)**

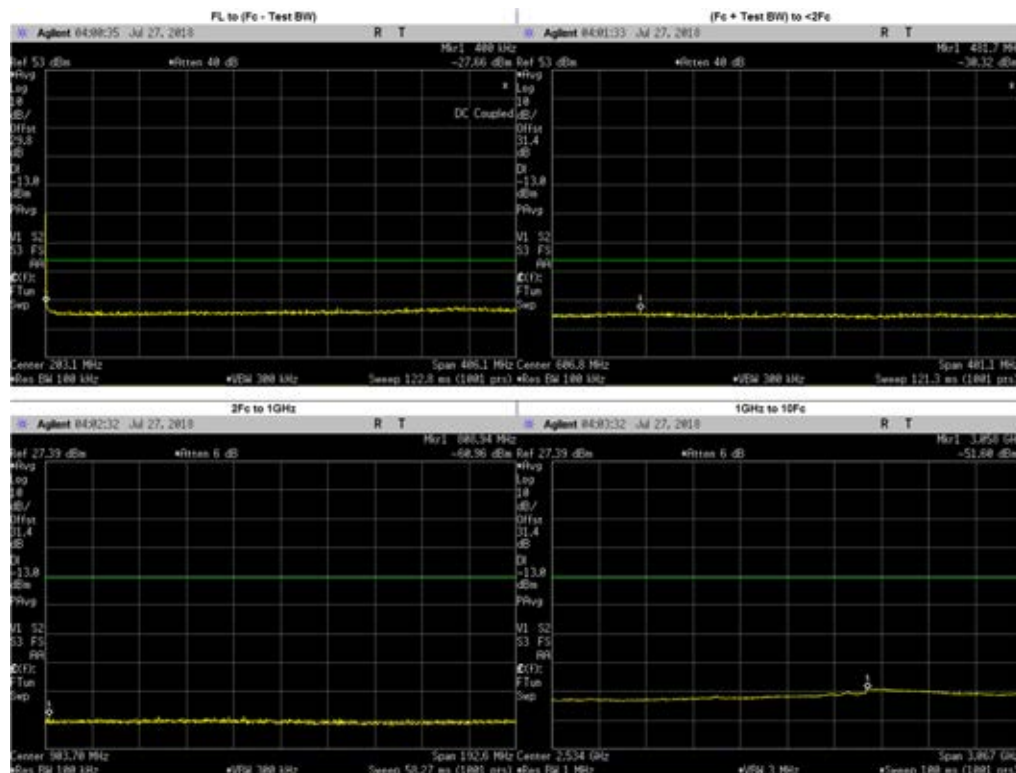


| Frequency Range        | Highest Spur Frequency (MHz) | Spurious Level (dBm) | Failing Limit (dBm) | Results |
|------------------------|------------------------------|----------------------|---------------------|---------|
| FL to (Fc - Test BW)   | 361.0633                     | -27.54               | -13                 | PASS    |
| (Fc + Test BW) to <2Fc | 481.6708                     | -30.32               | -13                 | PASS    |
| 2Fc to 1GHz            | 808.9408                     | -60.96               | -13                 | PASS    |
|                        | 812.4000                     | -63.41               | -13                 | PASS    |
| 1GHz to 10Fc           | 3057.9570                    | -51.60               | -13                 | PASS    |
|                        | 1218.6000                    | -55.39               | -13                 | PASS    |
|                        | 1624.8000                    | -55.50               | -13                 | PASS    |
|                        | 2031.0000                    | -54.86               | -13                 | PASS    |
|                        | 2437.2000                    | -54.54               | -13                 | PASS    |
|                        | 2843.4000                    | -53.79               | -13                 | PASS    |
|                        | 3249.6000                    | -52.18               | -13                 | PASS    |
|                        | 3655.8000                    | -53.37               | -13                 | PASS    |
|                        | 4062.0000                    | -53.22               | -13                 | PASS    |

**Analog: 450.65 MHz, 25.0kHz Channel Spacing, Max Power**  
**FCC Part 74**

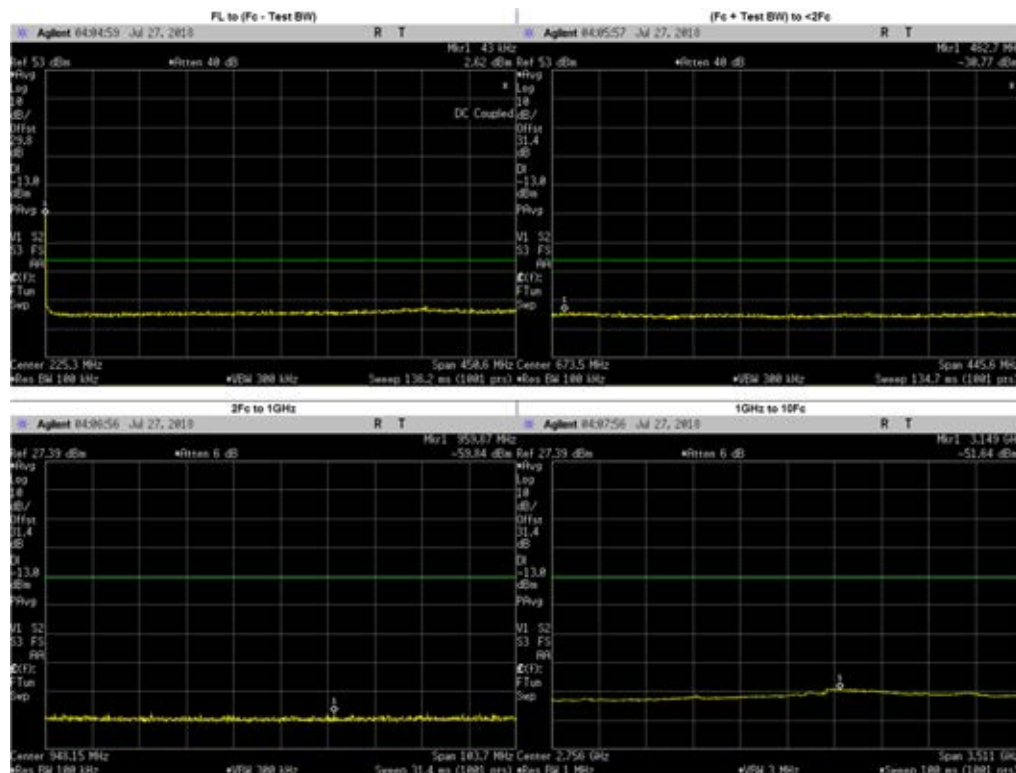


| Frequency Range        | Highest Spur Frequency (MHz) | Spurious Level (dBm) | Failing Limit (dBm) | Results |
|------------------------|------------------------------|----------------------|---------------------|---------|
| FL to (Fc - Test BW)   | 364.9822                     | -27.63               | -13                 | PASS    |
| (Fc + Test BW) to <2Fc | 462.7378                     | -30.77               | -13                 | PASS    |
| 2Fc to 1GHz            | 959.8681                     | -59.84               | -13                 | PASS    |
|                        | 901.3000                     | -61.63               | -13                 | PASS    |
| 1GHz to 10Fc           | 3149.0380                    | -51.64               | -13                 | PASS    |
|                        | 1351.9500                    | -55.65               | -13                 | PASS    |
|                        | 1802.6000                    | -55.31               | -13                 | PASS    |
|                        | 2253.2500                    | -54.96               | -13                 | PASS    |
|                        | 2703.9000                    | -54.17               | -13                 | PASS    |
|                        | 3154.5500                    | -51.87               | -13                 | PASS    |
|                        | 3605.2000                    | -53.39               | -13                 | PASS    |
|                        | 4055.8500                    | -53.23               | -13                 | PASS    |
|                        | 4506.5000                    | -54.34               | -13                 | PASS    |

**Analog: 450.65 MHz, 25.0kHz Channel Spacing, Low Power  
FCC Part 74**

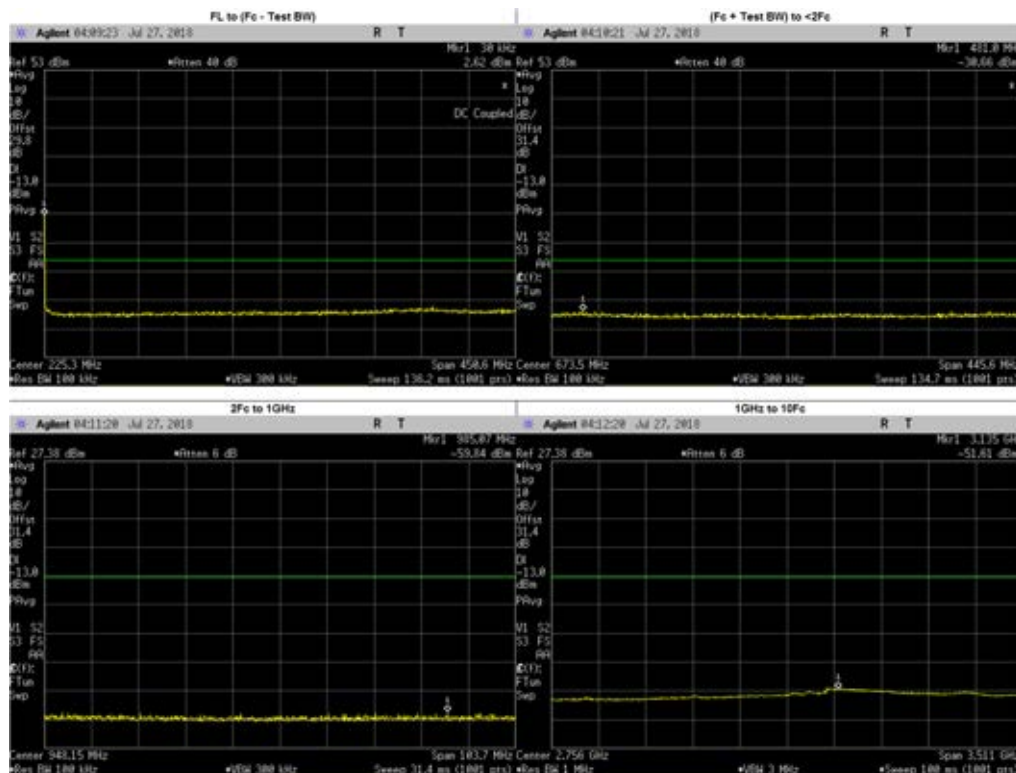


| Frequency Range        | Highest Spur Frequency (MHz) | Spurious Level (dBm) | Failing Limit (dBm) | Results |
|------------------------|------------------------------|----------------------|---------------------|---------|
| FL to (Fc - Test BW)   | 371.2904                     | -27.42               | -13                 | PASS    |
| (Fc + Test BW) to <2Fc | 481.0071                     | -30.66               | -13                 | PASS    |
| 2Fc to 1GHz            | 985.0672                     | -59.84               | -13                 | PASS    |
|                        | 901.3000                     | -61.72               | -13                 | PASS    |
| 1GHz to 10Fc           | 3134.9920                    | -51.61               | -13                 | PASS    |
|                        | 1351.9500                    | -55.52               | -13                 | PASS    |
|                        | 1802.6000                    | -55.22               | -13                 | PASS    |
|                        | 2253.2500                    | -54.91               | -13                 | PASS    |
|                        | 2703.9000                    | -54.12               | -13                 | PASS    |
|                        | 3154.5500                    | -51.86               | -13                 | PASS    |
|                        | 3605.2000                    | -53.22               | -13                 | PASS    |
|                        | 4055.8500                    | -53.28               | -13                 | PASS    |
|                        | 4506.5000                    | -54.31               | -13                 | PASS    |

**Analog: 459.125 MHz, 25.0kHz Channel Spacing, Max Power**  
**FCC Part 22**

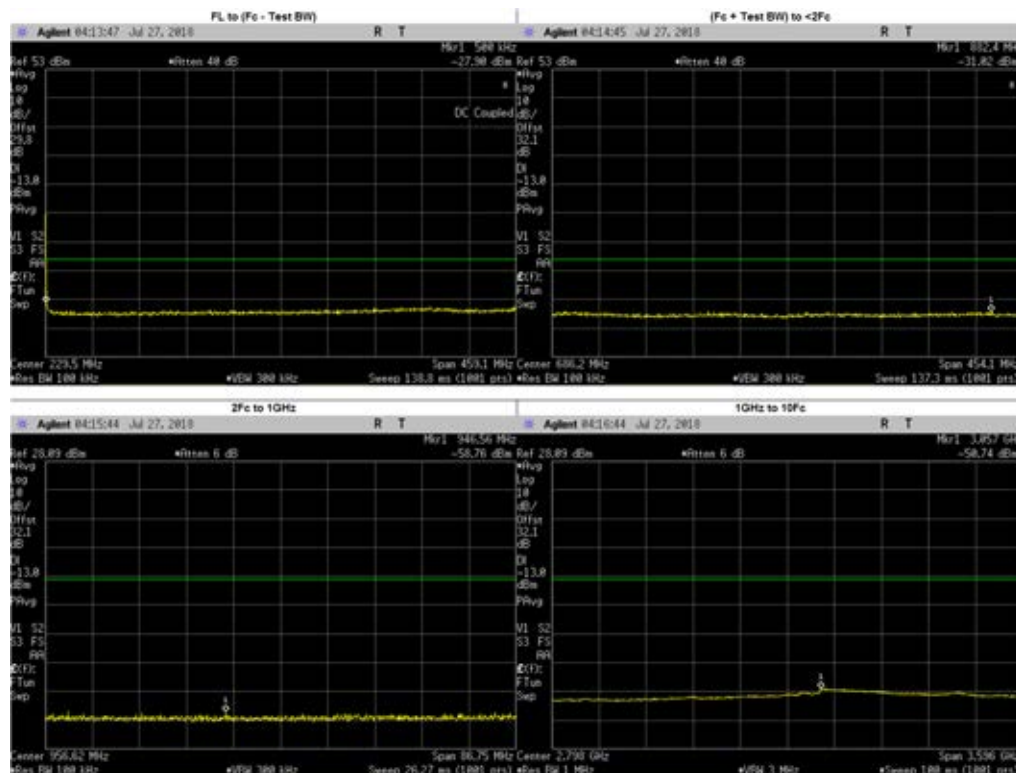


| Frequency Range        | Highest Spur Frequency (MHz) | Spurious Level (dBm) | Failing Limit (dBm) | Results |
|------------------------|------------------------------|----------------------|---------------------|---------|
| FL to (Fc - Test BW)   | 374.6013                     | -27.99               | -13                 | PASS    |
| (Fc + Test BW) to <2Fc | 882.3734                     | -31.02               | -13                 | PASS    |
| 2Fc to 1GHz            | 946.5620                     | -58.76               | -13                 | PASS    |
|                        | 918.2500                     | -60.54               | -13                 | PASS    |
| 1GHz to 10Fc           | 3057.0550                    | -50.74               | -13                 | PASS    |
|                        | 1377.3750                    | -54.93               | -13                 | PASS    |
|                        | 1836.5000                    | -54.51               | -13                 | PASS    |
|                        | 2295.6250                    | -54.22               | -13                 | PASS    |
|                        | 2754.7500                    | -53.45               | -13                 | PASS    |
|                        | 3213.8750                    | -51.50               | -13                 | PASS    |
|                        | 3673.0000                    | -52.80               | -13                 | PASS    |
|                        | 4132.1250                    | -52.55               | -13                 | PASS    |
|                        | 4591.2500                    | -53.89               | -13                 | PASS    |

**Analog: 459.125 MHz, 25.0kHz Channel Spacing, Low Power**  
**FCC Part 22**

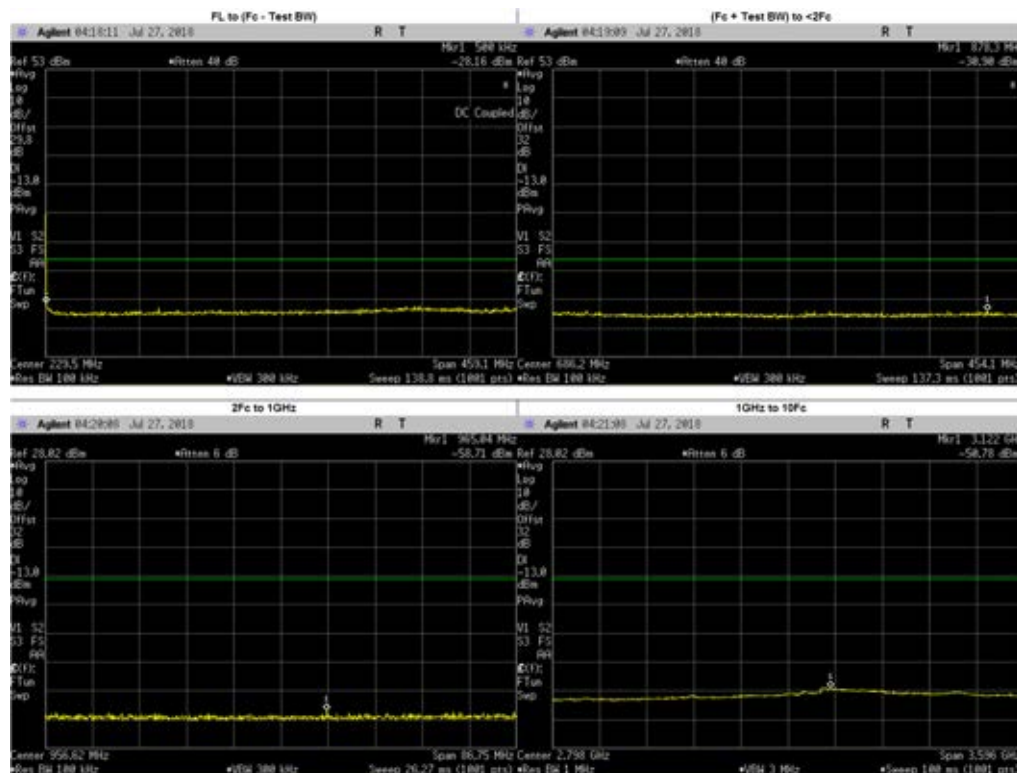


| Frequency Range        | Highest Spur Frequency (MHz) | Spurious Level (dBm) | Failing Limit (dBm) | Results |
|------------------------|------------------------------|----------------------|---------------------|---------|
| FL to (Fc - Test BW)   | 364.9611                     | -27.82               | -13                 | PASS    |
| (Fc + Test BW) to <2Fc | 878.2867                     | -30.90               | -13                 | PASS    |
| 2Fc to 1GHz            | 965.0398                     | -58.71               | -13                 | PASS    |
|                        | 918.2500                     | -61.75               | -13                 | PASS    |
| 1GHz to 10Fc           | 3121.7870                    | -50.78               | -13                 | PASS    |
|                        | 1377.3750                    | -54.93               | -13                 | PASS    |
|                        | 1836.5000                    | -54.62               | -13                 | PASS    |
|                        | 2295.6250                    | -54.11               | -13                 | PASS    |
|                        | 2754.7500                    | -53.28               | -13                 | PASS    |
|                        | 3213.8750                    | -51.40               | -13                 | PASS    |
|                        | 3673.0000                    | -52.96               | -13                 | PASS    |
|                        | 4132.1250                    | -52.57               | -13                 | PASS    |
|                        | 4591.2500                    | -53.98               | -13                 | PASS    |

**Analog: 467.775 MHz, 25.0kHz Channel Spacing, Max Power  
RSS-119**

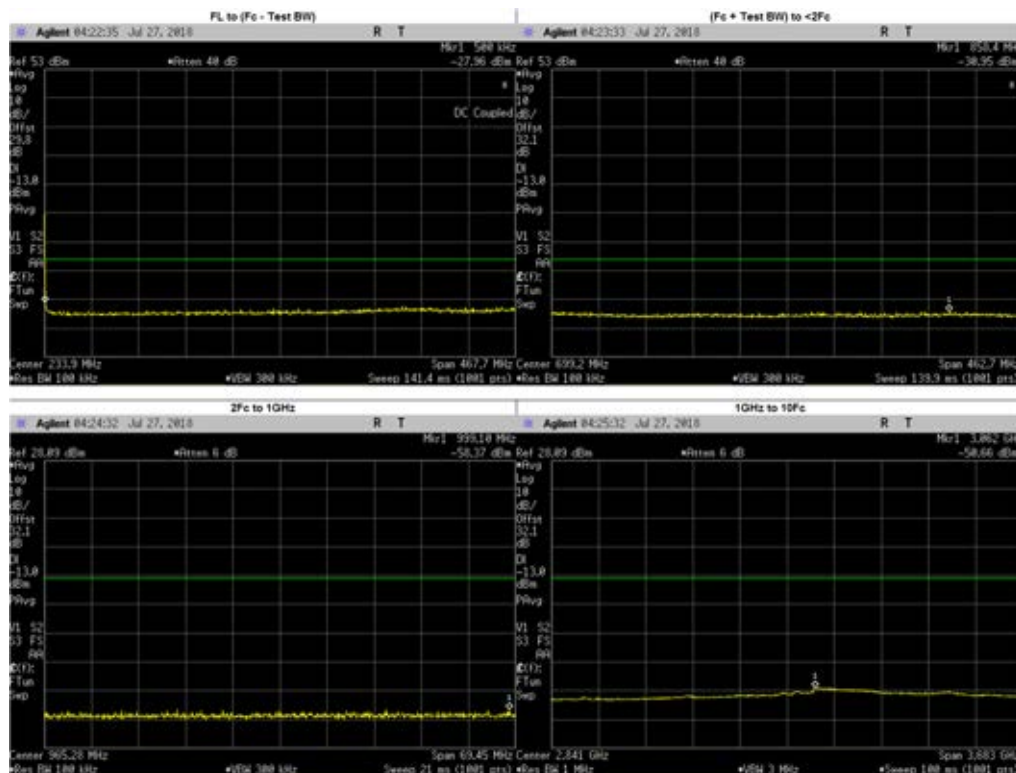


| Frequency Range        | Highest Spur Frequency (MHz) | Spurious Level (dBm) | Failing Limit (dBm) | Results |
|------------------------|------------------------------|----------------------|---------------------|---------|
| FL to (Fc - Test BW)   | 355.0003                     | -27.85               | -13                 | PASS    |
| (Fc + Test BW) to <2Fc | 858.3660                     | -30.95               | -13                 | PASS    |
| 2Fc to 1GHz            | 999.0972                     | -58.37               | -13                 | PASS    |
|                        | 935.5500                     | -61.08               | -13                 | PASS    |
| 1GHz to 10Fc           | 3062.3400                    | -50.66               | -13                 | PASS    |
|                        | 1403.3250                    | -54.62               | -13                 | PASS    |
|                        | 1871.1000                    | -54.62               | -13                 | PASS    |
|                        | 2338.8750                    | -54.07               | -13                 | PASS    |
|                        | 2806.6500                    | -52.75               | -13                 | PASS    |
|                        | 3274.4250                    | -51.71               | -13                 | PASS    |
|                        | 3742.2000                    | -52.81               | -13                 | PASS    |
|                        | 4209.9750                    | -53.04               | -13                 | PASS    |
|                        | 4677.7500                    | -53.75               | -13                 | PASS    |

**Analog: 467.775 MHz, 25.0kHz Channel Spacing, Low Power**  
**RSS-119**

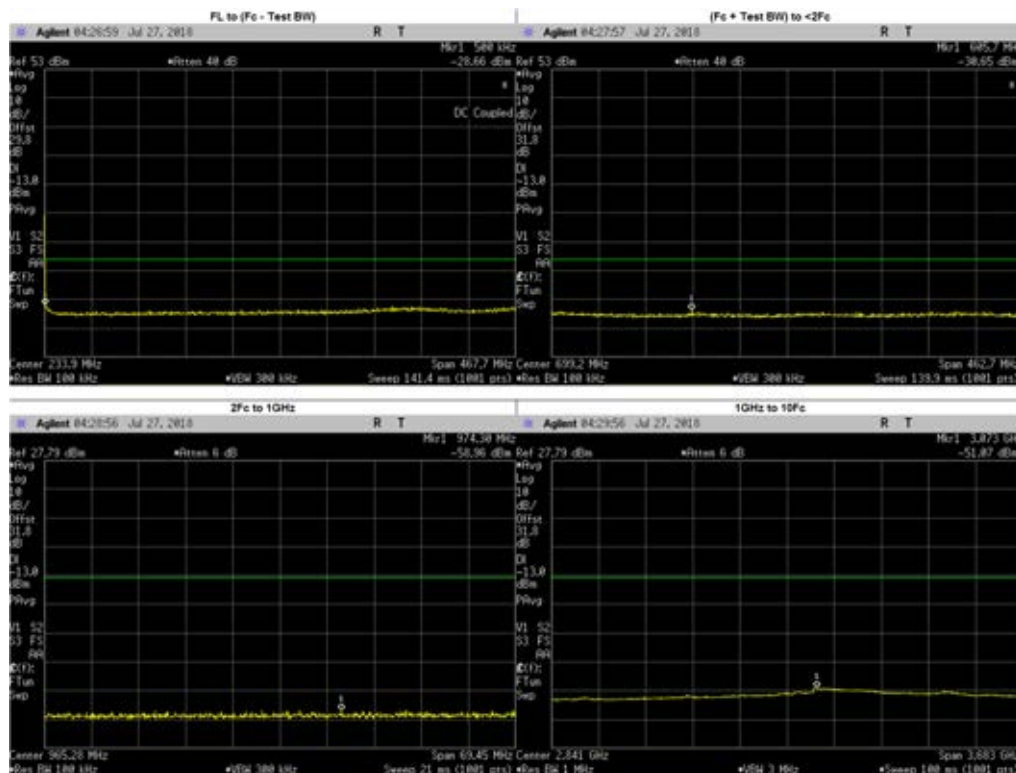


| Frequency Range        | Highest Spur Frequency (MHz) | Spurious Level (dBm) | Failing Limit (dBm) | Results |
|------------------------|------------------------------|----------------------|---------------------|---------|
| FL to (Fc - Test BW)   | 372.3055                     | -27.90               | -13                 | PASS    |
| (Fc + Test BW) to <2Fc | 605.7218                     | -30.65               | -13                 | PASS    |
| 2Fc to 1GHz            | 974.3035                     | -58.96               | -13                 | PASS    |
|                        | 935.5500                     | -61.04               | -13                 | PASS    |
| 1GHz to 10Fc           | 3073.3880                    | -51.07               | -13                 | PASS    |
|                        | 1403.3250                    | -55.20               | -13                 | PASS    |
|                        | 1871.1000                    | -54.87               | -13                 | PASS    |
|                        | 2338.8750                    | -54.31               | -13                 | PASS    |
|                        | 2806.6500                    | -53.23               | -13                 | PASS    |
|                        | 3274.4250                    | -52.04               | -13                 | PASS    |
|                        | 3742.2000                    | -53.14               | -13                 | PASS    |
|                        | 4209.9750                    | -53.40               | -13                 | PASS    |
|                        | 4677.7500                    | -54.14               | -13                 | PASS    |

**Analog: 459.025 MHz, 25.0kHz Channel Spacing, Max Power**  
**FCC Part 22**

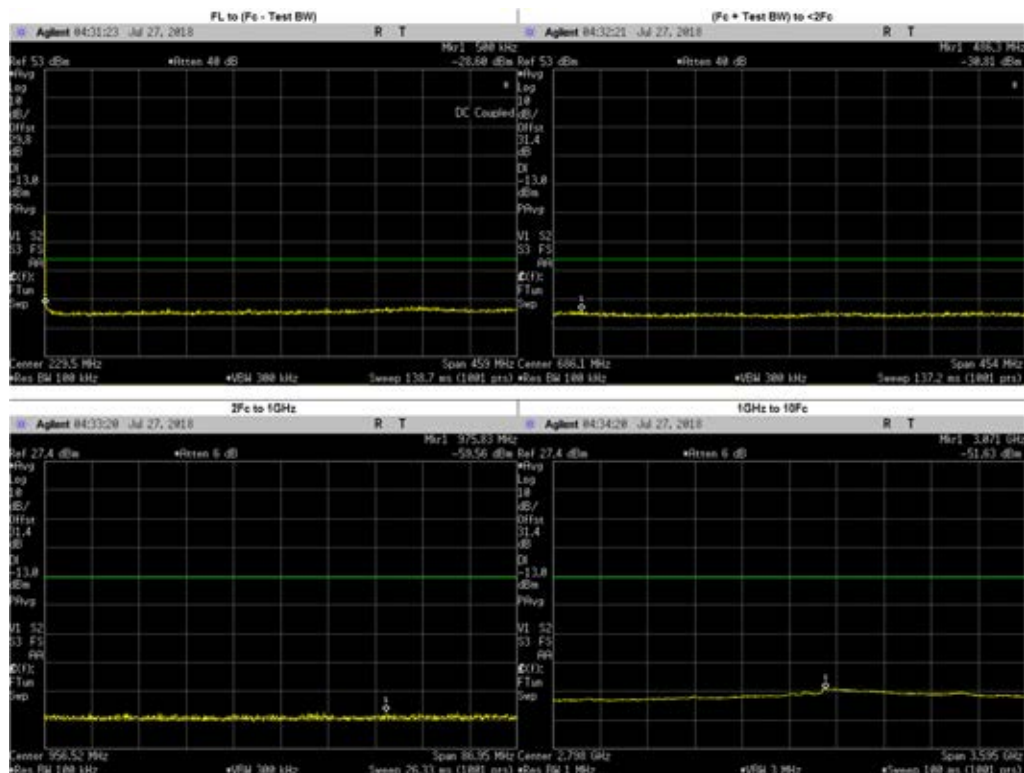


| Frequency Range        | Highest Spur Frequency (MHz) | Spurious Level (dBm) | Failing Limit (dBm) | Results |
|------------------------|------------------------------|----------------------|---------------------|---------|
| FL to (Fc - Test BW)   | 364.4226                     | -27.80               | -13                 | PASS    |
| (Fc + Test BW) to <2Fc | 486.3199                     | -30.81               | -13                 | PASS    |
| 2Fc to 1GHz            | 975.8279                     | -59.56               | -13                 | PASS    |
|                        | 918.0500                     | -61.81               | -13                 | PASS    |
| 1GHz to 10Fc           | 3070.8640                    | -51.63               | -13                 | PASS    |
|                        | 1377.0750                    | -55.52               | -13                 | PASS    |
|                        | 1836.1000                    | -55.30               | -13                 | PASS    |
|                        | 2295.1250                    | -54.85               | -13                 | PASS    |
|                        | 2754.1500                    | -54.08               | -13                 | PASS    |
|                        | 3213.1750                    | -52.05               | -13                 | PASS    |
|                        | 3672.2000                    | -53.49               | -13                 | PASS    |
|                        | 4131.2250                    | -53.29               | -13                 | PASS    |
|                        | 4590.2500                    | -54.33               | -13                 | PASS    |

**Analog: 459.025 MHz, 25.0kHz Channel Spacing, Low Power**  
**FCC Part 22**

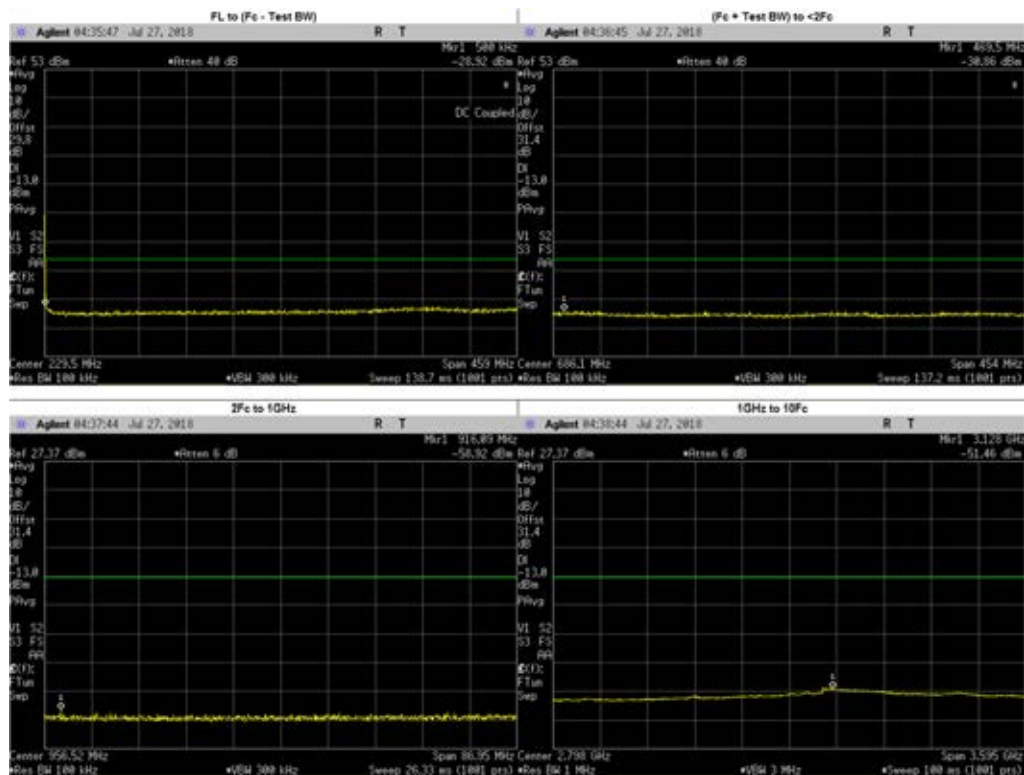


| Frequency Range        | Highest Spur Frequency (MHz) | Spurious Level (dbm) | Failing Limit (dBm) | Results |
|------------------------|------------------------------|----------------------|---------------------|---------|
| FL to (Fc - Test BW)   | 376.8145                     | -27.86               | -13                 | PASS    |
| (Fc + Test BW) to <2Fc | 469.5231                     | -30.86               | -13                 | PASS    |
| 2Fc to 1GHz            | 916.0933                     | -58.92               | -13                 | PASS    |
|                        | 918.0500                     | -62.22               | -13                 | PASS    |
| 1GHz to 10Fc           | 3128.3880                    | -51.46               | -13                 | PASS    |
| 1GHz to 10Fc           | 1377.0750                    | -55.42               | -13                 | PASS    |
|                        | 1836.1000                    | -55.29               | -13                 | PASS    |
|                        | 2295.1250                    | -54.83               | -13                 | PASS    |
|                        | 2754.1500                    | -54.18               | -13                 | PASS    |
|                        | 3213.1750                    | -52.09               | -13                 | PASS    |
|                        | 3672.2000                    | -53.40               | -13                 | PASS    |
|                        | 4131.2250                    | -53.39               | -13                 | PASS    |
|                        | 4590.2500                    | -54.56               | -13                 | PASS    |

**Analog: 459.65 MHz, 25.0kHz Channel Spacing, Max Power**  
**FCC Part 22**

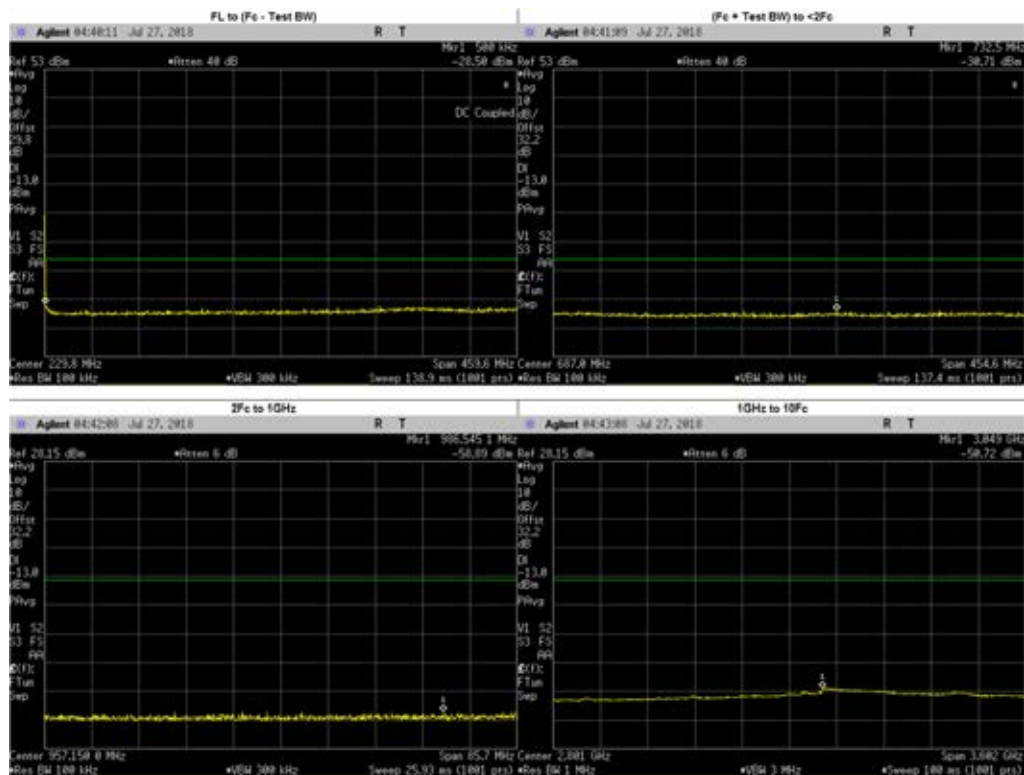

| Frequency Range        | Highest Spur Frequency (MHz) | Spurious Level (dBm) | Failing Limit (dBm) | Results |
|------------------------|------------------------------|----------------------|---------------------|---------|
| FL to (Fc - Test BW)   | 358.9443                     | -27.93               | -13                 | PASS    |
| (Fc + Test BW) to <2Fc | 732.4627                     | -30.71               | -13                 | PASS    |
| 2Fc to 1GHz            | 986.5451                     | -58.89               | -13                 | PASS    |
|                        | 919.3000                     | -60.86               | -13                 | PASS    |
| 1GHz to 10Fc           | 3049.2530                    | -50.72               | -13                 | PASS    |
|                        | 1378.9500                    | -54.90               | -13                 | PASS    |
|                        | 1838.6000                    | -54.62               | -13                 | PASS    |
|                        | 2298.2500                    | -54.09               | -13                 | PASS    |
|                        | 2757.9000                    | -53.24               | -13                 | PASS    |
|                        | 3217.5500                    | -51.50               | -13                 | PASS    |
|                        | 3677.2000                    | -52.81               | -13                 | PASS    |
|                        | 4136.8500                    | -52.41               | -13                 | PASS    |
|                        | 4596.5000                    | -53.71               | -13                 | PASS    |


**Analog: 459.65 MHz, 25.0kHz Channel Spacing, Low Power**  
**FCC Part 22**

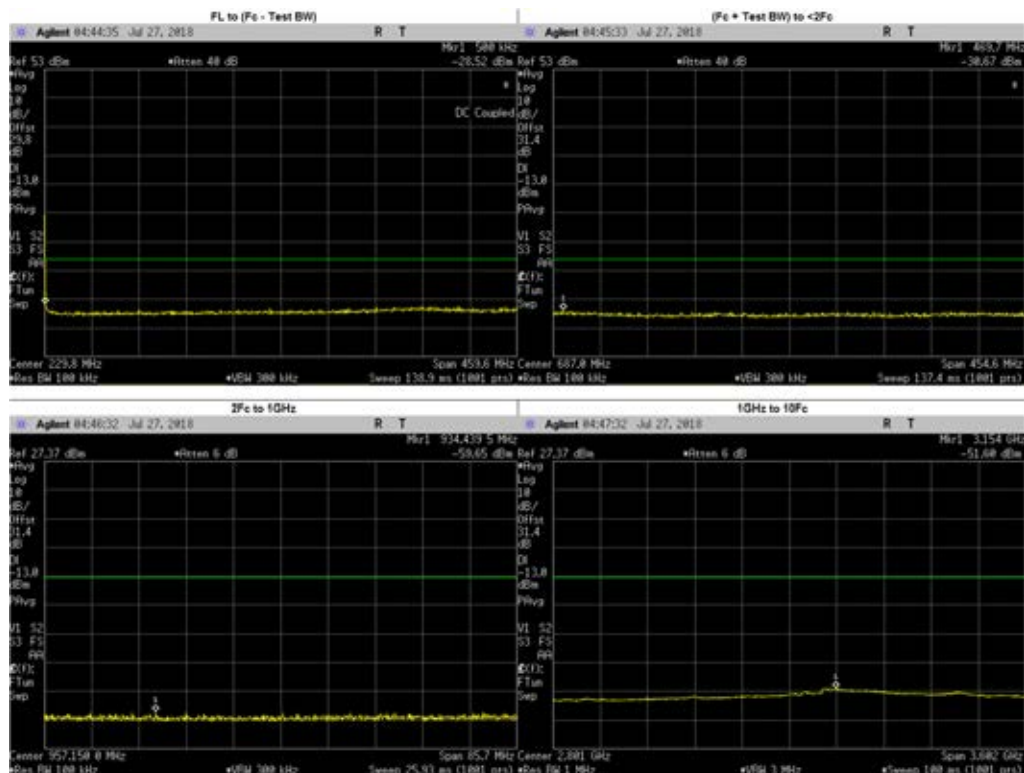

| Frequency Range        | Highest Spur Frequency (MHz) | Spurious Level (dBm) | Failing Limit (dBm) | Results |
|------------------------|------------------------------|----------------------|---------------------|---------|
| FL to (Fc - Test BW)   | 402.6048                     | -27.65               | -13                 | PASS    |
| (Fc + Test BW) to <2Fc | 469.7079                     | -30.67               | -13                 | PASS    |
| 2Fc to 1GHz            | 934.4395                     | -59.65               | -13                 | PASS    |
|                        | 919.3000                     | -61.73               | -13                 | PASS    |
| 1GHz to 10Fc           | 3153.6970                    | -51.60               | -13                 | PASS    |
|                        | 1378.9500                    | -55.28               | -13                 | PASS    |
|                        | 1838.6000                    | -55.16               | -13                 | PASS    |
|                        | 2298.2500                    | -54.97               | -13                 | PASS    |
|                        | 2757.9000                    | -54.10               | -13                 | PASS    |
|                        | 3217.5500                    | -52.36               | -13                 | PASS    |
|                        | 3677.2000                    | -53.40               | -13                 | PASS    |
|                        | 4136.8500                    | -53.30               | -13                 | PASS    |
|                        | 4596.5000                    | -54.32               | -13                 | PASS    |


### 6.10.3. Test Result (Digital)

#### Digital: 406.2 MHz, 12.5kHz Channel Spacing, Max Power FCC Part 90

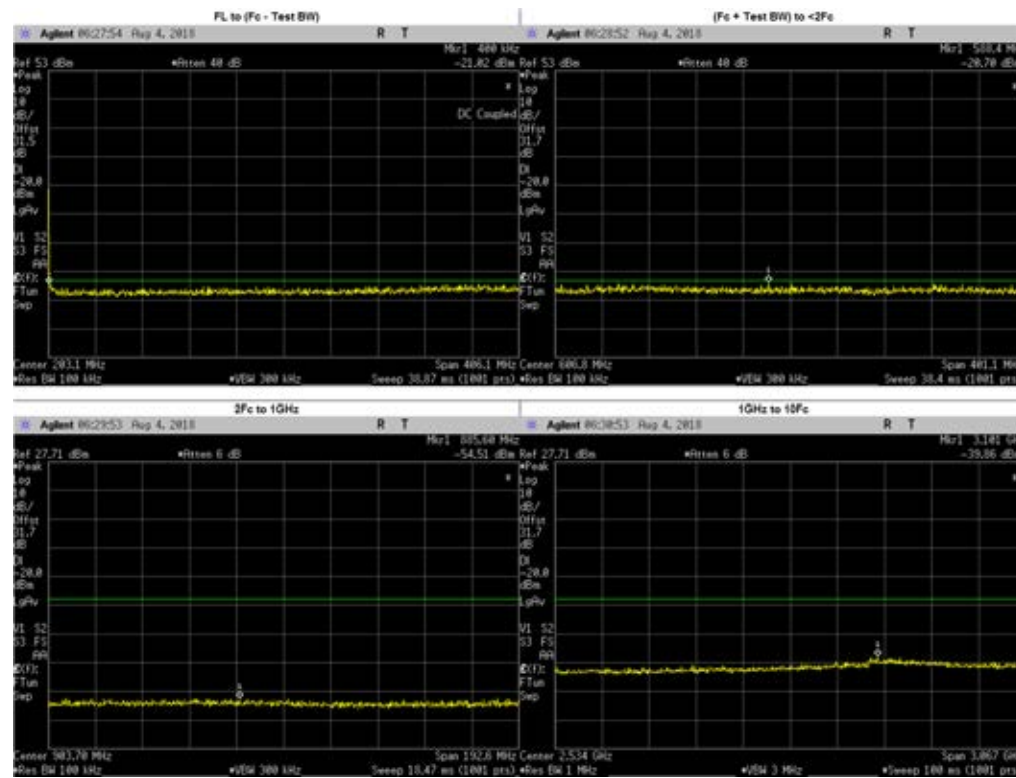


| Frequency Range        | Highest Spur Frequency (MHz) | Spurious Level (dBm) | Failing Limit (dBm) | Results |
|------------------------|------------------------------|----------------------|---------------------|---------|
| FL to (Fc - Test BW)   | 371.2167                     | -21.33               | -20                 | PASS    |
| (Fc + Test BW) to <2Fc | 588.3752                     | -20.70               | -20                 | PASS    |
| 2Fc to 1GHz            | 885.5956                     | -54.51               | -20                 | PASS    |
|                        | 812.4000                     | -57.08               | -20                 | PASS    |
| 1GHz to 10Fc           | 3061.0240                    | -40.41               | -20                 | PASS    |
|                        | 1218.6000                    | -45.23               | -20                 | PASS    |
|                        | 1624.8000                    | -45.48               | -20                 | PASS    |
|                        | 2031.0000                    | -44.82               | -20                 | PASS    |
|                        | 2437.2000                    | -44.42               | -20                 | PASS    |
|                        | 2843.4000                    | -43.42               | -20                 | PASS    |
|                        | 3249.6000                    | -42.17               | -20                 | PASS    |
|                        | 3655.8000                    | -43.23               | -20                 | PASS    |
|                        | 4062.0000                    | -42.60               | -20                 | PASS    |
|                        | 3100.8950                    | -50.64               | -20                 | PASS    |

**Digital: 406.2 MHz, 12.5kHz Channel Spacing, Low Power**  
**FCC Part 90**

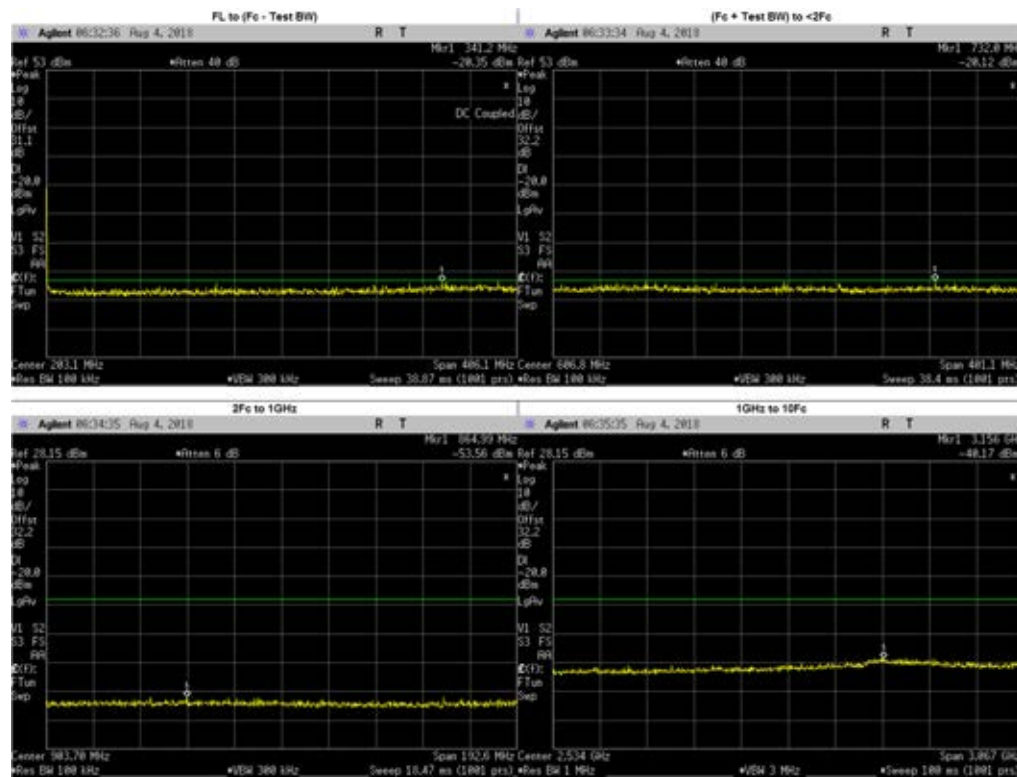


| Frequency Range        | Highest Spur Frequency (MHz) | Spurious Level (dBm) | Failing Limit (dBm) | Results |
|------------------------|------------------------------|----------------------|---------------------|---------|
| FL to (Fc - Test BW)   | 341.1627                     | -20.35               | -20                 | PASS    |
| (Fc + Test BW) to <2Fc | 731.9849                     | -20.12               | -20                 | PASS    |
| 2Fc to 1GHz            | 864.9874                     | -53.56               | -20                 | PASS    |
|                        | 812.4000                     | -57.13               | -20                 | PASS    |
| 1GHz to 10Fc           | 3156.1010                    | -40.17               | -20                 | PASS    |
|                        | 1218.6000                    | -44.99               | -20                 | PASS    |
|                        | 1624.8000                    | -45.48               | -20                 | PASS    |
|                        | 2031.0000                    | -44.32               | -20                 | PASS    |
|                        | 2437.2000                    | -43.98               | -20                 | PASS    |
|                        | 2843.4000                    | -43.15               | -20                 | PASS    |
|                        | 3249.6000                    | -41.11               | -20                 | PASS    |
|                        | 3655.8000                    | -43.17               | -20                 | PASS    |
|                        | 4062.0000                    | -42.61               | -20                 | PASS    |

**Digital: 450.65 MHz, 12.5kHz Channel Spacing, Max Power**  
**FCC Part 74, 90**

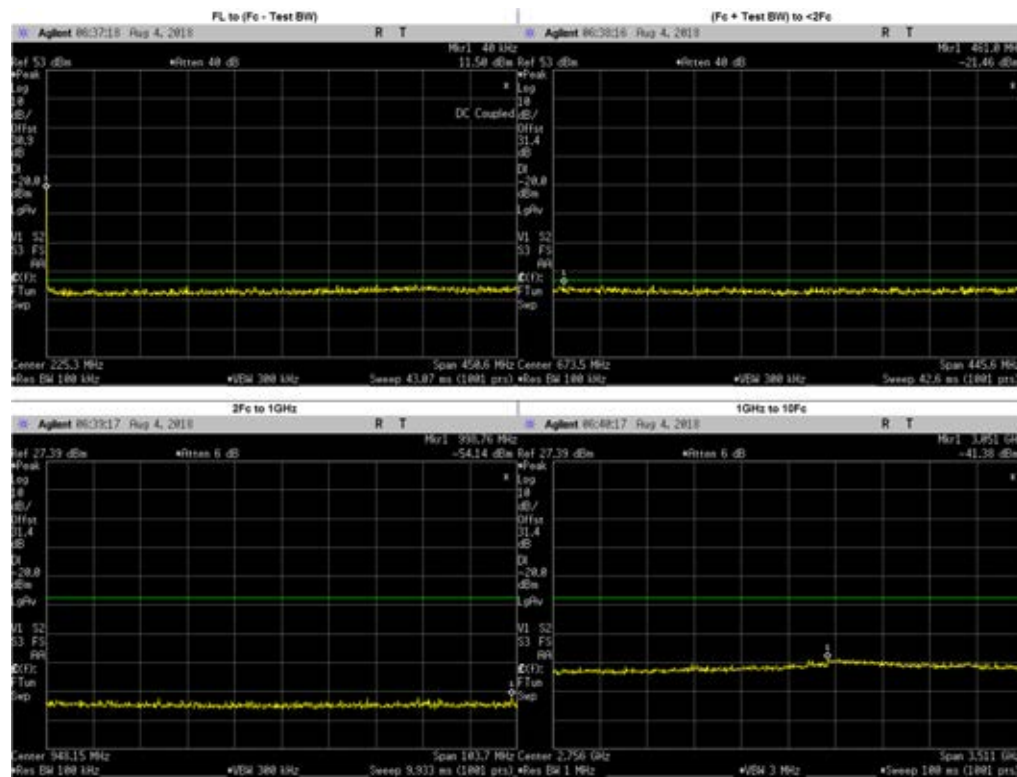


| Frequency Range        | Highest Spur Frequency (MHz) | Spurious Level (dBm) | Failing Limit (dBm) | Results |
|------------------------|------------------------------|----------------------|---------------------|---------|
| FL to (Fc - Test BW)   | 353.7176                     | -21.14               | -20                 | PASS    |
| (Fc + Test BW) to <2Fc | 460.9554                     | -21.46               | -20                 | PASS    |
| 2Fc to 1GHz            | 998.7556                     | -54.14               | -20                 | PASS    |
|                        | 901.3000                     | -56.91               | -20                 | PASS    |
| 1GHz to 10Fc           | 3050.7160                    | -41.38               | -20                 | PASS    |
|                        | 1351.9500                    | -45.45               | -20                 | PASS    |
|                        | 1802.6000                    | -45.52               | -20                 | PASS    |
|                        | 2253.2500                    | -45.44               | -20                 | PASS    |
|                        | 2703.9000                    | -44.82               | -20                 | PASS    |
|                        | 3154.5500                    | -42.27               | -20                 | PASS    |
|                        | 3605.2000                    | -43.87               | -20                 | PASS    |
|                        | 4055.8500                    | -43.69               | -20                 | PASS    |
|                        | 4506.5000                    | -44.40               | -20                 | PASS    |

**Digital: 450.65 MHz, 12.5kHz Channel Spacing, Low Power**  
**FCC Part 74, 90**

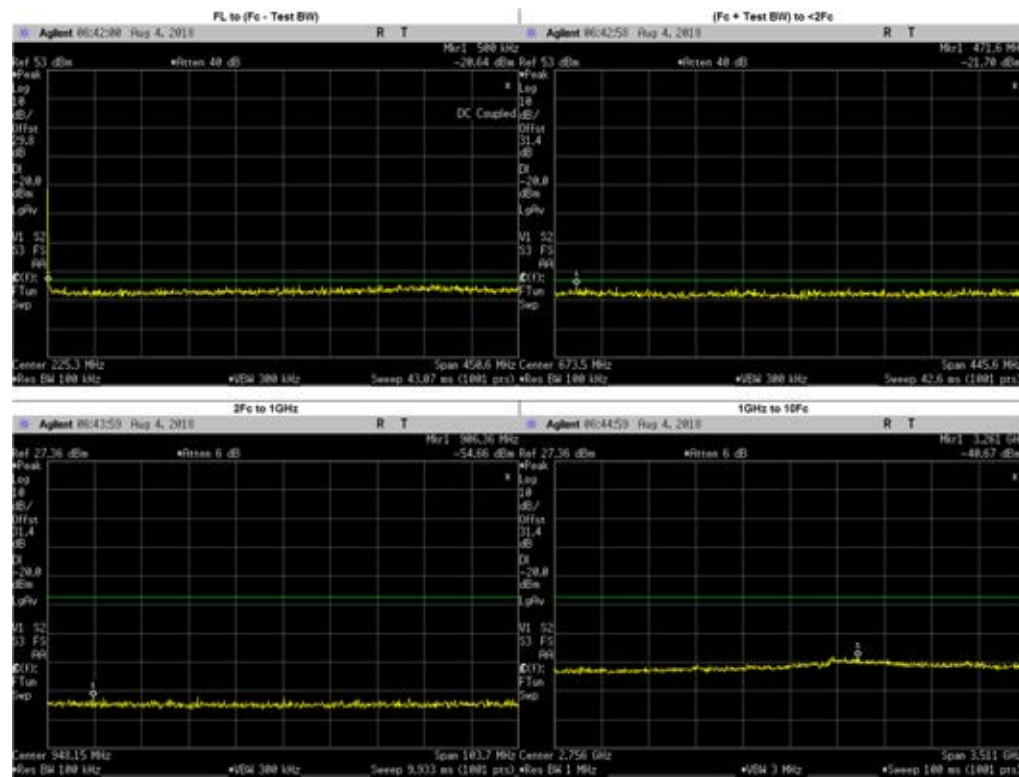


| Frequency Range        | Highest Spur Frequency (MHz) | Spurious Level (dBm) | Failing Limit (dBm) | Results |
|------------------------|------------------------------|----------------------|---------------------|---------|
| FL to (Fc - Test BW)   | 367.2351                     | -20.02               | -20                 | PASS    |
| (Fc + Test BW) to <2Fc | 471.6497                     | -21.70               | -20                 | PASS    |
| 2Fc to 1GHz            | 906.3589                     | -54.66               | -20                 | PASS    |
|                        | 901.3000                     | -57.08               | -20                 | PASS    |
| 1GHz to 10Fc           | 3261.4060                    | -40.67               | -20                 | PASS    |
|                        | 1351.9500                    | -46.12               | -20                 | PASS    |
|                        | 1802.6000                    | -45.05               | -20                 | PASS    |
|                        | 2253.2500                    | -45.36               | -20                 | PASS    |
|                        | 2703.9000                    | -44.65               | -20                 | PASS    |
|                        | 3154.5500                    | -42.31               | -20                 | PASS    |
|                        | 3605.2000                    | -42.92               | -20                 | PASS    |
|                        | 4055.8500                    | -43.16               | -20                 | PASS    |
|                        | 4506.5000                    | -44.44               | -20                 | PASS    |

**Digital: 459.125 MHz, 12.5kHz Channel Spacing, Max Power**  
**FCC Part 22, 90**

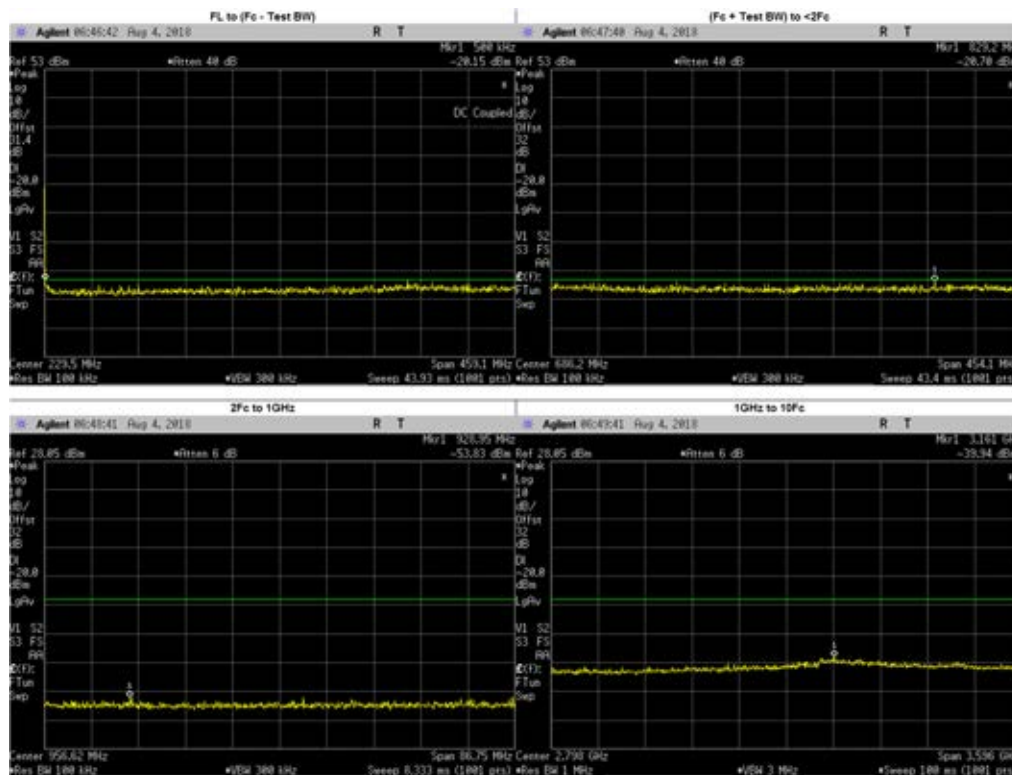


| Frequency Range        | Highest Spur Frequency (MHz) | Spurious Level (dBm) | Failing Limit (dBm) | Results |
|------------------------|------------------------------|----------------------|---------------------|---------|
| FL to (Fc - Test BW)   | 354.4027                     | -20.66               | -20                 | PASS    |
| (Fc + Test BW) to <2Fc | 829.2474                     | -20.70               | -20                 | PASS    |
| 2Fc to 1GHz            | 928.9517                     | -53.83               | -20                 | PASS    |
|                        | 918.2500                     | -55.36               | -20                 | PASS    |
| 1GHz to 10Fc           | 3064.2470                    | -40.46               | -20                 | PASS    |
|                        | 1377.3750                    | -44.94               | -20                 | PASS    |
|                        | 1836.5000                    | -44.80               | -20                 | PASS    |
|                        | 2295.6250                    | -44.93               | -20                 | PASS    |
|                        | 2754.7500                    | -43.71               | -20                 | PASS    |
|                        | 3213.8750                    | -41.91               | -20                 | PASS    |
|                        | 3673.0000                    | -43.02               | -20                 | PASS    |
|                        | 4132.1250                    | -42.76               | -20                 | PASS    |
|                        | 4591.2500                    | -44.15               | -20                 | PASS    |
|                        | 3161.3460                    | -50.92               | -20                 | PASS    |

**Digital: 459.125 MHz, 12.5kHz Channel Spacing, Low Power**  
**FCC Part 22, 90**

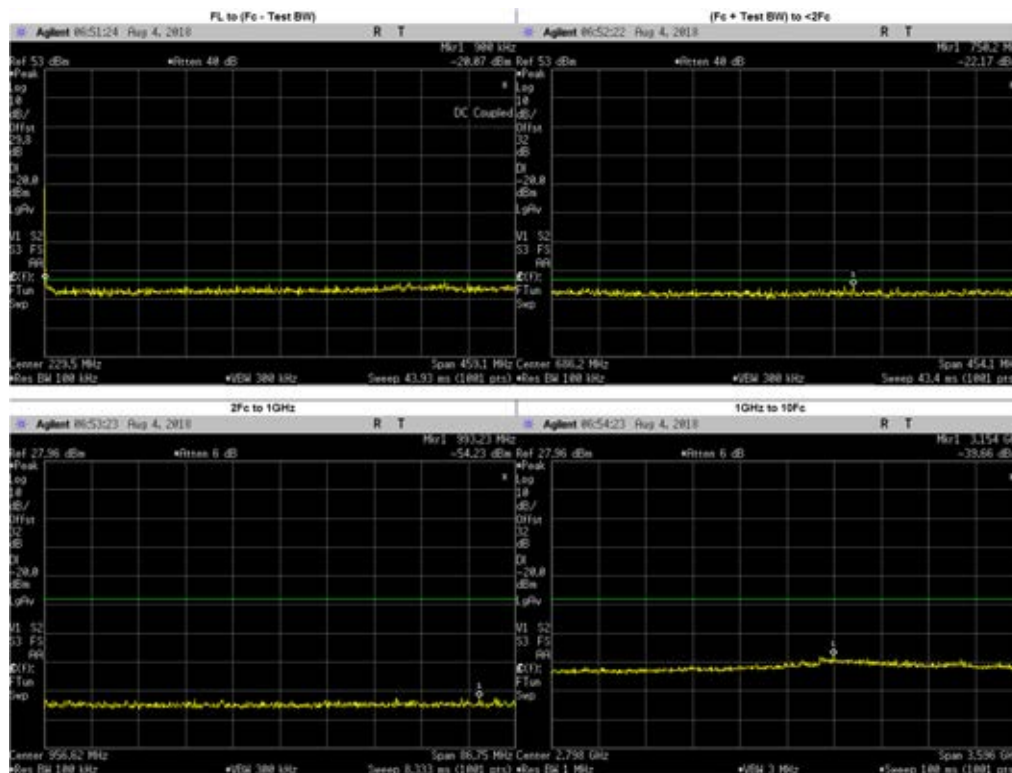


| Frequency Range        | Highest Spur Frequency (MHz) | Spurious Level (dBm) | Failing Limit (dBm) | Results |
|------------------------|------------------------------|----------------------|---------------------|---------|
| FL to (Fc - Test BW)   | 0.9271                       | -20.13               | -20                 | PASS    |
| (Fc + Test BW) to <2Fc | 750.2395                     | -22.17               | -20                 | PASS    |
| 2Fc to 1GHz            | 993.2335                     | -54.23               | -20                 | PASS    |
|                        | 918.2500                     | -56.91               | -20                 | PASS    |
| 1GHz to 10Fc           | 3075.0360                    | -40.25               | -20                 | PASS    |
|                        | 1377.3750                    | -45.59               | -20                 | PASS    |
|                        | 1836.5000                    | -44.83               | -20                 | PASS    |
|                        | 2295.6250                    | -44.78               | -20                 | PASS    |
|                        | 2754.7500                    | -43.68               | -20                 | PASS    |
|                        | 3213.8750                    | -42.02               | -20                 | PASS    |
|                        | 3673.0000                    | -43.12               | -20                 | PASS    |
|                        | 4132.1250                    | -43.30               | -20                 | PASS    |
|                        | 4591.2500                    | -44.03               | -20                 | PASS    |
|                        | 3154.1540                    | -39.66               | -20                 | PASS    |

**Digital: 467.775 MHz, 12.5kHz Channel Spacing, Max Power**  
**FCC Part 90**

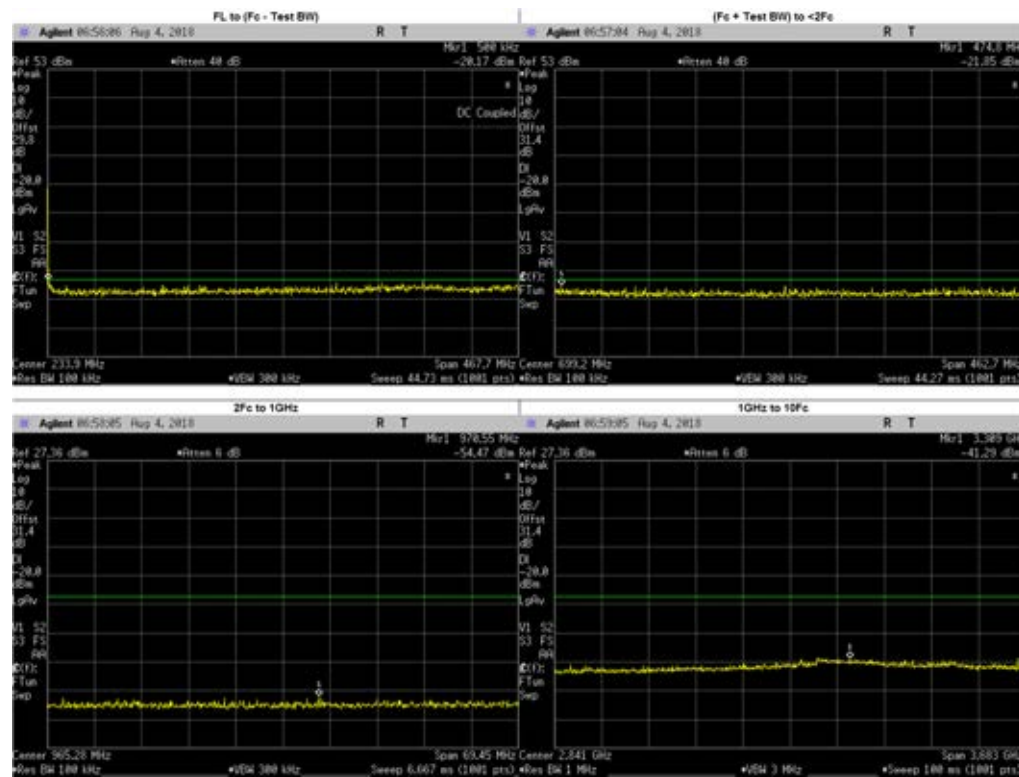


| Frequency Range        | Highest Spur Frequency (MHz) | Spurious Level (dBm) | Failing Limit (dBm) | Results |
|------------------------|------------------------------|----------------------|---------------------|---------|
| FL to (Fc - Test BW)   | 331.6148                     | -20.24               | -20                 | PASS    |
| (Fc + Test BW) to <2Fc | 474.7726                     | -21.85               | -20                 | PASS    |
| 2Fc to 1GHz            | 970.5532                     | -54.47               | -20                 | PASS    |
|                        | 935.5500                     | -58.27               | -20                 | PASS    |
| 1GHz to 10Fc           | 3309.0840                    | -41.29               | -20                 | PASS    |
|                        | 1403.3250                    | -46.00               | -20                 | PASS    |
|                        | 1871.1000                    | -45.98               | -20                 | PASS    |
|                        | 2338.8750                    | -45.33               | -20                 | PASS    |
|                        | 2806.6500                    | -43.62               | -20                 | PASS    |
|                        | 3274.4250                    | -42.63               | -20                 | PASS    |
|                        | 3742.2000                    | -42.91               | -20                 | PASS    |
|                        | 4209.9750                    | -44.10               | -20                 | PASS    |
|                        | 4677.7500                    | -44.78               | -20                 | PASS    |

**Digital: 467.775 MHz, 12.5kHz Channel Spacing, Low Power  
FCC Part 90**

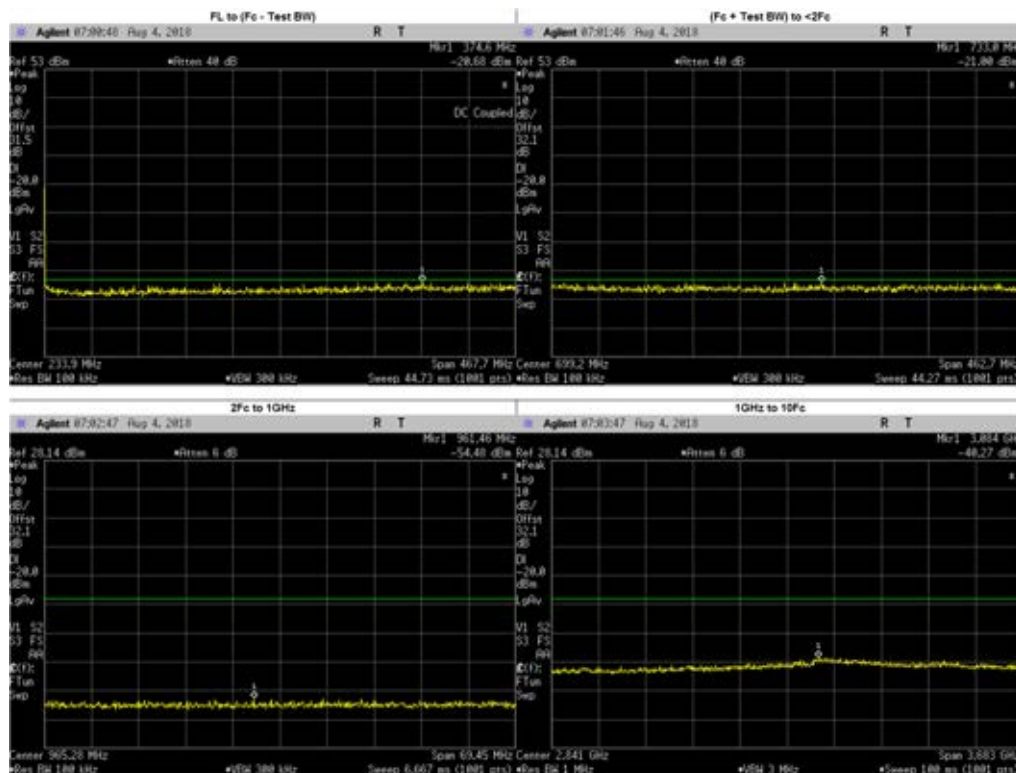


| Frequency Range        | Highest Spur Frequency (MHz) | Spurious Level (dBm) | Failing Limit (dBm) | Results |
|------------------------|------------------------------|----------------------|---------------------|---------|
| FL to (Fc - Test BW)   | 374.6441                     | -20.86               | -20                 | PASS    |
| (Fc + Test BW) to <2Fc | 732.9693                     | -21.00               | -20                 | PASS    |
| 2Fc to 1GHz            | 961.4552                     | -54.48               | -20                 | PASS    |
|                        | 935.5500                     | -57.22               | -20                 | PASS    |
| 1GHz to 10Fc           | 3084.4360                    | -40.27               | -20                 | PASS    |
|                        | 1403.3250                    | -44.72               | -20                 | PASS    |
|                        | 1871.1000                    | -45.19               | -20                 | PASS    |
|                        | 2338.8750                    | -44.44               | -20                 | PASS    |
|                        | 2806.6500                    | -43.09               | -20                 | PASS    |
|                        | 3274.4250                    | -42.01               | -20                 | PASS    |
|                        | 3742.2000                    | -42.83               | -20                 | PASS    |
|                        | 4209.9750                    | -42.88               | -20                 | PASS    |
|                        | 4677.7500                    | -44.00               | -20                 | PASS    |

**Digital: 459.025 MHz, 12.5kHz Channel Spacing, Max Power**  
**FCC Part 22**

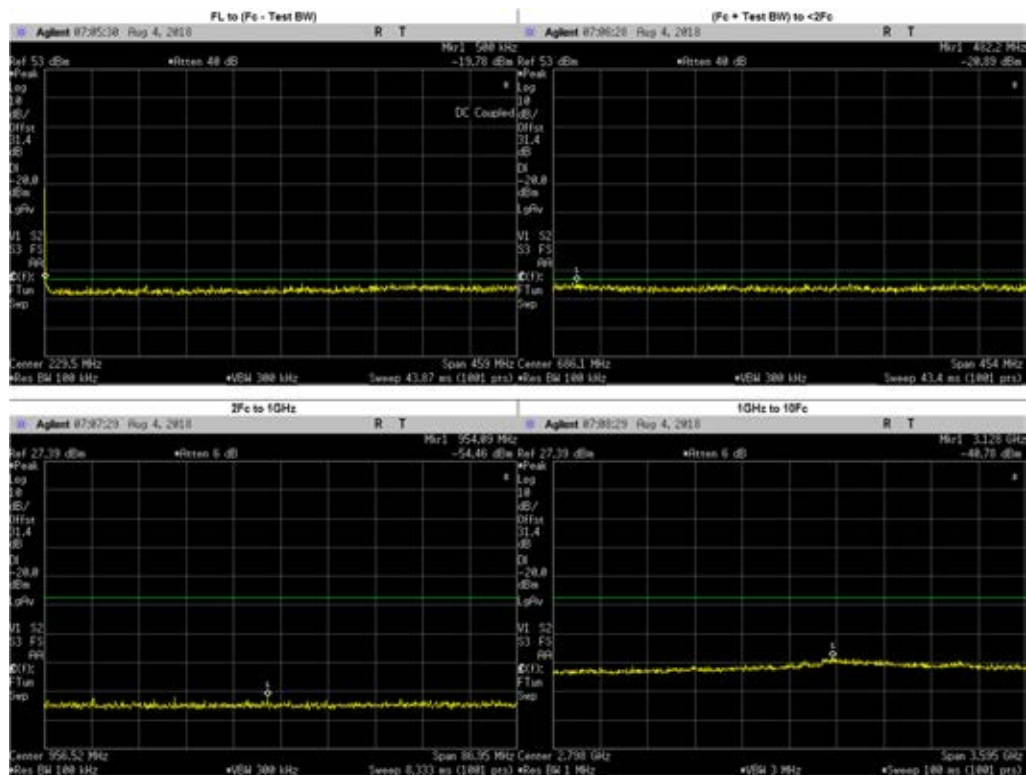


| Frequency Range        | Highest Spur Frequency (MHz) | Spurious Level (dBm) | Failing Limit (dBm) | Results |
|------------------------|------------------------------|----------------------|---------------------|---------|
| FL to (Fc - Test BW)   | 357.9972                     | -21.41               | -20                 | PASS    |
| (Fc + Test BW) to <2Fc | 482.2342                     | -20.89               | -20                 | PASS    |
| 2Fc to 1GHz            | 954.0904                     | -54.46               | -20                 | PASS    |
|                        | 918.0500                     | -57.96               | -20                 | PASS    |
| 1GHz to 10Fc           | 3128.3880                    | -40.78               | -20                 | PASS    |
|                        | 1377.0750                    | -46.04               | -20                 | PASS    |
|                        | 1836.1000                    | -45.97               | -20                 | PASS    |
|                        | 2295.1250                    | -44.88               | -20                 | PASS    |
|                        | 2754.1500                    | -44.58               | -20                 | PASS    |
|                        | 3213.1750                    | -42.27               | -20                 | PASS    |
|                        | 3672.2000                    | -43.14               | -20                 | PASS    |
|                        | 4131.2250                    | -44.00               | -20                 | PASS    |
|                        | 4590.2500                    | -44.70               | -20                 | PASS    |

**Digital: 459.025 MHz, 12.5kHz Channel Spacing, Low Power**  
**FCC Part 22**

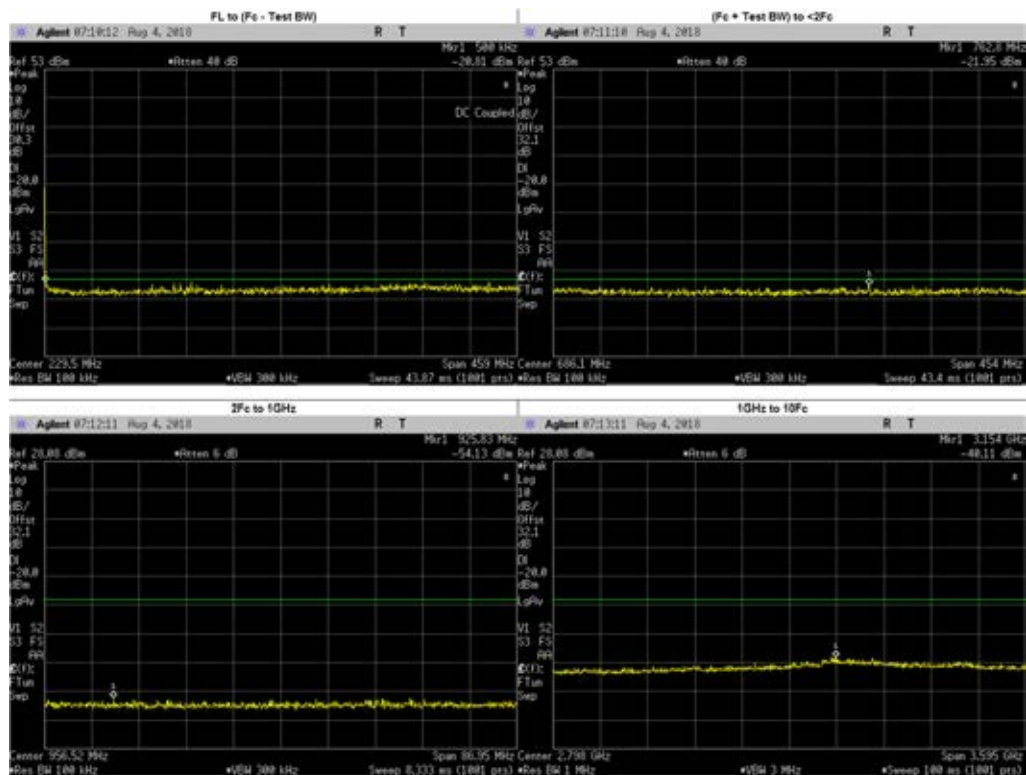


| Frequency Range        | Highest Spur Frequency (MHz) | Spurious Level (dBm) | Failing Limit (dBm) | Results |
|------------------------|------------------------------|----------------------|---------------------|---------|
| FL to (Fc - Test BW)   | 369.9301                     | -20.21               | -20                 | PASS    |
| (Fc + Test BW) to <2Fc | 762.7865                     | -21.95               | -20                 | PASS    |
| 2Fc to 1GHz            | 925.8316                     | -54.13               | -20                 | PASS    |
|                        | 918.0500                     | -57.40               | -20                 | PASS    |
| 1GHz to 10Fc           | 3153.5550                    | -40.11               | -20                 | PASS    |
|                        | 1377.0750                    | -45.37               | -20                 | PASS    |
|                        | 1836.1000                    | -44.98               | -20                 | PASS    |
|                        | 2295.1250                    | -44.37               | -20                 | PASS    |
|                        | 2754.1500                    | -43.79               | -20                 | PASS    |
|                        | 3213.1750                    | -41.88               | -20                 | PASS    |
|                        | 3672.2000                    | -42.57               | -20                 | PASS    |
|                        | 4131.2250                    | -42.83               | -20                 | PASS    |
|                        | 4590.2500                    | -44.18               | -20                 | PASS    |

**Digital: 459.65 MHz, 12.5kHz Channel Spacing, Max Power**  
**FCC Part 22**

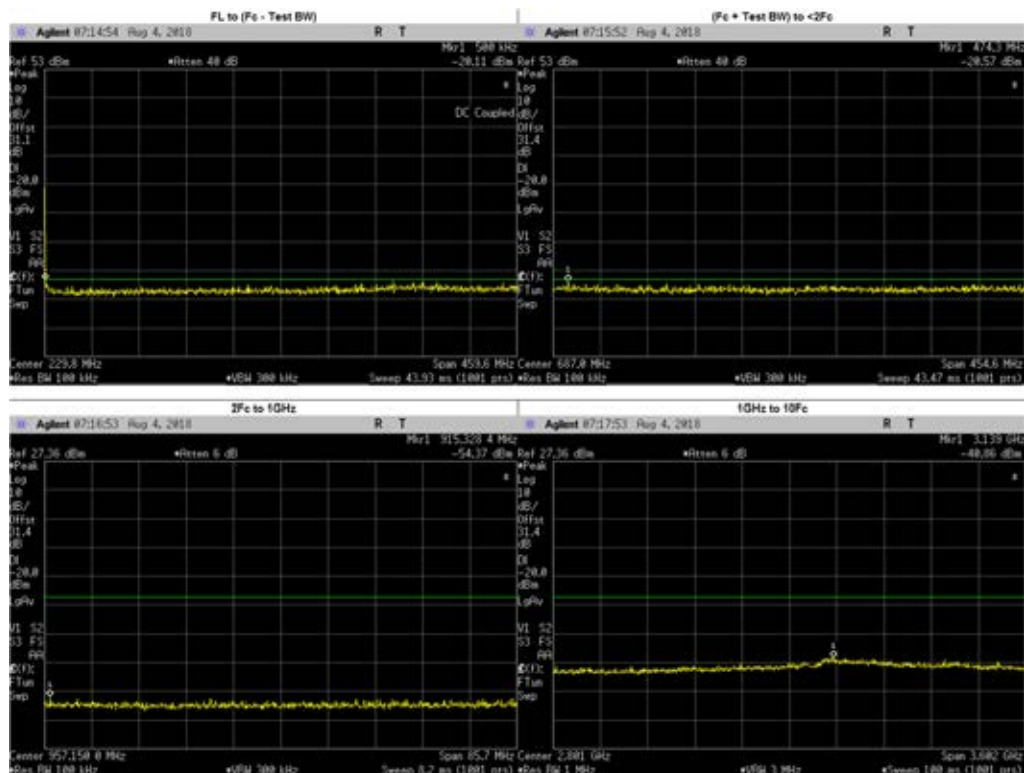

| Frequency Range        | Highest Spur Frequency (MHz) | Spurious Level (dBm) | Failing Limit (dBm) | Results |
|------------------------|------------------------------|----------------------|---------------------|---------|
| FL to (Fc - Test BW)   | 381.9235                     | -20.60               | -20                 | PASS    |
| (Fc + Test BW) to <2Fc | 474.2538                     | -20.57               | -20                 | PASS    |
| 2Fc to 1GHz            | 915.3284                     | -54.37               | -20                 | PASS    |
|                        | 919.3000                     | -57.53               | -20                 | PASS    |
| 1GHz to 10Fc           | 3139.2910                    | -40.86               | -20                 | PASS    |
|                        | 1378.9500                    | -45.01               | -20                 | PASS    |
|                        | 1838.6000                    | -45.18               | -20                 | PASS    |
|                        | 2298.2500                    | -45.00               | -20                 | PASS    |
|                        | 2757.9000                    | -44.33               | -20                 | PASS    |
|                        | 3217.5500                    | -42.03               | -20                 | PASS    |
|                        | 3677.2000                    | -43.03               | -20                 | PASS    |
|                        | 4136.8500                    | -43.20               | -20                 | PASS    |
|                        | 4596.5000                    | -45.06               | -20                 | PASS    |

**Digital: 459.65 MHz, 12.5kHz Channel Spacing, Low Power  
FCC Part 22**

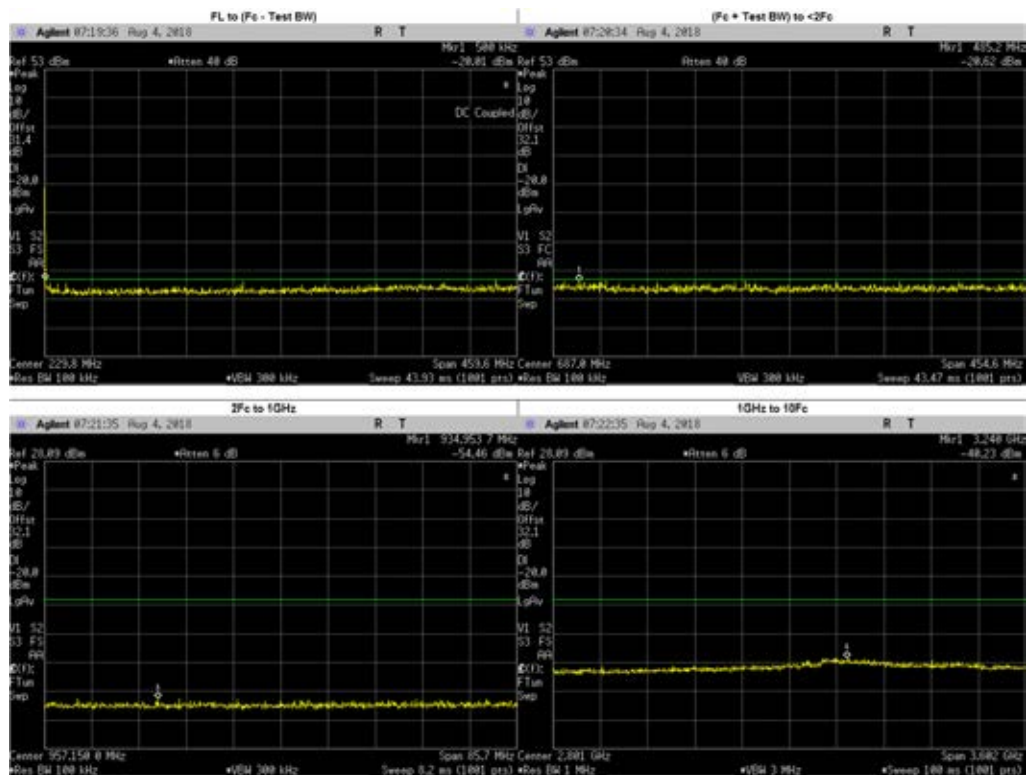

| Frequency Range        | Highest Spur Frequency (MHz) | Spurious Level (dBm) | Failing Limit (dBm) | Results |
|------------------------|------------------------------|----------------------|---------------------|---------|
| FL to (Fc - Test BW)   | 438.9119                     | -20.50               | -20                 | PASS    |
| (Fc + Test BW) to <2Fc | 485.2                        | -20.62               | -20                 | PASS    |
| 2Fc to 1GHz            | 934.9537                     | -54.46               | -20                 | PASS    |
|                        | 919.3000                     | -57.49               | -20                 | PASS    |
| 1GHz to 10Fc           | 3240.1330                    | -40.23               | -20                 | PASS    |
|                        | 1378.9500                    | -45.21               | -20                 | PASS    |
|                        | 1838.6000                    | -44.92               | -20                 | PASS    |
|                        | 2298.2500                    | -44.59               | -20                 | PASS    |
|                        | 2757.9000                    | -42.87               | -20                 | PASS    |
|                        | 3217.5500                    | -41.90               | -20                 | PASS    |
|                        | 3677.2000                    | -42.72               | -20                 | PASS    |
|                        | 4136.8500                    | -43.10               | -20                 | PASS    |
|                        | 4596.5000                    | -43.72               | -20                 | PASS    |

#### 6.10.4. Test Limit


Table below summarized the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least

| Channel Spacing | Part 22                                 | Part 24D                                | Part 74                                 | Part 80                                 | Part 90 (UHF, VHF, 800, 900)            | Part 90 (700)                           |
|-----------------|-----------------------------------------|-----------------------------------------|-----------------------------------------|-----------------------------------------|-----------------------------------------|-----------------------------------------|
| 12.5kHz         | 43 + log <sub>10</sub> (P)<br>(-13 dBm) | 43 + log <sub>10</sub> (P)<br>(-13 dBm) | 43 + log <sub>10</sub> (P)<br>(-13 dBm) | Not Applicable                          | 50 + log <sub>10</sub> (P)<br>(-20 dBm) | 43 + log <sub>10</sub> (P)<br>(-13 dBm) |
| 25kHz           |                                         | Not Applicable                          |                                         | 43 + log <sub>10</sub> (P)<br>(-13 dBm) | 43 + log <sub>10</sub> (P)<br>(-13 dBm) | 43 + log <sub>10</sub> (P)<br>(-13 dBm) |

| Channel Spacing | RSS 134                                 | RSS 182                                 | RSS 119 (UHF, VHF, 800, 900)            | RSS 119 (700)                           |
|-----------------|-----------------------------------------|-----------------------------------------|-----------------------------------------|-----------------------------------------|
| 12.5kHz         | 43 + log <sub>10</sub> (P)<br>(-13 dBm) | Not Applicable                          | 50 + log <sub>10</sub> (P)<br>(-20 dBm) | 43 + log <sub>10</sub> (P)<br>(-13 dBm) |
| 25kHz           | Not Applicable                          | 43 + log <sub>10</sub> (P)<br>(-13 dBm) | 43 + log <sub>10</sub> (P)<br>(-13 dBm) | 43 + log <sub>10</sub> (P)<br>(-13 dBm) |

## 6.11. Radiated Spurious Emission

### 6.11.1. Test Setup

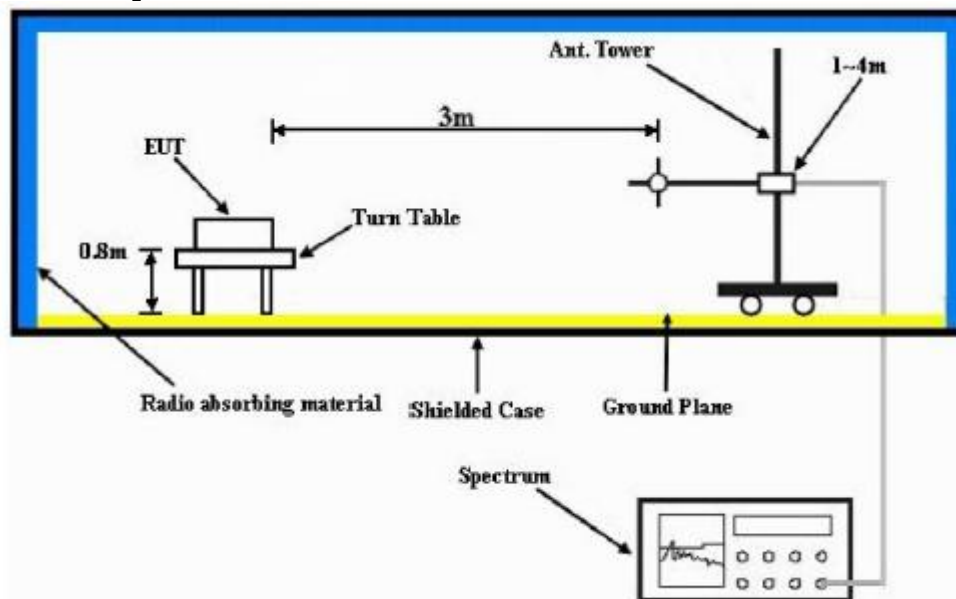


- 1) The Resolution Bandwidth for scanning Radiated Emission below 1 GHz is 100 kHz with Video Bandwidth = 300 kHz and Resolution Bandwidth for above 1 GHz is 1 MHz with Video Bandwidth = 3 MHz. Detector mode is positive peak.
- 2) In the semi- anechoic chamber, setup as illustrated above the DUT placed on the 0.8m height (for frequencies < 1GHz) or 1.5m (for frequencies > 1GHz) of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- 3) The substitution antenna is substituted for DUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.
- 4) Final Radiated Spurious Emission = “Read Value” + Measured substitution value.

## 6.11.2. Test Result (Analog)

Model Number: AAM02QNH9JA1AN      SAC Transmitter Radiated Emission:      S/N: 776TUK4068      SR:12850-EMC-00001  
 Battery Part No: NA      Accy Part No: 1175-PMMN4089A-2, HKN4192B  
 Test Mode: TX Analog  
 406.200000 MHz      25 kHz      30.000 Watt(s) /Max Power

| Frequency (MHz) | Limit    | Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm) | Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm) |
|-----------------|----------|----------------------------------------------------------------|--------------------------------------------------------------|
| 812.4000        | -13.0000 | -82.4468 **                                                    | -82.7541 **                                                  |
| 1218.6000       | -13.0000 | -46.5200 *                                                     | -42.1800 *                                                   |
| 1624.8000       | -13.0000 | -41.8300 *                                                     | -46.6400 *                                                   |
| 2031.0000       | -13.0000 | -54.7807 **                                                    | -56.1494 **                                                  |
| 2437.2000       | -13.0000 | -55.1281 **                                                    | -57.3897 **                                                  |
| 2843.4000       | -13.0000 | -55.7051 **                                                    | -56.4038 **                                                  |
| 3249.6000       | -13.0000 | -51.4980 **                                                    | -52.9213 **                                                  |
| 3655.8000       | -13.0000 | -55.1542 **                                                    | -55.4770 **                                                  |
| 4062.0000       | -13.0000 | -52.2548 **                                                    | -52.2344 **                                                  |

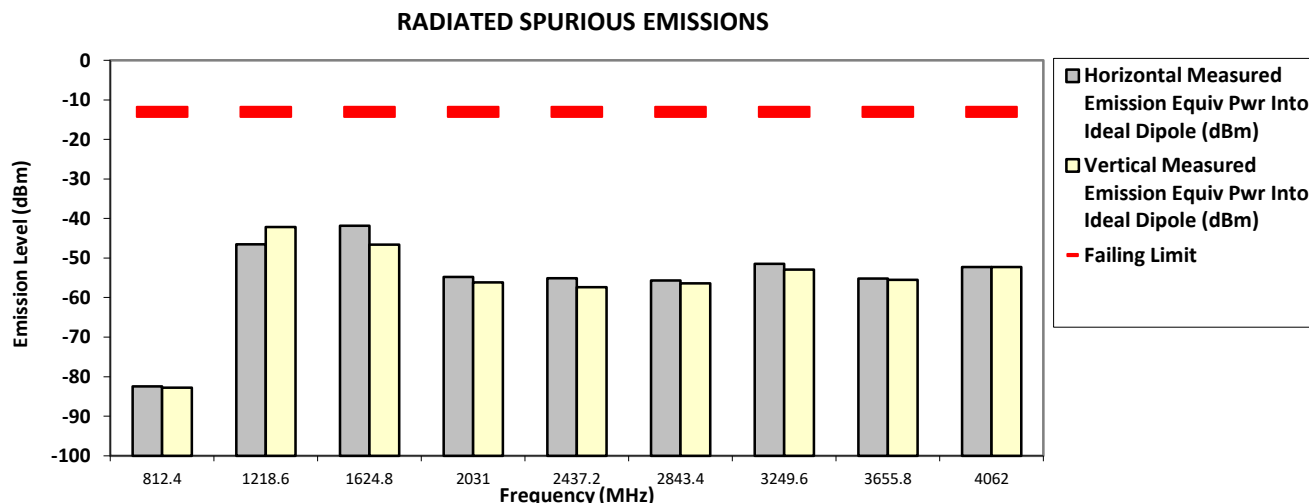

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.  
 Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman      Fri, Jun 29, 2018

Remarks: \*\* Indicates the spurious emission could not be detected due to noise limitations or ambient.  
 \*Pursuant to CFR 47 Part 2.1057 ( c ), emissions attenuated more than 20 dB below the permissible limit are not reported  
 Temp(Deg): 23.6 Hum(%RH): 69.3

System MU: 5.01 dB

Remarks:

|                |                  |                |
|----------------|------------------|----------------|
| Passed Results | Marginal Results | Failed Results |
|----------------|------------------|----------------|

Model Number: AAM02QNH9JA1AN  
 Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 776TUK4068

SR:12850-EMC-00001

Accy Part No: 1175-PMMN4089A-2, HKN4192B

Test Mode: TX Analog


406.200000 MHz

25 kHz

1.000 Watt(s) /Low Power

| Frequency (MHz) | Limit    | Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm) | Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm) |
|-----------------|----------|----------------------------------------------------------------|--------------------------------------------------------------|
| 812.4000        | -13.0000 | -85.2119 **                                                    | -84.6115 **                                                  |
| 1218.6000       | -13.0000 | -62.2447 **                                                    | -64.7574 **                                                  |
| 1624.8000       | -13.0000 | -61.1266 **                                                    | -65.0809 **                                                  |
| 2031.0000       | -13.0000 | -57.2439 **                                                    | -59.3228 **                                                  |
| 2437.2000       | -13.0000 | -57.5879 **                                                    | -62.4424 **                                                  |
| 2843.4000       | -13.0000 | -56.0751 **                                                    | -57.4105 **                                                  |
| 3249.6000       | -13.0000 | -54.1100 **                                                    | -57.9263 **                                                  |
| 3655.8000       | -13.0000 | -54.3708 **                                                    | -59.1224 **                                                  |
| 4062.0000       | -13.0000 | -52.1555 **                                                    | -57.7600 **                                                  |

### RADIATED SPURIOUS EMISSIONS

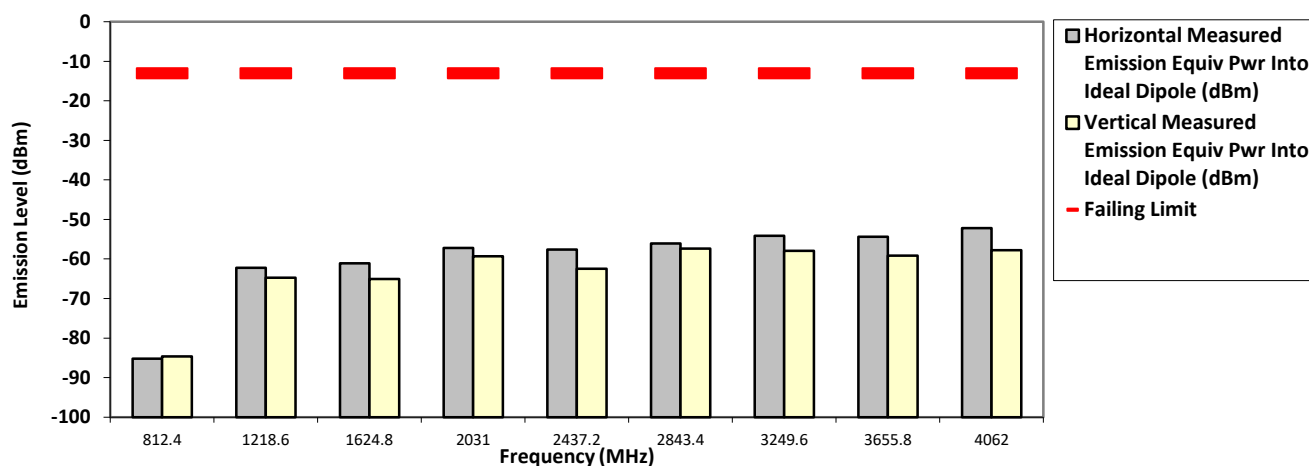

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman

Thu, Jun 28, 2018

Remarks: \*\* Indicates the spurious emission could not be detected due to noise limitations or ambient.

\*Pursuant to CFR 47 Part 2.1057 ( c ), emissions attenuated more than 20 dB below the permissible limit are not reported  
 Temp(Deg): 23.6 Hum(%RH): 69.3

System MU: 5.01 dB

Remarks:

|                |                  |                |
|----------------|------------------|----------------|
| Passed Results | Marginal Results | Failed Results |
|----------------|------------------|----------------|

Model Number: AAM02QNH9JA1AN  
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 776TUK4068

SR:12850-EMC-00001

Accy Part No: 1175-PMMN4089A-2, HKN4192B

Test Mode: TX Analog


450.650000 MHz

25 kHz

30.000 Watt(s) /Max Power

| Frequency (MHz) | Limit    | Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm) | Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm) |
|-----------------|----------|----------------------------------------------------------------|--------------------------------------------------------------|
| 901.3000        | -13.0000 | -83.3758 **                                                    | -84.0606 **                                                  |
| 1351.9500       | -13.0000 | -49.5700 *                                                     | -40.2600 *                                                   |
| 1802.6000       | -13.0000 | -46.5800 *                                                     | -48.4200 *                                                   |
| 2253.2500       | -13.0000 | -54.2998 **                                                    | -56.5156 **                                                  |
| 2703.9000       | -13.0000 | -53.3523 **                                                    | -53.5375 **                                                  |
| 3154.5500       | -13.0000 | -53.1824 **                                                    | -53.7612 **                                                  |
| 3605.2000       | -13.0000 | -53.0055 **                                                    | -53.2063 **                                                  |
| 4055.8500       | -13.0000 | -52.6703 **                                                    | -51.4574 **                                                  |
| 4506.5000       | -13.0000 | -52.1708 **                                                    | -50.5984 **                                                  |

### RADIATED SPURIOUS EMISSIONS

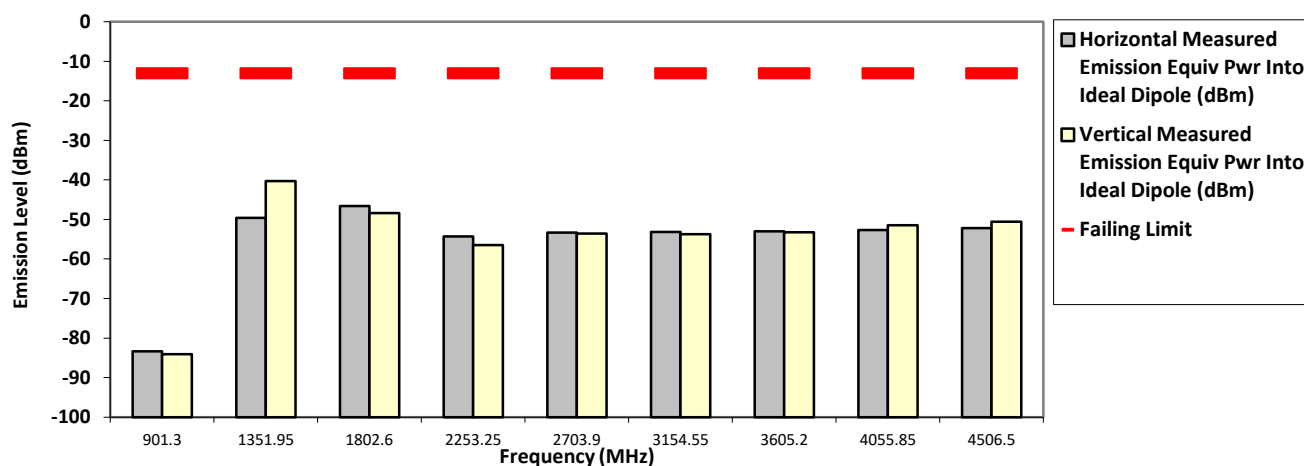

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman

Fri, Jun 29, 2018

Remarks: \*\* Indicates the spurious emission could not be detected due to noise limitations or ambient.

\*Pursuant to CFR 47 Part 2.1057 ( c ), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 23.6 Hum(%RH): 69.3

System MU: 5.01 dB

Remarks:

|                |                  |                |
|----------------|------------------|----------------|
| Passed Results | Marginal Results | Failed Results |
|----------------|------------------|----------------|

Model Number: AAM02QNH9JA1AN  
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 776TUK4068

SR:12850-EMC-00001

Accy Part No: 1175-PMMN4089A-2, HKN4192B

Test Mode: TX Analog


450.650000 MHz

25 kHz

1.000 Watt(s) /Low Power

| Frequency (MHz) | Limit    | Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm) | Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm) |
|-----------------|----------|----------------------------------------------------------------|--------------------------------------------------------------|
| 901.3000        | -13.0000 | -85.2278 **                                                    | -84.4453 **                                                  |
| 1351.9500       | -13.0000 | -62.0779 **                                                    | -60.9471 **                                                  |
| 1802.6000       | -13.0000 | -60.2855 **                                                    | -60.8390 **                                                  |
| 2253.2500       | -13.0000 | -55.7359 **                                                    | -58.3605 **                                                  |
| 2703.9000       | -13.0000 | -55.1761 **                                                    | -55.5833 **                                                  |
| 3154.5500       | -13.0000 | -53.7634 **                                                    | -54.2443 **                                                  |
| 3605.2000       | -13.0000 | -54.0866 **                                                    | -53.7980 **                                                  |
| 4055.8500       | -13.0000 | -52.0892 **                                                    | -52.2805 **                                                  |
| 4506.5000       | -13.0000 | -49.9946 **                                                    | -51.3038 **                                                  |

#### RADIATED SPURIOUS EMISSIONS

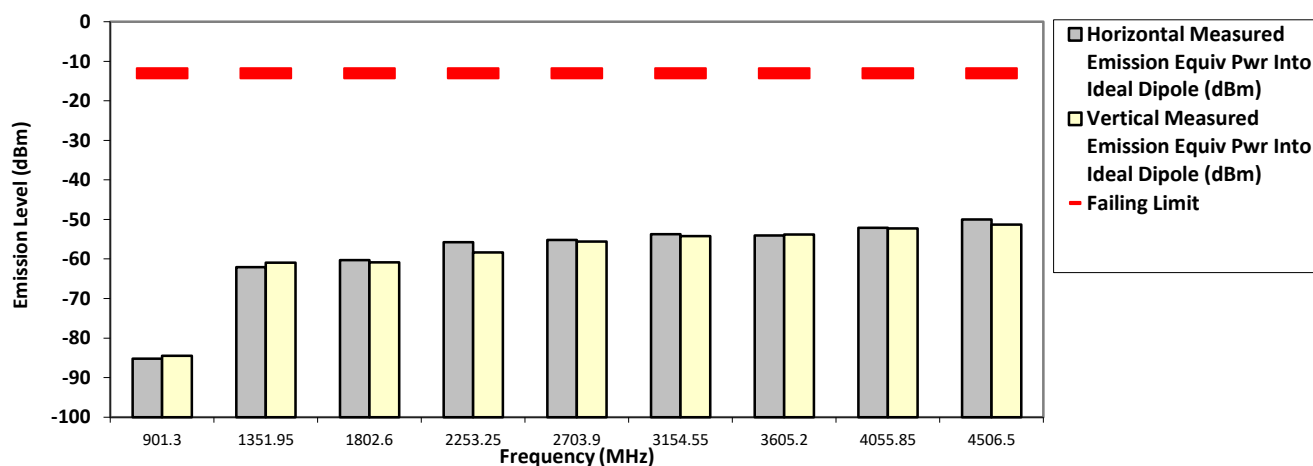

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman

Thu, Jun 28, 2018

Remarks: \*\* Indicates the spurious emission could not be detected due to noise limitations or ambient.

\*Pursuant to CFR 47 Part 2.1057 ( c ), emissions attenuated more than 20 dB below the permissible limit are not reported  
Temp(Deg): 23.6 Hum(%RH): 69.3

System MU: 5.01 dB

Remarks:

|                |                  |                |
|----------------|------------------|----------------|
| Passed Results | Marginal Results | Failed Results |
|----------------|------------------|----------------|

Model Number: AAM02QNH9JA1AN  
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 776TUK4068

SR:12850-EMC-00001

Accy Part No: 1175-PMMN4089A-2, HKN4192B

Test Mode: TX Analog


459.125000 MHz

25 kHz

30.000 Watt(s) /Max Power

| Frequency (MHz) | Limit    | Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm) | Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm) |
|-----------------|----------|----------------------------------------------------------------|--------------------------------------------------------------|
| 918.2500        | -13.0000 | -84.4767 **                                                    | -84.1693 **                                                  |
| 1377.3750       | -13.0000 | -50.2300 *                                                     | -42.2700 *                                                   |
| 1836.5000       | -13.0000 | -58.7741 **                                                    | -58.3348 **                                                  |
| 2295.6250       | -13.0000 | -49.9700 *                                                     | -48.2200 *                                                   |
| 2754.7500       | -13.0000 | -53.5565 **                                                    | -54.7849 **                                                  |
| 3213.8750       | -13.0000 | -52.8276 **                                                    | -54.1829 **                                                  |
| 3673.0000       | -13.0000 | -55.2649 **                                                    | -53.5071 **                                                  |
| 4132.1250       | -13.0000 | -52.1603 **                                                    | -52.5822 **                                                  |
| 4591.2500       | -13.0000 | -51.6856 **                                                    | -50.7617 **                                                  |

#### RADIATED SPURIOUS EMISSIONS

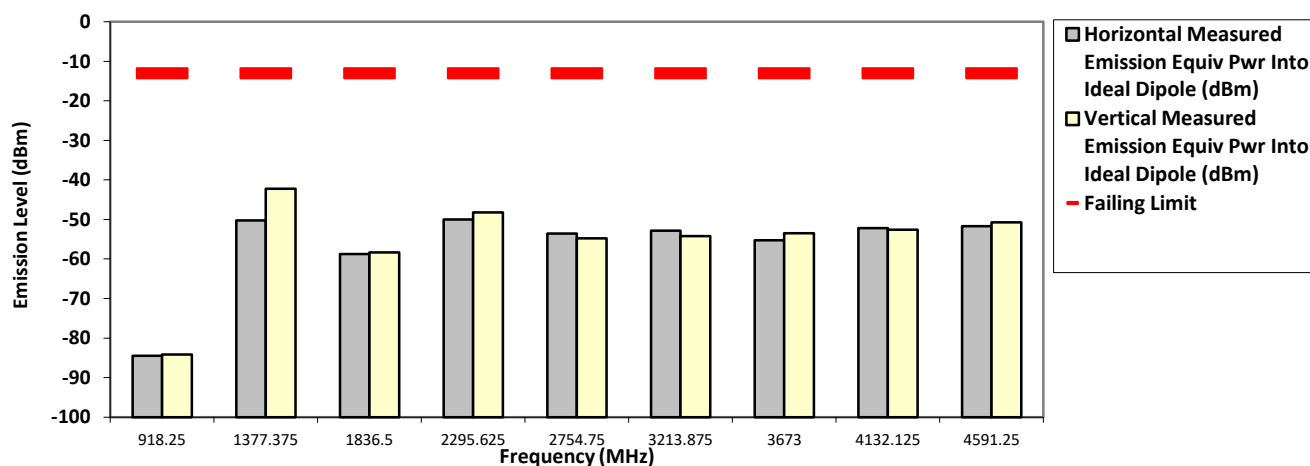

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman

Fri, Jun 29, 2018

Remarks: \*\* Indicates the spurious emission could not be detected due to noise limitations or ambient.

\*Pursuant to CFR 47 Part 2.1057 ( c ), emissions attenuated more than 20 dB below the permissible limit are not reported  
Temp(Deg): 23.6 Hum(%RH): 69.3

System MU: 5.01 dB

Remarks:

|                |                  |                |
|----------------|------------------|----------------|
| Passed Results | Marginal Results | Failed Results |
|----------------|------------------|----------------|

Model Number: AAM02QNH9JA1AN  
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 776TUK4068

SR:12850-EMC-00001

Accy Part No: 1175-PMMN4089A-2, HKN4192B

Test Mode: TX Analog


459.125000 MHz

25 kHz

1.000 Watt(s) /Low Power

| Frequency (MHz) | Limit    | Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm) | Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm) |
|-----------------|----------|----------------------------------------------------------------|--------------------------------------------------------------|
| 918.2500        | -13.0000 | -84.6114 **                                                    | -84.5847 **                                                  |
| 1377.3750       | -13.0000 | -61.9312 **                                                    | -61.2421 **                                                  |
| 1836.5000       | -13.0000 | -58.6894 **                                                    | -59.6137 **                                                  |
| 2295.6250       | -13.0000 | -57.6213 **                                                    | -57.9438 **                                                  |
| 2754.7500       | -13.0000 | -56.1726 **                                                    | -55.7321 **                                                  |
| 3213.8750       | -13.0000 | -53.3977 **                                                    | -53.8737 **                                                  |
| 3673.0000       | -13.0000 | -54.8825 **                                                    | -54.2749 **                                                  |
| 4132.1250       | -13.0000 | -51.7312 **                                                    | -51.8053 **                                                  |
| 4591.2500       | -13.0000 | -50.3676 **                                                    | -50.9259 **                                                  |

### RADIATED SPURIOUS EMISSIONS

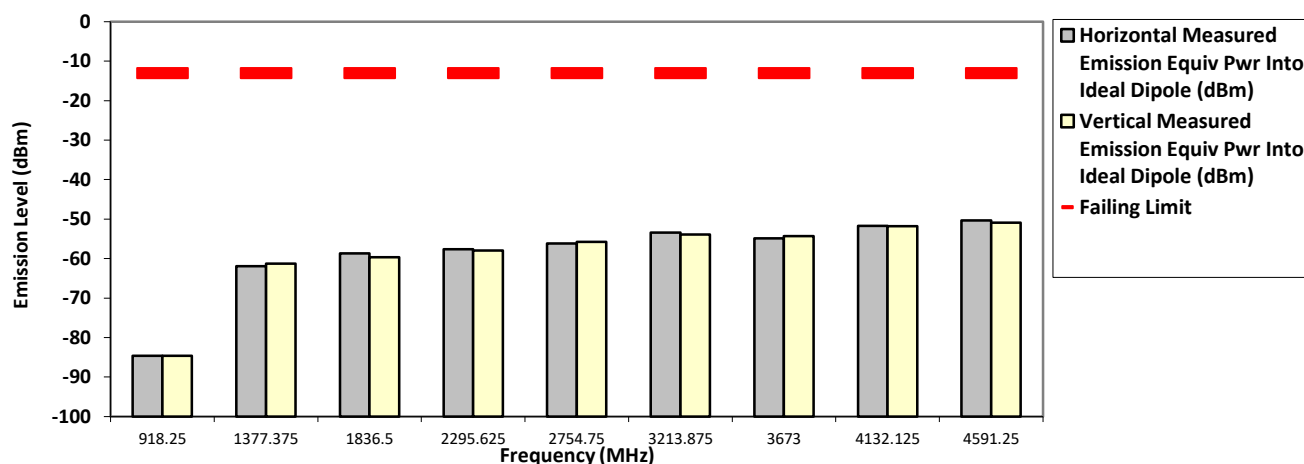

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman

Thu, Jun 28, 2018

Remarks: \*\* Indicates the spurious emission could not be detected due to noise limitations or ambient.

\*Pursuant to CFR 47 Part 2.1057 ( c ), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 23.6 Hum(%RH): 69.3

System MU: 5.01 dB

Remarks:

|                |                  |                |
|----------------|------------------|----------------|
| Passed Results | Marginal Results | Failed Results |
|----------------|------------------|----------------|

Model Number: AAM02QNH9JA1AN  
 Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 776TUK4068

SR:12850-EMC-00001

Accy Part No: 1175-PMMN4089A-2, HKN4192B

Test Mode: TX Analog


467.775000 MHz

25 kHz

30.000 Watt(s) /Max Power

| Frequency (MHz) | Limit    | Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm) | Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm) |
|-----------------|----------|----------------------------------------------------------------|--------------------------------------------------------------|
| 935.5500        | -13.0000 | -84.0985 **                                                    | -83.8398 **                                                  |
| 1403.3250       | -13.0000 | -58.7571 **                                                    | -59.1058 **                                                  |
| 1871.1000       | -13.0000 | -57.8277 **                                                    | -57.4219 **                                                  |
| 2338.8750       | -13.0000 | -57.8904 **                                                    | -58.5610 **                                                  |
| 2806.6500       | -13.0000 | -55.9273 **                                                    | -56.8752 **                                                  |
| 3274.4250       | -13.0000 | -52.9202 **                                                    | -53.5350 **                                                  |
| 3742.2000       | -13.0000 | -52.6943 **                                                    | -52.3518 **                                                  |
| 4209.9750       | -13.0000 | -51.1841 **                                                    | -52.0396 **                                                  |
| 4677.7500       | -13.0000 | -50.6513 **                                                    | -50.0704 **                                                  |

### RADIATED SPURIOUS EMISSIONS

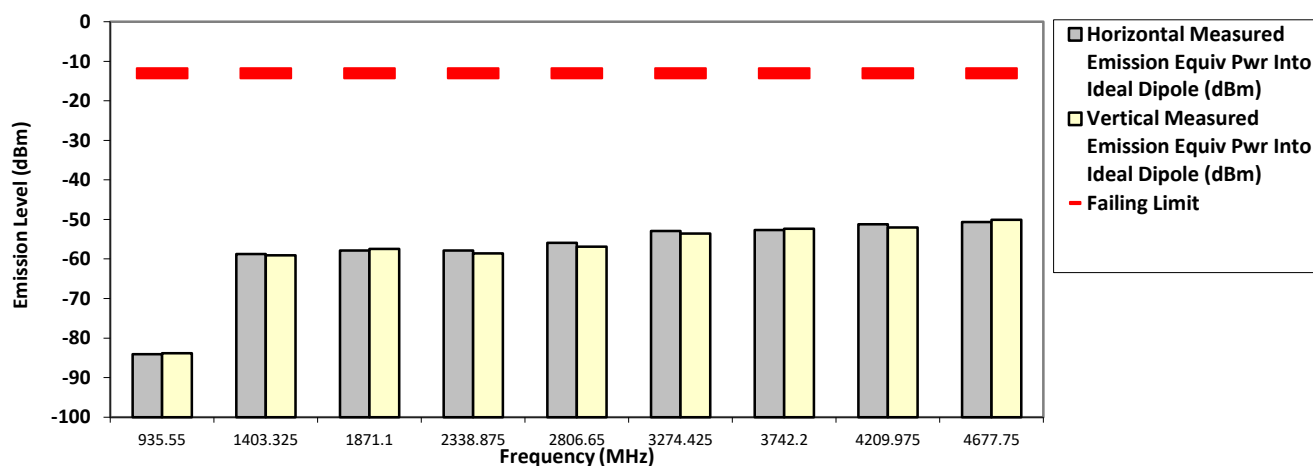

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman

Thu, Jun 28, 2018

Remarks: \*\* Indicates the spurious emission could not be detected due to noise limitations or ambient.

\*Pursuant to CFR 47 Part 2.1057 ( c ), emissions attenuated more than 20 dB below the permissible limit are not reported  
 Temp(Deg): 23.6 Hum(%RH): 69.3

System MU: 5.01 dB

Remarks:

|                |                  |                |
|----------------|------------------|----------------|
| Passed Results | Marginal Results | Failed Results |
|----------------|------------------|----------------|

Model Number: AAM02QNH9JA1AN  
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 776TUK4068

SR:12850-EMC-00001

Accy Part No: 1175-PMMN4089A-2, HKN4192B

Test Mode: TX Analog


467.775000 MHz

25 kHz

1.000 Watt(s) /Low Power

| Frequency (MHz) | Limit    | Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm) | Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm) |
|-----------------|----------|----------------------------------------------------------------|--------------------------------------------------------------|
| 935.5500        | -13.0000 | -84.9468 **                                                    | -83.4538 **                                                  |
| 1403.3250       | -13.0000 | -60.6115 **                                                    | -64.0223 **                                                  |
| 1871.1000       | -13.0000 | -59.4183 **                                                    | -63.0629 **                                                  |
| 2338.8750       | -13.0000 | -57.6676 **                                                    | -59.9861 **                                                  |
| 2806.6500       | -13.0000 | -55.6480 **                                                    | -58.6347 **                                                  |
| 3274.4250       | -13.0000 | -52.9171 **                                                    | -57.6391 **                                                  |
| 3742.2000       | -13.0000 | -53.4861 **                                                    | -55.1644 **                                                  |
| 4209.9750       | -13.0000 | -52.1795 **                                                    | -55.0620 **                                                  |
| 4677.7500       | -13.0000 | -50.8936 **                                                    | -53.9566 **                                                  |

### RADIATED SPURIOUS EMISSIONS

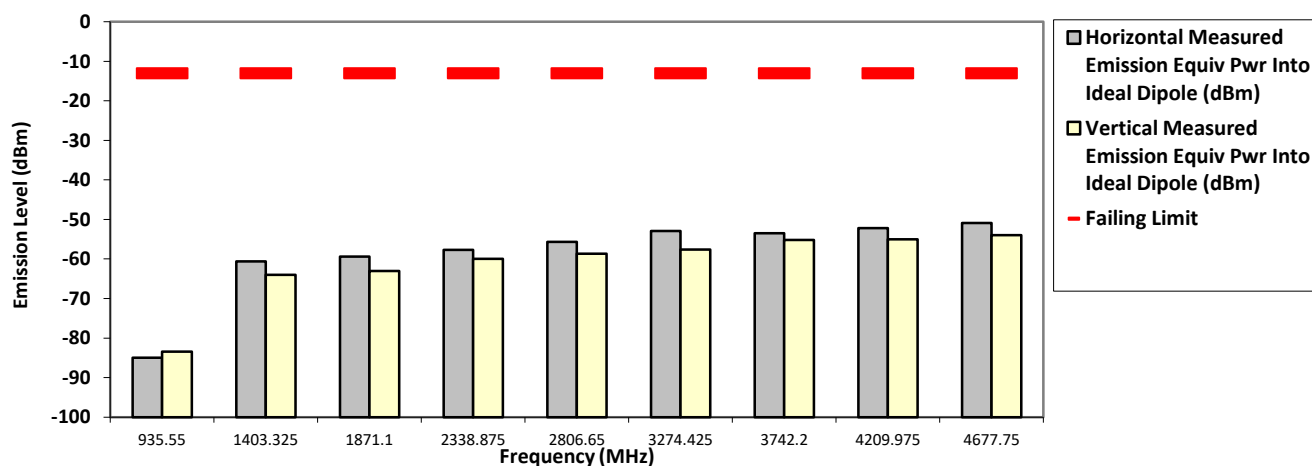

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman

Thu, Jun 28, 2018

Remarks: \*\* Indicates the spurious emission could not be detected due to noise limitations or ambient.

\*Pursuant to CFR 47 Part 2.1057 ( c ), emissions attenuated more than 20 dB below the permissible limit are not reported  
Temp(Deg): 23.6 Hum(%RH): 69.3

System MU: 5.01 dB


Remarks:

|                |                  |                |
|----------------|------------------|----------------|
| Passed Results | Marginal Results | Failed Results |
|----------------|------------------|----------------|

### 6.11.3. Test Result (Digital)

Model Number: AAM02QNH9JA1AN      SAC Transmitter Radiated Emission:      S/N: 776TUK4068      SR:12850-EMC-00001  
Battery Part No: NA      Accy Part No: 1175-PMMN4089A-2, HKN4192B  
Test Mode: TX Digital  
406.200000 MHz      12.5 kHz      30.000 Watt(s) /Max Power

| Frequency (MHz) | Limit    | Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm) | Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm) |
|-----------------|----------|----------------------------------------------------------------|--------------------------------------------------------------|
| 812.4000        | -20.0000 | -83.0604 **                                                    | -83.3316 **                                                  |
| 1218.6000       | -20.0000 | -40.9300 *                                                     | -43.8600 *                                                   |
| 1624.8000       | -20.0000 | -43.9000 *                                                     | -47.0800 *                                                   |
| 2031.0000       | -20.0000 | -55.1300 **                                                    | -58.7208 **                                                  |
| 2437.2000       | -20.0000 | -55.3328 **                                                    | -60.8333 **                                                  |
| 2843.4000       | -20.0000 | -55.1990 **                                                    | -59.7871 **                                                  |
| 3249.6000       | -20.0000 | -51.6187 **                                                    | -55.6377 **                                                  |
| 3655.8000       | -20.0000 | -54.3302 **                                                    | -55.3910 **                                                  |
| 4062.0000       | -20.0000 | -52.2421 **                                                    | -53.8087 **                                                  |

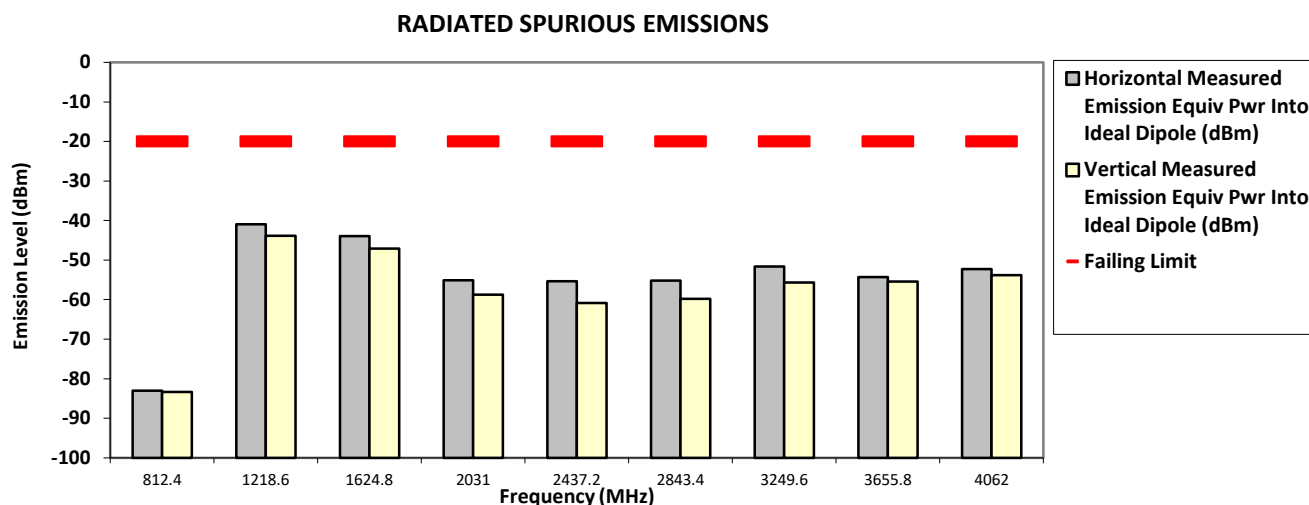

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.  
Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman      Fri, Jun 29, 2018

Remarks: \*\* Indicates the spurious emission could not be detected due to noise limitations or ambient.  
\*Pursuant to CFR 47 Part 2.1057 ( c ), emissions attenuated more than 20 dB below the permissible limit are not reported  
Temp(Deg): 23.6 Hum(%RH): 69.3

System MU: 5.01 dB

Remarks: 

|                |                  |                |
|----------------|------------------|----------------|
| Passed Results | Marginal Results | Failed Results |
|----------------|------------------|----------------|

Model Number: AAM02QNH9JA1AN  
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 776TUK4068

SR:12850-EMC-00001

Accy Part No: 1175-PMMN4089A-2, HKN4192B

Test Mode: TX Digital


406.200000 MHz

12.5 kHz

1.000 Watt(s) /Low Power

| Frequency (MHz) | Limit    | Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm) | Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm) |
|-----------------|----------|----------------------------------------------------------------|--------------------------------------------------------------|
| 812.4000        | -20.0000 | -84.8597 **                                                    | -83.9352 **                                                  |
| 1218.6000       | -20.0000 | -61.6414 **                                                    | -62.4334 **                                                  |
| 1624.8000       | -20.0000 | -62.1840 **                                                    | -61.1430 **                                                  |
| 2031.0000       | -20.0000 | -57.4961 **                                                    | -57.8078 **                                                  |
| 2437.2000       | -20.0000 | -56.9779 **                                                    | -57.8620 **                                                  |
| 2843.4000       | -20.0000 | -55.6652 **                                                    | -55.3725 **                                                  |
| 3249.6000       | -20.0000 | -52.2411 **                                                    | -53.6766 **                                                  |
| 3655.8000       | -20.0000 | -54.4049 **                                                    | -54.3401 **                                                  |
| 4062.0000       | -20.0000 | -52.1906 **                                                    | -52.0402 **                                                  |

#### RADIATED SPURIOUS EMISSIONS

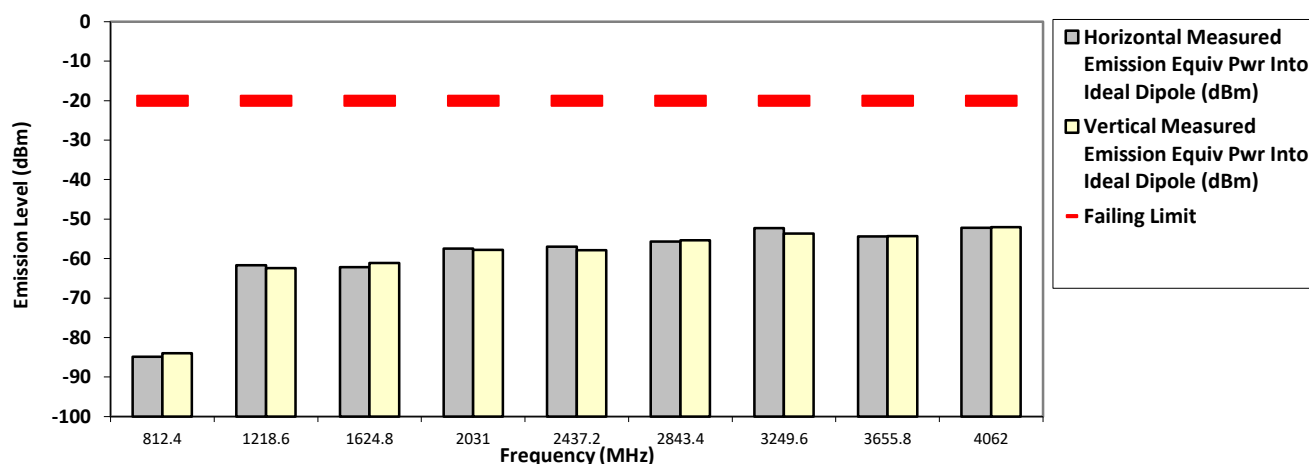

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman

Thu, Jun 28, 2018

Remarks: \*\* Indicates the spurious emission could not be detected due to noise limitations or ambient.

\*Pursuant to CFR 47 Part 2.1057 ( c ), emissions attenuated more than 20 dB below the permissible limit are not reported  
Temp(Deg): 23.6 Hum(%RH): 69.3

System MU: 5.01 dB

Remarks:

|                |                  |                |
|----------------|------------------|----------------|
| Passed Results | Marginal Results | Failed Results |
|----------------|------------------|----------------|

Model Number: AAM02QNH9JA1AN  
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 776TUK4068

SR:12850-EMC-00001

Accy Part No: 1175-PMMN4089A-2, HKN4192B

Test Mode: TX Digital


450.650000 MHz

12.5 kHz

30.000 Watt(s) /Max Power

| Frequency (MHz) | Limit    | Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm) | Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm) |
|-----------------|----------|----------------------------------------------------------------|--------------------------------------------------------------|
| 901.3000        | -20.0000 | -83.8165 **                                                    | -84.4821 **                                                  |
| 1351.9500       | -20.0000 | -49.6000 *                                                     | -42.8400 *                                                   |
| 1802.6000       | -20.0000 | -45.6600 *                                                     | -48.1600 *                                                   |
| 2253.2500       | -20.0000 | -55.3709 **                                                    | -56.4747 **                                                  |
| 2703.9000       | -20.0000 | -53.0419 **                                                    | -52.7229 **                                                  |
| 3154.5500       | -20.0000 | -53.5593 **                                                    | -53.0871 **                                                  |
| 3605.2000       | -20.0000 | -53.9212 **                                                    | -53.9139 **                                                  |
| 4055.8500       | -20.0000 | -52.3134 **                                                    | -51.9128 **                                                  |
| 4506.5000       | -20.0000 | -51.5915 **                                                    | -50.7873 **                                                  |

### RADIATED SPURIOUS EMISSIONS

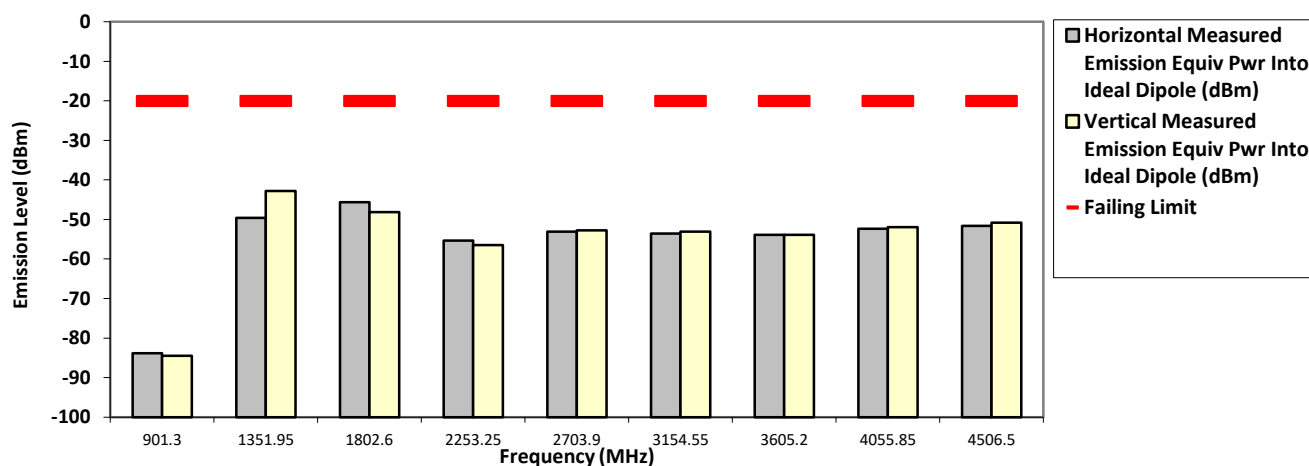

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman

Fri, Jun 29, 2018

Remarks: \*\* Indicates the spurious emission could not be detected due to noise limitations or ambient.

\*Pursuant to CFR 47 Part 2.1057 ( c ), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 23.6 Hum(%RH): 69.3

System MU: 5.01 dB

Remarks:

|                |                  |                |
|----------------|------------------|----------------|
| Passed Results | Marginal Results | Failed Results |
|----------------|------------------|----------------|

Model Number: AAM02QNH9JA1AN  
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 776TUK4068

SR:12850-EMC-00001

Accy Part No: 1175-PMMN4089A-2, HKN4192B

Test Mode: TX Digital


450.650000 MHz

12.5 kHz

1.000 Watt(s) /Low Power

| Frequency (MHz) | Limit    | Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm) | Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm) |
|-----------------|----------|----------------------------------------------------------------|--------------------------------------------------------------|
| 901.3000        | -20.0000 | -83.7711 **                                                    | -83.7873 **                                                  |
| 1351.9500       | -20.0000 | -61.2214 **                                                    | -61.9440 **                                                  |
| 1802.6000       | -20.0000 | -59.7888 **                                                    | -60.8303 **                                                  |
| 2253.2500       | -20.0000 | -57.7139 **                                                    | -58.5089 **                                                  |
| 2703.9000       | -20.0000 | -56.7876 **                                                    | -55.4928 **                                                  |
| 3154.5500       | -20.0000 | -53.6245 **                                                    | -54.8233 **                                                  |
| 3605.2000       | -20.0000 | -55.1334 **                                                    | -54.0825 **                                                  |
| 4055.8500       | -20.0000 | -50.4048 **                                                    | -52.1331 **                                                  |
| 4506.5000       | -20.0000 | -50.4821 **                                                    | -51.1915 **                                                  |

### RADIATED SPURIOUS EMISSIONS

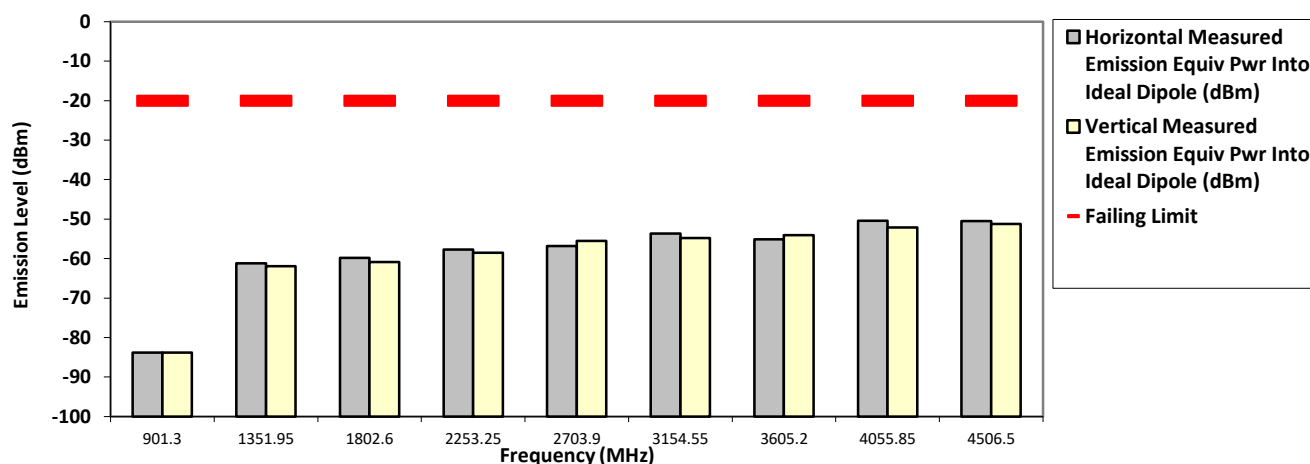

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman

Thu, Jun 28, 2018

Remarks: \*\* Indicates the spurious emission could not be detected due to noise limitations or ambient.

\*Pursuant to CFR 47 Part 2.1057 ( c ), emissions attenuated more than 20 dB below the permissible limit are not reported  
Temp(Deg): 23.6 Hum(%RH): 69.3

System MU: 5.01 dB

Remarks:

|                |                  |                |
|----------------|------------------|----------------|
| Passed Results | Marginal Results | Failed Results |
|----------------|------------------|----------------|

Model Number: AAM02QNH9JA1AN  
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 776TUK4068

SR:12850-EMC-00001

Accy Part No: 1175-PMMN4089A-2, HKN4192B

Test Mode: TX Digital


459.125000 MHz

12.5 kHz

30.000 Watt(s) /Max Power

| Frequency (MHz) | Limit    | Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm) | Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm) |
|-----------------|----------|----------------------------------------------------------------|--------------------------------------------------------------|
| 918.2500        | -20.0000 | -84.1659 **                                                    | -84.0346 **                                                  |
| 1377.3750       | -20.0000 | -49.1000 *                                                     | -43.3900 *                                                   |
| 1836.5000       | -20.0000 | -60.2750 **                                                    | -64.7663 **                                                  |
| 2295.6250       | -20.0000 | -48.1900 *                                                     | -43.4500 *                                                   |
| 2754.7500       | -20.0000 | -53.4334 **                                                    | -59.3659 **                                                  |
| 3213.8750       | -20.0000 | -52.6809 **                                                    | -55.2865 **                                                  |
| 3673.0000       | -20.0000 | -54.6547 **                                                    | -58.0548 **                                                  |
| 4132.1250       | -20.0000 | -52.8782 **                                                    | -57.4686 **                                                  |
| 4591.2500       | -20.0000 | -51.0786 **                                                    | -53.4080 **                                                  |

### RADIATED SPURIOUS EMISSIONS

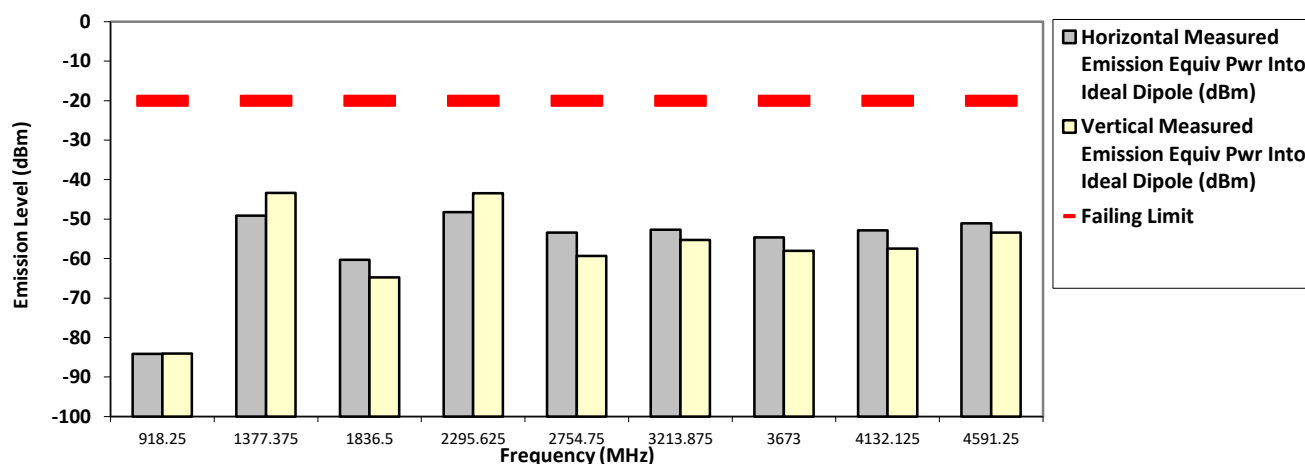

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman

Fri, Jun 29, 2018

Remarks: \*\* Indicates the spurious emission could not be detected due to noise limitations or ambient.

\*Pursuant to CFR 47 Part 2.1057 ( c ), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 23.6 Hum(%RH): 69.3

System MU: 5.01 dB

Remarks:

|                |                  |                |
|----------------|------------------|----------------|
| Passed Results | Marginal Results | Failed Results |
|----------------|------------------|----------------|

Model Number: AAM02QNH9JA1AN  
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 776TUK4068

SR:12850-EMC-00001

Accy Part No: 1175-PMMN4089A-2, HKN4192B

Test Mode: TX Digital


459.125000 MHz

12.5 kHz

1.000 Watt(s) /Low Power

| Frequency (MHz) | Limit    | Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm) | Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm) |
|-----------------|----------|----------------------------------------------------------------|--------------------------------------------------------------|
| 918.2500        | -20.0000 | -82.9830 **                                                    | -84.6958 **                                                  |
| 1377.3750       | -20.0000 | -61.4580 **                                                    | -61.5504 **                                                  |
| 1836.5000       | -20.0000 | -59.9800 **                                                    | -60.1816 **                                                  |
| 2295.6250       | -20.0000 | -56.9278 **                                                    | -57.4249 **                                                  |
| 2754.7500       | -20.0000 | -55.2323 **                                                    | -56.4001 **                                                  |
| 3213.8750       | -20.0000 | -52.2576 **                                                    | -54.0085 **                                                  |
| 3673.0000       | -20.0000 | -53.4739 **                                                    | -54.3264 **                                                  |
| 4132.1250       | -20.0000 | -52.6433 **                                                    | -51.6953 **                                                  |
| 4591.2500       | -20.0000 | -50.7296 **                                                    | -50.9823 **                                                  |

#### RADIATED SPURIOUS EMISSIONS

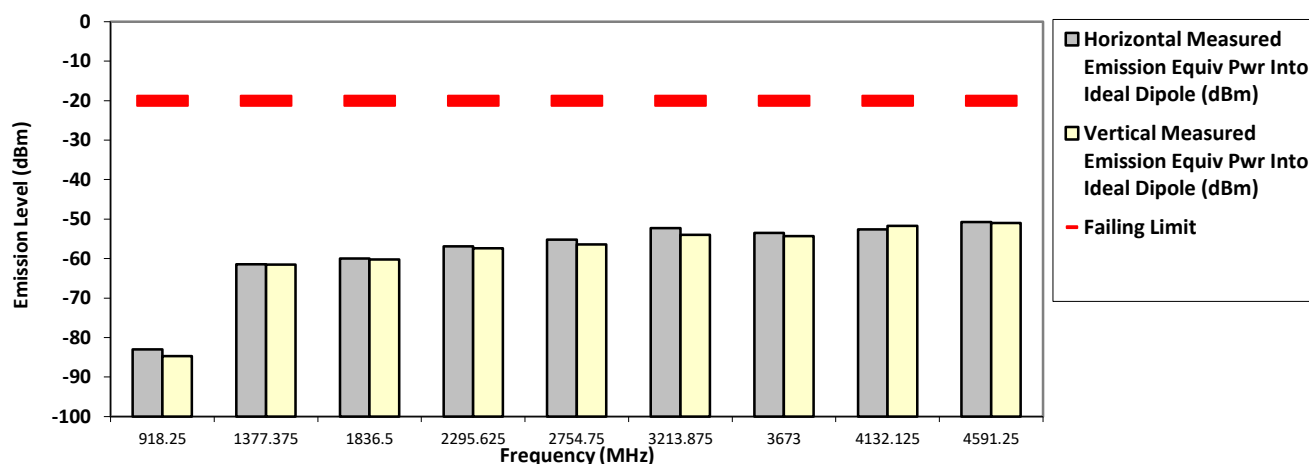

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman

Thu, Jun 28, 2018

Remarks: \*\* Indicates the spurious emission could not be detected due to noise limitations or ambient.

\*Pursuant to CFR 47 Part 2.1057 ( c ), emissions attenuated more than 20 dB below the permissible limit are not reported  
Temp(Deg): 23.6 Hum(%RH): 69.3

System MU: 5.01 dB

Remarks:

|                |                  |                |
|----------------|------------------|----------------|
| Passed Results | Marginal Results | Failed Results |
|----------------|------------------|----------------|

Model Number: AAM02QNH9JA1AN  
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 776TUK4068

SR:12850-EMC-00001

Accy Part No: 1175-PMMN4089A-2, HKN4192B

Test Mode: TX Digital


467.775000 MHz

12.5 kHz

30.000 Watt(s) /Max Power

| Frequency (MHz) | Limit    | Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm) | Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm) |
|-----------------|----------|----------------------------------------------------------------|--------------------------------------------------------------|
| 935.5500        | -20.0000 | -82.8537 **                                                    | -84.2038 **                                                  |
| 1403.3250       | -20.0000 | -52.0200 *                                                     | -40.2200 *                                                   |
| 1871.1000       | -20.0000 | -52.3400 *                                                     | -46.5200 *                                                   |
| 2338.8750       | -20.0000 | -55.3904 **                                                    | -57.5631 **                                                  |
| 2806.6500       | -20.0000 | -56.1251 **                                                    | -56.1081 **                                                  |
| 3274.4250       | -20.0000 | -53.2221 **                                                    | -53.7711 **                                                  |
| 3742.2000       | -20.0000 | -53.1781 **                                                    | -54.5050 **                                                  |
| 4209.9750       | -20.0000 | -51.2027 **                                                    | -51.7991 **                                                  |
| 4677.7500       | -20.0000 | -50.6181 **                                                    | -50.2201 **                                                  |

#### RADIATED SPURIOUS EMISSIONS

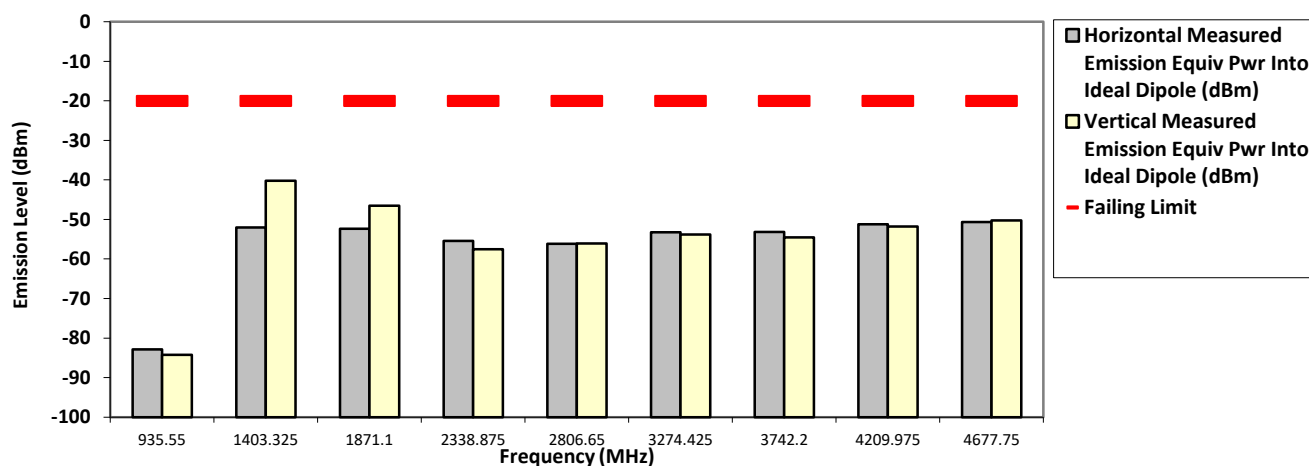

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman

Fri, Jun 29, 2018

Remarks: \*\* Indicates the spurious emission could not be detected due to noise limitations or ambient.

\*Pursuant to CFR 47 Part 2.1057 ( c ), emissions attenuated more than 20 dB below the permissible limit are not reported  
Temp(Deg): 23.6 Hum(%RH): 69.3

System MU: 5.01 dB

Remarks:

|                |                  |                |
|----------------|------------------|----------------|
| Passed Results | Marginal Results | Failed Results |
|----------------|------------------|----------------|

Model Number: AAM02QNH9JA1AN  
 Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 776TUK4068

SR:12850-EMC-00001

Accy Part No: 1175-PMMN4089A-2, HKN4192B

Test Mode: TX Digital


467.775000 MHz

12.5 kHz

1.000 Watt(s) /Low Power

| Frequency (MHz) | Limit    | Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm) | Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm) |
|-----------------|----------|----------------------------------------------------------------|--------------------------------------------------------------|
| 935.5500        | -20.0000 | -83.8966 **                                                    | -83.4331 **                                                  |
| 1403.3250       | -20.0000 | -61.5698 **                                                    | -60.8443 **                                                  |
| 1871.1000       | -20.0000 | -58.8447 **                                                    | -59.6692 **                                                  |
| 2338.8750       | -20.0000 | -56.7272 **                                                    | -56.5493 **                                                  |
| 2806.6500       | -20.0000 | -56.2351 **                                                    | -54.7584 **                                                  |
| 3274.4250       | -20.0000 | -52.5942 **                                                    | -53.9574 **                                                  |
| 3742.2000       | -20.0000 | -53.2869 **                                                    | -53.9580 **                                                  |
| 4209.9750       | -20.0000 | -52.2988 **                                                    | -51.1968 **                                                  |
| 4677.7500       | -20.0000 | -50.0488 **                                                    | -50.0453 **                                                  |

### RADIATED SPURIOUS EMISSIONS

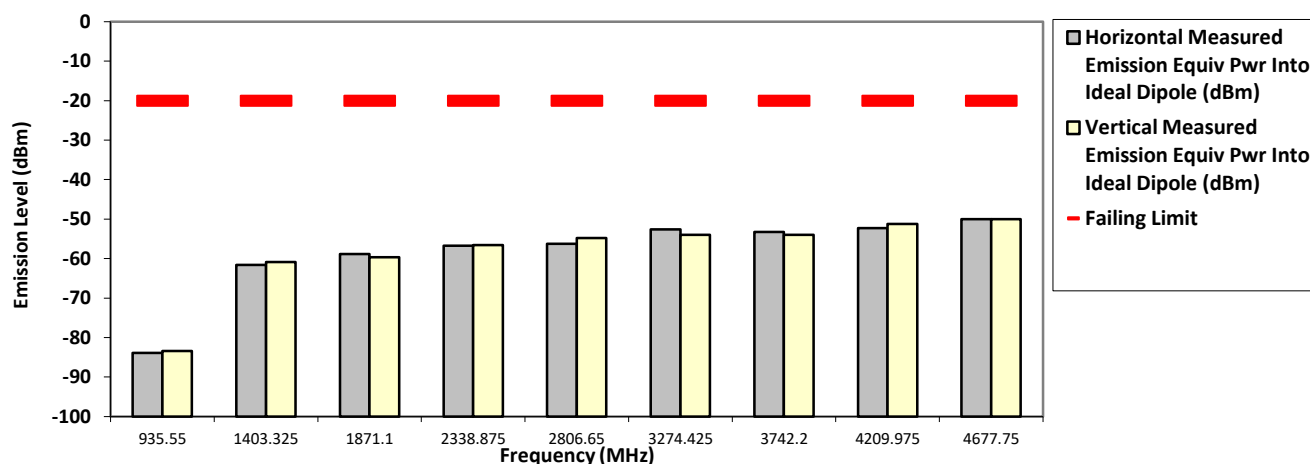

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman

Thu, Jun 28, 2018

Remarks: \*\* Indicates the spurious emission could not be detected due to noise limitations or ambient.

\*Pursuant to CFR 47 Part 2.1057 ( c ), emissions attenuated more than 20 dB below the permissible limit are not reported  
 Temp(Deg): 23.6 Hum(%RH): 69.3

System MU: 5.01 dB

Remarks:

|                |                  |                |
|----------------|------------------|----------------|
| Passed Results | Marginal Results | Failed Results |
|----------------|------------------|----------------|

#### 6.11.4. Test Limit


Table below summarized the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least

| Channel Spacing | Part 22                                 | Part 24D                                | Part 74                                 | Part 80                                 | Part 90 (UHF, VHF, 800, 900)            | Part 90 (700)                           |
|-----------------|-----------------------------------------|-----------------------------------------|-----------------------------------------|-----------------------------------------|-----------------------------------------|-----------------------------------------|
| 12.5kHz         | 43 + log <sub>10</sub> (P)<br>(-13 dBm) | 43 + log <sub>10</sub> (P)<br>(-13 dBm) | 43 + log <sub>10</sub> (P)<br>(-13 dBm) | Not Applicable                          | 50 + log <sub>10</sub> (P)<br>(-20 dBm) | 43 + log <sub>10</sub> (P)<br>(-13 dBm) |
| 25kHz           |                                         | Not Applicable                          |                                         | 43 + log <sub>10</sub> (P)<br>(-13 dBm) | 43 + log <sub>10</sub> (P)<br>(-13 dBm) | 43 + log <sub>10</sub> (P)<br>(-13 dBm) |

| Channel Spacing | RSS 134                                 | RSS 182                                 | RSS 119 (UHF, VHF, 800, 900)            | RSS 119 (700)                           |
|-----------------|-----------------------------------------|-----------------------------------------|-----------------------------------------|-----------------------------------------|
| 12.5kHz         | 43 + log <sub>10</sub> (P)<br>(-13 dBm) | Not Applicable                          | 50 + log <sub>10</sub> (P)<br>(-20 dBm) | 43 + log <sub>10</sub> (P)<br>(-13 dBm) |
| 25kHz           | Not Applicable                          | 43 + log <sub>10</sub> (P)<br>(-13 dBm) | 43 + log <sub>10</sub> (P)<br>(-13 dBm) | 43 + log <sub>10</sub> (P)<br>(-13 dBm) |

## 6.12. Effective Radiated Power (ERP)

### 6.12.1. Test Setup

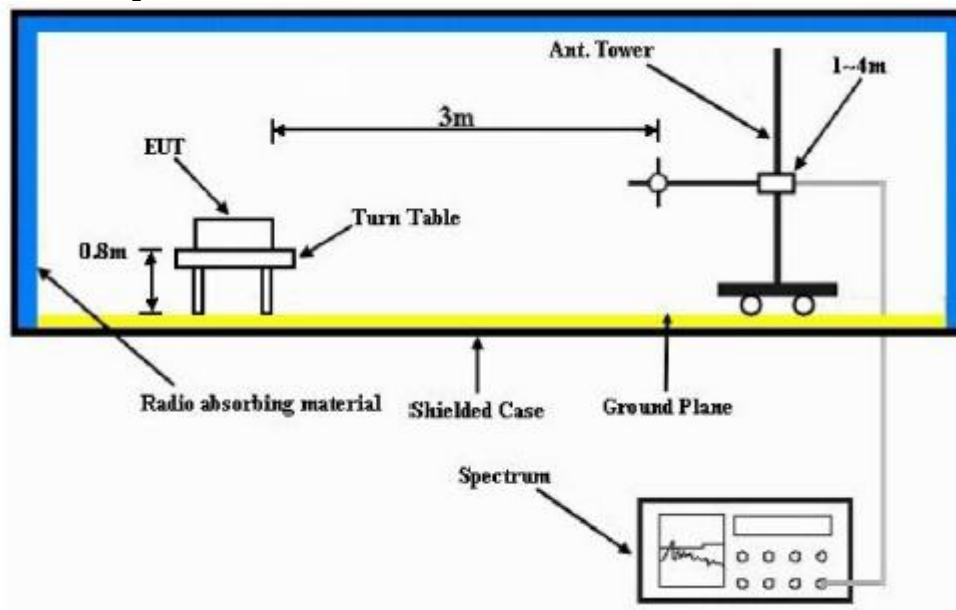

- 1) The Resolution Bandwidth for Equivalent Radiated Power (ERP) below 1 GHz is 100 kHz with Video Bandwidth = 300 kHz and Resolution Bandwidth for EIRP above 1 GHz is 1 MHz with Video Bandwidth = 3 MHz. Detector Mode is RMS.
- 2) In the semi-anechoic chamber, setup as illustrated above the DUT placed on the 0.8m height of Turn Table, rotated the table 45 degree each interval to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power for each degree interval. The "Read Value" is the spectrum reading of maximum power value.
- 3) The substitution antenna is substituted for DUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the Measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.

### 6.12.2. Test Result


NA → Not Applicable

### 6.12.3. Test Limit

The maximum output power of the transmitter for mobile stations is 100 watts (20 dB). Power is given in terms of effective radiated power (ERP).

## 6.13. GNSS (EIRP for 1559 - 1610MHz)

### 6.13.1. Test Setup

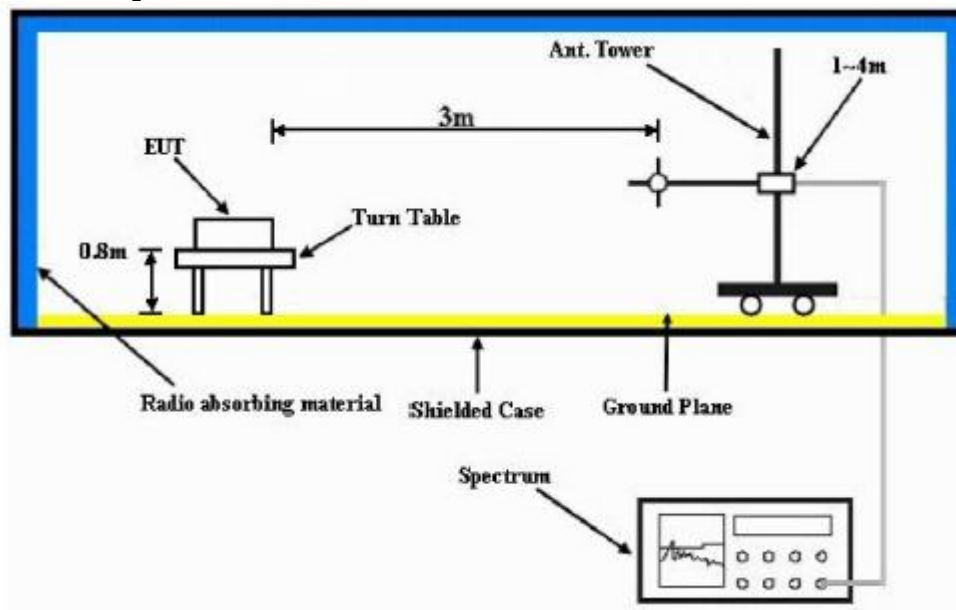

- 4) The Resolution Bandwidth for Equivalent Isotropically Radiated Power (EIRP) below 1 GHz is 100 kHz with Video Bandwidth = 300 kHz and Resolution Bandwidth for EIRP above 1 GHz is 1 MHz with Video Bandwidth = 3 MHz. Detector Mode is RMS.
- 5) In the semi-anechoic chamber, setup as illustrated above the DUT placed on the 0.8m height of Turn Table, rotated the table 45 degree each interval to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power for each degree interval. The “Read Value” is the spectrum reading of maximum power value.
- 6) The substitution antenna is substituted for DUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the Measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.
- 7)  $EIRP = \text{“Read Value”} + \text{Measured substitution value} + 2.15$ .

### 6.13.1. Test Result

NA → Not Applicable

**6.13.2. Test Limit**

For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559-1610 MHz shall be limited to  $-70$  dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and  $-80$  dBW EIRP for discrete emissions of less than 700 Hz bandwidth.

**~ End of Report ~**