



FCC RF Test Report

APPLICANT : Espressif Systems (Shanghai) Co.,Ltd.
EQUIPMENT : 2.4GHz Wi-Fi & BT IoT Module
BRAND NAME : ESPRESSIF
MODEL NAME : ESP8684-WROOM-07
FCC ID : 2AC7Z-ESP868407
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Apr. 21, 2023 ~ Dec. 21, 2023

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION.....	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	5
1.6 Testing Location	6
1.7 Test Software.....	6
1.8 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 TEST RESULT	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	20
3.3 Power Spectral Density Measurement	21
3.4 Conducted Band Edges and Spurious Emission Measurement	30
3.5 Radiated Band Edges and Spurious Emission Measurement	42
3.6 AC Conducted Emission Measurement.....	46
3.7 Antenna Requirements.....	48
4 LIST OF MEASURING EQUIPMENT.....	49
5 MEASUREMENT UNCERTAINTY.....	50
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR310907A	Rev. 01	Initial issue of report	Jan. 04, 2024



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Report only	-
3.2	15.247(b)(3)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 1.40 dB at 2483.56 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 12.91 dB at 0.157 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

1 General Description

1.1 Applicant

Espressif Systems (Shanghai) Co.,Ltd.

Suite 204, Block 2, 690 Bibo Road, Zhang Jiang Hi-Tech Park, Shanghai, China

1.2 Manufacturer

Espressif Systems (Shanghai) Co.,Ltd.

Suite 204, Block 2, 690 Bibo Road, Zhang Jiang Hi-Tech Park, Shanghai, China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	2.4GHz Wi-Fi & BT IoT Module
Brand Name	ESPRESSIF
Model Name	ESP8684-WROOM-07
FCC ID	2AC7Z-ESP868407
HW Version	V1.0
SW Version	v1.1.3.4
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	BLE 1Mbps: 18.46 dBm (0.0701 W) BLE 2Mbps: 18.57 dBm (0.0719 W) BLE 125kbps: 18.13 dBm (0.0650 W) BLE 500kbps: 18.24 dBm (0.0667 W)
99% Occupied Bandwidth	BLE 1Mbps:1.08MHz BLE 2Mbps:2.06MHz
Antenna Type / Gain	Monopole Antenna with gain 2.33 dBi
Type of Modulation	Bluetooth LE : GFSK

Note: For Bluetooth LE 125Kbps & 500Kbps & 1Mbps & 2Mbps mode, the whole testing has assessed only BLE 1Mbps & 2Mbps mode by referring to their higher conducted power.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH06-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	SPORTON	FCC 15C-15E Test Tools Ver10.0_210607	10.0
2.	03CH06-KS	AUDIX	E3	210616
3.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-

2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth – LE / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_BLE 1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_BLE 1Mbps Mode 3: Bluetooth Tx CH38_2478 MHz_BLE 1Mbps Mode 4: Bluetooth Tx CH39_2480 MHz_BLE 1Mbps Mode 5: Bluetooth Tx CH01_2404 MHz_BLE 2Mbps Mode 6: Bluetooth Tx CH19_2440 MHz_BLE 2Mbps Mode 7: Bluetooth Tx CH38_2478 MHz_BLE 2Mbps Mode 8: Bluetooth Tx CH39_2480 MHz_BLE 2Mbps
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_BLE 1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_BLE 1Mbps Mode 3: Bluetooth Tx CH38_2478 MHz_BLE 1Mbps Mode 4: Bluetooth Tx CH39_2480 MHz_BLE 1Mbps Mode 5: Bluetooth Tx CH01_2404 MHz_BLE 2Mbps Mode 6: Bluetooth Tx CH19_2440 MHz_BLE 2Mbps Mode 7: Bluetooth Tx CH38_2478 MHz_BLE 2Mbps Mode 8: Bluetooth Tx CH39_2480 MHz_BLE 2Mbps
AC Conducted Emission	Mode 1: BLE Tx + power from test Jig
Remark: For Radiated Test Cases, The tests were performance with Test Jig and Notebook	

2.3 Connection Diagram of Test System

AC Conducted Emission:

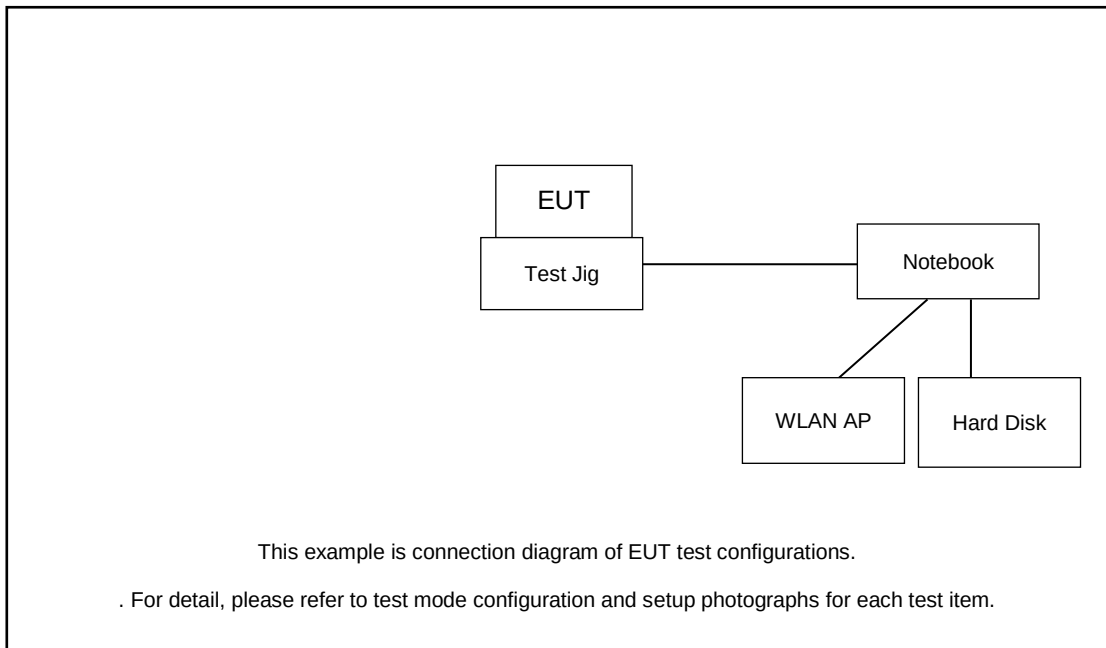

Radiated Emission:

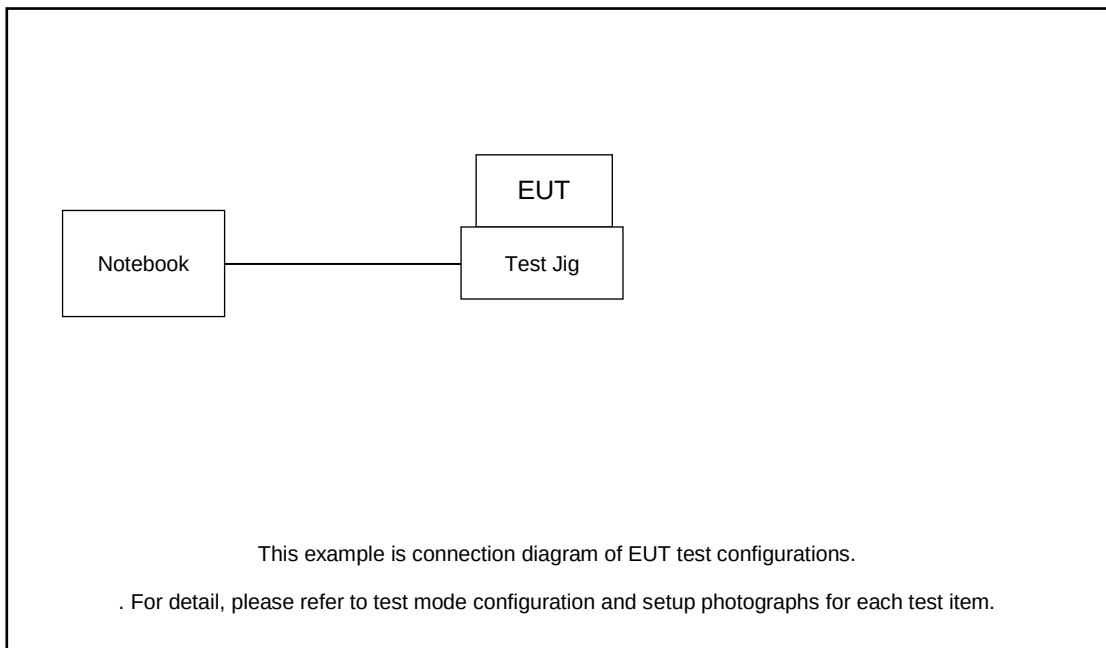

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
2.	Notebook	Lenovo	V130-14IKB004	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
3.	Hard Disk	Lenovo	F310	DoC	Shielded, 1.2m	N/A
4.	Test Jig	Amphenol	W106C_EVB	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For BLE function, the engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 5.6 dB.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\
 &= 5.6 \text{ (dB)}
 \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1% to 5% of the 99% OBW and the VBW is set to 3 times of the RBW.
6. Measure and record the results in the test report.

3.1.4 Test Setup

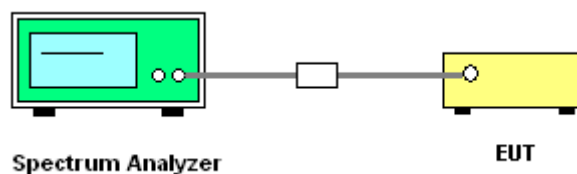




3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.


BLE 1Mbps

6 dB Bandwidth Plot on Channel 00

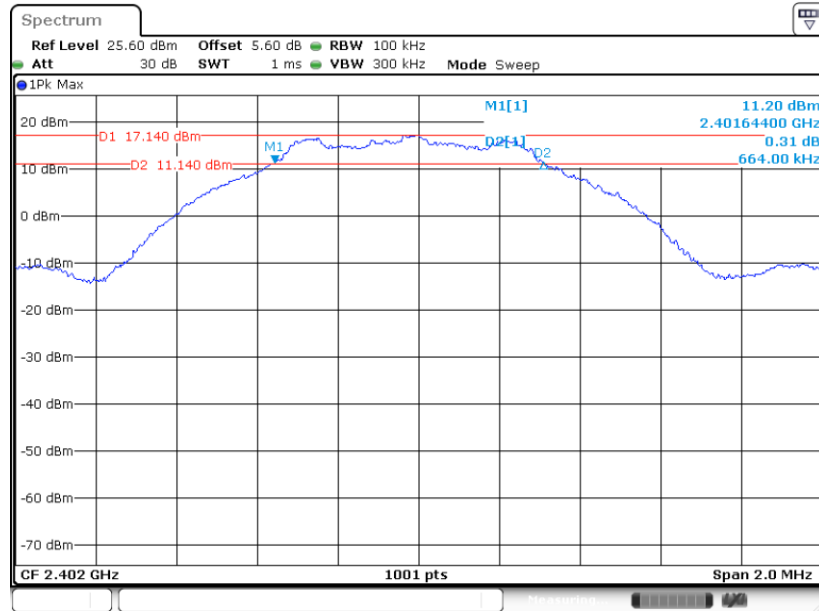

Date: 18 DEC 2023 13:43:55


6 dB Bandwidth Plot on Channel 19

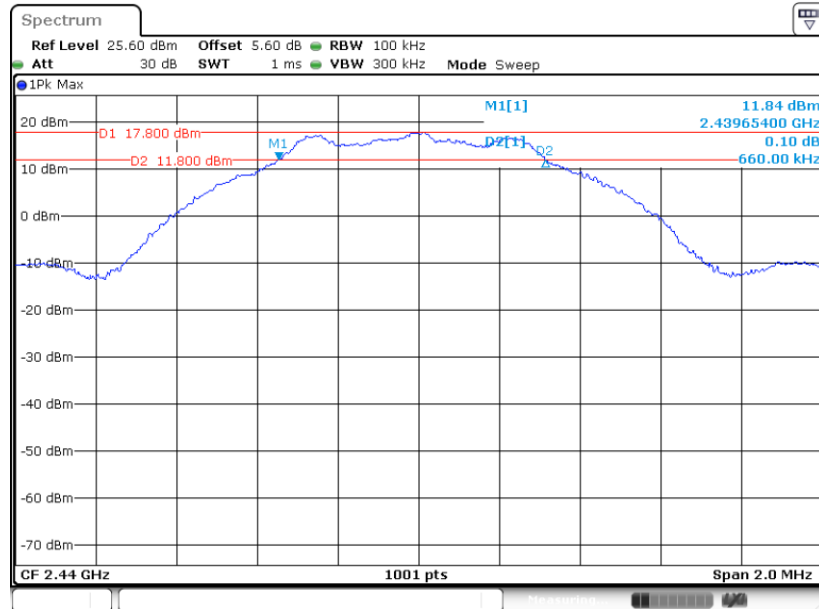

Date: 18 DEC 2023 13:47:27




6 dB Bandwidth Plot on Channel 38

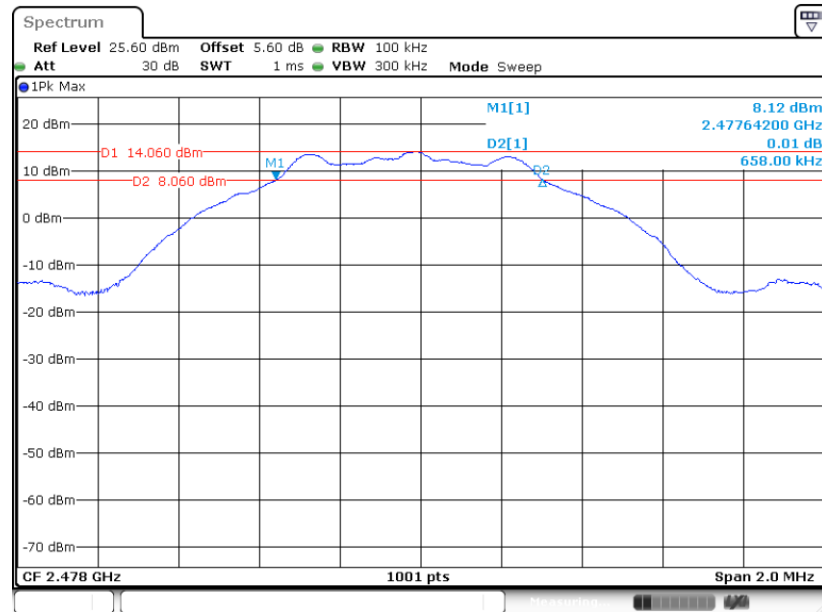

Date: 19.DEC.2023 08:34:29

6 dB Bandwidth Plot on Channel 39

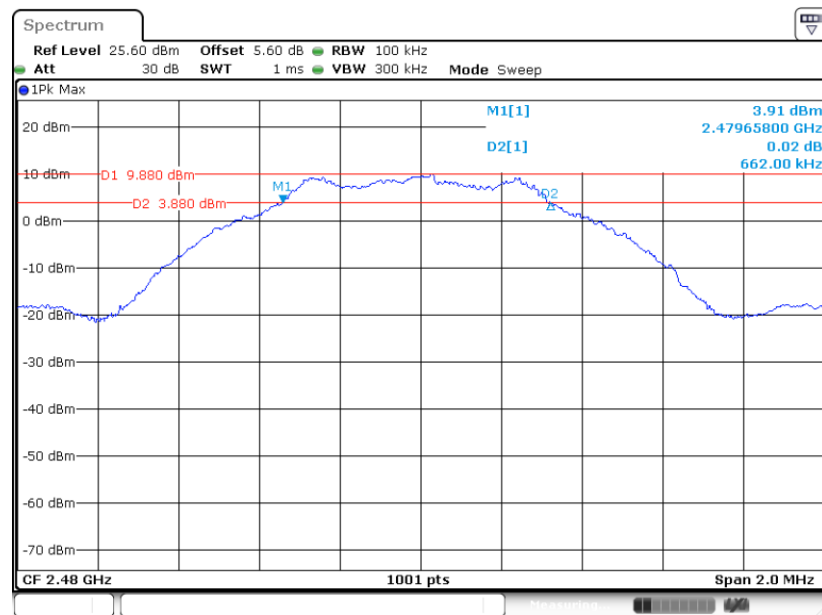


Date: 18.DEC.2023 13:50:14




BLE 2Mbps

6 dB Bandwidth Plot on Channel 00

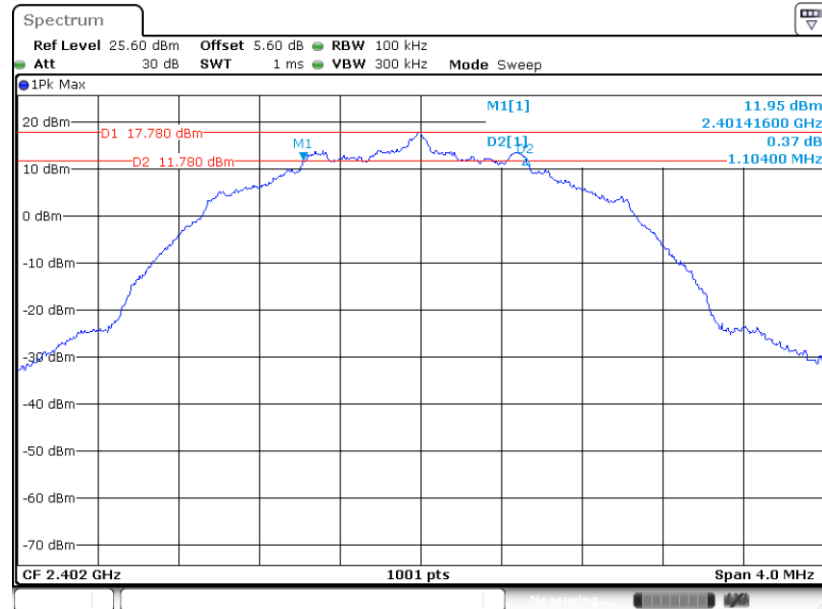

Date: 18.DEC.2023 13:53:21


6 dB Bandwidth Plot on Channel 19

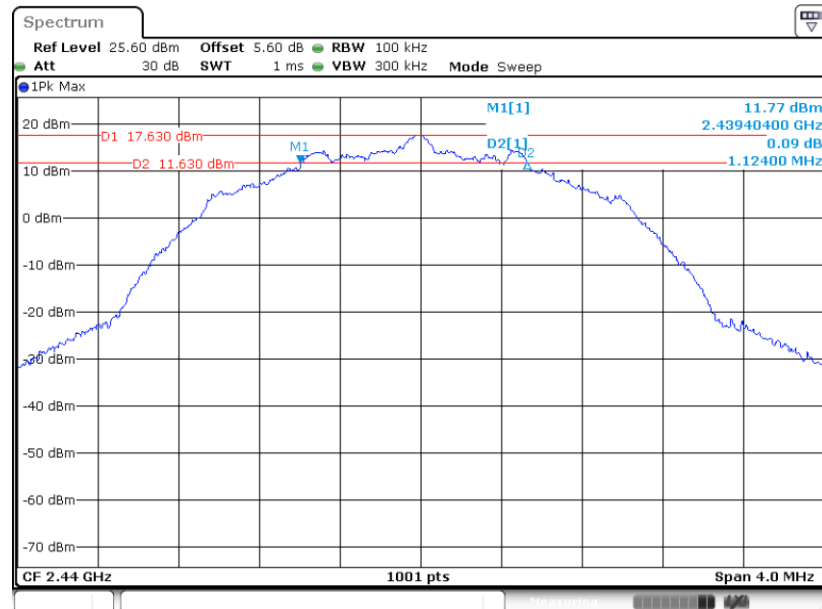


Date: 18.DEC.2023 13:56:17



6 dB Bandwidth Plot on Channel 38

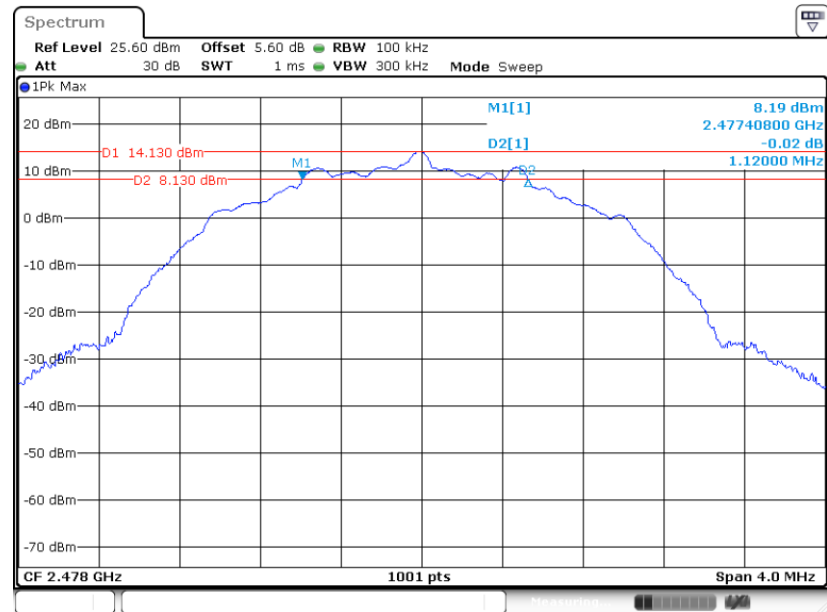

6 dB Bandwidth Plot on Channel 39

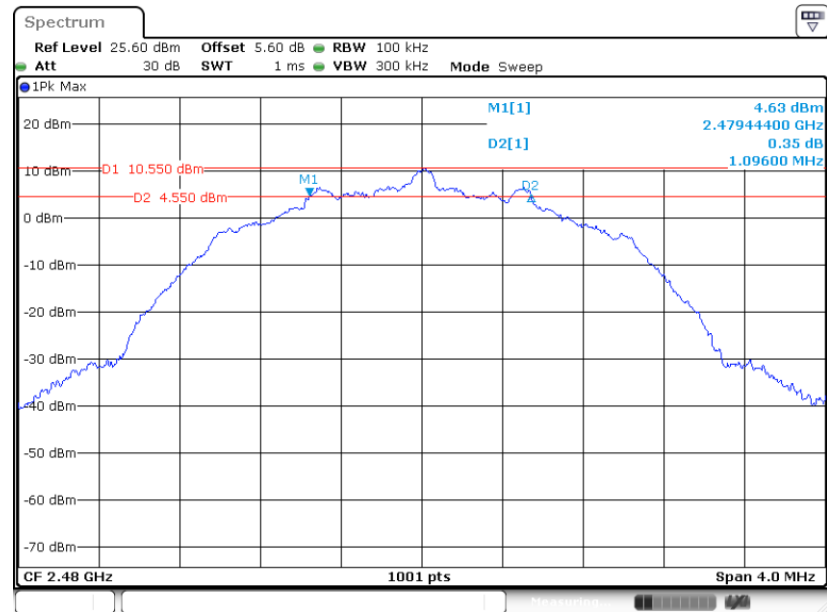




3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.


BLE 1Mbps

99% Occupied Bandwidth Plot on Channel 00

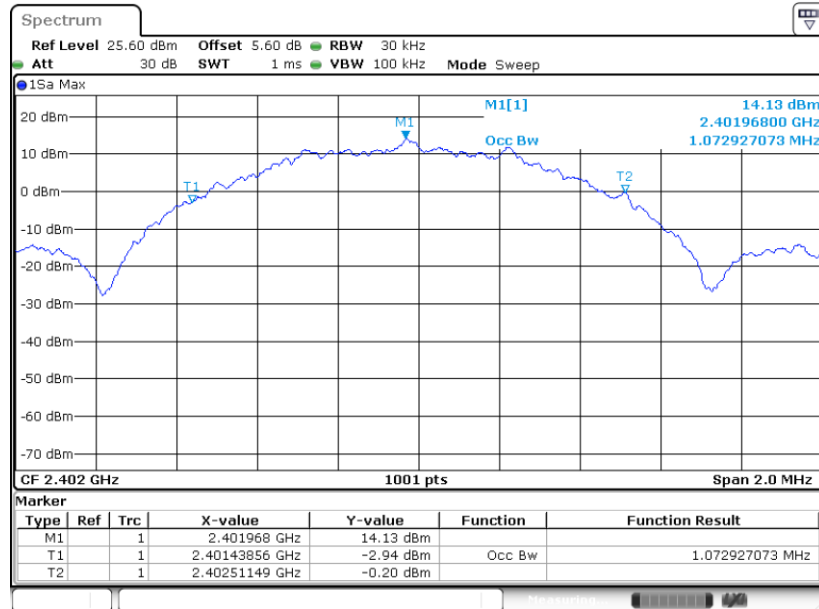

Date: 18.DEC.2023 13:45:41


99% Occupied Bandwidth Plot on Channel 19

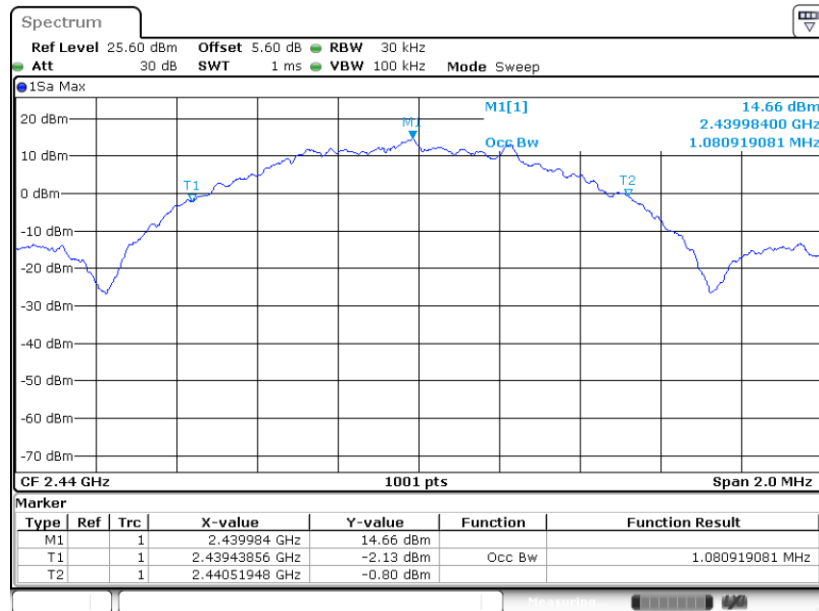

Date: 18.DEC.2023 13:48:55




99% Occupied Bandwidth Plot on Channel 38

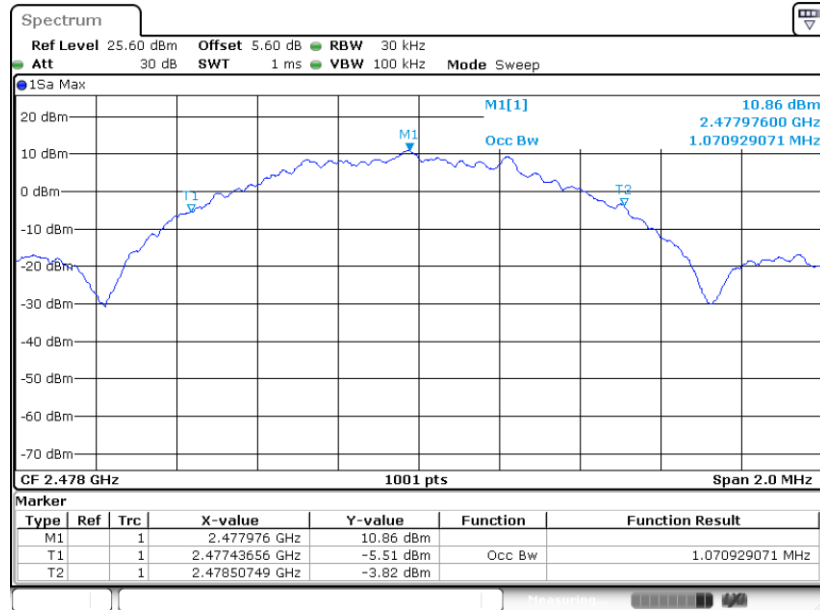

Date: 19.DEC.2023 08:36:16

99% Occupied Bandwidth Plot on Channel 39

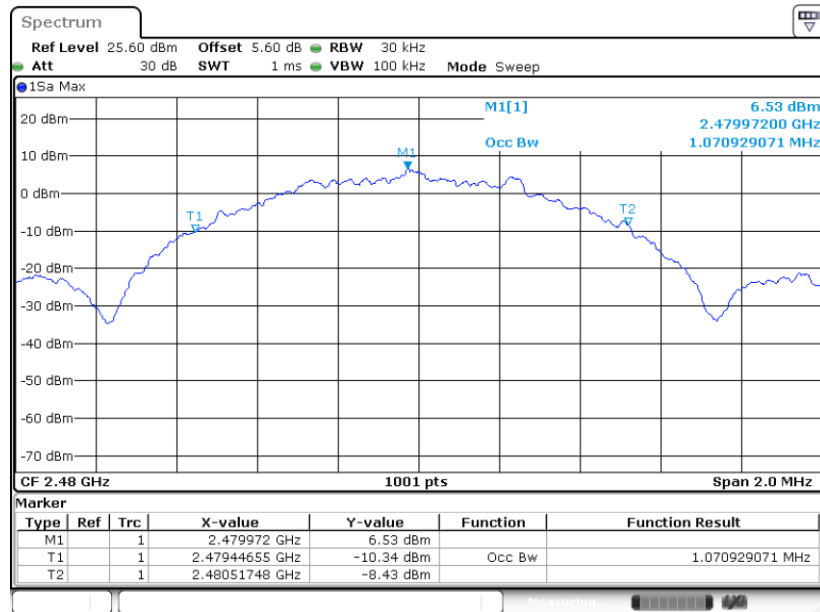


Date: 18.DEC.2023 13:52:01




BLE 2Mbps

99% Occupied Bandwidth Plot on Channel 00

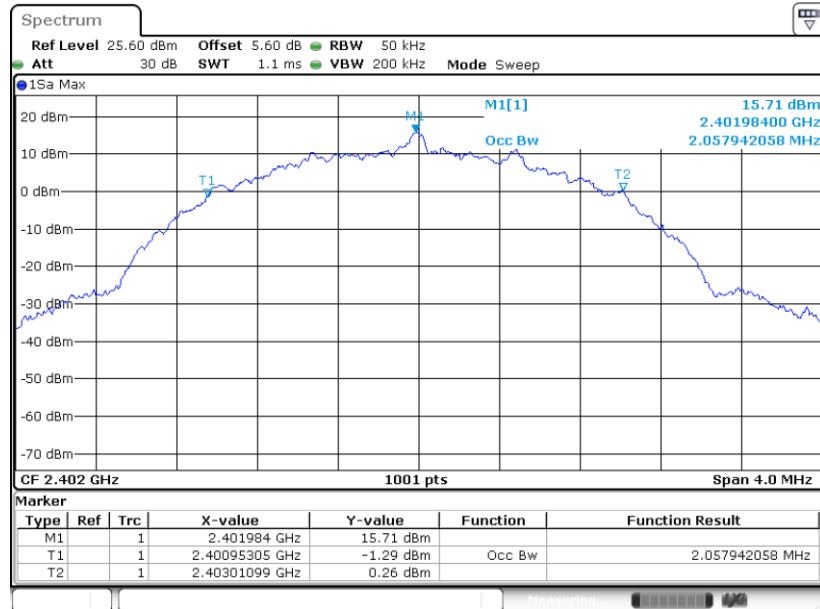


99% Occupied Bandwidth Plot on Channel 19

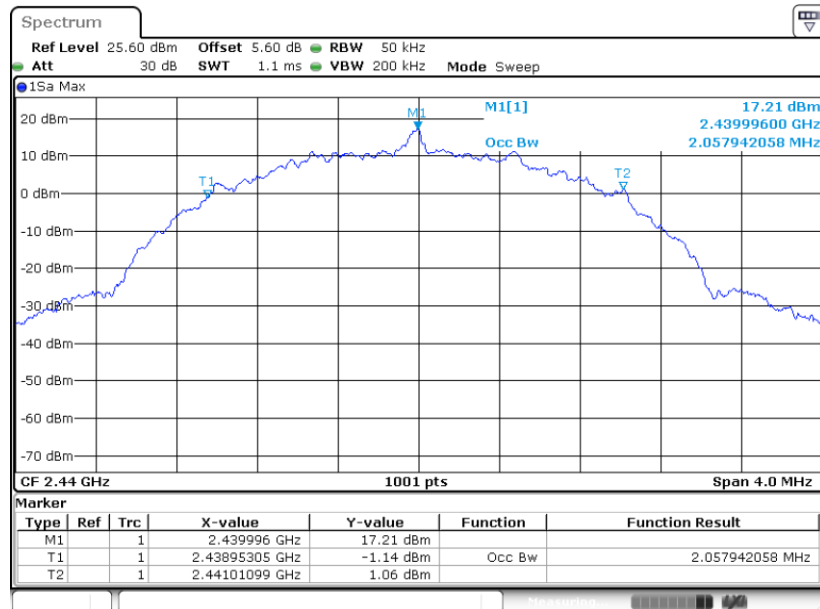




99% Occupied Bandwidth Plot on Channel 38

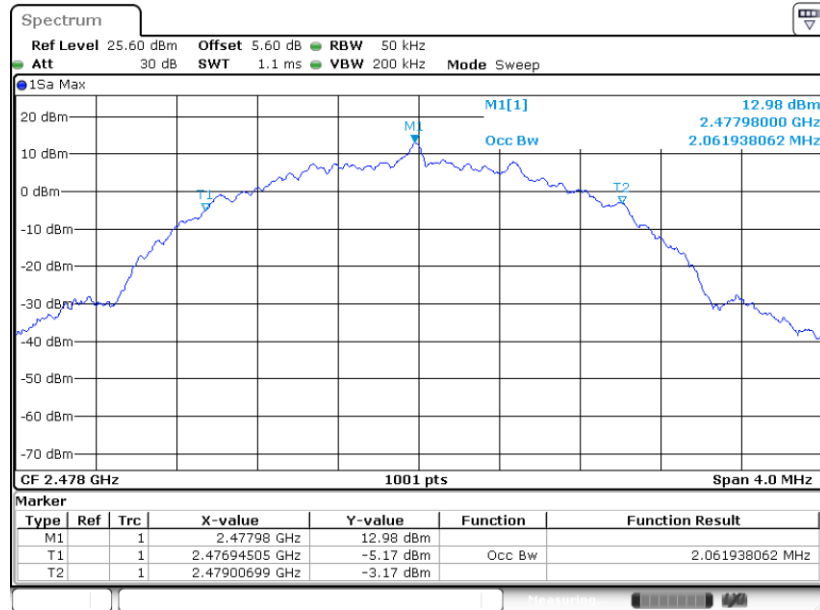

Date: 19.DEC.2023 08:49:01

99% Occupied Bandwidth Plot on Channel 39

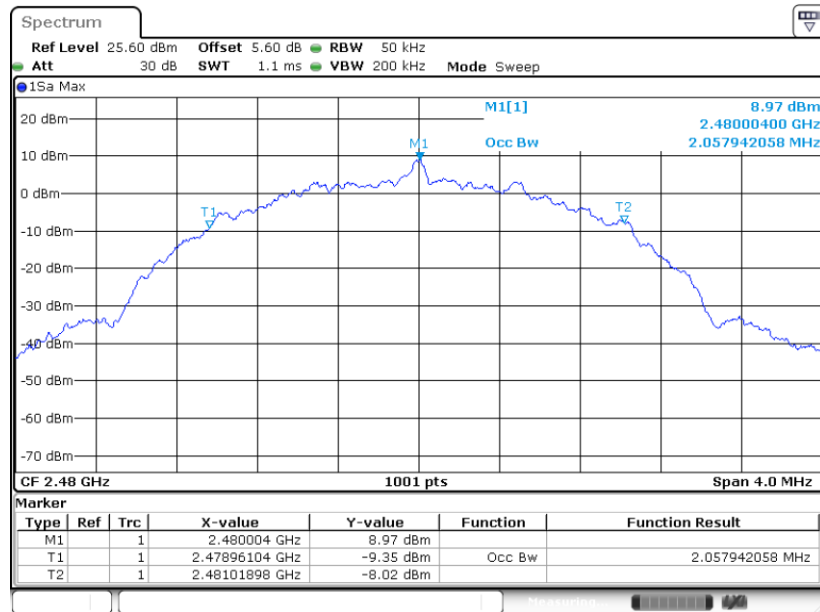

Date: 18.DEC.2023 14:01:09

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

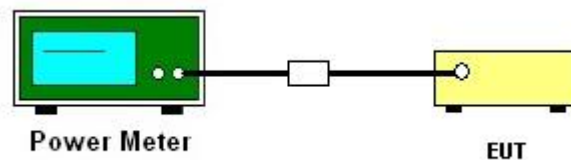

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

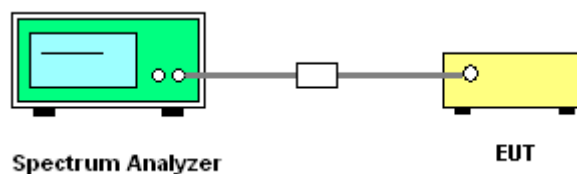

3.3.5 Test Result of Power Spectral Density


Please refer to Appendix A.



3.3.6 Test Result of Power Spectral Density Plots (100kHz)


BLE 1Mbps

PSD 100kHz Plot on Channel 00

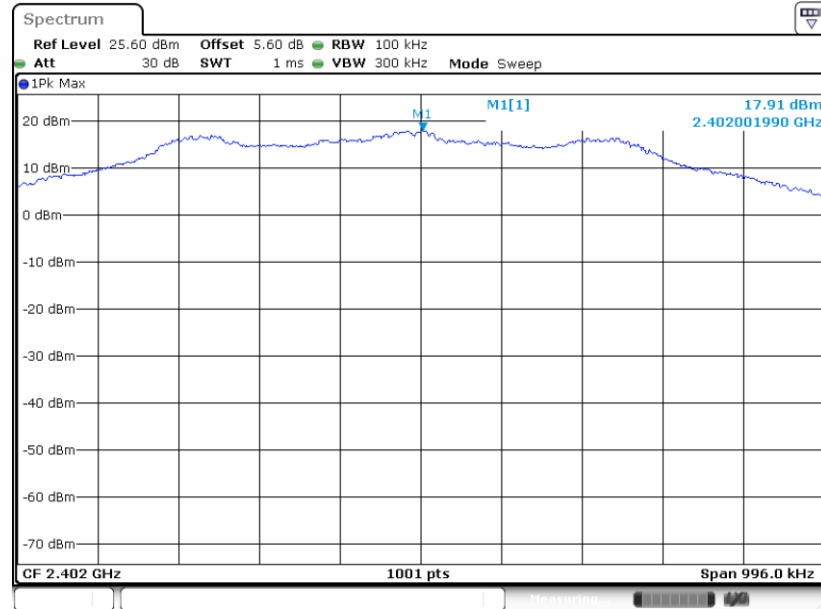

Date: 18.DEC.2023 13:44:33


PSD 100kHz Plot on Channel 19

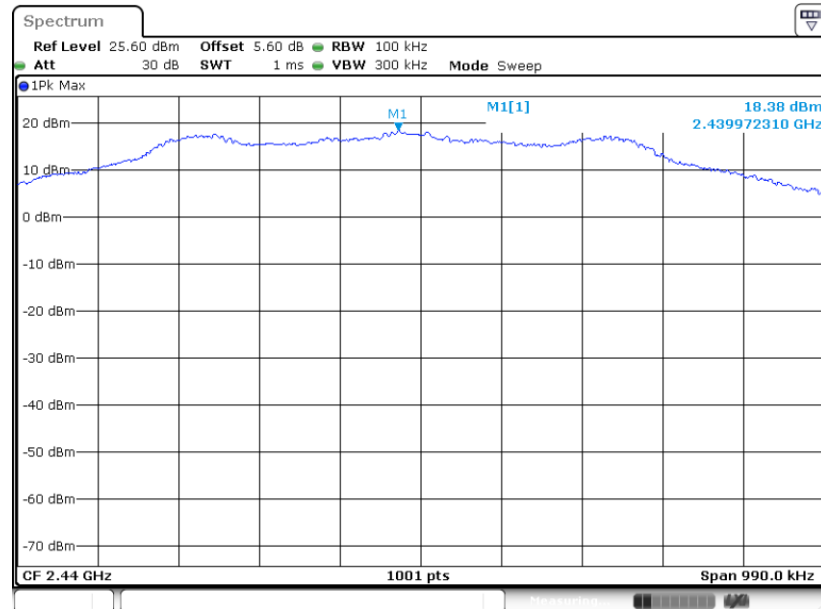

Date: 18.DEC.2023 13:48:05




PSD 100kHz Plot on Channel 38

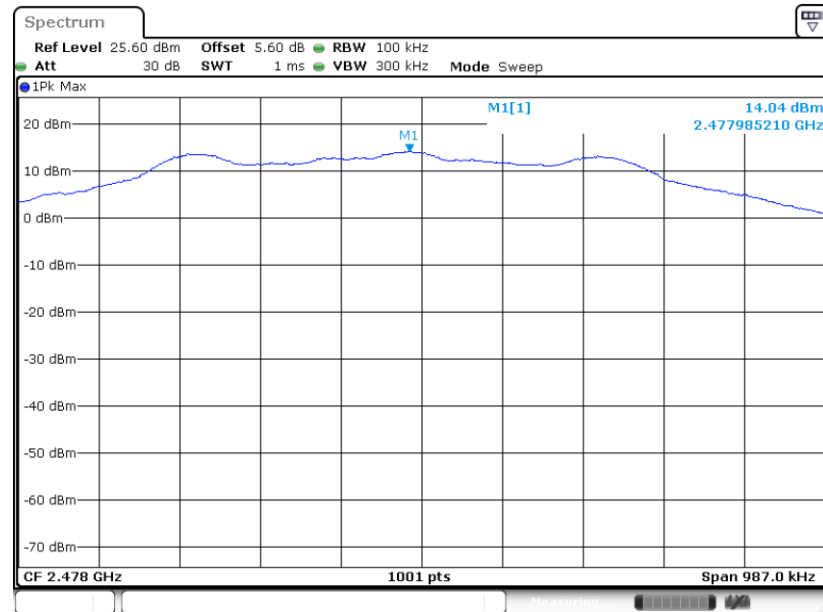

Date: 19.DEC.2023 08:35:07

PSD 100kHz Plot on Channel 39

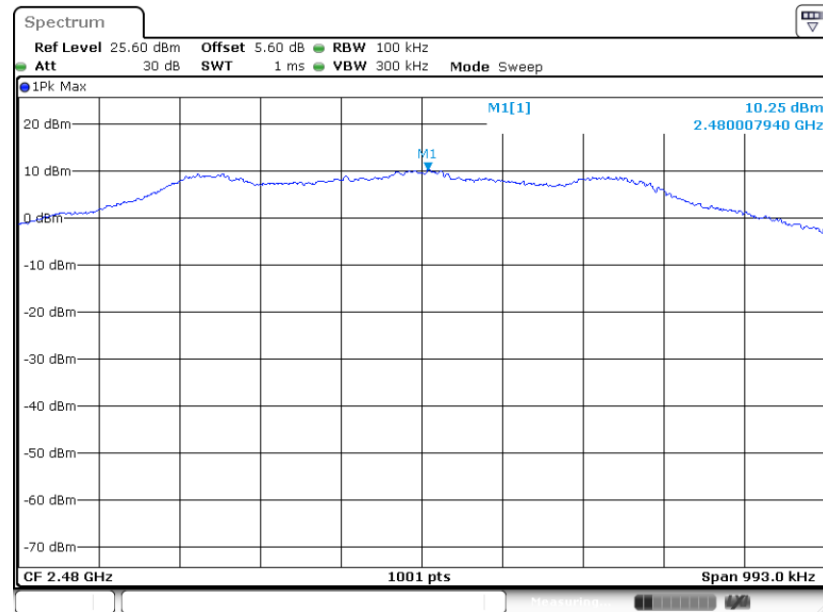


Date: 18.DEC.2023 13:50:52




BLE 2Mbps

PSD 100kHz Plot on Channel 00

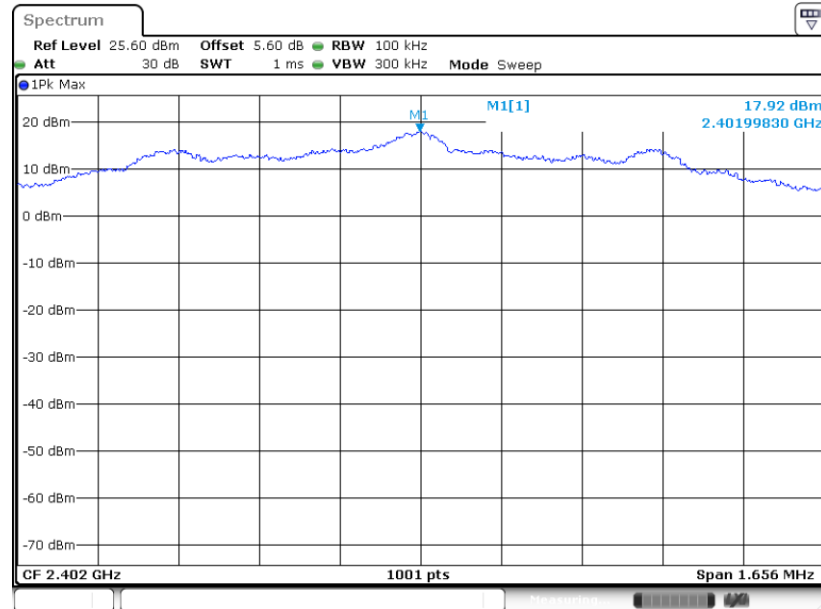

Date: 18 DEC. 2023 13:53:59


PSD 100kHz Plot on Channel 19

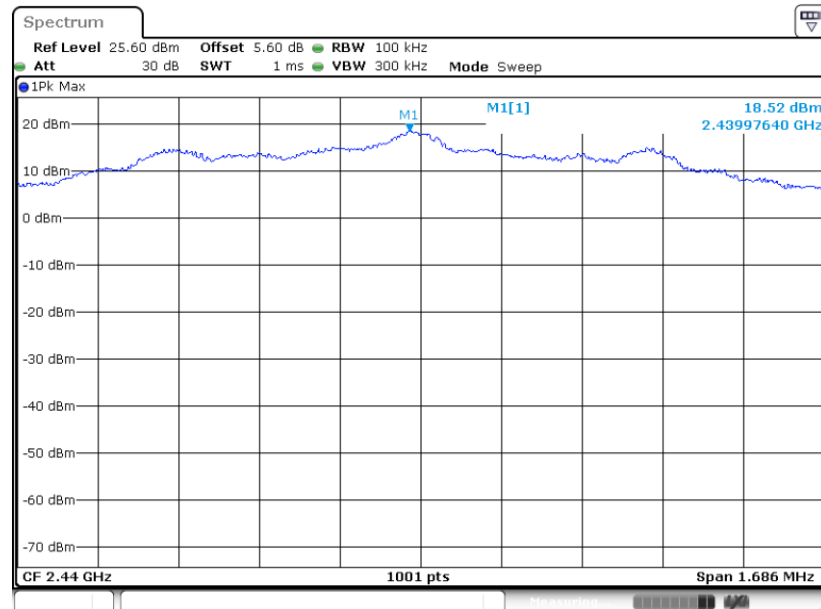

Date: 18 DEC. 2023 13:56:54




PSD 100kHz Plot on Channel 38

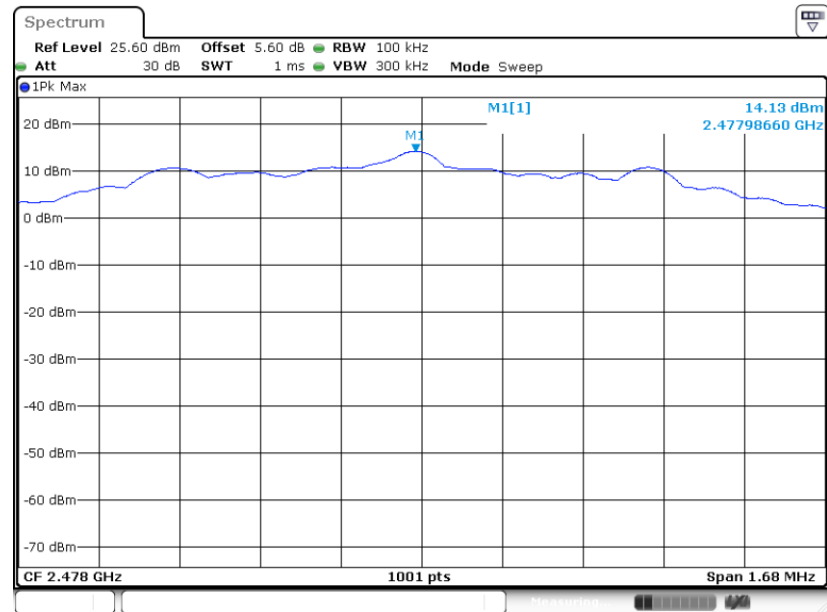

Date: 19.DEC.2023 08:47:45

PSD 100kHz Plot on Channel 39

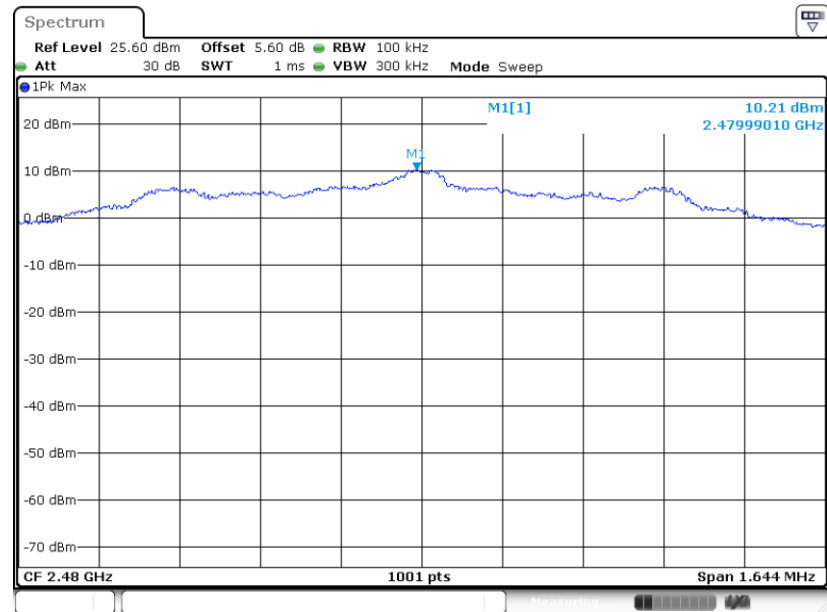


Date: 18.DEC.2023 13:59:16



3.3.7 Test Result of Power Spectral Density Plots (3kHz)


BLE 1Mbps

PSD 3kHz Plot on Channel 00

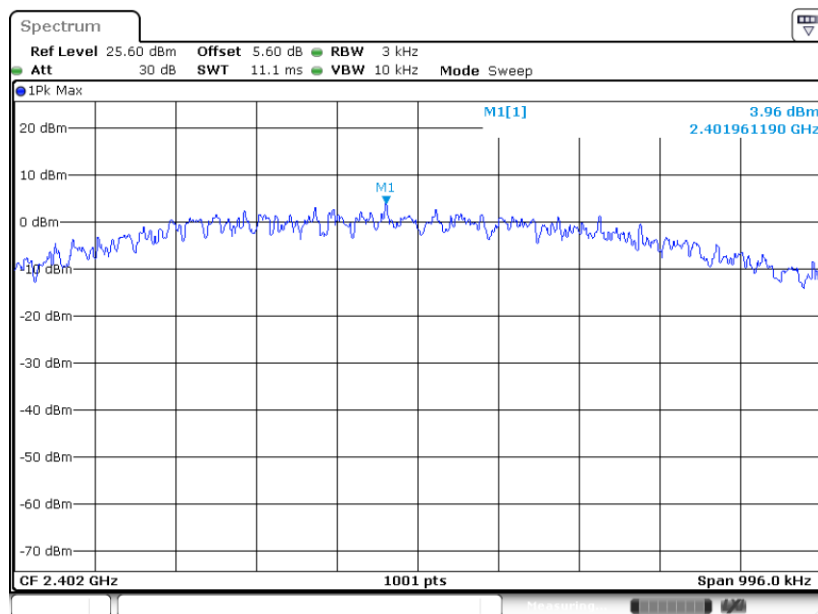

Date: 18 DEC 2023 13:44:14


PSD 3kHz Plot on Channel 19

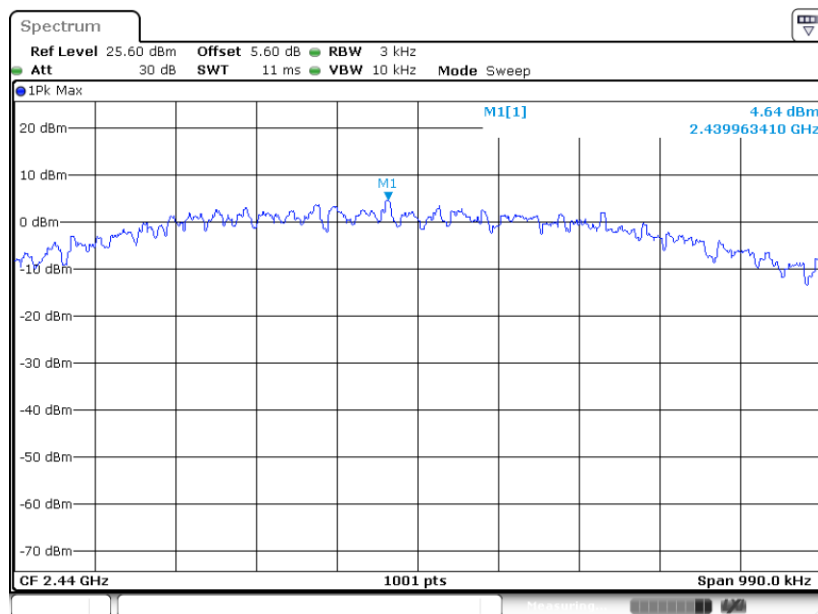

Date: 18 DEC 2023 13:47:46




PSD 3kHz Plot on Channel 38

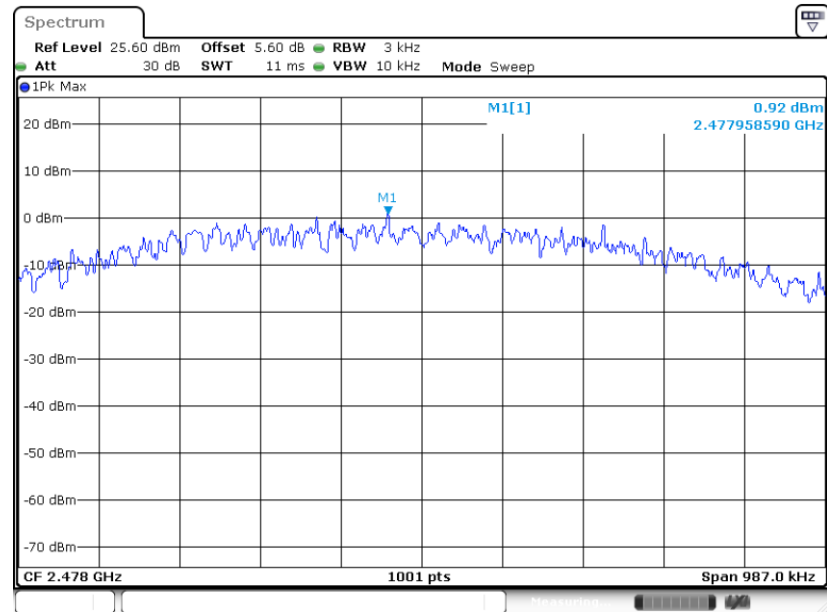

Date: 19.DEC.2023 08:34:48

PSD 3kHz Plot on Channel 39

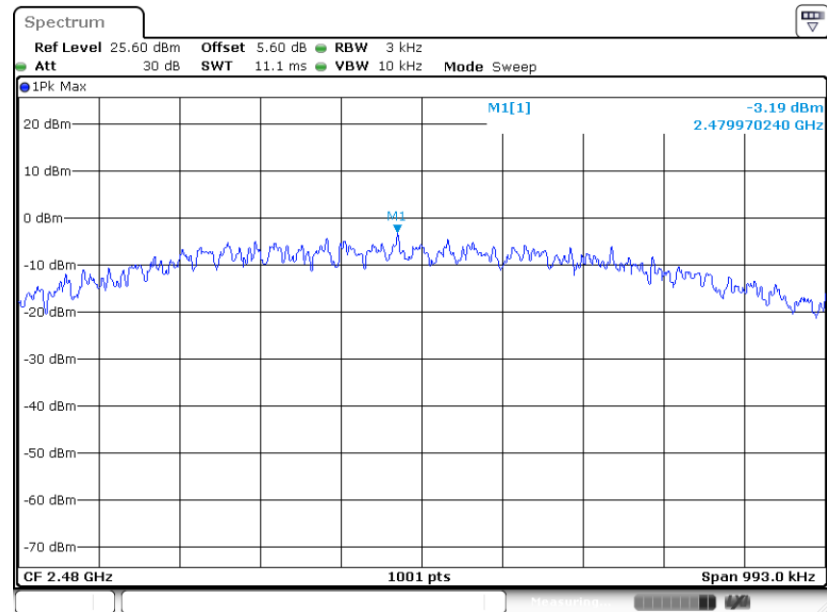


Date: 18.DEC.2023 13:50:33




BLE 2Mbps

PSD 3kHz Plot on Channel 00

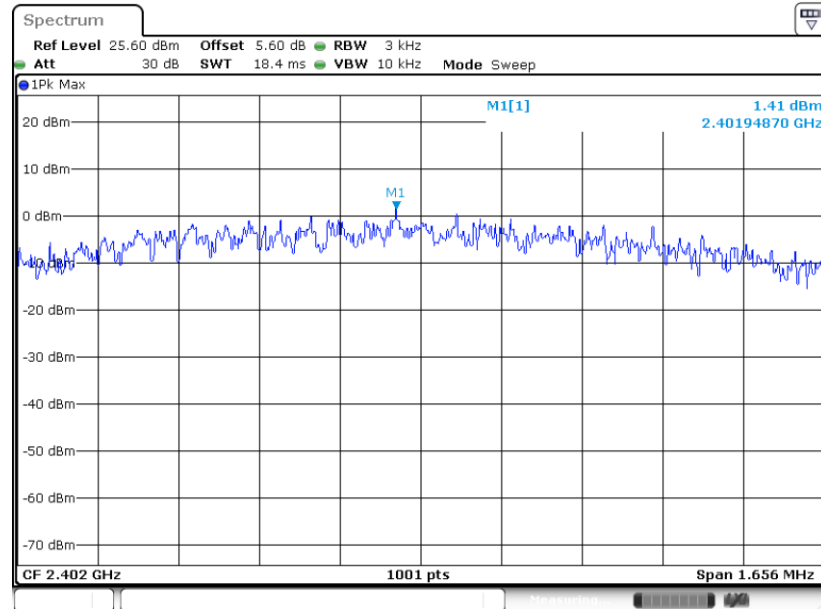


Date: 18.DEC.2023 13:53:40

PSD 3kHz Plot on Channel 19

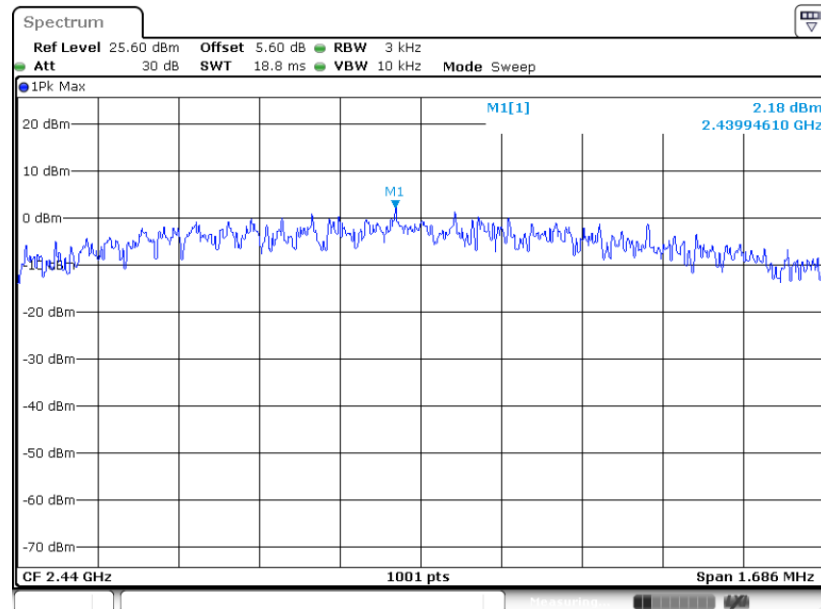


Date: 18.DEC.2023 13:56:36

PSD 3kHz Plot on Channel 38

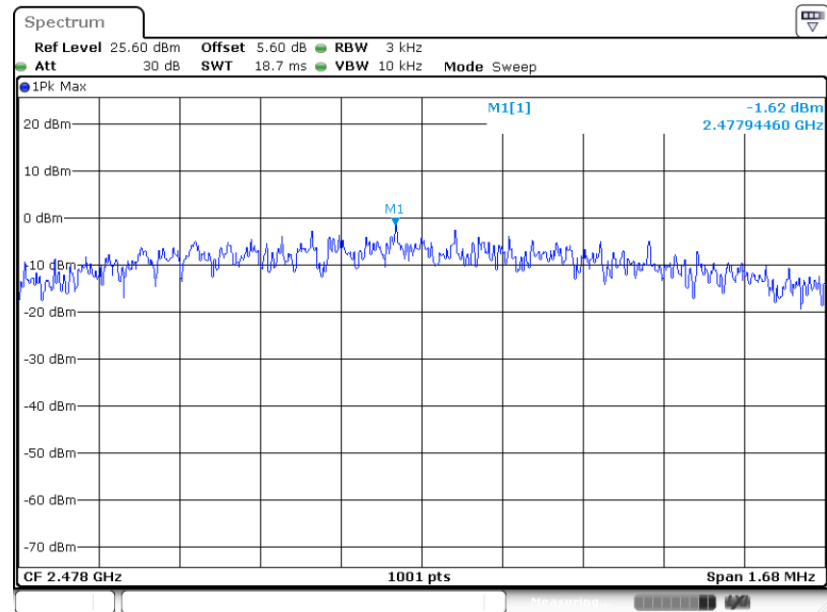

Date: 19.DEC.2023 08:47:26

PSD 3kHz Plot on Channel 39

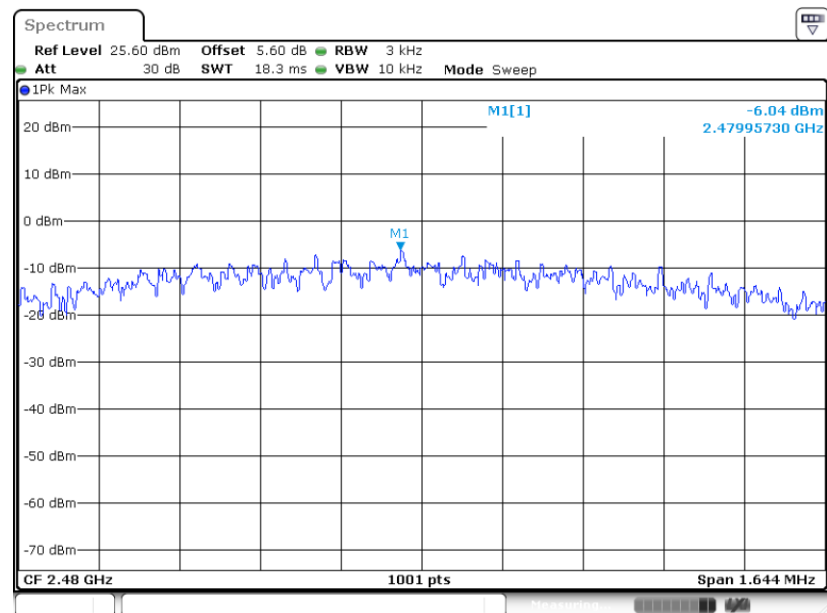

Date: 18.DEC.2023 13:58:57

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.4.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

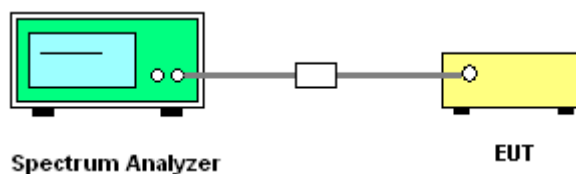




3.4.5 Test Result of Conducted Band Edges Plots


BLE 1Mbps

Low Band Edge Plot on Channel 00

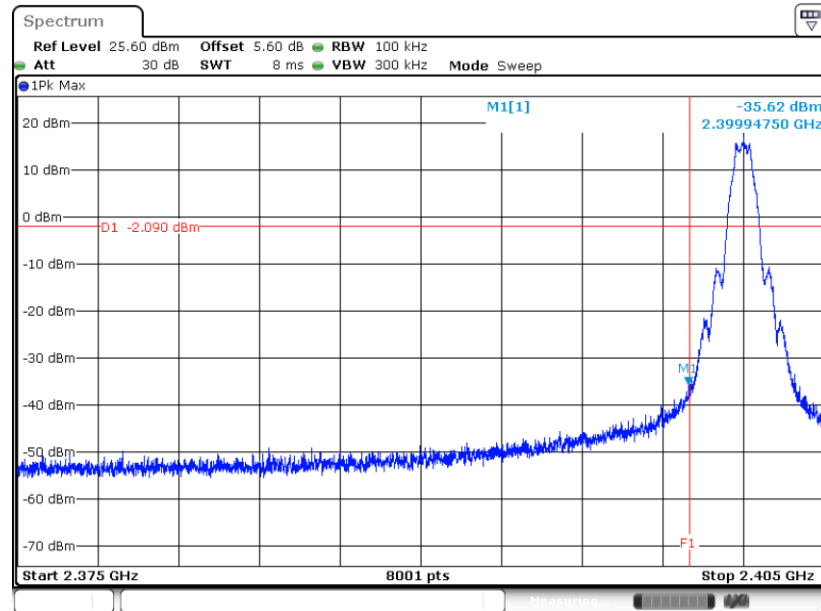

Date: 18.DEC.2023 13:46:32


High Band Edge Plot on Channel 38

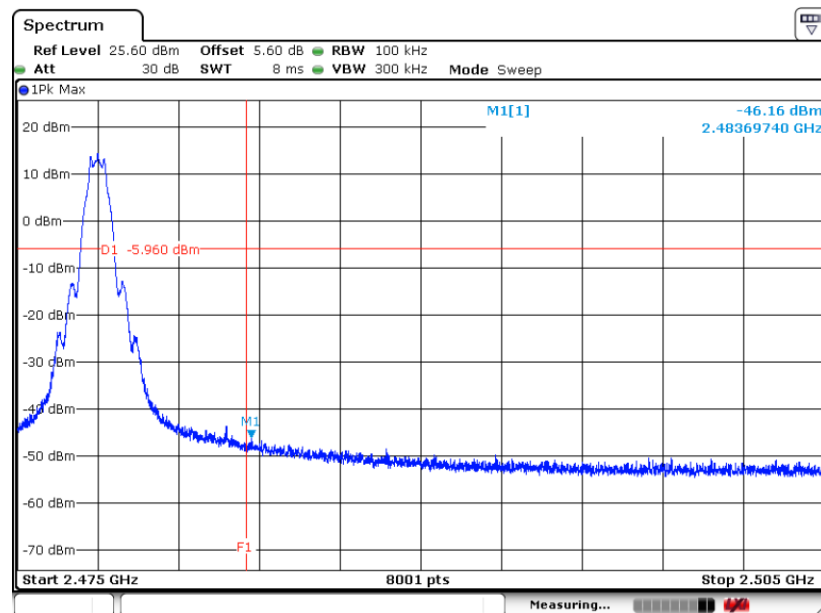

Date: 19.DEC.2023 08:45:01




High Band Edge Plot on Channel 39

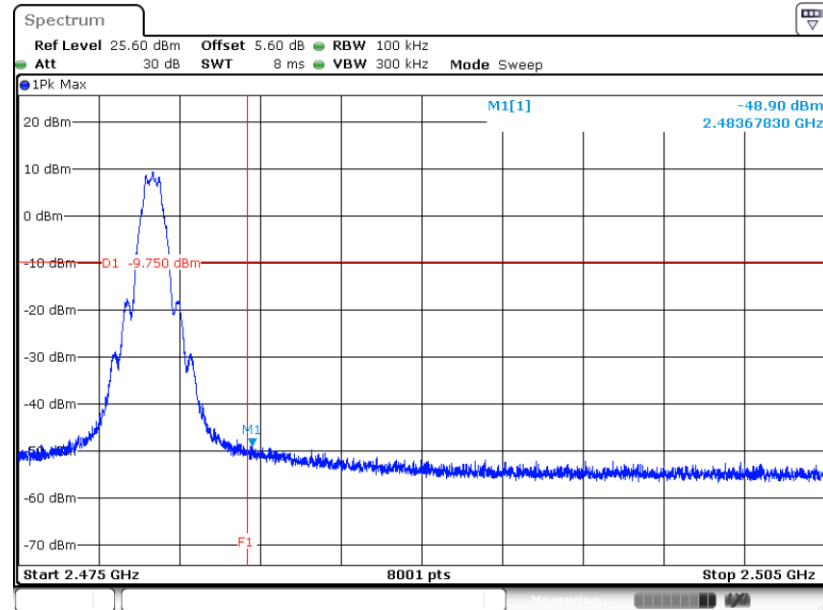

Date: 18.DEC.2023 13:51:11

BLE 2Mbps


Low Band Edge Plot on Channel 00

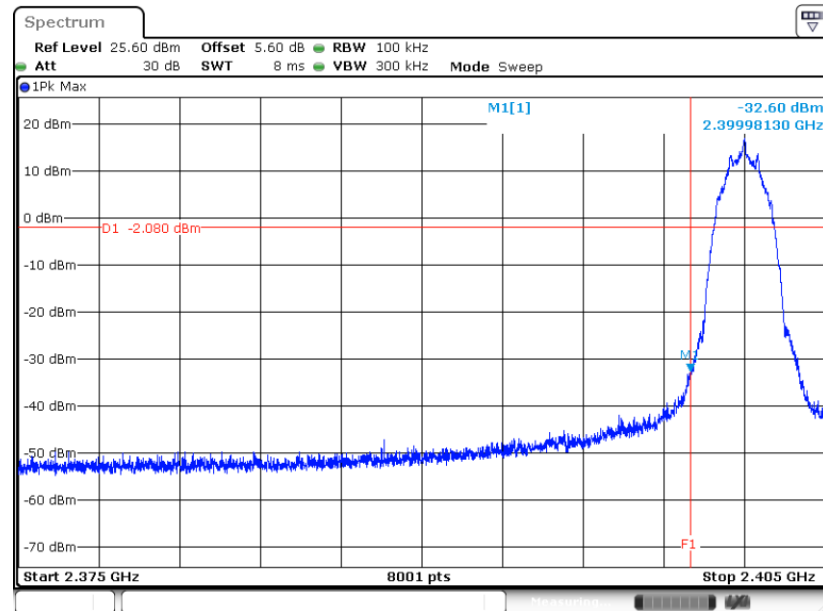

Date: 18.DEC.2023 13:54:18




High Band Edge Plot on Channel 38

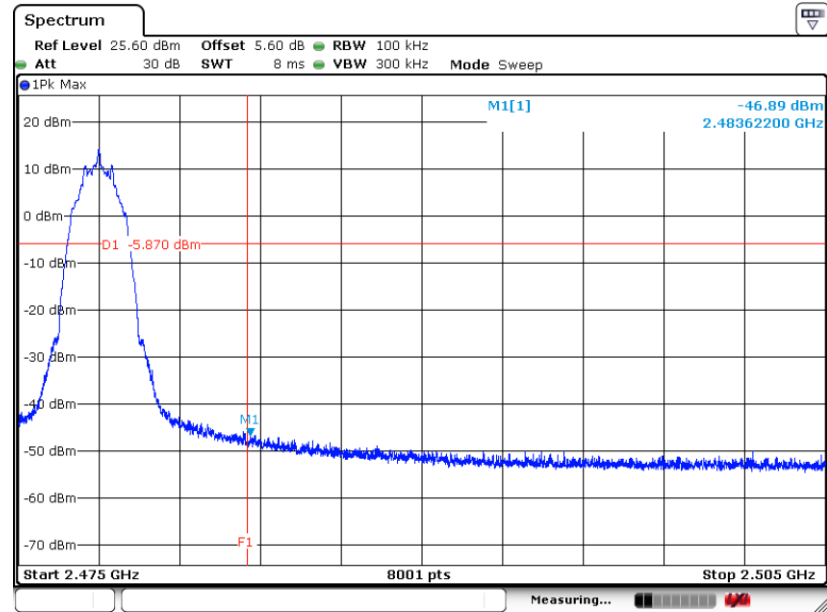

Date: 19.DEC.2023 08:50:54

High Band Edge Plot on Channel 39

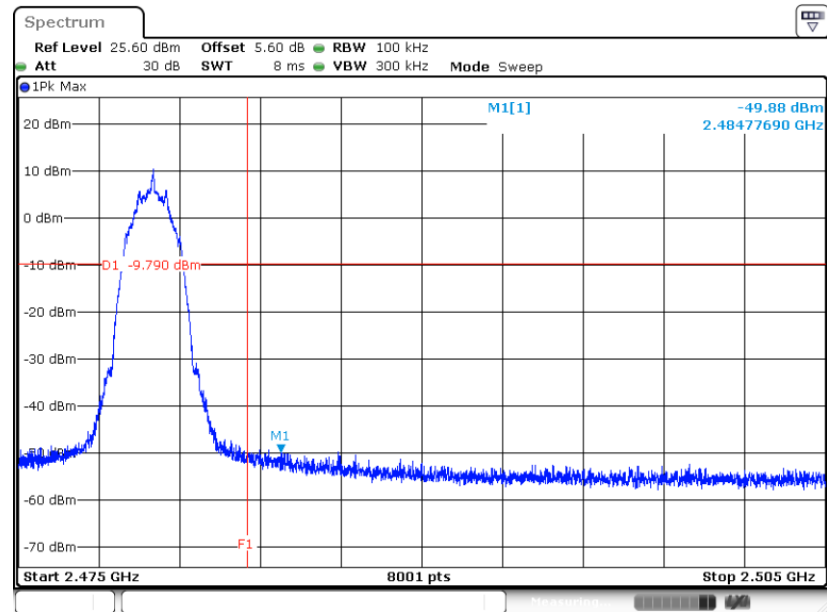


Date: 18.DEC.2023 14:00:35




3.4.6 Test Result of Conducted Spurious Emission Plots

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

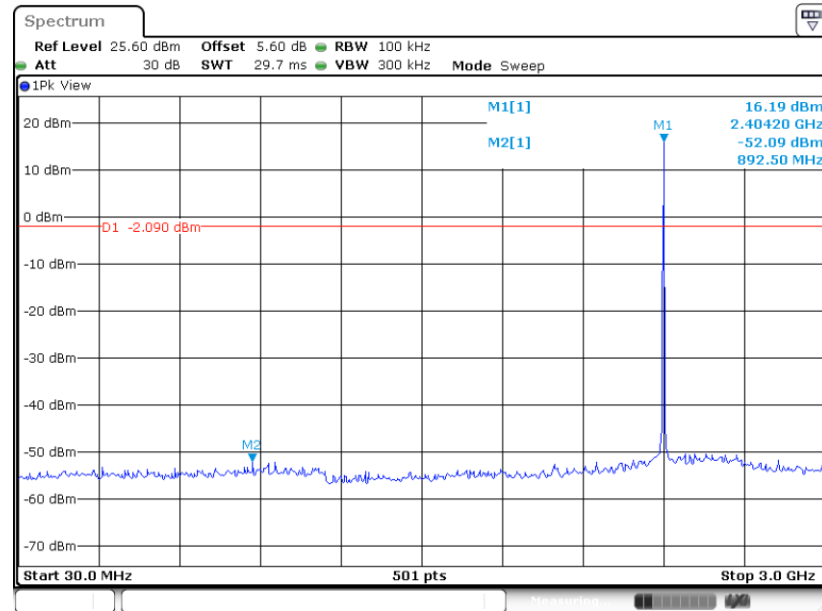

Date: 18.DEC.2023 13:45:13


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

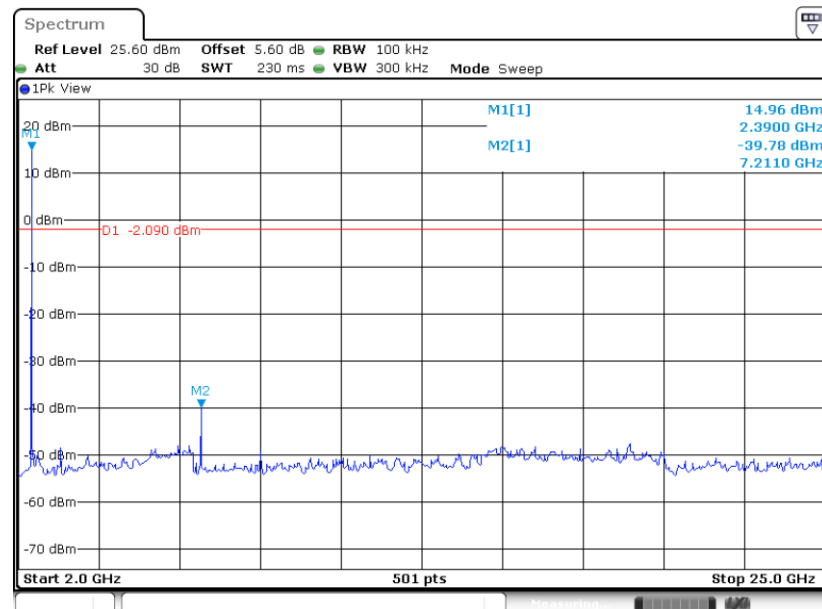

Date: 18.DEC.2023 13:45:32




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 19

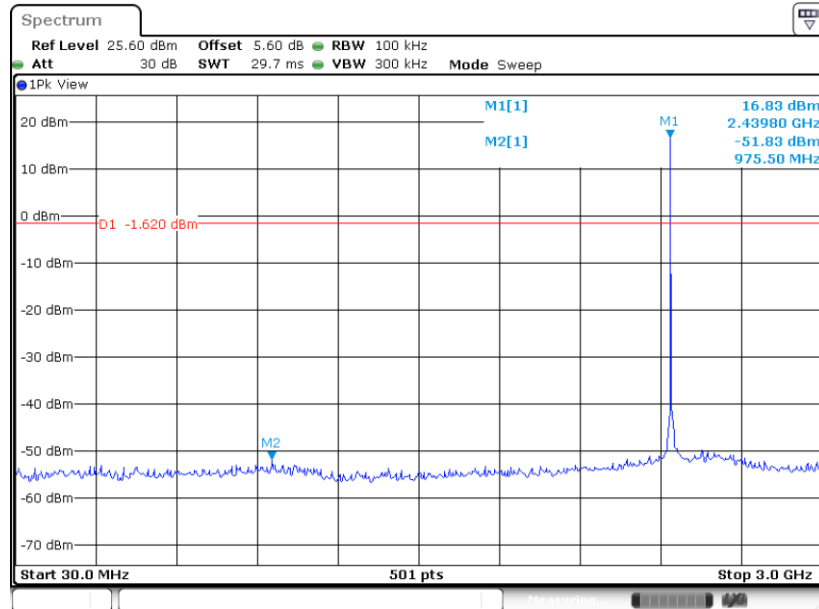

Date: 18.DEC.2023 13:48:26


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 19

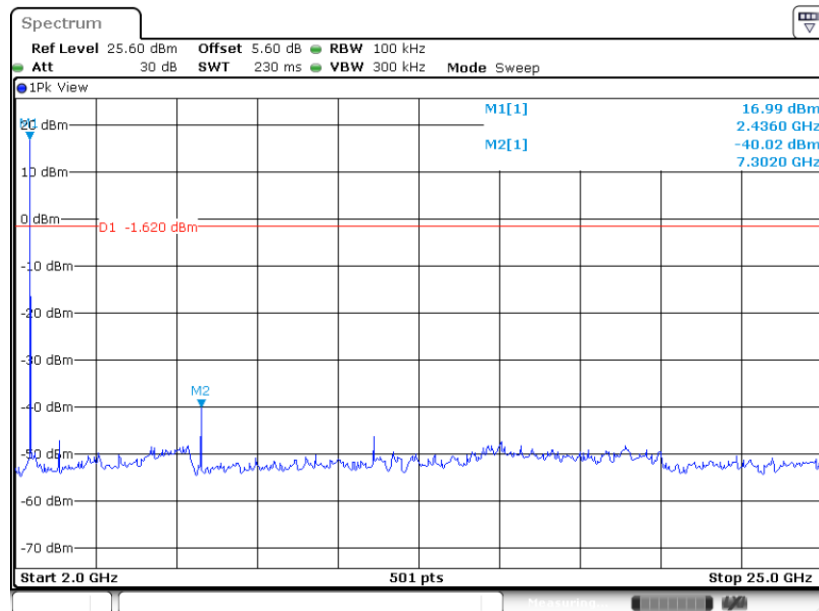

Date: 18.DEC.2023 13:48:46




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 38

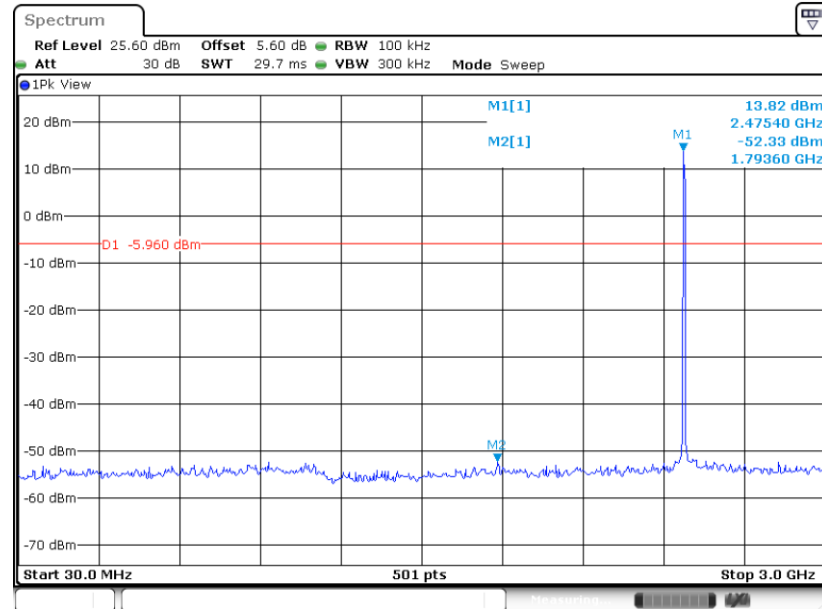

Date: 19.DEC.2023 08:39:44


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 38

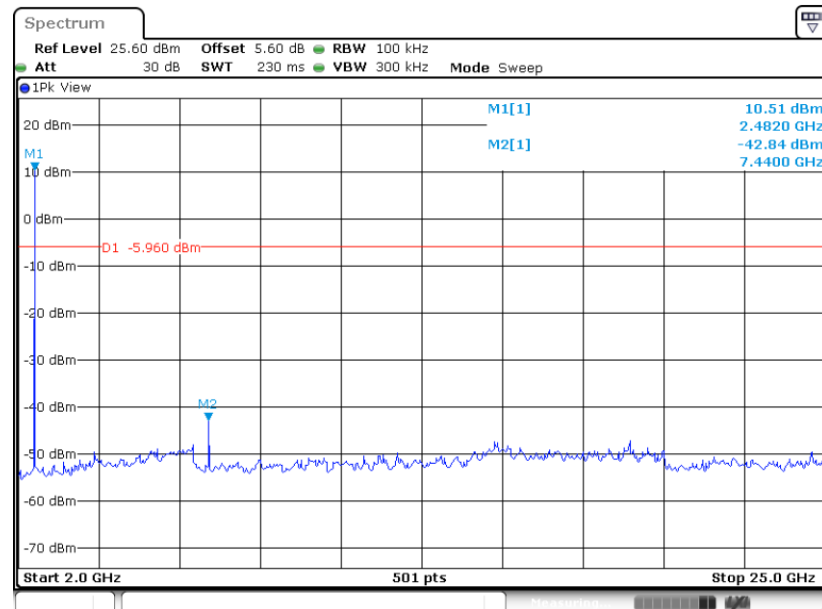

Date: 19.DEC.2023 08:39:55




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 39

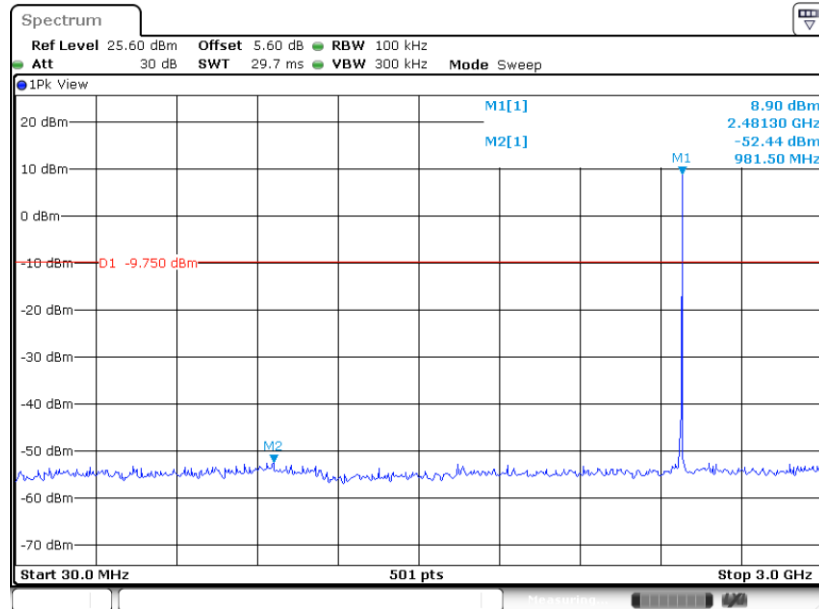

Date: 18.DEC.2023 13:51:32


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 39

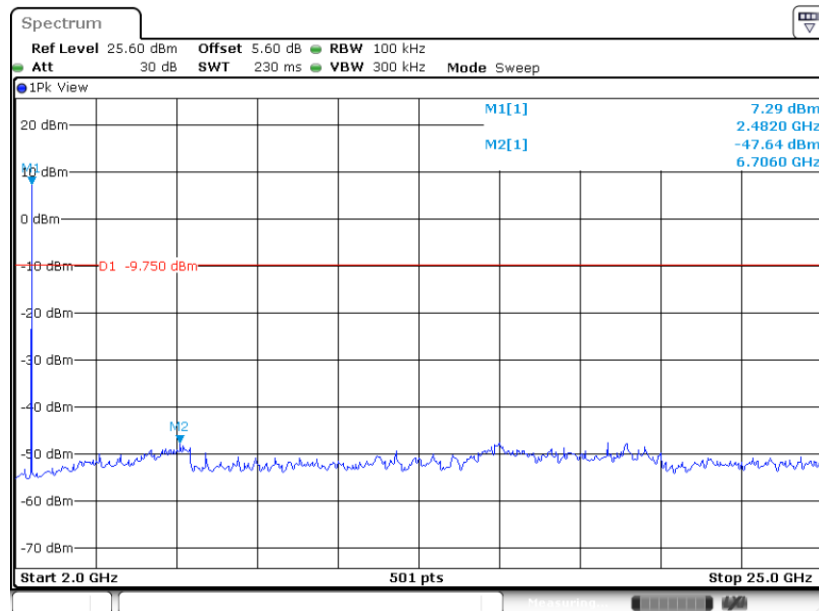

Date: 18.DEC.2023 13:51:52




Conducted Spurious Emission Plot on Bluetooth LE 2Mbps
GFSK Channel 00

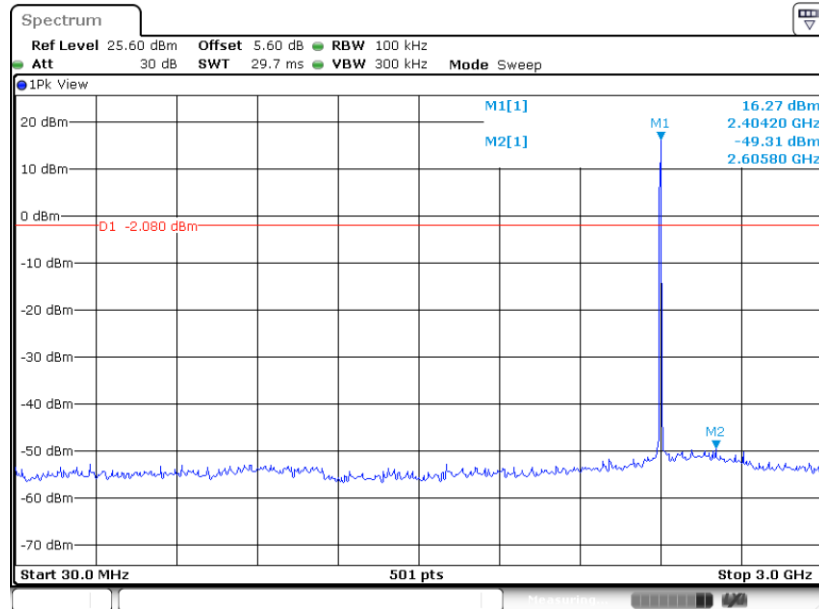

Date: 18.DEC.2023 13:54:39


Conducted Spurious Emission Plot on Bluetooth LE 2Mbps
GFSK Channel 00

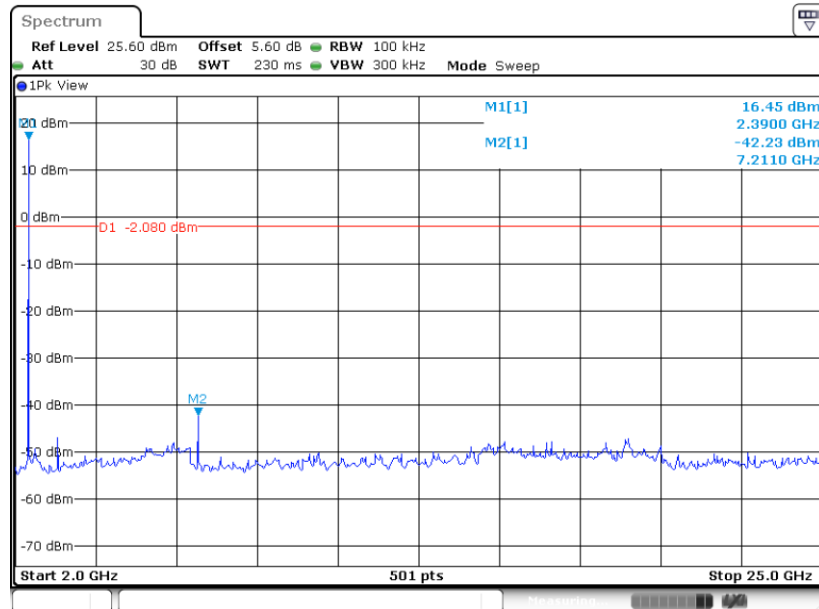

Date: 18.DEC.2023 13:54:59




Conducted Spurious Emission Plot on Bluetooth LE 2Mbps GFSK Channel 19

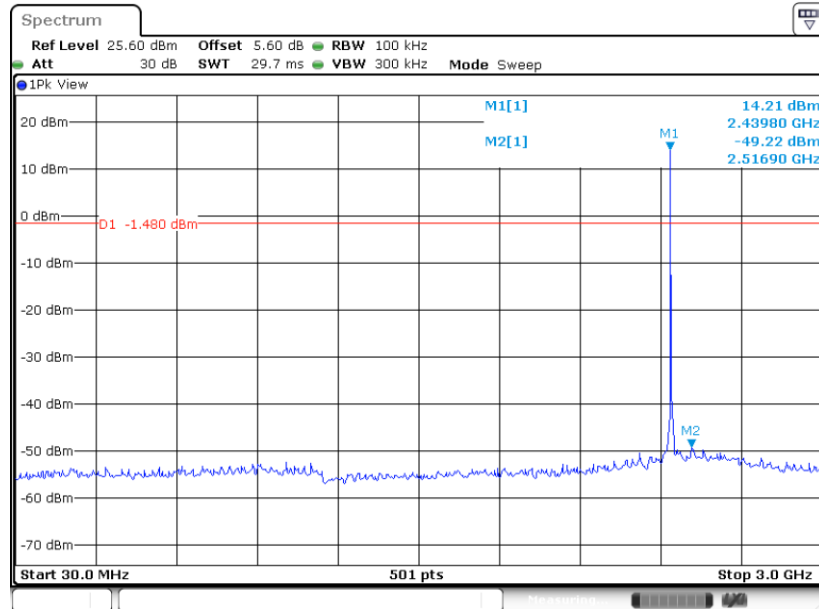

Date: 18.DEC.2023 13:57:15


Conducted Spurious Emission Plot on Bluetooth LE 2Mbps GFSK Channel 19

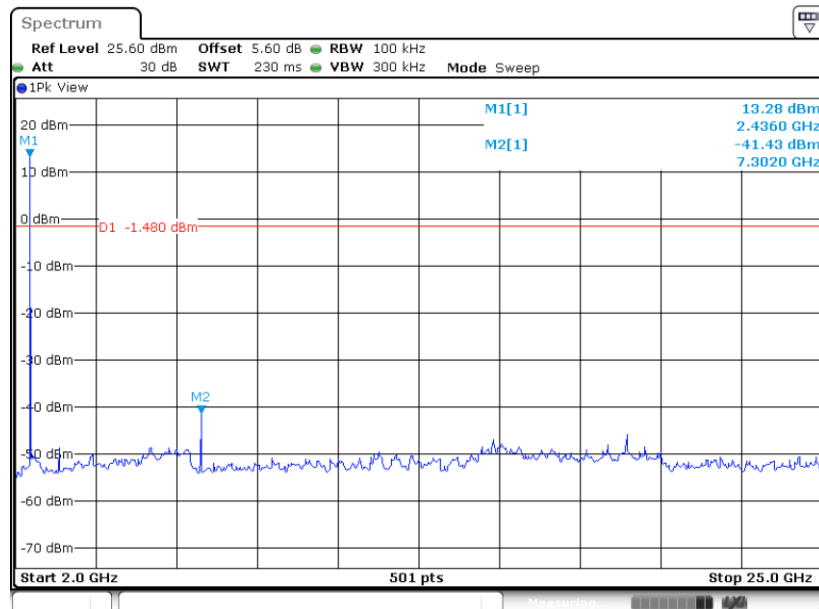

Date: 18.DEC.2023 13:57:35




Conducted Spurious Emission Plot on Bluetooth LE 2Mbps GFSK Channel 38

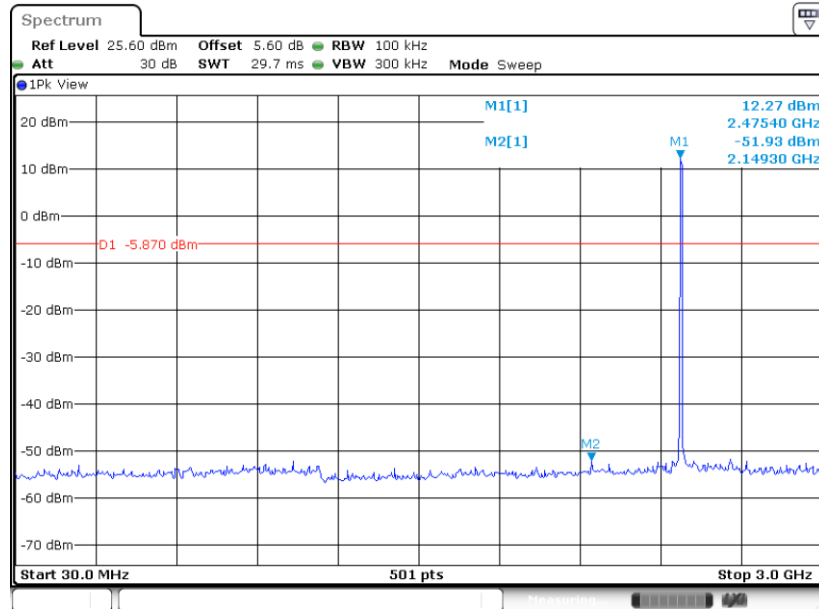

Date: 19 DEC 2023 08:48:06


Conducted Spurious Emission Plot on Bluetooth LE 2Mbps GFSK Channel 38

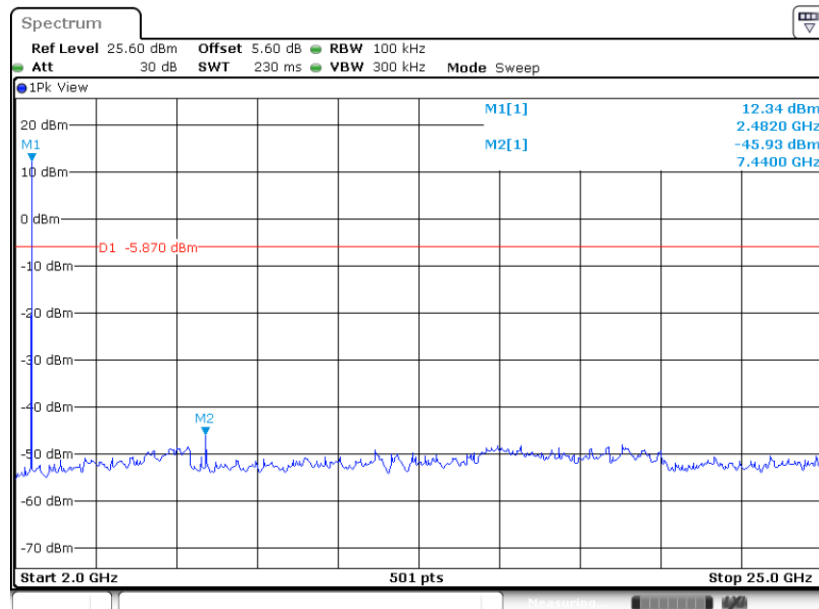

Date: 19 DEC 2023 08:48:26




Conducted Spurious Emission Plot on Bluetooth LE 2Mbps GFSK Channel 39

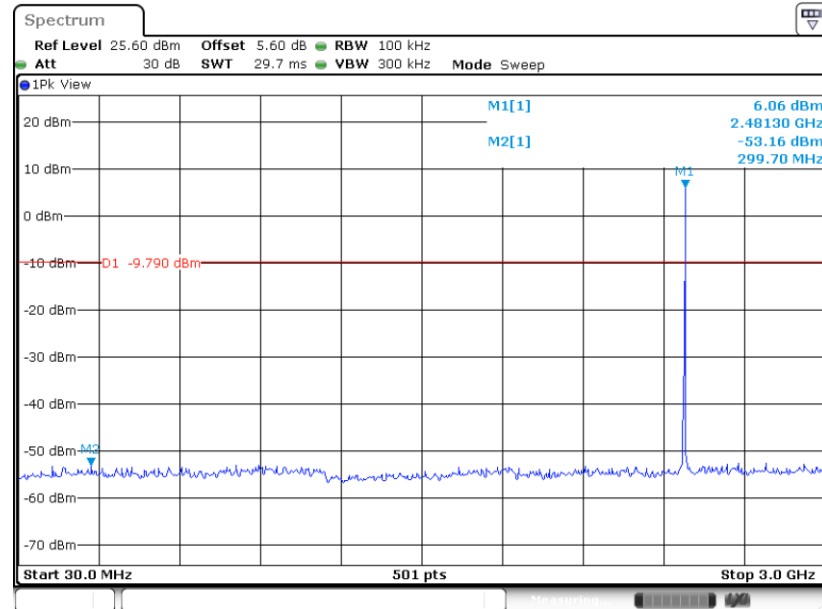

Date: 18.DEC.2023 13:59:56

Conducted Spurious Emission Plot on Bluetooth LE 2Mbps GFSK Channel 39

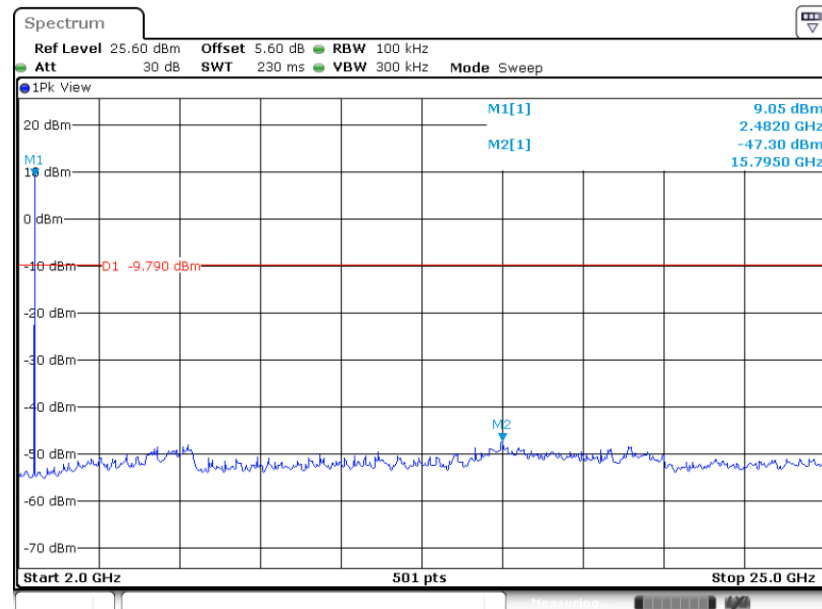

Date: 18.DEC.2023 14:00:16



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

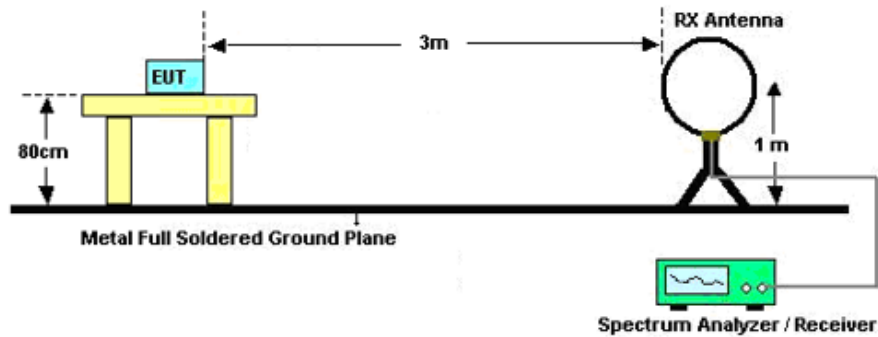

For radiated emissions from 30MHz to 1GHz

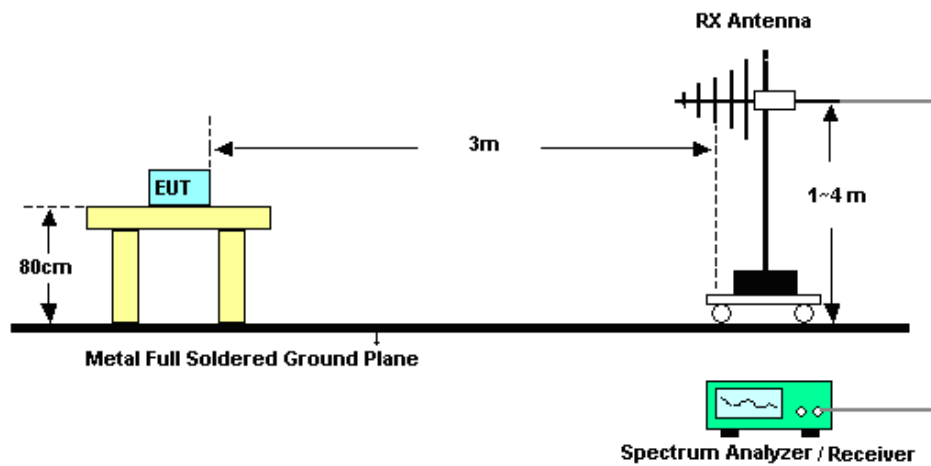

For radiated emissions above 1GHz

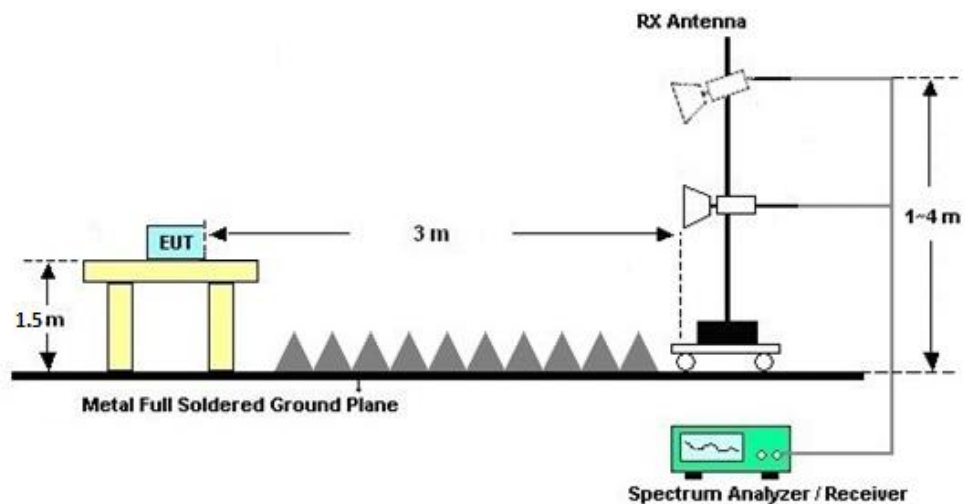

**3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

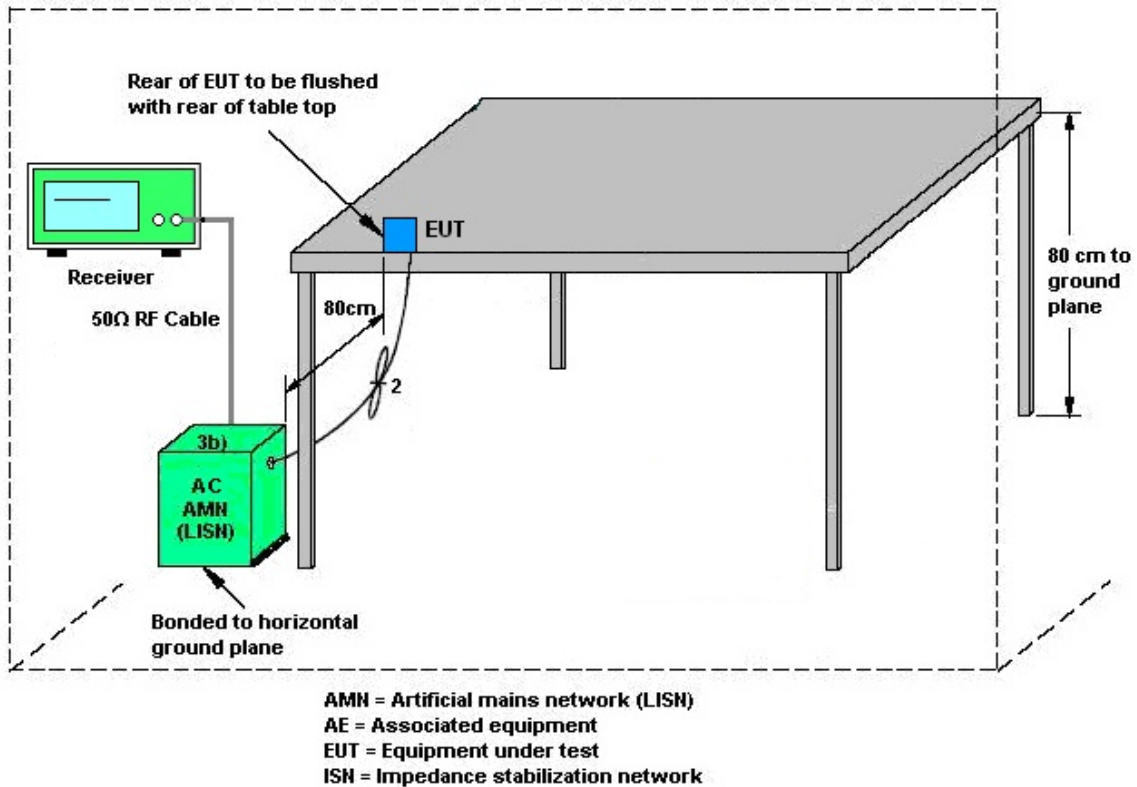

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Dec. 18, 2023~ Dec. 19, 2023	Oct. 10, 2024	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 05, 2023	Dec. 18, 2023~ Dec. 19, 2023	Jan. 04, 2024	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2023	Dec. 18, 2023~ Dec. 19, 2023	Jan. 04, 2024	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY564000 04	3Hz~8.5GHz; Max 30dBm	Oct. 10, 2023	Dec. 21, 2023	Oct. 09, 2024	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY602421 26	10Hz~44GHz	Oct. 10, 2023	Dec. 21, 2023	Oct. 09, 2024	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 10, 2023	Dec. 21, 2023	Oct. 09, 2024	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz~1GHz	Apr. 09, 2023	Dec. 21, 2023	Apr. 08, 2024	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 06, 2023	Dec. 21, 2023	Apr. 05, 2024	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101093	18GHz~40GHz	Jan. 08, 2023	Dec. 21, 2023	Jan. 07, 2024	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	380827	9KHz ~1GHZ	Jul. 06, 2023	Dec. 21, 2023	Jul. 05, 2024	Radiation (03CH06-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 05, 2023	Dec. 21, 2023	Jan. 04, 2024	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2082395	1Ghz-18Ghz	Jan. 05, 2023	Dec. 21, 2023	Jan. 04, 2024	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY532703 19	500MHz~26.5GHz	Oct. 10, 2023	Dec. 21, 2023	Oct. 09, 2024	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F1040900 04	N/A	NCR	Dec. 21, 2023	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Dec. 21, 2023	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Dec. 21, 2023	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May 24, 2022	Apr. 21, 2023	May 23, 2023	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2022	Apr. 21, 2023	Oct. 12, 2023	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May. 24, 2022	Apr. 21, 2023	May. 23, 2023	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000 0811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2022	Apr. 21, 2023	Oct. 11, 2023	Conduction (CO01-KS)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.26 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.46 dB
Conducted Power Spectral Density	±0.88 dB
Frequency	±0.4 Hz

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.94 dB
---	---------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.32 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.26 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.02 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.26 dB
---	---------

----- THE END -----



Appendix A. Conducted Test Results

Bluetooth Low Energy

Test Engineer:	Jiang Jun	Temperature:	20~26	°C
Test Date:	2023.12.18~2023.12.19	Relative Humidity:	40~51	%

Power setting	
CH 00	14
CH 19	14
CH 38	13
CH 39	11

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.07	0.66	0.50	Pass
BLE	1Mbps	1	19	2440	1.08	0.66	0.50	Pass
BLE	1Mbps	1	38	2478	1.07	0.66	0.50	Pass
BLE	1Mbps	1	39	2480	1.07	0.66	0.50	Pass

TEST RESULTS DATA
Peak Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	17.98	30.00	2.33	20.31	36.00	Pass
BLE	1Mbps	1	19	2440	18.46	30.00	2.33	20.79	36.00	Pass
BLE	1Mbps	1	38	2478	15.05	30.00	2.33	17.38	36.00	Pass
BLE	1Mbps	1	39	2480	10.47	30.00	2.33	12.80	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	1Mbps	1	0	2402	0.23	16.46
BLE	1Mbps	1	19	2440	0.23	17.00
BLE	1Mbps	1	38	2478	0.23	14.05
BLE	1Mbps	1	39	2480	0.23	9.11

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	17.91	3.96	2.33	8.00	Pass
BLE	1Mbps	1	19	2440	18.38	4.64	2.33	8.00	Pass
BLE	1Mbps	1	38	2478	14.04	0.92	2.33	8.00	Pass
BLE	1Mbps	1	39	2480	10.25	-3.19	2.33	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.

Bluetooth Low Energy

Test Engineer:	Jiang Jun	Temperature:	20~26	°C
Test Date:	2023.12.18~2023.12.19	Relative Humidity:	40~51	%

Power setting	
CH 00	14
CH 19	14
CH 38	13
CH 39	11

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	0	2402	2.06	1.10	0.50	Pass
BLE	2Mbps	1	19	2440	2.06	1.12	0.50	Pass
BLE	2Mbps	1	38	2478	2.06	1.12	0.50	Pass
BLE	2Mbps	1	39	2480	2.06	1.10	0.50	Pass

TEST RESULTS DATA
Peak Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	18.15	30.00	2.33	20.48	36.00	Pass
BLE	2Mbps	1	19	2440	18.57	30.00	2.33	20.90	36.00	Pass
BLE	2Mbps	1	38	2478	15.05	30.00	2.33	17.38	36.00	Pass
BLE	2Mbps	1	39	2480	10.72	30.00	2.33	13.05	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	2Mbps	1	0	2402	0.42	16.47
BLE	2Mbps	1	19	2440	0.42	16.72
BLE	2Mbps	1	38	2478	0.42	13.94
BLE	2Mbps	1	39	2480	0.42	9.29

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	0	2402	17.92	1.41	2.33	8.00	Pass
BLE	2Mbps	1	19	2440	18.52	2.18	2.33	8.00	Pass
BLE	2Mbps	1	38	2478	14.13	-1.62	2.33	8.00	Pass
BLE	2Mbps	1	39	2480	10.21	-6.04	2.33	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.

Bluetooth Low Energy

Test Engineer:	Jiang Jun	Temperature:	20~26	°C
Test Date:	2023.12.18~2023.12.19	Relative Humidity:	40~51	%

BLE 125K	
Power setting	
CH 00	14
CH 19	14
CH 38	13
CH 39	11

TEST RESULTS DATA
Peak Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	125K	1	0	2402	17.20	30.00	2.33	19.53	36.00	Pass
BLE	125K	1	19	2440	18.13	30.00	2.33	20.46	36.00	Pass
BLE	125K	1	38	2478	15.48	30.00	2.33	17.81	36.00	Pass
BLE	125K	1	39	2480	10.07	30.00	2.33	12.40	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	125K	1	0	2402	0.10	16.19
BLE	125K	1	19	2440	0.10	16.67
BLE	125K	1	38	2478	0.10	13.86
BLE	125K	1	39	2480	0.10	9.02

Bluetooth Low Energy

Test Engineer:	Jiang Jun	Temperature:	20~26	°C
Test Date:	2023.12.18~2023.12.19	Relative Humidity:	40~51	%


BLE 500K	
Power setting	
CH 00	14
CH 19	14
CH 38	13
CH 39	11

TEST RESULTS DATA										
Peak Power Table										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	500K	1	0	2402	17.12	30.00	2.33	19.45	36.00	Pass
BLE	500K	1	19	2440	18.24	30.00	2.33	20.57	36.00	Pass
BLE	500K	1	38	2478	14.93	30.00	2.33	17.26	36.00	Pass
BLE	500K	1	39	2480	9.88	30.00	2.33	12.21	36.00	Pass

TEST RESULTS DATA						
Average Power Table						
(Reporting Only)						
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	500K	1	0	2402	0.04	16.31
BLE	500K	1	19	2440	0.04	16.62
BLE	500K	1	38	2478	0.04	13.89
BLE	500K	1	39	2480	0.04	9.05




Appendix B. AC Conducted Emission Test Results

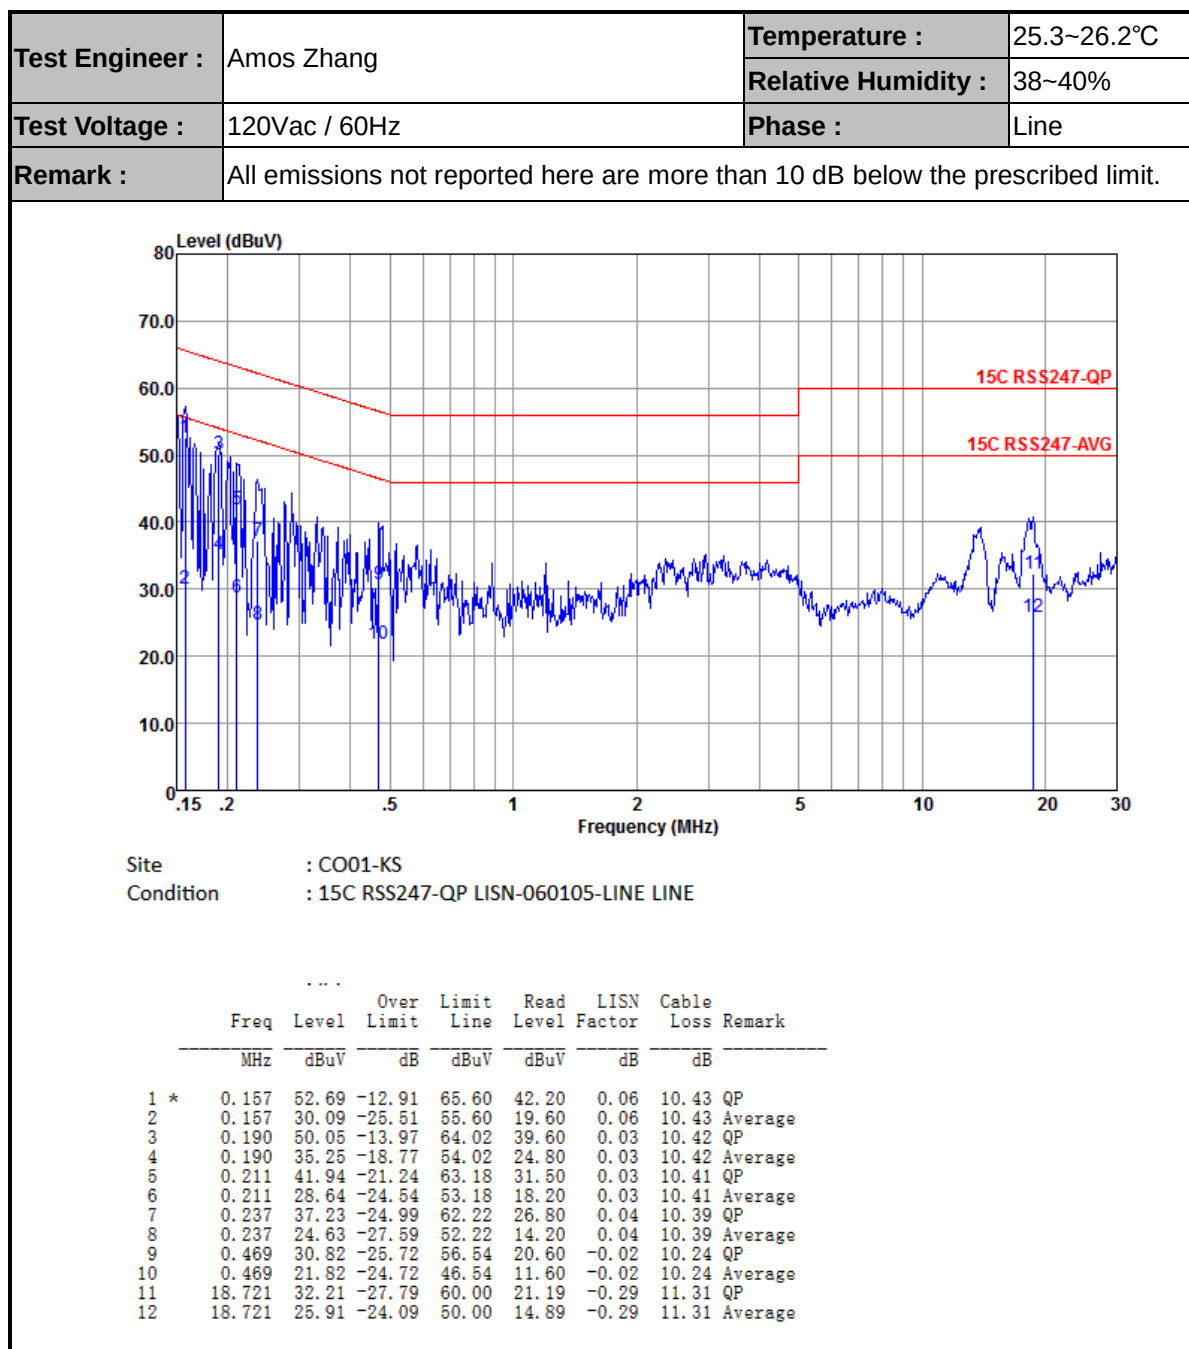



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

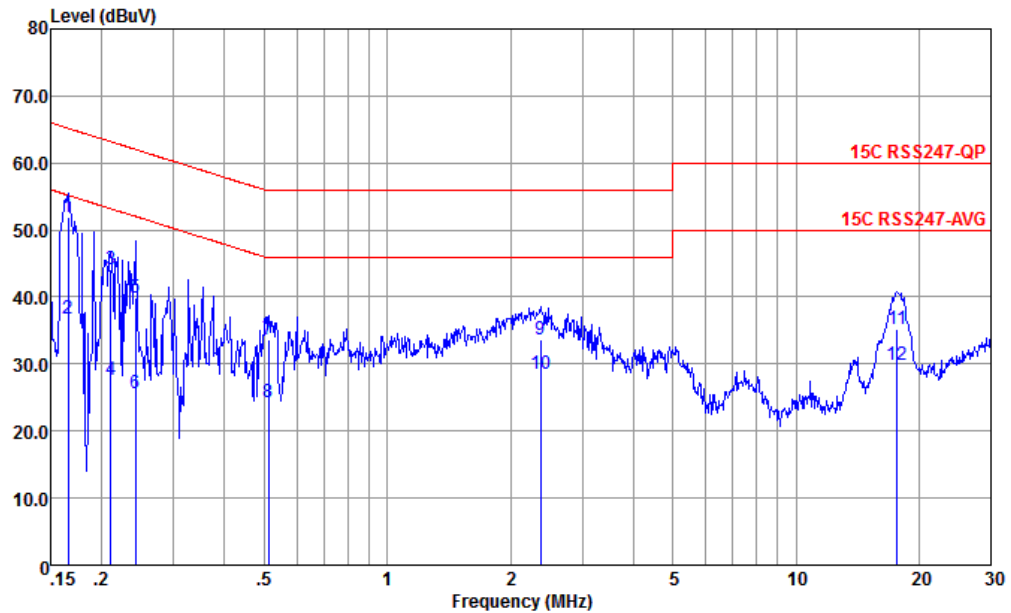

Site : CO01-KS
Condition : 15C RSS247-QP LISN-060105-NEUTRAL NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1 *	0.166	51.96	-13.20	65.16	41.49	0.04	10.43	QP
2	0.166	36.66	-18.50	55.16	26.19	0.04	10.43	Average
3	0.211	44.05	-19.13	63.18	33.60	0.04	10.41	QP
4	0.211	27.65	-25.53	53.18	17.20	0.04	10.41	Average
5	0.242	39.89	-22.15	62.04	29.50	0.00	10.39	QP
6	0.242	25.59	-26.45	52.04	15.20	0.00	10.39	Average
7	0.513	33.63	-22.37	56.00	23.50	-0.08	10.21	QP
8	0.513	24.33	-21.67	46.00	14.20	-0.08	10.21	Average
9	2.371	33.74	-22.26	56.00	23.80	-0.12	10.06	QP
10	2.371	28.54	-17.46	46.00	18.60	-0.12	10.06	Average
11	17.661	35.24	-24.76	60.00	24.19	-0.24	11.29	QP
12	17.661	29.84	-20.16	50.00	18.79	-0.24	11.29	Average

Note:

1. Level(dBuV) = Read Level(dBuV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBuV) – Limit Line(dBuV)



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Jiankang Jiang	Relative Humidity :	41 ~ 42 %
		Temperature :	22~ 23 °C

Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Modulation	Channel	Frequency	Data Rate	Power setting	Remark
Mode 1	2400-2483.5	Bluetooth-LE_GSFK	00	2402	1Mbps	14	-
Mode 2	2400-2483.5	Bluetooth-LE_GSFK	19	2440	1Mbps	14	-
Mode 3	2400-2483.5	Bluetooth-LE_GSFK	39	2480	1Mbps	11	-
Mode 4	2400-2483.5	Bluetooth-LE_GSFK	00	2402	2Mbps	14	-
Mode 5	2400-2483.5	Bluetooth-LE_GSFK	19	2440	2Mbps	14	-
Mode 6	2400-2483.5	Bluetooth-LE_GSFK	39	2480	2Mbps	11	-
Mode 7	2400-2483.5	Bluetooth-LE_GSFK	38	2478	1Mbps	13	
Mode 7	2400-2483.5	Bluetooth-LE_GSFK	38	2478	1Mbps	13	LF
Mode 8	2400-2483.5	Bluetooth-LE_GSFK	38	2478	2Mbps	13	





Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth-LE_GSFK	00	2389.95	49.15	54.00	-4.85	V	AVERAGE	Pass	Band Edge
	Bluetooth-LE_GSFK	00	4804.00	49.90	54.00	-4.10	V	AVERAGE	Pass	Harmonic
2	Bluetooth-LE_GSFK	19	-	-	-	-	-	-	-	Band Edge
	Bluetooth-LE_GSFK	19	4880.00	50.41	54.00	-3.59	V	AVERAGE	Pass	Harmonic
3	Bluetooth-LE_GSFK	39	2483.50	49.33	54.00	-4.67	V	AVERAGE	Pass	Band Edge
	Bluetooth-LE_GSFK	39	7440.00	43.46	74.00	-30.54	V	PEAK	Pass	Harmonic
4	Bluetooth-LE_GSFK	00	2389.82	48.30	54.00	-5.70	V	AVERAGE	Pass	Band Edge
	Bluetooth-LE_GSFK	00	4804.00	46.45	54.00	-7.55	V	AVERAGE	Pass	Harmonic
5	Bluetooth-LE_GSFK	19	-	-	-	-	-	-	-	Band Edge
	Bluetooth-LE_GSFK	19	4880.00	47.59	54.00	-6.41	V	AVERAGE	Pass	Harmonic
6	Bluetooth-LE_GSFK	39	2483.50	49.49	54.00	-4.51	V	AVERAGE	Pass	Band Edge
	Bluetooth-LE_GSFK	39	7440.00	43.71	74.00	-30.29	V	PEAK	Pass	Harmonic
7	Bluetooth-LE_GSFK	38	2483.56	52.60	54.00	-1.40	H	AVERAGE	Pass	Band Edge
	Bluetooth-LE_GSFK	38	4926.00	48.83	54.00	-5.17	H	AVERAGE	Pass	Harmonic
	Bluetooth-LE_GSFK	38	42.61	29.51	40.00	-10.49	V	PEAK	Pass	LF
8	Bluetooth-LE_GSFK	38	2483.50	52.55	54.00	-1.45	H	AVERAGE	Pass	Band Edge
	Bluetooth-LE_GSFK	38	4956.00	46.83	54.00	-7.17	H	PEAK	Pass	Harmonic



Mode	1																																																					
	Band Edge																																																					
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																					
Pol.	Horizontal																																																					
Peak																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2340.16</td><td>56.16</td><td>74.00</td><td>-17.84</td><td>44.15</td><td>32.42</td><td>6.53</td><td>32.94</td><td>6.00</td><td>119</td><td>0 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2340.16	56.16	74.00	-17.84	44.15	32.42	6.53	32.94	6.00	119	0 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2340.16	56.16	74.00	-17.84	44.15	32.42	6.53	32.94	6.00	119	0 PEAK																																											
Fundamental																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>110.93</td><td>-----</td><td>-----</td><td>99.13</td><td>32.02</td><td>6.62</td><td>32.84</td><td>6.00</td><td>119</td><td>0 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	110.93	-----	-----	99.13	32.02	6.62	32.84	6.00	119	0 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2402.00	110.93	-----	-----	99.13	32.02	6.62	32.84	6.00	119	0 PEAK																																											
Avg																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.82</td><td>44.28</td><td>54.00</td><td>-9.72</td><td>32.42</td><td>32.12</td><td>6.60</td><td>32.86</td><td>6.00</td><td>119</td><td>0 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.82	44.28	54.00	-9.72	32.42	32.12	6.60	32.86	6.00	119	0 AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2389.82	44.28	54.00	-9.72	32.42	32.12	6.60	32.86	6.00	119	0 AVERAGE																																											
Avg																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>109.54</td><td>-----</td><td>-----</td><td>97.74</td><td>32.02</td><td>6.62</td><td>32.84</td><td>6.00</td><td>119</td><td>0 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	109.54	-----	-----	97.74	32.02	6.62	32.84	6.00	119	0 AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2402.00	109.54	-----	-----	97.74	32.02	6.62	32.84	6.00	119	0 AVERAGE																																											

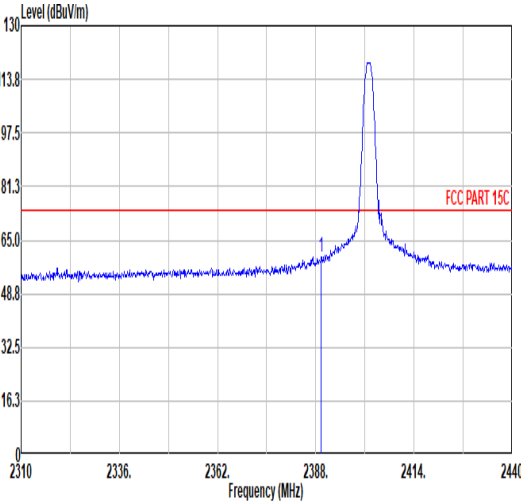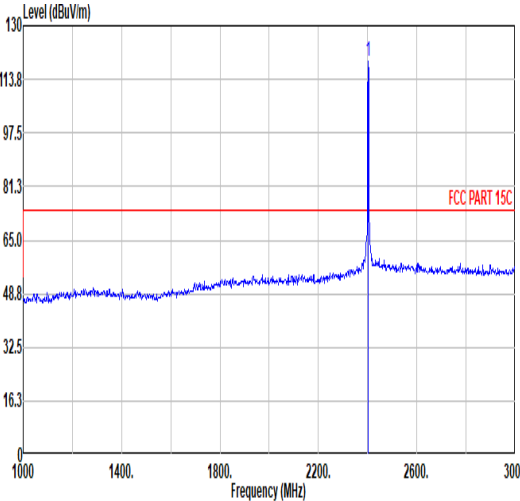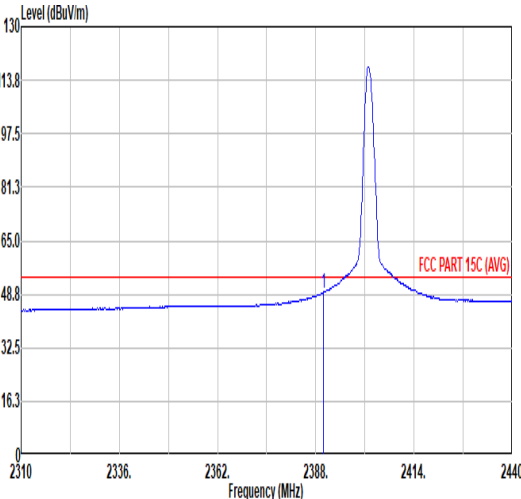
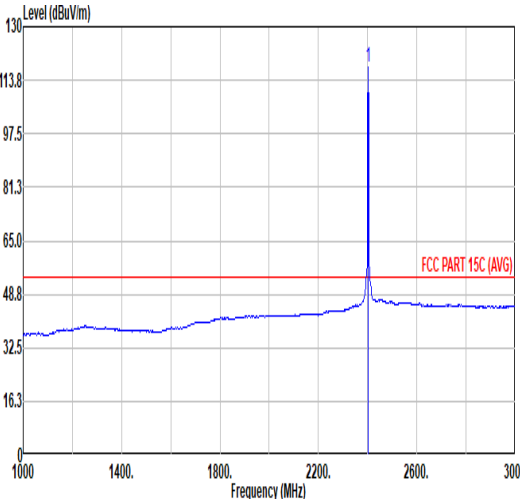


Mode	1																																																																																																
	Band Edge																																																																																																
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																																																
Pol.	Vertical						Fundamental																																																																																										
Peak																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.43</td><td>60.05</td><td>74.00</td><td>-13.95</td><td>48.18</td><td>32.13</td><td>6.60</td><td>32.86</td><td>6.00</td><td>294</td><td>338</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2389.43	60.05	74.00	-13.95	48.18	32.13	6.60	32.86	6.00	294	338	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>119.02</td><td>-----</td><td>-----</td><td>107.22</td><td>32.02</td><td>6.62</td><td>32.84</td><td>6.00</td><td>294</td><td>338</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2402.00	119.02	-----	-----	107.22	32.02	6.62	32.84	6.00	294	338
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																								
1	2389.43	60.05	74.00	-13.95	48.18	32.13	6.60	32.86	6.00	294	338	PEAK																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																								
1	2402.00	119.02	-----	-----	107.22	32.02	6.62	32.84	6.00	294	338	PEAK																																																																																					
Avg																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>49.15</td><td>54.00</td><td>-4.85</td><td>37.29</td><td>32.12</td><td>6.60</td><td>32.86</td><td>6.00</td><td>294</td><td>338</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2389.95	49.15	54.00	-4.85	37.29	32.12	6.60	32.86	6.00	294	338	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>117.66</td><td>-----</td><td>-----</td><td>105.86</td><td>32.02</td><td>6.62</td><td>32.84</td><td>6.00</td><td>294</td><td>338</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2402.00	117.66	-----	-----	105.86	32.02	6.62	32.84	6.00	294	338
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																								
1	2389.95	49.15	54.00	-4.85	37.29	32.12	6.60	32.86	6.00	294	338	AVERAGE																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																								
1	2402.00	117.66	-----	-----	105.86	32.02	6.62	32.84	6.00	294	338	AVERAGE																																																																																					



Mode	1																																																																																													
	Harmonic																																																																																													
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																																													
Pol.	Horizontal																																																																																													
Peak Avg																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>50.98</td><td>74.00</td><td>-23.02</td><td>69.17</td><td>34.19</td><td>9.44</td><td>61.82</td><td>0.00</td><td>168</td><td>332</td><td>PEAK</td></tr><tr><td>2</td><td>4804.00</td><td>47.85</td><td>54.00</td><td>-6.15</td><td>66.04</td><td>34.19</td><td>9.44</td><td>61.82</td><td>0.00</td><td>168</td><td>332</td><td>AVERAGE</td></tr><tr><td>3</td><td>7215.00</td><td>48.48</td><td>97.33</td><td>-48.85</td><td>62.98</td><td>35.90</td><td>11.65</td><td>62.05</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4804.00	50.98	74.00	-23.02	69.17	34.19	9.44	61.82	0.00	168	332	PEAK	2	4804.00	47.85	54.00	-6.15	66.04	34.19	9.44	61.82	0.00	168	332	AVERAGE	3	7215.00	48.48	97.33	-48.85	62.98	35.90	11.65	62.05	0.00	---	---	Peak													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																				
1	4804.00	50.98	74.00	-23.02	69.17	34.19	9.44	61.82	0.00	168	332	PEAK																																																																																		
2	4804.00	47.85	54.00	-6.15	66.04	34.19	9.44	61.82	0.00	168	332	AVERAGE																																																																																		
3	7215.00	48.48	97.33	-48.85	62.98	35.90	11.65	62.05	0.00	---	---	Peak																																																																																		
	Vertical																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4805.00</td><td>46.70</td><td>74.00</td><td>-27.30</td><td>65.82</td><td>33.82</td><td>8.63</td><td>61.57</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4804.00</td><td>52.79</td><td>74.00</td><td>-21.21</td><td>70.98</td><td>34.19</td><td>9.44</td><td>61.82</td><td>0.00</td><td>272</td><td>213</td><td>PEAK</td></tr><tr><td>3</td><td>4804.00</td><td>49.90</td><td>54.00</td><td>-4.10</td><td>68.09</td><td>34.19</td><td>9.44</td><td>61.82</td><td>0.00</td><td>272</td><td>213</td><td>AVERAGE</td></tr><tr><td>4</td><td>7215.00</td><td>49.66</td><td>98.12</td><td>-48.46</td><td>64.16</td><td>35.90</td><td>11.65</td><td>62.05</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4805.00	46.70	74.00	-27.30	65.82	33.82	8.63	61.57	0.00	---	---	Peak	2	4804.00	52.79	74.00	-21.21	70.98	34.19	9.44	61.82	0.00	272	213	PEAK	3	4804.00	49.90	54.00	-4.10	68.09	34.19	9.44	61.82	0.00	272	213	AVERAGE	4	7215.00	49.66	98.12	-48.46	64.16	35.90	11.65	62.05	0.00	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																				
1	4805.00	46.70	74.00	-27.30	65.82	33.82	8.63	61.57	0.00	---	---	Peak																																																																																		
2	4804.00	52.79	74.00	-21.21	70.98	34.19	9.44	61.82	0.00	272	213	PEAK																																																																																		
3	4804.00	49.90	54.00	-4.10	68.09	34.19	9.44	61.82	0.00	272	213	AVERAGE																																																																																		
4	7215.00	49.66	98.12	-48.46	64.16	35.90	11.65	62.05	0.00	---	---	Peak																																																																																		

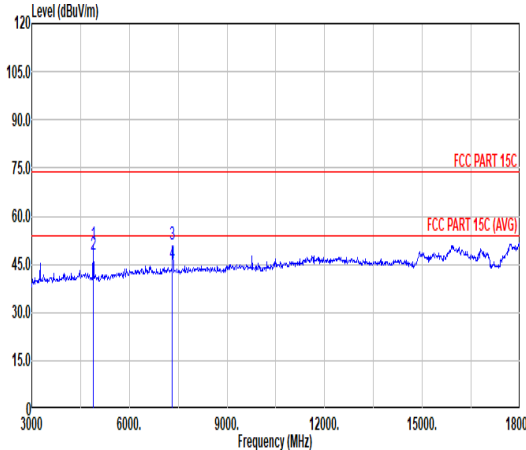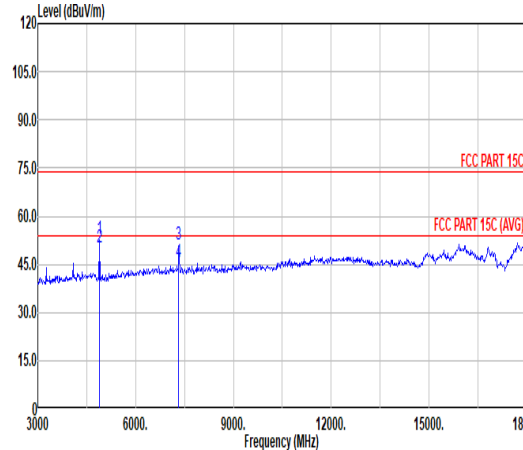

Mode	2																																																																																												
	Harmonic																																																																																												
	2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																																																																												
Pol.	Horizontal																																																																																												
Peak Avg																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>51.30</td><td>74.00</td><td>-22.70</td><td>69.50</td><td>34.04</td><td>9.53</td><td>61.77</td><td>0.00</td><td>119</td><td>141</td><td>PEAK</td></tr><tr><td>2</td><td>4880.00</td><td>48.03</td><td>54.00</td><td>-5.97</td><td>66.23</td><td>34.04</td><td>9.53</td><td>61.77</td><td>0.00</td><td>119</td><td>141</td><td>AVERAGE</td></tr><tr><td>3</td><td>7320.00</td><td>51.11</td><td>74.00</td><td>-22.89</td><td>65.64</td><td>35.84</td><td>11.69</td><td>62.06</td><td>0.00</td><td>100</td><td>85</td><td>PEAK</td></tr><tr><td>4</td><td>7320.00</td><td>45.13</td><td>54.00</td><td>-8.87</td><td>59.66</td><td>35.84</td><td>11.69</td><td>62.06</td><td>0.00</td><td>100</td><td>85</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4880.00	51.30	74.00	-22.70	69.50	34.04	9.53	61.77	0.00	119	141	PEAK	2	4880.00	48.03	54.00	-5.97	66.23	34.04	9.53	61.77	0.00	119	141	AVERAGE	3	7320.00	51.11	74.00	-22.89	65.64	35.84	11.69	62.06	0.00	100	85	PEAK	4	7320.00	45.13	54.00	-8.87	59.66	35.84	11.69	62.06	0.00	100	85
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																			
1	4880.00	51.30	74.00	-22.70	69.50	34.04	9.53	61.77	0.00	119	141	PEAK																																																																																	
2	4880.00	48.03	54.00	-5.97	66.23	34.04	9.53	61.77	0.00	119	141	AVERAGE																																																																																	
3	7320.00	51.11	74.00	-22.89	65.64	35.84	11.69	62.06	0.00	100	85	PEAK																																																																																	
4	7320.00	45.13	54.00	-8.87	59.66	35.84	11.69	62.06	0.00	100	85	AVERAGE																																																																																	
Peak Avg																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>53.19</td><td>74.00</td><td>-20.81</td><td>71.39</td><td>34.04</td><td>9.53</td><td>61.77</td><td>0.00</td><td>276</td><td>217</td><td>PEAK</td></tr><tr><td>2</td><td>4880.00</td><td>50.41</td><td>54.00</td><td>-3.59</td><td>68.61</td><td>34.04</td><td>9.53</td><td>61.77</td><td>0.00</td><td>276</td><td>217</td><td>AVERAGE</td></tr><tr><td>3</td><td>7320.00</td><td>51.17</td><td>74.00</td><td>-22.83</td><td>65.70</td><td>35.84</td><td>11.69</td><td>62.06</td><td>0.00</td><td>104</td><td>70</td><td>PEAK</td></tr><tr><td>4</td><td>7320.00</td><td>45.79</td><td>54.00</td><td>-8.21</td><td>60.32</td><td>35.84</td><td>11.69</td><td>62.06</td><td>0.00</td><td>104</td><td>70</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4880.00	53.19	74.00	-20.81	71.39	34.04	9.53	61.77	0.00	276	217	PEAK	2	4880.00	50.41	54.00	-3.59	68.61	34.04	9.53	61.77	0.00	276	217	AVERAGE	3	7320.00	51.17	74.00	-22.83	65.70	35.84	11.69	62.06	0.00	104	70	PEAK	4	7320.00	45.79	54.00	-8.21	60.32	35.84	11.69	62.06	0.00	104	70
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																			
1	4880.00	53.19	74.00	-20.81	71.39	34.04	9.53	61.77	0.00	276	217	PEAK																																																																																	
2	4880.00	50.41	54.00	-3.59	68.61	34.04	9.53	61.77	0.00	276	217	AVERAGE																																																																																	
3	7320.00	51.17	74.00	-22.83	65.70	35.84	11.69	62.06	0.00	104	70	PEAK																																																																																	
4	7320.00	45.79	54.00	-8.21	60.32	35.84	11.69	62.06	0.00	104	70	AVERAGE																																																																																	





Mode	3																																																																																	
	Band Edge																																																																																	
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1 2484.40</td><td>57.31</td><td>74.00</td><td>-16.69</td><td>44.88</td><td>32.32</td><td>6.73</td><td>32.62</td><td>6.00</td><td>301 300 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB		1 2484.40	57.31	74.00	-16.69	44.88	32.32	6.73	32.62	6.00	301 300 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1 2480.00</td><td>98.74</td><td>-----</td><td>-----</td><td>86.28</td><td>32.36</td><td>6.73</td><td>32.63</td><td>6.00</td><td>301 300 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB		1 2480.00	98.74	-----	-----	86.28	32.36	6.73	32.63	6.00	301 300 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1 2484.40	57.31	74.00	-16.69	44.88	32.32	6.73	32.62	6.00	301 300 PEAK																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1 2480.00	98.74	-----	-----	86.28	32.36	6.73	32.63	6.00	301 300 PEAK																																																																									
Avg	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1 2483.74</td><td>44.67</td><td>54.00</td><td>-9.33</td><td>32.23</td><td>32.33</td><td>6.73</td><td>32.62</td><td>6.00</td><td>301 300 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB		1 2483.74	44.67	54.00	-9.33	32.23	32.33	6.73	32.62	6.00	301 300 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1 2480.00</td><td>97.40</td><td>-----</td><td>-----</td><td>84.94</td><td>32.36</td><td>6.73</td><td>32.63</td><td>6.00</td><td>301 300 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB		1 2480.00	97.40	-----	-----	84.94	32.36	6.73	32.63	6.00	301 300 AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1 2483.74	44.67	54.00	-9.33	32.23	32.33	6.73	32.62	6.00	301 300 AVERAGE																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1 2480.00	97.40	-----	-----	84.94	32.36	6.73	32.63	6.00	301 300 AVERAGE																																																																									



		3																																																																																																												
Mode	Band Edge																																																																																																													
	2400-2483.5 Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																													
Pol.	Vertical						Fundamental																																																																																																							
Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2483.68</td><td>66.43</td><td>74.00</td><td>-7.57</td><td>54.00</td><td>32.33</td><td>6.73</td><td>32.63</td><td>6.00</td><td>255</td><td>360</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2483.68	66.43	74.00	-7.57	54.00	32.33	6.73	32.63	6.00	255	360	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>107.83</td><td>-----</td><td>-----</td><td>95.37</td><td>32.36</td><td>6.73</td><td>32.63</td><td>6.00</td><td>255</td><td>360</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2480.00	107.83	-----	-----	95.37	32.36	6.73	32.63	6.00	255	360	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	2483.68	66.43	74.00	-7.57	54.00	32.33	6.73	32.63	6.00	255	360	PEAK																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	2480.00	107.83	-----	-----	95.37	32.36	6.73	32.63	6.00	255	360	PEAK																																																																																																		
Avg	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2483.50</td><td>49.33</td><td>54.00</td><td>-4.67</td><td>36.90</td><td>32.33</td><td>6.73</td><td>32.63</td><td>6.00</td><td>255</td><td>360</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2483.50	49.33	54.00	-4.67	36.90	32.33	6.73	32.63	6.00	255	360	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>106.59</td><td>-----</td><td>-----</td><td>94.13</td><td>32.36</td><td>6.73</td><td>32.63</td><td>6.00</td><td>255</td><td>360</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2480.00	106.59	-----	-----	94.13	32.36	6.73	32.63	6.00	255	360	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	2483.50	49.33	54.00	-4.67	36.90	32.33	6.73	32.63	6.00	255	360	AVERAGE																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	2480.00	106.59	-----	-----	94.13	32.36	6.73	32.63	6.00	255	360	AVERAGE																																																																																																		



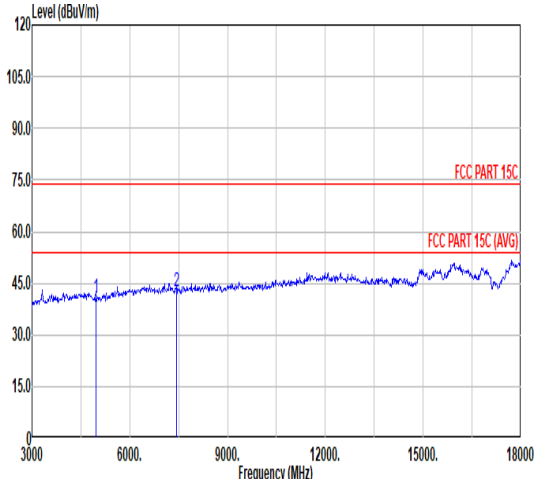
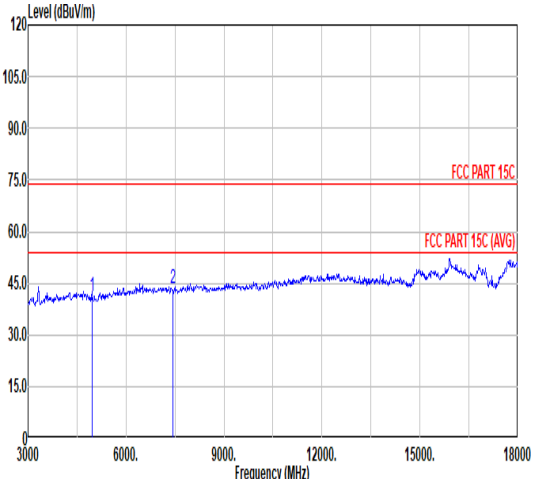


Mode	3																																																																																																																																																			
	Harmonic																																																																																																																																																			
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																																																																			
Pol.	Horizontal											Vertical																																																																																																																																								
Peak Avg																																																																																																																																																				
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th colspan="3">Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4960.00</td><td>40.95</td><td>74.00</td><td>-33.05</td><td>59.05</td><td>34.00</td><td>9.61</td><td>61.71</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7440.00</td><td>42.75</td><td>74.00</td><td>-31.25</td><td>57.13</td><td>35.92</td><td>11.77</td><td>62.07</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos				Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4960.00	40.95	74.00	-33.05	59.05	34.00	9.61	61.71	0.00	---	---	PEAK	2	7440.00	42.75	74.00	-31.25	57.13	35.92	11.77	62.07	0.00	---	---	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th colspan="3">Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4960.00</td><td>41.27</td><td>74.00</td><td>-32.73</td><td>59.37</td><td>34.00</td><td>9.61</td><td>61.71</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7440.00</td><td>43.46</td><td>74.00</td><td>-30.54</td><td>57.84</td><td>35.92</td><td>11.77</td><td>62.07</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos				Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4960.00	41.27	74.00	-32.73	59.37	34.00	9.61	61.71	0.00	---	---	PEAK	2	7440.00	43.46	74.00	-30.54	57.84	35.92	11.77	62.07	0.00	---	---	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																									
1	4960.00	40.95	74.00	-33.05	59.05	34.00	9.61	61.71	0.00	---	---	PEAK																																																																																																																																								
2	7440.00	42.75	74.00	-31.25	57.13	35.92	11.77	62.07	0.00	---	---	PEAK																																																																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																									
1	4960.00	41.27	74.00	-32.73	59.37	34.00	9.61	61.71	0.00	---	---	PEAK																																																																																																																																								
2	7440.00	43.46	74.00	-30.54	57.84	35.92	11.77	62.07	0.00	---	---	PEAK																																																																																																																																								



Mode	4																																																																									
	Band Edge																																																																									
	2400-2483.5_Bluetooth-LE_GSKF_CH00_MHz																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1 2372.53</td><td>55.55</td><td>74.00</td><td>-18.45</td><td>43.53</td><td>32.33</td><td>6.58</td><td>32.89</td><td>6.00</td></tr></tbody></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2372.53	55.55	74.00	-18.45	43.53	32.33	6.58	32.89	6.00	<table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1 2402.00</td><td>110.51</td><td>-----</td><td>-----</td><td>98.71</td><td>32.02</td><td>6.62</td><td>32.84</td><td>6.00</td></tr></tbody></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2402.00	110.51	-----	-----	98.71	32.02	6.62	32.84	6.00
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																		
1 2372.53	55.55	74.00	-18.45	43.53	32.33	6.58	32.89	6.00																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																		
1 2402.00	110.51	-----	-----	98.71	32.02	6.62	32.84	6.00																																																																		
Avg	<table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1 2389.95</td><td>43.92</td><td>54.00</td><td>-10.08</td><td>32.06</td><td>32.12</td><td>6.60</td><td>32.86</td><td>6.00</td></tr></tbody></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2389.95	43.92	54.00	-10.08	32.06	32.12	6.60	32.86	6.00	<table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1 2402.00</td><td>107.82</td><td>-----</td><td>-----</td><td>96.02</td><td>32.02</td><td>6.62</td><td>32.84</td><td>6.00</td></tr></tbody></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2402.00	107.82	-----	-----	96.02	32.02	6.62	32.84	6.00
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																		
1 2389.95	43.92	54.00	-10.08	32.06	32.12	6.60	32.86	6.00																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																		
1 2402.00	107.82	-----	-----	96.02	32.02	6.62	32.84	6.00																																																																		

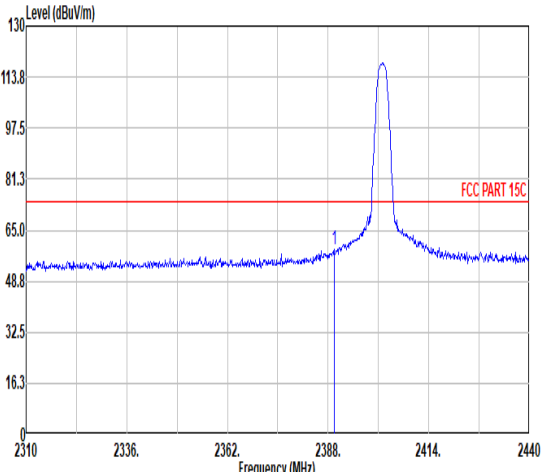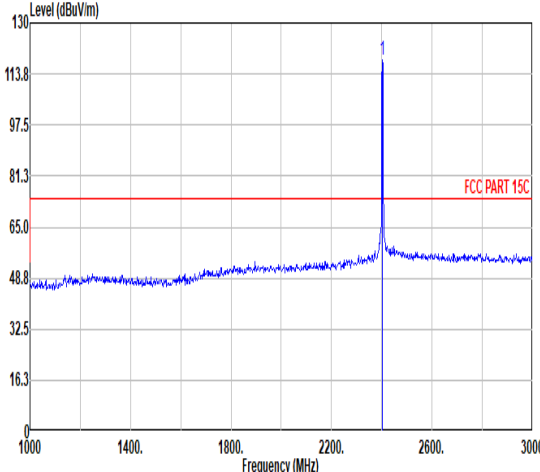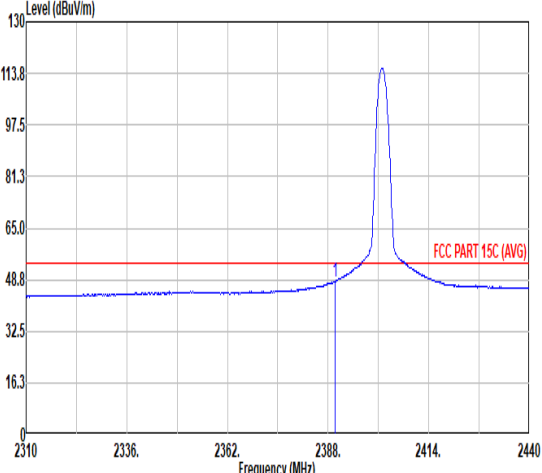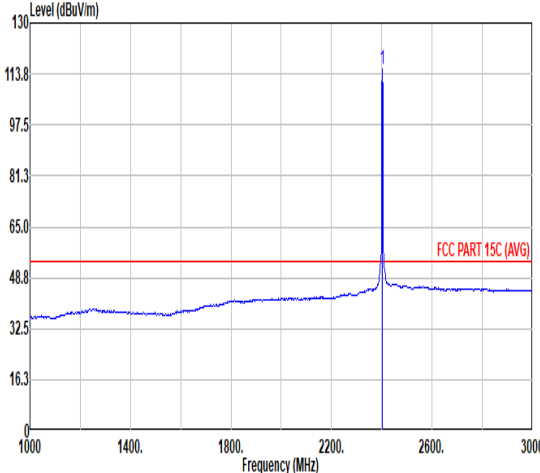

Mode	4																																																						
	Band Edge																																																						
	2400-2483.5_Bluetooth-LE_GSKF_CH00_MHz																																																						
Pol.	Vertical						Fundamental																																																
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.56</td><td>58.69</td><td>74.00</td><td>-15.31</td><td>46.82</td><td>32.13</td><td>6.60</td><td>32.86</td><td>6.00</td><td>293</td><td>340</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.56	58.69	74.00	-15.31	46.82	32.13	6.60	32.86	6.00	293	340
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2389.56	58.69	74.00	-15.31	46.82	32.13	6.60	32.86	6.00	293	340	PEAK																																											
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>118.07</td><td>-----</td><td>-----</td><td>106.27</td><td>32.02</td><td>6.62</td><td>32.84</td><td>6.00</td><td>293</td><td>340</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	118.07	-----	-----	106.27	32.02	6.62	32.84	6.00	293	340
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2402.00	118.07	-----	-----	106.27	32.02	6.62	32.84	6.00	293	340	PEAK																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.82</td><td>48.30</td><td>54.00</td><td>-5.70</td><td>36.44</td><td>32.12</td><td>6.60</td><td>32.86</td><td>6.00</td><td>293</td><td>340</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.82	48.30	54.00	-5.70	36.44	32.12	6.60	32.86	6.00	293	340
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2389.82	48.30	54.00	-5.70	36.44	32.12	6.60	32.86	6.00	293	340	AVERAGE																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>115.35</td><td>-----</td><td>-----</td><td>103.55</td><td>32.02</td><td>6.62</td><td>32.84</td><td>6.00</td><td>293</td><td>340</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	115.35	-----	-----	103.55	32.02	6.62	32.84	6.00	293	340
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2402.00	115.35	-----	-----	103.55	32.02	6.62	32.84	6.00	293	340	AVERAGE																																											



4

Mode


Harmonic

2400-2483.5_Bluetooth-LE_GSKF_CH00_MHz


Pol.

Horizontal

Vertical

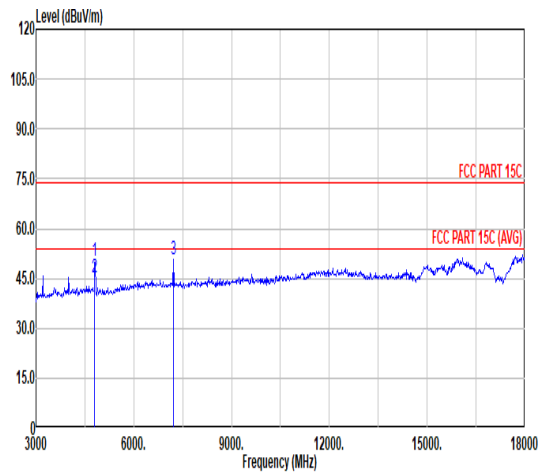Peak
Avg

Freq	MHz	Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark
		Level	Line	Level	Margin							
		dBuV/m	dB	dBuV	dB/m		Loss	Factor	Factor			
1	4804.00	50.18	74.00	-23.82	68.37	34.19	9.44	61.82	0.00	101	332	PEAK
2	4804.00	45.29	54.00	-8.71	63.48	34.19	9.44	61.82	0.00	101	332	AVERAGE
3	7215.00	50.93	74.00	-23.07	65.43	35.90	11.65	62.05	0.00	---	---	Peak

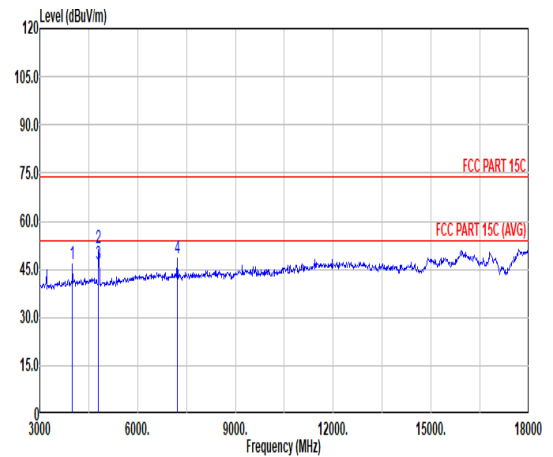

Freq	MHz	Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark
		Level	Line	Level	Margin							
		dBuV/m	dB	dBuV	dB/m		Loss	Factor	Factor			
1	4805.00	46.51	74.00	-27.49	65.63	33.82	8.63	61.57	0.00	---	---	Peak
2	4804.00	51.49	74.00	-22.51	69.68	34.19	9.44	61.82	0.00	302	211	PEAK
3	4804.00	46.45	54.00	-7.55	64.64	34.19	9.44	61.82	0.00	302	211	AVERAGE
4	7215.00	48.26	95.69	-47.43	62.76	35.90	11.65	62.05	0.00	---	---	Peak







Mode	5																																																																																																				
	Harmonic																																																																																																				
	2400-2483.5_Bluetooth-LE_GSKF_CH19_MHz																																																																																																				
Pol.	Horizontal																																																																																																				
Peak Avg																																																																																																					
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>4880.00</td><td>51.52</td><td>74.00</td><td>-22.48</td><td>69.72</td><td>34.04</td><td>9.53</td><td>61.77</td><td>0.00</td><td>100</td><td>326</td><td>PEAK</td></tr><tr><td>2</td><td>4880.00</td><td>46.29</td><td>54.00</td><td>-7.71</td><td>64.49</td><td>34.04</td><td>9.53</td><td>61.77</td><td>0.00</td><td>100</td><td>326</td><td>AVERAGE</td></tr><tr><td>3</td><td>7320.00</td><td>49.91</td><td>74.00</td><td>-24.09</td><td>64.44</td><td>35.84</td><td>11.69</td><td>62.06</td><td>0.00</td><td>100</td><td>82</td><td>PEAK</td></tr><tr><td>4</td><td>7320.00</td><td>44.01</td><td>54.00</td><td>-9.99</td><td>58.54</td><td>35.84</td><td>11.69</td><td>62.06</td><td>0.00</td><td>100</td><td>82</td><td>AVERAGE</td></tr></table>													Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	4880.00	51.52	74.00	-22.48	69.72	34.04	9.53	61.77	0.00	100	326	PEAK	2	4880.00	46.29	54.00	-7.71	64.49	34.04	9.53	61.77	0.00	100	326	AVERAGE	3	7320.00	49.91	74.00	-24.09	64.44	35.84	11.69	62.06	0.00	100	82	PEAK	4	7320.00	44.01	54.00	-9.99	58.54	35.84	11.69	62.06	0.00	100	82	AVERAGE
			Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																										
1	4880.00	51.52	74.00	-22.48	69.72	34.04	9.53	61.77	0.00	100	326	PEAK																																																																																									
2	4880.00	46.29	54.00	-7.71	64.49	34.04	9.53	61.77	0.00	100	326	AVERAGE																																																																																									
3	7320.00	49.91	74.00	-24.09	64.44	35.84	11.69	62.06	0.00	100	82	PEAK																																																																																									
4	7320.00	44.01	54.00	-9.99	58.54	35.84	11.69	62.06	0.00	100	82	AVERAGE																																																																																									
<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>4880.00</td><td>52.42</td><td>74.00</td><td>-21.58</td><td>70.62</td><td>34.04</td><td>9.53</td><td>61.77</td><td>0.00</td><td>375</td><td>215</td><td>PEAK</td></tr><tr><td>2</td><td>4880.00</td><td>47.59</td><td>54.00</td><td>-6.41</td><td>65.79</td><td>34.04</td><td>9.53</td><td>61.77</td><td>0.00</td><td>375</td><td>215</td><td>AVERAGE</td></tr><tr><td>3</td><td>7320.00</td><td>43.98</td><td>74.00</td><td>-30.02</td><td>58.51</td><td>35.84</td><td>11.69</td><td>62.06</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>													Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	4880.00	52.42	74.00	-21.58	70.62	34.04	9.53	61.77	0.00	375	215	PEAK	2	4880.00	47.59	54.00	-6.41	65.79	34.04	9.53	61.77	0.00	375	215	AVERAGE	3	7320.00	43.98	74.00	-30.02	58.51	35.84	11.69	62.06	0.00	---	---	PEAK														
		Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																											
1	4880.00	52.42	74.00	-21.58	70.62	34.04	9.53	61.77	0.00	375	215	PEAK																																																																																									
2	4880.00	47.59	54.00	-6.41	65.79	34.04	9.53	61.77	0.00	375	215	AVERAGE																																																																																									
3	7320.00	43.98	74.00	-30.02	58.51	35.84	11.69	62.06	0.00	---	---	PEAK																																																																																									





Mode	6																																																							
	Band Edge																																																							
	2400-2483.5_Bluetooth-LE_GSKF_CH39_MHz																																																							
Pol.	Horizontal																																																							
Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.62</td><td>58.11</td><td>74.00</td><td>-15.89</td><td>45.68</td><td>32.33</td><td>6.73</td><td>32.63</td><td>6.00</td><td>300</td><td>301 PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.62	58.11	74.00	-15.89	45.68	32.33	6.73	32.63	6.00	300	301 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2483.62	58.11	74.00	-15.89	45.68	32.33	6.73	32.63	6.00	300	301 PEAK																																													
Fundamental	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>98.35</td><td>-----</td><td>-----</td><td>85.89</td><td>32.36</td><td>6.73</td><td>32.63</td><td>6.00</td><td>300</td><td>301 PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	98.35	-----	-----	85.89	32.36	6.73	32.63	6.00	300	301 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2480.00	98.35	-----	-----	85.89	32.36	6.73	32.63	6.00	300	301 PEAK																																													
Avg	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.50</td><td>44.71</td><td>54.00</td><td>-9.29</td><td>32.28</td><td>32.33</td><td>6.73</td><td>32.63</td><td>6.00</td><td>300</td><td>301 AVERAGE</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	44.71	54.00	-9.29	32.28	32.33	6.73	32.63	6.00	300	301 AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2483.50	44.71	54.00	-9.29	32.28	32.33	6.73	32.63	6.00	300	301 AVERAGE																																													
Fundamental	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>95.65</td><td>-----</td><td>-----</td><td>83.19</td><td>32.36</td><td>6.73</td><td>32.63</td><td>6.00</td><td>300</td><td>301 AVERAGE</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	95.65	-----	-----	83.19	32.36	6.73	32.63	6.00	300	301 AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2480.00	95.65	-----	-----	83.19	32.36	6.73	32.63	6.00	300	301 AVERAGE																																													

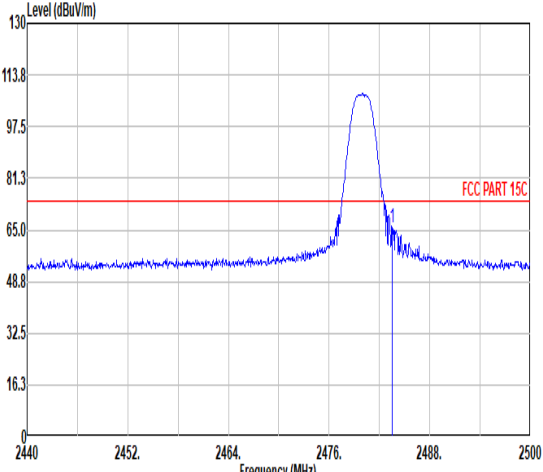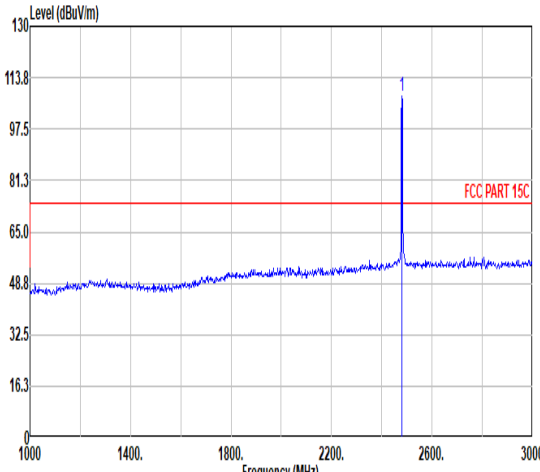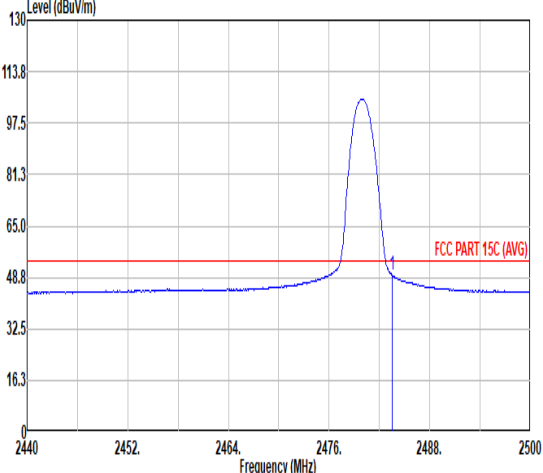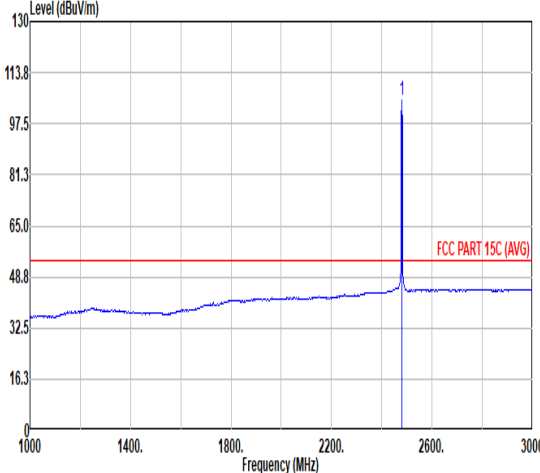

Mode	6																																																						
	Band Edge																																																						
	2400-2483.5_Bluetooth-LE_GSKF_CH39_MHz																																																						
Pol.	Vertical						Fundamental																																																
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>65.76</td><td>74.00</td><td>-8.24</td><td>53.33</td><td>32.33</td><td>6.73</td><td>32.63</td><td>6.00</td><td>255</td><td>360</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	65.76	74.00	-8.24	53.33	32.33	6.73	32.63	6.00	255	360
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2483.50	65.76	74.00	-8.24	53.33	32.33	6.73	32.63	6.00	255	360	PEAK																																											
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>107.79</td><td>-----</td><td>-----</td><td>95.33</td><td>32.36</td><td>6.73</td><td>32.63</td><td>6.00</td><td>255</td><td>360</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	107.79	-----	-----	95.33	32.36	6.73	32.63	6.00	255	360
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2480.00	107.79	-----	-----	95.33	32.36	6.73	32.63	6.00	255	360	PEAK																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>49.49</td><td>54.00</td><td>-4.51</td><td>37.06</td><td>32.33</td><td>6.73</td><td>32.63</td><td>6.00</td><td>255</td><td>360</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	49.49	54.00	-4.51	37.06	32.33	6.73	32.63	6.00	255	360
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2483.50	49.49	54.00	-4.51	37.06	32.33	6.73	32.63	6.00	255	360	AVERAGE																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>104.88</td><td>-----</td><td>-----</td><td>92.42</td><td>32.36</td><td>6.73</td><td>32.63</td><td>6.00</td><td>255</td><td>360</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	104.88	-----	-----	92.42	32.36	6.73	32.63	6.00	255	360
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2480.00	104.88	-----	-----	92.42	32.36	6.73	32.63	6.00	255	360	AVERAGE																																											

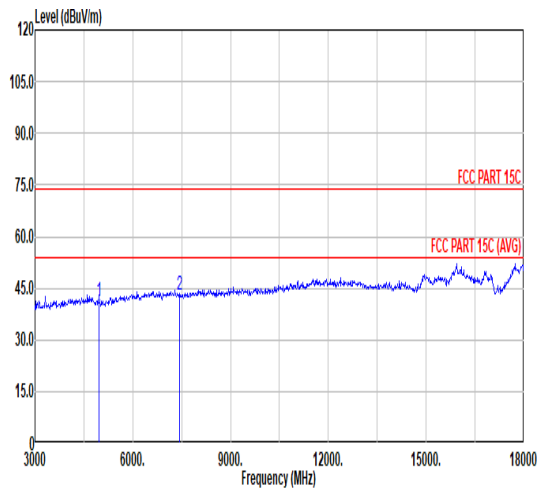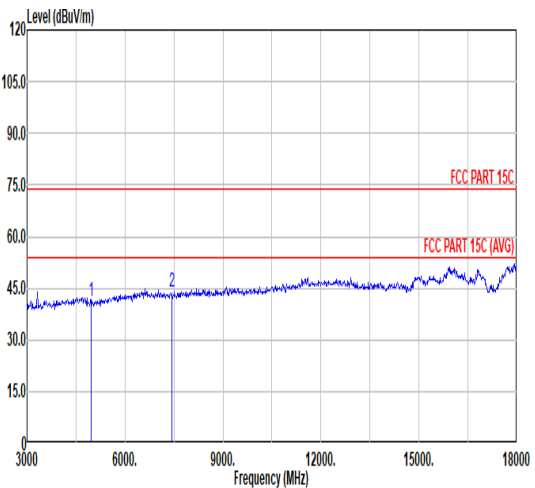

Mode	6																																																																																																																													
	Harmonic																																																																																																																													
	2400-2483.5_Bluetooth-LE_GSKF_CH39_MHz																																																																																																																													
Pol.	Horizontal						Vertical																																																																																																																							
Peak Avg																																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>41.10</td><td>74.00</td><td>-32.90</td><td>59.20</td><td>34.00</td><td>9.61</td><td>61.71</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7440.00</td><td>43.02</td><td>74.00</td><td>-30.98</td><td>57.40</td><td>35.92</td><td>11.77</td><td>62.07</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4960.00	41.10	74.00	-32.90	59.20	34.00	9.61	61.71	0.00	---	---	PEAK	2	7440.00	43.02	74.00	-30.98	57.40	35.92	11.77	62.07	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>41.33</td><td>74.00</td><td>-32.67</td><td>59.43</td><td>34.00</td><td>9.61</td><td>61.71</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7440.00</td><td>43.71</td><td>74.00</td><td>-30.29</td><td>58.09</td><td>35.92</td><td>11.77</td><td>62.07</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4960.00	41.33	74.00	-32.67	59.43	34.00	9.61	61.71	0.00	---	---	PEAK	2	7440.00	43.71	74.00	-30.29	58.09	35.92	11.77	62.07	0.00	---	---	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																				
1	4960.00	41.10	74.00	-32.90	59.20	34.00	9.61	61.71	0.00	---	---	PEAK																																																																																																																		
2	7440.00	43.02	74.00	-30.98	57.40	35.92	11.77	62.07	0.00	---	---	PEAK																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																				
1	4960.00	41.33	74.00	-32.67	59.43	34.00	9.61	61.71	0.00	---	---	PEAK																																																																																																																		
2	7440.00	43.71	74.00	-30.29	58.09	35.92	11.77	62.07	0.00	---	---	PEAK																																																																																																																		



7

Mode

Band Edge


2400-2483.5_Bluetooth-LE_GSKF_CH38_MHz

Pol.


Horizontal

Fundamental

Peak

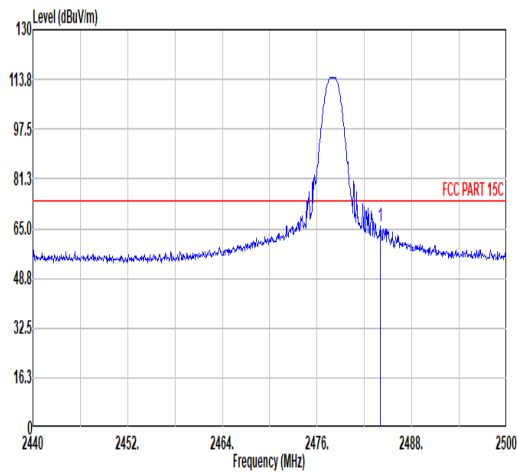


Freq	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	Level	Line Margin	Level	Factor	Loss	Factor	Factor			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg
1	2483.98	65.78	74.00	-8.22	52.90	32.77	6.73	32.62	6.00	111
										0 PEAK

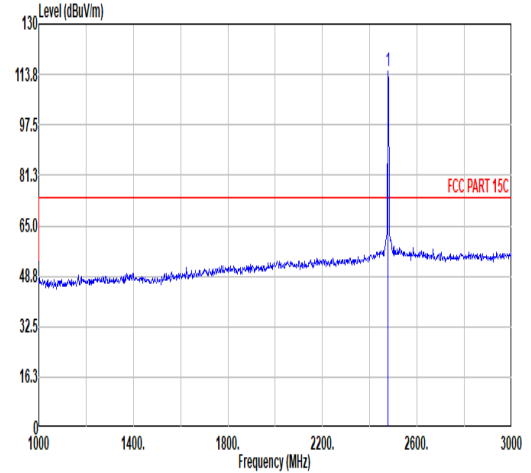


Freq	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	Level	Line Margin	Level	Factor	Loss	Factor	Factor			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg
1	2478.00	114.59	-----	101.78	32.72	6.73	32.64	6.00	111	0 PEAK

Avg

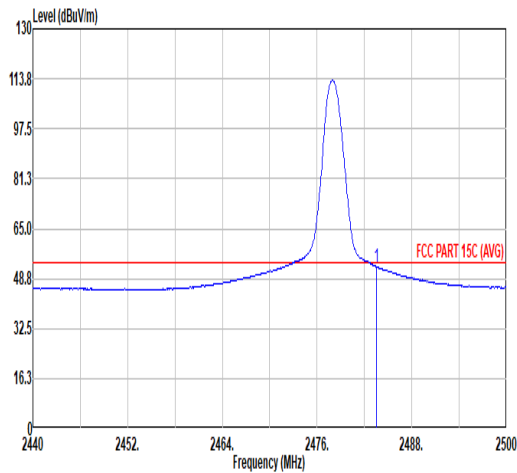

Freq	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	Level	Line Margin	Level	Factor	Loss	Factor	Factor			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg
1	2483.56	52.60	54.00	-1.40	39.73	32.77	6.73	32.63	6.00	111
										0 AVERAGE

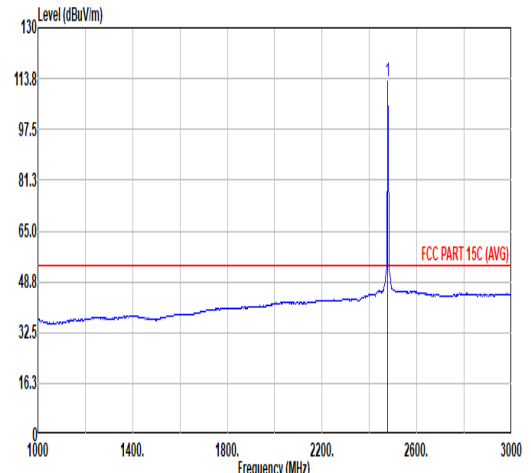

Freq	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	Level	Line Margin	Level	Factor	Loss	Factor	Factor			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg
1	2478.00	112.98	-----	100.17	32.72	6.73	32.64	6.00	111	0 AVERAGE



7

Mode

Band Edge


2400-2483.5_Bluetooth-LE_GSKF_CH38_MHz

Pol.


Vertical

Fundamental

Peak

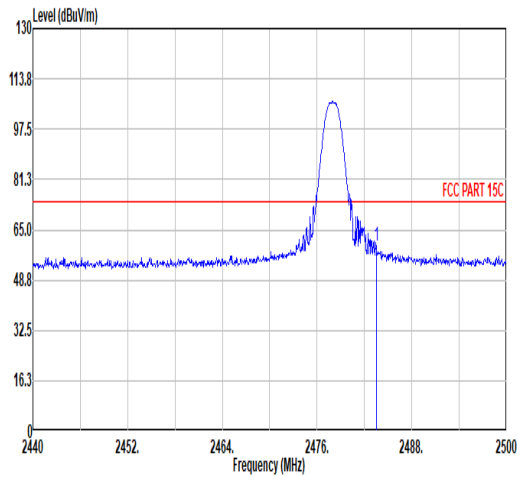


Freq	MHz	Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark
		Level	Line Margin	Level	Factor							
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg
1	2483.50	59.93	74.00	-14.07	47.06	32.77	6.73	32.63	6.00	296	341	PEAK

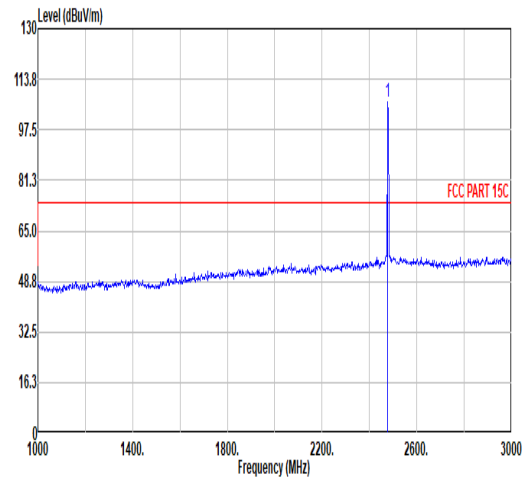


Freq	Level	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
		Line	Margin	Level	Factor	Loss	Factor	Factor			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg
1	2478.00	106.43	-----	93.62	32.72	6.73	32.64	6.00	296	341	PEAK

Avg




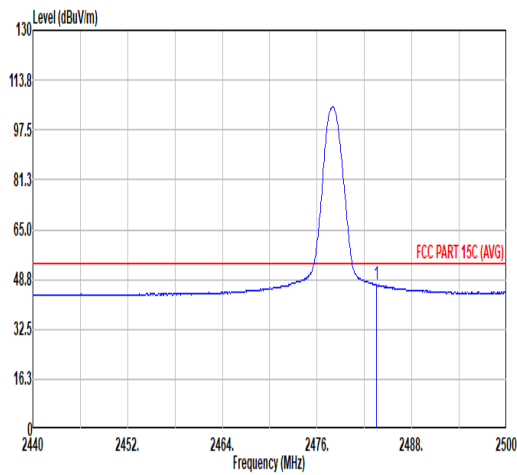


Freq	MHz	Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark
		Level	Line Margin	Level	Factor							
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg
1	2483.50	47.02	54.00	-6.98	34.15	32.77	6.73	32.63	6.00	296	341	AVERAGE


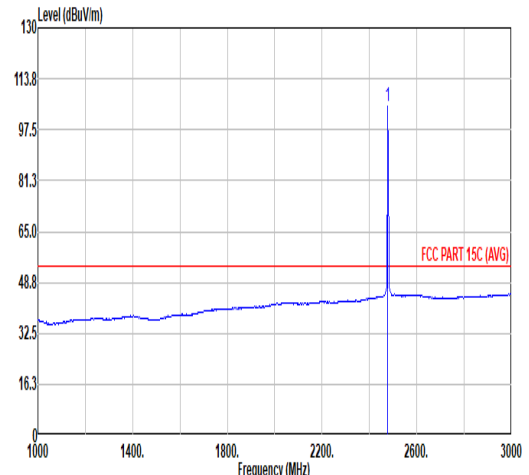


Freq	Level	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
		Line	Margin	Level	Factor	Loss	Factor	Factor			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg
1	2478.00	104.98	-----	92.17	32.72	6.73	32.64	6.00	296	341	AVERAGE

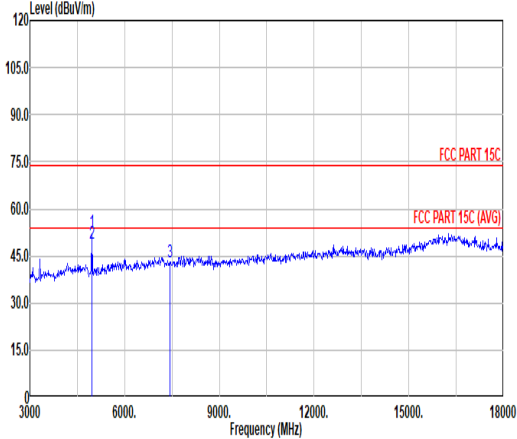
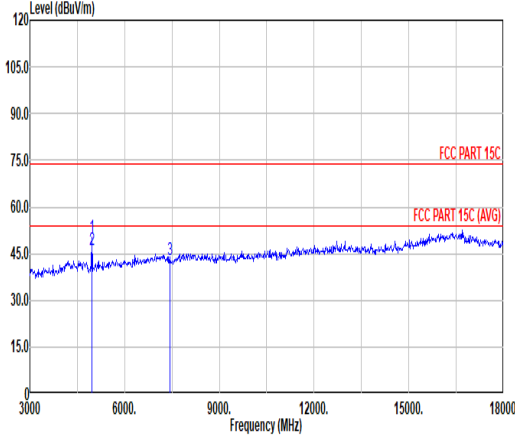
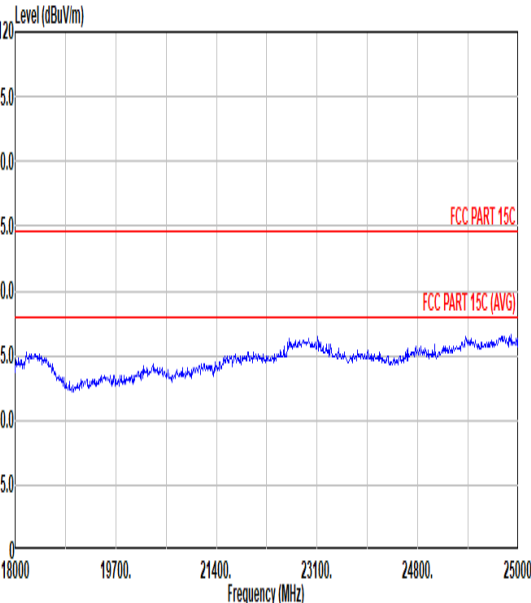
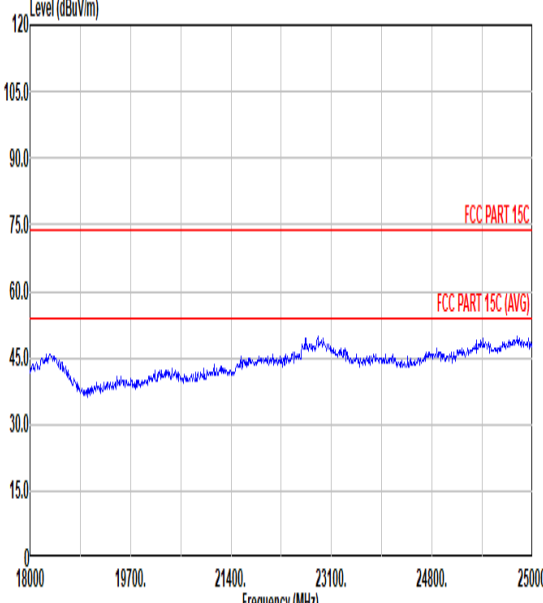


Mode	7																																																																																																																																																								
	Harmonic																																																																																																																																																								
	2400-2483.5_Bluetooth-LE_GSKF_CH38_MHz																																																																																																																																																								
Pol.	Horizontal						Vertical																																																																																																																																																		
Peak Avg	 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4956.00</td><td>52.32</td><td>74.00</td><td>-21.68</td><td>69.33</td><td>34.19</td><td>9.61</td><td>60.81</td><td>0.00</td><td>130</td><td>136</td><td>PEAK</td></tr><tr><td>2</td><td>4956.00</td><td>48.83</td><td>54.00</td><td>-5.17</td><td>65.84</td><td>34.19</td><td>9.61</td><td>60.81</td><td>0.00</td><td>130</td><td>136</td><td>AVERAGE</td></tr><tr><td>3</td><td>7440.00</td><td>43.12</td><td>74.00</td><td>-30.88</td><td>56.27</td><td>35.70</td><td>11.77</td><td>60.62</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4956.00	52.32	74.00	-21.68	69.33	34.19	9.61	60.81	0.00	130	136	PEAK	2	4956.00	48.83	54.00	-5.17	65.84	34.19	9.61	60.81	0.00	130	136	AVERAGE	3	7440.00	43.12	74.00	-30.88	56.27	35.70	11.77	60.62	0.00	---	---	Peak	 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4965.00</td><td>50.17</td><td>74.00</td><td>-23.83</td><td>67.18</td><td>34.17</td><td>9.62</td><td>60.80</td><td>0.00</td><td>356</td><td>109</td><td>Peak</td></tr><tr><td>2</td><td>4965.00</td><td>46.34</td><td>54.00</td><td>-7.66</td><td>63.35</td><td>34.17</td><td>9.62</td><td>60.80</td><td>0.00</td><td>356</td><td>109</td><td>Average</td></tr><tr><td>3</td><td>7440.00</td><td>42.92</td><td>74.00</td><td>-31.08</td><td>56.07</td><td>35.70</td><td>11.77</td><td>60.62</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4965.00	50.17	74.00	-23.83	67.18	34.17	9.62	60.80	0.00	356	109	Peak	2	4965.00	46.34	54.00	-7.66	63.35	34.17	9.62	60.80	0.00	356	109	Average	3	7440.00	42.92	74.00	-31.08	56.07	35.70	11.77	60.62	0.00	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																															
1	4956.00	52.32	74.00	-21.68	69.33	34.19	9.61	60.81	0.00	130	136	PEAK																																																																																																																																													
2	4956.00	48.83	54.00	-5.17	65.84	34.19	9.61	60.81	0.00	130	136	AVERAGE																																																																																																																																													
3	7440.00	43.12	74.00	-30.88	56.27	35.70	11.77	60.62	0.00	---	---	Peak																																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																														
1	4965.00	50.17	74.00	-23.83	67.18	34.17	9.62	60.80	0.00	356	109	Peak																																																																																																																																													
2	4965.00	46.34	54.00	-7.66	63.35	34.17	9.62	60.80	0.00	356	109	Average																																																																																																																																													
3	7440.00	42.92	74.00	-31.08	56.07	35.70	11.77	60.62	0.00	---	---	Peak																																																																																																																																													
Peak Avg	 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>43.12</td><td>74.00</td><td>-30.88</td><td>56.27</td><td>35.70</td><td>11.77</td><td>60.62</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2440.00	43.12	74.00	-30.88	56.27	35.70	11.77	60.62	0.00	---	---	Peak	 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>42.92</td><td>74.00</td><td>-31.08</td><td>56.07</td><td>35.70</td><td>11.77</td><td>60.62</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2440.00	42.92	74.00	-31.08	56.07	35.70	11.77	60.62	0.00	---	---	Peak																																																			
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																														
1	2440.00	43.12	74.00	-30.88	56.27	35.70	11.77	60.62	0.00	---	---	Peak																																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																														
1	2440.00	42.92	74.00	-31.08	56.07	35.70	11.77	60.62	0.00	---	---	Peak																																																																																																																																													



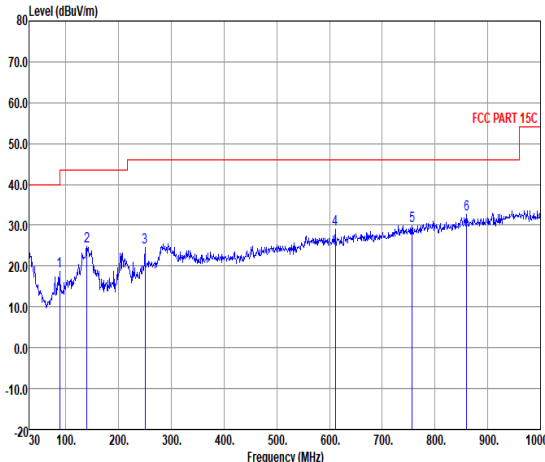
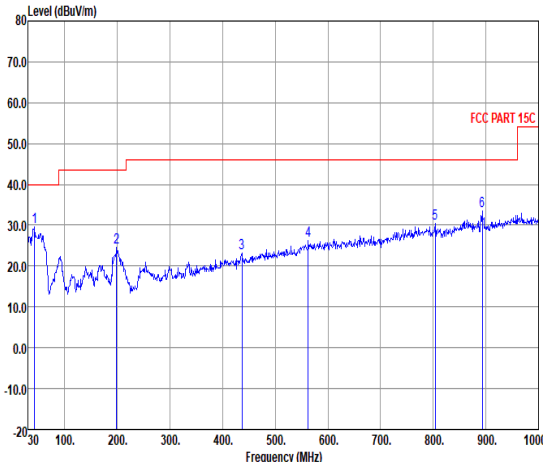


Mode	7																																																																																																								
	LF																																																																																																								
	2400-2483.5_Bluetooth-LE_GSKF_CH38_2478MHz																																																																																																								
Pol.	Horizontal																																																																																																								
Peak QP																																																																																																									
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Over Limit</th><th>Limit Line</th><th>Read Level</th><th>CableAntenna Loss</th><th>Preamp Factor</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>88.20</td><td>18.73</td><td>-24.77</td><td>43.50</td><td>35.19</td><td>1.20</td><td>14.56</td><td>32.22</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>139.61</td><td>24.95</td><td>-18.55</td><td>43.50</td><td>38.00</td><td>1.57</td><td>17.50</td><td>32.12</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>250.19</td><td>24.70</td><td>-21.30</td><td>46.00</td><td>35.75</td><td>2.13</td><td>19.02</td><td>32.20</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>611.03</td><td>28.97</td><td>-17.03</td><td>46.00</td><td>31.96</td><td>3.34</td><td>25.95</td><td>32.28</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>756.53</td><td>29.98</td><td>-16.02</td><td>46.00</td><td>30.36</td><td>3.72</td><td>28.20</td><td>32.30</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>860.32</td><td>32.59</td><td>-13.41</td><td>46.00</td><td>31.74</td><td>3.95</td><td>29.26</td><td>32.36</td><td>---</td><td>---</td><td>Peak</td></tr></table>												Freq	Level	Over Limit	Limit Line	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB/m	dB	cm	deg	1	88.20	18.73	-24.77	43.50	35.19	1.20	14.56	32.22	---	---	Peak	2	139.61	24.95	-18.55	43.50	38.00	1.57	17.50	32.12	---	---	Peak	3	250.19	24.70	-21.30	46.00	35.75	2.13	19.02	32.20	---	---	Peak	4	611.03	28.97	-17.03	46.00	31.96	3.34	25.95	32.28	---	---	Peak	5	756.53	29.98	-16.02	46.00	30.36	3.72	28.20	32.30	---	---	Peak	6	860.32	32.59	-13.41	46.00	31.74	3.95	29.26	32.36	---	---	Peak
		Freq	Level	Over Limit	Limit Line	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark																																																																																														
		MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB/m	dB	cm	deg																																																																																														
	1	88.20	18.73	-24.77	43.50	35.19	1.20	14.56	32.22	---	---	Peak																																																																																													
	2	139.61	24.95	-18.55	43.50	38.00	1.57	17.50	32.12	---	---	Peak																																																																																													
	3	250.19	24.70	-21.30	46.00	35.75	2.13	19.02	32.20	---	---	Peak																																																																																													
4	611.03	28.97	-17.03	46.00	31.96	3.34	25.95	32.28	---	---	Peak																																																																																														
5	756.53	29.98	-16.02	46.00	30.36	3.72	28.20	32.30	---	---	Peak																																																																																														
6	860.32	32.59	-13.41	46.00	31.74	3.95	29.26	32.36	---	---	Peak																																																																																														
Vertical																																																																																																									
																																																																																																									
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Over Limit</th><th>Limit Line</th><th>Read Level</th><th>CableAntenna Loss</th><th>Preamp Factor</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>42.61</td><td>29.51</td><td>-10.49</td><td>40.00</td><td>42.70</td><td>0.62</td><td>18.33</td><td>32.14</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>198.78</td><td>24.58</td><td>-18.92</td><td>43.50</td><td>39.70</td><td>1.91</td><td>15.07</td><td>32.10</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>436.43</td><td>23.07</td><td>-22.93</td><td>46.00</td><td>29.70</td><td>2.82</td><td>22.78</td><td>32.23</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>562.53</td><td>26.25</td><td>-19.75</td><td>46.00</td><td>29.85</td><td>3.20</td><td>25.50</td><td>32.30</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>804.06</td><td>30.29</td><td>-15.71</td><td>46.00</td><td>30.48</td><td>3.83</td><td>28.29</td><td>32.31</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>893.30</td><td>33.48</td><td>-12.52</td><td>46.00</td><td>32.56</td><td>4.02</td><td>29.13</td><td>32.23</td><td>---</td><td>---</td><td>Peak</td></tr></table>												Freq	Level	Over Limit	Limit Line	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB/m	dB	cm	deg	1	42.61	29.51	-10.49	40.00	42.70	0.62	18.33	32.14	---	---	Peak	2	198.78	24.58	-18.92	43.50	39.70	1.91	15.07	32.10	---	---	Peak	3	436.43	23.07	-22.93	46.00	29.70	2.82	22.78	32.23	---	---	Peak	4	562.53	26.25	-19.75	46.00	29.85	3.20	25.50	32.30	---	---	Peak	5	804.06	30.29	-15.71	46.00	30.48	3.83	28.29	32.31	---	---	Peak	6	893.30	33.48	-12.52	46.00	32.56	4.02	29.13	32.23	---	---	Peak
		Freq	Level	Over Limit	Limit Line	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark																																																																																														
		MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB/m	dB	cm	deg																																																																																														
	1	42.61	29.51	-10.49	40.00	42.70	0.62	18.33	32.14	---	---	Peak																																																																																													
	2	198.78	24.58	-18.92	43.50	39.70	1.91	15.07	32.10	---	---	Peak																																																																																													
	3	436.43	23.07	-22.93	46.00	29.70	2.82	22.78	32.23	---	---	Peak																																																																																													
4	562.53	26.25	-19.75	46.00	29.85	3.20	25.50	32.30	---	---	Peak																																																																																														
5	804.06	30.29	-15.71	46.00	30.48	3.83	28.29	32.31	---	---	Peak																																																																																														
6	893.30	33.48	-12.52	46.00	32.56	4.02	29.13	32.23	---	---	Peak																																																																																														

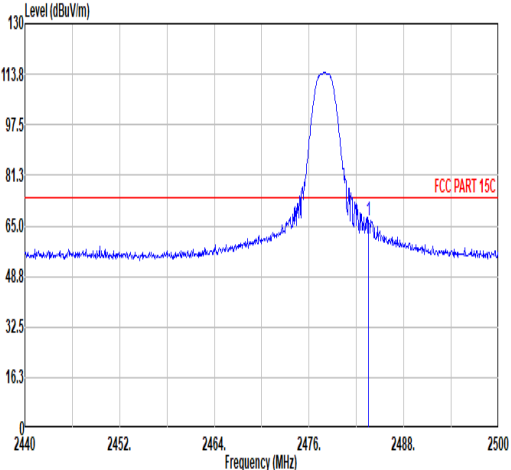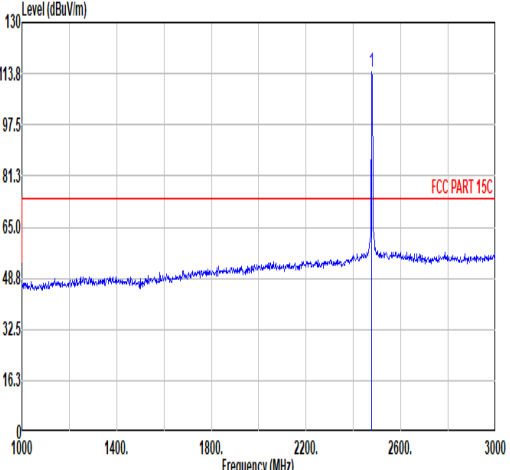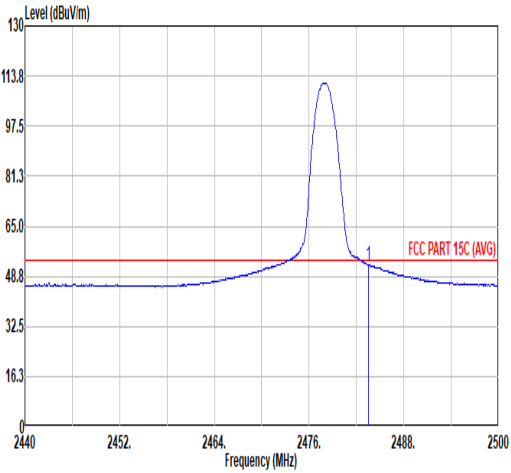
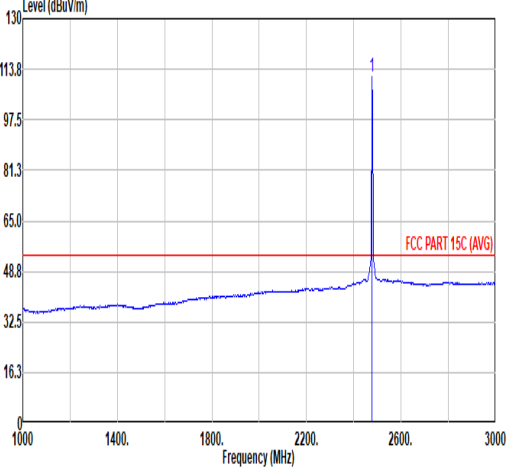


Mode	8																																																																																																														
	Band Edge																																																																																																														
	2400-2483.5_Bluetooth-LE_GSKF_CH38_MHz																																																																																																														
Pol.	Horizontal						Fundamental																																																																																																								
Peak																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.56</td><td>66.91</td><td>74.00</td><td>-7.09</td><td>54.04</td><td>32.77</td><td>6.73</td><td>32.63</td><td>6.00</td><td>113</td><td>360</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.56	66.91	74.00	-7.09	54.04	32.77	6.73	32.63	6.00	113	360	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2478.00</td><td>114.36</td><td>-----</td><td>-----</td><td>101.55</td><td>32.72</td><td>6.73</td><td>32.64</td><td>6.00</td><td>113</td><td>360</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2478.00	114.36	-----	-----	101.55	32.72	6.73	32.64	6.00	113	360
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2483.56	66.91	74.00	-7.09	54.04	32.77	6.73	32.63	6.00	113	360	PEAK																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2478.00	114.36	-----	-----	101.55	32.72	6.73	32.64	6.00	113	360	PEAK																																																																																																			
Avg																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>52.55</td><td>54.00</td><td>-1.45</td><td>39.68</td><td>32.77</td><td>6.73</td><td>32.63</td><td>6.00</td><td>113</td><td>360</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	52.55	54.00	-1.45	39.68	32.77	6.73	32.63	6.00	113	360	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2478.00</td><td>111.39</td><td>-----</td><td>-----</td><td>98.58</td><td>32.72</td><td>6.73</td><td>32.64</td><td>6.00</td><td>113</td><td>360</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2478.00	111.39	-----	-----	98.58	32.72	6.73	32.64	6.00	113	360
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2483.50	52.55	54.00	-1.45	39.68	32.77	6.73	32.63	6.00	113	360	AVERAGE																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2478.00	111.39	-----	-----	98.58	32.72	6.73	32.64	6.00	113	360	AVERAGE																																																																																																			

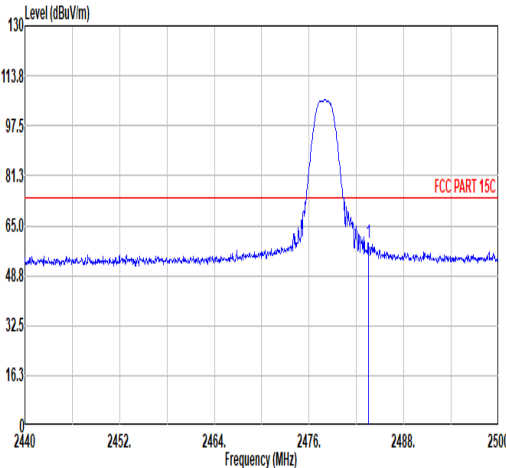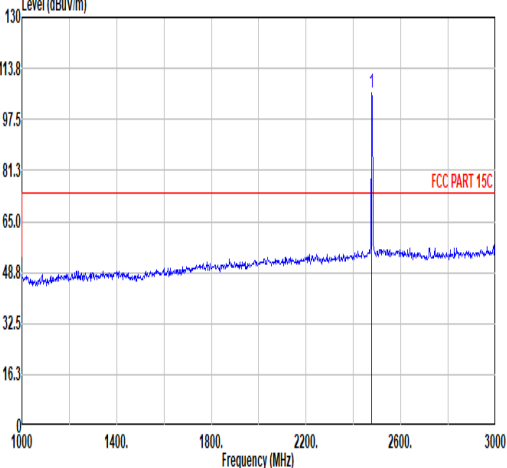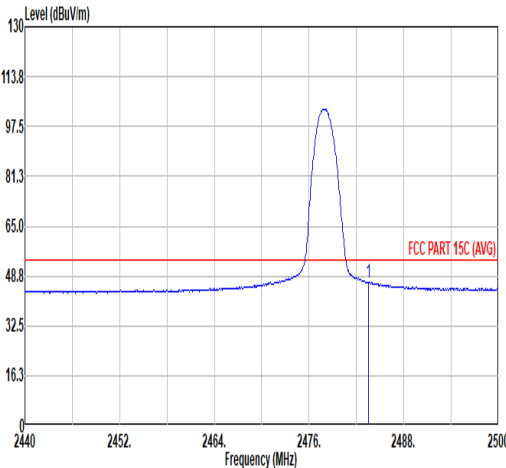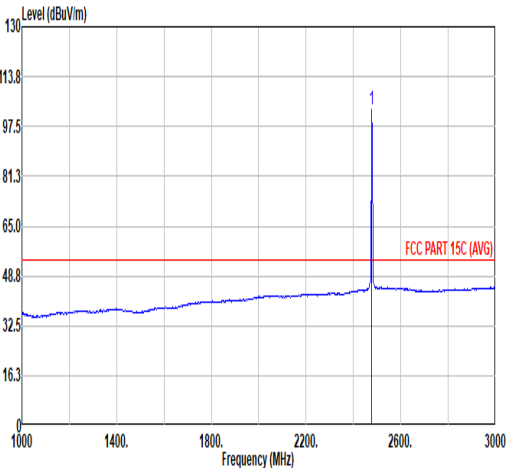

		8																																																																																																	
Mode	Band Edge																																																																																																		
	2400-2483.5_Bluetooth-LE_GSKF_CH38_MHz																																																																																																		
Pol.	Vertical					Fundamental																																																																																													
Peak	 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.50</td><td>59.13</td><td>74.00</td><td>-14.87</td><td>46.26</td><td>32.77</td><td>6.73</td><td>32.63</td><td>6.00</td><td>285</td><td>156</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	59.13	74.00	-14.87	46.26	32.77	6.73	32.63	6.00	285	156	PEAK	 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2478.00</td><td>105.97</td><td>-----</td><td>-----</td><td>93.16</td><td>32.72</td><td>6.73</td><td>32.64</td><td>6.00</td><td>285</td><td>156</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2478.00	105.97	-----	-----	93.16	32.72	6.73	32.64	6.00	285	156	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.50	59.13	74.00	-14.87	46.26	32.77	6.73	32.63	6.00	285	156	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2478.00	105.97	-----	-----	93.16	32.72	6.73	32.64	6.00	285	156	PEAK																																																																																							
Avg	 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.50</td><td>46.67</td><td>54.00</td><td>-7.33</td><td>33.80</td><td>32.77</td><td>6.73</td><td>32.63</td><td>6.00</td><td>285</td><td>156</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	46.67	54.00	-7.33	33.80	32.77	6.73	32.63	6.00	285	156	AVERAGE	 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2478.00</td><td>103.24</td><td>-----</td><td>-----</td><td>90.43</td><td>32.72</td><td>6.73</td><td>32.64</td><td>6.00</td><td>285</td><td>156</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2478.00	103.24	-----	-----	90.43	32.72	6.73	32.64	6.00	285	156	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.50	46.67	54.00	-7.33	33.80	32.77	6.73	32.63	6.00	285	156	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2478.00	103.24	-----	-----	90.43	32.72	6.73	32.64	6.00	285	156	AVERAGE																																																																																							

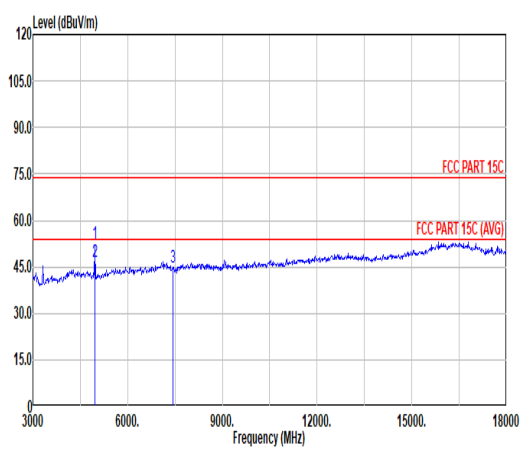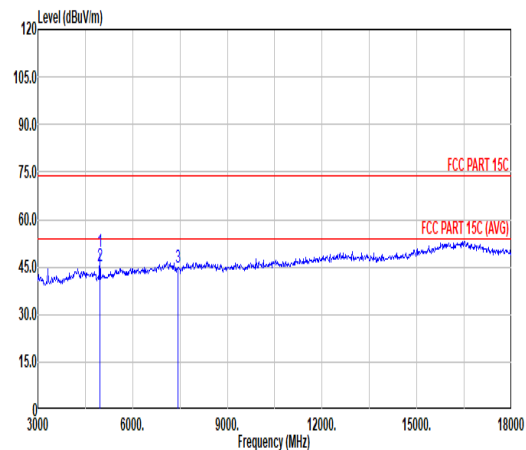


Mode	8																																																																																																																																																																		
	Harmonic																																																																																																																																																																		
	2400-2483.5_Bluetooth-LE_GSKF_CH38_MHz																																																																																																																																																																		
Pol.	Horizontal											Vertical																																																																																																																																																							
Peak Avg																																																																																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4956.00</td><td>52.46</td><td>74.00</td><td>-21.54</td><td>69.47</td><td>34.19</td><td>9.61</td><td>60.81</td><td>0.00</td><td>129</td><td>134</td><td>PEAK</td></tr><tr><td>2</td><td>4956.00</td><td>46.83</td><td>54.00</td><td>-7.17</td><td>63.84</td><td>34.19</td><td>9.61</td><td>60.81</td><td>0.00</td><td>129</td><td>134</td><td>AVERAGE</td></tr><tr><td>3</td><td>7440.00</td><td>44.88</td><td>74.00</td><td>-29.12</td><td>58.03</td><td>35.70</td><td>11.77</td><td>60.62</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4956.00	52.46	74.00	-21.54	69.47	34.19	9.61	60.81	0.00	129	134	PEAK	2	4956.00	46.83	54.00	-7.17	63.84	34.19	9.61	60.81	0.00	129	134	AVERAGE	3	7440.00	44.88	74.00	-29.12	58.03	35.70	11.77	60.62	0.00	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4956.00</td><td>49.77</td><td>74.00</td><td>-24.23</td><td>66.78</td><td>34.19</td><td>9.61</td><td>60.81</td><td>0.00</td><td>158</td><td>264</td><td>PEAK</td></tr><tr><td>2</td><td>4956.00</td><td>45.25</td><td>54.00</td><td>-8.75</td><td>62.26</td><td>34.19</td><td>9.61</td><td>60.81</td><td>0.00</td><td>158</td><td>264</td><td>Average</td></tr><tr><td>3</td><td>7440.00</td><td>44.68</td><td>74.00</td><td>-29.32</td><td>57.83</td><td>35.70</td><td>11.77</td><td>60.62</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4956.00	49.77	74.00	-24.23	66.78	34.19	9.61	60.81	0.00	158	264	PEAK	2	4956.00	45.25	54.00	-8.75	62.26	34.19	9.61	60.81	0.00	158	264	Average	3	7440.00	44.68	74.00	-29.32	57.83	35.70	11.77	60.62	0.00	---	---
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																									
1	4956.00	52.46	74.00	-21.54	69.47	34.19	9.61	60.81	0.00	129	134	PEAK																																																																																																																																																							
2	4956.00	46.83	54.00	-7.17	63.84	34.19	9.61	60.81	0.00	129	134	AVERAGE																																																																																																																																																							
3	7440.00	44.88	74.00	-29.12	58.03	35.70	11.77	60.62	0.00	---	---	Peak																																																																																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																									
1	4956.00	49.77	74.00	-24.23	66.78	34.19	9.61	60.81	0.00	158	264	PEAK																																																																																																																																																							
2	4956.00	45.25	54.00	-8.75	62.26	34.19	9.61	60.81	0.00	158	264	Average																																																																																																																																																							
3	7440.00	44.68	74.00	-29.32	57.83	35.70	11.77	60.62	0.00	---	---	Peak																																																																																																																																																							

Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Bluetooth LE 1Mbps	94.78	2.090	0.478	0.51KHz
Bluetooth LE 2Mbps	90.17	1.055	0.948	1KHz

Bluetooth LE 1Mbps

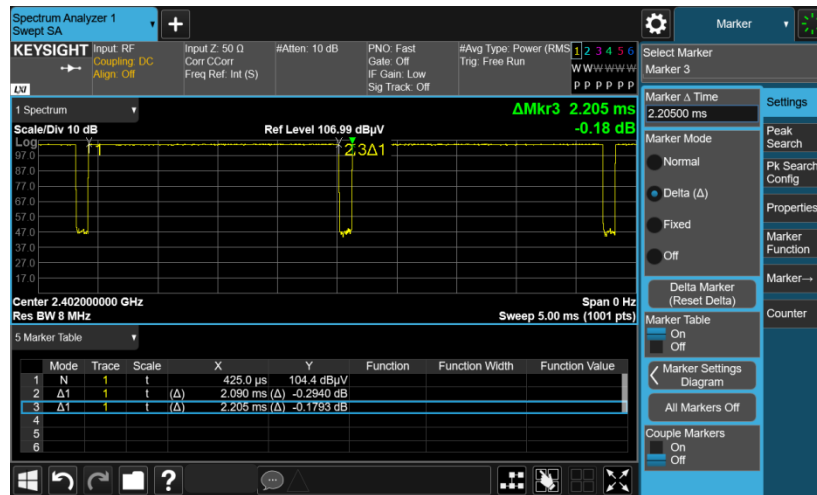

Bluetooth LE 2Mbps

