

Data Sheet

CUSTOMER: 虹堡

MODEL NAME: S1F4 pro Com Cradle

CUSTOMER P/N: 311600259000

AWAN P/N: ALF6P-100026



1. Description-----	
1.1 Specifications-----	1
1.2 Antenna Picture (LTE Antenna)-----	1
2. Electrical Specification-----	2
2.1.1 Test Equipment-----	2
2.1.2 General Information-----	2
2.2 Test Setup-----	2
2.2.1 Frequency Range-----	2
2.2.2 VSWR-----	2
2.2.3 Radiation Pattern & Gain-----	2
2.2.4 Efficiency-----	2
3. Performance Data-----	4
3.1 VSWR-----	4
3.2 Radiation pattern & Gain (LTE Antenna) -----	5
3.2.1 Antenna pattern-----	5
4. Mechanical Specification-----	13
4.1 Assembly Drawing(LTE Antenna)-----	13
5. Description-----	14
5.1 Specifications-----	14
5.2 Antenna Picture (WIFI Antenna)-----	14
6. Performance Data-----	
6.1 VSWR-----	15
6.2 Radiation pattern & Gain(WIFI Antenna)-----	16
6.2.1 Antenna pattern-----	16
7. Mechanical Specification-----	20
7.1 Assembly Drawing(WIFI Antenna)-----	20

1. Description


1.1 Specifications

Antennas Type	Dipole Antenna for Dual Band Wi-Fi application	
Impedance	50Ω	
Polarization	Linear	
Radiation pattern	Omni-directional	
Frequency	Dual Band Wi-Fi	2400-2500MHz, 5150-5850MHz

Frequency range	2400-2500MHz	5150-5850MHz
Peak gain	2.16~2.93dBi	3.59~4.72dBi
Efficiency (%)	60~66%	53~59%
VSWR (in Device)	1.90 Max.	3 Max.
Polarization	Linear	
Power handling	1W (cw)	
Impedance	50 Ω	

1.2 Antenna Picture

Wi-Fi Dual Band P/N: ALF6P-100026

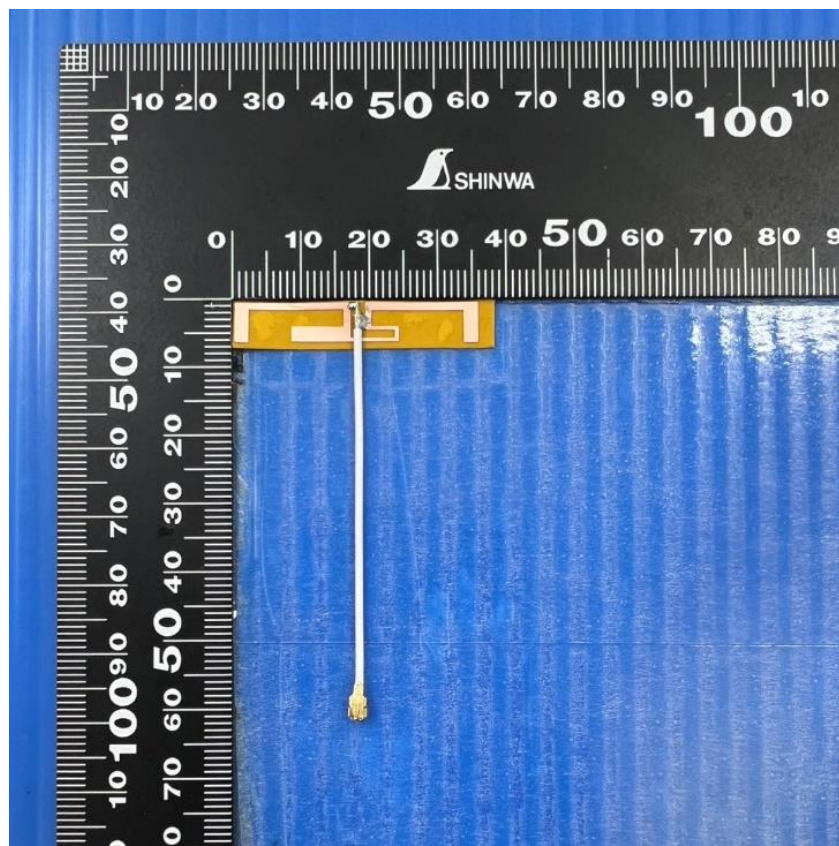

2. Electrical Specification

2.1 Test Equipment

Equipment Description	Manufacturer	Identification no.	Current Calibration date	Next calibration date
Universal Radio Communication tester	R&S	CMW500	2024/07/29	2025/01/29
Network Analyzer	Agilent	E5071C	2024/07/29	2025/01/29
Sleeve Dipole	MVG	SD740	2024/07/29	2025/01/29
Dual Ridge Horn	MVG	SH800	2024/07/29	2025/01/29
Dipole antenna	MVG	3126-700	2024/07/29	2025/01/29
Stargate-16-L probe array	MVG	Stargate-16-L	2024/07/29	2025/01/29
Measurement software	MVG	Wave Studio 22.1	2024/12/29	2025/02/11
Wireless protocol tester	R&S	CMW500	2024/07/29	2025/01/29

2.1.2 General Information

Description	Tester	Measured Date
Measured	Kevin.Lin	2025/02/11

2.2 Test Setup

2.2.1 Frequency Range

A. Wi-Fi Dual Band: 2400~2500 MHz
5150~5850 MHz

2.2.2 VSWR

Step 1: The antenna is arranged on the customer provided test fixture.

Step 2: The VSWR of the antenna is measured via Agilent 8720/8753 Network Analyzer (see figure. 1).



Figure.1

2.2.3 Radiation pattern and Gain

- A. The 3D chamber provides less than -40dB reflectivity from 600MHz to 6GHz and a 20cm diameter spherical quiet zone. The measurement results are calibrated using Stargate-16-L probe array (see figure. 2).
- B. The measured results of the radiation patterns and antenna gain are obtained from the control system and showed on the monitor (see figure. 3).
- C. The measured photo is shown in figure. 4

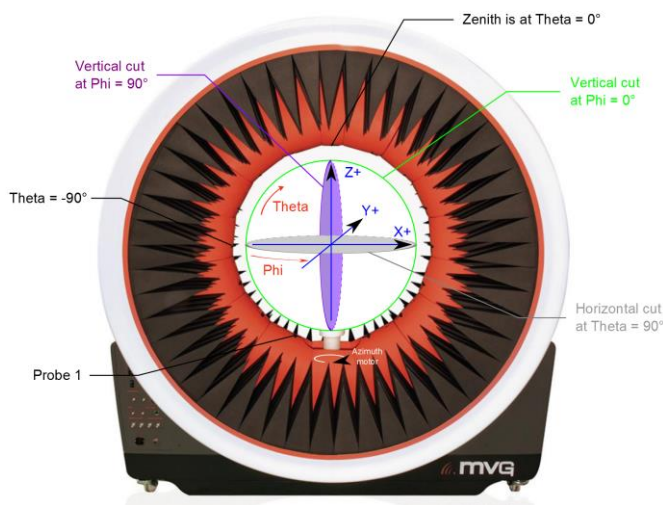


Figure.2

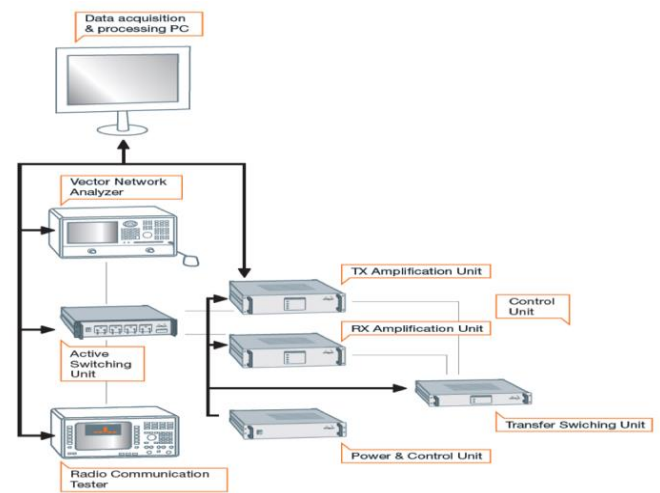


Figure.3


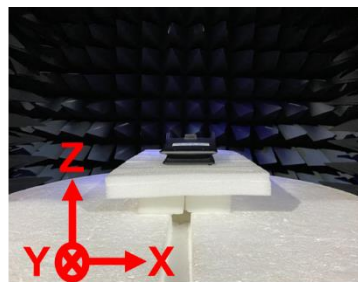


Figure.4

3. Performance Data


3.1 VSWR

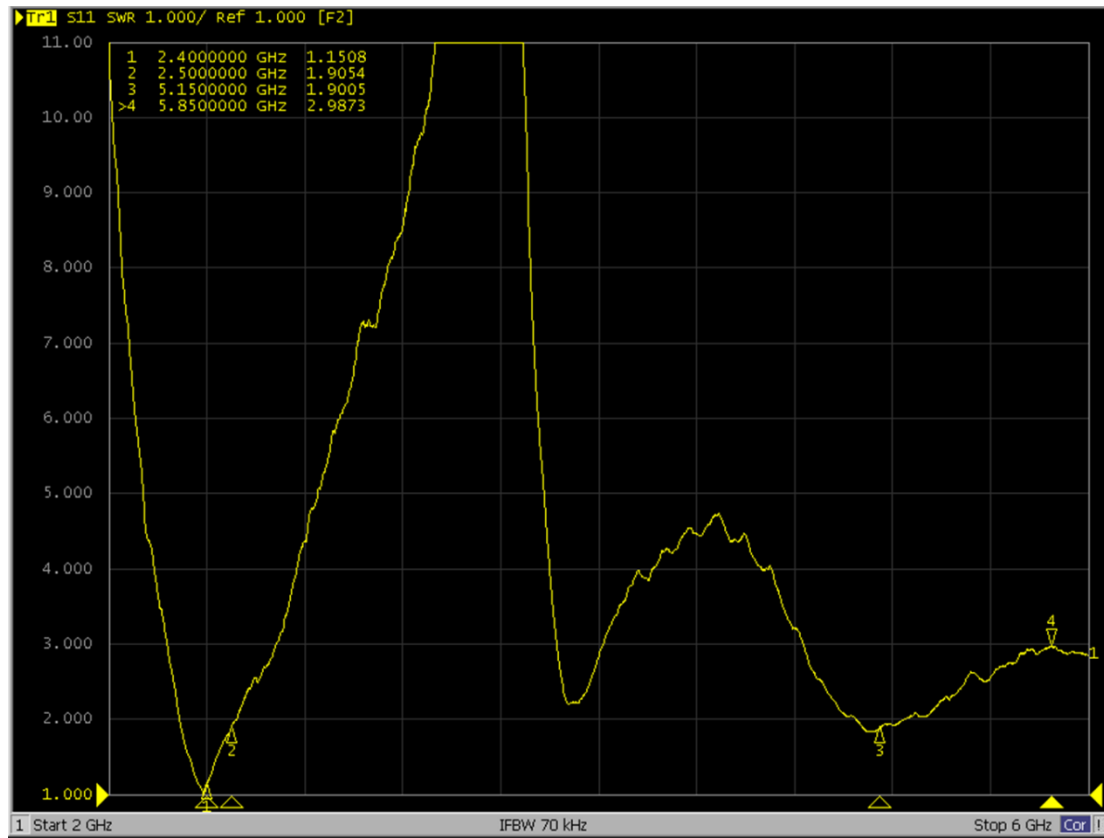


3.2 Radiation pattern & Gain

3.2.1 Antenna pattern

2400-2500MHz

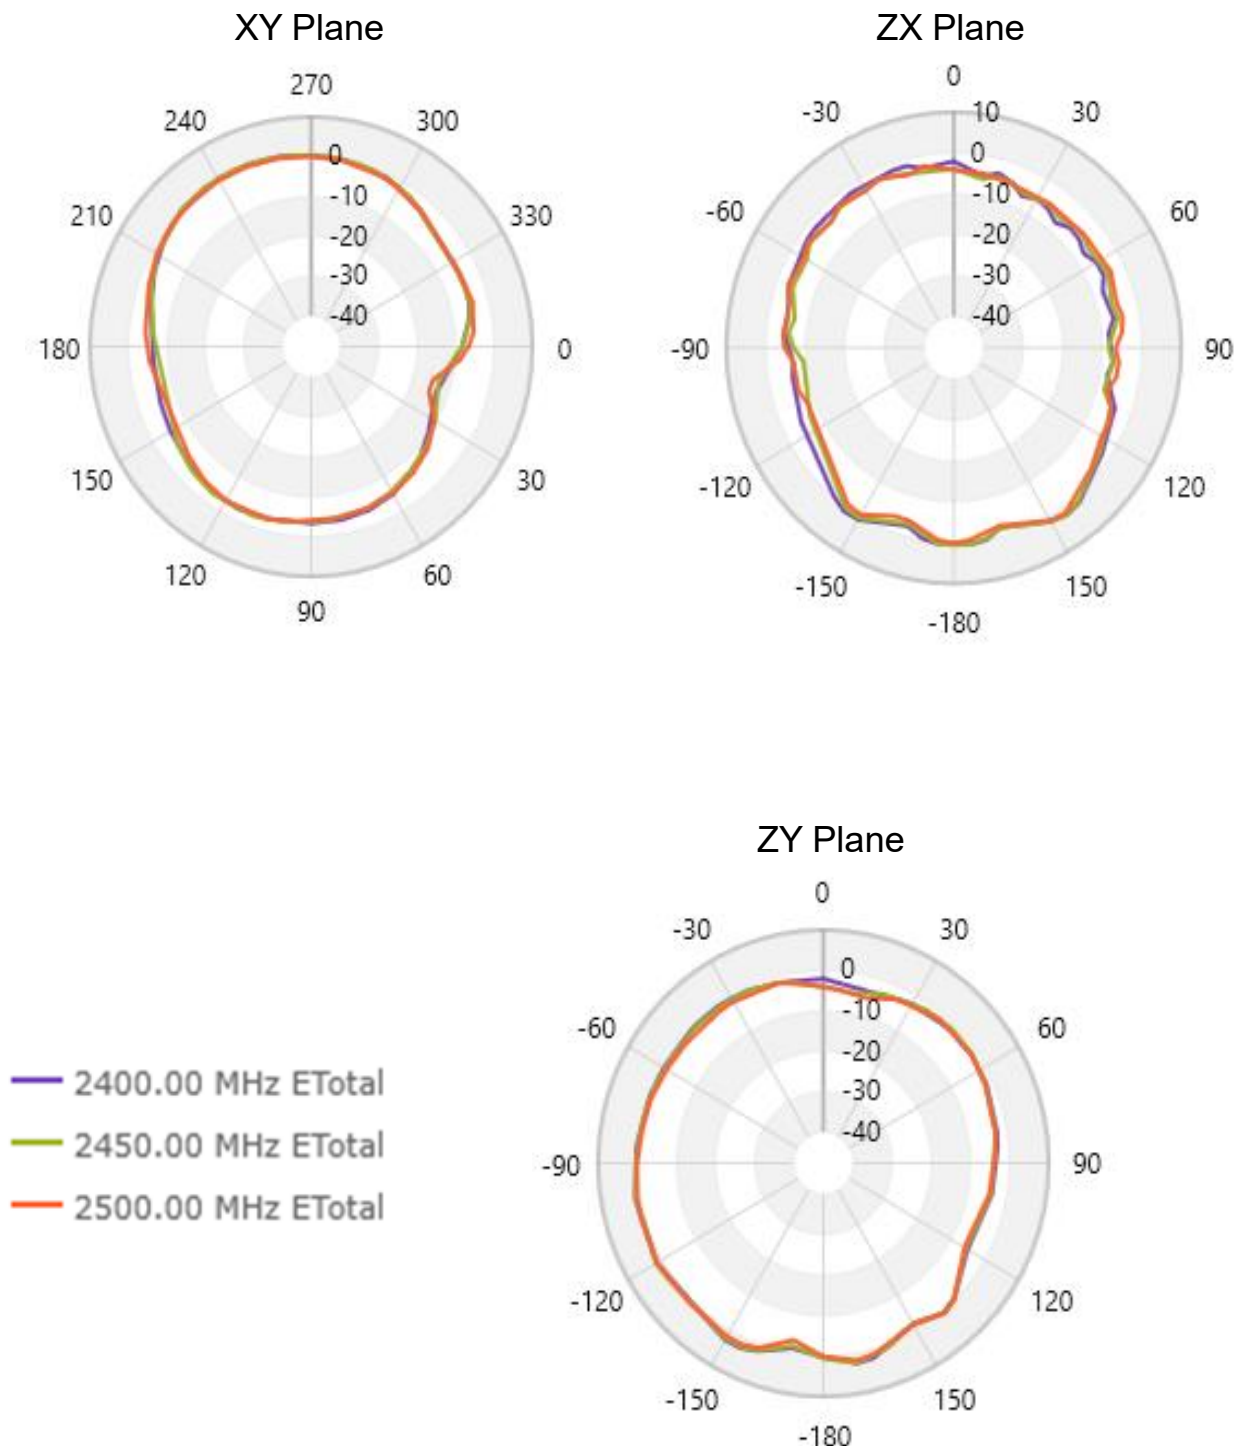

5150-58500MHz

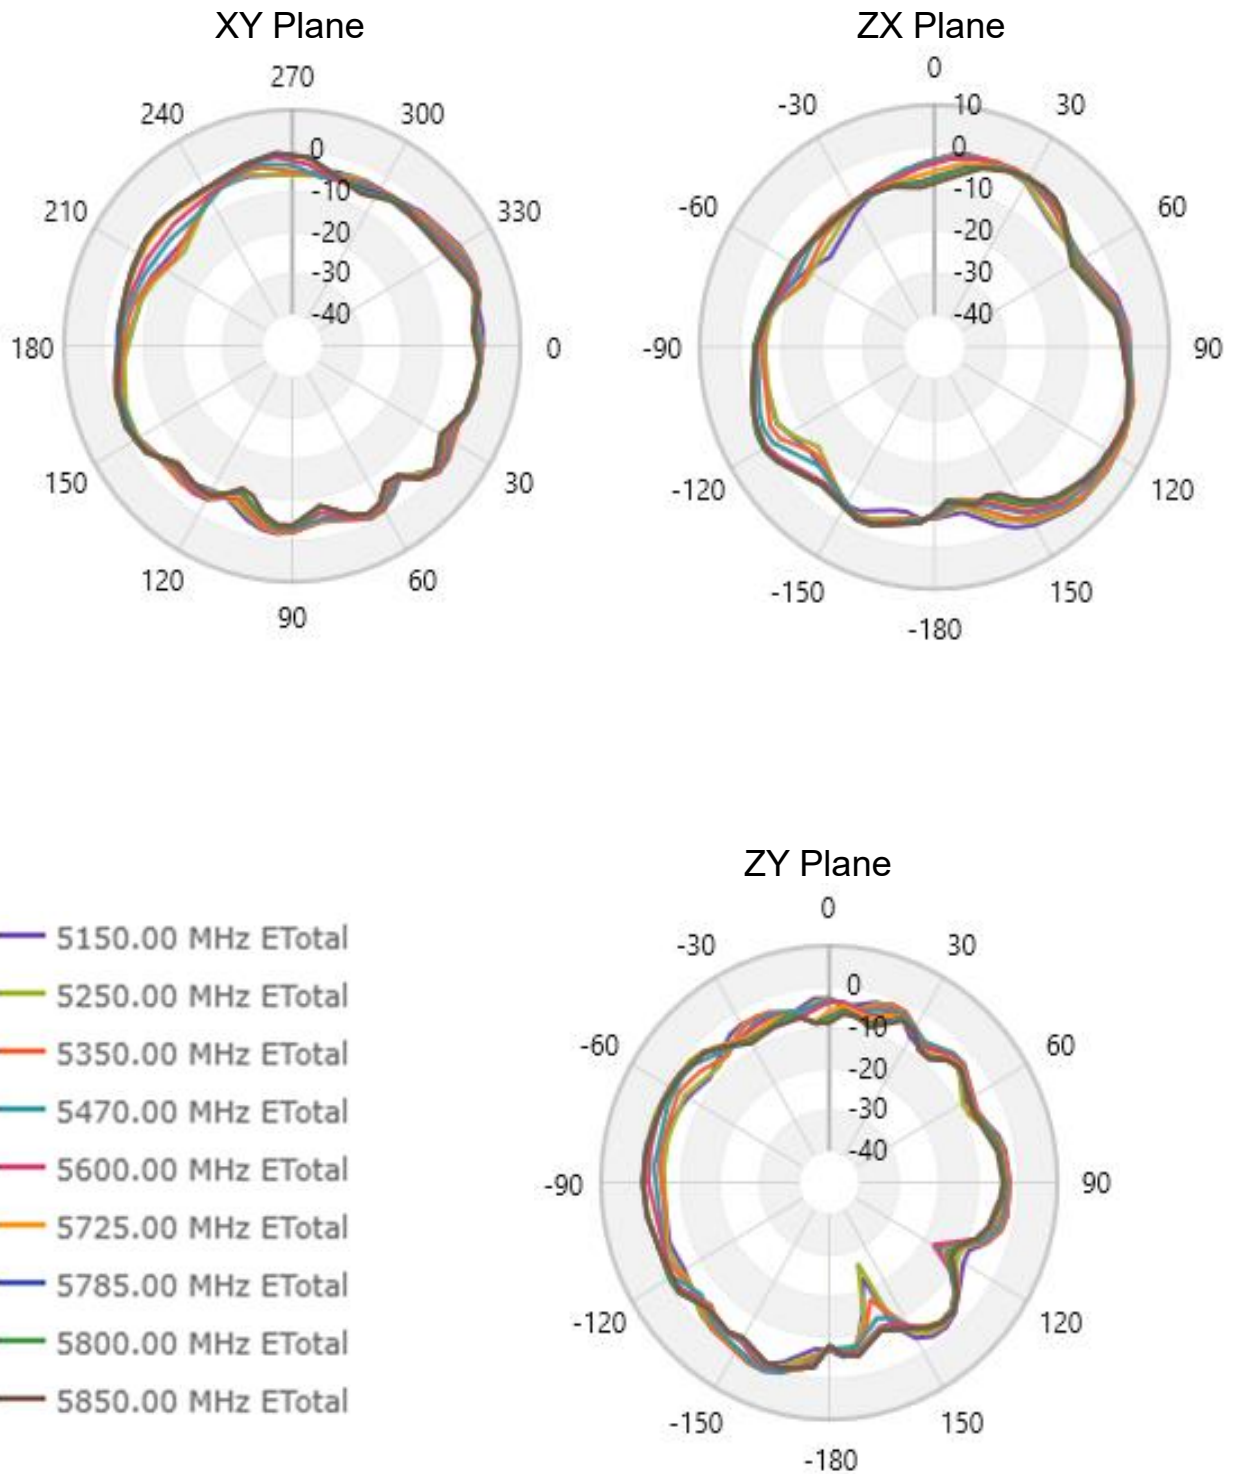


Antenna Gain Table

Frequency (MHz)	3D		
	Efficiency(%)	Avg. Gain(dB)	Peak Gain(dBi)
2400	66	-1.81	2.93
2450	64	-1.96	2.66
2500	60	-2.23	2.16
5150	57	-2.41	4.33
5250	56	-2.53	4.49
5350	59	-2.3	4.72
5470	56	-2.48	4.22
5600	55	-2.57	3.9
5725	56	-2.51	3.98
5785	56	-2.55	3.84
5800	54	-2.64	3.73
5850	53	-2.75	3.59

4.Mechanical Specification

4.1 Assembly Drawing (Wi-Fi Dual Band Antenna)

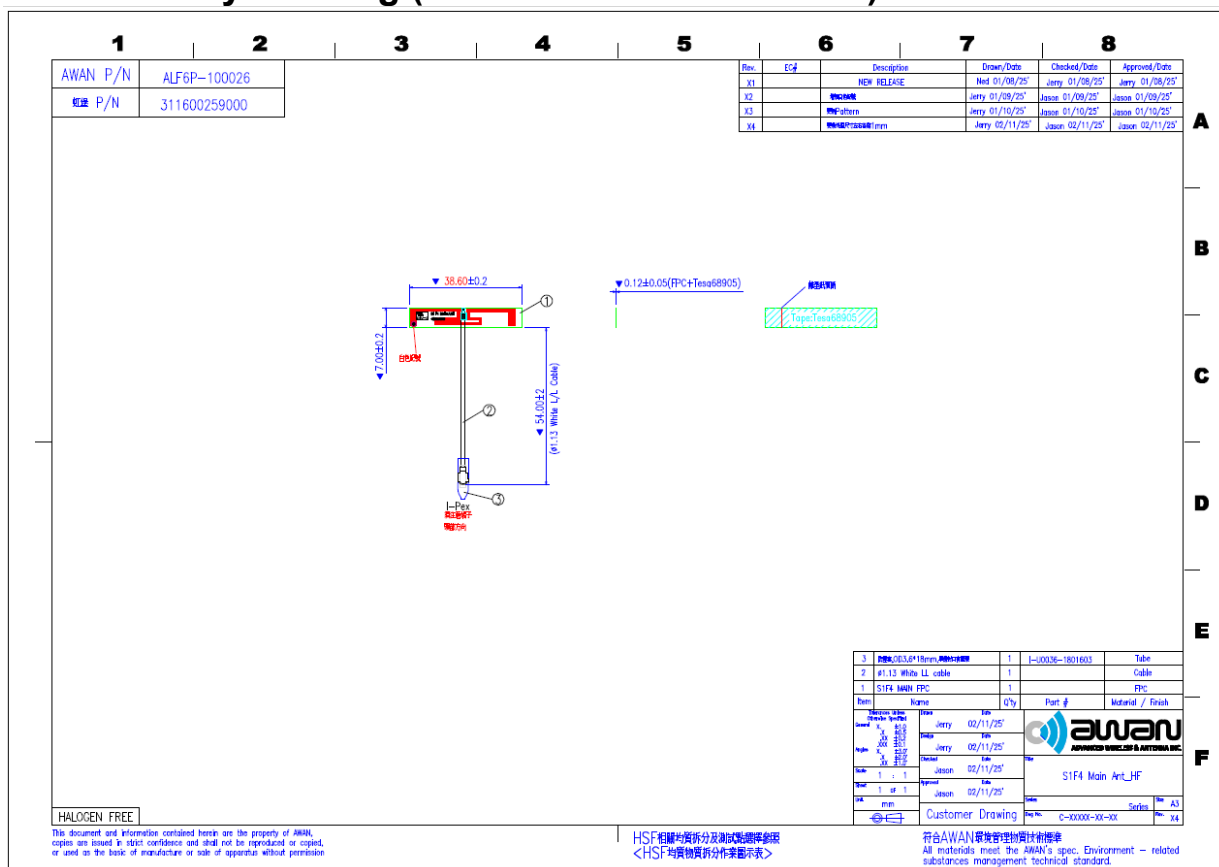

Revision

Revision	Date	Change Notification	Notes
Rev.1	2025-02-11		