

FCC SAR Test Report


APPLICANT : Xiaomi Communications Co., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : POCO
MODEL NAME : 21091116AG
FCC ID : 2AFZZ116AG
STANDARD : FCC 47 CFR Part 2 (2.1093)

We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.



Reviewed by: Nick Hu / Supervisor



Approved by: Kat Yin / Manager



Sporton International (Kunshan) Inc.

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China

Table of Contents

1. Statement of Compliance	4
2. Administration Data	6
3. Guidance Applied	6
4. Equipment Under Test (EUT) Information	7
4.1 General Information.....	7
4.2 General LTE SAR Test and Reporting Considerations	9
4.3 General 5G NR SAR Test and Reporting Considerations	11
5. Proximity Sensor Triggering Test.....	14
5.1 Proximity sensor triggering distances(Per KDB616217§6.2).....	14
6. RF Exposure Limits.....	16
6.1 Uncontrolled Environment.....	16
6.2 Controlled Environment.....	16
7. Specific Absorption Rate (SAR).....	17
7.1 Introduction	17
7.2 SAR Definition	17
8. System Description and Setup.....	18
8.1 E-Field Probe	19
8.2 Data Acquisition Electronics (DAE)	19
8.3 Phantom.....	20
8.4 Device Holder.....	21
9. Measurement Procedures.....	22
9.1 Spatial Peak SAR Evaluation	22
9.2 Power Reference Measurement.....	23
9.3 Area Scan.....	23
9.4 Zoom Scan.....	24
9.5 Volume Scan Procedures.....	24
9.6 Power Drift Monitoring.....	24
10. Test Equipment List	25
11. System Verification	26
11.1 Tissue Simulating Liquids	26
11.2 Tissue Verification.....	27
11.3 System Performance Check Results	29
12. RF Exposure Positions	32
12.1 Ear and handset reference point	32
12.2 Definition of the cheek position	33
12.3 Definition of the tilt position	34
12.4 Body Worn Accessory	35
12.5 Product Specific 10g SAR Exposure	36
12.6 Wireless Router	36
13. Conducted RF Output Power (Unit: dBm).....	37
14. Antenna Location	53
15. SAR Test Results	54
15.1 Head SAR	57
15.2 Hotspot SAR	66
15.3 Body Worn Accessory SAR.....	77
15.4 Product Specific SAR.....	82
15.5 Repeated SAR Measurement	83
16. Simultaneous Transmission Analysis	84
16.1 Head Exposure Conditions.....	85
16.2 Hotspot Exposure Conditions.....	87
16.3 Body-Worn Accessory Exposure Conditions	91
17. Uncertainty Assessment.....	93
18. References	94
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	
Appendix E. Conducted RF Output Power Table	



Report No. : FA180507

Revision History

[illegible]

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Xiaomi Communications Co., Ltd., Mobile Phone, 21091116AG**, are as follows.

Highest 1g SAR Summary						
Equipment Class	Frequency Band		Head (Separation 0mm)	Hotspot (Separation 10mm)	Body-worn (Separation 15mm)	Highest Simultaneous Transmission 1g SAR (W/kg)
			1g SAR (W/kg)			
Licensed	GSM	GSM850	0.69	0.88	0.65	1.59
		GSM1900	0.42	0.86	0.35	
	WCDMA	Band II	0.87	0.71	0.48	
		Band IV	0.99	0.75	0.35	
		Band V	0.64	0.29	0.24	
	LTE	Band 2	0.85	0.67	0.47	
		Band 5	0.55	0.19	0.19	
		Band 7	0.80	1.04	1.09	
		Band 12/Band 17	0.32	0.28	0.31	
		Band 66/ Band 4	0.96	0.86	0.35	
		Band 41/ Band 38	0.54	1.06	0.25	
	5G NR	n5	0.54	0.33	0.21	
		n7	0.89	1.07	0.91	
		n66	1.07	1.02	0.37	
		n41/ n38	1.00	0.76	0.48	
		n77/ n78	1.00	0.72	0.53	
DTS	WLAN	2.4GHz WLAN	0.45	0.17	<0.10	1.47
NII		5GHz WLAN	0.49	0.51	0.48	1.59
DSS	Bluetooth	2.4GHz Bluetooth	<0.10	<0.10	<0.10	1.59
Highest 10g SAR Summary						
Equipment Class	Frequency Band		Product Specific 10g SAR (W/kg) (Separation 0mm)			Highest Simultaneous Transmission 10g SAR (W/kg)
NII	WLAN	5GHz WLAN	2.42			-
Date of Testing:			2021/8/19 ~ 2021/9/13			
Remark:						
1. This device supports LTE B4 / B38 / B17 and B66 / B41 / B12. Since the supported frequency span for LTE B4 / B38 / B17 falls completely within the supports frequency span for LTE B66 / B41 / B12, both LTE bands have the same target power, and both LTE bands share the same transmission path; therefore, SAR was only assessed for LTE B66 / B41 / B12.						
2. This device supports 5G NR n38/ n77 and n41/ n78. Since the supported frequency span for n38/ n77 falls completely within the supports frequency span for n41/ n78, both LTE bands have the same target power, and both LTE bands share the same transmission path; therefore, SAR was only assessed for n41/ n78.						

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

Sporton International (Kunshan) Inc.

TEL : +86-512-57900158 / FAX : +86-512-57900958

FCC ID : 2AFZZ116AG



The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

2. Administration Data

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Testing Laboratory			
Test Firm	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	SAR04-KS	CN1257	314309

Applicant	
Company Name	Xiaomi Communications Co., Ltd.
Address	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

Manufacturer	
Company Name	Xiaomi Communications Co., Ltd.
Address	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01

4. Equipment Under Test (EUT) Information

4.1 General Information

Product Feature & Specification	
Equipment Name	Mobile Phone
Brand Name	POCO
Model Name	21091116AG
FCC ID	2AFZZ116AG
IMEI Code	SIM1: 864926050100040 SIM2: 864926050100057
Wireless Technology and Frequency Range	GSM850: 824 MHz ~ 849 MHz GSM1900: 1850 MHz ~ 1910 MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 66: 1710 MHz ~ 1780 MHz 5G NR n5: 824 MHz ~ 849 MHz 5G NR n7: 2500 MHz ~ 2570 MHz 5G NR n38 : 2570 MHz ~ 2620 MHz 5G NR n41: 2496 MHz ~ 2690 MHz 5G NR n66 : 1710 MHz ~ 1780 MHz 5G NR n77: 3450 MHz ~ 3550 MHz, 3700 MHz ~ 3980 MHz 5G NR n78: 3450 MHz ~ 3550 MHz, 3700 MHz ~ 3800 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5720 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC: 13.56 MHz
Mode	GSM/GPRS/EGPRS RMC/AMR 12.2Kbps HSDPA HSUPA DC-HSDPA HSPA+(16QAM uplink is not supported) LTE: QPSK, 16QAM, 64QAM LTE: 256QAM(Downlink Only) 5G NR : CP-OFDM / DFT-s-OFDM, PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE NFC:ASK
HW Version	P2
SW Version	MIUI 12.5
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Identical Prototype
Remark:	
1. This device supports VoIP in WCDMA and LTE (e.g. for 3rd-party VoIP), LTE supports VoLTE operation, but do not	

- support VoIP in GPRS/EGPRS.
2. This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications.
 3. This device 2.4GHz WLAN/5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WiFi Direct (GC/GO), and 5.3GHz / 5.5GHz supports WiFi Direct (GC only).
 4. This device does not support DTM operation and supports GPRS/EGPRS mode up to multi-slot class 12.
 5. For dual SIM card mobile has two SIM slots and supports dual SIM dual standby. The WWAN radio transmission will be enabled by either one SIM at a time (single active). After pre-scan two SIM cards power, we found test result of the SIM1 was the worse, so we chose SIM1 slot to perform all tests.
 6. There are two types of EUT, they are single SIM card mobile and dual SIM card mobile, according to the differences, we choose sample 1 to perform full test.
 7. The device has two batteries with the same battery capacity, only Manufacturer is different. We only chose battery 1 to perform full SAR testing.
 8. The device implements Proximity sensors/receiver detect mechanism/hotspot trigger reduced power for the power management for SAR compliance at different exposure conditions (head, body-worn, hotspot, extremity). The device will invoke corresponding work scenarios power level base on frequency bands/antennas, which can refer to appendix E. power table. Full power table and reduced power table (DSI 1: receiver on reduced power for head; DSI 3/4: P-sensor on for hotspot; DSI 2: receiver off /P-sensor off).
 9. For 5G NR test, using FTM (Factory Test Mode) to perform SAR with default 100% transmission.
 10. NSA and SA mode should perform SAR separately. For the maximum power of NSA mode is the same as SA total power level, so SA SAR can represent NSA mode SAR.
 11. 5G NR NSA mode, the power level is the same as 5G NR SA mode, so 5G NR NSA mode and SA mode power table only show one time.
 12. For 5G NR FDD/TDD supports SCS15KHz and SCS30KHz, chose higher power which is SCS30KHz to perform SAR testing.
 13. 5G NR supports CP-OFDM and DFT-s-OFDM modulation, for DFT-s-OFDM power is higher than CP-OFDM, so only show DFT-s-OFDM power table and chose DFT-s-OFDM to perform SAR testing.
 14. For DFT-s-OFDM and CP-OFDM output power measurement reduction, according to 38.101 maximum power reduction for the CP-OFDM mode will not higher than DFT-s-OFDM mode, therefore, CP-OFDM measurement is unnecessary.
 15. 5G NR n41/n77/n78 supports HPUE, HPUE power level higher than class 3 power level, and HPUE can represent class 3 conservatively, so SAR testing only performed HPUE.
 16. For 5G NR NSA EN-DC mode, standalone SAR performed for 5G NR band with the maximum power, EN-DC SAR summed 5G NR standalone SAR and LTE standalone SAR, the result of EN-DC SAR is more conservatively.
 17. This device supports 5G NR FR1 bands as following table, including NSA mode and SA mode. NSA and SA mode performed SAR separately.

<5G NR>

Mode	Band	Duplex	SCS(KHz)	Bandwidths(BW)
NSA	n5	FDD	15	5, 10, 15, 20
			30	10, 15, 20
	n7	FDD	15	5, 10, 15, 20
			30	10, 15, 20
	n66	FDD	15	5, 10, 15, 20, 25, 30, 40
			30	10, 15, 20, 25, 30, 40
	n38	TDD	15	5, 10, 15, 20, 40
			30	10, 15, 20, 40
	n41	TDD	15	10, 15, 20, 30, 40, 50
			30	10, 15, 20, 30, 40, 50, 60, 80, 90, 100
	n77	TDD	15	10, 15, 20, 40, 50
			30	10, 15, 20, 40, 50, 60, 70, 80, 90, 100
	n78	TDD	15	10, 15, 20, 40, 50
			30	10, 15, 20, 40, 50, 60, 70, 80, 90, 100
SA	n5	FDD	15	5, 10, 15, 20
			30	10, 15, 20
	n7	FDD	15	5, 10, 15, 20
			30	10, 15, 20
	n66	FDD	15	5, 10, 15, 20, 25, 30, 40
			30	10, 15, 20, 25, 30, 40
	n38	TDD	15	5, 10, 15, 20, 40
			30	10, 15, 20, 40
	n41	TDD	15	10, 15, 20, 30, 40, 50
			30	10, 15, 20, 30, 40, 50

			30	10, 15, 20, 30, 40, 50, 60, 80, 90, 100
	n77	TDD	15	10, 15, 20, 40, 50
			30	10, 15, 20, 40, 50, 60, 70, 80, 90, 100
	n78	TDD	15	10, 15, 20, 40, 50
			30	10, 15, 20, 40, 50, 60, 70, 80, 90, 100

4.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																																							
FCC ID	2AFZZ116AG																																																																						
Equipment Name	Mobile Phone																																																																						
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 66: 1710 MHz ~ 1780 MHz																																																																						
Channel Bandwidth	LTE Band 2:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 12:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 66:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz																																																																						
uplink modulations used	QPSK / 16QAM / 64QAM																																																																						
LTE Voice / Data requirements	Voice and Data																																																																						
LTE Release Version	R15, Cat13																																																																						
CA Support	Supported, Uplink and Downlink																																																																						
LTE MPR permanently built-in by design	<table><tr><th colspan="8">Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</th></tr><tr><th rowspan="2">Modulation</th><th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th><th rowspan="2">MPR (dB)</th></tr><tr><th>1.4 MHz</th><th>3.0 MHz</th><th>5 MHz</th><th>10 MHz</th><th>15 MHz</th><th>20 MHz</th></tr><tr><td>QPSK</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 3</td></tr><tr><td>256 QAM</td><td colspan="6">≥ 1</td><td>≤ 5</td></tr></table>	Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3								Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3																																																																							
Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)																																																																
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																																	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																																
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																																
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																																
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																																
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																																
256 QAM	≥ 1						≤ 5																																																																
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																																						
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																																						
Power reduction applied to satisfy SAR compliance	Yes, head/body-worn/ hotspot/extremity will trigger reduced power for some LTE bands, the detail please referred to section 13.																																																																						
LTE Carrier Aggregation Combinations	Inter-Band and Intra-Band possible combinations and the detail power verification please referred to section 13.																																																																						
LTE Carrier Aggregation Additional Information	1. This device supports LTE Carrier Aggregation (CA) in the uplink for 7C/38C with two component carriers in the uplink. SAR Measurements and conducted powers were evaluated per FCC Guidance. 2. This device supports maximum of 2 carriers in the downlink and 2 carriers in the uplink.																																																																						

Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829				
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5				
H	20643	848.3	20635	847.5	20625	846.5	20600	844				
LTE Band 7												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510				
M	21100	2535	21100	2535	21100	2535	21100	2535				
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560				
LTE Band 12												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	23017	699.7	23025	700.5	23035	701.5	23060	704				
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5				
H	23173	715.3	23165	714.5	23155	713.5	23130	711				
LTE Band 17												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Freq.(MHz)		Channel #		Freq. (MHz)					
L	23755		706.5		23780		709					
M	23790		710		23790		710					
H	23825		713.5		23800		711					
LTE Band 38												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	37775	2572.5	37800	2575	37825	2577.5	37850	2580				
M	38000	2595	38000	2595	38000	2595	38000	2595				
H	38225	2617.5	38200	2615	38175	2612.5	38150	2610				
LTE Band 41												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	39675	2498.5	39700	2501	39725	2503.5	39750	2506				
LM	40148	2545.8	40160	2547	40173	2548.3	40185	2549.5				
M	40620	2593	40620	2593	40620	2593	40620	2593				
HM	41093	2640.3	41080	2639	41068	2637.8	41055	2636.5				
H	41565	2687.5	41540	2685	41515	2682.5	41490	2680				

LTE Band 66												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	131979	1710.7	131987	1711.5	131997	1712.5	132022	1715	132047	1717.5	132072	1720
M	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745
H	132665	1779.3	132657	1778.5	132647	1777.5	132622	1775	132597	1772.5	132572	1770

4.3 General 5G NR SAR Test and Reporting Considerations

5G NR Information								
Operating Frequency Range of each 5G NR transmission band	5G NR n5: 824 MHz ~ 849 MHz							
	5G NR n7: 2500 MHz ~ 2570 MHz							
	5G NR n38 : 2570 MHz ~ 2620 MHz							
	5G NR n41: 2496 MHz ~ 2690 MHz							
	5G NR n66 : 1710 MHz ~ 1780 MHz							
	5G NR n77: 3450 MHz ~ 3550 MHz, 3700 MHz ~ 3980 MHz							
	5G NR n78: 3450 MHz ~ 3550 MHz, 3700 MHz ~ 3800 MHz							
Channel Bandwidth	5G NR n5: 5MHz, 10MHz, 15MHz, 20MHz							
	5G NR n7: 5MHz, 10MHz, 15MHz, 20MHz							
	5G NR n38: 5MHz, 10MHz, 15MHz, 20MHz, 40MHz							
	5G NR n41: 10MHz, 15MHz, 20MHz, 30MHz, 40MHz, 50MHz, 60MHz, 80MHz, 90MHz, 100MHz							
	5G NR n66: 5MHz, 10MHz, 15MHz, 20MHz, 30MHz, 40MHz							
	5G NR n77: 10MHz, 15MHz, 20MHz, 40MHz, 50MHz, 60MHz, 70MHz, 80MHz, 90MHz, 100MHz							
	5G NR n78: 10MHz, 15MHz, 20MHz, 40MHz, 50MHz, 60MHz, 70MHz, 80MHz, 90MHz, 100MHz							
SCS	FDD: SCS15KHz /SCS30KHz, TDD: SCS15KHz /SCS30KHz							
uplink modulations used	DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM							
A-MPR (Additional MPR) disabled for SAR Testing?	Yes							
LTE Anchor Bands for n5	LTE B2/7/38/41/66							
LTE Anchor Bands for n7	LTE B2/5/7/38/41/66							
LTE Anchor Bands for n38	LTE B2/5/7/38/41/66							
LTE Anchor Bands for n41	LTE B2/5/7/38/41/66							
LTE Anchor Bands for n66	LTE B2/7/66							
LTE Anchor Bands for n77	LTE B2/5/7/38/41/66							
LTE Anchor Bands for n78	LTE B2/5/7/38/41/66							
NR Band 5 SCS15KHz								
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	165300	826.5	165800	829	166300	831.5	166800	834
M	167300	836.5	167300	836.5	167300	836.5	167300	836.5
H	169300	846.5	168800	844	168300	841.5	167800	839
NR Band 5 SCS30KHz								
	Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	165800	829	166300	831.5	166800	834		
M	167300	836.5	167300	836.5	167300	836.5		
H	168800	844	168300	841.5	167800	839		
NR Band 7 SCS15KHz								
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	500500	2502.5	501000	2505	501500	2507.5	502000	2510
M	507000	2535	507000	2535	507000	2535	507000	2535
H	513500	2567.5	513000	2565	512500	2562.5	512000	2560
NR Band 7 SCS30KHz								
	Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	501000	2505	501500	2507.5	502000	2510		
M	507000	2535	507000	2535	507000	2535		
H	513000	2565	512500	2562.5	512000	2560		

NR Band 38 SCS15KHz										
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 40MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	514506	2572.53	515004	2575.02	515502	2577.51	516000	2580	518004	2590.02
M	519000	2595	519000	2595	519000	2595	519000	2595	519000	2595
H	523494	2617.47	522996	2614.98	522498	2612.49	522000	2610	519996	2599.98

NR Band 66 SCS15KHz														
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 25MHz		Bandwidth 30MHz		Bandwidth 40MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	342500	1712.5	343000	1715	343500	1717.5	344000	1720	344500	1722.5	345000	1725	346000	1730
M	349000	1745	349000	1745	349000	1745	349000	1745	349000	1745	349000	1745	349000	1745
H	355500	1777.5	355000	1775	354500	1772.5	354000	1770	353500	1767.5	353000	1765	352000	1760
NR Band 66 SCS30KHz														
	Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 25MHz		Bandwidth 30MHz		Bandwidth 40MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	343000	1715	343500	1717.5	344000	1720	344500	1722.5	345000	1725	346000	1730		
M	349000	1745	349000	1745	349000	1745	349000	1745	349000	1745	349000	1745		
H	355000	1775	354500	1772.5	354000	1770	353500	1767.5	353000	1765	352000	1760		

NR Band 41 SCS15KHz													
	Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 30MHz		Bandwidth 40MHz		Bandwidth 50MHz		
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	500202	2501.01	500700	2503.5	501204	2506.02	502200	2511	503202	2516.01	504204	2521.02	
M	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	
H	537000	2685	536496	2682.48	535998	2679.99	534996	2674.98	534000	2670	532998	2664.99	

<3700 MHz ~ 3980 MHz>

NR Band 77 SCS15KHz										
	Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 40MHz		Bandwidth 50MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	647000	3705	647168	3707.52	647334	3710.01	648000	3720	648334	3725.01
M	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840
H	665000	3975	664834	3972.51	664668	3970.02	664000	3960	663668	3955.02

NR Band 77 SCS30KHz																				
	Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth 70MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth 100MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	647000	3705	647168	3707.52	647334	3710.01	648000	3720	648334	3725.01	648668	3730.02	649000	3735	649334	3740.01	649668	3745.02	650000	3750
M	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840
H	665000	3975	664834	3972.51	664668	3970.02	664000	3960	663668	3955.02	663334	3950.01	663000	3945	662668	3940.02	662334	3935.01	662000	3930

NR Band 78 SCS15KHz										
	Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 40MHz		Bandwidth 50MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	647000	3705	647168	3707.52	647334	3710.01	648000	3720	648334	3725.01
M	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750
H	653000	3795	652834	3792.51	652668	3790.02	652000	3780	651668	3775.02

NR Band 78 SCS30KHz																				
	Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth 70MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth 100MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	647000	3705	647168	3707.52	647334	3710.01	648000	3720	648334	3725.01	648668	3730.02	649000	3735	649334	3740.01	649668	3745.02		
M	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750
H	653000	3795	652834	3792.51	652668	3790.02	652000	3780	651668	3775.02	651334	3770.01	651000	3765	650668	3760.02	650334	3755.01		

<3450 MHz ~ 3550 MHz>

NR Band 77 SCS15KHz										
	Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 40MHz		Bandwidth 50MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	630334	3455.01	630500	3457.5	630668	3460.02	631334	3470.01	631668	3475.02
M	633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01
H	636332	3544.98	636166	3542.49	636000	3540	635332	3529.98	635000	3525

NR Band 77 SCS30KHz																				
Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth 70MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth 100MHz		
Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	630334	3455.01	630500	3457.5	630668	3460.02	631334	3470.01	631668	3475.02	632000	3480	632334	3485.01	632668	3490.02	633000	3495		
M	633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01
H	636332	3544.98	636166	3542.49	636000	3540	635332	3529.98	635000	3525	634666	3519.99	634332	3514.98	634000	3510	633666	3504.99		


NR Band 78 SCS15KHz										
	Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 40MHz		Bandwidth 50MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	630334	3455.01	630500	3457.5	630668	3460.02	631334	3470.01	631668	3475.02
M	633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01
H	636332	3544.98	636166	3542.49	636000	3540	635332	3529.98	635000	3525

NR Band 78 SCS30KHz																				
Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth 70MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth 100MHz		
Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	630334	3455.01	630500	3457.5	630668	3460.02	631334	3470.01	631668	3475.02	632000	3480	632334	3485.01	632668	3490.02	633000	3495		
M	633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01
H	636332	3544.98	636166	3542.49	636000	3540	635332	3529.98	635000	3525	634666	3519.99	634332	3514.98	634000	3510	633666	3504.99		

5. Proximity Sensor Triggering Test

5.1 Proximity sensor triggering distances(Per KDB616217§6.2)

1. Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed.
2. In the preliminary triggering distance testing, the tissue-equivalent medium for different frequency bands were used for verification; no other frequency bands tissue-equivalent medium was found to result in shortest triggering distance than that for 1900MHz, and the tissue-equivalent medium for 1900MHz was used for formal proximity sensor triggering testing.
3. Capacitive proximity sensor placed coincident with antenna elements at the top/bottom end of the phone are utilized to determine when the device comes in proximity of the user's body or finger or hand at the front or back or bottom or left or top side surface of the device. There is no need to do sensor coverage testing for the proximity sensor is designed to support sufficient detection range and sensitivity to cover regions of the sensors in all applicable directions since the proximity sensor entirely covers the antenna.
4. The proximity sensors used to detect the proximity of the user's body or handheld state at the front or back or bottom or left or top side of the device use a detection threshold distance. When front/back/left/top/bottom sides of body or handheld condition is detected reduced power will be active. The data shown in the sections below shows the distance(s).
5. For verification of compliance of power reduction scheme, additional SAR testing with EUT transmitting at full RF power at a conservative triggering distance -1mm was performed.

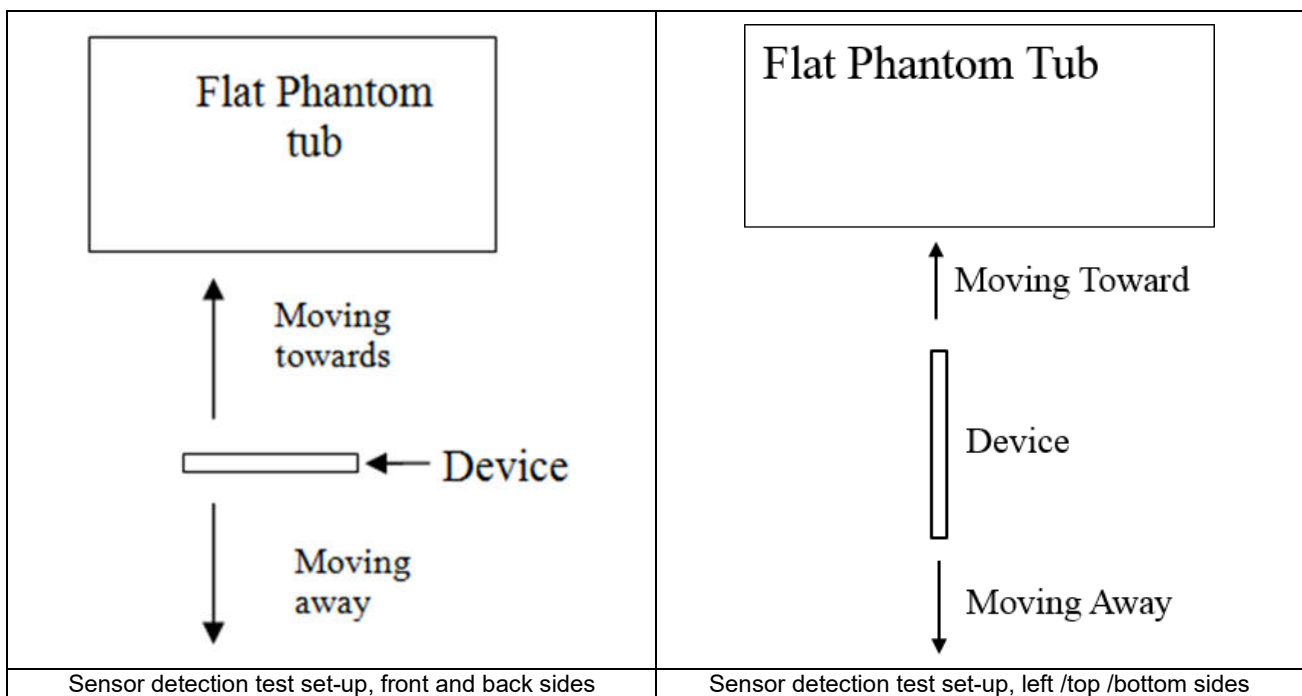

<P-Sensor>
< Sensor for Ant0/ Ant1 >

Proximity Sensor Triggering Distance (mm)						
Position	Front		Back		Bottom Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	16	16	16	16	16	16

<Sensor for Ant2/ Ant4>

Proximity Sensor Triggering Distance (mm)								
Position	Front		Back		Left Side		Top Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	16	16	16	16	6	6	16	16

6. RF Exposure Limits

6.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

6.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

7. Specific Absorption Rate (SAR)

7.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

7.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

8. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

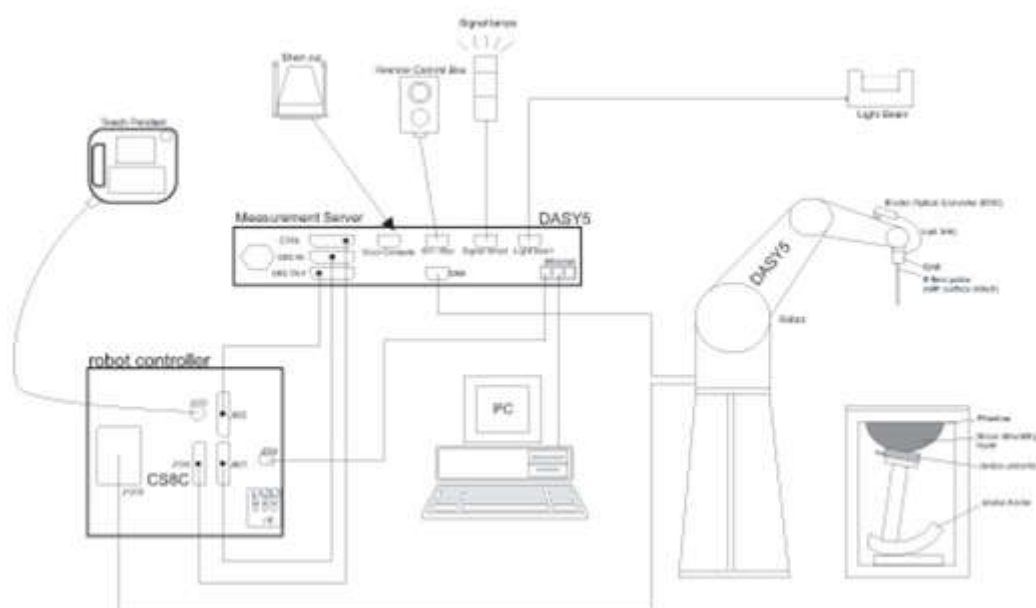

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

8.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

8.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Photo of DAE

8.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.


8.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the head, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters

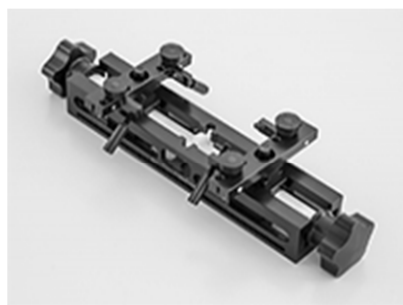

Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

9. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

9.1 **Spatial Peak SAR Evaluation**

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

9.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

9.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

9.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm *	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

9.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

9.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

10. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1087	2019/3/27	2022/3/24
SPEAG	835MHz System Validation Kit	D835V2	4d258	2020/5/7	2023/5/6
SPEAG	1750MHz System Validation Kit	D1750V2	1090	2019/3/27	2022/3/25
SPEAG	1900MHz System Validation Kit	D1900V2	5d170	2019/3/26	2022/3/24
SPEAG	2450MHz System Validation Kit	D2450V2	908	2019/3/25	2022/3/23
SPEAG	2600MHz System Validation Kit	D2600V2	1061	2020/11/26	2021/11/25
SPEAG	3500MHz System Validation Kit	D3500V2	1037	2020/11/25	2021/11/24
SPEAG	3700MHz System Validation Kit	D3700V2	1008	2020/11/25	2021/11/24
SPEAG	3900MHz System Validation Kit	D3900V2	1048	2020/5/14	2023/5/13
SPEAG	5000MHz System Validation Kit	D5GHzV2	1113	2019/9/24	2022/9/23
SPEAG	Data Acquisition Electronics	DAE4	1303	2021/6/18	2022/6/17
SPEAG	Dosimetric E-Field Probe	EX3DV4	7592	2021/6/24	2022/6/23
SPEAG	SAM Twin Phantom	SAM Twin	TP-1697	NCR	NCR
Testo	Hygrometer	608-H1	1241332102	2021/1/7	2022/1/6
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Anritsu	Radio Communication Analyzer	MT8821C	6201432831	2021/4/13	2022/4/12
Agilent	ENA Series Network Analyzer	E5071C	MY46106933	2021/7/31	2022/7/30
SPEAG	Dielectric Probe Kit	DAK-3.5	1144	2020/12/2	2021/12/1
Anritsu	Vector Signal Generator	MG3710A	6201682672	2021/1/7	2022/1/6
Rohde & Schwarz	Power Meter	NRVD	102081	2021/8/12	2022/8/11
Rohde & Schwarz	Power Sensor	NRV-Z5	100538	2021/8/12	2022/8/11
Rohde & Schwarz	Power Sensor	NRV-Z5	100539	2021/8/12	2022/8/11
R&S	CBT BLUETOOTH TESTER	CBT	101246	2021/4/12	2022/4/11
EXA	Spectrum Analyzer	FSV7	101632	2021/1/7	2022/1/6
FLUKE	DIGITAC THERMOMETER	51II	97240029	2021/8/13	2022/8/12
BONN	POWER AMPLIFIER	BLMA 0830-3	087193A	Note 1	
BONN	POWER AMPLIFIER	BLMA 2060-2	087193B	Note 1	
Agilent	Dual Directional Coupler	778D	20500	Note 1	
Agilent	Dual Directional Coupler	11691D	MY48151020	Note 1	
ARRA	Power Divider	A3200-2	N/A	Note 1	
MCL	Attenuation1	BW-S10W5+	N/A	Note 1	
MCL	Attenuation2	BW-S10W5+	N/A	Note 1	
MCL	Attenuation3	BW-S10W5+	N/A	Note 1	

Note:

- Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check.
- Referring to KDB 865664 D01v01r04, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
- The justification data of dipole can be found in appendix C. The return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration.

11. System Verification

11.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 11.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 11.2.

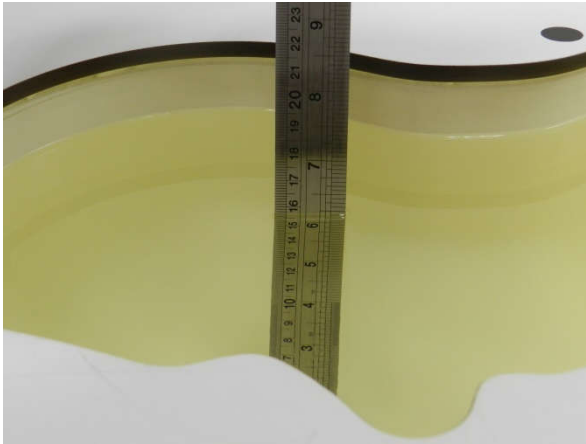


Fig 11.1 Photo of Liquid Height for Head SAR



Fig 11.2 Photo of Liquid Height for Body SAR

11.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
750	Head	22.9	0.906	42.762	0.89	41.90	1.80	2.06	±5	2021/8/19
835	Head	22.8	0.935	42.525	0.90	41.50	3.89	2.47	±5	2021/8/21
1750	Head	22.7	1.370	41.290	1.37	40.10	0.00	2.97	±5	2021/8/23
1900	Head	22.6	1.427	38.725	1.40	40.00	1.93	-3.19	±5	2021/8/25
2450	Head	22.7	1.824	39.243	1.80	39.20	1.33	0.11	±5	2021/8/27
2600	Head	22.9	1.931	39.054	1.96	39.00	-1.48	0.14	±5	2021/8/29
3500	Head	22.9	2.808	39.002	2.91	37.90	-3.51	2.91	±5	2021/8/29
3700	Head	22.8	2.994	38.681	3.12	37.70	-4.04	2.60	±5	2021/9/1
3900	Head	22.6	3.194	38.385	3.32	37.50	-3.80	2.36	±5	2021/9/3
5250	Head	22.8	4.552	36.211	4.71	35.90	-3.35	0.87	±5	2021/9/5
5600	Head	22.6	4.933	35.666	5.07	35.50	-2.70	0.47	±5	2021/9/7
5750	Head	22.7	5.097	35.471	5.22	35.40	-2.36	0.20	±5	2021/9/9
750	Head	22.8	0.905	42.768	0.89	41.90	1.69	2.07	±5	2021/8/22
835	Head	22.6	0.936	42.529	0.90	41.50	4.00	2.48	±5	2021/8/24
1750	Head	22.9	1.371	41.287	1.37	40.10	0.07	2.96	±5	2021/8/25
1900	Head	22.7	1.435	40.100	1.40	40.00	2.50	0.25	±5	2021/8/28
2450	Head	22.6	1.825	39.239	1.80	39.20	1.39	0.10	±5	2021/8/29
2600	Head	22.9	1.932	39.049	1.96	39.00	-1.43	0.13	±5	2021/8/31
3500	Head	22.8	2.850	38.606	2.91	37.90	-2.06	1.86	±5	2021/9/2
3700	Head	22.8	3.142	38.977	3.12	37.70	0.71	3.39	±5	2021/9/2
3900	Head	22.7	3.310	38.758	3.32	37.50	-0.30	3.35	±5	2021/9/3
5250	Head	22.6	4.584	36.297	4.71	35.90	-2.68	1.11	±5	2021/9/6
5600	Head	22.7	4.964	35.746	5.07	35.50	-2.09	0.69	±5	2021/9/8
5750	Head	22.9	5.142	35.579	5.22	35.40	-1.49	0.51	±5	2021/9/10
750	Head	22.6	0.914	43.495	0.89	41.90	2.70	3.81	±5	2021/8/21
835	Head	22.6	0.922	40.880	0.90	41.50	2.44	-1.49	±5	2021/8/23
1750	Head	22.6	1.353	39.045	1.37	40.10	-1.24	-2.63	±5	2021/8/25
1900	Head	22.8	1.436	40.110	1.40	40.00	2.57	0.27	±5	2021/8/27
2450	Head	22.8	1.872	40.808	1.80	39.20	4.00	4.10	±5	2021/8/29
2600	Head	22.6	1.879	39.158	1.96	39.00	-4.13	0.41	±5	2021/9/2
3500	Head	22.8	2.850	38.606	2.91	37.90	-2.06	1.86	±5	2021/9/2
3700	Head	22.7	3.044	38.163	3.12	37.70	-2.44	1.23	±5	2021/9/4
3900	Head	22.9	3.247	37.755	3.32	37.50	-2.20	0.68	±5	2121/9/7
5250	Head	22.7	4.596	36.238	4.71	35.90	-2.42	0.94	±5	2021/9/9
5600	Head	22.6	4.976	35.693	5.07	35.50	-1.85	0.54	±5	2021/9/11
5750	Head	22.7	5.146	35.522	5.22	35.40	-1.42	0.34	±5	2021/9/13

11.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

<1g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2021/8/19	750	Head	50	1087	7592	1303	0.422	8.36	8.44	0.96
2021/8/21	835	Head	50	4d258	7592	1303	0.473	9.44	9.46	0.21
2021/8/23	1750	Head	50	1090	7592	1303	1.870	36.40	37.4	2.75
2021/8/25	1900	Head	50	5d170	7592	1303	2.050	39.00	41	5.13
2021/8/27	2450	Head	50	908	7592	1303	2.570	52.80	51.4	-2.65
2021/8/29	2600	Head	50	1061	7592	1303	3.020	56.60	60.4	6.71
2021/8/29	3500	Head	50	1037	7592	1303	3.290	68.00	65.8	-3.24
2021/9/1	3700	Head	50	1008	7592	1303	3.250	67.60	65	-3.85
2021/9/3	3900	Head	50	1048	7592	1303	3.510	70.20	70.2	0.00
2021/9/5	5250	Head	50	1113	7592	1303	3.870	80.50	77.4	-3.85
2021/9/7	5600	Head	50	1113	7592	1303	3.900	83.40	78	-6.47
2021/9/9	5750	Head	50	1113	7592	1303	4.020	80.00	80.4	0.50
2021/8/22	750	Head	50	1087	7592	1303	0.422	8.36	8.44	0.96
2021/8/24	835	Head	50	4d258	7592	1303	0.484	9.44	9.68	2.54
2021/8/25	1750	Head	50	1090	7592	1303	1.870	36.40	37.4	2.75
2021/8/28	1900	Head	50	5d170	7592	1303	2.060	39.00	41.2	5.64
2021/8/29	2450	Head	50	908	7592	1303	2.570	52.80	51.4	-2.65
2021/8/31	2600	Head	50	1061	7592	1303	3.020	56.60	60.4	6.71
2021/9/2	3500	Head	50	1037	7592	1303	3.140	68.00	62.8	-7.65
2021/9/2	3700	Head	50	1008	7592	1303	3.410	67.60	68.2	0.89
2021/9/3	3900	Head	50	1048	7592	1303	3.320	70.20	66.4	-5.41
2021/9/6	5250	Head	50	1113	7592	1303	3.900	80.50	78	-3.11
2021/9/8	5600	Head	50	1113	7592	1303	3.930	83.40	78.6	-5.76
2021/9/10	5750	Head	50	1113	7592	1303	4.050	80.00	81	1.25
2021/8/21	750	Head	50	1087	7592	1303	0.426	8.36	8.52	1.91
2021/8/23	835	Head	50	4d258	7592	1303	0.502	9.44	10.04	6.36
2021/8/25	1750	Head	50	1090	7592	1303	1.840	36.40	36.8	1.10
2021/8/27	1900	Head	50	5d170	7592	1303	2.060	39.00	41.2	5.64
2021/8/29	2450	Head	50	908	7592	1303	2.640	52.80	52.8	0.00
2021/9/2	2600	Head	50	1061	7592	1303	2.940	56.60	58.8	3.89
2021/9/2	3500	Head	50	1037	7592	1303	3.140	68.00	62.8	-7.65
2021/9/4	3700	Head	50	1008	7592	1303	3.300	67.60	66	-2.37
2121/9/7	3900	Head	50	1048	7592	1303	3.250	70.20	65	-7.41
2021/9/9	5250	Head	50	1113	7592	1303	3.910	80.50	78.2	-2.86
2021/9/11	5600	Head	50	1113	7592	1303	3.940	83.40	78.8	-5.52
2021/9/13	5750	Head	50	1113	7592	1303	4.060	80.00	81.2	1.50

<10g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2021/8/19	750	Head	50	1087	7592	1303	0.275	5.65	5.5	-2.65
2021/8/21	835	Head	50	4d258	7592	1303	0.307	6.13	6.14	0.16
2021/8/23	1750	Head	50	1090	7592	1303	0.985	19.20	19.7	2.60
2021/8/25	1900	Head	50	5d170	7592	1303	1.050	20.30	21	3.45
2021/8/27	2450	Head	50	908	7592	1303	1.180	24.20	23.6	-2.48
2021/8/29	2600	Head	50	1061	7592	1303	1.330	25.10	26.6	5.98
2021/8/29	3500	Head	50	1037	7592	1303	1.250	25.40	25	-1.57
2021/9/1	3700	Head	50	1008	7592	1303	1.210	24.40	24.2	-0.82
2021/9/3	3900	Head	50	1048	7592	1303	1.250	24.40	25	2.46
2021/9/5	5250	Head	50	1113	7592	1303	1.100	23.10	22	-4.76
2021/9/7	5600	Head	50	1113	7592	1303	1.130	23.80	22.6	-5.04
2021/9/9	5750	Head	50	1113	7592	1303	1.140	22.80	22.8	0.00
2021/8/22	750	Head	50	1087	7592	1303	0.276	5.65	5.52	-2.30
2021/8/24	835	Head	50	4d258	7592	1303	0.300	6.13	6	-2.12
2021/8/25	1750	Head	50	1090	7592	1303	0.985	19.20	19.7	2.60
2021/8/28	1900	Head	50	5d170	7592	1303	1.060	20.30	21.2	4.43
2021/8/29	2450	Head	50	908	7592	1303	1.180	24.20	23.6	-2.48
2021/8/31	2600	Head	50	1061	7592	1303	1.330	25.10	26.6	5.98
2021/9/2	3500	Head	50	1037	7592	1303	1.190	25.40	23.8	-6.30
2021/9/2	3700	Head	50	1008	7592	1303	1.270	24.40	25.4	4.10
2021/9/3	3900	Head	50	1048	7592	1303	1.180	24.40	23.6	-3.28
2021/9/6	5250	Head	50	1113	7592	1303	1.110	23.10	22.2	-3.90
2021/9/8	5600	Head	50	1113	7592	1303	1.140	23.80	22.8	-4.20
2021/9/10	5750	Head	50	1113	7592	1303	1.150	22.80	23	0.88
2021/8/21	750	Head	50	1087	7592	1303	0.278	5.65	5.56	-1.59
2021/8/23	835	Head	50	4d258	7592	1303	0.322	6.13	6.44	5.06
2021/8/25	1750	Head	50	1090	7592	1303	0.973	19.20	19.46	1.35
2021/8/27	1900	Head	50	5d170	7592	1303	1.060	20.30	21.2	4.43
2021/8/29	2450	Head	50	908	7592	1303	1.220	24.20	24.4	0.83
2021/9/2	2600	Head	50	1061	7592	1303	1.290	25.10	25.8	2.79
2021/9/2	3500	Head	50	1037	7592	1303	1.190	25.40	23.8	-6.30
2021/9/4	3700	Head	50	1008	7592	1303	1.230	24.40	24.6	0.82
2121/9/7	3900	Head	50	1048	7592	1303	1.160	24.40	23.2	-4.92
2021/9/9	5250	Head	50	1113	7592	1303	1.120	23.10	22.4	-3.03
2021/9/11	5600	Head	50	1113	7592	1303	1.140	23.80	22.8	-4.20
2021/9/13	5750	Head	50	1113	7592	1303	1.150	22.80	23	0.88

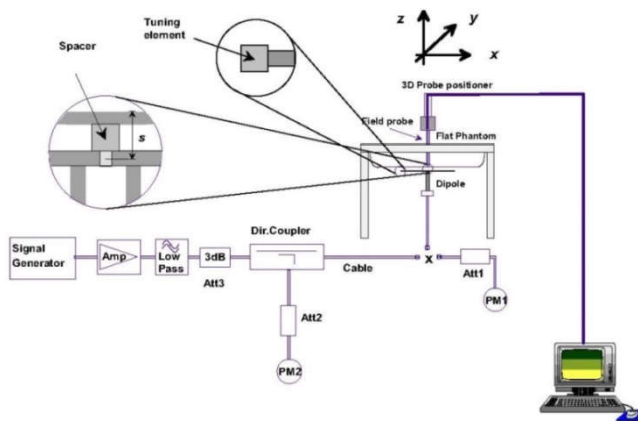


Fig 11.3.1 System Performance Check Setup



Fig 11.3.2 Setup Photo

12. RF Exposure Positions

12.1 Ear and handset reference point

Figure 12.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M,” the left ear reference point (ERP) is marked “LE,” and the right ERP is marked “RE.” Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 12.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 12.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 12.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

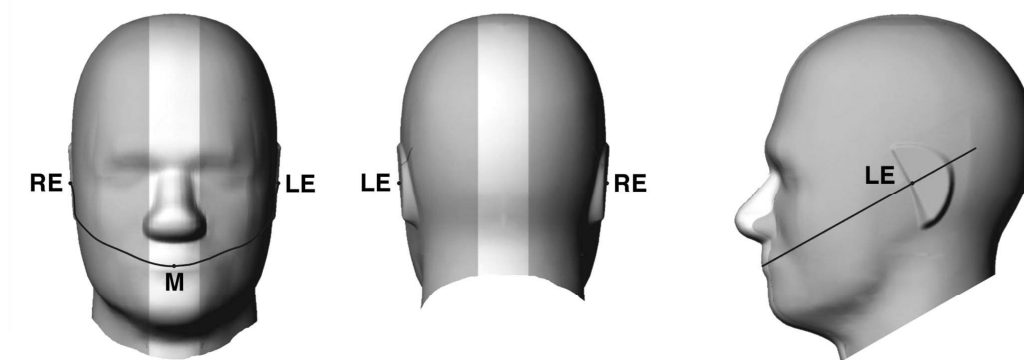


Fig 12.1.1 Front, back, and side views of SAM twin phantom

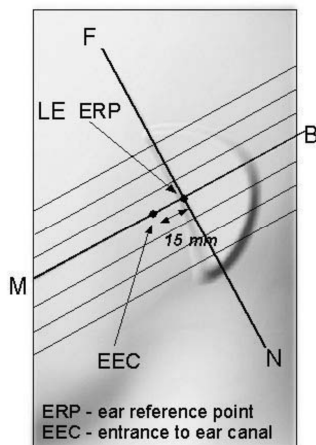


Fig 12.1.2 Close-up side view of phantom showing the ear region.

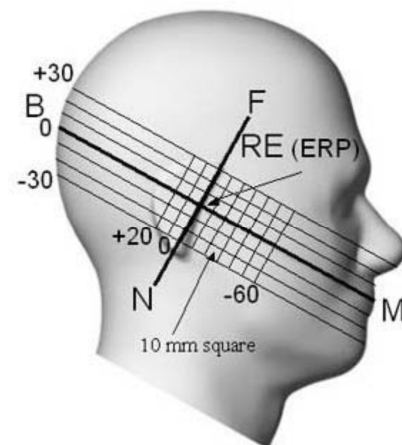


Fig 12.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

12.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 12.2.1 and Figure 12.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 12.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the handset. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 12.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 12.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 12.2.3. The actual rotation angles should be documented in the test report.

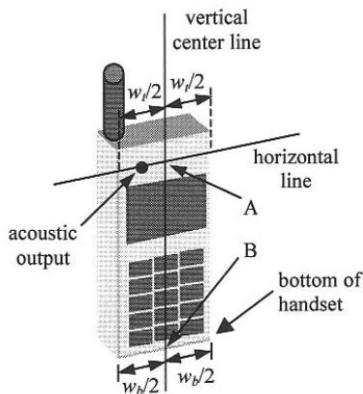


Fig 12.2.1 Handset vertical and horizontal reference lines—"fixed case"

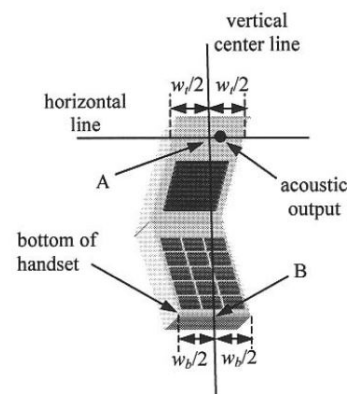


Fig 12.2.2 Handset vertical and horizontal reference lines—"clam-shell case"

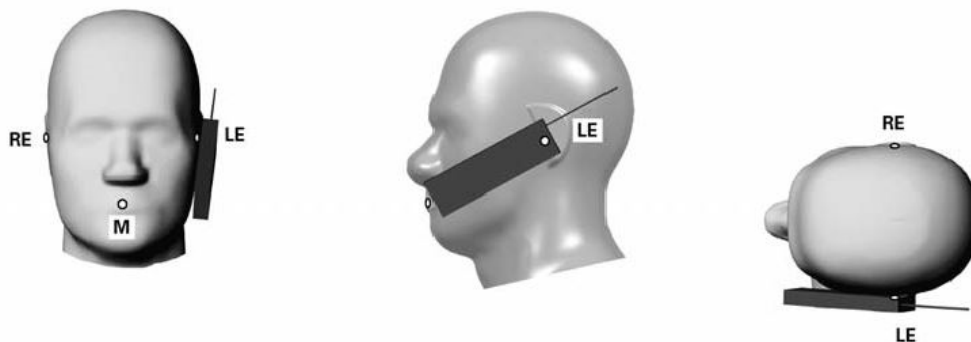


Fig 12.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

12.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 12.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

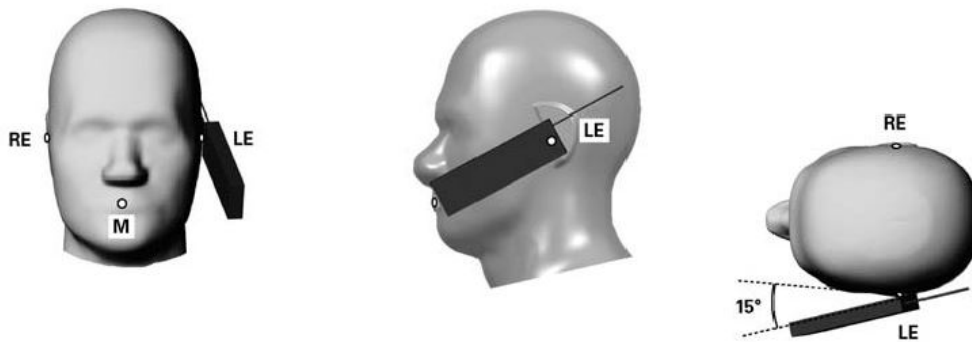


Fig 12.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

12.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 12.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

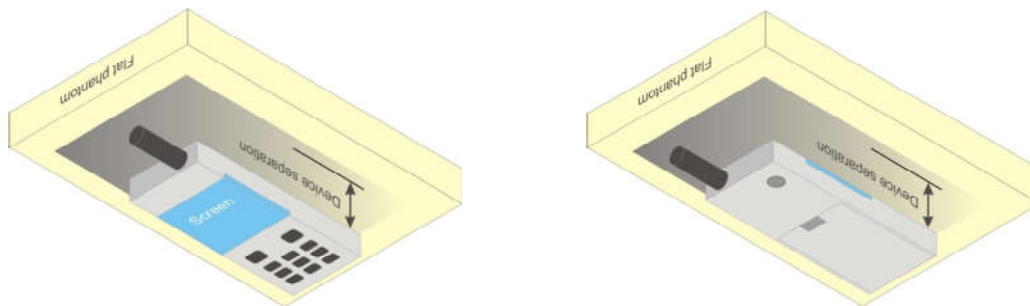


Fig 12.4 Body Worn Position

12.5 Product Specific 10g SAR Exposure

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.⁶ The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

12.6 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9$ cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

13. Conducted RF Output Power (Unit: dBm)

The detailed conducted power table can refer to Appendix E.

<GSM Conducted Power>

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/4$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_o/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5
Note 1: Δ_{ACK}, Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$. Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$. Note 3: CM = 1 for $\beta_o/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases. Note 4: For subtest 2 the β_o/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.							

Setup Configuration

HSUPA Setup Configuration:

- The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- The RF path losses were compensated into the measurements.
- A call was established between EUT and Base Station with following setting * :
 - Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - Set Cell Power = -86 dBm
 - Set Channel Type = 12.2k + HSPA
 - Set UE Target Power
 - Power Ctrl Mode= Alternating bits
 - Set and observe the E-TFCI
 - Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{EC}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration

DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

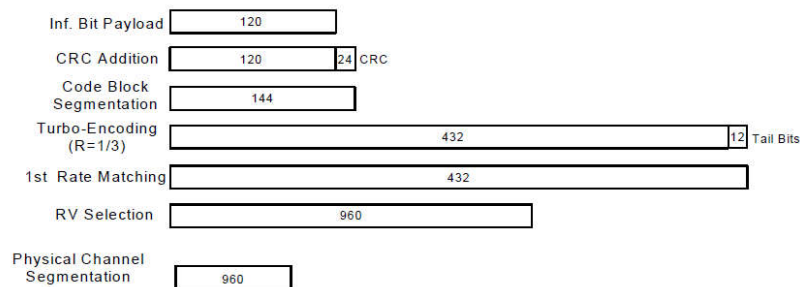


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

Setup Configuration

<WCDMA Conducted Power>**General Note:**

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA


<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4 / B5 / B12 / B17 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE B4 / B38 / B17 SAR test was covered by B66 / B41 / B12; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band
10. According to 2017 TCB workshop, for 64 QAM and 16 QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 64QAM and 16QAM signal modulation are correct.



64QAM

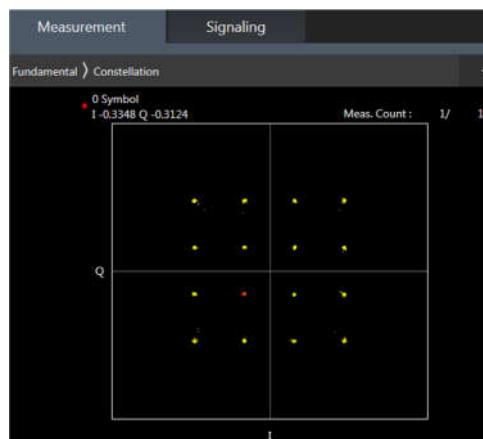

16QAM

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- “special subframe S” contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

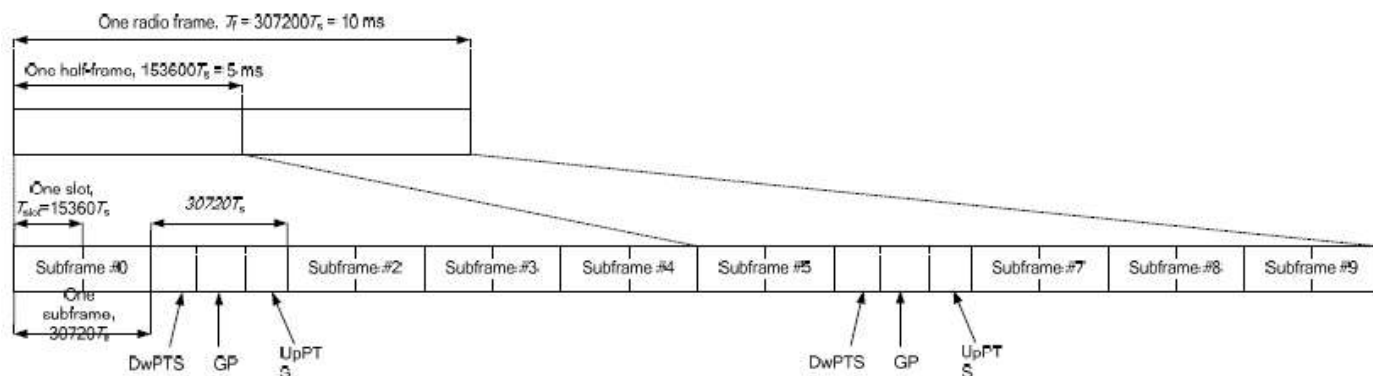


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$	-	-
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Special subframe (30720·T _s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T _s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

- Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is:
 $(3+0.167)/5 = 63.3\%$
- for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is:
 $(3+0.143)/5 = 62.9\%$
- For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.

<LTE Carrier Aggregation>
General Note:

1. This device supports Carrier Aggregation on downlink for inter and intra band. For the device supports bands and bandwidths and configurations are provided as follow table was according to 3GPP.
2. In applying the existing power measurement procedures of KDB 941225 D05A for DL CA SAR test exclusion, only the subset with the largest number of combinations of frequency bands and CCs in each row need combination, and for this device that all the configurations were choose to power measurement.
3. The gray color table is covered by other combinations and no need to verify power.

2CC Downlink Carrier Aggregation		
Number	Combination	Covered by Measurement Superset
2CC #1	CA_2C	
2CC #2	CA_2A-4A	
2CC #3	CA_2A-5A	
2CC #4	CA_2A-7A	
2CC #5	CA_4A-5A	
2CC #6	CA_4A-7A	
2CC #7	CA_5A-7A	
2CC #8	CA_5A-66A	
2CC #9	CA_7A-7A	
2CC #10	CA_7C	
2CC #11	CA_12A-66A	
2CC #12	CA_38C	
2CC #13	CA_41A-41A	
2CC #14	CA_41C	
2CC #15	CA_66A-66A	
2CC #16	CA_7A-66A	
2CC #17	CA_2A-66A	

LTE Carrier Aggregation Conducted Power (Downlink)

- i. According to KDB941225 D05A v01r02, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- ii. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- iii. The device supports downlink two carrier aggregation. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
- iv. Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
- v. For inter-band CA, the SCC selected highest bandwidth and near the middle of its transmission band. For SCC DL RB size and offset will base on the PCC corresponding RB allocation.
- vi. For non-contiguous intra-band CA, the SCC selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band.
- vii. For Intra-band, contiguous CA, the downlink channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements.

$$\text{Nominal channel spacing} = \left\lceil \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 0.1|BW_{\text{Channel}(1)} - BW_{\text{Channel}(2)}|}{0.6} \right\rceil 0.3 \text{ [MHz]}$$

LTE 4x4 MIMO (Downlink)

This device supports downlink 4x4 MIMO operations for LTE Bands 4/7/66/38/41/42 only. Uplink transmission is limited to a single output stream. Power measurements were performed with downlink 4x4 MIMO active for the configuration with highest measured maximum conducted power with 4x4 downlink MIMO inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band.

Per FCC Guidance, SAR for downlink 4x4 MIMO was not needed since the maximum average output power in 4x4 downlink MIMO mode was not > 0.25 dB higher than the maximum output power with downlink 4x4 MIMO inactive. When carrier aggregation is applicable, power measurements were performed with the downlink carrier aggregation and 4x4 DL MIMO active for the configuration with highest measured maximum conducted power with downlink carrier aggregation inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band.

4X4 MIMO	WWAN Band
	LTE Band: B7 / B38 / B41 / B66

LTE Carrier Aggregation Conducted Power (Uplink)
<Intra-band>

2CC Uplink Carrier Aggregation	
Number	Combination
1	7C
2	38C

General Note:

- i. The device supports intra-band uplink carrier aggregation for LTE B7/B38 with a maximum of two 20MHz component carriers. For intra band contiguous carrier aggregation scenarios, 3GPP 36.101 table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. 3GPP 36.101 6.2.3A allows for several dB of MPR to be applied when not-contiguous RB allocation is implemented. The conducted power and MPR setting in this device are permanently implemented pre 3GPP requirement.
- ii. The device supports uplink carrier aggregation with a maximum of two 20MHz component carriers. For intra band contiguous carrier aggregation scenarios, 3GPP 36.101 table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. 3GPP 36.101 6.2.3A allows for several dB of MPR to be applied when not-contiguous RB allocation is implemented. The conducted power and MPR setting in this device are permanently implemented pre the 3GPP requirement.
- iii. According TCB workshop, the output power with uplink CA active was measured for the configuration with the highest reported SAR with single carrier for each exposure condition. The power was measured with wideband signal integration over both component carriers.
- iv. According TCB workshop, the output power with uplink CA active was measured for the configuration with the highest reported SAR with single carrier for each exposure condition. The power was measured with wideband signal integration over both component carriers.
- v. Additional SAR measurement for LTE UL CA with other DL CA combinations active were not required since the maximum output power for this configuration was not > 0.25dB higher than the maximum output power for UL CA active.

5G NR Output Power (Unit: dBm)

General Note:

1. 5G NR n5, n7, n66, n38, n41, n77, n78 supports NSA and SA operations.
2. For 5G NR test procedure was following step similar FCC KDB 941225 D05:
 - a. For DFT-OFDM and CP-OFDM output power measurement reduction, according to 38.101 maximum power reduction for power class2 and 3, the CP-OFDM mode will not higher than DFT-OFDM mode, therefore, similar FCC KDB 941225 D05 procedure for other modulation output power for each RB allocation configuration is > not ½ dB higher than the same configuration in DFT-QPSK and the reported SAR for the DFT-QPSK configuration is ≤ 1.45 W/kg; CP-OFDM testing is not required.
 - b. For DFT-OFDM output power measurement reduction, according to 38.101 maximum power reduction for power class2 and 3, for 16QAM/64 QAM/256QAM and smaller bandwidth output power will spot check largest channel bandwidth worst RB configuration to ensure the 16QAM/64QAM/256QAM and smaller bandwidth output power will not ½ dB higher than the same configuration in the largest supported bandwidth.
 - c. SAR testing start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel
 - d. 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure
 - e. QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested
 - f. PI/2 BPSK/16QAM/64QAM/256QAM output powers according to 3GPP MPR will not ½ dB higher than the same configuration in QPSK, also reported SAR for the QPSK configuration is less than 1.45 W/kg, PI/2 BPSK /16QAM/64QAM/256QAM SAR testing are not required.
 - g. Smaller bandwidth output power for each RB allocation configuration for this device will not ½ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg, smaller bandwidth SAR testing is not required for this device
3. Due to test setup limitations, SAR testing for NR was performed using Factory Test Mode software to establish the connection and perform SAR with 100% transmission.
4. For DFT-s-OFDM and CP-OFDM output power measurement reduction, according to 38.101 maximum power reduction for the CP-OFDM mode will not higher than DFT-s-OFDM mode, therefore, CP-OFDM measurement is unnecessary.
5. NSA and SA mode should perform SAR separately. For the maximum power of SA mode is the same as NSA total power level, so SA standalone total power level SAR can represent NSA mode SAR.
6. 5G NR NSA mode, the power level is the same as 5G NR SA mode, so 5G NR NSA mode and SA mode power table only show one time.
7. 5G NR n41/n77/n78 supports HPUE, HPUE power level higher than class 3 power level, and HPUE can represent class 3 conservatively, so SAR testing only performed HPUE.
8. For 5G NR NSA EN-DC mode, standalone SAR performed for 5G NR band with the maximum power, EN-DC SAR summed 5G NR standalone SAR and LTE standalone SAR, the result of EN-DC SAR is more conservatively.
9. 5G NR supports CP-OFDM and DFT-s-OFDM modulation, for DFT-s-OFDM power is higher than CP-OFDM, so only show DFT-s-OFDM power table and chose DFT-s-OFDM to perform SAR testing.

<3GPP 38.101 MPR for EN-DC>

Table 6.2.2-1 Maximum power reduction (MPR) for power class 3

Modulation		MPR (dB)		
		Edge RB allocations	Outer RB allocations	Inner RB allocations
DFT-s-OFDM	Pi/2 BPSK	$\leq 3.5^1$	$\leq 1.2^1$	$\leq 0.2^1$
		$\leq 0.5^2$	$\leq 0.5^2$	0 ²
	QPSK	≤ 1		0
	16 QAM	≤ 2		≤ 1
	64 QAM	≤ 2.5		
CP-OFDM	256 QAM	≤ 4.5		
	QPSK	≤ 3		≤ 1.5
	16 QAM	≤ 3		≤ 2
	64 QAM	≤ 3.5		
	256 QAM	≤ 6.5		

NOTE 1: Applicable for UE operating in TDD mode with Pi/2 BPSK modulation and UE indicates support for UE capability *powerBoosting-pi2BPSK* and if the IE *powerBoostPi2BPSK* is set to 1 and 40 % or less slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79. The reference power of 0 dB MPR is 26 dBm.

NOTE 2: Applicable for UE operating in FDD mode, or in TDD mode in bands other than n40, n41, n77, n78 and n79 with Pi/2 BPSK modulation and if the IE *powerBoostPi2BPSK* is set to 0 and if more than 40 % of slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79.

Table 6.2.2-2 Maximum power reduction (MPR) for power class 2

Modulation		MPR (dB)		
		Edge RB allocations	Outer RB allocations	Inner RB allocations
DFT-s-OFDM	Pi/2 BPSK	≤ 3.5	≤ 0.5	0
	QPSK	≤ 3.5	≤ 1	0
	16 QAM	≤ 3.5	≤ 2	≤ 1
	64 QAM	≤ 3.5	≤ 2.5	
	256 QAM	≤ 4.5		
CP-OFDM	QPSK	≤ 3.5	≤ 3	≤ 1.5
	16 QAM	≤ 3.5	≤ 3	≤ 2
	64 QAM	≤ 3.5		
	256 QAM	≤ 6.5		

ENDC	ENDC combination 1		ENDC combination 2		ENDC combination 3		ENDC combination 4	
	LTE Ant	FR1 Ant	LTE Ant	FR1 Ant	LTE Ant	FR1 Ant	LTE Ant	FR1 Ant
5A_n7A	Ant 4	Ant 0	Ant 0	Ant 4	Ant 4	Ant 2		
5A_n38A	Ant 4	Ant 0	Ant 0	Ant 4	Ant 4	Ant 2		
5A_n41A	Ant 4	Ant 0	Ant 0	Ant 4	Ant 4	Ant 2		
5A_n77A	Ant 4	Ant 5	Ant 4	Ant 3	Ant 4	Ant 1	Ant 4	Ant 8
5A_n78A	Ant 4	Ant 5	Ant 4	Ant 3	Ant 4	Ant 1	Ant 4	Ant 8
2A_n5A	Ant 4	Ant 0						
2A_n7A	Ant 4	Ant 0	Ant 4	Ant 2	Ant 1	Ant 4		
2A_n38A	Ant 4	Ant 0	Ant 4	Ant 2	Ant 1	Ant 4		
2A_n41A	Ant 4	Ant 0	Ant 4	Ant 2	Ant 1	Ant 4		
2A_n66A	Ant 4	Ant 1	Ant 4	Ant 2	Ant 1	Ant 4		
2A_n77A	Ant 4	Ant 5	Ant 4	Ant 3	Ant 4	Ant 1	Ant 4	Ant 8
2A_n78A	Ant 4	Ant 5	Ant 4	Ant 3	Ant 4	Ant 1	Ant 4	Ant 8
7A_n5A	Ant 4	Ant 0						
7A_n7A	Ant 4	Ant 0	Ant 4	Ant 2	Ant 0	Ant 4		
7A_n38A	Ant 4	Ant 0	Ant 4	Ant 2	Ant 0	Ant 4		
7A_n41A	Ant 4	Ant 0	Ant 4	Ant 2	Ant 0	Ant 4		
7A_n66A	Ant 4	Ant 1	Ant 4	Ant 2	Ant 0	Ant 4		
7A_n77A	Ant 4	Ant 5	Ant 4	Ant 3	Ant 4	Ant 1	Ant 4	Ant 8
7A_n78A	Ant 4	Ant 5	Ant 4	Ant 3	Ant 4	Ant 1	Ant 4	Ant 8
38A_n5A	Ant 4	Ant 0						
38A_n7A	Ant 4	Ant 0	Ant 4	Ant 2	Ant 0	Ant 4		
38A_n38A	Ant 4	Ant 0	Ant 4	Ant 2	Ant 0	Ant 4		
38A_n41A	Ant 4	Ant 0	Ant 4	Ant 2	Ant 0	Ant 4		
38A_n77A	Ant 4	Ant 5	Ant 4	Ant 3	Ant 4	Ant 1	Ant 4	Ant 8
38A_n78A	Ant 4	Ant 5	Ant 4	Ant 3	Ant 4	Ant 1	Ant 4	Ant 8
41A_n5A	Ant 4	Ant 0						
41A_n7A	Ant 4	Ant 0	Ant 4	Ant 2	Ant 0	Ant 4		
41A_n38A	Ant 4	Ant 0	Ant 4	Ant 2	Ant 0	Ant 4		
41A_n41A	Ant 4	Ant 0	Ant 4	Ant 2	Ant 0	Ant 4		
41A_n77A	Ant 4	Ant 5	Ant 4	Ant 3	Ant 4	Ant 1	Ant 4	Ant 8
41A_n78A	Ant 4	Ant 5	Ant 4	Ant 3	Ant 4	Ant 1	Ant 4	Ant 8
66A_n5A	Ant 4	Ant 0						
66A_n7A	Ant 4	Ant 0	Ant 4	Ant 2	Ant 1	Ant 4		
66A_n38A	Ant 4	Ant 0	Ant 4	Ant 2	Ant 1	Ant 4		
66A_n41A	Ant 4	Ant 0	Ant 4	Ant 2	Ant 1	Ant 4		
66A_n66A	Ant 4	Ant 1	Ant 4	Ant 2	Ant 1	Ant 4		
66A_n77A	Ant 4	Ant 5	Ant 4	Ant 3	Ant 4	Ant 1	Ant 4	Ant 8
66A_n78A	Ant 4	Ant 5	Ant 4	Ant 3	Ant 4	Ant 1	Ant 4	Ant 8


<WLAN Conducted Power>**General Note:**

1. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
2. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
3. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
4. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

<2.4GHz Bluetooth>

General Note:

1. For 2.4GHz Bluetooth SAR testing was selected 1Mbps, due to its highest average power.
2. The Bluetooth duty cycle is 76.84 % as following figure, according to 2016 Oct. TCB workshop for Bluetooth SAR scaling need further consideration and the maximum duty cycle is 100%, therefore the actual duty cycle will be scaled up to 100% for Bluetooth reported SAR calculation

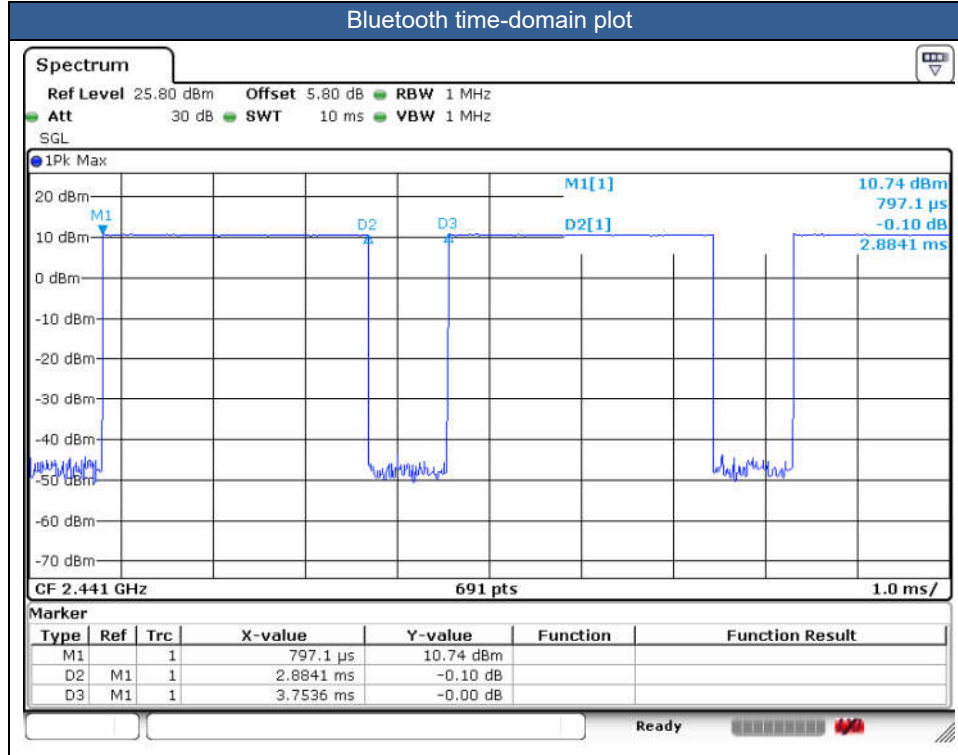



14. Antenna Location

The detailed antenna location information can refer to SAR Test Setup Photos.

15. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of BT/WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For BT/WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
 - e. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix 63.3%/62.9% = 1.006 is applied to scale-up the measured SAR result. The Reported TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required when the measured SAR is ≥ 0.8 W/kg. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. For dual SIM card mobile has two SIM slots and supports dual SIM dual standby. The WWAN radio transmission will be enabled by either one SIM at a time (single active). After pre-scan two SIM cards power, we found test result of the SIM1 was the worse, so we chose SIM1 slot to perform all tests.
5. There are two types of EUT, they are single SIM card mobile and dual SIM card mobile, according to the differences, we choose sample 1 to perform full test.
6. The device has two batteries with the same battery capacity, only Manufacturer is different. We only chose battery 1 to perform full SAR testing.
7. The device implements Proximity sensors/receiver detect mechanism/hotspot trigger reduced power for the power management for SAR compliance at different exposure conditions (head, body-worn, hotspot, extremity). The device will invoke corresponding work scenarios power level base on frequency bands/antennas, which can refer to appendix E. power table. Full power table and reduced power table (DSI 1: receiver on reduced power for head; DSI 3/4: P-sensor on for hotspot; DSI 2: receiver off /P-sensor off).
8. For 5G NR test, using FTM (Factory Test Mode) to perform SAR with default 100% transmission.
9. 5GNR n41/n77/n78 supports HPUE, HPUE power level higher than class 3 power level, and HPUE can represent class 3 conservatively, so SAR testing only performed HPUE.
10. For 5G NR NSA EN-DC mode, standalone SAR performed for 5GNR band with the maximum power, EN-DC SAR summed 5GNR standalone SAR and LTE standalone SAR, the result of EN-DC SAR is more conservatively.
11. NSA and SA mode should perform SAR separately. For the maximum power of SA mode is the same as NSA total power level, so SA standalone total power level SAR can represent NSA mode SAR.
12. 5GNR NSA mode, the power level is the same as 5GNR SA mode, so 5GNR NSA mode and SA mode power table only show one time.
13. 5G NR supports CP-OFDM and DFT-s-OFDM modulation, for DFT-s-OFDM power is higher than CP-OFDM, so only show DFT-s-OFDM power table and chose DFT-s-OFDM to perform SAR testing.
14. For DFT-s-OFDM and CP-OFDM output power measurement reduction, according to 38.101 maximum power reduction for the CP-OFDM mode will not higher than DFT-s-OFDM mode, therefore, CP-OFDM measurement is unnecessary.
15. Per KDB648474 D04v01r03, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, when hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold.
 - a. WLAN 5.3/5.5GHz tested the product specific 10g SAR since it has no hotspot mode.
 - b. When 10-g product specific 10g SAR is considered, SAR thresholds is specified in the procedures for SAR test reduction and exclusion should be multiplied by 2.5.
16. For LTE anchors in EN-DC combinations, due to the same configuration as standalone LTE Bands, always chose worse position of standalone LTE Bands to perform SAR testing.

GSM Note:

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.
2. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq$ ¼ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

WCDMA Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq$ ¼ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is $\leq$ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA) are less than ¼ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are $\leq$ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is $>$ 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is $>$ not ½ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is $\leq$ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not ½ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is $\leq$ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B4 / B5 / B12 / B17 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE B4 / B38 / B17 SAR test was covered by B66 / B41 / B12; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band

5G NR Note:

1. For 5G NR test procedure was following step similar FCC KDB 941225 D05:
 - a. SAR testing start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
 - b. 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure
 - c. QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
 - d. PI/2 BPSK/16QAM/64QAM/256QAM output powers according to 3GPP MPR will not $\frac{1}{2}$ dB higher than the same configuration in QPSK, also reported SAR for the QPSK configuration is less than 1.45 W/kg, PI/2 BPSK/16QAM /64QAM/256QAM SAR testing are not required.
 - e. Smaller bandwidth output power for each RB allocation configuration for this device will not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg, smaller bandwidth SAR testing is not required for this device
 - f. For 5G FR1 n41/n66/n77 the maximum bandwidth does not support three non-overlapping channels, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

WLAN Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. During SAR testing the WLAN transmission was verified using a spectrum analyzer.



15.1 Head SAR

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
750MHz																		
	LTE Band 12	10M	QPSK	1	0	-	Right Cheek	0mm	Ant 0	DSI 1	23095	707.5	24.32	25.00	1.169	-0.01	0.138	0.161
	LTE Band 12	10M	QPSK	25	0	-	Right Cheek	0mm	Ant 0	DSI 1	23095	707.5	23.27	24.00	1.183	0.06	0.114	0.135
	LTE Band 12	10M	QPSK	1	0	-	Right Tilted	0mm	Ant 0	DSI 1	23095	707.5	24.32	25.00	1.169	0.07	0.099	0.116
	LTE Band 12	10M	QPSK	25	0	-	Right Tilted	0mm	Ant 0	DSI 1	23095	707.5	23.27	24.00	1.183	-0.03	0.081	0.096
	LTE Band 12	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI 1	23095	707.5	24.32	25.00	1.169	0.13	0.130	0.152
	LTE Band 12	10M	QPSK	25	0	-	Left Cheek	0mm	Ant 0	DSI 1	23095	707.5	23.27	24.00	1.183	-0.05	0.108	0.128
	LTE Band 12	10M	QPSK	1	0	-	Left Tilted	0mm	Ant 0	DSI 1	23095	707.5	24.32	25.00	1.169	0.13	0.091	0.106
	LTE Band 12	10M	QPSK	25	0	-	Left Tilted	0mm	Ant 0	DSI 1	23095	707.5	23.27	24.00	1.183	0.02	0.072	0.085
	LTE Band 12	10M	QPSK	1	0	-	Right Cheek	0mm	Ant 4	DSI 1	23095	707.5	22.25	23.50	1.334	0.15	0.207	0.276
	LTE Band 12	10M	QPSK	25	0	-	Right Cheek	0mm	Ant 4	DSI 1	23095	707.5	22.24	22.50	1.062	0.12	0.167	0.177
01	LTE Band 12	10M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 1	23095	707.5	22.25	23.50	1.334	0.01	0.240	0.320
	LTE Band 12	10M	QPSK	25	0	-	Right Tilted	0mm	Ant 4	DSI 1	23095	707.5	22.24	22.50	1.062	0.09	0.192	0.204
	LTE Band 12	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 4	DSI 1	23095	707.5	22.25	23.50	1.334	-0.06	0.147	0.196
	LTE Band 12	10M	QPSK	25	0	-	Left Cheek	0mm	Ant 4	DSI 1	23095	707.5	22.24	22.50	1.062	0.14	0.121	0.128
	LTE Band 12	10M	QPSK	1	0	-	Left Tilted	0mm	Ant 4	DSI 1	23095	707.5	22.25	23.50	1.334	-0.02	0.162	0.216
	LTE Band 12	10M	QPSK	25	0	-	Left Tilted	0mm	Ant 4	DSI 1	23095	707.5	22.24	22.50	1.062	0.02	0.129	0.137
835MHz																		
	GSM850	-	-	-	-	GSM Voice	Right Cheek	0mm	Ant 0	DSI 1	189	836.4	32.70	33.50	1.202	-0.02	0.213	0.256
	GSM850	-	-	-	-	GSM Voice	Right Tilted	0mm	Ant 0	DSI 1	189	836.4	32.70	33.50	1.202	-0.04	0.140	0.168
	GSM850	-	-	-	-	GSM Voice	Left Cheek	0mm	Ant 0	DSI 1	189	836.4	32.70	33.50	1.202	0.12	0.194	0.233
	GSM850	-	-	-	-	GSM Voice	Left Tilted	0mm	Ant 0	DSI 1	189	836.4	32.70	33.50	1.202	0.14	0.114	0.137
	GSM850	-	-	-	-	GSM Voice	Right Cheek	0mm	Ant 4	DSI 1	189	836.4	31.60	32.50	1.230	-0.02	0.550	0.677
02	GSM850	-	-	-	-	GSM Voice	Right Tilted	0mm	Ant 4	DSI 1	189	836.4	31.60	32.50	1.230	0.19	0.558	0.686
	GSM850	-	-	-	-	GSM Voice	Left Cheek	0mm	Ant 4	DSI 1	189	836.4	31.60	32.50	1.230	-0.02	0.416	0.512
	GSM850	-	-	-	-	GSM Voice	Left Tilted	0mm	Ant 4	DSI 1	189	836.4	31.60	32.50	1.230	-0.15	0.424	0.522
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 0	DSI 1	4182	836.4	25.04	25.50	1.112	-0.02	0.224	0.249
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 0	DSI 1	4182	836.4	25.04	25.50	1.112	0.07	0.134	0.149
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 0	DSI 1	4182	836.4	25.04	25.50	1.112	0.04	0.211	0.235
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Tilted	0mm	Ant 0	DSI 1	4182	836.4	25.04	25.50	1.112	-0.1	0.134	0.149
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 4	DSI 1	4182	836.4	22.55	23.50	1.245	0.07	0.495	0.616
03	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 4	DSI 1	4182	836.4	22.55	23.50	1.245	0.19	0.512	0.637
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 4	DSI 1	4182	836.4	22.55	23.50	1.245	-0.13	0.381	0.474
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Tilted	0mm	Ant 4	DSI 1	4182	836.4	22.55	23.50	1.245	0.08	0.411	0.511
	LTE Band 5	10M	QPSK	1	0	-	Right Cheek	0mm	Ant 0	DSI 1	20525	836.5	24.32	25.00	1.169	0.05	0.148	0.173
	LTE Band 5	10M	QPSK	25	0	-	Right Cheek	0mm	Ant 0	DSI 1	20525	836.5	23.24	24.00	1.191	0.06	0.121	0.144
	LTE Band 5	10M	QPSK	1	0	-	Right Tilted	0mm	Ant 0	DSI 1	20525	836.5	24.32	25.00	1.169	0.09	0.086	0.101
	LTE Band 5	10M	QPSK	25	0	-	Right Tilted	0mm	Ant 0	DSI 1	20525	836.5	23.24	24.00	1.191	0.05	0.070	0.083
	LTE Band 5	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI 1	20525	836.5	24.32	25.00	1.169	0.07	0.129	0.151
	LTE Band 5	10M	QPSK	25	0	-	Left Cheek	0mm	Ant 0	DSI 1	20525	836.5	23.24	24.00	1.191	0.01	0.104	0.124
	LTE Band 5	10M	QPSK	1	0	-	Left Tilted	0mm	Ant 0	DSI 1	20525	836.5	24.32	25.00	1.169	0.05	0.081	0.095
	LTE Band 5	10M	QPSK	25	0	-	Left Tilted	0mm	Ant 0	DSI 1	20525	836.5	23.24	24.00	1.191	0.05	0.063	0.075
04	LTE Band 5	10M	QPSK	1	0	-	Right Cheek	0mm	Ant 4	DSI 1	20525	836.5	23.15	24.00	1.216	0.02	0.450	0.547
	LTE Band 5	10M	QPSK	25	0	-	Right Cheek	0mm	Ant 4	DSI 1	20525	836.5	22.05	23.00	1.245	0.06	0.360	0.448
	LTE Band 5	10M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 1	20525	836.5	23.15	24.00	1.216	0.15	0.441	0.536
	LTE Band 5	10M	QPSK	25	0	-	Right Tilted	0mm	Ant 4	DSI 1	20525	836.5	22.05	23.00	1.245	0.03	0.347	0.432
	LTE Band 5	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 4	DSI 1	20525	836.5	23.15	24.00	1.216	-0.02	0.354	0.431
	LTE Band 5	10M	QPSK	25	0	-	Left Cheek	0mm	Ant 4	DSI 1	20525	836.5	22.05	23.00	1.245	0.01	0.278	0.346
	LTE Band 5	10M	QPSK	1	0	-	Left Tilted	0mm	Ant 4	DSI 1	20525	836.5	23.15	24.00	1.216	0.09	0.364	0.443
	LTE Band 5	10M	QPSK	25	0	-	Left Tilted	0mm	Ant 4	DSI 1	20525	836.5	22.05	23.00	1.245	-0.06	0.292	0.363
	FR1 n5	20M	QPSK	1	26	DFT-SCS-30KHz	Right Cheek	0mm	Ant 0	DSI 1	167300	836.5	23.99	25.00	1.262	0.02	0.119	0.150

Sporton International (Kunshan) Inc.

TEL : +86-512-57900158 / FAX : +86-512-57900958

FCC ID : 2AFZZ116AG

Issued Date : Oct. 09, 2021

Form version. : 200414



FCC SAR Test Report

Report No. : FA180507

	FR1 n5	20M	QPSK	25	13	DFT-SCS-30KHz	Right Cheek	0mm	Ant 0	DSI 1	167300	836.5	23.89	25.00	1.291	-0.19	0.124	0.160
	FR1 n5	20M	QPSK	1	26	DFT-SCS-30KHz	Right Tilted	0mm	Ant 0	DSI 1	167300	836.5	23.99	25.00	1.262	-0.19	0.075	0.095
	FR1 n5	20M	QPSK	25	13	DFT-SCS-30KHz	Right Tilted	0mm	Ant 0	DSI 1	167300	836.5	23.89	25.00	1.291	-0.07	0.072	0.093
	FR1 n5	20M	QPSK	1	26	DFT-SCS-30KHz	Left Cheek	0mm	Ant 0	DSI 1	167300	836.5	23.99	25.00	1.262	0.09	0.111	0.140
	FR1 n5	20M	QPSK	25	13	DFT-SCS-30KHz	Left Cheek	0mm	Ant 0	DSI 1	167300	836.5	23.89	25.00	1.291	0.03	0.110	0.142
	FR1 n5	20M	QPSK	1	26	DFT-SCS-30KHz	Left Tilted	0mm	Ant 0	DSI 1	167300	836.5	23.99	25.00	1.262	0.03	0.074	0.093
	FR1 n5	20M	QPSK	25	13	DFT-SCS-30KHz	Left Tilted	0mm	Ant 0	DSI 1	167300	836.5	23.89	25.00	1.291	0.06	0.078	0.101
05	FR1 n5	20M	QPSK	1	26	DFT-SCS-30KHz	Right Cheek	0mm	Ant 4	DSI 1	167300	836.5	22.99	24.00	1.262	0.01	0.431	0.544
	FR1 n5	20M	QPSK	25	13	DFT-SCS-30KHz	Right Cheek	0mm	Ant 4	DSI 1	167300	836.5	22.86	24.00	1.300	0.08	0.386	0.502
	FR1 n5	20M	QPSK	1	26	DFT-SCS-30KHz	Right Tilted	0mm	Ant 4	DSI 1	167300	836.5	22.99	24.00	1.262	0.06	0.341	0.430
	FR1 n5	20M	QPSK	25	13	DFT-SCS-30KHz	Right Tilted	0mm	Ant 4	DSI 1	167300	836.5	22.86	24.00	1.300	0.16	0.316	0.411
	FR1 n5	20M	QPSK	1	26	DFT-SCS-30KHz	Left Cheek	0mm	Ant 4	DSI 1	167300	836.5	22.99	24.00	1.262	-0.13	0.302	0.381
	FR1 n5	20M	QPSK	25	13	DFT-SCS-30KHz	Left Cheek	0mm	Ant 4	DSI 1	167300	836.5	22.86	24.00	1.300	0.02	0.290	0.377
	FR1 n5	20M	QPSK	1	26	DFT-SCS-30KHz	Left Tilted	0mm	Ant 4	DSI 1	167300	836.5	22.99	24.00	1.262	0.02	0.246	0.310
	FR1 n5	20M	QPSK	25	13	DFT-SCS-30KHz	Left Tilted	0mm	Ant 4	DSI 1	167300	836.5	22.86	24.00	1.300	0.01	0.250	0.325
1750MHz																		
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 1	DSI 1	1413	1732.6	23.98	25.00	1.265	0.08	0.127	0.161
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 1	DSI 1	1413	1732.6	23.98	25.00	1.265	-0.16	0.097	0.123
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 1	DSI 1	1413	1732.6	23.98	25.00	1.265	-0.13	0.178	0.225
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Left Tilted	0mm	Ant 1	DSI 1	1413	1732.6	23.98	25.00	1.265	0.01	0.110	0.139
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 2	DSI 1	1413	1732.6	23.50	24.50	1.259	0.02	0.008	0.010
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 2	DSI 1	1413	1732.6	23.50	24.50	1.259	0.01	0.006	0.008
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 2	DSI 1	1413	1732.6	23.50	24.50	1.259	-0.1	0.004	0.005
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Left Tilted	0mm	Ant 2	DSI 1	1413	1732.6	23.50	24.50	1.259	0.03	0.003	0.004
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 4	DSI 1	1413	1732.6	18.16	19.50	1.361	0.1	0.540	0.735
06	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 4	DSI 1	1413	1732.6	18.16	19.50	1.361	0.08	0.725	0.987
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 4	DSI 1	1312	1712.4	18.06	19.50	1.393	0.01	0.702	0.978
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 4	DSI 1	1513	1752.6	18.10	19.50	1.380	-0.02	0.698	0.964
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 4	DSI 1	1413	1732.6	18.16	19.50	1.361	-0.08	0.394	0.536
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Left Tilted	0mm	Ant 4	DSI 1	1413	1732.6	18.16	19.50	1.361	0.02	0.561	0.764
	LTE Band 66	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 1	132322	1745	24.52	25.50	1.253	-0.08	0.146	0.183
	LTE Band 66	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 1	DSI 1	132322	1745	23.46	24.50	1.271	-0.01	0.122	0.155
	LTE Band 66	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	DSI 1	132322	1745	24.52	25.50	1.253	0.04	0.109	0.137
	LTE Band 66	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 1	DSI 1	132322	1745	23.46	24.50	1.271	0.04	0.094	0.119
	LTE Band 66	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 1	132322	1745	24.52	25.50	1.253	-0.04	0.181	0.227
	LTE Band 66	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 1	DSI 1	132322	1745	23.46	24.50	1.271	0.19	0.151	0.192
	LTE Band 66	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 1	DSI 1	132322	1745	24.52	25.50	1.253	-0.05	0.121	0.152
	LTE Band 66	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 1	DSI 1	132322	1745	23.46	24.50	1.271	0.12	0.102	0.130
	LTE Band 66	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 2	DSI 1	132322	1745	23.58	24.50	1.236	0.02	0.006	0.007
	LTE Band 66	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 2	DSI 1	132322	1745	22.59	23.50	1.233	0.04	0.008	0.010
	LTE Band 66	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 2	DSI 1	132322	1745	23.58	24.50	1.236	-0.18	0.005	0.006
	LTE Band 66	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 2	DSI 1	132322	1745	22.59	23.50	1.233	-0.08	0.005	0.006
	LTE Band 66	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 2	DSI 1	132322	1745	23.58	24.50	1.236	0.07	0.004	0.005
	LTE Band 66	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 2	DSI 1	132322	1745	22.59	23.50	1.233	0.07	0.004	0.005
	LTE Band 66	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 2	DSI 1	132322	1745	23.58	24.50	1.236	0.08	0.006	0.007
	LTE Band 66	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 2	DSI 1	132322	1745	22.59	23.50	1.233	0.03	0.005	0.006
	LTE Band 66	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 4	DSI 1	132322	1745	18.88	20.00	1.294	0.06	0.543	0.703
	LTE Band 66	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 4	DSI 1	132322	1745	18.75	20.00	1.334	0.03	0.442	0.589
07	LTE Band 66	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 1	132322	1745	18.88	20.00	1.294	0.06	0.742	0.960
	LTE Band 66	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 1	132072	1720	18.58	20.00	1.387	0.02	0.691	0.958
	LTE Band 66	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 1	132572	1770	18.73	20.00	1.340	0.01	0.705	0.944
	LTE Band 66	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 4	DSI 1	132322	1745	18.75	20.00	1.334	-0.09	0.612	0.816
	LTE Band 66	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 4	DSI 1	132072	1720	18.52	20.00	1.406	0.02	0.643	0.904
	LTE Band 66	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 4	DSI 1	132572	1770	18.66	20.00	1.361	-0.01	0.657	0.894
	LTE Band 66	20M	QPSK	100	0	-	Right Tilted	0mm	Ant 4	DSI 1	132322	1745	18.61	20.00	1.377	0.03	0.689	0.949
	LTE Band 66	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 4	DSI 1	132322	1745	18.88	20.00	1.294	0.08	0.410	0.531

Sporton International (Kunshan) Inc.

TEL : +86-512-57900158 / FAX : +86-512-57900958

FCC ID : 2AFZZ116AG

Page 58 of 94

Issued Date : Oct. 09, 2021

Form version. : 200414



FCC SAR Test Report

Report No. : FA180507

	LTE Band 66	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 4	DSI 1	132322	1745	18.75	20.00	1.334	0.14	0.335	0.447
	LTE Band 66	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 4	DSI 1	132322	1745	18.88	20.00	1.294	0.15	0.572	0.740
	LTE Band 66	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 4	DSI 1	132322	1745	18.75	20.00	1.334	-0.06	0.474	0.632
	LTE Band 66_ENDC	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 1	132322	1745	15.90	17.00	1.288	0.05	0.366	0.471
	FR1 n66	40M	QPSK	1	53	DFT-SCS-30KHz	Right Cheek	0mm	Ant 1	DSI 1	349000	1745	24.44	25.50	1.276	-0.1	0.141	0.180
	FR1 n66	40M	QPSK	50	28	DFT-SCS-30KHz	Right Cheek	0mm	Ant 1	DSI 1	349000	1745	24.24	25.50	1.337	-0.07	0.156	0.209
	FR1 n66	40M	QPSK	1	53	DFT-SCS-30KHz	Right Tilted	0mm	Ant 1	DSI 1	349000	1745	24.44	25.50	1.276	0.13	0.126	0.161
	FR1 n66	40M	QPSK	50	28	DFT-SCS-30KHz	Right Tilted	0mm	Ant 1	DSI 1	349000	1745	24.24	25.50	1.337	-0.07	0.128	0.171
	FR1 n66	40M	QPSK	1	53	DFT-SCS-30KHz	Left Cheek	0mm	Ant 1	DSI 1	349000	1745	24.44	25.50	1.276	0.08	0.149	0.190
	FR1 n66	40M	QPSK	50	28	DFT-SCS-30KHz	Left Cheek	0mm	Ant 1	DSI 1	349000	1745	24.24	25.50	1.337	0.02	0.228	0.305
	FR1 n66	40M	QPSK	1	53	DFT-SCS-30KHz	Left Tilted	0mm	Ant 1	DSI 1	349000	1745	24.44	25.50	1.276	0.1	0.148	0.189
	FR1 n66	40M	QPSK	50	28	DFT-SCS-30KHz	Left Tilted	0mm	Ant 1	DSI 1	349000	1745	24.24	25.50	1.337	0.04	0.154	0.206
	FR1 n66	40M	QPSK	1	53	DFT-SCS-30KHz	Right Cheek	0mm	Ant 2	DSI 1	349000	1745	23.27	24.50	1.327	-0.05	0.006	0.008
	FR1 n66	40M	QPSK	50	28	DFT-SCS-30KHz	Right Cheek	0mm	Ant 2	DSI 1	349000	1745	23.02	24.50	1.406	0.05	0.007	0.010
	FR1 n66	40M	QPSK	1	53	DFT-SCS-30KHz	Right Tilted	0mm	Ant 2	DSI 1	349000	1745	23.27	24.50	1.327	-0.17	0.004	0.005
	FR1 n66	40M	QPSK	50	28	DFT-SCS-30KHz	Right Tilted	0mm	Ant 2	DSI 1	349000	1745	23.02	24.50	1.406	-0.03	0.004	0.006
	FR1 n66	40M	QPSK	1	53	DFT-SCS-30KHz	Left Cheek	0mm	Ant 2	DSI 1	349000	1745	23.27	24.50	1.327	-0.06	0.004	0.005
	FR1 n66	40M	QPSK	50	28	DFT-SCS-30KHz	Left Cheek	0mm	Ant 2	DSI 1	349000	1745	23.02	24.50	1.406	-0.02	0.003	0.004
	FR1 n66	40M	QPSK	1	53	DFT-SCS-30KHz	Left Tilted	0mm	Ant 2	DSI 1	349000	1745	23.27	24.50	1.327	0.07	0.003	0.004
	FR1 n66	40M	QPSK	50	28	DFT-SCS-30KHz	Left Tilted	0mm	Ant 2	DSI 1	349000	1745	23.02	24.50	1.406	0.06	0.003	0.004
	FR1 n66	40M	QPSK	1	53	DFT-SCS-30KHz	Right Cheek	0mm	Ant 4	DSI 1	349000	1745	18.75	20.00	1.334	0.03	0.554	0.739
	FR1 n66	40M	QPSK	50	28	DFT-SCS-30KHz	Right Cheek	0mm	Ant 4	DSI 1	349000	1745	18.73	20.00	1.340	0.03	0.576	0.772
	FR1 n66	40M	QPSK	1	53	DFT-SCS-30KHz	Right Tilted	0mm	Ant 4	DSI 1	349000	1745	18.75	20.00	1.334	-0.15	0.794	1.059
08	FR1 n66	40M	QPSK	50	28	DFT-SCS-30KHz	Right Tilted	0mm	Ant 4	DSI 1	349000	1745	18.73	20.00	1.340	0.09	0.802	1.074
	FR1 n66	40M	QPSK	100	0	DFT-SCS-30KHz	Right Tilted	0mm	Ant 4	DSI 1	349000	1745	18.60	20.00	1.380	0.05	0.774	1.068
	FR1 n66	40M	QPSK	1	53	DFT-SCS-30KHz	Left Cheek	0mm	Ant 4	DSI 1	349000	1745	18.75	20.00	1.334	0.04	0.334	0.445
	FR1 n66	40M	QPSK	50	28	DFT-SCS-30KHz	Left Cheek	0mm	Ant 4	DSI 1	349000	1745	18.73	20.00	1.340	0.16	0.364	0.488
	FR1 n66	40M	QPSK	1	53	DFT-SCS-30KHz	Left Tilted	0mm	Ant 4	DSI 1	349000	1745	18.75	20.00	1.334	-0.17	0.473	0.631
	FR1 n66	40M	QPSK	50	28	DFT-SCS-30KHz	Left Tilted	0mm	Ant 4	DSI 1	349000	1745	18.73	20.00	1.340	-0.04	0.493	0.660
	FR1 n66_ENDC	40M	QPSK	50	28	DFT-SCS-30KHz	Right Tilted	0mm	Ant 4	DSI 1	349000	1745	15.72	17.00	1.343	0.04	0.388	0.521
1900MHz																		
	GSM1900	-	-	-	-	GSM Voice	Right Cheek	0mm	Ant 1	DSI 1	661	1880	30.11	31.50	1.377	0.09	0.091	0.125
	GSM1900	-	-	-	-	GSM Voice	Right Tilted	0mm	Ant 1	DSI 1	661	1880	30.11	31.50	1.377	0.02	0.091	0.125
	GSM1900	-	-	-	-	GSM Voice	Left Cheek	0mm	Ant 1	DSI 1	661	1880	30.11	31.50	1.377	0.01	0.130	0.179
	GSM1900	-	-	-	-	GSM Voice	Left Tilted	0mm	Ant 1	DSI 1	661	1880	30.11	31.50	1.377	0.04	0.086	0.118
	GSM1900	-	-	-	-	GSM Voice	Right Cheek	0mm	Ant 2	DSI 1	661	1880	28.50	29.50	1.259	0.13	0.003	0.004
	GSM1900	-	-	-	-	GSM Voice	Right Tilted	0mm	Ant 2	DSI 1	661	1880	28.50	29.50	1.259	0.11	0.002	0.003
	GSM1900	-	-	-	-	GSM Voice	Left Cheek	0mm	Ant 2	DSI 1	661	1880	28.50	29.50	1.259	-0.08	0.001	0.001
	GSM1900	-	-	-	-	GSM Voice	Left Tilted	0mm	Ant 2	DSI 1	661	1880	28.50	29.50	1.259	0.03	0.033	0.042
	GSM1900	-	-	-	-	GSM Voice	Right Cheek	0mm	Ant 4	DSI 1	661	1880	26.20	27.00	1.202	-0.1	0.265	0.319
09	GSM1900	-	-	-	-	GSM Voice	Right Tilted	0mm	Ant 4	DSI 1	661	1880	26.20	27.00	1.202	0.01	0.349	0.420
	GSM1900	-	-	-	-	GSM Voice	Left Cheek	0mm	Ant 4	DSI 1	661	1880	26.20	27.00	1.202	0.04	0.190	0.228
	GSM1900	-	-	-	-	GSM Voice	Left Tilted	0mm	Ant 4	DSI 1	661	1880	26.20	27.00	1.202	-0.07	0.261	0.314
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 1	DSI 1	9400	1880	23.45	24.50	1.274	0.02	0.157	0.200
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 1	DSI 1	9400	1880	23.45	24.50	1.274	0.05	0.157	0.200
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 1	DSI 1	9400	1880	23.45	24.50	1.274	-0.12	0.250	0.318
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Left Tilted	0mm	Ant 1	DSI 1	9400	1880	23.45	24.50	1.274	0.17	0.185	0.236
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 4	DSI 1	9400	1880	19.26	19.50	1.057	0.05	0.558	0.590
10	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 4	DSI 1	9400	1880	19.26	19.50	1.057	0.01	0.822	0.869
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 4	DSI 1	9262	1852.4	18.95	19.50	1.135	0.02	0.757	0.859
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 4	DSI 1	9538	1907.6	19.07	19.50	1.104	-0.12	0.769	0.849
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 4	DSI 1	9400	1880	19.26	19.50	1.057	0.07	0.399	0.422
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Left Tilted	0mm	Ant 4	DSI 1	9400	1880	19.26	19.50	1.057	0.12	0.548	0.579
	LTE Band 2	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 1	18900	1880	23.43	24.50	1.279	-0.15	0.144	0.184
	LTE Band 2	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 1	DSI 1	18900	1880	22.08	23.50	1.387	-0.03	0.127	0.176
	LTE Band 2	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	DSI 1	18900	1880	23.43	24.50	1.279	0.09	0.134	0.171

Sporton International (Kunshan) Inc.

TEL : +86-512-57900158 / FAX : +86-512-57900958

FCC ID : 2AFZZ116AG

Issued Date : Oct. 09, 2021

Form version. : 200414



FCC SAR Test Report

Report No. : FA180507

	LTE Band 2	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 1	DSI 1	18900	1880	22.08	23.50	1.387	-0.05	0.117	0.162
	LTE Band 2	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 1	18900	1880	23.43	24.50	1.279	0.06	0.199	0.255
	LTE Band 2	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 1	DSI 1	18900	1880	22.08	23.50	1.387	0.02	0.184	0.255
	LTE Band 2	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 1	DSI 1	18900	1880	23.43	24.50	1.279	0.02	0.031	0.040
	LTE Band 2	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 1	DSI 1	18900	1880	22.08	23.50	1.387	-0.1	0.138	0.191
	LTE Band 2	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 4	DSI 1	18900	1880	19.08	19.50	1.102	0.14	0.454	0.500
	LTE Band 2	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 4	DSI 1	18900	1880	18.98	19.50	1.127	0.01	0.412	0.464
	LTE Band 2	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 1	18900	1880	19.08	19.50	1.102	0.02	0.736	0.811
11	LTE Band 2	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 1	18700	1860	18.92	19.50	1.143	0.09	0.746	0.853
	LTE Band 2	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 1	19100	1900	18.72	19.50	1.197	0.01	0.540	0.646
	LTE Band 2	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 4	DSI 1	18900	1880	18.98	19.50	1.127	-0.07	0.520	0.586
	LTE Band 2	20M	QPSK	100	0	-	Right Tilted	0mm	Ant 4	DSI 1	18900	1880	18.83	19.50	1.167	-0.1	0.569	0.664
	LTE Band 2	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 4	DSI 1	18900	1880	19.08	19.50	1.102	0.17	0.339	0.373
	LTE Band 2	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 4	DSI 1	18900	1880	18.98	19.50	1.127	0.09	0.307	0.346
	LTE Band 2	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 4	DSI 1	18900	1880	19.08	19.50	1.102	0.17	0.437	0.481
	LTE Band 2	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 4	DSI 1	18900	1880	18.98	19.50	1.127	-0.05	0.373	0.420
	LTE Band 2_ENDC	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 1	18700	1860	15.31	16.50	1.315	0.09	0.374	0.492



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
2600MHz																				
	LTE Band 7	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 0	DSI 1	21100	2535	24.12	25.00	1.225	-	-	0.06	0.143	0.175
	LTE Band 7	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 0	DSI 1	21100	2535	22.95	24.00	1.274	-	-	0.09	0.152	0.194
	LTE Band 7C	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 0	DSI 1	21100+21298	2535+2554.8	22.92	24.00	1.282	-	-	0.03	0.146	0.187
	LTE Band 7	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 0	DSI 1	21100	2535	24.12	25.00	1.225	-	-	0.05	0.077	0.094
	LTE Band 7	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 0	DSI 1	21100	2535	22.95	24.00	1.274	-	-	0.07	0.080	0.102
	LTE Band 7	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI 1	21100	2535	24.12	25.00	1.225	-	-	-0.04	0.132	0.162
	LTE Band 7	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 0	DSI 1	21100	2535	22.95	24.00	1.274	-	-	-0.02	0.135	0.172
	LTE Band 7	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 0	DSI 1	21100	2535	24.12	25.00	1.225	-	-	0.04	0.138	0.169
	LTE Band 7	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 0	DSI 1	21100	2535	22.95	24.00	1.274	-	-	0.08	0.149	0.190
	LTE Band 7	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 2	DSI 1	21100	2535	23.13	24.50	1.371	-	-	0.03	0.095	0.130
	LTE Band 7	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 2	DSI 1	21100	2535	22.13	23.50	1.371	-	-	-0.01	0.098	0.134
	LTE Band 7C	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 2	DSI 1	21100+21298	2535+2554.8	22.10	23.50	1.380	-	-	-0.01	0.088	0.121
	LTE Band 7	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 2	DSI 1	21100	2535	23.13	24.50	1.371	-	-	0.03	0.085	0.117
	LTE Band 7	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 2	DSI 1	21100	2535	22.13	23.50	1.371	-	-	0.07	0.078	0.107
	LTE Band 7	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 2	DSI 1	21100	2535	23.13	24.50	1.371	-	-	0.02	0.044	0.060
	LTE Band 7	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 2	DSI 1	21100	2535	22.13	23.50	1.371	-	-	0.05	0.044	0.060
	LTE Band 7	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 2	DSI 1	21100	2535	23.13	24.50	1.371	-	-	0.06	0.047	0.064
	LTE Band 7	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 2	DSI 1	21100	2535	22.13	23.50	1.371	-	-	0.16	0.051	0.070
	LTE Band 7	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 4	DSI 1	21100	2535	16.83	17.50	1.167	-	-	0.04	0.534	0.623
	LTE Band 7	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 4	DSI 1	21100	2535	16.77	17.50	1.183	-	-	0.08	0.472	0.558
	LTE Band 7	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 1	21100	2535	16.83	17.50	1.167	-	-	0.16	0.667	0.778
12	LTE Band 7	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 4	DSI 1	21100	2535	16.77	17.50	1.183	-	-	-0.04	0.672	0.795
	LTE Band 7C	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 4	DSI 1	21100+21298	2535+2554.8	16.63	17.50	1.222	-	-	0.01	0.644	0.787
	LTE Band 7	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 4	DSI 1	21100	2535	16.83	17.50	1.167	-	-	0.07	0.212	0.247
	LTE Band 7	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 4	DSI 1	21100	2535	16.77	17.50	1.183	-	-	0.13	0.213	0.252
	LTE Band 7	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 4	DSI 1	21100	2535	16.83	17.50	1.167	-	-	-0.07	0.272	0.317
	LTE Band 7	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 4	DSI 1	21100	2535	16.77	17.50	1.183	-	-	-0.11	0.272	0.322
	LTE Band 7_ENDC	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 4	DSI 1	21100	2535	13.69	14.50	1.205	-	-	0.01	0.412	0.496
	LTE Band 41	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 0	DSI 1	40620	2593	24.68	25.00	1.076	62.9	1.006	-0.08	0.062	0.067
	LTE Band 41	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 0	DSI 1	40620	2593	23.65	24.00	1.084	62.9	1.006	0.04	0.044	0.048
	LTE Band 41	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 0	DSI 1	40620	2593	24.68	25.00	1.076	62.9	1.006	0.06	0.044	0.048
	LTE Band 41	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 0	DSI 1	40620	2593	23.65	24.00	1.084	62.9	1.006	0.15	0.052	0.057
	LTE Band 41	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI 1	40620	2593	24.68	25.00	1.076	62.9	1.006	0.01	0.075	0.081
	LTE Band 38C	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI 1	37901+38099	2585.1+2604.9	24.50	25.00	1.122	62.9	1.006	0.01	0.067	0.076
	LTE Band 41	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 0	DSI 1	40620	2593	23.65	24.00	1.084	62.9	1.006	-0.07	0.060	0.065
	LTE Band 41	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 0	DSI 1	40620	2593	24.68	25.00	1.076	62.9	1.006	-0.02	0.071	0.077
	LTE Band 41	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 0	DSI 1	40620	2593	23.65	24.00	1.084	62.9	1.006	0.07	0.057	0.062
	LTE Band 41	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 2	DSI 1	40620	2593	21.98	23.00	1.265	62.9	1.006	0.16	0.047	0.060
	LTE Band 38C	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 2	DSI 1	37901+38099	2585.1+2604.9	21.69	23.00	1.352	62.9	1.006	0.01	0.036	0.049
	LTE Band 41	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 2	DSI 1	40620	2593	20.98	22.00	1.265	62.9	1.006	0.08	0.039	0.050
	LTE Band 41	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 2	DSI 1	40620	2593	21.98	23.00	1.265	62.9	1.006	-0.12	0.020	0.025
	LTE Band 41	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 2	DSI 1	40620	2593	20.98	22.00	1.265	62.9	1.006	-0.09	0.015	0.019
	LTE Band 41	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 2	DSI 1	40620	2593	21.98	23.00	1.265	62.9	1.006	0.06	0.040	0.051
	LTE Band 41	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 2	DSI 1	40620	2593	20.98	22.00	1.265	62.9	1.006	-0.12	0.038	0.048
	LTE Band 41	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 2	DSI 1	40620	2593	21.98	23.00	1.265	62.9	1.006	0.06	0.010	0.013
	LTE Band 41	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 2	DSI 1	40620	2593	20.98	22.00	1.265	62.9	1.006	0.04	0.005	0.006
	LTE Band 41	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 4	DSI 1	40620	2593	19.37	20.50	1.297	62.9	1.006	-0.04	0.326	0.425
	LTE Band 41	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 4	DSI 1	40620	2593	19.29	20.50	1.321	62.9	1.006	0.08	0.261	0.347
13	LTE Band 41	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 1	40620	2593	19.37	20.50	1.297	62.9	1.006	0.17	0.414	0.540
	LTE Band 38C	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 4	DSI 1	37901+38099	2585.1+2604.9	19.26	20.50	1.330	62.9	1.006	0.01	0.403	0.539



FCC SAR Test Report

Report No. : FA180507

	LTE Band 41	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 4	DSI 1	40620	2593	19.29	20.50	1.321	62.9	1.006	0.1	0.338	0.449
	LTE Band 41	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 4	DSI 1	40620	2593	19.37	20.50	1.297	62.9	1.006	0.09	0.111	0.145
	LTE Band 41	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 4	DSI 1	40620	2593	19.29	20.50	1.321	62.9	1.006	0.02	0.087	0.116
	LTE Band 41	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 4	DSI 1	40620	2593	19.37	20.50	1.297	62.9	1.006	-0.03	0.157	0.205
	LTE Band 41	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 4	DSI 1	40620	2593	19.29	20.50	1.321	62.9	1.006	0.13	0.126	0.167
	FR1 n7	20M	QPSK	1	26	DFT-SCS-30KHz	Right Cheek	0mm	Ant 0	DSI 1	507000	2535	23.68	25.00	1.355	-	-	0.04	0.091	0.123
	FR1 n7	20M	QPSK	25	13	DFT-SCS-30KHz	Right Cheek	0mm	Ant 0	DSI 1	507000	2535	23.49	25.00	1.416	-	-	0.09	0.105	0.149
	FR1 n7	20M	QPSK	1	26	DFT-SCS-30KHz	Right Tilted	0mm	Ant 0	DSI 1	507000	2535	23.68	25.00	1.355	-	-	-0.19	0.053	0.072
	FR1 n7	20M	QPSK	25	13	DFT-SCS-30KHz	Right Tilted	0mm	Ant 0	DSI 1	507000	2535	23.49	25.00	1.416	-	-	-0.13	0.058	0.082
	FR1 n7	20M	QPSK	1	26	DFT-SCS-30KHz	Left Cheek	0mm	Ant 0	DSI 1	507000	2535	23.68	25.00	1.355	-	-	0.1	0.040	0.054
	FR1 n7	20M	QPSK	25	13	DFT-SCS-30KHz	Left Cheek	0mm	Ant 0	DSI 1	507000	2535	23.49	25.00	1.416	-	-	0.03	0.069	0.098
	FR1 n7	20M	QPSK	1	26	DFT-SCS-30KHz	Left Tilted	0mm	Ant 0	DSI 1	507000	2535	23.68	25.00	1.355	-	-	0.08	0.082	0.111
	FR1 n7	20M	QPSK	25	13	DFT-SCS-30KHz	Left Tilted	0mm	Ant 0	DSI 1	507000	2535	23.49	25.00	1.416	-	-	-0.09	0.085	0.120
	FR1 n7	20M	QPSK	1	26	DFT-SCS-30KHz	Right Cheek	0mm	Ant 2	DSI 1	507000	2535	23.31	24.50	1.315	-	-	-0.08	0.092	0.121
	FR1 n7	20M	QPSK	25	13	DFT-SCS-30KHz	Right Cheek	0mm	Ant 2	DSI 1	507000	2535	23.11	24.50	1.377	-	-	0.03	0.085	0.117
	FR1 n7	20M	QPSK	1	26	DFT-SCS-30KHz	Right Tilted	0mm	Ant 2	DSI 1	507000	2535	23.31	24.50	1.315	-	-	-0.09	0.035	0.046
	FR1 n7	20M	QPSK	25	13	DFT-SCS-30KHz	Right Tilted	0mm	Ant 2	DSI 1	507000	2535	23.11	24.50	1.377	-	-	-0.05	0.032	0.044
	FR1 n7	20M	QPSK	1	26	DFT-SCS-30KHz	Left Cheek	0mm	Ant 2	DSI 1	507000	2535	23.31	24.50	1.315	-	-	0.02	0.031	0.041
	FR1 n7	20M	QPSK	25	13	DFT-SCS-30KHz	Left Cheek	0mm	Ant 2	DSI 1	507000	2535	23.11	24.50	1.377	-	-	0.04	0.022	0.030
	FR1 n7	20M	QPSK	1	26	DFT-SCS-30KHz	Left Tilted	0mm	Ant 2	DSI 1	507000	2535	23.31	24.50	1.315	-	-	0.08	0.017	0.022
	FR1 n7	20M	QPSK	25	13	DFT-SCS-30KHz	Left Tilted	0mm	Ant 2	DSI 1	507000	2535	23.11	24.50	1.377	-	-	-0.17	0.011	0.015
	FR1 n7	20M	QPSK	1	26	DFT-SCS-30KHz	Right Cheek	0mm	Ant 4	DSI 1	507000	2535	17.95	19.00	1.274	-	-	0.16	0.543	0.692
	FR1 n7	20M	QPSK	25	13	DFT-SCS-30KHz	Right Cheek	0mm	Ant 4	DSI 1	507000	2535	17.91	19.00	1.285	-	-	-0.18	0.535	0.688
14	FR1 n7	20M	QPSK	1	26	DFT-SCS-30KHz	Right Tilted	0mm	Ant 4	DSI 1	507000	2535	17.95	19.00	1.274	-	-	0.01	0.700	0.891
	FR1 n7	20M	QPSK	1	26	DFT-SCS-30KHz	Right Tilted	0mm	Ant 4	DSI 1	502000	2510	17.87	19.00	1.297	-	-	-0.03	0.668	0.867
	FR1 n7	20M	QPSK	1	26	DFT-SCS-30KHz	Right Tilted	0mm	Ant 4	DSI 1	512000	2560	17.87	19.00	1.297	-	-	0.02	0.660	0.856
	FR1 n7	20M	QPSK	25	13	DFT-SCS-30KHz	Right Tilted	0mm	Ant 4	DSI 1	507000	2535	17.91	19.00	1.285	-	-	0.09	0.668	0.859
	FR1 n7	20M	QPSK	25	13	DFT-SCS-30KHz	Right Tilted	0mm	Ant 4	DSI 1	502000	2510	17.80	19.00	1.318	-	-	0.05	0.660	0.870
	FR1 n7	20M	QPSK	25	13	DFT-SCS-30KHz	Right Tilted	0mm	Ant 4	DSI 1	512000	2560	17.88	19.00	1.294	-	-	0.08	0.656	0.849
	FR1 n7	20M	QPSK	50	0	DFT-SCS-30KHz	Right Tilted	0mm	Ant 4	DSI 1	507000	2535	17.85	19.00	1.303	-	-	0.03	0.664	0.865
	FR1 n7	20M	QPSK	1	26	DFT-SCS-30KHz	Left Cheek	0mm	Ant 4	DSI 1	507000	2535	17.95	19.00	1.274	-	-	-0.03	0.274	0.349
	FR1 n7	20M	QPSK	25	13	DFT-SCS-30KHz	Left Cheek	0mm	Ant 4	DSI 1	507000	2535	17.91	19.00	1.285	-	-	0.07	0.266	0.342
	FR1 n7	20M	QPSK	1	26	DFT-SCS-30KHz	Left Tilted	0mm	Ant 4	DSI 1	507000	2535	17.95	19.00	1.274	-	-	0.07	0.387	0.493
	FR1 n7	20M	QPSK	25	13	DFT-SCS-30KHz	Left Tilted	0mm	Ant 4	DSI 1	507000	2535	17.91	19.00	1.285	-	-	0.08	0.376	0.483
	FR1 n7_ENDC	20M	QPSK	1	26	DFT-SCS-30KHz	Right Tilted	0mm	Ant 4	DSI 1	507000	2535	14.83	16.00	1.309	-	-	0.05	0.338	0.443
	FR1 n41	100M	QPSK	1	137	DFT-SCS-30KHz	Right Cheek	0mm	Ant 0	DSI 1	518598	2592.99	25.26	25.50	1.057	-	-	-0.05	0.076	0.080
	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Right Cheek	0mm	Ant 0	DSI 1	518598	2592.99	25.15	25.50	1.084	-	-	-0.16	0.084	0.091
	FR1 n41	100M	QPSK	1	137	DFT-SCS-30KHz	Right Tilted	0mm	Ant 0	DSI 1	518598	2592.99	25.26	25.50	1.057	-	-	0.09	0.039	0.041
	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Right Tilted	0mm	Ant 0	DSI 1	518598	2592.99	25.15	25.50	1.084	-	-	0.06	0.054	0.059
	FR1 n41	100M	QPSK	1	137	DFT-SCS-30KHz	Left Cheek	0mm	Ant 0	DSI 1	518598	2592.99	25.26	25.50	1.057	-	-	0.02	0.063	0.067
	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Left Cheek	0mm	Ant 0	DSI 1	518598	2592.99	25.15	25.50	1.084	-	-	0.08	0.090	0.098
	FR1 n41	100M	QPSK	1	137	DFT-SCS-30KHz	Left Tilted	0mm	Ant 0	DSI 1	518598	2592.99	25.26	25.50	1.057	-	-	0.06	0.099	0.105
	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Left Tilted	0mm	Ant 0	DSI 1	518598	2592.99	25.15	25.50	1.084	-	-	-0.05	0.102	0.111
	FR1 n41	100M	QPSK	1	137	DFT-SCS-30KHz	Right Cheek	0mm	Ant 2	DSI 1	518598	2592.99	24.16	25.00	1.213	-	-	-0.05	0.068	0.083
	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Right Cheek	0mm	Ant 2	DSI 1	518598	2592.99	23.93	25.00	1.279	-	-	-0.06	0.061	0.078
	FR1 n41	100M	QPSK	1	137	DFT-SCS-30KHz	Right Tilted	0mm	Ant 2	DSI 1	518598	2592.99	24.16	25.00	1.213	-	-	-0.11	0.033	0.040
	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Right Tilted	0mm	Ant 2	DSI 1	518598	2592.99	23.93	25.00	1.279	-	-	-0.04	0.036	0.046
	FR1 n41	100M	QPSK	1	137	DFT-SCS-30KHz	Left Cheek	0mm	Ant 2	DSI 1	518598	2592.99	24.16	25.00	1.213	-	-	-0.03	0.036	0.044
	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Left Cheek	0mm	Ant 2	DSI 1	518598	2592.99	23.93	25.00	1.279	-	-	-0.13	0.032	0.041
	FR1 n41	100M	QPSK	1	137	DFT-SCS-30KHz	Left Tilted	0mm	Ant 2	DSI 1	518598	2592.99	24.16	25.00	1.213	-	-	0.14	0.018	0.022
	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Left Tilted	0mm	Ant 2	DSI 1	518598	2592.99	23.93	25.00	1.279	-	-	0.08	0.012	0.015
	FR1 n41	100M	QPSK	1	137	DFT-SCS-30KHz	Right Cheek	0mm	Ant 4	DSI 1	518598	2592.99	21.59	22.50	1.233	-	-	0.02	0.642	0.792
	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Right Cheek	0mm	Ant 4	DSI 1	518598	2592.99	21.56	22.50	1.242	-	-	0.12	0.652	0.810
	FR1 n41	100M	QPSK	270	0	DFT-SCS-30KHz	Right Cheek	0mm	Ant 4	DSI 1	518598	2592.99	21.53	22.50	1.250	-	-	0.12	0.589	0.736
	FR1 n41	100M	QPSK	1	137	DFT-SCS-30KHz	Right Tilted	0mm	Ant 4	DSI 1	518598	2592.99	21.59	22.50	1.233	-	-	0.03	0.789	0.973
15	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Right Tilted	0mm	Ant 4	DSI 1	518598	2592.99	21.56	22.50	1.242	-	-	-0.02	0.805	1.000

Sporton International (Kunshan) Inc.

TEL : +86-512-57900158 / FAX : +86-512-57900958

FCC ID : 2AFZZ116AG

Page 62 of 94

Issued Date : Oct. 09, 2021

Form version. : 200414



FCC SAR Test Report

Report No. : FA180507

	FR1 n41	100M	QPSK	270	0	DFT-SCS-30KHz	Right Tilted	0mm	Ant 4	DSI 1	518598	2592.99	21.53	22.50	1.250	-	-	0.08	0.763	0.954
	FR1 n41	100M	QPSK	1	137	DFT-SCS-30KHz	Left Cheek	0mm	Ant 4	DSI 1	518598	2592.99	21.59	22.50	1.233	-	-	-0.05	0.242	0.298
	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Left Cheek	0mm	Ant 4	DSI 1	518598	2592.99	21.56	22.50	1.242	-	-	0.05	0.257	0.319
	FR1 n41	100M	QPSK	1	137	DFT-SCS-30KHz	Left Tilted	0mm	Ant 4	DSI 1	518598	2592.99	21.59	22.50	1.233	-	-	-0.04	0.327	0.403
	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Left Tilted	0mm	Ant 4	DSI 1	518598	2592.99	21.56	22.50	1.242	-	-	0.15	0.340	0.422
	FR1 n41_ENDC	100M	QPSK	135	69	DFT-SCS-30KHz	Right Tilted	0mm	Ant 4	DSI 1	518598	2592.99	18.57	19.50	1.239	-	-	-0.02	0.380	0.471
3500MHz																				
	FR1 n77	100M	QPSK	1	137	DFT-SCS-30KHz	Right Cheek	0mm	Ant 1	DSI 1	656000	3840	22.61	23.50	1.227	-	-	-0.03	0.022	0.027
	FR1 n77	100M	QPSK	135	69	DFT-SCS-30KHz	Right Cheek	0mm	Ant 1	DSI 1	656000	3840	22.51	23.50	1.256	-	-	0.15	0.015	0.019
	FR1 n77	100M	QPSK	1	137	DFT-SCS-30KHz	Right Tilted	0mm	Ant 1	DSI 1	656000	3840	22.61	23.50	1.227	-	-	-0.06	0.056	0.069
	FR1 n77	100M	QPSK	135	69	DFT-SCS-30KHz	Right Tilted	0mm	Ant 1	DSI 1	656000	3840	22.51	23.50	1.256	-	-	0.02	0.019	0.024
	FR1 n77	100M	QPSK	1	137	DFT-SCS-30KHz	Left Cheek	0mm	Ant 1	DSI 1	656000	3840	22.61	23.50	1.227	-	-	-0.11	0.026	0.032
	FR1 n77	100M	QPSK	135	69	DFT-SCS-30KHz	Left Cheek	0mm	Ant 1	DSI 1	656000	3840	22.51	23.50	1.256	-	-	-0.17	0.019	0.024
	FR1 n77	100M	QPSK	1	137	DFT-SCS-30KHz	Left Tilted	0mm	Ant 1	DSI 1	656000	3840	22.61	23.50	1.227	-	-	0.06	0.045	0.055
	FR1 n77	100M	QPSK	135	69	DFT-SCS-30KHz	Left Tilted	0mm	Ant 1	DSI 1	656000	3840	22.51	23.50	1.256	-	-	-0.15	0.030	0.038
	FR1 n77	100M	QPSK	1	137	DFT-SCS-30KHz	Right Cheek	0mm	Ant 1	DSI 1	633334	3500.01	22.53	23.50	1.250	-	-	0.14	0.010	0.013
	FR1 n77	100M	QPSK	135	69	DFT-SCS-30KHz	Right Cheek	0mm	Ant 1	DSI 1	633334	3500.01	22.31	23.50	1.315	-	-	0.03	0.008	0.011
	FR1 n77	100M	QPSK	1	137	DFT-SCS-30KHz	Right Tilted	0mm	Ant 1	DSI 1	633334	3500.01	22.53	23.50	1.250	-	-	-0.01	0.052	0.065
	FR1 n77	100M	QPSK	135	69	DFT-SCS-30KHz	Right Tilted	0mm	Ant 1	DSI 1	633334	3500.01	22.31	23.50	1.315	-	-	0.13	0.049	0.064
	FR1 n77	100M	QPSK	1	137	DFT-SCS-30KHz	Left Cheek	0mm	Ant 1	DSI 1	633334	3500.01	22.53	23.50	1.250	-	-	0.01	0.037	0.046
	FR1 n77	100M	QPSK	135	69	DFT-SCS-30KHz	Left Cheek	0mm	Ant 1	DSI 1	633334	3500.01	22.31	23.50	1.315	-	-	0.01	0.000	0.000
	FR1 n77	100M	QPSK	1	137	DFT-SCS-30KHz	Left Tilted	0mm	Ant 1	DSI 1	633334	3500.01	22.53	23.50	1.250	-	-	0.08	0.041	0.051
	FR1 n77	100M	QPSK	135	69	DFT-SCS-30KHz	Left Tilted	0mm	Ant 1	DSI 1	633334	3500.01	22.31	23.50	1.315	-	-	-0.07	0.041	0.054
	FR1 n77	100M	QPSK	1	137	DFT-SCS-30KHz	Right Cheek	0mm	Ant 3	DSI 1	656000	3840	24.55	25.50	1.245	-	-	-0.05	0.617	0.768
	FR1 n77	100M	QPSK	135	69	DFT-SCS-30KHz	Right Cheek	0mm	Ant 3	DSI 1	656000	3840	24.44	25.50	1.276	-	-	-0.09	0.600	0.766
	FR1 n77	100M	QPSK	1	137	DFT-SCS-30KHz	Right Tilted	0mm	Ant 3	DSI 1	656000	3840	24.55	25.50	1.245	-	-	0.19	0.357	0.444
	FR1 n77	100M	QPSK	135	69	DFT-SCS-30KHz	Right Tilted	0mm	Ant 3	DSI 1	656000	3840	24.44	25.50	1.276	-	-	-0.17	0.369	0.471
	FR1 n77	100M	QPSK	1	137	DFT-SCS-30KHz	Left Cheek	0mm	Ant 3	DSI 1	656000	3840	24.55	25.50	1.245	-	-	-0.17	0.203	0.253
	FR1 n77	100M	QPSK	135	69	DFT-SCS-30KHz	Left Cheek	0mm	Ant 3	DSI 1	656000	3840	24.44	25.50	1.276	-	-	-0.13	0.226	0.288
	FR1 n77	100M	QPSK	1	137	DFT-SCS-30KHz	Left Tilted	0mm	Ant 3	DSI 1	656000	3840	24.55	25.50	1.245	-	-	-0.1	0.164	0.204
	FR1 n77	100M	QPSK	135	69	DFT-SCS-30KHz	Left Tilted	0mm	Ant 3	DSI 1	656000	3840	24.44	25.50	1.276	-	-	0.06	0.195	0.249
	FR1 n77_ENDC	100M	QPSK	1	137	DFT-SCS-30KHz	Right Cheek	0mm	Ant 3	DSI 1	656000	3840	21.63	22.50	1.222	-	-	0.05	0.299	0.365
	FR1 n77	100M	QPSK	1	137	DFT-SCS-30KHz	Right Cheek	0mm	Ant 3	DSI 1	633334	3500.01	24.47	25.50	1.268	-	-	0.06	0.664	0.842
	FR1 n77	100M	QPSK	135	69	DFT-SCS-30KHz	Right Cheek	0mm	Ant 3	DSI 1	633334	3500.01	24.29	25.50	1.321	-	-	0.18	0.607	0.802
	FR1 n77	100M	QPSK	270	0	DFT-SCS-30KHz	Right Cheek	0mm	Ant 3	DSI 1	633334	3500.01	23.38	24.50	1.294	-	-	0.02	0.633	0.819
	FR1 n77	100M	QPSK	1	137	DFT-SCS-30KHz	Right Tilted	0mm	Ant 3	DSI 1	633334	3500.01	24.47	25.50	1.268	-	-	0.09	0.566	0.717
	FR1 n77	100M	QPSK	135	69	DFT-SCS-30KHz	Right Tilted	0mm	Ant 3	DSI 1	633334	3500.01	24.29	25.50	1.321	-	-	0.05	0.534	0.706
	FR1 n77	100M	QPSK	1	137	DFT-SCS-30KHz	Left Cheek	0mm	Ant 3	DSI 1	633334	3500.01	24.47	25.50	1.268	-	-	-0.15	0.273	0.346
	FR1 n77	100M	QPSK	135	69	DFT-SCS-30KHz	Left Cheek	0mm	Ant 3	DSI 1	633334	3500.01	24.29	25.50	1.321	-	-	-0.12	0.273	0.361
	FR1 n77	100M	QPSK	1	137	DFT-SCS-30KHz	Left Tilted	0mm	Ant 3	DSI 1	633334	3500.01	24.47	25.50	1.268	-	-	0.18	0.225	0.285
	FR1 n77	100M	QPSK	135	69	DFT-SCS-30KHz	Left Tilted	0mm	Ant 3	DSI 1	633334	3500.01	24.29	25.50	1.321	-	-	-0.11	0.227	0.300
	FR1 n77_ENDC	100M	QPSK	1	137	DFT-SCS-30KHz	Right Cheek	0mm	Ant 3	DSI 1	633334	3500.01	21.59	22.50	1.233	-	-	-0.07	0.312	0.385
	FR1 n77	100M	QPSK	1	137	DFT-SCS-30KHz	Right Cheek	0mm	Ant 5	DSI 1	656000	3840	18.29	19.00	1.178	-	-	-0.11	0.413	0.486
	FR1 n77	100M	QPSK	135	69	DFT-SCS-30KHz	Right Cheek	0mm	Ant 5	DSI 1	656000	3840	18.28	19.00	1.180	-	-	-0.15	0.498	0.588
	FR1 n77	100M	QPSK	1	137	DFT-SCS-30KHz	Right Tilted	0mm	Ant 5	DSI 1	656000	3840	18.29	19.00	1.178	-	-	0.14	0.498	0.586
	FR1 n77	100M	QPSK	135	69	DFT-SCS-30KHz	Right Tilted	0mm	Ant 5	DSI 1	656000	3840	18.28	19.00	1.180	-	-	0.1	0.603	0.712
	FR1 n77	100M	QPSK	1	137	DFT-SCS-30KHz	Left Cheek	0mm	Ant 5	DSI 1	656000	3840	18.29	19.00	1.178	-	-	0.13	0.477	0.562
	FR1 n77	100M	QPSK	135	69	DFT-SCS-30KHz	Left Cheek	0mm	Ant 5	DSI 1	656000	3840	18.28	19.00	1.180	-	-	0.15	0.670	0.791
	FR1 n77	100M	QPSK	1	137	DFT-SCS-30KHz	Left Tilted	0mm	Ant 5	DSI 1	656000	3840	18.29	19.00	1.178	-	-	0.02	0.758	0.893
16	FR1 n77	100M	QPSK	135	69	DFT-SCS-30KHz	Left Tilted	0mm	Ant 5	DSI 1	656000	3840	18.28	19.00	1.180	-	-	-0.07	0.851	1.004
	FR1 n77	100M	QPSK	270	0	DFT-SCS-30KHz	Left Tilted	0mm	Ant 5	DSI 1	656000	3840	18.15	19.00	1.216	-	-	0.02	0.785	0.955
	FR1 n77_ENDC	100M	QPSK	135	69	DFT-SCS-30KHz	Left Tilted	0mm	Ant 5	DSI 1	656000	3840	15.14	16.00	1.219	-	-	-0.07	0.421	0.513
	FR1 n77	100M	QPSK	1	137	DFT-SCS-30KHz	Right Cheek	0mm	Ant 5	DSI 1	633334	3500.01	18.25	19.00	1.189	-	-	-0.05	0.336	0.399
	FR1 n77	100M	QPSK	135	69	DFT-SCS-30KHz	Right Cheek	0mm	Ant 5	DSI 1	633334	3500.01	18.24	19.00	1.191	-	-	-0.14	0.328	0.391
	FR1 n77	100M	QPSK	1	137	DFT-SCS-30KHz	Right Tilted	0mm	Ant 5	DSI 1	633334	3500.01	18.25	19.00	1.189	-	-	0.02	0.357	0.424
	FR1 n77	100M	QPSK	135	69	DFT-SCS-30KHz	Right Tilted	0mm	Ant 5	DSI 1	633334	3500.01	18.24	19.00	1.191	-	-	-0.08	0.386	0.460

Sporton International (Kunshan) Inc.

TEL : +86-512-57900158 / FAX : +86-512-57900958

FCC ID : 2AFZZ116AG

Page 63 of 94

Issued Date : Oct. 09, 2021

Form version. : 200414



FCC SAR Test Report

Report No. : FA180507

FR1 n77	100M	QPSK	1	137	DFT-SCS-30KHz	Left Cheek	0mm	Ant 5	DSI 1	633334	3500.01	18.25	19.00	1.189	-	-	-0.03	0.480	0.570
FR1 n77	100M	QPSK	135	69	DFT-SCS-30KHz	Left Cheek	0mm	Ant 5	DSI 1	633334	3500.01	18.24	19.00	1.191	-	-	0.16	0.670	0.798
FR1 n77	100M	QPSK	1	137	DFT-SCS-30KHz	Left Tilted	0mm	Ant 5	DSI 1	633334	3500.01	18.25	19.00	1.189	-	-	-0.01	0.502	0.597
FR1 n77	100M	QPSK	135	69	DFT-SCS-30KHz	Left Tilted	0mm	Ant 5	DSI 1	633334	3500.01	18.24	19.00	1.191	-	-	-0.1	0.684	0.815
FR1 n77	100M	QPSK	270	0	DFT-SCS-30KHz	Left Tilted	0mm	Ant 5	DSI 1	633334	3500.01	18.10	19.00	1.230	-	-	0.02	0.654	0.805
FR1 n77_ENDC	100M	QPSK	135	69	DFT-SCS-30KHz	Left Tilted	0mm	Ant 5	DSI 1	633334	3500.01	15.04	16.00	1.247	-	-	-0.02	0.334	0.417
FR1 n77	100M	QPSK	1	137	DFT-SCS-30KHz	Right Cheek	0mm	Ant 8	DSI 1	656000	3840	22.14	23.00	1.219	-	-	-0.02	0.102	0.124
FR1 n77	100M	QPSK	135	69	DFT-SCS-30KHz	Right Cheek	0mm	Ant 8	DSI 1	656000	3840	22.03	23.00	1.250	-	-	0.01	0.092	0.115
FR1 n77	100M	QPSK	1	137	DFT-SCS-30KHz	Right Tilted	0mm	Ant 8	DSI 1	656000	3840	22.14	23.00	1.219	-	-	0.02	0.085	0.104
FR1 n77	100M	QPSK	135	69	DFT-SCS-30KHz	Right Tilted	0mm	Ant 8	DSI 1	656000	3840	22.03	23.00	1.250	-	-	0.03	0.078	0.098
FR1 n77	100M	QPSK	1	137	DFT-SCS-30KHz	Left Cheek	0mm	Ant 8	DSI 1	656000	3840	22.14	23.00	1.219	-	-	-0.02	0.277	0.338
FR1 n77	100M	QPSK	135	69	DFT-SCS-30KHz	Left Cheek	0mm	Ant 8	DSI 1	656000	3840	22.03	23.00	1.250	-	-	0.1	0.245	0.306
FR1 n77	100M	QPSK	1	137	DFT-SCS-30KHz	Left Tilted	0mm	Ant 8	DSI 1	656000	3840	22.14	23.00	1.219	-	-	-0.15	0.164	0.200
FR1 n77	100M	QPSK	135	69	DFT-SCS-30KHz	Left Tilted	0mm	Ant 8	DSI 1	656000	3840	22.03	23.00	1.250	-	-	0.18	0.154	0.193
FR1 n77	100M	QPSK	1	137	DFT-SCS-30KHz	Right Cheek	0mm	Ant 8	DSI 1	633334	3500.01	22.12	23.00	1.225	-	-	0.04	0.051	0.062
FR1 n77	100M	QPSK	135	69	DFT-SCS-30KHz	Right Cheek	0mm	Ant 8	DSI 1	633334	3500.01	21.96	23.00	1.271	-	-	-0.08	0.040	0.051
FR1 n77	100M	QPSK	1	137	DFT-SCS-30KHz	Right Tilted	0mm	Ant 8	DSI 1	633334	3500.01	22.12	23.00	1.225	-	-	-0.07	0.036	0.044
FR1 n77	100M	QPSK	135	69	DFT-SCS-30KHz	Right Tilted	0mm	Ant 8	DSI 1	633334	3500.01	21.96	23.00	1.271	-	-	0.12	0.042	0.053
FR1 n77	100M	QPSK	1	137	DFT-SCS-30KHz	Left Cheek	0mm	Ant 8	DSI 1	633334	3500.01	22.12	23.00	1.225	-	-	0.07	0.248	0.304
FR1 n77	100M	QPSK	135	69	DFT-SCS-30KHz	Left Cheek	0mm	Ant 8	DSI 1	633334	3500.01	21.96	23.00	1.271	-	-	0.04	0.234	0.297
FR1 n77	100M	QPSK	1	137	DFT-SCS-30KHz	Left Tilted	0mm	Ant 8	DSI 1	633334	3500.01	22.12	23.00	1.225	-	-	0.13	0.055	0.067
FR1 n77	100M	QPSK	135	69	DFT-SCS-30KHz	Left Tilted	0mm	Ant 8	DSI 1	633334	3500.01	21.96	23.00	1.271	-	-	0.09	0.055	0.070



Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
2450MHz																
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Ant 6	Reduced	1	2412	16.44	16.50	1.014	100	1.000	0.02	0.141	0.143
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	Ant 6	Reduced	1	2412	16.44	16.50	1.014	100	1.000	0.01	0.172	0.174
17	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 6	Reduced	1	2412	16.44	16.50	1.014	100	1.000	0.03	0.447	0.453
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Ant 6	Reduced	1	2412	16.44	16.50	1.014	100	1.000	-0.07	0.365	0.370
	Bluetooth	1Mbps	Right Cheek	0mm	Ant 6	Full	39	2441	11.00	11.50	1.122	76.84	1.301	0.07	0.005	0.007
	Bluetooth	1Mbps	Right Tilted	0mm	Ant 6	Full	39	2441	11.00	11.50	1.122	76.84	1.301	0.03	0.002	0.003
18	Bluetooth	1Mbps	Left Cheek	0mm	Ant 6	Full	39	2441	11.00	11.50	1.122	76.84	1.301	0.08	0.035	0.051
	Bluetooth	1Mbps	Left Tilted	0mm	Ant 6	Full	39	2441	11.00	11.50	1.122	76.84	1.301	-0.06	0.031	0.045
5000MHz																
	WLAN5.3GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 6	Reduced	58	5290	10.45	11.50	1.274	100	1.000	-0.11	0.112	0.143
	WLAN5.3GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 6	Reduced	58	5290	10.45	11.50	1.274	100	1.000	0.03	0.148	0.188
	WLAN5.3GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 6	Reduced	58	5290	10.45	11.50	1.274	100	1.000	0.06	0.261	0.332
19	WLAN5.3GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 6	Reduced	58	5290	10.45	11.50	1.274	100	1.000	0.12	0.315	0.401
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 6	Reduced	138	5690	9.61	10.50	1.227	100	1.000	0.1	0.152	0.187
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 6	Reduced	138	5690	9.61	10.50	1.227	100	1.000	0.03	0.202	0.248
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 6	Reduced	138	5690	9.61	10.50	1.227	100	1.000	0.01	0.299	0.367
20	WLAN5.5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 6	Reduced	138	5690	9.61	10.50	1.227	100	1.000	0.04	0.351	0.431
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 6	Reduced	155	5775	10.12	11.50	1.374	100	1.000	-0.01	0.123	0.169
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 6	Reduced	155	5775	10.12	11.50	1.374	100	1.000	0.03	0.141	0.194
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 6	Reduced	155	5775	10.12	11.50	1.374	100	1.000	-0.05	0.257	0.353
21	WLAN5.8GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 6	Reduced	155	5775	10.12	11.50	1.374	100	1.000	0.01	0.357	0.491



15.2 Hotspot SAR

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
750MHz																		
	LTE Band 12	10M	QPSK	1	0	-	Front	10mm	Ant 0	DSI 3	23095	707.5	24.32	25.00	1.169	0.06	0.154	0.180
	LTE Band 12	10M	QPSK	25	0	-	Front	10mm	Ant 0	DSI 3	23095	707.5	23.27	24.00	1.183	0.05	0.120	0.142
22	LTE Band 12	10M	QPSK	1	0	-	Back	10mm	Ant 0	DSI 3	23095	707.5	24.32	25.00	1.169	-0.11	0.241	0.282
	LTE Band 12	10M	QPSK	25	0	-	Back	10mm	Ant 0	DSI 3	23095	707.5	23.27	24.00	1.183	-0.1	0.193	0.228
	LTE Band 12	10M	QPSK	1	0	-	Left Side	10mm	Ant 0	DSI 2	23095	707.5	24.32	25.00	1.169	0.08	0.163	0.191
	LTE Band 12	10M	QPSK	25	0	-	Left Side	10mm	Ant 0	DSI 2	23095	707.5	23.27	24.00	1.183	0.05	0.127	0.150
	LTE Band 12	10M	QPSK	1	0	-	Right Side	10mm	Ant 0	DSI 2	23095	707.5	24.32	25.00	1.169	0.07	0.221	0.258
	LTE Band 12	10M	QPSK	25	0	-	Right Side	10mm	Ant 0	DSI 2	23095	707.5	23.27	24.00	1.183	-0.04	0.173	0.205
	LTE Band 12	10M	QPSK	1	0	-	Bottom Side	10mm	Ant 0	DSI 3	23095	707.5	24.32	25.00	1.169	0.09	0.205	0.240
	LTE Band 12	10M	QPSK	25	0	-	Bottom Side	10mm	Ant 0	DSI 3	23095	707.5	23.27	24.00	1.183	0.11	0.165	0.195
	LTE Band 12	10M	QPSK	1	0	-	Front	10mm	Ant 4	DSI 4	23095	707.5	22.25	23.50	1.334	0.12	0.070	0.093
	LTE Band 12	10M	QPSK	25	0	-	Front	10mm	Ant 4	DSI 4	23095	707.5	22.24	22.50	1.062	0.16	0.056	0.059
	LTE Band 12	10M	QPSK	1	0	-	Back	10mm	Ant 4	DSI 4	23095	707.5	22.25	23.50	1.334	-0.17	0.103	0.137
	LTE Band 12	10M	QPSK	25	0	-	Back	10mm	Ant 4	DSI 4	23095	707.5	22.24	22.50	1.062	0.09	0.081	0.086
	LTE Band 12	10M	QPSK	1	0	-	Left Side	10mm	Ant 4	DSI 2	23095	707.5	22.25	23.50	1.334	0.12	0.112	0.149
	LTE Band 12	10M	QPSK	25	0	-	Left Side	10mm	Ant 4	DSI 2	23095	707.5	22.24	22.50	1.062	0.19	0.089	0.094
	LTE Band 12	10M	QPSK	1	0	-	Right Side	10mm	Ant 4	DSI 2	23095	707.5	22.25	23.50	1.334	0.19	0.074	0.099
	LTE Band 12	10M	QPSK	25	0	-	Right Side	10mm	Ant 4	DSI 2	23095	707.5	22.24	22.50	1.062	0.03	0.058	0.062
	LTE Band 12	10M	QPSK	1	0	-	Top Side	10mm	Ant 4	DSI 4	23095	707.5	22.25	23.50	1.334	0.03	0.076	0.101
	LTE Band 12	10M	QPSK	25	0	-	Top Side	10mm	Ant 4	DSI 4	23095	707.5	22.24	22.50	1.062	0.04	0.062	0.066
835MHz																		
	GSM850	-	-	-	-	GPRS (4 Tx slots)	Front	10mm	Ant 0	DSI 3	189	836.4	28.45	29.50	1.274	-0.09	0.367	0.467
23	GSM850	-	-	-	-	GPRS (4 Tx slots)	Back	10mm	Ant 0	DSI 3	189	836.4	28.45	29.50	1.274	-0.15	0.692	0.881
	GSM850	-	-	-	-	GPRS (4 Tx slots)	Back	10mm	Ant 0	DSI 3	128	824.2	28.34	29.50	1.306	0.01	0.632	0.826
	GSM850	-	-	-	-	GPRS (4 Tx slots)	Back	10mm	Ant 0	DSI 3	251	848.8	28.35	29.50	1.303	-0.02	0.666	0.868
	GSM850	-	-	-	-	GPRS (4 Tx slots)	Left Side	10mm	Ant 0	DSI 2	189	836.4	28.45	29.50	1.274	0.1	0.296	0.377
	GSM850	-	-	-	-	GPRS (4 Tx slots)	Right Side	10mm	Ant 0	DSI 2	189	836.4	28.45	29.50	1.274	0.08	0.375	0.478
	GSM850	-	-	-	-	GPRS (4 Tx slots)	Bottom Side	10mm	Ant 0	DSI 3	189	836.4	28.45	29.50	1.274	0.12	0.498	0.634
	GSM850	-	-	-	-	GPRS (4 Tx slots)	Front	10mm	Ant 4	DSI 4	189	836.4	27.35	28.50	1.303	0.06	0.263	0.343
	GSM850	-	-	-	-	GPRS (4 Tx slots)	Back	10mm	Ant 4	DSI 4	189	836.4	27.35	28.50	1.303	-0.07	0.355	0.463
	GSM850	-	-	-	-	GPRS (4 Tx slots)	Left Side	10mm	Ant 4	DSI 2	189	836.4	27.35	28.50	1.303	-0.16	0.118	0.154
	GSM850	-	-	-	-	GPRS (4 Tx slots)	Right Side	10mm	Ant 4	DSI 2	189	836.4	27.35	28.50	1.303	0.19	0.112	0.146
	GSM850	-	-	-	-	GPRS (4 Tx slots)	Top Side	10mm	Ant 4	DSI 4	189	836.4	27.35	28.50	1.303	0.18	0.261	0.340
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Front	10mm	Ant 0	DSI 3	4182	836.4	24.37	25.00	1.156	0.07	0.120	0.139
24	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	10mm	Ant 0	DSI 3	4182	836.4	24.37	25.00	1.156	-0.09	0.251	0.290
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Side	10mm	Ant 0	DSI 2	4182	836.4	25.04	25.50	1.112	-0.16	0.132	0.147
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Side	10mm	Ant 0	DSI 2	4182	836.4	25.04	25.50	1.112	0.05	0.165	0.183
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Bottom Side	10mm	Ant 0	DSI 3	4182	836.4	24.37	25.00	1.156	-0.19	0.207	0.239
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Bottom Side	15mm	Ant 0	DSI 2	4182	836.4	25.04	25.50	1.112	0.06	0.172	0.191
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Front	10mm	Ant 4	DSI 4	4182	836.4	23.57	24.50	1.239	-0.03	0.109	0.135
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	10mm	Ant 4	DSI 4	4182	836.4	23.57	24.50	1.239	0.07	0.126	0.156
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Side	10mm	Ant 4	DSI 2	4182	836.4	23.57	24.50	1.239	0.03	0.069	0.085
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Side	10mm	Ant 4	DSI 2	4182	836.4	23.57	24.50	1.239	0.09	0.067	0.083
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Top Side	10mm	Ant 4	DSI 4	4182	836.4	23.57	24.50	1.239	-0.08	0.135	0.167
	LTE Band 5	10M	QPSK	1	0	-	Front	10mm	Ant 0	DSI 3	20525	836.5	23.35	24.00	1.161	0.07	0.081	0.094
	LTE Band 5	10M	QPSK	25	0	-	Front	10mm	Ant 0	DSI 3	20525	836.5	23.14	24.00	1.219	-0.01	0.081	0.099
	LTE Band 5	10M	QPSK	1	0	-	Back	10mm	Ant 0	DSI 3	20525	836.5	23.35	24.00	1.161	0.05	0.156	0.181
25	LTE Band 5	10M	QPSK	25	0	-	Back	10mm	Ant 0	DSI 3	20525	836.5	23.14	24.00	1.219	-0.16	0.158	0.193
	LTE Band 5	10M	QPSK	1	0	-	Left Side	10mm	Ant 0	DSI 2	20525	836.5	24.32	25.00	1.169	0.01	0.076	0.089
	LTE Band 5	10M	QPSK	25	0	-	Left Side	10mm	Ant 0	DSI 2	20525	836.5	23.24	24.00	1.191	-0.08	0.064	0.076

Sporton International (Kunshan) Inc.

TEL : +86-512-57900158 / FAX : +86-512-57900958

FCC ID : 2AFZZ116AG

Page 66 of 94

Issued Date : Oct. 09, 2021

Form version. : 200414



FCC SAR Test Report

Report No. : FA180507

	LTE Band 5	10M	QPSK	1	0	-	Right Side	10mm	Ant 0	DSI 2	20525	836.5	24.32	25.00	1.169	-0.11	0.130	0.152
	LTE Band 5	10M	QPSK	25	0	-	Right Side	10mm	Ant 0	DSI 2	20525	836.5	23.24	24.00	1.191	-0.04	0.093	0.111
	LTE Band 5	10M	QPSK	1	0	-	Bottom Side	10mm	Ant 0	DSI 3	20525	836.5	23.35	24.00	1.161	-0.15	0.150	0.174
	LTE Band 5	10M	QPSK	25	0	-	Bottom Side	10mm	Ant 0	DSI 3	20525	836.5	23.14	24.00	1.219	0.02	0.152	0.185
	LTE Band 5	10M	QPSK	1	0	-	Bottom Side	15mm	Ant 0	DSI 2	20525	836.5	24.32	25.00	1.169	0.06	0.129	0.151
	LTE Band 5	10M	QPSK	1	0	-	Front	10mm	Ant 4	DSI 4	20525	836.5	23.15	24.00	1.216	0.03	0.112	0.136
	LTE Band 5	10M	QPSK	25	0	-	Front	10mm	Ant 4	DSI 4	20525	836.5	22.05	23.00	1.245	0.16	0.090	0.112
	LTE Band 5	10M	QPSK	1	0	-	Back	10mm	Ant 4	DSI 4	20525	836.5	23.15	24.00	1.216	0.03	0.127	0.154
	LTE Band 5	10M	QPSK	25	0	-	Back	10mm	Ant 4	DSI 4	20525	836.5	22.05	23.00	1.245	0.15	0.101	0.126
	LTE Band 5	10M	QPSK	1	0	-	Left Side	10mm	Ant 4	DSI 2	20525	836.5	23.15	24.00	1.216	-0.11	0.058	0.071
	LTE Band 5	10M	QPSK	25	0	-	Left Side	10mm	Ant 4	DSI 2	20525	836.5	22.05	23.00	1.245	0.02	0.049	0.061
	LTE Band 5	10M	QPSK	1	0	-	Right Side	10mm	Ant 4	DSI 2	20525	836.5	23.15	24.00	1.216	-0.19	0.053	0.064
	LTE Band 5	10M	QPSK	25	0	-	Right Side	10mm	Ant 4	DSI 2	20525	836.5	22.05	23.00	1.245	0.05	0.045	0.056
	LTE Band 5	10M	QPSK	1	0	-	Top Side	10mm	Ant 4	DSI 4	20525	836.5	23.15	24.00	1.216	0.01	0.113	0.137
	LTE Band 5	10M	QPSK	25	0	-	Top Side	10mm	Ant 4	DSI 4	20525	836.5	22.05	23.00	1.245	0.07	0.093	0.116
	FR1 n5	20M	QPSK	1	26	DFT-SCS-30KHz	Front	10mm	Ant 0	DSI 3	167300	836.5	23.99	25.00	1.262	-0.13	0.105	0.132
	FR1 n5	20M	QPSK	25	13	DFT-SCS-30KHz	Front	10mm	Ant 0	DSI 3	167300	836.5	23.89	25.00	1.291	-0.14	0.087	0.112
	FR1 n5	20M	QPSK	1	26	DFT-SCS-30KHz	Back	10mm	Ant 0	DSI 3	167300	836.5	23.99	25.00	1.262	0.06	0.230	0.290
26	FR1 n5	20M	QPSK	25	13	DFT-SCS-30KHz	Back	10mm	Ant 0	DSI 3	167300	836.5	23.89	25.00	1.291	0.05	0.253	0.327
	FR1 n5	20M	QPSK	1	26	DFT-SCS-30KHz	Left Side	10mm	Ant 0	DSI 2	167300	836.5	23.99	25.00	1.262	0.02	0.079	0.100
	FR1 n5	20M	QPSK	25	13	DFT-SCS-30KHz	Left Side	10mm	Ant 0	DSI 2	167300	836.5	23.89	25.00	1.291	0.02	0.074	0.096
	FR1 n5	20M	QPSK	1	26	DFT-SCS-30KHz	Right Side	10mm	Ant 0	DSI 2	167300	836.5	23.99	25.00	1.262	0.07	0.124	0.156
	FR1 n5	20M	QPSK	25	13	DFT-SCS-30KHz	Right Side	10mm	Ant 0	DSI 2	167300	836.5	23.89	25.00	1.291	0.04	0.127	0.164
	FR1 n5	20M	QPSK	1	26	DFT-SCS-30KHz	Bottom Side	10mm	Ant 0	DSI 3	167300	836.5	23.99	25.00	1.262	0.08	0.141	0.178
	FR1 n5	20M	QPSK	25	13	DFT-SCS-30KHz	Bottom Side	10mm	Ant 0	DSI 3	167300	836.5	23.89	25.00	1.291	-0.12	0.120	0.155
	FR1 n5	20M	QPSK	1	26	DFT-SCS-30KHz	Front	10mm	Ant 4	DSI 4	167300	836.5	22.99	24.00	1.262	0.11	0.096	0.121
	FR1 n5	20M	QPSK	25	13	DFT-SCS-30KHz	Front	10mm	Ant 4	DSI 4	167300	836.5	22.86	24.00	1.300	0.06	0.106	0.138
	FR1 n5	20M	QPSK	1	26	DFT-SCS-30KHz	Back	10mm	Ant 4	DSI 4	167300	836.5	22.99	24.00	1.262	-0.02	0.132	0.167
	FR1 n5	20M	QPSK	25	13	DFT-SCS-30KHz	Back	10mm	Ant 4	DSI 4	167300	836.5	22.86	24.00	1.300	-0.07	0.137	0.178
	FR1 n5	20M	QPSK	1	26	DFT-SCS-30KHz	Left Side	10mm	Ant 4	DSI 2	167300	836.5	22.99	24.00	1.262	-0.15	0.078	0.098
	FR1 n5	20M	QPSK	25	13	DFT-SCS-30KHz	Left Side	10mm	Ant 4	DSI 2	167300	836.5	22.86	24.00	1.300	0.02	0.055	0.072
	FR1 n5	20M	QPSK	1	26	DFT-SCS-30KHz	Right Side	10mm	Ant 4	DSI 2	167300	836.5	22.99	24.00	1.262	0.02	0.056	0.071
	FR1 n5	20M	QPSK	25	13	DFT-SCS-30KHz	Right Side	10mm	Ant 4	DSI 2	167300	836.5	22.86	24.00	1.300	0.06	0.051	0.066
	FR1 n5	20M	QPSK	1	26	DFT-SCS-30KHz	Top Side	10mm	Ant 4	DSI 4	167300	836.5	22.99	24.00	1.262	0.08	0.094	0.119
	FR1 n5	20M	QPSK	25	13	DFT-SCS-30KHz	Top Side	10mm	Ant 4	DSI 4	167300	836.5	22.86	24.00	1.300	0.05	0.097	0.126



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
1750MHz																		
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Front	10mm	Ant 1	DSI 3	1413	1732.6	22.03	23.00	1.250	0.18	0.227	0.284
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	10mm	Ant 1	DSI 3	1413	1732.6	22.03	23.00	1.250	-0.16	0.355	0.444
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Left Side	10mm	Ant 1	DSI 2	1413	1732.6	23.98	25.00	1.265	0.13	0.263	0.333
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Bottom Side	10mm	Ant 1	DSI 3	1413	1732.6	22.03	23.00	1.250	0.05	0.314	0.393
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Bottom Side	15mm	Ant 1	DSI 2	1413	1732.6	23.98	25.00	1.265	0.06	0.300	0.379
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Front	10mm	Ant 2	DSI 4	1413	1732.6	23.50	24.50	1.259	0.03	0.003	0.004
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	10mm	Ant 2	DSI 4	1413	1732.6	23.50	24.50	1.259	0.04	0.043	0.054
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Left Side	10mm	Ant 2	DSI 2	1413	1732.6	23.50	24.50	1.259	0.06	0.020	0.025
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Top Side	10mm	Ant 2	DSI 4	1413	1732.6	23.50	24.50	1.259	0.04	0.013	0.016
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Front	10mm	Ant 4	DSI 4	1413	1732.6	22.29	23.50	1.321	-0.19	0.324	0.428
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	10mm	Ant 4	DSI 4	1413	1732.6	22.29	23.50	1.321	0.13	0.363	0.480
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Left Side	10mm	Ant 4	DSI 2	1413	1732.6	23.39	24.50	1.291	0.13	0.125	0.161
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Side	10mm	Ant 4	DSI 2	1413	1732.6	23.39	24.50	1.291	0.01	0.121	0.156
27	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Top Side	10mm	Ant 4	DSI 4	1413	1732.6	22.29	23.50	1.321	-0.06	0.568	0.750
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Top Side	15mm	Ant 4	DSI 2	1413	1732.6	23.39	24.50	1.291	0.02	0.445	0.575
	LTE Band 66	20M	QPSK	1	0	-	Front	10mm	Ant 1	DSI 3	132322	1745	22.56	23.50	1.242	0.07	0.189	0.235
	LTE Band 66	20M	QPSK	50	0	-	Front	10mm	Ant 1	DSI 3	132322	1745	22.33	23.50	1.309	0.06	0.187	0.245
	LTE Band 66	20M	QPSK	1	0	-	Back	10mm	Ant 1	DSI 3	132322	1745	22.56	23.50	1.242	-0.1	0.310	0.385
	LTE Band 66	20M	QPSK	50	0	-	Back	10mm	Ant 1	DSI 3	132322	1745	22.33	23.50	1.309	0.03	0.285	0.373
	LTE Band 66	20M	QPSK	1	0	-	Left Side	10mm	Ant 1	DSI 2	132322	1745	24.52	25.50	1.253	0.11	0.263	0.330
	LTE Band 66	20M	QPSK	50	0	-	Left Side	10mm	Ant 1	DSI 2	132322	1745	23.46	24.50	1.271	-0.13	0.185	0.235
	LTE Band 66	20M	QPSK	1	0	-	Bottom Side	10mm	Ant 1	DSI 3	132322	1745	22.56	23.50	1.242	0.09	0.237	0.294
	LTE Band 66	20M	QPSK	50	0	-	Bottom Side	10mm	Ant 1	DSI 3	132322	1745	22.33	23.50	1.309	0.01	0.237	0.310
	LTE Band 66	20M	QPSK	1	0	-	Bottom Side	15mm	Ant 1	DSI 2	132322	1745	24.52	25.50	1.253	0.01	0.270	0.338
	LTE Band 66	20M	QPSK	1	0	-	Front	10mm	Ant 2	DSI 4	132322	1745	23.58	24.50	1.236	-0.08	0.026	0.032
	LTE Band 66	20M	QPSK	50	0	-	Front	10mm	Ant 2	DSI 4	132322	1745	22.59	23.50	1.233	-0.19	0.022	0.027
	LTE Band 66	20M	QPSK	1	0	-	Back	10mm	Ant 2	DSI 4	132322	1745	23.58	24.50	1.236	-0.03	0.041	0.051
	LTE Band 66	20M	QPSK	50	0	-	Back	10mm	Ant 2	DSI 4	132322	1745	22.59	23.50	1.233	-0.17	0.034	0.042
	LTE Band 66	20M	QPSK	1	0	-	Left Side	10mm	Ant 2	DSI 2	132322	1745	23.58	24.50	1.236	0.16	0.021	0.026
	LTE Band 66	20M	QPSK	50	0	-	Left Side	10mm	Ant 2	DSI 2	132322	1745	22.59	23.50	1.233	0.03	0.017	0.021
	LTE Band 66	20M	QPSK	1	0	-	Top Side	10mm	Ant 2	DSI 4	132322	1745	23.58	24.50	1.236	0.08	0.004	0.005
	LTE Band 66	20M	QPSK	50	0	-	Top Side	10mm	Ant 2	DSI 4	132322	1745	22.59	23.50	1.233	0.05	0.004	0.005
	LTE Band 66	20M	QPSK	1	0	-	Front	10mm	Ant 4	DSI 4	132322	1745	22.94	24.00	1.276	0.08	0.348	0.444
	LTE Band 66	20M	QPSK	50	0	-	Front	10mm	Ant 4	DSI 4	132322	1745	21.87	23.00	1.297	0.18	0.277	0.359
	LTE Band 66	20M	QPSK	1	0	-	Back	10mm	Ant 4	DSI 4	132322	1745	22.94	24.00	1.276	-0.13	0.398	0.508
	LTE Band 66	20M	QPSK	50	0	-	Back	10mm	Ant 4	DSI 4	132322	1745	21.87	23.00	1.297	0.01	0.328	0.425
	LTE Band 66	20M	QPSK	1	0	-	Left Side	10mm	Ant 4	DSI 2	132322	1745	22.94	24.00	1.276	-0.12	0.087	0.111
	LTE Band 66	20M	QPSK	50	0	-	Left Side	10mm	Ant 4	DSI 2	132322	1745	21.87	23.00	1.297	0.06	0.072	0.093
	LTE Band 66	20M	QPSK	1	0	-	Right Side	10mm	Ant 4	DSI 2	132322	1745	22.94	24.00	1.276	0.11	0.071	0.091
	LTE Band 66	20M	QPSK	50	0	-	Right Side	10mm	Ant 4	DSI 2	132322	1745	21.87	23.00	1.297	-0.07	0.058	0.075
28	LTE Band 66	20M	QPSK	1	0	-	Top Side	10mm	Ant 4	DSI 4	132322	1745	22.94	24.00	1.276	-0.04	0.673	0.859
	LTE Band 66	20M	QPSK	1	0	-	Top Side	10mm	Ant 4	DSI 4	132072	1720	22.73	24.00	1.340	0.01	0.569	0.762
	LTE Band 66	20M	QPSK	1	0	-	Top Side	10mm	Ant 4	DSI 4	132572	1770	22.87	24.00	1.297	0.04	0.638	0.828
	LTE Band 66	20M	QPSK	50	0	-	Top Side	10mm	Ant 4	DSI 4	132322	1745	21.87	23.00	1.297	0.09	0.486	0.630
	LTE Band 66	20M	QPSK	100	0	-	Top Side	10mm	Ant 4	DSI 4	132322	1745	22.05	23.00	1.245	0.02	0.572	0.712
	LTE Band 66_ENDC	20M	QPSK	1	0	-	Top Side	10mm	Ant 4	DSI 4	132322	1745	19.92	21.00	1.282	-0.04	0.337	0.432
	FR1 n66	40M	QPSK	1	53	DFT-SCS-30KHz	Front	10mm	Ant 1	DSI 3	349000	1745	22.58	23.50	1.236	0.05	0.307	0.379
	FR1 n66	40M	QPSK	50	28	DFT-SCS-30KHz	Front	10mm	Ant 1	DSI 3	349000	1745	22.43	23.50	1.279	0.07	0.210	0.269
	FR1 n66	40M	QPSK	1	53	DFT-SCS-30KHz	Back	10mm	Ant 1	DSI 3	349000	1745	22.58	23.50	1.236	0.14	0.297	0.367
	FR1 n66	40M	QPSK	50	28	DFT-SCS-30KHz	Back	10mm	Ant 1	DSI 3	349000	1745	22.43	23.50	1.279	-0.03	0.390	0.499
	FR1 n66	40M	QPSK	1	53	DFT-SCS-30KHz	Left Side	10mm	Ant 1	DSI 2	349000	1745	24.44	25.50	1.276	0.09	0.246	0.314
	FR1 n66	40M	QPSK	50	28	DFT-SCS-30KHz	Left Side	10mm	Ant 1	DSI 2	349000	1745	24.24	25.50	1.337	-0.15	0.269	0.360



FCC SAR Test Report

Report No. : FA180507

	FR1 n66	40M	QPSK	1	53	DFT-SCS-30KHz	Bottom Side	10mm	Ant 1	DSI 3	349000	1745	22.58	23.50	1.236	0.03	0.232	0.287
	FR1 n66	40M	QPSK	50	28	DFT-SCS-30KHz	Bottom Side	10mm	Ant 1	DSI 3	349000	1745	22.43	23.50	1.279	0.05	0.242	0.310
	FR1 n66	40M	QPSK	1	53	DFT-SCS-30KHz	Bottom Side	15mm	Ant 1	DSI 2	349000	1745	24.44	25.50	1.276	0.03	0.257	0.328
	FR1 n66	40M	QPSK	1	53	DFT-SCS-30KHz	Front	10mm	Ant 2	DSI 4	349000	1745	23.27	24.50	1.327	0.16	0.004	0.005
	FR1 n66	40M	QPSK	50	28	DFT-SCS-30KHz	Front	10mm	Ant 2	DSI 4	349000	1745	23.02	24.50	1.406	0.04	0.004	0.006
	FR1 n66	40M	QPSK	1	53	DFT-SCS-30KHz	Back	10mm	Ant 2	DSI 4	349000	1745	23.27	24.50	1.327	0.02	0.044	0.058
	FR1 n66	40M	QPSK	50	28	DFT-SCS-30KHz	Back	10mm	Ant 2	DSI 4	349000	1745	23.02	24.50	1.406	-0.04	0.046	0.065
	FR1 n66	40M	QPSK	1	53	DFT-SCS-30KHz	Left Side	10mm	Ant 2	DSI 2	349000	1745	23.27	24.50	1.327	0.12	0.022	0.029
	FR1 n66	40M	QPSK	50	28	DFT-SCS-30KHz	Left Side	10mm	Ant 2	DSI 2	349000	1745	23.02	24.50	1.406	0.08	0.026	0.037
	FR1 n66	40M	QPSK	1	53	DFT-SCS-30KHz	Top Side	10mm	Ant 2	DSI 4	349000	1745	23.27	24.50	1.327	-0.04	0.002	0.003
	FR1 n66	40M	QPSK	50	28	DFT-SCS-30KHz	Top Side	10mm	Ant 2	DSI 4	349000	1745	23.02	24.50	1.406	0.07	0.000	0.000
	FR1 n66	40M	QPSK	1	53	DFT-SCS-30KHz	Front	10mm	Ant 4	DSI 4	349000	1745	22.64	24.00	1.368	-0.07	0.280	0.383
	FR1 n66	40M	QPSK	50	28	DFT-SCS-30KHz	Front	10mm	Ant 4	DSI 4	349000	1745	22.54	24.00	1.400	-0.07	0.318	0.445
	FR1 n66	40M	QPSK	1	53	DFT-SCS-30KHz	Back	10mm	Ant 4	DSI 4	349000	1745	22.64	24.00	1.368	0.06	0.301	0.412
	FR1 n66	40M	QPSK	50	28	DFT-SCS-30KHz	Back	10mm	Ant 4	DSI 4	349000	1745	22.54	24.00	1.400	0.03	0.365	0.511
	FR1 n66	40M	QPSK	1	53	DFT-SCS-30KHz	Left Side	10mm	Ant 4	DSI 2	349000	1745	22.64	24.00	1.368	0.08	0.075	0.103
	FR1 n66	40M	QPSK	50	28	DFT-SCS-30KHz	Left Side	10mm	Ant 4	DSI 2	349000	1745	22.54	24.00	1.400	-0.07	0.095	0.133
	FR1 n66	40M	QPSK	1	53	DFT-SCS-30KHz	Right Side	10mm	Ant 4	DSI 2	349000	1745	22.64	24.00	1.368	0.17	0.070	0.096
	FR1 n66	40M	QPSK	50	28	DFT-SCS-30KHz	Right Side	10mm	Ant 4	DSI 2	349000	1745	22.54	24.00	1.400	0.05	0.086	0.120
29	FR1 n66	40M	QPSK	1	53	DFT-SCS-30KHz	Top Side	10mm	Ant 4	DSI 4	349000	1745	22.64	24.00	1.368	0.01	0.745	1.019
	FR1 n66	40M	QPSK	50	28	DFT-SCS-30KHz	Top Side	10mm	Ant 4	DSI 4	349000	1745	22.54	24.00	1.400	0.07	0.563	0.788
	FR1 n66	40M	QPSK	100	0	DFT-SCS-30KHz	Top Side	10mm	Ant 4	DSI 4	349000	1745	21.51	23.00	1.409	0.04	0.581	0.819
	FR1 n66_ENDC	40M	QPSK	1	53	DFT-SCS-30KHz	Top Side	10mm	Ant 4	DSI 4	349000	1745	19.86	21.00	1.300	0.09	0.389	0.506



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
1900MHz																		
30	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Front	10mm	Ant 1	DSI 3	661	1880	29.33	30.50	1.309	0.09	0.409	0.535
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Back	10mm	Ant 1	DSI 3	661	1880	29.33	30.50	1.309	-0.02	0.656	0.859
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Back	10mm	Ant 1	DSI 3	512	1850.2	29.23	30.50	1.340	0.05	0.614	0.823
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Back	10mm	Ant 1	DSI 3	810	1909.8	29.01	30.50	1.409	0.03	0.586	0.826
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Left Side	10mm	Ant 1	DSI 2	661	1880	29.33	30.50	1.309	0.08	0.342	0.448
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Bottom Side	10mm	Ant 1	DSI 3	661	1880	29.33	30.50	1.309	-0.08	0.431	0.564
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Front	10mm	Ant 2	DSI 4	661	1880	27.73	28.50	1.194	0.09	0.002	0.002
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Back	10mm	Ant 2	DSI 4	661	1880	27.73	28.50	1.194	-0.12	0.011	0.013
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Left Side	10mm	Ant 2	DSI 2	661	1880	27.73	28.50	1.194	0.12	0.004	0.005
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Top Side	10mm	Ant 2	DSI 4	661	1880	27.73	28.50	1.194	0.07	0.006	0.007
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Front	10mm	Ant 4	DSI 4	661	1880	27.22	28.50	1.343	0.07	0.146	0.196
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Back	10mm	Ant 4	DSI 4	661	1880	27.22	28.50	1.343	-0.11	0.160	0.215
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Left Side	10mm	Ant 4	DSI 2	661	1880	27.22	28.50	1.343	-0.19	0.029	0.039
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Right Side	10mm	Ant 4	DSI 2	661	1880	27.22	28.50	1.343	-0.15	0.032	0.043
	GSM1900	-	-	-	-	GPRS (2 Tx slots)	Top Side	10mm	Ant 4	DSI 4	661	1880	27.22	28.50	1.343	0.08	0.359	0.482
31	WCDMA II	-	-	-	-	RMC 12.2Kbps	Front	10mm	Ant 1	DSI 3	9400	1880	21.53	22.50	1.250	0.07	0.296	0.370
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	10mm	Ant 1	DSI 3	9400	1880	21.53	22.50	1.250	-0.04	0.479	0.599
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Left Side	10mm	Ant 1	DSI 2	9400	1880	23.45	24.50	1.274	-0.03	0.346	0.441
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	10mm	Ant 1	DSI 3	9400	1880	21.53	22.50	1.250	-0.1	0.331	0.414
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	15mm	Ant 1	DSI 2	9400	1880	23.45	24.50	1.274	0.05	0.321	0.409
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Front	10mm	Ant 4	DSI 4	9400	1880	22.87	23.00	1.030	-0.08	0.286	0.295
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	10mm	Ant 4	DSI 4	9400	1880	22.87	23.00	1.030	0.18	0.337	0.347
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Left Side	10mm	Ant 4	DSI 2	9400	1880	25.20	25.50	1.072	0.1	0.168	0.180
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Side	10mm	Ant 4	DSI 2	9400	1880	25.20	25.50	1.072	0.05	0.194	0.208
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Top Side	10mm	Ant 4	DSI 4	9400	1880	22.87	23.00	1.030	-0.13	0.691	0.712
32	WCDMA II	-	-	-	-	RMC 12.2Kbps	Top Side	15mm	Ant 4	DSI 2	9400	1880	25.20	25.50	1.072	0.06	0.662	0.709
	LTE Band 2	20M	QPSK	1	0	-	Front	10mm	Ant 1	DSI 3	18900	1880	21.36	22.50	1.300	0.03	0.279	0.363
	LTE Band 2	20M	QPSK	50	0	-	Front	10mm	Ant 1	DSI 3	18900	1880	21.29	22.50	1.321	0.05	0.286	0.378
	LTE Band 2	20M	QPSK	1	0	-	Back	10mm	Ant 1	DSI 3	18900	1880	21.36	22.50	1.300	0.02	0.436	0.567
	LTE Band 2	20M	QPSK	50	0	-	Back	10mm	Ant 1	DSI 3	18900	1880	21.29	22.50	1.321	-0.08	0.443	0.585
	LTE Band 2	20M	QPSK	1	0	-	Left Side	10mm	Ant 1	DSI 2	18900	1880	23.43	24.50	1.279	0.04	0.369	0.472
	LTE Band 2	20M	QPSK	50	0	-	Left Side	10mm	Ant 1	DSI 2	18900	1880	22.08	23.50	1.387	0.02	0.296	0.410
	LTE Band 2	20M	QPSK	1	0	-	Bottom Side	10mm	Ant 1	DSI 3	18900	1880	21.36	22.50	1.300	0.18	0.346	0.450
	LTE Band 2	20M	QPSK	50	0	-	Bottom Side	10mm	Ant 1	DSI 3	18900	1880	21.29	22.50	1.321	0.08	0.335	0.443
	LTE Band 2	20M	QPSK	1	0	-	Bottom Side	15mm	Ant 1	DSI 2	18900	1880	23.43	24.50	1.279	0.01	0.276	0.353
	LTE Band 2	20M	QPSK	1	0	-	Front	10mm	Ant 4	DSI 4	18900	1880	22.57	23.00	1.104	0.07	0.251	0.277
	LTE Band 2	20M	QPSK	50	0	-	Front	10mm	Ant 4	DSI 4	18900	1880	22.47	23.00	1.130	0.04	0.200	0.226
	LTE Band 2	20M	QPSK	1	0	-	Back	10mm	Ant 4	DSI 4	18900	1880	22.57	23.00	1.104	-0.06	0.318	0.351
	LTE Band 2	20M	QPSK	50	0	-	Back	10mm	Ant 4	DSI 4	18900	1880	22.47	23.00	1.130	0.07	0.244	0.276
	LTE Band 2	20M	QPSK	1	0	-	Left Side	10mm	Ant 4	DSI 2	18900	1880	24.73	25.50	1.194	0.04	0.112	0.134
	LTE Band 2	20M	QPSK	50	0	-	Left Side	10mm	Ant 4	DSI 2	18900	1880	23.69	24.50	1.205	0.05	0.089	0.107
	LTE Band 2	20M	QPSK	1	0	-	Right Side	10mm	Ant 4	DSI 2	18900	1880	24.73	25.50	1.194	0.03	0.096	0.115
	LTE Band 2	20M	QPSK	50	0	-	Right Side	10mm	Ant 4	DSI 2	18900	1880	23.69	24.50	1.205	0.01	0.061	0.074
	LTE Band 2	20M	QPSK	1	0	-	Top Side	10mm	Ant 4	DSI 4	18900	1880	22.57	23.00	1.104	0.02	0.603	0.666
	LTE Band 2	20M	QPSK	50	0	-	Top Side	10mm	Ant 4	DSI 4	18900	1880	22.47	23.00	1.130	0.06	0.572	0.646
32	LTE Band 2_ENDC	20M	QPSK	1	0	-	Top Side	10mm	Ant 4	DSI 4	18900	1880	19.47	20.00	1.130	-0.06	0.321	0.363
	LTE Band 2	20M	QPSK	1	0	-	Top Side	15mm	Ant 4	DSI 2	18900	1880	24.73	25.50	1.194	0.05	0.548	0.654
32	LTE Band 2_ENDC	20M	QPSK	1	0	-	Top Side	15mm	Ant 4	DSI 2	18900	1880	23.67	24.50	1.211	0.05	0.433	0.524



FCC SAR Test Report

Report No. : FA180507

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
2600MHz																				
	LTE Band 7	20M	QPSK	1	0	-	Front	10mm	Ant 0	DSI 3	21100	2535	16.57	17.50	1.239	-	-	-0.1	0.145	0.180
	LTE Band 7	20M	QPSK	50	0	-	Front	10mm	Ant 0	DSI 3	21100	2535	16.33	17.50	1.309	-	-	-0.12	0.148	0.194
	LTE Band 7	20M	QPSK	1	0	-	Back	10mm	Ant 0	DSI 3	21100	2535	16.57	17.50	1.239	-	-	0.03	0.530	0.657
	LTE Band 7	20M	QPSK	50	0	-	Back	10mm	Ant 0	DSI 3	21100	2535	16.33	17.50	1.309	-	-	-0.03	0.522	0.683
	LTE Band 7	20M	QPSK	1	0	-	Left Side	10mm	Ant 0	DSI 2	21100	2535	21.27	22.00	1.183	-	-	0.04	0.086	0.102
	LTE Band 7	20M	QPSK	50	0	-	Left Side	10mm	Ant 0	DSI 2	21100	2535	21.26	22.00	1.186	-	-	0.03	0.059	0.070
	LTE Band 7	20M	QPSK	1	0	-	Right Side	10mm	Ant 0	DSI 2	21100	2535	21.27	22.00	1.183	-	-	0.02	0.272	0.322
	LTE Band 7	20M	QPSK	50	0	-	Right Side	10mm	Ant 0	DSI 2	21100	2535	21.26	22.00	1.186	-	-	-0.07	0.222	0.263
	LTE Band 7	20M	QPSK	1	0	-	Bottom Side	10mm	Ant 0	DSI 3	21100	2535	16.57	17.50	1.239	-	-	-0.08	0.741	0.918
	LTE Band 7C	20M	QPSK	1	0	-	Bottom Side	10mm	Ant 0	DSI 3	21100+21298	2535+2554.8	16.47	17.50	1.268	-	-	0.01	0.716	0.908
	LTE Band 7	20M	QPSK	1	0	-	Bottom Side	10mm	Ant 0	DSI 3	20850	2510	16.35	17.50	1.303	-	-	-0.09	0.606	0.790
	LTE Band 7	20M	QPSK	1	0	-	Bottom Side	10mm	Ant 0	DSI 3	21350	2560	16.27	17.50	1.327	-	-	0.02	0.542	0.719
	LTE Band 7	20M	QPSK	50	0	-	Bottom Side	10mm	Ant 0	DSI 3	21100	2535	16.33	17.50	1.309	-	-	-0.19	0.680	0.890
	LTE Band 7	20M	QPSK	50	0	-	Bottom Side	10mm	Ant 0	DSI 3	20850	2510	16.32	17.50	1.312	-	-	0.05	0.655	0.859
	LTE Band 7	20M	QPSK	50	0	-	Bottom Side	10mm	Ant 0	DSI 3	21350	2560	16.11	17.50	1.377	-	-	0.01	0.524	0.722
	LTE Band 7	20M	QPSK	100	0	-	Bottom Side	10mm	Ant 0	DSI 3	21100	2535	16.34	17.50	1.306	-	-	0.08	0.655	0.856
	LTE Band 7_ENDC	20M	QPSK	1	0	-	Bottom Side	10mm	Ant 0	DSI 3	21100	2535	13.22	14.50	1.343	-	-	-0.08	0.371	0.498
	LTE Band 7	20M	QPSK	1	0	-	Bottom Side	15mm	Ant 0	DSI 2	21100	2535	21.27	22.00	1.183	-	-	0.02	0.782	0.925
	LTE Band 7_ENDC	20M	QPSK	1	0	-	Bottom Side	15mm	Ant 0	DSI 2	21100	2535	18.17	19.00	1.211	-	-	0.01	0.353	0.427
	LTE Band 7	20M	QPSK	1	0	-	Front	10mm	Ant 2	DSI 4	21100	2535	18.25	19.50	1.334	-	-	0.04	0.075	0.100
	LTE Band 7	20M	QPSK	50	0	-	Front	10mm	Ant 2	DSI 4	21100	2535	18.10	19.50	1.380	-	-	-0.08	0.013	0.018
	LTE Band 7	20M	QPSK	1	0	-	Back	10mm	Ant 2	DSI 4	21100	2535	18.25	19.50	1.334	-	-	-0.11	0.683	0.911
	LTE Band 7	20M	QPSK	1	0	-	Back	10mm	Ant 2	DSI 4	20850	2510	17.99	19.50	1.416	-	-	0.02	0.625	0.885
	LTE Band 7	20M	QPSK	1	0	-	Back	10mm	Ant 2	DSI 4	21350	2560	18.23	19.50	1.340	-	-	0.01	0.477	0.639
	LTE Band 7	20M	QPSK	50	0	-	Back	10mm	Ant 2	DSI 4	21100	2535	18.10	19.50	1.380	-	-	-0.04	0.693	0.957
	LTE Band 7C	20M	QPSK	50	0	-	Back	10mm	Ant 2	DSI 4	21100+21298	2535+2554.8	18.05	19.50	1.396	-	-	0.01	0.682	0.952
	LTE Band 7	20M	QPSK	50	0	-	Back	10mm	Ant 2	DSI 4	20850	2510	17.94	19.50	1.432	-	-	0.02	0.661	0.947
	LTE Band 7	20M	QPSK	50	0	-	Back	10mm	Ant 2	DSI 4	21350	2560	17.87	19.50	1.455	-	-	0.01	0.445	0.648
	LTE Band 7	20M	QPSK	100	0	-	Back	10mm	Ant 2	DSI 4	21100	2535	18.07	19.50	1.390	-	-	-0.02	0.612	0.851
	LTE Band 7	20M	QPSK	1	0	-	Left Side	10mm	Ant 2	DSI 2	21100	2535	23.13	24.50	1.371	-	-	-0.15	0.403	0.552
	LTE Band 7	20M	QPSK	50	0	-	Left Side	10mm	Ant 2	DSI 2	21100	2535	22.13	23.50	1.371	-	-	0.02	0.311	0.426
	LTE Band 7	20M	QPSK	1	0	-	Top Side	10mm	Ant 2	DSI 4	21100	2535	18.25	19.50	1.334	-	-	-0.15	0.021	0.028
	LTE Band 7	20M	QPSK	50	0	-	Top Side	10mm	Ant 2	DSI 4	21100	2535	18.10	19.50	1.380	-	-	0.06	0.016	0.022
	LTE Band 7_ENDC	20M	QPSK	50	0	-	Back	10mm	Ant 2	DSI 4	21100	2535	15.12	16.50	1.374	-	-	-0.04	0.345	0.474
	LTE Band 7	20M	QPSK	1	0	-	Top Side	15mm	Ant 2	DSI 2	21100	2535	23.13	24.50	1.371	-	-	-0.16	0.003	0.004
	LTE Band 7	20M	QPSK	1	0	-	Front	10mm	Ant 4	DSI 4	21100	2535	20.26	20.50	1.057	-	-	-0.08	0.359	0.379
	LTE Band 7	20M	QPSK	50	0	-	Front	10mm	Ant 4	DSI 4	21100	2535	20.25	20.50	1.059	-	-	0.17	0.350	0.371
	LTE Band 7	20M	QPSK	1	0	-	Back	10mm	Ant 4	DSI 4	21100	2535	20.26	20.50	1.057	-	-	0.04	0.398	0.421
	LTE Band 7	20M	QPSK	50	0	-	Back	10mm	Ant 4	DSI 4	21100	2535	20.25	20.50	1.059	-	-	0.05	0.400	0.424
	LTE Band 7	20M	QPSK	1	0	-	Left Side	10mm	Ant 4	DSI 2	21100	2535	23.19	23.50	1.074	-	-	0.09	0.411	0.441
	LTE Band 7	20M	QPSK	50	0	-	Left Side	10mm	Ant 4	DSI 2	21100	2535	22.15	22.50	1.084	-	-	0.06	0.385	0.417
	LTE Band 7	20M	QPSK	1	0	-	Right Side	10mm	Ant 4	DSI 2	21100	2535	23.19	23.50	1.074	-	-	0.17	0.011	0.012
	LTE Band 7	20M	QPSK	50	0	-	Right Side	10mm	Ant 4	DSI 2	21100	2535	22.15	22.50	1.084	-	-	-0.08	0.003	0.003
33	LTE Band 7	20M	QPSK	1	0	-	Top Side	10mm	Ant 4	DSI 4	21100	2535	20.26	20.50	1.057	-	-	-0.07	0.979	1.035
	LTE Band 7C	20M	QPSK	1	0	-	Top Side	10mm	Ant 4	DSI 4	21100+21298	2535+2554.8	20.17	20.50	1.079	-	-	0.02	0.923	0.996
	LTE Band 7	20M	QPSK	1	0	-	Top Side	10mm	Ant 4	DSI 4	20850	2510	19.86	20.50	1.159	-	-	0.06	0.817	0.947
	LTE Band 7	20M	QPSK	1	0	-	Top Side	10mm	Ant 4	DSI 4	21350	2560	20.16	20.50	1.081	-	-	0.12	0.878	0.949
	LTE Band 7	20M	QPSK	50	0	-	Top Side	10mm	Ant 4	DSI 4	21100	2535	20.25	20.50	1.059	-	-	0.12	0.839	0.889
	LTE Band 7	20M	QPSK	50	0	-	Top Side	10mm	Ant 4	DSI 4	20850	2510	19.98	20.50	1.127	-	-	0.12	0.850	0.958
	LTE Band 7	20M	QPSK	50	0	-	Top Side	10mm	Ant 4	DSI 4	21350	2560	19.99	20.50	1.125	-	-	0.02	0.848	0.954
	LTE Band 7	20M	QPSK	100	0	-	Top Side	10mm	Ant 4	DSI 4	21100	2535	20.11	20.50	1.094	-	-	0.08	0.871	0.953
	LTE Band 7_ENDC	20M	QPSK	1	0	-	Top Side	10mm	Ant 4	DSI 4	21100	2535	17.33	17.50	1.040	-	-	-0.07	0.452	0.470
	LTE Band 7	20M	QPSK	1	0	-	Top Side	15mm	Ant 4	DSI 2	21100	2535	23.19	23.50	1.074	-	-	-0.11	0.428	0.460

Sporton International (Kunshan) Inc.

TEL : +86-512-57900158 / FAX : +86-512-57900958

FCC ID : 2AFZZ116AG

Page 71 of 94

Issued Date : Oct. 09, 2021

Form version. : 200414



FCC SAR Test Report

Report No. : FA180507

	LTE Band 41	20M	QPSK	1	0	-	Front	10mm	Ant 0	DSI 3	40620	2593	20.21	20.50	1.069	62.9	1.006	0.08	0.129	0.139
	LTE Band 41	20M	QPSK	50	0	-	Front	10mm	Ant 0	DSI 3	40620	2593	20.10	20.50	1.096	62.9	1.006	0.16	0.134	0.148
	LTE Band 41	20M	QPSK	1	0	-	Back	10mm	Ant 0	DSI 3	40620	2593	20.21	20.50	1.069	62.9	1.006	0.04	0.452	0.486
	LTE Band 41	20M	QPSK	50	0	-	Back	10mm	Ant 0	DSI 3	40620	2593	20.10	20.50	1.096	62.9	1.006	0.08	0.459	0.506
	LTE Band 41	20M	QPSK	1	0	-	Left Side	10mm	Ant 0	DSI 2	40620	2593	24.68	25.00	1.076	62.9	1.006	0.02	0.096	0.104
	LTE Band 41	20M	QPSK	50	0	-	Left Side	10mm	Ant 0	DSI 2	40620	2593	23.65	24.00	1.084	62.9	1.006	-0.19	0.068	0.074
	LTE Band 41	20M	QPSK	1	0	-	Right Side	10mm	Ant 0	DSI 2	40620	2593	24.68	25.00	1.076	62.9	1.006	-0.13	0.130	0.141
	LTE Band 41	20M	QPSK	50	0	-	Right Side	10mm	Ant 0	DSI 2	40620	2593	23.65	24.00	1.084	62.9	1.006	-0.07	0.025	0.027
	LTE Band 41	20M	QPSK	1	0	-	Bottom Side	10mm	Ant 0	DSI 3	40620	2593	20.21	20.50	1.069	62.9	1.006	-0.1	0.652	0.701
	LTE Band 41	20M	QPSK	1	0	-	Bottom Side	10mm	Ant 0	DSI 3	39750	2506	19.89	20.50	1.151	62.9	1.006	0.01	0.592	0.685
	LTE Band 41	20M	QPSK	1	0	-	Bottom Side	10mm	Ant 0	DSI 3	40185	2549.5	19.91	20.50	1.146	62.9	1.006	0.02	0.621	0.716
	LTE Band 41	20M	QPSK	1	0	-	Bottom Side	10mm	Ant 0	DSI 3	41055	2636.5	19.83	20.50	1.167	62.9	1.006	-0.01	0.428	0.502
	LTE Band 41	20M	QPSK	1	0	-	Bottom Side	10mm	Ant 0	DSI 3	41490	2680	19.91	20.50	1.146	62.9	1.006	0.04	0.512	0.590
	LTE Band 41	20M	QPSK	50	0	-	Bottom Side	10mm	Ant 0	DSI 3	40620	2593	20.10	20.50	1.096	62.9	1.006	-0.03	0.660	0.728
	LTE Band 38C	20M	QPSK	50	0	-	Bottom Side	10mm	Ant 0	DSI 3	37901+38099	2585.1+2604.9	19.85	20.50	1.161	62.9	1.006	0.01	0.600	0.701
	LTE Band 41	20M	QPSK	50	0	-	Bottom Side	10mm	Ant 0	DSI 3	39750	2506	19.70	20.50	1.202	62.9	1.006	-0.02	0.600	0.726
	LTE Band 41	20M	QPSK	50	0	-	Bottom Side	10mm	Ant 0	DSI 3	40185	2549.5	19.91	20.50	1.146	62.9	1.006	0.04	0.520	0.599
	LTE Band 41	20M	QPSK	50	0	-	Bottom Side	10mm	Ant 0	DSI 3	41055	2636.5	19.70	20.50	1.202	62.9	1.006	0.01	0.600	0.726
	LTE Band 41	20M	QPSK	50	0	-	Bottom Side	10mm	Ant 0	DSI 3	41490	2680	19.71	20.50	1.199	62.9	1.006	0.05	0.452	0.545
	LTE Band 41	20M	QPSK	100	0	-	Bottom Side	10mm	Ant 0	DSI 3	40620	2593	20.11	20.50	1.094	62.9	1.006	0.05	0.583	0.642
	LTE Band 41_ENDC	20M	QPSK	50	0	-	Bottom Side	10mm	Ant 0	DSI 3	40620	2593	17.30	17.50	1.047	62.9	1.006	0.05	0.331	0.349
	LTE Band 41	20M	QPSK	1	0	-	Bottom Side	15mm	Ant 0	DSI 2	40620	2593	24.68	25.00	1.076	62.9	1.006	0.03	0.591	0.640
	LTE Band 41_ENDC	20M	QPSK	1	0	-	Bottom Side	15mm	Ant 0	DSI 2	40620	2593	23.78	24.00	1.052	62.9	1.006	0.03	0.472	0.500
	LTE Band 41	20M	QPSK	1	0	-	Front	10mm	Ant 2	DSI 4	40620	2593	18.05	19.00	1.245	62.9	1.006	0.05	0.011	0.014
	LTE Band 41	20M	QPSK	50	0	-	Front	10mm	Ant 2	DSI 4	40620	2593	18.03	19.00	1.250	62.9	1.006	0.04	0.006	0.008
	LTE Band 41	20M	QPSK	1	0	-	Back	10mm	Ant 2	DSI 4	40620	2593	18.05	19.00	1.245	62.9	1.006	-0.07	0.171	0.214
	LTE Band 38C	20M	QPSK	1	0	-	Back	10mm	Ant 2	DSI 4	37901+38099	2585.1+2604.9	17.65	19.00	1.365	62.9	1.006	0.07	0.152	0.209
	LTE Band 41	20M	QPSK	50	0	-	Back	10mm	Ant 2	DSI 4	40620	2593	18.03	19.00	1.250	62.9	1.006	0.07	0.140	0.176
	LTE Band 41	20M	QPSK	1	0	-	Left Side	10mm	Ant 2	DSI 2	40620	2593	21.98	23.00	1.265	62.9	1.006	0.05	0.096	0.122
	LTE Band 41	20M	QPSK	50	0	-	Left Side	10mm	Ant 2	DSI 2	40620	2593	20.98	22.00	1.265	62.9	1.006	-0.19	0.113	0.144
	LTE Band 41	20M	QPSK	1	0	-	Top Side	10mm	Ant 2	DSI 4	40620	2593	18.05	19.00	1.245	62.9	1.006	0.02	0.003	0.004
	LTE Band 41	20M	QPSK	50	0	-	Top Side	10mm	Ant 2	DSI 4	40620	2593	18.03	19.00	1.250	62.9	1.006	0.17	0.001	0.001
	LTE Band 41	20M	QPSK	1	0	-	Top Side	15mm	Ant 2	DSI 2	40620	2593	21.98	23.00	1.265	62.9	1.006	-0.05	0.031	0.039
	LTE Band 41	20M	QPSK	1	0	-	Front	10mm	Ant 4	DSI 4	40620	2593	23.43	24.50	1.279	62.9	1.006	0.04	0.255	0.328
	LTE Band 41	20M	QPSK	50	0	-	Front	10mm	Ant 4	DSI 4	40620	2593	23.39	24.50	1.291	62.9	1.006	0.08	0.261	0.339
	LTE Band 41	20M	QPSK	1	0	-	Back	10mm	Ant 4	DSI 4	40620	2593	23.43	24.50	1.279	62.9	1.006	0.04	0.317	0.408
	LTE Band 41	20M	QPSK	50	0	-	Back	10mm	Ant 4	DSI 4	40620	2593	23.39	24.50	1.291	62.9	1.006	-0.13	0.313	0.407
	LTE Band 41	20M	QPSK	1	0	-	Left Side	10mm	Ant 4	DSI 2	40620	2593	24.32	25.50	1.312	62.9	1.006	0.01	0.296	0.391
	LTE Band 41	20M	QPSK	50	0	-	Left Side	10mm	Ant 4	DSI 2	40620	2593	23.25	24.50	1.334	62.9	1.006	-0.04	0.267	0.358
	LTE Band 41	20M	QPSK	1	0	-	Right Side	10mm	Ant 4	DSI 2	40620	2593	24.32	25.50	1.312	62.9	1.006	0.01	0.016	0.021
	LTE Band 41	20M	QPSK	50	0	-	Right Side	10mm	Ant 4	DSI 2	40620	2593	23.25	24.50	1.334	62.9	1.006	0.08	0.005	0.007
	LTE Band 41	20M	QPSK	1	0	-	Top Side	10mm	Ant 4	DSI 4	40620	2593	23.43	24.50	1.279	62.9	1.006	-0.08	0.634	0.816
34	LTE Band 41	20M	QPSK	1	0	-	Top Side	10mm	Ant 4	DSI 4	39750	2506	22.97	24.50	1.422	62.9	1.006	-0.09	0.738	1.056
	LTE Band 38C	20M	QPSK	1	0	-	Top Side	10mm	Ant 4	DSI 4	37901+38099	2585.1+2604.9	22.74	24.50	1.500	62.9	1.006	0.02	0.691	1.042
	LTE Band 41	20M	QPSK	1	0	-	Top Side	10mm	Ant 4	DSI 4	40185	2549.5	23.00	24.50	1.413	62.9	1.006	0.03	0.631	0.897
	LTE Band 41	20M	QPSK	1	0	-	Top Side	10mm	Ant 4	DSI 4	41055	2636.5	23.16	24.50	1.361	62.9	1.006	0.04	0.369	0.505
	LTE Band 41	20M	QPSK	1	0	-	Top Side	10mm	Ant 4	DSI 4	41490	2680	23.32	24.50	1.312	62.9	1.006	0.04	0.339	0.448
	LTE Band 41	20M	QPSK	50	0	-	Top Side	10mm	Ant 4	DSI 4	40620	2593	23.39	24.50	1.291	62.9	1.006	-0.06	0.528	0.686
	LTE Band 41	20M	QPSK	50	0	-	Top Side	10mm	Ant 4	DSI 4	39750	2506	23.11	24.50	1.377	62.9	1.006	0.05	0.521	0.722
	LTE Band 41	20M	QPSK	50	0	-	Top Side	10mm	Ant 4	DSI 4	40185	2549.5	23.12	24.50	1.374	62.9	1.006	-0.06	0.428	0.592
	LTE Band 41	20M	QPSK	50	0	-	Top Side	10mm	Ant 4	DSI 4	41055	2636.5	23.25	24.50	1.334	62.9	1.006	0.12	0.349	0.468
	LTE Band 41	20M	QPSK	50	0	-	Top Side	10mm	Ant 4	DSI 4	41490	2680	23.34	24.50	1.306	62.9	1.006	0.07	0.324	0.426
	LTE Band 41	20M	QPSK	100	0	-	Top Side	10mm	Ant 4	DSI 4	40620	2593	23.35	24.50	1.303	62.9	1.006	0.01	0.478	0.627
	LTE Band 41_ENDC	20M	QPSK	1	0	-	Top Side	10mm	Ant 4	DSI 4	39750	2506	19.57	21.50	1.560	62.9	1.006	-0.06	0.318	0.499
	LTE Band 41	20M	QPSK	1	0	-	Top Side	15mm	Ant 4	DSI 2	40620	2593	24.32	25.50	1.312	62.9	1.006	0.02	0.310	0.409
	FR1 n7	20M	QPSK	1	26	DFT-SCS-30KHz	Front	10mm	Ant 0	DSI 3	507000	2535	16.18	17.50	1.355	-	-	-0.1	0.171	0.232

Sporton International (Kunshan) Inc.

TEL : +86-512-57900158 / FAX : +86-512-57900958

FCC ID : 2AFZZ116AG

Page 72 of 94

Issued Date : Oct. 09, 2021

Form version. : 200414



FCC SAR Test Report

Report No. : FA180507

	FR1 n7	20M	QPSK	25	13	DFT-SCS-30KHz	Front	10mm	Ant 0	DSI 3	507000	2535	16.16	17.50	1.361	-	-	0.06	0.150	0.204
	FR1 n7	20M	QPSK	1	26	DFT-SCS-30KHz	Back	10mm	Ant 0	DSI 3	507000	2535	16.18	17.50	1.355	-	-	0.09	0.521	0.706
	FR1 n7	20M	QPSK	25	13	DFT-SCS-30KHz	Back	10mm	Ant 0	DSI 3	507000	2535	16.16	17.50	1.361	-	-	-0.04	0.574	0.781
	FR1 n7	20M	QPSK	1	26	DFT-SCS-30KHz	Left Side	10mm	Ant 0	DSI 2	507000	2535	21.28	22.00	1.180	-	-	0.04	0.091	0.107
	FR1 n7	20M	QPSK	25	13	DFT-SCS-30KHz	Left Side	10mm	Ant 0	DSI 2	507000	2535	21.20	22.00	1.202	-	-	-0.06	0.082	0.099
	FR1 n7	20M	QPSK	1	26	DFT-SCS-30KHz	Right Side	10mm	Ant 0	DSI 2	507000	2535	21.28	22.00	1.180	-	-	0.16	0.312	0.368
	FR1 n7	20M	QPSK	25	13	DFT-SCS-30KHz	Right Side	10mm	Ant 0	DSI 2	507000	2535	21.20	22.00	1.202	-	-	0.05	0.276	0.332
	FR1 n7	20M	QPSK	1	26	DFT-SCS-30KHz	Bottom Side	10mm	Ant 0	DSI 3	507000	2535	16.18	17.50	1.355	-	-	0.08	0.595	0.806
	FR1 n7	20M	QPSK	1	26	DFT-SCS-30KHz	Bottom Side	10mm	Ant 0	DSI 3	502000	2510	16.02	17.50	1.406	-	-	-0.04	0.394	0.554
	FR1 n7	20M	QPSK	1	26	DFT-SCS-30KHz	Bottom Side	10mm	Ant 0	DSI 3	512000	2560	16.09	17.50	1.384	-	-	-0.14	0.519	0.718
	FR1 n7	20M	QPSK	25	13	DFT-SCS-30KHz	Bottom Side	10mm	Ant 0	DSI 3	507000	2535	16.16	17.50	1.361	-	-	-0.13	0.485	0.660
	FR1 n7	20M	QPSK	50	0	DFT-SCS-30KHz	Bottom Side	10mm	Ant 0	DSI 3	507000	2535	16.09	17.50	1.384	-	-	0.07	0.554	0.766
	FR1 n7_ENDC	20M	QPSK	1	26	DFT-SCS-30KHz	Bottom Side	10mm	Ant 0	DSI 3	507000	2535	13.26	14.50	1.330	-	-	-0.18	0.303	0.403
	FR1 n7	20M	QPSK	1	26	DFT-SCS-30KHz	Bottom Side	15mm	Ant 0	DSI 2	507000	2535	21.28	22.00	1.180	-	-	0.02	0.782	0.923
	FR1 n7_ENDC	20M	QPSK	1	26	DFT-SCS-30KHz	Bottom Side	15mm	Ant 0	DSI 2	507000	2535	18.38	19.00	1.153	-	-	0.03	0.425	0.490
	FR1 n7	20M	QPSK	1	26	DFT-SCS-30KHz	Front	10mm	Ant 2	DSI 4	507000	2535	18.50	19.50	1.259	-	-	0.06	0.106	0.133
	FR1 n7	20M	QPSK	25	13	DFT-SCS-30KHz	Front	10mm	Ant 2	DSI 4	507000	2535	18.34	19.50	1.306	-	-	0.04	0.098	0.128
	FR1 n7	20M	QPSK	1	26	DFT-SCS-30KHz	Back	10mm	Ant 2	DSI 4	507000	2535	18.50	19.50	1.259	-	-	-0.05	0.758	0.954
35	FR1 n7	20M	QPSK	1	26	DFT-SCS-30KHz	Back	10mm	Ant 2	DSI 4	502000	2510	18.10	19.50	1.380	-	-	-0.09	0.775	1.070
	FR1 n7	20M	QPSK	1	26	DFT-SCS-30KHz	Back	10mm	Ant 2	DSI 4	512000	2560	18.03	19.50	1.403	-	-	0.04	0.410	0.575
	FR1 n7	20M	QPSK	25	13	DFT-SCS-30KHz	Back	10mm	Ant 2	DSI 4	507000	2535	18.34	19.50	1.306	-	-	0.07	0.658	0.859
	FR1 n7	20M	QPSK	25	13	DFT-SCS-30KHz	Back	10mm	Ant 2	DSI 4	502000	2510	18.04	19.50	1.400	-	-	-0.18	0.675	0.945
	FR1 n7	20M	QPSK	25	13	DFT-SCS-30KHz	Back	10mm	Ant 2	DSI 4	512000	2560	18.03	19.50	1.403	-	-	0.07	0.374	0.525
	FR1 n7	20M	QPSK	50	0	DFT-SCS-30KHz	Back	10mm	Ant 2	DSI 4	507000	2535	18.39	19.50	1.291	-	-	-0.05	0.577	0.745
	FR1 n7	20M	QPSK	1	26	DFT-SCS-30KHz	Left Side	10mm	Ant 2	DSI 2	507000	2535	23.31	24.50	1.315	-	-	0.04	0.411	0.541
	FR1 n7	20M	QPSK	25	13	DFT-SCS-30KHz	Left Side	10mm	Ant 2	DSI 2	507000	2535	23.11	24.50	1.377	-	-	-0.15	0.395	0.544
	FR1 n7	20M	QPSK	1	26	DFT-SCS-30KHz	Top Side	10mm	Ant 2	DSI 4	507000	2535	18.50	19.50	1.259	-	-	0.08	0.094	0.118
	FR1 n7	20M	QPSK	25	13	DFT-SCS-30KHz	Top Side	10mm	Ant 2	DSI 4	507000	2535	18.34	19.50	1.306	-	-	0.08	0.090	0.118
	FR1 n7_ENDC	20M	QPSK	1	26	DFT-SCS-30KHz	Back	10mm	Ant 2	DSI 4	502000	2510	15.01	16.50	1.409	-	-	-0.04	0.292	0.412
	FR1 n7	20M	QPSK	1	26	DFT-SCS-30KHz	Top Side	15mm	Ant 2	DSI 2	507000	2535	23.31	24.50	1.315	-	-	0.02	0.053	0.070
	FR1 n7	20M	QPSK	1	26	DFT-SCS-30KHz	Front	10mm	Ant 4	DSI 4	507000	2535	19.94	21.00	1.276	-	-	0.03	0.507	0.647
	FR1 n7	20M	QPSK	25	13	DFT-SCS-30KHz	Front	10mm	Ant 4	DSI 4	507000	2535	19.88	21.00	1.294	-	-	0.02	0.432	0.559
	FR1 n7	20M	QPSK	1	26	DFT-SCS-30KHz	Back	10mm	Ant 4	DSI 4	507000	2535	19.94	21.00	1.276	-	-	0.19	0.507	0.647
	FR1 n7	20M	QPSK	25	13	DFT-SCS-30KHz	Back	10mm	Ant 4	DSI 4	507000	2535	19.88	21.00	1.294	-	-	0.08	0.571	0.739
	FR1 n7	20M	QPSK	1	26	DFT-SCS-30KHz	Left Side	10mm	Ant 4	DSI 2	507000	2535	22.89	24.00	1.291	-	-	-0.13	0.616	0.795
	FR1 n7	20M	QPSK	25	13	DFT-SCS-30KHz	Left Side	10mm	Ant 4	DSI 2	507000	2535	22.85	24.00	1.303	-	-	0.04	0.569	0.742
	FR1 n7	20M	QPSK	1	26	DFT-SCS-30KHz	Right Side	10mm	Ant 4	DSI 2	507000	2535	22.89	24.00	1.291	-	-	-0.06	0.011	0.014
	FR1 n7	20M	QPSK	25	13	DFT-SCS-30KHz	Right Side	10mm	Ant 4	DSI 2	507000	2535	22.85	24.00	1.303	-	-	0.06	0.003	0.004
	FR1 n7	20M	QPSK	1	26	DFT-SCS-30KHz	Top Side	10mm	Ant 4	DSI 4	507000	2535	19.94	21.00	1.276	-	-	-0.19	0.747	0.953
	FR1 n7	20M	QPSK	1	26	DFT-SCS-30KHz	Top Side	10mm	Ant 4	DSI 4	502000	2510	19.68	21.00	1.355	-	-	0.01	0.678	0.919
	FR1 n7	20M	QPSK	1	26	DFT-SCS-30KHz	Top Side	10mm	Ant 4	DSI 4	512000	2560	19.63	21.00	1.371	-	-	0.03	0.507	0.695
	FR1 n7	20M	QPSK	25	13	DFT-SCS-30KHz	Top Side	10mm	Ant 4	DSI 4	507000	2535	19.88	21.00	1.294	-	-	0.05	0.611	0.791
	FR1 n7	20M	QPSK	50	0	DFT-SCS-30KHz	Top Side	10mm	Ant 4	DSI 4	507000	2535	19.86	21.00	1.300	-	-	-0.02	0.496	0.645
	FR1 n7_ENDC	20M	QPSK	1	26	DFT-SCS-30KHz	Top Side	10mm	Ant 4	DSI 4	507000	2535	16.84	18.00	1.306	-	-	0.18	0.357	0.466
	FR1 n7	20M	QPSK	1	26	DFT-SCS-30KHz	Top Side	15mm	Ant 4	DSI 2	507000	2535	22.89	24.00	1.291	-	-	0.01	0.532	0.687
	FR1 n7_ENDC	20M	QPSK	1	26	DFT-SCS-30KHz	Top Side	15mm	Ant 4	DSI 2	507000	2535	21.96	23.00	1.271	-	-	0.01	0.425	0.540
	FR1 n41	100M	QPSK	1	137	DFT-SCS-30KHz	Front	10mm	Ant 0	DSI 3	518598	2592.99	16.88	18.00	1.294	-	-	0.07	0.121	0.157
	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Front	10mm	Ant 0	DSI 3	518598	2592.99	16.75	18.00	1.334	-	-	0.09	0.089	0.119
	FR1 n41	100M	QPSK	1	137	DFT-SCS-30KHz	Back	10mm	Ant 0	DSI 3	518598	2592.99	16.88	18.00	1.294	-	-	-0.05	0.334	0.432
	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Back	10mm	Ant 0	DSI 3	518598	2592.99	16.75	18.00	1.334	-	-	-0.15	0.230	0.307
	FR1 n41	100M	QPSK	1	137	DFT-SCS-30KHz	Left Side	10mm	Ant 0	DSI 2	518598	2592.99	22.18	22.50	1.076	-	-	-0.12	0.163	0.175
	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Left Side	10mm	Ant 0	DSI 2	518598	2592.99	22.10	22.50	1.096	-	-	0.13	0.152	0.167
	FR1 n41	100M	QPSK	1	137	DFT-SCS-30KHz	Right Side	10mm	Ant 0	DSI 2	518598	2592.99	22.18	22.50	1.076	-	-	0.01	0.175	0.188
	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Right Side	10mm	Ant 0	DSI 2	518598	2592.99	22.10	22.50	1.096	-	-	0.02	0.157	0.172
36	FR1 n41	100M	QPSK	1	137	DFT-SCS-30KHz	Bottom Side	10mm	Ant 0	DSI 3	518598	2592.99	16.88	18.00	1.294	-	-	-0.04	0.587	0.760
	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Bottom Side	10mm	Ant 0	DSI 3	518598	2592.99	16.75	18.00	1.334	-	-	-0.18	0.443	0.591

Sporton International (Kunshan) Inc.

TEL : +86-512-57900158 / FAX : +86-512-57900958

FCC ID : 2AFZZ116AG

Page 73 of 94

Issued Date : Oct. 09, 2021

Form version. : 200414



FCC SAR Test Report

Report No. : FA180507

FR1 n41_ENDC	100M	QPSK	1	137	DFT-SCS-30KHz	Bottom Side	10mm	Ant 0	DSI 3	518598	2592.99	14.39	15.50	1.291	-	-	0.02	0.312	0.403
FR1 n41	100M	QPSK	1	137	DFT-SCS-30KHz	Bottom Side	15mm	Ant 0	DSI 2	518598	2592.99	22.18	22.50	1.076	-	-	0.01	0.535	0.576
FR1 n41	100M	QPSK	1	137	DFT-SCS-30KHz	Front	10mm	Ant 2	DSI 4	518598	2592.99	19.35	20.50	1.303	-	-	0.03	0.010	0.013
FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Front	10mm	Ant 2	DSI 4	518598	2592.99	19.22	20.50	1.343	-	-	0.09	0.011	0.015
FR1 n41	100M	QPSK	1	137	DFT-SCS-30KHz	Back	10mm	Ant 2	DSI 4	518598	2592.99	19.35	20.50	1.303	-	-	-0.09	0.316	0.412
FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Back	10mm	Ant 2	DSI 4	518598	2592.99	19.22	20.50	1.343	-	-	-0.06	0.212	0.285
FR1 n41	100M	QPSK	1	137	DFT-SCS-30KHz	Left Side	10mm	Ant 2	DSI 2	518598	2592.99	24.16	25.00	1.213	-	-	-0.15	0.194	0.235
FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Left Side	10mm	Ant 2	DSI 2	518598	2592.99	23.93	25.00	1.279	-	-	-0.13	0.159	0.203
FR1 n41	100M	QPSK	1	137	DFT-SCS-30KHz	Top Side	10mm	Ant 2	DSI 4	518598	2592.99	19.35	20.50	1.303	-	-	0.06	0.009	0.012
FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Top Side	10mm	Ant 2	DSI 4	518598	2592.99	19.22	20.50	1.343	-	-	0.08	0.009	0.012
FR1 n41	100M	QPSK	1	137	DFT-SCS-30KHz	Top Side	15mm	Ant 2	DSI 2	518598	2592.99	24.16	25.00	1.213	-	-	0.01	0.067	0.081
FR1 n41	100M	QPSK	1	137	DFT-SCS-30KHz	Front	10mm	Ant 4	DSI 4	518598	2592.99	19.64	20.50	1.219	-	-	0.09	0.173	0.211
FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Front	10mm	Ant 4	DSI 4	518598	2592.99	19.55	20.50	1.245	-	-	-0.12	0.189	0.235
FR1 n41	100M	QPSK	1	137	DFT-SCS-30KHz	Back	10mm	Ant 4	DSI 4	518598	2592.99	19.64	20.50	1.219	-	-	-0.14	0.256	0.312
FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Back	10mm	Ant 4	DSI 4	518598	2592.99	19.55	20.50	1.245	-	-	-0.04	0.303	0.377
FR1 n41	100M	QPSK	1	137	DFT-SCS-30KHz	Left Side	10mm	Ant 4	DSI 2	518598	2592.99	24.25	25.50	1.334	-	-	0.09	0.311	0.415
FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Left Side	10mm	Ant 4	DSI 2	518598	2592.99	24.21	25.50	1.346	-	-	0.16	0.285	0.384
FR1 n41	100M	QPSK	1	137	DFT-SCS-30KHz	Right Side	10mm	Ant 4	DSI 2	518598	2592.99	24.25	25.50	1.334	-	-	0.09	0.019	0.025
FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Right Side	10mm	Ant 4	DSI 2	518598	2592.99	24.21	25.50	1.346	-	-	0.08	0.031	0.042
FR1 n41	100M	QPSK	1	137	DFT-SCS-30KHz	Top Side	10mm	Ant 4	DSI 4	518598	2592.99	19.64	20.50	1.219	-	-	0.01	0.468	0.570
FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Top Side	10mm	Ant 4	DSI 4	518598	2592.99	19.55	20.50	1.245	-	-	-0.05	0.470	0.585
FR1 n41	100M	QPSK	1	137	DFT-SCS-30KHz	Top Side	15mm	Ant 4	DSI 2	518598	2592.99	24.25	25.50	1.334	-	-	0.02	0.420	0.560