

SONY

Antenna Specification

PY7-35141E

Sony Corporation

1-7-1 Konan Minato-ku Tokyo, 108-0075

Signature:

Hao Yang

<Hao Yang>

Date: April.14, 2023

Contents

1 Introduction 3

2 Measurement Environment 3

2.1 Test Site 3

2.2 Test Equipment List 3

3 Test Condition 3

3.1 Test Method (Test Procedure) 3

3.2 Measurement System 4

3.3 Test Setup Photo 4

4 Test Results 5

4.1 Gain and Efficiency 5

4.2 Radiation Pattern (2D or 3D) 5

1

Introduction

This document describe how to measure the antenna performance of this device PY7-35141E and the characteristics of the antenna i.e.antenna gain, antenna efficiency and radiation pattern.

2


Measurement Environment

2.1

Test Site

Company: Huaqin Technology Co., Ltd.

Address:5F, Block C, Huanpu Industrial Park, No.211 Tiangu Eighth Road, Xi 'an High-tech Zone

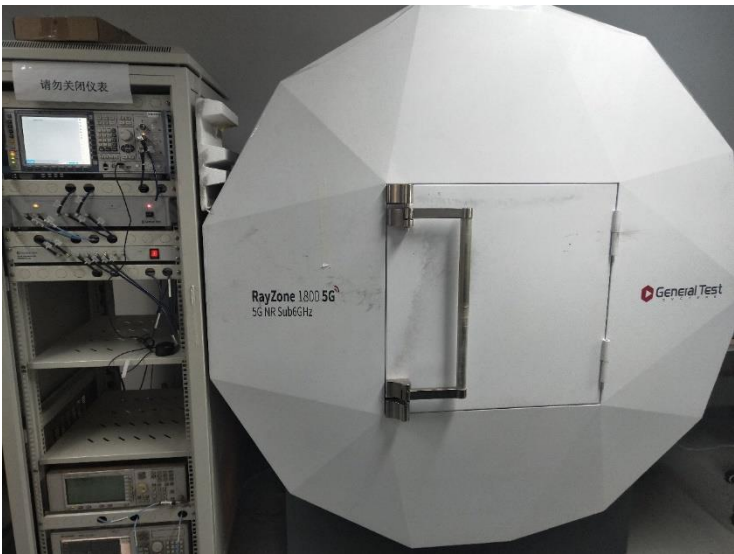

2.2

Test Equipment List

Type of Equipment	Manufacturer	Model Number	S/N	Calibration	
				Last Cal.	Due Date
Vector network analyzer	Agilen	E5071C	00144569068472	2022/11	2023/11
CMW500	ROHDE&SCHWARZ	CMW500	110506011561409	2022/11	2023/11
3D near-field microwave darkroom	GTS	Ray Zone 1800	CT10120520A2175	2022/11	2023/11

3

Test Condition


3.1

Test Method (Test Procedure)

1. First turn on the product (at this time, the blue light flashes) and place it in a dark room.
2. Connect the product Bluetooth with the tablet computer, and the product will flash a white light after successful connection.
3. Use the tablet to enter test commands into the product. after receiving the correct return value, wait about 5 seconds, the Bluetooth connection between the tablet computer and the product will be disconnected, and the blinking light of the product will be off.

4. Start the power test.
- Efficiency=Peak gain-Directivity

3.2 Measurement System

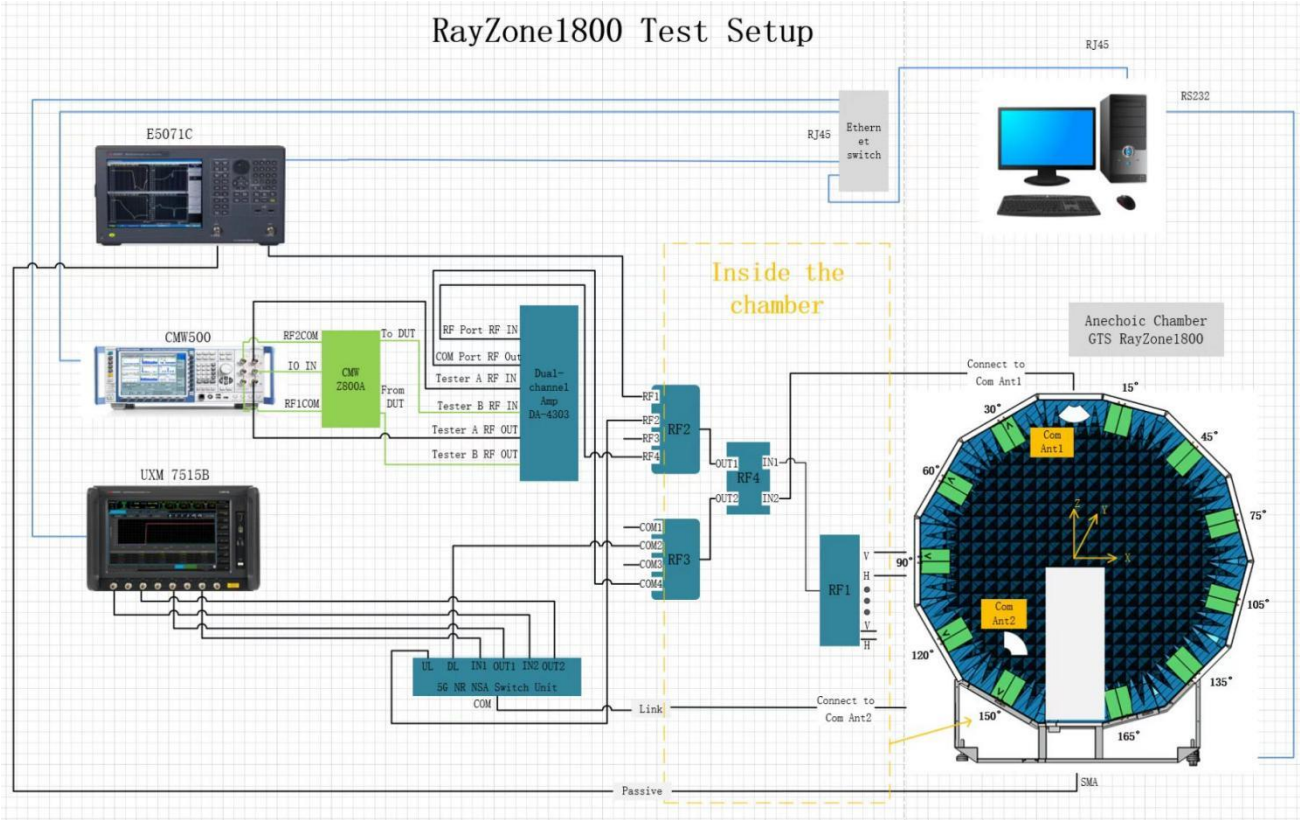

3.3 Test Setup Photo



4 Test Results

4.1 Gain and Efficiency


Free space				
Frequency (MHz)	AVG Gain	efficiency	Peak Gain	Directivity
2400	-4.56	35	-0.81	3.753041496
2410	-4.44	35.97	-0.68	3.759776527
2420	-4.08	39.07	-0.21	3.87554157
2430	-3.72	42.44	0.46	4.186250617
2440	-3.42	45.52	0.9	4.317728784
2450	-3.4	45.75	1.04	4.433541976
2460	-3.57	43.99	1.09	4.651196826
2470	-3.85	41.17	0.84	4.693580078
2480	-3.85	41.22	0.94	4.789109582
2490	-3.8	41.66	0.95	4.754457781
2500	-3.81	41.63	0.88	4.684048521

-


4.2 Radiation Pattern (2D or 3D)

Free space

2402MHz

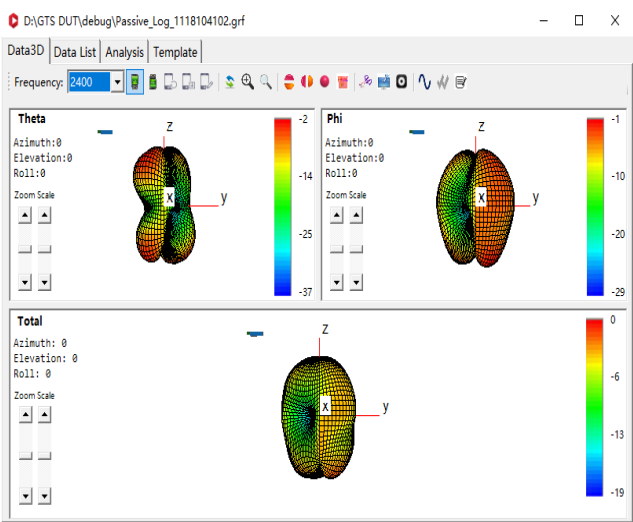

2480MHz

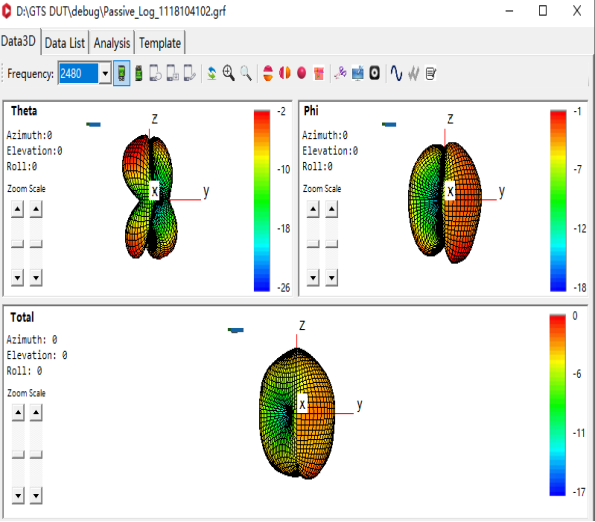

Arm condition
2402MHz

2480MHz

