# HB6081说明书 (hellobaby)

说明书为折叠式


尺寸: 630\*120MM 材质: 100g双胶纸 (彩色)

版本: V1.1 类型: 环保

版本	修改内容	日期
Ver: 1.0	文件首发。	2023/01/03
Ver: 1.1	文件改多国语言,ECO。	2023/06/19

设计	审核	审批
王勇		
2023/06/19		

630.00 mm

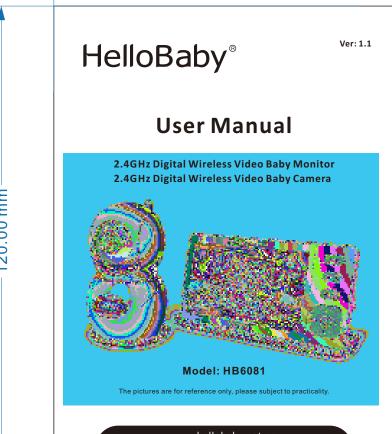

hank you for purchasing the HB6081 Baby Monitor. With our baby monitor, you could se and hear your baby sleeping or playing in their room anytime

product, you will need to provide a copy of your dated sales receipt to confirm warranty

Please make sure the following included in your package Camera unit x 1

Wall-mounting kit x 1

1. SAFETY INSTRUCTIOINS

Strangulation Hazard: Children have STRANGLED in cords. Keep this cord out of the reach nore than 3ft (0.9m) away). Never use extension cords with AC Adapters. Only u

Read and keep to instructions: All the safety and operating in structions should be read

exposed to rain, moisture, dripping or splashing. No objects filled with liquid should be

operating properly or has suffered any damage, contact "service@hellobaby.net.cn" servi enter to request inspection and repair of the appliance in order to avoid any possible risk OO NOT: Do not attempt to repair or adjust any of the electrical or mechanical functions o he unit. Otherwise, the guarantee will be made void.

may block the ventilation openings, or be placed in an enclosed area such as a bookcase or Keep away from sources of heat: This unit should not be exposed to direct heat sources

ch as a candle, radiator, heat register, stove or other appliance that emits heat. The un **Power source:** This unit should only be used with the AC power adapters included in this

Damage requiring service: This unit should be serviced by qualified personnel only who . Objects have fallen or liquid has been spilled into the product. The units have been exposed to rain.

The units do not appear to operate normally or exhibits a distinct change in performance

We offer one-year warranty from the original purchase date against defects in workmanshi

3.INSTALLATION GUIDELINES

\* To use your parent unit and camera unit together, you have to establish a radio link between them, and the range will be affected by environmental conditions. \* Any large metal object, like a refrigerator, a mirror, a filling cabinet, metallic doors or The signal strength may also be reduced by other solid structures, like walls, or by radio or electrical equipment, such as TV, computers, cordless or mobile phones, fluorescen

Use of other 2.4GHz product, such as wireless networks (Wi-Fi routers), Bluetooth systems, or microwave ovens, may cause interference with this product, so keep the baby monitor away at least 5ft (1.5m) from such products, or turn them off if they cause

The camera can be placed on the desktop or mounted on the wall. Don't place baby monit

n soft quilts or blankets or in the corners of cupboards, shelves, etc; Keep the baby monit way from heat sources such as radiators, chimneys, cookers and direct sunlight; Keep the baby unit away from TV sets, microwave oven and radios. If interference occurs, move the \* Place the camera within 6 feet (2 meters) of the area being monitored for ontimum

### 5.1 TURN ON THE BARY UNIT:

L. Insert the DC plug of the power adapter into the DC jack in the rear of the Baby Unit. 2. Insert the other end of the power adapter into a suitable electrical outlet

ected, the power LED will light up. 5.2 TURN ON THE PARENT UNIT:


2412MHz-2462MHz


2. Insert the other end of the power adapter into a suitable electrical outle 3. Press and hold the power key 3 seconds on the back of the Parent Unit. 1. Once parent unit is on, the power LED will light up and the image will display on the LC 5.3 INFRARED NIGHT VISION (AUTOMATIC)

The infrared night vision function allows the camera to pick up images in dark or low light conditions. In this mode, only black and white images will be displayed on the onitor, the optimum image lie in where baby unit is 6ft (2m) away from object. The camera is in night vision mode, the icon will be displayed on the top of screen.



6.2 PARENT UNIT OVERVIEW

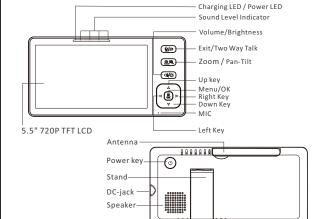

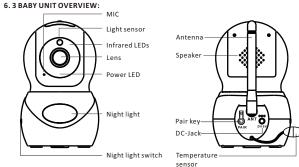

7.1 TURN ON/OFF

ss and hold the power (1) key for 3 seconds to turn on/off the Parent Unit. 7.2 TWO WAY TALK / EXIT KEY

on the LCD screen. Release the key to stop.

7.4 VOLUME AND DISPLAY BRIGHTNESS ADJUSTMENT 1. Press the Volume and Brightness 🐠 key, the volume and brightness icons will display o

Also this key acts as exit function

3. Press the ▲ / ▼ key to adjust the brightness

4. Press the Return Key 取 to exit. Note: The volume and brightness has 6 levels. The default level setting is level 4. 7.5 REMOTE PAN/TILT (DIRECTION ARROW)

1. Press any of direction arrow  $\blacktriangleleft$  /  $\blacktriangleright$  /  $\bigstar$  key, the direction icons will display on the LG

2. Press the ◀/ ▶ key to pan the camera 3. Press the  $\blacktriangle$  /  $\blacktriangledown$  key to tilt the camera 4. Press the Return Key 🖅 to exit.

You can soothe the baby to sleep by playing a gentle lullaby from the baby unit

1. Press the MENU key (a) and the menu will pop up.

2. Press the ◀ / ▶ / ▲ / ▼ key until the lullaby icon is selected by orange box. 3. Press the ◀/ ▶/▲/▼ key to select one of 8 av

5. Select stop icon 

to stop.

6. Press the Return Key 

to stop.

Note: The Juliaby default setting is OFF

8.21 ADD CAMERA

1. Press the MENU key ( and the menu will pop up.

2. Press the ◀ / ▶ / ▲ / ▼ key until the camera icon ② is selected by orange box.

3. Press the ◀ / ▶ / ▲ / ▼ key until the camera adding icon ② is selected by orange box. 4. When the Pair sign is displayed 30 seconds countdov

button on the back of the camera. 5. Once paired, Successful pairing icon shows on the LCD screen

6. If fails, repeat above steps 8.22 DELETE CAMERA

1. Press the MENU key ( and the menu will pop u 1. Press the mereov key ( ) Januarie menia win pop up.

2. Press the ◀ | ▶ | ▲ | ▼ key until the camera icon ② is selected by orange box.

3. Press the ◀ | ▶ | ▲ | ▼ key until the camera deleting icon ② is selected by orange box.

4. Press the (E) key, the icon YES and NO the will appear 5. Select YES and press ( key to delete the camera.

The baby moniter has Split-Screen feature. When 2 cameras are paired, the two different imagines will be displayed on the monitor's screen side by side at the same time. When 3 o 4 cameras are paired, all imagines will be displayed splitly on the screen in real-time.

This mode allows you to control the sound activation of your baby unit. If there is no sour around the baby unit within 30 seconds, it will stop audio transmission and turn off the screen of the parent unit. When the baby unit detects any sounds louder than the sensitiv

parent unit. To change the ECO level, please follow the below instructions. 1. Press the MENU key ( ) and the menu will po 2. Press the ◀/ ►/ ▲/ ▼ key until the ECO icon is selected by orange box.

3. Press the ◀/ ▶ key to select desired level

5. Press (♣⊋) key to Exit. Note: [652] is Low sensitivity level, the baby have to make a lot of sound before the ECO

Note: [ is High sensitivity level, the baby don't have to make a lot of sound before the EC 8.4 FEEDING TIME SETTING

1. Press the MENU key ( and the menu will pop up.
2. Press the ◀ / ▶ / ▲ / ▼ key until the Feeding Time icon is selected by orange box.

3. Press the ◀ / ▶ / ▲ / ▼ key to select the feeding alarm time you need.

4. Press the ∰ to confirm. The Feeding Time icon ⊕ shows on the LCD screen.

Note 1: The minimum setting is 0.5 hours, and the maximum setting is 7 hours (9 levels).

Note 2: The Feeding alarm default setting is OFF.

Note 3: Select icon and press to cancel feeding alarm setting.

8.5 TEMPERATURE SETTING

 Press the MENU key and the menu will pop up. 2. Press the ◀/ ▶/ ▲/ ▼ key until the thermometer icon 🚦 is selected by orange box.

Press the ▲ / ▼ key to select the Degrees Centigrade (°C) or Degrees Fahrenheit (°F)

4. Press the ▲ / ▼ key to select on or or for turning on/off alarm function.

5. Press ▲ / ▼ keys to adjust the Hi limit when ♣ ↑ (red ) is selected.

6. Press ▲ / ▼ keys to adjust the Lo limit when ♣ ↓ (blue) is selected.

7. The corresponding temperature shows on th

Note: The detected temperature range is 0~40 °C.

Note: The high temperature alarm default setting is 36  $^{\circ}$ C, and the low temperature alarm default setting is 8 °C. When the temperature goes above or below the settings, the emperature icon 📺 will display on the screen. It will alert user by beeps. Press any key on

8.6 LANGUAGE SETTING 1. Press the MENU ( key and the menu will pop up

Press the  $\blacktriangleleft/$   $\blacktriangleright/$   $\blacktriangleleft/$   $\blacktriangledown$  keys until the language icon 0 is selected by red box.

3. Press key to enter into sub-menu, then press ◀ / ▶ / ▲ / ▼ key to select the

language you need.
4. Press key to confirm.

.7 NIGHT LIGHT SETTING

the parent unit to stop beeping and flashing.

Press the MENU ( key and the menu will pop up.
 Press the ◄ / ► / ▲ / ▼ keys until the language icon ( is selected by red box.

3. Press key to wor or the night lightlight.
4. Press key to Exit. Note: Press the night light 🔆 key can also turn on or turn off the night light (Key on the side

8.8.1 DEFAULT SETTINGS

1. Press MENU ∰ Key, the Main Menu will pop up.
2. Press the ◀ / ▶ / ▲ / ▼ key until the Settings icon ♣ is selected.

www.hellobabv.net.cn service@hellobaby.net.cn

### 3. Press the MENU Key . The sub-menu Settings will pop up.

- 4. Press ◀/ ▶/▲/ ▼ to select default settings ♥ , press the MANU key ♠ to enter.

  5. Select icon YES to restore default setting; Select icon No to cancel the default setting. 6. Press the Return Key ( ) one time to exit sub-menu, and two times exit main menu

- 8.8.2 ALARM VOULME SETTING 1. Press MENU ( Key, the Main Menu will por

- 8.8.3 CONTACT
- Press the ◀/►/▲/▼ key until the Setting icon ♣ is selected.
- 8.8.4 DATE/TIME SETTING

- 7. Press ◀/ ▶ key to select Hour, Minute setting; Press ▲/ ▼ key to set your desired hou
- 1. Press MENU ( Key, the Main Menu will pop up. 2. Press the ◀/ ►/ ▲/▼ key until the Setting icon 🏚 is selected.
- 3. Press the MENU Key (♣). The sub-menu Settings will pop up.
  4. Press ◀ / ▶ / ▲ / ▼ key to select Disply Reverse ⑤.
  5. Press MANU key (♣) to open Display Reverse ⊙ or close Display Reverse or close Display

No reception on the monitor	The power adapters may not be properly connected; Confirm that the camera and monitor are ON; Camera may be far away from the monitor; Camera and monitor may not be properly paired; follow PAIRING instructions;
Interference or poor reception	* Move the monitor close to the camera; * The camera or monitor may be placed too close to many metal objects; * Other electronic devices may be interfering with the signal; * The battery power may be too low;
Audio feedback (high pitched noise)	* The camera and monitor may be placed too closed; * The volume on the monitor may be set too high;
Frozen picture on screen	Repower the baby unit (plug out the adapter, then plug it into the socket again);      Press the RESET key at the back of parent unit.

12. DISPOSAL GUIDE FOR BATTERY AND PRODUCT

\* For proper collection and processing of these products, take them to the collectio

could cause personal injury or damage to property. Use only the types of the batteries

Disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a batte

result in an explosion or the leakage of flammable liquid or gas: A battery subjected to extremely low air pressure that may result in an explosion or the

d'interférences nuisibles, et (2)cet appareil doit accepter toute interférence reçue, y comp es interferences pouvant entraîner un fonctionnement indés.

mmunications. However, there is no guarantee that interference will not occur in a eception, which can be determined by turning the equipment off and on, the user is

## encouraged to try to correct the interference by one or more of the following measures

-- Consult the dealer or an experienced radio/TV technician for help.

du cnr - 102 et conformité avec rss 102 de l'exposition aux rf, les utilisateurs peuvent obt des données canadiennes sur l'exposition aux champs rf et la conformité This equipment complies with Canada radiation exposure limits set forth for an unco

Radiation Exposure Statement for camera his equipment should be installed and operated with minimum distance 20cm betwee

SAR Statement for Monito

This Monitor meets the government's requirements for exposure to radio waves. The

 ${\tt Canada(ISED~\&FCC)}\ is\ 1.6\ W/kg\ averaged\ over\ one\ gram\ of\ tissue.\ Device\ types:\ Monitor$ has also been tested against this SAR limit. This device was tested for typical body-worn operations with the back of the Monitor kept 0mm from the body. To maintain compliance distance between the user's body and the back of the Monitor . The use of belt clips, holst and similar accessories should not contain metallic components in its assembly. The use of accessories that do not satisfy these requirements may not comply with ISED RF exposure

requirements, and should be avoided. Informations sur le débit d'absorption spécifique (DAS):

Cette Moniteur répond aux exigences du gouvernement en matière d'exposition aux ondes radio. Les lignes directrices sont basées sur des normes élaborées par des organisations scientifiques indépendantes à travers une évaluation périodique et approfondie des étude assurer la sécurité de toutes les personnes, quel que soit leur âge ou leur état de santé. Information et déclaration d'ISDE sur l'exposition aux RF la limite DAS du Canada (ISDE) e

de 1,6 W / kg en moyenne sur un gramme de tissu. Types d'appareils: la Moniteur a également été testée par rapport à cette limite SAR. Cet appareil a été testé pour des opérations typiques portées sur le corps avec le dos de la Moniteur gardé à 0 mm du corp Pour maintenir la conformité avec les exigences d'exposition RF d'ISDE, utilisez des accessoires qui maintiennent une distance de séparation de 0 mm entre le corps de l'utilisateur et l'arrière de la Moniteur. L'utilisation de clips de ceinture, d'étuis et assemblage. L'utilisation d'accessoires qui ne satisfont pas à ces exigences peut ne pas ê onforme aux exigences d'exposition aux RF d'ISDE et doit être évitée. EU Declaration of Conformity (DOC)

Hereby, videotimes declares that the radio equipment type is in compliance with RED

Directive 2014/53/EU.

www.hellobaby.net.cn

Note: [652] is Middle sensitivity level

Authorized UK Representative(UK): APEX CE SPECIALISTS LIMITED

The full text of the EU declaration of conformity is available on the website:

WARNING IR emitted from this product. Do not stare at operating lamp

**MARNING** 



Strangulation Hazard: Children have STRANGLED

in cords. Keep this cord out of the reach of children

DANGER D'ÉTRANGLEMENT: Des enfants se sont ÉTRANGLÉS avec des cordons électriques. Garde le cordonélectrique hors de la portée des enfants(à plus de 0.9m/3 pi du lit d'enfant). Ne pas enlever cette étiquette.
















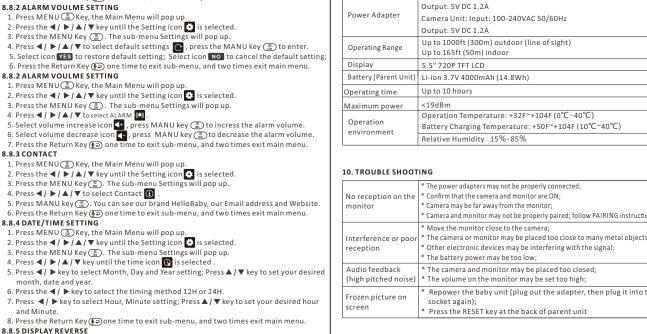

## Clean your baby monitor with a slightly damp or anti-static cloth.

points designated by local authorities. You can also contact the store where you

CAUTION: Risk of Fire and Burns. Do Not Open, Crush, Heat Above 45 degree C or Inci

Leaving a battery in an extremely high temperature surrounding envi leakage of flammable liquid or gas.

his device complies with Part 15 of the FCC Rules and with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, ncluding interference that may cause undesired operation. Cet appareil est conforme à la artie 15 des règles de la FCC et aux normes RSS exemptées de licence d'Industrie Canada. Le onctionnement est soumis aux deuxconditions suivantes : (1)cet appareil ne doit pas causer

Changes or modifications to this unit not expressly approved by the party responsible compliance could void the user's authority to operate the equipment. NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide easonable protection against harmful interference in a residential installation. This used in accordance with the instructions, may cause harmful interference to radio particular installation. If this equipment does cause harmful interference to radio or telev

-- Reorient or relocate the receiving antenna. -- Increase the separation between the equipment and receiver - Connect the equipment into an outlet on a circuit different from that to which the rece

and compliance with RSS 102 RF exposure, users can obtain Canadian information on RF exposure and compliance. cet appareil est conforme à l'exemption des limites d'évaluation courante dans la sectio

Cet équipement est conforme aux limites d'expo

radiator & your body. Cet équipement doit être installé et utilisé à une distance minimale de 20 cm entre le

guidelines are based on standards that were developed by independent scientific organizations through periodic and thorough evaluation of scientific studies. The standard include a substantial safety margin designed to assure the safety of all persons regardless age or health. ISED & FCC RF Exposure Information and Statement the SAR limit of

Responsible Party(US): Startline LLC
Add: 22 Hazelwood Drive, Jericho, NY 11753
Tel: 1-516-681-3729

Room 2106, Building 11, Tianan Yungu Phase II, Gangtou Community, Bantian Street, Longgang District, Shenzhen, Guangdong, China

Product tested against EN62471



