

FCC TEST REPORT**For****GCteq Wireless (Shenzhen) Co., Ltd.****Embedded 3-in-1 Wireless Charging Board for apple****Test Model: GF-17-01B****Additional Model No.: Please Refer to Page 6**

Prepared for : GCteq Wireless (Shenzhen) Co., Ltd.
Address : No. A402, Floor 4, Suojia Science parkComplex Sanwei
Community, HangchengStreet, Bao'an, District, Shenzhen City,
Guangdong Province, China

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Shajing Street,
Baoan District, Shenzhen, China
Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : June 19, 2024
Number of tested samples : 2
Sample No. : A240618058-1(Engineer sample), A240618058-2(Normal sample)
Serial number : Prototype
Date of Test : June 19, 2024 ~ July 01, 2024
Date of Report : July 02, 2024



Shenzhen LCS Compliance Testing Laboratory Ltd.Add:101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,
518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**FCC TEST REPORT
FCC CFR 47 PART 15C****Report Reference No. : LCSA06184096EA**

Date Of Issue : July 02, 2024

Testing Laboratory Name..... : Shenzhen LCS Compliance Testing Laboratory Ltd.Address : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Shajing Street,
Baoan District, Shenzhen, ChinaTesting Location/ Procedure : Full application of Harmonised standards ■
Partial application of Harmonised standards □
Other standard testing method □**Applicant's Name : GCteq Wireless (Shenzhen) Co., Ltd.**Address : No. A402, Floor 4, Suojia Science parkComplex Sanwei
Community, HangchengStreet, Bao'an, District, Shenzhen City,
Guangdong Province, China**Test Specification**

Standard..... : FCC CFR 47 PART 15C

Test Report Form No..... : LCSEMC-1.0

TRF Originator..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF..... : Dated 2011-03


Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description..... : Embedded 3-in-1 Wireless Charging Board for apple

Trade Mark : GCteq


Test Model..... : GF-17-01B

Power Supply : Input: DC 24-36V
Wireless Charging Output: (Mobile phone: 15W Max,
Airpods/ iWatch: 5W Max)
Type-C Output: 30W Max
USB -A Output: 18W Max
A+C Combined Output: 15W Max**Result : Positive****Compiled by:**

Ling Zhu/Administrator

Supervised by:

Cary Luo/ Technique principal

Approved by:

Gavin Liang/ Manager



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add:101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,
518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

FCC TEST REPORT

Test Report No. : LCSA06184096EA	<u>July 02, 2024</u> Date of issue
--	---------------------------------------

Test Model.....	: GF-17-01B
EUT.....	: Embedded 3-in-1 Wireless Charging Board for apple
Applicant.....	: GCteq Wireless (Shenzhen) Co., Ltd.
Address.....	: No. A402, Floor 4, Suojia Science parkComplex Sanwei Community, HangchengStreet, Bao'an, District, Shenzhen City, Guangdong Province, China
Telephone.....	: /
Fax.....	: /
Manufacturer.....	: GCteq Wireless (Shenzhen) Co., Ltd.
Address.....	: No. A402, Floor 4, Suojia Science parkComplex Sanwei Community, HangchengStreet, Bao'an, District, Shenzhen City, Guangdong Province, China
Telephone.....	: /
Fax.....	: /
Factory.....	: TEN PAO ELECTRONICS(HUIZHC)Co., LTD.
Address.....	: dongjiang indus trial Estate, shuikou Street, Huizhou City, Guangdong Province, P.R.C
Telephone.....	: /
Fax.....	: /

Test Result	Positive
--------------------	-----------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add:101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Revision History

Report Version	Issue Date	Revision Content	Revised By
000	July 02, 2024	Initial Issue	--



TABLE OF CONTENTS

1. GENERAL INFORMATION.....	6
1.1 Description of Device (EUT).....	6
1.2 Support equipment List.....	6
Note: Auxiliary equipment is provided by the laboratory.	6
1.3 External I/O Cable	7
1.4 Description of Test Facility	7
1.5 Statement of the Measurement Uncertainty	7
1.6 Measurement Uncertainty	7
1.7 Description of Test Modes.....	8
2. TEST METHODOLOGY	11
2.1 EUT Configuration	11
2.2 EUT Exercise.....	11
2.3 General Test Procedures.....	11
2.3.1 Conducted Emissions	11
2.3.2 Radiated Emissions	11
2.4. Test Sample.....	11
3. SYSTEM TEST CONFIGURATION.....	12
3.1 Justification	12
3.2 EUT Exercise Software.....	12
3.3 Special Accessories	12
3.4 Block Diagram/Schematics	12
3.5 Equipment Modifications.....	12
3.6 Test Setup.....	12
4. SUMMARY OF TEST EQUIPMENT	13
5. SUMMARY OF TEST RESULT	14
6. POWER LINE CONDUCTED MEASUREMENT	15
7. RADIATED EMISSION MEASUREMENT.....	18
7.1. Block Diagram of Test Setup	18
7.2. Radiated Emission Limit	19
7.3. EUT Configuration on Measurement	19
7.4. Field Strength Calculation	20
7.5. Operating Condition of EUT	20
7.6. Measuring Setting.....	20
7.7. Test Procedure.....	20
7.8. Test Results.....	22
8.1. Block Diagram of Test Setup	27
8.2. Test Procedure.....	27
8.3. Test Results.....	28
9. PHOTOGRAPHS OF TEST SETUP.....	29
10. EXTERNAL PHOTOGRAPHS OF THE EUT	29
11. INTERNAL PHOTOGRAPHS OF THE EUT	29



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

1. GENERAL INFORMATION

1.1 Description of Device (EUT)

EUT : Embedded 3-in-1 Wireless Charging Board for apple

Test Model : GF-17-01B

Additional Model No. : GF-17-01BP, GF-17-01U, GF-17-01S, GF-17-03B, GF-17-03U, GF-17-03S

Model Declaration : PCB board, structure and internal of these model(s) are the same, So no additional models were tested

Rating : Input: DC 24-36V
Wireless Charging Output: (Mobile phone: 15W Max, AirPods/ iWatch: 5W Max)
Type-C Output: 30W Max
USB -A Output: 18W Max
A+C Combined Output: 15W Max

Hardware Version : /

Software Version : /

Wireless Charging :

Operating Frequency : 110.0~205.0KHz, 360KHz

Modulation Type : ASK

Antenna Type : Coil Antenna

1.2 Support equipment List

Manufacturer	Description	Model	Serial Number	Certificate
SHENZHEN TIANYIN ELECTRONICS CO., LTD	Power Adapter	TPA-46050200UU	--	FCC
Huawei	Mobile phone	FRD-AL10	FRD-AL10C00B373	FCC
Huawei	TWS Earphone	--	--	FCC
Apple	Watch	--	--	FCC
SHENZHEN TIANYIN ELECTRONICS CO., LTD	Power Adapter	TPA-46050200UU	--	FCC

Note: Auxiliary equipment is provided by the laboratory.



1.3 External I/O Cable

I/O Port Description	Quantity	Cable
Power Port	1	N/A

1.4 Description of Test Facility

NVLAP Accreditation Code is 600167-0.

FCC Designation Number is CN5024

CAB identifier is CN0071.

CNAS Registration Number is L4595.

Test Firm Registration Number: 254912.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

1.5 Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

1.6 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Radiation Uncertainty	9KHz~30MHz	3.10dB	(1)
	30MHz~200MHz	2.96dB	(1)
	200MHz~1000MHz	3.10dB	(1)
	1GHz~26.5GHz	3.80dB	(1)
	26.5GHz~40GHz	3.90dB	(1)
Conduction Uncertainty	150kHz~30MHz	1.63dB	(1)
Power disturbance	30MHz~300MHz	1.60dB	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add:101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

1.7 Description of Test Modes

Equipment under test was operated during the measurement under the following conditions:

☒ Charging and communication mode

Modulation Type: ASK

Test Modes		
Mode 1	AC/DC Adapter (DC36V) + EUT + Phone + TWS Earphone + Watch (Battery Status: <1%) (110-205KHz)	Record
Mode 2	AC/DC Adapter (DC36V) + EUT + Phone + TWS Earphone + Watch (Battery Status: <50%) (110-205KHz)	Record
Mode 3	AC/DC Adapter (DC36V) + EUT + Phone + TWS Earphone + Watch (Battery Status: 100%) (110-205KHz)	Record
Mode 4	AC/DC Adapter (DC36V) + EUT + Phone + TWS Earphone (Battery Status: <1%) (110-205KHz)	Pre-tested
Mode 5	AC/DC Adapter (DC36V) + EUT + Phone + TWS Earphone (Battery Status: <50%) (110-205KHz)	Pre-tested
Mode 6	AC/DC Adapter (DC36V) + EUT + Phone + TWS Earphone (Battery Status: 100%) (110-205KHz)	Pre-tested
Mode 7	AC/DC Adapter (DC36V) + EUT + Phone + Watch (Battery Status: <1%) (110-205KHz)	Pre-tested
Mode 8	AC/DC Adapter (DC36V) + EUT + Phone + Watch (Battery Status: <50%) (110-205KHz)	Pre-tested
Mode 9	AC/DC Adapter (DC36V) + EUT + Phone + Watch (Battery Status: 100%) (110-205KHz)	Pre-tested
Mode 10	AC/DC Adapter (DC36V) + EUT + TWS Earphone + Watch (Battery Status: <1%) (110-205KHz)	Pre-tested
Mode 11	AC/DC Adapter (DC36V) + EUT + TWS Earphone + Watch (Battery Status: <50%) (110-205KHz)	Pre-tested
Mode 12	AC/DC Adapter (DC36V) + EUT + TWS Earphone + Watch (Battery Status: 100%) (110-205KHz)	Pre-tested
Mode 13	AC/DC Adapter (DC36V) + EUT + Phone (Battery Status: <1%) (110-205KHz)	Pre-tested
Mode 14	AC/DC Adapter (DC36V) + EUT + Phone (Battery Status: <50%) (110-205KHz)	Pre-tested
Mode 15	AC/DC Adapter (DC36V) + EUT + Phone (Battery Status: 100%) (110-205KHz)	Pre-tested
Mode 16	AC/DC Adapter (DC36V) + EUT + Watch (Battery Status: <1%) (110-205KHz)	Pre-tested
Mode 17	AC/DC Adapter (DC36V) + EUT + Watch (Battery Status: <50%) (110-205KHz)	Pre-tested
Mode 18	AC/DC Adapter (DC36V) + EUT + Watch (Battery Status: 100%) (110-205KHz)	Pre-tested
Mode 19	AC/DC Adapter (DC36V) + EUT + TWS Earphone (Battery Status: <1%) (110-205KHz)	Pre-tested
Mode 20	AC/DC Adapter (DC36V) + EUT + TWS Earphone (Battery Status: <50%) (110-205KHz)	Pre-tested
Mode 21	AC/DC Adapter (DC36V) + EUT + TWS Earphone (Battery Status: 100%) (110-205KHz)	Pre-tested
Mode 22	AC/DC Adapter (DC24V) + EUT + Phone + TWS Earphone + Watch (Battery Status: <1%) (110-205KHz)	Pre-tested
Mode 23	AC/DC Adapter (DC24V) + EUT + Phone + TWS Earphone + Watch (Battery Status: <50%) (110-205KHz)	Pre-tested
Mode 24	AC/DC Adapter (DC24V) + EUT + Phone + TWS Earphone + Watch (Battery Status: 100%) (110-205KHz)	Pre-tested
Mode 25	AC/DC Adapter (DC24V) + EUT + Phone + TWS Earphone (Battery Status: <1%) (110-205KHz)	Pre-tested
Mode 26	AC/DC Adapter (DC24V) + EUT + Phone + TWS Earphone (Battery Status: <50%) (110-205KHz)	Pre-tested
Mode 27	AC/DC Adapter (DC24V) + EUT + Phone + TWS Earphone (Battery Status: 100%) (110-205KHz)	Pre-tested
Mode 28	AC/DC Adapter (DC24V) + EUT + Phone + Watch (Battery Status: <1%) (110-205KHz)	Pre-tested
Mode 29	AC/DC Adapter (DC24V) + EUT + Phone + Watch (Battery Status: <50%) (110-205KHz)	Pre-tested
Mode 30	AC/DC Adapter (DC24V) + EUT + Phone + Watch (Battery Status: 100%) (110-205KHz)	Pre-tested
Mode 31	AC/DC Adapter (DC24V) + EUT + TWS Earphone + Watch (Battery Status: <1%) (110-205KHz)	Pre-tested
Mode 32	AC/DC Adapter (DC24V) + EUT + TWS Earphone + Watch (Battery Status: <50%) (110-205KHz)	Pre-tested
Mode 33	AC/DC Adapter (DC24V) + EUT + TWS Earphone + Watch (Battery Status: 100%) (110-205KHz)	Pre-tested
Mode 34	AC/DC Adapter (DC24V) + EUT + Phone (Battery Status: <1%) (110-205KHz)	Pre-tested
Mode 35	AC/DC Adapter (DC24V) + EUT + Phone (Battery Status: <50%) (110-205KHz)	Pre-tested



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Mode 36	AC/DC Adapter (DC24V) + EUT + Phone (Battery Status: 100%) (110-205KHz)	Pre-tested
Mode 37	AC/DC Adapter (DC24V) + EUT + Watch (Battery Status: <1%) (110-205KHz)	Pre-tested
Mode 38	AC/DC Adapter (DC24V) + EUT + Watch (Battery Status: <50%) (110-205KHz)	Pre-tested
Mode 39	AC/DC Adapter (DC24V) + EUT + Watch (Battery Status: 100%) (110-205KHz)	Pre-tested
Mode 40	AC/DC Adapter (DC24V) + EUT + TWS Earphone (Battery Status: <1%) (110-205KHz)	Pre-tested
Mode 41	AC/DC Adapter (DC24V) + EUT + TWS Earphone (Battery Status: <50%) (110-205KHz)	Pre-tested
Mode 42	AC/DC Adapter (DC24V) + EUT + TWS Earphone (Battery Status: 100%) (110-205KHz)	Pre-tested
Mode 43	AC/DC Adapter (DC36V) + EUT + Phone + TWS Earphone + Watch (Battery Status: <1%) (360KHz)	Record
Mode 44	AC/DC Adapter (DC36V) + EUT + Phone + TWS Earphone + Watch (Battery Status: <50%) (360KHz)	Record
Mode 45	AC/DC Adapter (DC36V) + EUT + Phone + TWS Earphone + Watch (Battery Status: 100%) (360KHz)	Record
Mode 46	AC/DC Adapter (DC36V) + EUT + Phone + TWS Earphone (Battery Status: <1%) (360KHz)	Pre-tested
Mode 47	AC/DC Adapter (DC36V) + EUT + Phone + TWS Earphone (Battery Status: <50%) (360KHz)	Pre-tested
Mode 48	AC/DC Adapter (DC36V) + EUT + Phone + TWS Earphone (Battery Status: 100%) (360KHz)	Pre-tested
Mode 49	AC/DC Adapter (DC36V) + EUT + Phone + Watch (Battery Status: <1%) (360KHz)	Pre-tested
Mode 50	AC/DC Adapter (DC36V) + EUT + Phone + Watch (Battery Status: <50%) (360KHz)	Pre-tested
Mode 51	AC/DC Adapter (DC36V) + EUT + Phone + Watch (Battery Status: 100%) (360KHz)	Pre-tested
Mode 52	AC/DC Adapter (DC36V) + EUT + TWS Earphone + Watch (Battery Status: <1%) (360KHz)	Pre-tested
Mode 53	AC/DC Adapter (DC36V) + EUT + TWS Earphone + Watch (Battery Status: <50%) (360KHz)	Pre-tested
Mode 54	AC/DC Adapter (DC36V) + EUT + TWS Earphone + Watch (Battery Status: 100%) (360KHz)	Pre-tested
Mode 55	AC/DC Adapter (DC36V) + EUT + Phone (Battery Status: <1%) (360KHz)	Pre-tested
Mode 56	AC/DC Adapter (DC36V) + EUT + Phone (Battery Status: <50%) (360KHz)	Pre-tested
Mode 57	AC/DC Adapter (DC36V) + EUT + Phone (Battery Status: 100%) (360KHz)	Pre-tested
Mode 58	AC/DC Adapter (DC36V) + EUT + Watch (Battery Status: <1%) (360KHz)	Pre-tested
Mode 59	AC/DC Adapter (DC36V) + EUT + Watch (Battery Status: <50%) (360KHz)	Pre-tested
Mode 60	AC/DC Adapter (DC36V) + EUT + Watch (Battery Status: 100%) (360KHz)	Pre-tested
Mode 61	AC/DC Adapter (DC36V) + EUT + TWS Earphone (Battery Status: <1%) (360KHz)	Pre-tested
Mode 62	AC/DC Adapter (DC36V) + EUT + TWS Earphone (Battery Status: <50%) (360KHz)	Pre-tested
Mode 63	AC/DC Adapter (DC36V) + EUT + TWS Earphone (Battery Status: 100%) (360KHz)	Pre-tested
Mode 64	AC/DC Adapter (DC24V) + EUT + Phone + TWS Earphone + Watch (Battery Status: <1%) (360KHz)	Pre-tested
Mode 65	AC/DC Adapter (DC24V) + EUT + Phone + TWS Earphone + Watch (Battery Status: <50%) (360KHz)	Pre-tested
Mode 66	AC/DC Adapter (DC24V) + EUT + Phone + TWS Earphone + Watch (Battery Status: 100%) (360KHz)	Pre-tested
Mode 67	AC/DC Adapter (DC24V) + EUT + Phone + TWS Earphone (Battery Status: <1%) (360KHz)	Pre-tested
Mode 68	AC/DC Adapter (DC24V) + EUT + Phone + TWS Earphone (Battery Status: <50%) (360KHz)	Pre-tested
Mode 69	AC/DC Adapter (DC24V) + EUT + Phone + TWS Earphone (Battery Status: 100%) (360KHz)	Pre-tested
Mode 70	AC/DC Adapter (DC24V) + EUT + Phone + Watch (Battery Status: <1%) (360KHz)	Pre-tested
Mode 71	AC/DC Adapter (DC24V) + EUT + Phone + Watch (Battery Status: <50%) (360KHz)	Pre-tested
Mode 72	AC/DC Adapter (DC24V) + EUT + Phone + Watch (Battery Status: 100%) (360KHz)	Pre-tested
Mode 73	AC/DC Adapter (DC24V) + EUT + TWS Earphone + Watch (Battery Status: <1%) (360KHz)	Pre-tested
Mode 74	AC/DC Adapter (DC24V) + EUT + TWS Earphone + Watch (Battery Status: <50%) (360KHz)	Pre-tested
Mode 75	AC/DC Adapter (DC24V) + EUT + TWS Earphone + Watch (Battery Status: 100%) (360KHz)	Pre-tested
Mode 76	AC/DC Adapter (DC24V) + EUT + Phone (Battery Status: <1%) (360KHz)	Pre-tested
Mode 77	AC/DC Adapter (DC24V) + EUT + Phone (Battery Status: <50%) (360KHz)	Pre-tested
Mode 78	AC/DC Adapter (DC24V) + EUT + Phone (Battery Status: 100%) (360KHz)	Pre-tested
Mode 79	AC/DC Adapter (DC24V) + EUT + Watch (Battery Status: <1%) (360KHz)	Pre-tested
Mode 80	AC/DC Adapter (DC24V) + EUT + Watch (Battery Status: <50%) (360KHz)	Pre-tested
Mode 81	AC/DC Adapter (DC24V) + EUT + Watch (Battery Status: 100%) (360KHz)	Pre-tested
Mode 82	AC/DC Adapter (DC24V) + EUT + TWS Earphone (Battery Status: <1%) (360KHz)	Pre-tested



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Mode 83	AC/DC Adapter (DC24V) + EUT + TWS Earphone (Battery Status: <50%) (360KHz)	Pre-tested
Mode 84	AC/DC Adapter (DC24V) + EUT + TWS Earphone (Battery Status: 100%) (360KHz)	Pre-tested



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2013, FCC CFR PART 15C 15.207.

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The EUT was operated in the normal operating mode and a continuous transmits mode for other tests.

According to its specifications, the EUT must comply with the requirements of the Section 15.207 under the FCC Rules Part 15 Subpart C.

2.3 General Test Procedures

2.3.1 Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

2.3.2 Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz and 1.5 m above ground plane above 1GHz. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10-2013

2.4. Test Sample

The application provides 2 samples to meet requirement;

Sample Number	Description
Sample 1(A240618058-1)	Engineer sample – continuous transmit
Sample 2(A240618058-2)	Normal sample – Intermittent transmit



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add:101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

3. SYSTEM TEST CONFIGURATION

3.1 Justification

The system was configured for testing in a normal condition.

3.2 EUT Exercise Software

N/A.

3.3 Special Accessories

No.	Equipment	Manufacturer	Model No.	Serial No.	Length	shielded/ unshielded	Notes
/	/	/	/	/	/	/	/

3.4 Block Diagram/Schematics

Please refer to the related document.

3.5 Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

3.6 Test Setup

Please refer to the test setup photo.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

4. SUMMARY OF TEST EQUIPMENT

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	MXA Signal Analyzer	Agilent	N9020A	MY49100040	2024-06-06	2025-06-05
2	RS SPECTRUM ANALYZER	R&S	FSP40	100503	2023-07-17	2024-07-16
3	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2024-06-06	2025-06-05
4	Positioning Controller	Max-Full	MF7802BS	MF780208586	N/A	N/A
5	EMI Test Software	AUDIX	E3	/	N/A	N/A
6	EMI Test Receiver	R&S	ESR 7	101181	2023-08-15	2024-08-14
7	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	00005	2021-08-29	2024-08-28
8	By-log Antenna	SCHWARZBECK	VULB9163	9163-470	2021-09-12	2024-09-11
9	EMI Test Receiver	R&S	ESPI	101940	2023-08-15	2024-08-14
10	Artificial Mains	R&S	ENV216	101288	2024-06-06	2025-06-05
11	10dB Attenuator	SCHWARZBECK	MTS-IMP-136	261115-001-0032	2024-06-06	2025-06-05
12	EMI Test Software	Farad	EZ	/	N/A	N/A
13	Antenna Mast	Max-Full	MFA-515BSN	1308572	N/A	N/A



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

5. SUMMARY OF TEST RESULT

FCC Rules	Description of Test	Test Sample	Result
§15.207(a)	AC Conducted Emissions	Sample 1	Compliant
§15.209	Radiated Spurious Emissions	Sample 1	Compliant
§15.215	20 dB Bandwidth	Sample 1	Compliant

Remark: The measurement uncertainty is not included in the test result.

N/A – Not Applicable!!!



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

6. POWER LINE CONDUCTED MEASUREMENT

6.1. Block Diagram of Test Setup

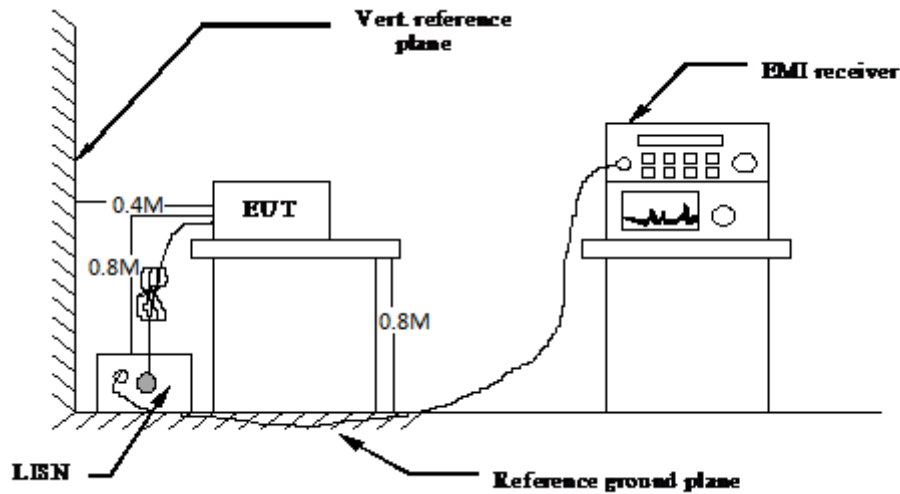

6.2. Standard Applicable

According to §15.207: For all the consumer devices which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range are listed as follows:

Frequency Range (MHz)	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

* Decreasing linearly with the logarithm of the frequency

6.3 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS \text{ (dBuV/m)} = RA \text{ (dBuV)} + AF \text{ (dB/m)} + CL \text{ (dB)} - AG \text{ (dB)}$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

6.4 Test Results

PASS


The test data please refer to following page.

Temperature	22.5℃	Humidity	53.7%
Test Engineer	Jay Luo	Configurations	Transmit



AC Power Line Conducted Emission (Power input to adapter @ AC 120V/60Hz (Worst Case))

Line

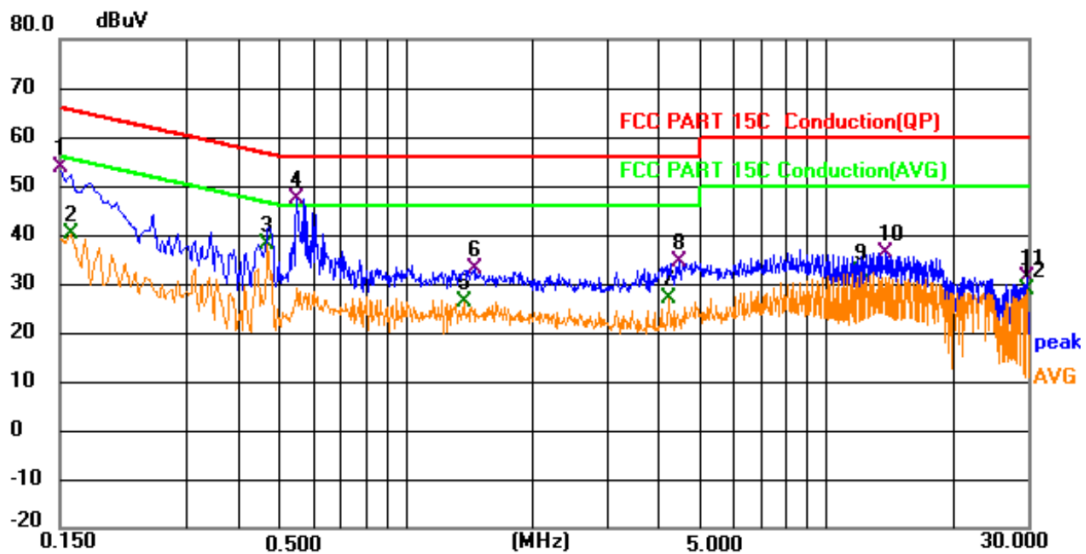

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	dBuV	Factor	ment	dBuV	dB	Detector	Comment
1		0.150	33.80	19.89	53.69	66.00	-12.31	QP	
2		0.159	20.49	19.84	40.33	55.52	-15.19	AVG	
3		0.465	18.01	19.94	37.95	46.60	-8.65	AVG	
4	*	0.546	27.78	19.70	47.48	56.00	-8.52	QP	
5		1.369	7.27	19.08	26.35	46.00	-19.65	AVG	
6		1.455	13.84	19.06	32.90	56.00	-23.10	QP	
7		4.218	7.73	19.12	26.85	46.00	-19.15	AVG	
8		4.452	15.29	19.06	34.35	56.00	-21.65	QP	
9		12.098	12.58	19.65	32.23	50.00	-17.77	AVG	
10		13.825	16.42	19.83	36.25	60.00	-23.75	QP	
11		29.922	12.11	19.15	31.26	60.00	-28.74	QP	
12		29.922	9.61	19.15	28.76	50.00	-21.24	AVG	




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Neutral

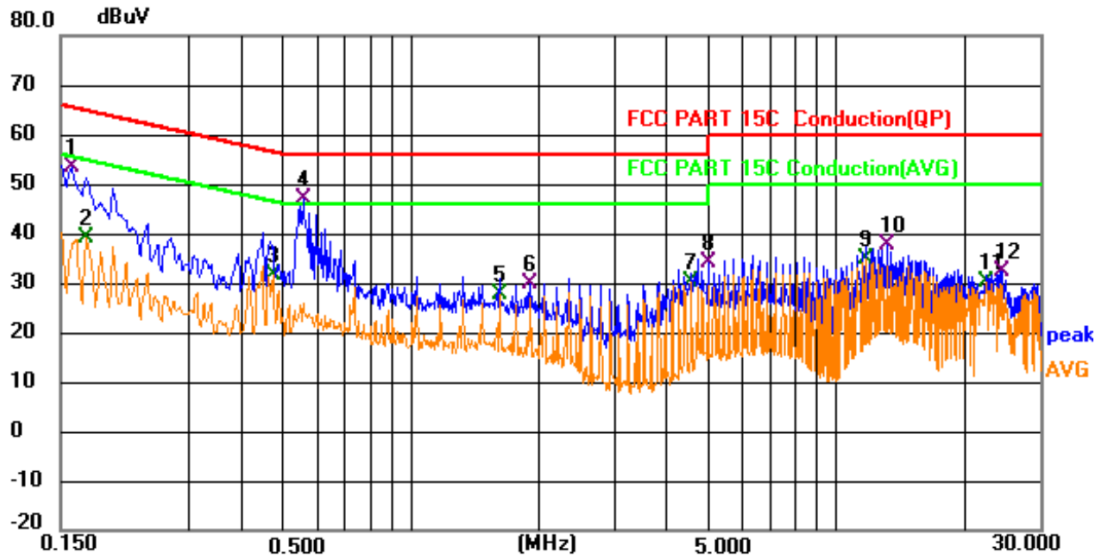

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	0.159	33.85	19.62	53.47	65.52	-12.05	QP	
2	0.172	19.42	19.67	39.09	54.86	-15.77	AVG	
3	0.474	12.24	19.53	31.77	46.44	-14.67	AVG	
4 *	0.559	27.46	19.42	46.88	56.00	-9.12	QP	
5	1.617	8.65	19.01	27.66	46.00	-18.34	AVG	
6	1.909	10.63	19.12	29.75	56.00	-26.25	QP	
7	4.556	11.22	18.89	30.11	46.00	-15.89	AVG	
8	4.997	15.40	18.83	34.23	56.00	-21.77	QP	
9	11.755	15.13	19.60	34.73	50.00	-15.27	AVG	
10	13.079	17.98	19.66	37.64	60.00	-22.36	QP	
11	22.483	10.97	19.19	30.16	50.00	-19.84	AVG	
12	24.612	12.97	19.33	32.30	60.00	-27.70	QP	

***Note: Pre-scan all modes and recorded the worst case results in this report.

Margin=Reading level + Correct - Limit; Correct Factor= Lism Factor+Cable Factor



Shenzhen LCS Compliance Testing Laboratory Ltd.



Add:101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

7. RADIATED EMISSION MEASUREMENT

7.1. Block Diagram of Test Setup

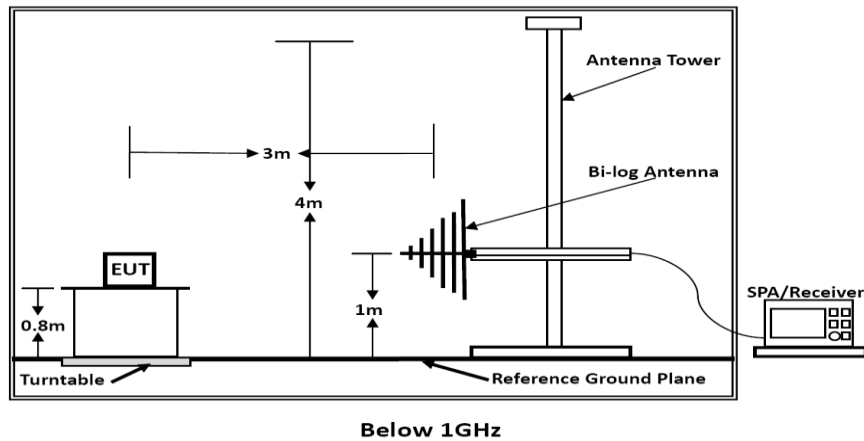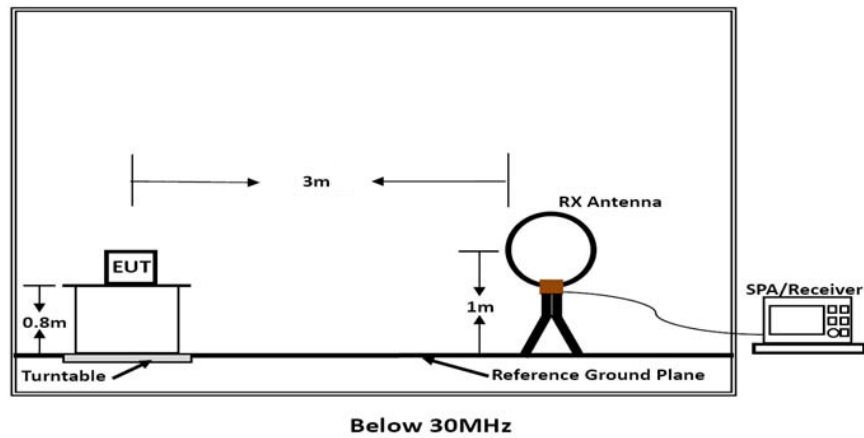

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

7.2. Radiated Emission Limit

15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
\1\ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2\)
13.36-13.41			

\1\ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

\2\ Above 38.6

According to §15.247 (d): 20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

7.3. EUT Configuration on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

7.4. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS \text{ (dBuV/m)} = RA \text{ (dBuV)} + AF \text{ (dB/m)} + CL \text{ (dB)} - AG \text{ (dB)}$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

7.5. Operating Condition of EUT

(1) Setup the EUT as shown in Section 7.1.

7.6. Measuring Setting

The following table is the setting of spectrum analyzer and receiver.

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP/Average
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP/Average
Start ~ Stop Frequency	30MHz~1000MHz / RB 100kHz for QP

7.7. Test Procedure

1) Sequence of testing 9 kHz to 30 MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1.0 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest



emissions with QPK detector.

--- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

2) Sequence of testing 30 MHz to 1 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

7.8. Test Results

PASS.

Only report the worst test data in test report;

The test data please refer to following page:

Temperature	23.8°C	Humidity	52.1%
Test Engineer	Jay Luo	Configurations	Transmit



Mode 1:

0.009 MHz – 30 MHz

0 degree



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.1257	80.05	-9.77	70.28	105.58	-35.30	QP
2	0.1564	83.28	-9.77	73.51	103.69	-30.18	QP
3	0.3246	68.53	-9.74	58.79	97.37	-38.58	QP
4	0.4676	60.58	-9.71	50.87	94.21	-43.34	QP
5	0.9943	61.10	-9.25	51.85	67.65	-15.80	QP
6	1.4796	54.95	-9.31	45.64	64.20	-18.56	QP

Remark: 1). Measured at antenna position 0 degree and 90 degree, recorded worst case at 0 degree.
 2). Margin=Reading level + Factor- Limit



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add:101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Mode 44:

0.009 MHz – 30 MHz

0 degree

130.0 dBuV/m



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	0.3548	61.49	-9.73	51.76	96.59	-44.83	QP	P	
2	0.4344	54.49	-9.71	44.78	94.84	-50.06	QP	P	
3	0.4909	42.23	-9.71	32.52	73.78	-41.26	QP	P	
4	0.9092	48.72	-9.34	39.38	68.43	-29.05	QP	P	
5	1.6045	45.48	-9.32	36.16	63.50	-27.34	QP	P	
6	4.8357	48.16	-9.40	38.76	69.54	-30.78	QP	P	

Remark: 1). Measured at antenna position 0 degree and 90 degree, recorded worst case at 0 degree.
 2). Margin=Reading level + Factor- Limit



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add:101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity

Temperature	23.8°C	Humidity	52.1%
Test Engineer	Jay Luo	Configurations	Transmit

Mode 1:

Below 1GHz

Horizontal

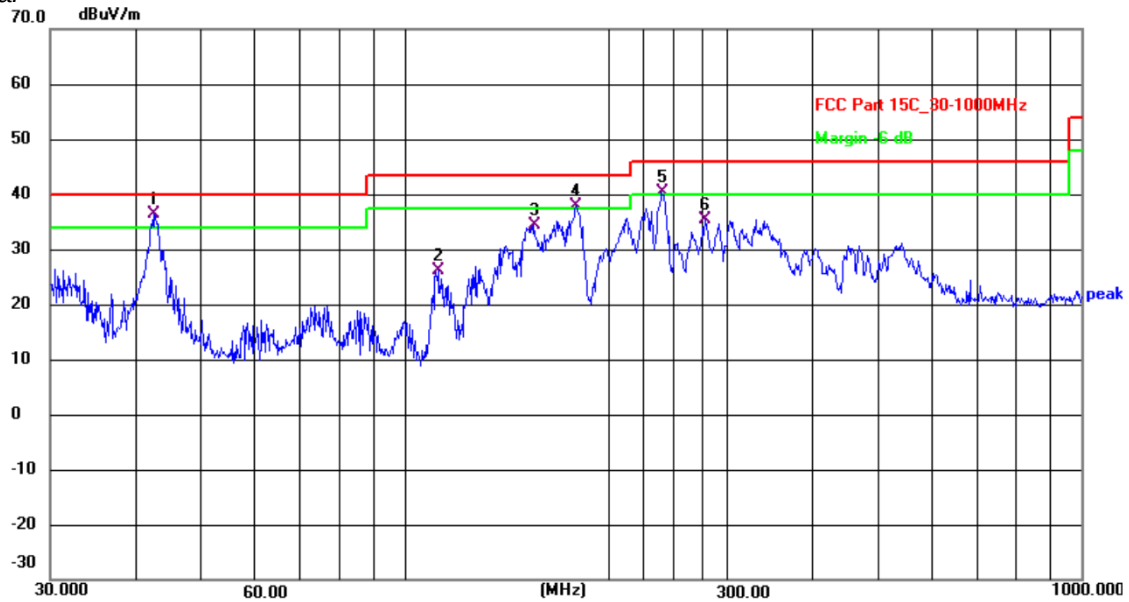

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	42.6000	53.64	-17.21	36.43	40.00	-3.57	QP
2	112.1305	45.31	-19.25	26.06	43.50	-17.44	QP
3	155.3644	54.22	-19.75	34.47	43.50	-9.03	QP
4	179.3863	56.64	-18.74	37.90	43.50	-5.60	QP
5	239.9874	56.36	-16.06	40.30	46.00	-5.70	QP
6	278.0668	50.67	-15.40	35.27	46.00	-10.73	QP




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Vertical

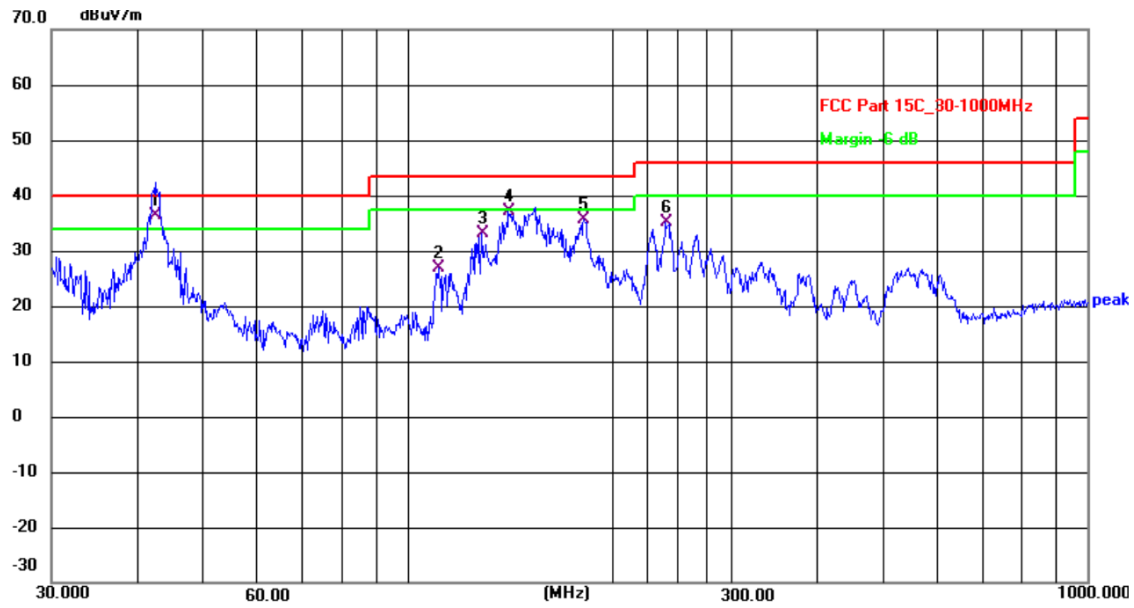

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	42.6000	53.71	-17.21	36.50	40.00	-3.50	QP
2	111.3468	45.95	-19.18	26.77	43.50	-16.73	QP
3	128.5630	53.52	-20.47	33.05	43.50	-10.45	QP
4	140.8351	58.00	-20.81	37.19	43.50	-6.31	QP
5	181.9202	54.12	-18.61	35.51	43.50	-7.99	QP
6	239.9874	51.08	-16.06	35.02	46.00	-10.98	QP

1). Emission level (dBuV/m) = 20 log Emission level (uV/m).

2). Margin=Reading level + Factor- Limit.

Correct Factor=Antenna Factor+Cable Factor- Pre-amplifier Factor



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add:101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

8. 20 dB Bandwidth Measurement

8.1. Block Diagram of Test Setup

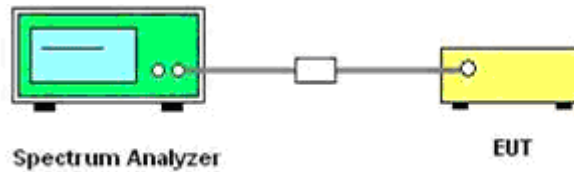

8.2. Test Procedure

Use the following spectrum analyzer settings:

Span = 1KHz

RBW = 100Hz

VBW = 300Hz

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity

8.3. Test Results

Test Result Of 20dB Bandwidth Measurement			
Test Mode	Test Frequency (MHz)	20dB Bandwidth (kHz)	Limit (kHz)
TM1	0.126	0.028	Non-Specified
TM2	0.360	0.029	Non-Specified

Result: Pass

Please refer to the following page for test plot.

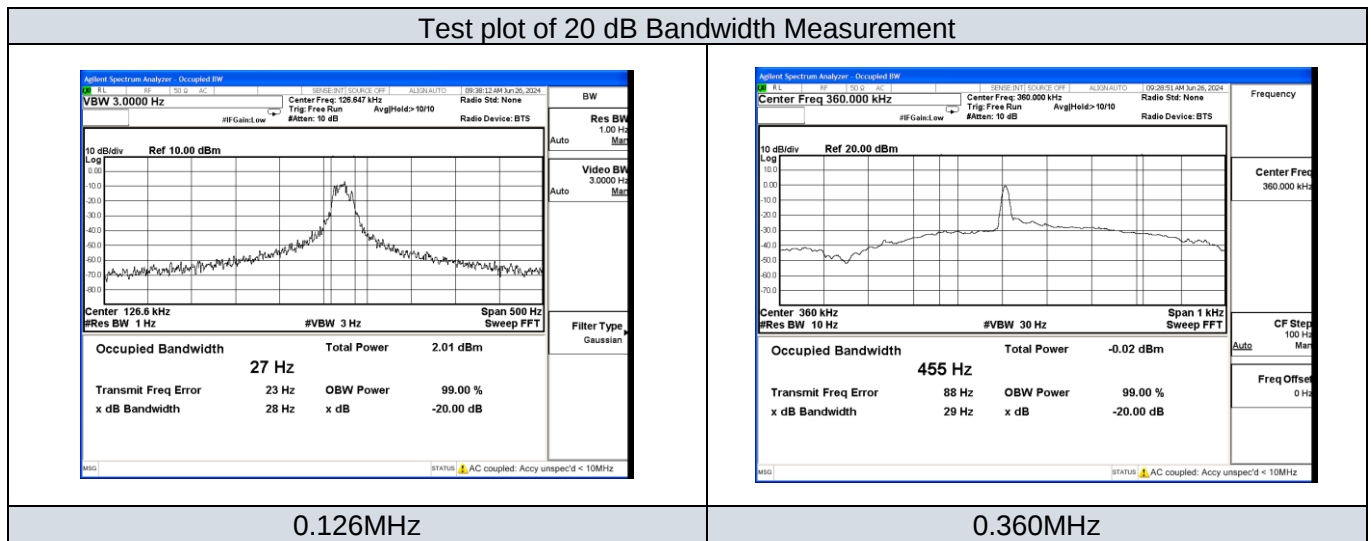

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

9. PHOTOGRAPHS OF TEST SETUP

Please refer to separated files for Test Setup Photos of the EUT.

10. EXTERNAL PHOTOGRAPHS OF THE EUT

Please refer to separated files for External Photos of the EUT.

11. INTERNAL PHOTOGRAPHS OF THE EUT

Please refer to separated files for Internal Photos of the EUT.

-----THE END OF REPORT-----



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity