


Conducted output power

Band	Channel	Frequency (MHz)	Power (dBm)	Verdict
EGPRS1900 1 Slot	512	1850.2	27.61	PASS
EGPRS1900 1 Slot	661	1880	27.42	PASS
EGPRS1900 1 Slot	810	1909.8	27.19	PASS
EGPRS1900 2 Slot	512	1850.2	26.53	PASS
EGPRS1900 2 Slot	661	1880	26.86	PASS
EGPRS1900 2 Slot	810	1909.8	26.71	PASS
EGPRS1900 3 Slot	512	1850.2	24.78	PASS
EGPRS1900 3 Slot	661	1880	24.82	PASS
EGPRS1900 3 Slot	810	1909.8	24.63	PASS
EGPRS1900 4 Slot	512	1850.2	23.98	PASS
EGPRS1900 4 Slot	661	1880	23.55	PASS
EGPRS1900 4 Slot	810	1909.8	23.39	PASS
EGPRS850 1 Slot	128	824.2	27.17	PASS
EGPRS850 1 Slot	189	836.4	27.71	PASS
EGPRS850 1 Slot	251	848.8	27.57	PASS
EGPRS850 2 Slot	128	824.2	26.98	PASS
EGPRS850 2 Slot	189	836.4	26.86	PASS
EGPRS850 2 Slot	251	848.8	26.85	PASS
EGPRS850 3 Slot	128	824.2	24.72	PASS
EGPRS850 3 Slot	189	836.4	24.85	PASS
EGPRS850 3 Slot	251	848.8	24.47	PASS
EGPRS850 4 Slot	128	824.2	23.90	PASS
EGPRS850 4 Slot	189	836.4	23.78	PASS
EGPRS850 4 Slot	251	848.8	23.21	PASS


Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
EGPRS1900	512	1850.2	5.98	13	PASS
EGPRS1900	661	1880	5.59	13	PASS
EGPRS1900	810	1909.8	6.12	13	PASS
EGPRS850	128	824.2	8.31	13	PASS
EGPRS850	189	836.4	8.53	13	PASS
EGPRS850	251	848.8	8.77	13	PASS


EGPRS1900 Channel=512

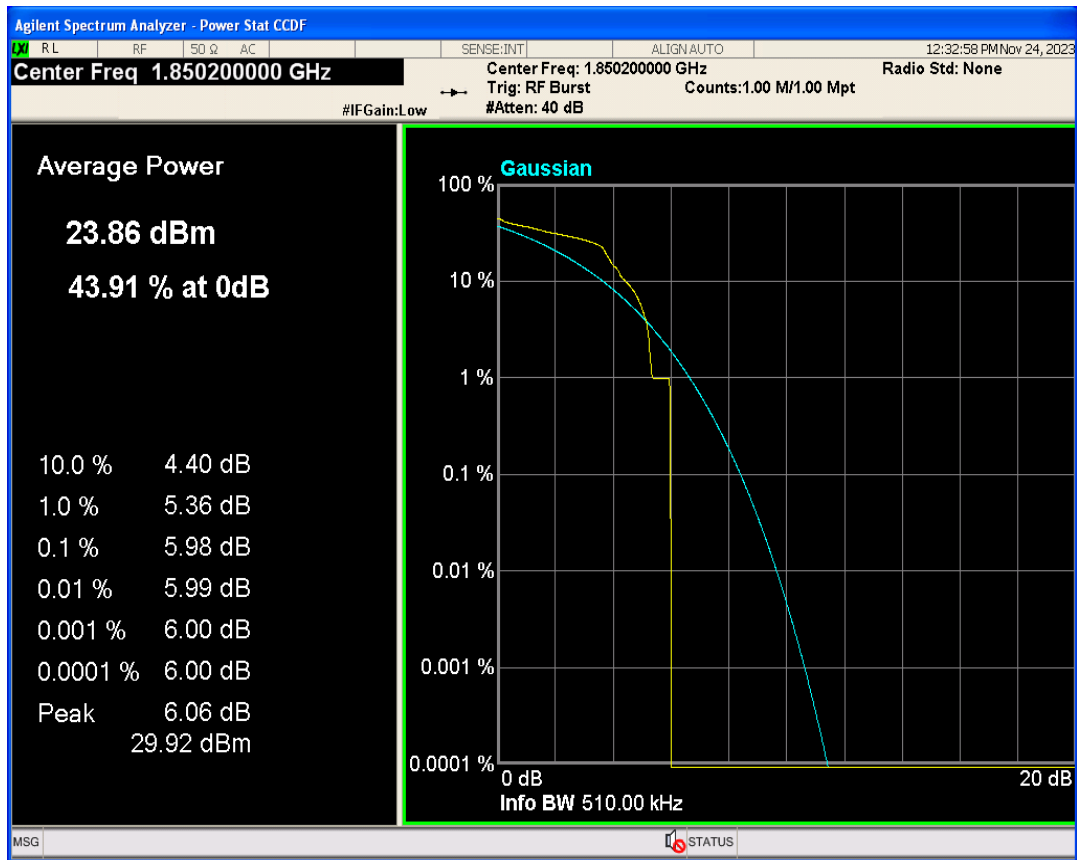


EGPRS1900 Channel=661

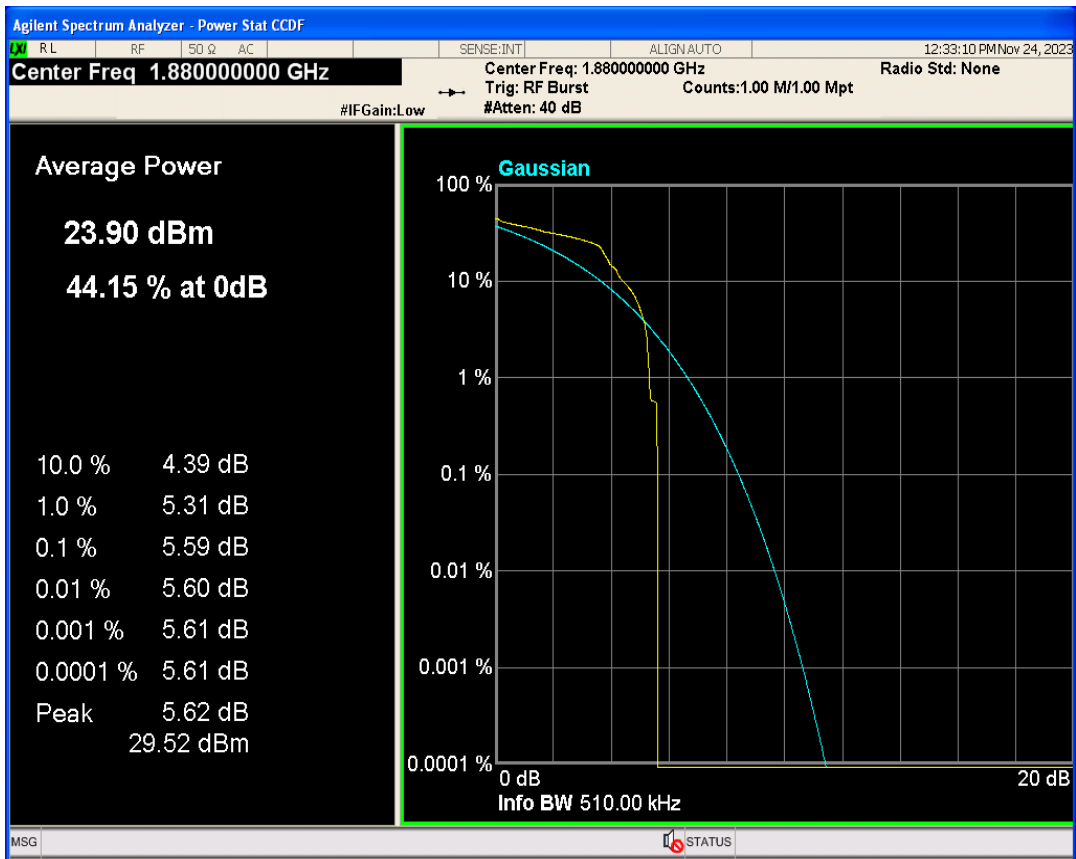


EGPRS1900 Channel=810

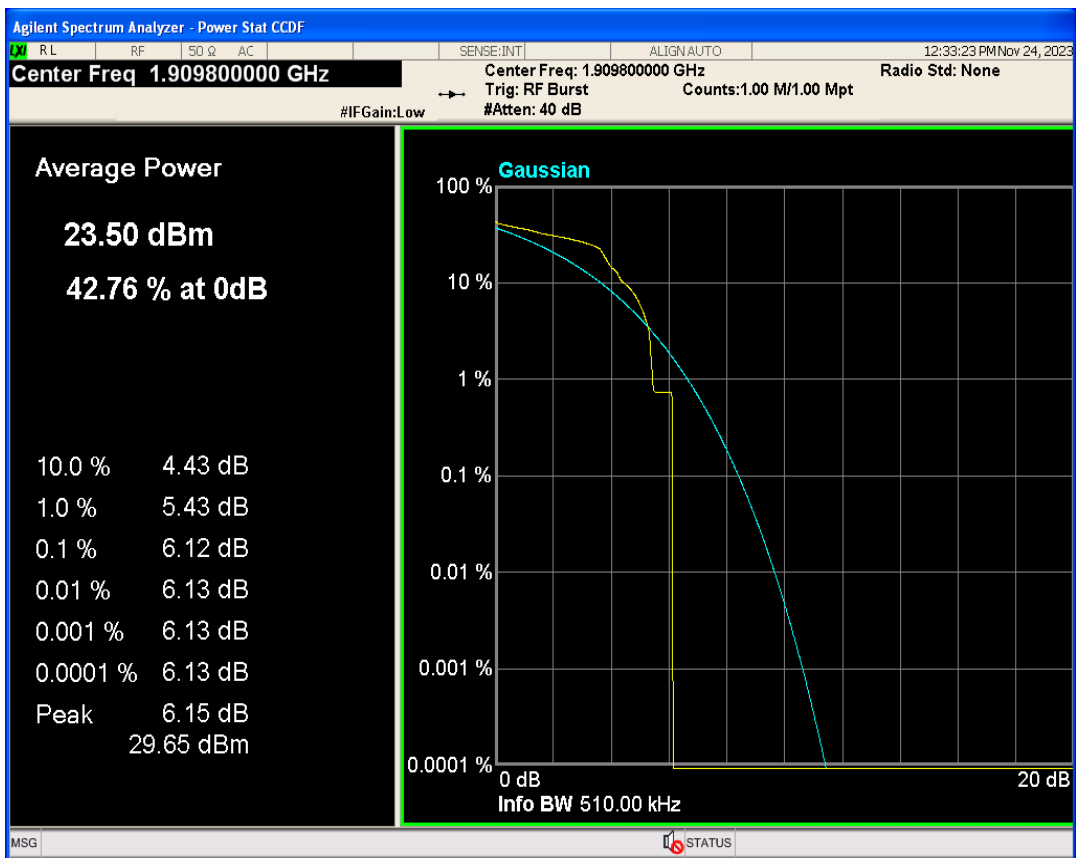


EGPRS850 Channel=128

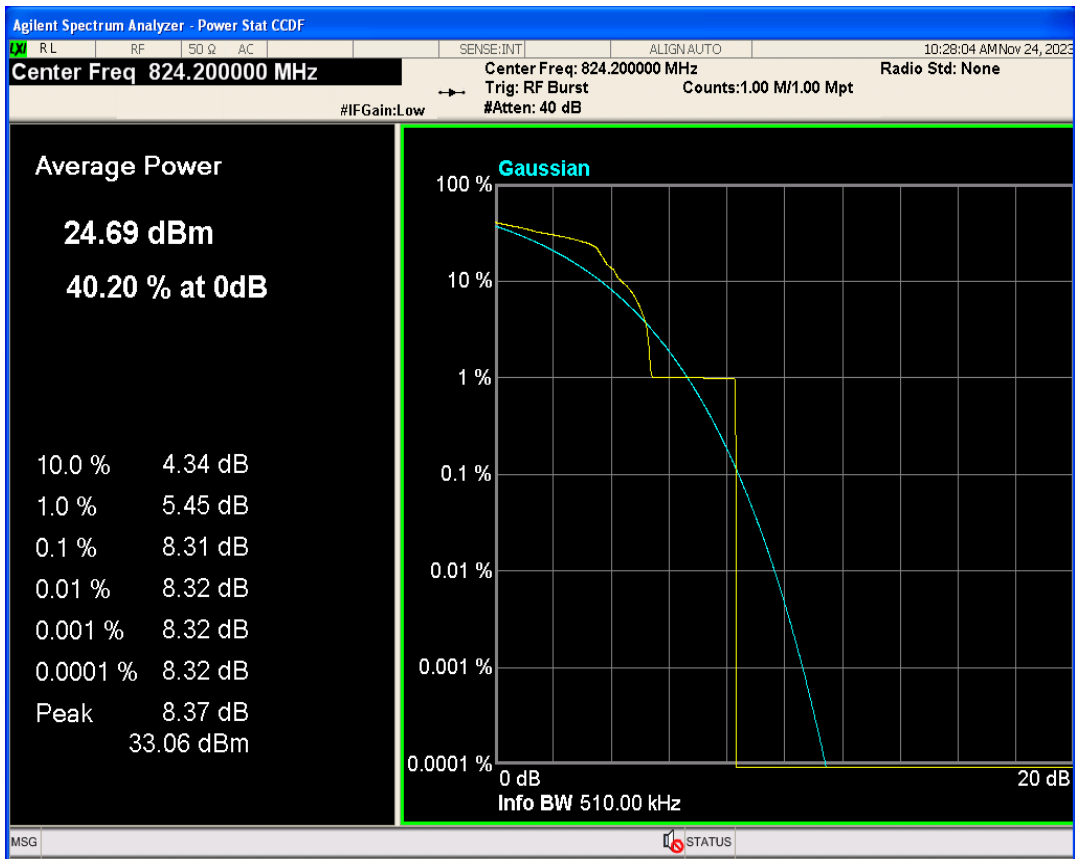

EGPRS850 Channel=189

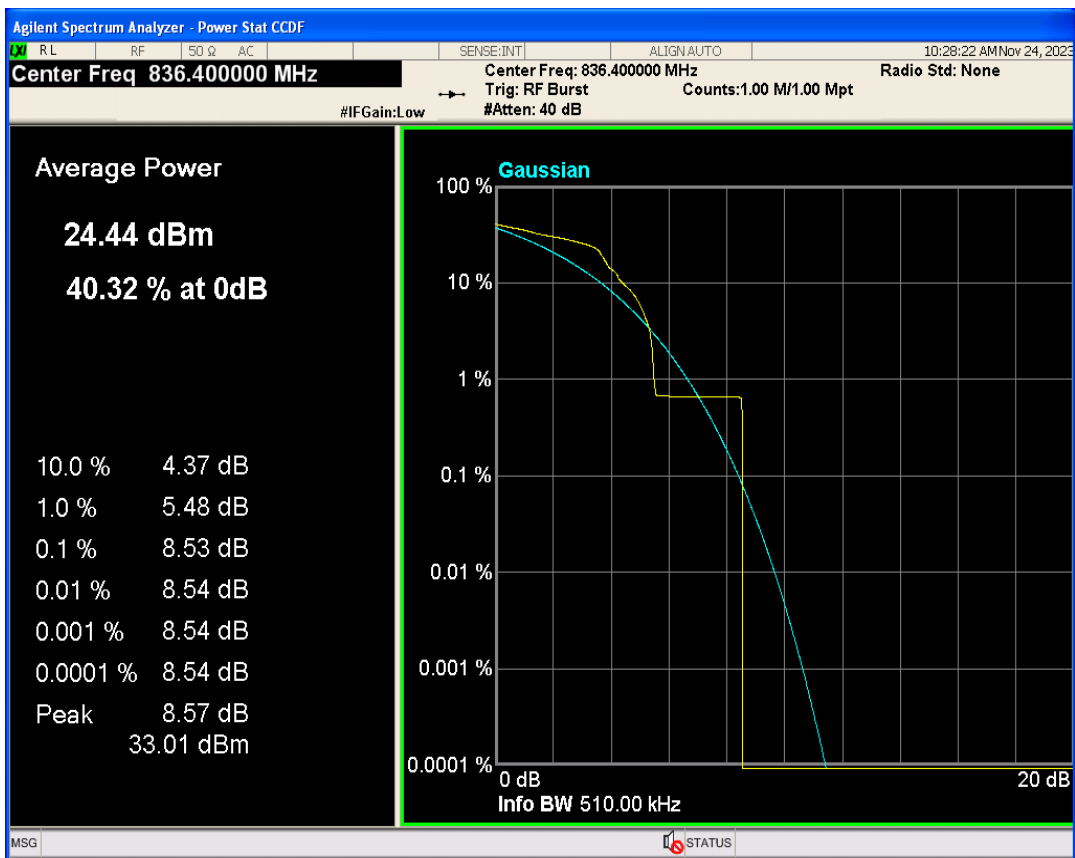


EGPRS850 Channel=251

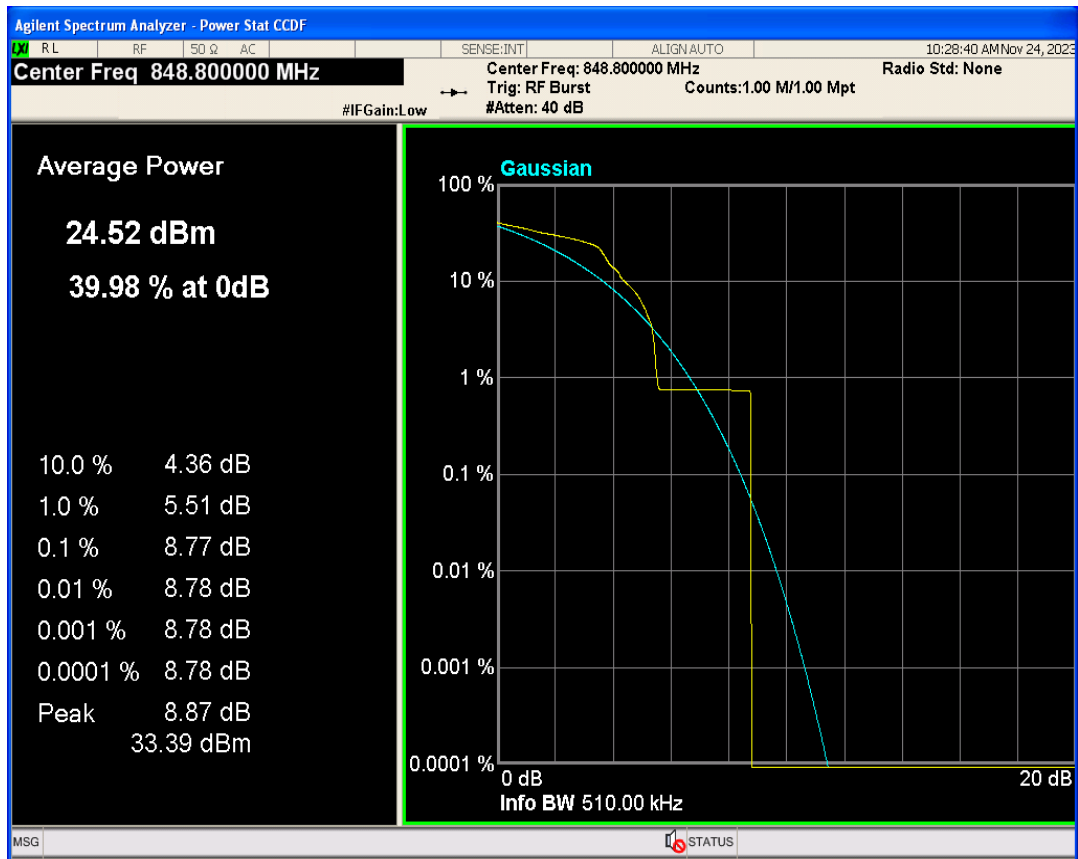


Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
EGPRS1900	512	1850.2	252.438	310.745	PASS
EGPRS1900	661	1880	252.402	316.320	PASS
EGPRS1900	810	1909.8	246.982	315.782	PASS
EGPRS850	128	824.2	236.581	296.483	PASS
EGPRS850	189	836.4	249.833	311.148	PASS
EGPRS850	251	848.8	240.122	291.608	PASS


EGPRS1900 Channel=512

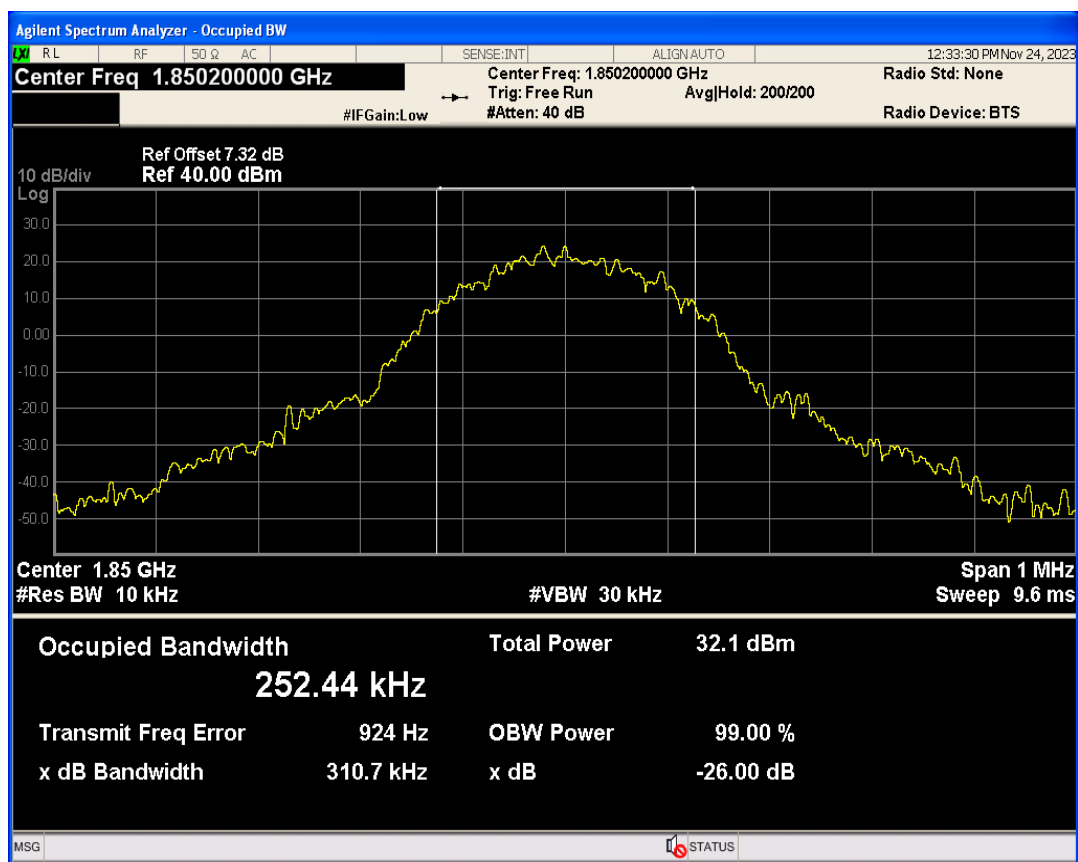


EGPRS1900 Channel=810

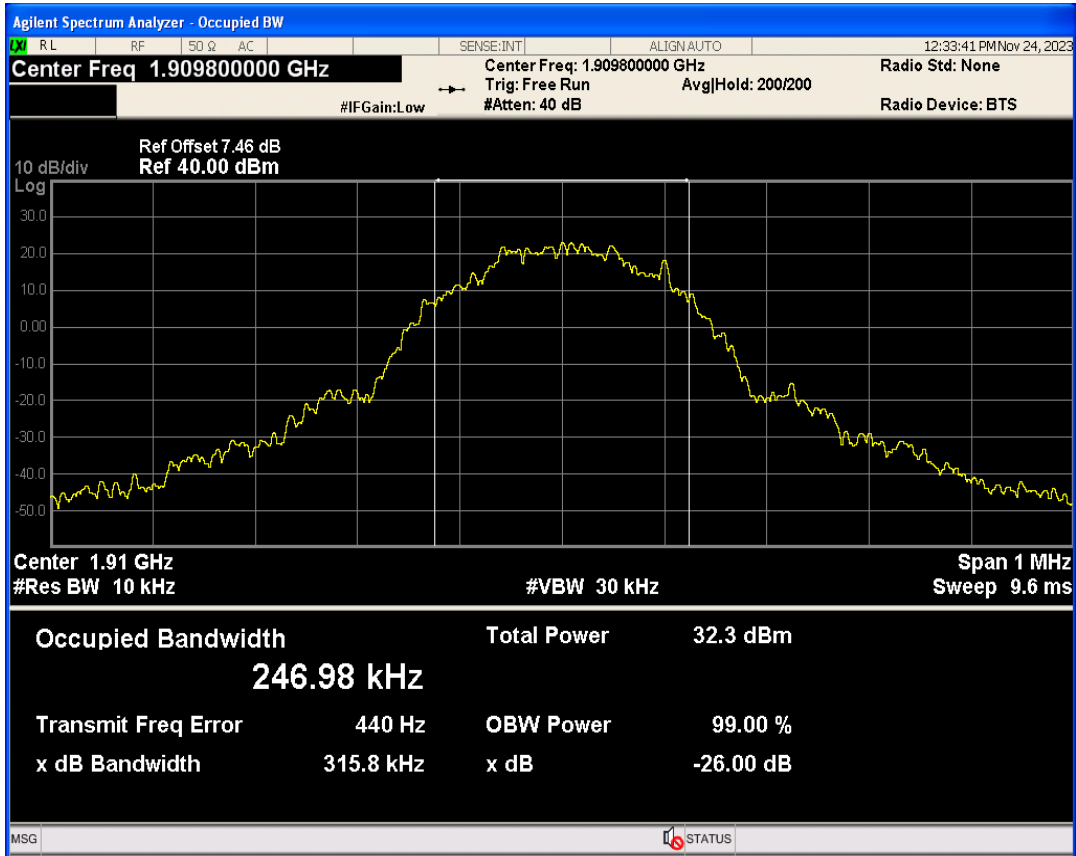


EGPRS1900 Channel=661

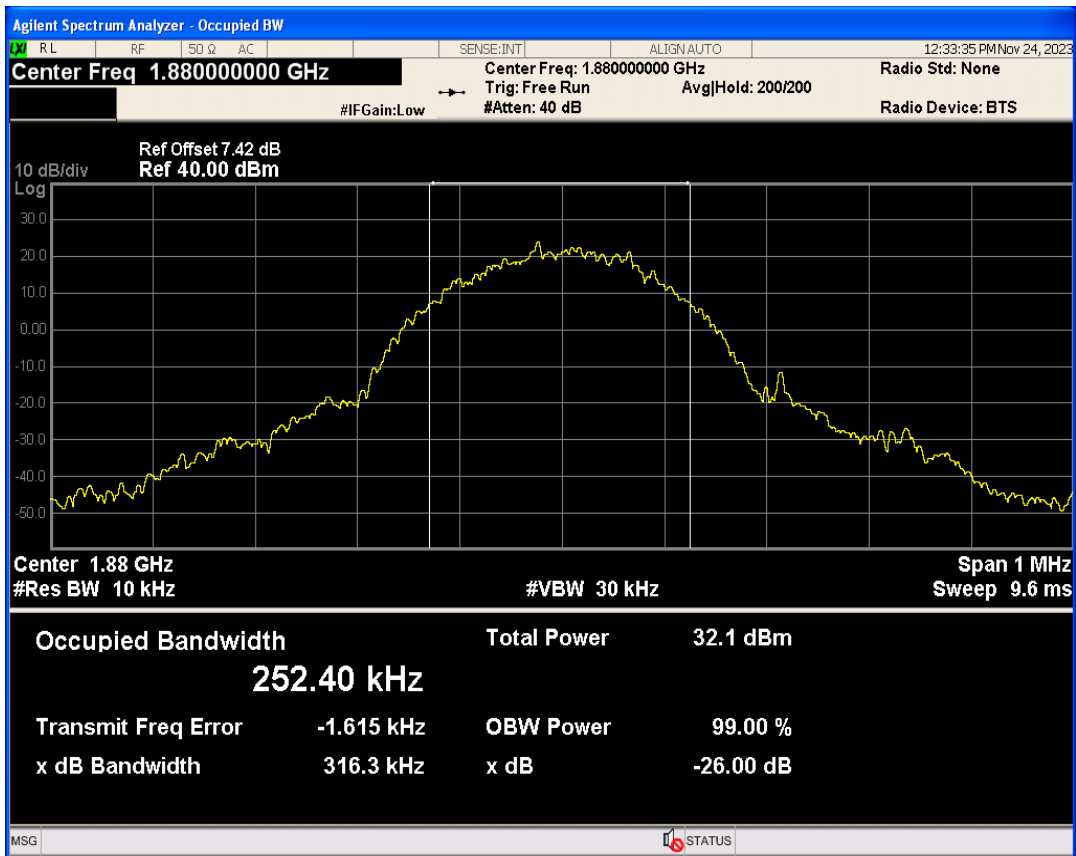


EGPRS850 Channel=128

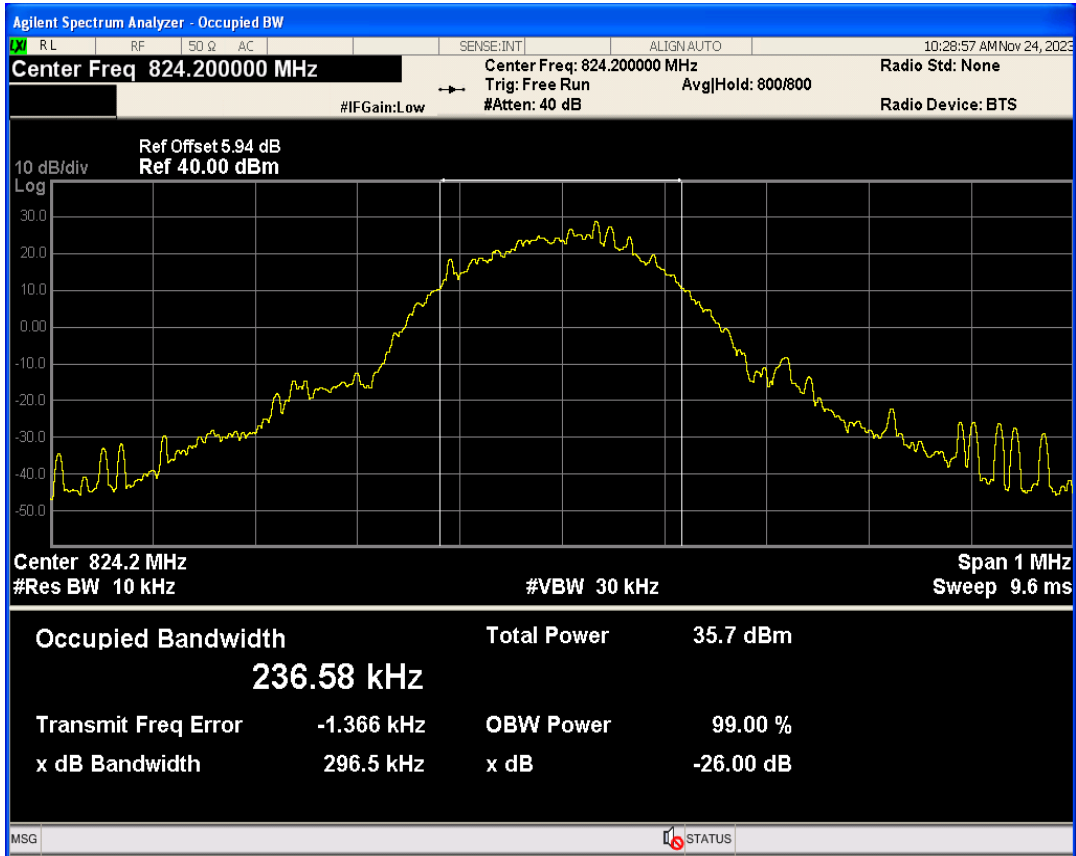

EGPRS850 Channel=251

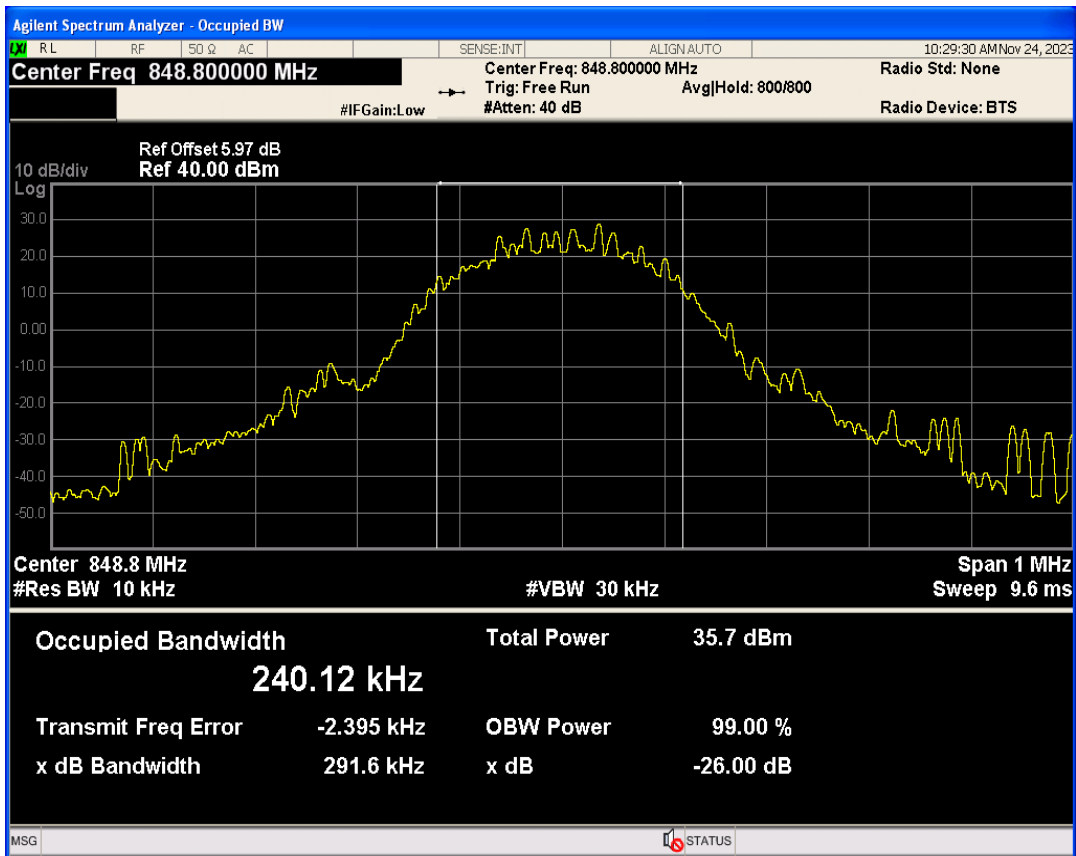


EGPRS850 Channel=189

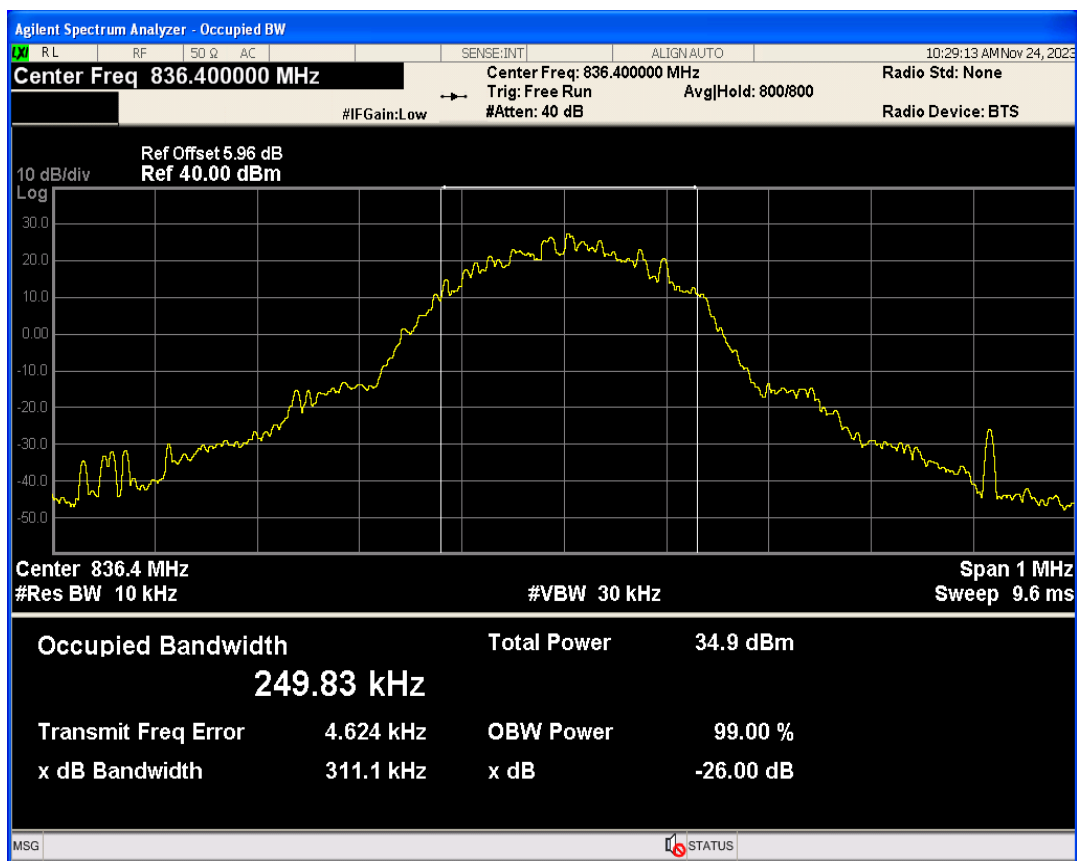


Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
EGPRS1900	512	1850.2	1849.99	-37.09	-13	PASS
EGPRS1900	810	1909.8	1910.03	-38.41	-13	PASS
EGPRS850	128	824.2	823.99	-35.50	-13	PASS
EGPRS850	251	848.8	849.01	-33.64	-13	PASS


EGPRS1900 Channel=512

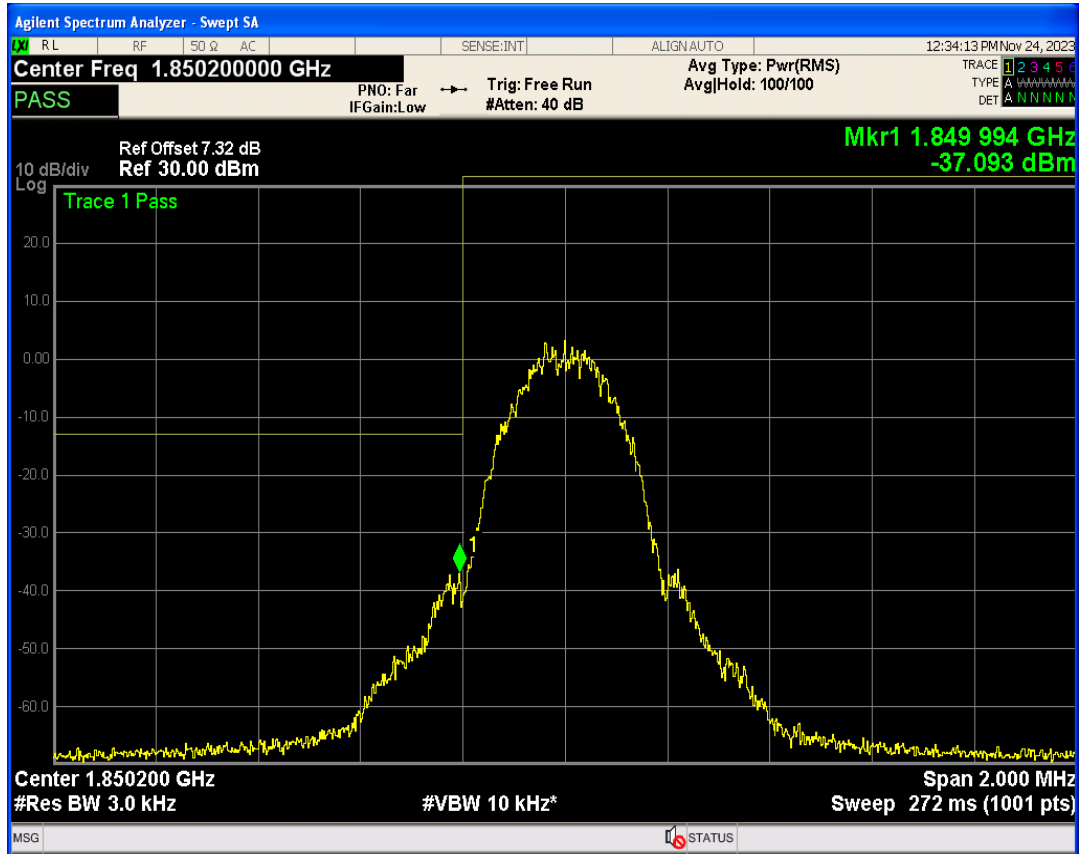


EGPRS1900 Channel=810

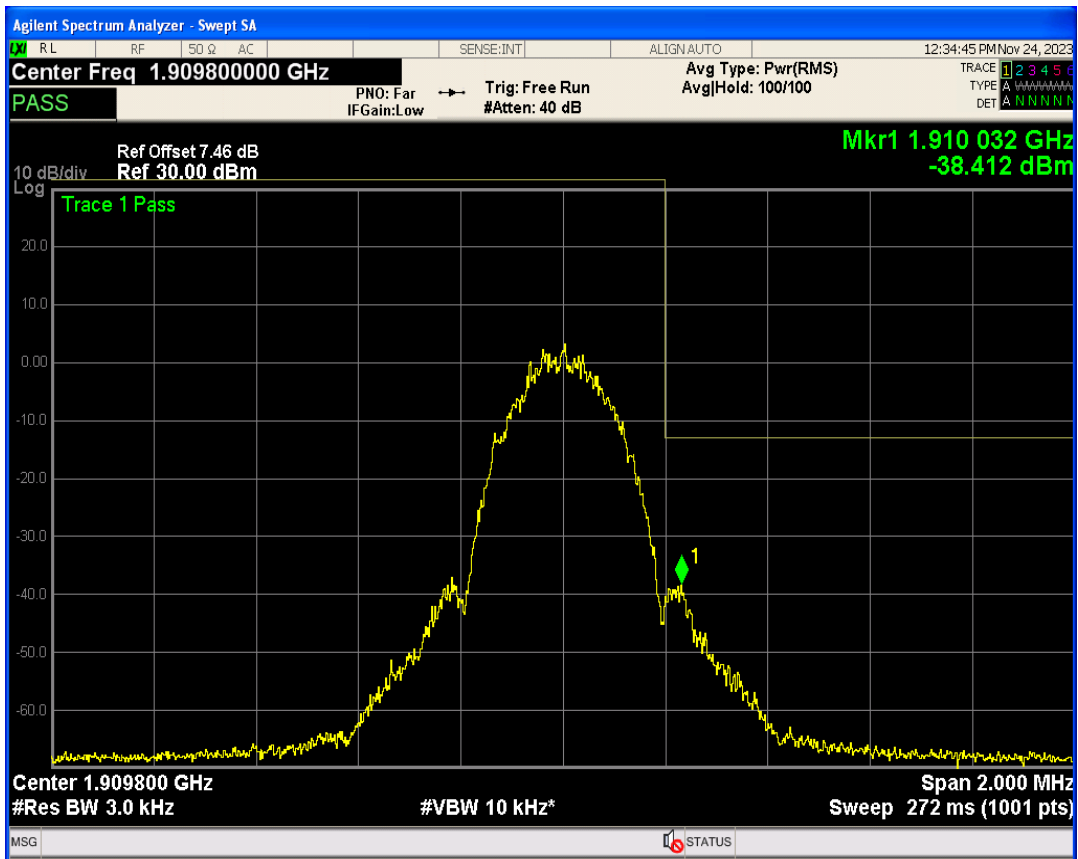

EGPRS850 Channel=128

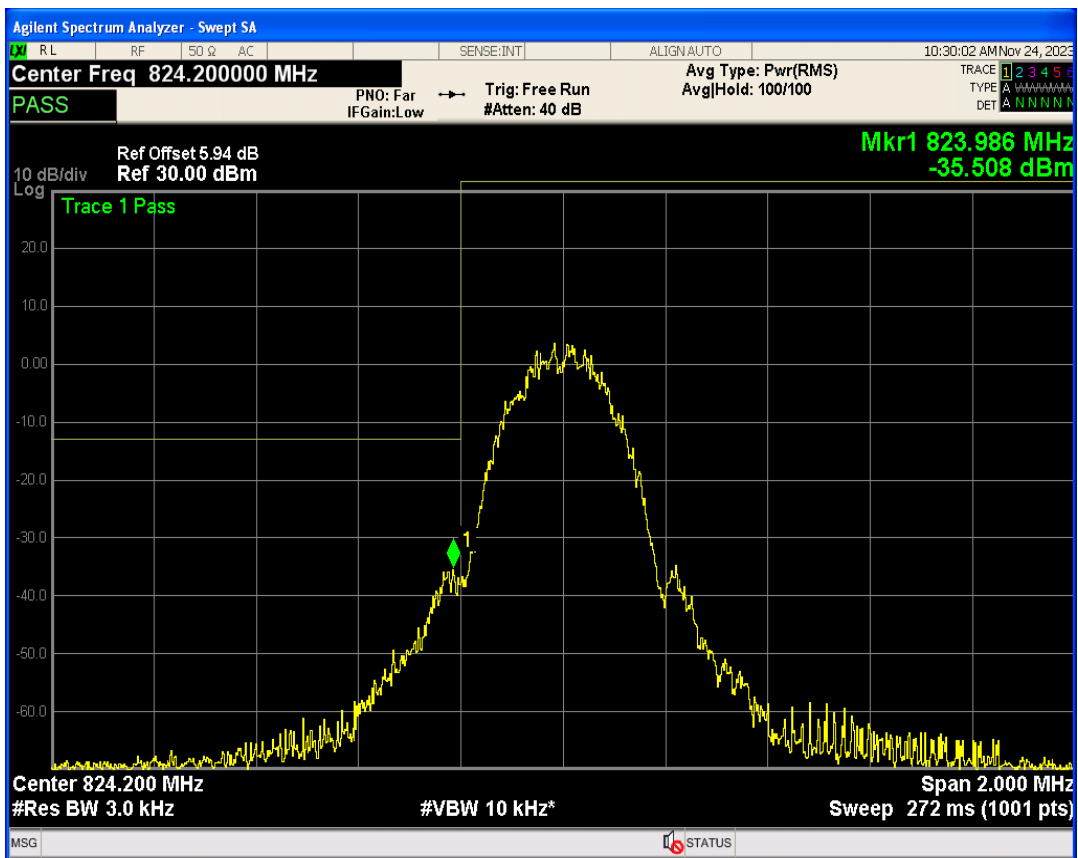


EGPRS850 Channel=251

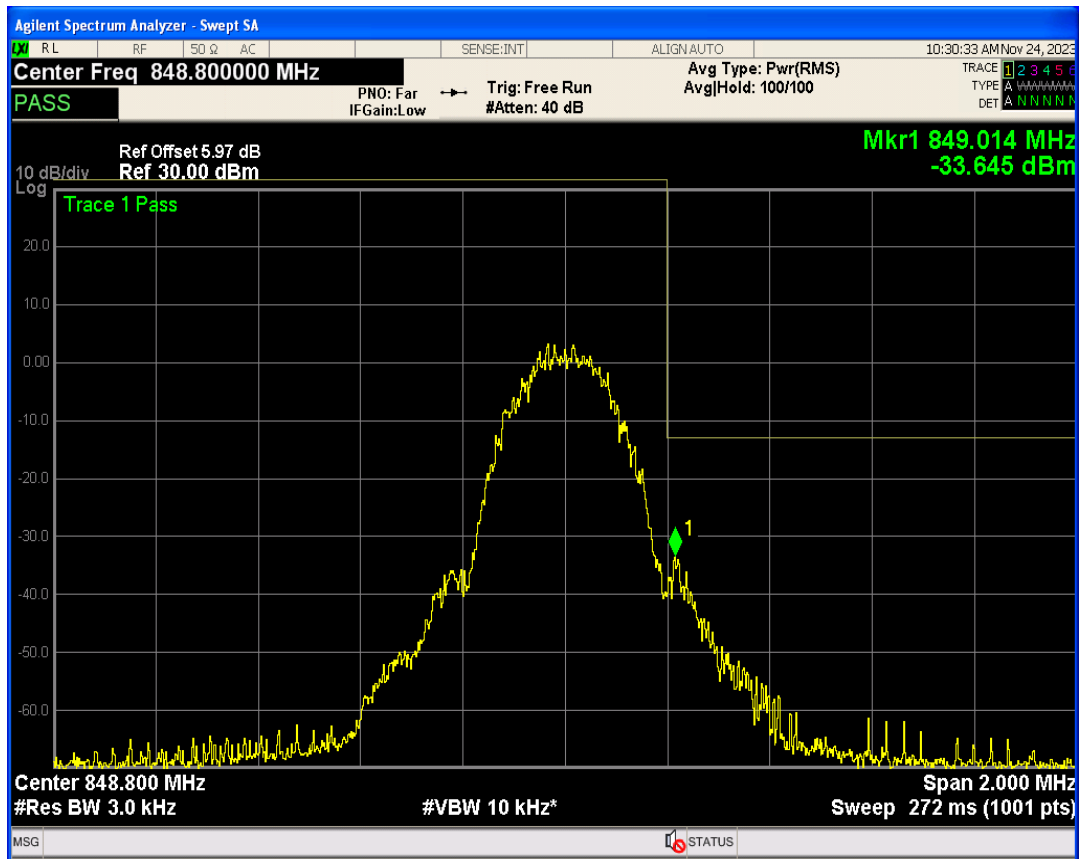


Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
EGPRS1900	512	1850.2	26003.69	-19.45	-13	PASS
EGPRS1900	661	1880	25967.95	-18.59	-13	PASS
EGPRS1900	810	1909.8	26061.92	-18.71	-13	PASS
EGPRS850	128	824.2	26024.20	-20.46	-13	PASS
EGPRS850	189	836.4	26018.25	-19.83	-13	PASS
EGPRS850	251	848.8	25969.28	-20.65	-13	PASS


EGPRS1900 Channel=512

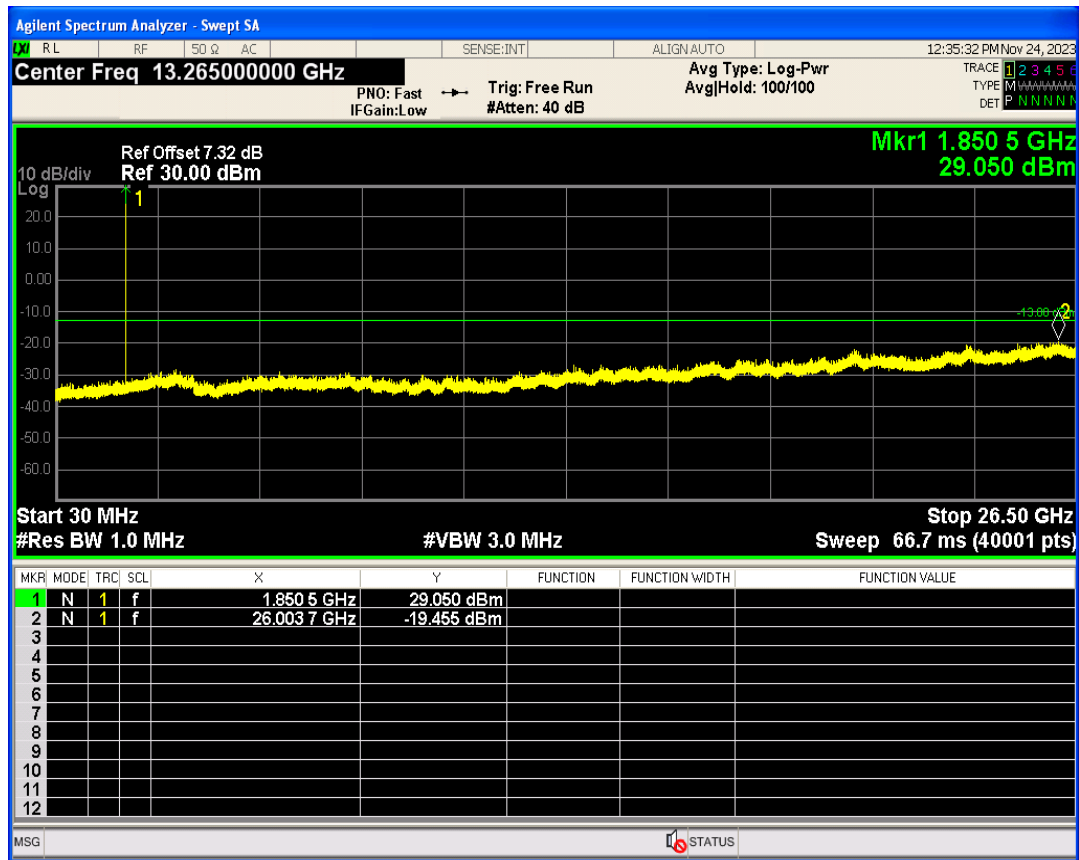


EGPRS1900 Channel=661

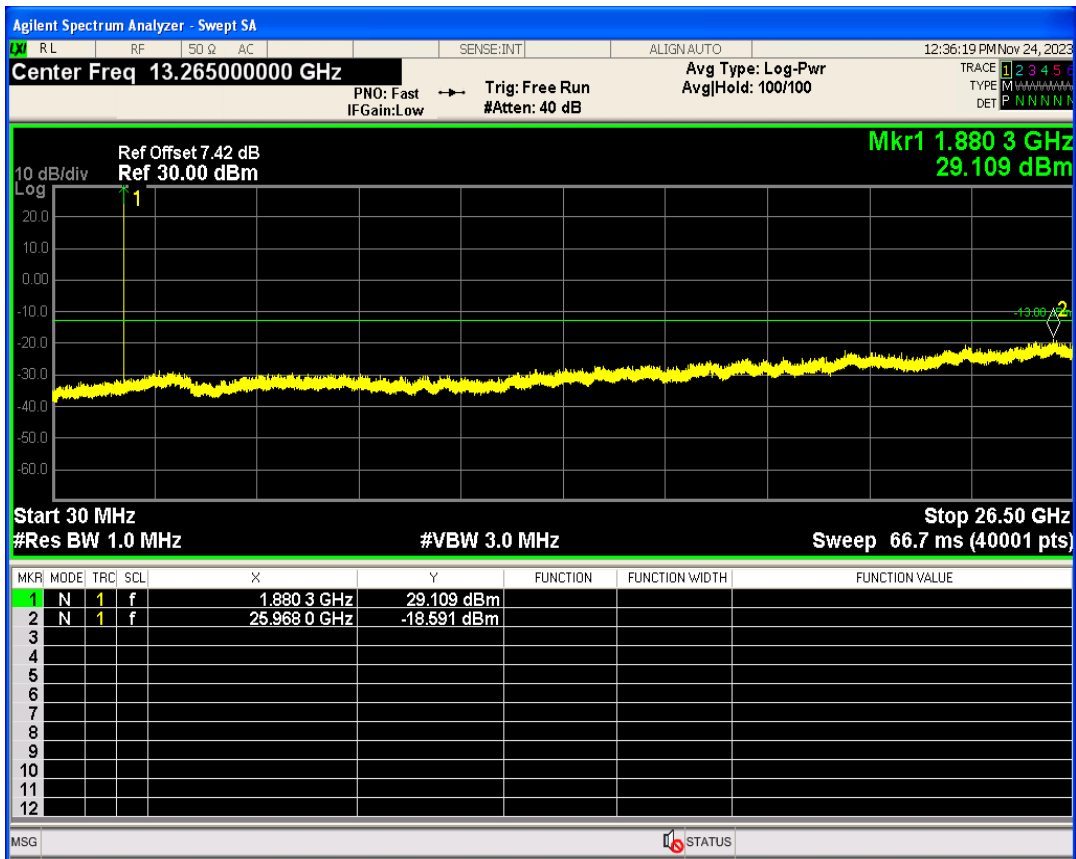


EGPRS1900 Channel=810

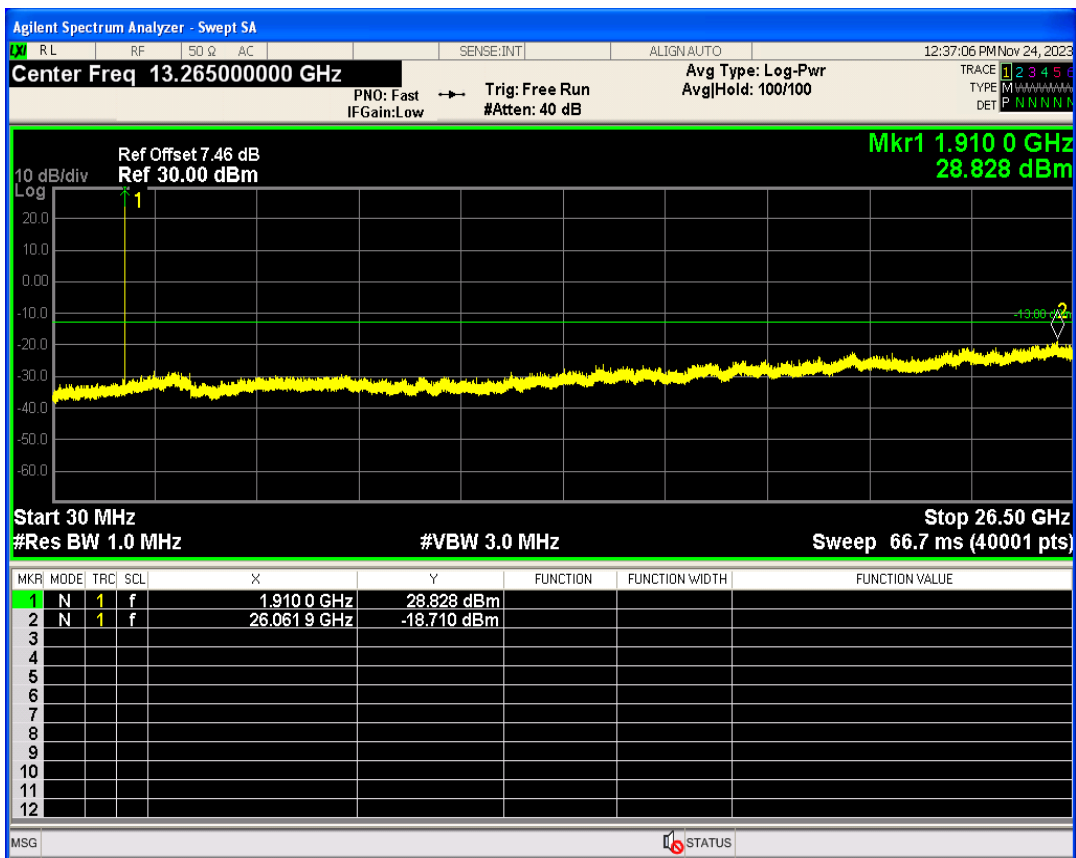


EGPRS850 Channel=128

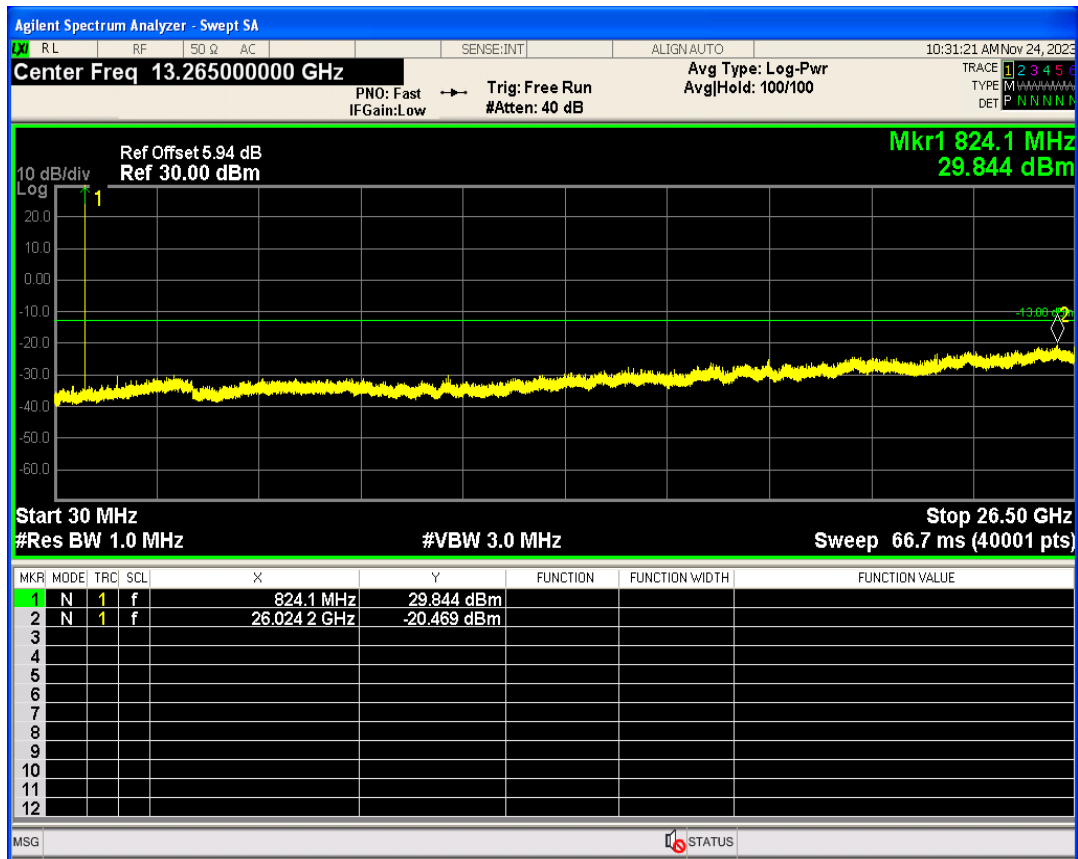

EGPRS850 Channel=189

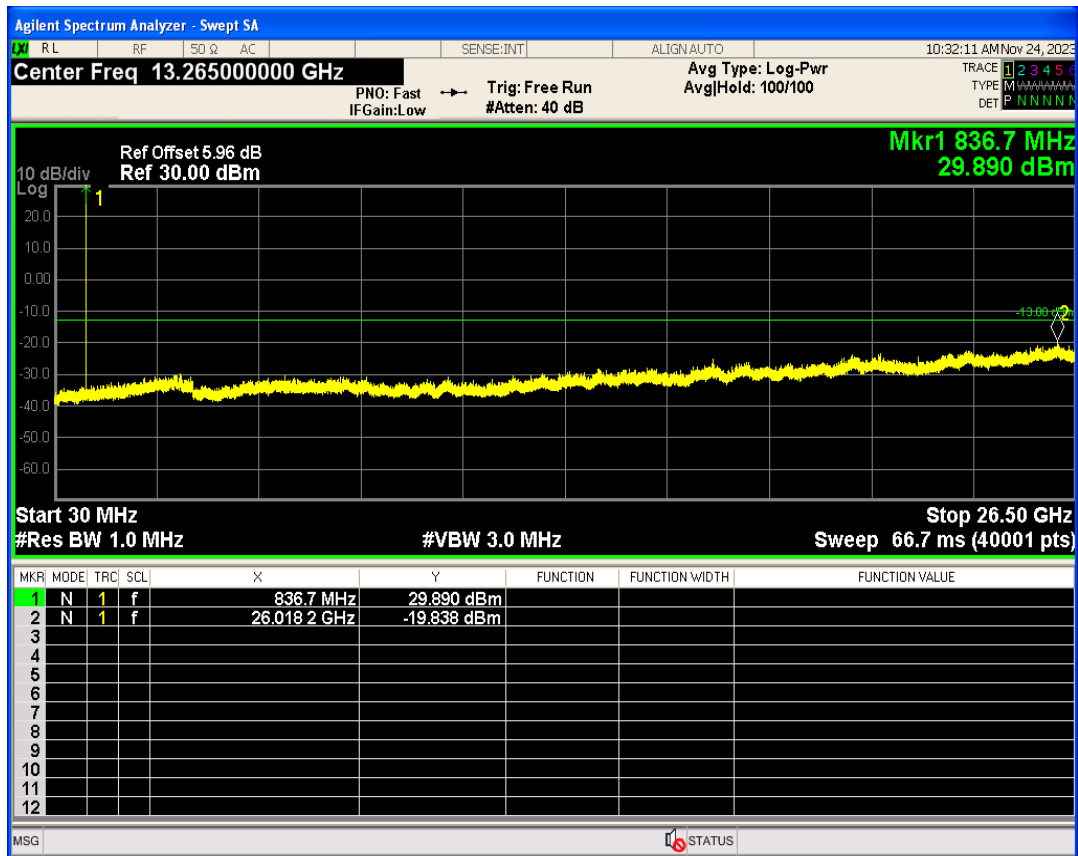

EGPRS850 Channel=251

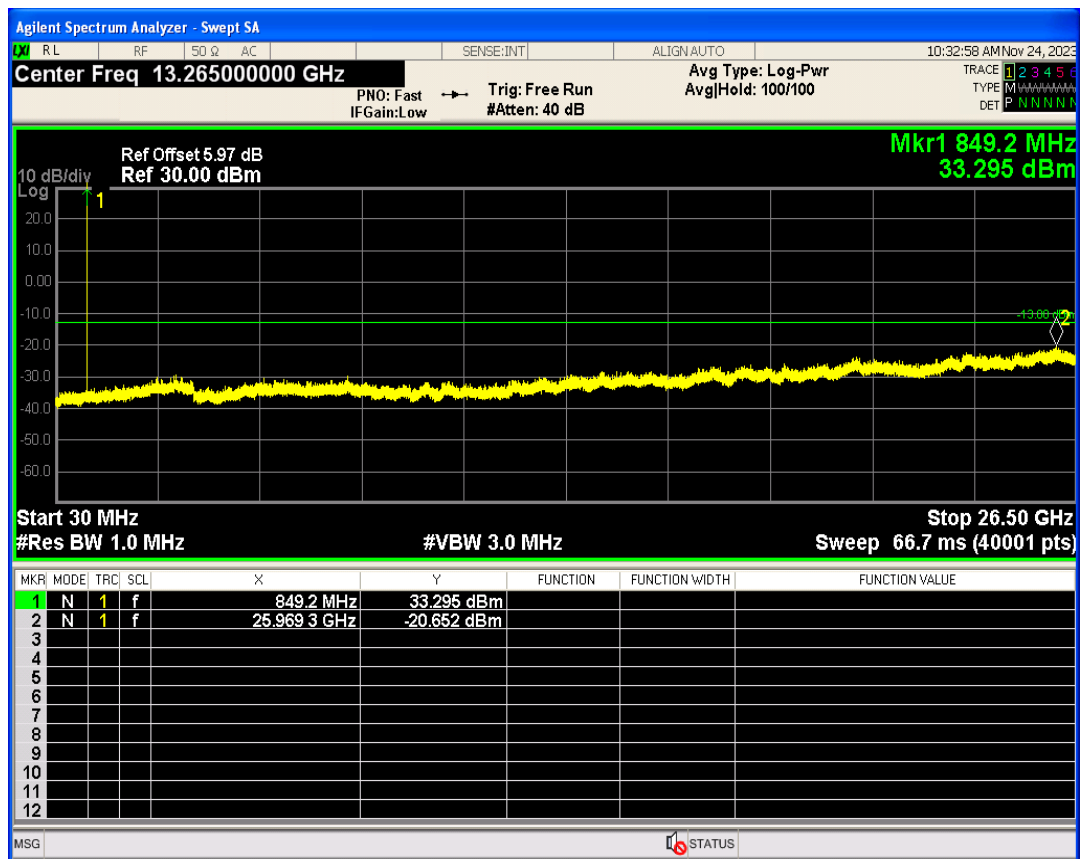


07 Conducted output power

Band	Channel	Frequency (MHz)	Power (dBm)	Verdict
GPRS1900 1 Slot	512	1850.2	30.89	PASS
GPRS1900 1 Slot	661	1880	30.76	PASS
GPRS1900 1 Slot	810	1909.8	30.77	PASS
GPRS1900 2 Slot	512	1850.2	30.13	PASS
GPRS1900 2 Slot	661	1880	29.99	PASS
GPRS1900 2 Slot	810	1909.8	29.96	PASS
GPRS1900 3 Slot	512	1850.2	28.36	PASS
GPRS1900 3 Slot	661	1880	28.16	PASS
GPRS1900 3 Slot	810	1909.8	28.11	PASS
GPRS1900 4 Slot	512	1850.2	27.35	PASS
GPRS1900 4 Slot	661	1880	27.15	PASS
GPRS1900 4 Slot	810	1909.8	27.06	PASS
GPRS850 1 Slot	128	824.2	33.90	PASS
GPRS850 1 Slot	189	836.4	33.63	PASS
GPRS850 1 Slot	251	848.8	33.88	PASS
GPRS850 2 Slot	128	824.2	32.95	PASS
GPRS850 2 Slot	189	836.4	32.70	PASS
GPRS850 2 Slot	251	848.8	32.86	PASS
GPRS850 3 Slot	128	824.2	30.94	PASS
GPRS850 3 Slot	189	836.4	30.68	PASS
GPRS850 3 Slot	251	848.8	30.84	PASS
GPRS850 4 Slot	128	824.2	29.87	PASS
GPRS850 4 Slot	189	836.4	29.61	PASS
GPRS850 4 Slot	251	848.8	29.77	PASS


Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
GPRS1900	512	1850.2	2.64	13	PASS
GPRS1900	661	1880	2.64	13	PASS
GPRS1900	810	1909.8	2.65	13	PASS
GPRS850	128	824.2	2.64	13	PASS
GPRS850	189	836.4	2.64	13	PASS
GPRS850	251	848.8	2.65	13	PASS


GPRS1900 Channel=512

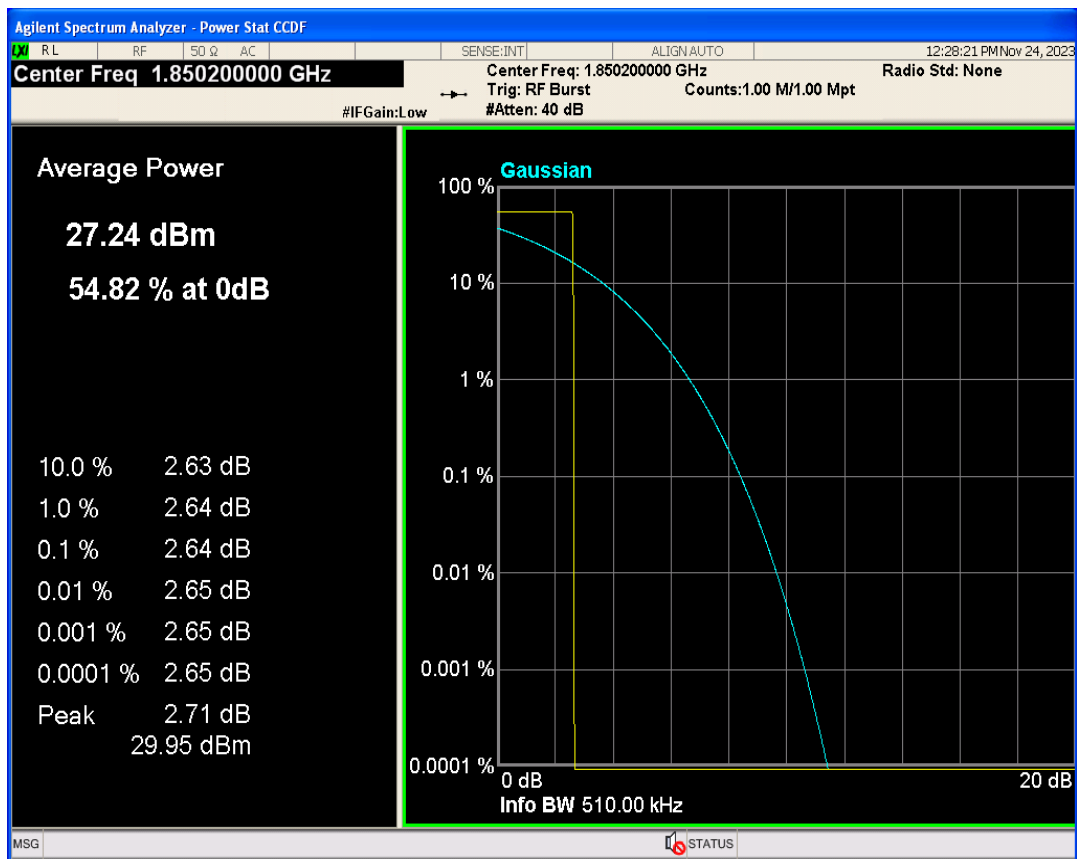


GPRS1900 Channel=661

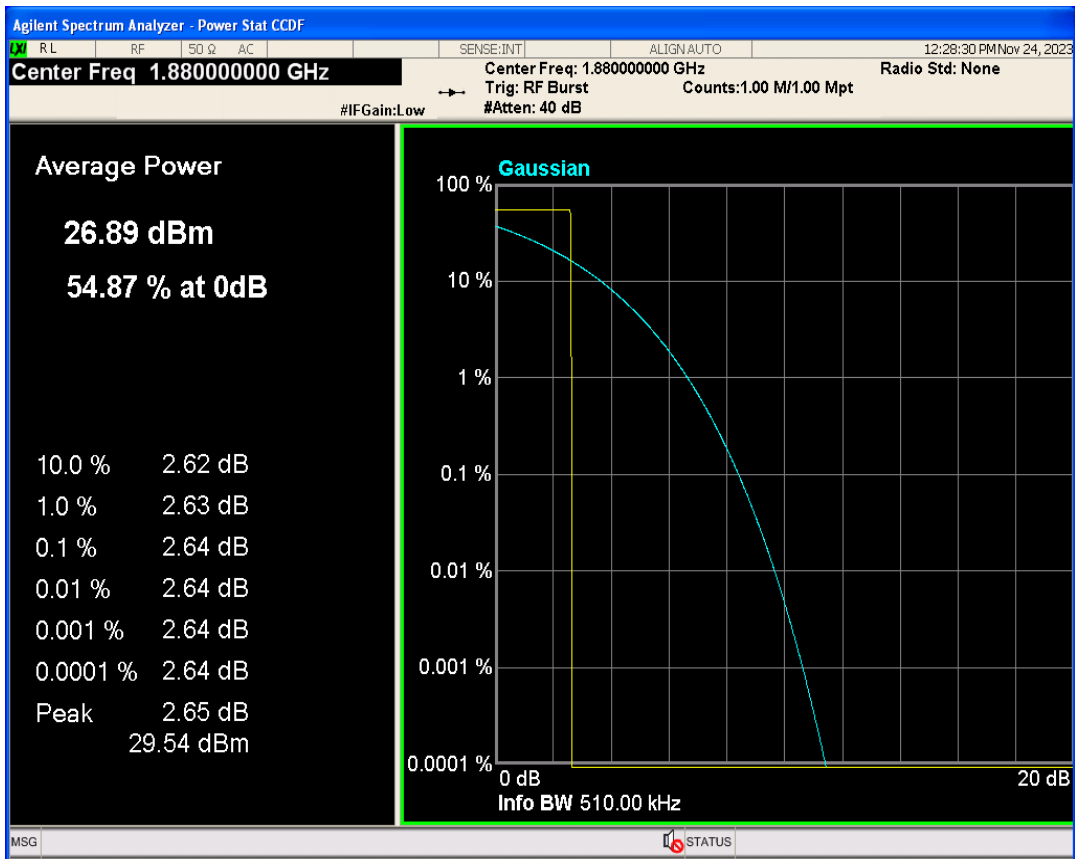


GPRS1900 Channel=810

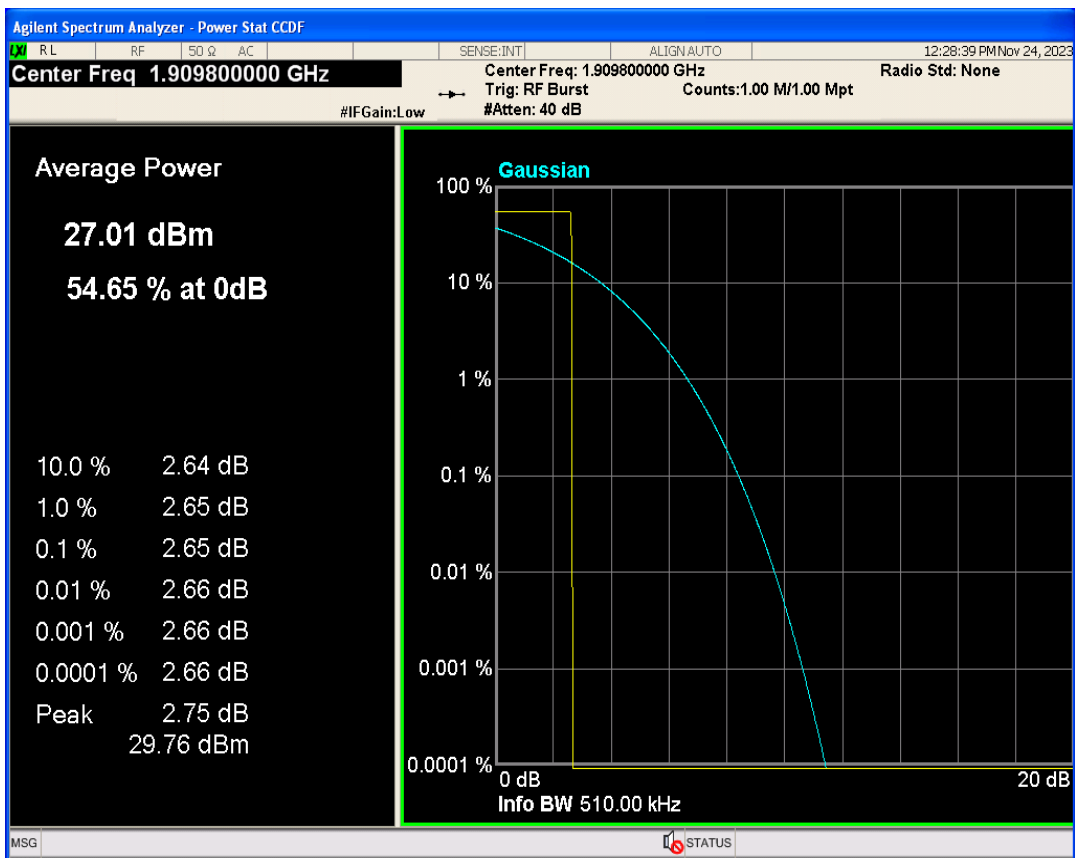

GPRS850 Channel=189

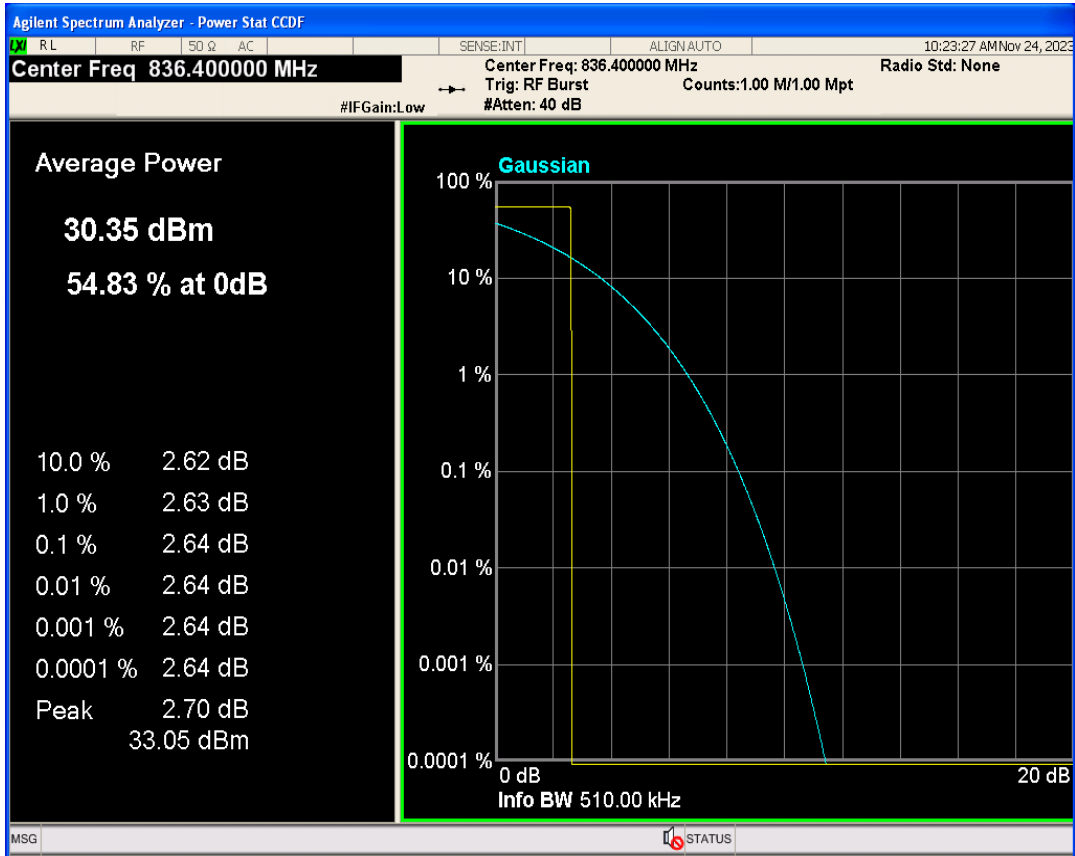

GPRS850 Channel=128

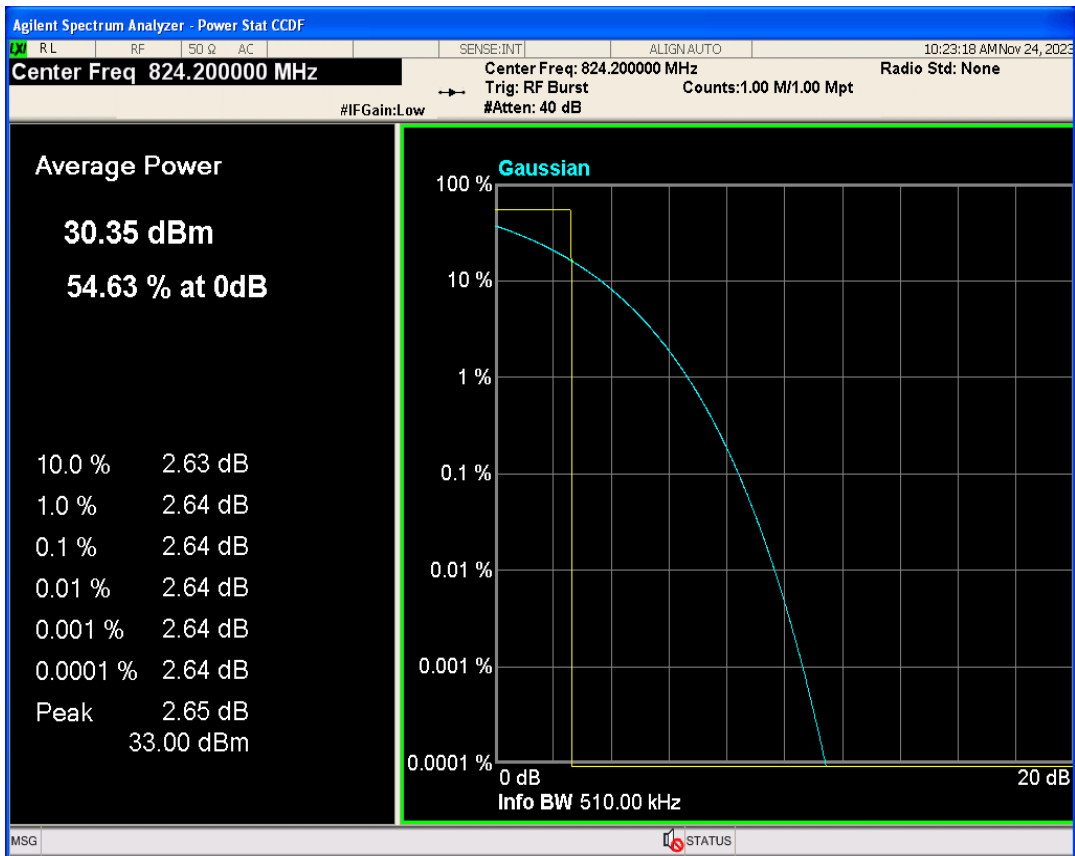


GPRS850 Channel=251




Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
GPRS1900	512	1850.2	249.468	319.865	PASS
GPRS1900	661	1880	251.261	311.369	PASS
GPRS1900	810	1909.8	247.345	322.672	PASS
GPRS850	128	824.2	246.033	315.156	PASS
GPRS850	189	836.4	240.059	316.724	PASS
GPRS850	251	848.8	246.950	321.188	PASS


GPRS1900 Channel=512

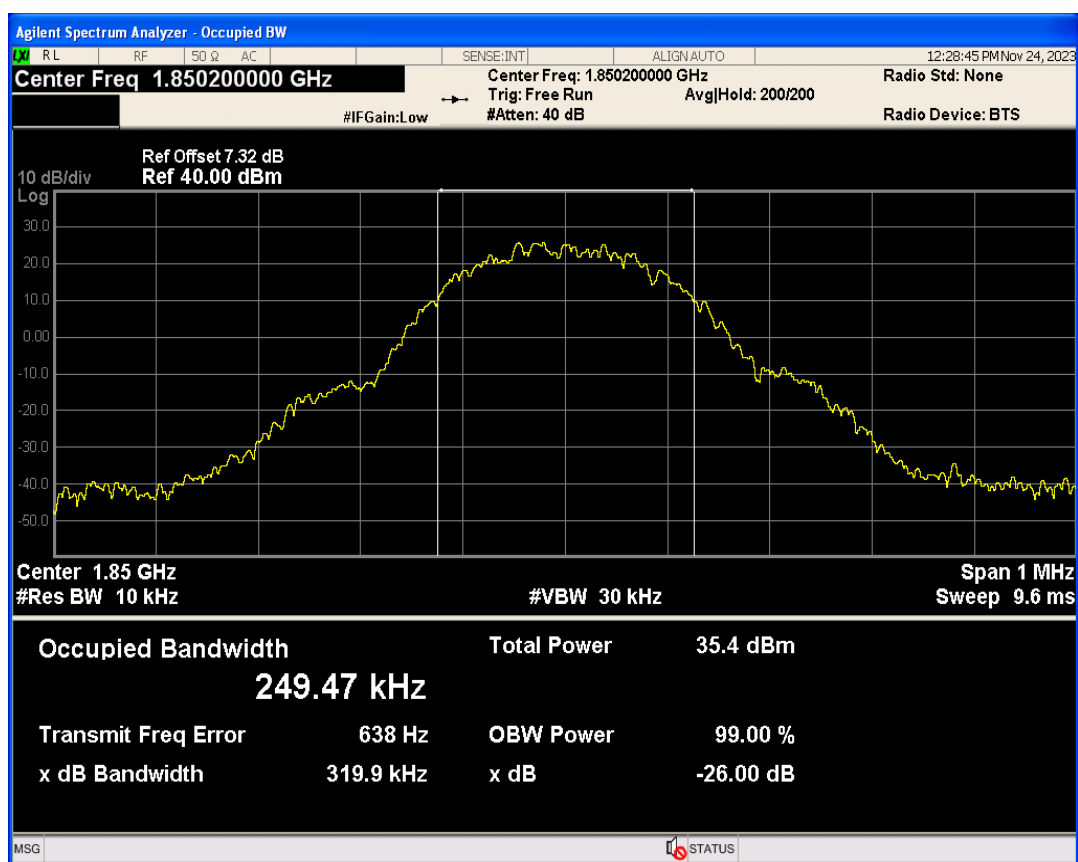


GPRS1900 Channel=661

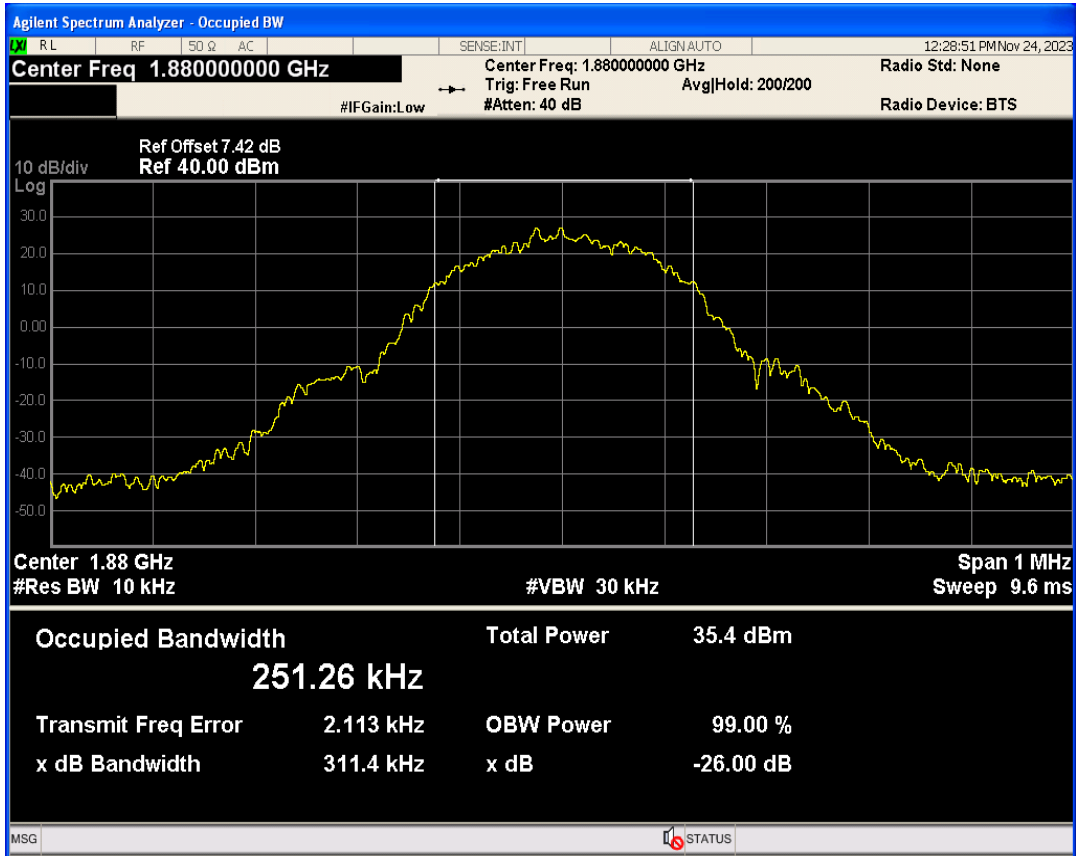


GPRS1900 Channel=810

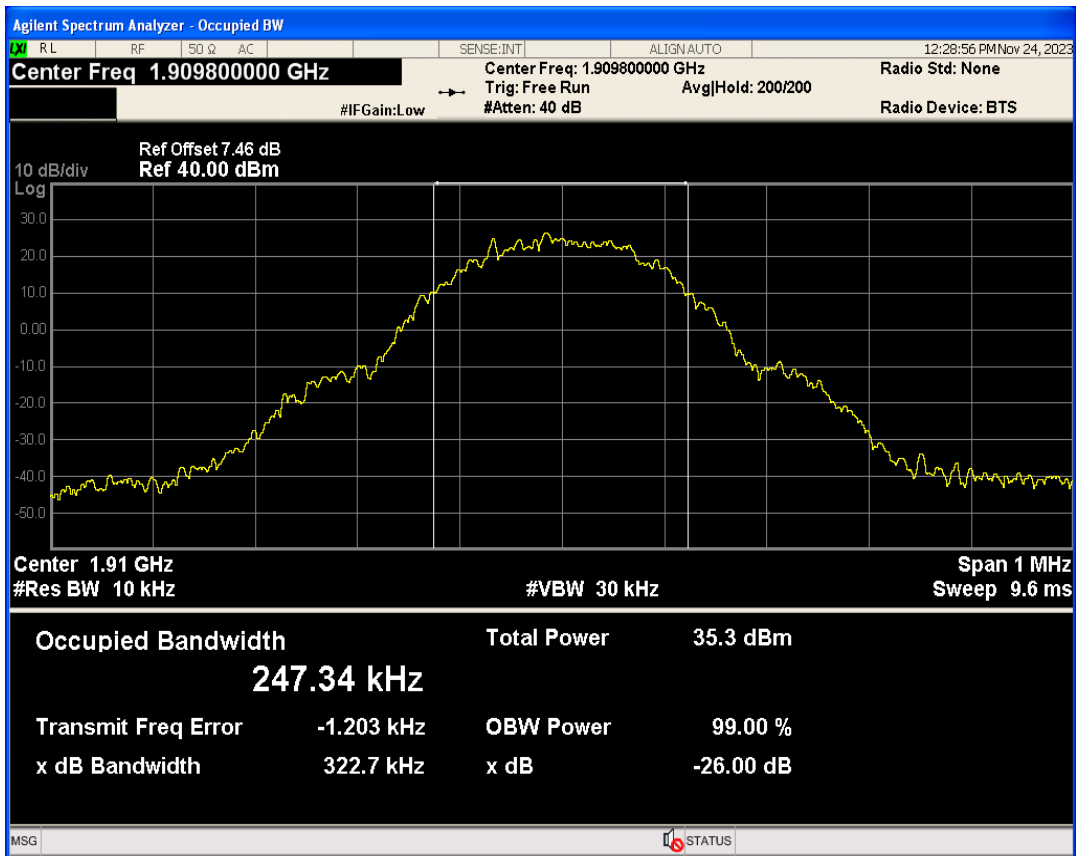


GPRS850 Channel=128

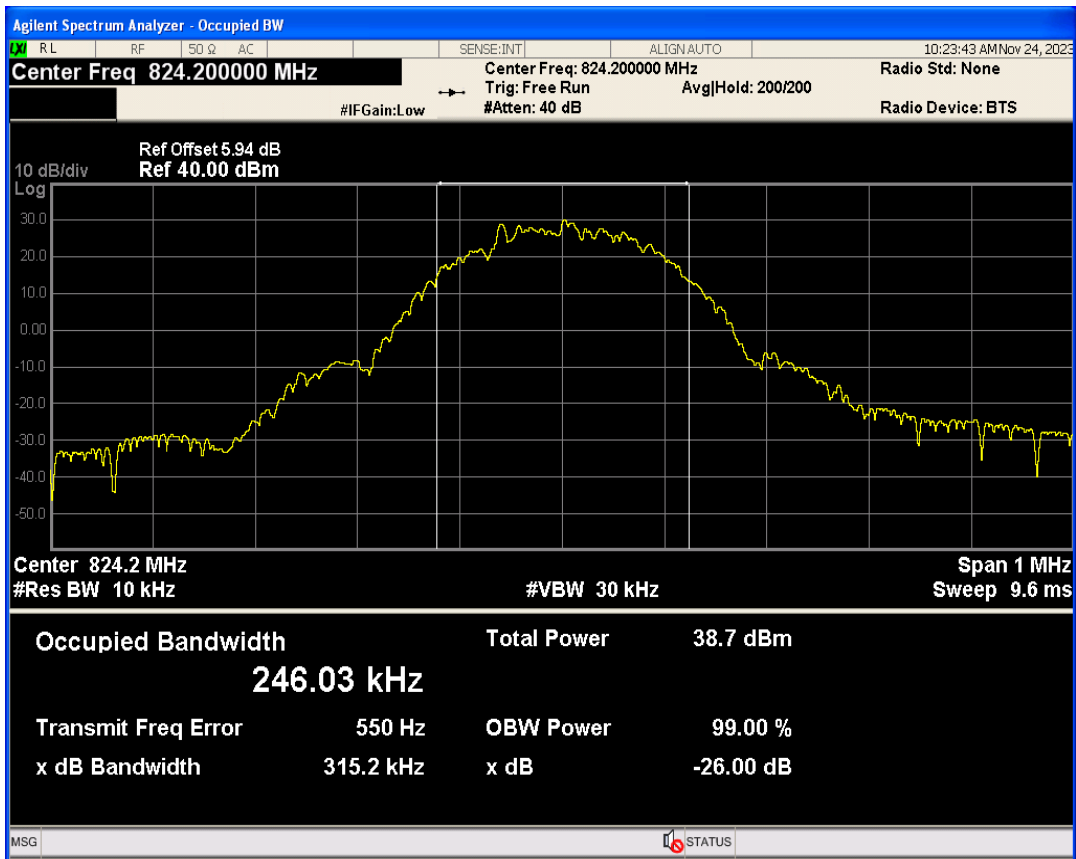

GPRS850 Channel=189

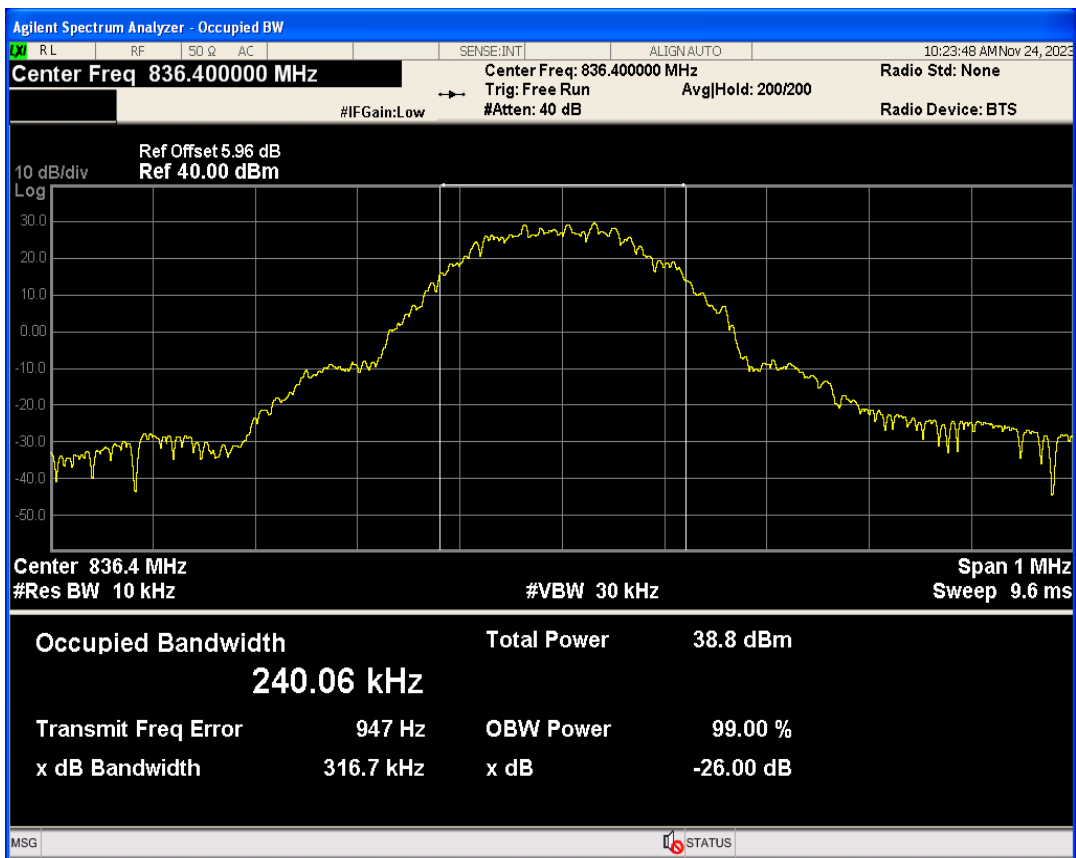


GPRS850 Channel=251

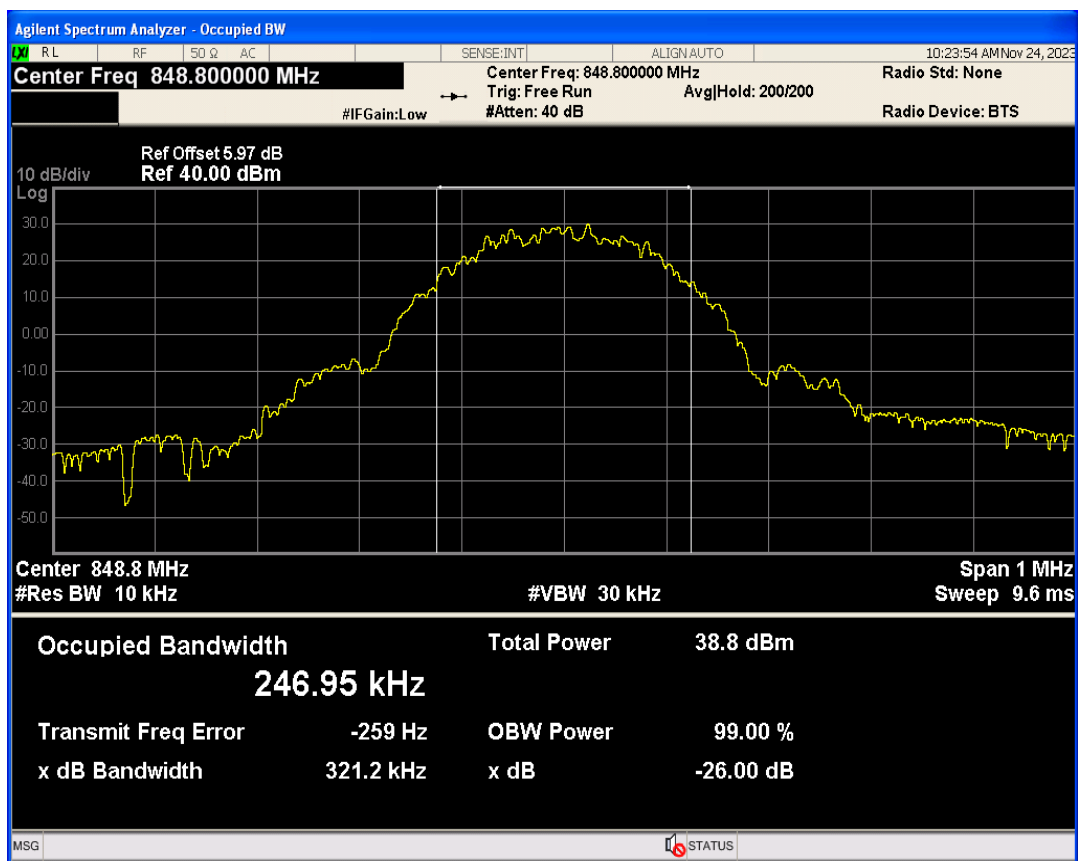


Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GPRS1900	512	1850.2	1849.98	-29.58	-13	PASS
GPRS1900	810	1909.8	1910.02	-28.80	-13	PASS
GPRS850	128	824.2	823.97	-27.88	-13	PASS
GPRS850	251	848.8	849.02	-27.10	-13	PASS


GPRS1900 Channel=512

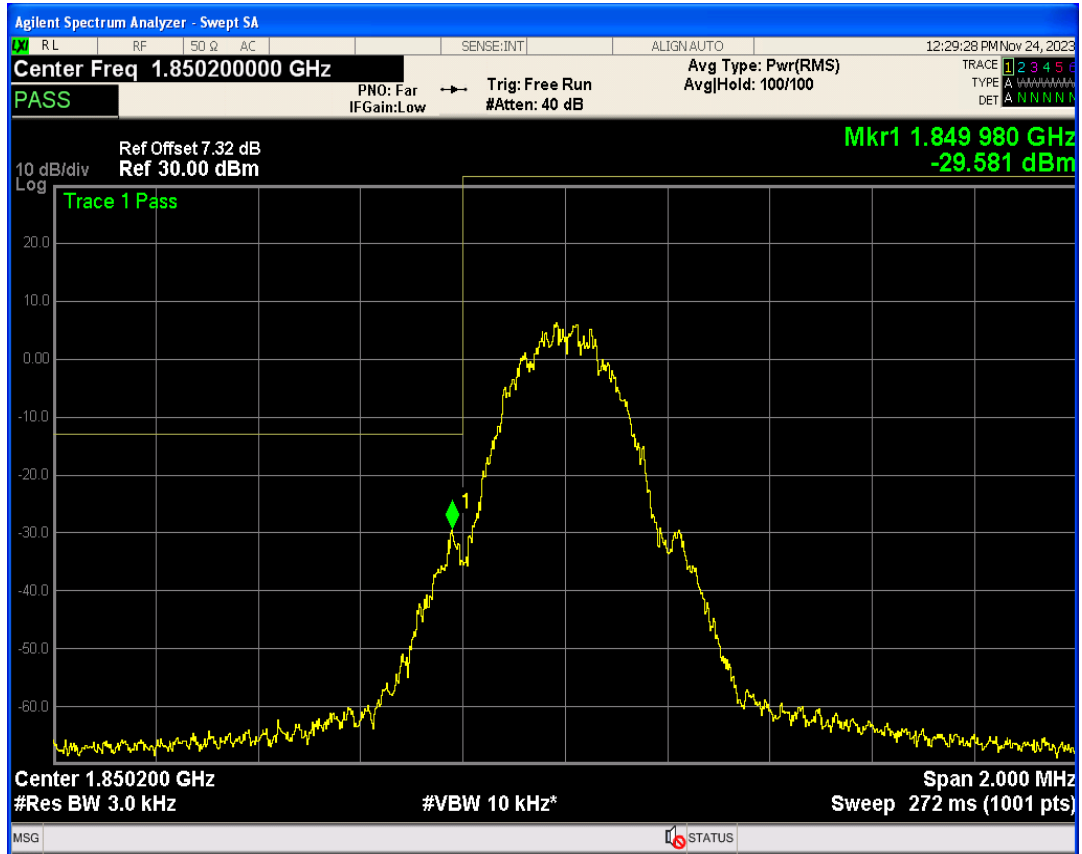


GPRS1900 Channel=810

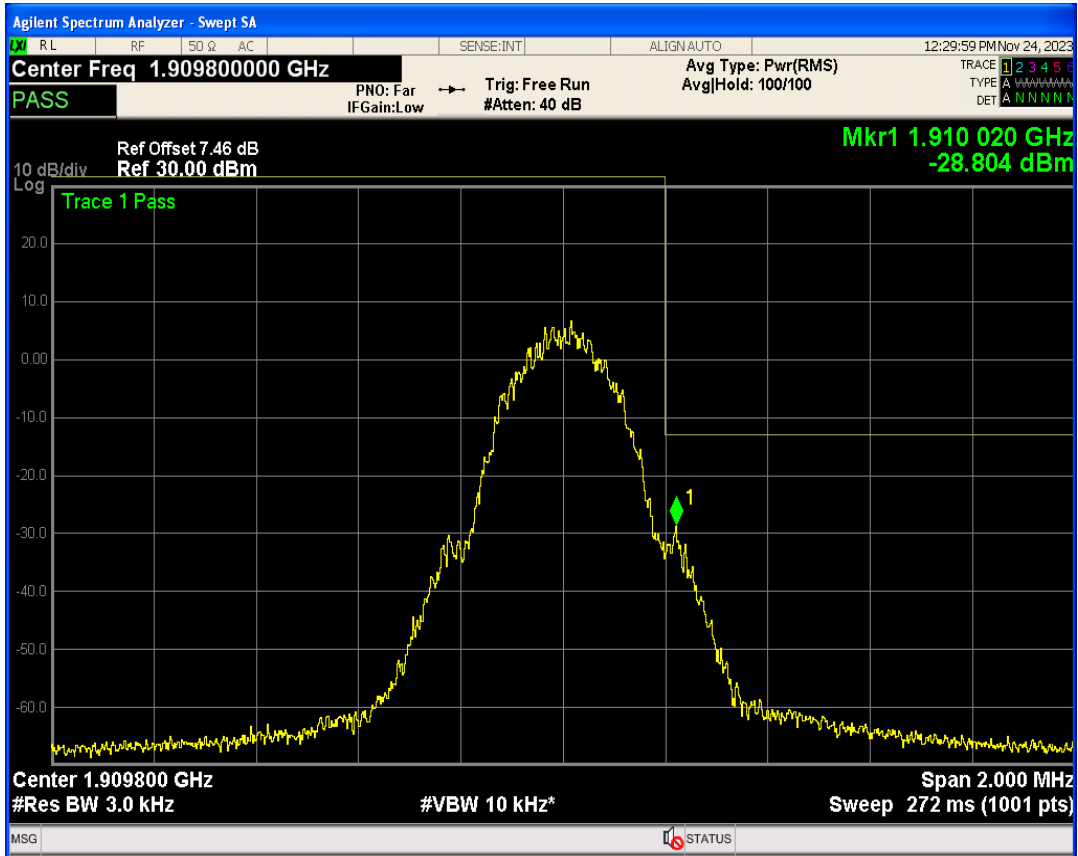

GPRS850 Channel=128

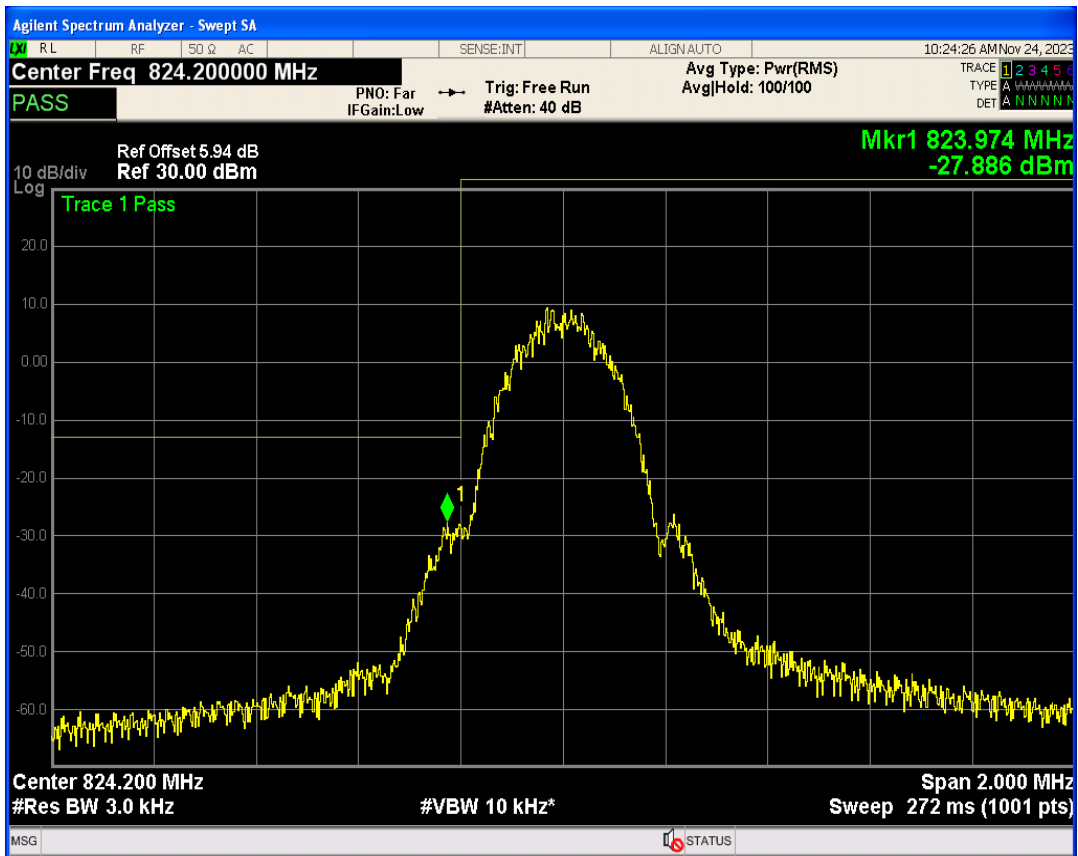


GPRS850 Channel=251

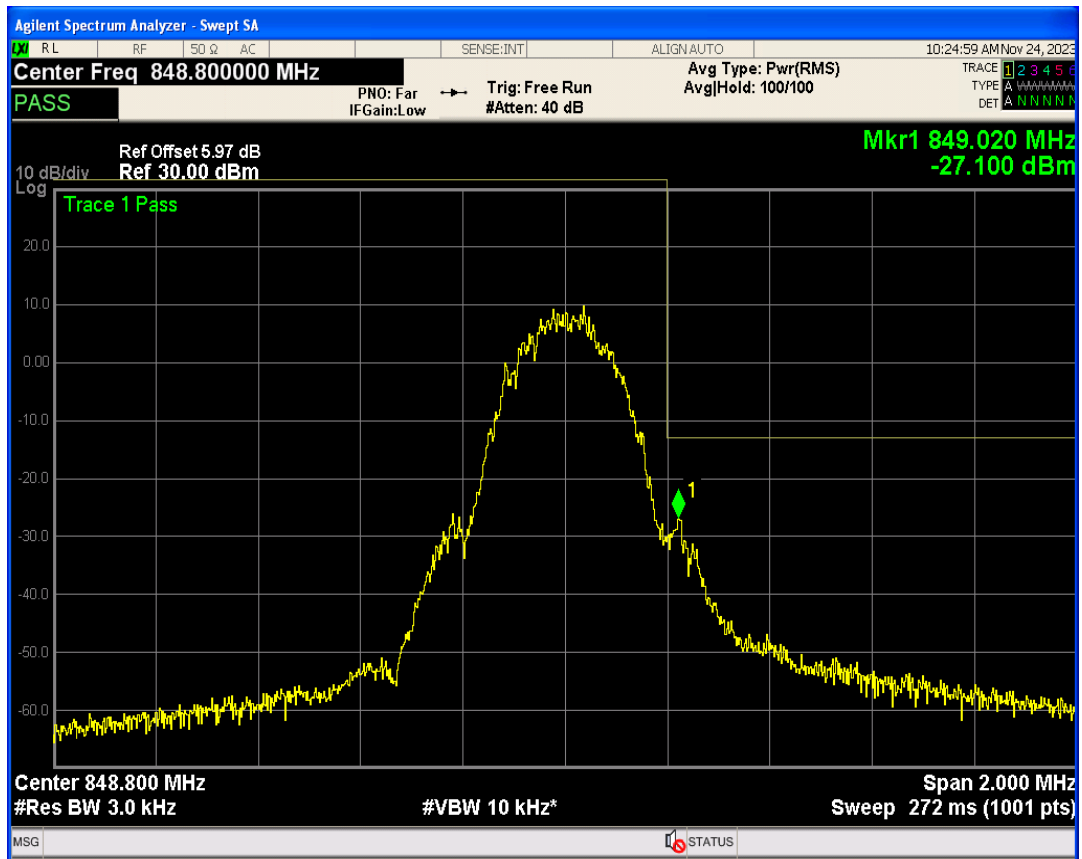


Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GPRS1900	512	1850.2	26028.83	-18.80	-13	PASS
GPRS1900	661	1880	25989.79	-19.71	-13	PASS
GPRS1900	810	1909.8	26024.20	-19.31	-13	PASS
GPRS850	128	824.2	25834.94	-20.88	-13	PASS
GPRS850	189	836.4	26003.69	-20.11	-13	PASS
GPRS850	251	848.8	25753.55	-20.83	-13	PASS


GPRS1900 Channel=512

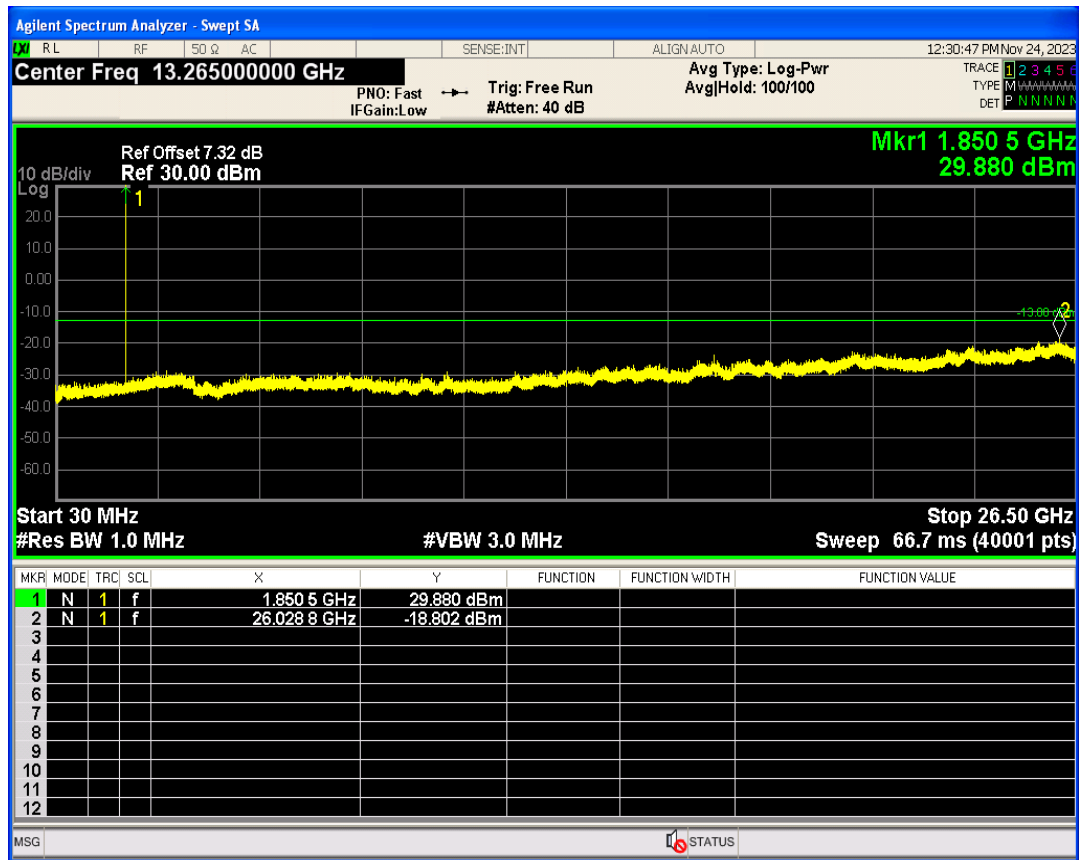


GPRS1900 Channel=661

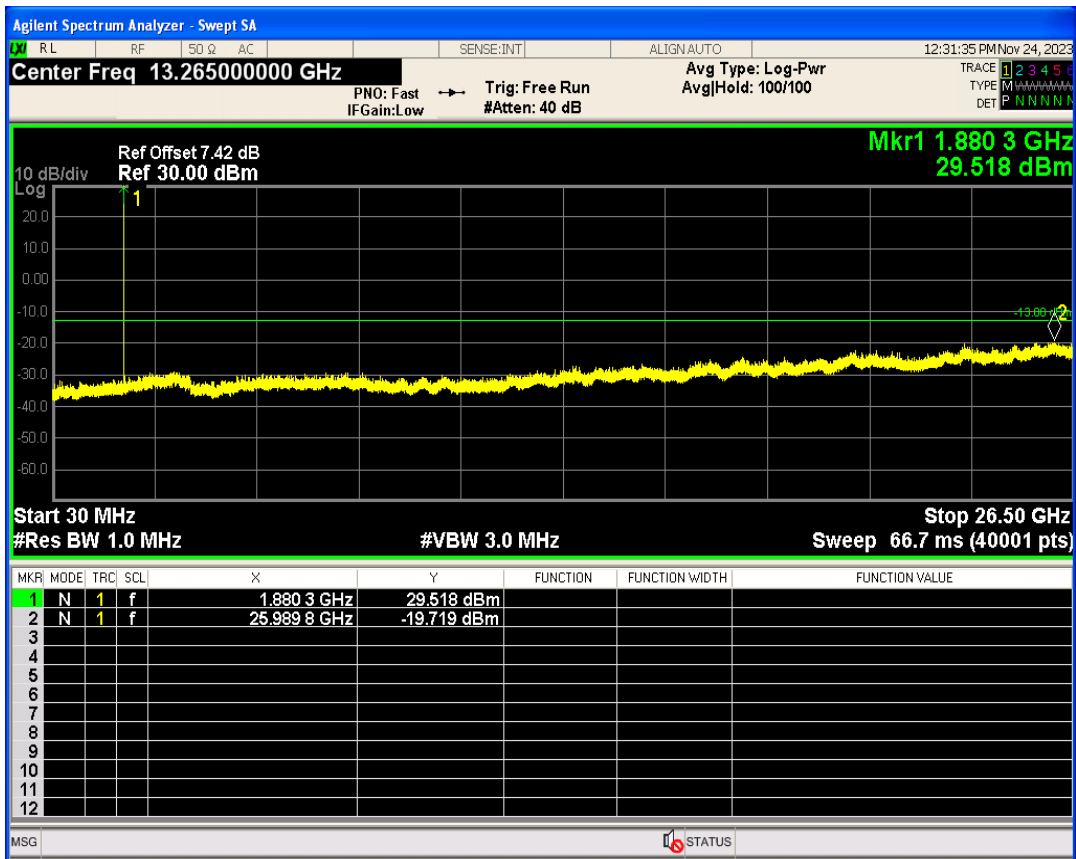


GPRS1900 Channel=810

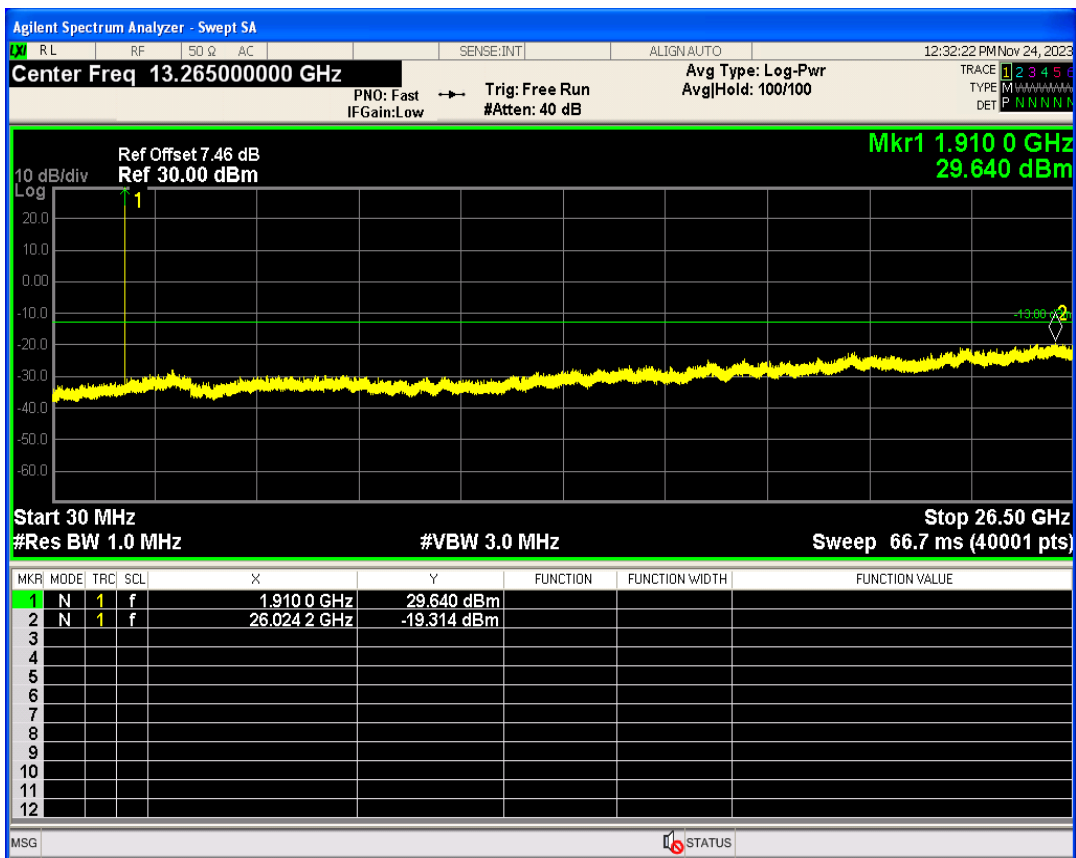


GPRS850 Channel=128

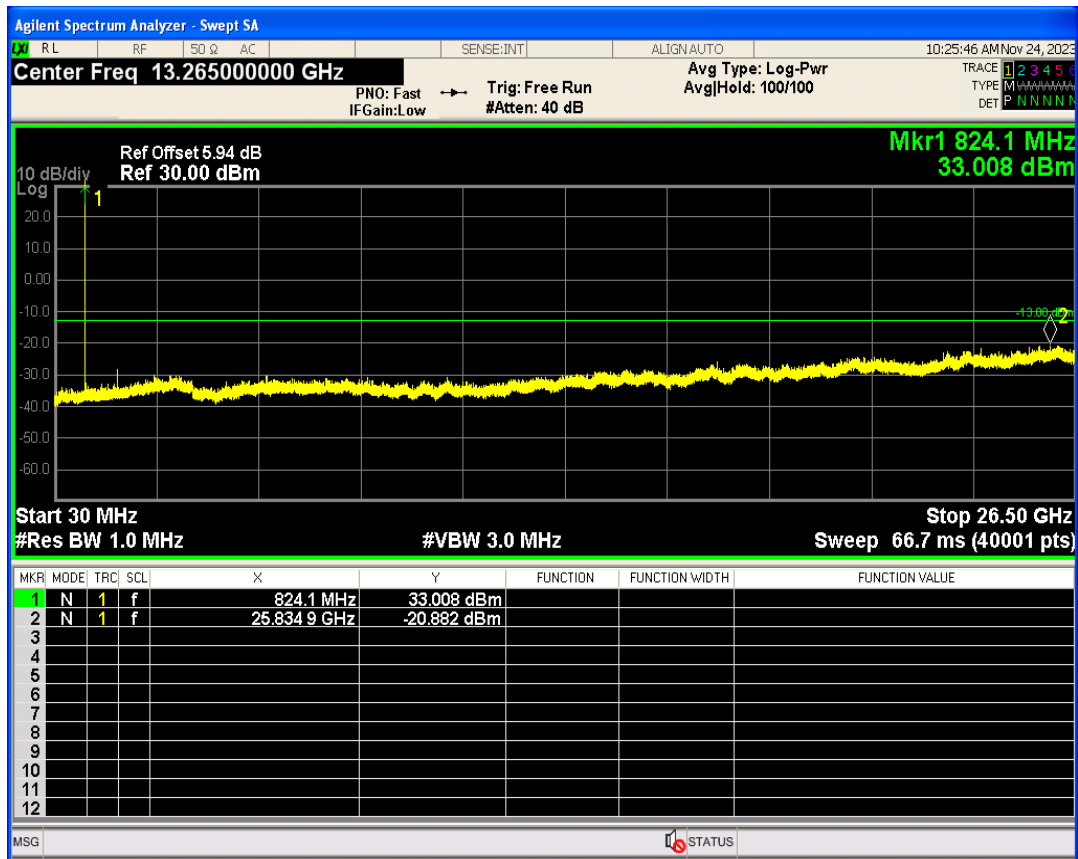

GPRS850 Channel=189

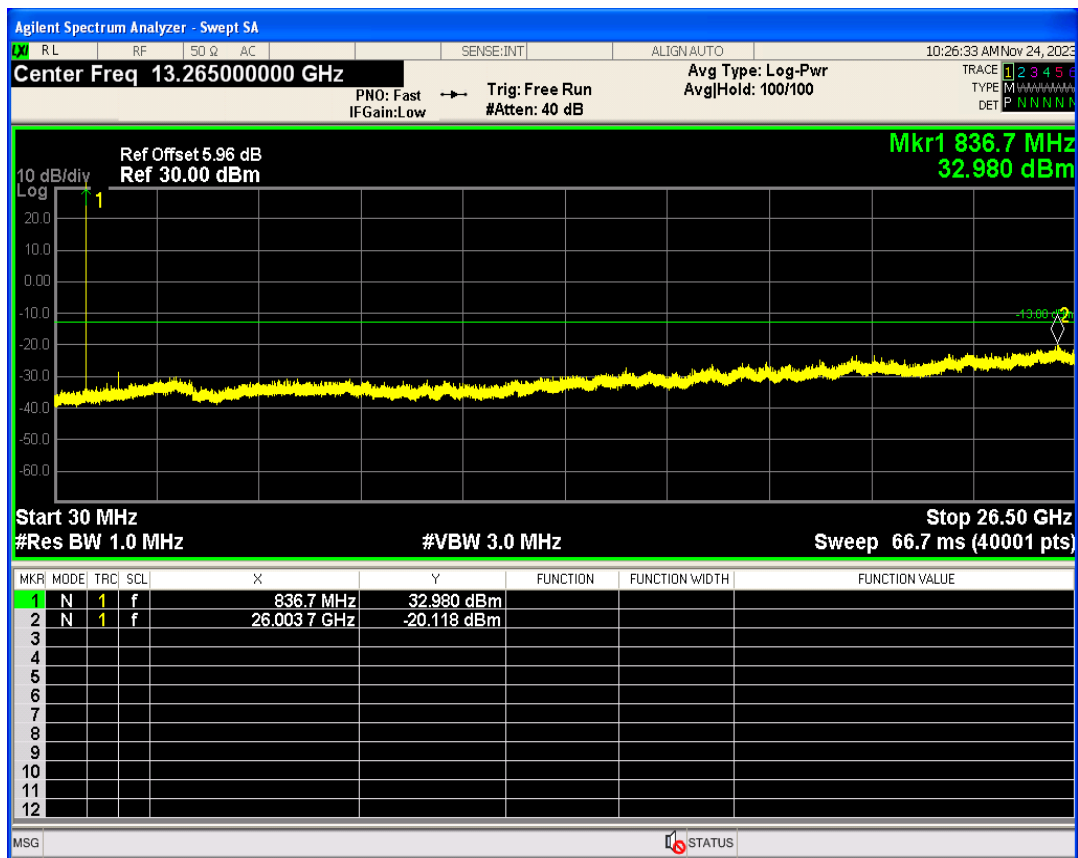

GPRS850 Channel=251

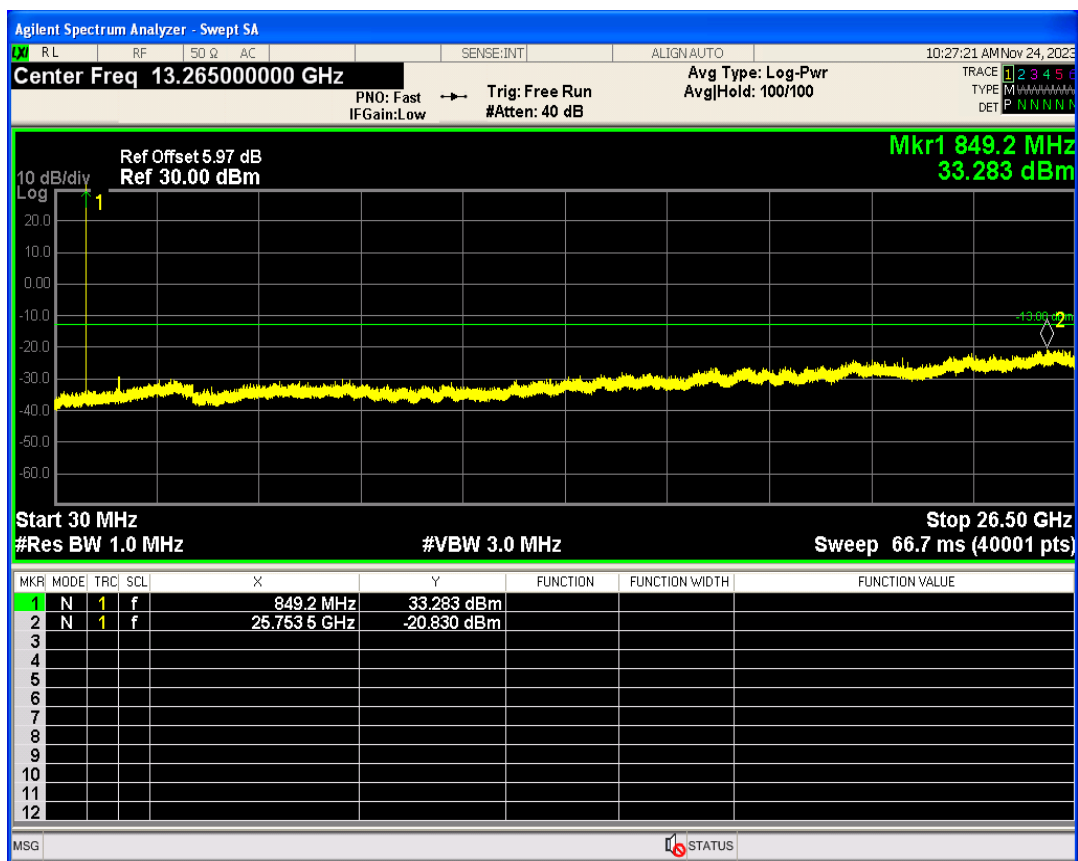


Conducted output power

Band	Channel	Frequency (MHz)	Power (dBm)	Verdict
GSM1900	512	1850.2	30.90	PASS
GSM1900	661	1880	30.77	PASS
GSM1900	810	1909.8	30.77	PASS
GSM850	128	824.2	33.90	PASS
GSM850	189	836.4	33.63	PASS
GSM850	251	848.8	33.89	PASS


Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
GSM1900	512	1850.2	2.60	13	PASS
GSM1900	661	1880	2.61	13	PASS
GSM1900	810	1909.8	2.61	13	PASS
GSM850	128	824.2	2.59	13	PASS
GSM850	189	836.4	2.60	13	PASS
GSM850	251	848.8	2.60	13	PASS


GSM1900 Channel=512

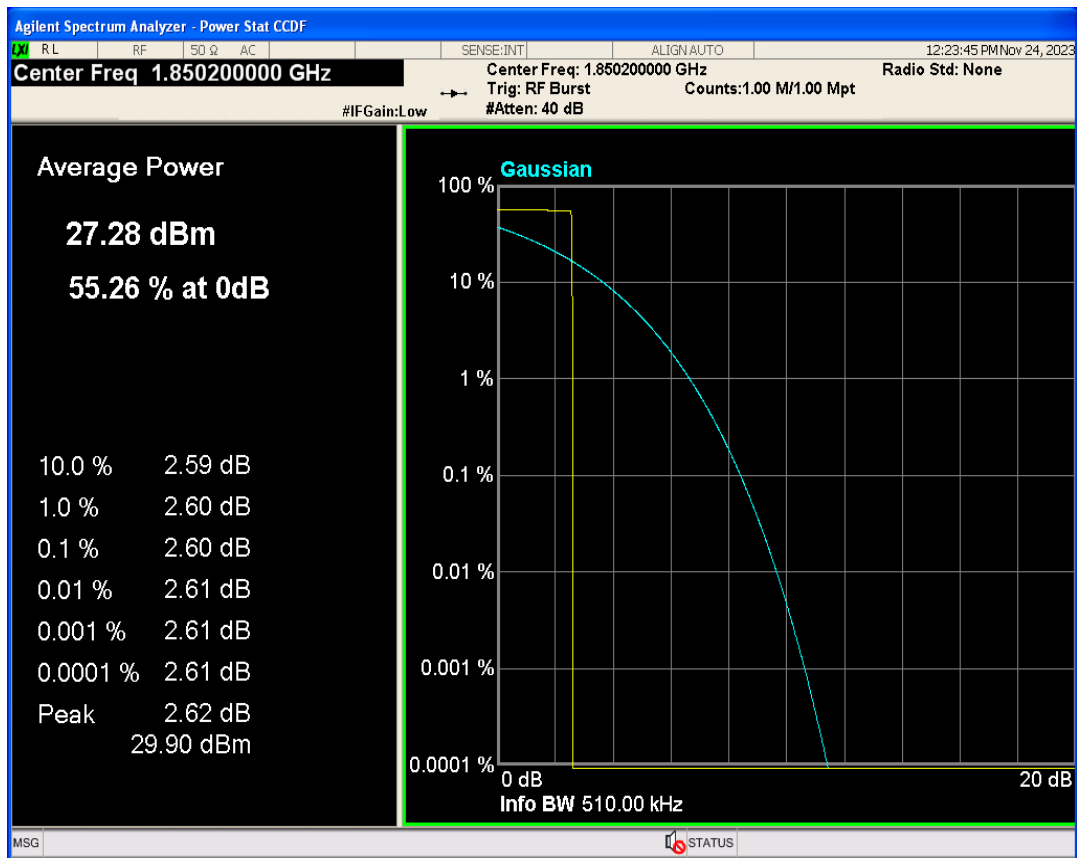


GSM1900 Channel=661

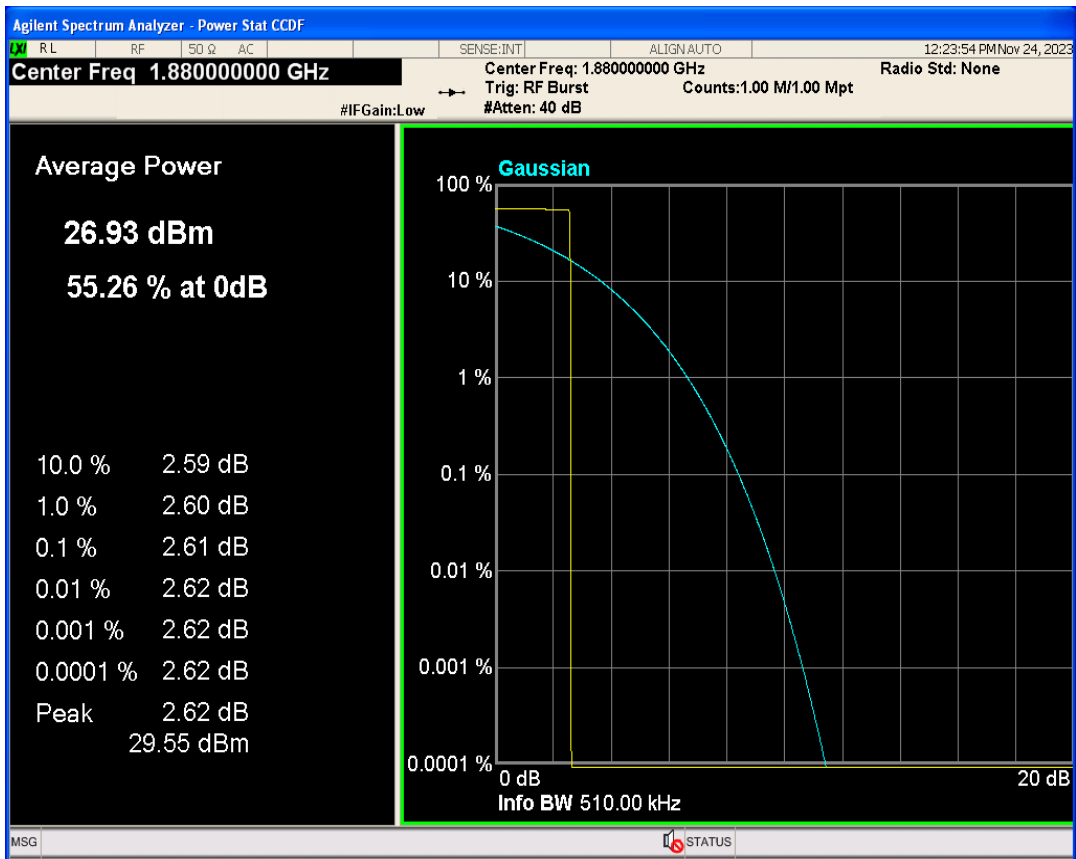


GSM1900 Channel=810

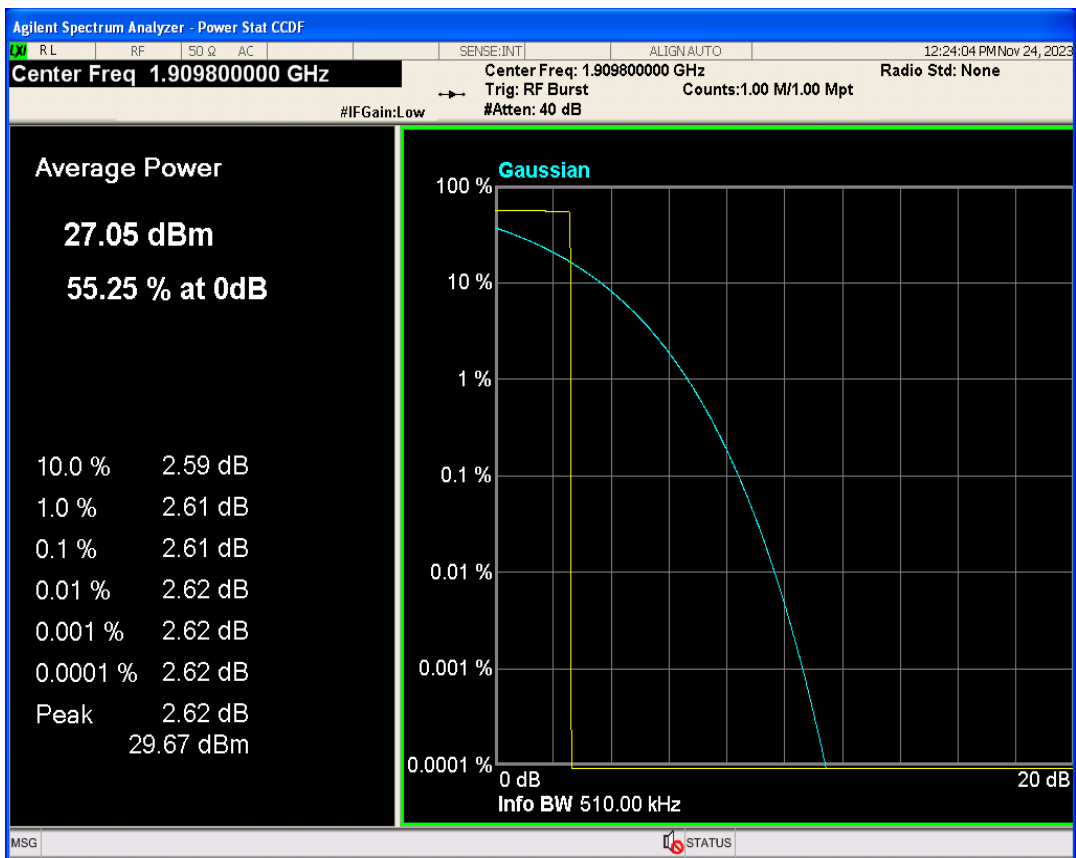


GSM850 Channel=128

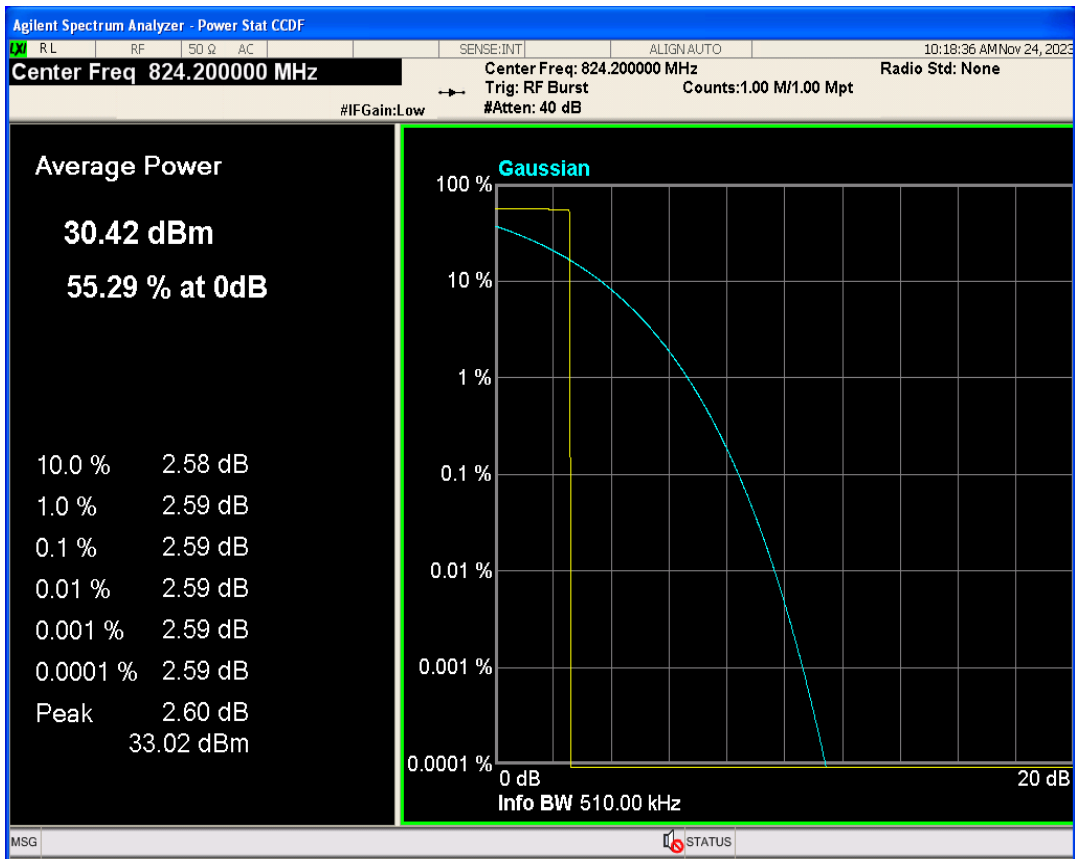

GSM850 Channel=189

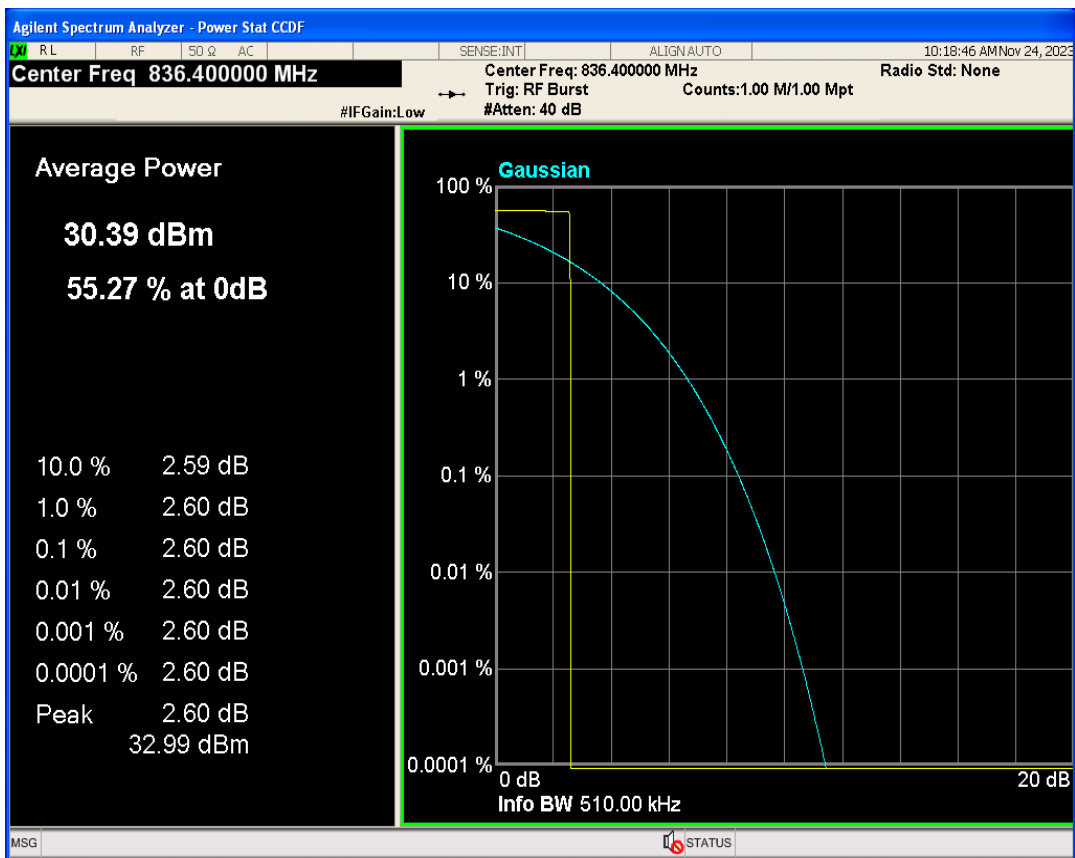


GSM850 Channel=251

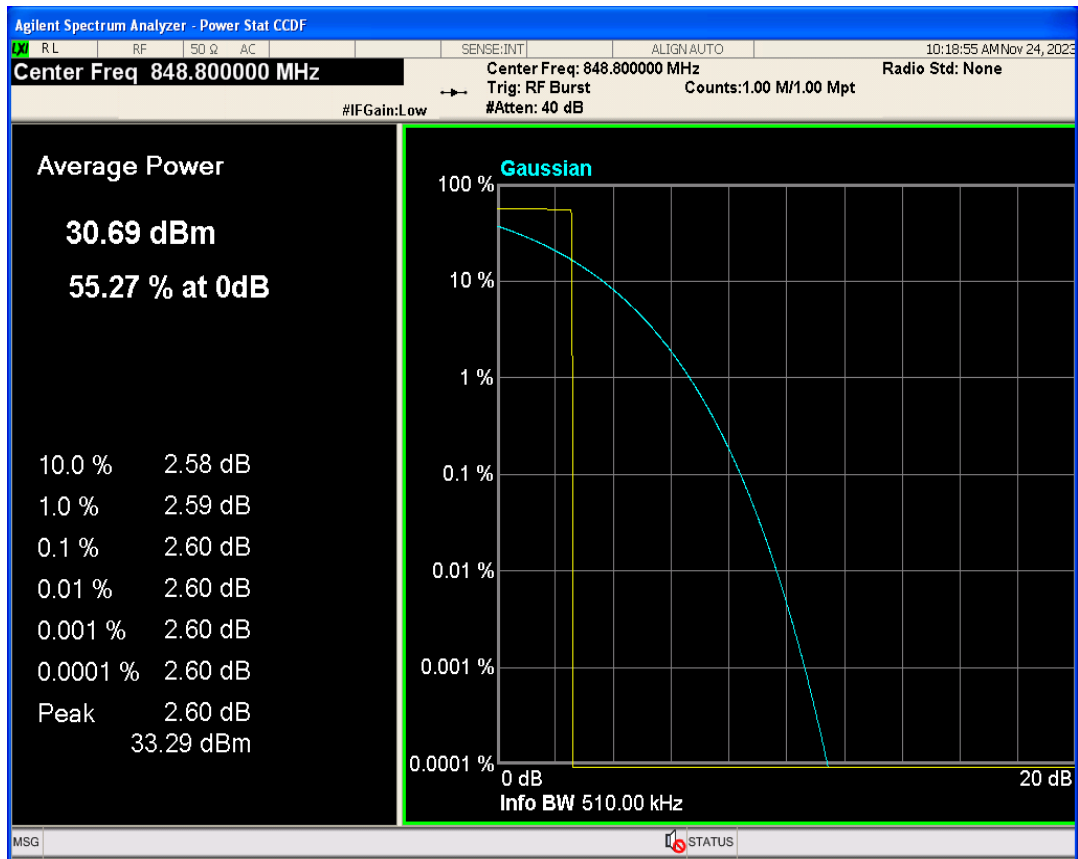


Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
GSM1900	512	1850.2	249.118	321.599	PASS
GSM1900	661	1880	246.636	308.666	PASS
GSM1900	810	1909.8	250.366	324.747	PASS
GSM850	128	824.2	246.641	312.380	PASS
GSM850	189	836.4	246.374	310.634	PASS
GSM850	251	848.8	250.022	315.607	PASS


GSM1900 Channel=512

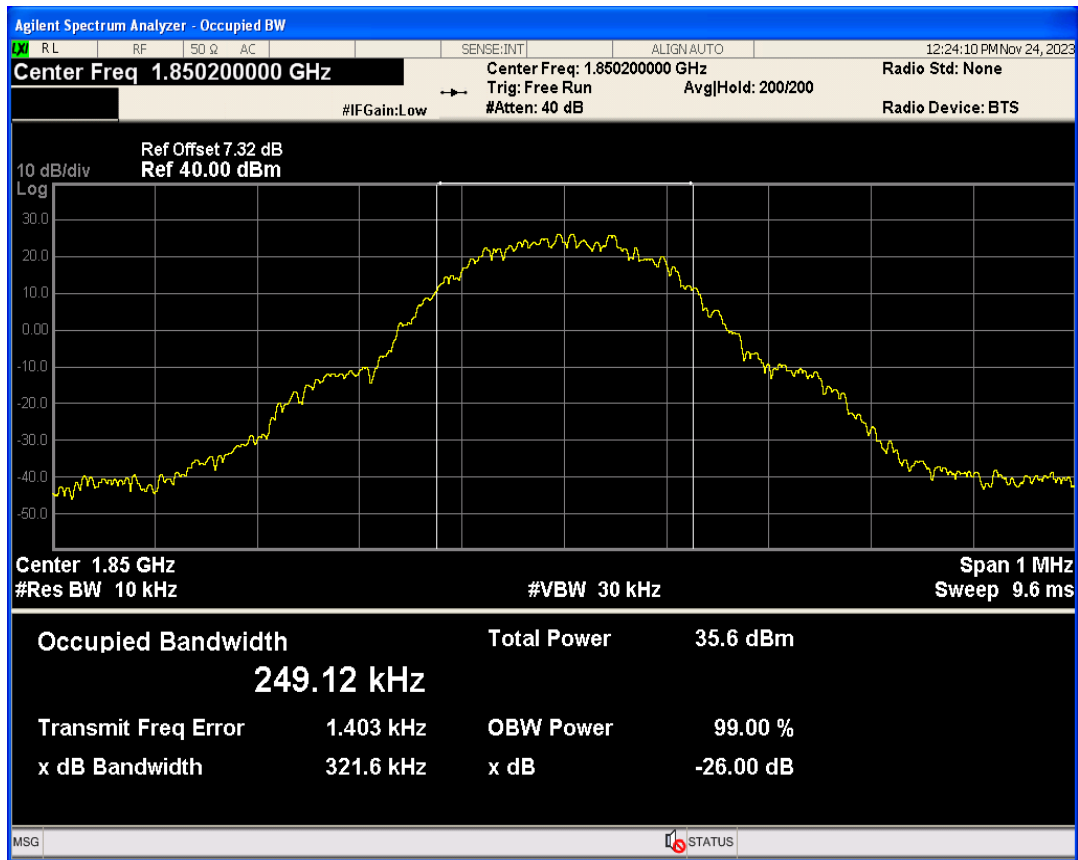


GSM1900 Channel=661

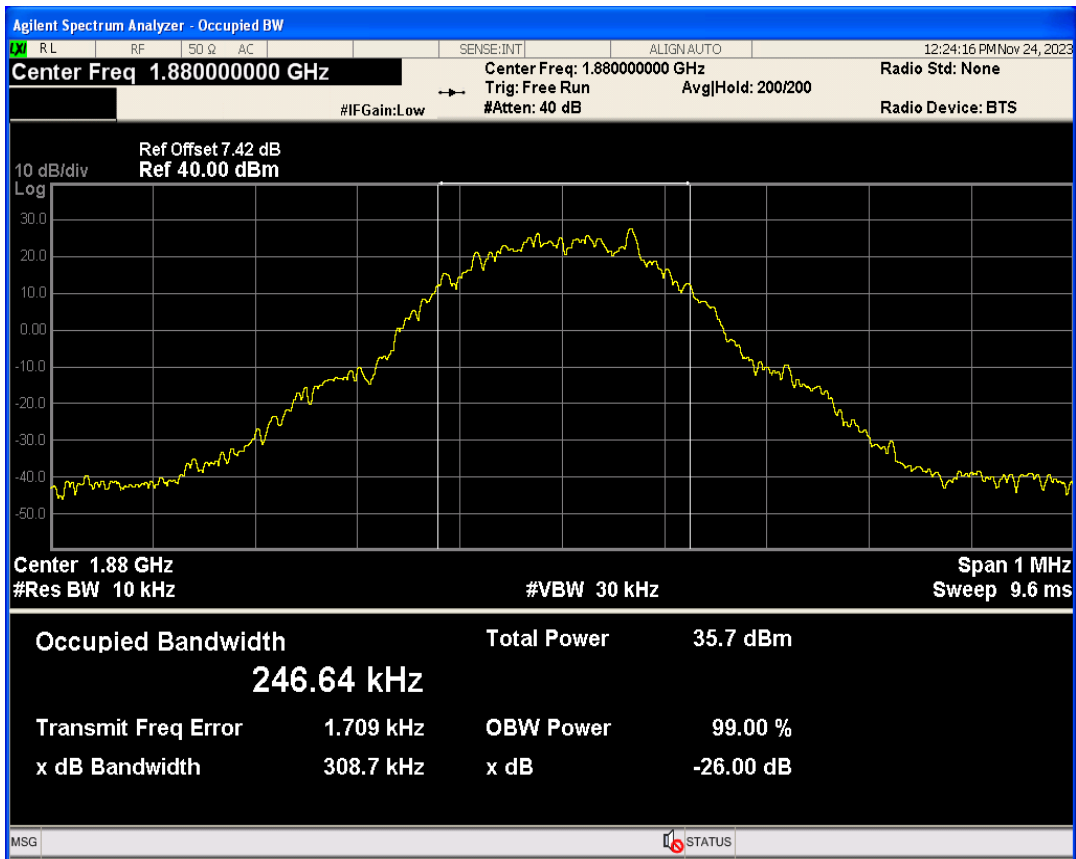


GSM1900 Channel=810

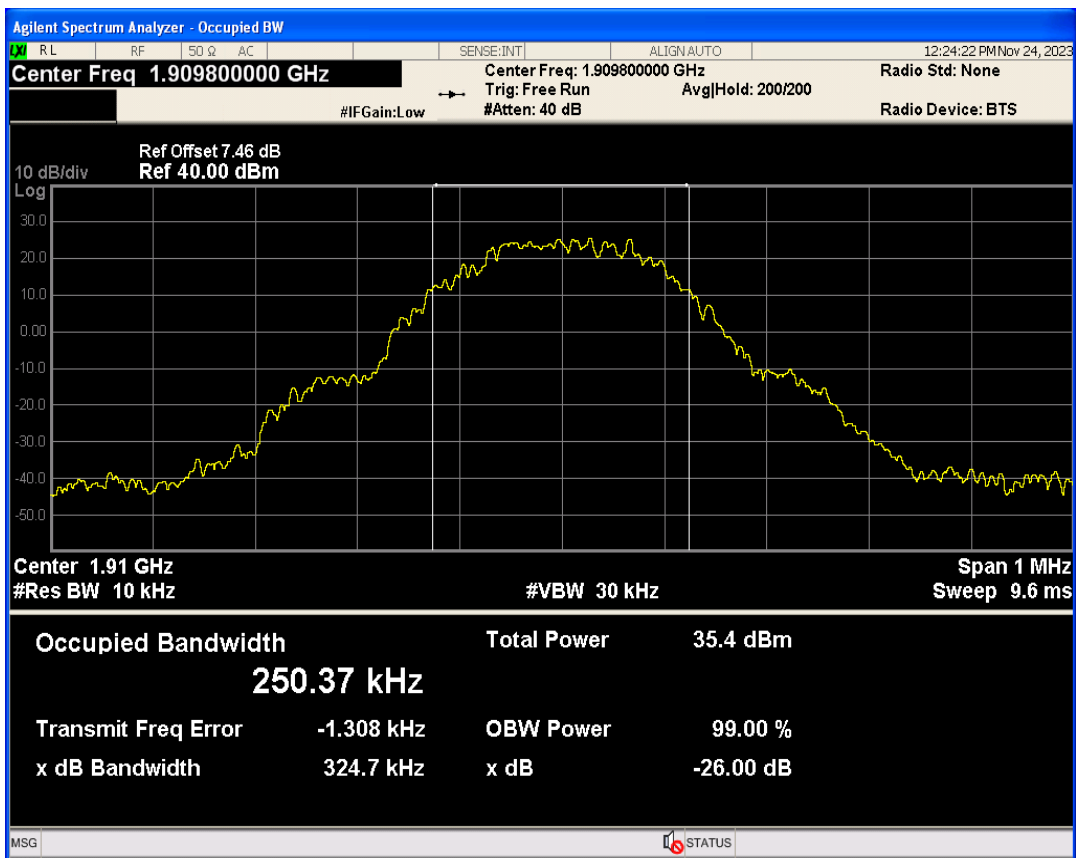


GSM850 Channel=128

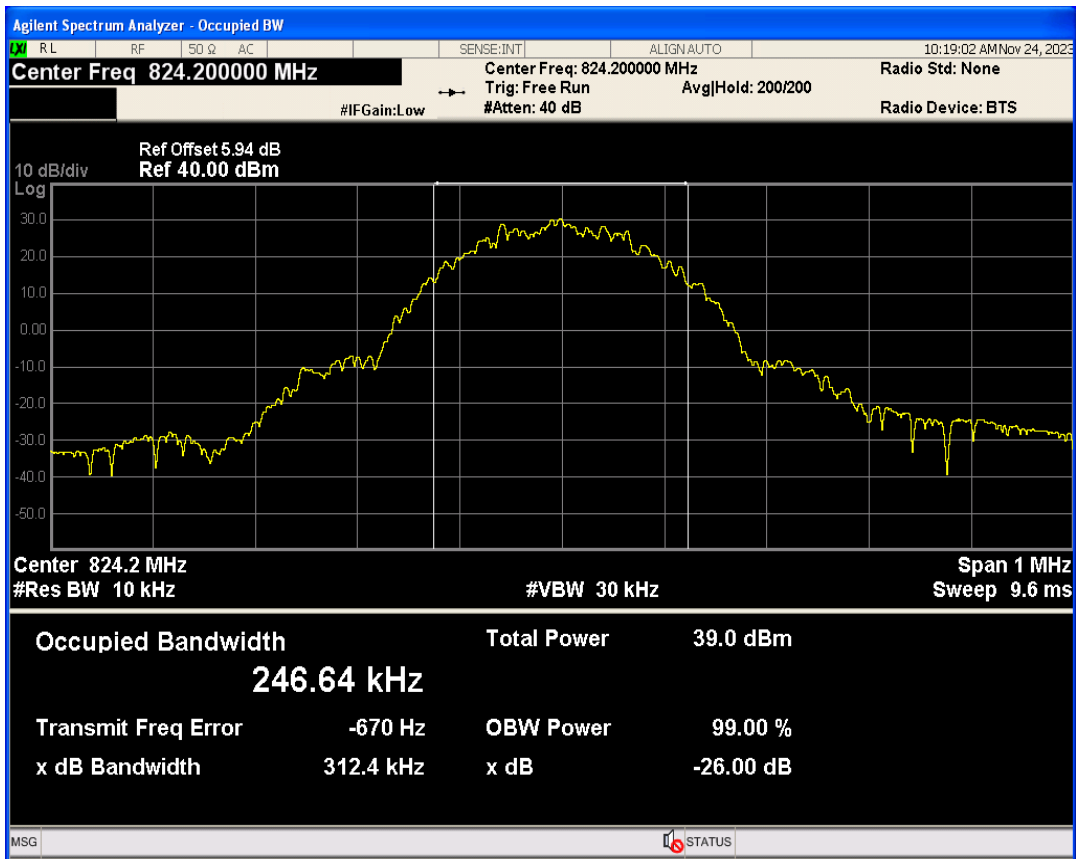

GSM850 Channel=189

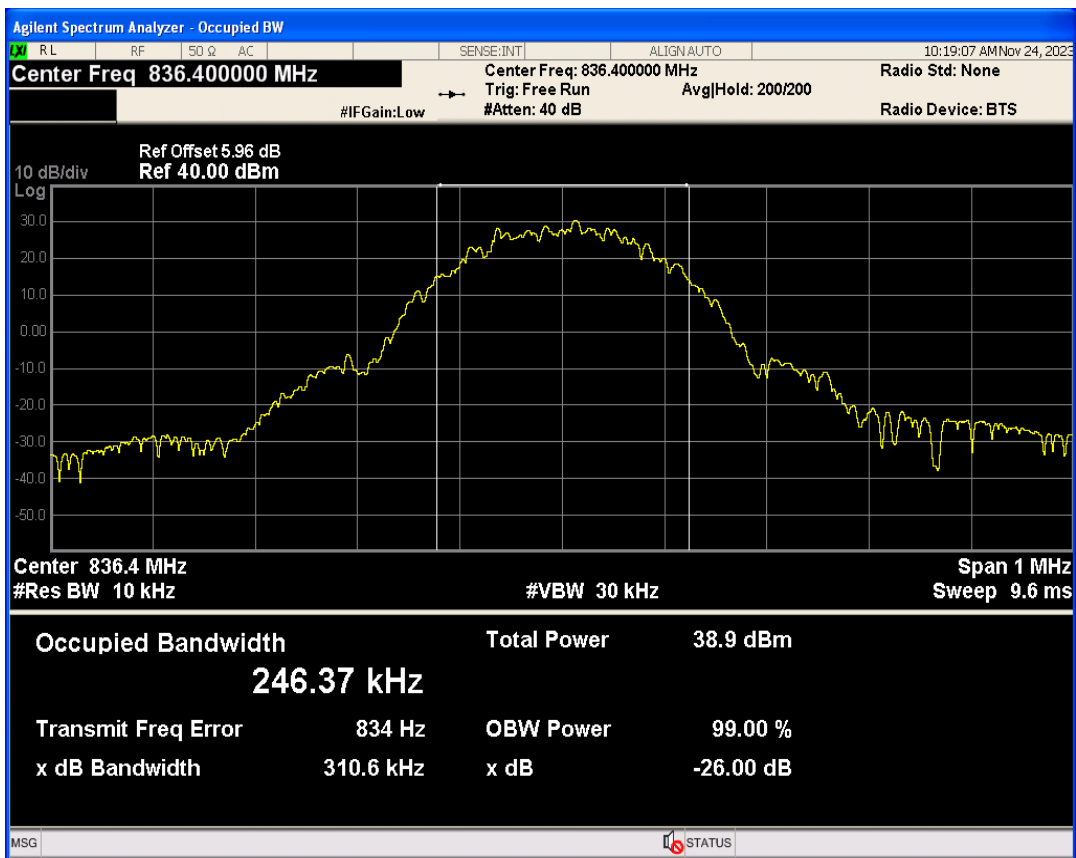


GSM850 Channel=251

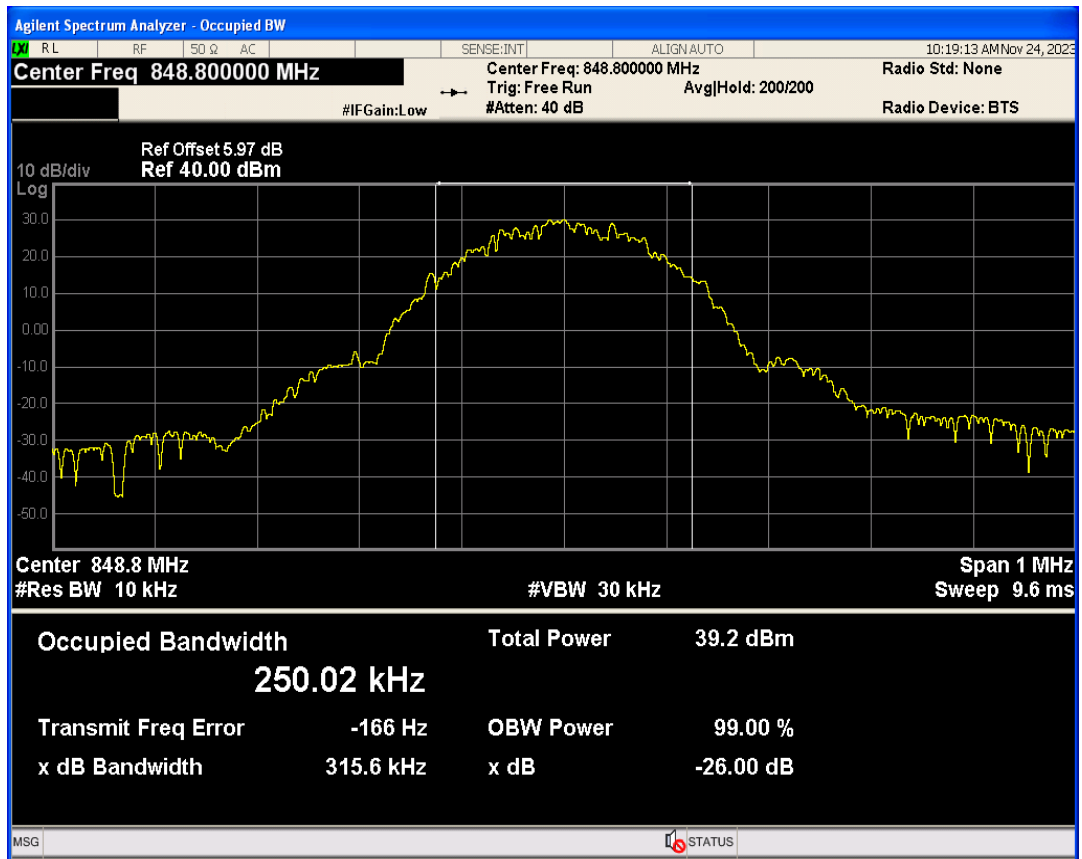


Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GSM1900	512	1850.2	1849.98	-29.37	-13	PASS
GSM1900	810	1909.8	1910.02	-28.74	-13	PASS
GSM850	128	824.2	824.00	-25.73	-13	PASS
GSM850	251	848.8	849.02	-26.07	-13	PASS


GSM1900 Channel=512

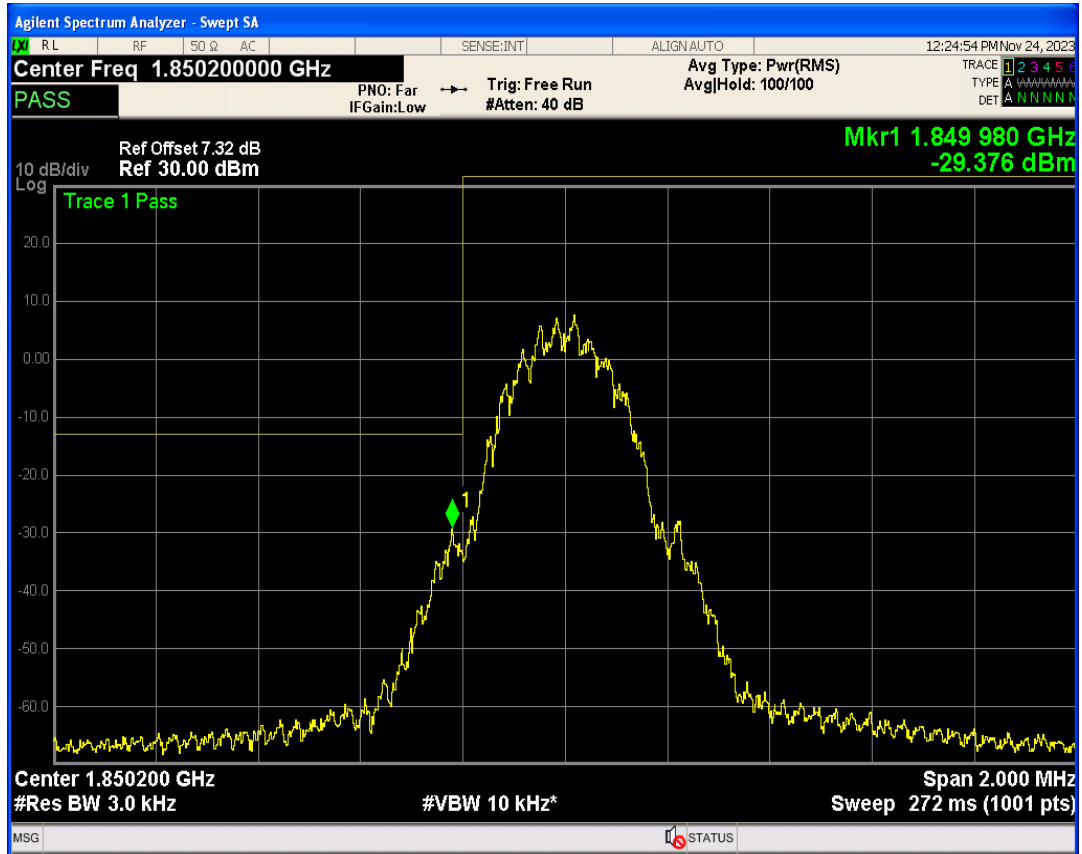


GSM1900 Channel=810

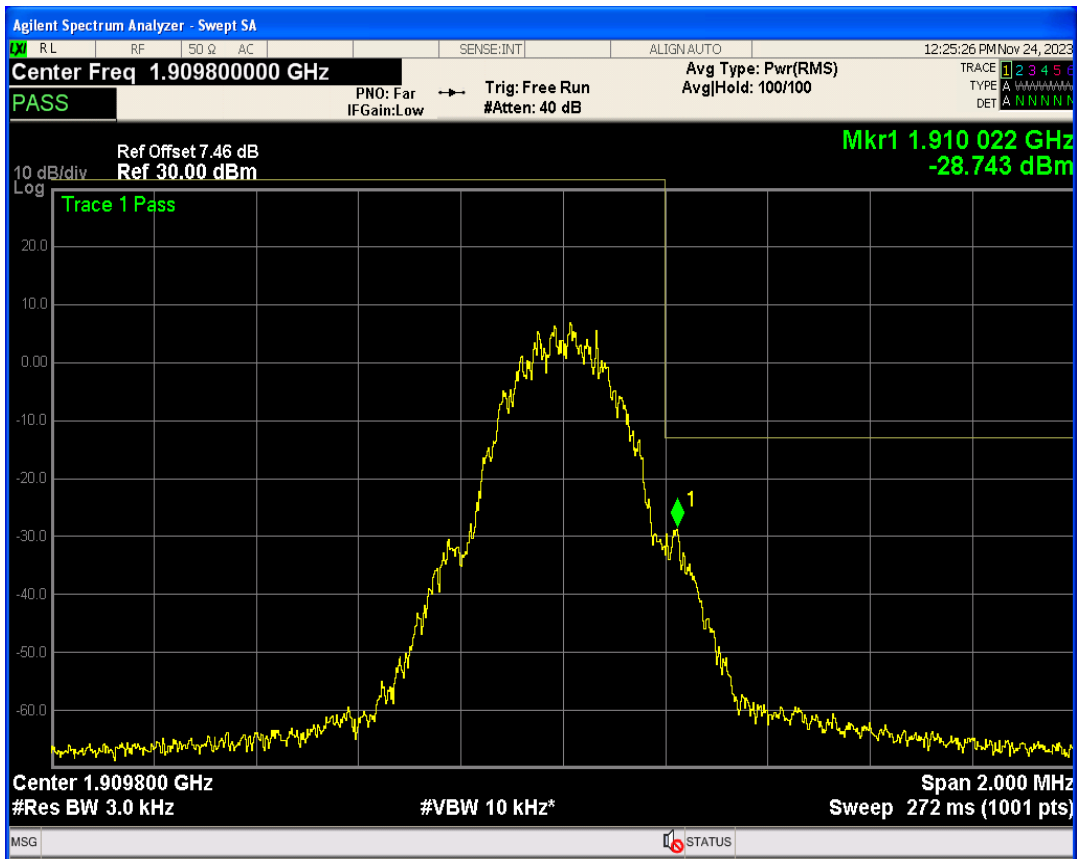

GSM850 Channel=128

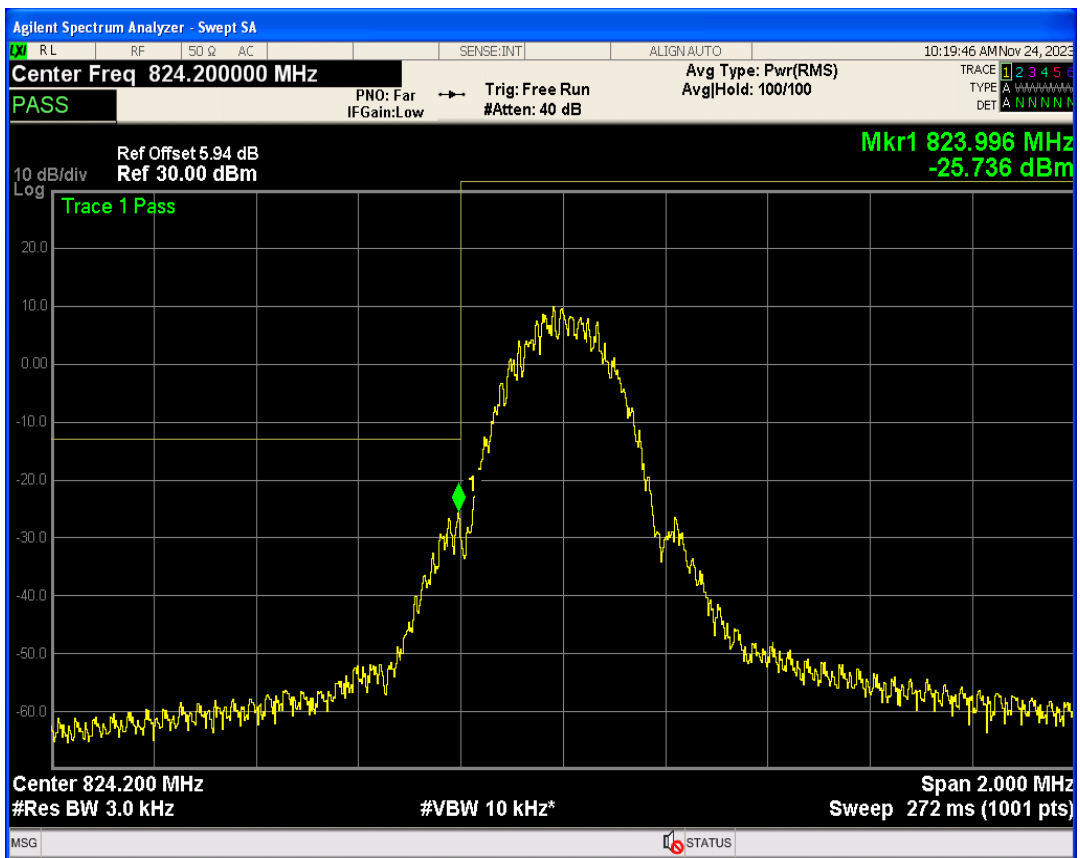


GSM850 Channel=251

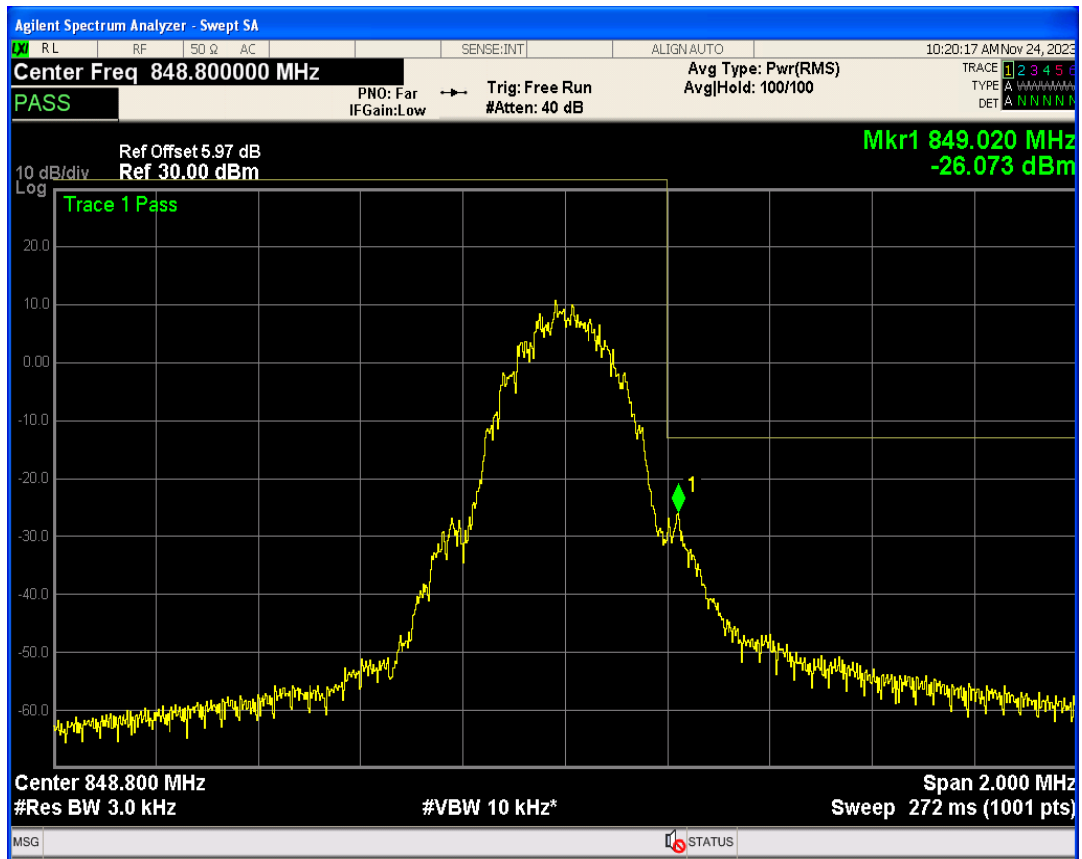


Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GSM1900	512	1850.2	25905.09	-18.57	-13	PASS
GSM1900	661	1880	25987.14	-18.99	-13	PASS
GSM1900	810	1909.8	25987.14	-18.42	-13	PASS
GSM850	128	824.2	26040.75	-20.28	-13	PASS
GSM850	189	836.4	26012.29	-20.10	-13	PASS
GSM850	251	848.8	26034.13	-20.22	-13	PASS


GSM1900 Channel=661

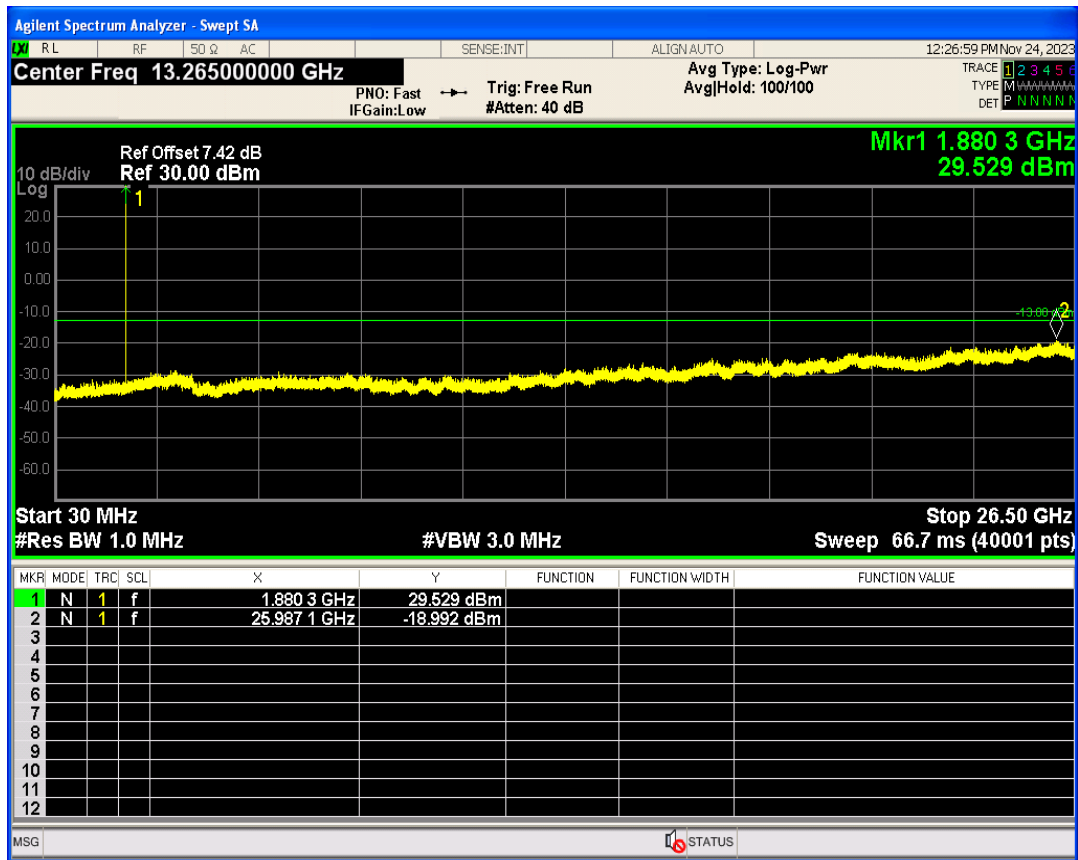


GSM1900 Channel=512

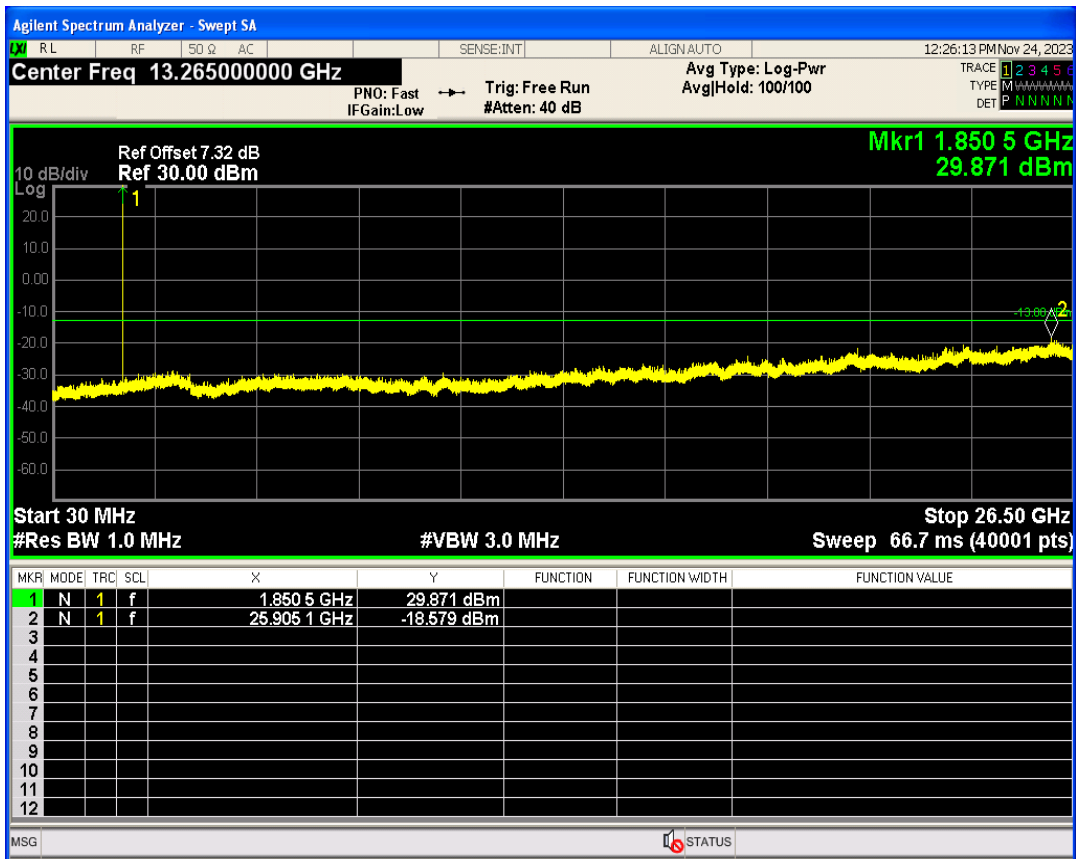


GSM1900 Channel=810

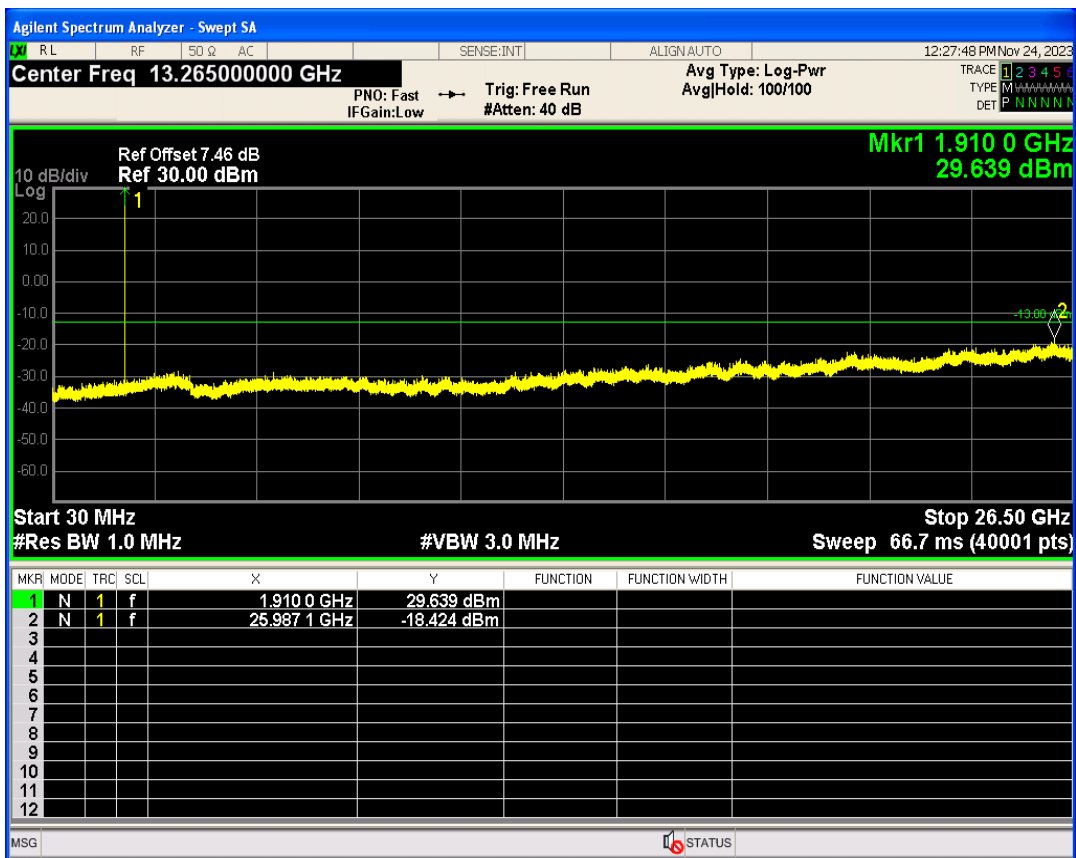

GSM850 Channel=128

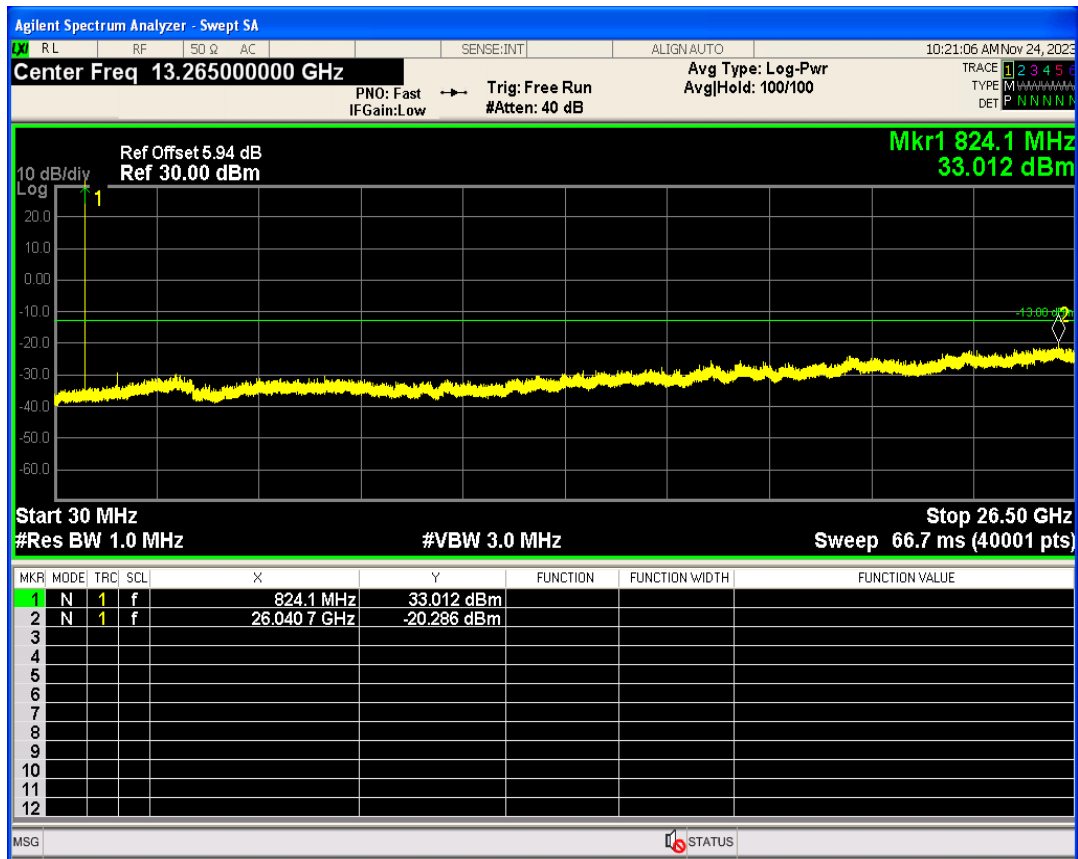

GSM850 Channel=189

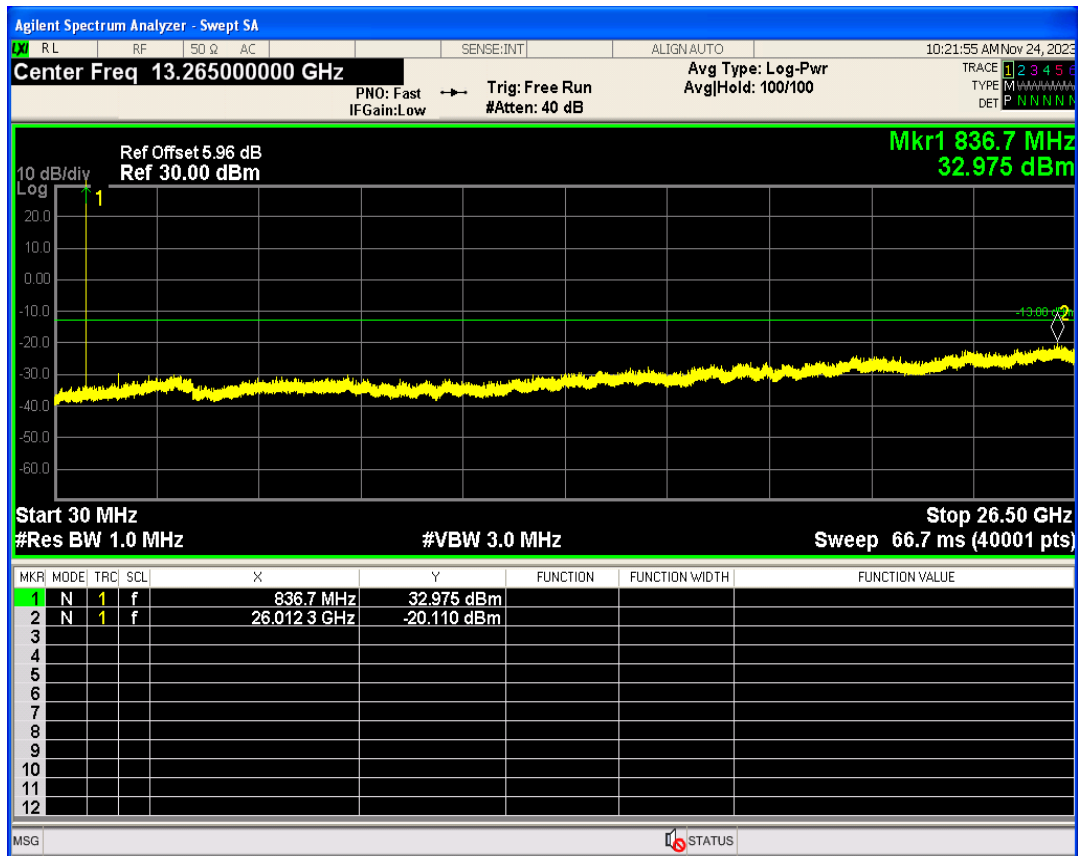

GSM850 Channel=251

