



RF MEASUREMENT REPORT

FCC ID: 2AD8UAWHQN01
Application: Nokia Solutions and Networks, OY
Product: AirScale Micro RRH
Model No.: AWHQN
Brand Name: Nokia
FCC Rule Part(s): Part 2, 27 Subpart O
Result: Complies
Test Date: 2022-09-21 ~ 2022-09-23

Reviewed By:

Sunny Sun

Approved By:

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.26-2015. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2209RSU049-U1	Rev. 01	Initial Report	2022-09-26	Valid

Note: This report is prepared for FCC Class II permissive supplement to FCC ID: 2AD8UAWHQN01, added 3800 ~ 3980MHz and highest channel test data.

CONTENTS

Description	Page
1. General Information.....	5
1.1. Applicant.....	5
1.2. Manufacturer.....	5
1.3. Testing Facility.....	5
1.4. Product Information.....	6
1.5. Radio Specification under Test.....	6
1.6. Emission Designator.....	6
1.7. Description of Available Antennas.....	7
1.8. EMI Suppression Device(s)/Modifications.....	7
1.9. Test Methodology.....	7
2. Test Configuration.....	8
2.1. Test Mode.....	8
2.2. Test System Connection Diagram.....	8
2.3. Test Environment Condition.....	9
3. Measuring Instrument.....	10
4. Decision Rules and Measurement Uncertainty.....	11
4.1. Decision Rules.....	11
4.2. Measurement Uncertainty.....	11
5. Test Result.....	12
5.1. Summary.....	12
5.2. Occupied Bandwidth Measurement.....	13
5.2.1. Test Limit.....	13
5.2.2. Test Procedure.....	13
5.2.3. Test Setting.....	13
5.2.4. Test Setup.....	13
5.2.5. Test Result.....	13
5.3. Frequency Stability Measurement.....	14
5.3.1. Test Limit.....	14
5.3.2. Test Procedures Used.....	14
5.3.3. Test Setting.....	14
5.3.4. Test Setup.....	14
5.3.5. Test Result.....	15
5.4. Peak to Average Ratio Measurement.....	16
5.4.1. Test Limit.....	16

5.4.2.	Test Procedure Used	16
5.4.3.	Test Setting	16
5.4.4.	Test Setup	16
5.4.5.	Test Result	16
5.5.	Equivalent Isotropically Radiated Power Measurement	17
5.5.1.	Test Limit	17
5.5.2.	Test Procedure	17
5.5.3.	Test Setting	17
5.5.4.	Test Setup	18
5.5.5.	Test Result	18
5.6.	Band Edge Measurement	19
5.6.1.	Test Limit	19
5.6.2.	Test Procedure	19
5.6.3.	Test Setting	19
5.6.4.	Test Setup	19
5.6.5.	Test Result	20
5.7.	Out-of-frequency Band unwanted Emissions Measurement	21
5.7.1.	Test Limit	21
5.7.2.	Test Procedure	21
5.7.3.	Test Setting	21
5.7.4.	Test Setup	22
5.7.5.	Test Result	23
Appendix A - Test Result		24
A.1	Occupied Bandwidth Test Result	24
A.2	Frequency Stability Measurement Test Result	26
A.3	Peak to Average Ratio Measurement Test Result	27
A.4	Equivalent Isotropically Radiated Power Test Result	28
A.5	Band Edge Test Result	31
A.6	Out-of-frequency Band unwanted Emissions Test Result	33
Appendix B - Test Setup Photograph		35
Appendix C - EUT Photograph		36

1. General Information

1.1. Applicant

Nokia Solutions and Networks, OY
2000 W. Lucent Lane, Naperville, Illinois, United States, 60563

1.2. Manufacturer

Nokia Solutions and Networks, OY
2000 W. Lucent Lane, Naperville, Illinois, United States, 60563

1.3. Testing Facility

☒	Test Site - MRT Suzhou Laboratory Laboratory Location (Suzhou - Wuzhong) D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China Laboratory Location (Suzhou - SIP) 4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China Laboratory Accreditations A2LA: 3628.01 CNAS: L10551 FCC: CN1166 ISED: CN0001 VCCI: ☐ R-20025 ☐ G-20034 ☐ C-20020 ☐ T-20020 ☐ R-20141 ☐ G-20134 ☐ C-20103 ☐ T-20104
☐	Test Site - MRT Shenzhen Laboratory Laboratory Location (Shenzhen) 1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China Laboratory Accreditations A2LA: 3628.02 CNAS: L10551 FCC: CN1284 ISED: CN0105
☐	Test Site - MRT Taiwan Laboratory Laboratory Location (Taiwan) No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) Laboratory Accreditations TAF: L3261-190725 FCC: 291082, TW3261 ISED: TW3261

1.4. Product Information

Product Name	AirScale Micro RRH
Model No.	AWHQN
Brand Name	Nokia
Operating Band (s)	5G NR: n77
Power Supply Rating:	PoE (40.5 ~ 57Vdc)
Antenna Specification	Refer to Section 1.7
Accessories	
AC to DC Adapter	Model: BLP0554FPXXXZ01A Input: 100-240V ~ 50/60Hz, 7.0A Output: 54V  9.3A
The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.	

1.5. Radio Specification under Test

NR Band Specification	
Single Band	5G NR n77
T _x Frequency Range	3700 ~ 3980 MHz
R _x Frequency Range	3700 ~ 3980 MHz
Modulation	QPSK, 16QAM, 64QAM, 256QAM
Max EIRP Power	40 MHz: 49.72 dBm/MHz; 100 MHz: 45.73 dBm/MHz

1.6. Emission Designator

Bandwidth (MHz)	Modulation	Emission Designator
40	QPSK	37M8G7D
	16QAM	37M9W7D
	64QAM	37M7W7D
	256QAM	37M8W7D
100	QPSK	97M1G7D
	16QAM	97M4W7D
	64QAM	97M4W7D
	256QAM	97M0W7D

1.7. Description of Available Antennas

Band Support	Antenna Type	Nokia Code	Antenna Gain
n77	Directional Antenna (Internal)	P567454	14.5dBi
Remark: 1. The transmit signals are completely uncorrelated with each other, directional gain = G_{ANT} dBi, G_{ANT} is the antenna gain in dBi; 2. The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.			

1.8. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

1.9. Test Methodology

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:


- ANSI C63.26:2015
- FCC CFR 47 Part 2, Part 27
- FCC KDB 971168 D01 v03r01: Power Meas License Digital Systems
- FCC KDB 971168 D02 v02r01: Misc Rev Approv License Devices
- FCC KDB 412172 D01 v01r01: Determining ERP and EIRP
- FCC KDB 662911 D01 v02r01: Multiple Transmitter Output

2. Test Configuration

2.1. Test Mode

Test Item	Channel Bandwidth	Modulation
Equivalent Isotropically Radiated Power	40MHz, 100MHz	QPSK, 16QAM, 64QAM, 256QAM
Emission Bandwidth		
Conducted Spurious Emissions		QPSK
Band Edge Measurements		QPSK
Radiated Spurious Emissions	40MHz	QPSK
Peak to Average Ratio	40MHz, 100MHz	QPSK
Frequency Stability	100MHz	QPSK

2.2. Test System Connection Diagram

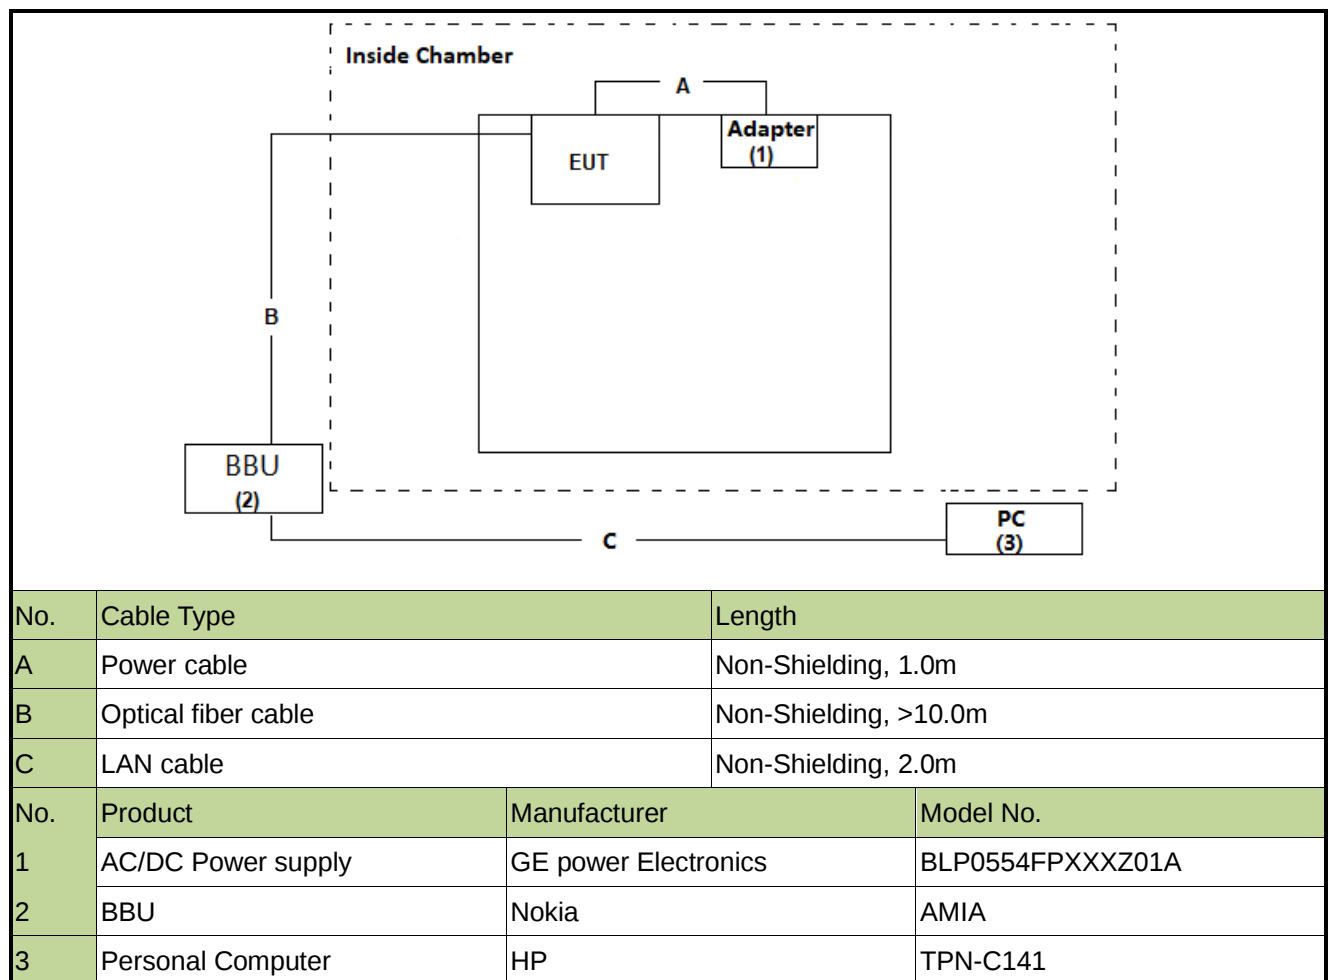

2.3. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20 ~ 75%RH

3. Measuring Instrument

Instrument Name	Manufacturer	Model No.	Asset No.	Cali. Interval	Cal. Due Date	Test Site
Signal Analyzer	Keysight	N9010B	MRTSUE07027	1 year	2022-12-05	WZ-TR3
Signal Analyzer	Keysight	N9020B	MRTSUE07037	1 year	2023-03-29	WZ-TR3
Temperature Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2022-10-10	WZ-TR3
Vibration Test System	DongLing	ES-1-150	MRTSUE06206	1 year	2023-07-07	WZ-TR3
Thermohygrometer	testo	608-H1	MRTSUE06401	1 year	2023-06-06	WZ-TR3
Thermohygrometer	testo	608-H1	MRTSUE06362	1 year	2023-02-15	WZ-SR6
Shielding Room	HUAMING	WZ-SR6	MRTSUE06443	N/A	N/A	WZ-SR6
Signal Analyzer	Keysight	N9020B	MRTSUE06583	1 year	2022-10-10	WZ-SR6
Signal Generator	Keysight	N5173B	MRTSUE06606	1 year	2022-11-29	WZ-SR6
Attenuator	SHX	WDTS100-40d B-6G-B	MRTSUE06690	1 year	2023-03-02	WZ-SR6
Attenuator	SHX	WDTS100-40d B-6G-B	MRTSUE06691	1 year	2023-03-02	WZ-SR6
Attenuator	SHX	WDTS100-40d B-6G-B	MRTSUE06692	1 year	2023-09-08	WZ-SR6
Attenuator	SHX	WDTS100-40d B-6G-B	MRTSUE06693	1 year	2023-03-02	WZ-SR6
TRILOG Antenna	Schwarzbeck	VULB 9162	MRTSUE06022	1 year	2023-05-20	WZ-AC2
EMI Test Receiver	Agilent	N9038A	MRTSUE06125	1 year	2023-06-04	WZ-AC2
Thermohygrometer	Mingle	ETH529	MRTSUE06170	1 year	2022-12-01	WZ-AC2
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06171	1 year	2022-10-21	WZ-AC2
Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2022-11-12	WZ-AC2
Anechoic Chamber	RIKEN	WZ-AC2	MRTSUE06213	1 year	2023-04-21	WZ-AC2
Horn Antenna	ETS	3117	MRTSUE06257	1 year	2022-09-25	WZ-AC2
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06597	1 year	2022-12-01	WZ-AC2
Preamplifier	EMCI	EMC184045SE	MRTSUE06640	1 year	2023-01-13	WZ-AC2
Preamplifier	EMCI	EMC051845SE	MRTSUE06987	1 year	2023-09-08	WZ-AC2
Thermohygrometer	testo	Testo 608-H1	MRTSUE11038	1 year	2022-11-11	WZ-AC2

Software	Version	Function
EMI Software	V3.0.0	EMI Test Software
Controller_MF 7802	1.02	RE Antenna & turntable

4. Decision Rules and Measurement Uncertainty

4.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2.
(Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

4.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

Radiated Spurious Emissions
Measurement Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): Horizontal: 9kHz ~ 300MHz: 5.04dB 300MHz ~ 1GHz: 4.95dB 1GHz ~ 40GHz: 6.40dB Vertical: 9kHz ~ 300MHz: 5.24dB 300MHz ~ 1GHz: 6.03dB 1GHz ~ 40GHz: 6.40dB
Conducted Spurious Emissions
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.78dB
Output Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 1.13dB
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.28%
Frequency Stability
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 76.2Hz

5. Test Result

5.1. Summary

FCC Section(s)	Test Description	Test Condition	Verdict
2.1049	Emission Bandwidth	Conducted	Pass
2.1055; 27.54	Frequency Stability		Pass
2.1046; 27.50(j)(4)	Peak to Average Ratio		Pass
2.1046; 27.50(j)(2)	Equivalent Isotropically Radiated Power		Pass
27.53(l)(1)	Transmitter unwanted emissions (Band Edge)		Pass
2.1051; 27.53(l)(1)	Out-of-frequency Band unwanted Emissions	Conducted & Radiated	Pass

Notes:

- 1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) The Occupied Bandwidth and Conducted Spurious Emission were presented the worst test data of modulation & antenna port in the test report.

5.2. Occupied Bandwidth Measurement

5.2.1. Test Limit

The occupied bandwidth shall not exceed the equipment's channel bandwidth, which is declared by the manufacturer.


5.2.2. Test Procedure

ANSI C63.26-2015 - Section 5.4.4

5.2.3. Test Setting

1. Set center frequency to the nominal EUT channel center frequency
2. RBW = The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace to stabilize
8. Use the 99% power bandwidth function of the instrument and report the measured bandwidth.

5.2.4. Test Setup

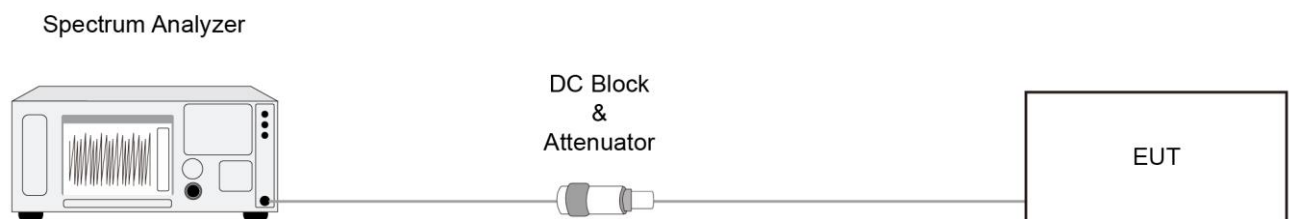

5.2.5. Test Result

Refer to Appendix A.1.

5.3. Frequency Stability Measurement

5.3.1. Test Limit

N/A

5.3.2. Test Procedures Used

ANSI C63.26-2015 - Section 5.6

5.3.3. Test Setting

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

5.3.4. Test Setup

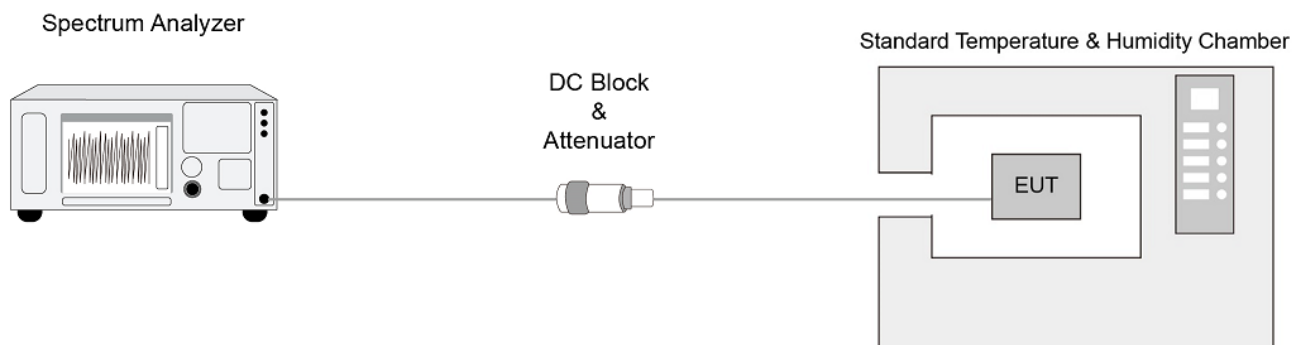

5.3.5. Test Result

Refer to Appendix A.2.

5.4. Peak to Average Ratio Measurement

5.4.1. Test Limit

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.


5.4.2. Test Procedure Used

ANSI C63.26-2015 - Section 5.2.3.4 (CCDF).

5.4.3. Test Setting

1. Set the resolution / measurement bandwidth $\geq$ signal's occupied bandwidth
2. Set the number of counts to a value that stabilizes the measured CCDF curve
3. Record the maximum PARR level associated with a probability of 0.1%

5.4.4. Test Setup

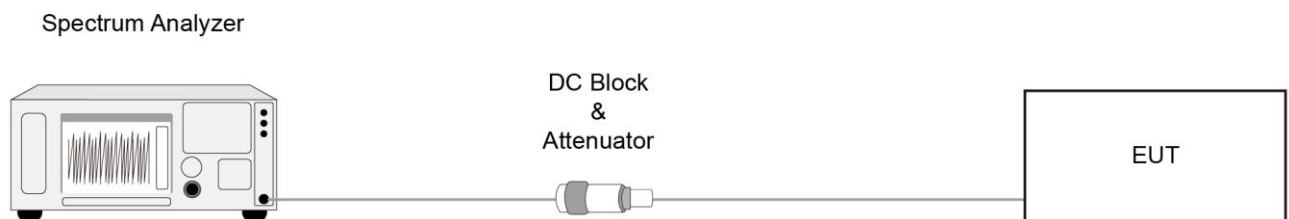

5.4.5. Test Result

Refer to Appendix A.3.

5.5. Equivalent Isotropically Radiated Power Measurement

5.5.1. Test Limit

The Radiated Equivalent Isotropically Power shall be according to the specific rule Part 27.50(j)(2) that are limited to EIRP of 1640 watts/MHz when transmitting with an emission bandwidth greater than 1 MHz.

5.5.2. Test Procedure

ANSI C63.26-2015 - Section 5.2.4.2 & 5.2.5.5

5.5.3. Test Setting


Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

Average Power Spectral Density Measurement

1. Span to $2 \times$ to $3 \times$ the OBW
2. RBW $\geq 1\%$ to 5% of the OBW
3. VBW $\geq 3 \times$ RBW
4. Sweep time $\geq 10 \times$ (number of points in sweep) $\times$ (transmission symbol period)
5. Detector = power averaging (rms)
6. Set sweep trigger to "free run"
7. If the EUT can be configured to transmit continuously, then set the trigger to free run
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple.
9. The trace was allowed to stabilize
10. Compute the power by integrating the spectrum across the OBW of the signal using the Instrument's band power measurement function, with the band/channel limits set equal to the OBW band edges.
11. EIRP = Output Power Level of S.G - T_x Cable Loss + Antenna Gain of Substitution Antenna.

5.5.4. Test Setup

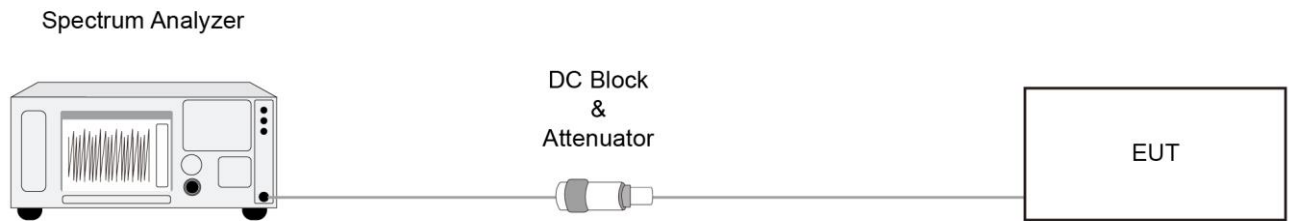

5.5.5. Test Result

Refer to Appendix A.4.

5.6. Band Edge Measurement

5.6.1. Test Limit

The first 1.0 MHz band immediately outside and adjacent to each of the sub-bands, the power of emissions per any 1% of the occupied bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} P$ (watts)

Note: This device can be implement MIMO function, so the limit os spurious emissions needs to be reduced $10 \cdot \log(\text{Numbers}_{\text{Ant}})$ according to FCC KDB 662911 D01 guidance.

The limit is adjusted to $-13\text{dBm} - 10 \cdot \log(4) = -19.02\text{dBm}$


5.6.2. Test Procedure

ANSI C63.26-2015 - Section 5.7.1

5.6.3. Test Setting

1. Set the analyzer frequency to Bottom or Top channel.
2. RBW = The nominal RBW shall be in the range of 1% of the anticipated OBW;
3. VBW $\geq 3 \cdot \text{RBW}$
4. Sweep time = auto
5. Detector = power averaging (rms)
6. Set sweep trigger to "free run"
7. User gate triggered such that the analyzer only sweeps when the device is transmitting at full power
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. To accurately determine the average power over the on and off time of the transmitter, it can be necessary to increase the number of traces to be averaged above 100, or if using a manually configured sweep time, increase the sweep time.
9. Used power integration when using a measurement bandwidth smaller than the specified bandwidth.

5.6.4. Test Setup

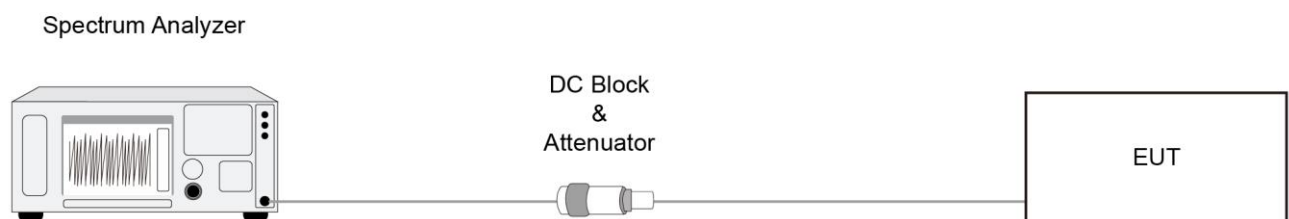

5.6.5. Test Result

Refer to Appendix A.5.

5.7. Out-of-frequency Band unwanted Emissions Measurement

5.7.1. Test Limit

The first 1.0 MHz band immediately outside and adjacent to each of the sub-bands, the power of emissions per any 1% of the occupied bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} P$ (watts)

Note: This device can be implement MIMO function, so the limit os spurious emissions needs to be reduced $10 \cdot \log(\text{Numbers}_{\text{Ant}})$ according to FCC KDB 662911 D01 guidance.

The limit is adjusted to $-13\text{dBm} - 10 \cdot \log(4) = -19.02\text{dBm}$

E (dB μ V/m) = EIRP (dBm) - $20 \log D$ + 104.8; where D is the measurement distance in meters. The emission limit equal to 82.3dB μ V/m.

5.7.2. Test Procedure

ANSI C63.26-2015 - Section 5.7 & Section 5.5

5.7.3. Test Setting

Conducted Measurement

1. Set the analyzer frequency to low or high channel.
2. RBW = 1MHz
3. VBW $\geq 3 \cdot$ RBW
4. Sweep time = auto
5. Detector = power averaging (rms)
6. Set sweep trigger to "free run."
7. User gate triggered such that the analyzer only sweeps when the device is transmitting at full power.
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. To accurately determine the average power over the on and off time of the transmitter, it can be necessary to increase the number of traces to be averaged above 100, or if using a manually configured sweep time, increase the sweep time.


Radiated Measurement

1. RBW = 1MHz
2. VBW $\geq 3 \times$ RBW
3. Sweep time $\geq 10 \times$ (number of points in sweep) $\times$ (transmission symbol period)
4. Detector = Peak
5. Trace mode = max hold
6. The trace was allowed to stabilize

5.7.4. Test Setup


Conducted Measurement

Spectrum Analyzer

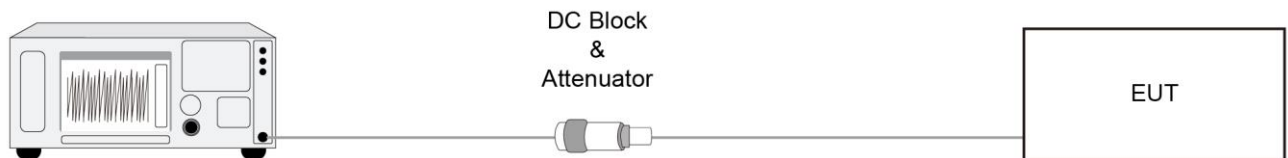


Radiated Measurement

Below 1GHz Test Setup:

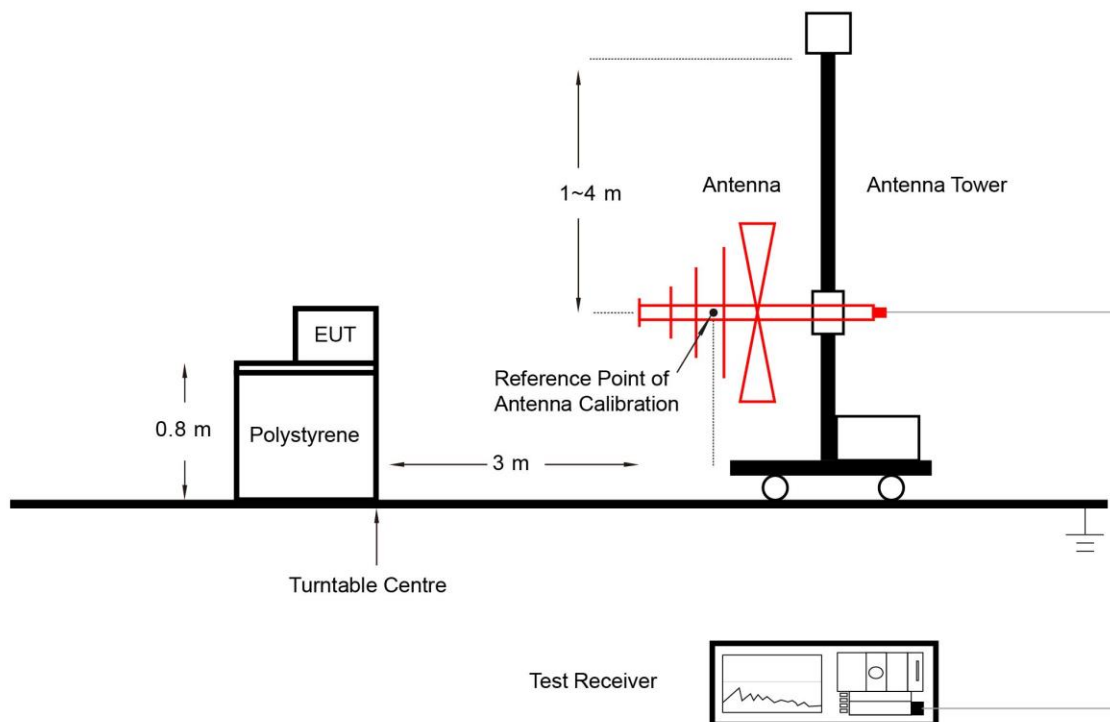

Above 1GHz Test Setup:

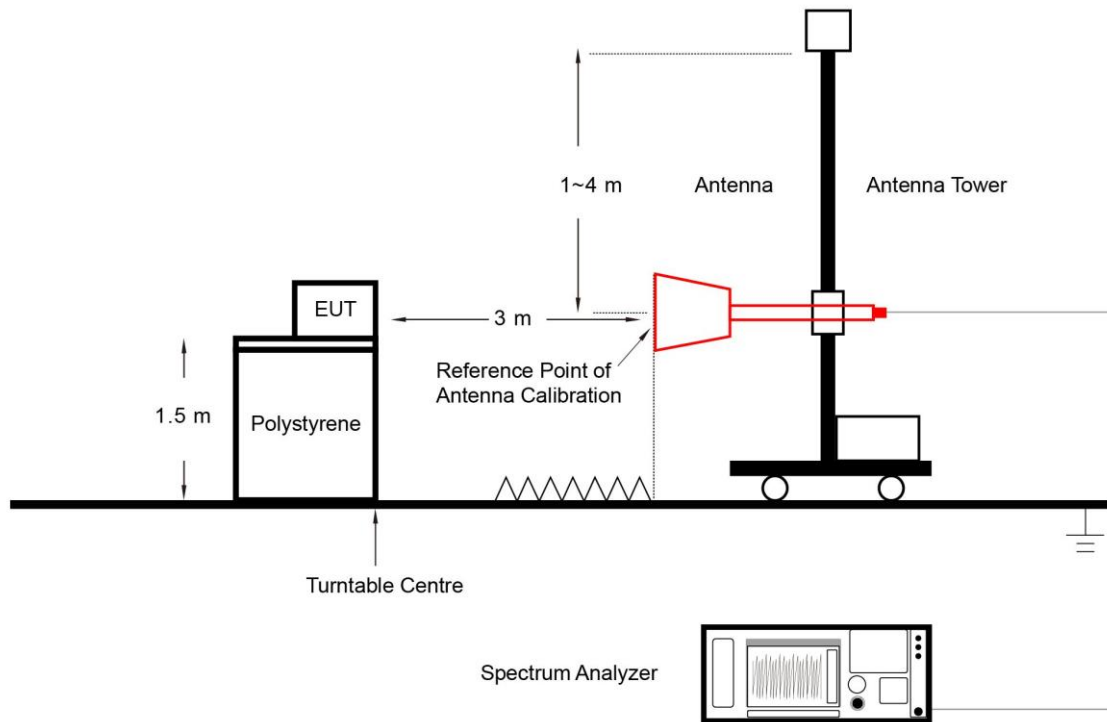

5.7.5. Test Result

Refer to Appendix A.6.

Appendix A - Test Result


A.1 Occupied Bandwidth Test Result

Test Site	WZ-SR6	Test Engineer	Cloud Guo
Test Date	2022/09/21	Test Configuration	n77


Frequency (MHz)	Bandwidth (MHz)	99% Bandwidth (MHz)
QPSK		
3960.0	40	37.84
3930.0	100	97.08
16QAM		
3960.0	40	37.88
3930.0	100	97.42
64QAM		
3960.0	40	37.74
3930.0	100	97.40
256QAM		
3960.0	40	37.82
3930.0	100	97.03

40MHz Channel Bandwidth - 3960MHz


QPSK

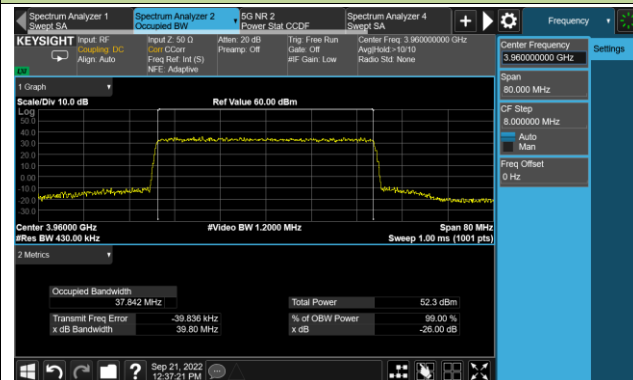


16QAM

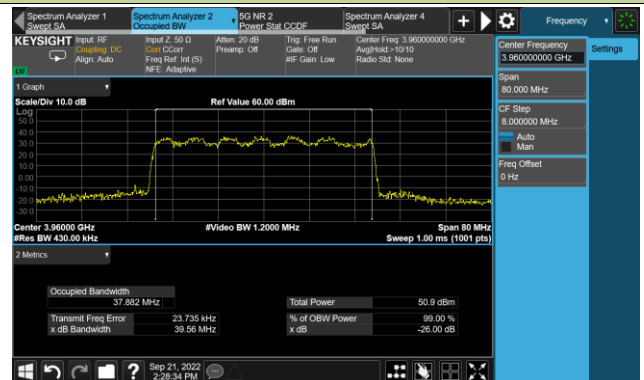

64QAM

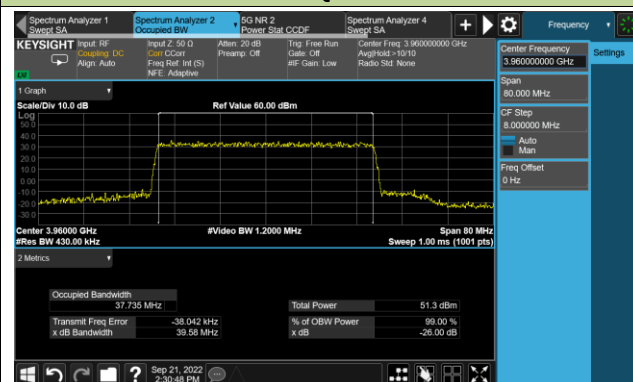


256QAM

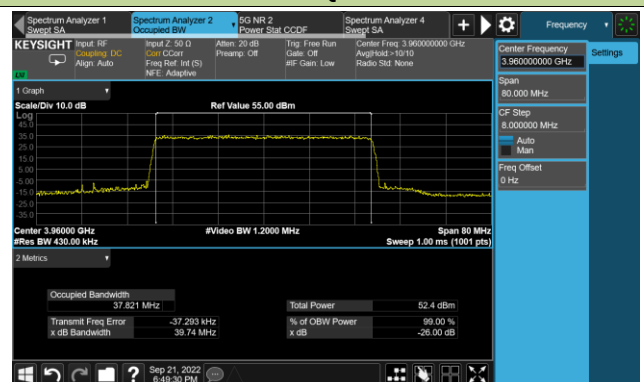


100MHz Channel Bandwidth - 3930MHz


QPSK

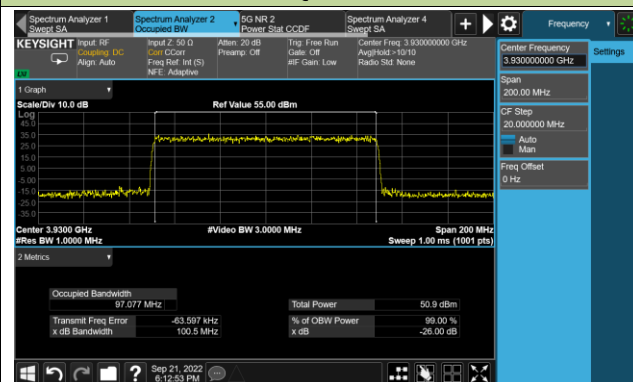


16QAM

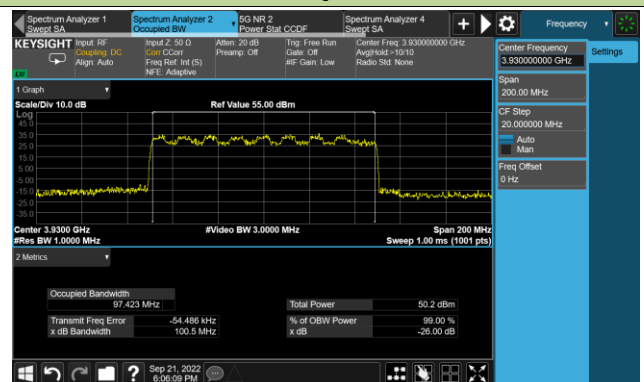

64QAM

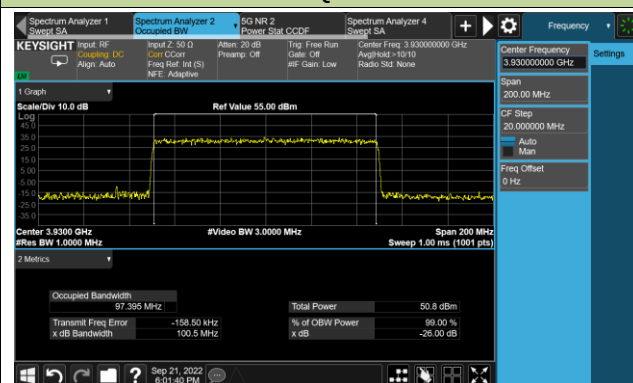

256QAM

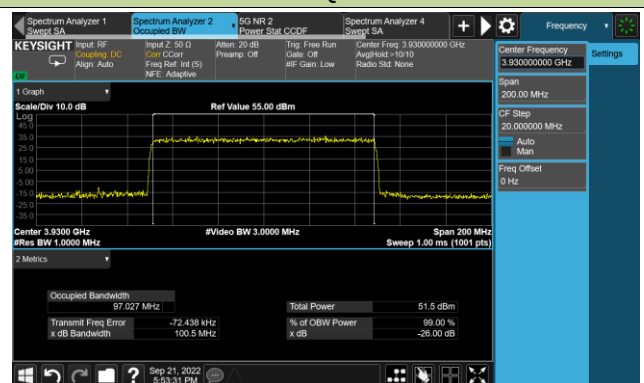

A.2 Frequency Stability Measurement Test Result


Test Engineer	Cloud Guo	Test Site	WZ-TR3
Test Date	2022/09/22	Test Configuration	n77

Voltage	Temp(°C)	Frequency Tolerance(ppm)
AC 120V	- 30	0.0209
	- 20	0.0207
	- 10	0.0207
	0	0.0207
	+ 10	0.0205
	+ 20	0.0203
	+ 30	0.0215
	+ 40	0.0201
AC 138V	+ 50	0.0210
	+ 20	0.0203
AC 102V	+ 20	0.0213

A.3 Peak to Average Ratio Measurement Test Result

Test Engineer	Cloud Guo	Test Site	WZ-SR6
Test Date	2022/09/21	Test Configuration	n77

Frequency (MHz)	Channel Bandwidth (MHz)	Peak to Average Ratio (dB)	Limit (dB)	Result
3960.00	40	8.50	≤ 13.00	Pass
3930.00	100	8.59	≤ 13.00	Pass

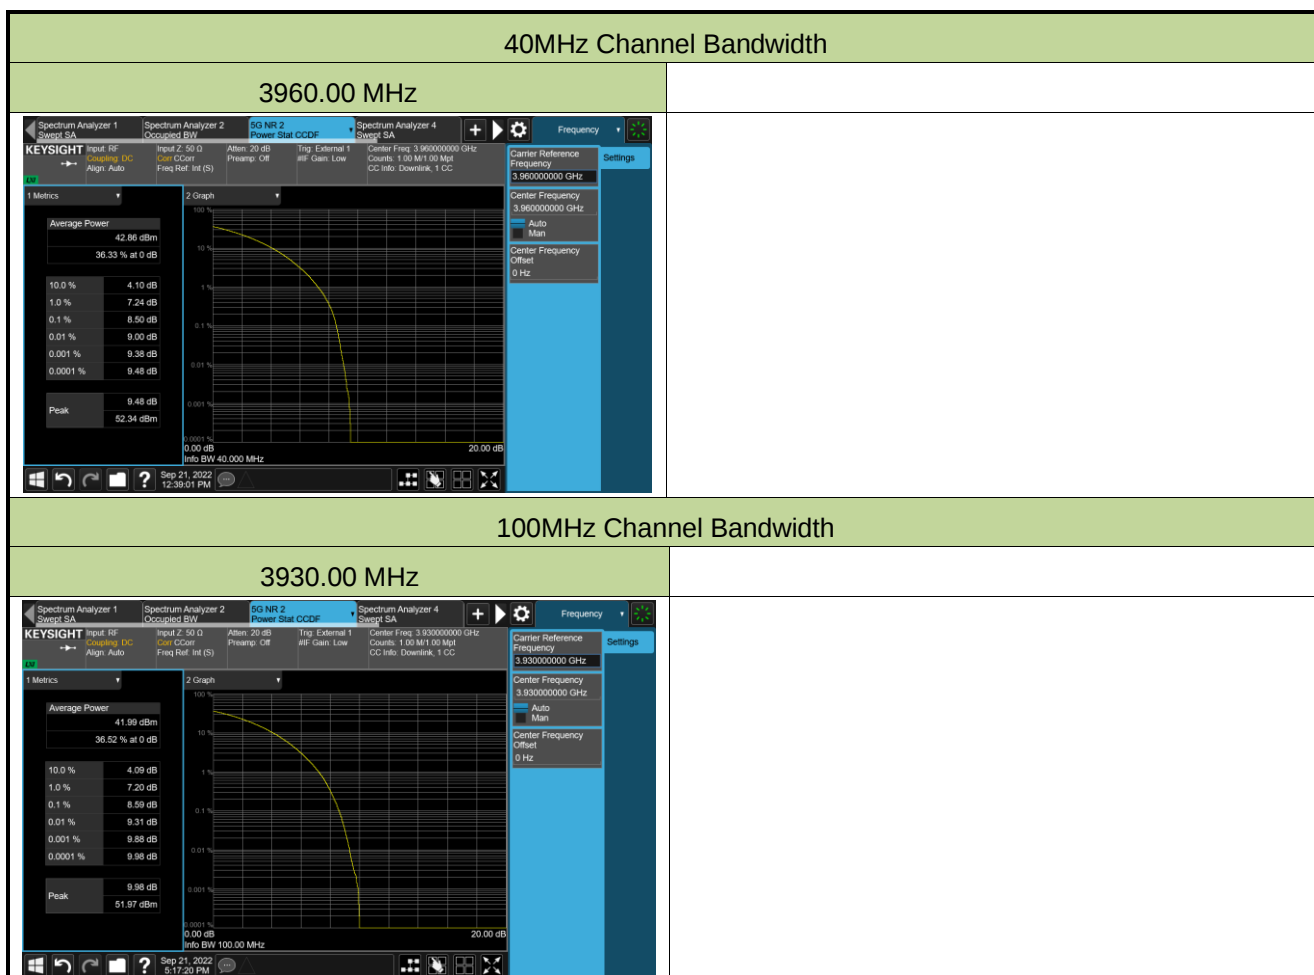

A.4 Equivalent Isotropically Radiated Power Test Result


Test Engineer	Cloud Guo	Test Site	WZ-SR6
Test Date	2022/09/21	Test Configuration	n77

Frequency (MHz)	Channel BW (MHz)	Output Power Density (dBm/MHz)				Total Power Density (dBm/MHz)	EIRP Density (dBm/MHz)	Limit (dBm /MHz)
		Ant 1	Ant 2	Ant 3	Ant 4			
QPSK								
3960.00	40	27.03	27.55	27.40	27.47	33.39	47.89	< 62.15
3930.00	100	22.63	23.16	23.25	23.34	29.12	43.62	< 62.15
16QAM								
3960.00	40	28.53	29.37	29.41	29.44	35.22	49.72	< 62.15
3930.00	100	24.69	25.16	25.43	25.50	31.23	45.73	< 62.15
64QAM								
3960.00	40	27.27	27.48	27.74	27.89	33.62	48.12	< 62.15
3930.00	100	22.96	23.34	23.47	23.74	29.41	43.91	< 62.15
256QAM								
3960.00	40	27.03	27.35	27.75	27.69	33.49	47.99	< 62.15
3930.00	100	22.58	23.15	23.30	23.69	29.22	43.72	< 62.15
Note 1: Total Power Density(dBm/MHz) = 10*log*{10^[ANT 1 Power (dBm/MHz) / 10] + 10^[ANT 2 Power (dBm/MHz) / 10] + 10^[ANT 3 Power (dBm/MHz) / 10] + 10^[ANT 4 Power (dBm/MHz) / 10]} (dBm/MHz).								
Note 2: EIRP Density (dBm/MHz) = Total Power Density (dBm/MHz) + Antenna Gain (dBi).								

Worst case test plots

40MHz Channel Bandwidth - 3960MHz - 16QAM


Ant 1

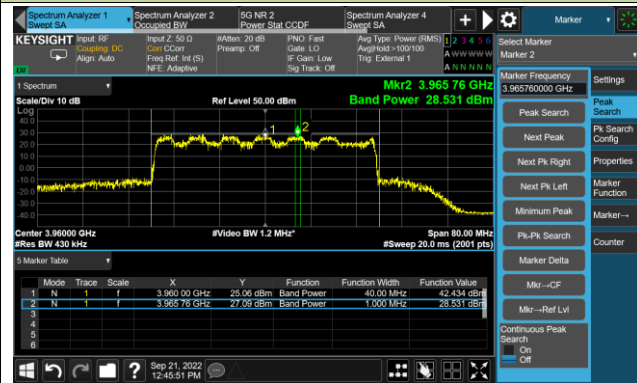

Ant 2



Ant 3

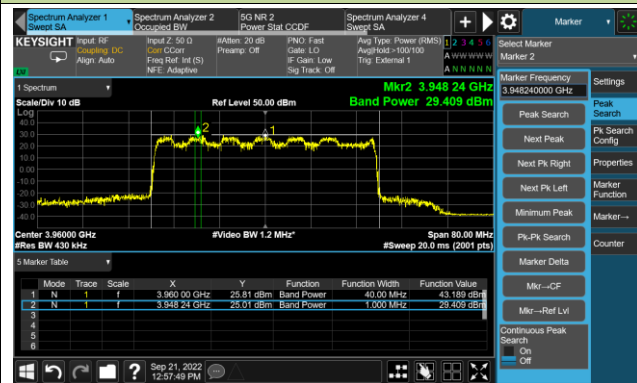

Ant 4



Test Engineer	Cloud Guo	Test Site	WZ-SR6
Test Date	2022/09/21	Test Configuration	n77
Test Item	Report Only		

Frequency (MHz)	Channel BW (MHz)	Output Power (dBm)				Total Power (dBm)
		Ant 1	Ant 2	Ant 3	Ant 4	
QPSK						
3960.00	40	42.61	43.14	43.26	43.32	49.11
3930.00	100	42.50	42.82	43.18	43.24	48.97
16QAM						
3960.00	40	42.43	43.13	43.19	43.13	49.00
3930.00	100	42.39	42.96	43.24	43.27	49.00
64QAM						
3960.00	40	42.64	43.01	43.26	43.28	49.08
3930.00	100	42.41	42.97	43.07	43.21	48.95
256QAM						
3960.00	40	42.58	42.97	43.13	43.06	48.96
3930.00	100	42.44	42.99	43.15	43.10	48.95
Note: Total Power (dBm) = 10*log*{10^[ANT 1 Power (dBm) / 10] + 10^[ANT 2 Power (dBm) / 10] + 10^[ANT 3 Power (dBm) / 10] + 10^[ANT 4 Power (dBm) / 10]} (dBm).						

A.5 Band Edge Test Result


Test Site	WZ-SR6	Test Engineer	Cloud Guo
Test Date	2022/09/22	Test Configuration	n77, 40MHz

Frequency (MHz)	Max Band Edge (dBm)				Limit (dBm)	Result
	Ant 1	Ant 2	Ant 3	Ant 4		
3960.00	-21.14	-19.60	-20.42	-20.16	≤ -19.02	Pass



Test Site	WZ-SR6	Test Engineer	Cloud Guo
Test Date	2022/09/22	Test Configuration	n77,100MHz

Frequency (MHz)	Max Band Edge (dBm)				Limit (dBm)	Result
	Ant 1	Ant 2	Ant 3	Ant 4		
3930.00	-29.33	-28.52	-29.90	-28.03	≤ -19.02	Pass

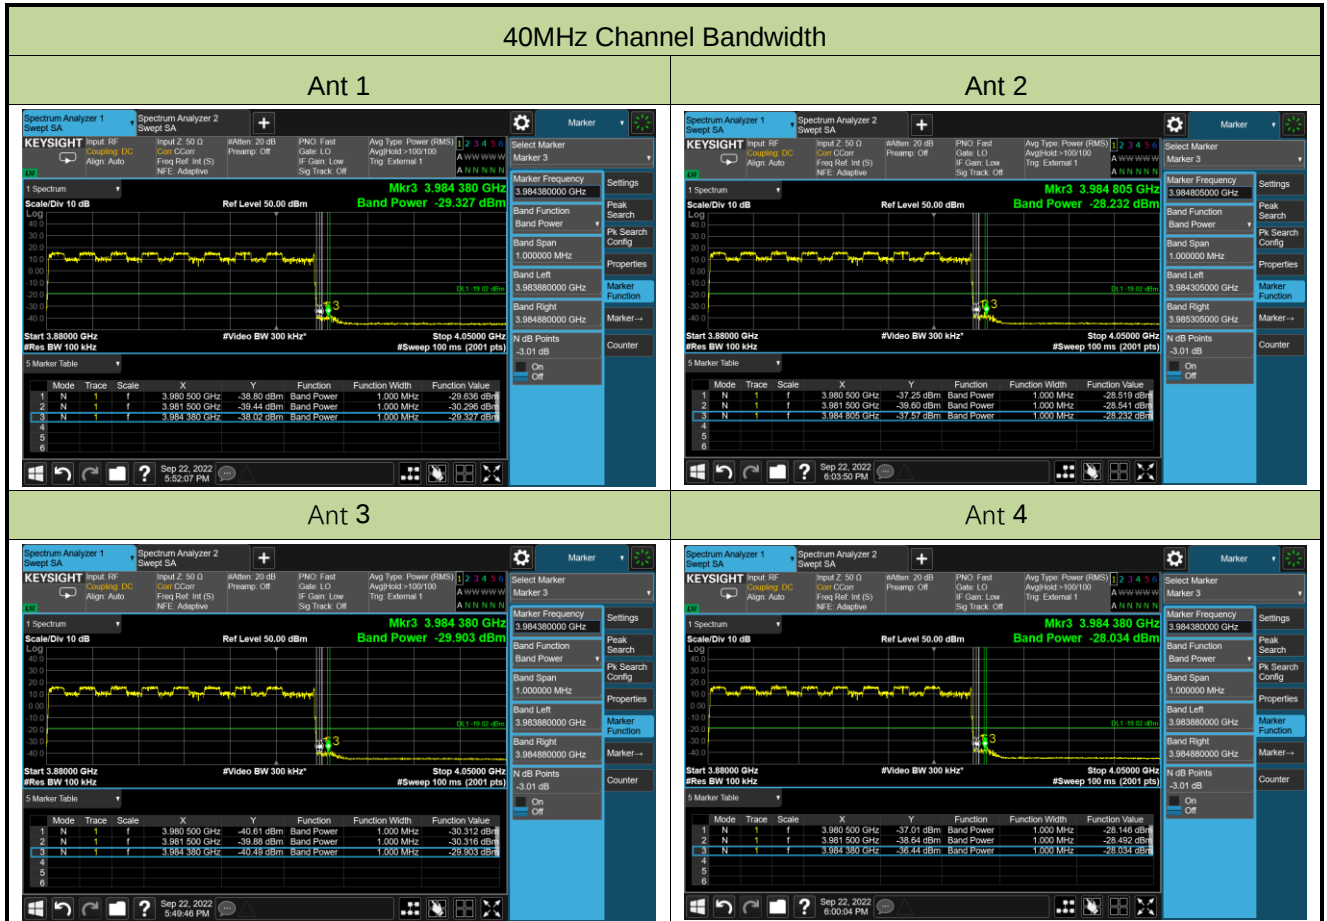


A.6 Out-of-frequency Band unwanted Emissions Test Result

Conducted Spurious Emissions Test Result

Test Site	WZ-SR6	Test Engineer	Cloud Guo
Test Date	2022/09/22	Test Configuration	n77

Frequency (MHz)	Channel BW(MHz)	Frequency Range (MHz)	Max Spurious Emissions (dBm)	Limit (dBm)	Result
3960.00	40	30 ~ 40000	-29.96	≤ -19.02	Pass
3930.00	100	30 ~ 40000	-28.82	≤ -19.02	Pass

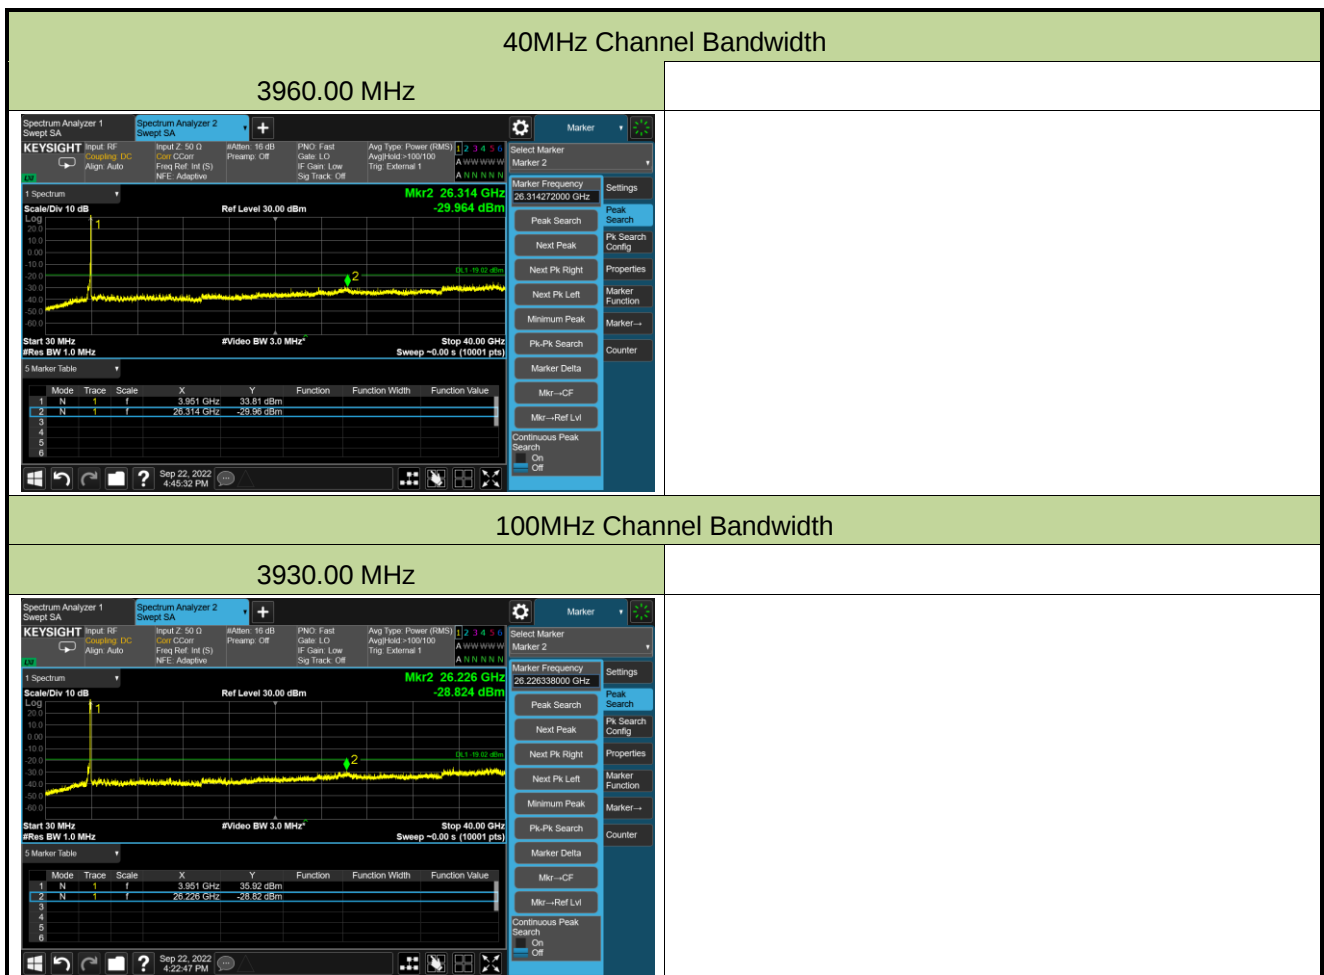

Note: The amplitude of Conducted Spurious emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Radiated Spurious Test Result

Test Engineer	Lucas Wang	Test Site	WZ-AC2
Test Date	2022/09/22	Test Configuration	n77, BW=40MHz

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Top Channel							
497.1	35.8	25.1	60.9	82.3	-21.4	Peak	Horizontal
514.5	36.7	24.9	61.6	82.3	-20.7	Peak	Horizontal
498.5	30.8	25.1	55.9	82.3	-26.4	Peak	Vertical
526.2	31.8	25.2	57.0	82.3	-25.3	Peak	Vertical
7927.5	44.6	11.6	56.2	82.3	-26.1	Peak	Horizontal
13707.5	45.2	19.7	64.9	82.3	-17.4	Peak	Horizontal
8063.5	43.9	12.1	56.0	82.3	-26.3	Peak	Vertical
11650.5	42.7	17.9	60.6	82.3	-21.7	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Appendix B - Test Setup Photograph

Refer to “2209RSU049-UT” file.

Appendix C - EUT Photograph

Refer to “2209RSU049-UE” file.