


SHARK BT Manual



SHARK BT shall be equipped like below.

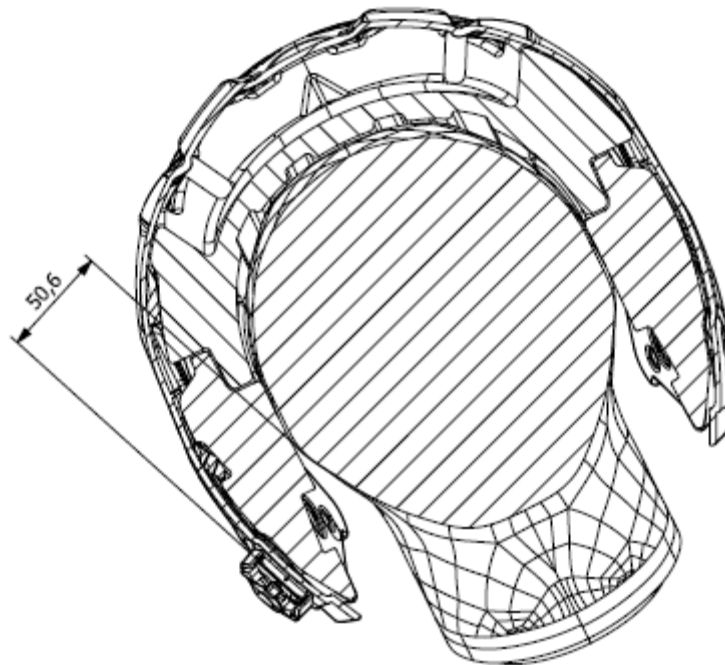

SECTION A-A

Charging

Red LED: Charging

White LED: Fully charged

Power On/Off

Power On : Press and hold the (+) Button and Center Button for 1 second

Power Off : Tap the (+) Button and Center Button.

Volume Adjustment

(+) Button - Increase the volume

(-) Button - Decrease the volume

Battery Check

When power on :

0 ~ 30 % : White LED blinks twice

30 ~ 70 % : White LED blinks 3 times

70 ~ 90 % : White LED blinks 4 times

Phone Pairing

1. Initially Pairing the headset

The headset will automatically enter the phone pairing mode when you initially turn on the headset or in the following situation:

- Rebooting after executing Factory Reset

1. Press and hold the Center Button and (+) Button for 1 second.
2. Search for Bluetooth devices on your mobile phone. Select the **SHARK BT** in the list of the devices detected on the mobile phone.

2. Starting with your headset powered off

1. Press and hold the Center Button and (+) Button for 5 seconds.

2. Search for Bluetooth devices on your mobile phone. Select the **SHARK BT** in the list of the devices detected on the mobile phone.

2. Starting with your headset powered on

1. Press and hold the Center Button for 10 seconds.
2. Tap the (+) Button.
3. Search for Bluetooth devices on your mobile phone. Select the **SHARK BT** in the list of the devices detected on the mobile phone.

Music Operation

Play or pause music: Press the Center Button for 1 second.

Track back: Press the (-) Button for 1 second.

Track forward: Press the (+) Button for 1 second.

Mobile Phone Call Making and Answering

Answering a call: Tap the Center Button

Ending a call: Press the Center Button for 2 seconds.

Voice dial: Press the Center Button for 3 seconds.

Speed dial: Press the (+) Button for 3 seconds.

Rejecting a call: Press the (+) Button for 2 seconds.

Intercom

Intercom Pairing

1. Press and hold the Center Button of two headsets for 5 seconds until red LEDs of both units start to flash rapidly.

Intercom Start/End : Tap the Center Button

Setting

Configuration Menu: Press the Center Button for 10 seconds.

Troubleshooting

Factory Reset

If you want to restore the headset to factory default settings, use the Factory Reset in the configuration menu. The headset automatically restores the default settings and turns off.



Pinhole Fault Reset Button

Certification and Safety Approvals FCC Compliance Statement

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1)

This device may not cause harmful interference, and

(2) This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment on and off, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antennae
- Increase the separation between the equipment and the receiver

-Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. -
Consult the dealer or an experienced radio/TV technician for help.

FCC RF Exposure Statement

This equipment complies with FCC/IC radiation exposure limits set forth for an uncontrolled environment. End users must follow the specific operating instructions for satisfying RF exposure compliance. When equipped, the distance between antenna and one's head surface is 50.6mm.

FCC Caution

Any changes or modifications to the equipment not expressly approved by the party responsible for compliance could void user's authority to operate the equipment.

Industry Canada(IC) Statement

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:

- (1) this device may not cause interference, and
- (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le present appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

IC RF Exposure Statement

Cet équipement est conforme aux limites d'exposition aux radiations de la FCC/IC définies pour un environnement non contrôlé. Les utilisateurs finaux doivent suivre les instructions d'utilisation spécifiques pour satisfaire à la conformité d'exposition RF.

Lorsque équipé, la distance entre l'antenne et la surface de la tête est de 50.6mm.