

CARE AND CLEANING:

Your fixture is made from quality materials that will last many years with minimum care. You may want to periodically clean the diffuser or interior of the fixture.

- Use a soft, non-abrasive cloth.
- Use a mild, non-abrasive glass cleaner.
- Do not use any solvents or harsh cleaning agents.
- When cleaning make sure power is OFF.
- Do not spray liquid cleaner directly onto LED/driver/wiring.

TROUBLESHOOTING:

Problem	Possible Cause	Solution
The fixture will not light.	The power is off.	Ensure the power supply is on.
	The circuit breaker is off.	Ensure the circuit breaker is in the on position.
	There is a bad connection.	Check to ensure proper wire connections are made. Contact a qualified electrician.
	There is a defective switch.	Contact a qualified electrician.
The Bluetooth speakers will not pair with a smart device.	The smart device is out of range of the Bluetooth speakers.	Be sure the shop light is within 33 ft. (10 m) of the smart device.
	The smart device is not discoverable.	Turn on "Discoverable" mode on the device to allow the shop light and smart device to recognize each other.
	Bluetooth speaker reset	Confirm the device's "Discoverable" mode is turned on to allow the shop light and smart device to recognize each other. The fixture will be in "Reset" mode after turning power off and on again. In this case, please remove "shop light 1" from the smart device paired list and rediscover it. Then pair the bluetooth speaker with smart device again.

EYES



DO NOT look directly at LED lights for any length of time!



This product is guaranteed against failure due to factory defects in materials or workmanship for five (5) years from the date of purchase. This warranty is non-transferable and applies only to the original owner. Proof of purchase required for repair or replacement. This warranty does not cover normal wear of parts or damage resulting from any misuse of the product. Misuse of the product includes but is not limited to: using in extreme weather conditions, opening the housing of the product, or attempted remodel/alterations made to product.

SMART

ELECTRICIAN



WARNING:
TO AVOID RISK OF ELECTRICAL SHOCK
DISCONNECT FROM POWER
WHILE INSTALLING OR SERVICING UNIT!



SPECIFICATIONS:

LED Bluetooth Speaker Shop Light	
Brightness (Lumen)	5000 LM
Power (Watts)	58W
CCT	4000K Cool White
Power Supply	5ft SJT Grounded Plug

WARNING



- Turn off electricity at main fuse box (or circuit breaker box) before beginning installation by removing fuse (or switching off circuit breaker).
- Be careful not to damage or cut the wire insulation (covering) during fixture installation. Do not permit wires to contact any surface having a sharp edge. To do so may damage or cut the wire insulation, which could cause serious injury or death from electric shock.
- LED electronics can be damaged by electro static discharge (ESD) shock. Before installation, discharge yourself by touching a grounded bare metal surface to remove this hazard. To avoid damage, do not touch the LED module.

CAUTION



- Not to be used with a dimming circuit or any other electronically controlled switch.
- All electrical connections must be in agreement with local codes, ordinances or the national electric code (NEC). Contact your municipal building department to learn about your local codes, permits and/or inspections.
- Risk of fire – most dwellings built before 1985 have supply wire rated for 140°F/60°C. Consult a qualified electrician before installation.


Assembly & Installation: 348-1442 | 5000 Lumen LED Bluetooth Speaker Shop Light

FCC Statement
This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
-- Reorient or relocate the receiving antenna.
-- Increase the separation between the equipment and receiver.
-- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
-- Consult the dealer or an experienced radio/TV technician for help.
Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
The distance between user and products should be no less than 20cm.

PRE-INSTALLATION INSTRUCTIONS:

Before beginning assembly, installation or operation of product, make sure all parts are present. Compare parts with package contents list and diagram on previous page. If any part is missing or damaged, do not attempt to assemble, install or operate the product. Contact customer service for replacement parts.

Due to varying mounting methods, above hooks are suggestions only and are not included. It is the user's responsibility to complete pre-installation. Manufacturer is NOT responsible for improper locations, hooks, or pre-installation errors.



(Figure 1)



(Figure 2)

ASSEMBLY INSTRUCTIONS:

1. Read all instructions carefully before installation and operation.
2. If you are not familiar with state and local electrical codes, it is recommended that you consult with a qualified electrician.
3. Do not use in wet locations, use indoors only.
4. Non-replaceable LEDs.
5. The light can not be installed in a ceiling where thermal radiation is generated.
6. The hook can hang the chain but not the power cable.

HANGING HARDWARE INCLUDED:

Part	Description	Quantity
A	"S" Hook	2
B	Chain	2



Assembly & Installation: 348-1442 | 5000 Lumen LED Bluetooth Speaker Shop Light

PRODUCT INSTALLATION INSTRUCTIONS:




1. Select suitable location that can support the weight of the fixture and has an outlet on the ceiling to ensure that the fixture hangs properly. Determine method of mounting before drilling. Make two spots on the ceiling 39 in. apart for the mounting hardware (not included).

Mount to drywall option: (hardware not included)
Drill 1/4 in. holes in the ceiling to ensure the closed flaps of the toggle bolt (not included) clear the ceiling. Insert the toggle bolt through the pilot hole in the drywall, and tighten the bolt so it secure against the ceiling.

Mount to wood option: (hardware not included)
Drill 1/16 in. diameter pilot hole in the ceiling. Screw in the mounting hook (not included) into the pilot hole.


2. Insert the "S" Hooks into each opening on the shop light. Attach each chain to the S hooks, and then hang the chains from your preferred mounting method.

3. Fold and secure the excess powercord away from the workareas to avoid any accidents that may result from entanglements. Plug the cord into the power outlet.



CONNECTING TO BLUETOOTH

1. Once plugged into power supply, the Bluetooth Speakers will sound a remind music, and the speaker are enabled and ready to connect.
2. Turn on/off light by using the pull chain.(Note:The speakers can continue working while the light is off.)
3. Enable Bluetooth on your smart device.
4. Wait for the smart device to detect the "shop light 1" and then select it to pair the device to the speakers. When successfully paired, the speakers will indicate "Connected".
5. Play music from your device while connected to the shop light to enjoy sound from the Bluetooth speakers.
6. Turn off music on your smart device, disconnect the shop light from Bluetooth on your smart device, or disable Bluetooth functionality on your smart device when sound is not wanted from the shop light speakers.

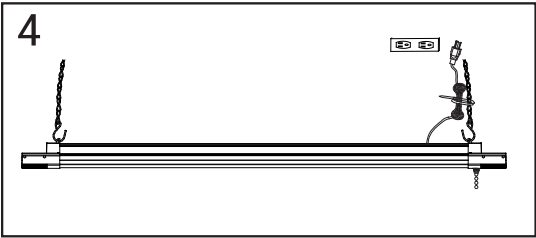

1. Bluetooth enabled smart devices typically have a range of approximately 33 ft. (10 m). Attempting to pair your smart device to the Bluetooth speakers beyond the intended range can result in poor audio quality, drop-outs, or failure to connect.
2. Only one device can be connected to the Bluetooth speakers at a time.