


RADIO REPORT FCC 47 CFR Part 15C ISED Canada RSS-247 Digital transmission systems operating within the 902 – 928 MHz band	
Report Reference No	G0M-2002-8868-TFC247DT-V01
Testing Laboratory	Eurofins Product Service GmbH
Address	Storkower Str. 38c 15526 Reichenwalde Germany
Accreditation	    DAkkS - Registration number : D-PL-12092-01-03 (ISED) ISED Testing Laboratory site: 3470A-2 DAkkS - Registration number : D-PL-12092-01-04 (FCC) FCC Filed Test Laboratory, Reg.-No.: 96970
Applicant	Kamstrup A/S
Address	Industrivej 28 8660 Skanderborg DENMARK
Test Specification	47 CFR Part 15C RSS-247, Issue 2, 2017-02 RSS-Gen, Issue 5, Amendment 1, 2019-03
Non-Standard Test Method	None
Equipment under Test (EUT):	
Product Description	Meter Transmit Unit
Model(s)	Ready MTU
Additional Model(s)	None
Brand Name(s)	Kamstrup
Hardware Version(s)	Assembly: 5915611, rev 00; PCB BOM: 55501820, rev E1
Software Version(s)	Software: 50981561, rev B1; Initiation file: 55141891, rev A1
FCC-ID	OUY-READYMTU
IC	22376-READYMTU
Test Result	PASSED

Possible test case verdicts:		
Required by standard but not tested	N/T	
Not required by standard	N/R	
Not applicable to EUT	N/A	
Test object does meet the requirement	P(PASS)	
Test object does not meet the requirement	F(FAIL)	
Testing:		
Test Lab Temperature	20 - 23 °C	
Test Lab Humidity	32 – 38 %	
Date of receipt of test item	2020-04-07	
Report:		
Compiled by	Toralf Jahn	
Tested by (+ signature) (Responsible for Test)	Toralf Jahn	
Approved by (+ signature) (Head of Lab)	Christian Weber	
Date of Issue	2020-05-27	
Total number of pages	234	
General Remarks:		
The test results presented in this report relate only to the object tested. The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report. This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.		
Additional Comments:		

VERSION HISTORY

Version History			
Version	Issue Date	Remarks	Revised By
01	2020-05-27	Initial Release	

ABBREVIATIONS AND ACRONYMS

Acronyms	
Acronym	Description
EUT	Equipment Under Test
FCC	Federal Communications Commission
ISED	Innovation, Science and Economic Development Canada
RBW	Resolution bandwidth
RMS	Root mean square
VBW	Video bandwidth
V _{NOM}	Nominal supply voltage

REPORT INDEX

1	Equipment (Test Item) Under Test.....	6
1.1	Photos – Equipment External	7
1.2	Photos – Equipment Internal	11
1.3	Photos – Test Setup.....	13
1.4	Support Equipment.....	16
1.5	Test mode duty cycle	17
1.6	Test Modes	19
1.7	Test Frequencies.....	20
1.8	Sample emission level calculation.....	21
2	Result Summary.....	22
3	Test Conditions and Results.....	23
3.1	Test Conditions and Results - Occupied bandwidth.....	23
3.2	Test Conditions and Results - 6 dB bandwidth.....	28
3.3	Test Conditions and Results - Maximum peak conducted output power	33
3.4	Test Conditions and Results - Power spectral density	35
3.5	Test Conditions and Results - Band-edge compliance.....	40
3.6	Test Conditions and Results - Conducted spurious emissions.....	44
3.7	Test Conditions and Results - Transmitter radiated emissions	49
3.8	Test Conditions and Results - Receiver radiated emissions	52
ANNEX A	Transmitter spurious emissions	55
ANNEX B	Receiver spurious emissions	145

1 Equipment (Test Item) Under Test

Description	Meter Transmit Unit	
Model	Ready MTU	
Additional Model(s)	None	
Brand Name(s)	Kamstrup	
Serial Number(s)	73600016 (radiated sample, ID 28927) 73600014 (conducted sample, ID 28930)	
Hardware Version(s)	Assembly: 5915611, rev 00; PCB BOM: 55501820, rev E1	
Software Version(s)	Software: 50981561, rev B1; Initiation file: 55141891, rev A1	
PMN	REAdy MTU	
HVIN	66962201D00820	
FVIN	50981561, rev B1, 55141891, rev A1	
HMN	N/A	
FCC-ID	OUY-READYMTU	
IC	22376-READYMTU	
Equipment type	End Product	
Radio type	Transceiver	
Assigned frequency bands	902.0 - 928.0 MHz	
Radio technology	Digital Modulation	
Modulation	2-FSK	
Number of antenna ports	1	
Antenna 1	Type	external, rod antenna
	Model	1653094
	Manufacturer	Kamstrup A/S
	Gain	-2.0 dBi
Antenna 2	Type	external, wall antenna 2 meters cable length
	Model	6699490
	Manufacturer	Kamstrup A/S
	Gain	-1.6 dBi
Antenna 3	Type	external, pit antenna 0.6 meters cable length
	Model	6697916
	Manufacturer	Kamstrup A/S
	Gain	1.2 dBi
Supply Voltage	V _{NOM}	3.66 VDC (lithium battery)
Operating Temperature	T _{NOM}	25 °C
AC/DC-Adaptor	Model	none
	Vendor	none
	Input	none
	Output	none
Manufacturer	Kamstrup A/S Industrivej 28 8660 Skanderborg DENMARK	

1.4 Support Equipment

Product Type	Device	Manufacturer	Model	Comment
AE	Honeywell meter	Honeywell + Kamstrup	VS2820181 + 5000-491	Typical load for 3 wire interface
AE	Laboratory power supply	KORAD	KD6005P	The EUT battery does not last to perform the tests. Therefore an external power supply was necessary.
CBL	Auxillary cable			To connect EUT and power supply.
SFT	Device Control Tool	Kamstrup	ver. 0.05	Tool for controlling RF modules and meters
Description:				
AE	Auxiliary Equipment			
SIM	Simulator			
CBL	Connecting Cable			
SFT	Software			
Comment:				

1.5 Test mode duty cycle


1.5.1 Information

Test Information	
Measurement Method	ANSI C63.10 11.6

1.5.2 Requirements

Requirements	
Duty cycle	Duty cycle correction
$\geq 98 \%$	No correction required
$< 98 \%$	Correction required ($10 \times \log_{10}(1/DC)$)

1.5.3 Setup

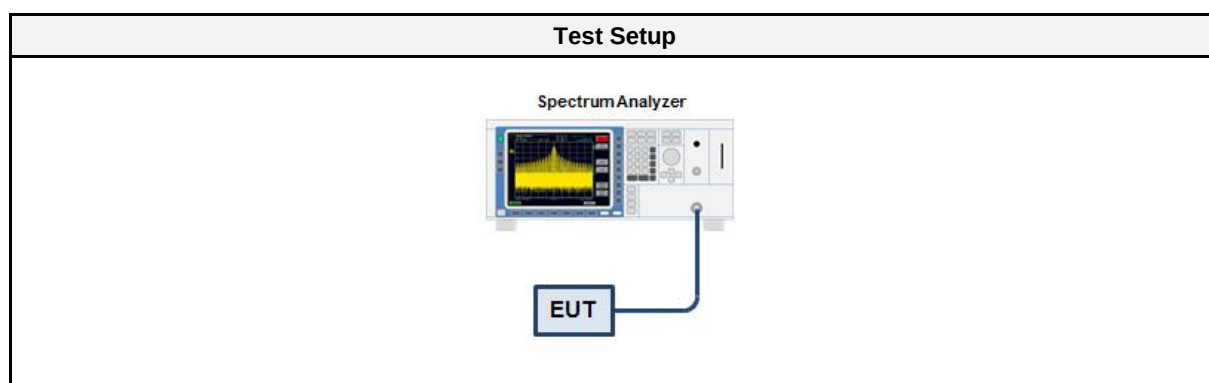

1.5.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSW 43	EF00896	2019-07	2020-07

1.5.5 Procedure

Test Procedure
1. EUT set to test mode 2. Span is set to zero span 3. Detector set to peak 4. Sweep time is set long enough to capture at least 5 bursts 5. Envelope peak value of emission spectrum is selected 6. The maximum burst duration T_{ON} is measured using two markers set to the start and the end of the longest burst 7. The minimum idle duration T_{OFF} is measured using two markers set to the start and the end of the shortest idle period 8. The duty cycle is calculated by $DC = T_{ON} / (T_{ON} + T_{OFF})$ 9. The duty cycle correction is calculated by $DC = 10 \times \log_{10}(T_{ON} / (T_{ON} + T_{OFF}))$

1.5.6 Results

Duty Cycle Results		
Mode	Duty Cycle	Correction Factor [dB]
Transmit	100%	0

1.6 Test Modes

Mode	Description
Transmit	Mode = Transmit Modulation = 2-FSK Duty cycle = 100 %
Receive	Mode = Receive Modulation = 2-FSK
Comment:	

1.7 Test Frequencies

Designator	Mode	Channel	Frequency [MHz]
F1	Tx / Rx	1	912.5
F2	Tx / Rx	2	915.0
F3	Tx / Rx	3	918.5

1.8 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dBμV. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB/m)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dBμV/m). The FCC limits are given in units of μV/m. The following formula is used to convert the units of μV/m to dBμV/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 \cdot \log(\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

Reading + AF	= Net Reading	:	Net reading - FCC limit	= Margin
+21.5 dBμV + 26 dB/m	= 47.5 dBμV/m	:	47.5 dBμV/m - 57.0 dBμV/m	= -9.5 dB

2 Result Summary

FCC 47 CFR Part 15C, ISED RSS-247				
Product Standard Reference	Requirement	Reference Method	Result	Remarks
ISED RSS-Gen, Issue 5 (section 6.6)	Occupied Bandwidth	ANSI C63.10-2013	N/R	Informational only
FCC § 15.247(a)(2) ISED RSS-247, Issue 2 (section 5.2)	6 dB Bandwidth	ANSI C63.10-2013	PASS	
FCC § 15.247(b)(1) ISED RSS-247, Issue 2 (section 5.4)	Maximum peak conducted power	ANSI C63.10-2013	PASS	
FCC § 15.247(e) ISED RSS-247, Issue 2 (section 5.2)	Power spectral density	ANSI C63.10-2013	PASS	
FCC § 15.207 ISED RSS-247, Issue 2 (section 3.1)	AC power line conducted emissions	ANSI C63.10-2013	N/R	No direct or indirect connection to AC mains
FCC § 15.247(d) ISED RSS-247, Issue 2 (section 5.5)	Band edge compliance	ANSI C63.10-2013	PASS	
FCC § 15.247(d) ISED RSS-247, Issue 2 (section 5.5)	Conducted spurious emissions	ANSI C63.10-2013	PASS	
FCC § 15.247(d) FCC § 15.209 ISED RSS-Gen, Issue 5 (section 6.13)	Transmitter radiated spurious emissions	ANSI C63.10-2013	PASS	
ISED RSS-247, Issue 2 (section 3.1)	Receiver radiated spurious emissions	ANSI C63.10-2013	PASS	
Comment:				

Possible Test Case Verdicts	
PASS	Test object does meet the requirements
FAIL	Test object does not meet the requirements
N/T	Required by standard but not tested
N/R	Not required by standard for the test object

3 Test Conditions and Results

3.1 Test Conditions and Results - Occupied bandwidth


3.1.1 Information

Test Information	
Reference	ISED RSS-Gen, Issue 5 (section 6.6)
Measurement Method	ANSI C63.10 6.9.3
Operator	Toralf Jahn
Date	2020-04-21

3.1.2 Limits

Limits
None (Informational only)

3.1.3 Setup

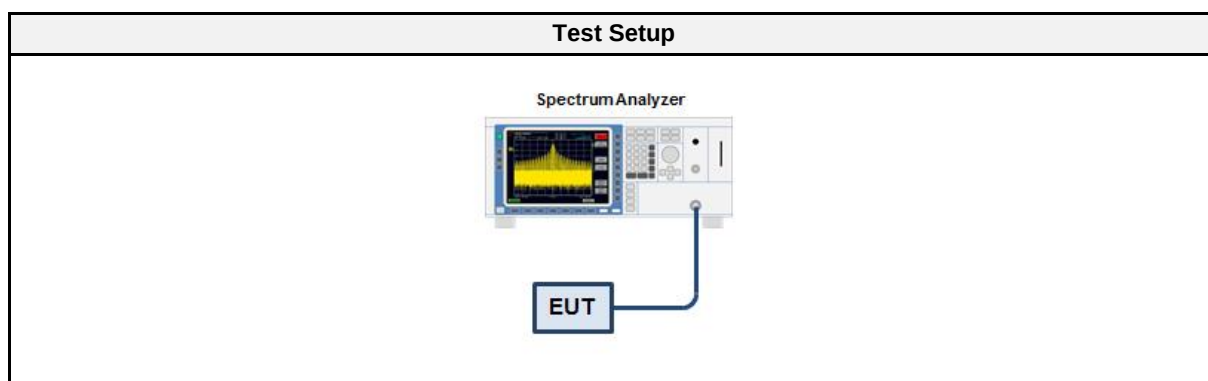

3.1.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSW 43	EF00896	2019-07	2020-07

3.1.5 Procedure


Test Procedure
1. EUT transmitter is activated in test mode under normal conditions 2. The spectrum analyzer is set to peak detection and maximum hold with a span twice the emission spectrum 3. The resolution bandwidth is set to the range of 1 % to 5 % of the occupied bandwidth 4. The occupied bandwidth is measured with the build-in analyzer function

3.1.6 Results

Test Results		
Mode	Frequency [MHz]	Bandwidth [MHz]
Transmit	912.5	0.762
Transmit	915.0	0.762
Transmit	918.5	0.762

Occupied Bandwidth


Project Number: G0M-2002-8868
 Applicant: Kamstrup A/S
 Model Description: Meter Transmit Unit
 Model: Ready MTU
 Test Sample ID: 28930
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 6.9.3
 Operational Mode: 2-FSK, Channel: 912.5 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Toralf Jahn
 Test Site: Eurofins Product Service GmbH
 Test Date: 2020-04-21
 Occupied Bandwidth [MHz]: 0.762

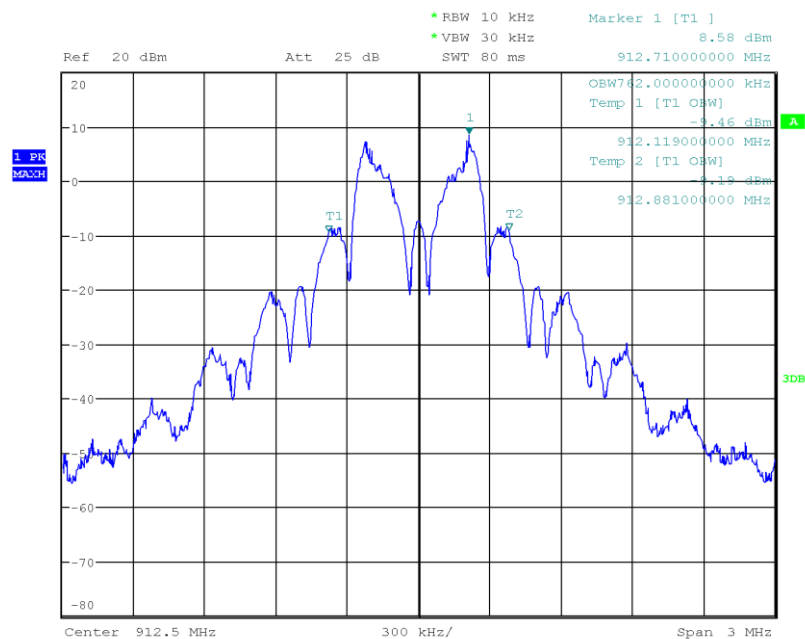

Date: 21.APR.2020 15:25:39

Occupied Bandwidth


Project Number: G0M-2002-8868
 Applicant: Kamstrup A/S
 Model Description: Meter Transmit Unit
 Model: Ready MTU
 Test Sample ID: 28930
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 6.9.3
 Operational Mode: 2-FSK, Channel: 915 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Toralf Jahn
 Test Site: Eurofins Product Service GmbH
 Test Date: 2020-04-21
 Occupied Bandwidth [MHz]: 0.762

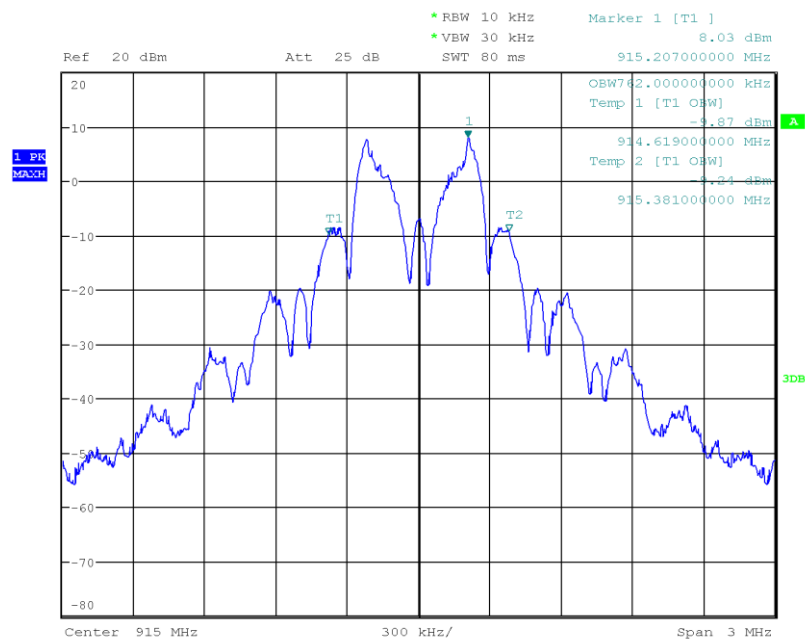

Date: 21.APR.2020 15:33:28

Occupied Bandwidth

Project Number: G0M-2002-8868
 Applicant: Kamstrup A/S
 Model Description: Meter Transmit Unit
 Model: Ready MTU
 Test Sample ID: 28930
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 6.9.3
 Operational Mode: 2-FSK, Channel: 918.5 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Toralf Jahn
 Test Site: Eurofins Product Service GmbH
 Test Date: 2020-04-21
 Occupied Bandwidth [MHz]: 0.762

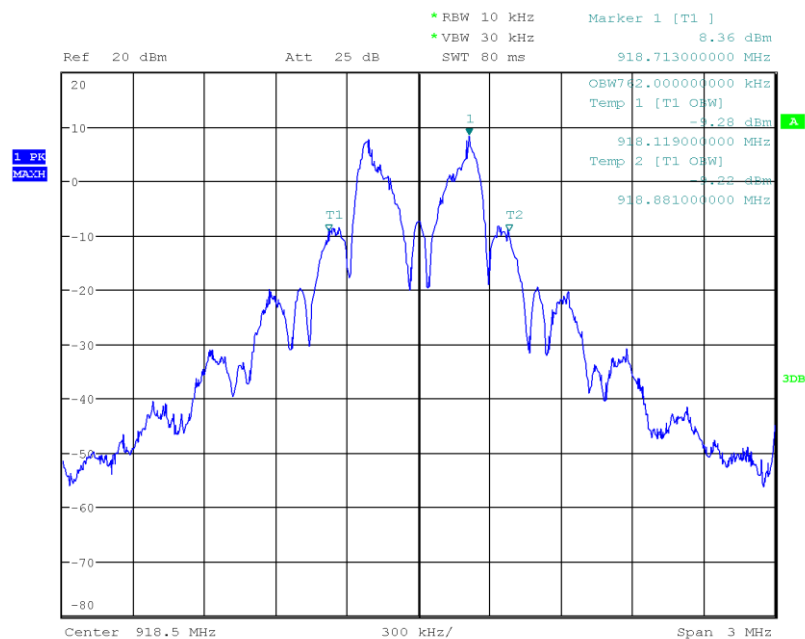

Date: 21.APR.2020 15:47:25

3.2 Test Conditions and Results - 6 dB bandwidth


3.2.1 Information

Test Information	
Reference	FCC § 15.247(a)(2); ISED RSS-247, Issue 2 (section 5.2)
Measurement Method	ANSI C63.10 11.8
Operator	Toralf Jahn
Date	2020-04-21

3.2.2 Limits

Limits
≥ 500kHz

3.2.3 Setup

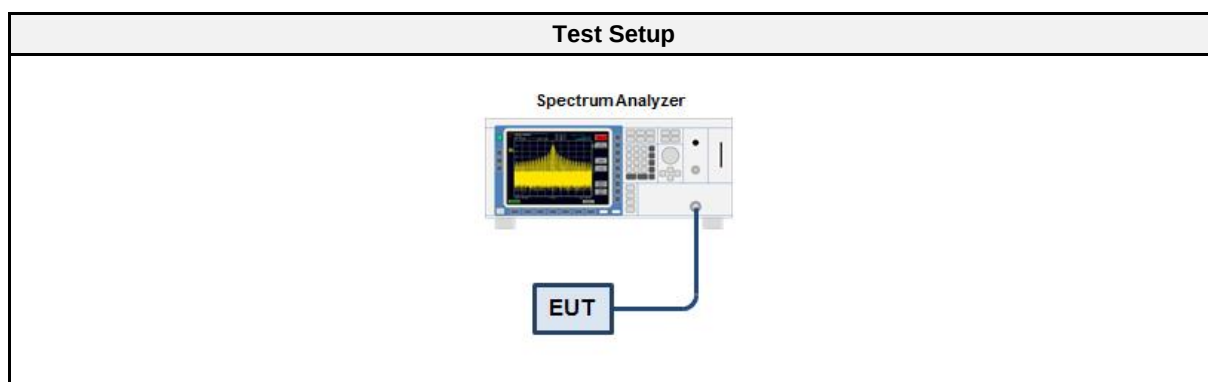

3.2.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSW 43	EF00896	2019-07	2020-07

3.2.5 Procedure


Test Procedure
1. EUT set to test mode 2. Span set to at least twice the emission spectrum 3. Detector set to peak and max hold and RBW is set to 100 kHz 4. Envelope peak value of emission spectrum is selected 5. Marker on envelope of spectrum is set to level of -6 dB to the left of the peak 6. Marker on envelope of spectrum is set to level of -6 dB to the right of the peak 7. 6 dB Bandwidth is determined by marker frequency separation

3.2.6 Results

Test Results				
Mode	Frequency [MHz]	Bandwidth [kHz]	Limit [kHz]	Verdict
Transmit	912.5	595	500	PASS
Transmit	915.0	585	500	PASS
Transmit	918.5	590	500	PASS

DTS (6 dB) Bandwidth


Project Number: G0M-2002-8868
 Applicant: Kamstrup A/S
 Model Description: Meter Transmit Unit
 Model: Ready MTU
 Test Sample ID: 28930
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1
 Operational Mode: 2-FSK, Channel: 912.5 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Toralf Jahn
 Test Site: Eurofins Product Service GmbH
 Test Date: 2020-04-21
 Lower Frequency [MHz]: 912.200
 Upper Frequency [MHz]: 912.795
 6 dB Bandwidth [kHz]: 595

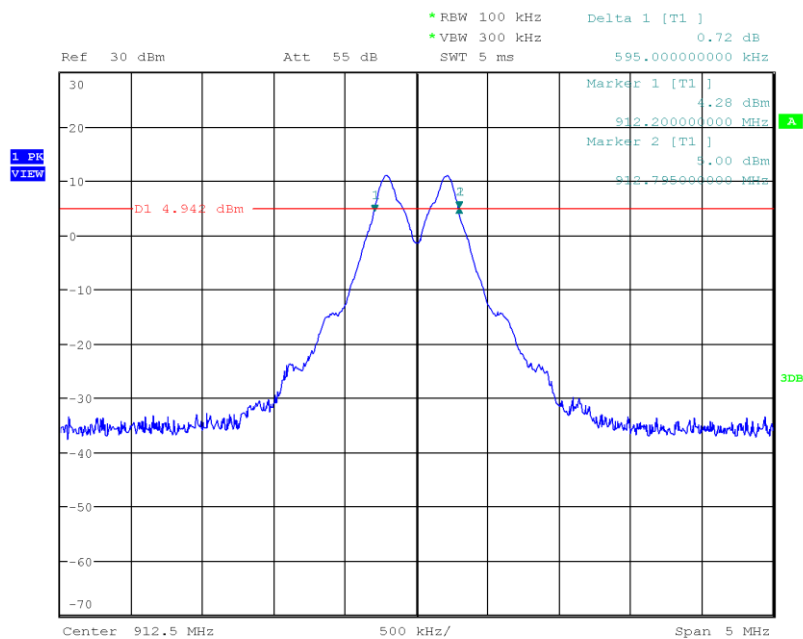

Date: 21.APR.2020 15:28:04

DTS (6 dB) Bandwidth


Project Number: G0M-2002-8868
 Applicant: Kamstrup A/S
 Model Description: Meter Transmit Unit
 Model: Ready MTU
 Test Sample ID: 28930
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1
 Operational Mode: 2-FSK, Channel: 915 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Toralf Jahn
 Test Site: Eurofins Product Service GmbH
 Test Date: 2020-04-21
 Lower Frequency [MHz]: 914.705
 Upper Frequency [MHz]: 915.290
 6 dB Bandwidth [kHz]: 585

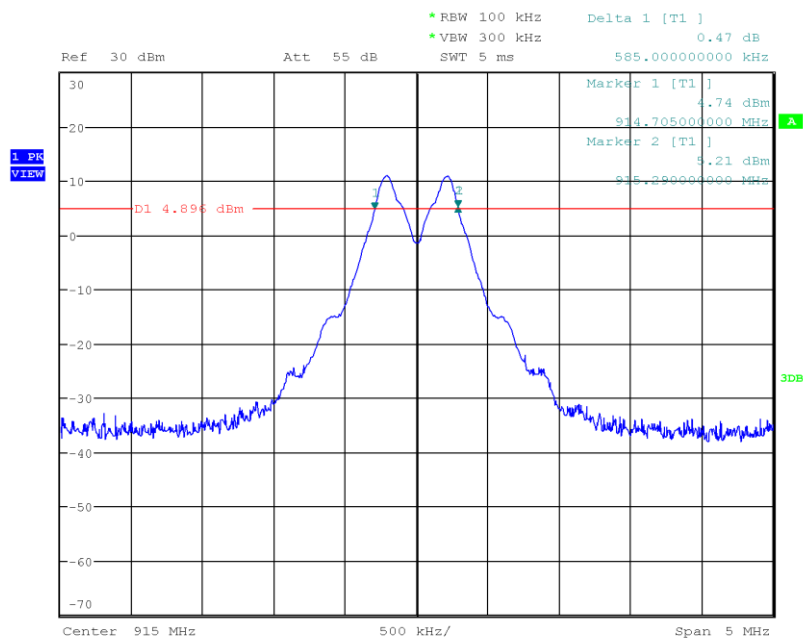

Date: 21.APR.2020 15:34:18

DTS (6 dB) Bandwidth

Project Number: G0M-2002-8868
 Applicant: Kamstrup A/S
 Model Description: Meter Transmit Unit
 Model: Ready MTU
 Test Sample ID: 28930
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1
 Operational Mode: 2-FSK, Channel: 918.5 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Toralf Jahn
 Test Site: Eurofins Product Service GmbH
 Test Date: 2020-04-21
 Lower Frequency [MHz]: 918.205
 Upper Frequency [MHz]: 918.795
 6 dB Bandwidth [kHz]: 590

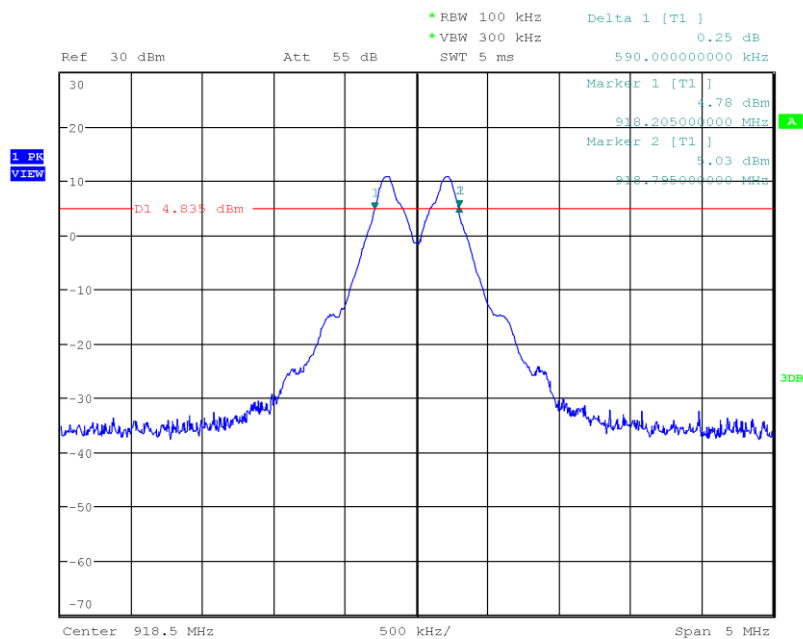

Date: 21.APR.2020 15:49:35

3.3 Test Conditions and Results - Maximum peak conducted output power


3.3.1 Information

Test Information	
Reference	FCC § 15.247(b)(1); ISED RSS-247, Issue 2 (section 5.4)
Measurement Method	ANSI C63.10 11.9.1
Operator	Toralf Jahn
Date	2020-04-21

3.3.2 Limits

Limits
1 W (30 dBm)
The conducted output power limit specified above is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in the table, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.3 Setup

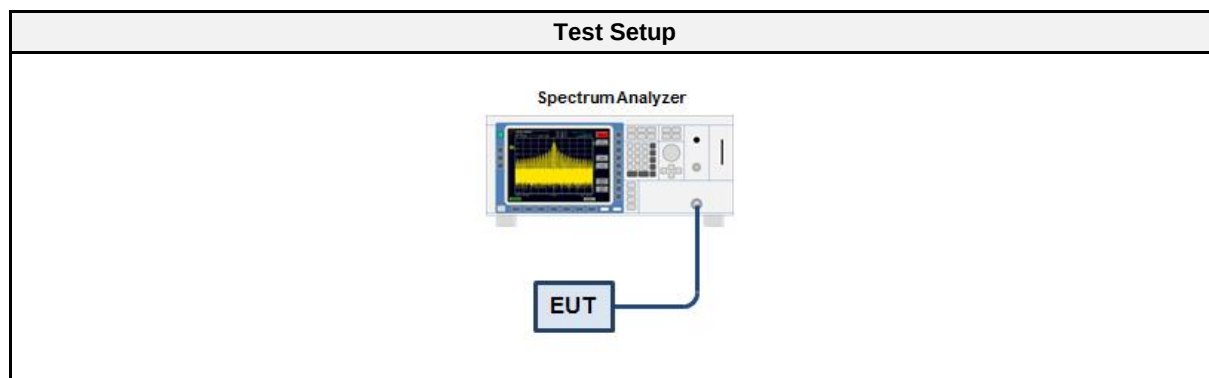

3.3.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSW 43	EF00896	2019-07	2020-07

3.3.5 Procedure

Test Procedure
1. EUT set to test mode (Communication tester is used if needed) 2. Analyzer resolution bandwidth is set $\geq$ DTS bandwidth 3. Detector set to peak and max hold 4. Sweep time is set to auto 5. After the trace has stabilized a marker is set to peak of envelope

3.3.6 Results

Test Results				
Channel [MHz]	Power [dBm]	Power [W]	Limit [W]	Verdict
912.5	12.629	0.0183	1.0	PASS
915.0	12.598	0.0182	1.0	PASS
918.5	12.476	0.0177	1.0	PASS

3.4 Test Conditions and Results - Power spectral density


3.4.1 Information

Test Information	
Reference	FCC § 15.247(e); ISSED RSS-247, Issue 2 (section 5.2)
Measurement Method	ANSI C63.10 11.10.2, 14.3.2
Operator	Toralf Jahn
Date	2020-04-22

3.4.2 Limits

Limits
8 dBm / 3 kHz

3.4.3 Setup

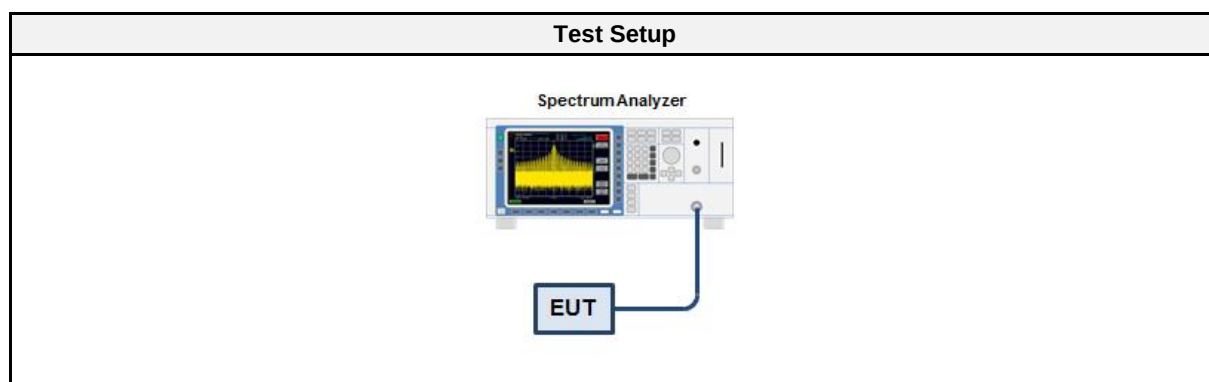

3.4.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSW 43	EF00896	2019-07	2020-07

3.4.5 Procedure


Test Procedure
1. EUT set to test mode 2. The analyzer is set to DTS channel center frequency with a span of 1.5 times the DTS bandwidth 3. The RBW is set to 100 kHz with VBW $\geq$ RBW and the detector is set to peak with max hold 4. After the trace has stabilized a marker is set to the envelope maximum 5. If the power spectral density is above the limit the RBW is reduced (not lower than 3 kHz) and the measurement is repeated 6. If the EUT has more than one transmit chain the procedure is repeated for each transmit chain

3.4.6 Results

Test Results			
Channel [MHz]	PSD [dBm/RBW]	Limit [dBm/3kHz]	Verdict
912.5	3.672	8.0	PASS
915.0	3.977	8.0	PASS
918.5	3.871	8.0	PASS
RBW = 3 kHz			

Peak Power Spectral Density


Project Number: G0M-2002-8868
 Applicant: Kamstrup A/S
 Model Description: Meter Transmit Unit
 Model: Ready MTU
 Test Sample ID: 28930
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.10.2
 Operational Mode: 2-FSK, Channel: 912.5 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Toralf Jahn
 Test Site: Eurofins Product Service GmbH
 Test Date: 2020-04-22
 Peak Frequency [MHz]: 912.275
 Spectral Density [dBm/RBW]: 3.672
 Resolution Bandwidth [kHz]: 3 kHz

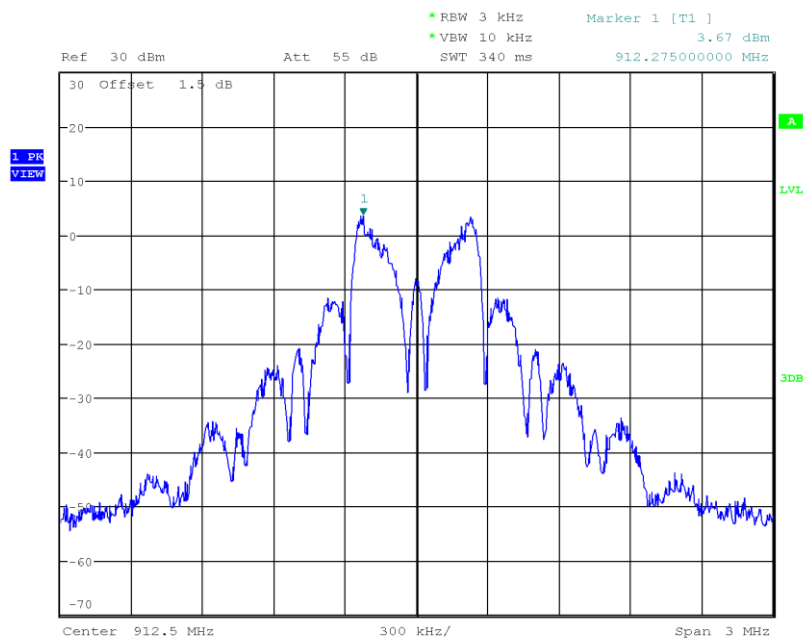

Date: 22.APR.2020 10:01:28

Peak Power Spectral Density


Project Number: G0M-2002-8868
 Applicant: Kamstrup A/S
 Model Description: Meter Transmit Unit
 Model: Ready MTU
 Test Sample ID: 28930
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.10.2
 Operational Mode: 2-FSK, Channel: 915 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Toralf Jahn
 Test Site: Eurofins Product Service GmbH
 Test Date: 2020-04-22
 Peak Frequency [MHz]: 915.231
 Spectral Density [dBm/RBW]: 3.977
 Resolution Bandwidth [kHz]: 3 kHz

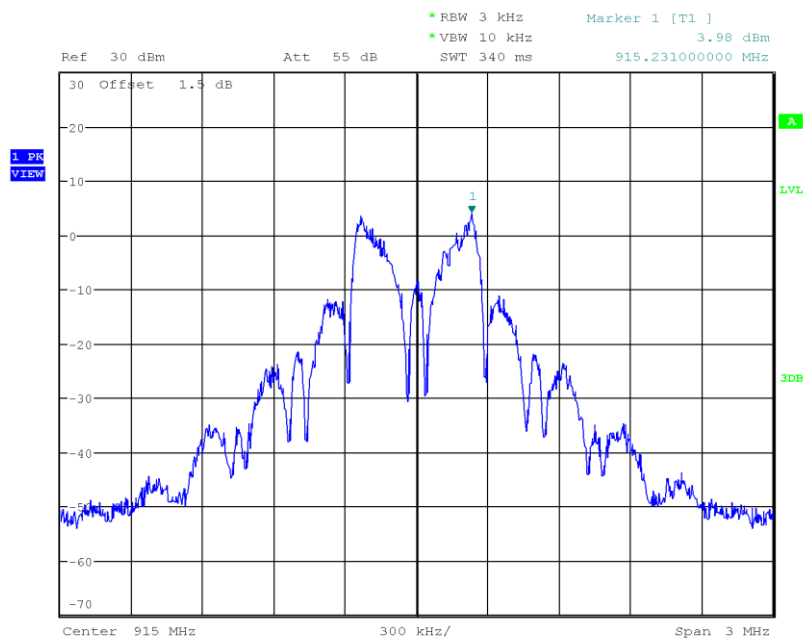

Date: 22.APR.2020 11:24:25

Peak Power Spectral Density

Project Number: G0M-2002-8868
 Applicant: Kamstrup A/S
 Model Description: Meter Transmit Unit
 Model: Ready MTU
 Test Sample ID: 28930
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.10.2
 Operational Mode: 2-FSK, Channel: 918.5 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Toralf Jahn
 Test Site: Eurofins Product Service GmbH
 Test Date: 2020-04-22
 Peak Frequency [MHz]: 918.269
 Spectral Density [dBm/RBW]: 3.871
 Resolution Bandwidth [kHz]: 3 kHz

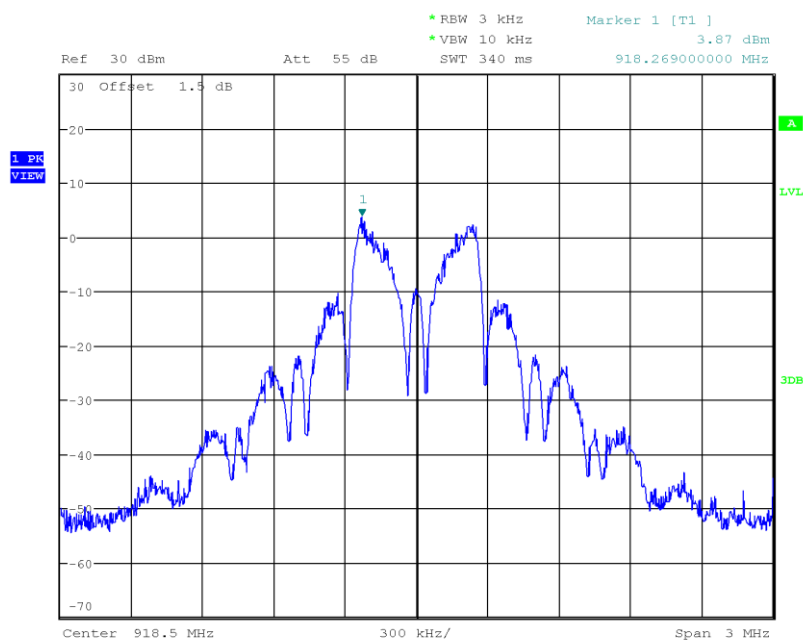

Date: 22.APR.2020 11:29:36

3.5 Test Conditions and Results - Band-edge compliance


3.5.1 Information

Test Information	
Reference	FCC § 15.247(d); ISED RSS-247, Issue 2 (section 5.5)
Measurement Method	ANSI C63.10 11.13
Operator	Toralf Jahn
Date	2020-04-22

3.5.2 Limits

Limits	
Power Measurement	Out-of-band attenuation [dB]
Peak	20
RMS	30

3.5.3 Setup

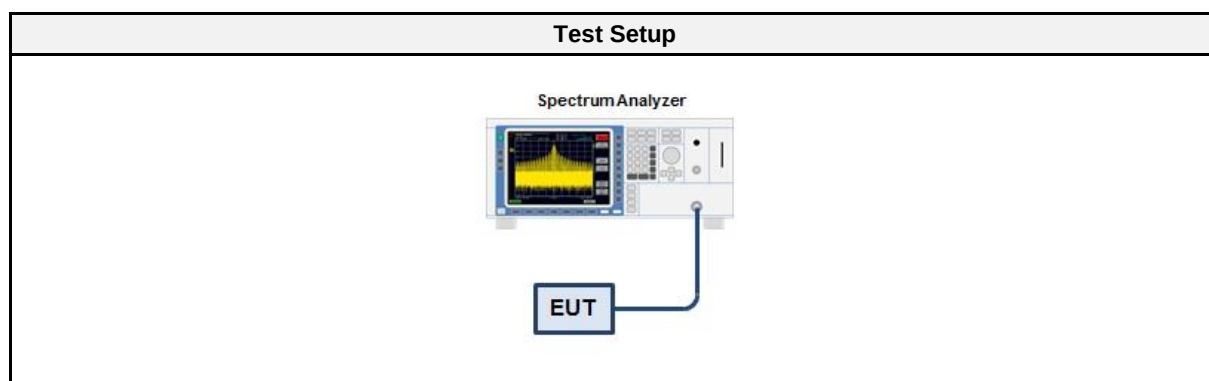

3.5.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSW 43	EF00896	2019-07	2020-07

3.5.5 Procedure


Test Procedure
1. EUT set to test mode (Communication tester is used if needed) 2. Span set around lower band edge and detector is set to peak and max hold 3. Resolution bandwidth is set to 100 kHz 4. Markers are set to peak emission levels within frequency band and outside frequency band 5. Band edge attenuation is determined from level difference

3.5.6 Results

Test Results				
Mode	Channel [MHz]	Out-of-band Attenuation [dB]	Limit [dB]	Verdict
Transmit	912.5	-52.49	-20	PASS
Transmit	918.5	-53.95	-20	PASS

Emissions in nonrestricted frequency bands at the Band-edge


Project Number: GOM-2002-8868
 Applicant: Kamstrup A/S
 Model Description: Meter Transmit Unit
 Model: Ready MTU
 Test Sample ID: 28930
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 6.10
 Operational Mode: single frequency, Channel: 912.5 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Toralf Jahn
 Test Site: Eurofins Product Service GmbH
 Test Date: 2020-04-22
 Band-edge: Lower
 In-band Frequency [MHz]: 912.293
 Max. in-band Level [dBm/100 kHz]: 12.58
 Out-of-band Frequency [MHz]: 899.091
 Max. out-of-band Level [dBm/100 kHz]: -39.911
 Attenuation [dB]: -52.49

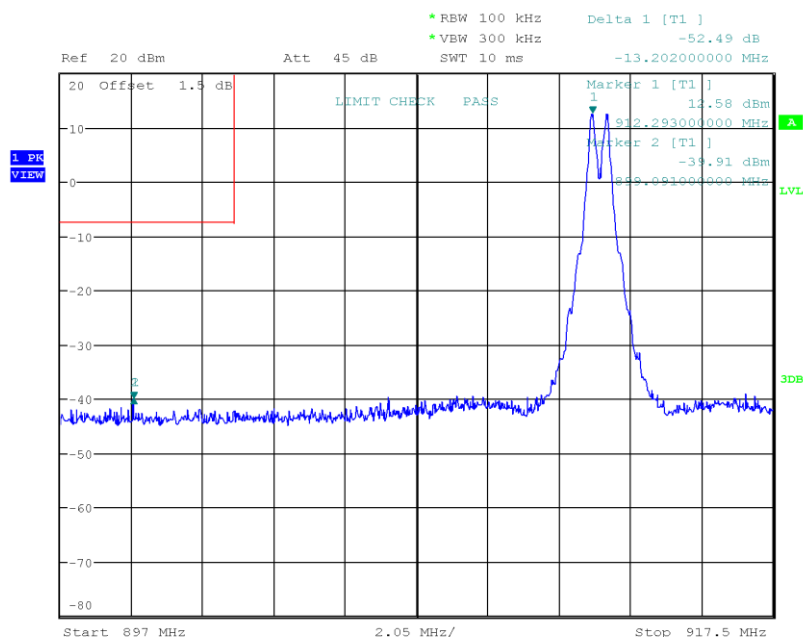

Date: 22.APR.2020 10:05:56

Emissions in nonrestricted frequency bands at the Band-edge

Project Number: GOM-2002-8868
 Applicant: Kamstrup A/S
 Model Description: Meter Transmit Unit
 Model: Ready MTU
 Test Sample ID: 28930
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 6.10
 Operational Mode: single frequency, Channel: 918.5 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Toralf Jahn
 Test Site: Eurofins Product Service GmbH
 Test Date: 2020-04-22
 Band-edge: Upper
 In-band Frequency [MHz]: 918.277
 Max. in-band Level [dBm/100 kHz]: 12.416
 Out-of-band Frequency [MHz]: 928.977
 Max. out-of-band Level [dBm/100 kHz]: -41.53
 Attenuation [dB]: -53.95

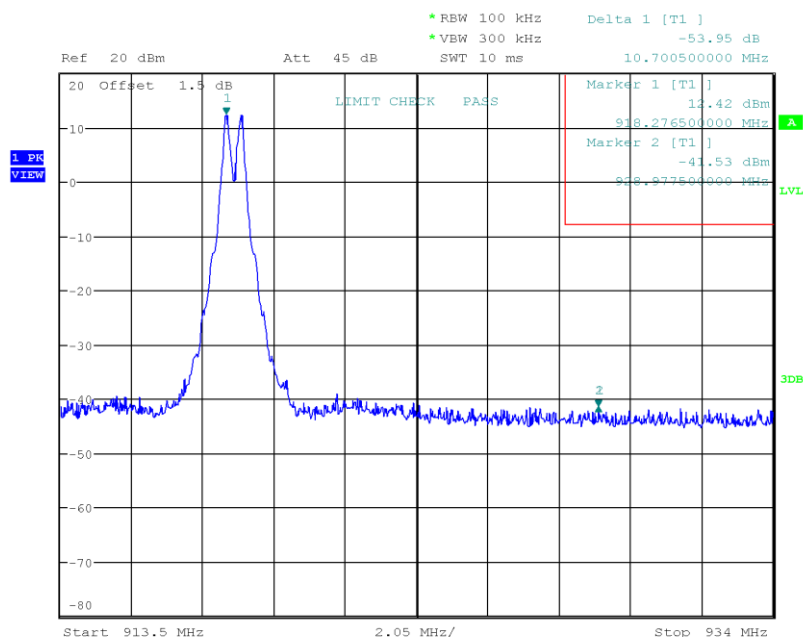

Date: 22.APR.2020 11:32:56

3.6 Test Conditions and Results - Conducted spurious emissions


3.6.1 Information

Test Information	
Reference	FCC § 15.247(d); ISED RSS-247, Issue 2 (section 5.5)
Measurement Method	ANSI C63.10 11.11
Operator	Toralf Jahn
Date	2020-04-22

3.6.2 Limits

Limits	
Power Measurement	Out-of-band attenuation [dB]
Peak	20
RMS	30

3.6.3 Setup

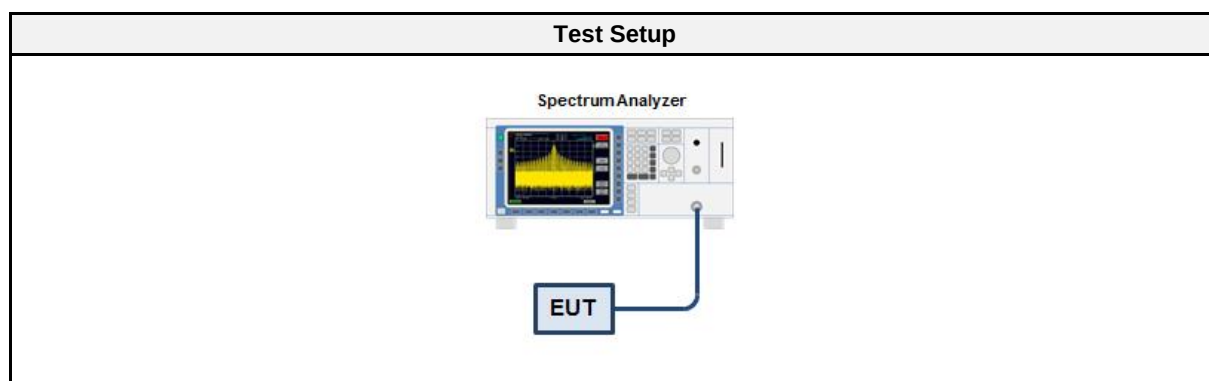

3.6.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSW 43	EF00896	2019-07	2020-07

3.6.5 Procedure


Test Procedure
1. EUT set to test mode (Communication tester is used if needed) 2. Span set around lower band edge and detector is set to peak and max hold 3. Resolution bandwidth is set to 100 kHz 4. Markers are set to peak emission levels within frequency band and outside frequency band 5. Band edge attenuation is determined from level difference

3.6.6 Results

Test Results		
Mode	Channel [MHz]	Verdict
Transmit	912.5	PASS
Transmit	915.0	PASS
Transmit	918.5	PASS

Conducted Spurious Emissions


Project Number: G0M-2002-8868
 Applicant: Kamstrup A/S
 Model Description: Meter Transmit Unit
 Model: Ready MTU
 Test Sample ID: 28930
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: 2-FSK, Channel: 912.5 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Toralf Jahn
 Test Site: Eurofins Product Service GmbH
 Test Date: 2020-04-22
 Max. in-band Frequency [MHz]: 912.3
 Max. in-band Level [dBm/100 kHz]: 11.5
 Out-of-band Limit [dBm/100 kHz]: -8.5

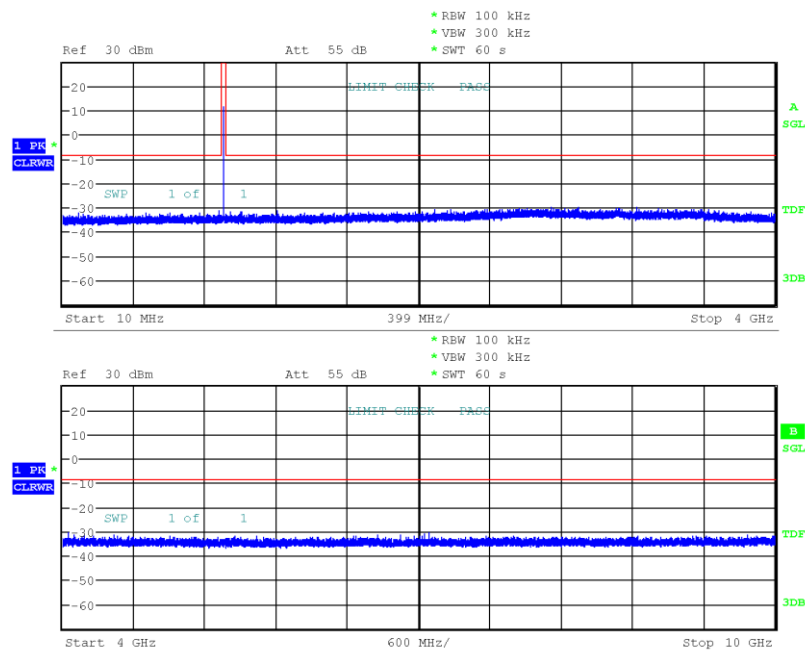

Date: 22.APR.2020 11:16:17

Conducted Spurious Emissions


Project Number: G0M-2002-8868
 Applicant: Kamstrup A/S
 Model Description: Meter Transmit Unit
 Model: Ready MTU
 Test Sample ID: 28930
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: 2-FSK, Channel: 915 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Toralf Jahn
 Test Site: Eurofins Product Service GmbH
 Test Date: 2020-04-22
 Max. in-band Frequency [MHz]: 914.8
 Max. in-band Level [dBm/100 kHz]: 11.4
 Out-of-band Limit [dBm/100 kHz]: -8.6

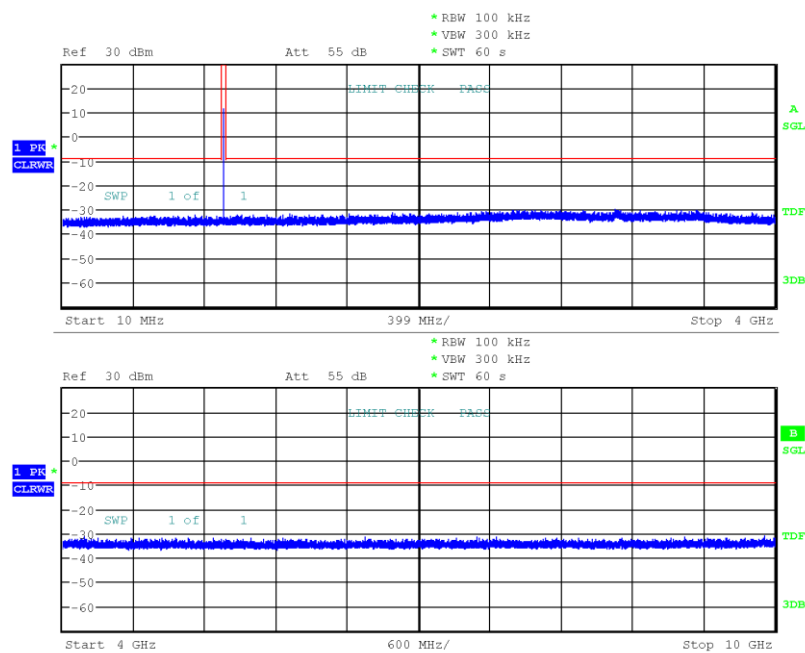

Date: 22.APR.2020 11:27:41

Conducted Spurious Emissions

Project Number: G0M-2002-8868
 Applicant: Kamstrup A/S
 Model Description: Meter Transmit Unit
 Model: Ready MTU
 Test Sample ID: 28930
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: 2-FSK, Channel: 918.5 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Toralf Jahn
 Test Site: Eurofins Product Service GmbH
 Test Date: 2020-04-22
 Max. in-band Frequency [MHz]: 918.3
 Max. in-band Level [dBm/100 kHz]: 11.2
 Out-of-band Limit [dBm/100 kHz]: -8.8

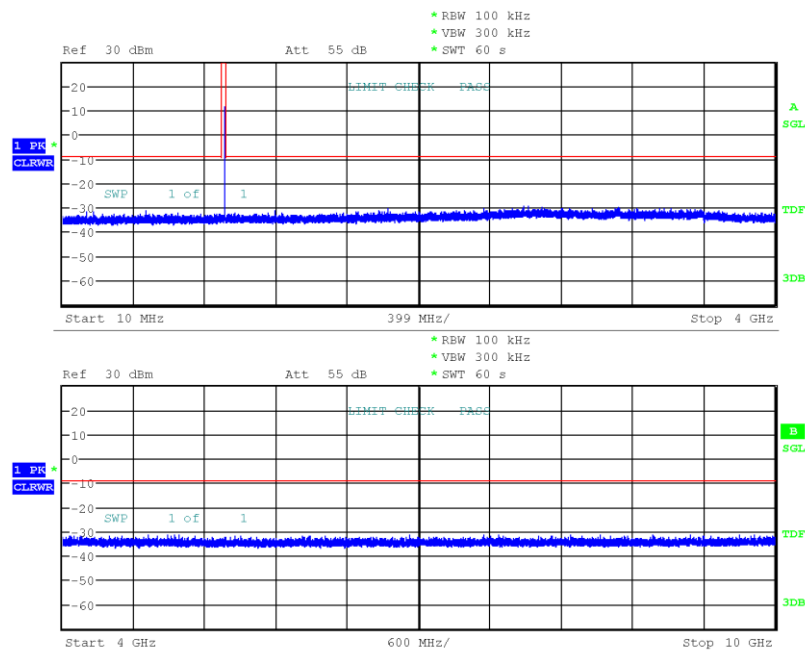

Date: 22.APR.2020 11:36:43

3.7 Test Conditions and Results - Transmitter radiated emissions


3.7.1 Information


Test Information	
Reference	FCC § 15.247(d); FCC § 15.209; ISSED RSS-Gen, Issue 5 (section 6.13)
Measurement Method	ANSI C63.10 6.4, 6.5, 6.6, 11.12
Operator	Toralf Jahn
Date	2020-04-17

3.7.2 Limits

Limits			
Frequency [MHz]	Detector	Field strength [$\mu\text{V/m}$]	Measurement distance [m]
30 - 88	Quasi-Peak	100	3
88 - 216	Quasi-Peak	150	3
216 - 960	Quasi-Peak	200	3
960 - 1000	Quasi-Peak	500	3
>1000	Average	500	3

3.7.3 Setup

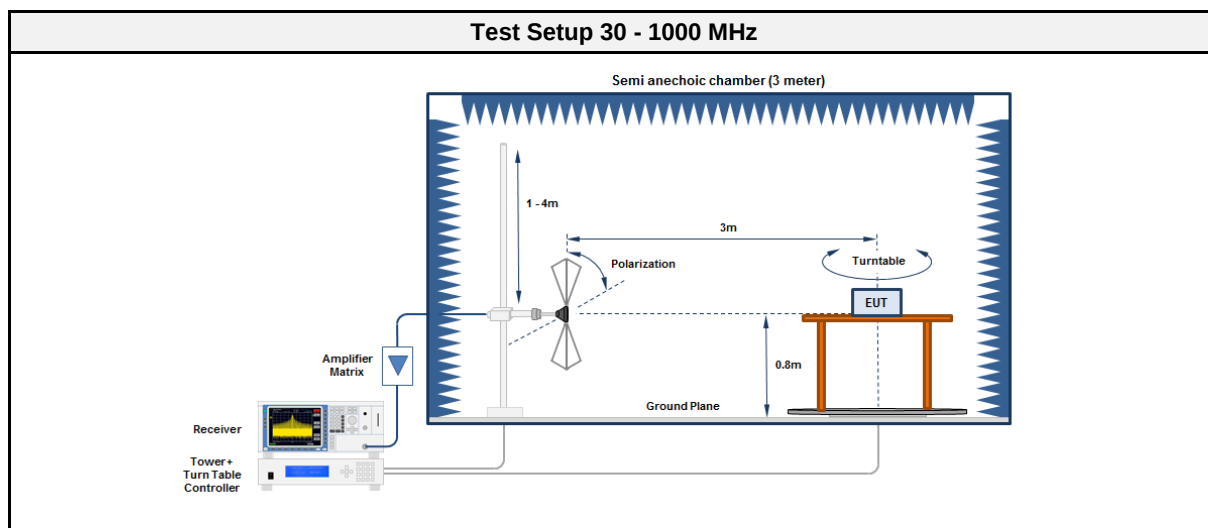

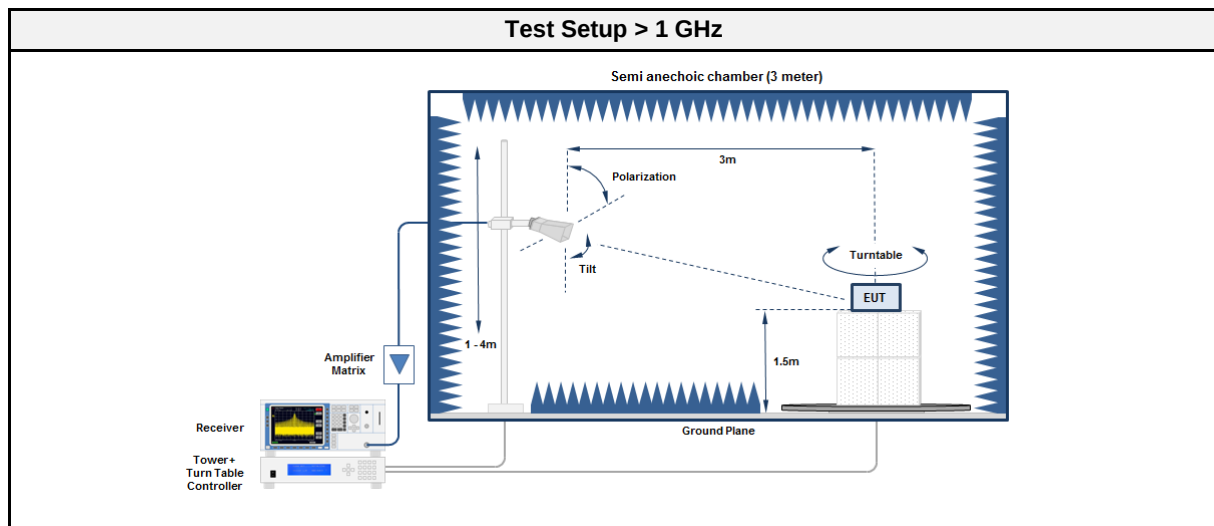

3.7.4 Equipment

Test Software			
Description	Manufacturer	Name	Version
EMC Software	DARE Instruments	RadiMation	2016.1.10

Test Equipment 30 - 1000 MHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF00062	2018-07	2021-07
Measurement Receiver	Agilent	N9038A-526/WXP	EF01070	2019-09	2020-09
Antenna	R&S	HK 116	EF00030	2019-04	2022-04
Antenna	R&S	HL 223	EF00187	2019-05	2022-05

Test Equipment > 1 GHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF00062	2018-07	2021-07
Measurement Receiver	Agilent	N9038A-526/WXP	EF01070	2019-09	2020-09
Antenna	Schwarzbeck	BBHA 9120D	EF00018	2019-10	2022-10

3.7.5 Procedure

Test Procedure 30 - 1000 MHz	
1. EUT is placed on a non conducting support at the center of a turn table 0.8 m above the ground 2. EUT set to test mode 3. The receiver is set to peak detection with max hold 4. The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m 5. All significant emissions are measured again using the corresponding final detector	

Test Procedure > 1 GHz	
1. EUT is placed on a non conducting support at the center of a turn table 1.5 m above the ground 2. EUT set to test mode 3. The receiver is set to peak detection with max hold 4. The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m 5. All significant emissions are measured again using the corresponding final detector	

3.7.6 Results

Test Results pit antenna						
Channel [MHz]	Emission [MHz]	Level [dBμV/m]	Det.	Pol.	Limit [dBμV/m]	Margin [dB]
912.5	273.5503	34.90	pk	hor	46.00	-11.10
912.5	408.8047	32.20	qpk	ver	46.00	-13.76
915.0	406.0609	34.60	qpk	hor	46.00	-11.35
915.0	407.0575	37.90	pk	ver	46.00	-08.12
915.0	407.0575	32.50	qpk	ver	46.00	-13.51
918.5	405.1182	32.00	qpk	ver	46.00	-13.98
918.5	406.3551	35.00	qpk	hor	46.00	-10.96

Test Results rod antenna						
Channel [MHz]	Emission [MHz]	Level [dBμV/m]	Det.	Pol.	Limit [dBμV/m]	Margin [dB]
912.5	406.9615	30.10	qpk	hor	46.00	-15.88
912.5	407.742	34.30	pk	ver	46.00	-11.74
915.0	406.0609	36.30	pk	hor	46.00	-09.70
915.0	408.9429	33.70	pk	ver	46.00	-12.34

Test Results wall antenna						
Channel [MHz]	Emission [MHz]	Level [dBμV/m]	Det.	Pol.	Limit [dBμV/m]	Margin [dB]
912.5	328.8481	34.60	pk	hor	46.00	-11.39
912.5	608.6394	36.10	pk	ver	46.00	-09.90
915.0	328.3077	34.30	pk	hor	46.00	-11.72
915.0	611.5214	35.60	pk	ver	46.00	-10.35
918.5	405.4004	31.40	qpk	hor	46.00	-14.56
918.5	406.181	32.80	pk	ver	46.00	-13.19
918.5	608.3272	36.50	qpk	ver	46.00	-09.47

3.8 Test Conditions and Results - Receiver radiated emissions


3.8.1 Information


Test Information	
Reference	ISED RSS-247, Issue 2 (section 3.1)
Measurement Method	ANSI C63.10 6.5, 6.6, 11.12
Operator	Toralf Jahn
Date	2020-04-17

3.8.2 Limits

Limits			
Frequency [MHz]	Detector	Field strength [$\mu\text{V/m}$]	Measurement distance [m]
30 - 88	Quasi-Peak	100	3
88 - 216	Quasi-Peak	150	3
216 - 960	Quasi-Peak	200	3
960 - 1000	Quasi-Peak	500	3
>1000	Average	500	3

3.8.3 Setup

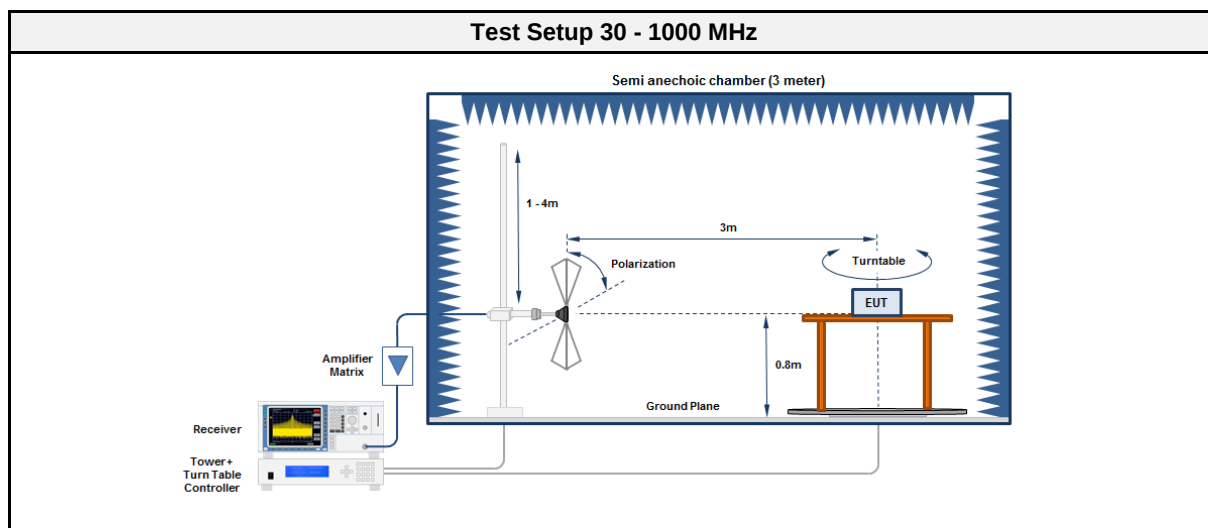

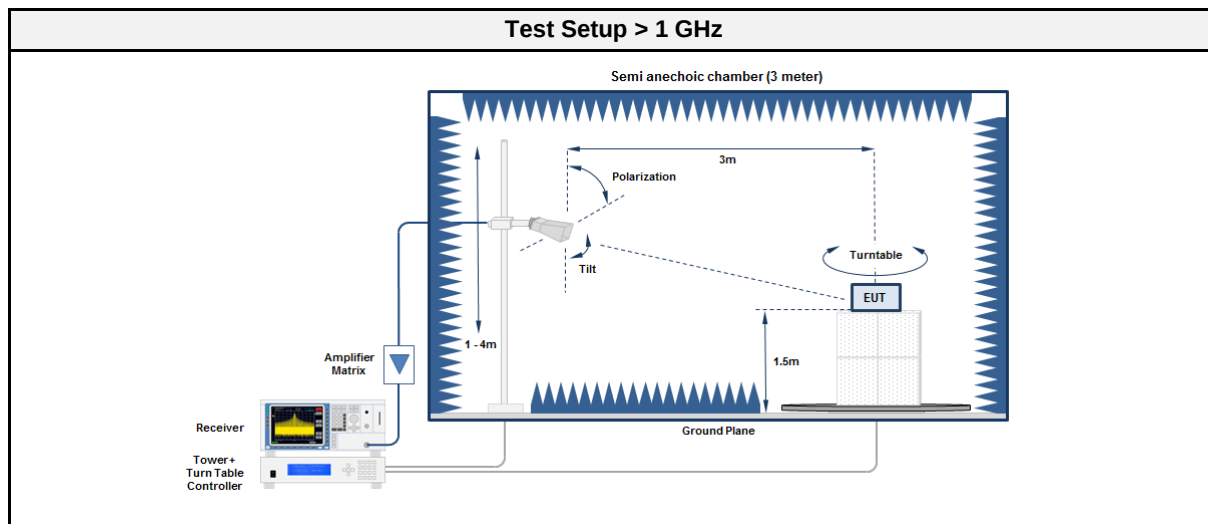

3.8.4 Equipment

Test Software			
Description	Manufacturer	Name	Version
EMC Software	DARE Instruments	RadiMation	2016.1.10

Test Equipment 30 - 1000 MHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF00062	2018-07	2021-07
Measurement Receiver	Agilent	N9038A-526/WXP	EF01070	2019-09	2020-09
Antenna	R&S	HK 116	EF00030	2019-04	2022-04
Antenna	R&S	HL 223	EF00187	2019-05	2022-05

Test Equipment > 1 GHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF00062	2018-07	2021-07
Measurement Receiver	Agilent	N9038A-526/WXP	EF01070	2019-09	2020-09
Antenna	Schwarzbeck	BBHA 9120D	EF00018	2019-10	2022-10

3.8.5 Procedure

Test Procedure 30 - 1000 MHz	
1.	EUT is placed on a non conducting support at the center of a turn table 0.8 m above the ground
2.	EUT set to test mode
3.	The receiver is set to peak detection with max hold
4.	The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m
5.	All significant emissions are measured again using the corresponding final detector

Test Procedure > 1 GHz	
1.	EUT is placed on a non conducting support at the center of a turn table 1.5 m above the ground
2.	EUT set to test mode
3.	The receiver is set to peak detection with max hold
4.	The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m
5.	All significant emissions are measured again using the corresponding final detector

Test Report No.: G0M-2002-8868-TFC247DT-V01

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

3.8.6 Results

Test Results pit antenna						
Channel [MHz]	Emission [MHz]	Level [dBμV/m]	Det.	Pol.	Limit [dBμV/m]	Margin [dB]
915.0	814.9505	33.20	pk	hor	46.00	-12.79
915.0	870.9096	33.70	pk	ver	46.00	-12.25

Test Results rod antenna						
Channel [MHz]	Emission [MHz]	Level [dBμV/m]	Det.	Pol.	Limit [dBμV/m]	Margin [dB]
915.0	885.6199	33.30	pk	hor	46.00	-12.70
915.0	937.076	32.70	pk	ver	46.00	-13.30

Test Results wall antenna						
Channel [MHz]	Emission [MHz]	Level [dBμV/m]	Det.	Pol.	Limit [dBμV/m]	Margin [dB]
915.0	896.1873	35.10	pk	ver	46.00	-10.91
915.0	905.4939	33.50	pk	hor	46.00	-12.49


ANNEX A Transmitter spurious emissions

Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
EUT Name: Meter Transmit Unit
Model: Ready MTU
Test Site: Eurofins Product Service Germany
Operator: Mr. Jahn
Measurement software: RadiMation, version 2016.1.10
Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
Antenna: Rohde & Schwarz HK 116, Horizontal
Measurement distance: 3 m
Mode: TX; 912.5 MHz; pit antenna
Test Date: 2020-04-17
Note:


Index 25

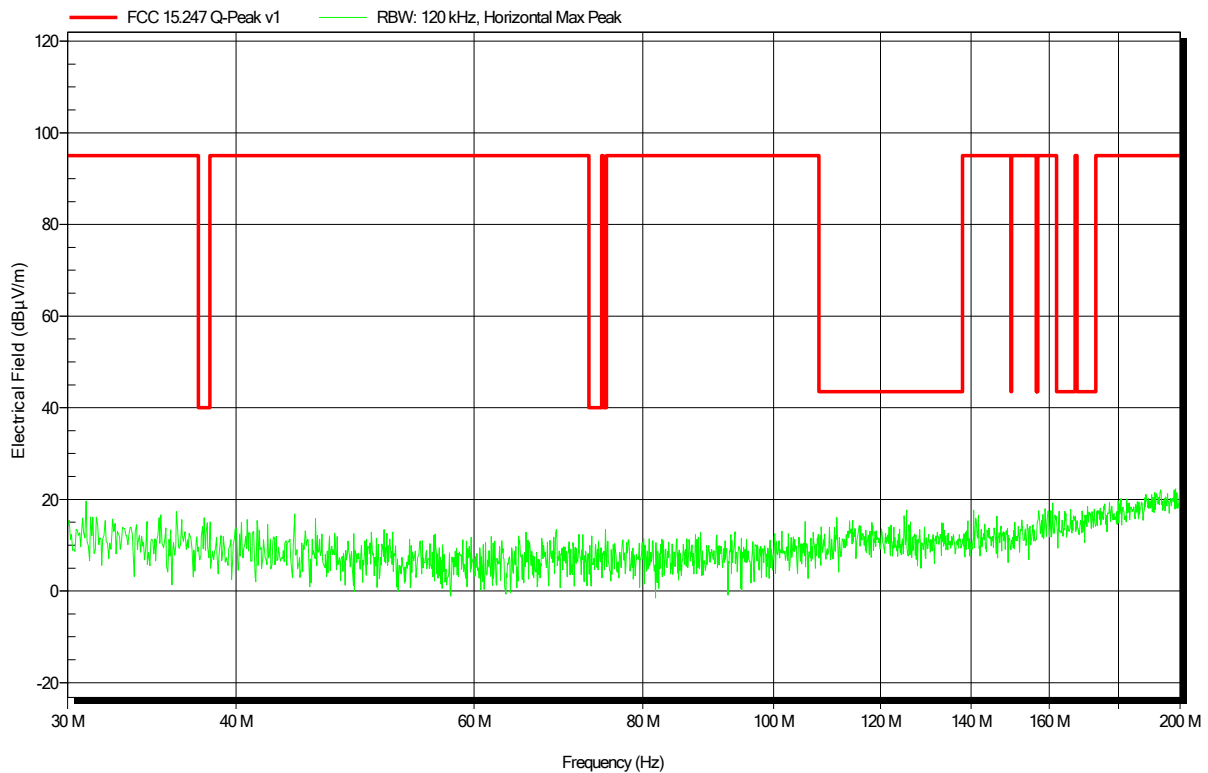

Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868
 Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Jahn
 Measurement software: RadiMation, version 2016.1.10
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Rohde & Schwarz HK 116, Vertical
 Measurement distance: 3 m
 Mode: TX; 912.5 MHz; pit antenna
 Test Date: 2020-04-17
 Note:

Index 26

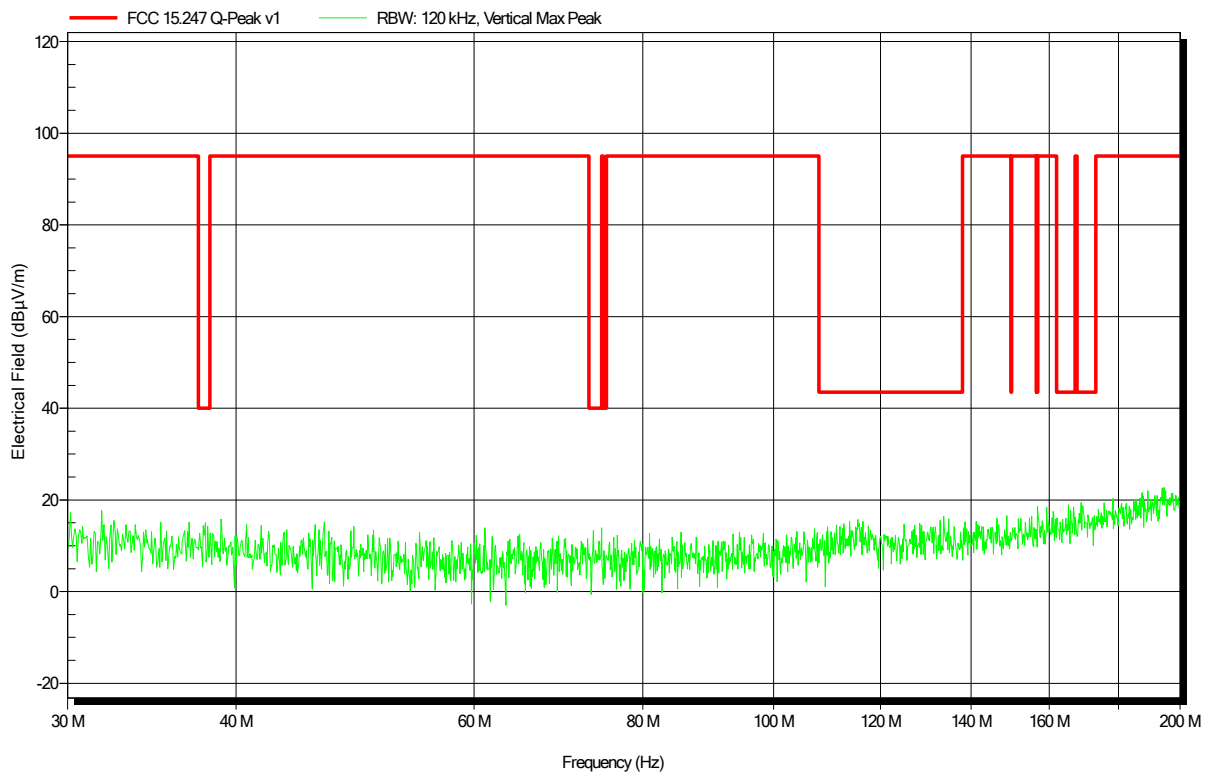


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
EUT Name: Meter Transmit Unit
Model: Ready MTU
Test Site: Eurofins Product Service Germany
Operator: Mr. Jahn
Measurement software: RadiMation, version 2016.1.10
Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
Antenna: Rohde & Schwarz HL 223, Horizontal
Measurement distance: 3 m
Mode: TX; 912.5 MHz; pit antenna
Test Date: 2020-04-17
Note:

Index 44

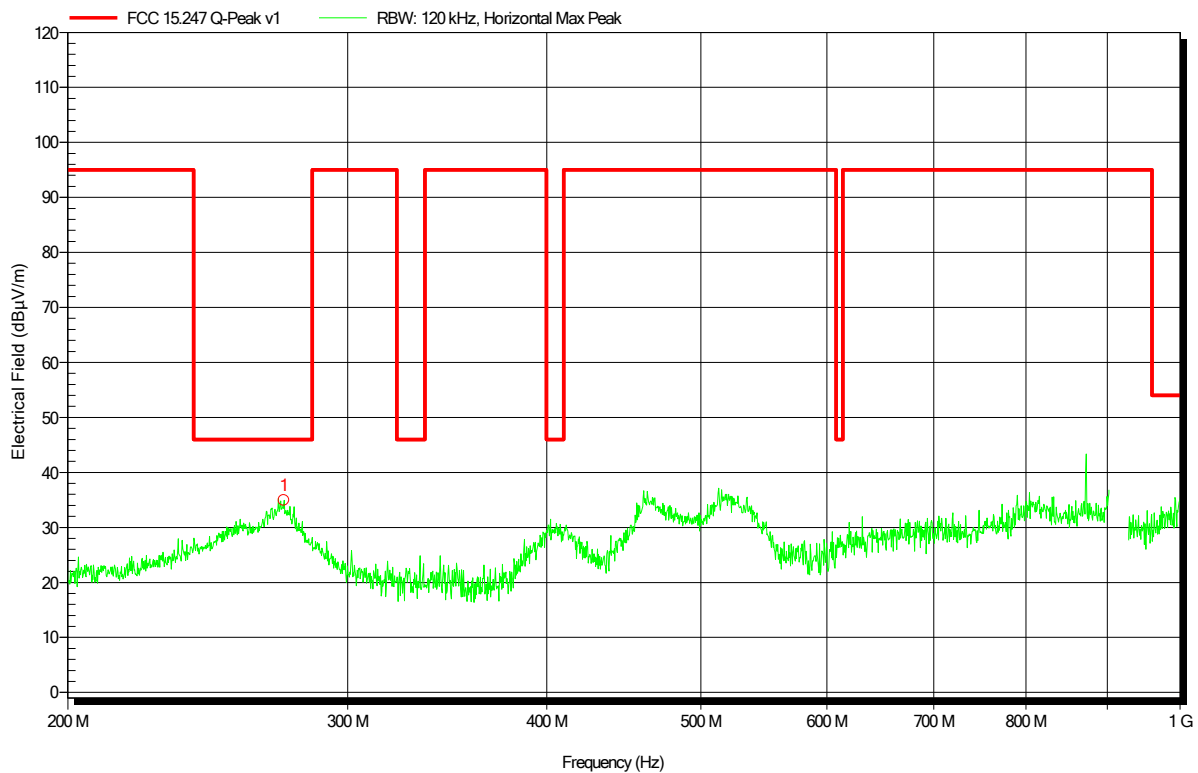


Frequency	Peak	Peak Limit	Peak Difference	Status
273.5503 MHz	34.9 dBµV/m	46 dBµV/m	-11.1 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
EUT Name: Meter Transmit Unit
Model: Ready MTU
Test Site: Eurofins Product Service Germany
Operator: Mr. Jahn
Measurement software: RadiMation, version 2016.1.10
Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
Antenna: Rohde & Schwarz HL 223, Vertical
Measurement distance: 3 m
Mode: TX; 912.5 MHz; pit antenna
Test Date: 2020-04-17
Note:

Index 46

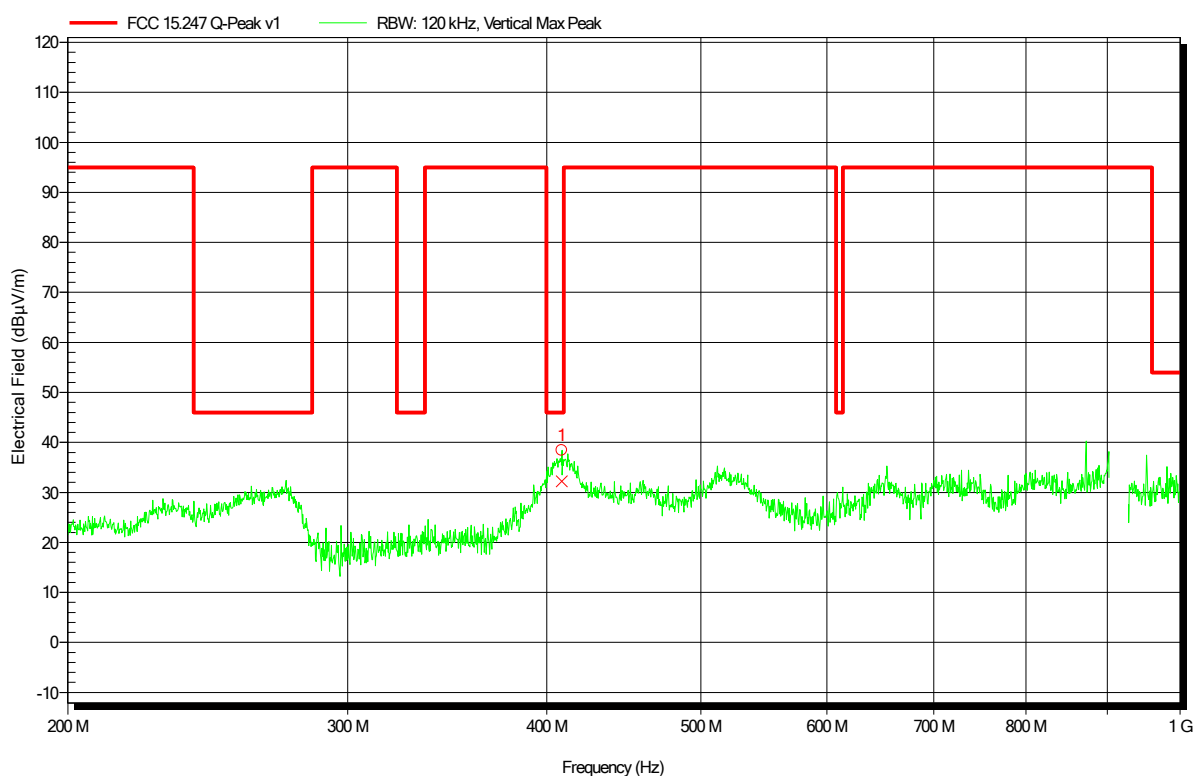


Frequency 408.8047 MHz	Peak 38.4 dBµV/m	Peak Limit 46 dBµV/m	Peak Difference -7.55 dB	Status Pass
Frequency 408.8047 MHz	Quasi-Peak 32.2 dBµV/m	Quasi-Peak Limit 46 dBµV/m	Quasi-Peak Difference -13.76 dB	Quasi-Peak Status Pass

Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Jahn
 Measurement software: RadiMation, version 2016.1.10
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Rohde & Schwarz HK 116, Horizontal
 Measurement distance: 3 m
 Mode: TX; 912.5 MHz; rod antenna
 Test Date: 2020-04-17
 Note:


Index 28

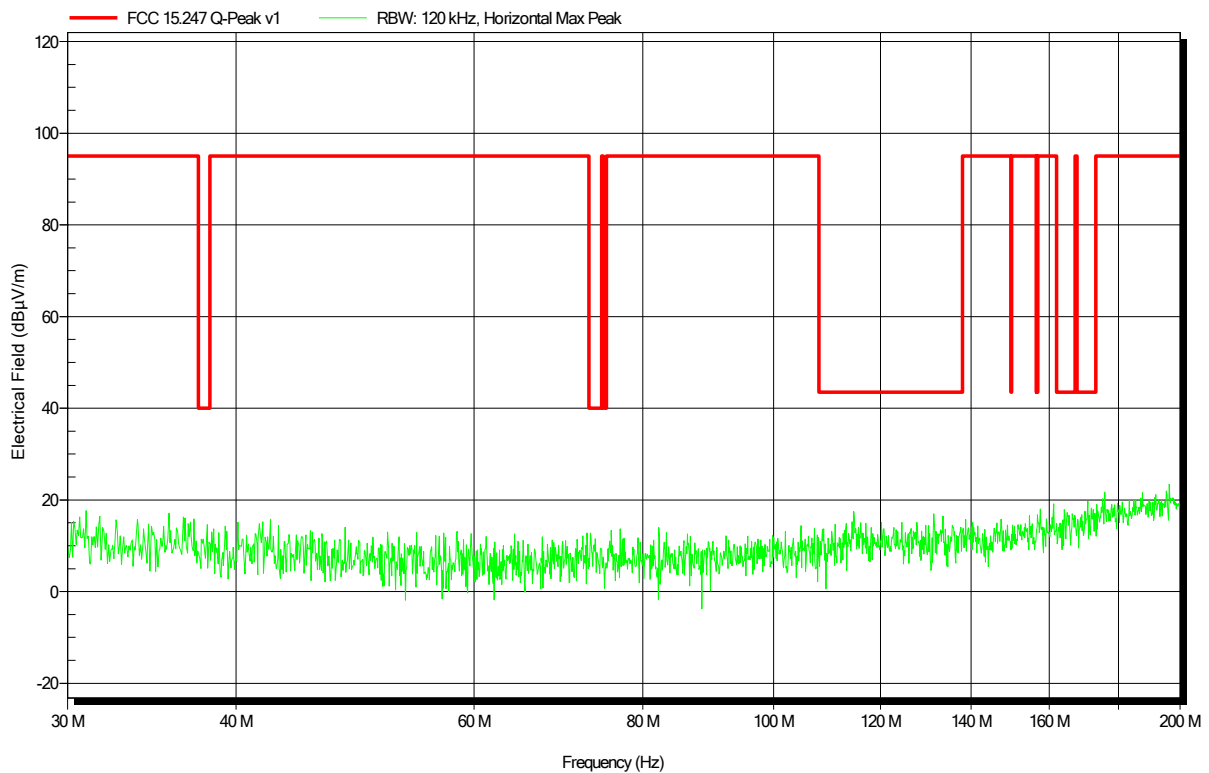

Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868
 Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Jahn
 Measurement software: RadiMation, version 2016.1.10
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Rohde & Schwarz HK 116, Vertical
 Measurement distance: 3 m
 Mode: TX; 912.5 MHz; rod antenna
 Test Date: 2020-04-17
 Note:

Index 27

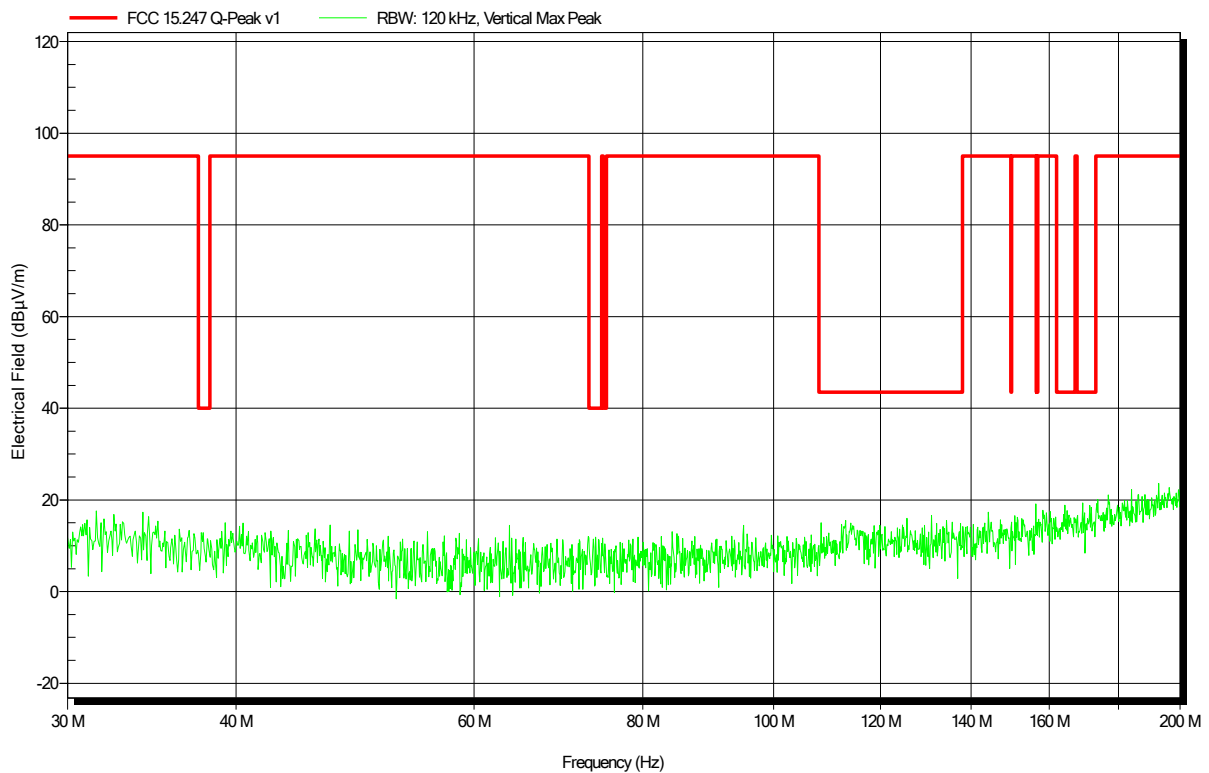


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Jahn
 Measurement software: RadiMation, version 2016.1.10
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement distance: 3 m
 Mode: TX; 912.5 MHz; rod antenna
 Test Date: 2020-04-17
 Note:

Index 48

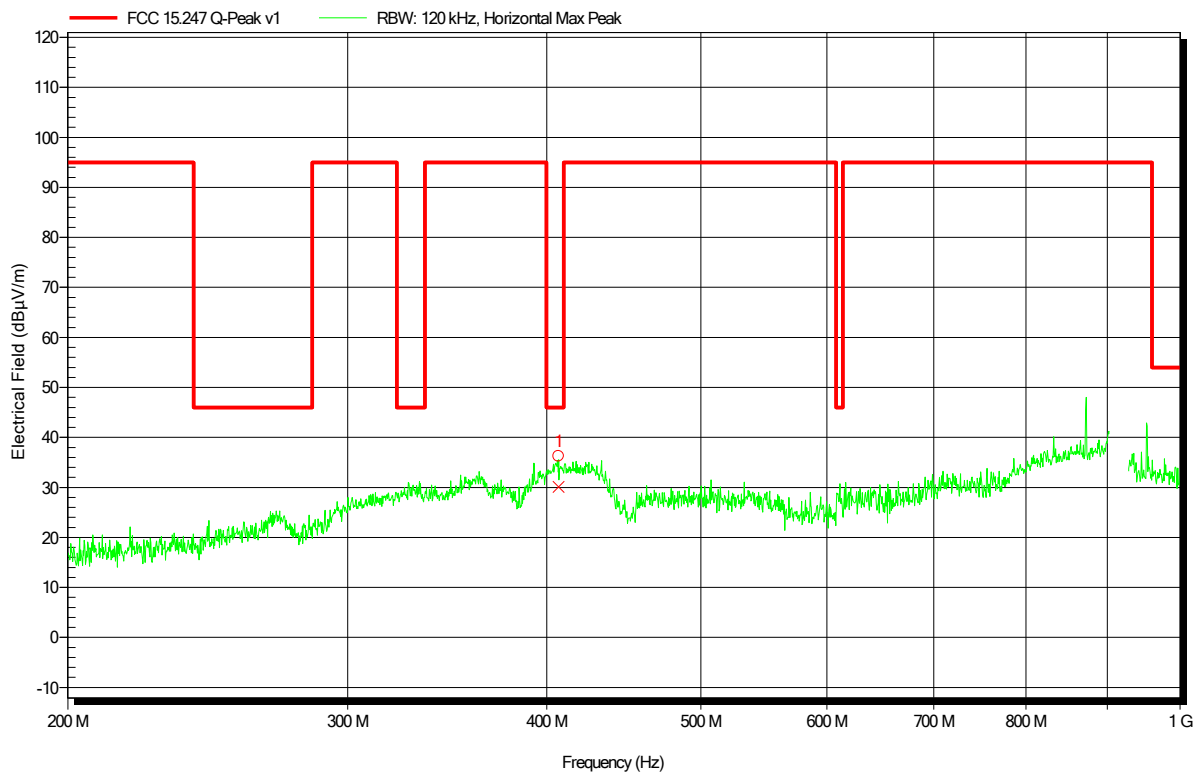


Frequency 406.9615 MHz	Peak 36.3 dBµV/m	Peak Limit 46 dBµV/m	Peak Difference -9.75 dB	Status Pass
Frequency 406.9615 MHz	Quasi-Peak 30.1 dBµV/m	Quasi-Peak Limit 46 dBµV/m	Quasi-Peak Difference -15.88 dB	Quasi-Peak Status Pass

Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Jahn
 Measurement software: RadiMation, version 2016.1.10
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement distance: 3 m
 Mode: TX; 912.5 MHz; rod antenna
 Test Date: 2020-04-17
 Note:

Index 47

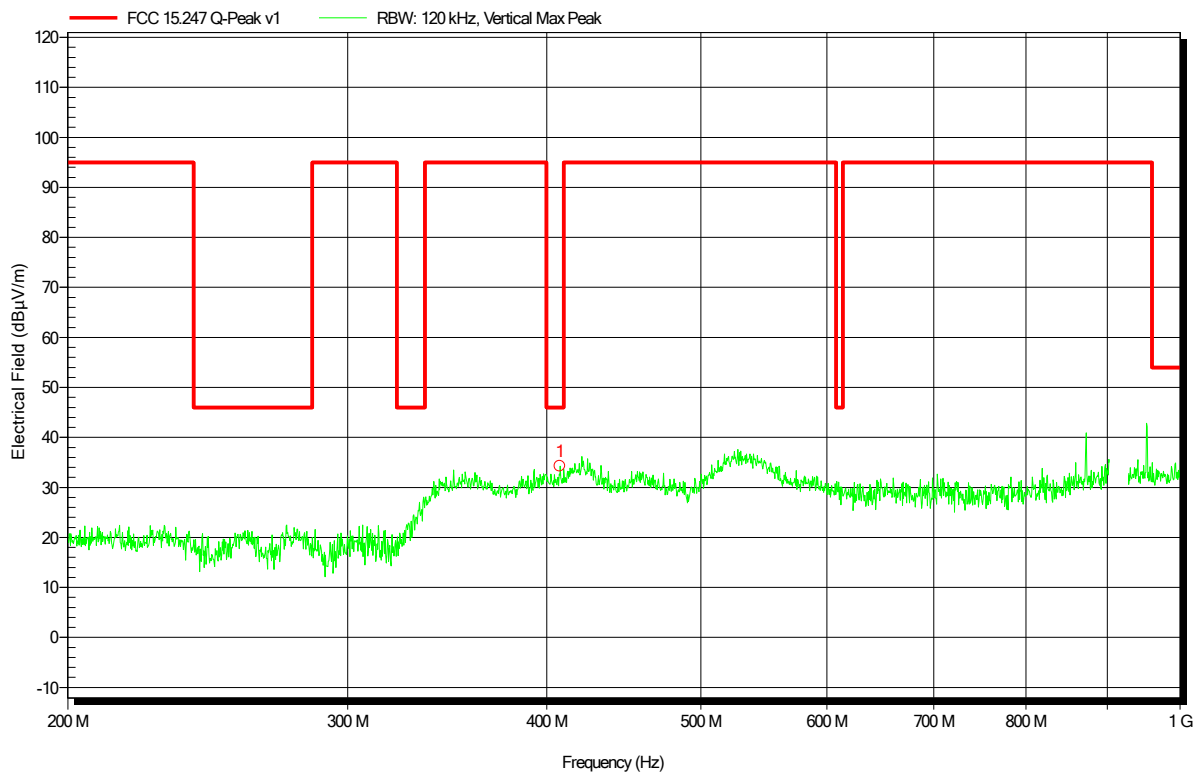


Frequency	Peak	Peak Limit	Peak Difference	Status
407.742 MHz	34.3 dBµV/m	46 dBµV/m	-11.74 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Jahn
 Measurement software: RadiMation, version 2016.1.10
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Rohde & Schwarz HK 116, Horizontal
 Measurement distance: 3 m
 Mode: TX; 912.5 MHz; wall antenna
 Test Date: 2020-04-17
 Note:

Index 29

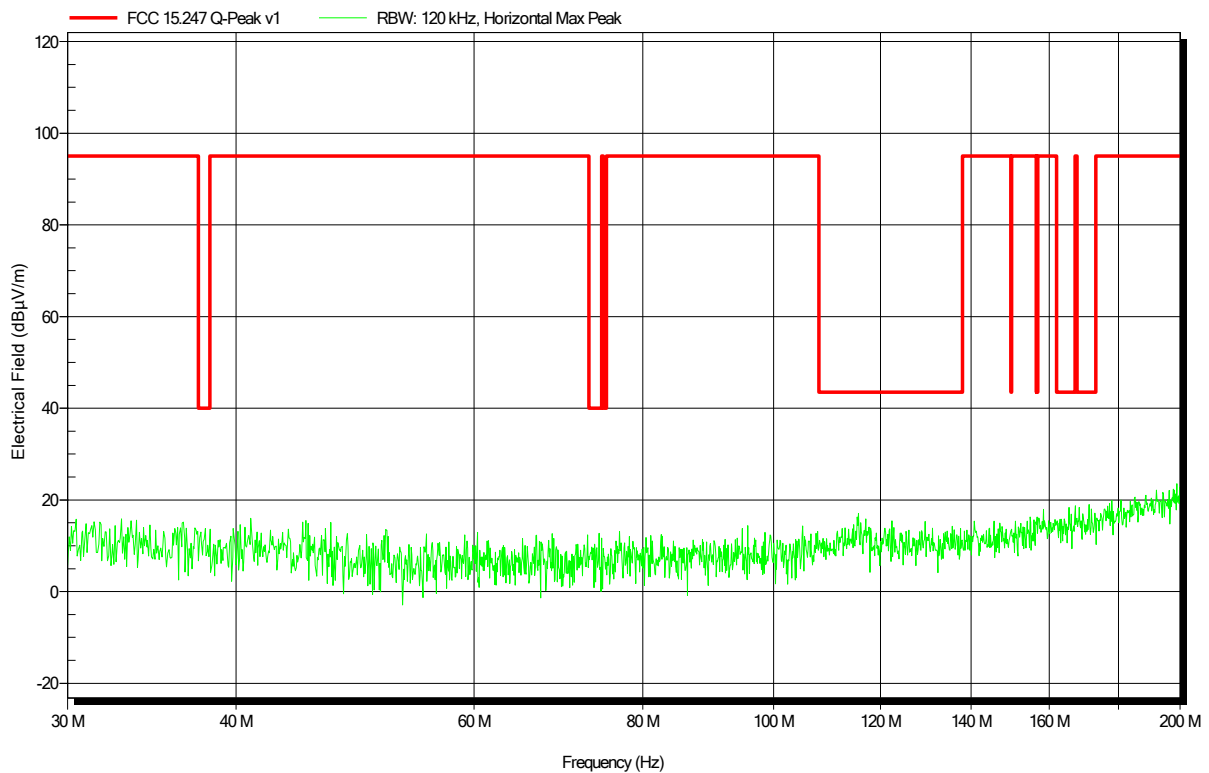


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
EUT Name: Meter Transmit Unit
Model: Ready MTU
Test Site: Eurofins Product Service Germany
Operator: Mr. Jahn
Measurement software: RadiMation, version 2016.1.10
Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
Antenna: Rohde & Schwarz HK 116, Vertical
Measurement distance: 3 m
Mode: TX; 912.5 MHz; wall antenna
Test Date: 2020-04-17
Note:

Index 30

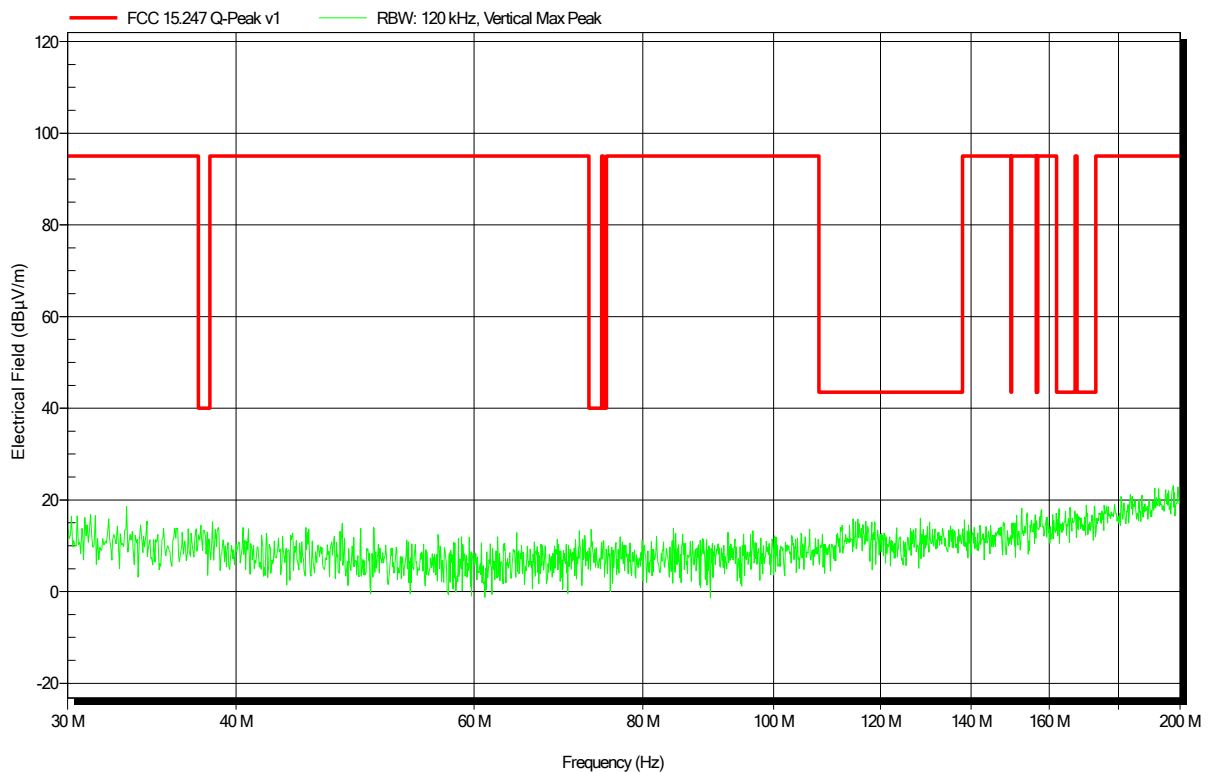


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
EUT Name: Meter Transmit Unit
Model: Ready MTU
Test Site: Eurofins Product Service Germany
Operator: Mr. Jahn
Measurement software: RadiMation, version 2016.1.10
Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
Antenna: Rohde & Schwarz HL 223, Horizontal
Measurement distance: 3 m
Mode: TX; 912.5 MHz; wall antenna
Test Date: 2020-04-17
Note:

Index 49

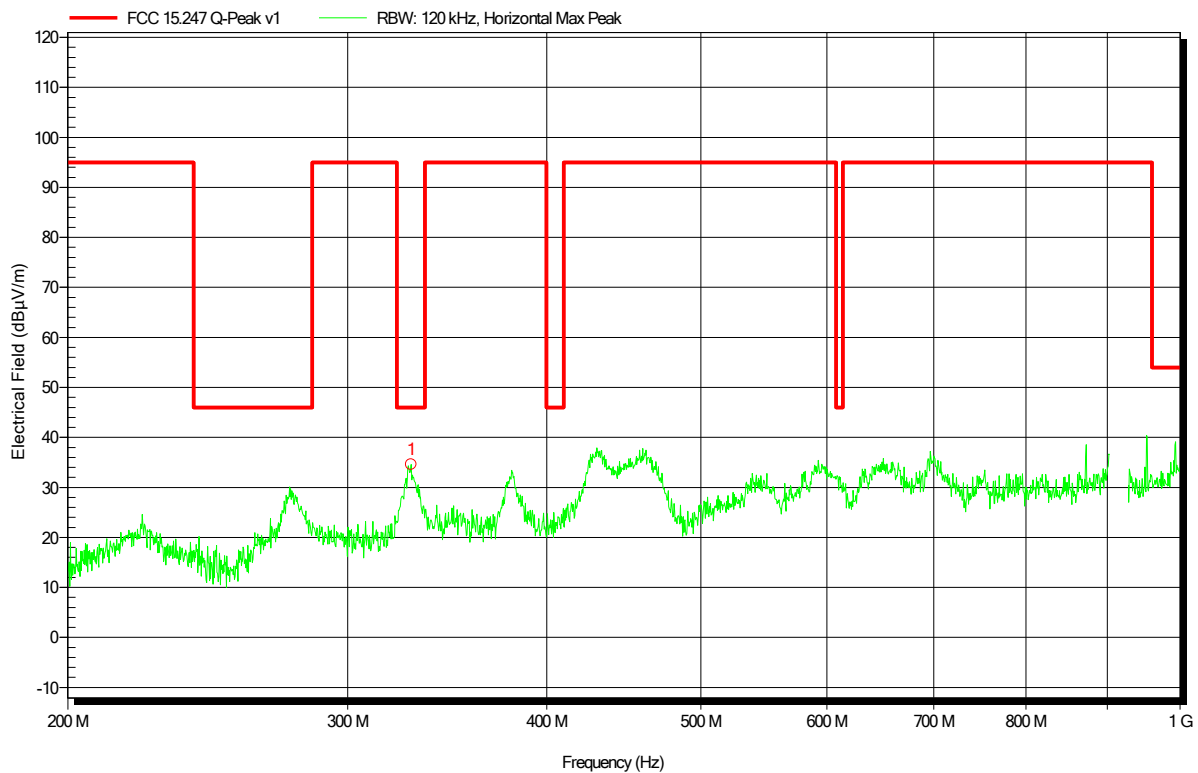


Frequency	Peak	Peak Limit	Peak Difference	Status
328.8481 MHz	34.6 dBµV/m	46 dBµV/m	-11.39 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Jahn
 Measurement software: RadiMation, version 2016.1.10
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement distance: 3 m
 Mode: TX; 912.5 MHz; wall antenna
 Test Date: 2020-04-17
 Note:

Index 50

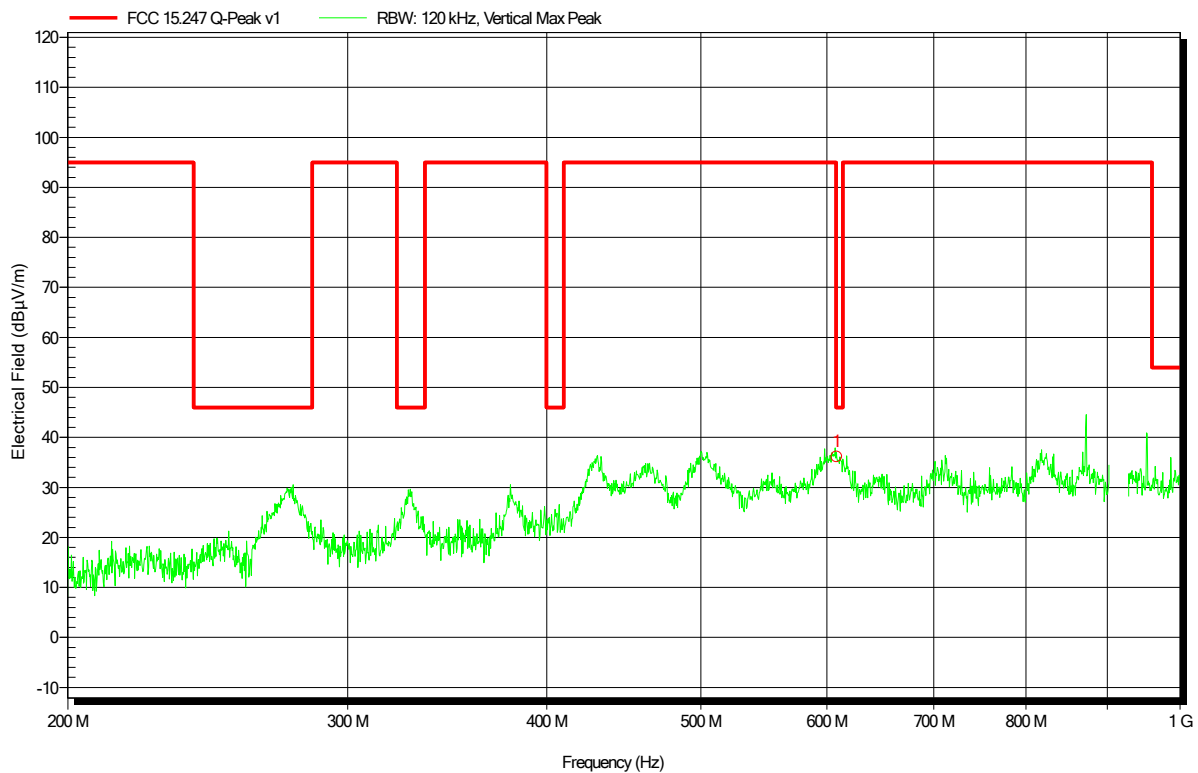


Frequency	Peak	Peak Limit	Peak Difference	Status
608.6394 MHz	36.1 dBµV/m	46 dBµV/m	-9.9 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Jahn
 Measurement software: RadiMation, version 2016.1.10
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Rohde & Schwarz HK 116, Horizontal
 Measurement distance: 3 m
 Mode: TX; 915 MHz; pit antenna
 Test Date: 2020-04-17
 Note:

Index 36

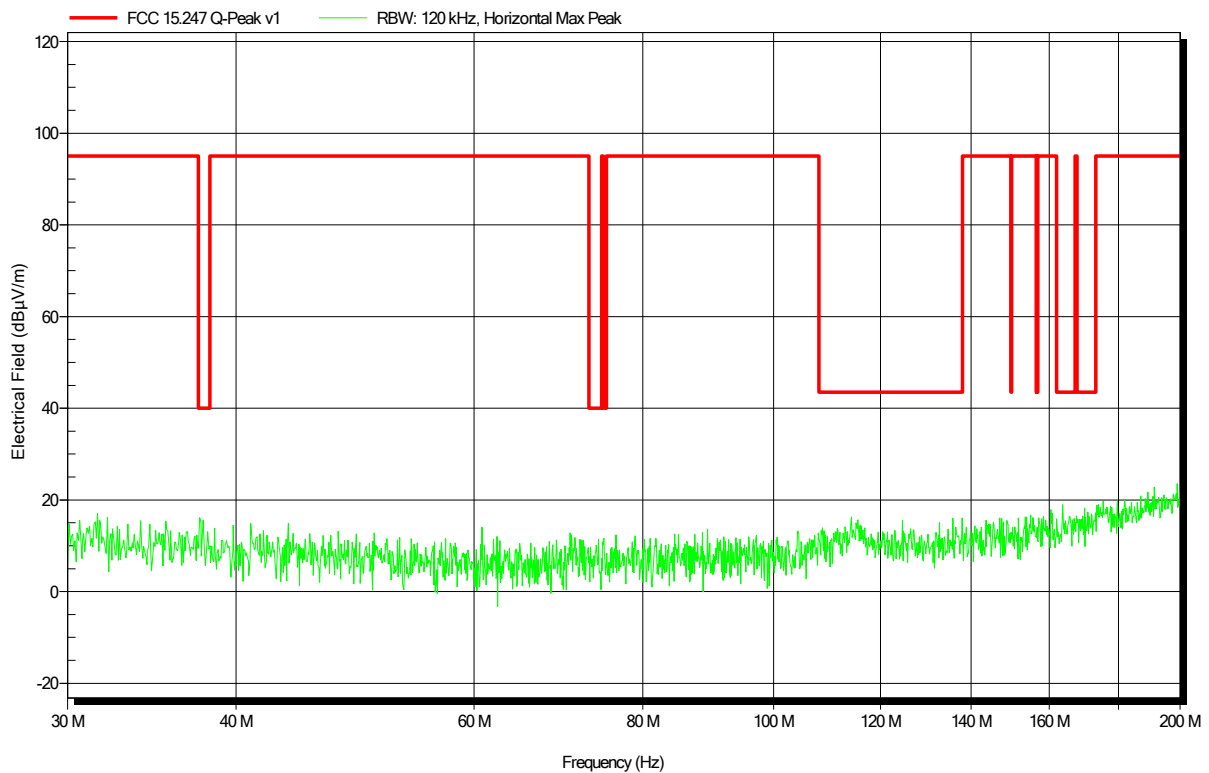


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Jahn
 Measurement software: RadiMation, version 2016.1.10
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Rohde & Schwarz HK 116, Vertical
 Measurement distance: 3 m
 Mode: TX; 915 MHz; pit antenna
 Test Date: 2020-04-17
 Note:

Index 35

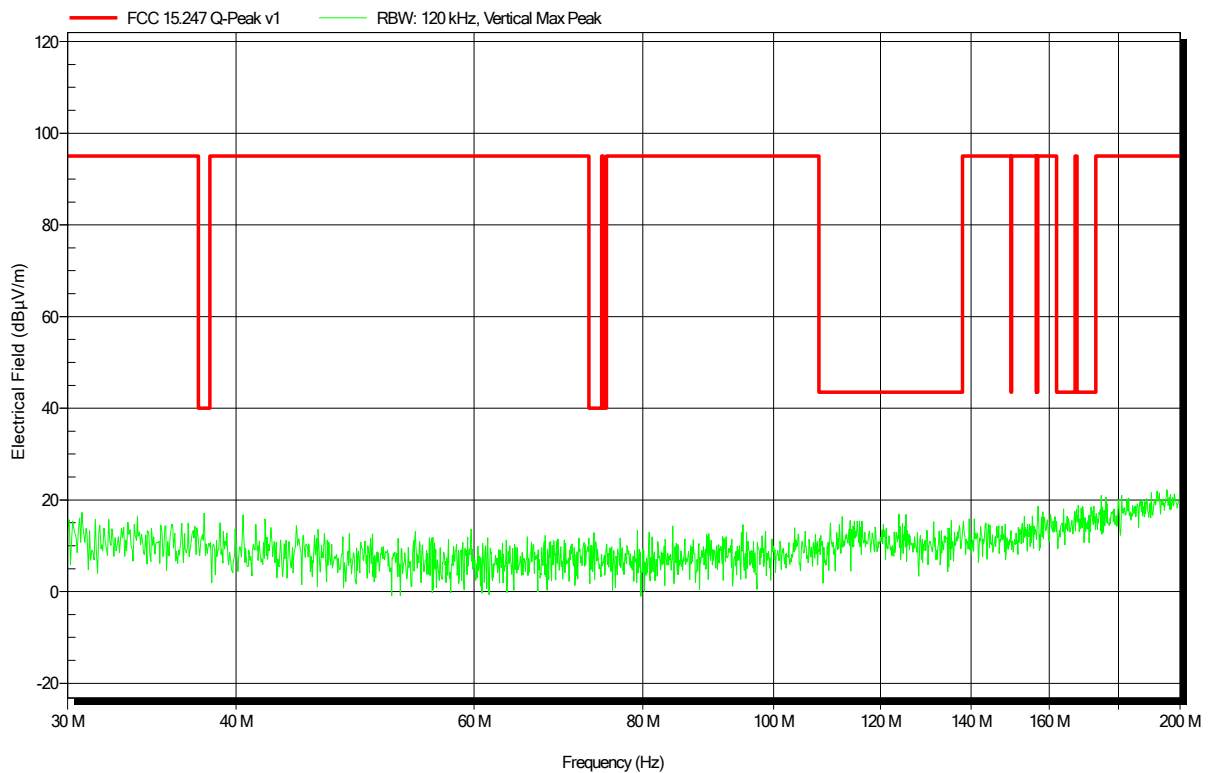


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Jahn
 Measurement software: RadiMation, version 2016.1.10
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement distance: 3 m
 Mode: TX; 915 MHz; pit antenna
 Test Date: 2020-04-17
 Note:

Index 56

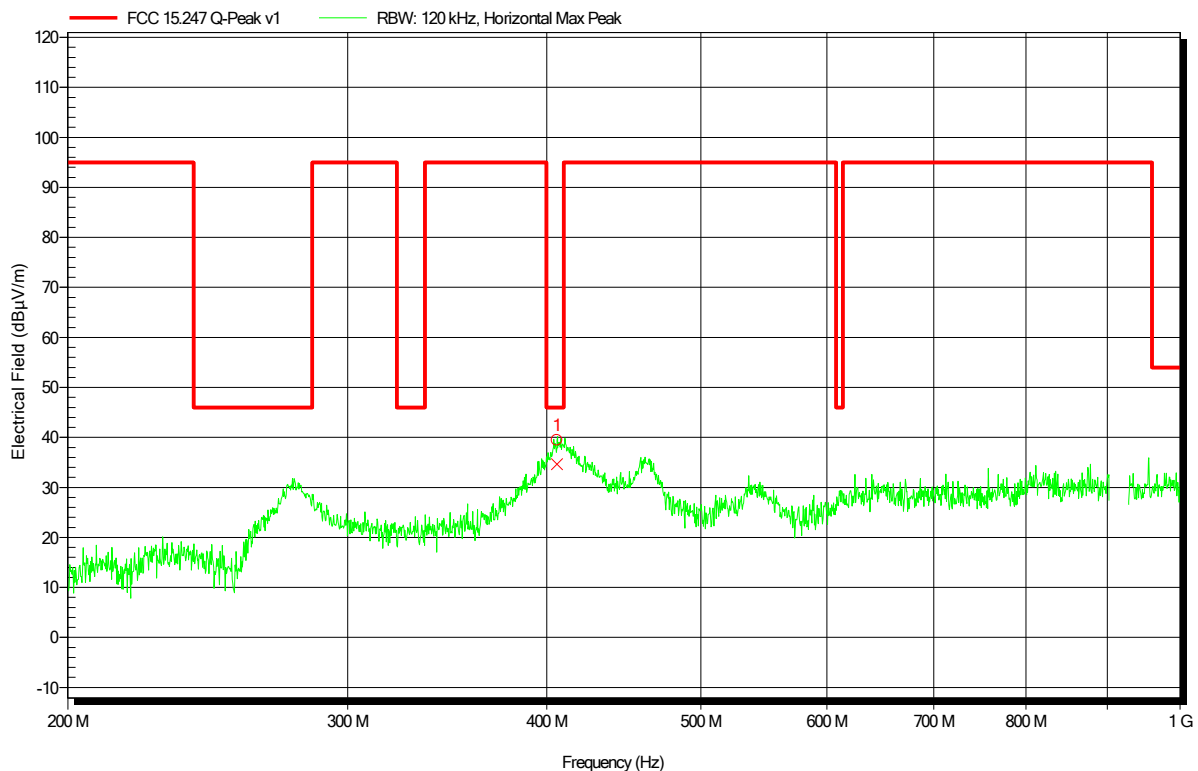


Frequency 406.0609 MHz	Peak 39.4 dBµV/m	Peak Limit 46 dBµV/m	Peak Difference -6.59 dB	Status Pass
Frequency 406.0609 MHz	Quasi-Peak 34.6 dBµV/m	Quasi-Peak Limit 46 dBµV/m	Quasi-Peak Difference -11.35 dB	Quasi-Peak Status Pass

Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Jahn
 Measurement software: RadiMation, version 2016.1.10
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement distance: 3 m
 Mode: TX; 915 MHz; pit antenna
 Test Date: 2020-04-17
 Note:

Index 55

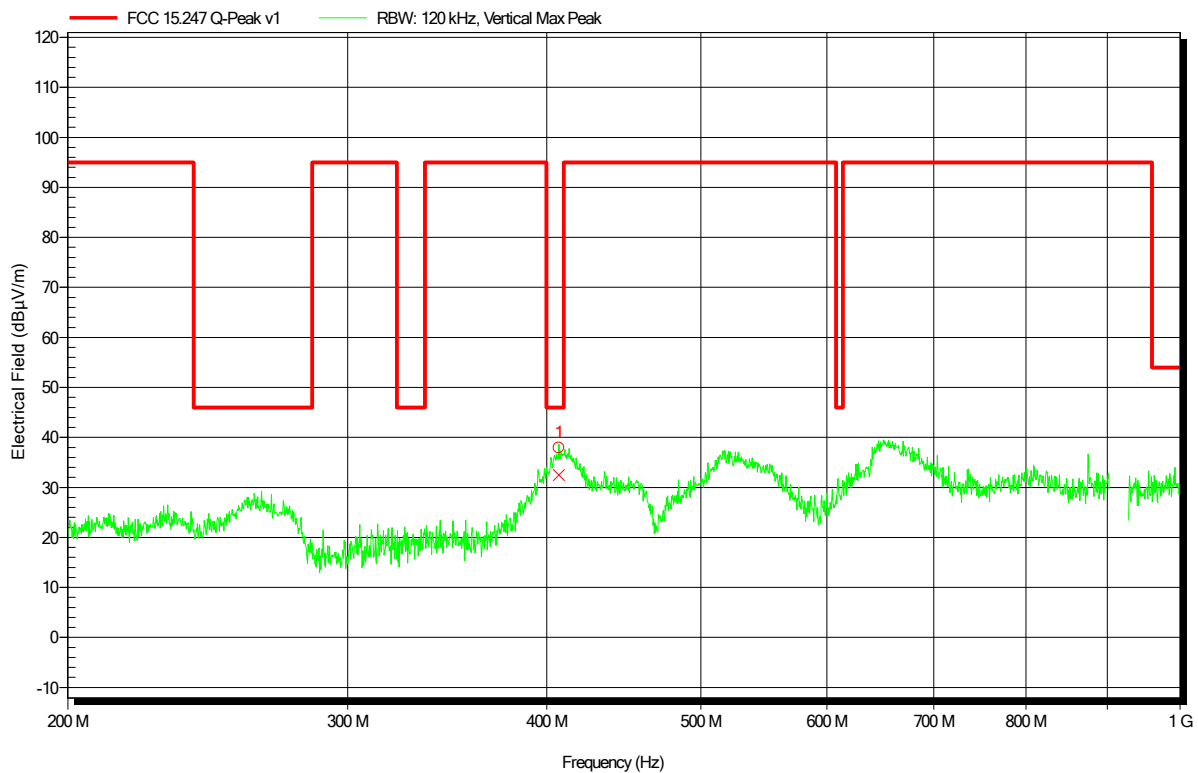


Frequency 407.0575 MHz	Peak 37.9 dBµV/m	Peak Limit 46 dBµV/m	Peak Difference -8.12 dB	Status Pass
Frequency 407.0575 MHz	Quasi-Peak 32.5 dBµV/m	Quasi-Peak Limit 46 dBµV/m	Quasi-Peak Difference -13.51 dB	Quasi-Peak Status Pass

Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
EUT Name: Meter Transmit Unit
Model: Ready MTU
Test Site: Eurofins Product Service Germany
Operator: Mr. Jahn
Measurement software: RadiMation, version 2016.1.10
Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
Antenna: Rohde & Schwarz HK 116, Horizontal
Measurement distance: 3 m
Mode: TX; 915 MHz; rod antenna
Test Date: 2020-04-17
Note:

Index 33

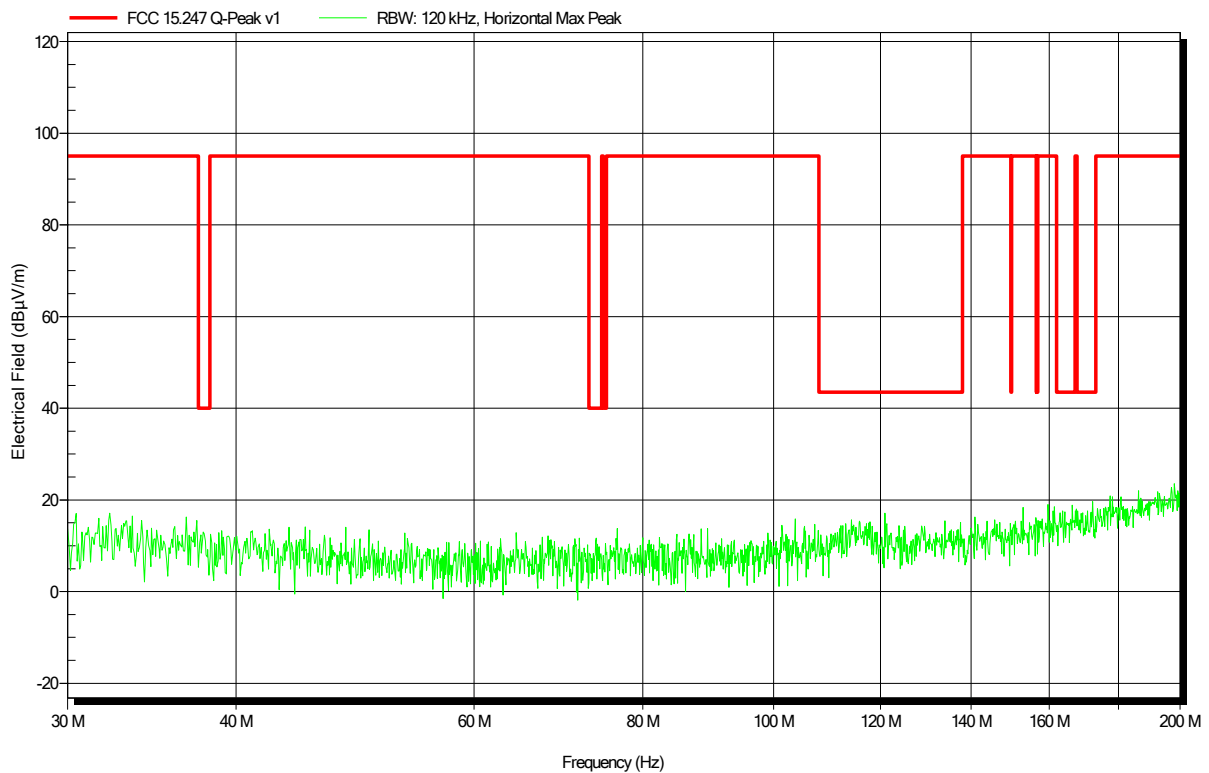


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Jahn
 Measurement software: RadiMation, version 2016.1.10
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Rohde & Schwarz HK 116, Vertical
 Measurement distance: 3 m
 Mode: TX; 915 MHz; rod antenna
 Test Date: 2020-04-17
 Note:


Index 34

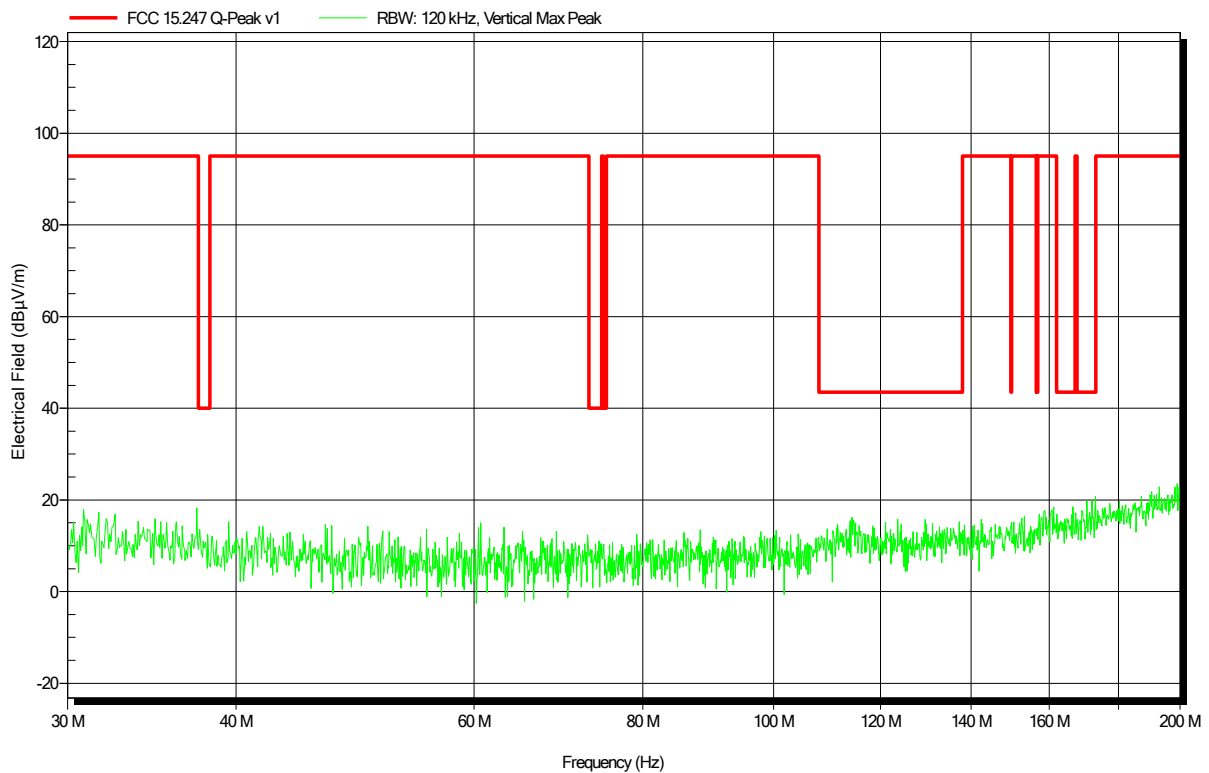

Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868
 Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Jahn
 Measurement software: RadiMation, version 2016.1.10
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement distance: 3 m
 Mode: TX; 915 MHz; rod antenna
 Test Date: 2020-04-17
 Note:

Index 53

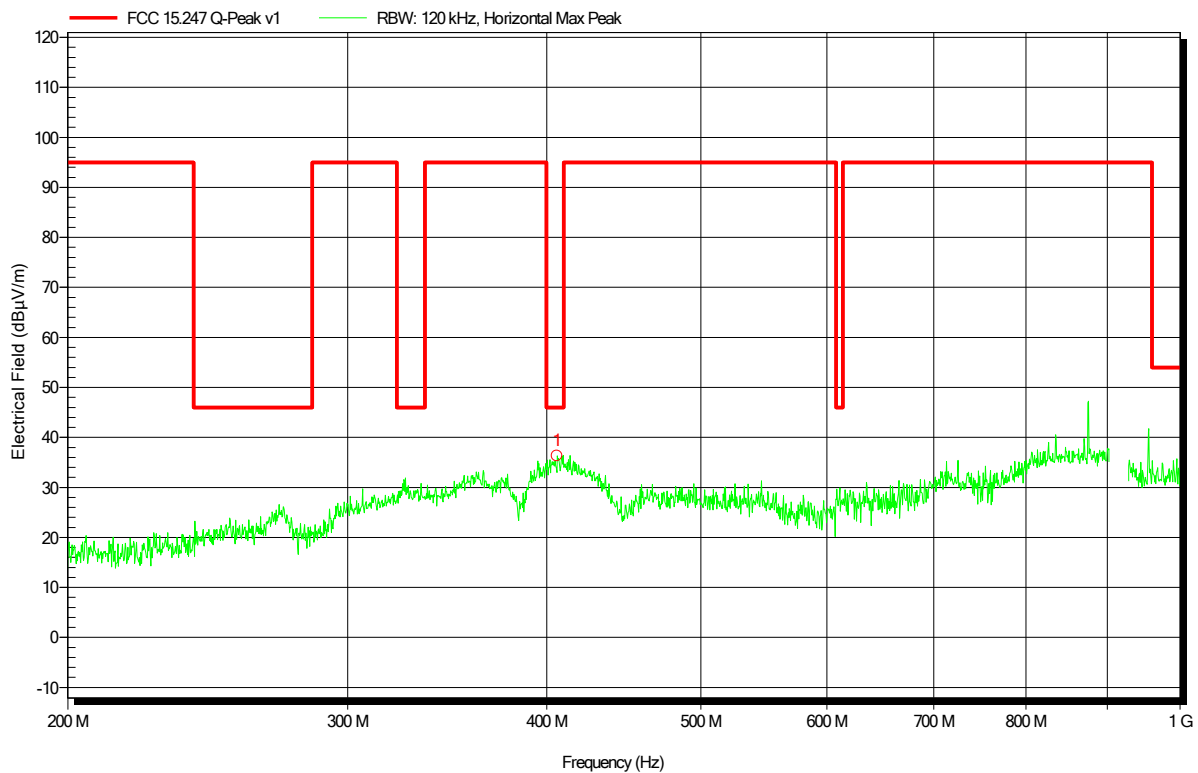


Frequency	Peak	Peak Limit	Peak Difference	Status
406.0609 MHz	36.3 dBµV/m	46 dBµV/m	-9.7 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868
 Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Jahn
 Measurement software: RadiMation, version 2016.1.10
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement distance: 3 m
 Mode: TX; 915 MHz; rod antenna
 Test Date: 2020-04-17
 Note:

Index 54

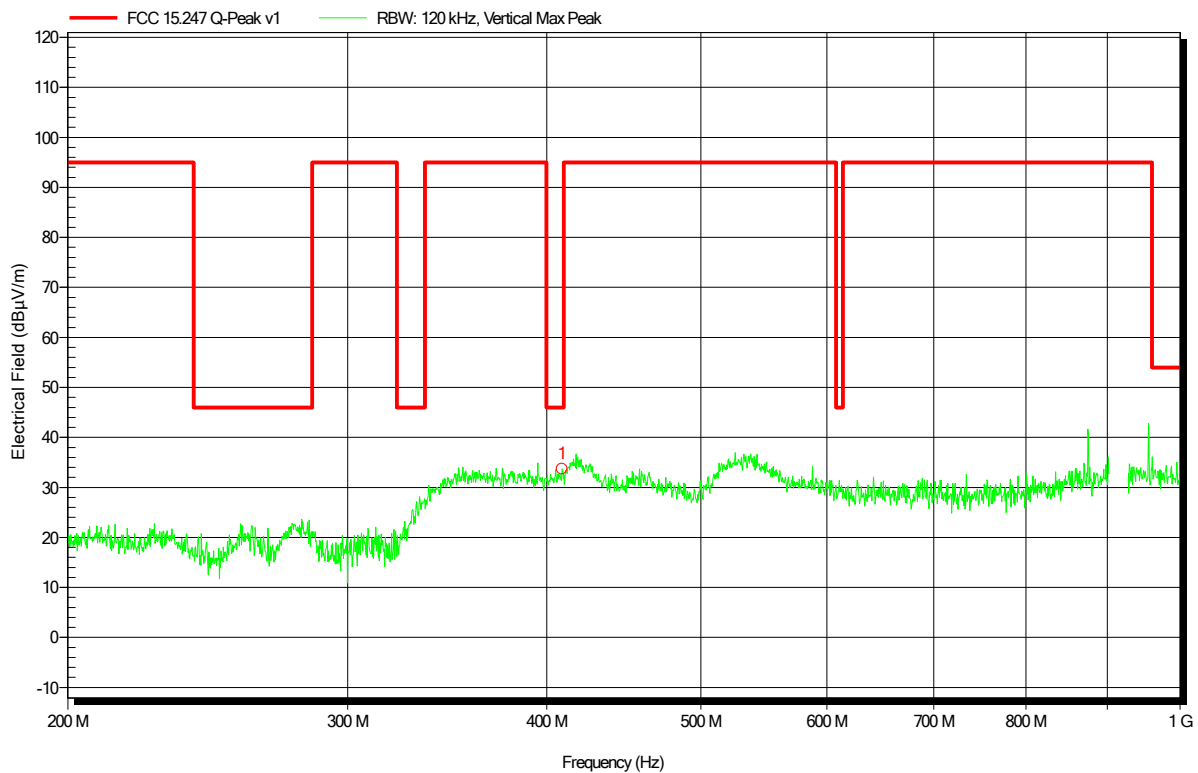


Frequency	Peak	Peak Limit	Peak Difference	Status
408.9429 MHz	33.7 dBµV/m	46 dBµV/m	-12.34 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868
 Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Jahn
 Measurement software: RadiMation, version 2016.1.10
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Rohde & Schwarz HK 116, Horizontal
 Measurement distance: 3 m
 Mode: TX; 915 MHz; wall antenna
 Test Date: 2020-04-17
 Note:

Index 32

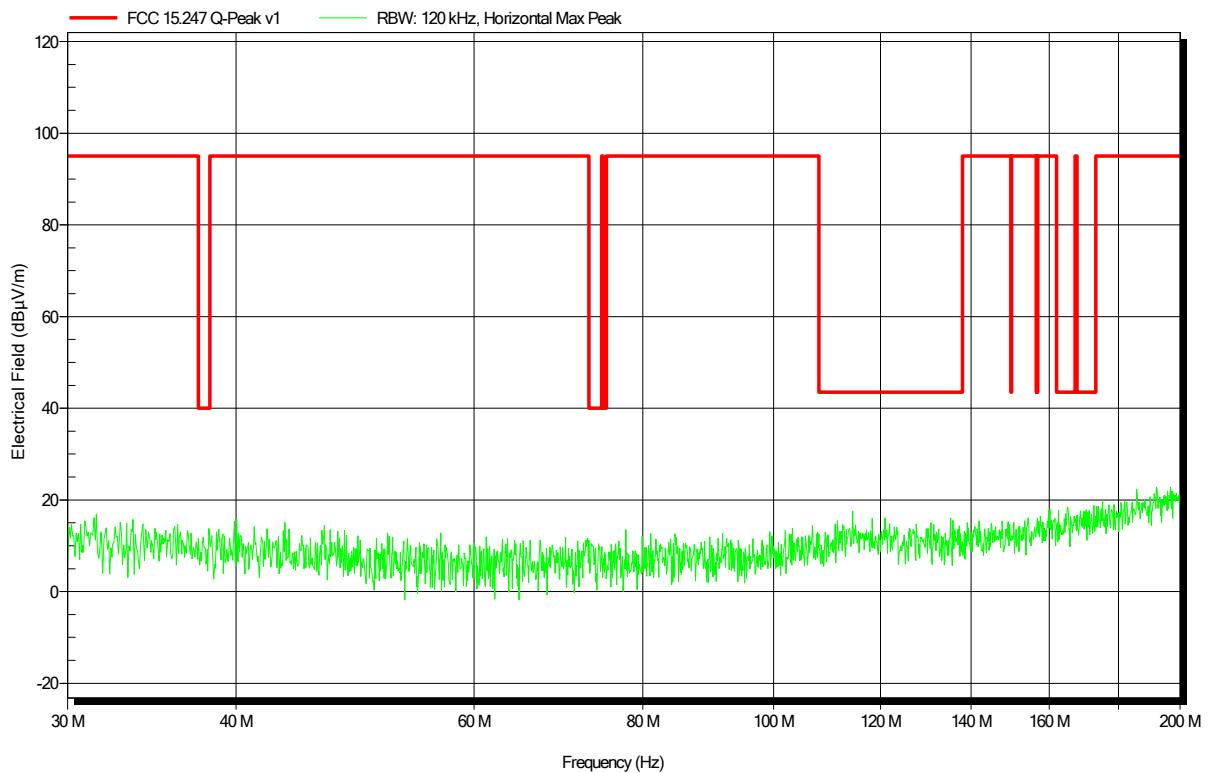


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
EUT Name: Meter Transmit Unit
Model: Ready MTU
Test Site: Eurofins Product Service Germany
Operator: Mr. Jahn
Measurement software: RadiMation, version 2016.1.10
Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
Antenna: Rohde & Schwarz HK 116, Vertical
Measurement distance: 3 m
Mode: TX; 915 MHz; wall antenna
Test Date: 2020-04-17
Note:

Index 31

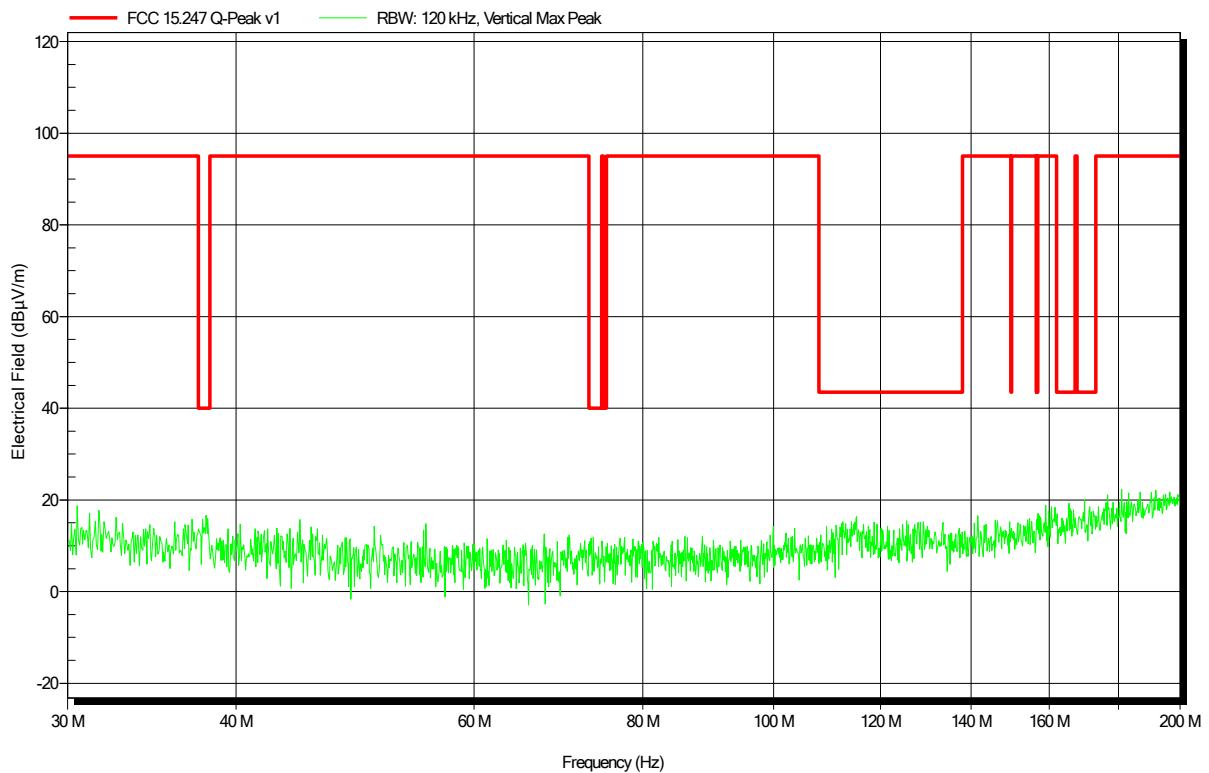


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
EUT Name: Meter Transmit Unit
Model: Ready MTU
Test Site: Eurofins Product Service Germany
Operator: Mr. Jahn
Measurement software: RadiMation, version 2016.1.10
Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
Antenna: Rohde & Schwarz HL 223, Horizontal
Measurement distance: 3 m
Mode: TX; 915 MHz; wall antenna
Test Date: 2020-04-17
Note:

Index 52

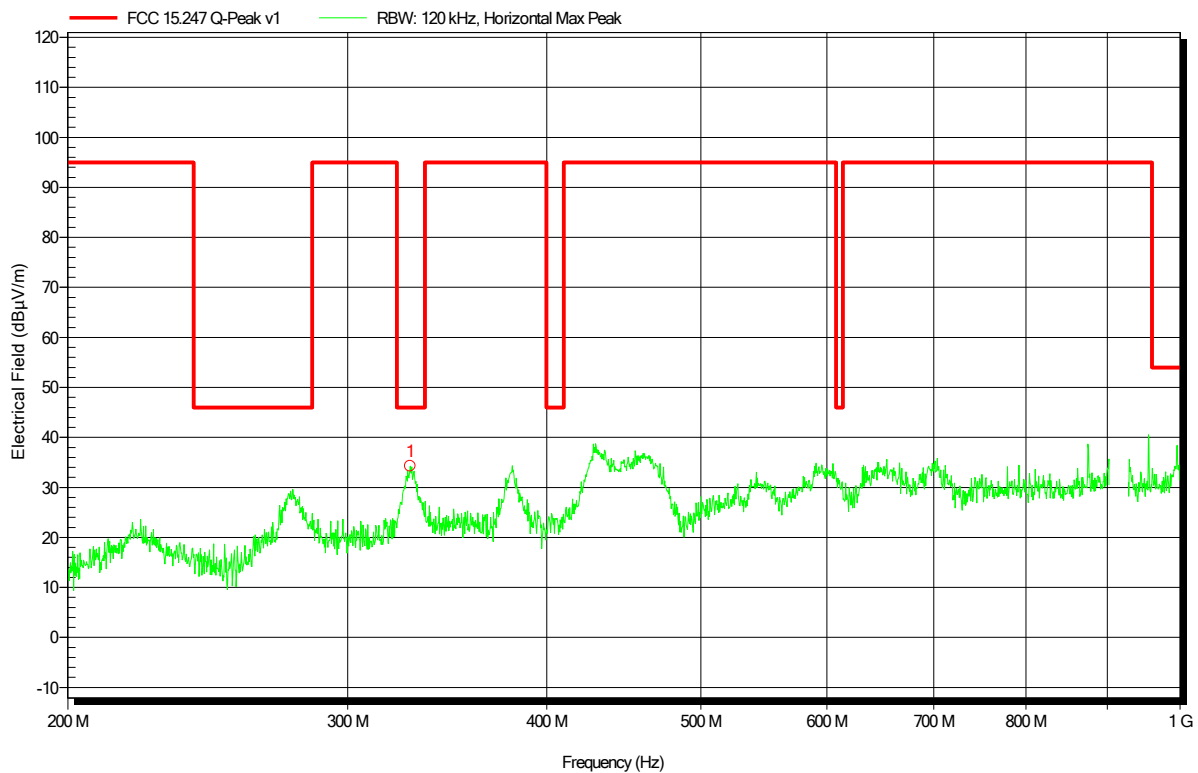


Frequency	Peak	Peak Limit	Peak Difference	Status
328.3077 MHz	34.3 dBµV/m	46 dBµV/m	-11.72 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
EUT Name: Meter Transmit Unit
Model: Ready MTU
Test Site: Eurofins Product Service Germany
Operator: Mr. Jahn
Measurement software: RadiMation, version 2016.1.10
Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
Antenna: Rohde & Schwarz HL 223, Vertical
Measurement distance: 3 m
Mode: TX; 915 MHz; wall antenna
Test Date: 2020-04-17
Note:

Index 51

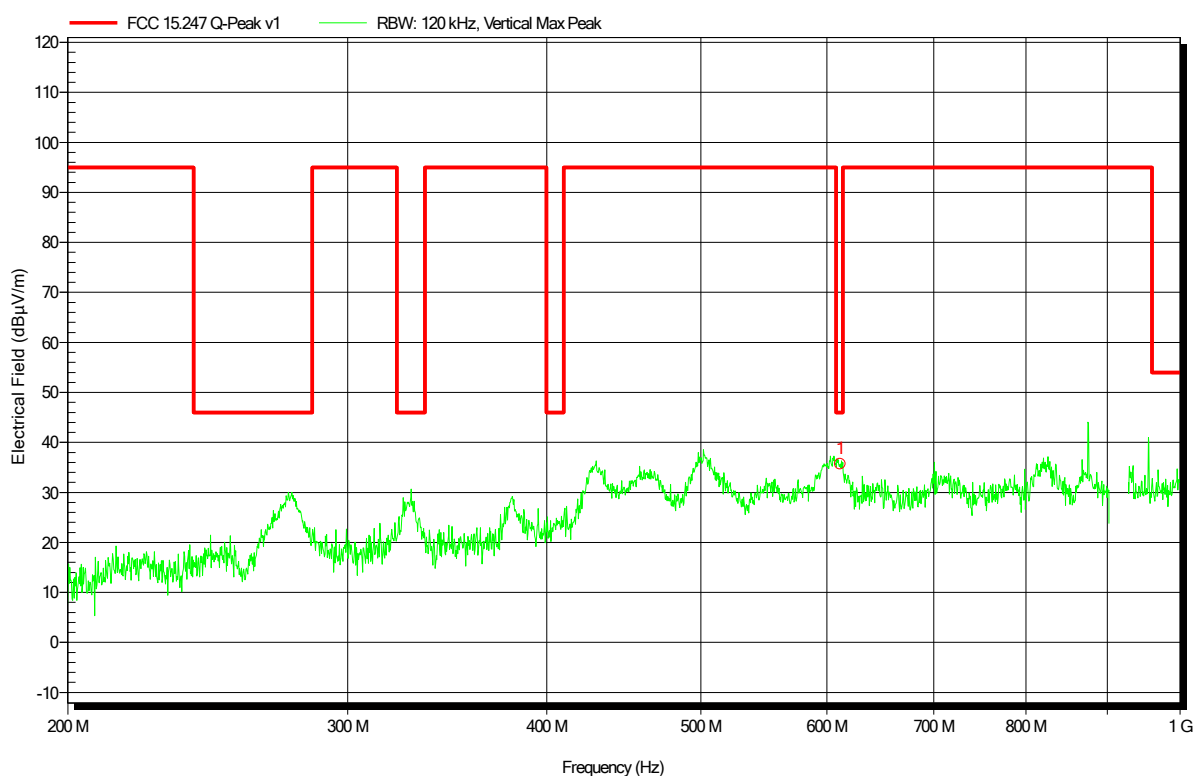


Frequency	Peak	Peak Limit	Peak Difference	Status
611.5214 MHz	35.6 dBµV/m	46 dBµV/m	-10.35 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868
 Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Jahn
 Measurement software: RadiMation, version 2016.1.10
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Rohde & Schwarz HK 116, Horizontal
 Measurement distance: 3 m
 Mode: TX; 918.5 MHz; pit antenna
 Test Date: 2020-04-17
 Note:

Index 37

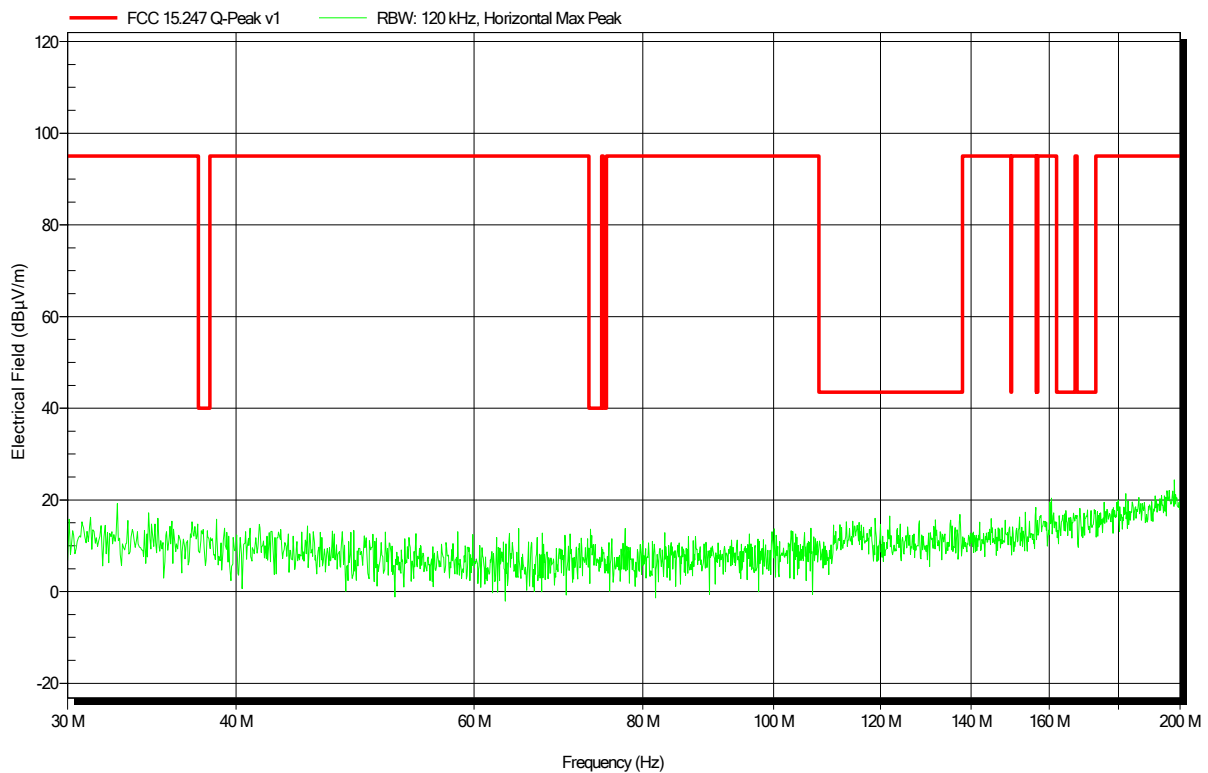


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
EUT Name: Meter Transmit Unit
Model: Ready MTU
Test Site: Eurofins Product Service Germany
Operator: Mr. Jahn
Measurement software: RadiMation, version 2016.1.10
Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
Antenna: Rohde & Schwarz HK 116, Vertical
Measurement distance: 3 m
Mode: TX; 918.5 MHz; pit antenna
Test Date: 2020-04-17
Note:

Index 38

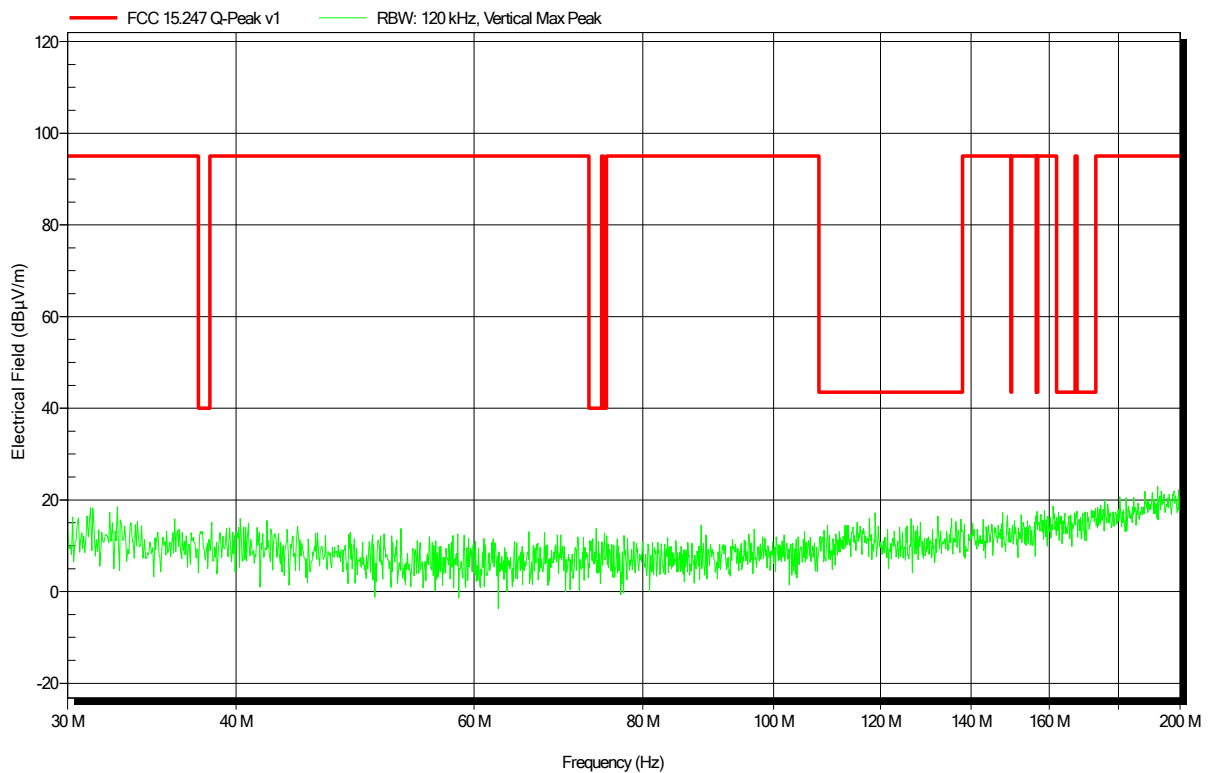


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Jahn
 Measurement software: RadiMation, version 2016.1.10
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement distance: 3 m
 Mode: TX; 918.5 MHz; pit antenna
 Test Date: 2020-04-17
 Note:

Index 57

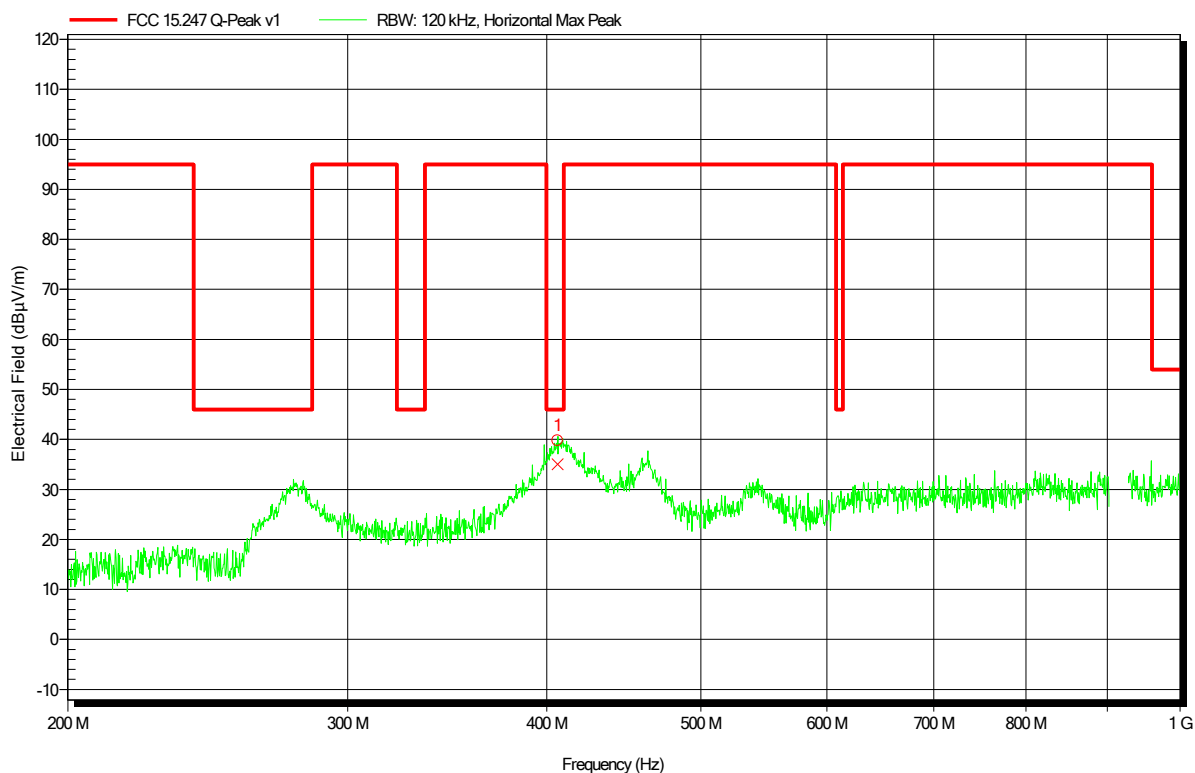


Frequency 406.3551 MHz	Peak 39.8 dBµV/m	Peak Limit 46 dBµV/m	Peak Difference -6.25 dB	Status Pass
Frequency 406.3551 MHz	Quasi-Peak 35 dBµV/m	Quasi-Peak Limit 46 dBµV/m	Quasi-Peak Difference -10.96 dB	Quasi-Peak Status Pass

Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Jahn
 Measurement software: RadiMation, version 2016.1.10
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement distance: 3 m
 Mode: TX; 918.5 MHz; pit antenna
 Test Date: 2020-04-17
 Note:

Index 58

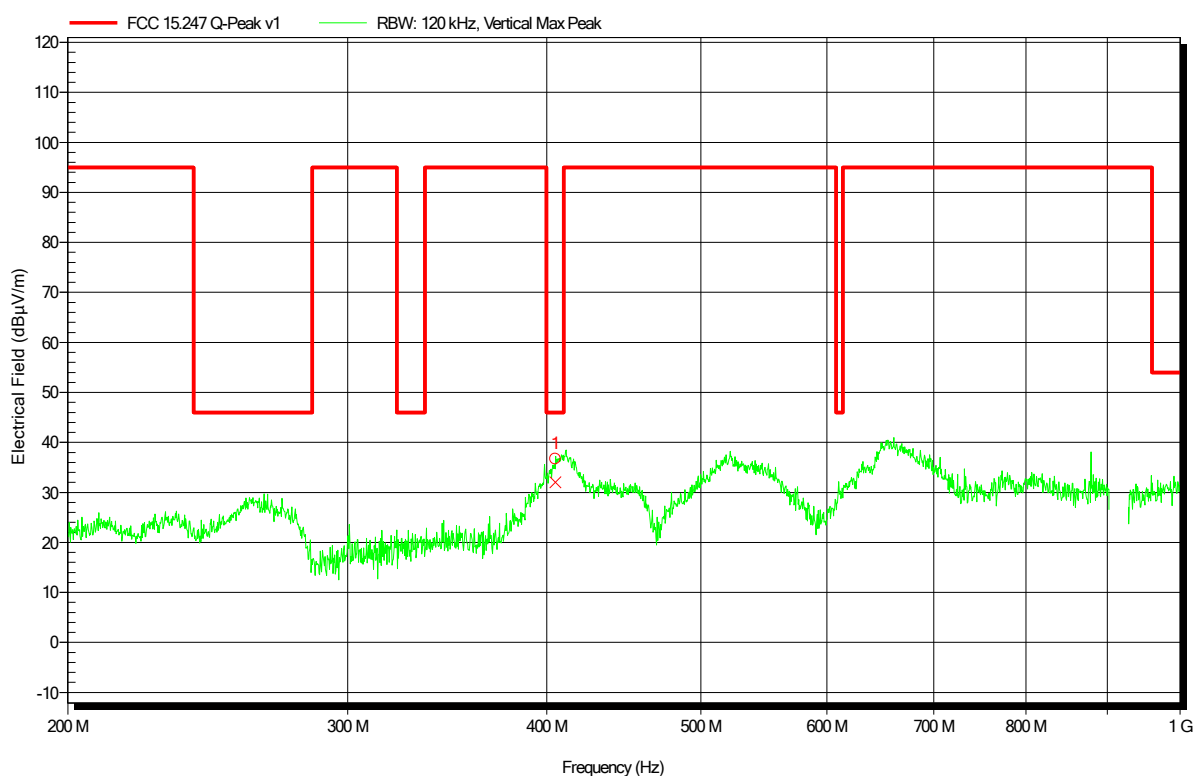


Frequency 405.1182 MHz	Peak 36.7 dBμV/m	Peak Limit 46 dBμV/m	Peak Difference -9.31 dB	Status Pass
Frequency 405.1182 MHz	Quasi-Peak 32 dBμV/m	Quasi-Peak Limit 46 dBμV/m	Quasi-Peak Difference -13.98 dB	Quasi-Peak Status Pass

Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Jahn
 Measurement software: RadiMation, version 2016.1.10
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Rohde & Schwarz HK 116, Horizontal
 Measurement distance: 3 m
 Mode: TX; 918.5 MHz; rod antenna
 Test Date: 2020-04-17
 Note:


Index 41

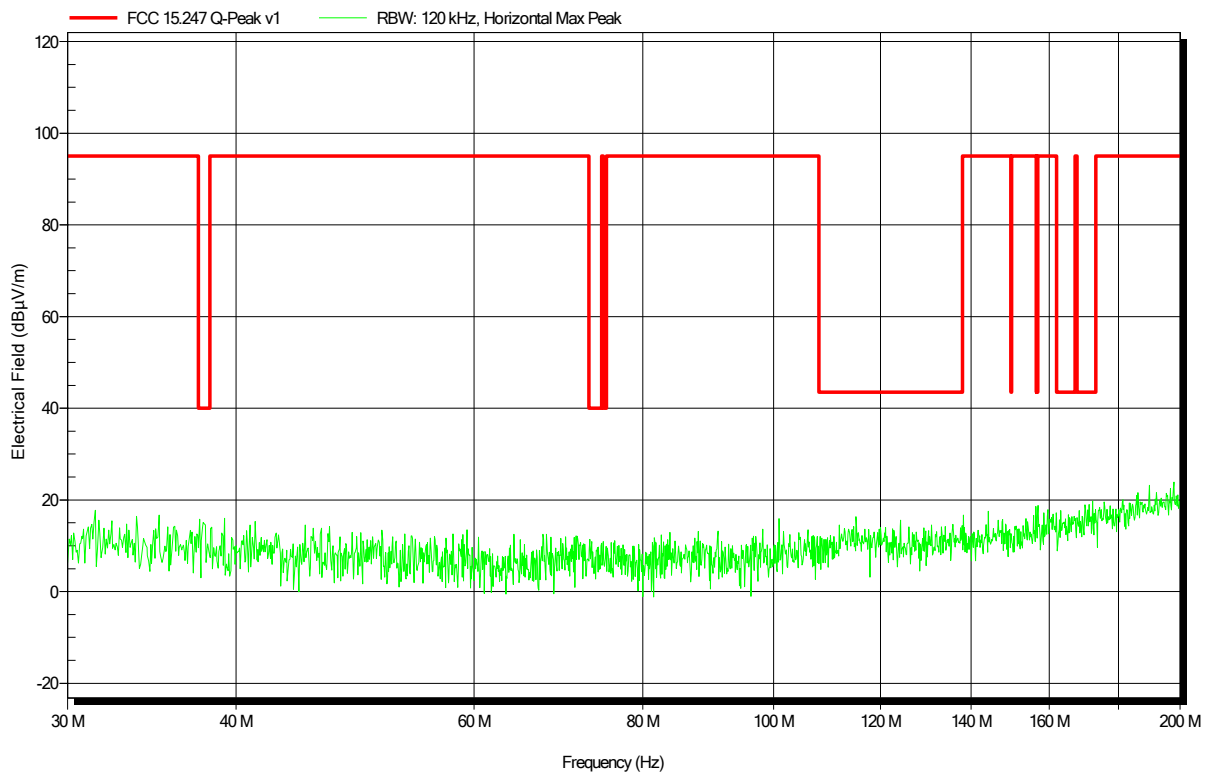

Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868
 Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Jahn
 Measurement software: RadiMation, version 2016.1.10
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Rohde & Schwarz HK 116, Vertical
 Measurement distance: 3 m
 Mode: TX; 918.5 MHz; rod antenna
 Test Date: 2020-04-17
 Note:


Index 42

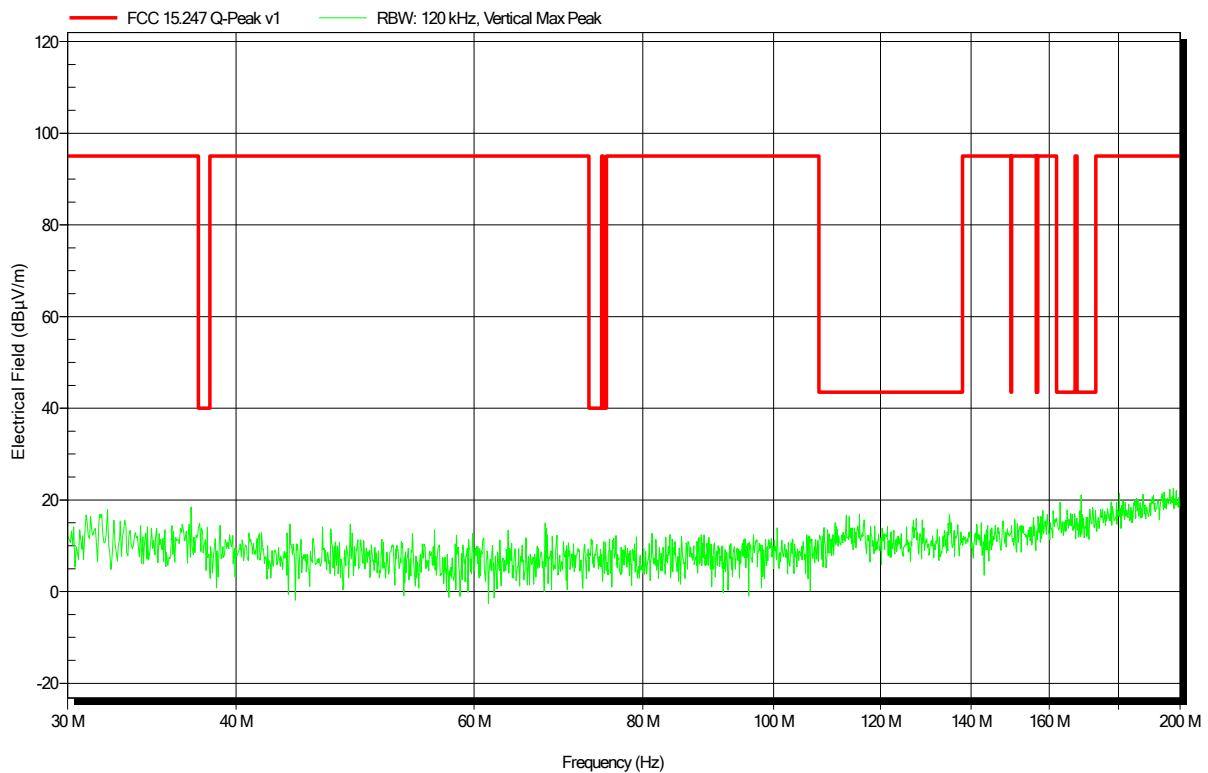

Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868
 Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Jahn
 Measurement software: RadiMation, version 2016.1.10
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Rohde & Schwarz HK 116, Horizontal
 Measurement distance: 3 m
 Mode: TX; 918.5 MHz; wall antenna
 Test Date: 2020-04-17
 Note:


Index 40

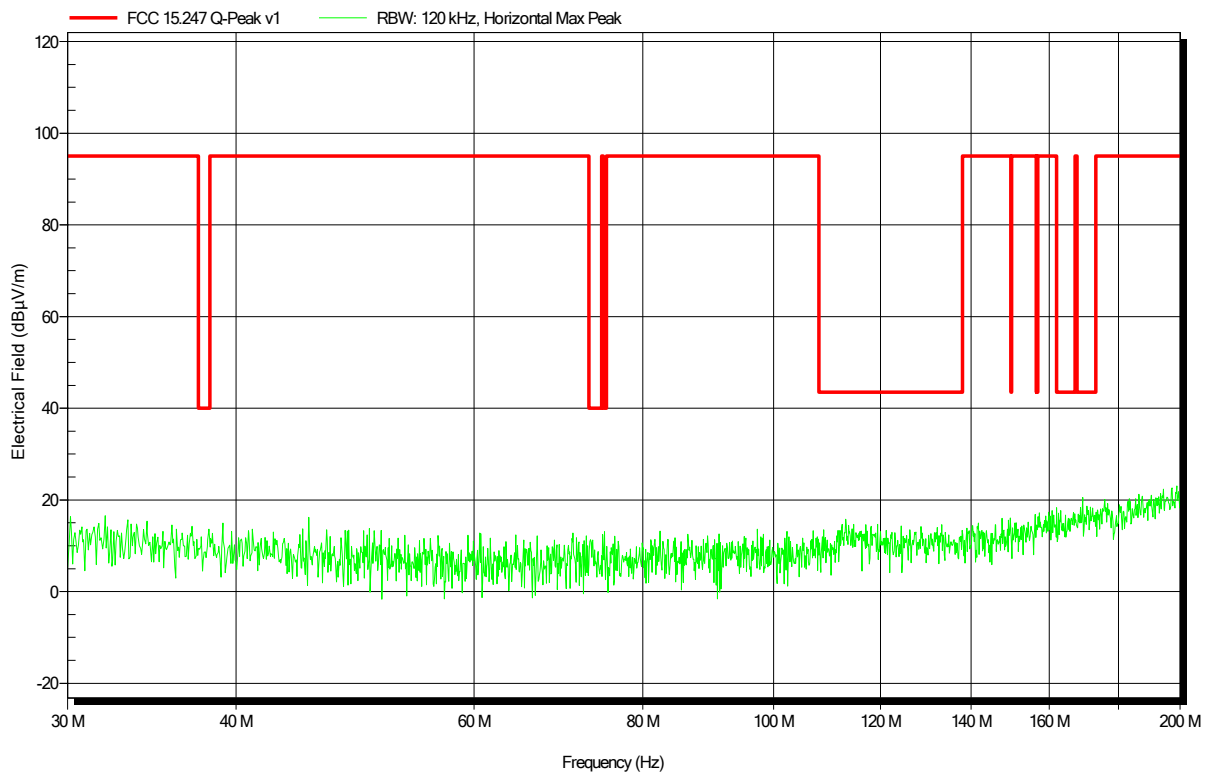

Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868
 Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Jahn
 Measurement software: RadiMation, version 2016.1.10
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Rohde & Schwarz HK 116, Vertical
 Measurement distance: 3 m
 Mode: TX; 918.5 MHz; wall antenna
 Test Date: 2020-04-17
 Note:

Index 39

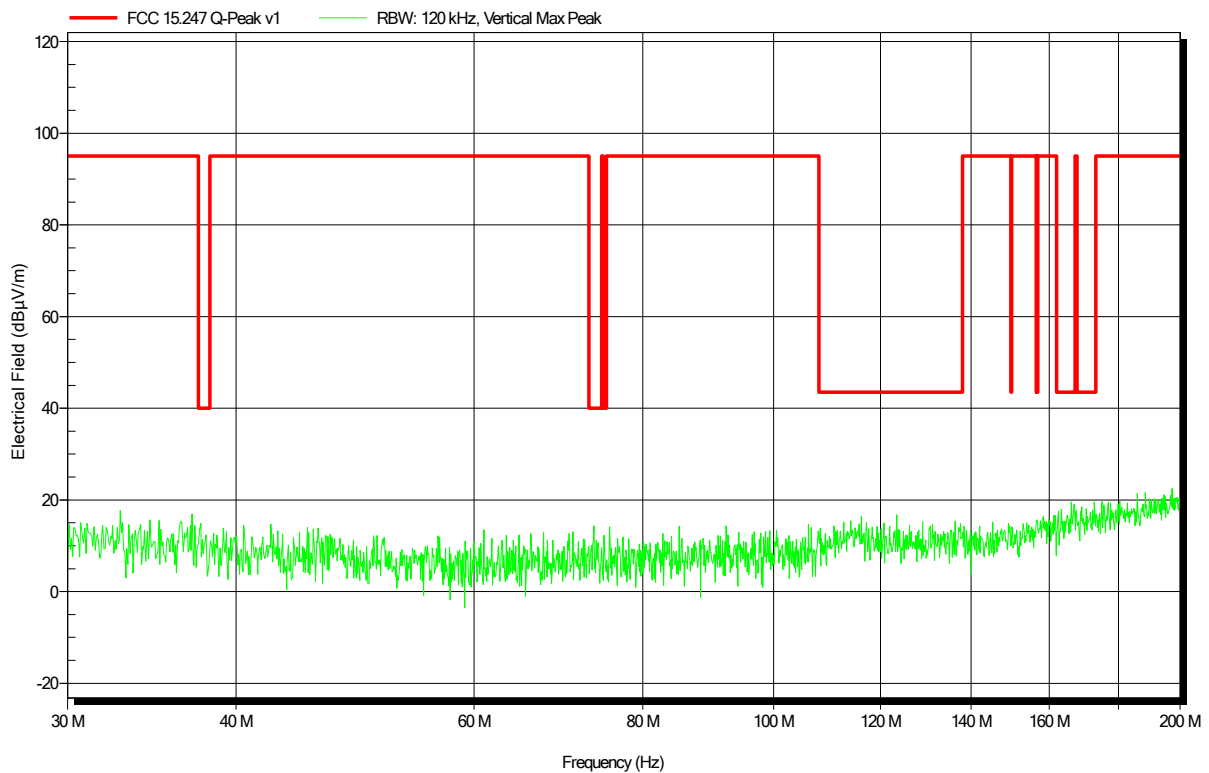


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Jahn
 Measurement software: RadiMation, version 2016.1.10
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement distance: 3 m
 Mode: TX; 918.5 MHz; wall antenna
 Test Date: 2020-04-17
 Note:

Index 60

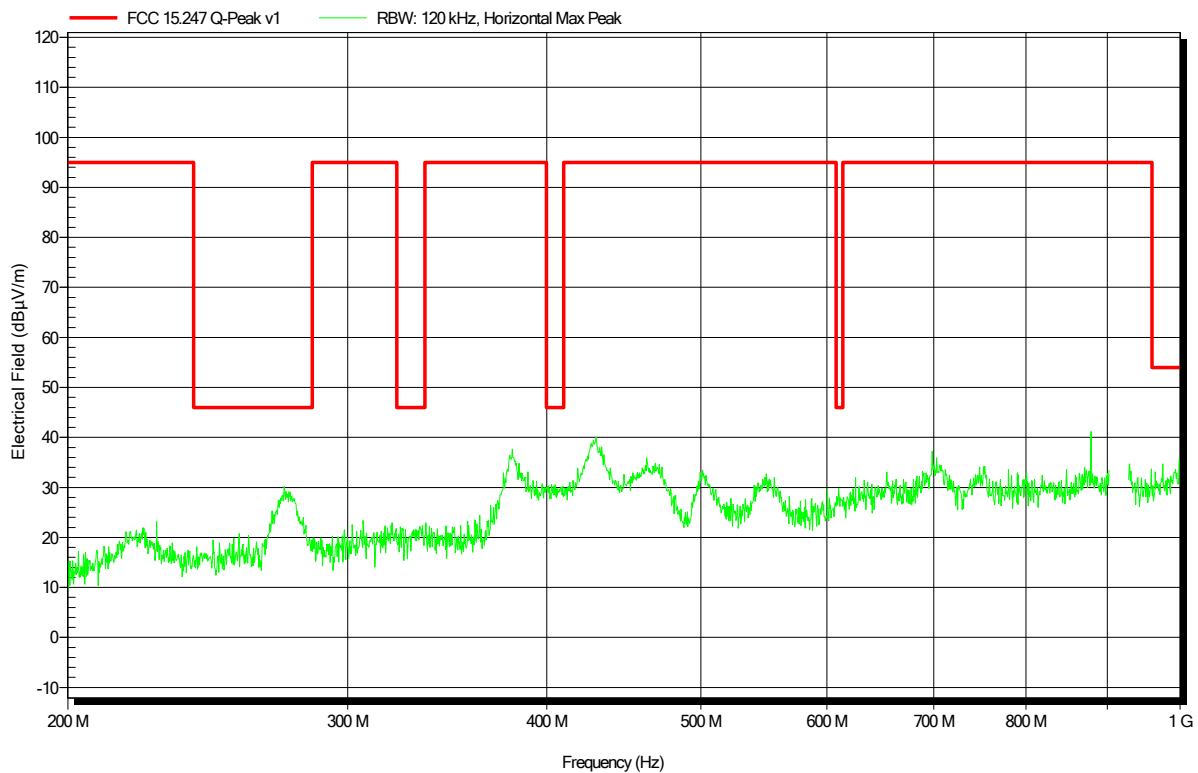


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Jahn
 Measurement software: RadiMation, version 2016.1.10
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement distance: 3 m
 Mode: TX; 918.5 MHz; wall antenna
 Test Date: 2020-04-17
 Note:

Index 61

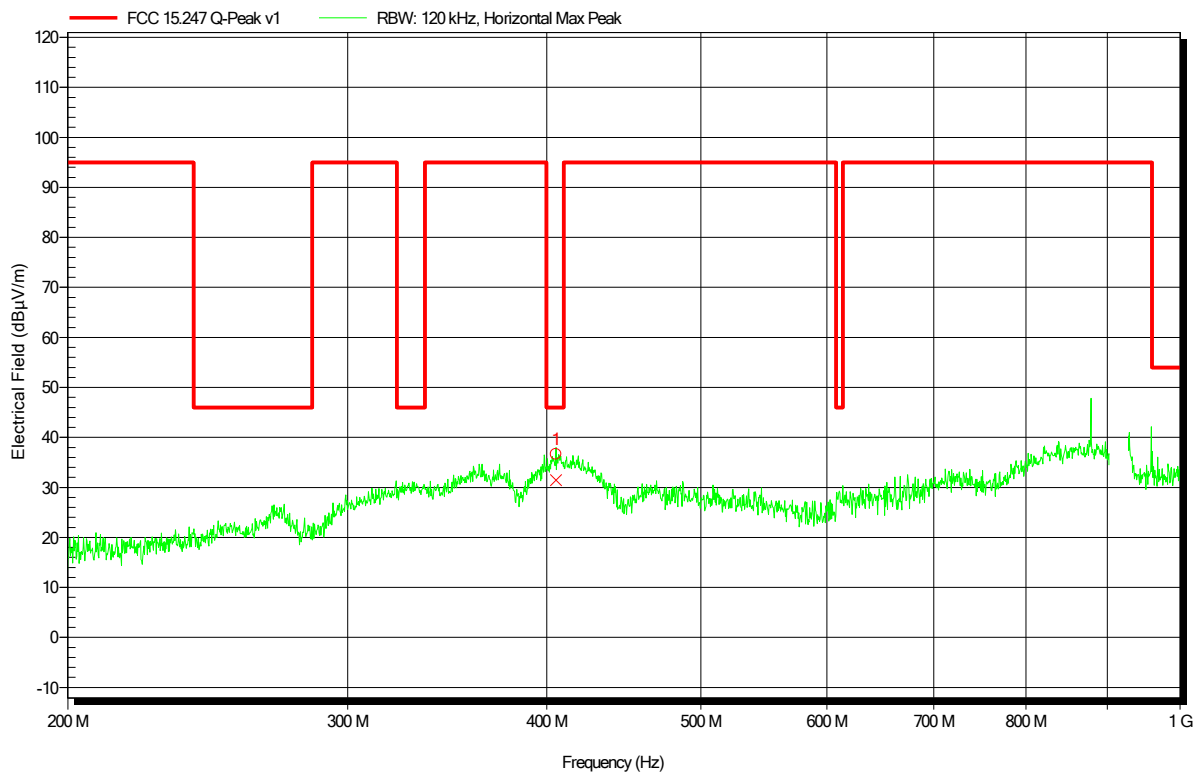


Frequency 405.4004 MHz	Peak 36.6 dBµV/m	Peak Limit 46 dBµV/m	Peak Difference -9.4 dB	Status Pass
Frequency 405.4004 MHz	Quasi-Peak 31.4 dBµV/m	Quasi-Peak Limit 46 dBµV/m	Quasi-Peak Difference -14.56 dB	Quasi-Peak Status Pass

Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
EUT Name: Meter Transmit Unit
Model: Ready MTU
Test Site: Eurofins Product Service Germany
Operator: Mr. Jahn
Measurement software: RadiMation, version 2016.1.10
Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
Antenna: Rohde & Schwarz HL 223, Vertical
Measurement distance: 3 m
Mode: TX; 918.5 MHz; wall antenna
Test Date: 2020-04-17
Note:

Index 59

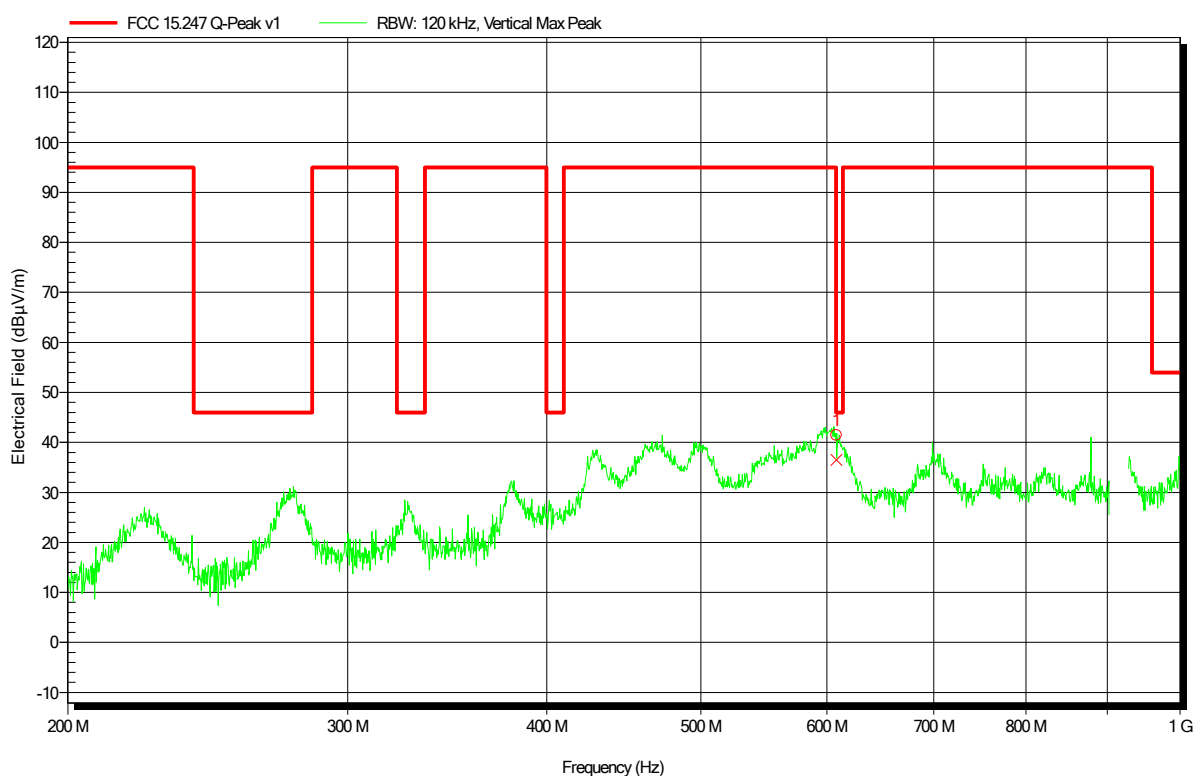


Frequency 608.3272 MHz	Peak 41.5 dBμV/m	Peak Limit 46 dBμV/m	Peak Difference -4.55 dB	Status Pass
Frequency 608.3272 MHz	Quasi-Peak 36.5 dBμV/m	Quasi-Peak Limit 46 dBμV/m	Quasi-Peak Difference -9.47 dB	Quasi-Peak Status Pass

Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868
 Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Jahn
 Measurement software: RadiMation, version 2016.1.10
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement distance: 3 m
 Mode: TX; 918.5 MHz; wall antenna
 Test Date: 2020-04-17
 Note:

Index 62

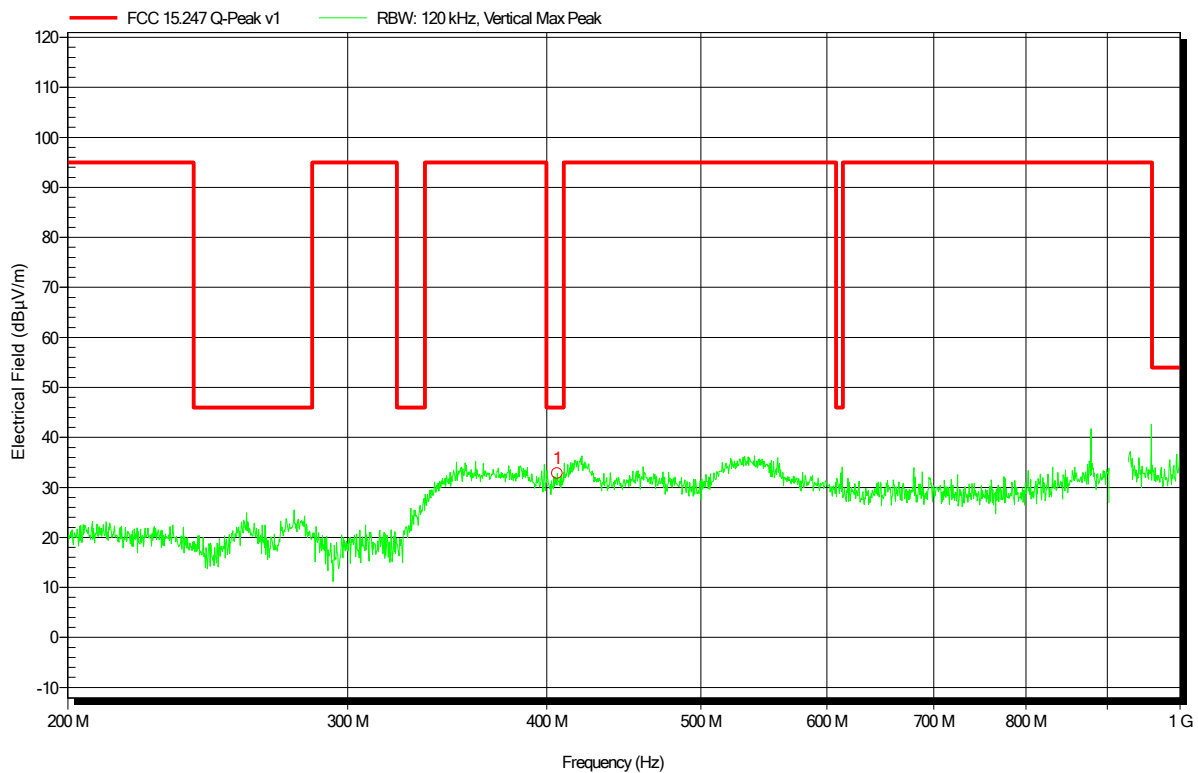


Frequency	Peak	Peak Limit	Peak Difference	Status
406.181 MHz	32.8 dBµV/m	46 dBµV/m	-13.19 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 912.5 MHz; pit antenna
 Test Date: 2020-04-20
 Note:

Index 75

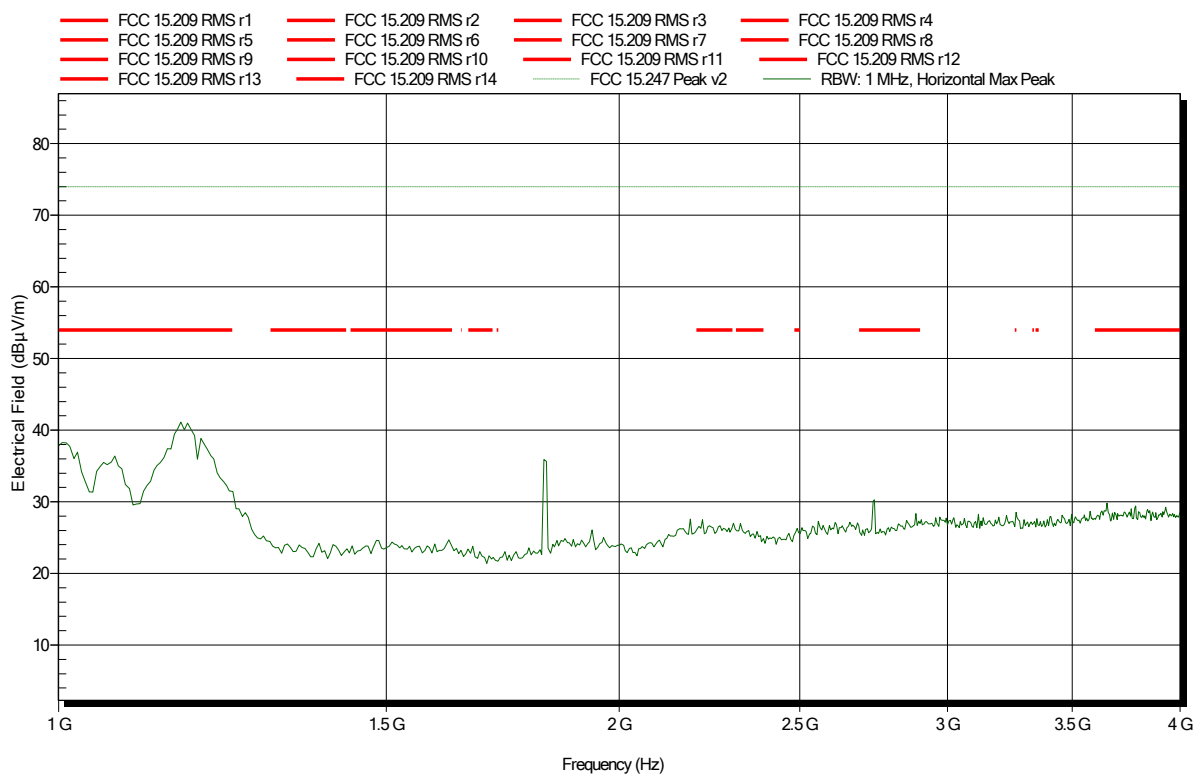


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
EUT Name: Meter Transmit Unit
Model: Ready MTU
Test Site: Eurofins Product Service Germany
Operator: Toralf Jahn
Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; 912.5 MHz; pit antenna
Test Date: 2020-04-20
Note:

Index 78

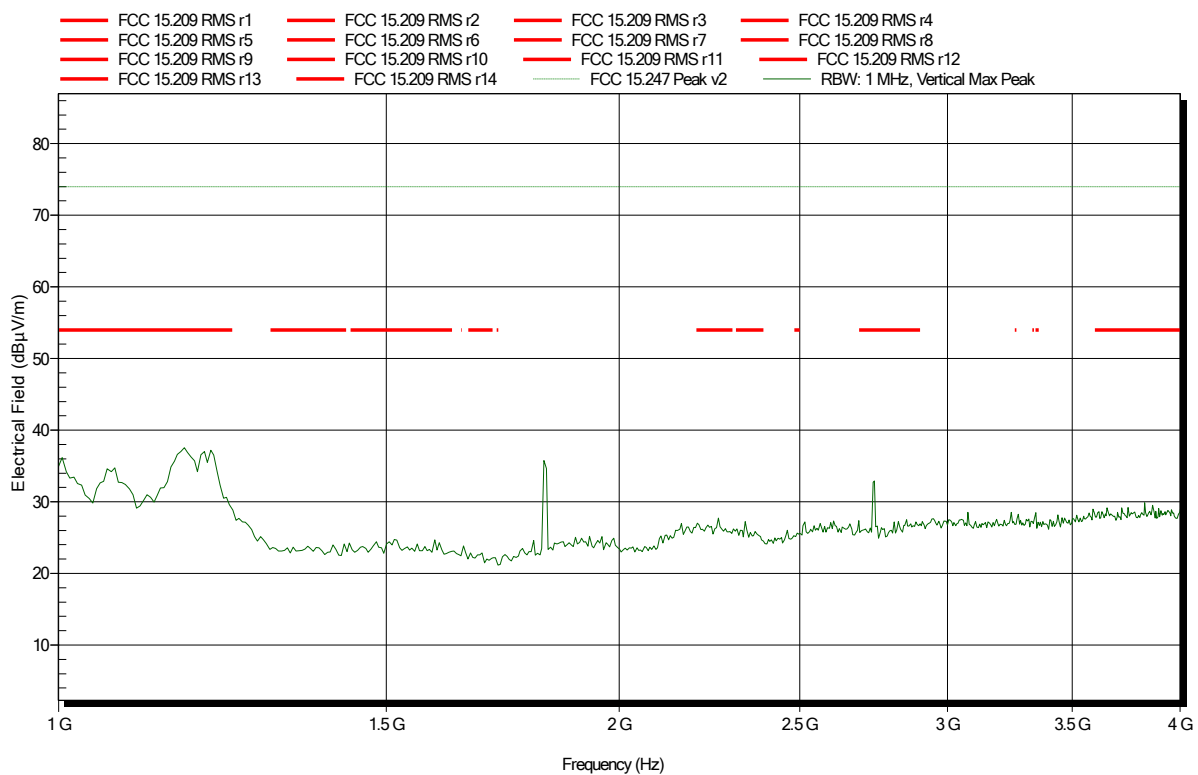


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 912.5 MHz; pit antenna
 Test Date: 2020-04-20
 Note:

Index 76

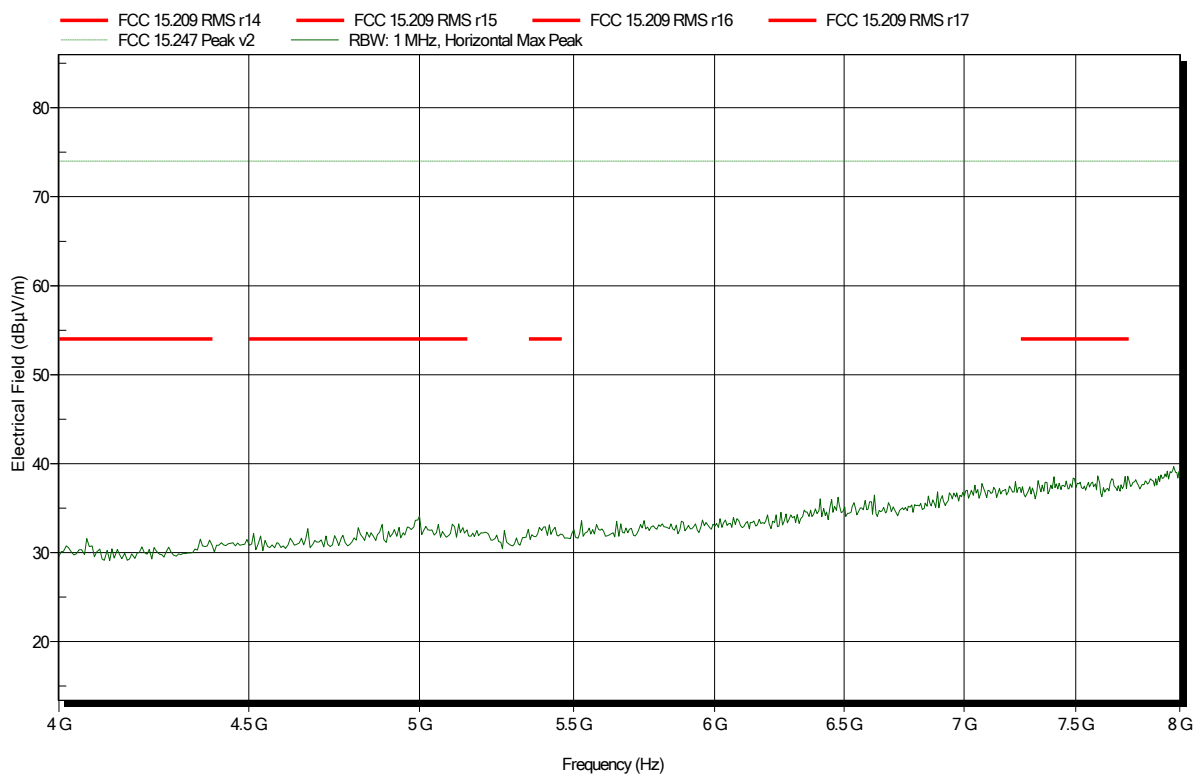


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Measurement software: RadiMation, version 2016.1.10
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m, converted to 3 m
 Mode: TX; 912.5 MHz; pit antenna
 Test Date: 2020-04-20
 Note:

Index 79

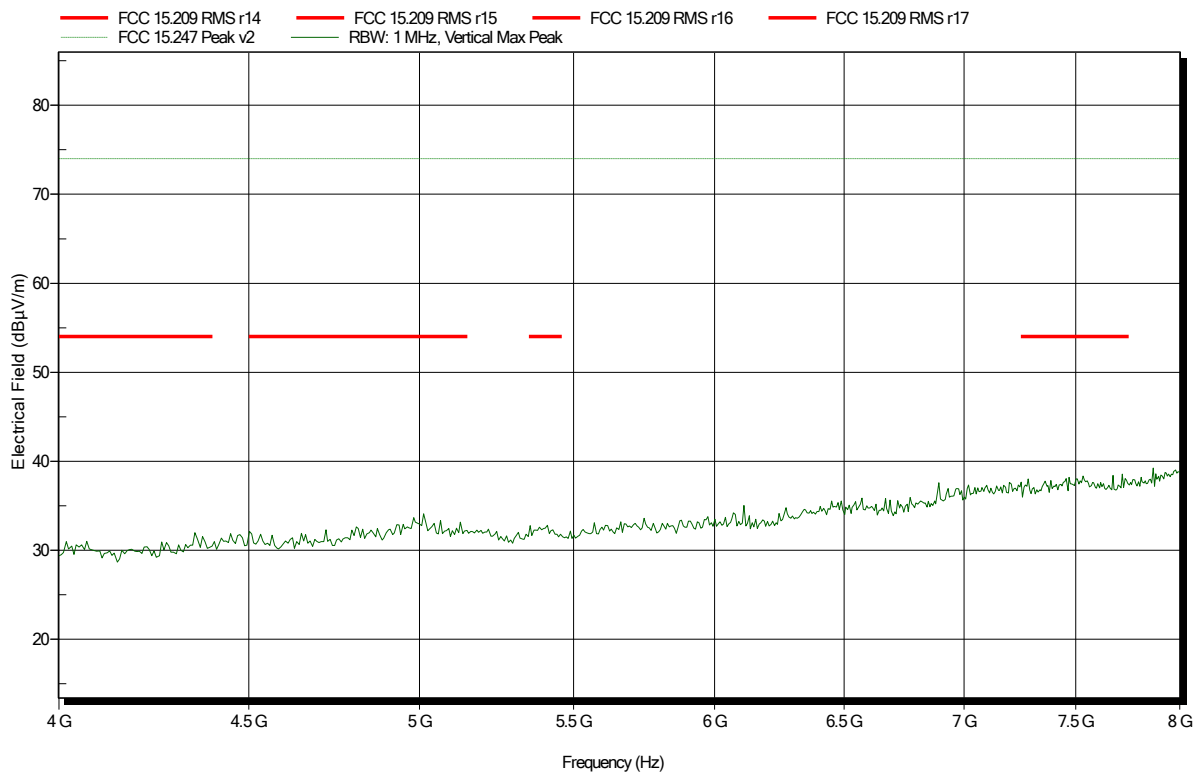


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 912.5 MHz; pit antenna
 Test Date: 2020-04-20
 Note:

Index 77

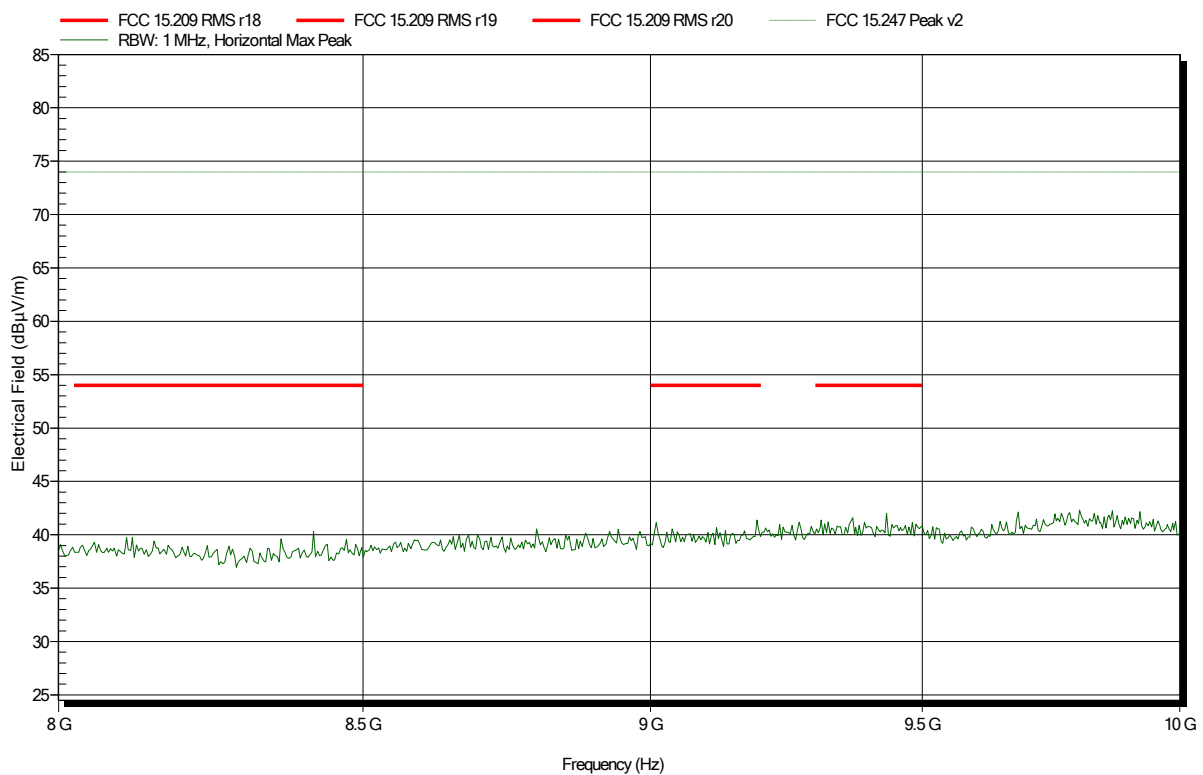


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; 912.5 MHz; pit antenna
 Test Date: 2020-04-20
 Note:

Index 80

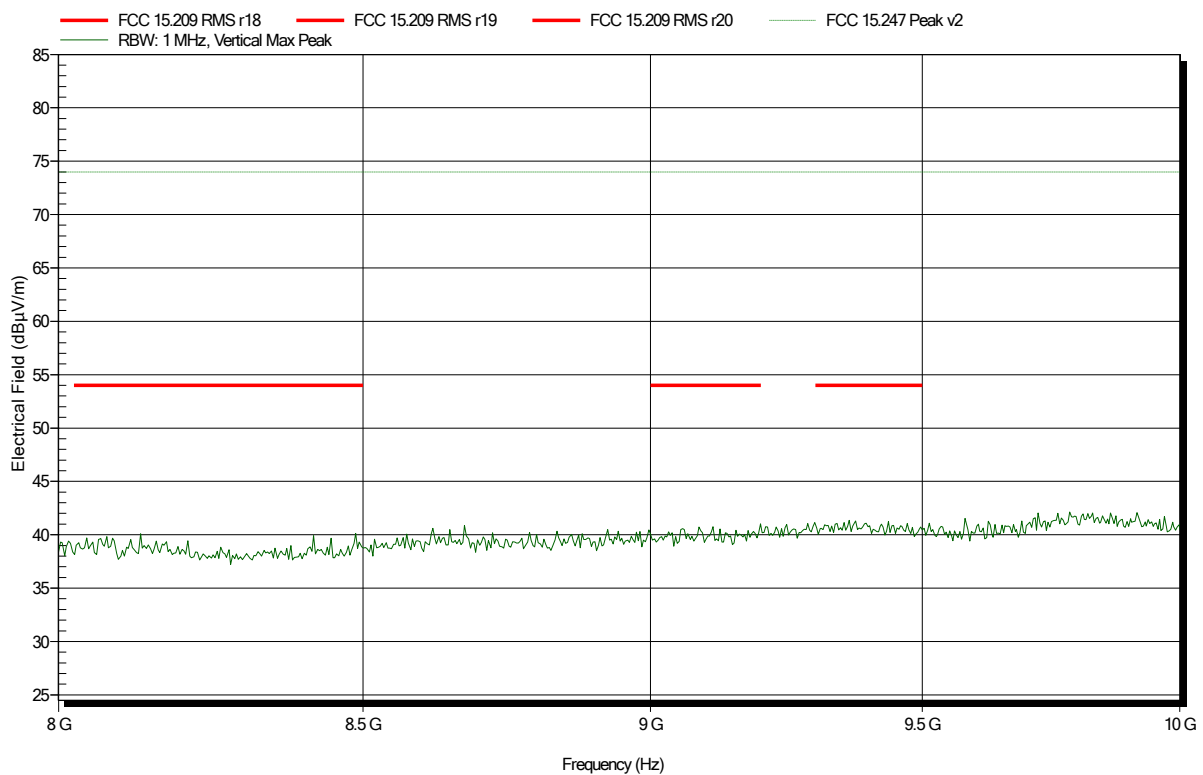


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 912.5 MHz; rod antenna
 Test Date: 2020-04-20
 Note:

Index 99

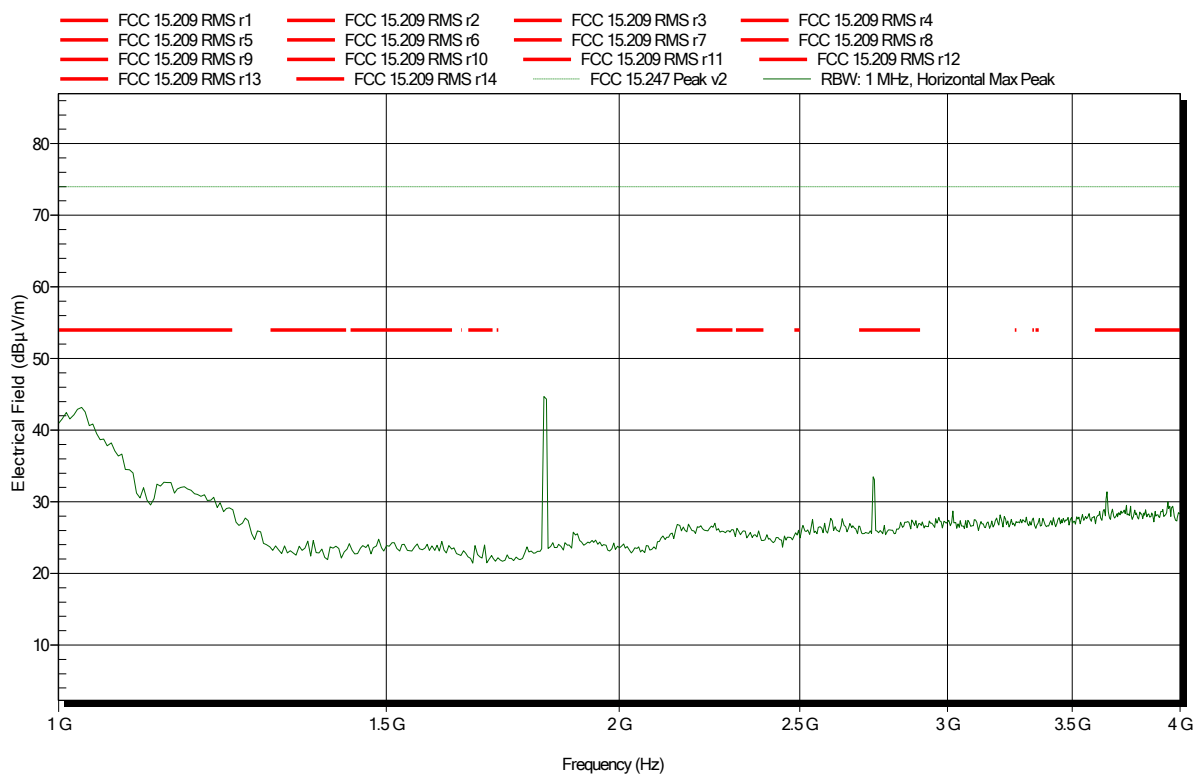


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; 912.5 MHz; rod antenna
 Test Date: 2020-04-20
 Note:


Index 102

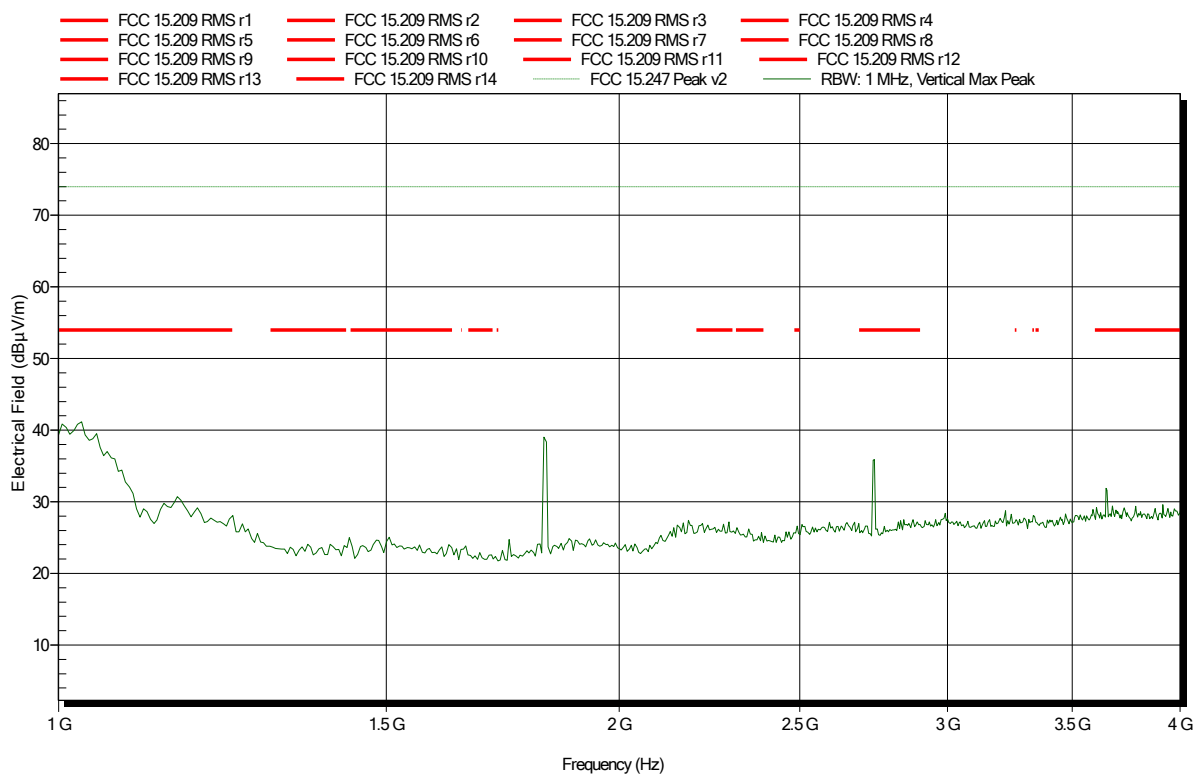

Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868
 Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 912.5 MHz; rod antenna
 Test Date: 2020-04-20
 Note:

Index 100

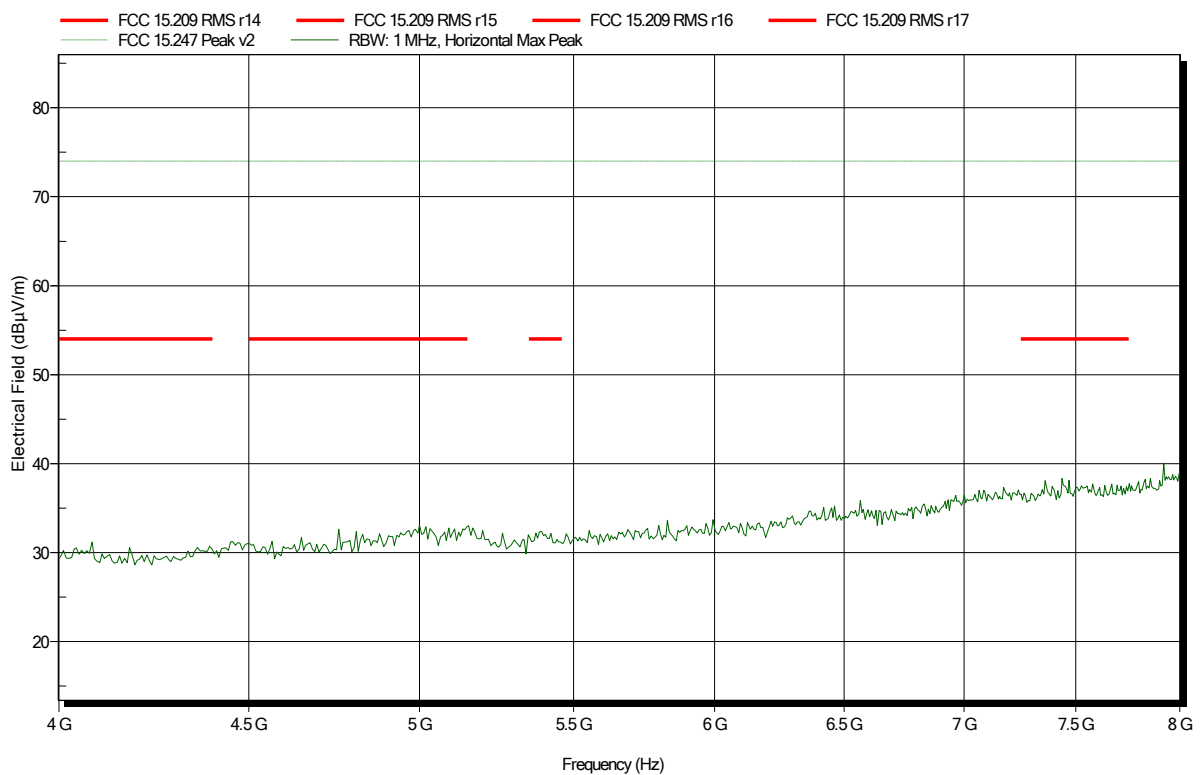


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Measurement software: RadiMation, version 2016.1.10
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m, converted to 3 m
 Mode: TX; 912.5 MHz; rod antenna
 Test Date: 2020-04-20
 Note:


Index 103

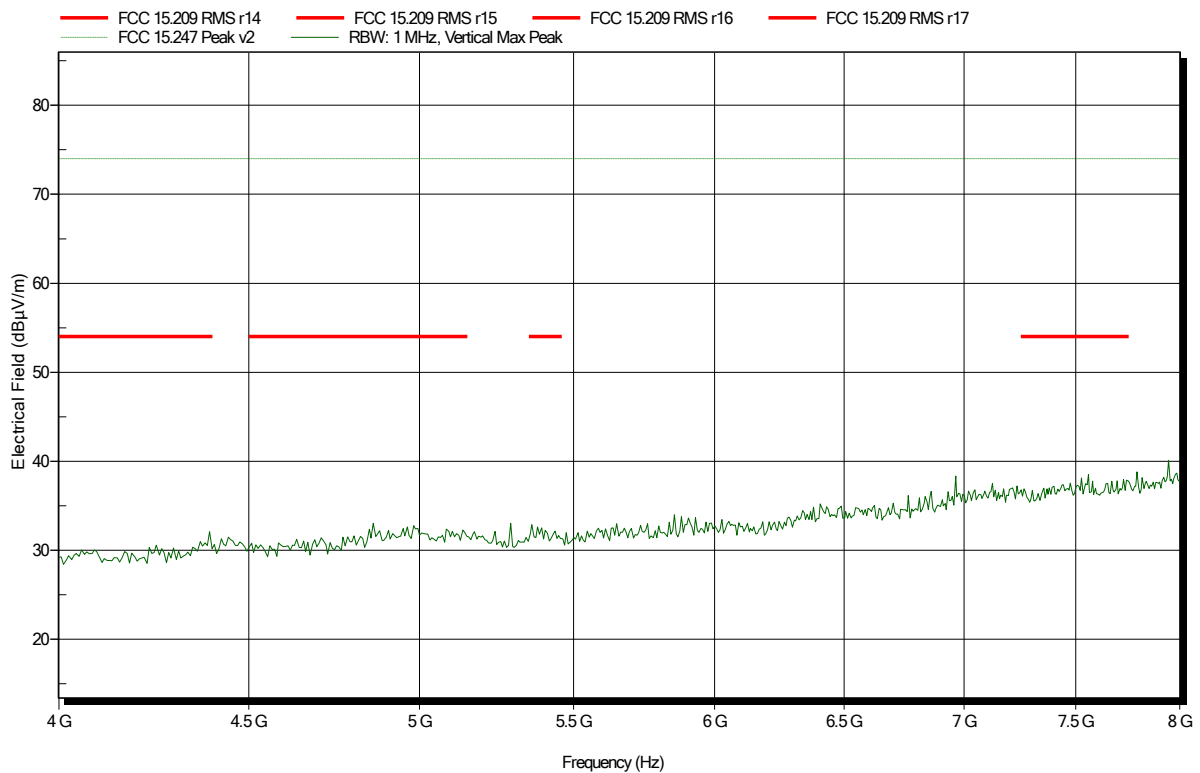

Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868
 Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 912.5 MHz; rod antenna
 Test Date: 2020-04-20
 Note:

Index 101

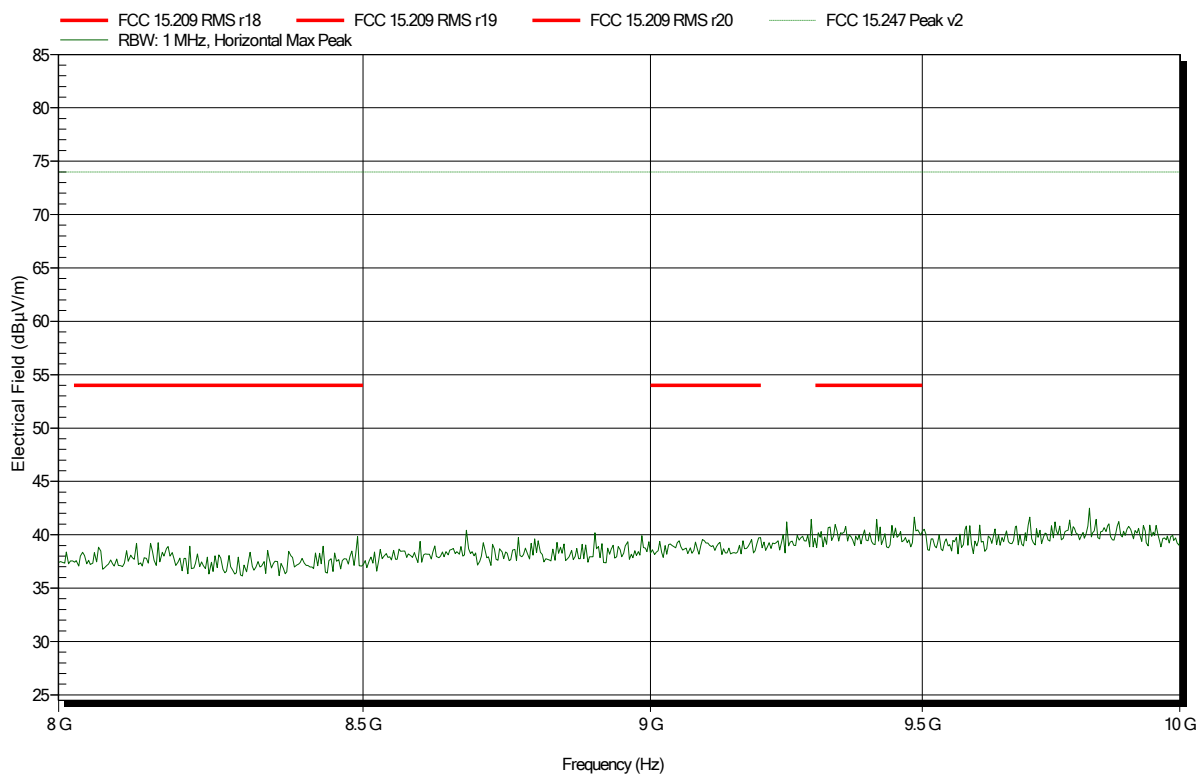


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
EUT Name: Meter Transmit Unit
Model: Ready MTU
Test Site: Eurofins Product Service Germany
Operator: Toralf Jahn
Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; 912.5 MHz; rod antenna
Test Date: 2020-04-20
Note:


Index 104

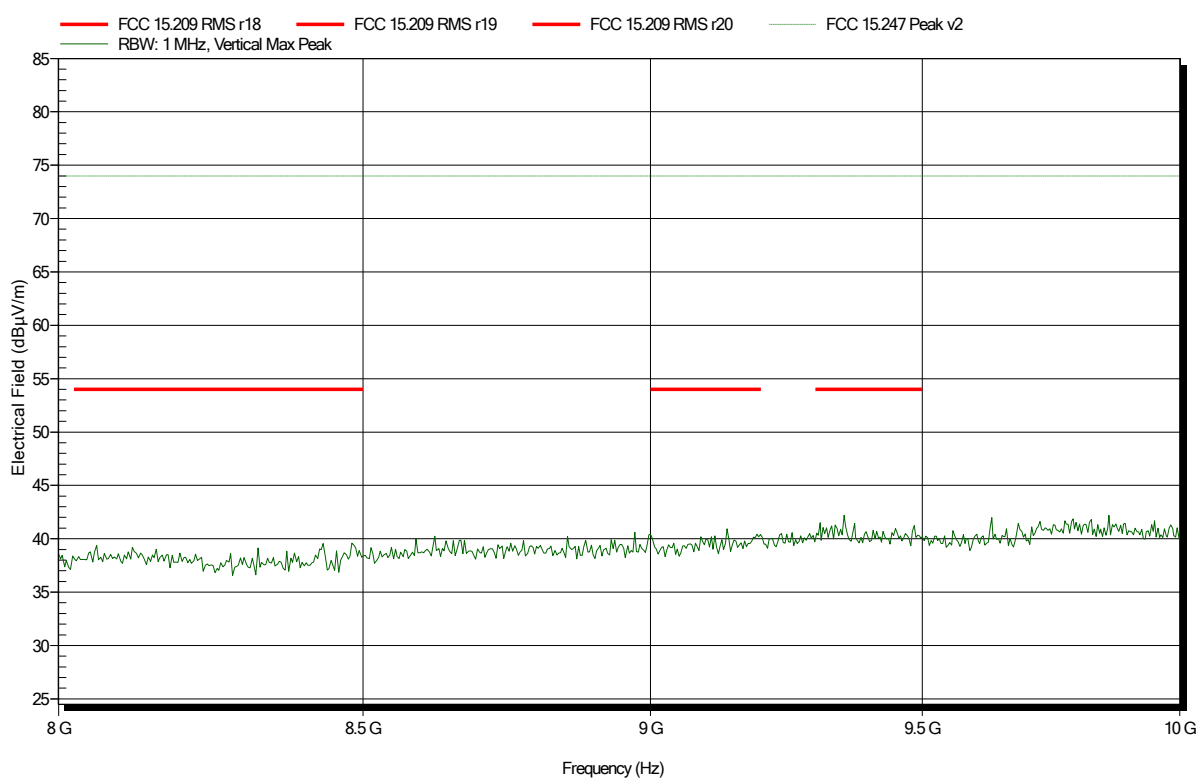

Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868
 Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 912.5 MHz; wall antenna
 Test Date: 2020-04-20
 Note:

Index 105

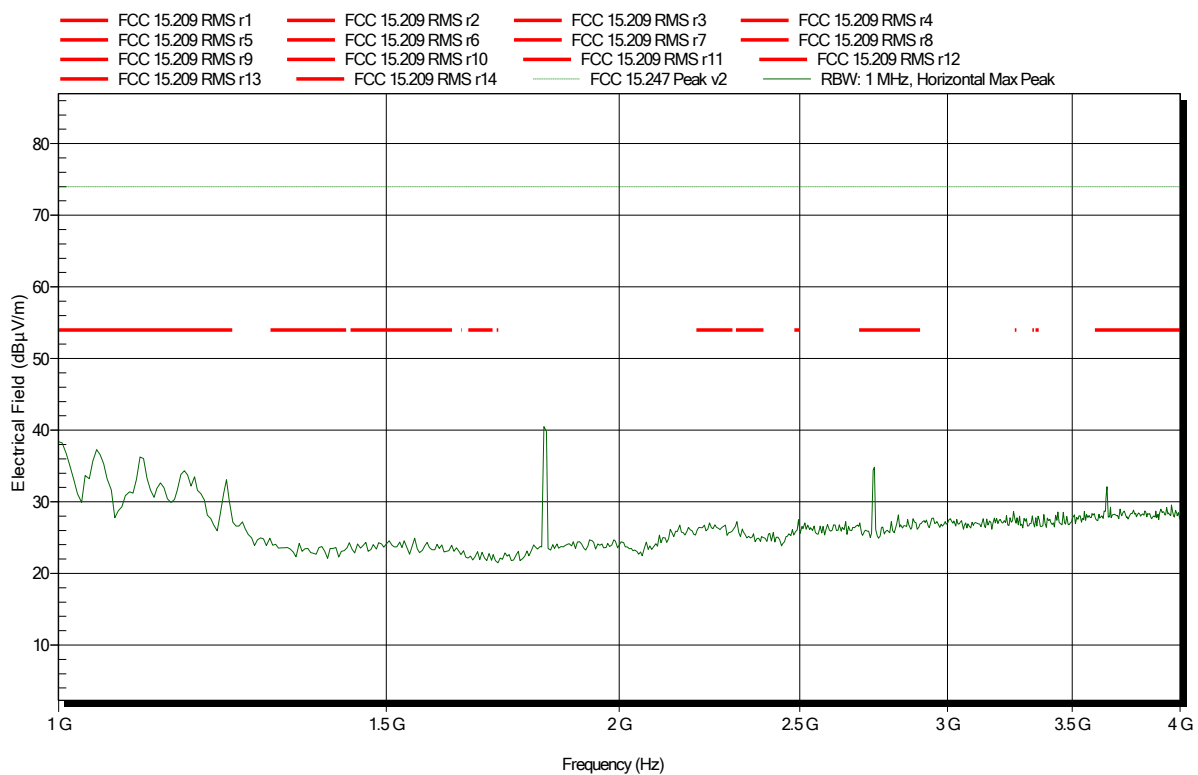


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
EUT Name: Meter Transmit Unit
Model: Ready MTU
Test Site: Eurofins Product Service Germany
Operator: Toralf Jahn
Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; 912.5 MHz; wall antenna
Test Date: 2020-04-20
Note:

Index 108

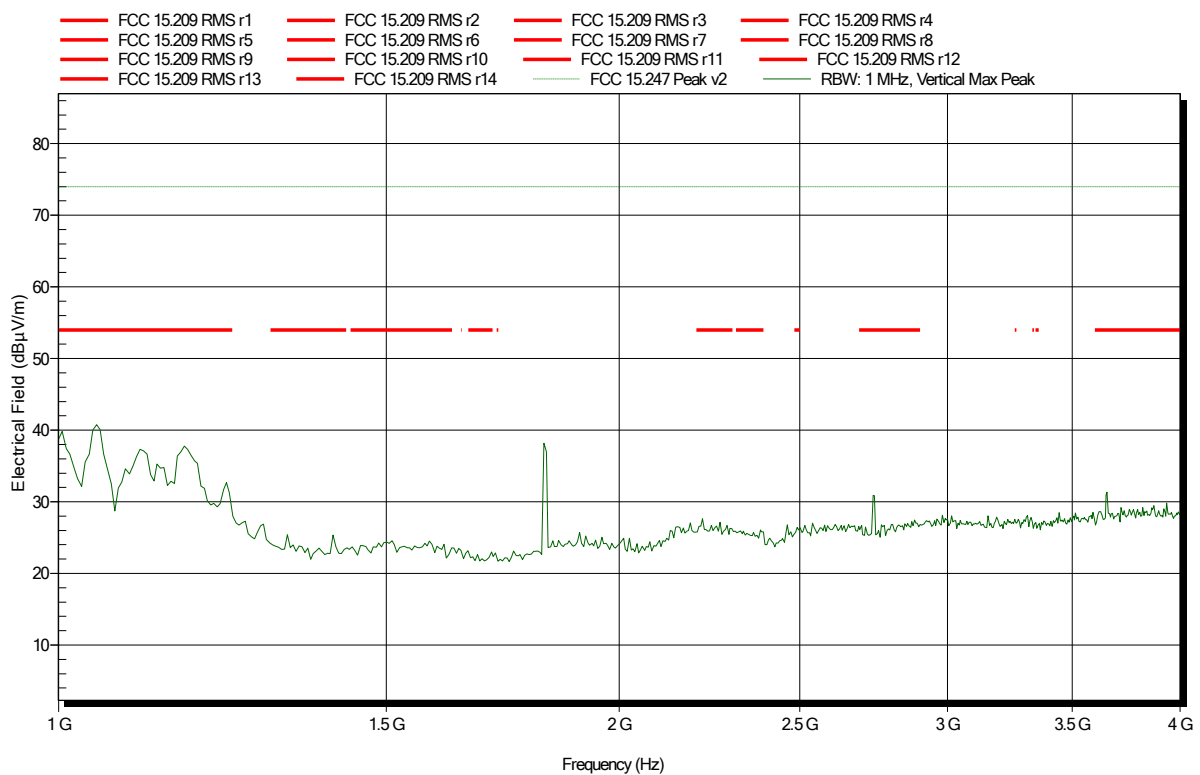


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
EUT Name: Meter Transmit Unit
Model: Ready MTU
Test Site: Eurofins Product Service Germany
Operator: Toralf Jahn
Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 1 m converted to 3m
Mode: TX; 912.5 MHz; wall antenna
Test Date: 2020-04-20
Note:

Index 106

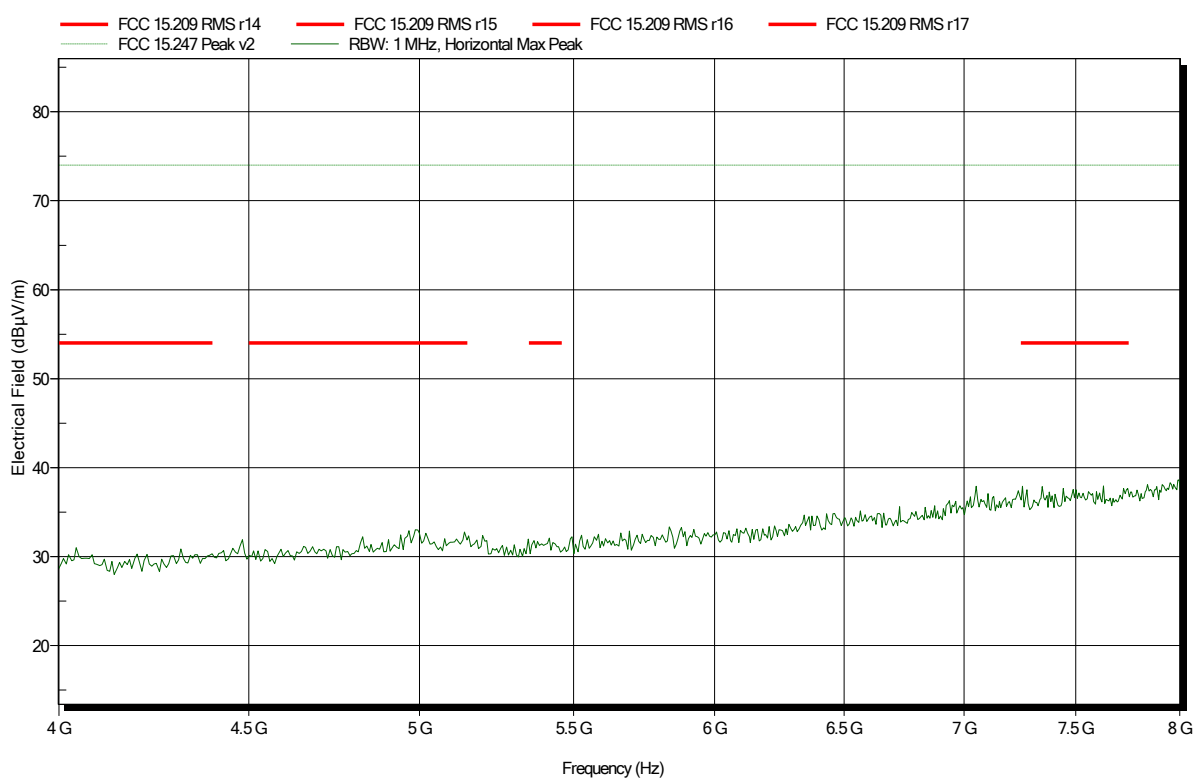


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
EUT Name: Meter Transmit Unit
Model: Ready MTU
Test Site: Eurofins Product Service Germany
Operator: Toralf Jahn
Measurement software: RadiMation, version 2016.1.10
Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m, converted to 3 m
Mode: TX; 912.5 MHz; wall antenna
Test Date: 2020-04-20
Note:

Index 109

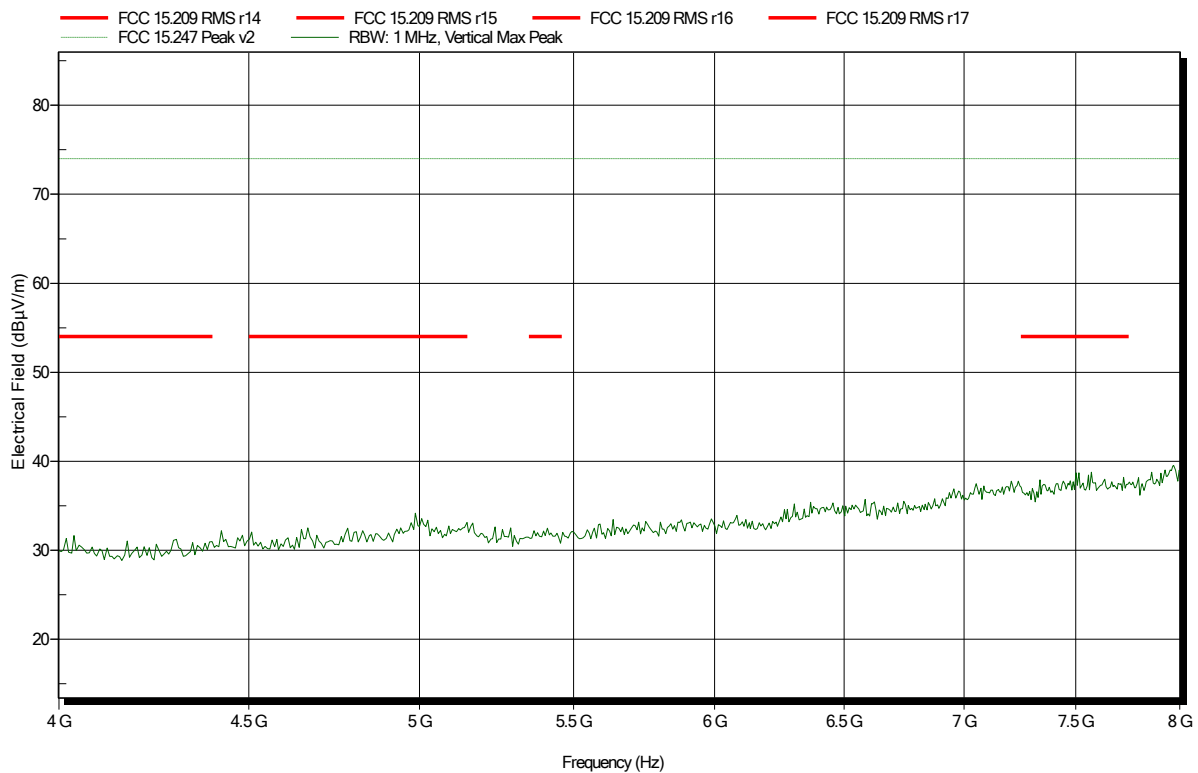


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 912.5 MHz; wall antenna
 Test Date: 2020-04-20
 Note:

Index 107

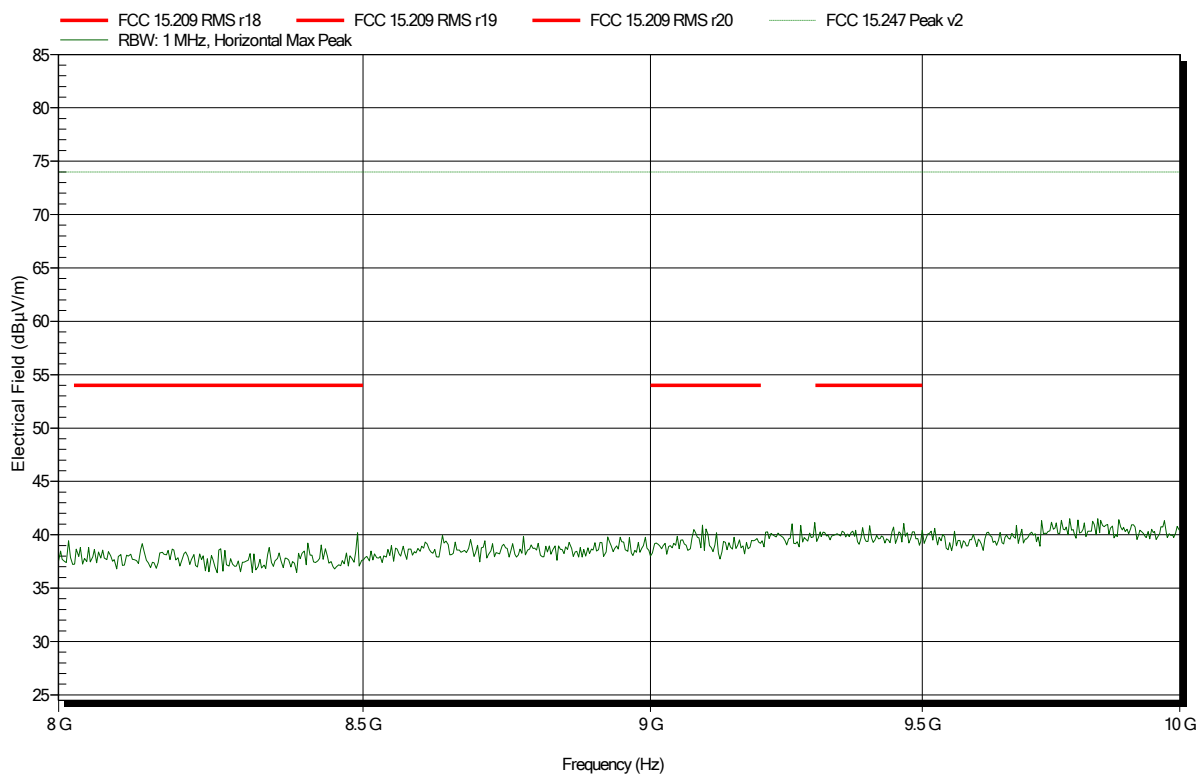


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
EUT Name: Meter Transmit Unit
Model: Ready MTU
Test Site: Eurofins Product Service Germany
Operator: Toralf Jahn
Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; 912.5 MHz; wall antenna
Test Date: 2020-04-20
Note:


Index 110

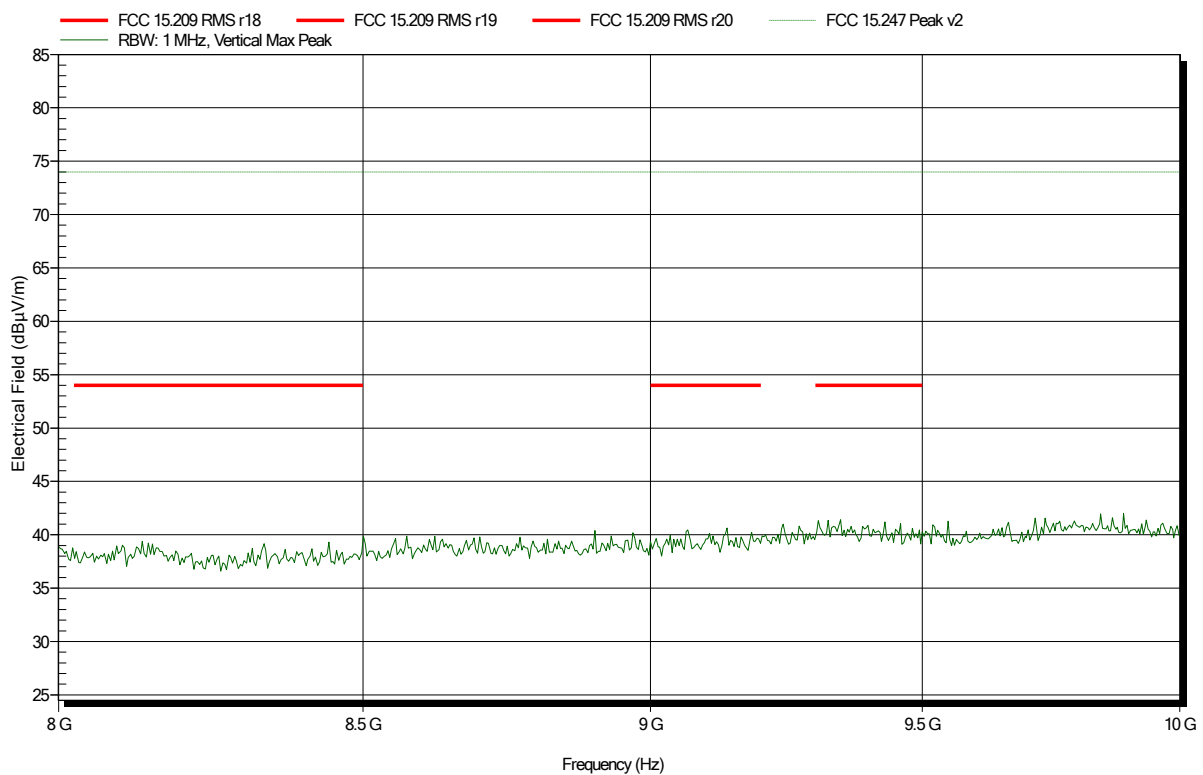

Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868
 Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; pit antenna
 Test Date: 2020-04-20
 Note:

Index 69

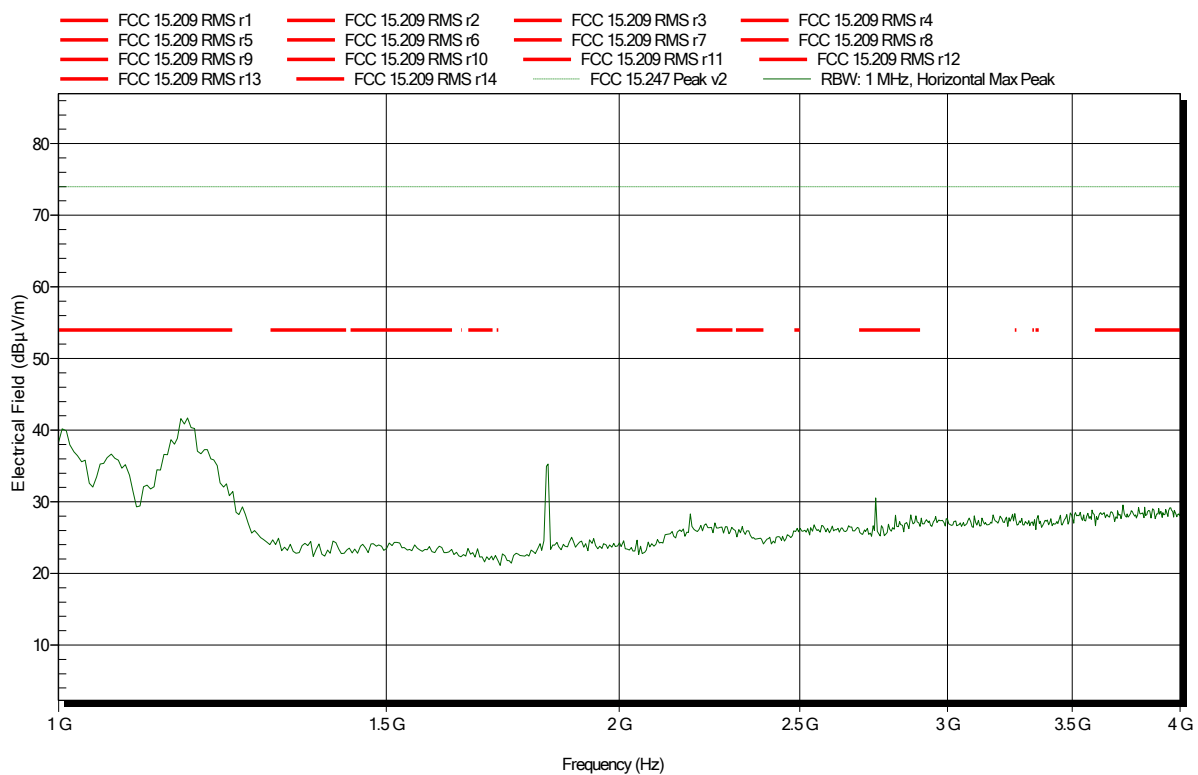


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
EUT Name: Meter Transmit Unit
Model: Ready MTU
Test Site: Eurofins Product Service Germany
Operator: Toralf Jahn
Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; 915 MHz; pit antenna
Test Date: 2020-04-20
Note:

Index 72

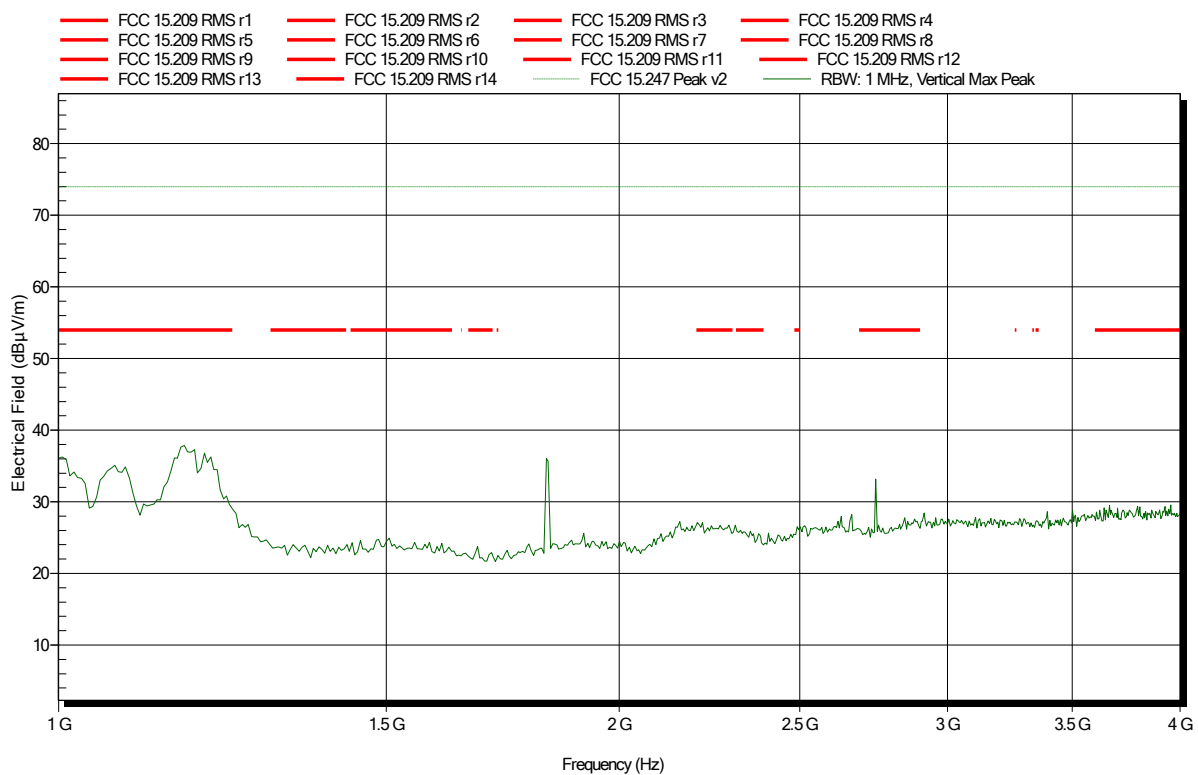


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; pit antenna
 Test Date: 2020-04-20
 Note:

Index 70

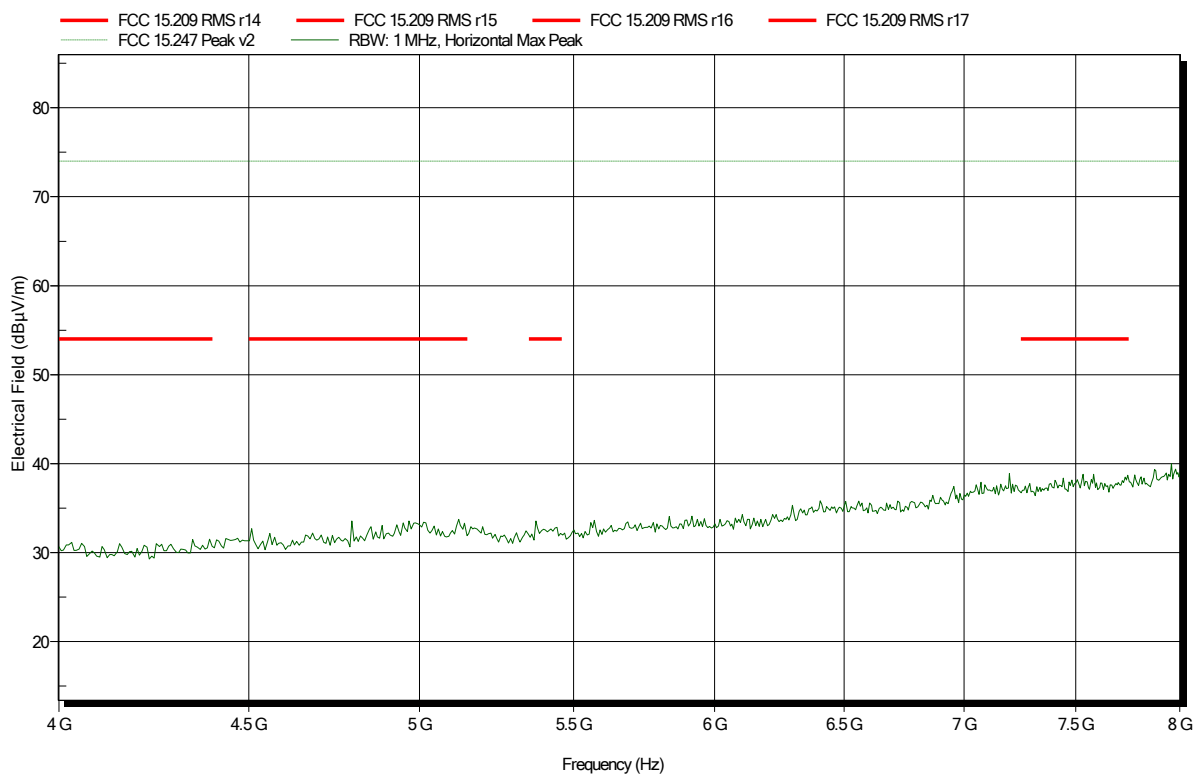


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Measurement software: RadiMation, version 2016.1.10
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m, converted to 3 m
 Mode: TX; 915 MHz; pit antenna
 Test Date: 2020-04-20
 Note:


Index 73

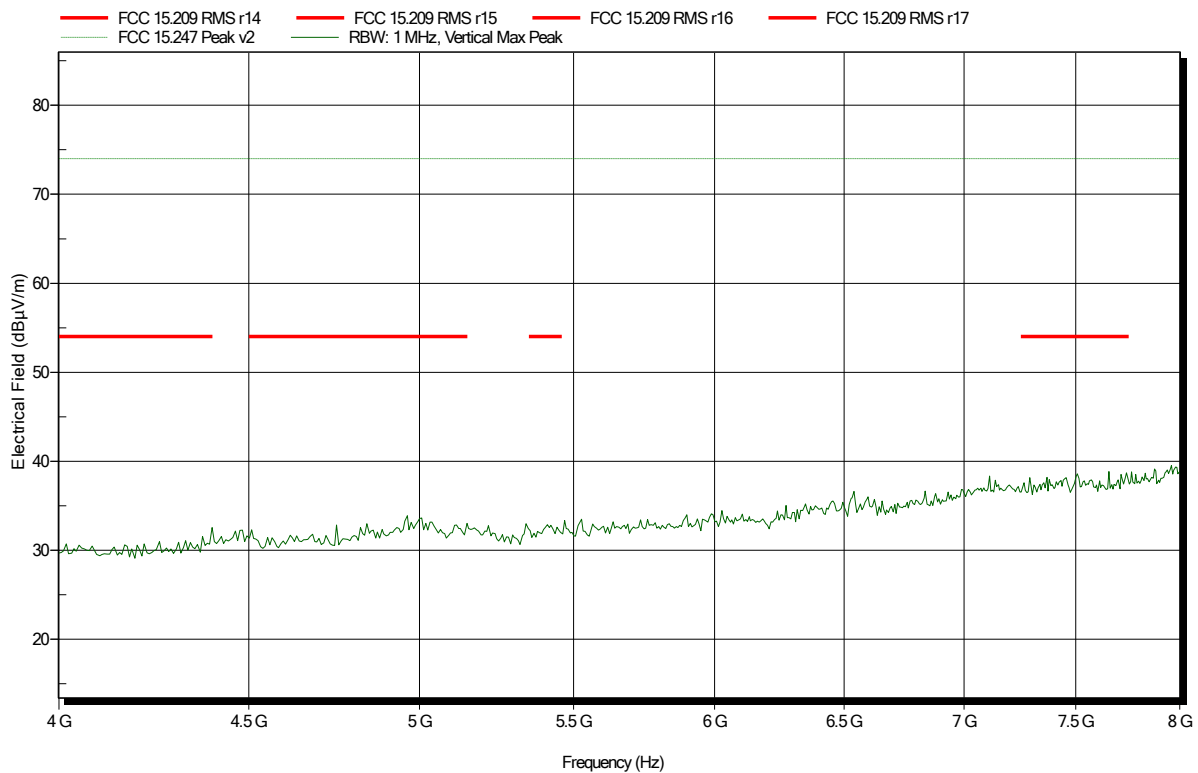

Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868
 Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; pit antenna
 Test Date: 2020-04-20
 Note:

Index 71

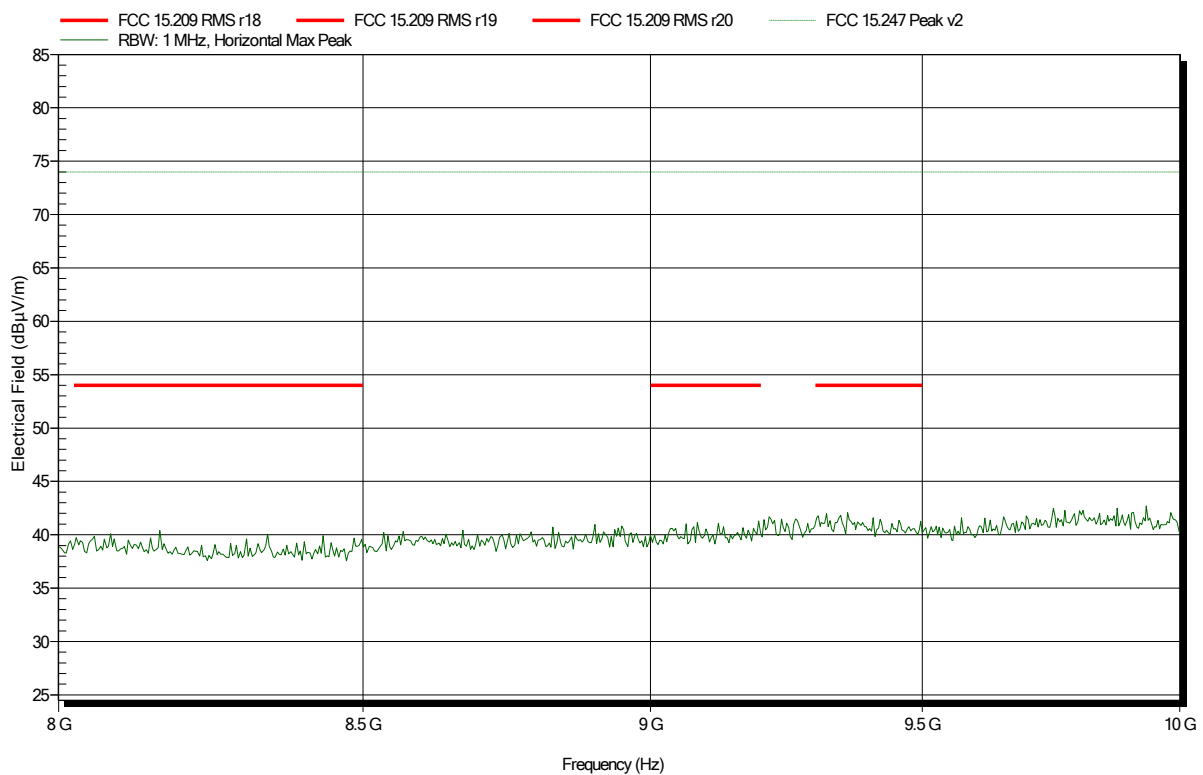


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; pit antenna
 Test Date: 2020-04-20
 Note:

Index 74

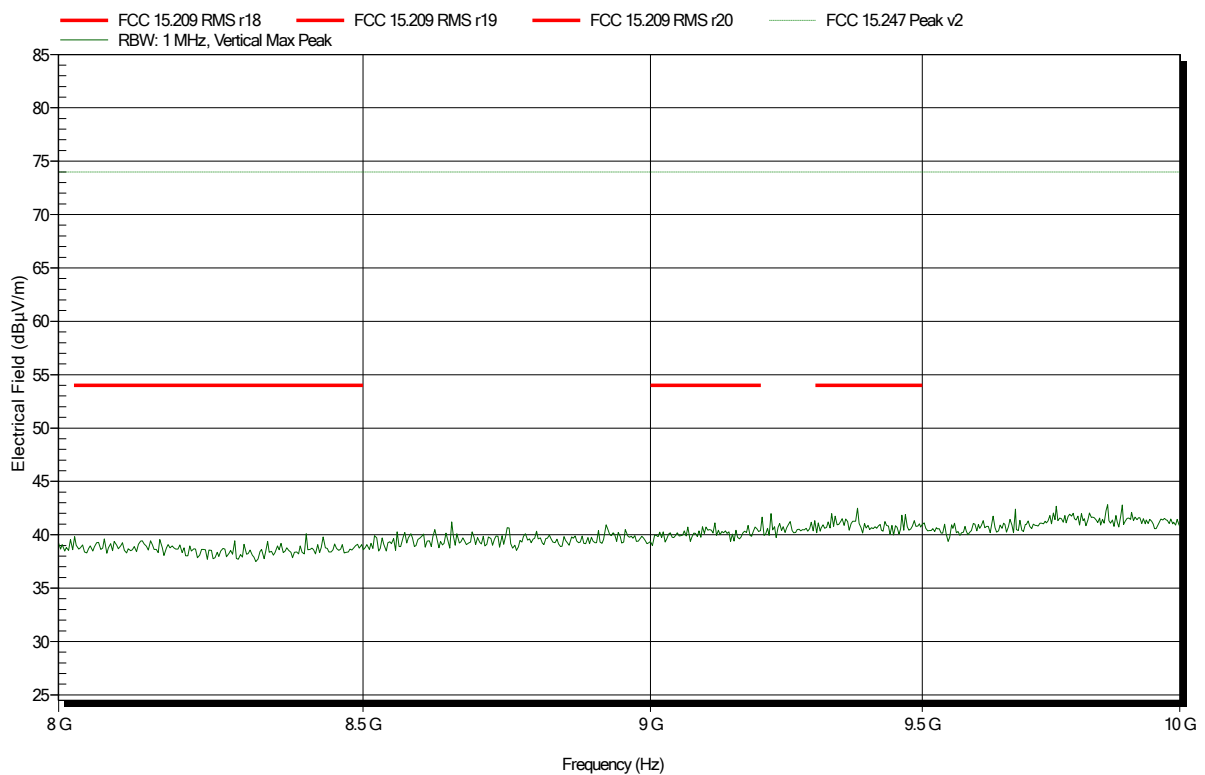


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
EUT Name: Meter Transmit Unit
Model: Ready MTU
Test Site: Eurofins Product Service Germany
Operator: Toralf Jahn
Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 1 m converted to 3m
Mode: TX; 915 MHz; rod antenna
Test Date: 2020-04-20
Note:

Index 93

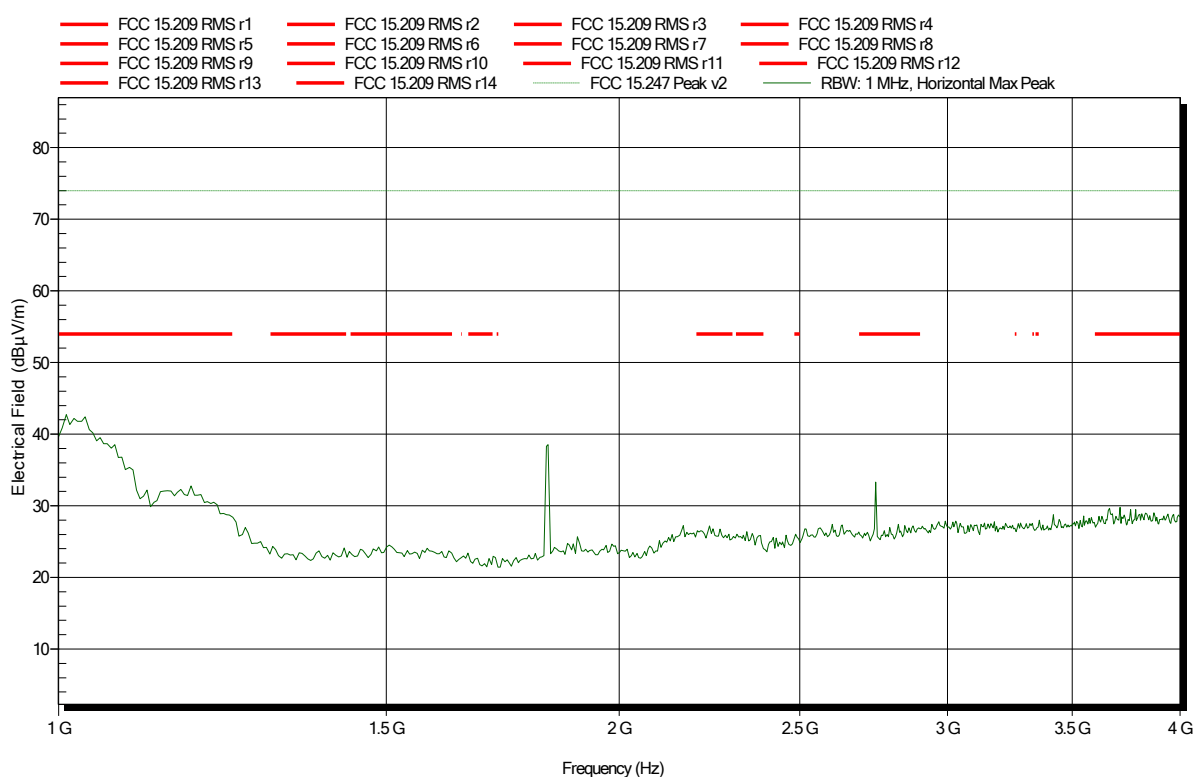


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
EUT Name: Meter Transmit Unit
Model: Ready MTU
Test Site: Eurofins Product Service Germany
Operator: Toralf Jahn
Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; 915 MHz; rod antenna
Test Date: 2020-04-20
Note:

Index 96

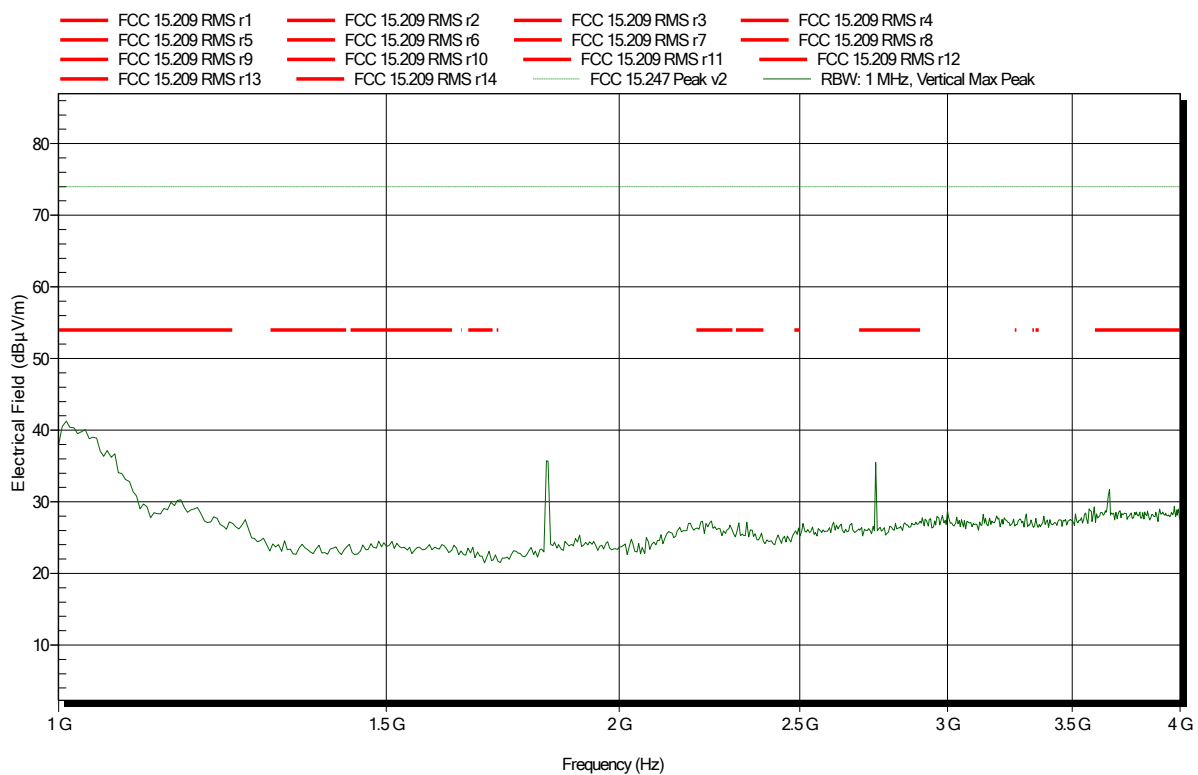


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; rod antenna
 Test Date: 2020-04-20
 Note:

Index 94

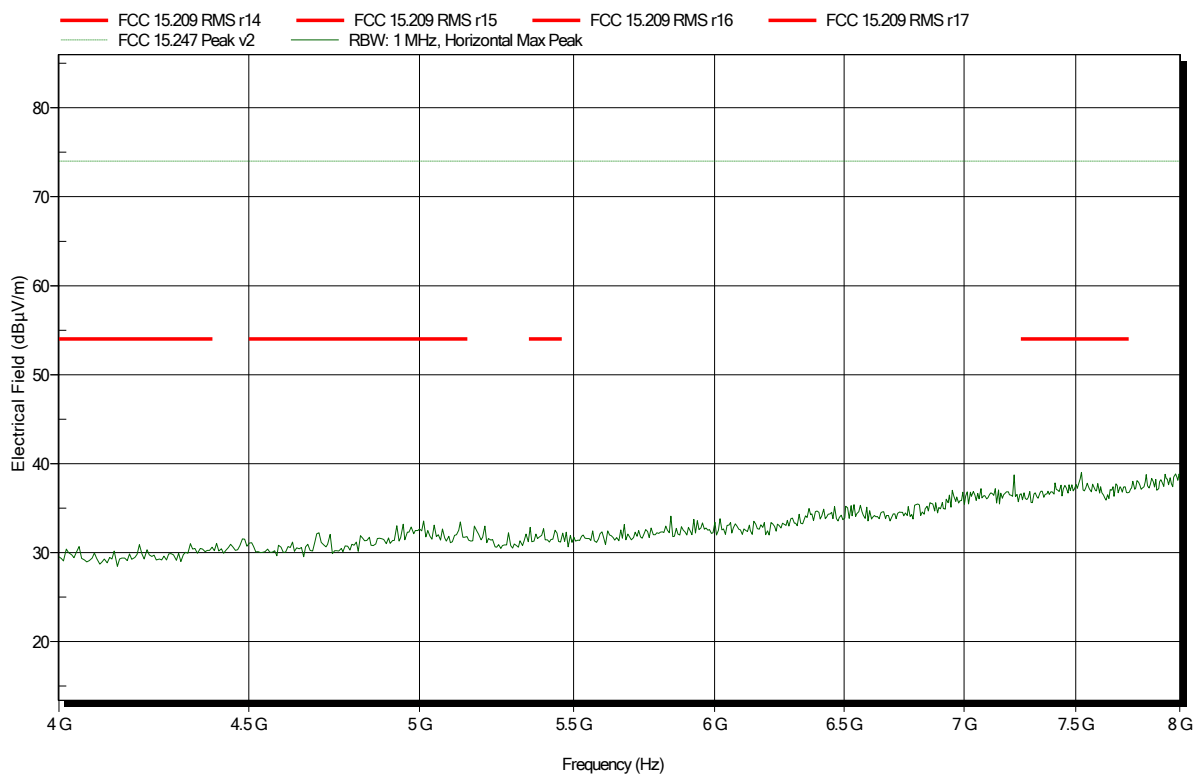


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Measurement software: RadiMation, version 2016.1.10
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m, converted to 3 m
 Mode: TX; 915 MHz; rod antenna
 Test Date: 2020-04-20
 Note:

Index 97

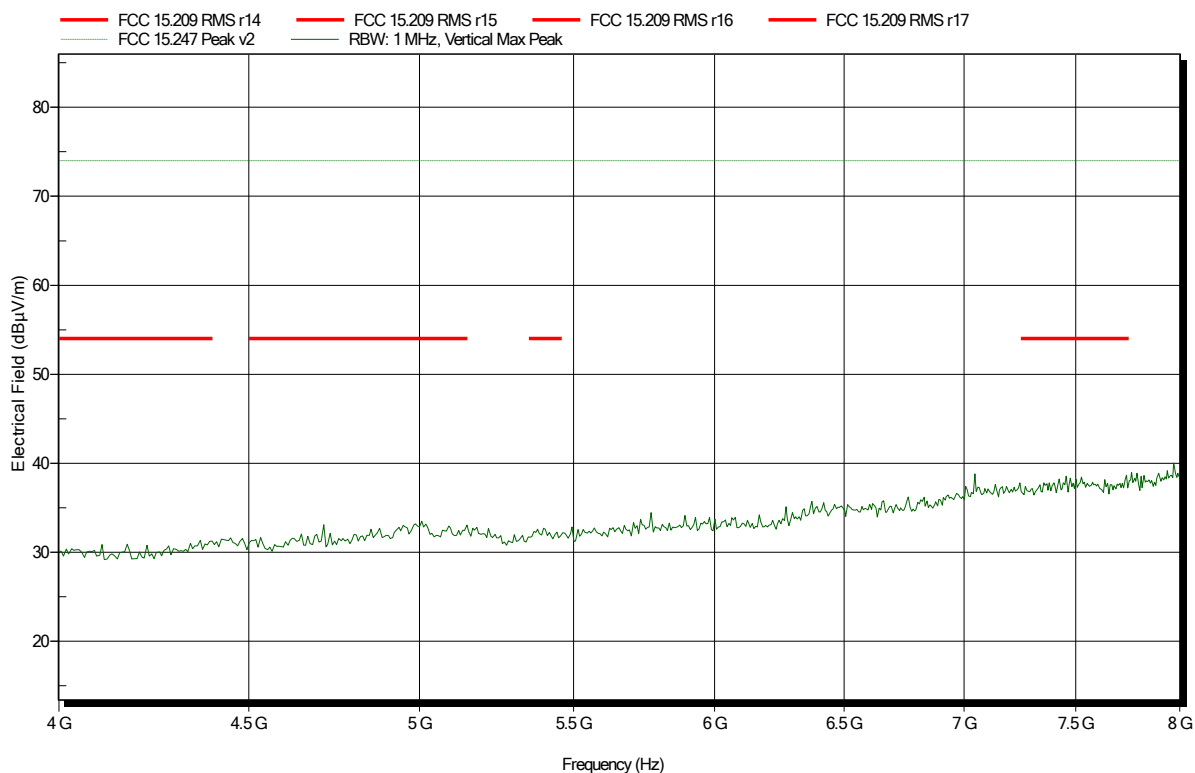


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; rod antenna
 Test Date: 2020-04-20
 Note:


Index 95

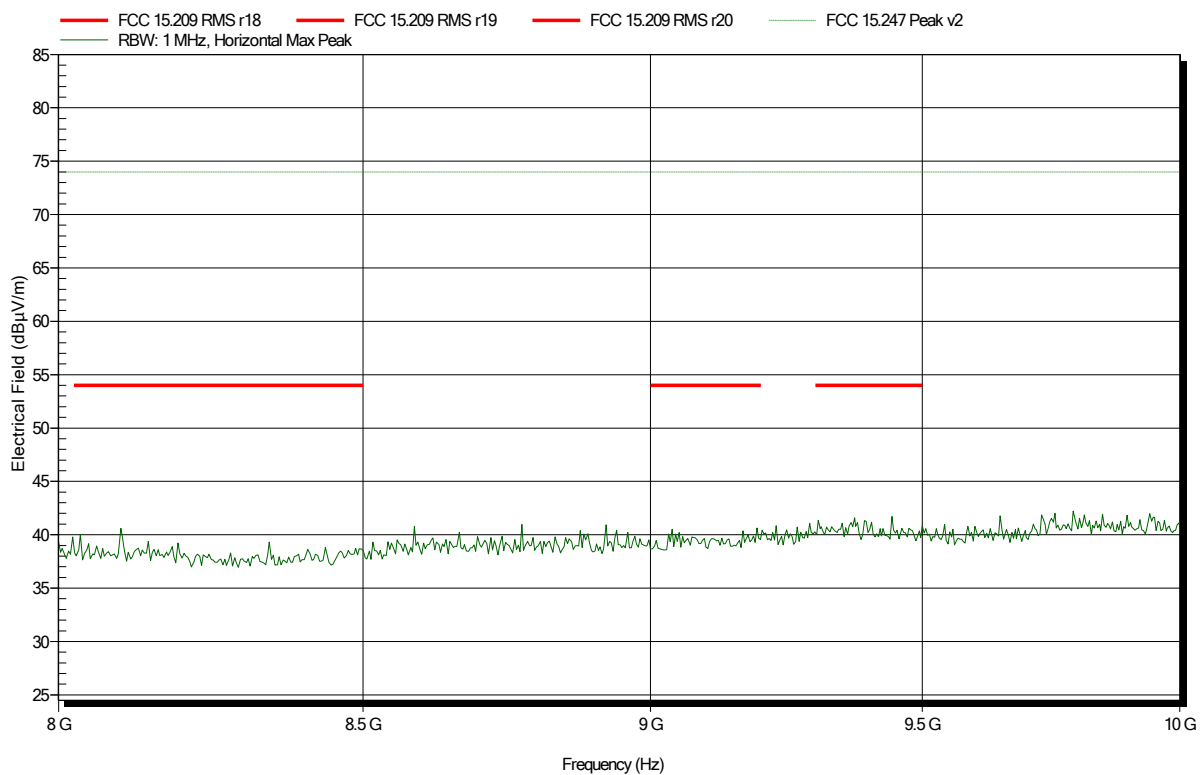

Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868
 Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; rod antenna
 Test Date: 2020-04-20
 Note:

Index 98

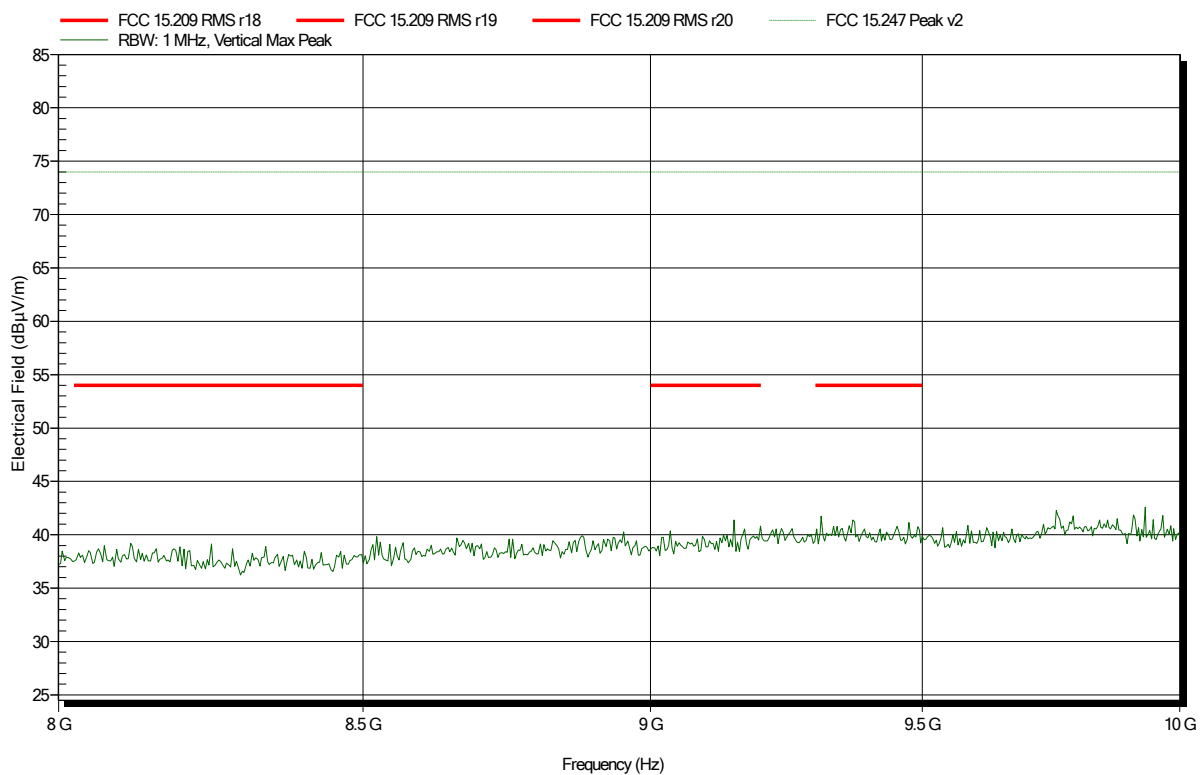


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
EUT Name: Meter Transmit Unit
Model: Ready MTU
Test Site: Eurofins Product Service Germany
Operator: Toralf Jahn
Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 1 m converted to 3m
Mode: TX; 915 MHz; wall antenna
Test Date: 2020-04-20
Note:

Index 111

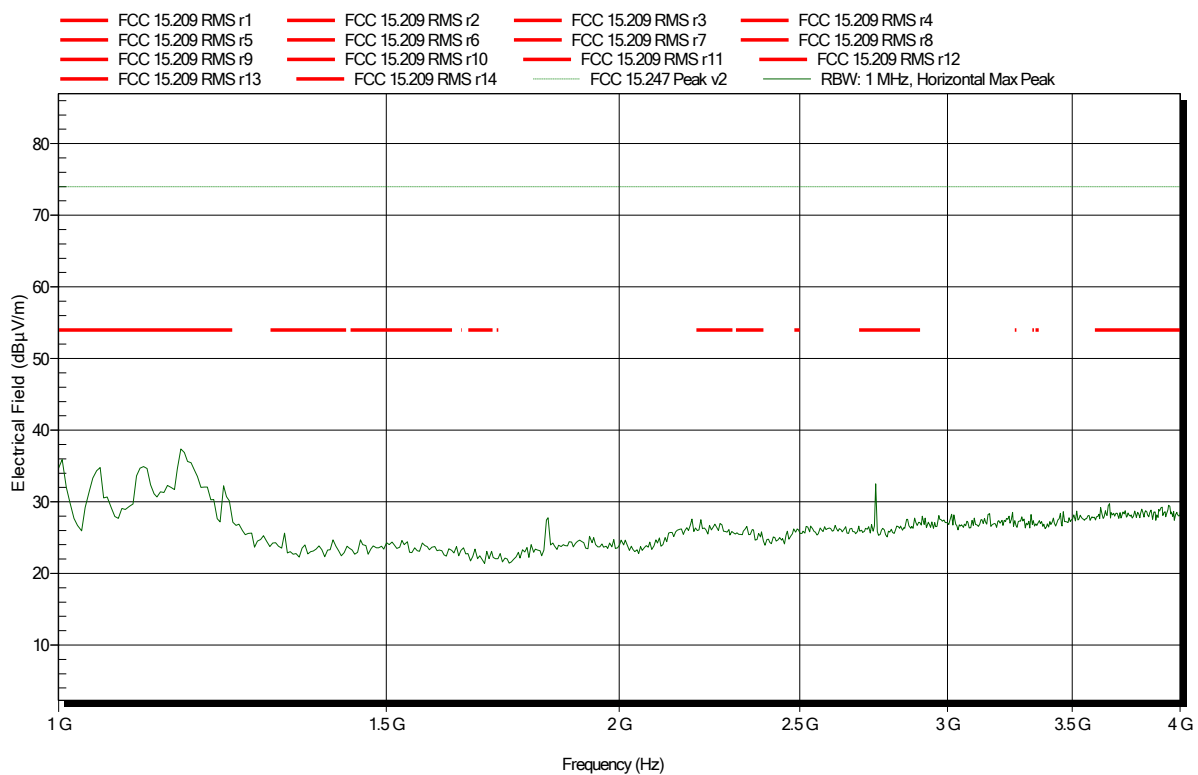


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
EUT Name: Meter Transmit Unit
Model: Ready MTU
Test Site: Eurofins Product Service Germany
Operator: Toralf Jahn
Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; 915 MHz; wall antenna
Test Date: 2020-04-20
Note:

Index 114

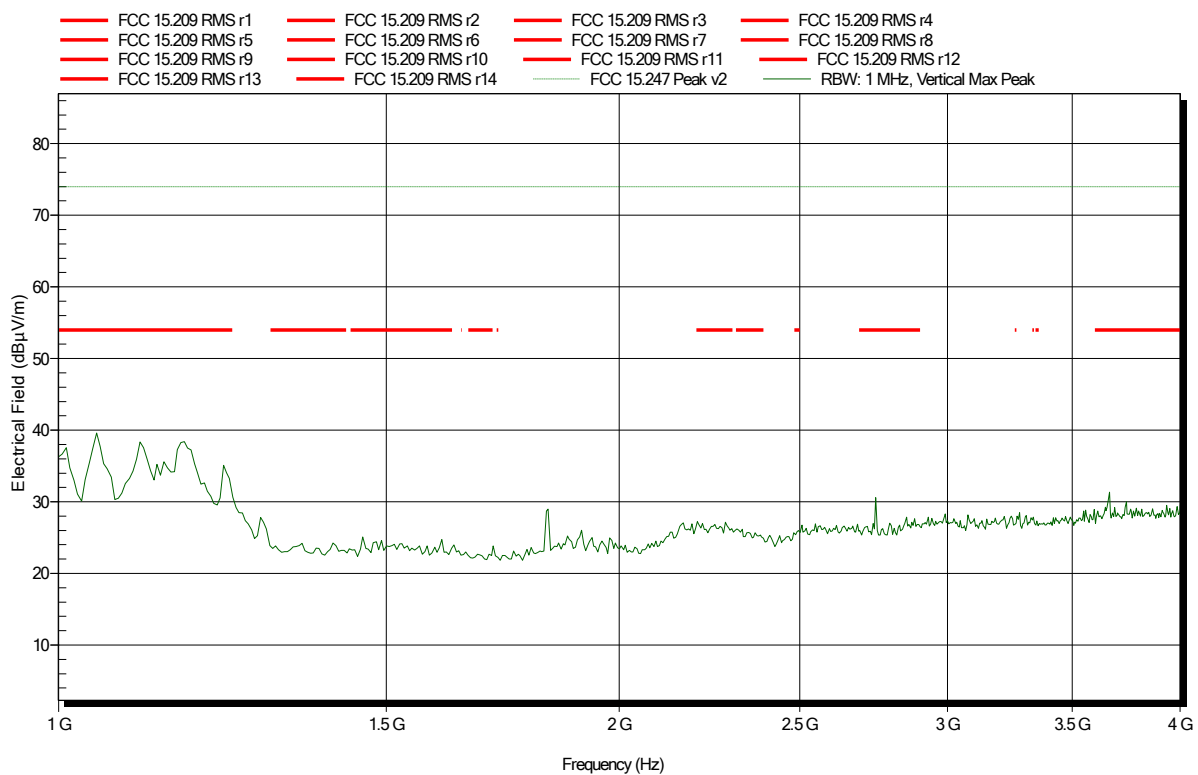


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; wall antenna
 Test Date: 2020-04-20
 Note:

Index 112

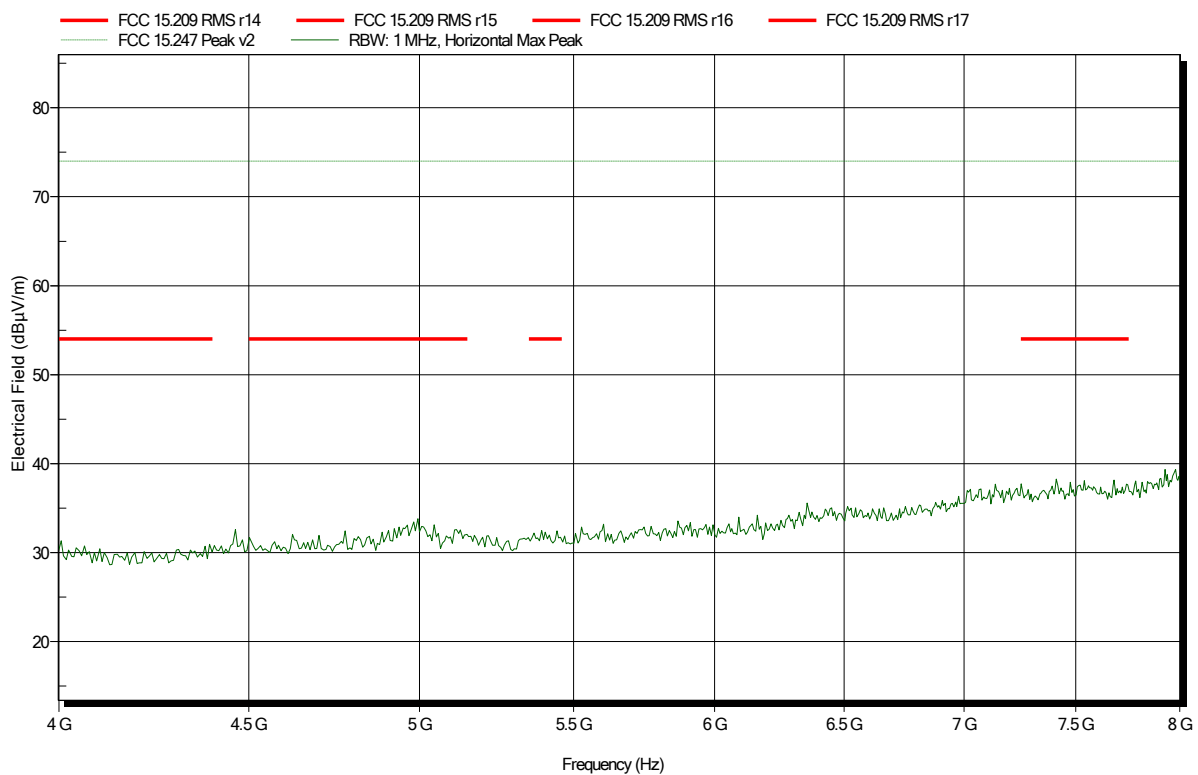


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Measurement software: RadiMation, version 2016.1.10
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m, converted to 3 m
 Mode: TX; 915 MHz; wall antenna
 Test Date: 2020-04-20
 Note:

Index 115

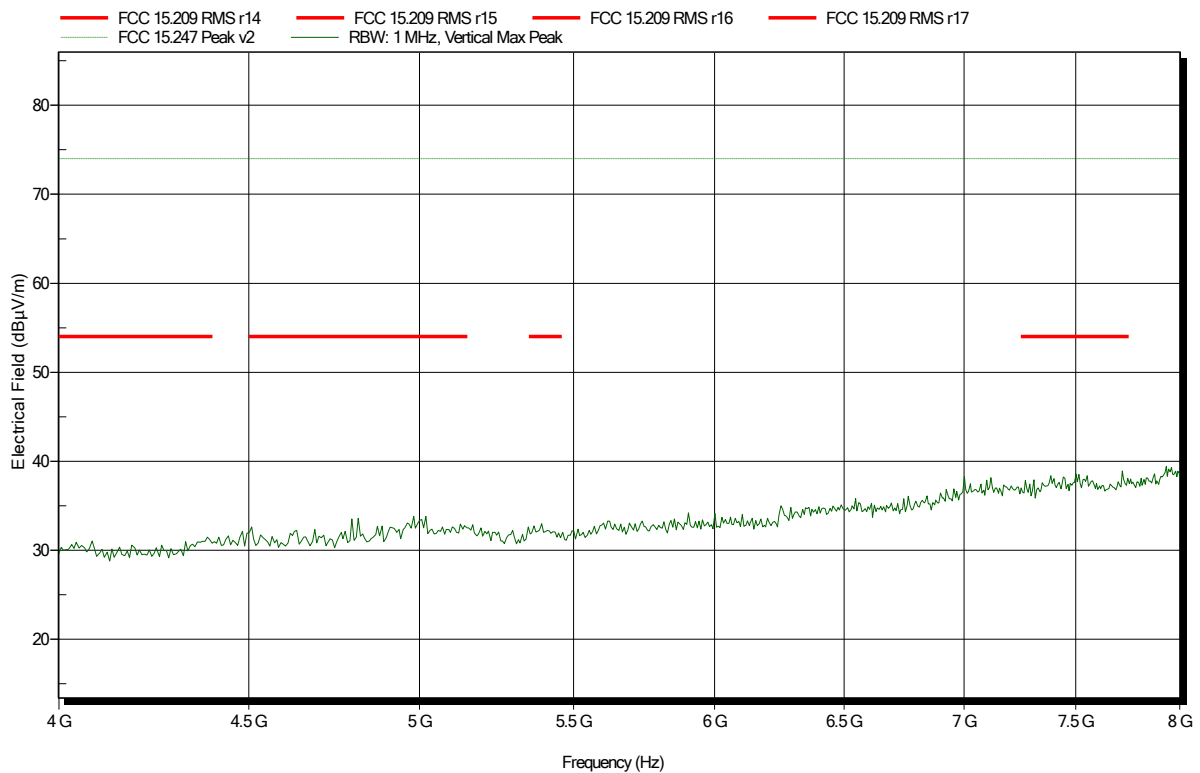


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; wall antenna
 Test Date: 2020-04-20
 Note:

Index 113

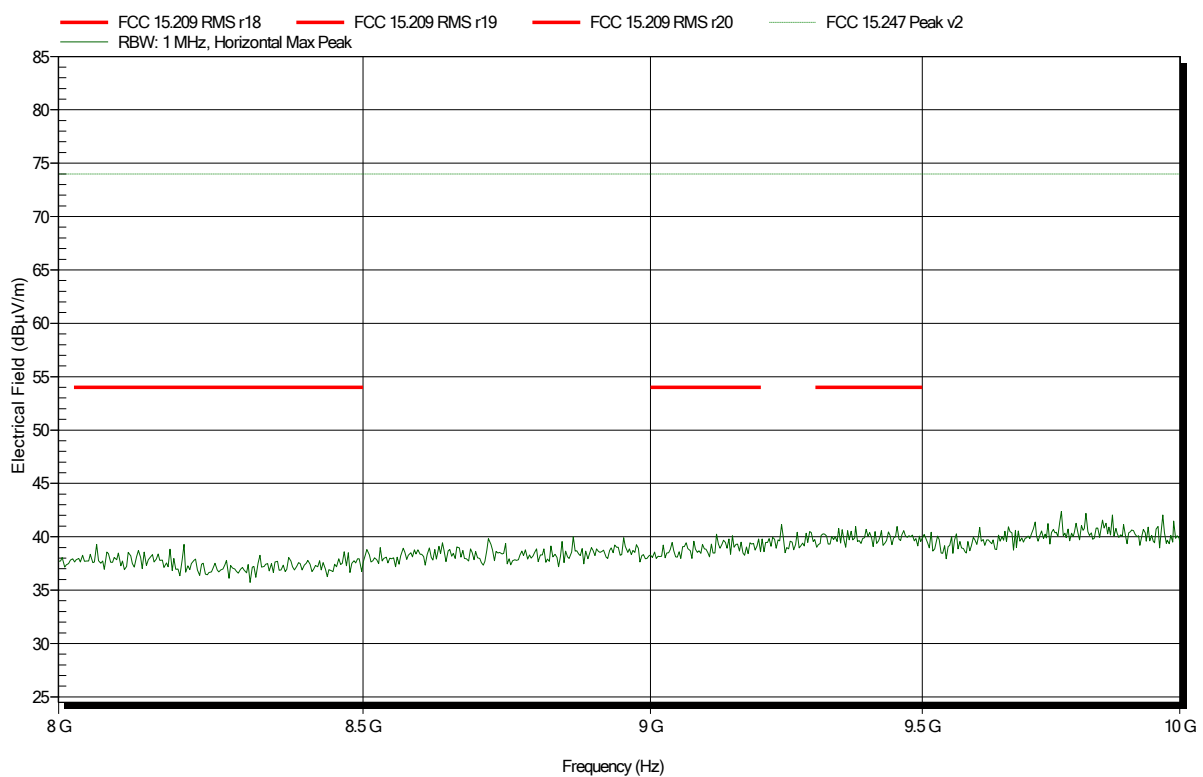


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
EUT Name: Meter Transmit Unit
Model: Ready MTU
Test Site: Eurofins Product Service Germany
Operator: Toralf Jahn
Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; 915 MHz; wall antenna
Test Date: 2020-04-20
Note:

Index 116

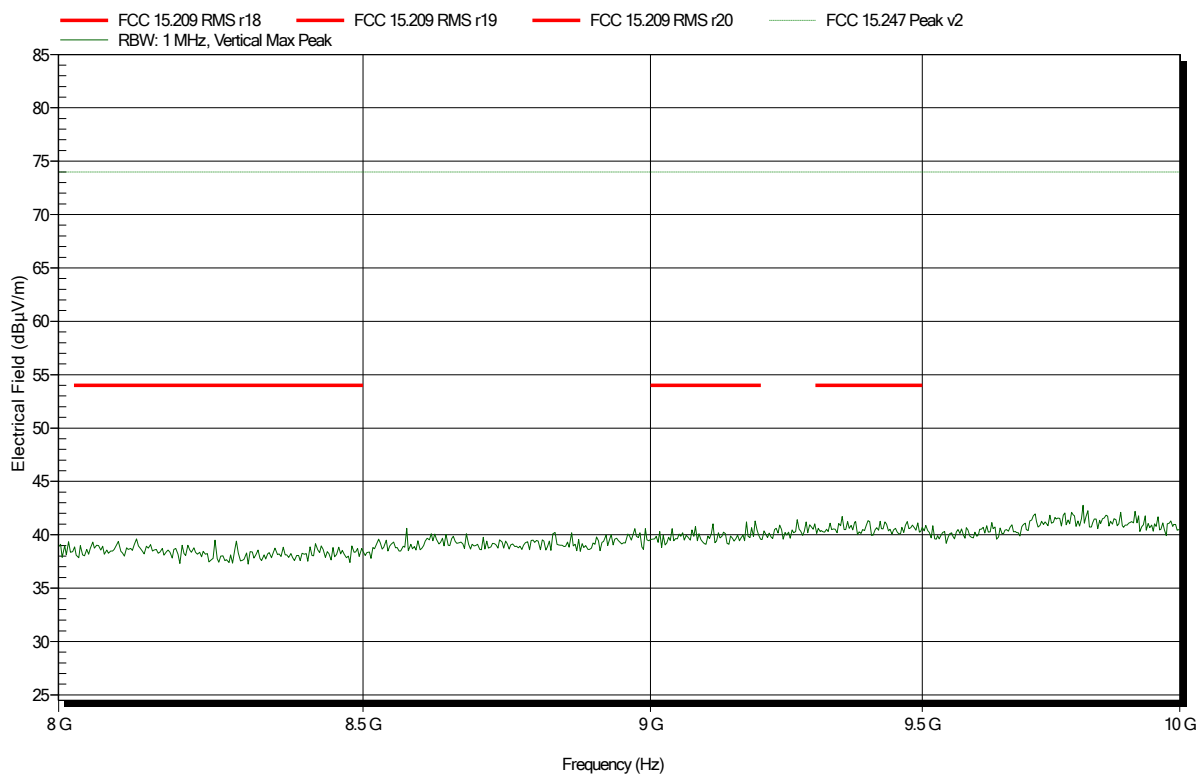


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 918.5 MHz; pit antenna
 Test Date: 2020-04-20
 Note:

Index 81

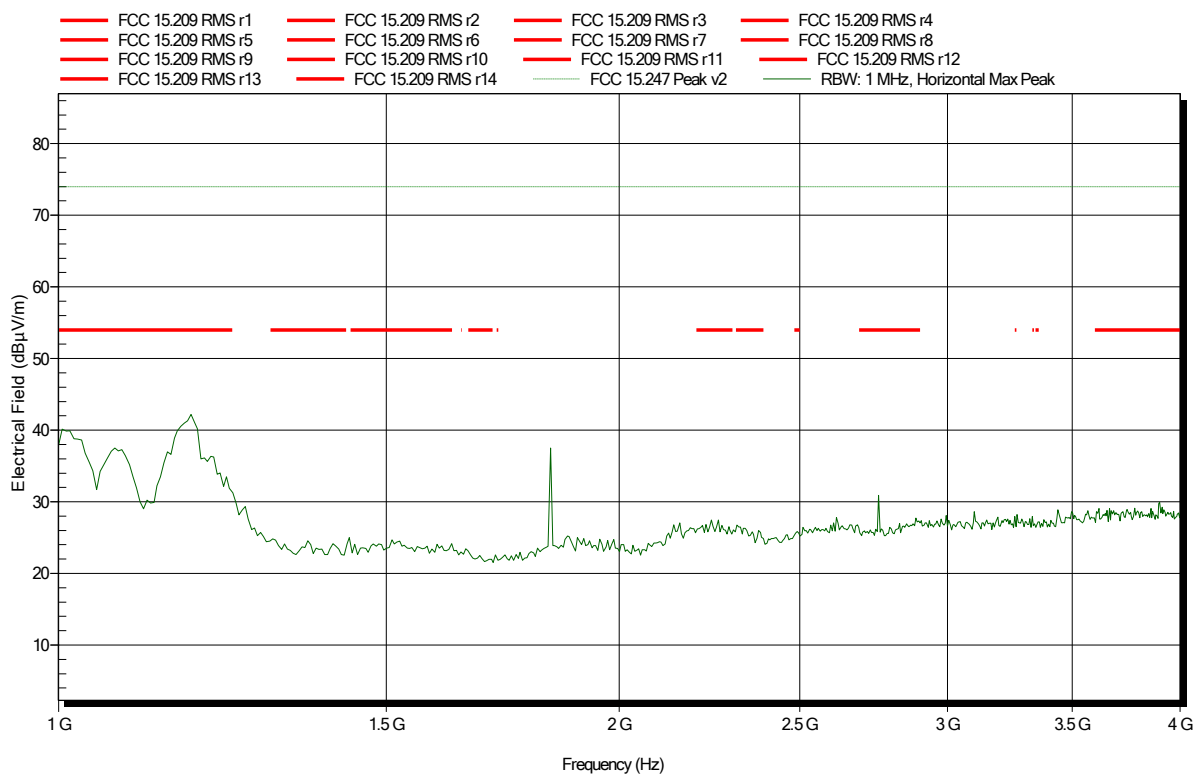


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
EUT Name: Meter Transmit Unit
Model: Ready MTU
Test Site: Eurofins Product Service Germany
Operator: Toralf Jahn
Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; 918.5 MHz; pit antenna
Test Date: 2020-04-20
Note:

Index 84

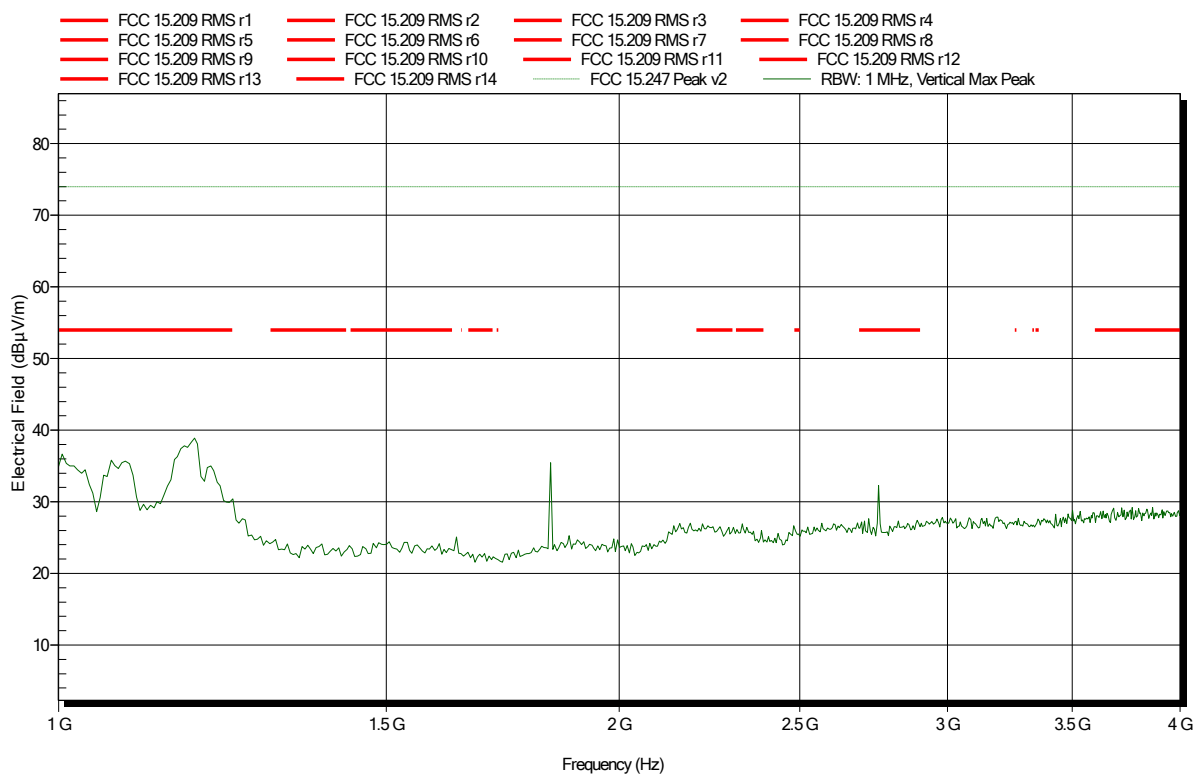


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 918.5 MHz; pit antenna
 Test Date: 2020-04-20
 Note:

Index 82

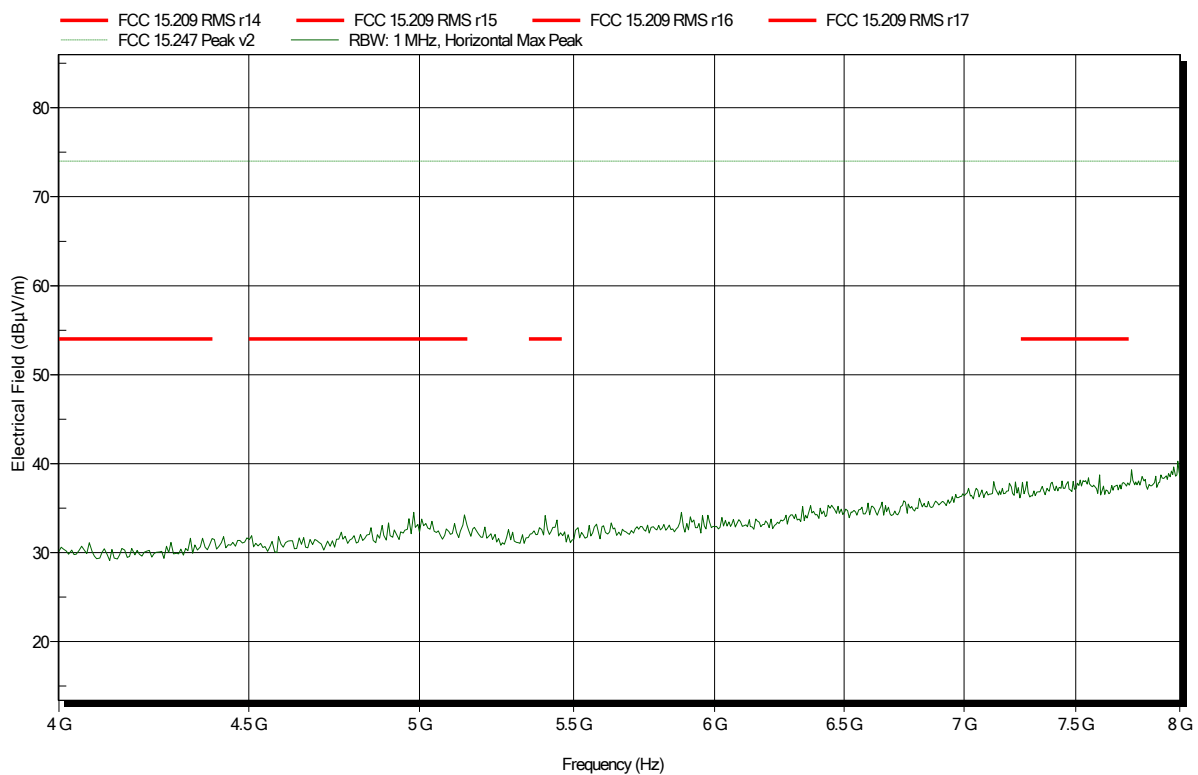


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
EUT Name: Meter Transmit Unit
Model: Ready MTU
Test Site: Eurofins Product Service Germany
Operator: Toralf Jahn
Measurement software: RadiMation, version 2016.1.10
Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m, converted to 3 m
Mode: TX; 918.5 MHz; pit antenna
Test Date: 2020-04-20
Note:

Index 85

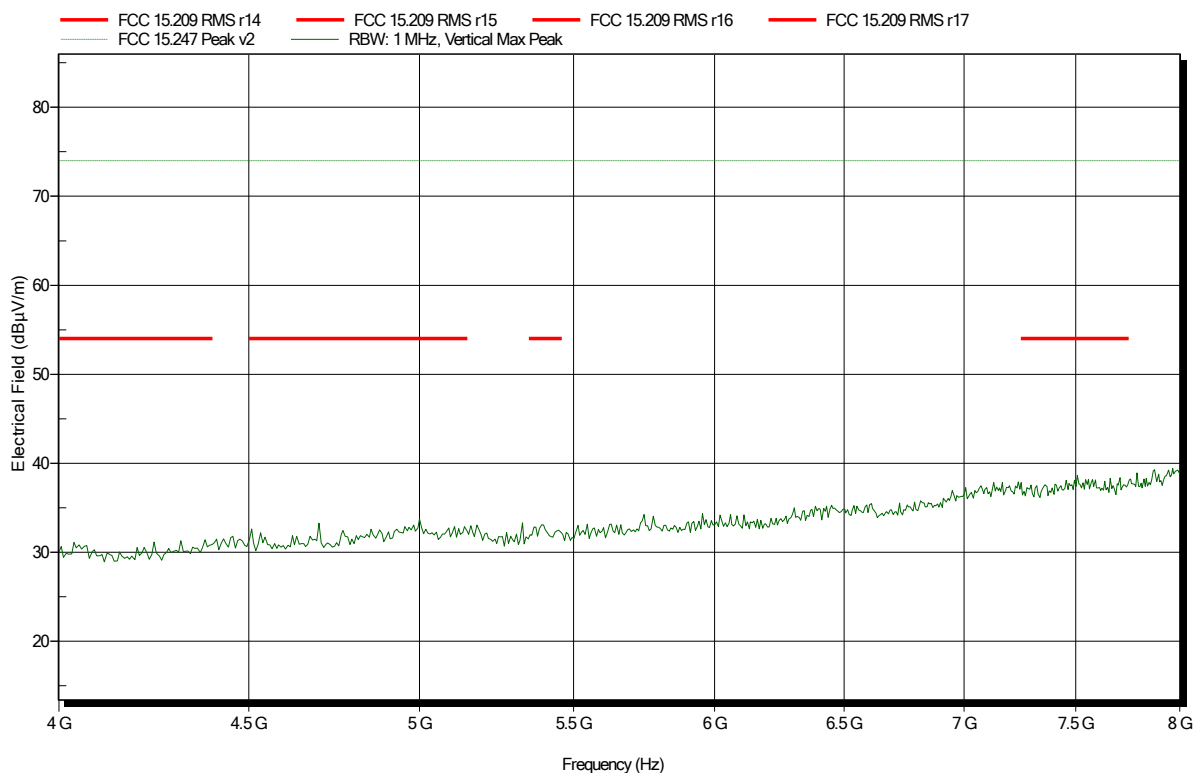


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 918.5 MHz; pit antenna
 Test Date: 2020-04-20
 Note:


Index 83

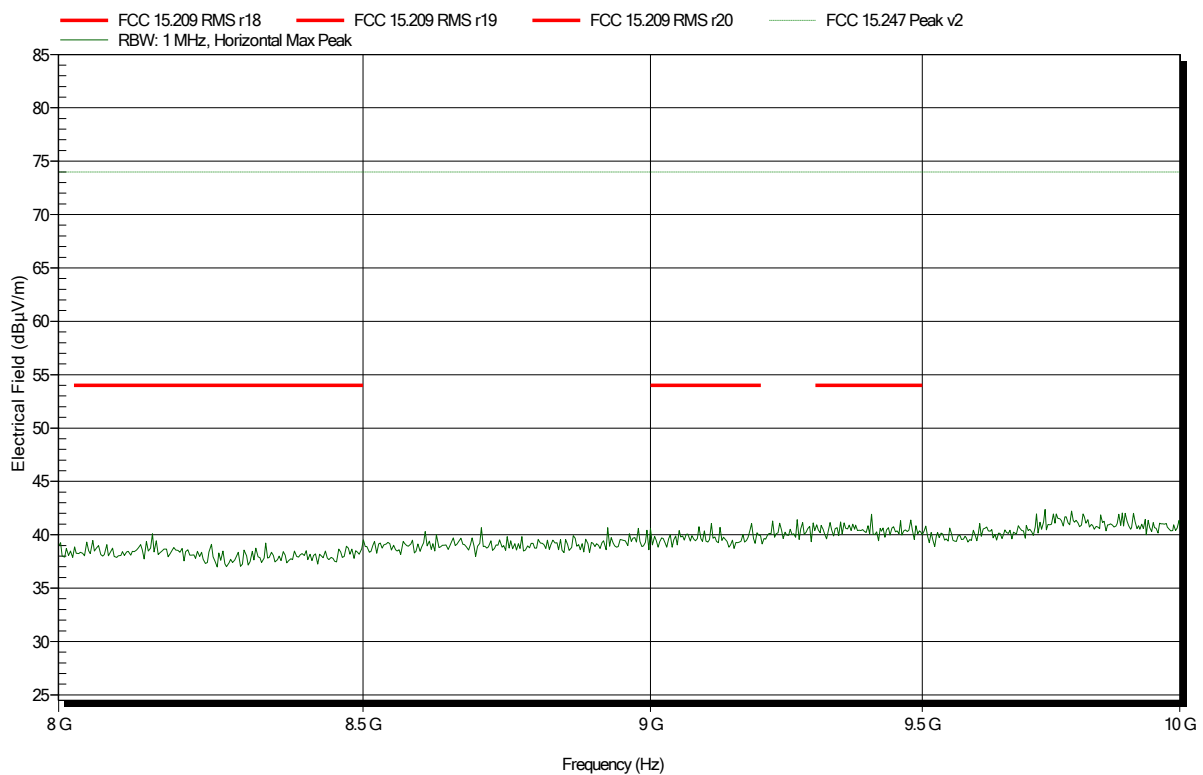

Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868
 Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; 918.5 MHz; pit antenna
 Test Date: 2020-04-20
 Note:

Index 86

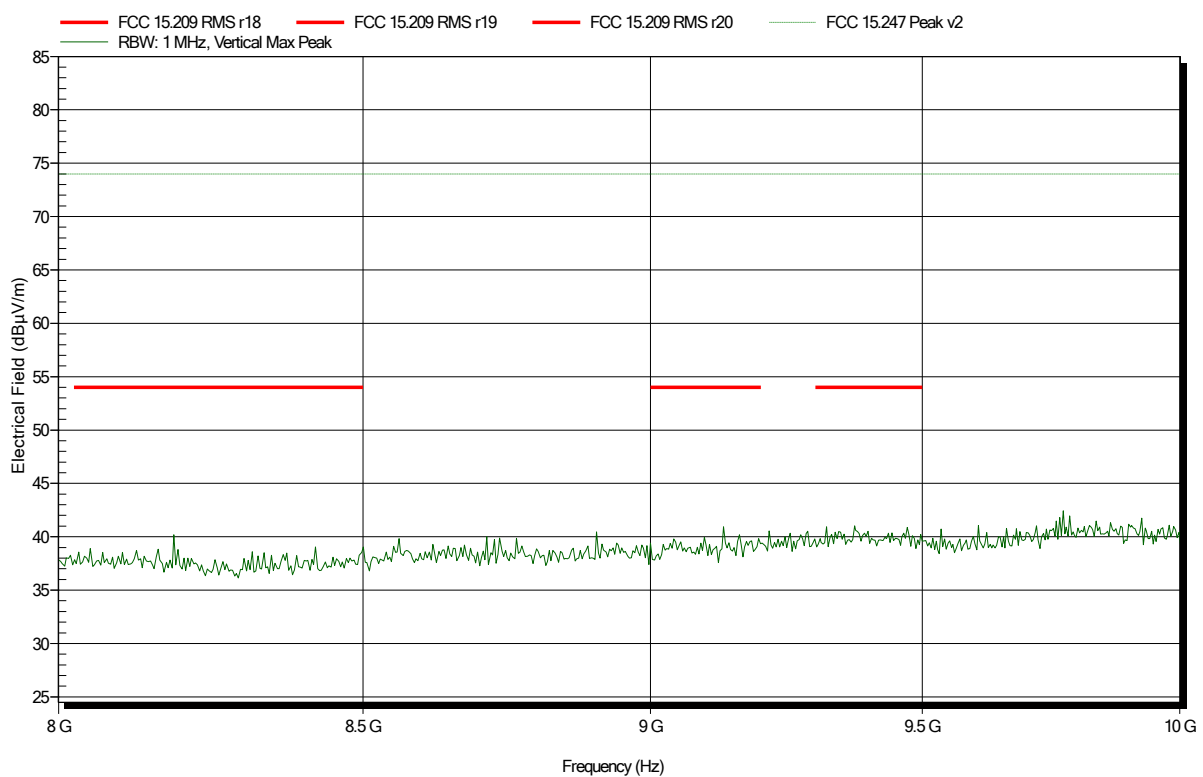


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
EUT Name: Meter Transmit Unit
Model: Ready MTU
Test Site: Eurofins Product Service Germany
Operator: Toralf Jahn
Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 1 m converted to 3m
Mode: TX; 918.5 MHz; rod antenna
Test Date: 2020-04-20
Note:


Index 87

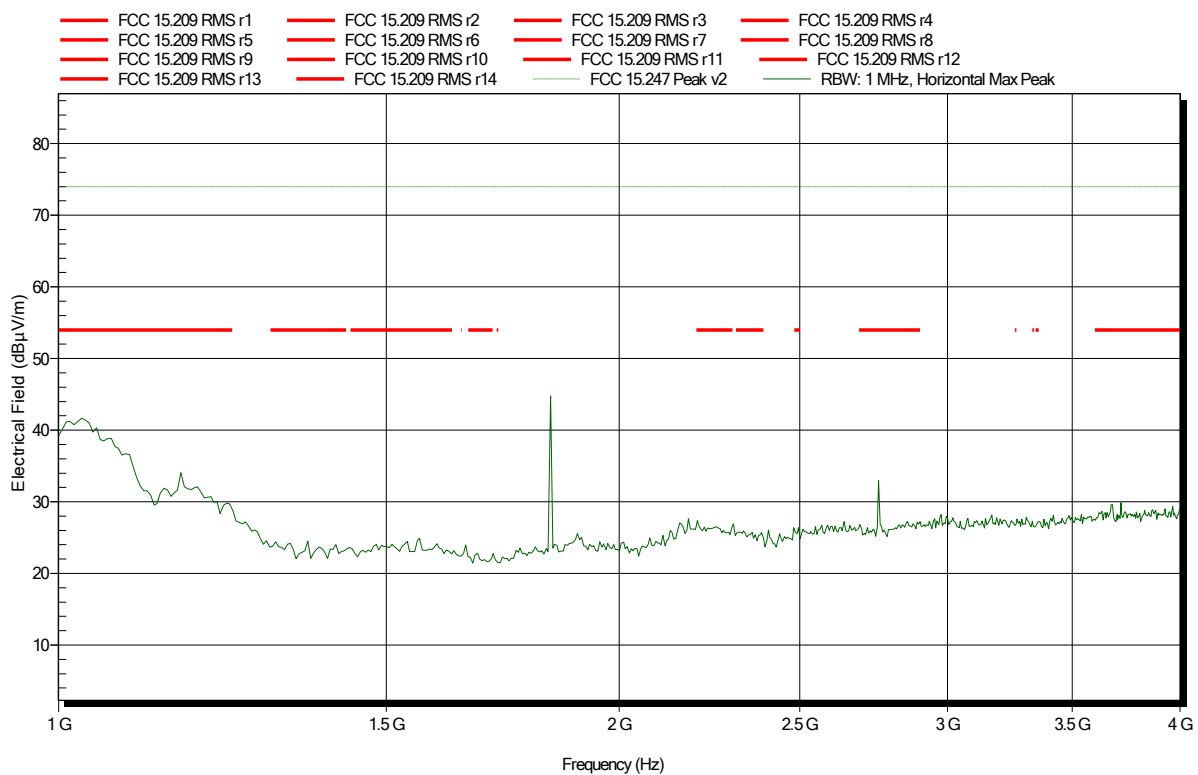

Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868
 Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; 918.5 MHz; rod antenna
 Test Date: 2020-04-20
 Note:


Index 90

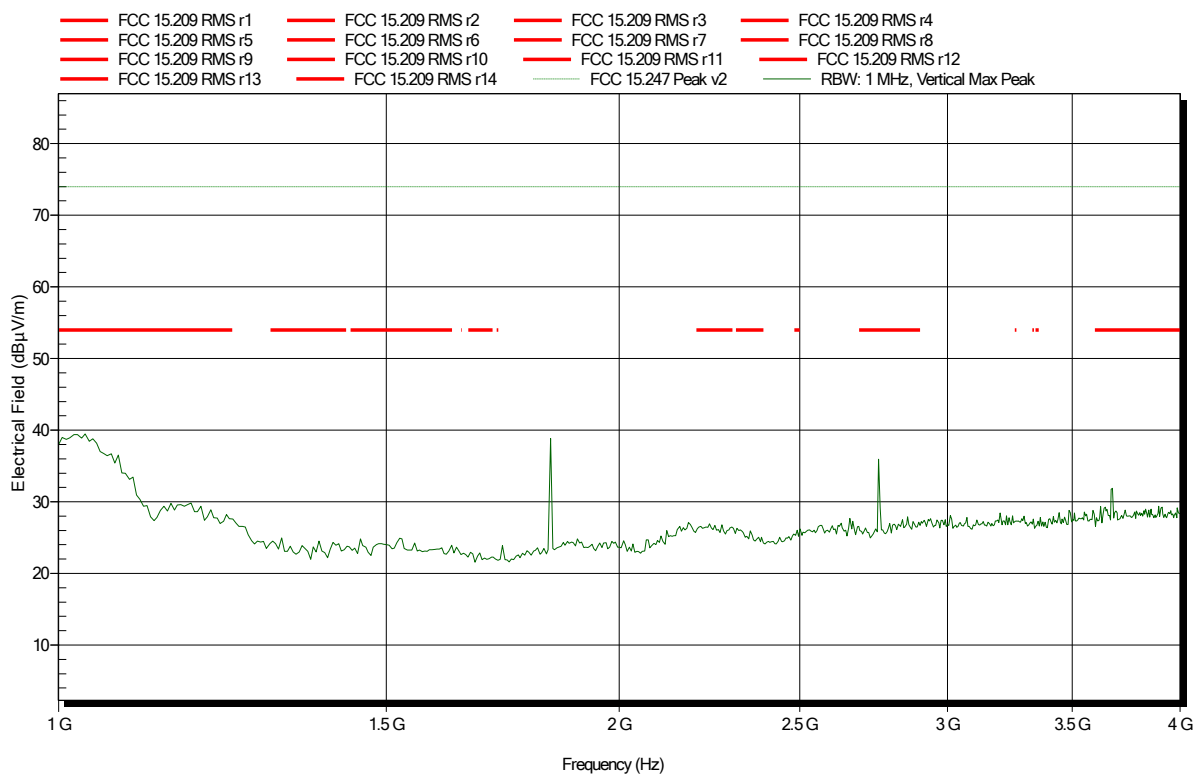

Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868
 Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 918.5 MHz; rod antenna
 Test Date: 2020-04-20
 Note:


Index 88

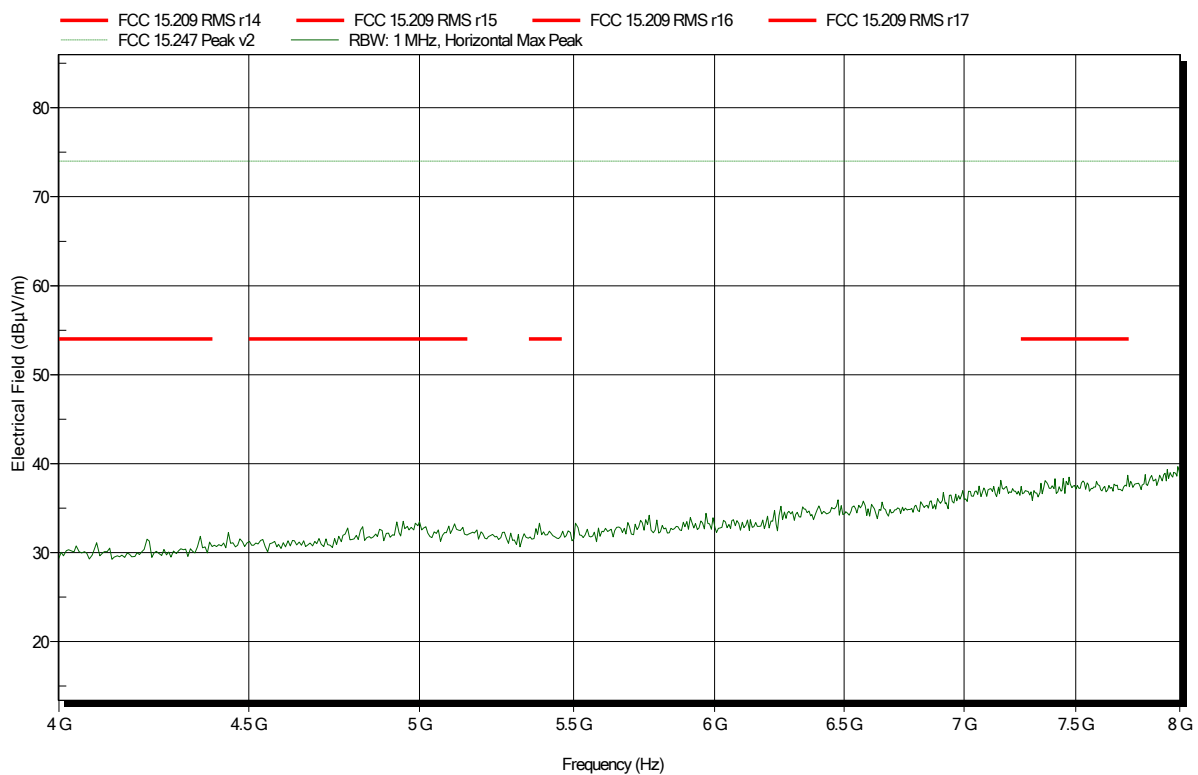

Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868
 Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Measurement software: RadiMation, version 2016.1.10
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m, converted to 3 m
 Mode: TX; 918.5 MHz; rod antenna
 Test Date: 2020-04-20
 Note:


Index 91

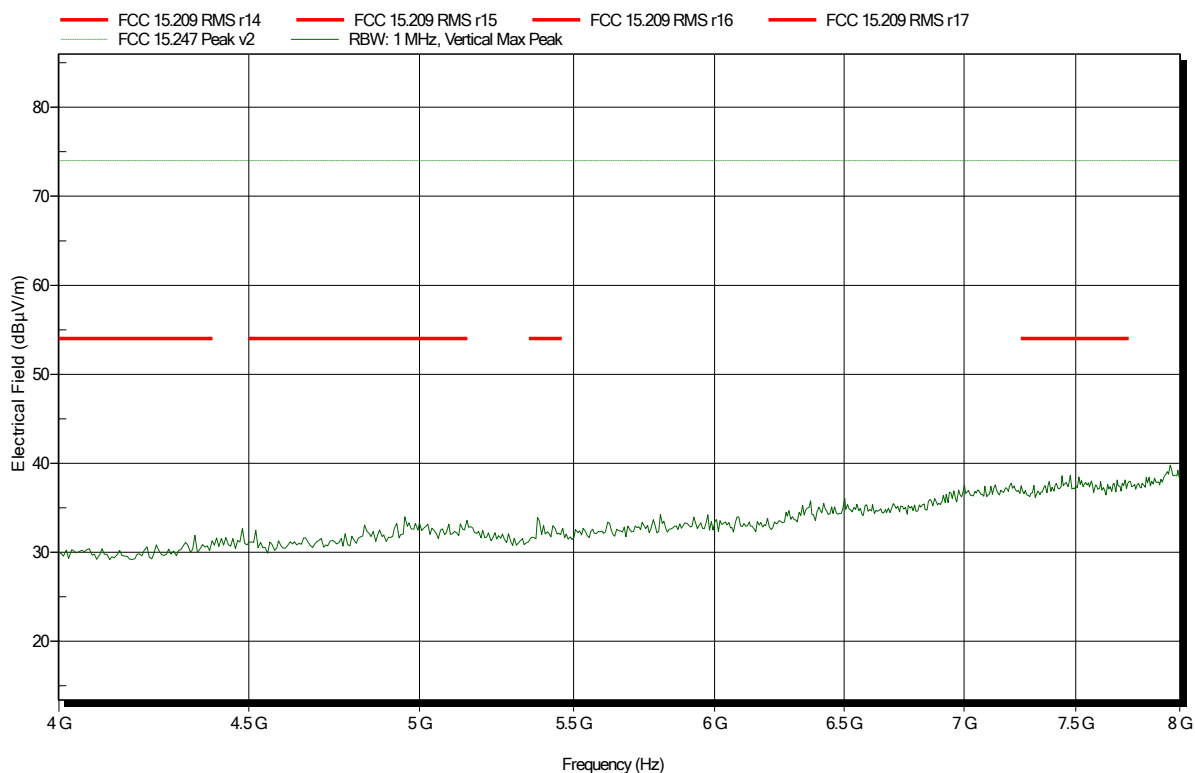

Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868
 Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 918.5 MHz; rod antenna
 Test Date: 2020-04-20
 Note:

Index 89

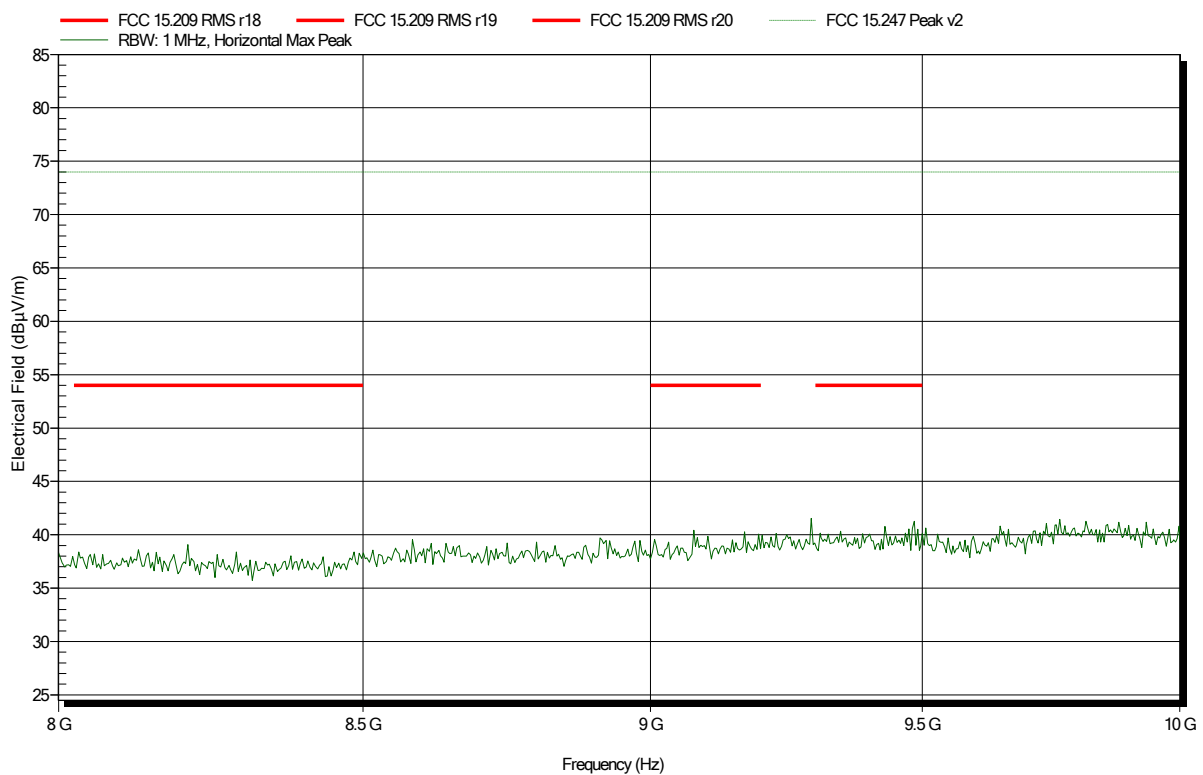


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
EUT Name: Meter Transmit Unit
Model: Ready MTU
Test Site: Eurofins Product Service Germany
Operator: Toralf Jahn
Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; 918.5 MHz; rod antenna
Test Date: 2020-04-20
Note:


Index 92

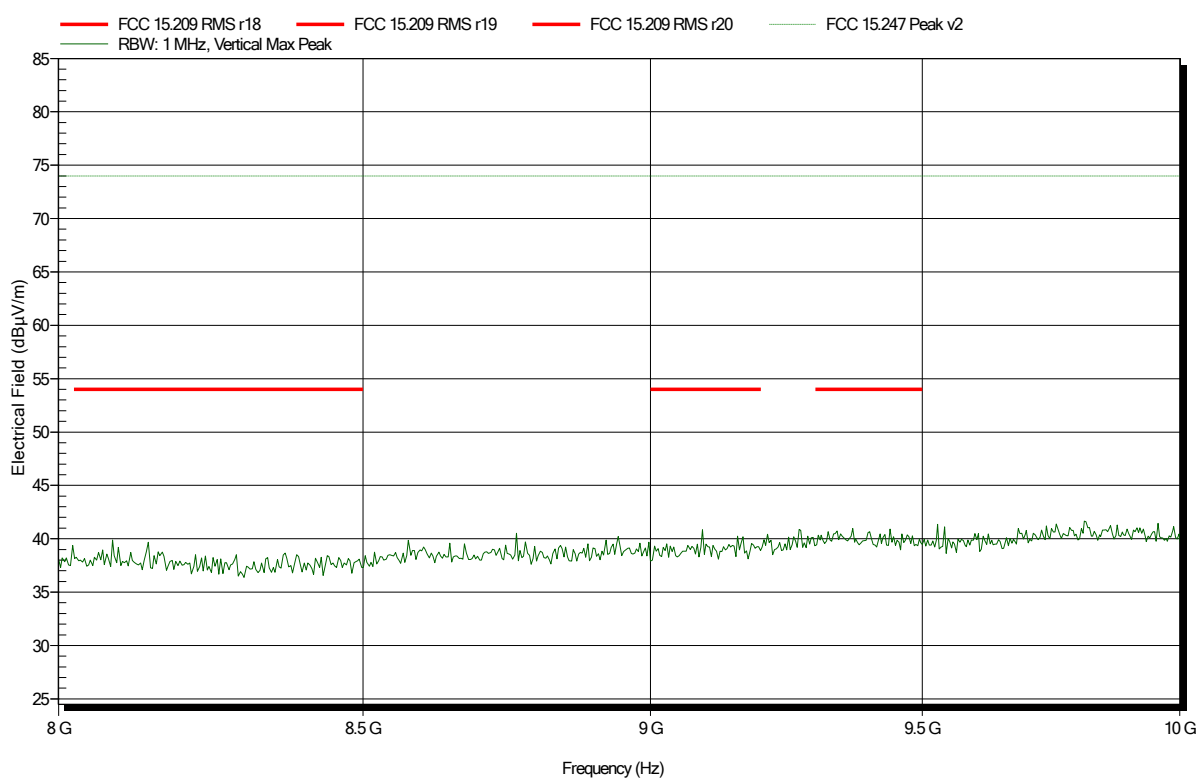

Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868
 Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 918.5 MHz; wall antenna
 Test Date: 2020-04-20
 Note:

Index 117

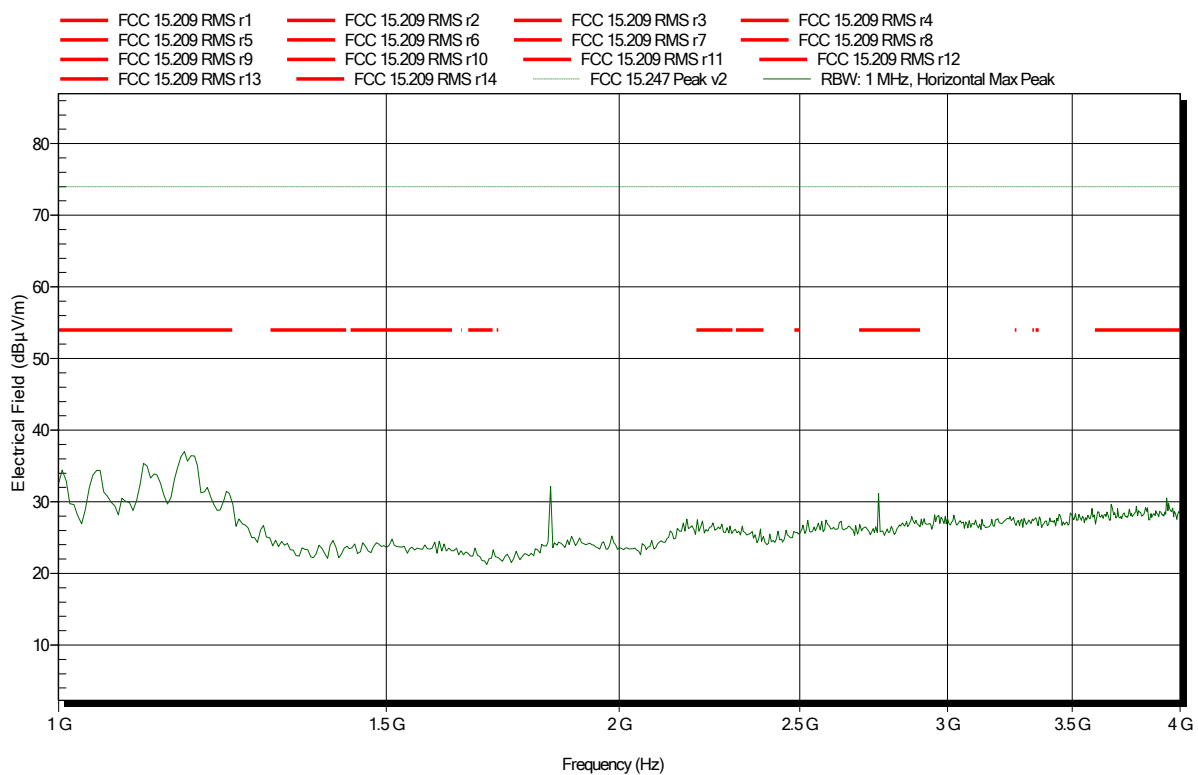


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
EUT Name: Meter Transmit Unit
Model: Ready MTU
Test Site: Eurofins Product Service Germany
Operator: Toralf Jahn
Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; 918.5 MHz; wall antenna
Test Date: 2020-04-20
Note:

Index 120

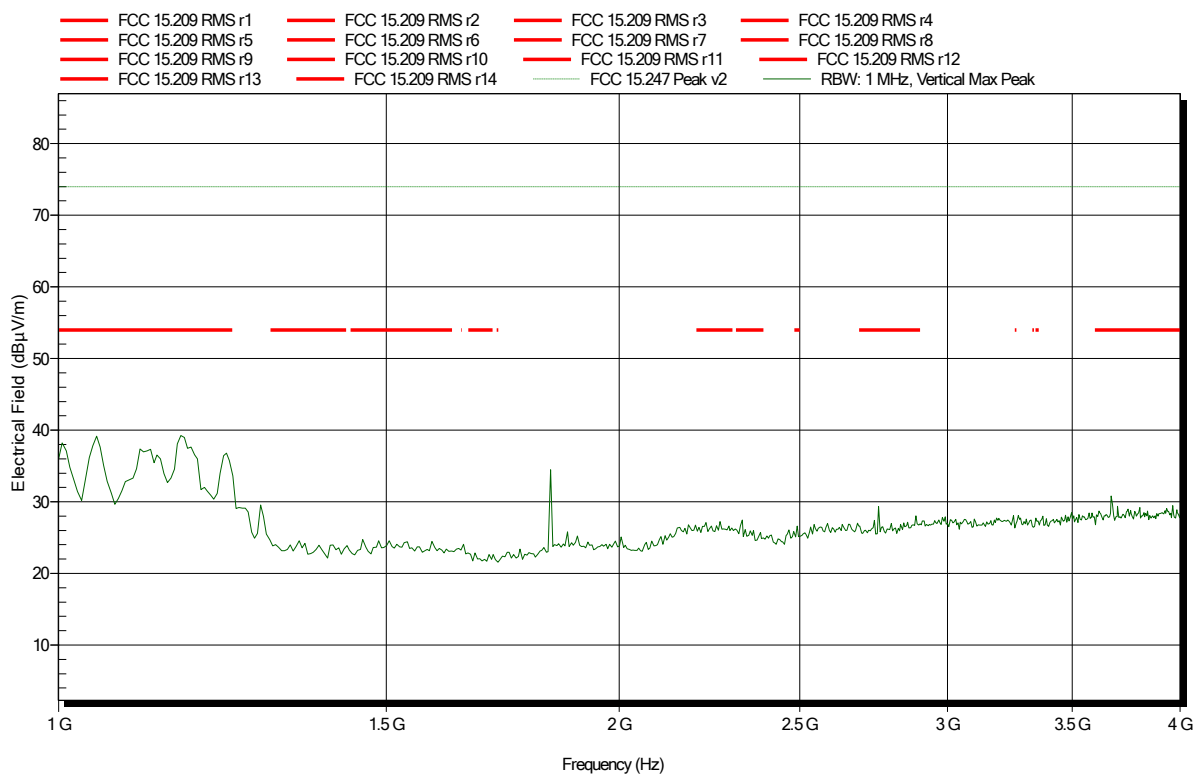


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
EUT Name: Meter Transmit Unit
Model: Ready MTU
Test Site: Eurofins Product Service Germany
Operator: Toralf Jahn
Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 1 m converted to 3m
Mode: TX; 918.5 MHz; wall antenna
Test Date: 2020-04-20
Note:

Index 118

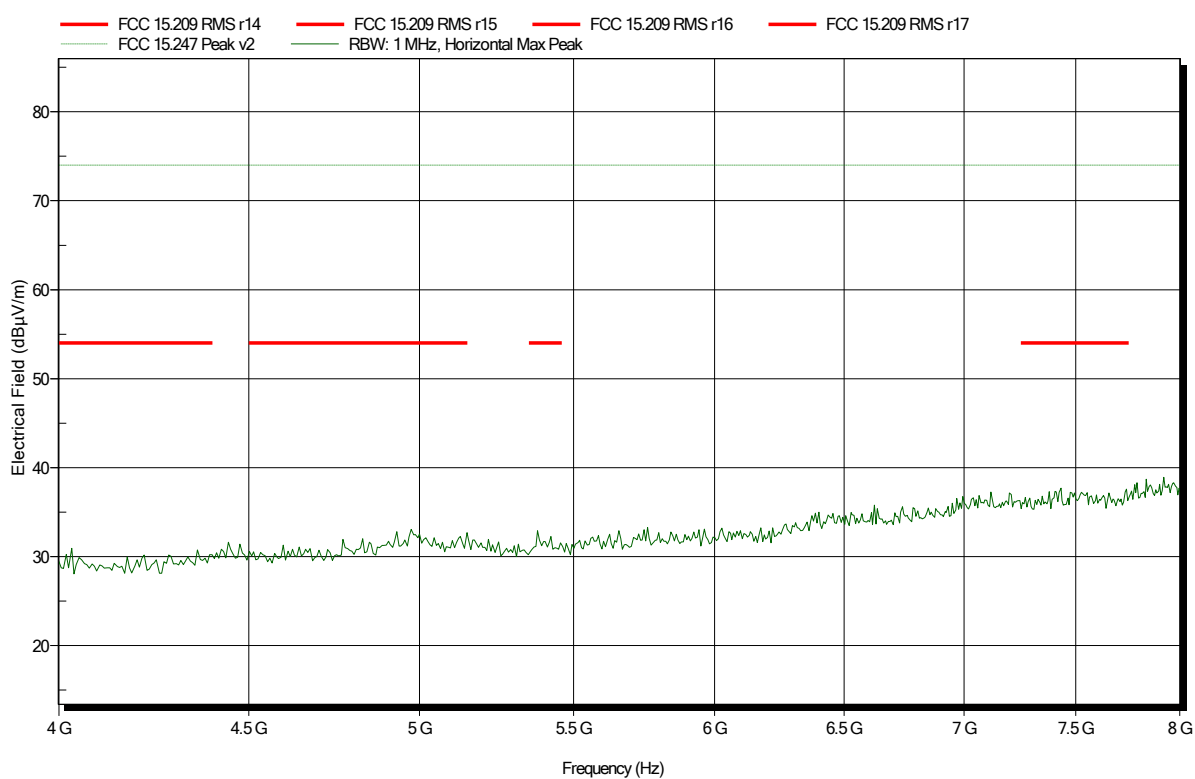


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
EUT Name: Meter Transmit Unit
Model: Ready MTU
Test Site: Eurofins Product Service Germany
Operator: Toralf Jahn
Measurement software: RadiMation, version 2016.1.10
Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m, converted to 3 m
Mode: TX; 918.5 MHz; wall antenna
Test Date: 2020-04-20
Note:

Index 121

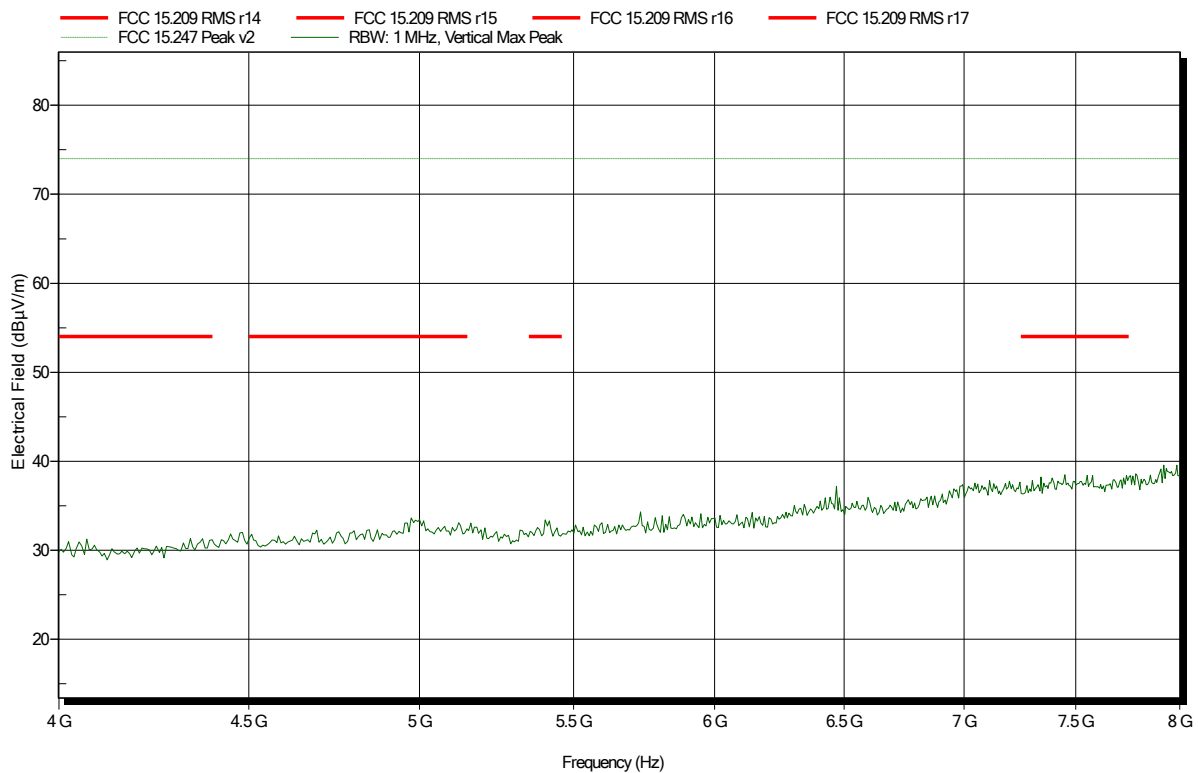


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 918.5 MHz; wall antenna
 Test Date: 2020-04-20
 Note:

Index 119

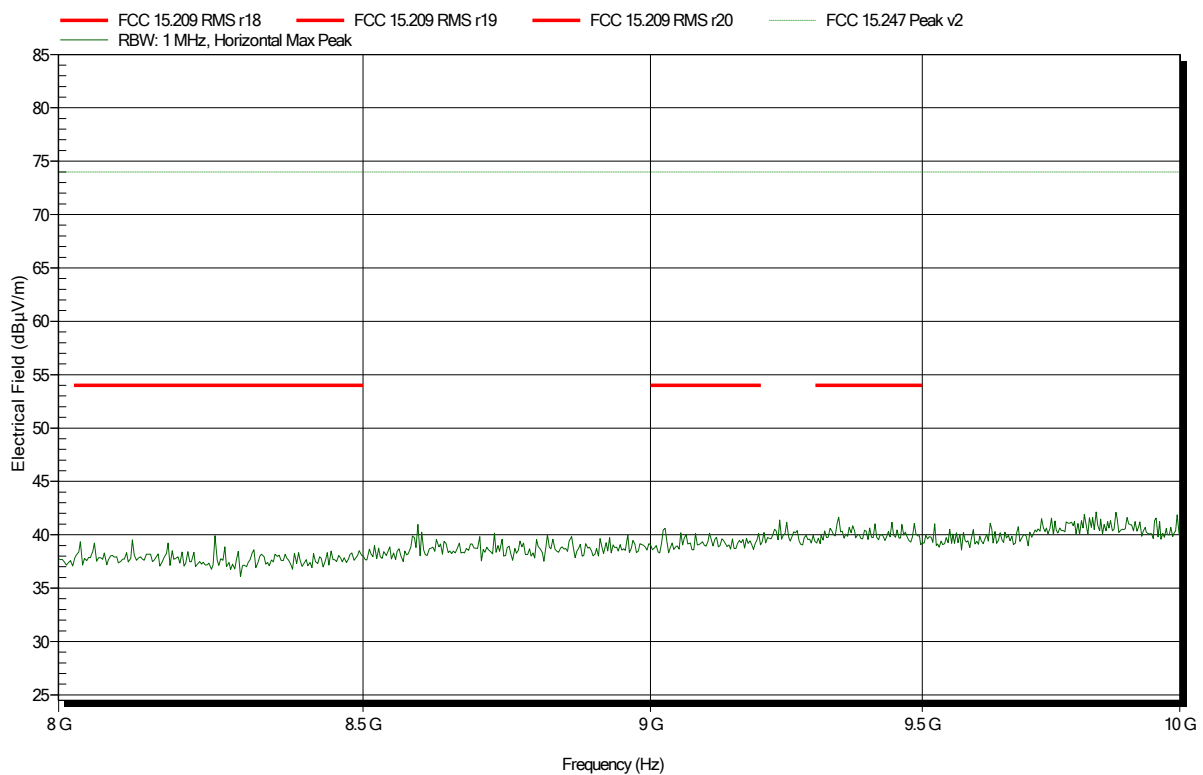


Spurious emissions according to FCC 15.247

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
EUT Name: Meter Transmit Unit
Model: Ready MTU
Test Site: Eurofins Product Service Germany
Operator: Toralf Jahn
Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; 918.5 MHz; wall antenna
Test Date: 2020-04-20
Note:

Index 122

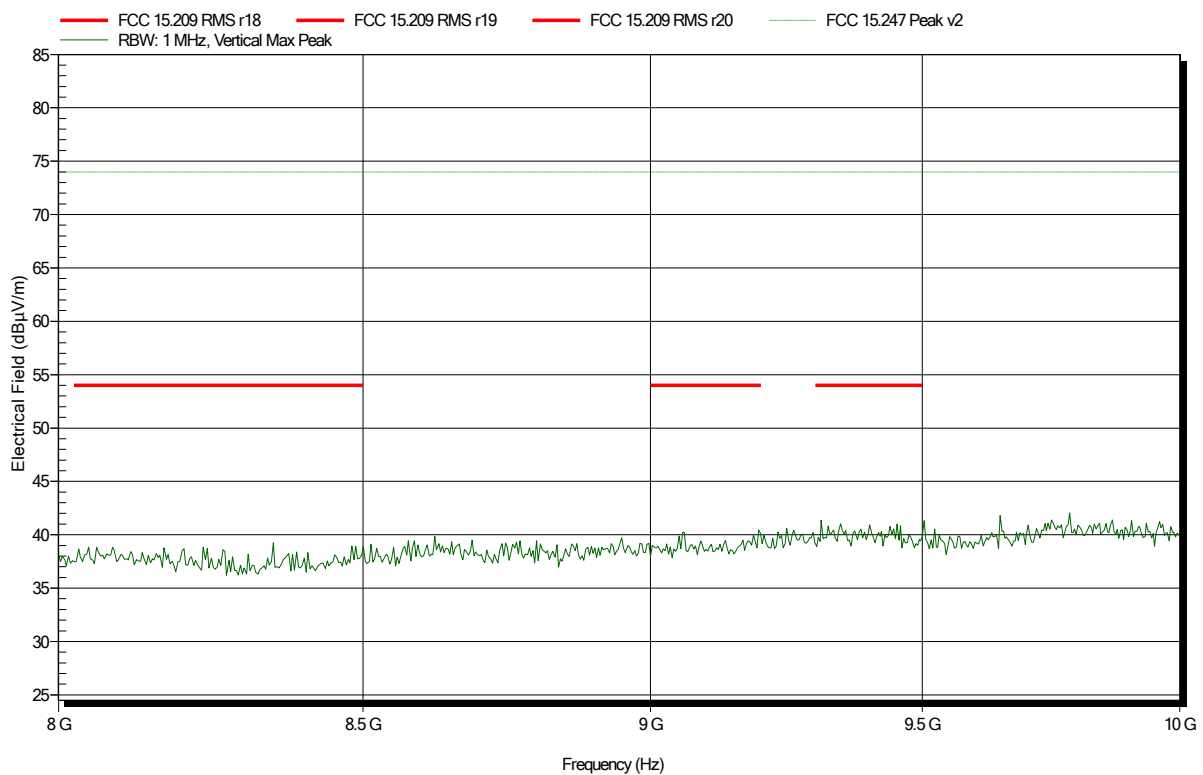


ANNEX B Receiver spurious emissions

Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
EUT Name: Meter Transmit Unit
Model: Ready MTU
Test Site: Eurofins Product Service Germany
Operator: Mr. Jahn
Measurement software: RadiMation, version 2016.1.10
Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
Antenna: Rohde & Schwarz HK 116, Horizontal
Measurement distance: 3 m
Mode: RX; 915 MHz; pit antenna
Test Date: 2020-04-17
Note:


Index 31

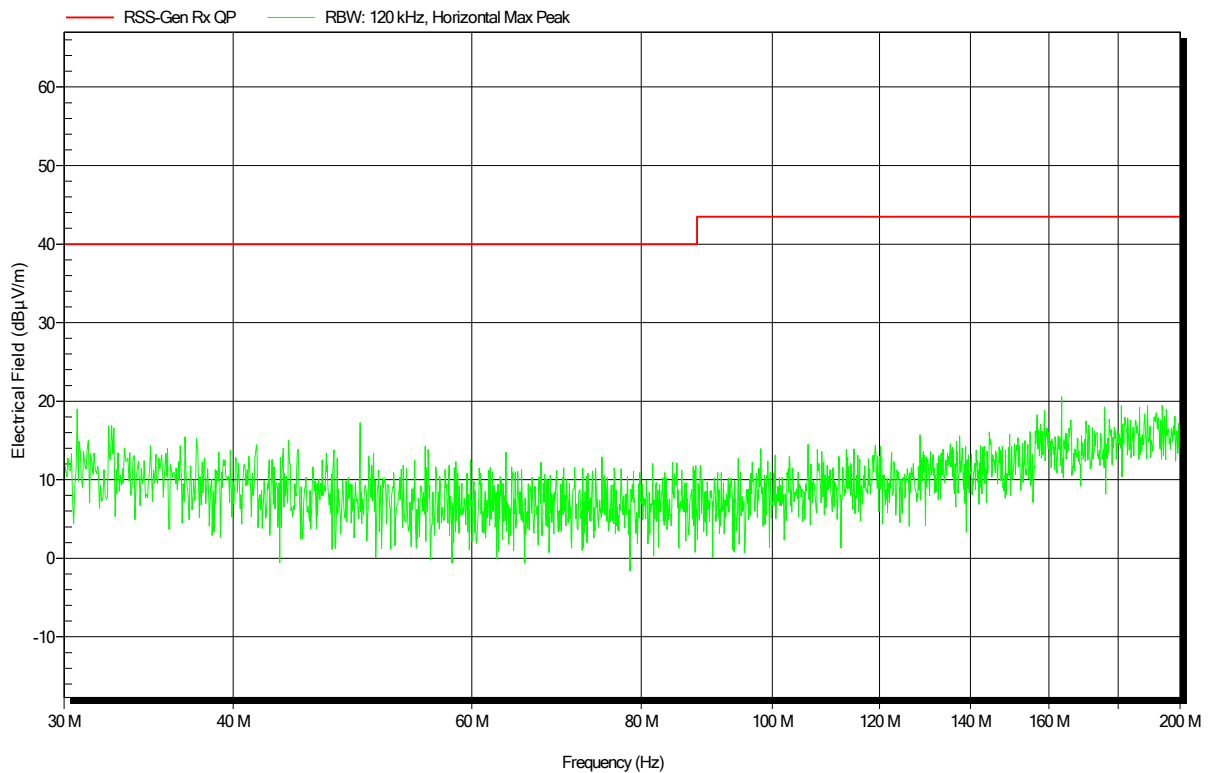

Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868
 Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Jahn
 Measurement software: RadiMation, version 2016.1.10
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Rohde & Schwarz HK 116, Vertical
 Measurement distance: 3 m
 Mode: RX; 915 MHz; pit antenna
 Test Date: 2020-04-17
 Note:

Index 32

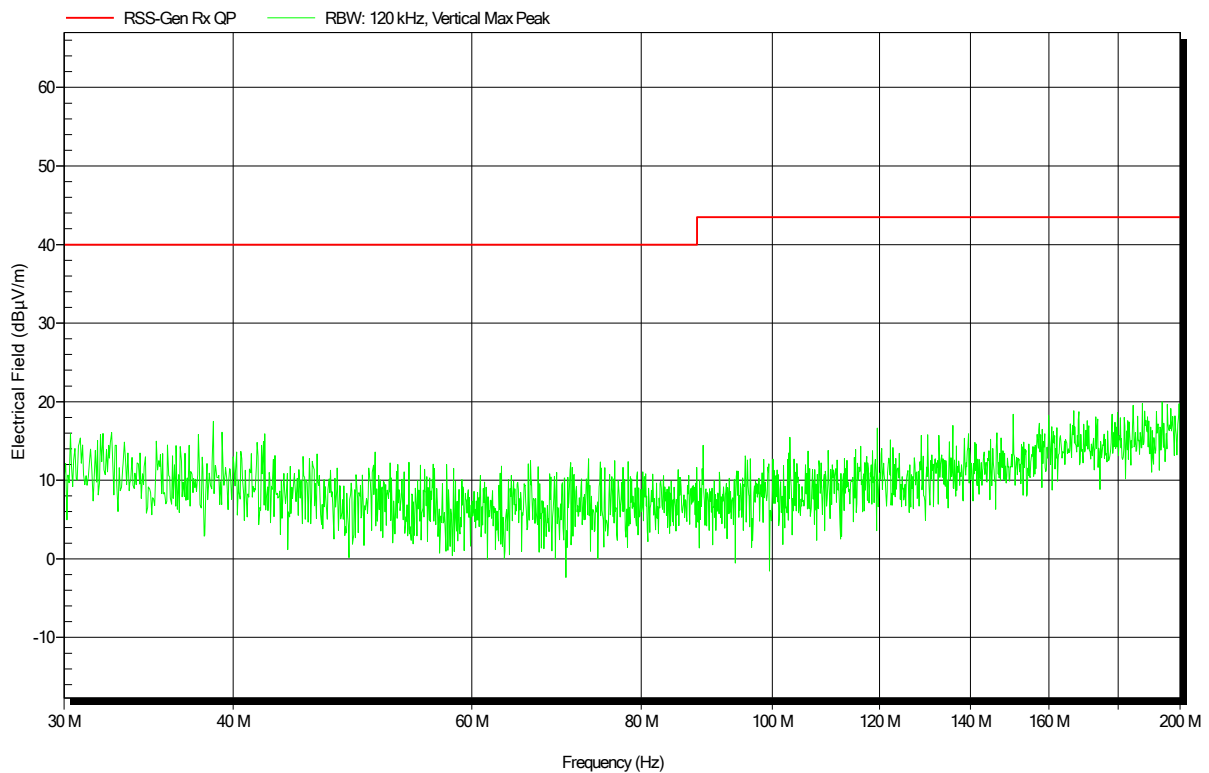


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Jahn
 Measurement software: RadiMation, version 2016.1.10
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement distance: 3 m
 Mode: RX; 915 MHz; pit antenna
 Test Date: 2020-04-17
 Note:

Index 30

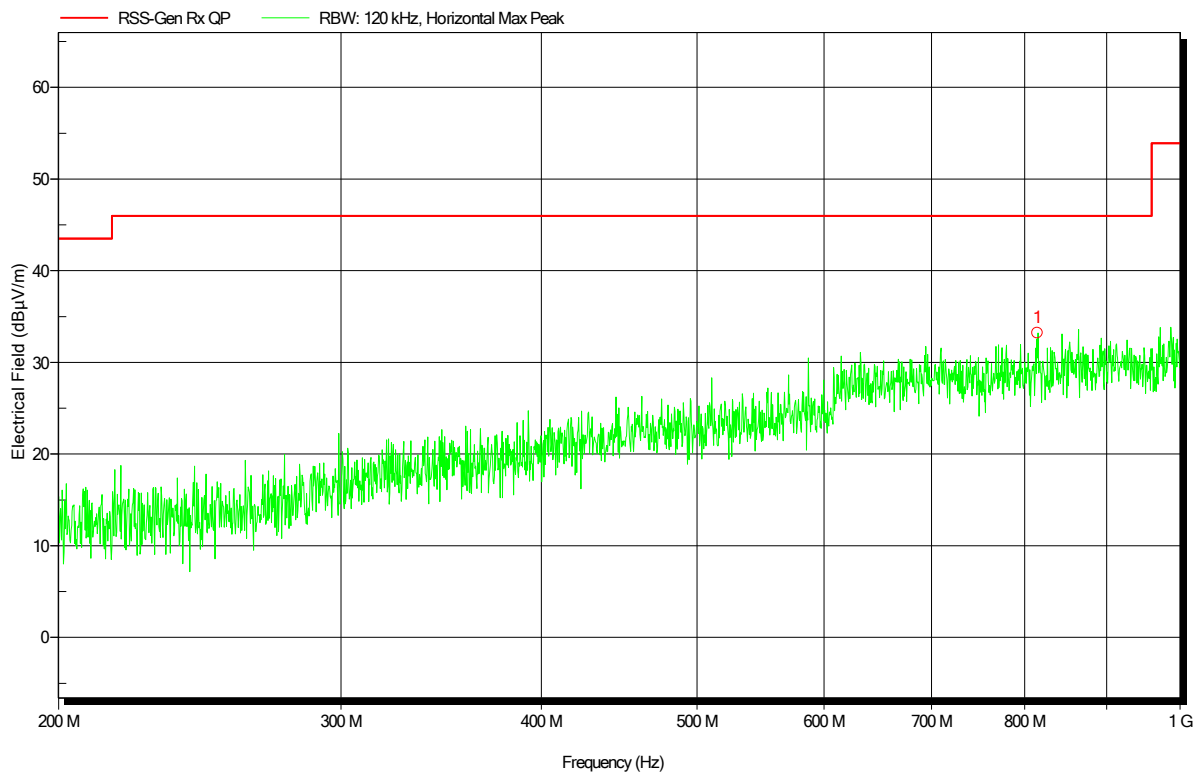


Frequency	Peak	Peak Limit	Peak Difference	Status	Angle	Height
814.9505 MHz	33.2 dBµV/m	46 dBµV/m	-12.79 dB	Pass	0 Degree	1 m

Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Jahn
 Measurement software: RadiMation, version 2016.1.10
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement distance: 3 m
 Mode: RX; 915 MHz; pit antenna
 Test Date: 2020-04-17
 Note:

Index 29

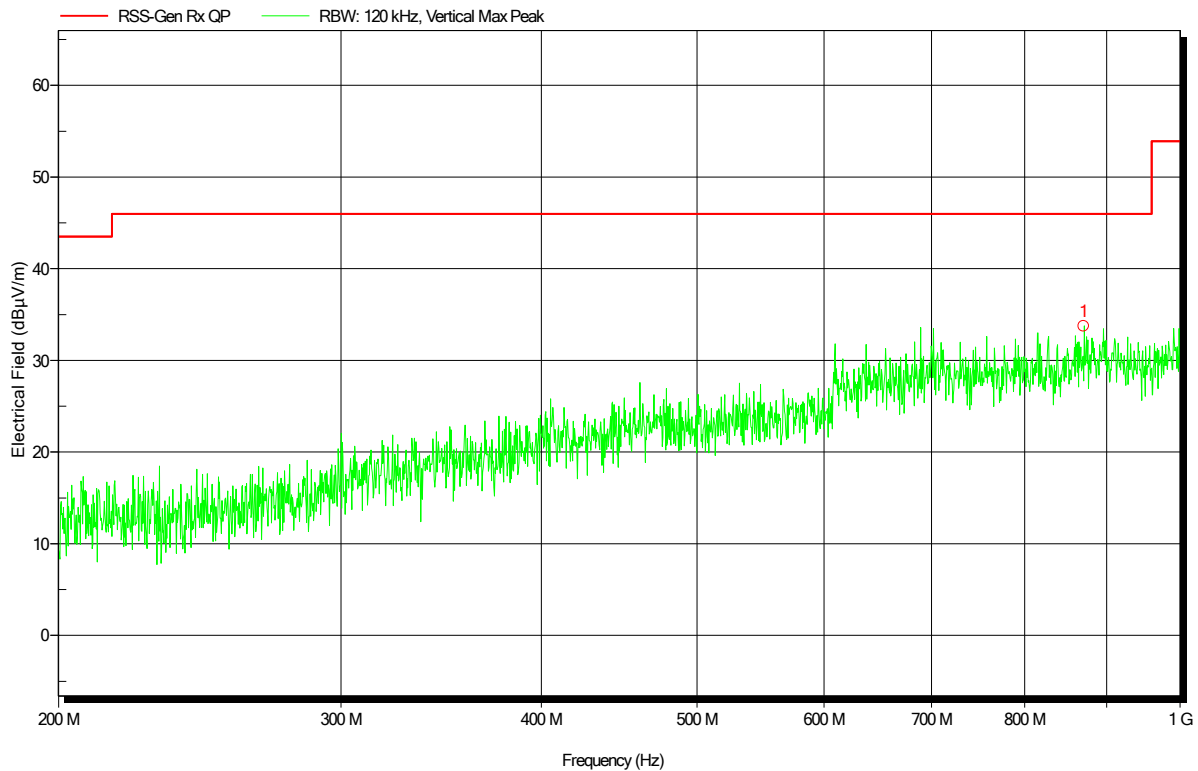


Frequency	Peak	Peak Limit	Peak Difference	Status	Angle	Height
870.9096 MHz	33.7 dBµV/m	46 dBµV/m	-12.25 dB	Pass	0 Degree	1 m

Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868
 Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Jahn
 Measurement software: RadiMation, version 2016.1.10
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Rohde & Schwarz HK 116, Horizontal
 Measurement distance: 3 m
 Mode: RX; 915 MHz; rod antenna
 Test Date: 2020-04-17
 Note:


Index 34

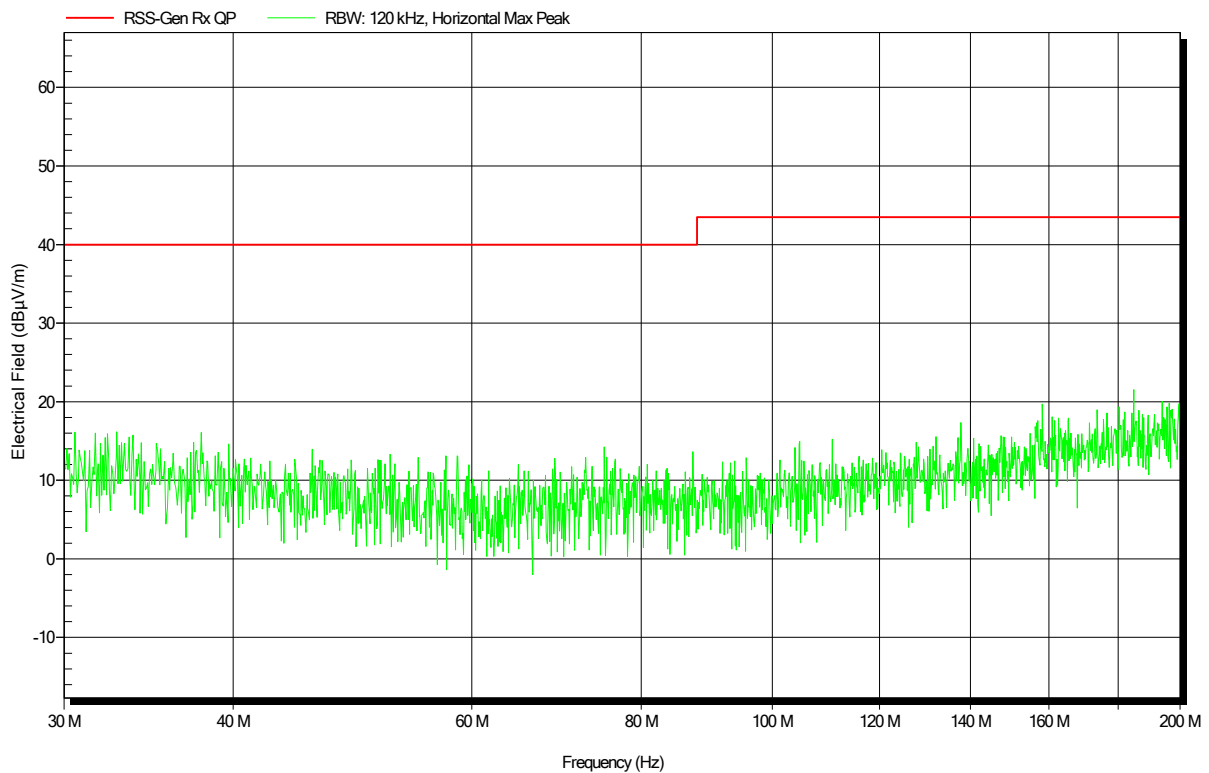

Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868
 Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Jahn
 Measurement software: RadiMation, version 2016.1.10
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Rohde & Schwarz HK 116, Vertical
 Measurement distance: 3 m
 Mode: RX; 915 MHz; rod antenna
 Test Date: 2020-04-17
 Note:

Index 33

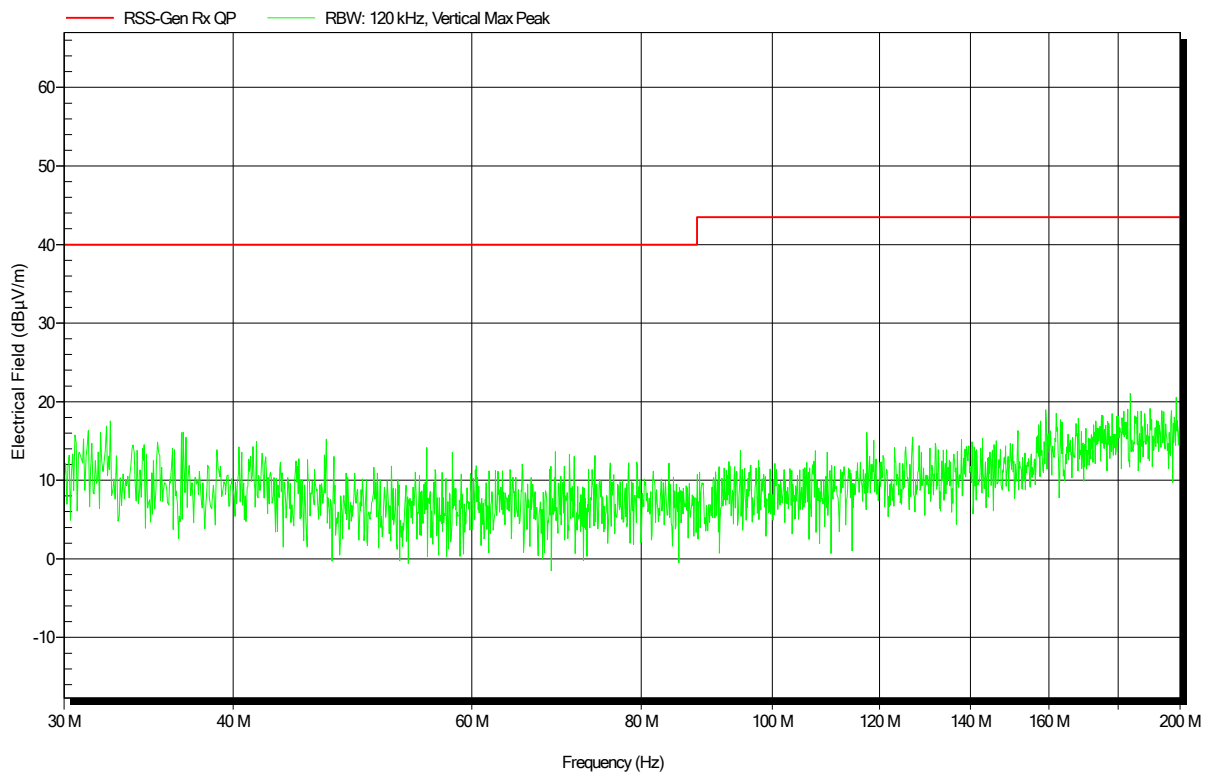


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Jahn
 Measurement software: RadiMation, version 2016.1.10
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement distance: 3 m
 Mode: RX; 915 MHz; rod antenna
 Test Date: 2020-04-17
 Note:

Index 26

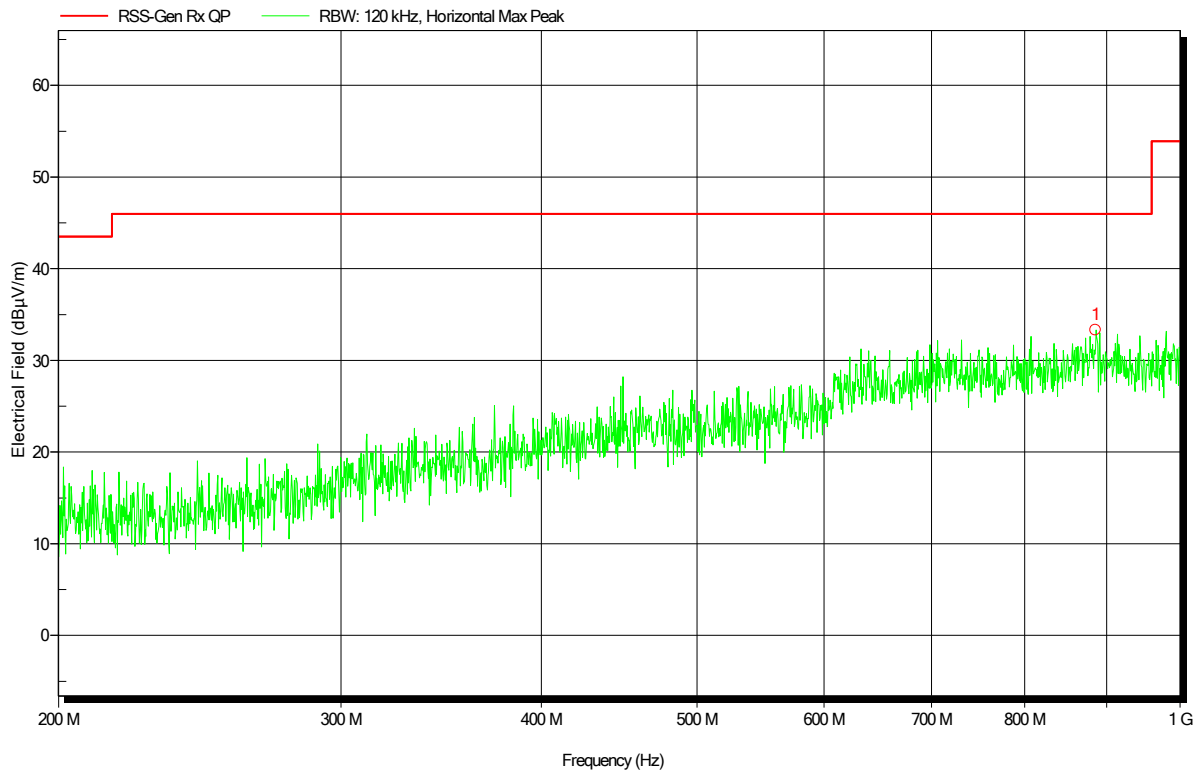


Frequency	Peak	Peak Limit	Peak Difference	Status	Angle	Height
885.6199 MHz	33.3 dBµV/m	46 dBµV/m	-12.7 dB	Pass	0 Degree	1 m

Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868
 Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Jahn
 Measurement software: RadiMation, version 2016.1.10
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement distance: 3 m
 Mode: RX; 915 MHz; rod antenna
 Test Date: 2020-04-17
 Note:

Index 25

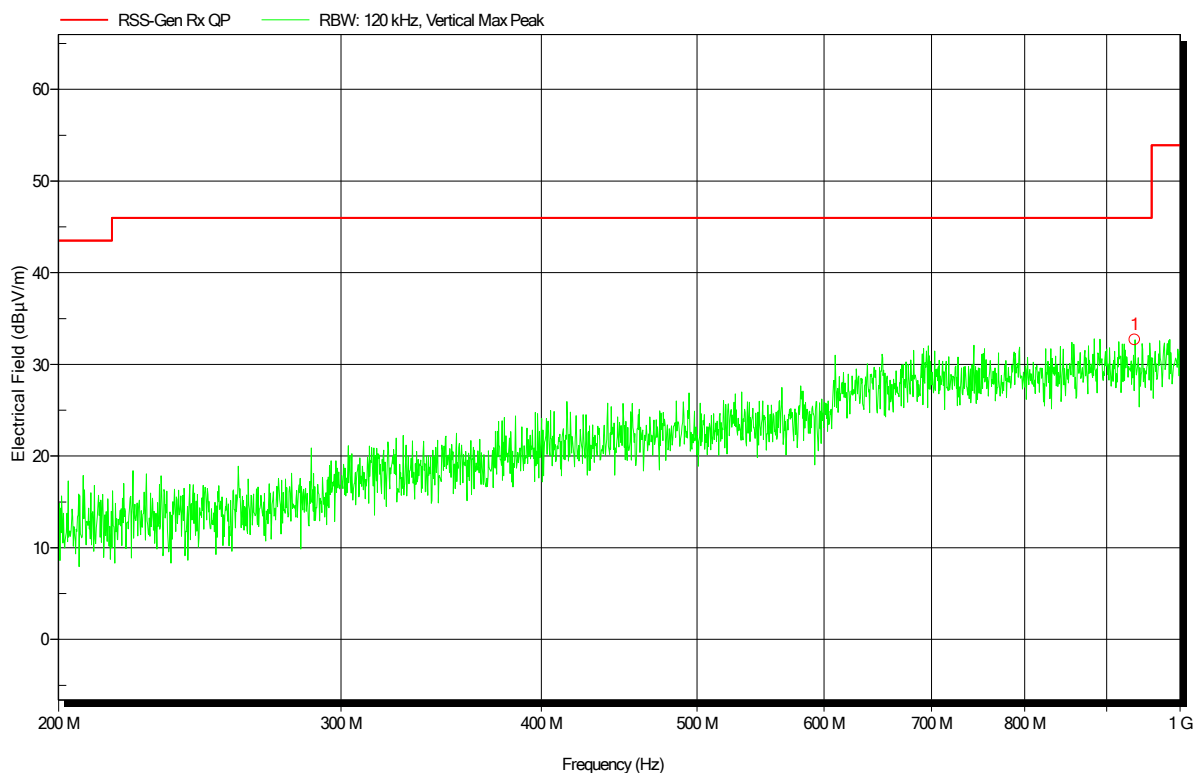


Frequency	Peak	Peak Limit	Peak Difference	Status	Angle	Height
937.076 MHz	32.7 dBµV/m	46 dBµV/m	-13.3 dB	Pass	0 Degree	1 m

Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Jahn
 Measurement software: RadiMation, version 2016.1.10
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Rohde & Schwarz HK 116, Horizontal
 Measurement distance: 3 m
 Mode: RX; 915 MHz; wall antenna
 Test Date: 2020-04-17
 Note:

Index 35

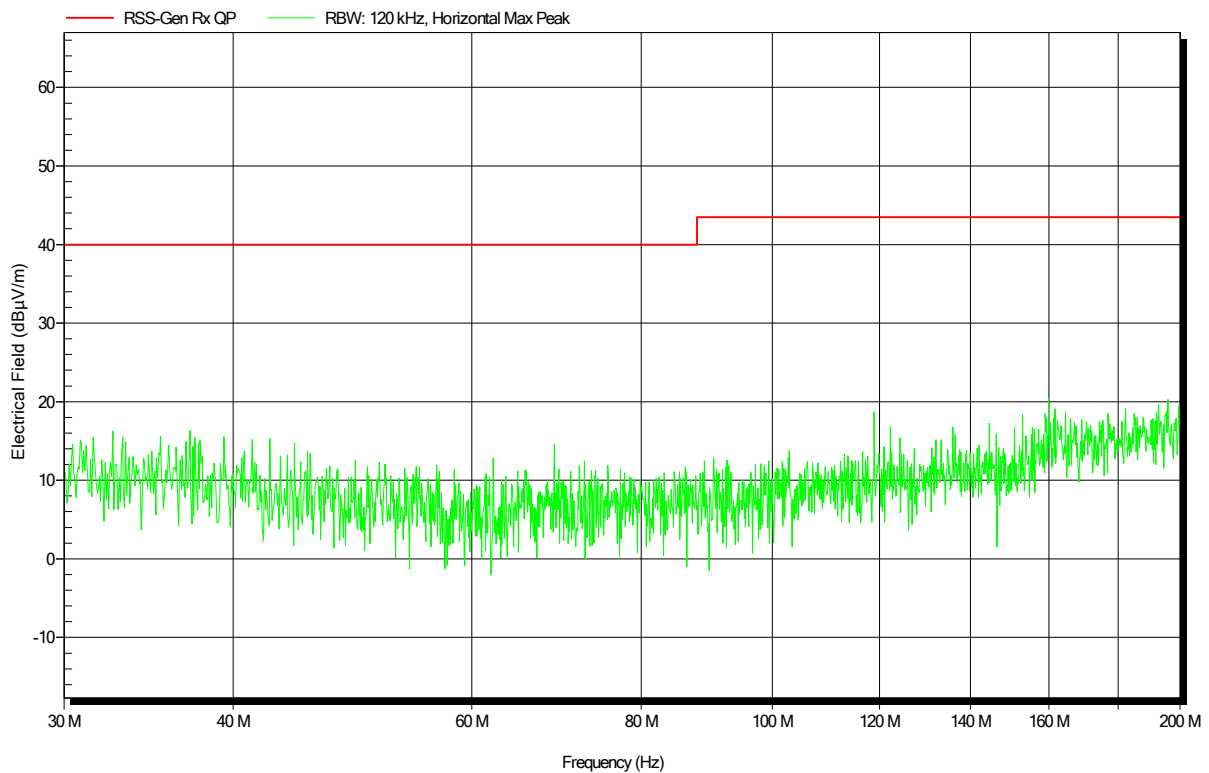


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Jahn
 Measurement software: RadiMation, version 2016.1.10
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Rohde & Schwarz HK 116, Vertical
 Measurement distance: 3 m
 Mode: RX; 915 MHz; wall antenna
 Test Date: 2020-04-17
 Note:

Index 36

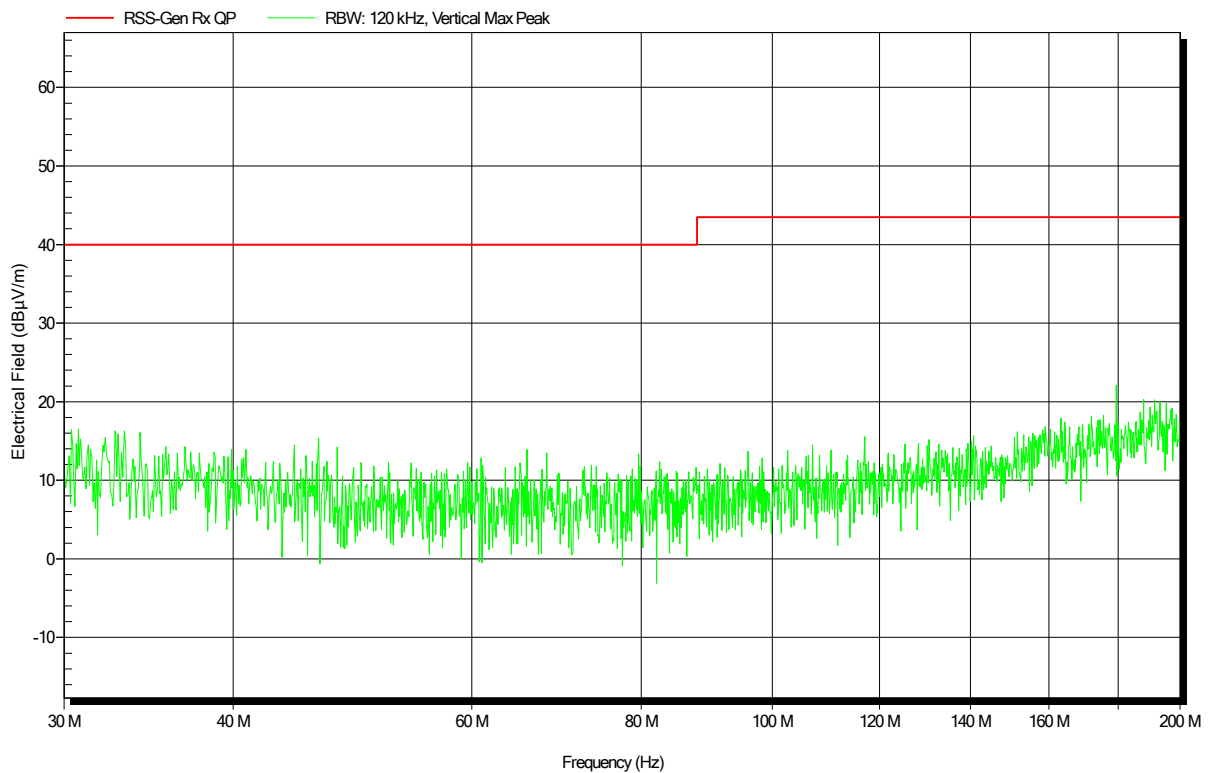


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Jahn
 Measurement software: RadiMation, version 2016.1.10
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement distance: 3 m
 Mode: RX; 915 MHz; wall antenna
 Test Date: 2020-04-17
 Note:

Index 27

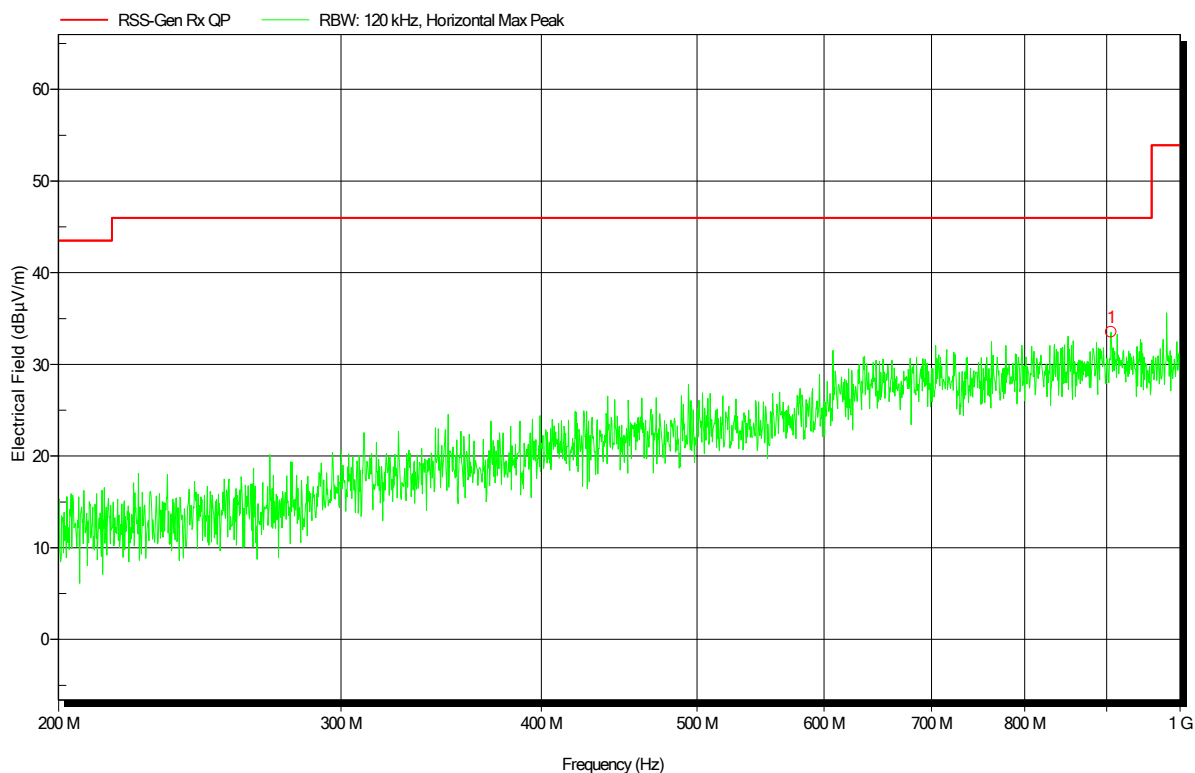


Frequency	Peak	Peak Limit	Peak Difference	Status	Angle	Height
905.4939 MHz	33.5 dBµV/m	46 dBµV/m	-12.49 dB	Pass	0 Degree	1 m

Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Jahn
 Measurement software: RadiMation, version 2016.1.10
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement distance: 3 m
 Mode: RX; 915 MHz; wall antenna
 Test Date: 2020-04-17
 Note:

Index 28

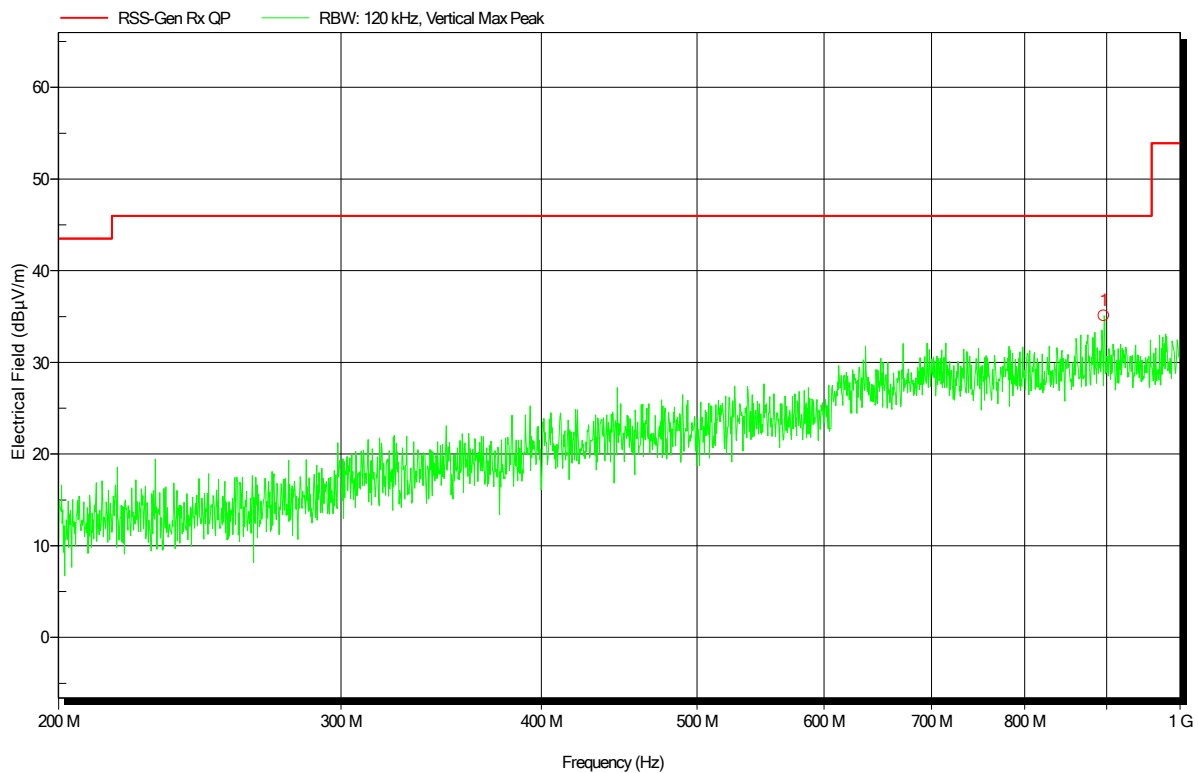


Frequency	Peak	Peak Limit	Peak Difference	Status	Angle	Height
896.1873 MHz	35.1 dBµV/m	46 dBµV/m	-10.91 dB	Pass	0 Degree	1 m

Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 V
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; pit antenna
 Test Date: 2020-04-20
 Note:

Index 45

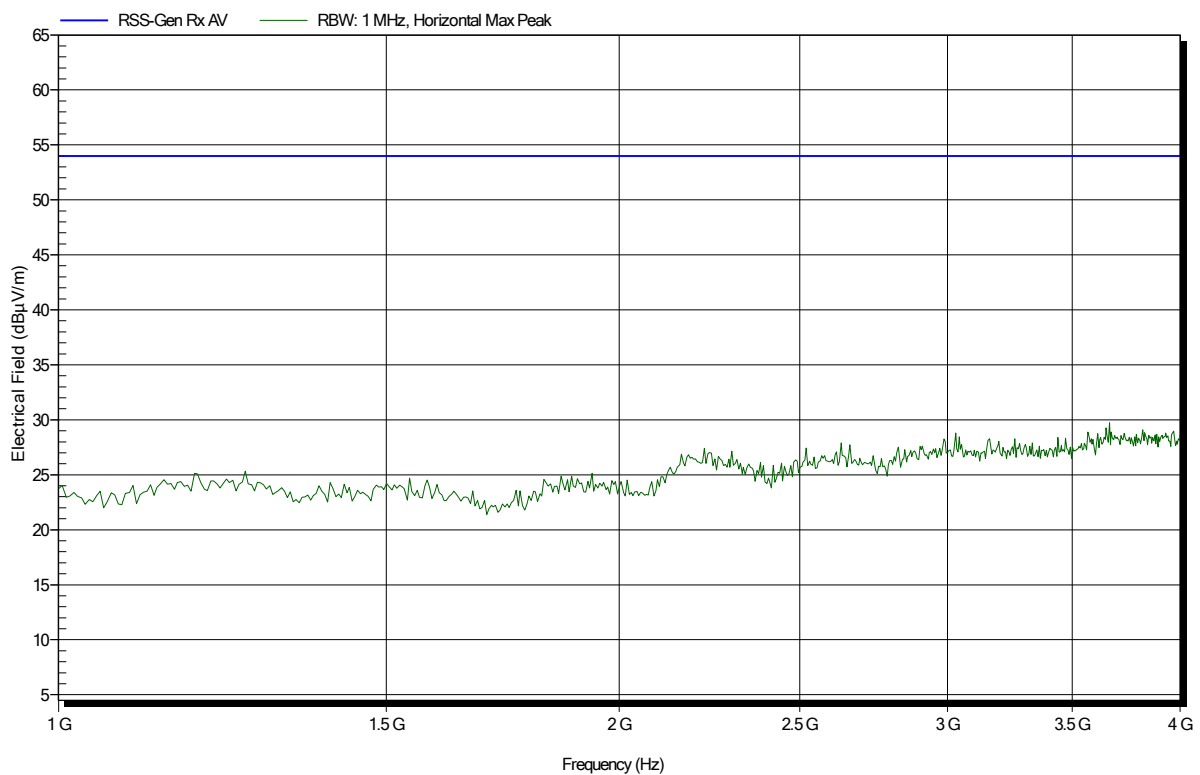


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; pit antenna
 Test Date: 2020-04-20
 Note:

Index 47

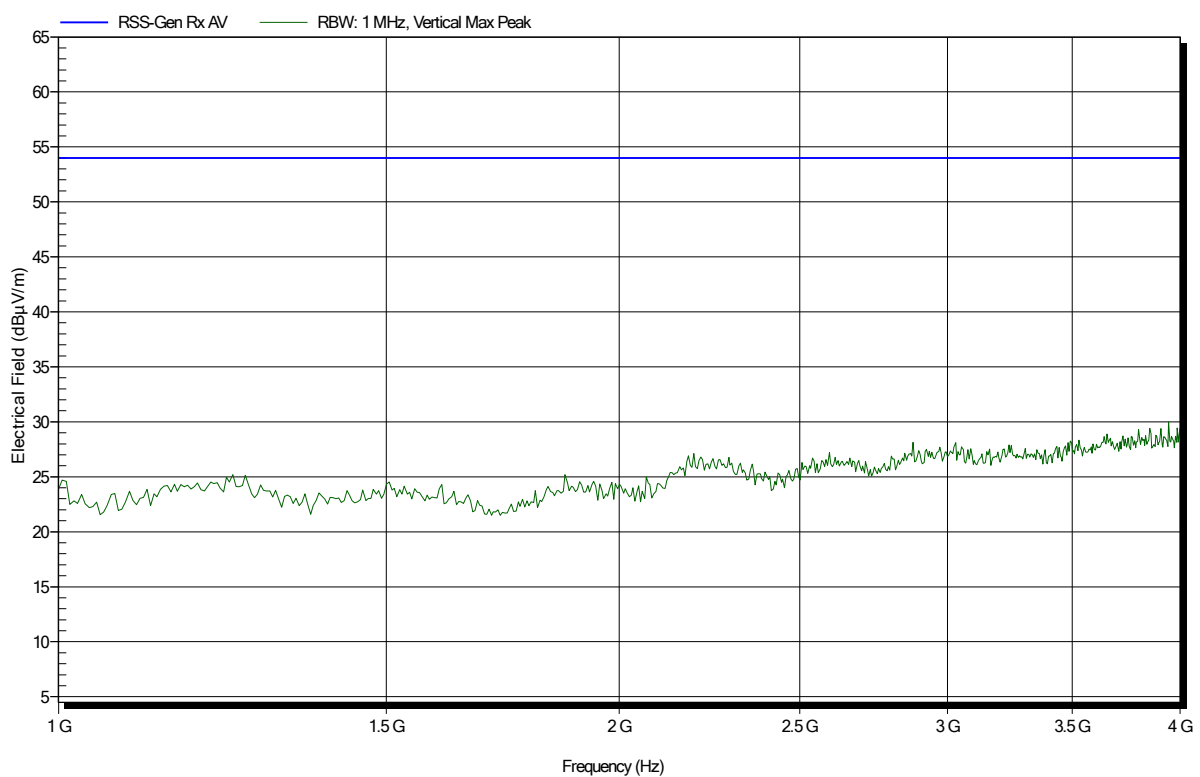


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; pit antenna
 Test Date: 2020-04-20
 Note:

Index 46

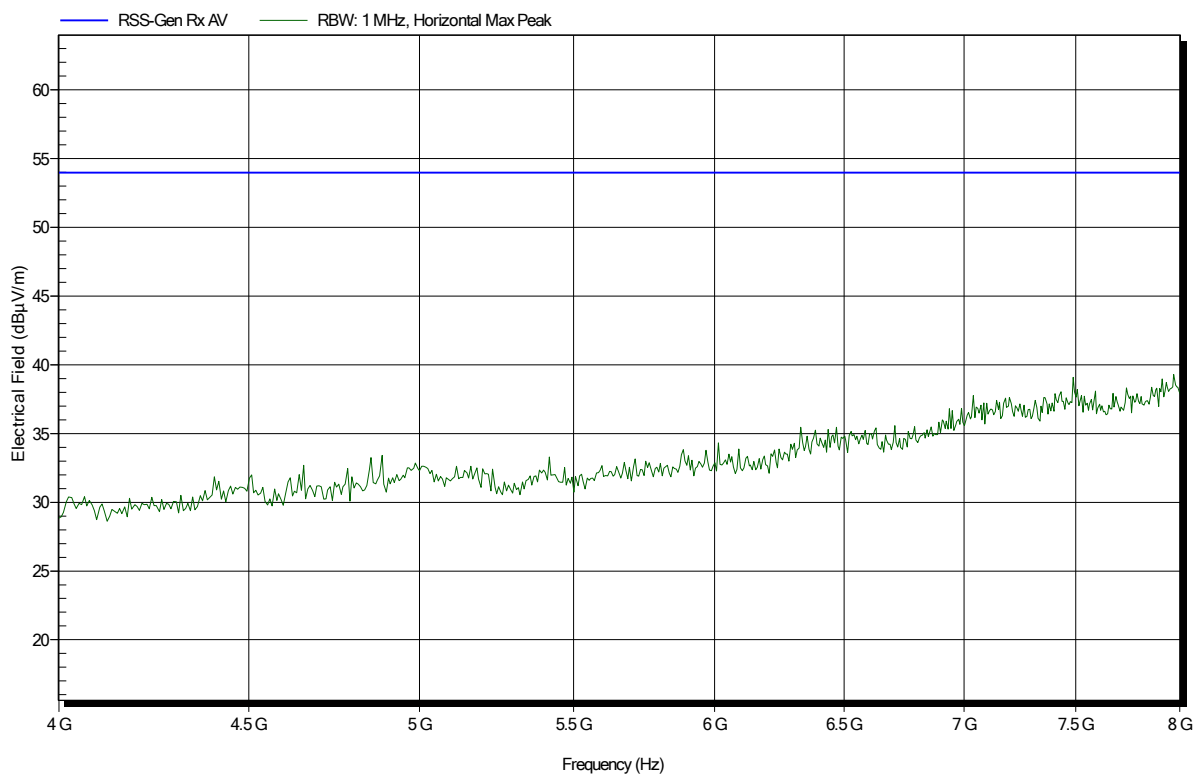


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; pit antenna
 Test Date: 2020-04-20
 Note:

Index 48

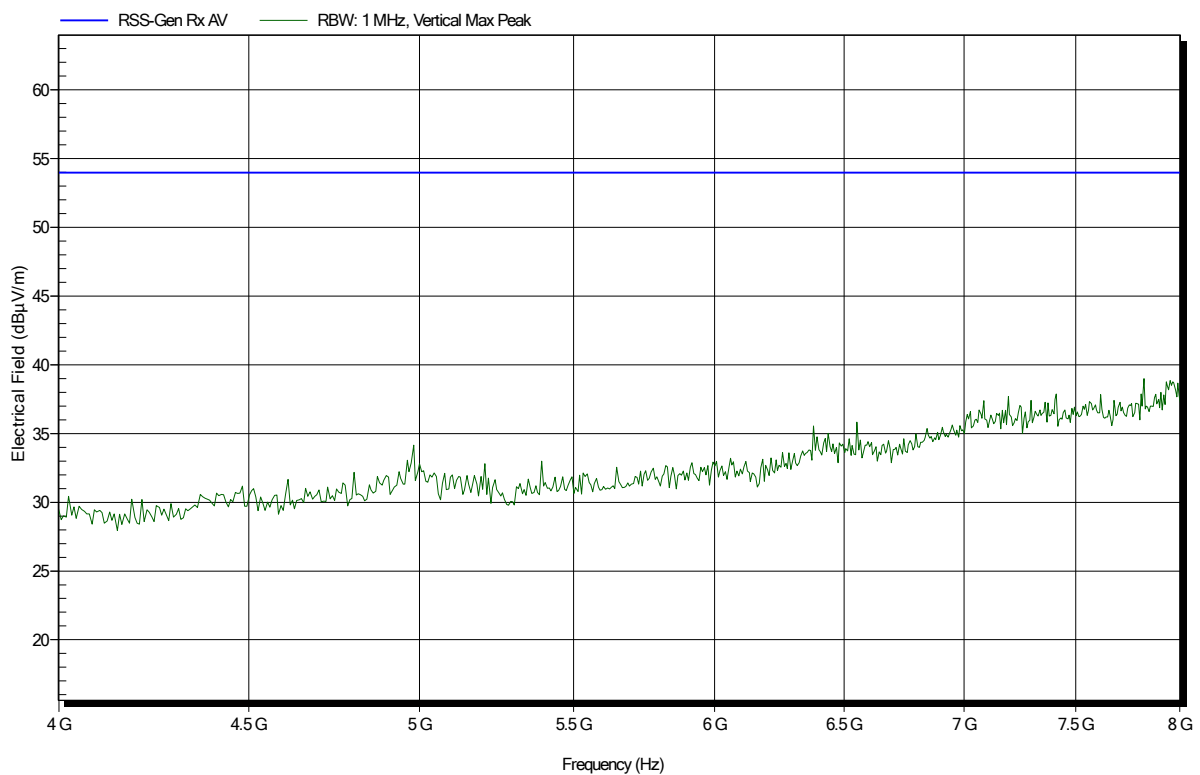


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; rod antenna
 Test Date: 2020-04-20
 Note:


Index 41

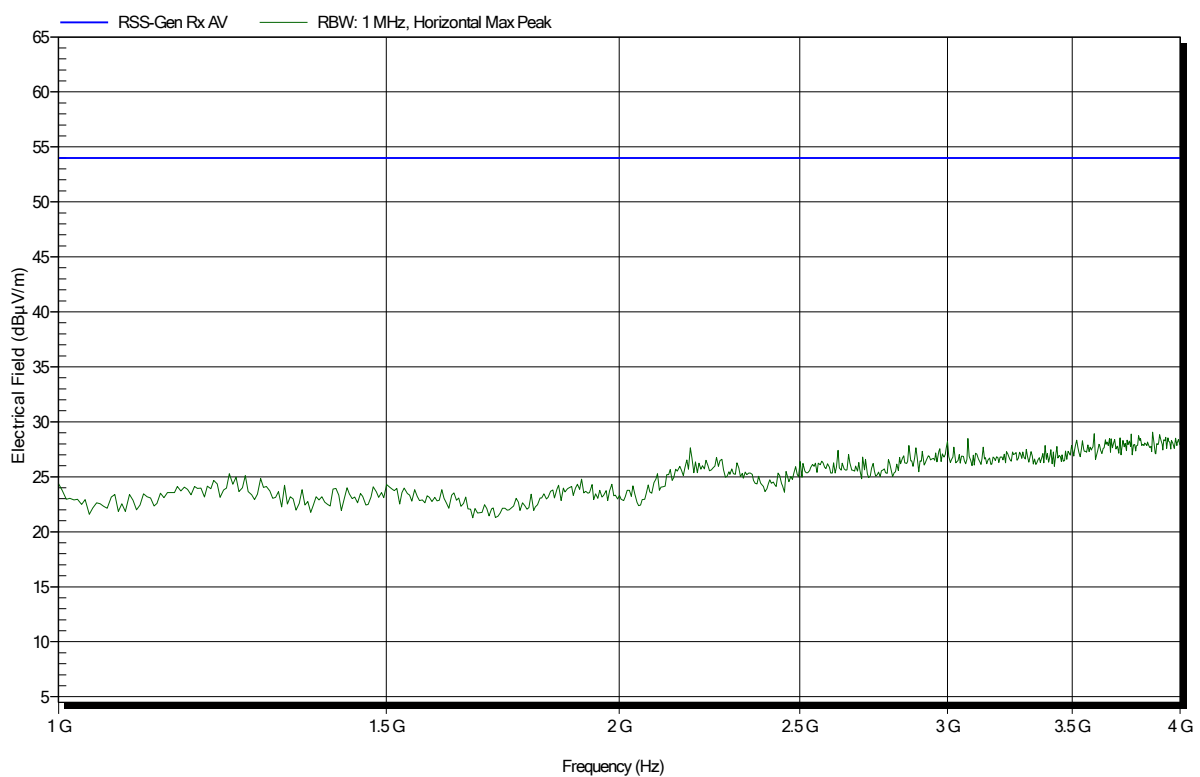

Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868
 Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; rod antenna
 Test Date: 2020-04-20
 Note:

Index 43

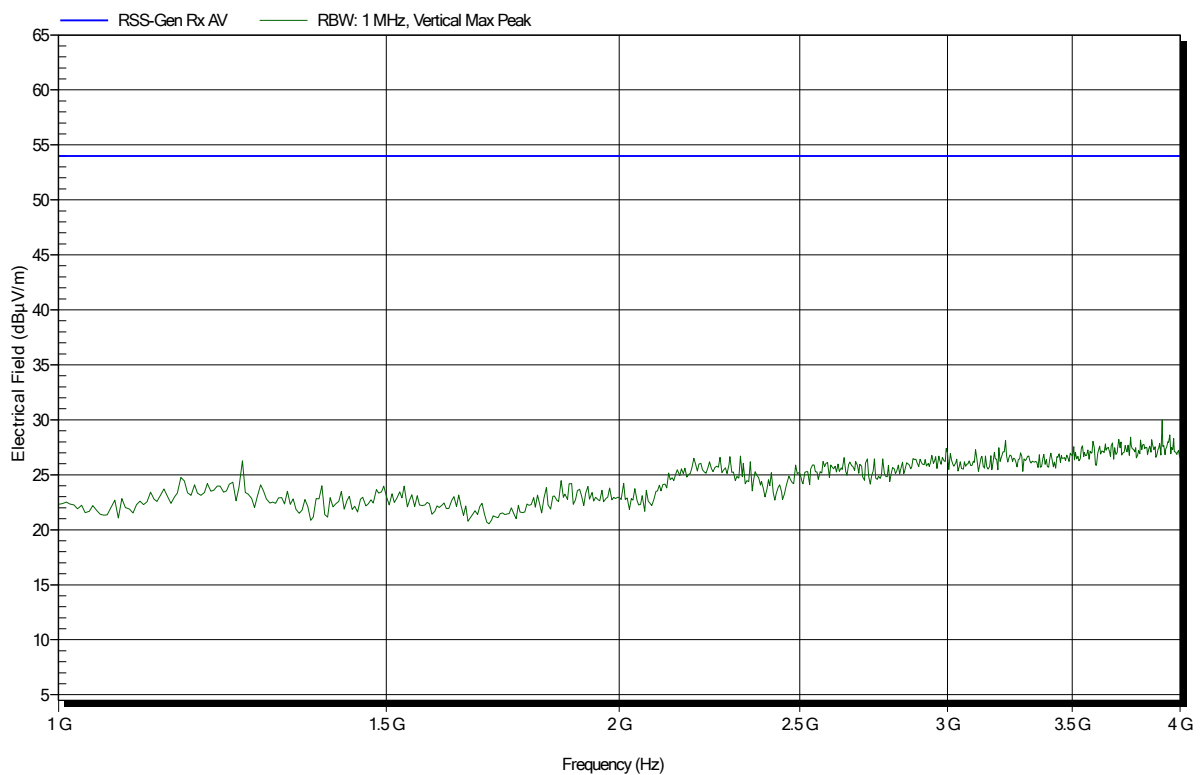


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; rod antenna
 Test Date: 2020-04-20
 Note:

Index 42

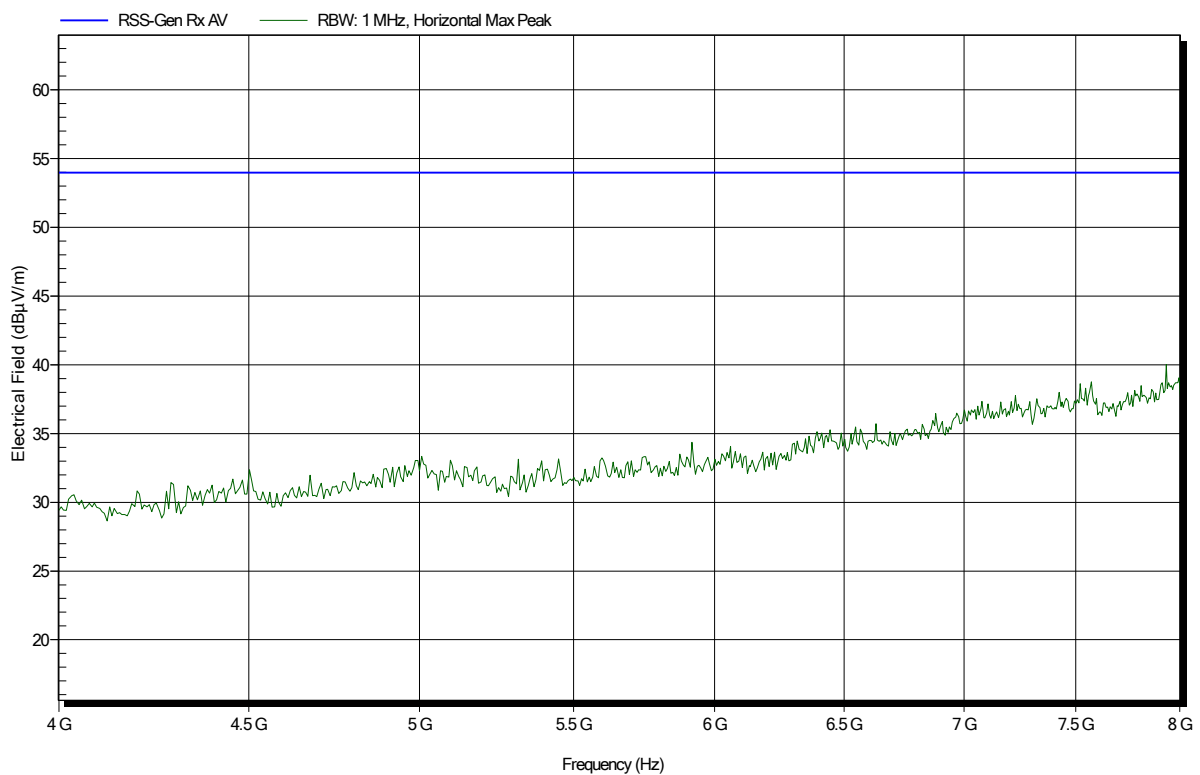


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; rod antenna
 Test Date: 2020-04-20
 Note:

Index 44

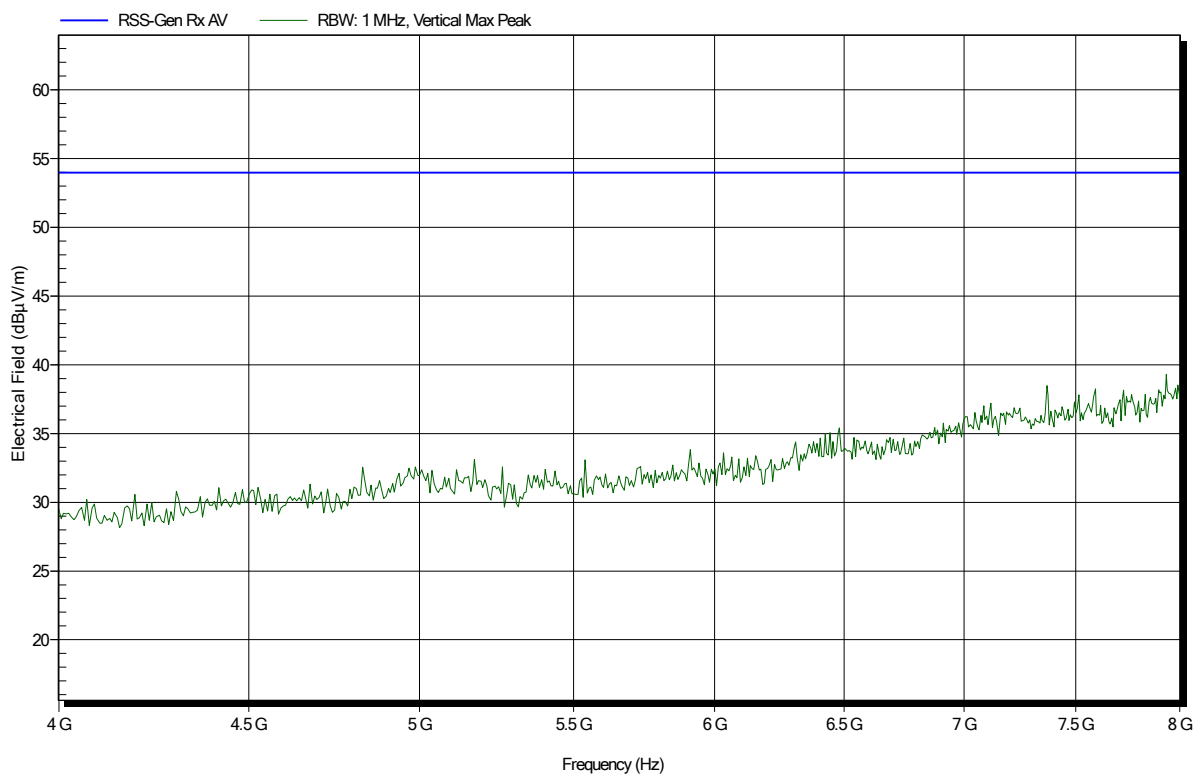


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
EUT Name: Meter Transmit Unit
Model: Ready MTU
Test Site: Eurofins Product Service Germany
Operator: Toralf Jahn
Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 1 m converted to 3m
Mode: TX; 915 MHz; wall antenna
Test Date: 2020-04-20
Note:

Index 37

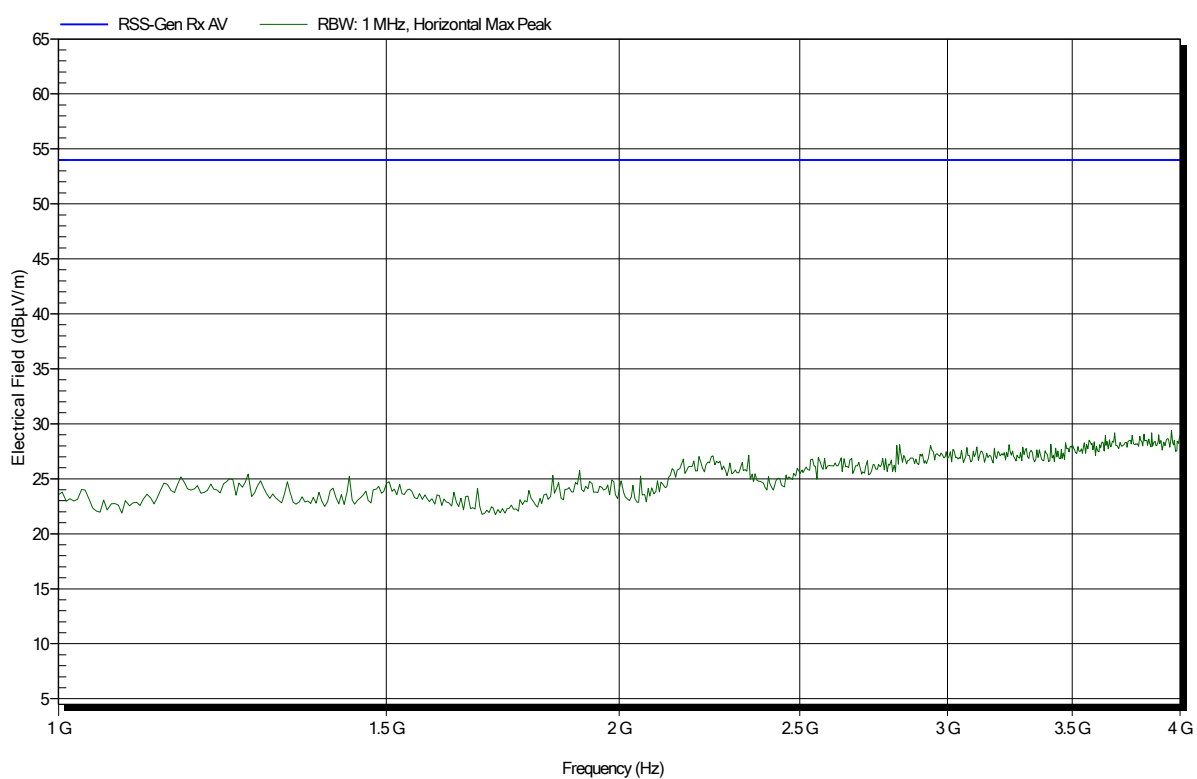


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; wall antenna
 Test Date: 2020-04-20
 Note:


Index 39

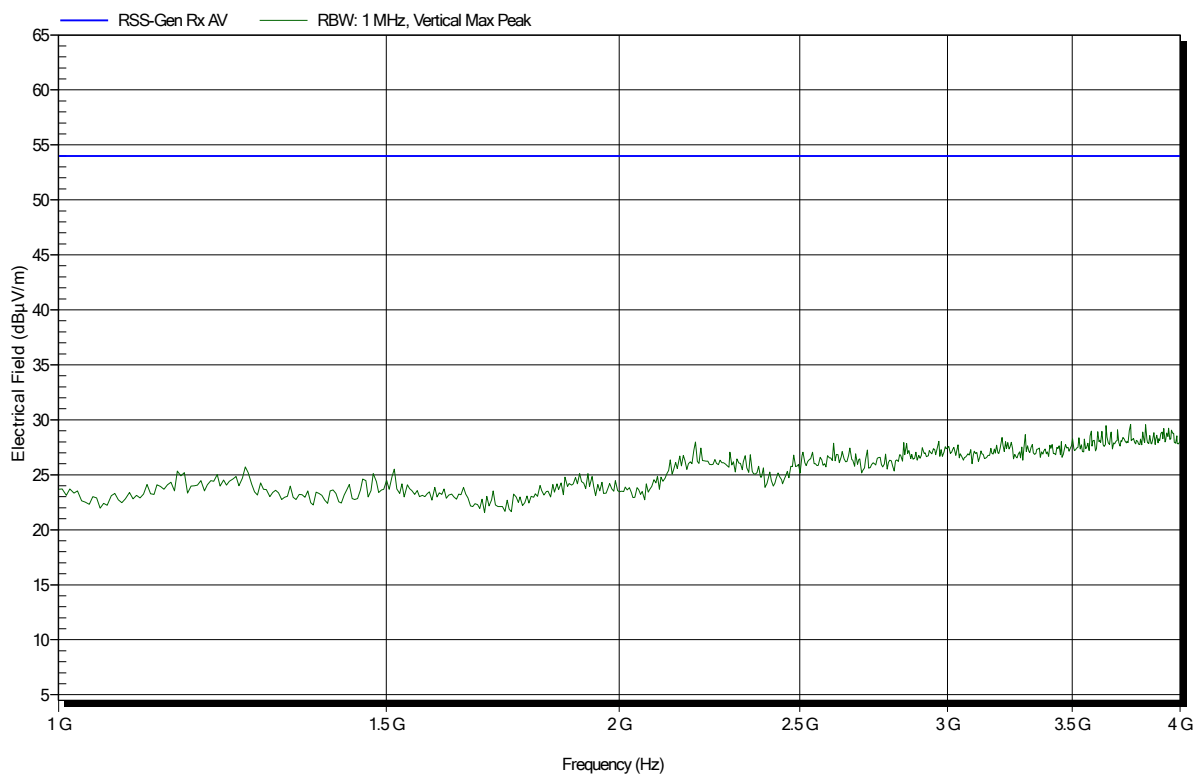

Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868
 Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; wall antenna
 Test Date: 2020-04-20
 Note:

Index 38

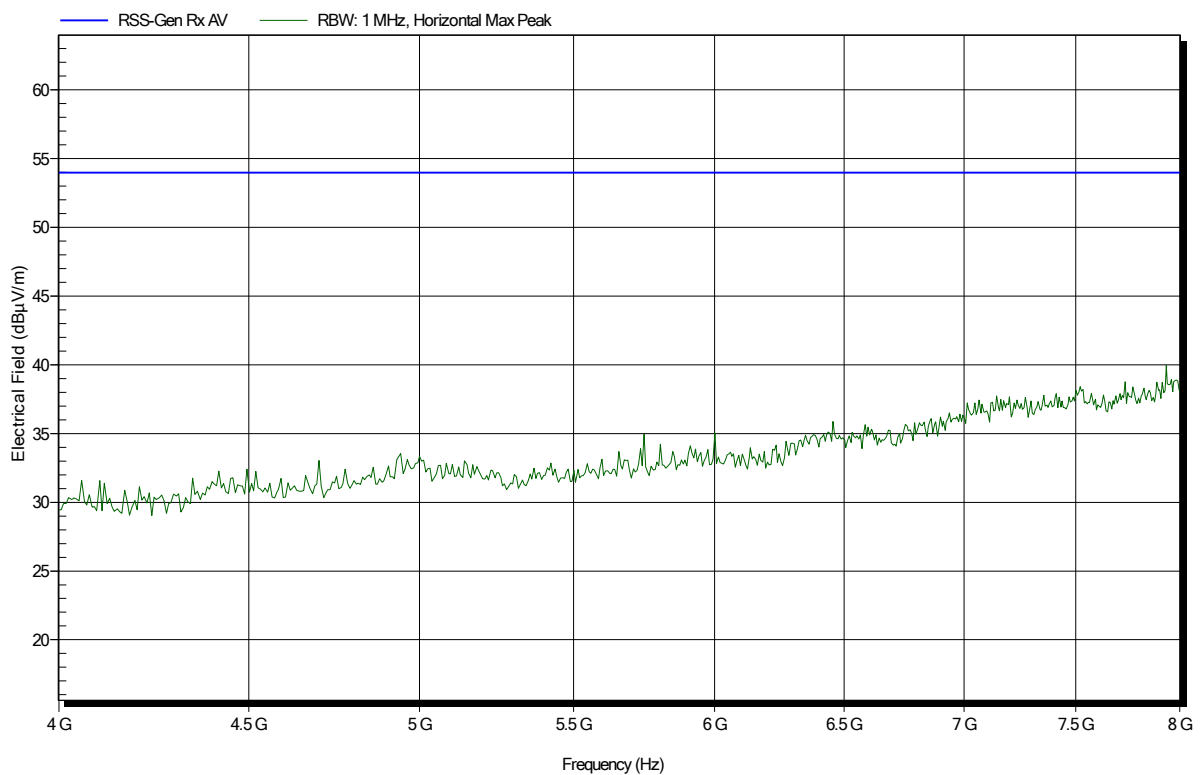


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
EUT Name: Meter Transmit Unit
Model: Ready MTU
Test Site: Eurofins Product Service Germany
Operator: Toralf Jahn
Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; 915 MHz; wall antenna
Test Date: 2020-04-20
Note:


Index 40

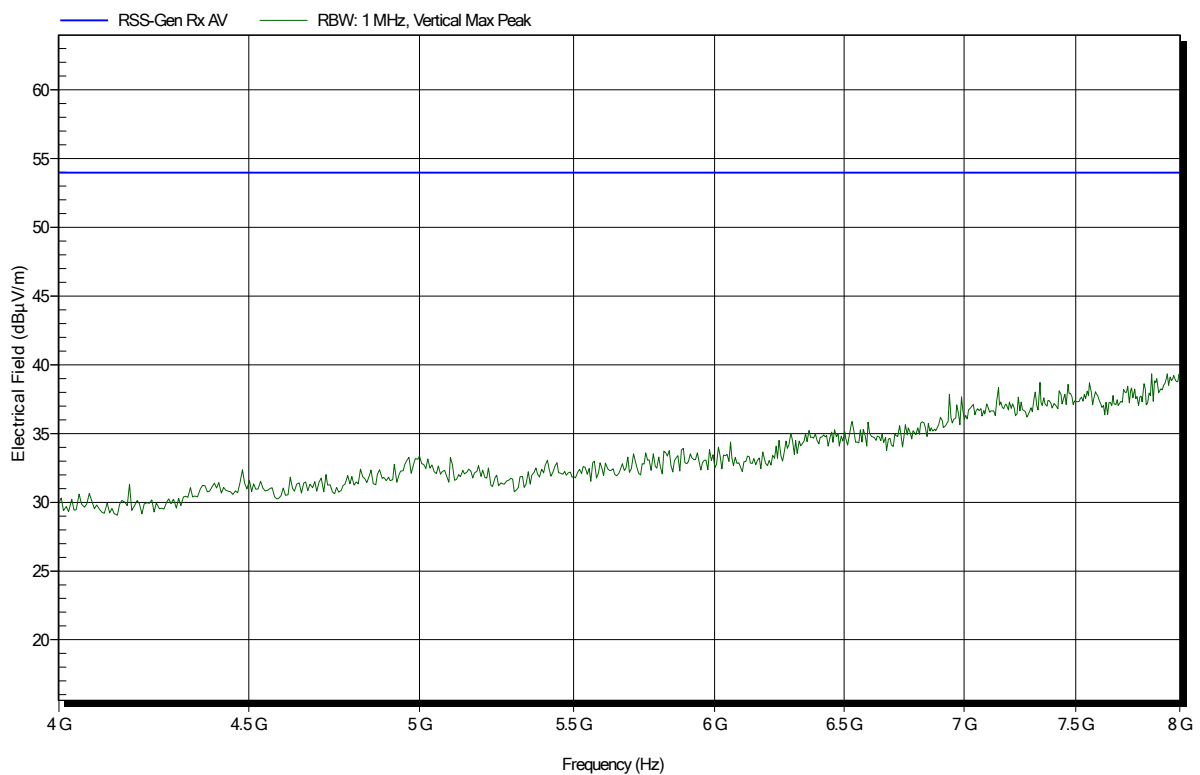

Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868
 Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; pit antenna
 Test Date: 2020-04-20
 Note:

Index 47

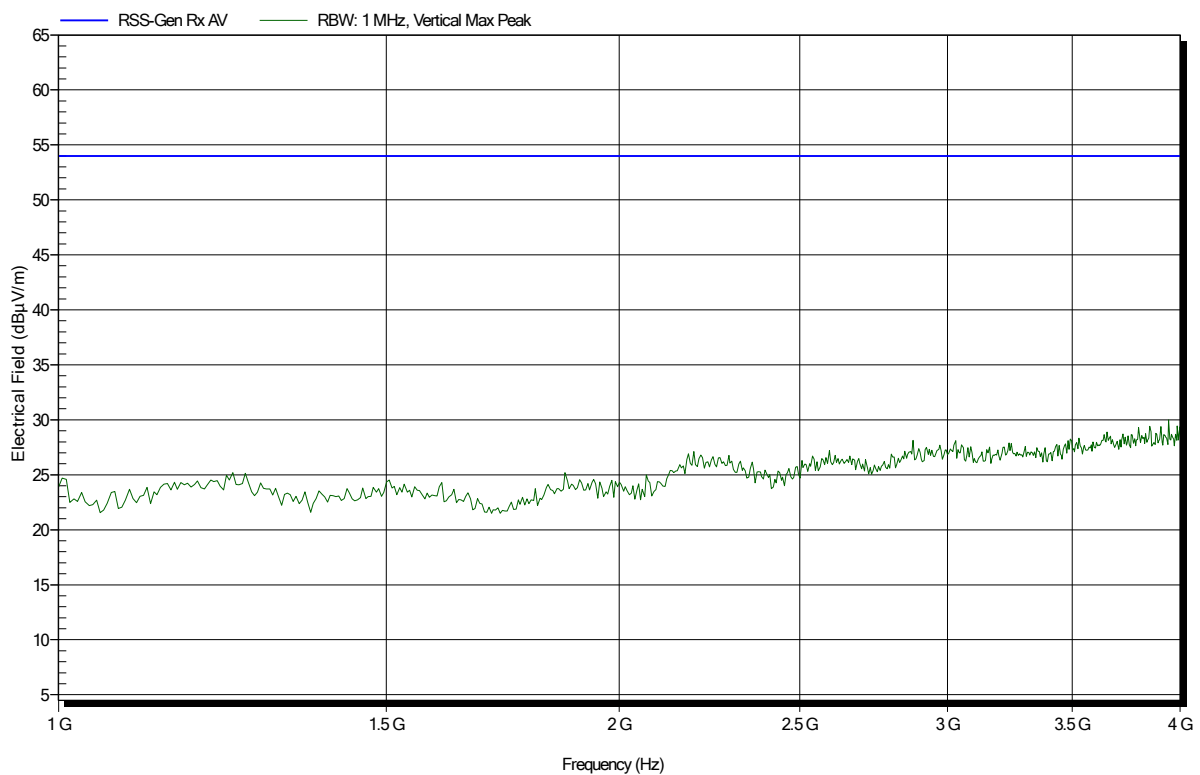


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; pit antenna
 Test Date: 2020-04-20
 Note:

Index 46

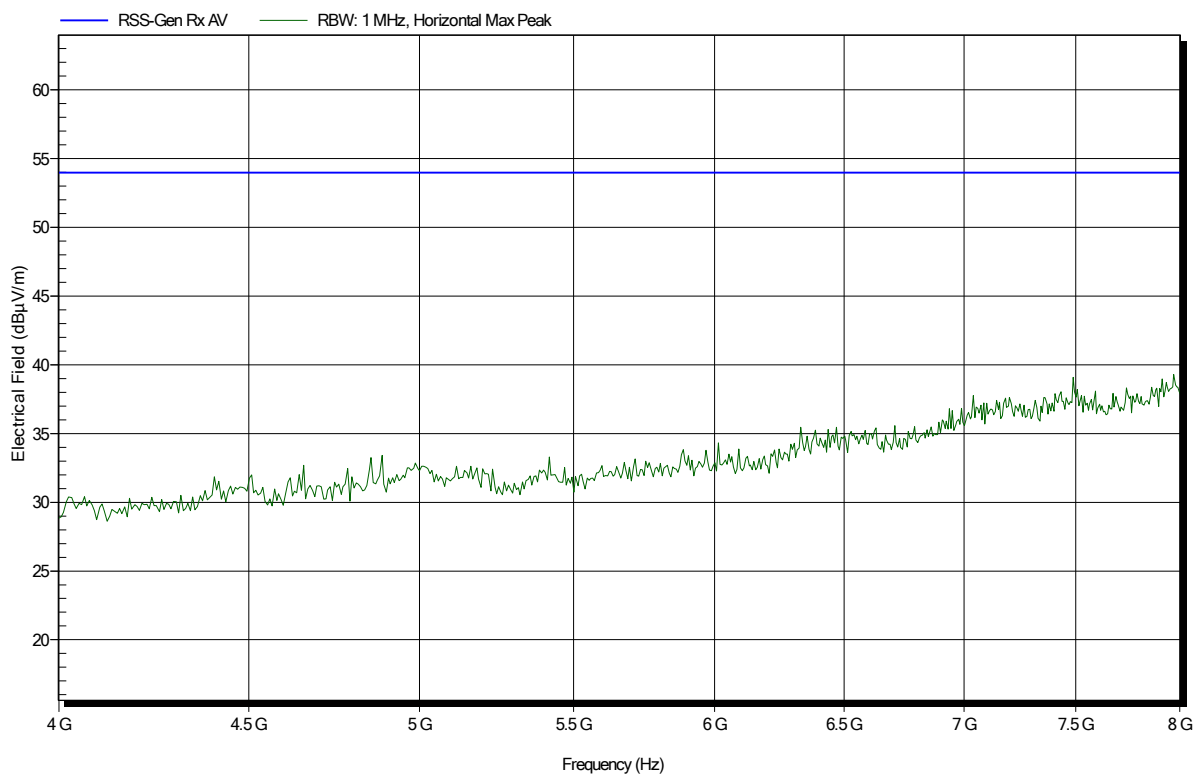


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; pit antenna
 Test Date: 2020-04-20
 Note:

Index 48

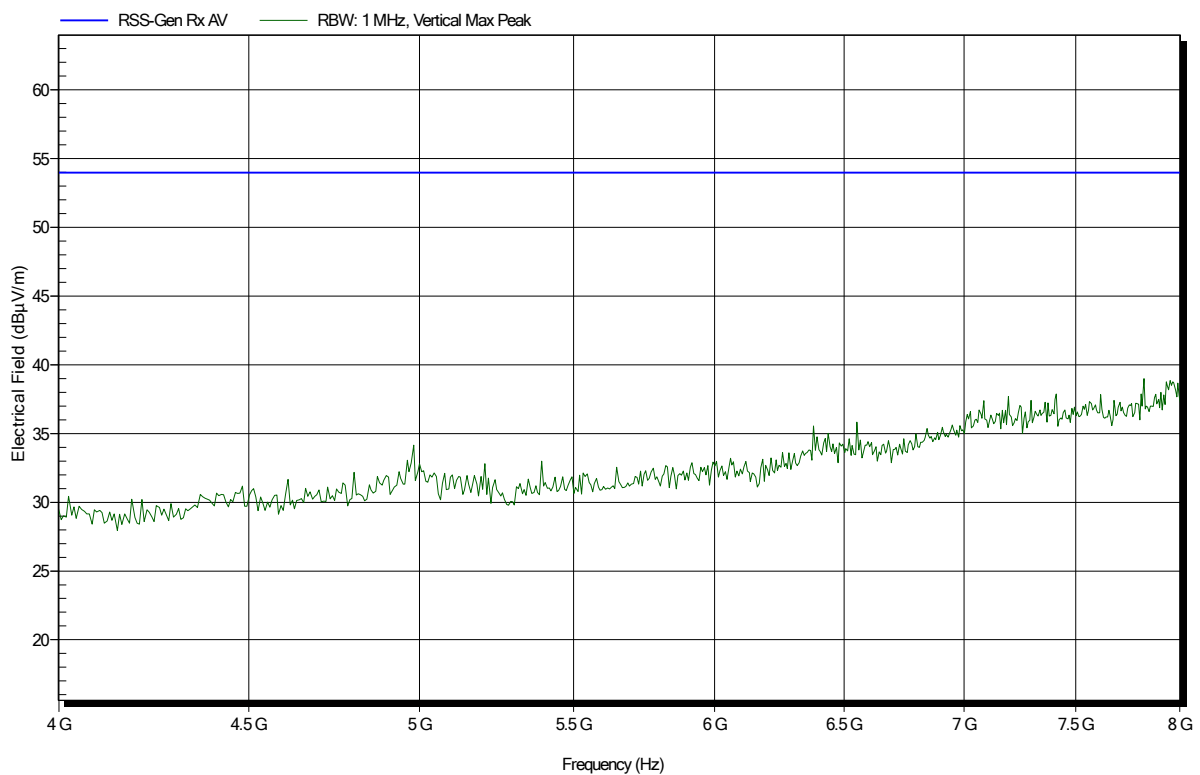


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; rod antenna
 Test Date: 2020-04-20
 Note:

Index 41

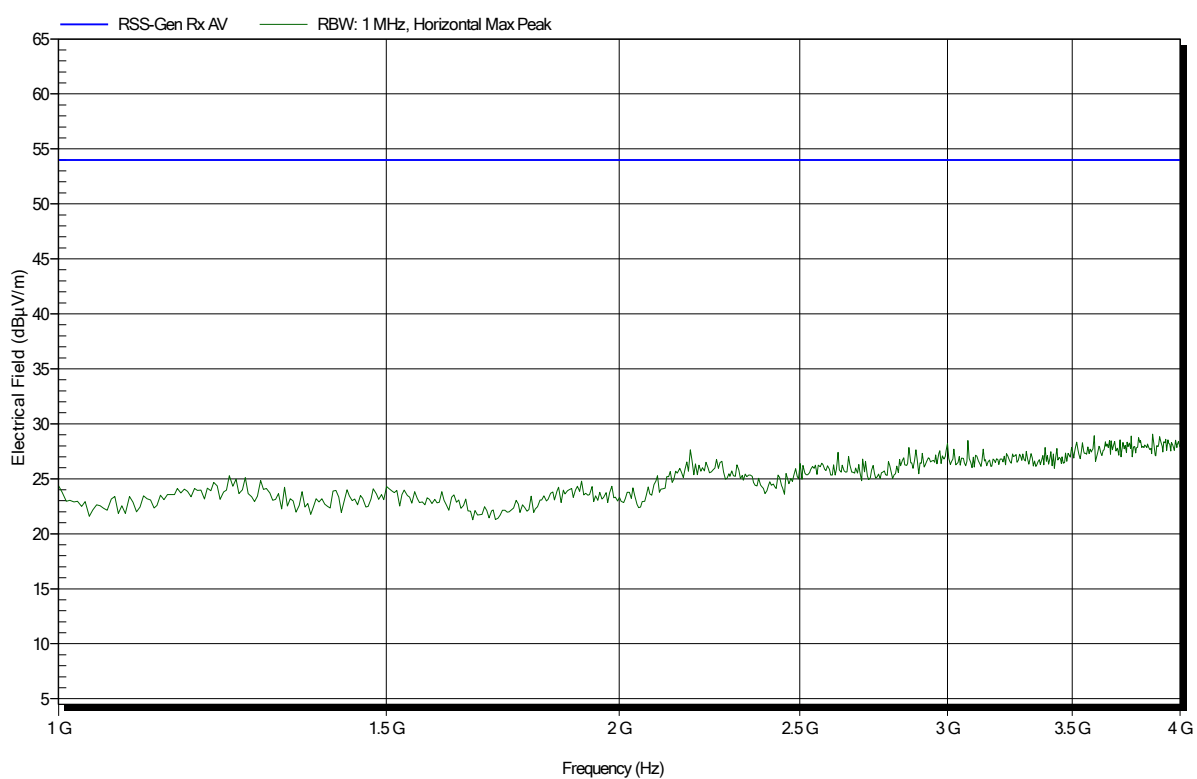


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; rod antenna
 Test Date: 2020-04-20
 Note:

Index 43

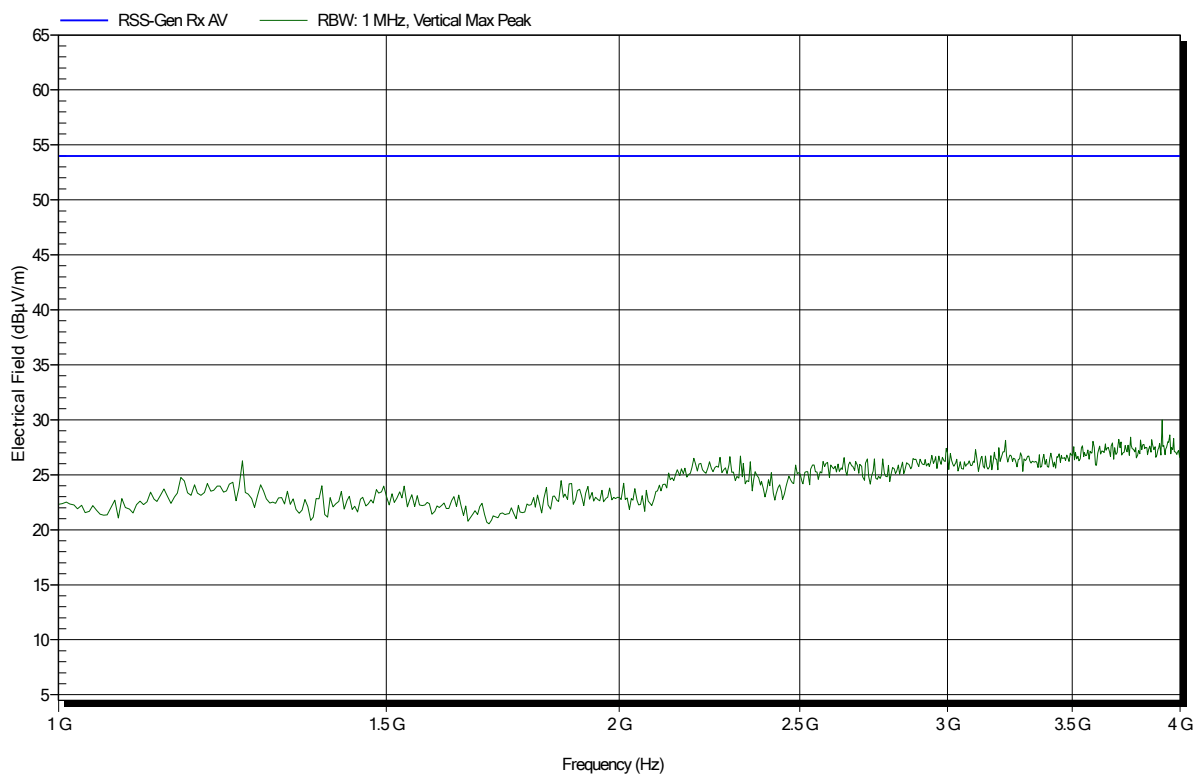


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; rod antenna
 Test Date: 2020-04-20
 Note:

Index 42

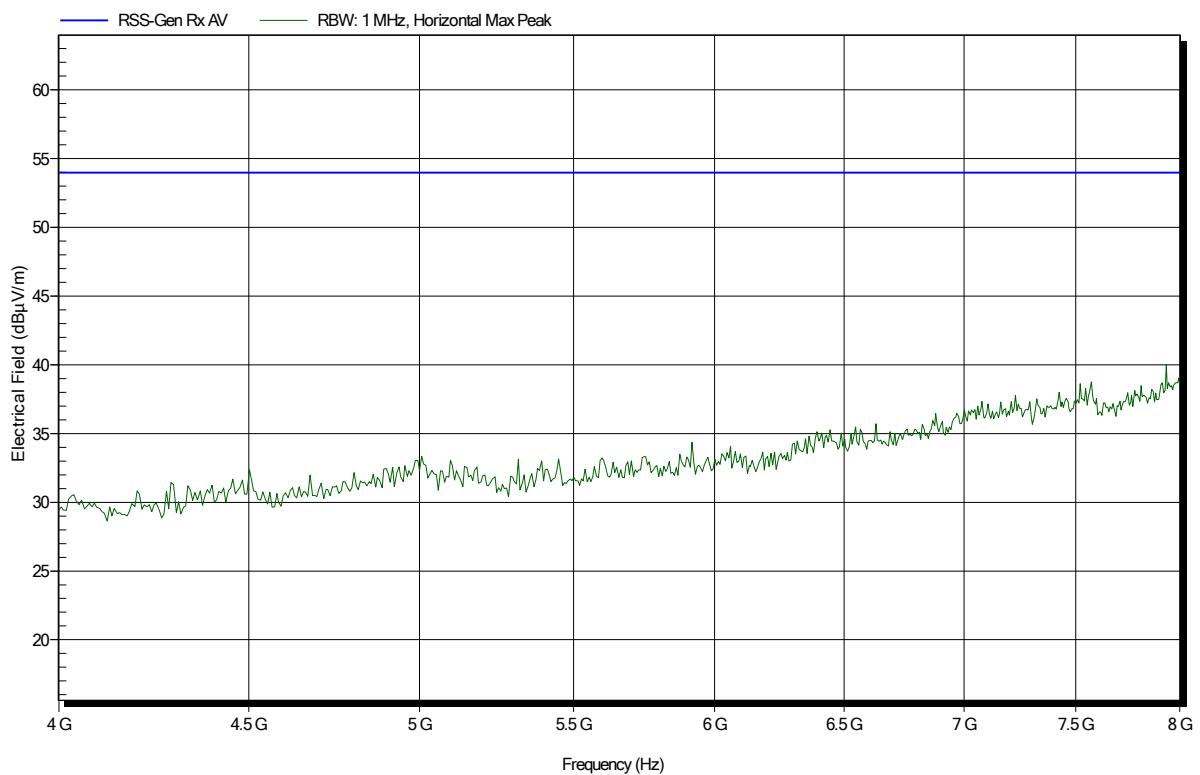


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; rod antenna
 Test Date: 2020-04-20
 Note:

Index 44

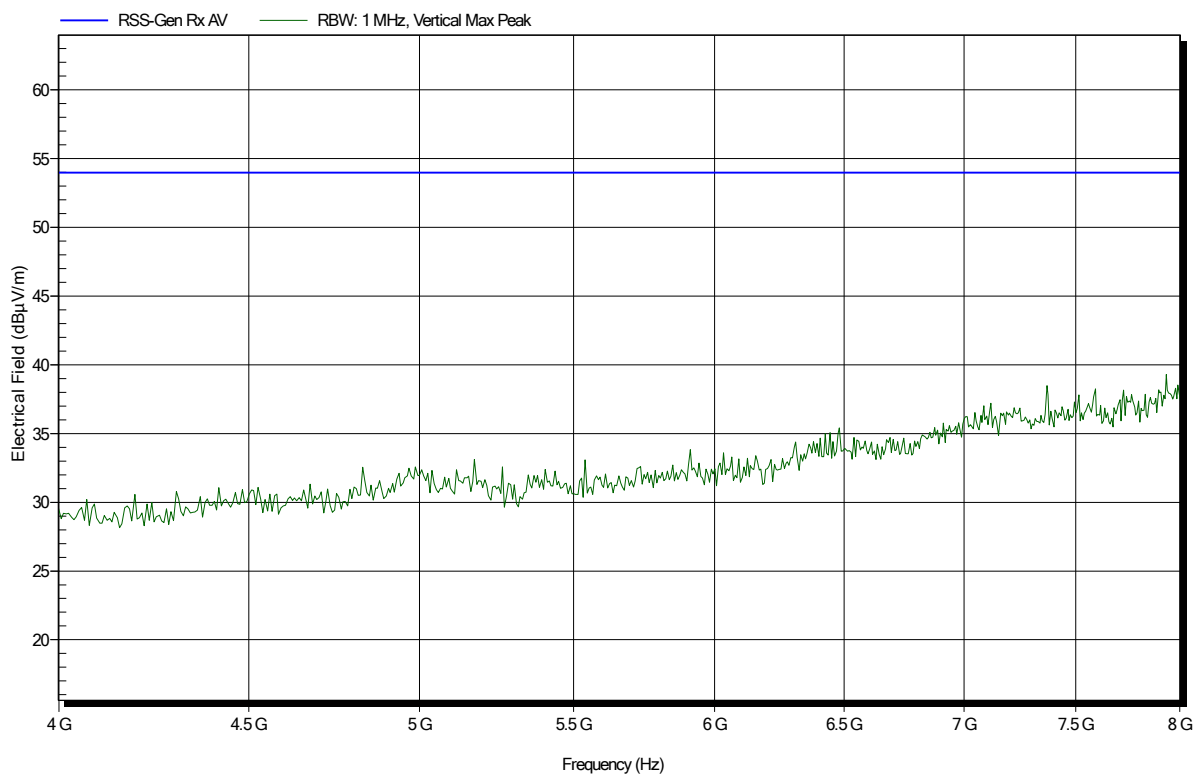


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; wall antenna
 Test Date: 2020-04-20
 Note:

Index 37

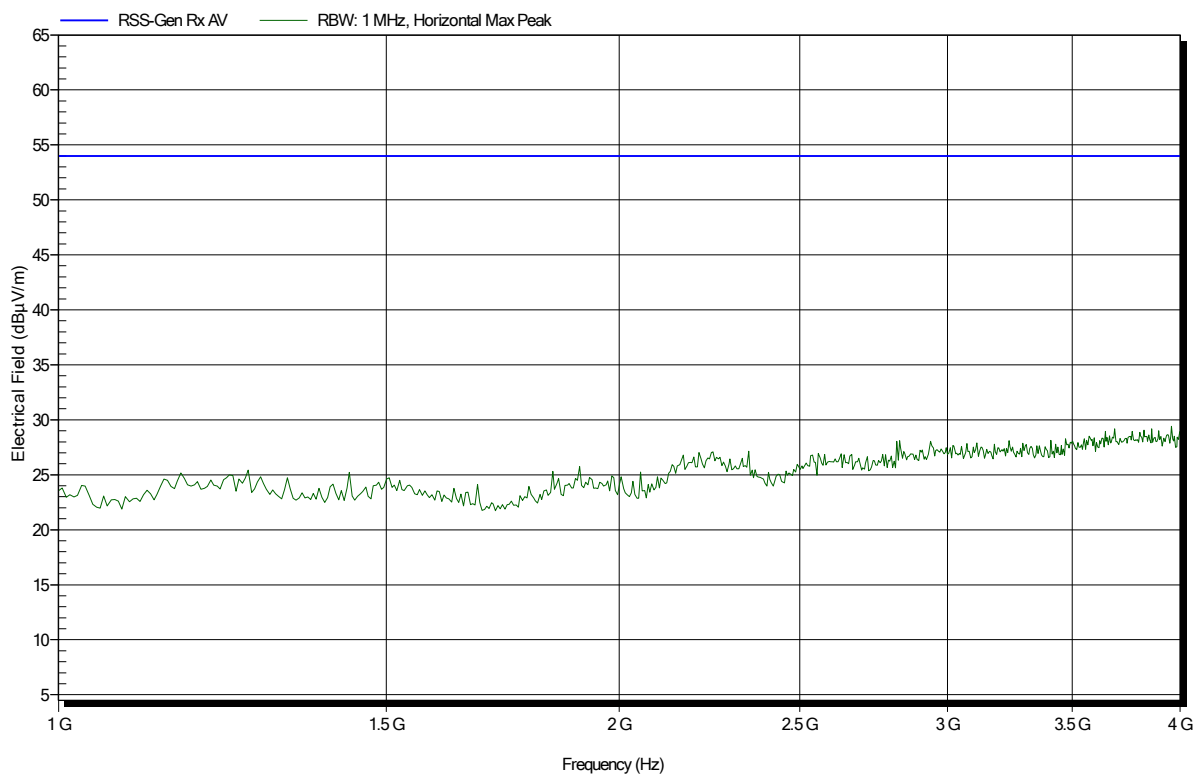


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; wall antenna
 Test Date: 2020-04-20
 Note:

Index 39

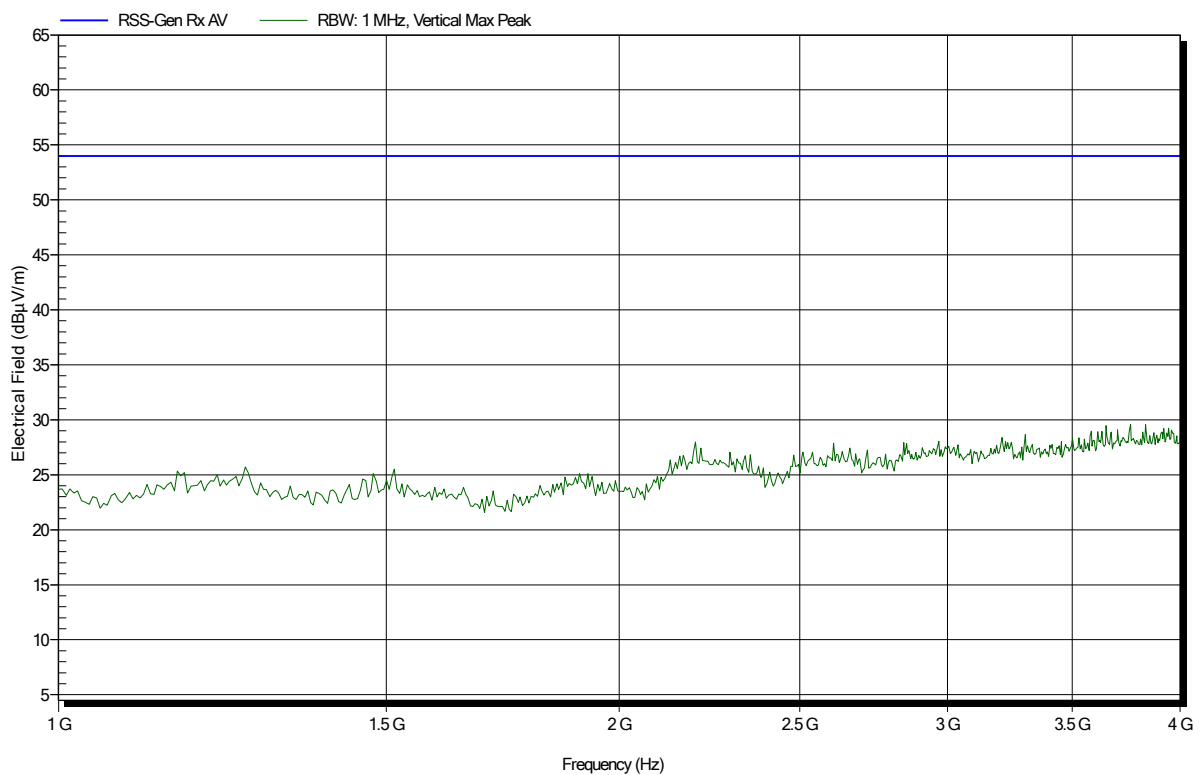


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; wall antenna
 Test Date: 2020-04-20
 Note:


Index 38

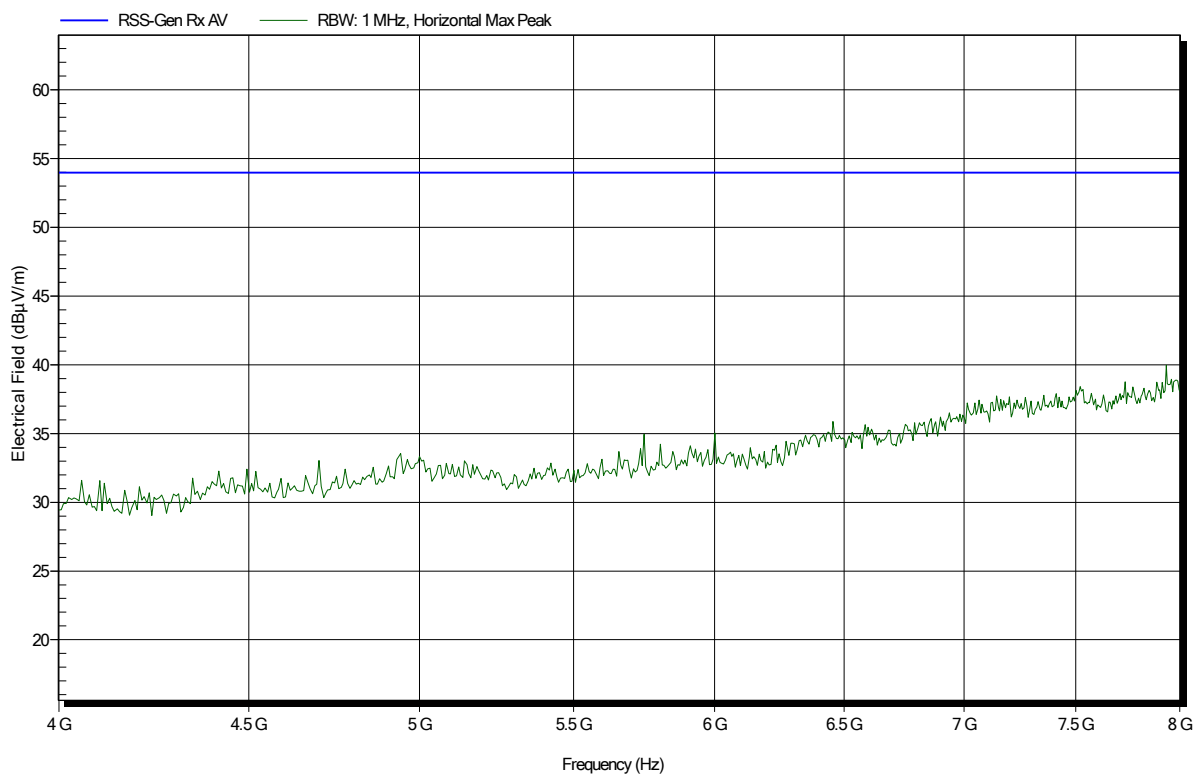

Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868
 Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; wall antenna
 Test Date: 2020-04-20
 Note:

Index 40

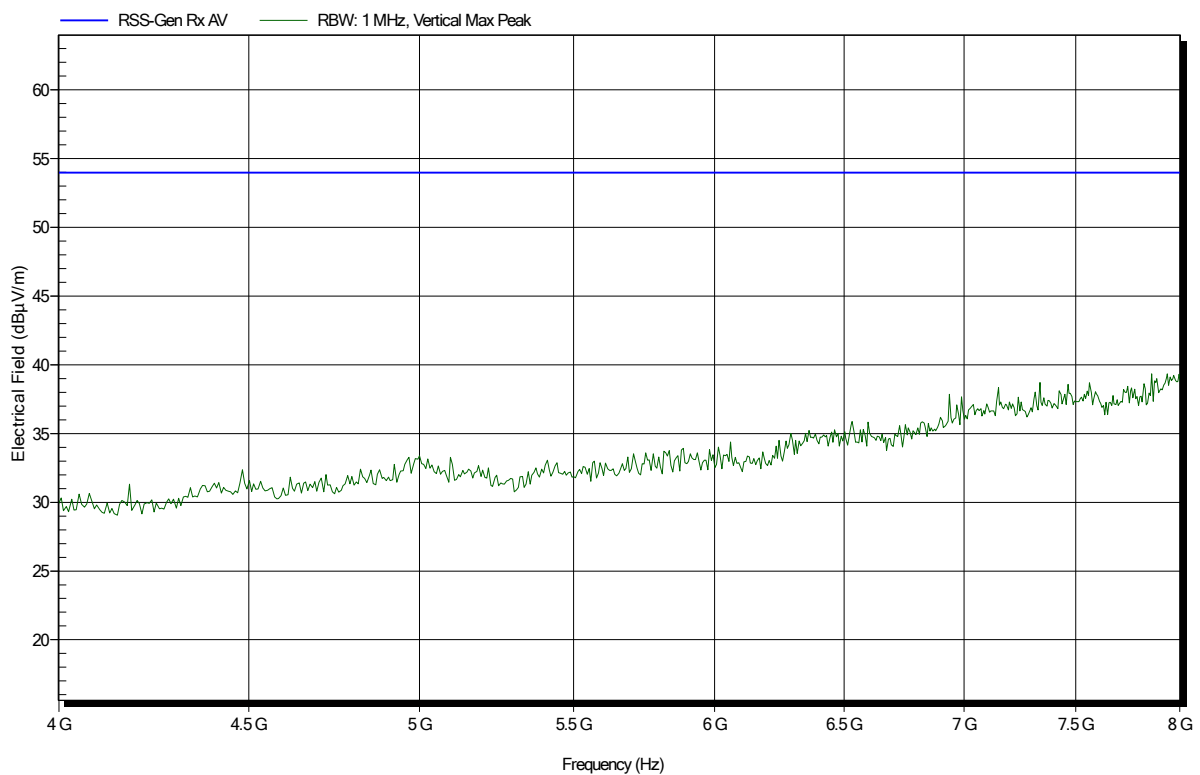


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; pit antenna
 Test Date: 2020-04-20
 Note:


Index 46

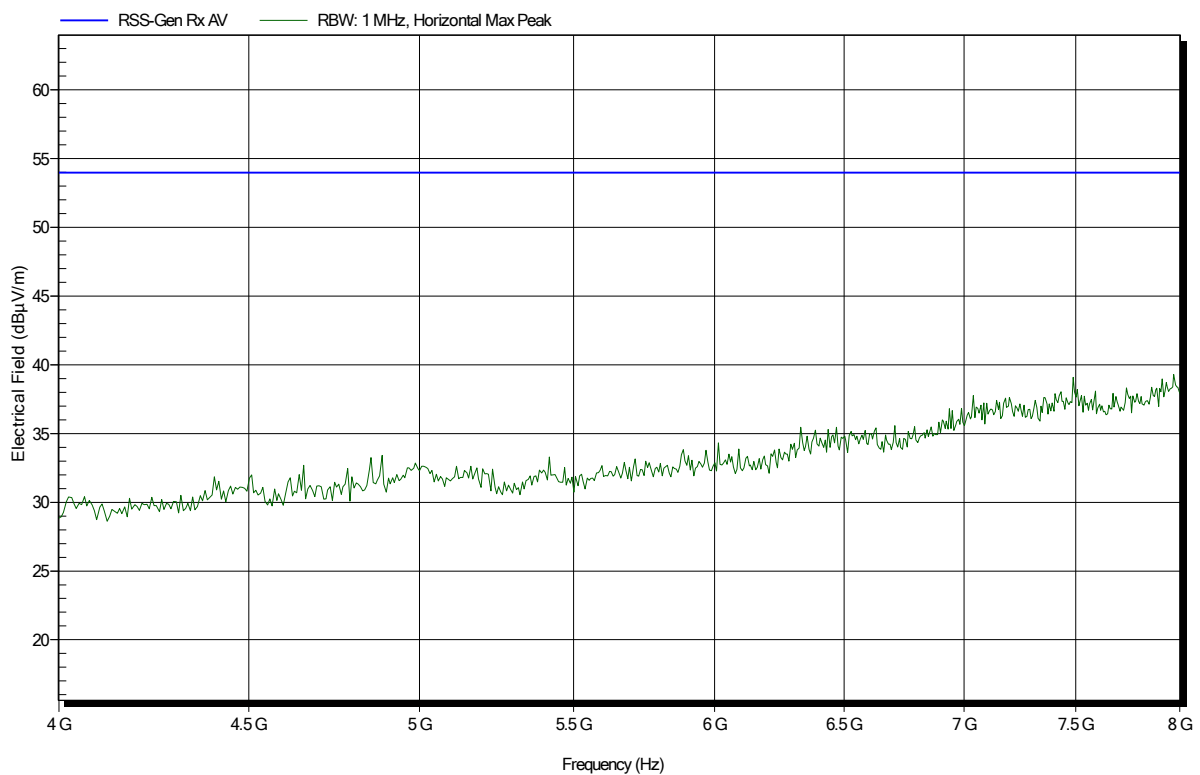

Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868
 Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; pit antenna
 Test Date: 2020-04-20
 Note:

Index 48

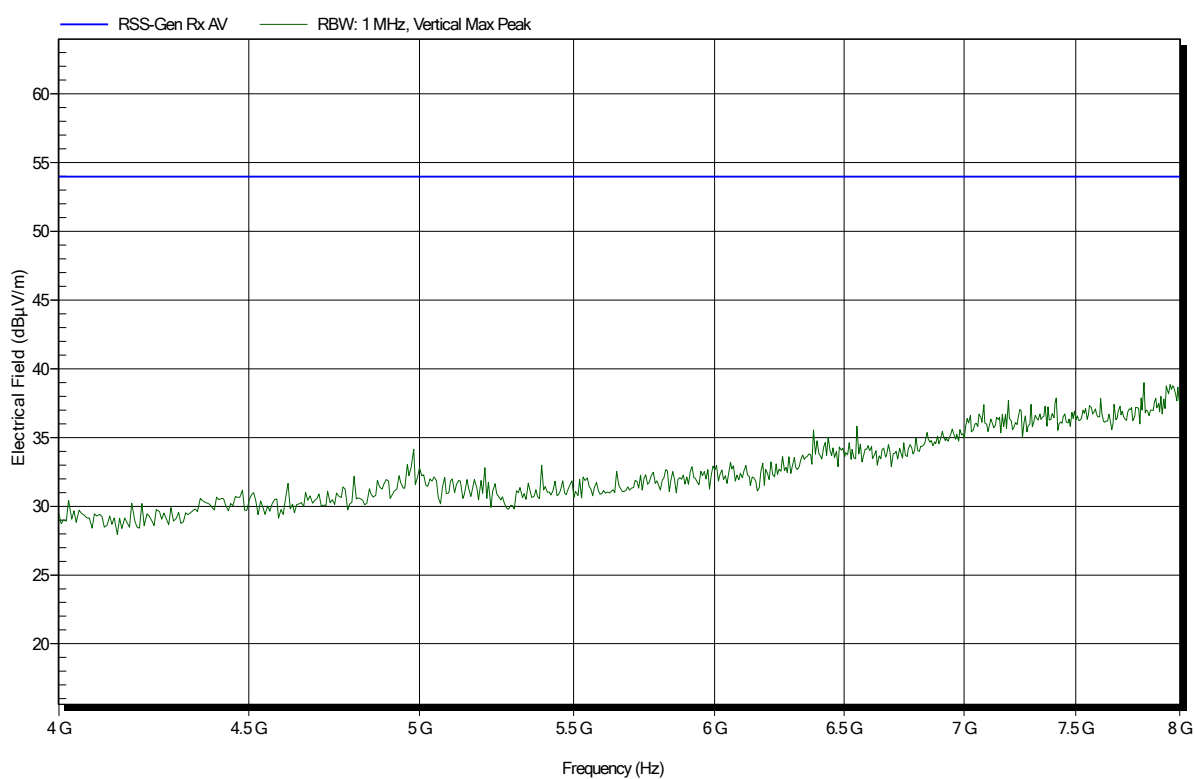


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; rod antenna
 Test Date: 2020-04-20
 Note:

Index 41

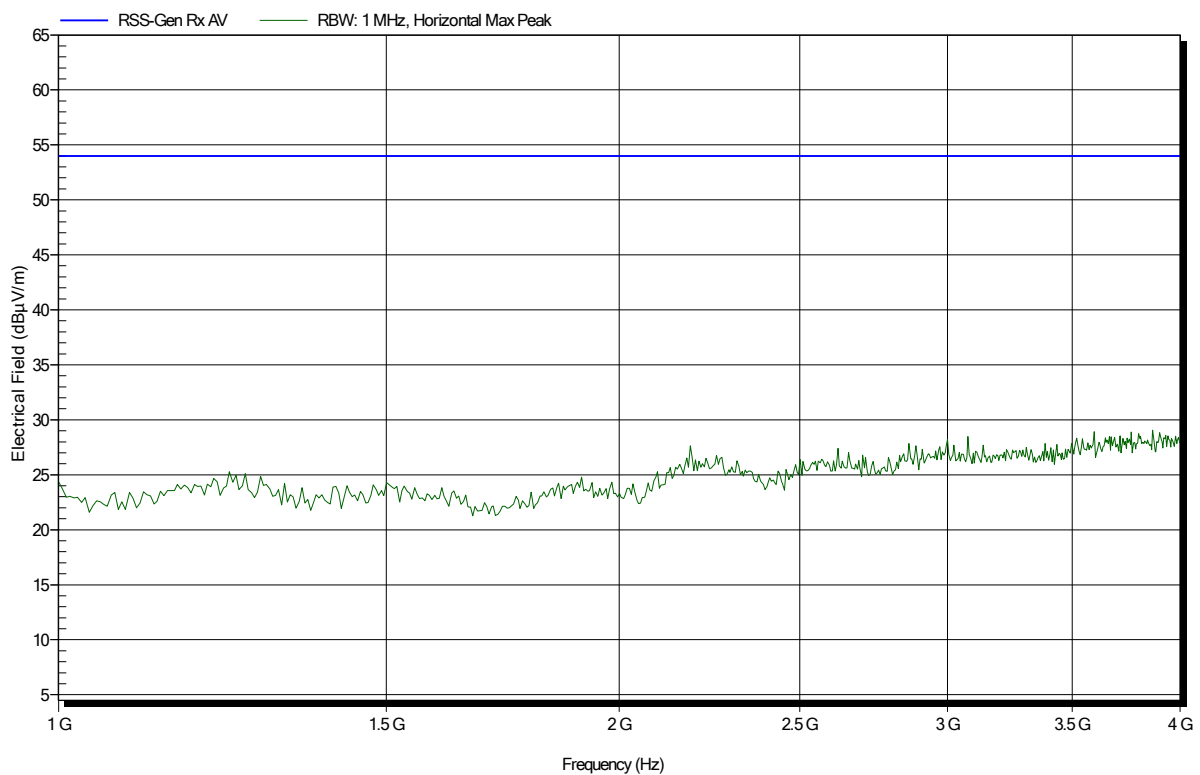


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; rod antenna
 Test Date: 2020-04-20
 Note:

Index 43

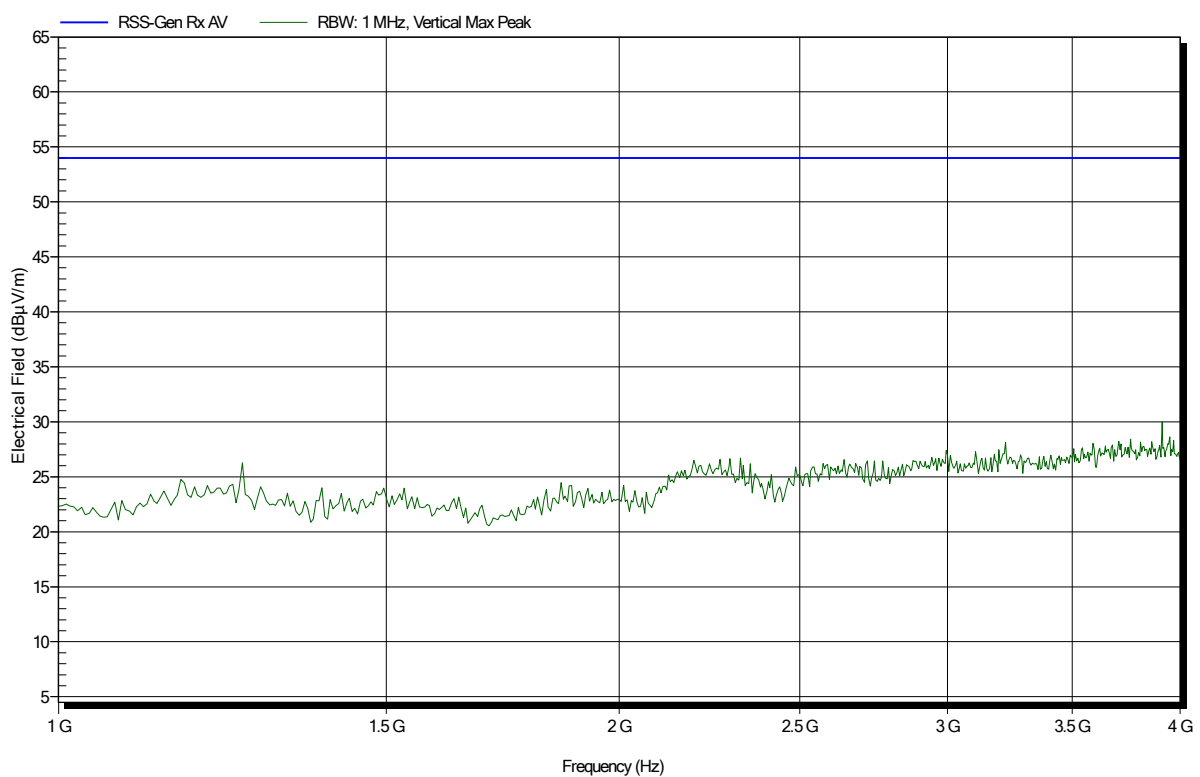


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; rod antenna
 Test Date: 2020-04-20
 Note:

Index 42

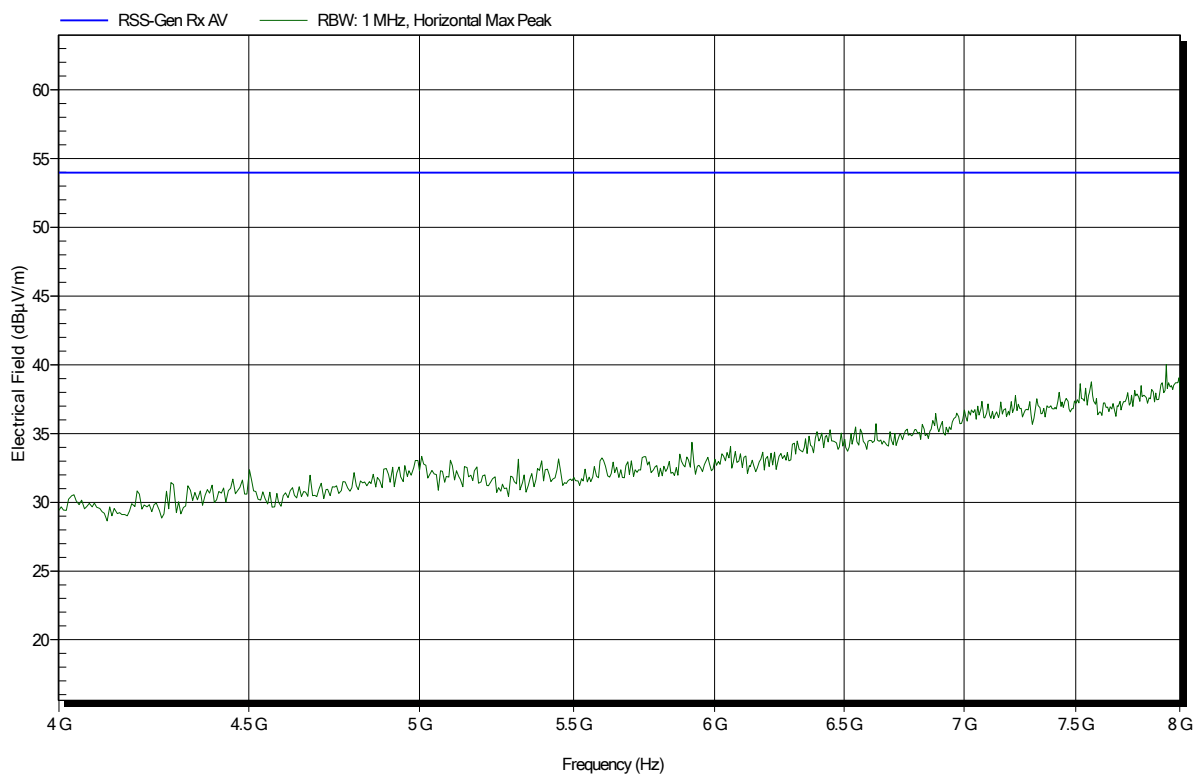


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; rod antenna
 Test Date: 2020-04-20
 Note:

Index 44

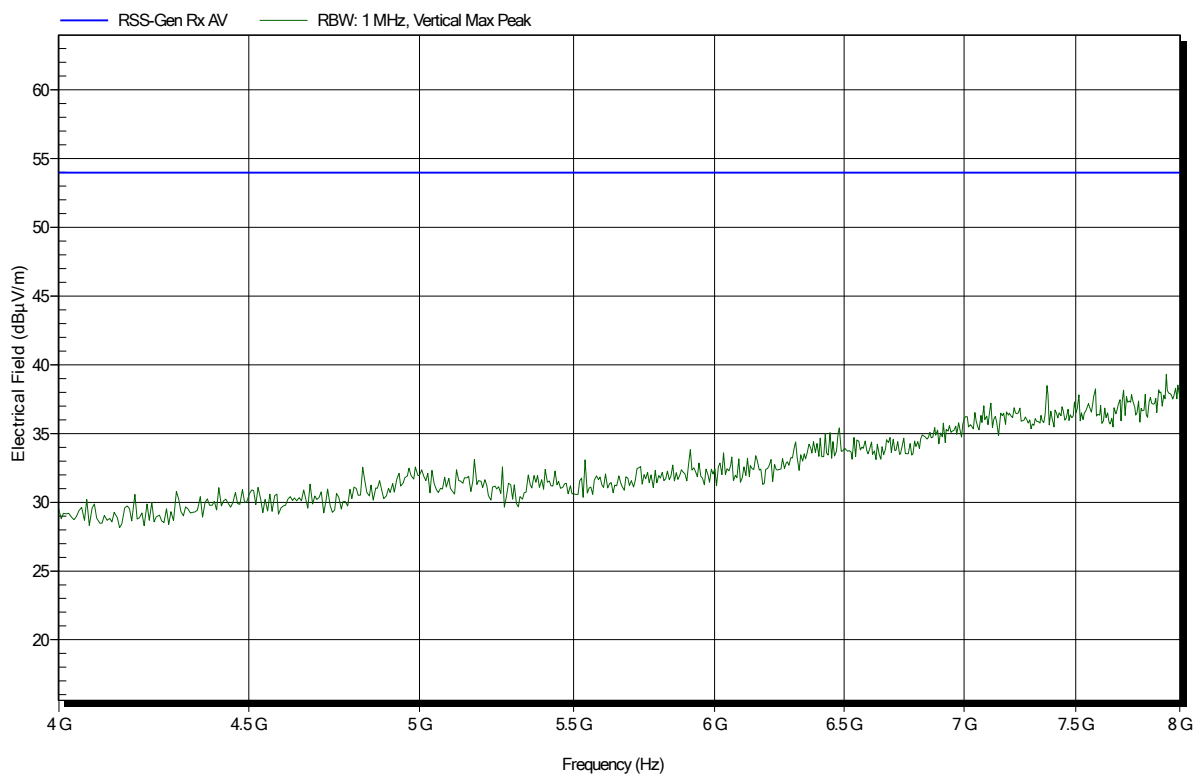


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; wall antenna
 Test Date: 2020-04-20
 Note:


Index 37

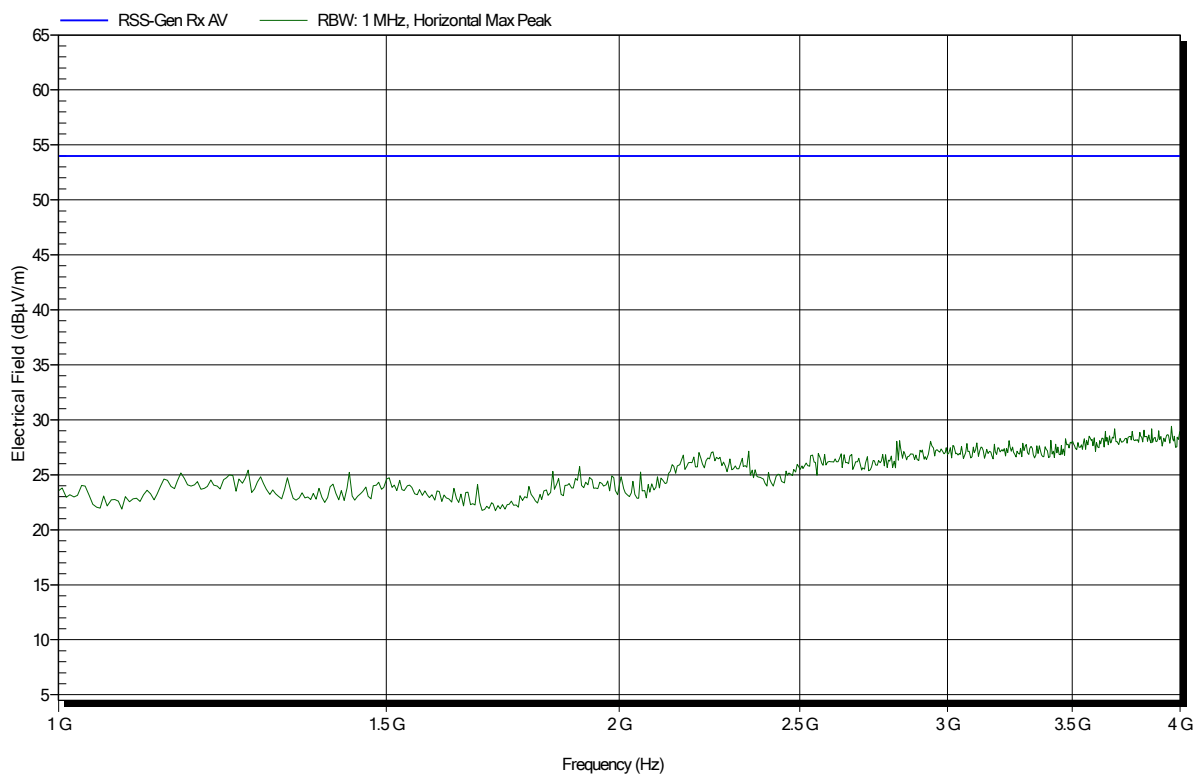

Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868
 Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; wall antenna
 Test Date: 2020-04-20
 Note:


Index 39

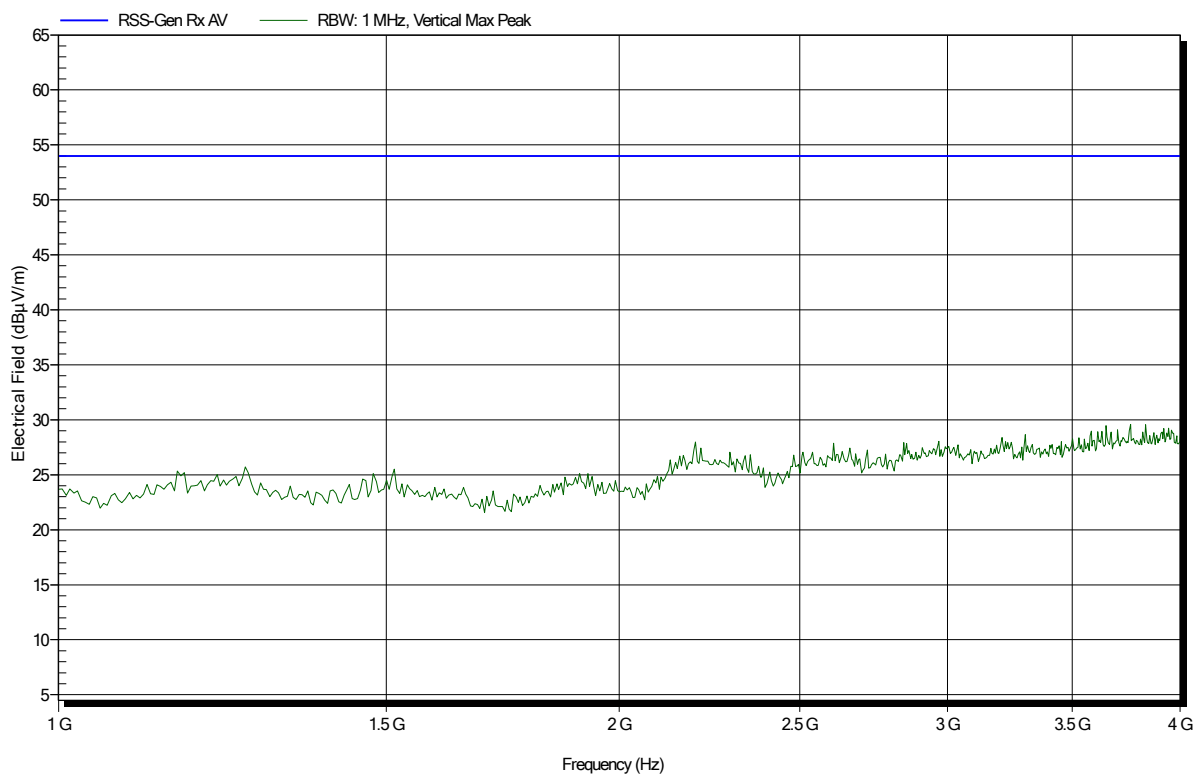

Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868
 Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; wall antenna
 Test Date: 2020-04-20
 Note:

Index 38

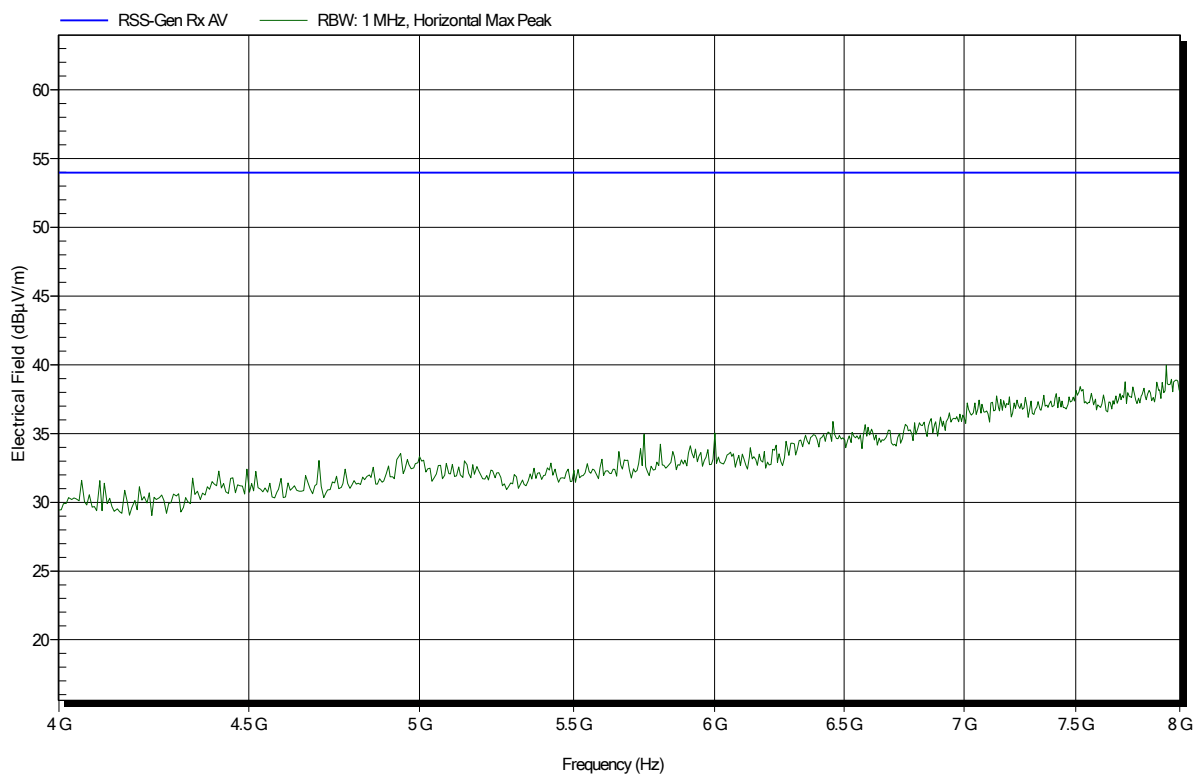


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; wall antenna
 Test Date: 2020-04-20
 Note:

Index 40

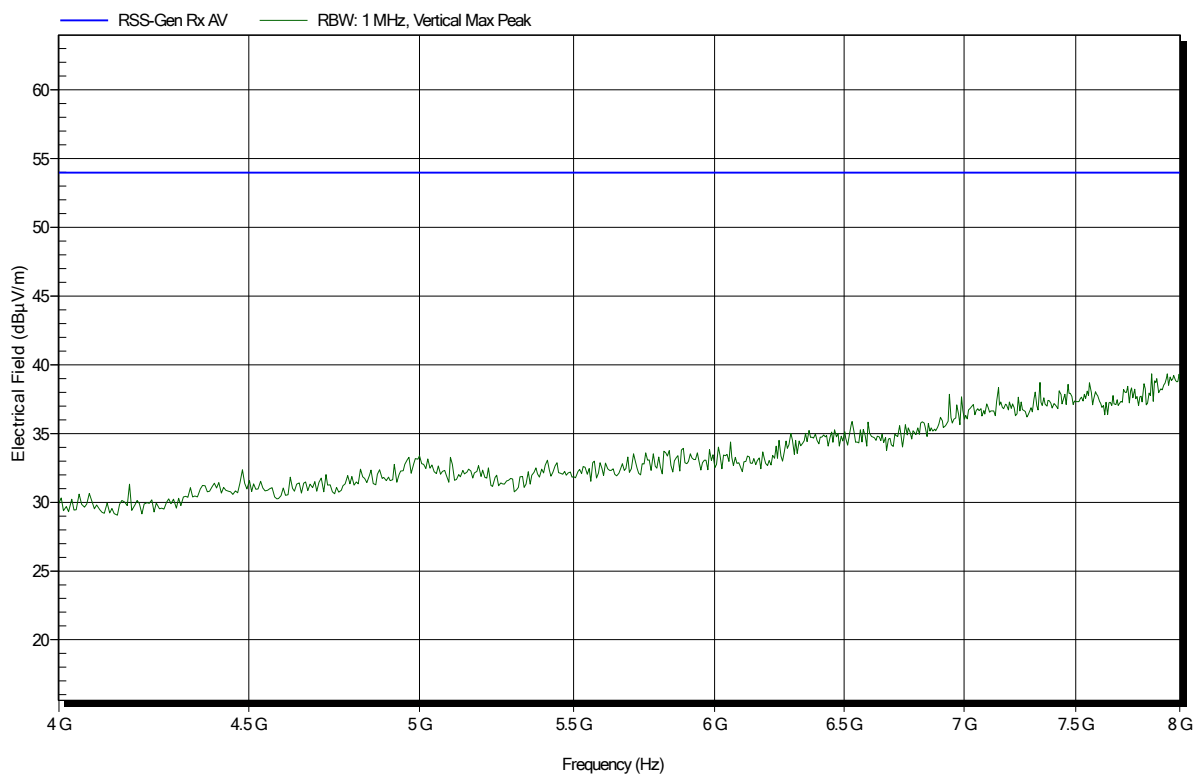


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
EUT Name: Meter Transmit Unit
Model: Ready MTU
Test Site: Eurofins Product Service Germany
Operator: Toralf Jahn
Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; 915 MHz; pit antenna
Test Date: 2020-04-20
Note:

Index 48

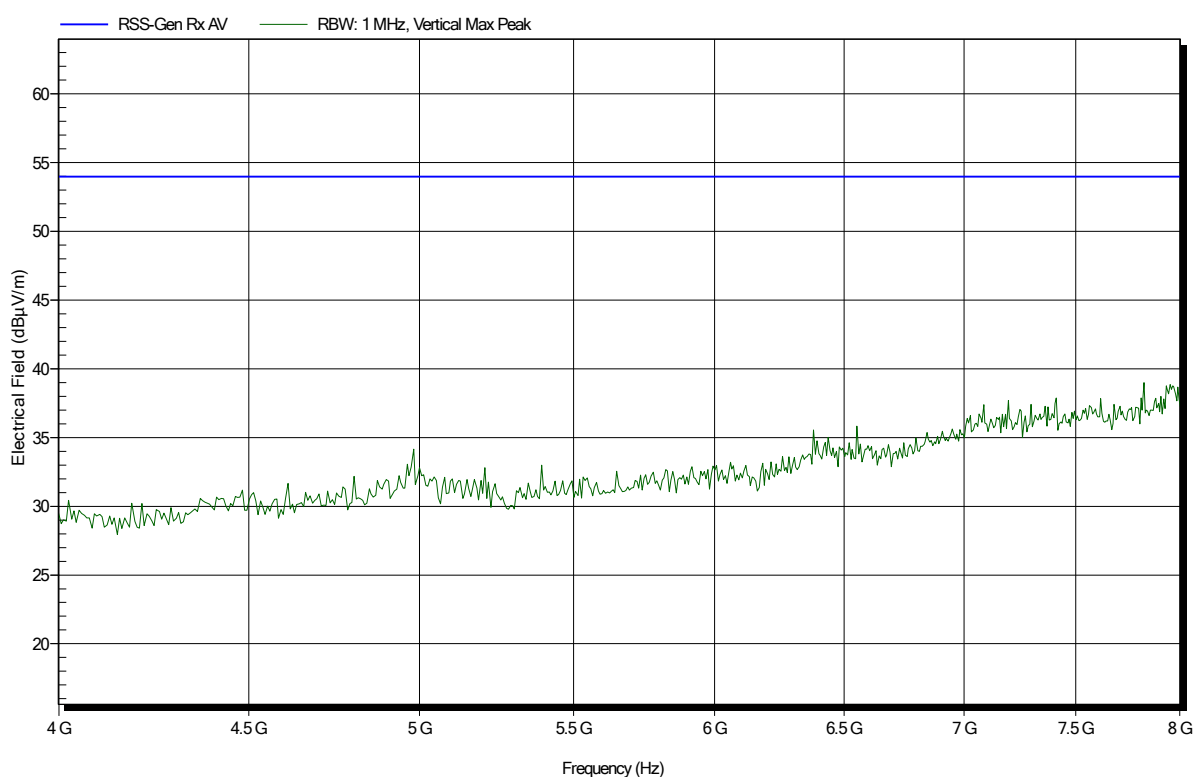


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; rod antenna
 Test Date: 2020-04-20
 Note:

Index 41

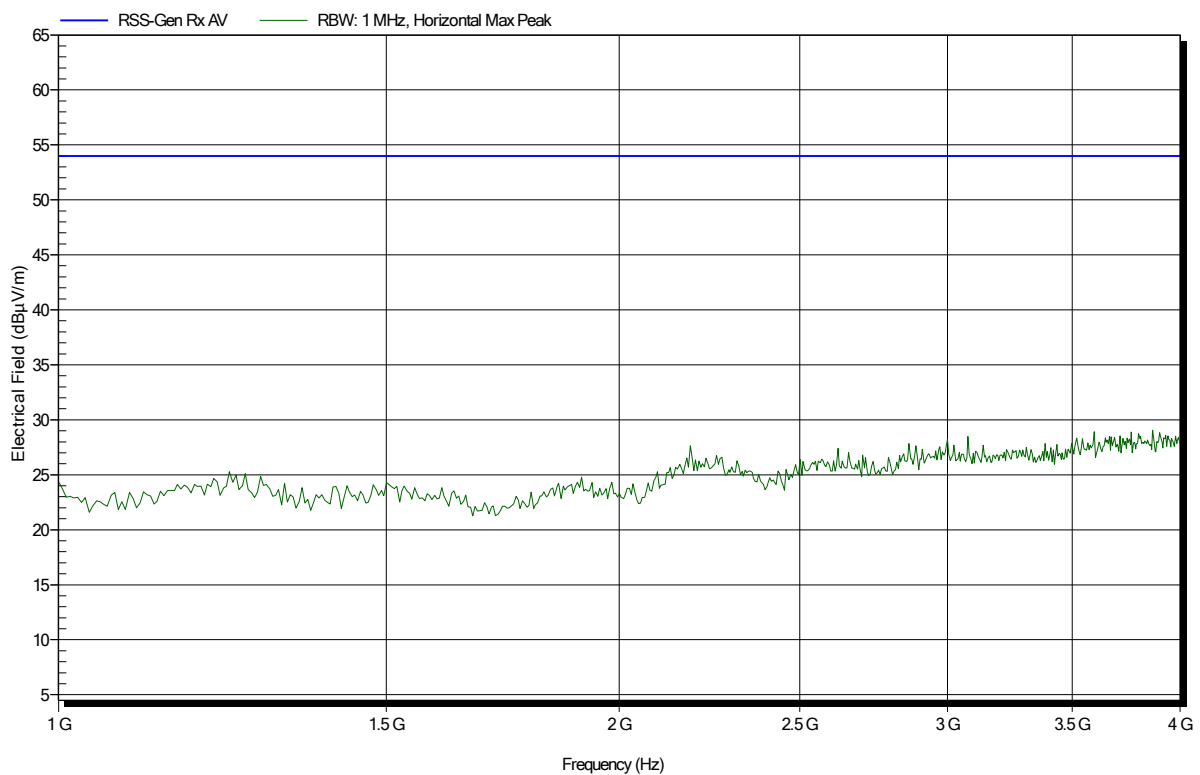


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; rod antenna
 Test Date: 2020-04-20
 Note:

Index 43

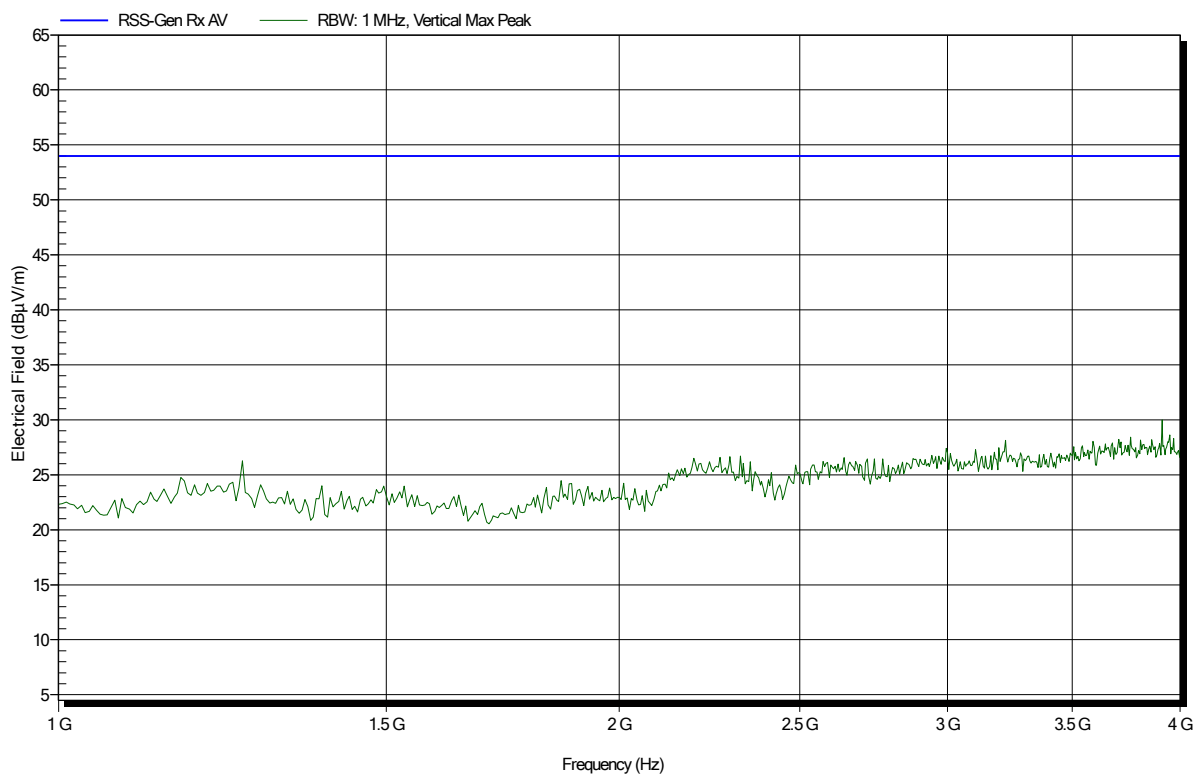


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; rod antenna
 Test Date: 2020-04-20
 Note:

Index 42

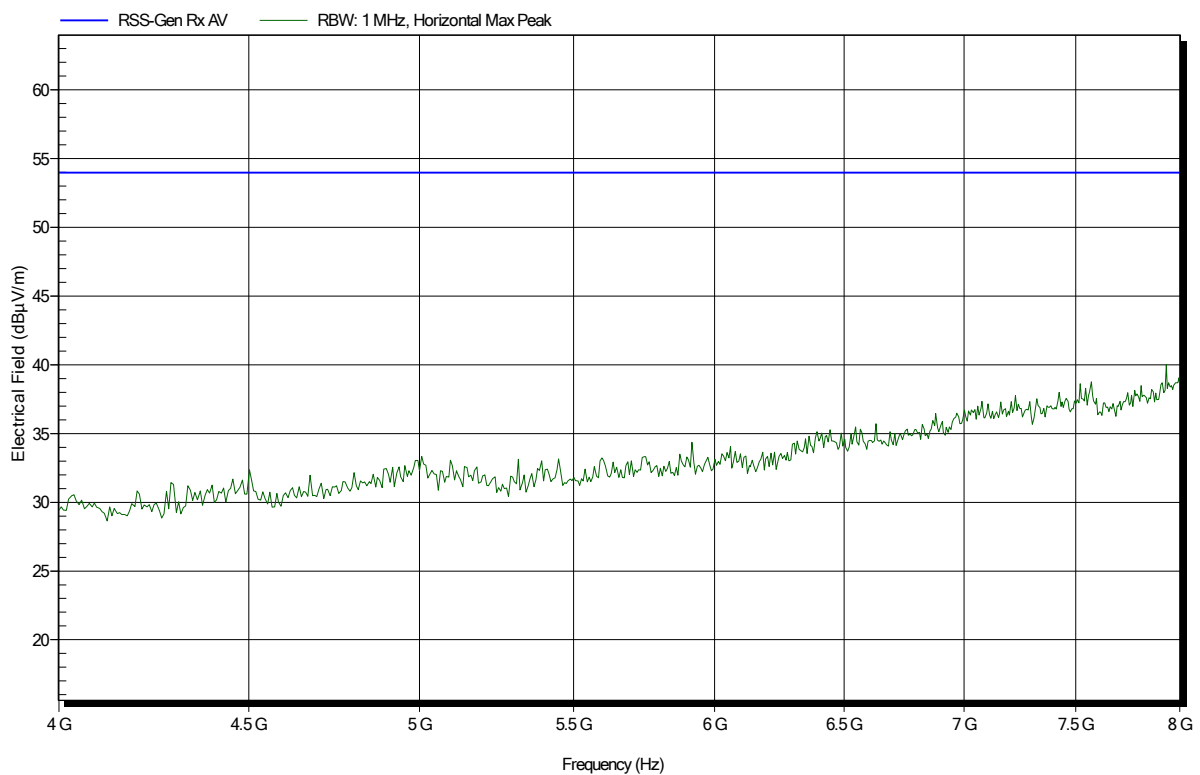


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; rod antenna
 Test Date: 2020-04-20
 Note:

Index 44

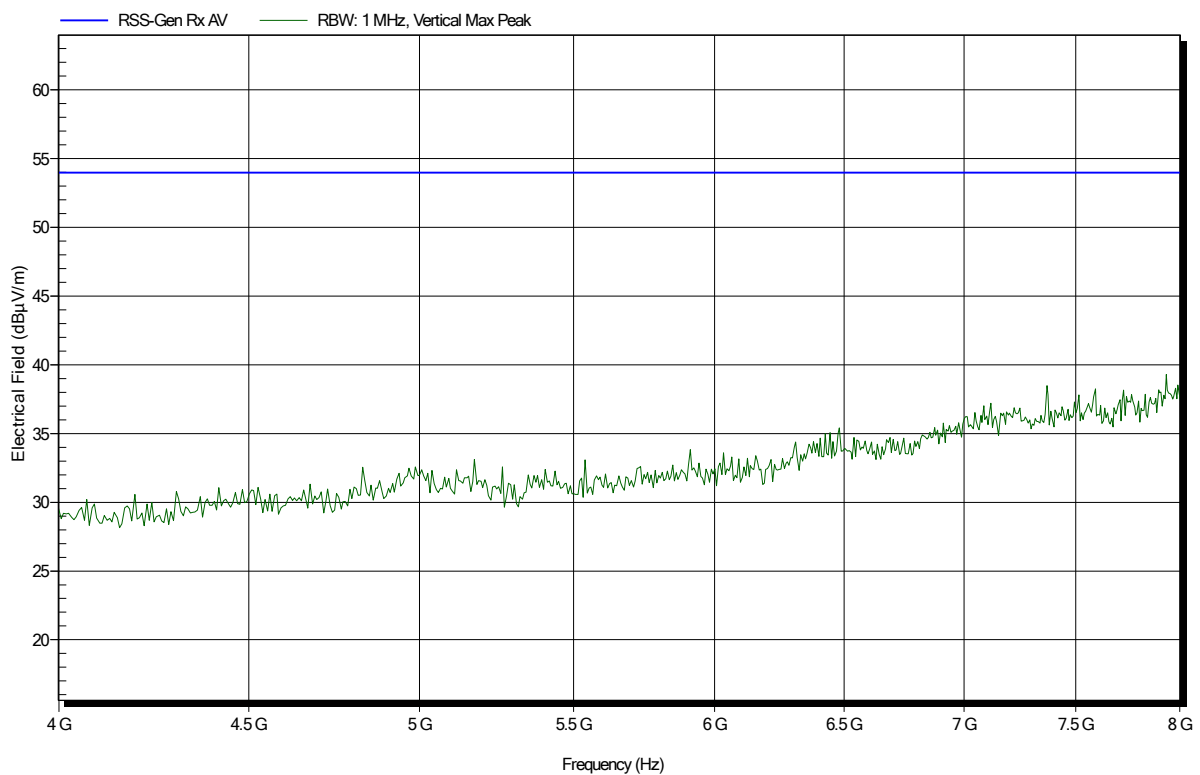


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; wall antenna
 Test Date: 2020-04-20
 Note:

Index 37

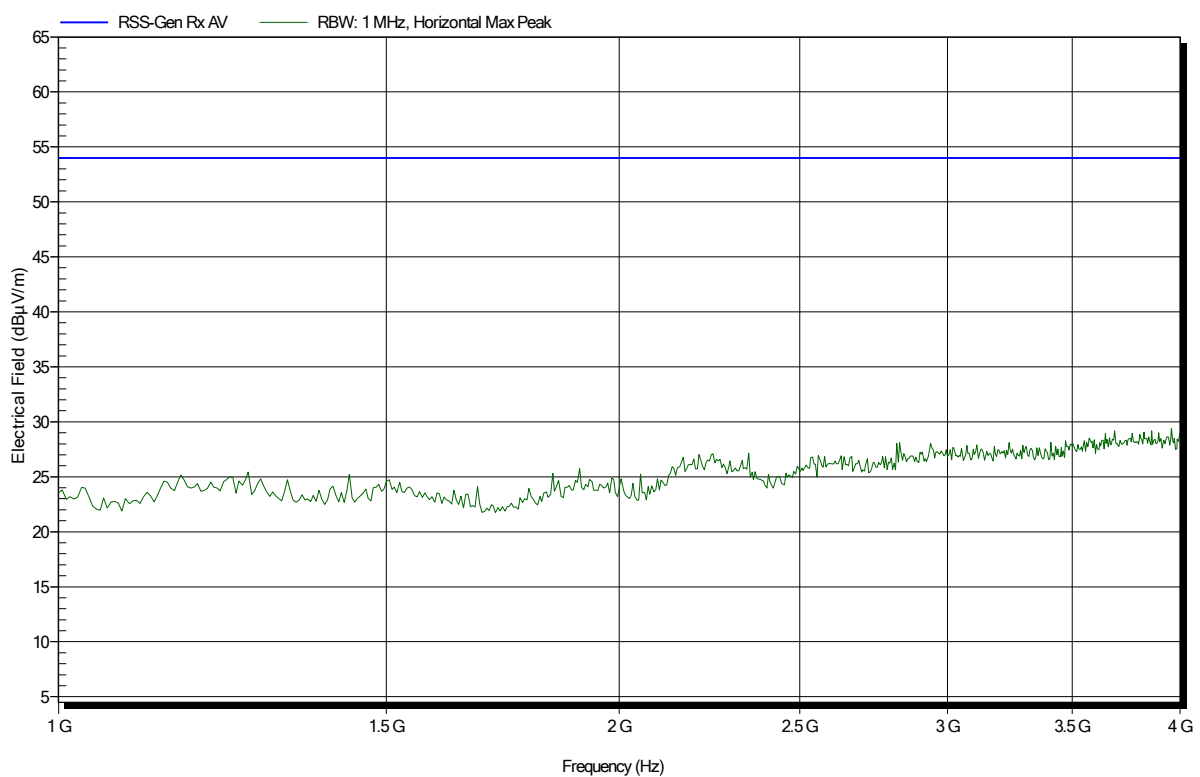


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; wall antenna
 Test Date: 2020-04-20
 Note:


Index 39

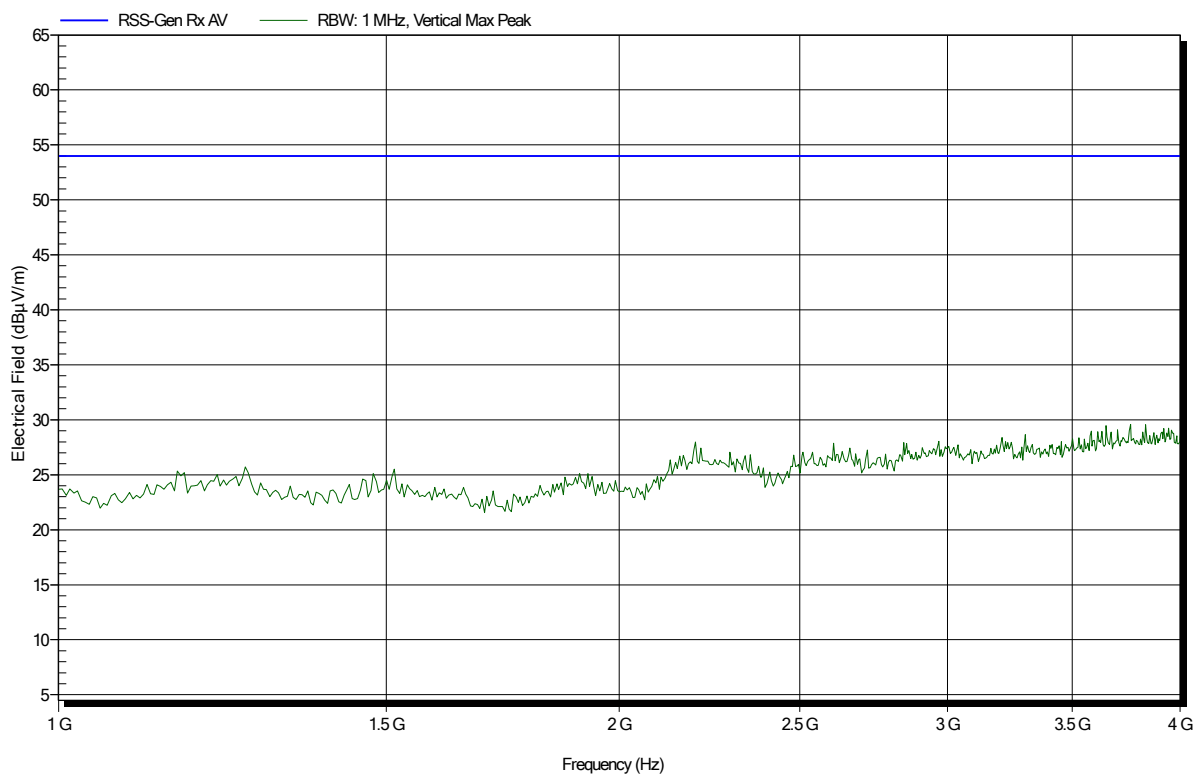

Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868
 Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; wall antenna
 Test Date: 2020-04-20
 Note:

Index 38

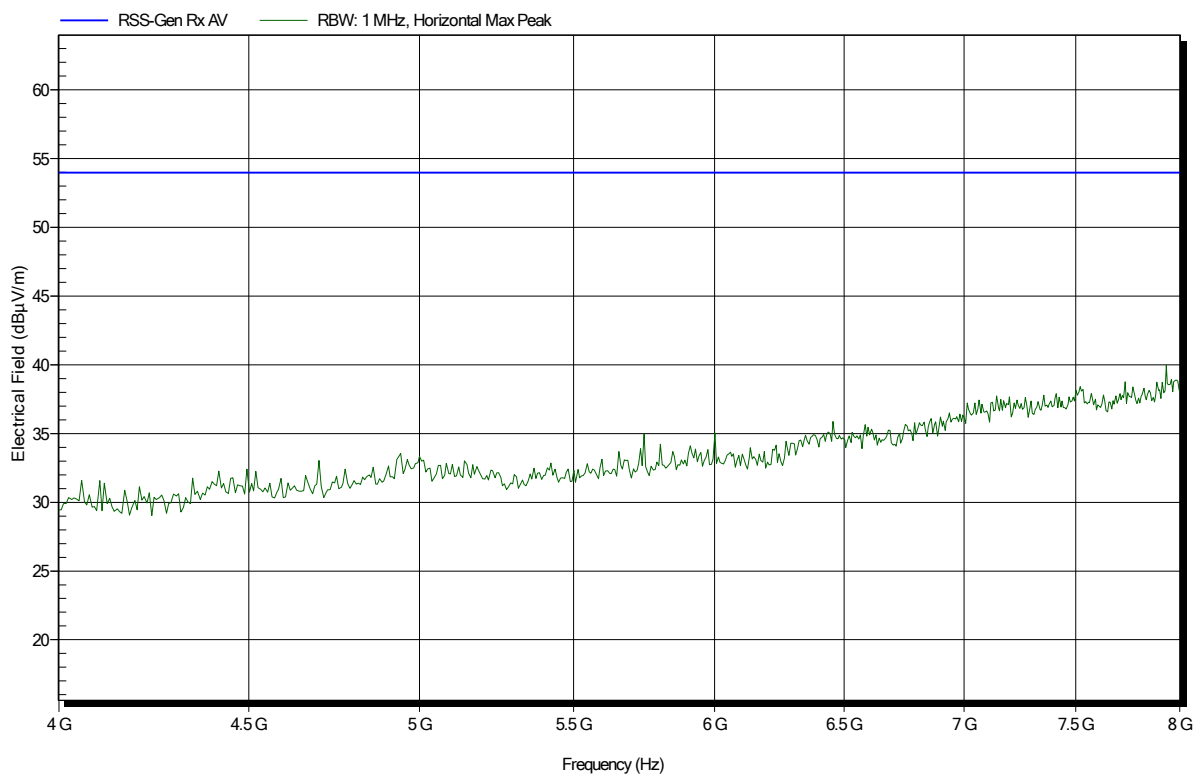


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
EUT Name: Meter Transmit Unit
Model: Ready MTU
Test Site: Eurofins Product Service Germany
Operator: Toralf Jahn
Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; 915 MHz; wall antenna
Test Date: 2020-04-20
Note:

Index 40

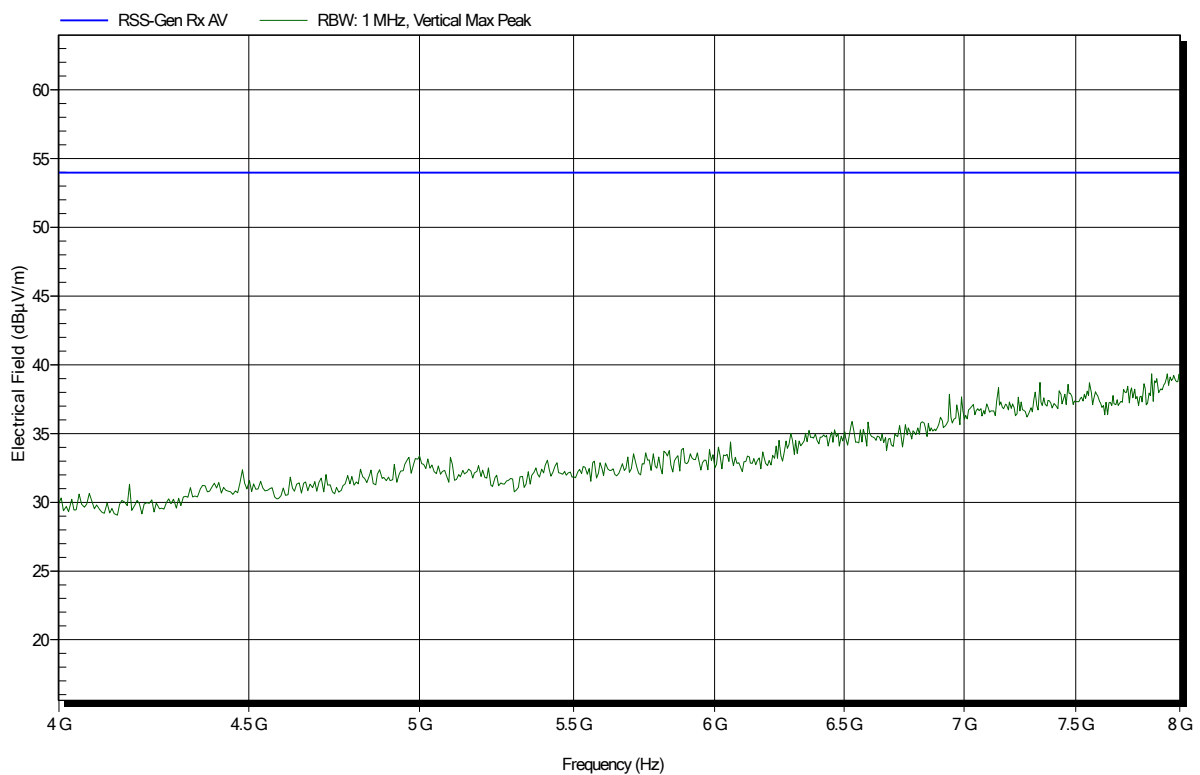


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; rod antenna
 Test Date: 2020-04-20
 Note:


Index 41

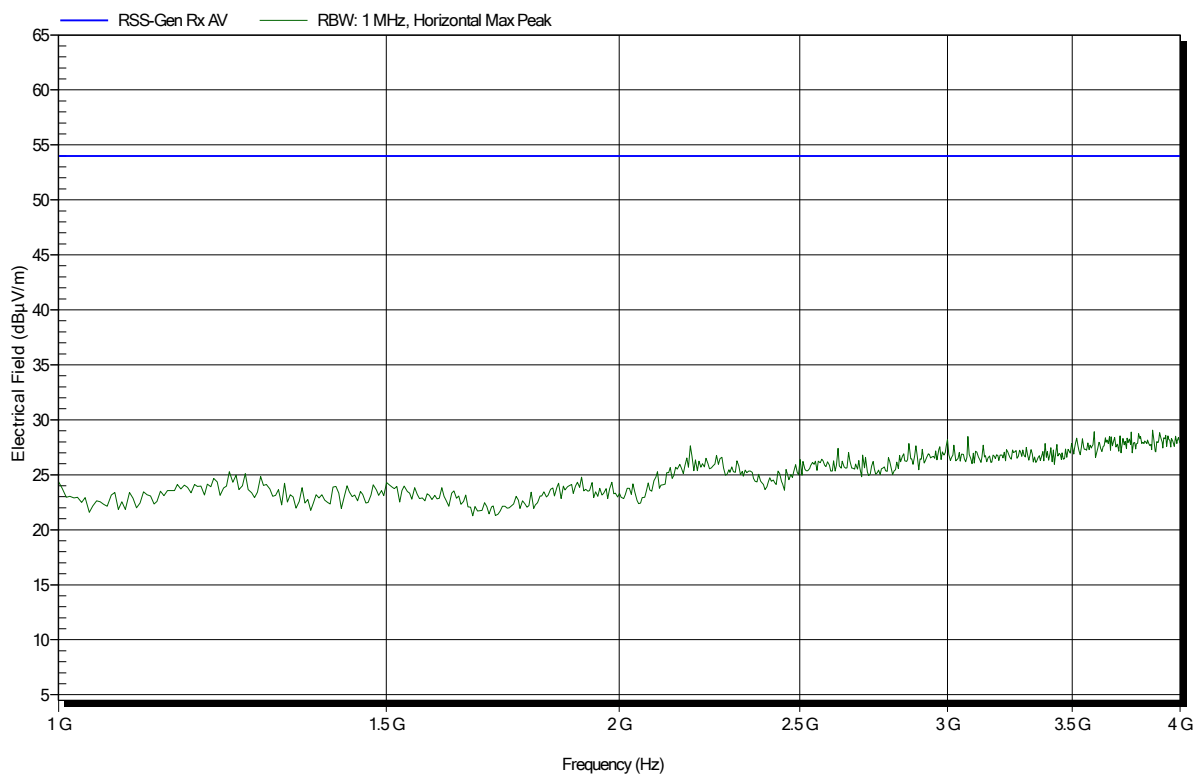

Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868
 Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; rod antenna
 Test Date: 2020-04-20
 Note:

Index 43

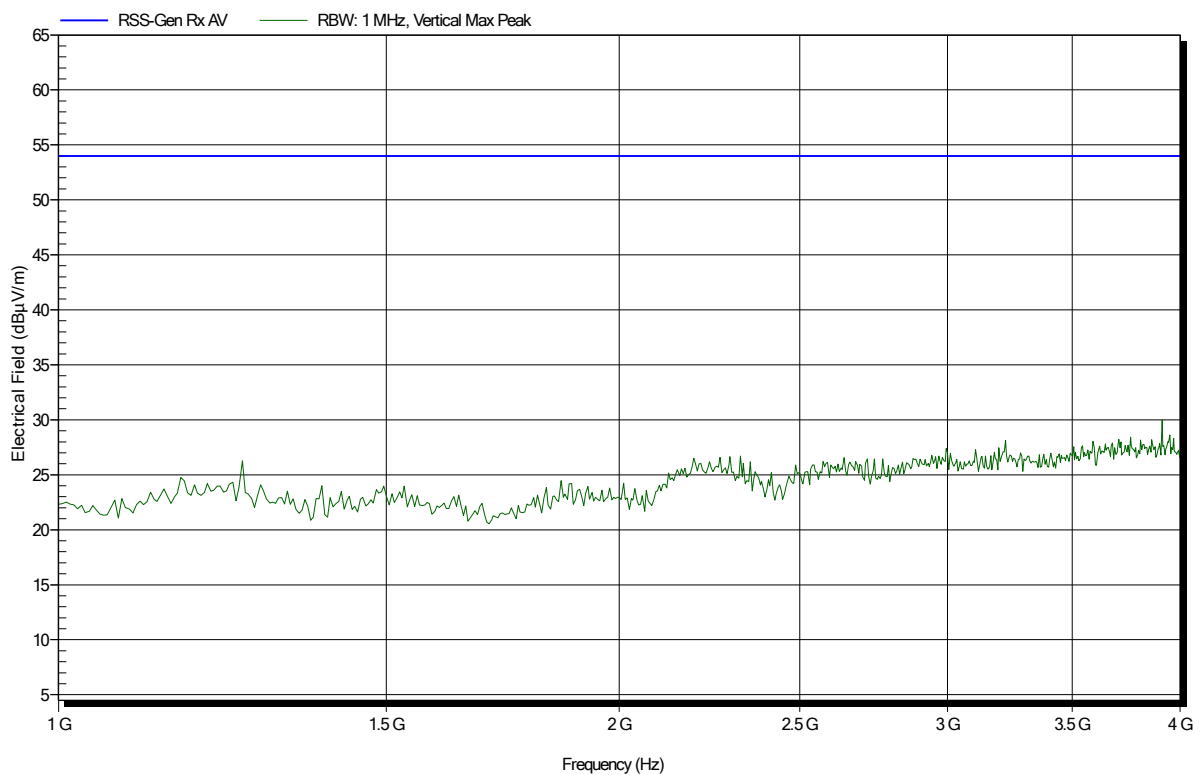


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; rod antenna
 Test Date: 2020-04-20
 Note:


Index 42

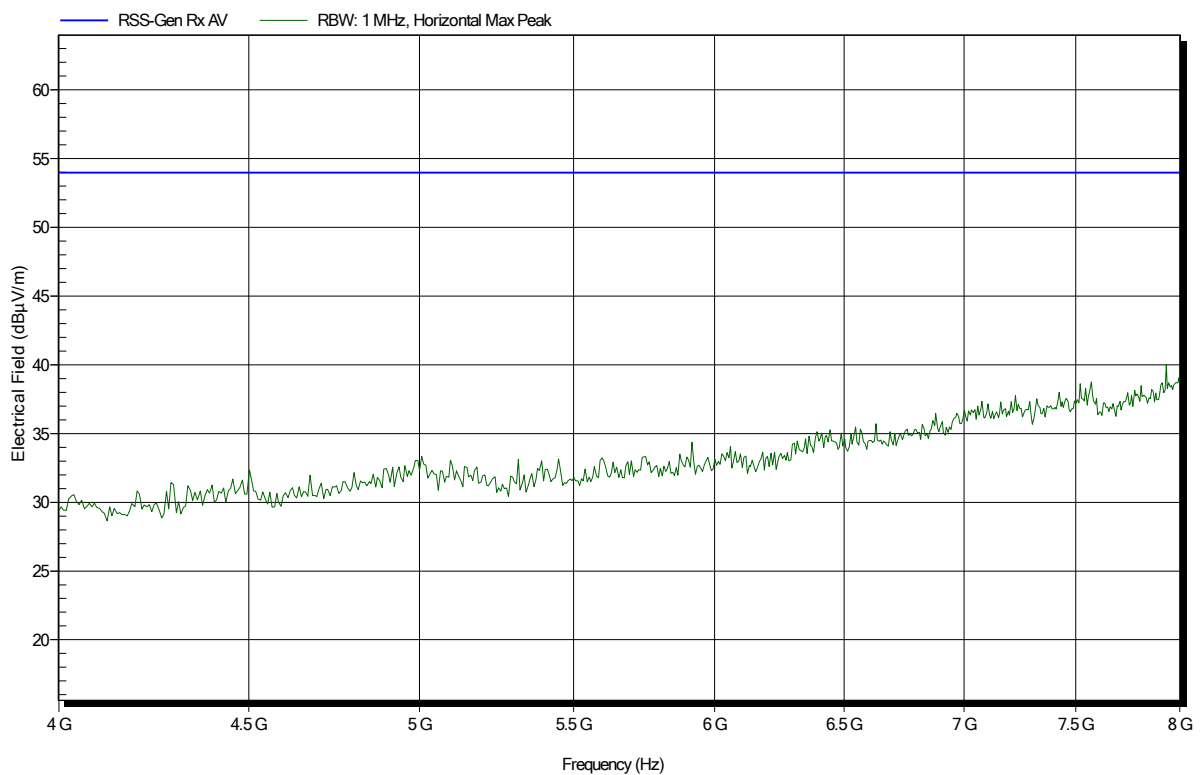

Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868
 Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; rod antenna
 Test Date: 2020-04-20
 Note:


Index 44

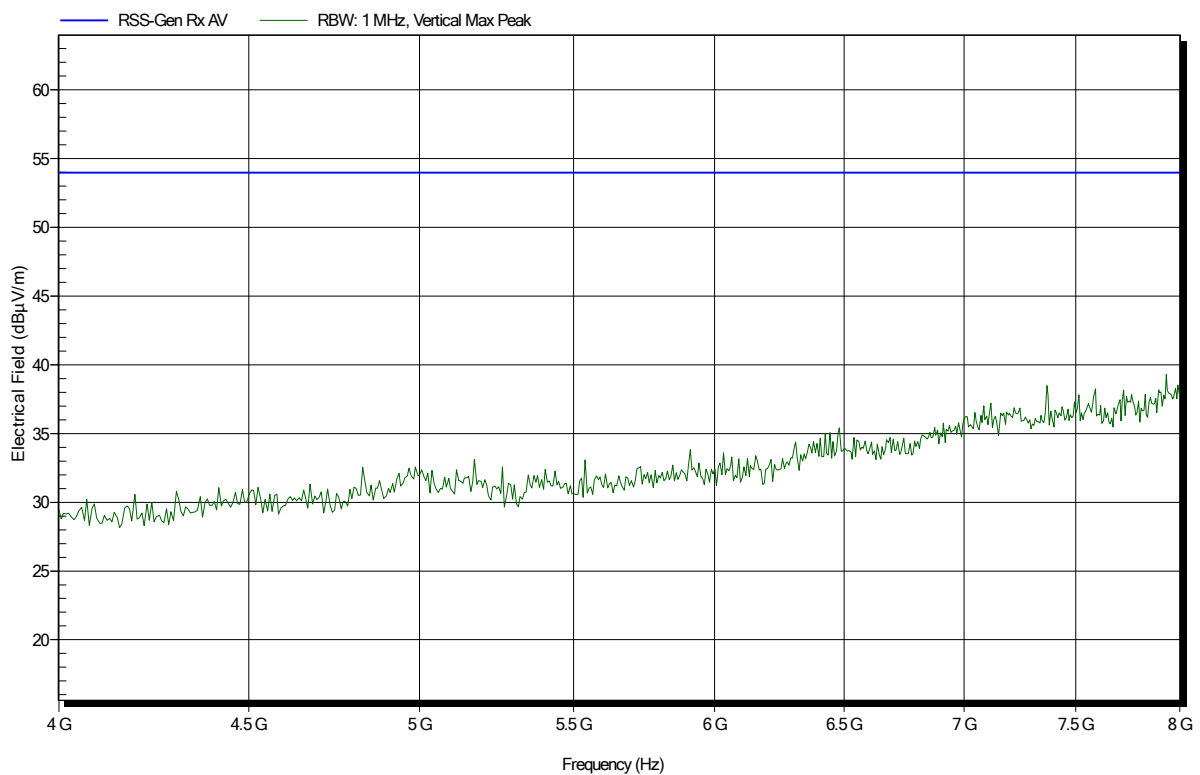

Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868
 Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; wall antenna
 Test Date: 2020-04-20
 Note:

Index 37

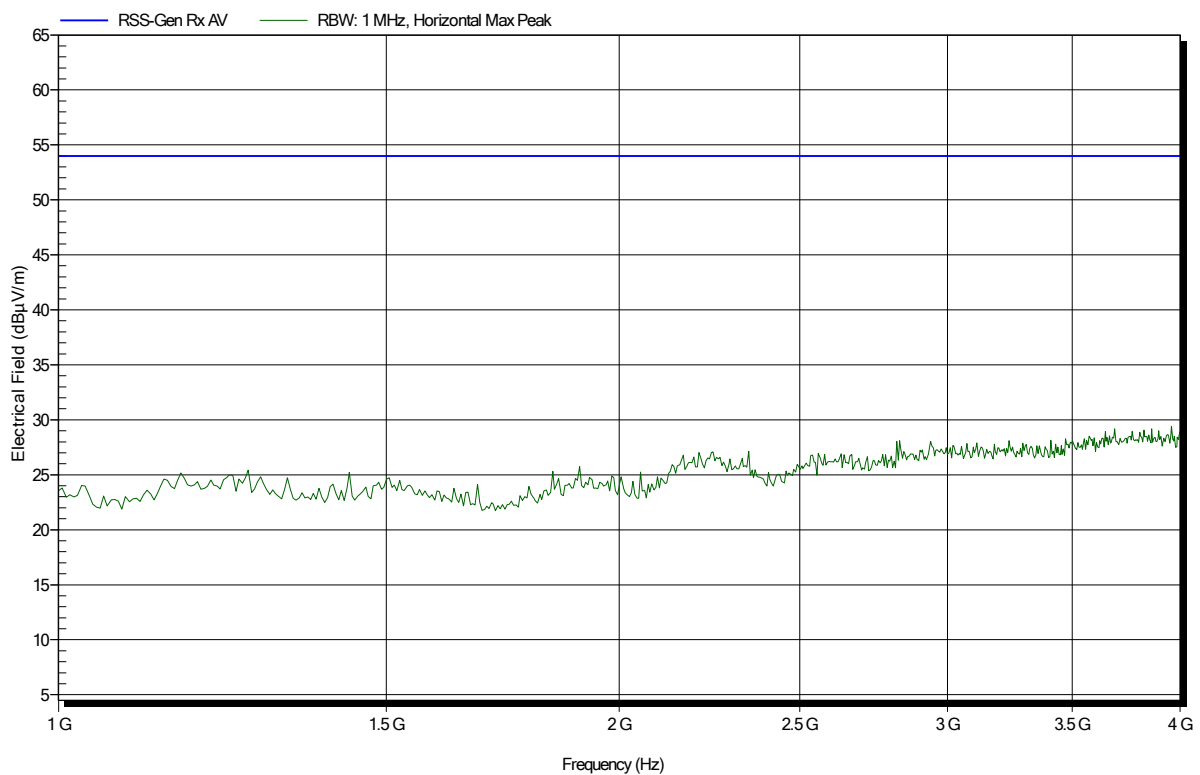


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; wall antenna
 Test Date: 2020-04-20
 Note:


Index 39

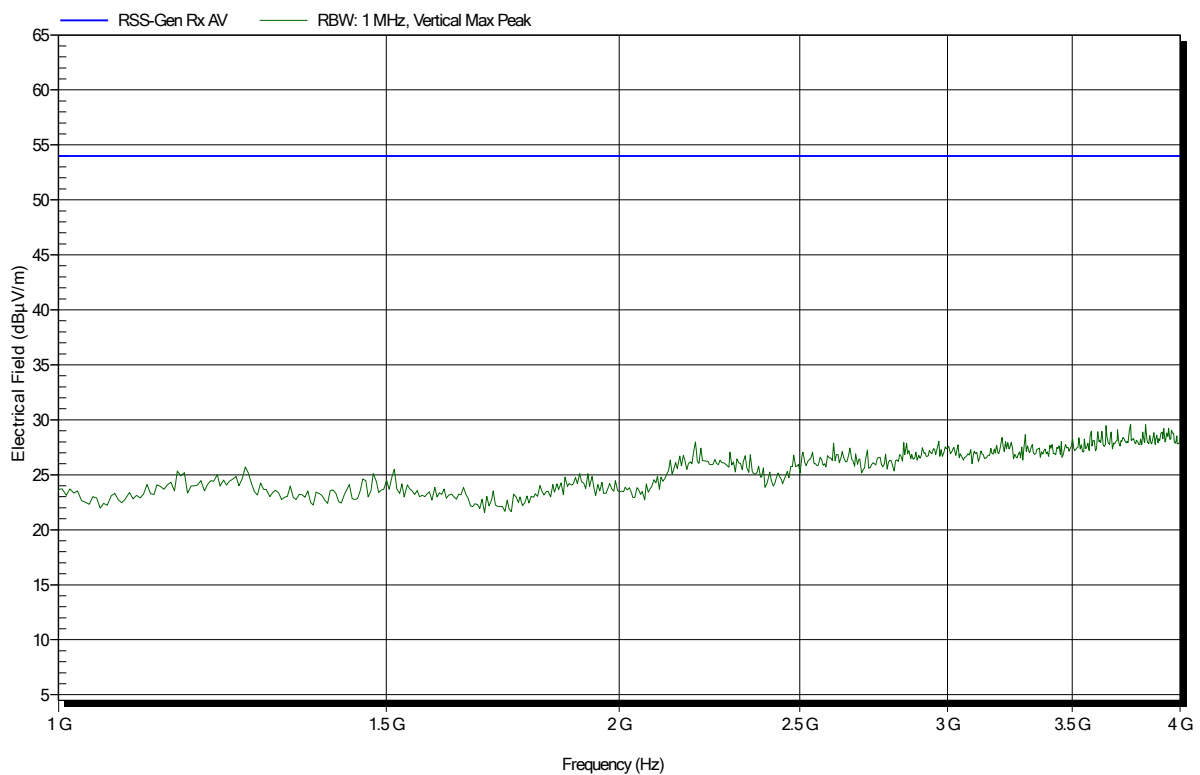

Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868
 Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; wall antenna
 Test Date: 2020-04-20
 Note:

Index 38

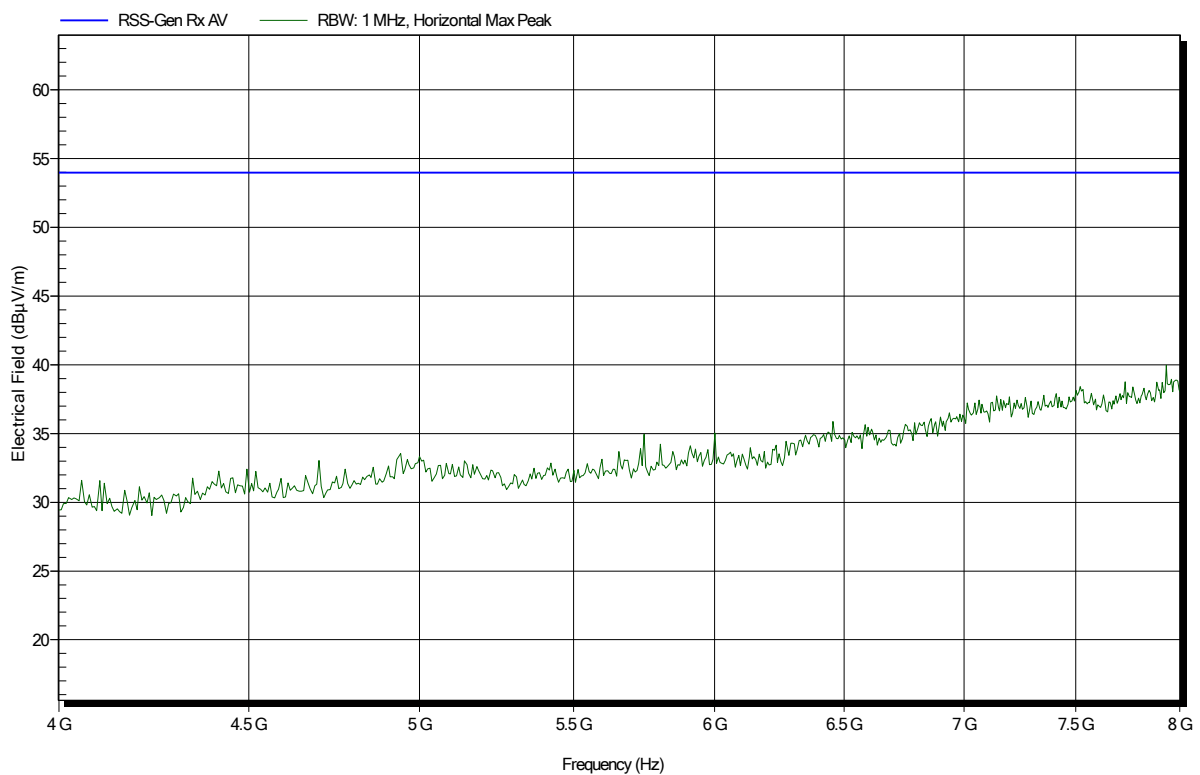


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
EUT Name: Meter Transmit Unit
Model: Ready MTU
Test Site: Eurofins Product Service Germany
Operator: Toralf Jahn
Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; 915 MHz; wall antenna
Test Date: 2020-04-20
Note:


Index 40

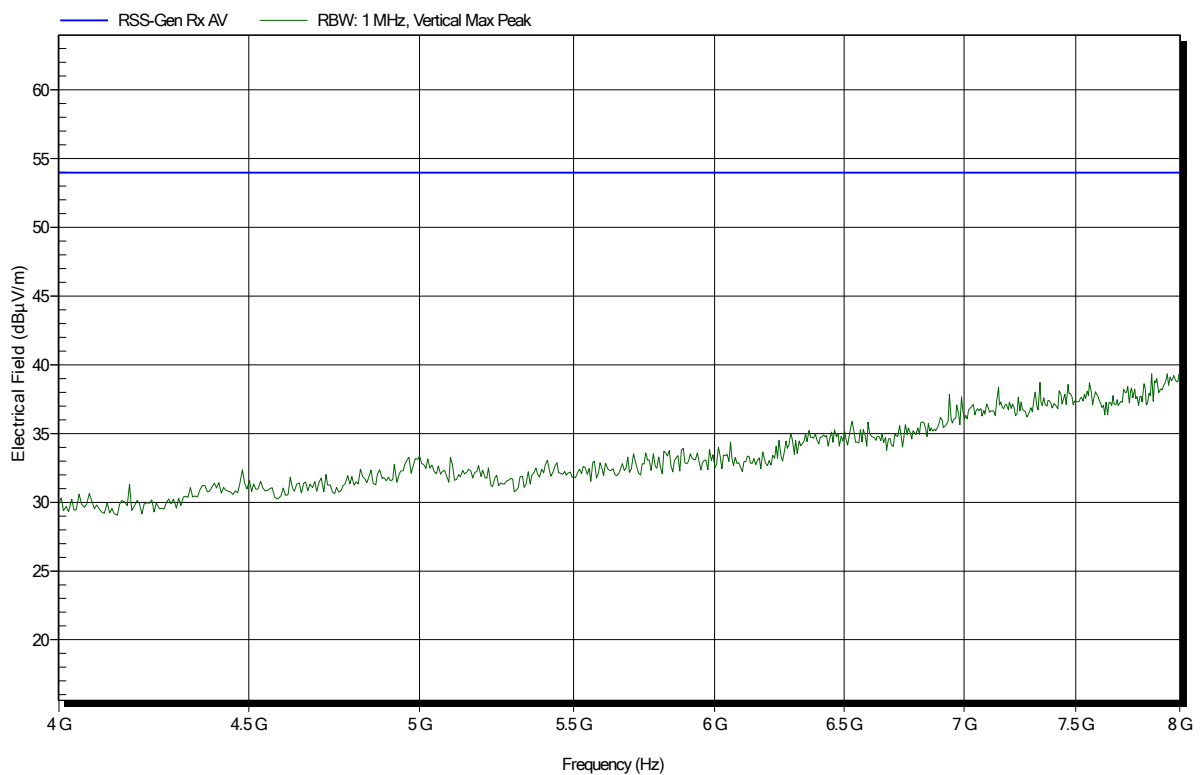

Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868
 Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; rod antenna
 Test Date: 2020-04-20
 Note:

Index 43

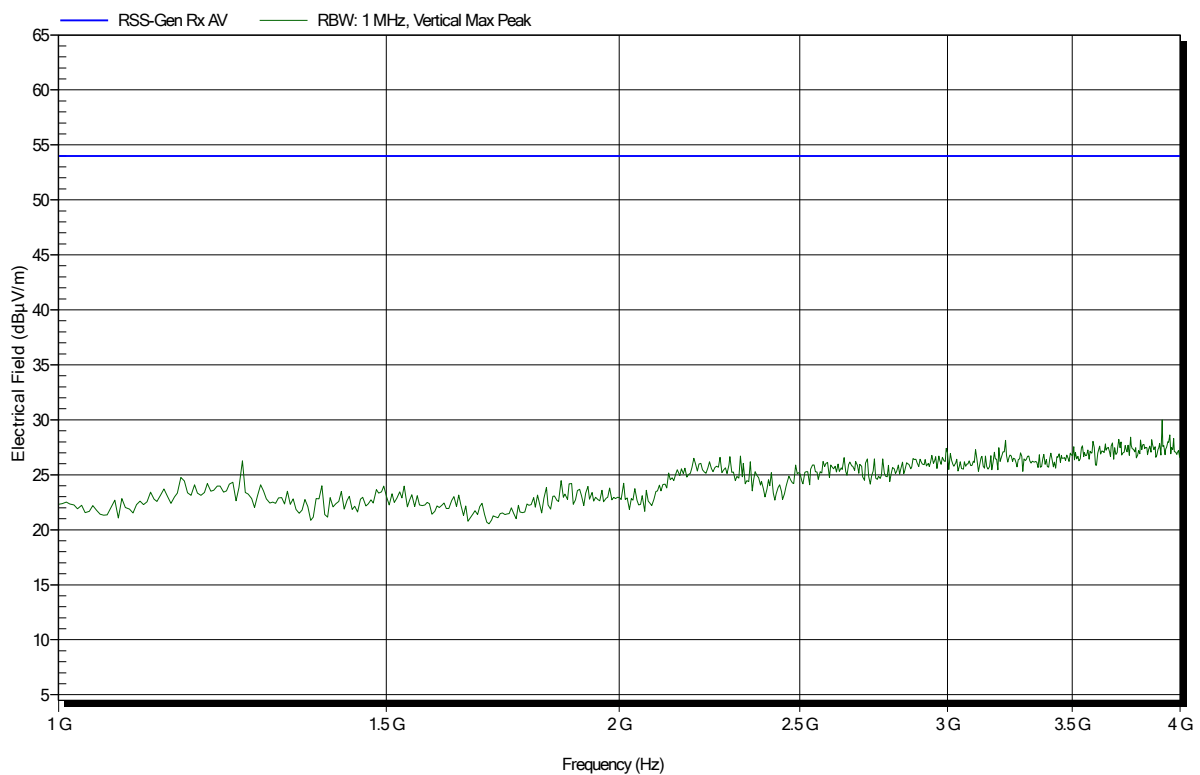


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; rod antenna
 Test Date: 2020-04-20
 Note:

Index 42

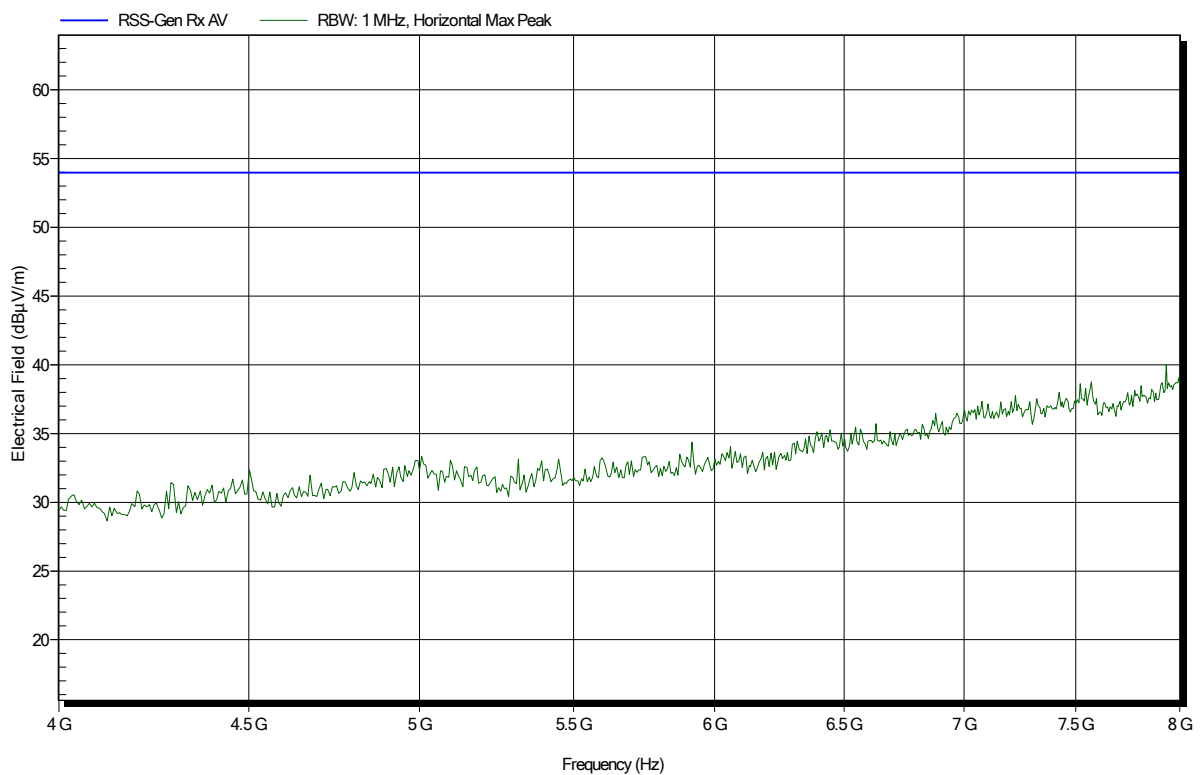


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
EUT Name: Meter Transmit Unit
Model: Ready MTU
Test Site: Eurofins Product Service Germany
Operator: Toralf Jahn
Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; 915 MHz; rod antenna
Test Date: 2020-04-20
Note:

Index 44

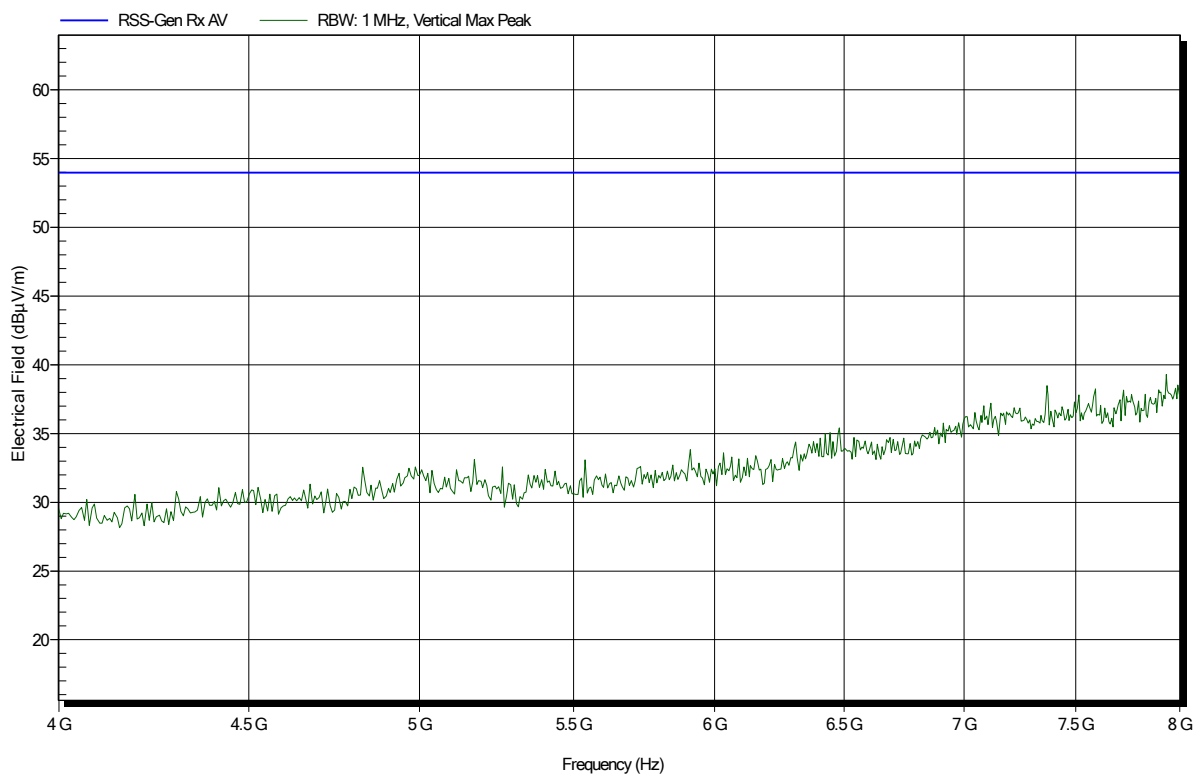


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; wall antenna
 Test Date: 2020-04-20
 Note:

Index 37

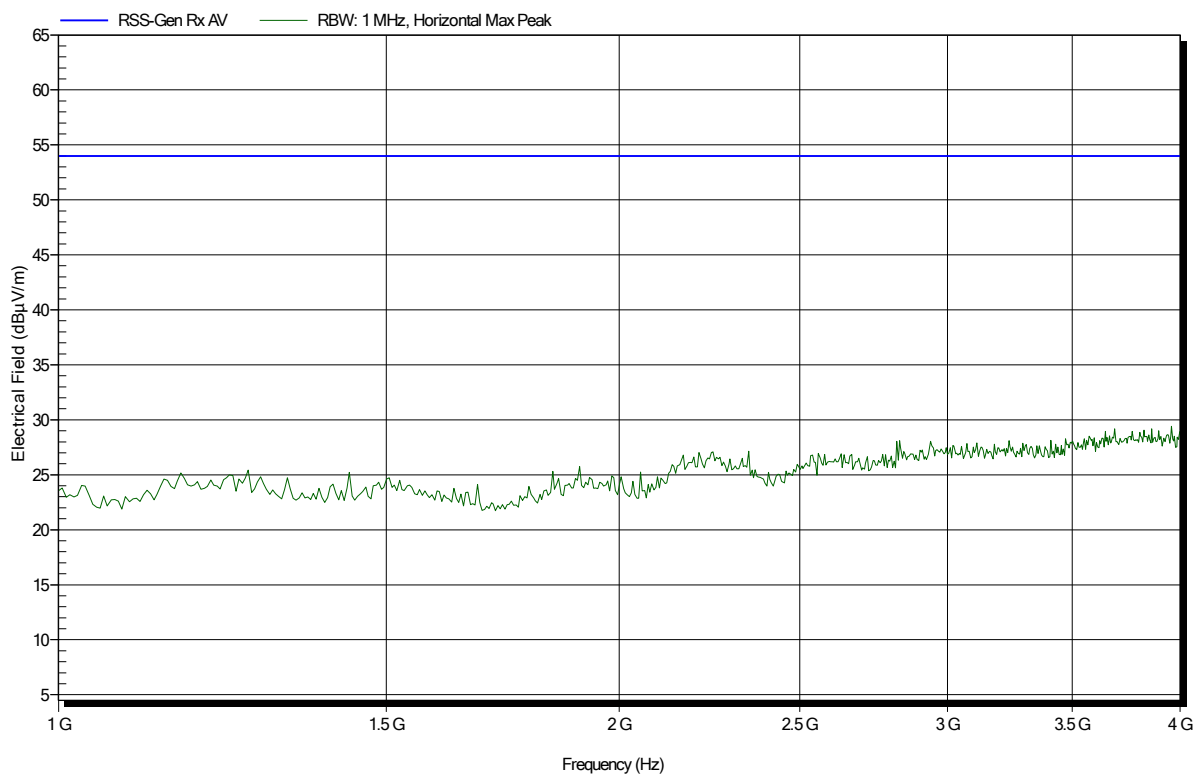


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; wall antenna
 Test Date: 2020-04-20
 Note:


Index 39

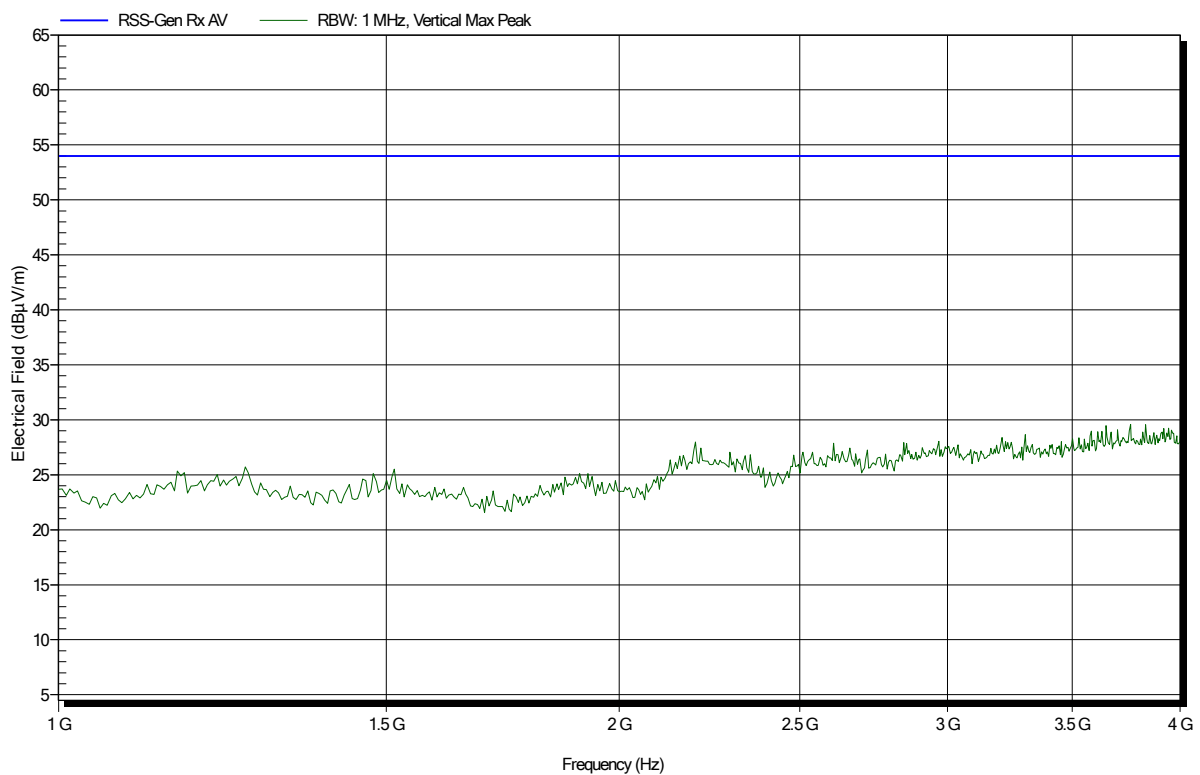

Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868
 Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; wall antenna
 Test Date: 2020-04-20
 Note:


Index 38

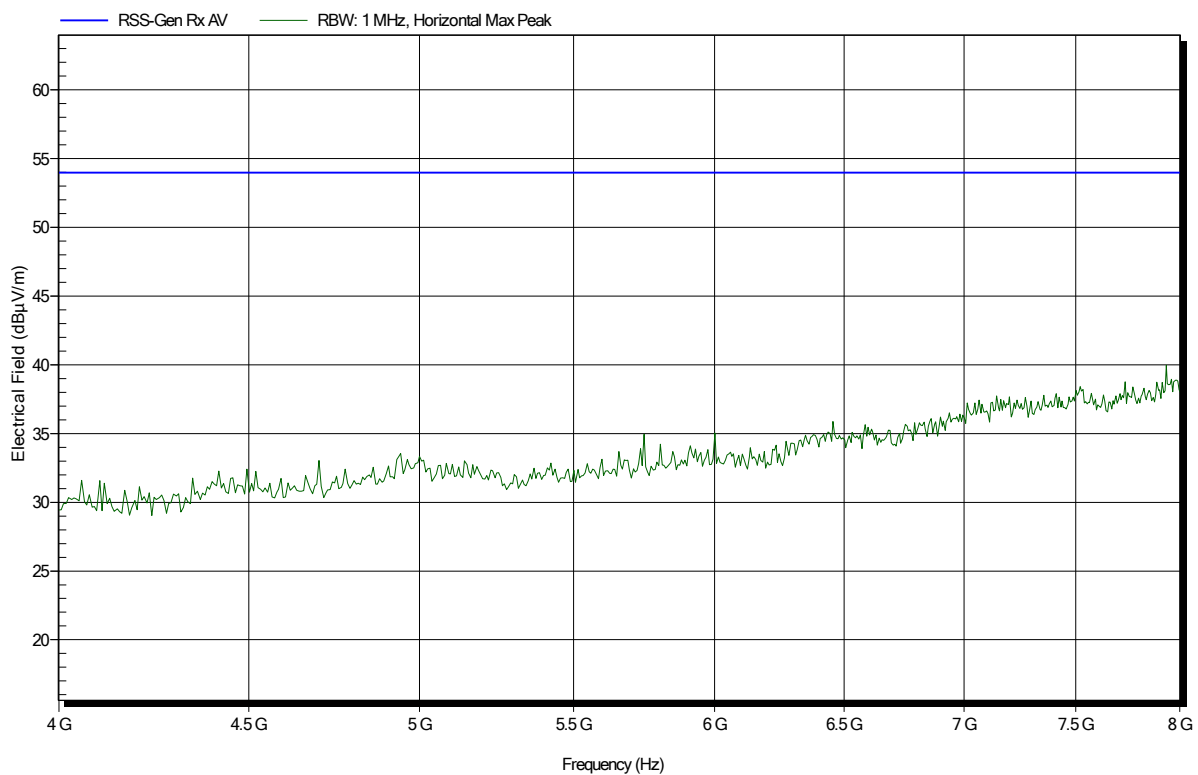

Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868
 Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; wall antenna
 Test Date: 2020-04-20
 Note:

Index 40

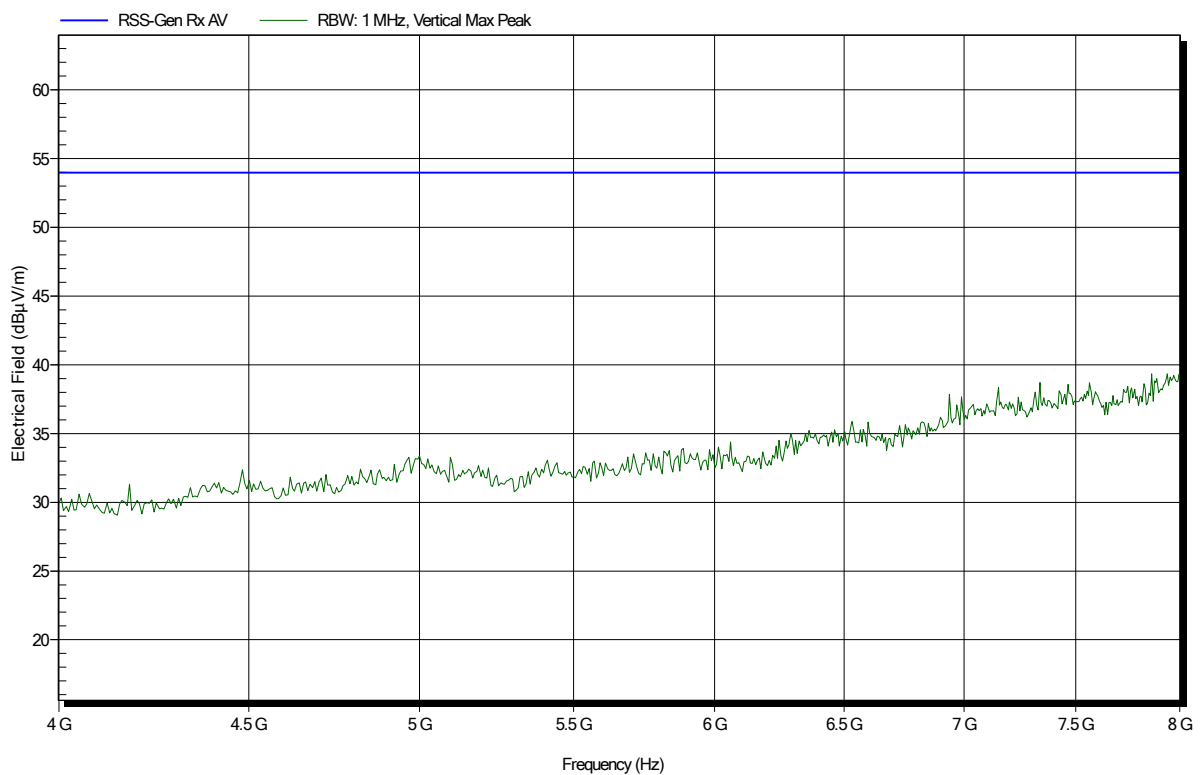


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; rod antenna
 Test Date: 2020-04-20
 Note:

Index 42

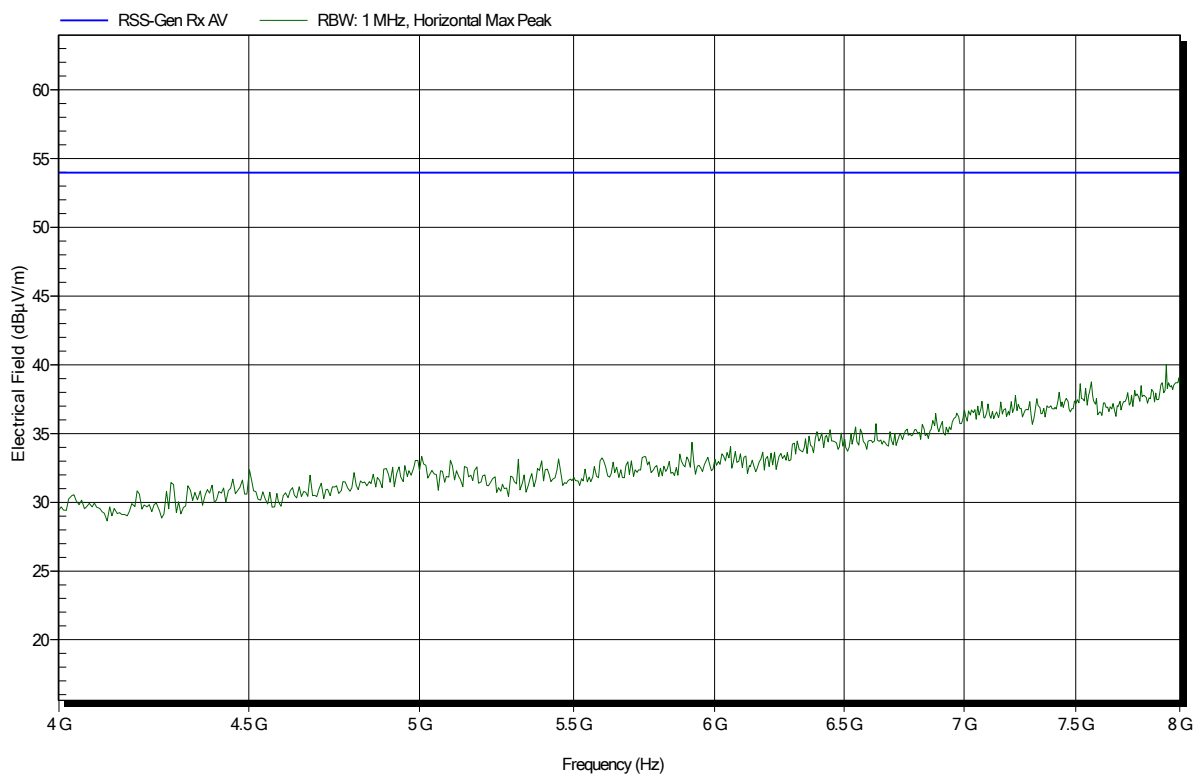


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; rod antenna
 Test Date: 2020-04-20
 Note:

Index 44

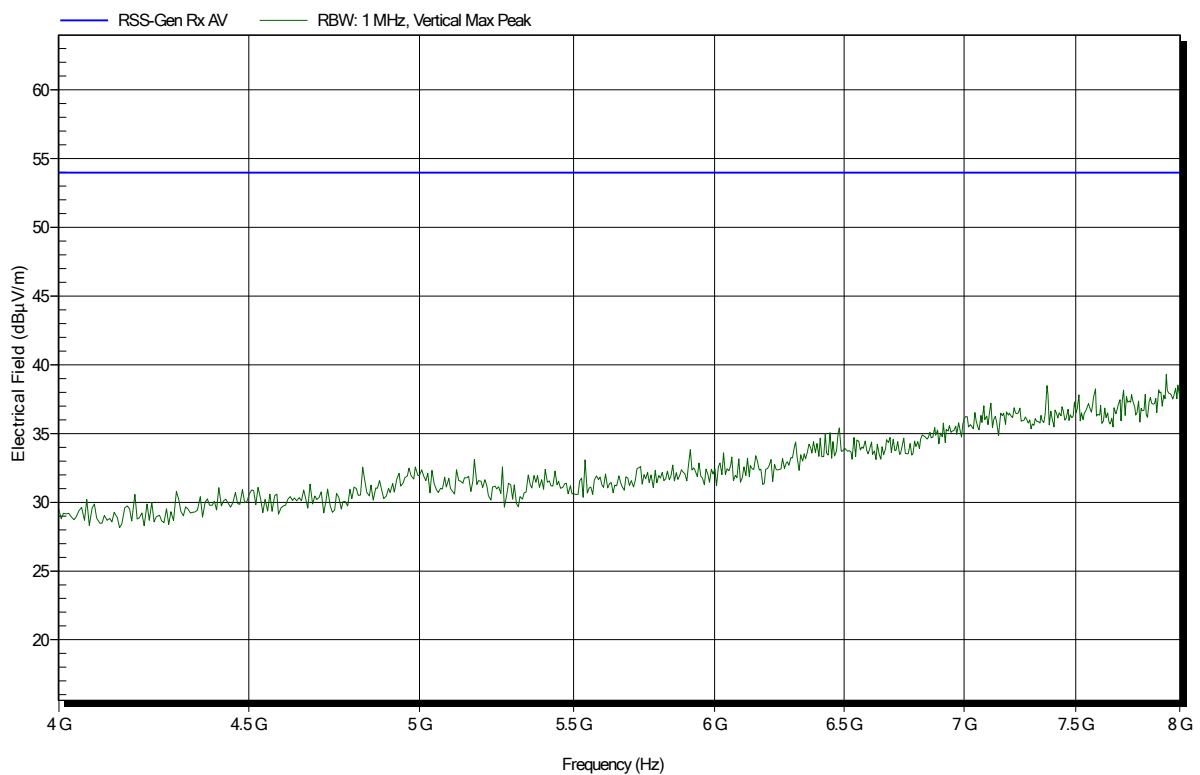


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; wall antenna
 Test Date: 2020-04-20
 Note:

Index 37

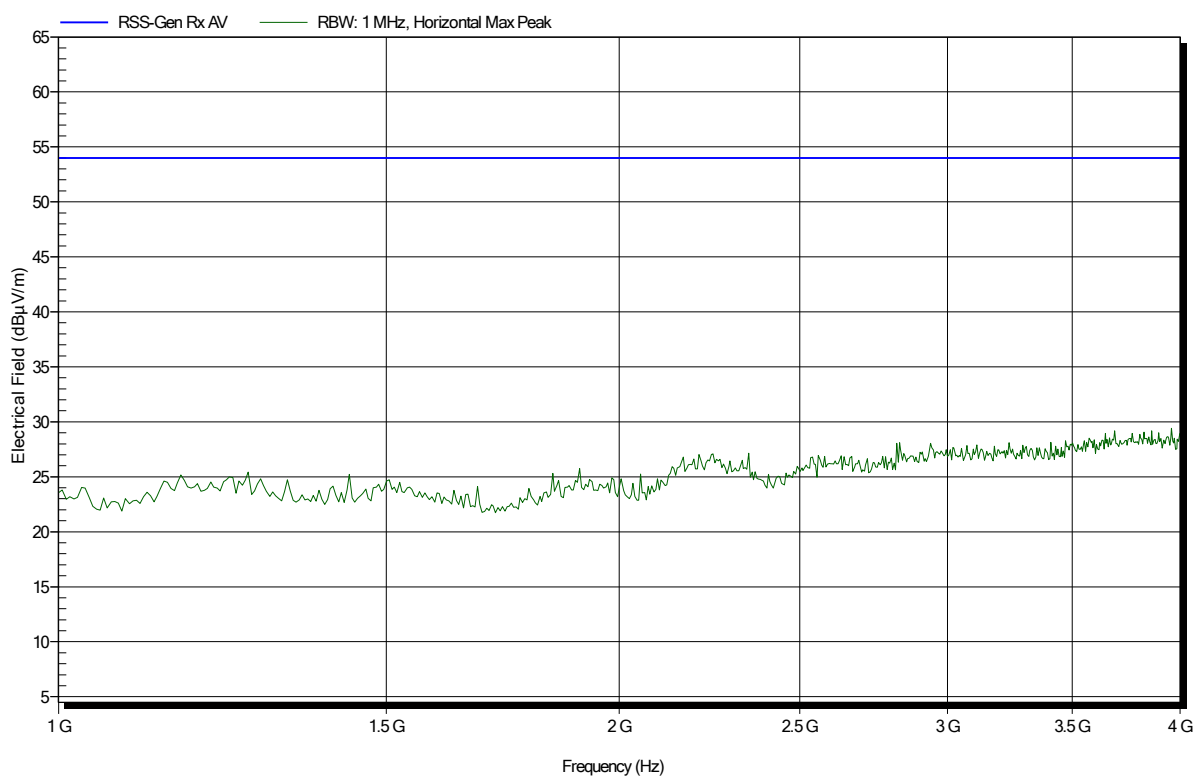


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; wall antenna
 Test Date: 2020-04-20
 Note:

Index 39

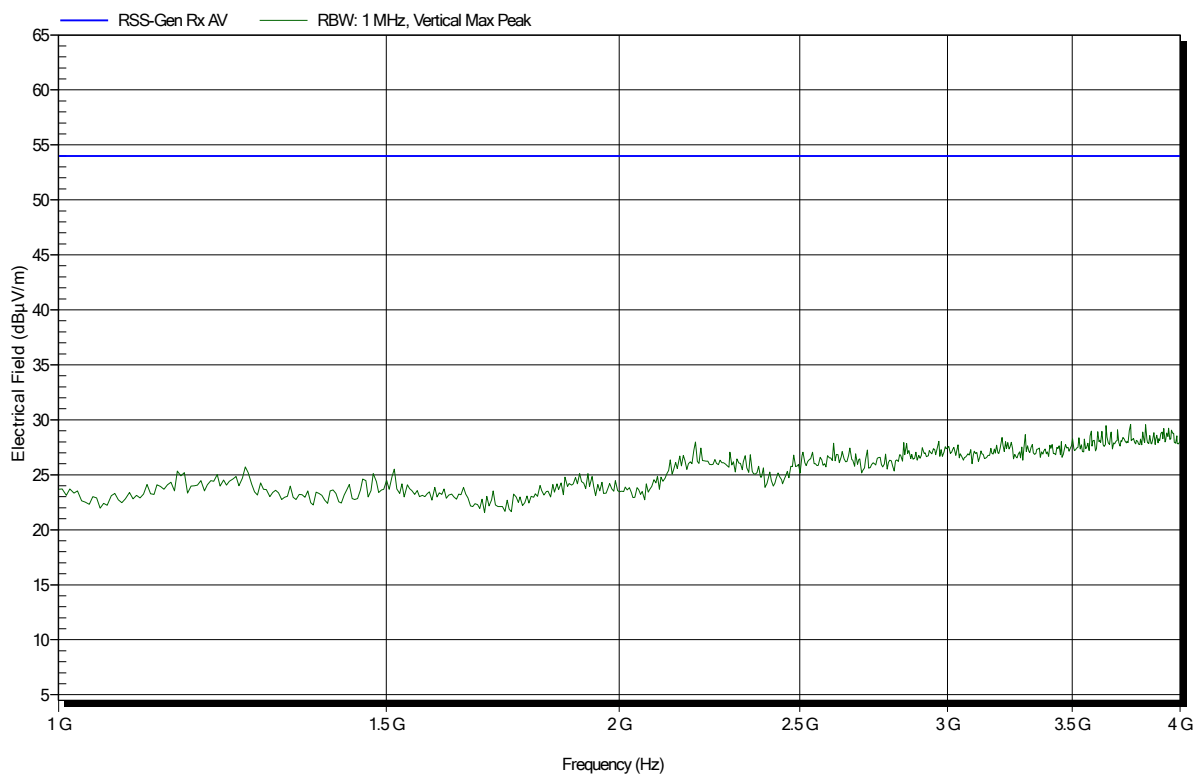


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; wall antenna
 Test Date: 2020-04-20
 Note:

Index 38

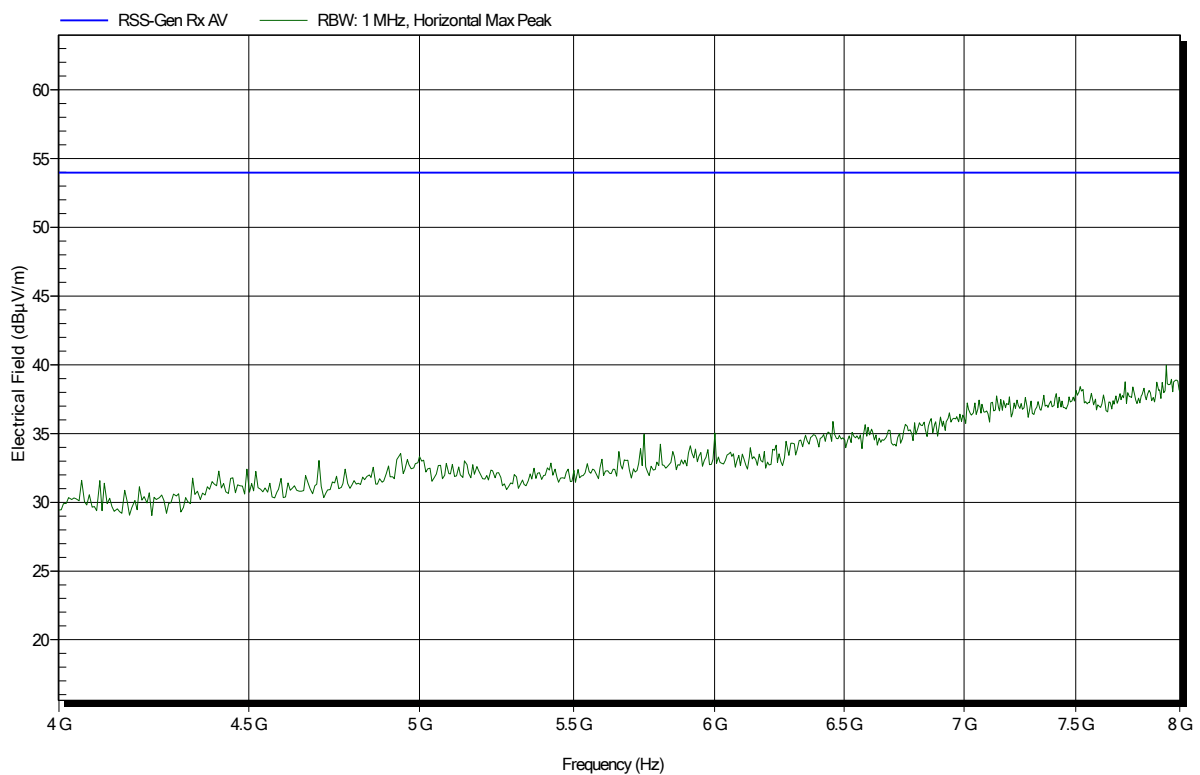


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; wall antenna
 Test Date: 2020-04-20
 Note:


Index 40

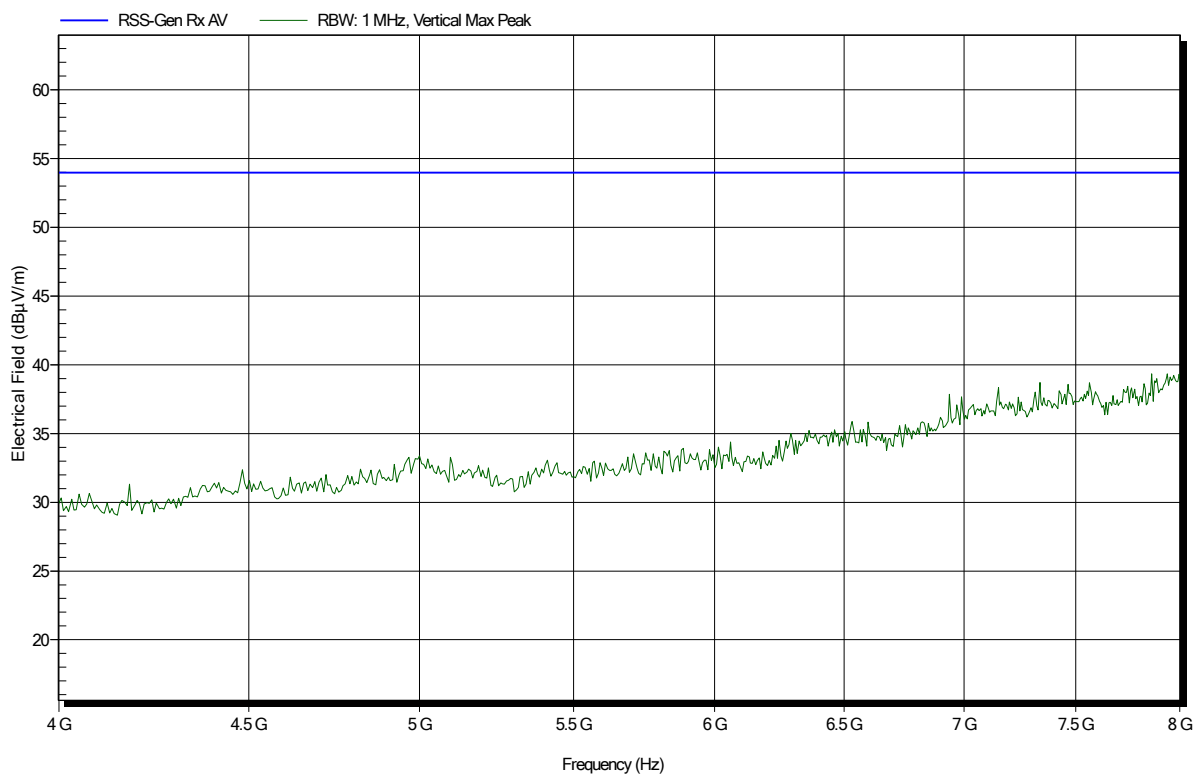

Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868
 Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; rod antenna
 Test Date: 2020-04-20
 Note:

Index 44

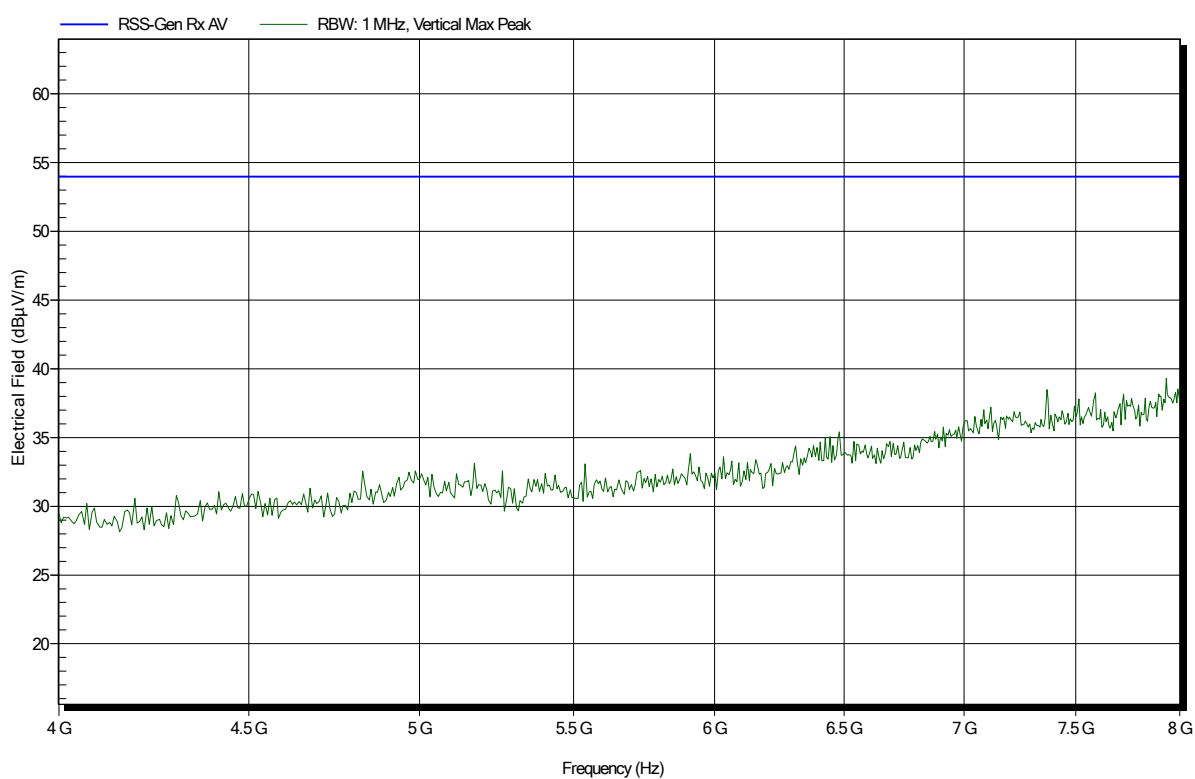


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; wall antenna
 Test Date: 2020-04-20
 Note:

Index 37

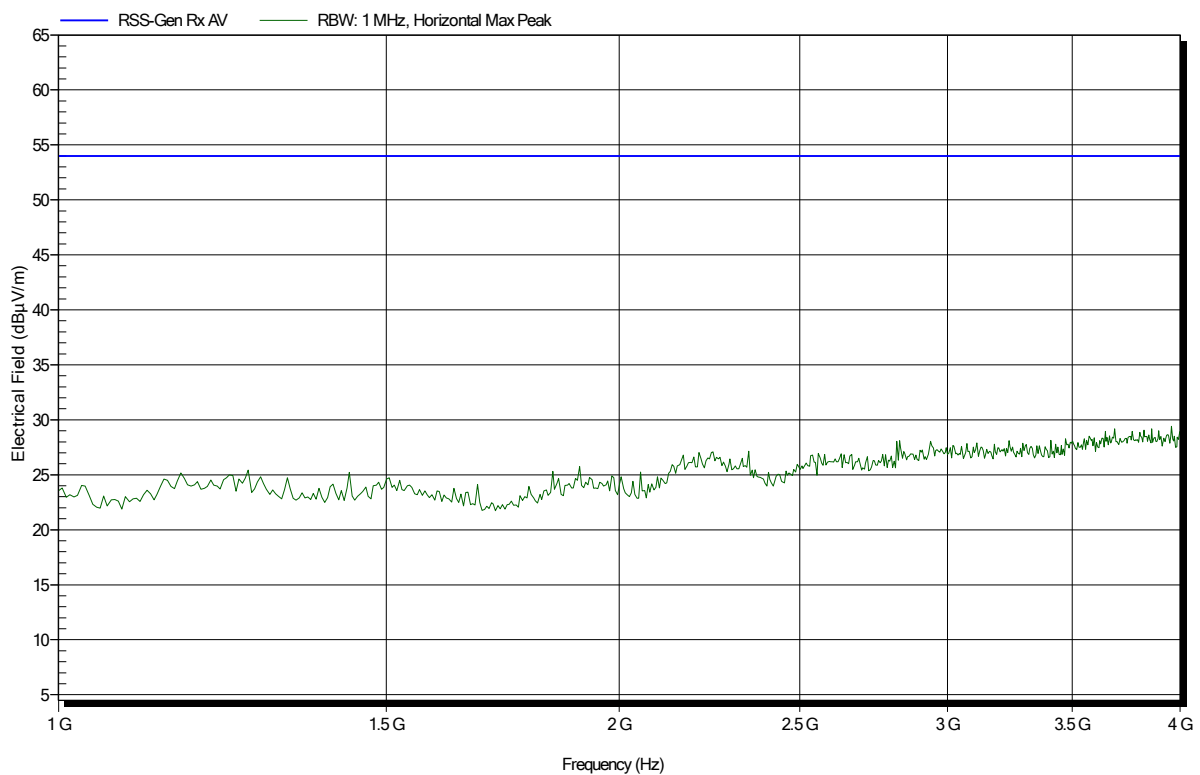


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; wall antenna
 Test Date: 2020-04-20
 Note:


Index 39

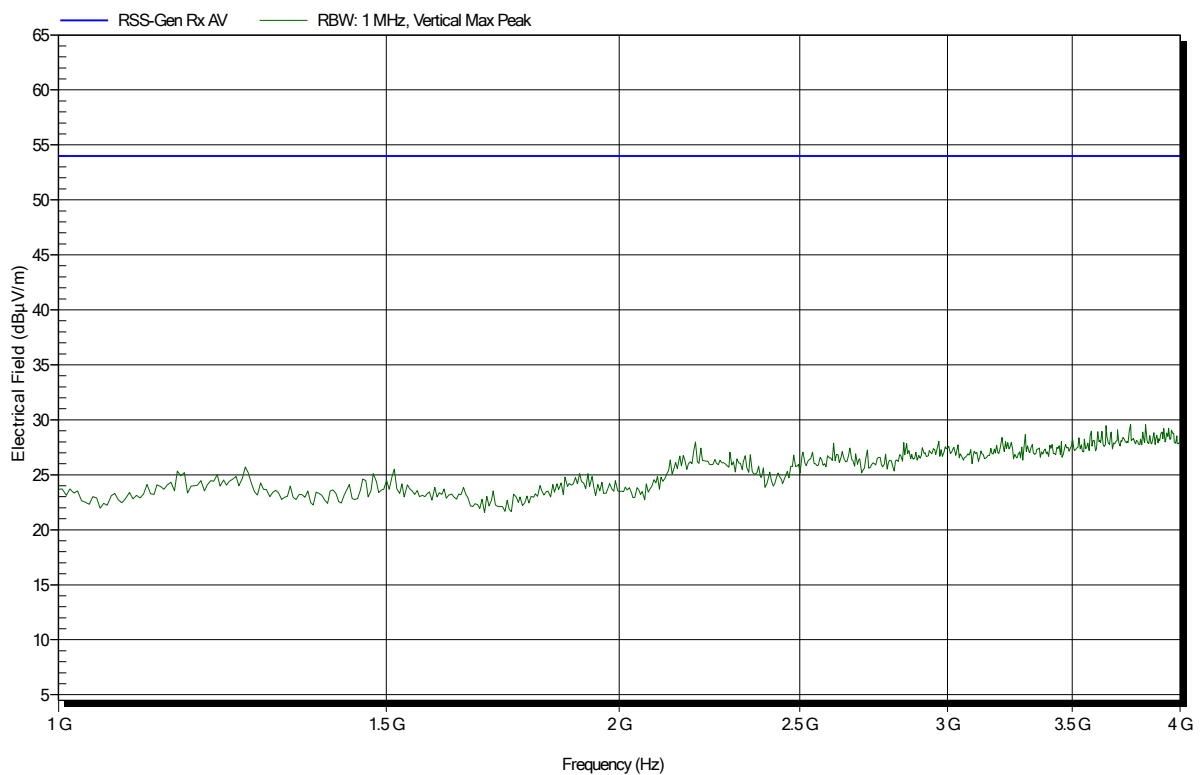

Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868
 Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; wall antenna
 Test Date: 2020-04-20
 Note:

Index 38

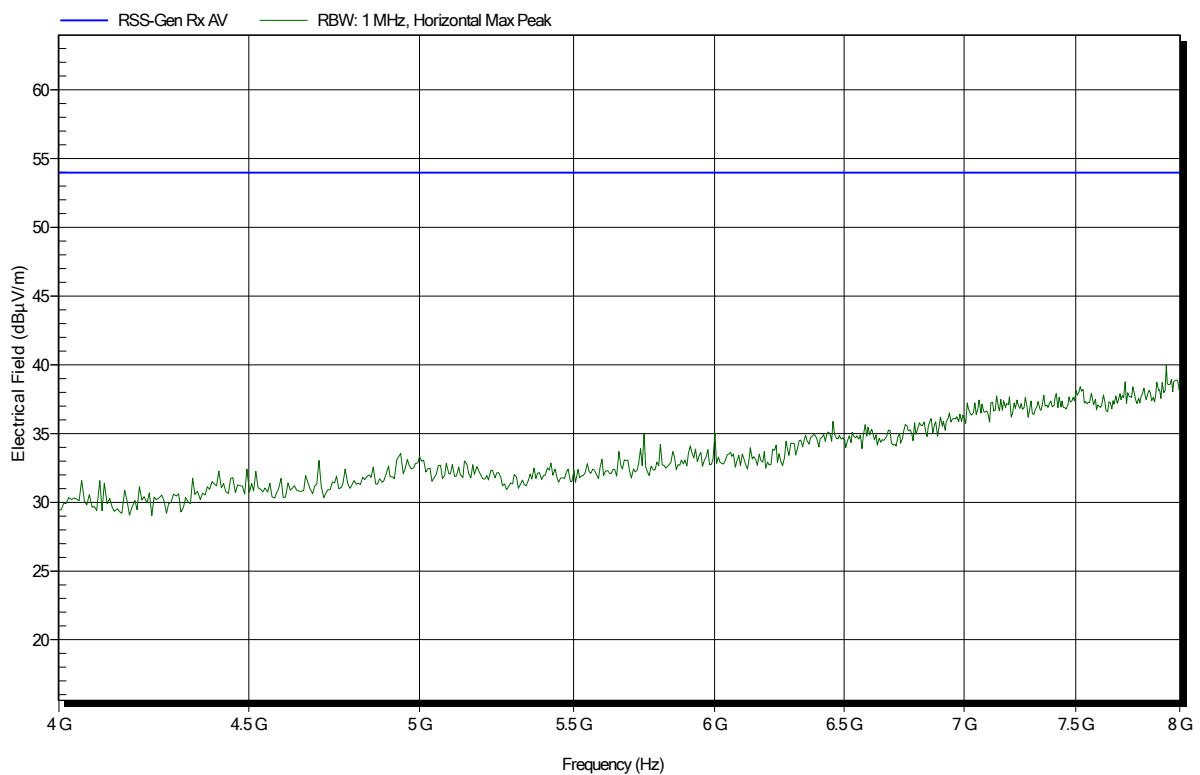


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; wall antenna
 Test Date: 2020-04-20
 Note:

Index 40

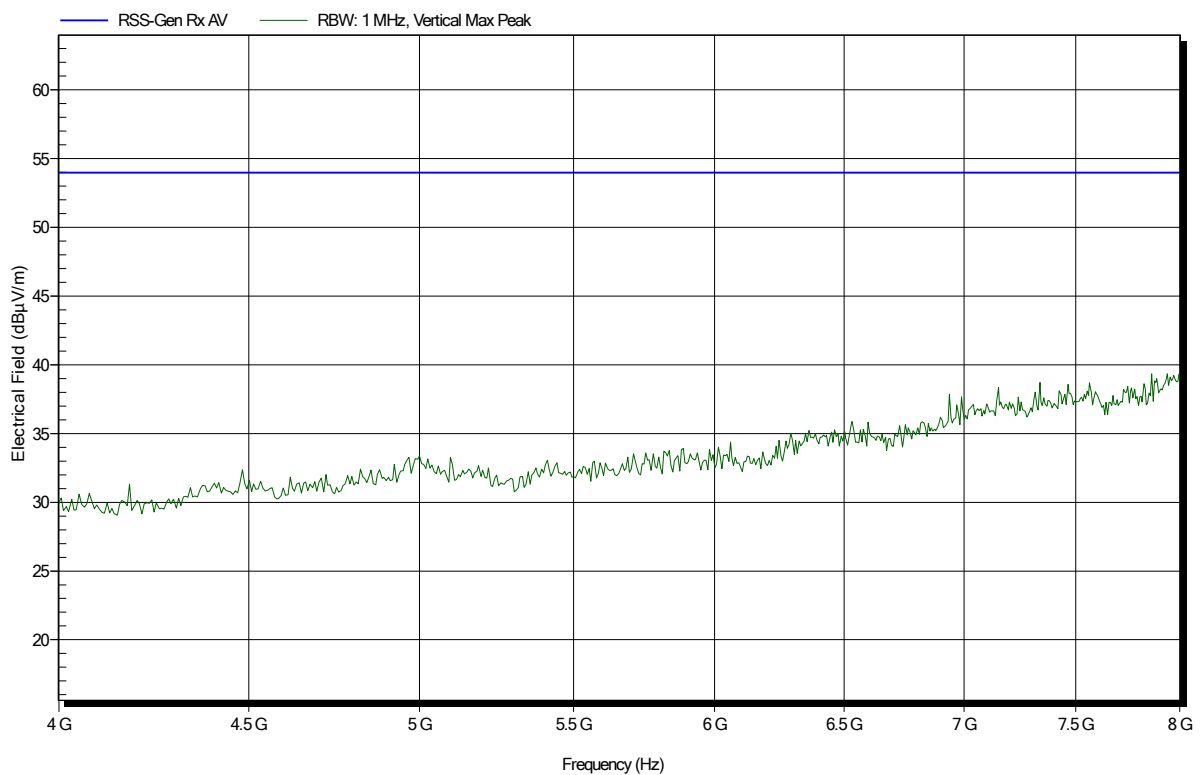


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; wall antenna
 Test Date: 2020-04-20
 Note:

Index 37

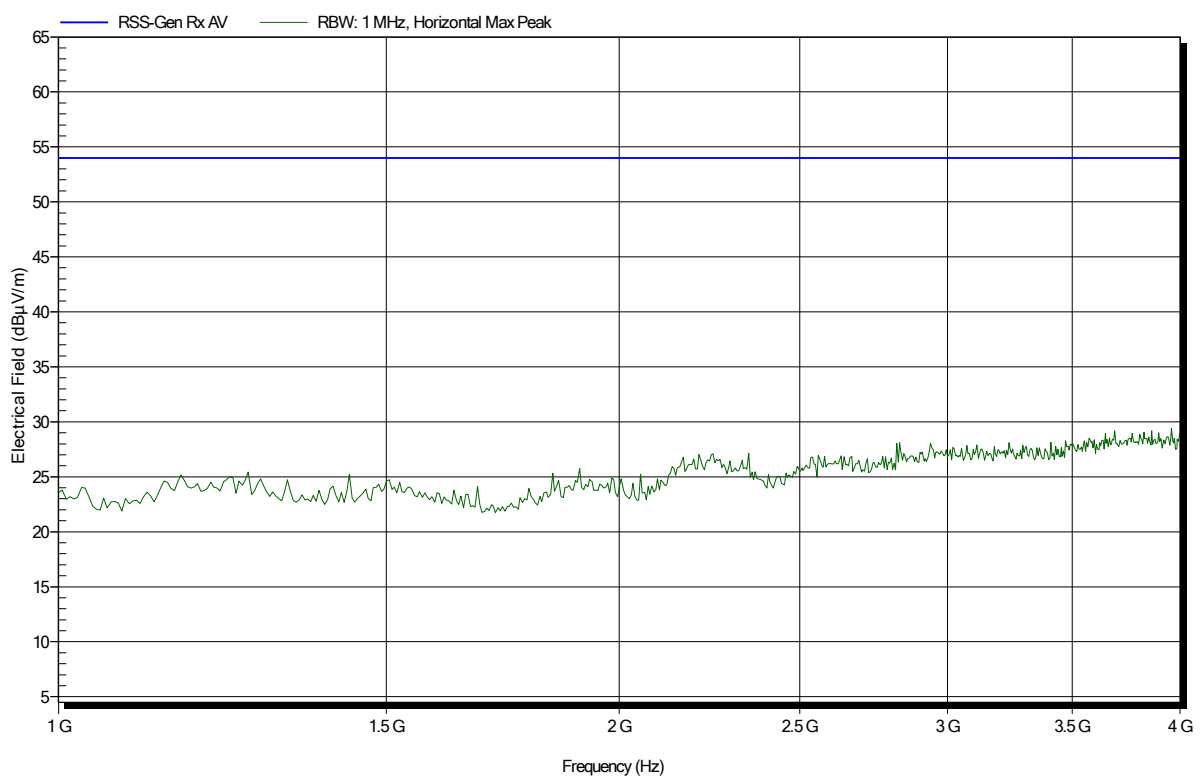


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; wall antenna
 Test Date: 2020-04-20
 Note:


Index 39

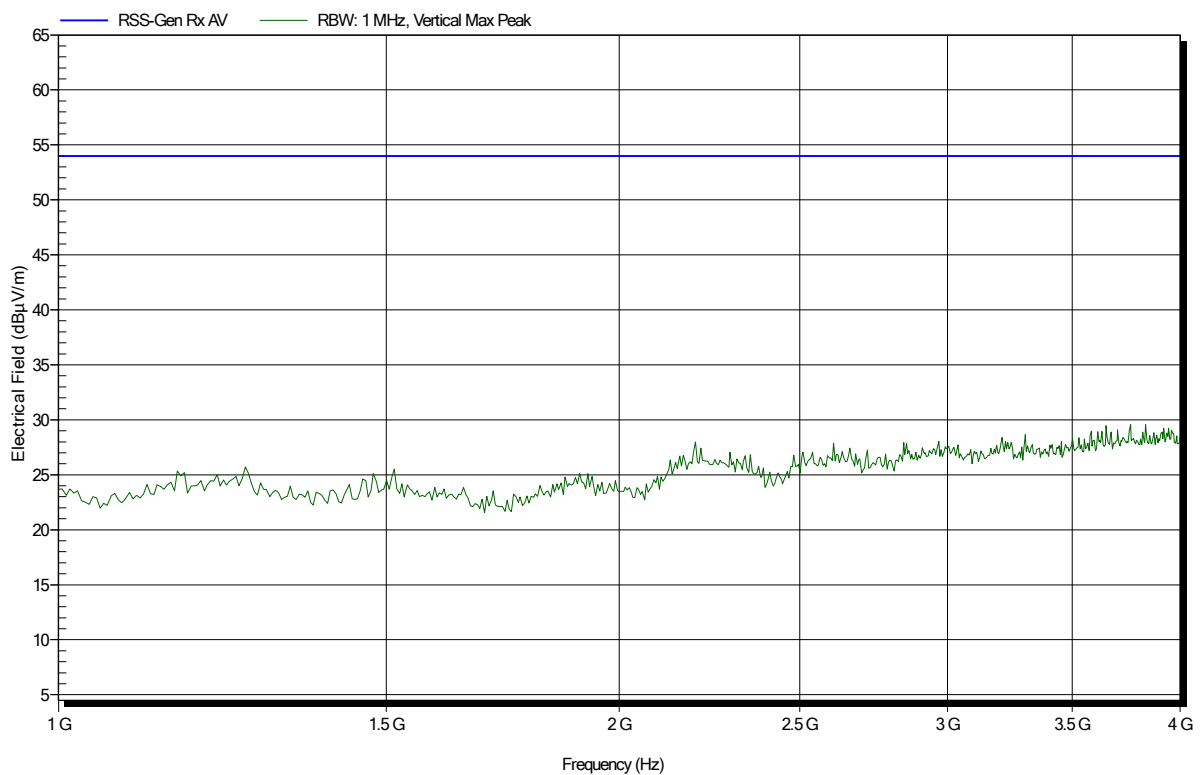

Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868
 Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; wall antenna
 Test Date: 2020-04-20
 Note:

Index 38

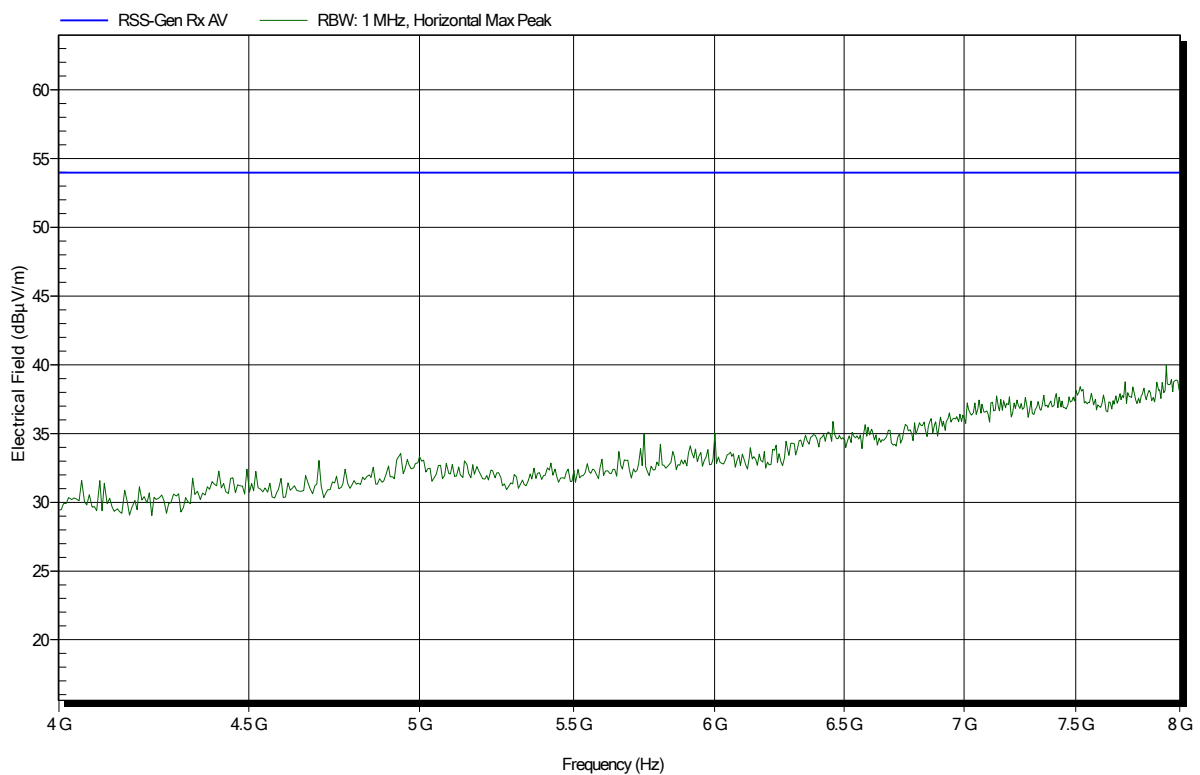


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; wall antenna
 Test Date: 2020-04-20
 Note:

Index 40

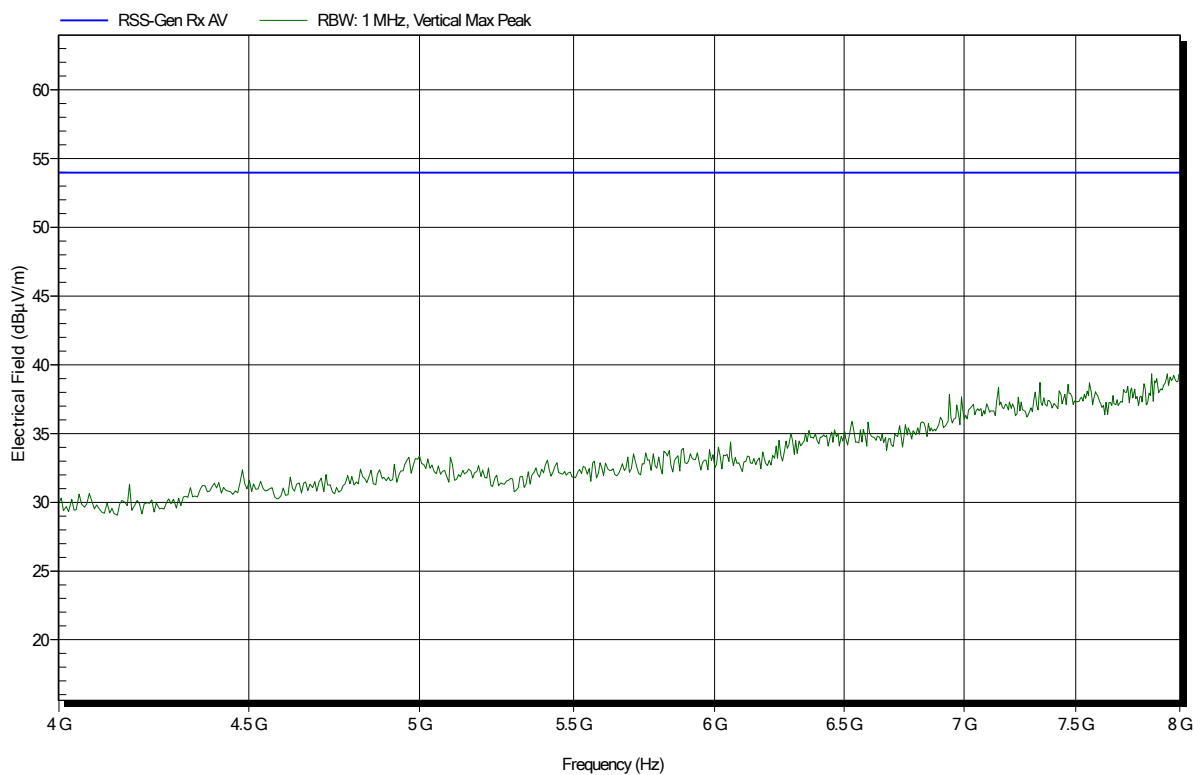


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; wall antenna
 Test Date: 2020-04-20
 Note:

Index 39

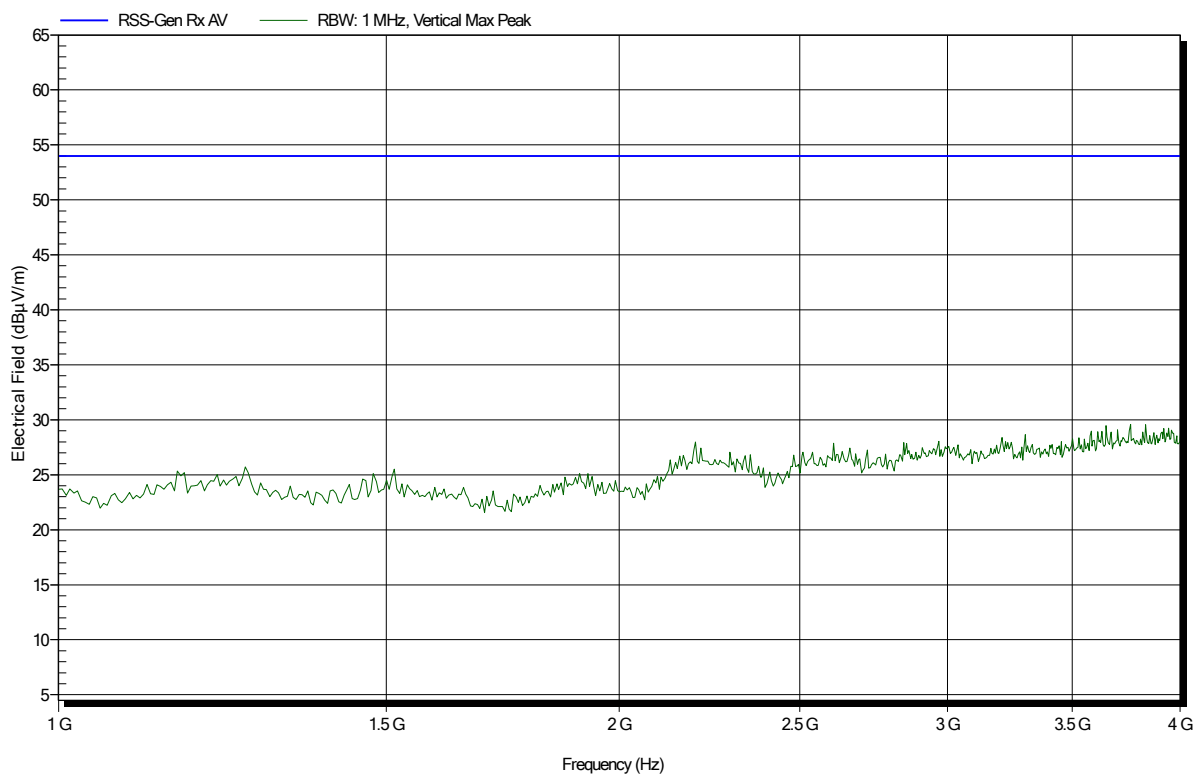


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
EUT Name: Meter Transmit Unit
Model: Ready MTU
Test Site: Eurofins Product Service Germany
Operator: Toralf Jahn
Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 1 m converted to 3m
Mode: TX; 915 MHz; wall antenna
Test Date: 2020-04-20
Note:

Index 38

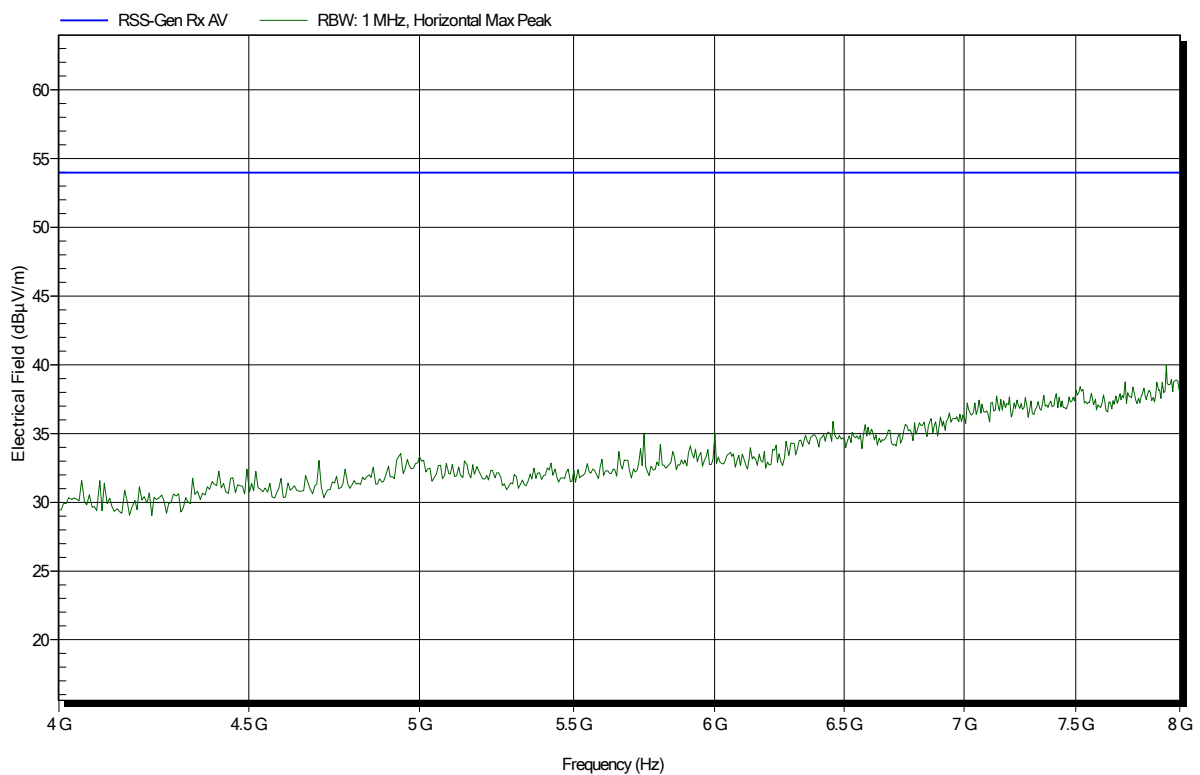


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; wall antenna
 Test Date: 2020-04-20
 Note:

Index 40

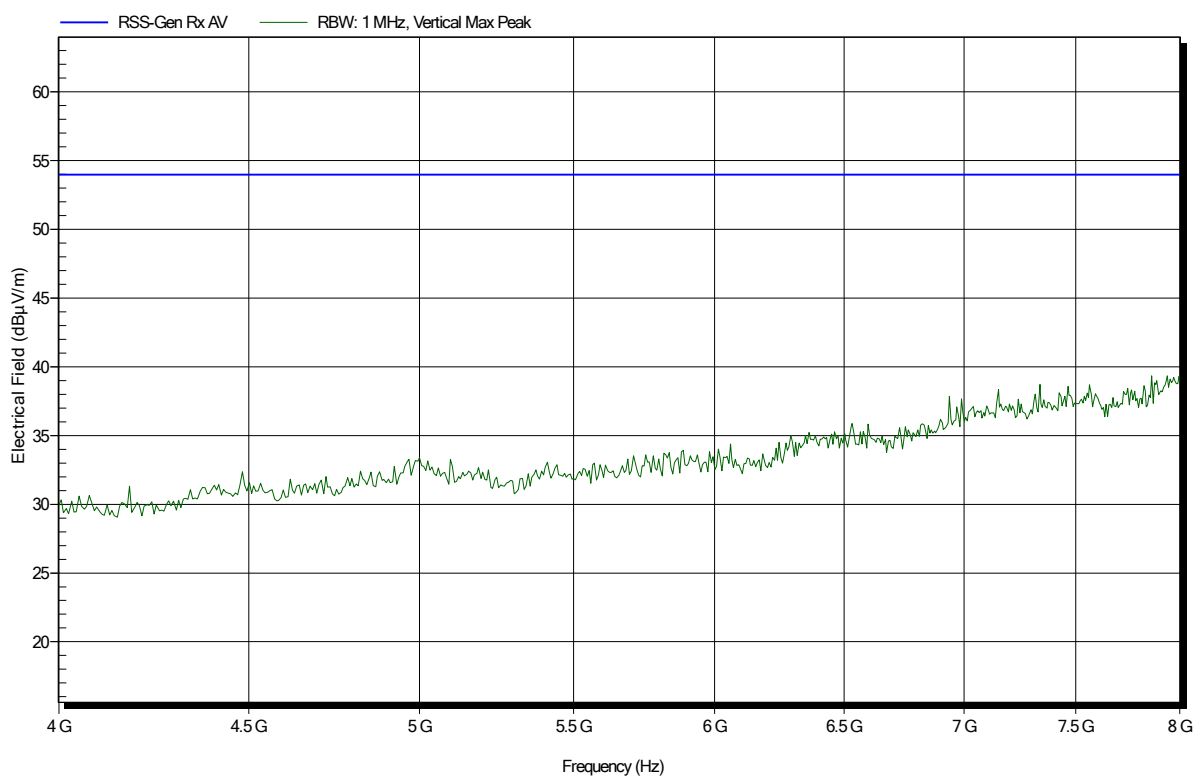


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; wall antenna
 Test Date: 2020-04-20
 Note:

Index 38

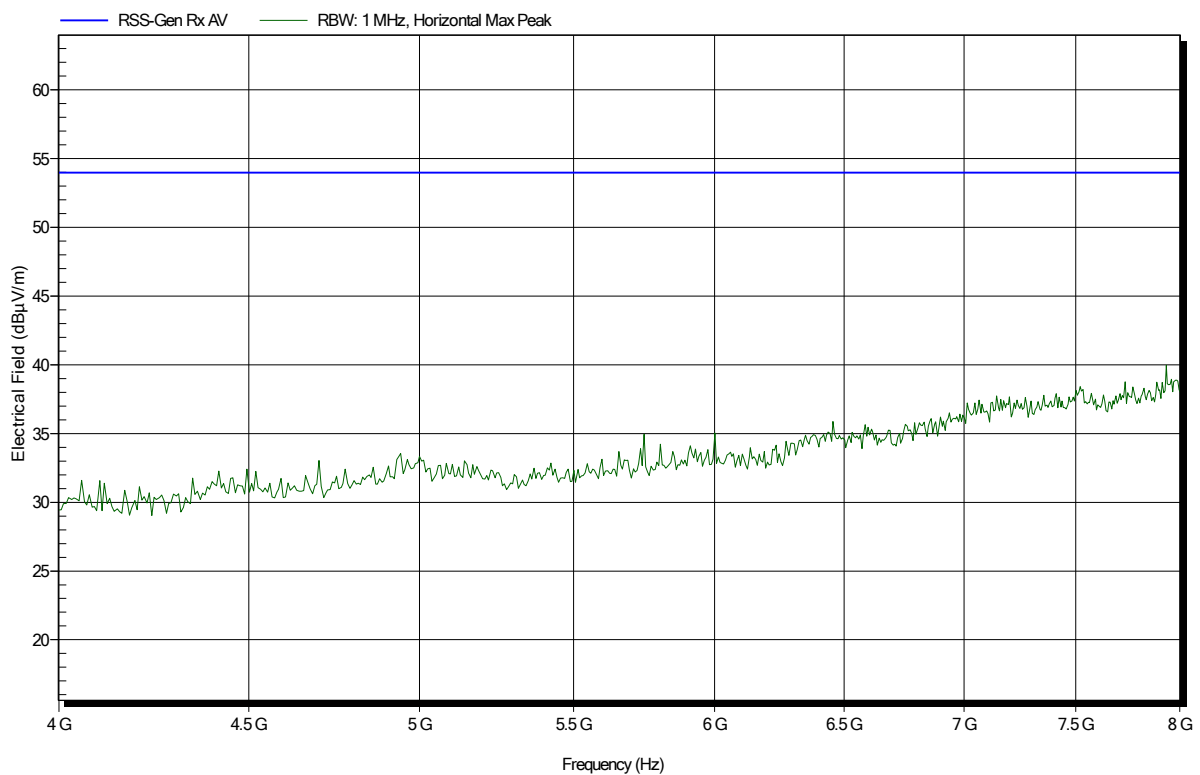


Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; wall antenna
 Test Date: 2020-04-20
 Note:

Index 40

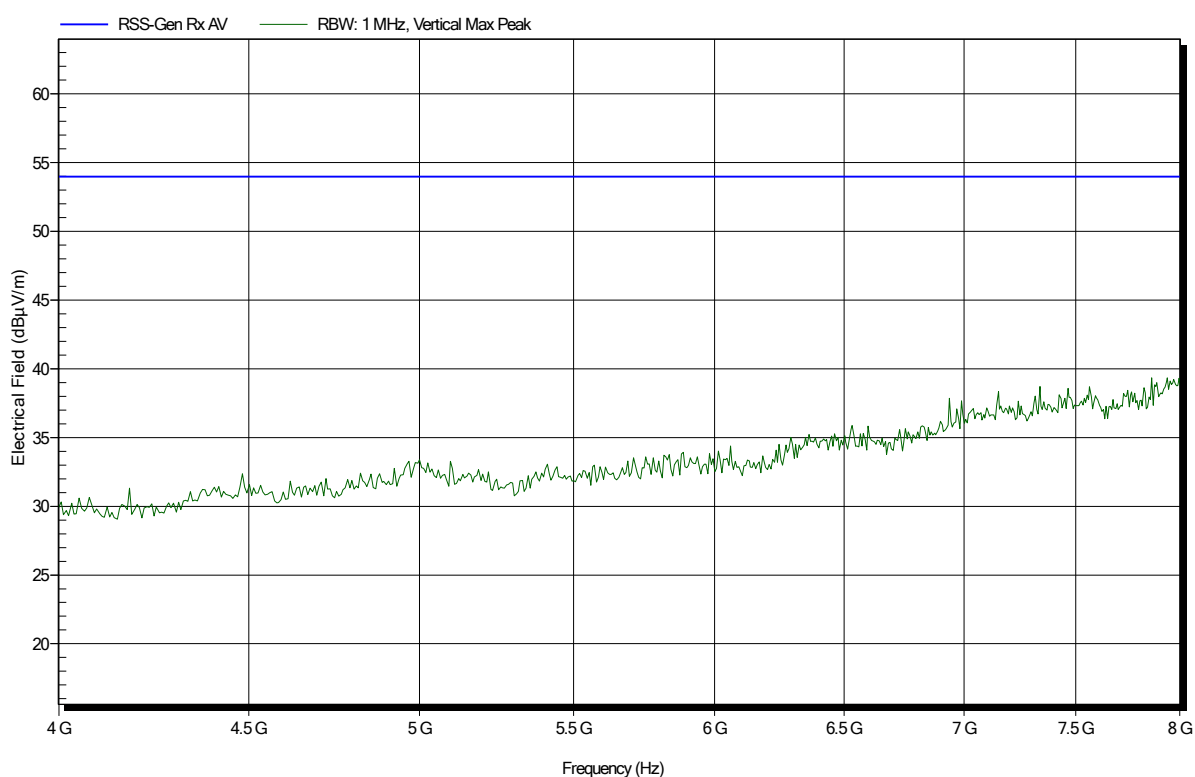

Spurious emissions according to RSS-Gen

Project number: G0M-2002-8868

Applicant: Kamstrup A/S
 EUT Name: Meter Transmit Unit
 Model: Ready MTU
 Test Site: Eurofins Product Service Germany
 Operator: Toralf Jahn
 Test Conditions: Tnom: 24°C, Vnom: 3.6 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; 915 MHz; wall antenna
 Test Date: 2020-04-20
 Note:

Index 40

