


FCC PART 22H, PART 24E
FCC PART 27
MEASUREMENT AND TEST REPORT

For

DT Research Inc.

6F., NO.1, Ning-Po E. Street, Taipei 100, Taiwan

FCC ID: YE3800D
Model: DT311

Report Type: Original Report	Product Type: Mobile Tablet
Test Engineer: Dean Liu 	
Report Number: RDG150615001-00C	
Report Date: 2015-07-01	
Reviewed By: Sula Huang RF Leader 	
Test Laboratory: Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
JUSTIFICATION	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
CONFIGURATION OF TEST SETUP	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
FCC §1.1310 & §2.1093- RF EXPOSURE	9
APPLICABLE STANDARD	9
TEST RESULT	9
FCC §2.1047 - MODULATION CHARACTERISTIC	10
FCC §2.1046, §22.913 (A) & §24.232 (C) & §27.50 - RF OUTPUT POWER.....	11
APPLICABLE STANDARD	11
TEST PROCEDURE	11
TEST EQUIPMENT LIST AND DETAILS.....	13
TEST DATA	13
FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53- OCCUPIED BANDWIDTH.....	35
APPLICABLE STANDARD	35
TEST PROCEDURE	35
TEST EQUIPMENT LIST AND DETAILS.....	35
TEST DATA	35
FCC §2.1051, §22.917(A) & §24.238(A) & §27.53- SPURIOUS EMISSIONS AT ANTENNA TERMINALS ...	48
APPLICABLE STANDARD	48
TEST PROCEDURE	48
TEST EQUIPMENT LIST AND DETAILS.....	48
TEST DATA	48
FCC §2.1053, §22.917 & §24.238 & §27.53- SPURIOUS RADIATED EMISSIONS	71
APPLICABLE STANDARD	71
TEST PROCEDURE	71
TEST EQUIPMENT LIST AND DETAILS.....	71
TEST DATA	72
FCC §22.917(A) & §24.238(A) & §27.53(H)- BAND EDGES.....	75
APPLICABLE STANDARD	75
TEST PROCEDURE	75
TEST EQUIPMENT LIST AND DETAILS.....	75
TEST DATA	76
FCC §2.1055, §22.355 & §24.235 & §27.54 - FREQUENCY STABILITY.....	114
APPLICABLE STANDARD	114

TEST PROCEDURE	114
TEST EQUIPMENT LIST AND DETAILS.....	115
TEST DATA	115

FINAL

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *DT Research Inc.*'s product, model number: *DT311 (FCC ID: YE3800D)* (the "EUT") in this report was a *Mobile Tablet*, which was measured approximately: 31.5 cm (L) x 21.2 cm (W) x 4.2 cm (H), rated input voltage: DC 7.2V rechargeable Li-ion battery or DC19V charging from adapter. The device used SIERRA WIRELESS™'s MC7355 module, FCC ID: N7NMC7355, which support CDMA2000(850/1900 band) 1xRTT and EVDO Rev.A and LTE band 4/band 13, all of the other functions eg.GSM,GRPS,EDGE, WCDMA R99,HSPA,HSPA+ and other band were disabled by software.

Adapter information:

Model: A11-065N1A

Input: 100-240V~50/60Hz, 1.7A

Output: 19V, 3.42A

All measurement and test data in this report was gathered from production sample serial number: 150615001 (Assigned by BACL, Dongguan). The EUT was received on 2015-06-15.

Objective

This report is prepared on behalf of *DT Research Inc.* in accordance with: Part 2-Subpart J, Part 22-Subpart H, Part 24-Subpart E and part 27 of the Federal Communications Commission's rules.

The objective is to determine compliance with FCC rules for output power, modulation characteristic, occupied bandwidth, spurious emissions at antenna terminal, spurious radiated emission, frequency stability and band edge.

Related Submittal(s)/Grant(s)

FCC Part 15B JBP, 15C DSS, DTS, and 15E NII submissions with FCC ID: YE3800D.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

Part 22 Subpart H - Public Mobile Services

Part 24 Subpart E - Personal Communication Services

Part 27 – Miscellaneous wireless communications services

Applicable Standards: TIA/EIA 603-D-2010.

All radiated and conducted emissions measurements were performed at Bay Area Compliance Laboratories Corp.(Dongguan).

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 06, 2015. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Justification

The EUT was configured for testing according to TIA/EIA-603-D-2010.

The test items were performed with the EUT operating at testing mode.


Equipment Modifications

No modification was made to the EUT.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
R&S	Universal Radio Communication Tester	CMU200	109038
R&S	Wideband Radio Communication Tester	CMW500	106891
N/A	ANTENNA	N/A	N/A

Configuration of Test Setup

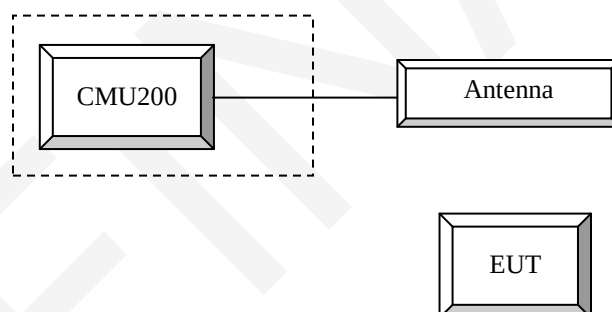

Block Diagram of Test Setup

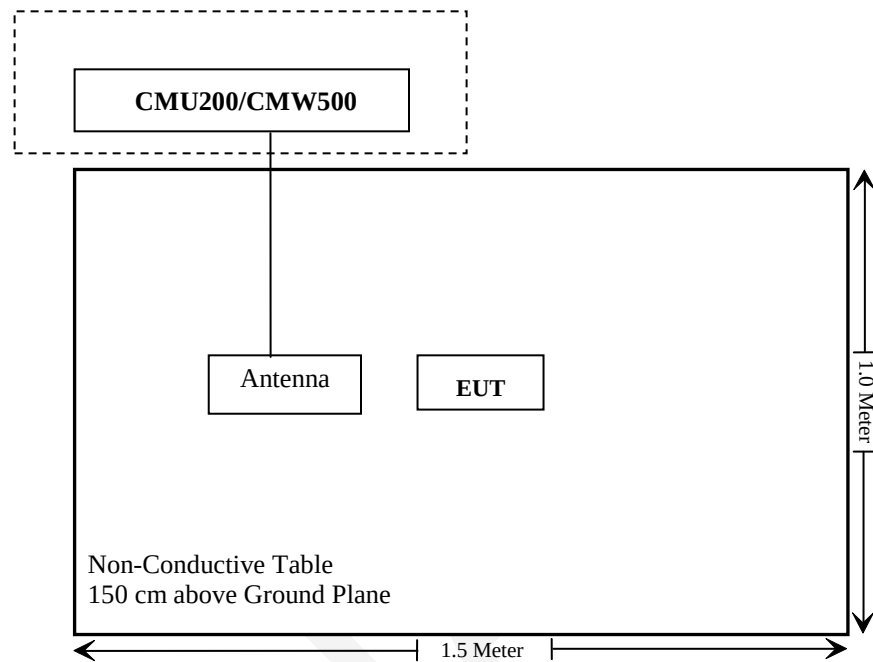

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1310, §2.1093	RF Exposure	Compliance
§2.1046; § 22.913 (a); § 24.232 (c); §27.50	RF Output Power	Compliance
§ 2.1047	Modulation Characteristics	Not Applicable
§ 2.1049; § 22.905 § 22.917; § 24.238; §27.53	Occupied Bandwidth	Compliance
§ 2.1051, § 22.917 (a); § 24.238 (a); §27.53	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053 § 22.917 (a); § 24.238 (a); §27.53	Field Strength of Spurious Radiation	Compliance
§ 22.917 (a); § 24.238 (a); §27.53	Out of band emission, Band Edge	Compliance
§ 2.1055 § 22.355; § 24.235; §27.54	Frequency stability vs. temperature Frequency stability vs. voltage	Compliance

FCC §1.1310 & §2.1093- RF EXPOSURE

Applicable Standard

FCC §1.1310 and §2.1093.

Test Result

Compliant, please refer to the SAR report: RDG150615001-20 and RDG150615001-20A.

FINAL

FCC §2.1047 - MODULATION CHARACTERISTIC

According to FCC §2.1047(d), Part 22H & 24E, Part 27 there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

FINAL

FCC § 2.1046, § 22.913 (a) & § 24.232 (c) & § 27.50 - RF OUTPUT POWER

Applicable Standard

According to FCC § 2.1046 and § 22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC § 2.1046 and § 24.232 (C), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications..

According to FCC § 2.1046 and § 27.50 (d), (4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP. Fixed stations operating in the 1710-1755 MHz band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.

According to § 24.232 (d) Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of § 24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

Test Procedure

CDMA 1x RTT

Maximum output power is verified on the high, middle and low channels according to procedures in section 4.4.5.2 of 3GPP2 C.S0011/TIA-98-E. Steps 3 and 4 are measured using Loopback Service Option SO55 with power control bits in “All Up” condition. Step 10 is measured using TDSO/SO32 with power control bits in the “Bits Hold” condition (i.e. alternative Up/Down Bits).

Table 4.4.5.2-1. Test Parameters for Maximum RF Output Power with a Single Traffic Code Channel, Spreading Rate 1

Parameter	Units	Value
$\bar{I}_{or}$	dBm/1.23 MHz	-104
$\frac{\text{Pilot } E_c}{I_{or}}$	dB	-7
$\frac{\text{Traffic } E_c}{I_{or}}$	dB	-7.4

Table 4.4.5.2-2. Test Parameters for Maximum RF Output Power with Multiple Traffic Code Channels, Spreading Rate 1

Parameter	Units	Value
$\frac{\text{Pilot } E_c}{I_{or}}$	dB	-7
$\frac{\text{Traffic } E_c}{I_{or}}$	dB	-7.4

EVDO

Maximum output power is verified on the high, middle and low channels according to procedures in section 3.1.2.3.4 of 3GPP2 C.S0033-0/TIA-866 for Rev. 0, section 4.3.4 of 3GPP2 C.S0033-A for Rev. A.

Maximum output power is measured for Rev. 0 and Rev. A in Subtype 0/1 and Subtype 2 Physical Layer configurations, respectively.

LTE:

The following tests were conducted according to the test requirements in 3GPP TS36.101

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

Radiated method:

ANSI/TIA 603-D section 2.2.17

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2015-05-09	2016-05-09
Sunol Sciences	Antenna	JB3	A060611-3	2014-11-06	2017-11-05
HP	Amplifier	8447E	2434A02181	2014-09-01	2015-09-01
R&S	Spectrum Analyzer	FSEM	DE31388	2015-05-09	2016-05-09
ETS LINDGREN	Horn Antenna	3115	000 527 35	2012-09-06	2015-09-06
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2015-02-19	2016-02-19
Giga	Signal Generator	1026	320408	2015-05-09	2016-05-09
EMCO	Adjustable Dipole Antenna	3121C	9109-753	N/A	N/A
TDK RF	Horn Antenna	HRN-0118	130 084	2012-09-06	2015-09-06

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	25.3-26.1 °C
Relative Humidity:	53-57 %
ATM Pressure:	99.7~100.3 kPa

The testing was performed by Dean Liu from 2015-06-22 to 2015-06-30.

Conducted Output Power:

CDMA 1x RTT

Band	Channel No.	Frequency (MHz)	RF Output Power (dBm)			
			RC1+SO55	RC3+SO55	RC3+SO32 (FCH)	RC3+SO32 (SCH)
BC0	1013	824.7	23.45	23.61	23.52	23.04
	283	833.49	23.52	23.52	23.54	23.44
	777	848.31	23.45	23.71	23.48	23.52
BC1	25	1851.25	22.87	22.64	22.70	22.71
	600	1880	22.75	22.75	22.68	22.59
	1175	1908.75	22.73	22.61	22.59	22.61

EVDO

Band	Channel No.	Frequency (MHz)	RF Output Power (dBm)	
			RTAP 153.6kbps Subtype 0	RETAP 4096pbs Subtype 2
BC0	1013	824.7	23.47	23.56
	283	833.49	23.52	23.50
	777	848.31	23.49	23.48
BC1	25	1851.25	22.82	22.55
	600	1880	22.75	22.39
	1175	1908.75	22.68	22.46

LTE Band 4

Channel Bandwidth	Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4 MHz	QPSK	1#0	22.33	22.34	22.35
		1#3	22.33	22.31	22.32
		1#5	22.28	22.29	22.27
		3#0	22.23	22.21	22.26
		3#1	22.17	22.20	22.18
		3#3	22.22	22.19	22.24
		6#0	21.27	21.29	21.27
	16QAM	1#0	21.05	21.03	21.10
		1#3	21.02	21.01	20.99
		1#5	21.03	21.01	21.02
		3#0	21.10	21.08	21.09
		3#1	21.04	21.07	21.06
		3#3	21.03	21.06	21.00
		6#0	20.26	20.26	20.22
3 MHz	QPSK	1#0	22.22	22.24	22.26
		1#7	22.25	22.26	22.23
		1#14	22.29	22.25	22.28
		8#0	21.26	21.26	21.25
		8#4	21.25	21.25	21.27
		8#7	21.23	21.24	21.20
		15#0	21.25	21.23	21.21
	16QAM	1#0	21.46	21.46	21.44
		1#7	21.47	21.44	21.50
		1#14	21.42	21.43	21.46
		8#0	20.21	20.18	20.25
		8#4	20.18	20.19	20.18
		8#7	20.19	20.20	20.22
		15#0	20.33	20.30	20.36
5 MHz	QPSK	1#0	22.34	22.33	22.30
		1#12	22.30	22.30	22.34
		1#24	22.26	22.26	22.28
		12#0	21.22	21.23	21.22
		12#6	21.24	21.28	21.23
		12#11	21.33	21.29	21.33
		25#0	21.21	21.19	21.23
	16QAM	1#0	21.11	21.14	21.14
		1#12	21.14	21.15	21.12
		1#24	21.12	21.14	21.12
		12#0	20.29	20.29	20.30
		12#6	20.27	20.27	20.25
		12#11	20.25	20.24	20.21
		25#0	20.15	20.18	20.11

Channel Bandwidth	Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
10 MHz	QPSK	1#0	22.26	22.25	22.23
		1#24	22.24	22.23	22.23
		1#49	22.22	22.24	22.20
		25#0	21.18	21.18	21.18
		25#12	21.17	21.16	21.18
		25#24	21.15	21.14	21.12
		50#0	21.13	21.10	21.13
	16QAM	1#0	21.39	21.41	21.40
		1#24	21.45	21.45	21.46
		1#49	21.46	21.46	21.45
		25#0	20.22	20.25	20.24
		25#12	20.20	20.21	20.18
		25#24	20.22	20.22	20.21
		50#0	20.06	20.03	20.04
15 MHz	QPSK	1#0	22.28	22.31	22.24
		1#37	22.36	22.36	22.36
		1#74	22.34	22.33	22.35
		36#0	21.06	21.08	21.05
		36#17	21.05	21.09	21.05
		36#35	21.08	21.07	21.07
		75#0	21.01	21.03	21.01
	16QAM	1#0	21.54	21.55	21.54
		1#37	21.54	21.58	21.55
		1#74	21.58	21.59	21.60
		36#0	20.34	20.34	20.31
		36#17	20.33	20.33	20.36
		36#35	20.35	20.36	20.34
		75#0	19.98	20.01	20.00
20 MHz	QPSK	1#0	22.23	22.22	22.21
		1#49	22.20	22.20	22.23
		1#99	22.23	22.19	22.20
		50#0	21.16	21.14	21.17
		50#24	21.11	21.12	21.09
		50#49	21.13	21.13	21.14
		100#0	21.09	21.08	21.12
	16QAM	1#0	21.76	21.76	21.77
		1#49	21.71	21.72	21.68
		1#99	21.73	21.71	21.70
		50#0	20.22	20.22	20.22
		50#24	20.22	20.23	20.23
		50#49	20.19	20.19	20.19
		100#0	20.14	20.12	20.18

Band 13

Channel Bandwidth	Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5 MHz	QPSK	1#0	22.13	22.44	22.42
		1#12	22.25	22.71	22.81
		1#24	22.33	22.52	22.43
		12#0	20.54	21.09	21.13
		12#6	21.37	21.52	21.64
		12#11	21.29	21.43	21.39
		25#0	20.96	21.46	20.88
	16QAM	1#0	20.70	21.28	21.57
		1#12	20.89	21.53	21.30
		1#24	21.34	21.49	21.42
		12#0	20.31	20.24	20.46
		12#6	20.41	20.38	20.37
		12#11	20.15	20.33	20.22
		25#0	20.12	20.26	20.28
10 MHz	QPSK	1#0	\	22.05	\
		1#24	\	22.48	\
		1#49	\	22.17	\
		25#0	\	21.26	\
		25#12	\	21.32	\
		25#24	\	21.25	\
		50#0	\	21.23	\
	16QAM	1#0	\	20.71	\
		1#24	\	21.11	\
		1#49	\	22.06	\
		25#0	\	20.33	\
		25#12	\	20.29	\
		25#24	\	20.28	\
		50#0	\	20.24	\


Peak-to-average ratio (PAR):**CDMA2000:**

Frequency Band	Test Mode	Test Status	Low Channel (dB)	Middle Channel (dB)	High Channel (dB)	Limits (dB)
BC0	1x RTT	RC1+SO55	4.16	4.2	4.2	13
	1xEVDO Rev. 0	RTAP 153.6kbps	4.36	4.28	4.16	13
BC0	1x RTT	RC1+SO55	3.76	3.16	3.36	13
	1xEVDO Rev. 0	RTAP 153.6kbps	3.76	3.12	3.40	13


LTE:

Frequency Band	Test Modulation		Channel Bandwidth	Low Channel (dB)	Middle Channel (dB)	High Channel (dB)	Limits (dB)
Band 4	QPSK	1 RB	20 MHz	4.52	5.44	5.84	13
		100 RB		7.92	8.12	8.04	13
	16QAM	1 RB	20 MHz	4.84	3.84	5.36	13
		100 RB		6.80	6.80	6.84	13
Band 13	QPSK	1 RB	20 MHz	/	4.60	/	13
		100 RB		/	5.60	/	13
	16QAM	1 RB	20 MHz	/	4.52	/	13
		100 RB		/	5.52	/	13


Note: peak-to-average ratio (PAR) <13 dB.

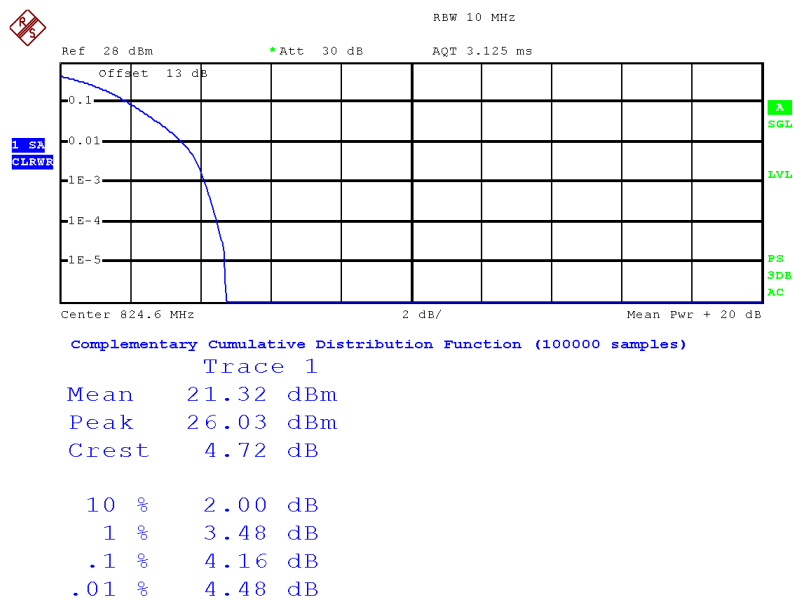Peak-to-average ratio (PAR)**BC0 Low Channel: 1x RTT**


Date: 30.JUN.2015 13:58:50

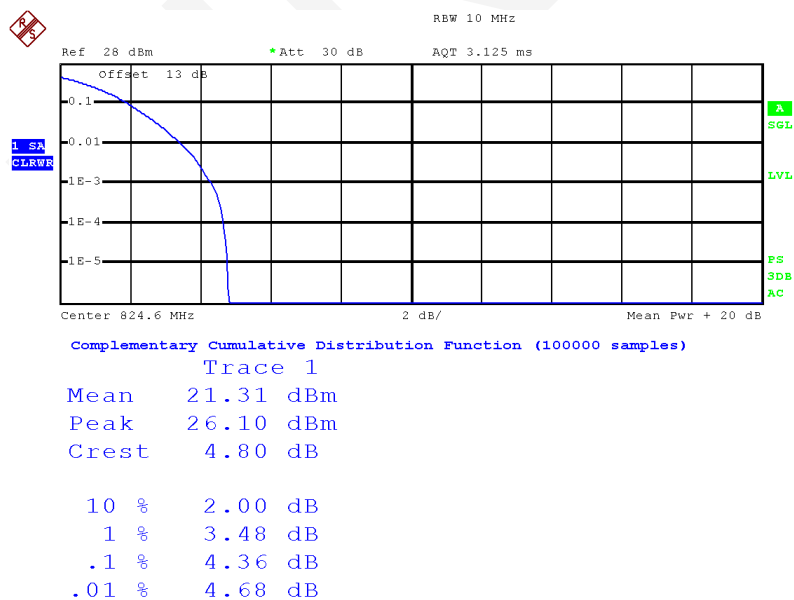BC0 Low Channel: 1xEVDO Rev. 0


Date: 30.JUN.2015 13:59:16

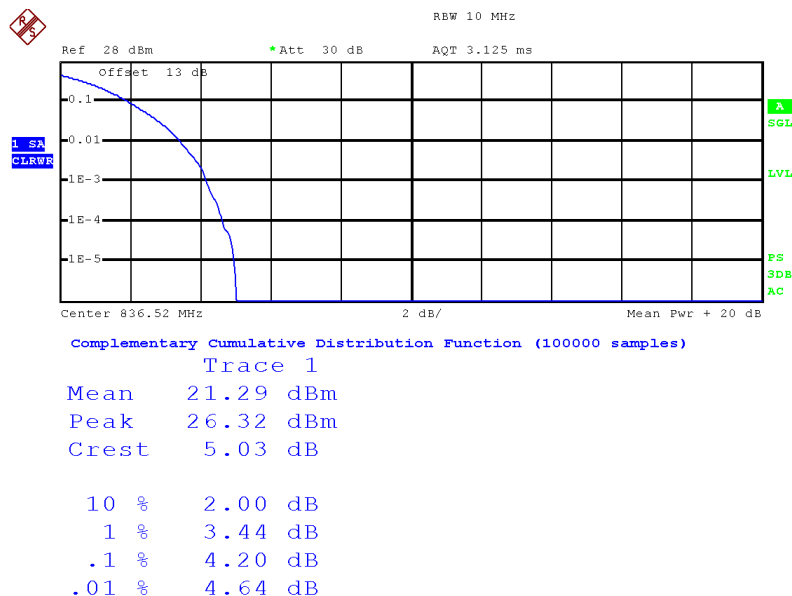BC0 Middle Channel: 1x RTT


Date: 30.JUN.2015 13:50:33

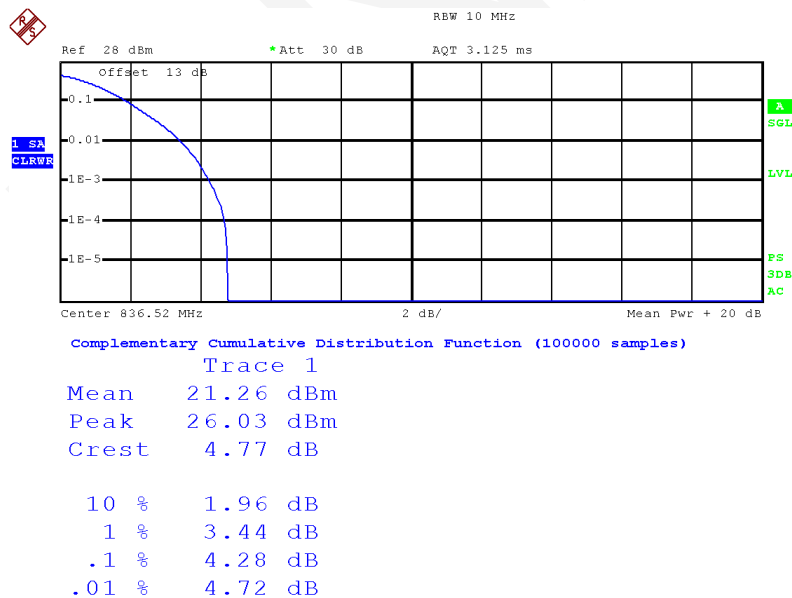BC0 Middle Channel: 1xEVDO Rev. 0

Date: 30.JUN.2015 13:51:00

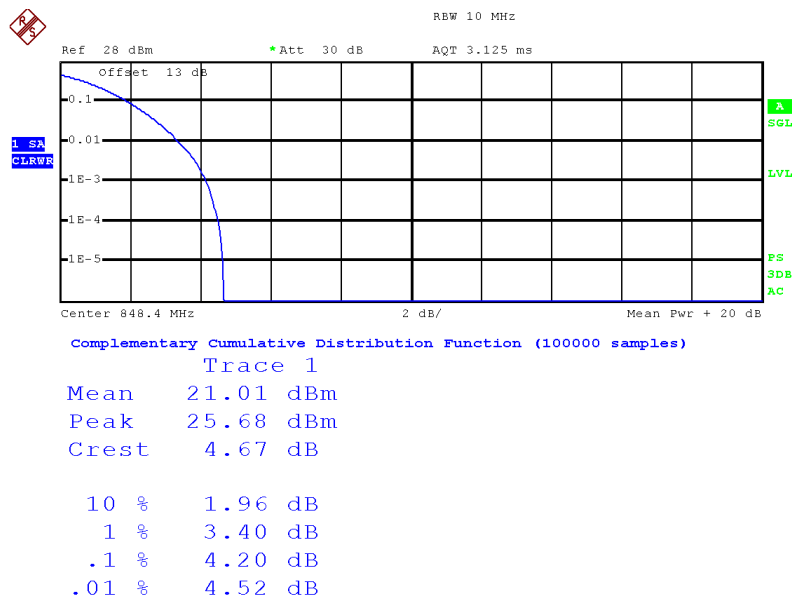
BC0 High Channel: 1x RTT

Date: 30.JUN.2015 13:52:17

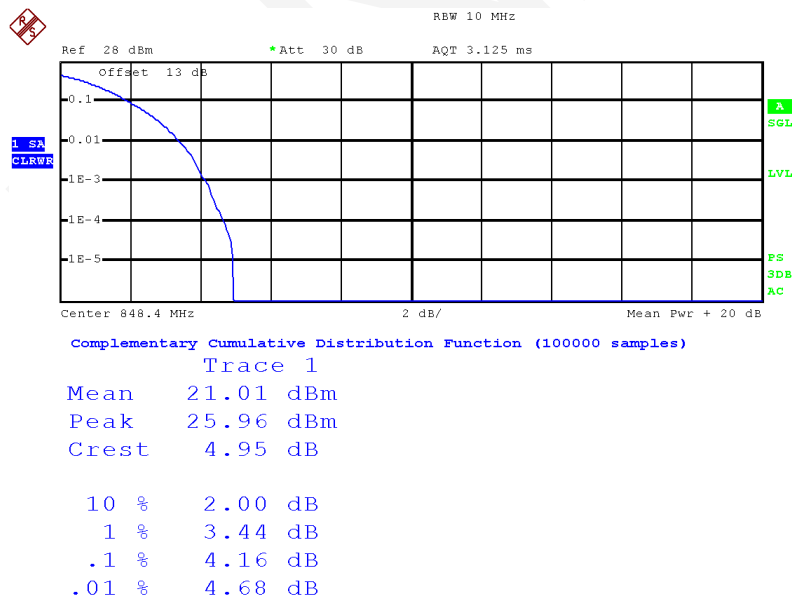BC0 High Channel: 1xEVDO Rev. 0

Date: 30.JUN.2015 13:59:37

BC1 Low Channel: 1x RTT

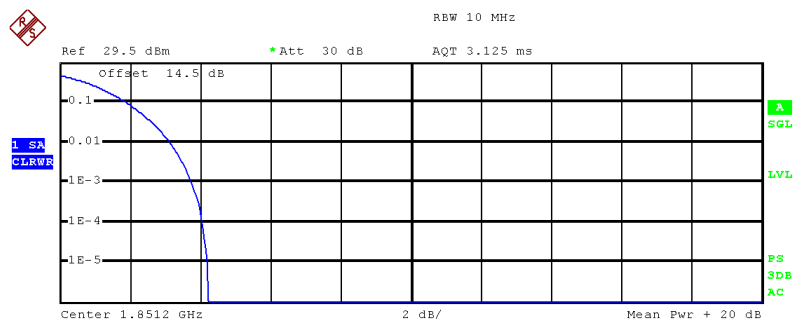

Complementary Cumulative Distribution Function (100000 samples)

Trace 1

Mean 20.83 dBm

Peak 25.06 dBm

Crest 4.23 dB

10 % 1.92 dB


1 % 3.16 dB

.1 % 3.76 dB

.01 % 4.04 dB

Date: 30.JUN.2015 14:08:18

BC1 Low Channel: 1xEVDO Rev. 0

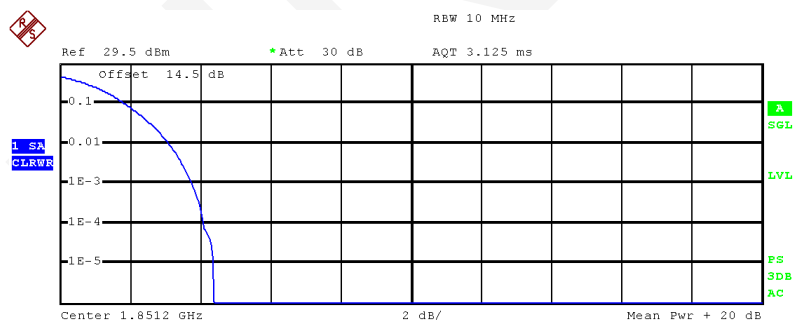

Complementary Cumulative Distribution Function (100000 samples)

Trace 1

Mean 20.82 dBm

Peak 25.21 dBm

Crest 4.39 dB

10 % 1.88 dB


1 % 3.12 dB

.1 % 3.76 dB

.01 % 4.12 dB


Date: 30.JUN.2015 14:08:56

BC1 Low Channel: 1x RTT

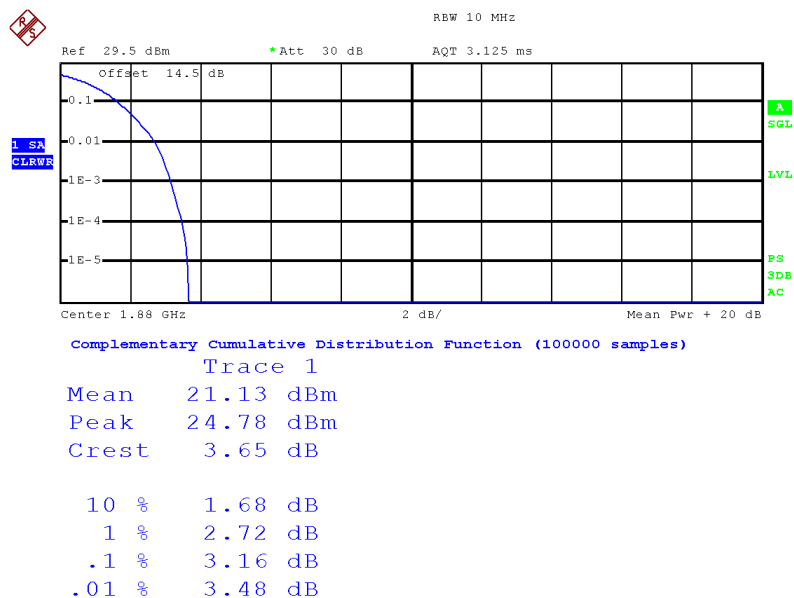


Date: 30.JUN.2015 14:00:30

BC1 Low Channel: 1xEVDO Rev. 0

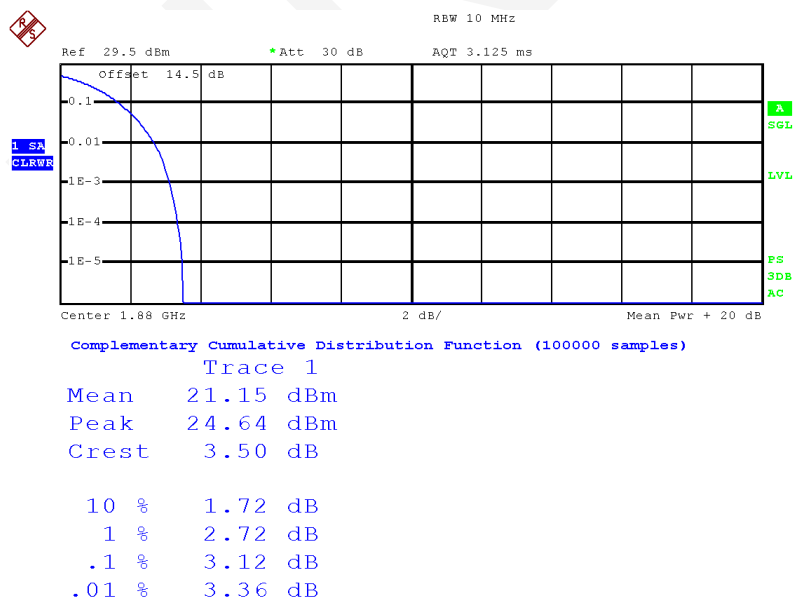

Date: 30.JUN.2015 14:00:40

BC1 High Channel: 1x RTT

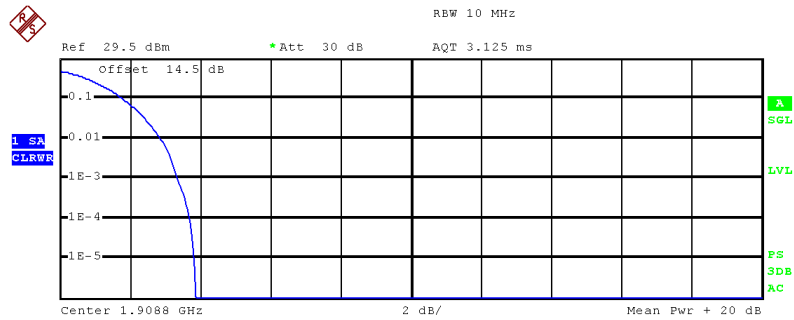

Complementary Cumulative Distribution Function (100000 samples)


Trace 1

Mean 21.54 dBm
Peak 25.42 dBm
Crest 3.88 dB

10 % 1.80 dB
1 % 2.88 dB
.1 % 3.36 dB
.01 % 3.72 dB

Date: 30.JUN.2015 14:10:19

BC1 High Channel: 1xEVDO Rev. 0

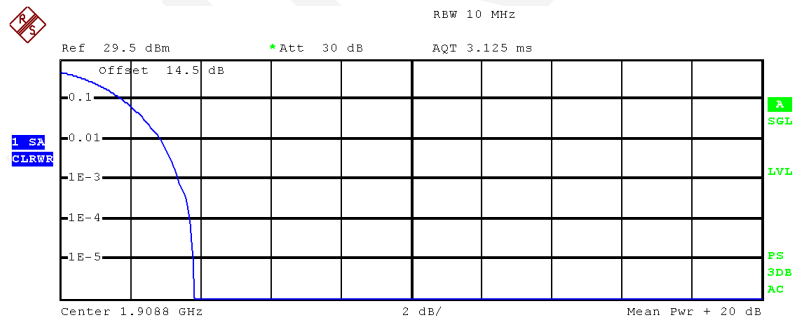

Complementary Cumulative Distribution Function (100000 samples)

Trace 1


Mean 21.46 dBm
Peak 25.28 dBm
Crest 3.82 dB

10 % 1.80 dB
1 % 2.88 dB
.1 % 3.40 dB
.01 % 3.72 dB

Date: 30.JUN.2015 14:10:42


LTE Band 4 (PART 27)

QPSK_20MHz_1RB_Low Channel

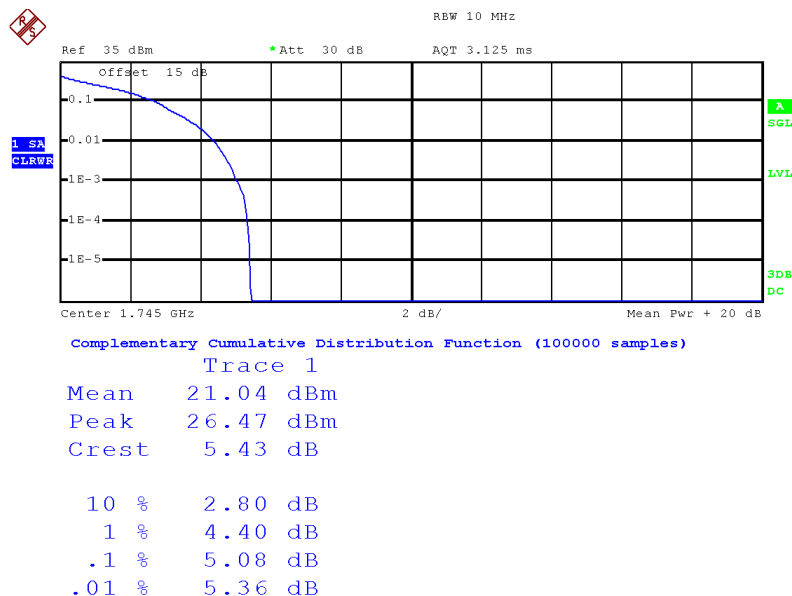


Date: 24.JUN.2015 09:31:01


QPSK_20MHz_1RB Middle Channel

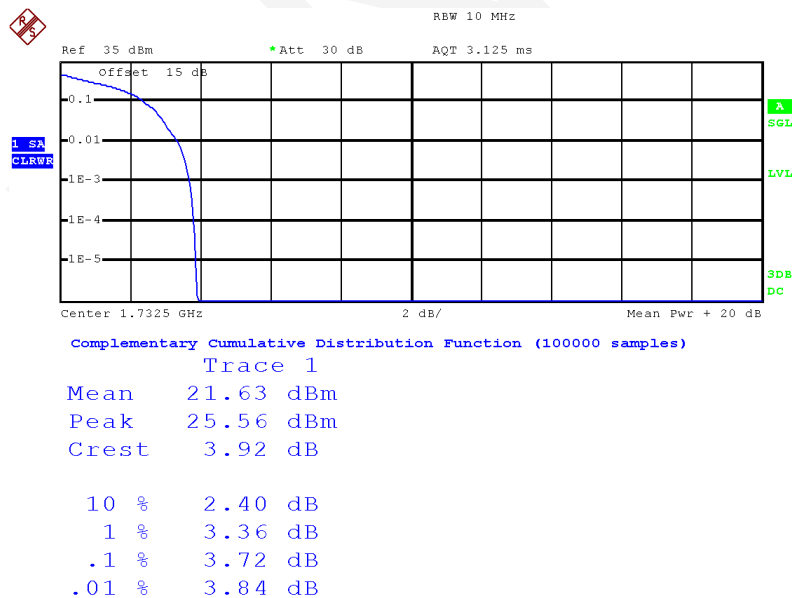


Date: 24.JUN.2015 09:29:31

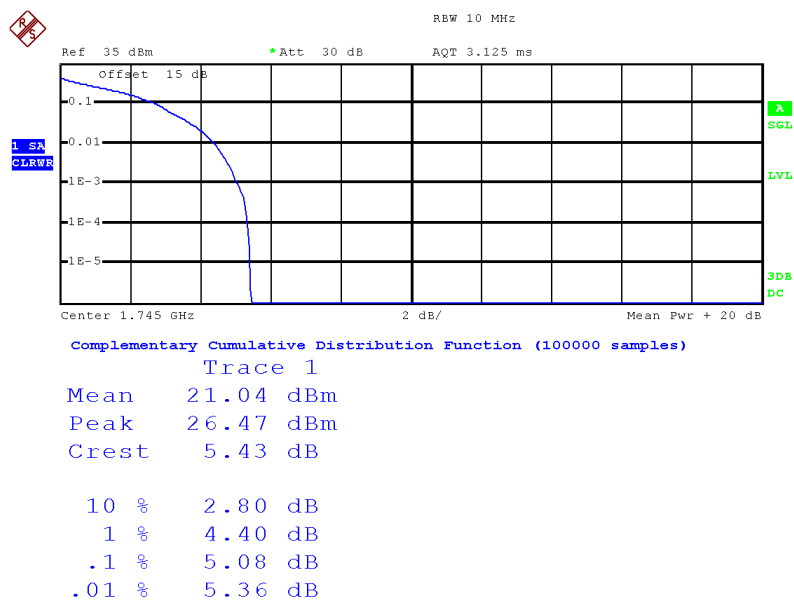QPSK_20MHz_1RB High Channel


Date: 24.JUN.2015 09:31:01

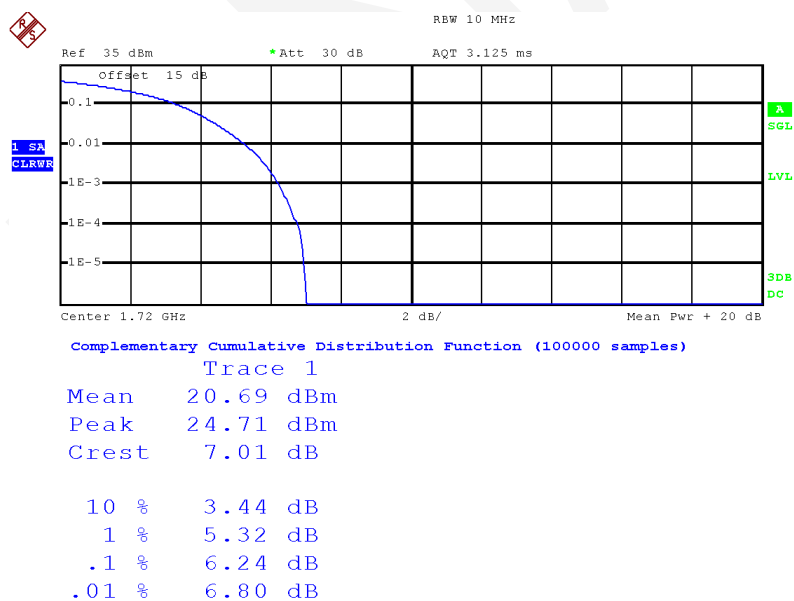QPSK_20MHz_FULL RB Low Channel


Date: 24.JUN.2015 09:23:48

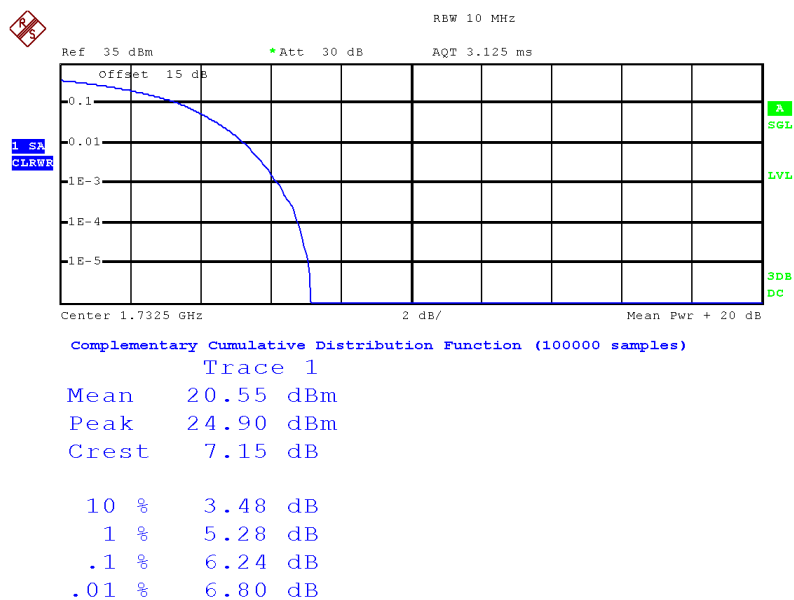QPSK_20MHz_FULL RB Middle Channel

Date: 24.JUN.2015 09:28:57

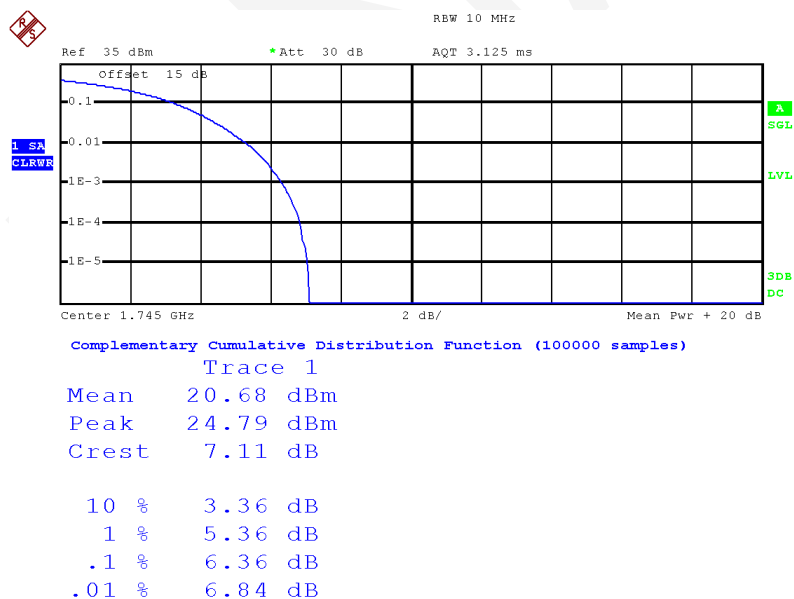QPSK 20MHz_FULL RB High Channel

Date: 24.JUN.2015 09:31:23

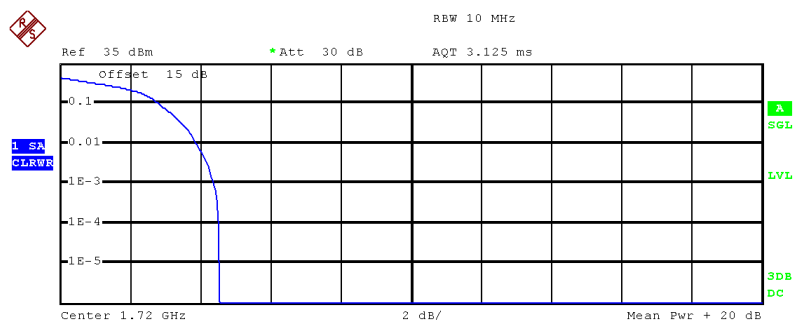16QAM_20MHz_1RB_Low Channel

Complementary Cumulative Distribution Function (100000 samples)

Trace 1

Mean 20.53 dBm

Peak 25.06 dBm

Crest 4.53 dB


10 % 2.84 dB

1 % 3.92 dB

.1 % 4.40 dB

.01 % 4.52 dB

Date: 24.JUN.2015 09:14:19

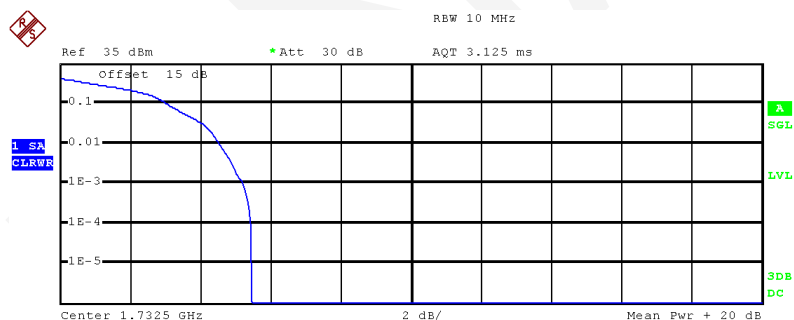16QAM 20MHz_1RB Middle Channel

Complementary Cumulative Distribution Function (100000 samples)

Trace 1

Mean 20.02 dBm

Peak 25.49 dBm

Crest 5.46 dB


10 % 3.08 dB

1 % 4.56 dB


.1 % 5.24 dB

.01 % 5.44 dB


Date: 24.JUN.2015 09:29:48

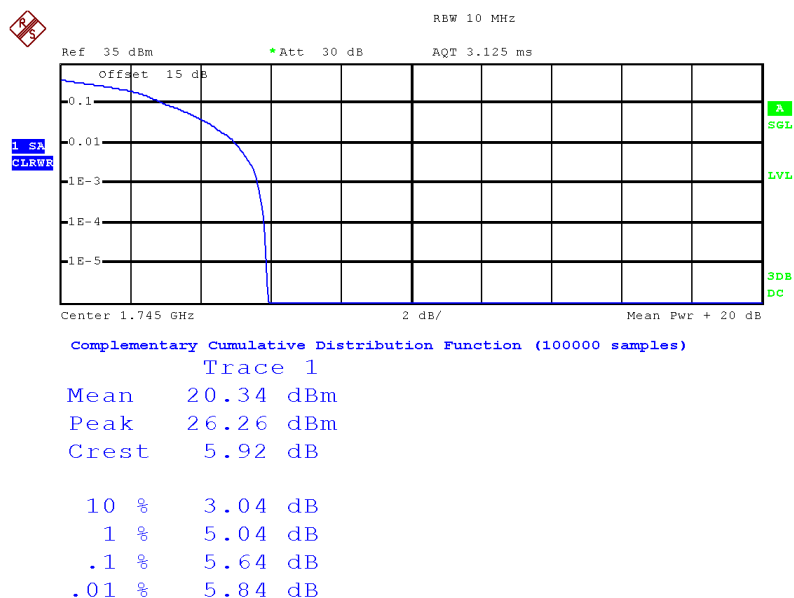16QAM 20MHz_1RB High Channel


Date: 24.JUN.2015 09:30:42

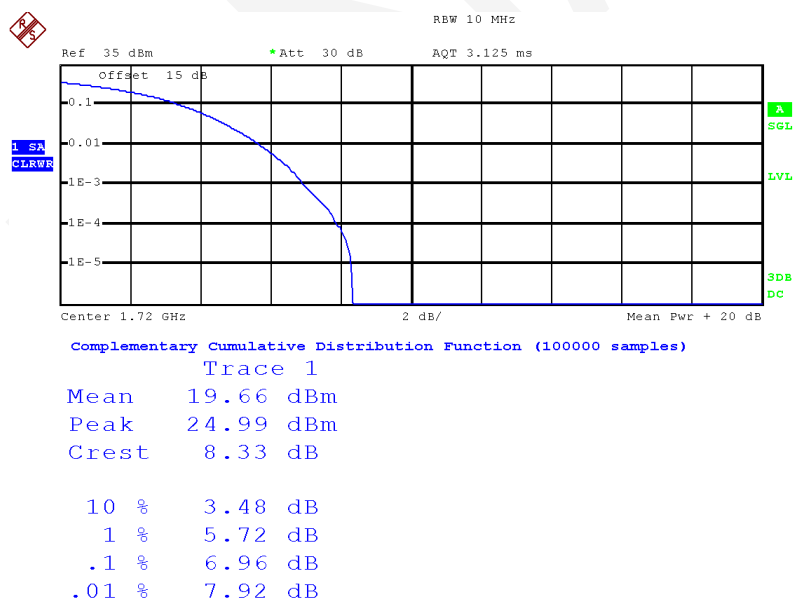16QAM 20MHz_FULL RB Low Channel

Date: 24.JUN.2015 09:25:47

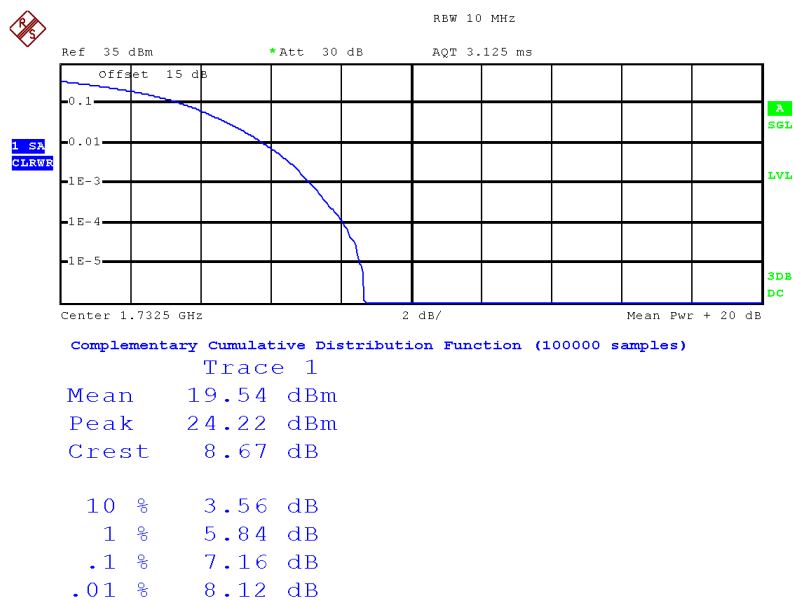16QAM 20MHz_FULL RB Middle Channel


Date: 24.JUN.2015 09:28:30

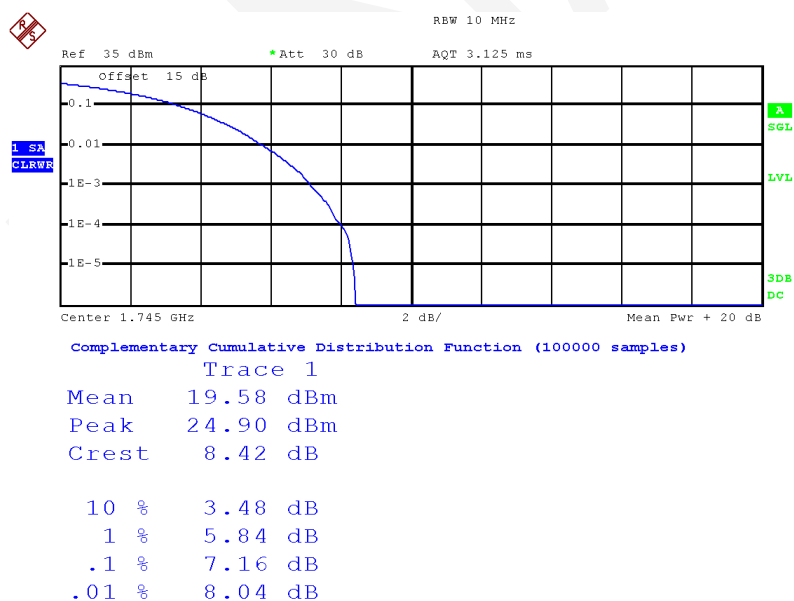16QAM 20MHz_FULL RB High Channel

Date: 24.JUN.2015 09:31:41


LTE Band 13(PART 27)

QPSK_20MHz_1RB Middle Channel

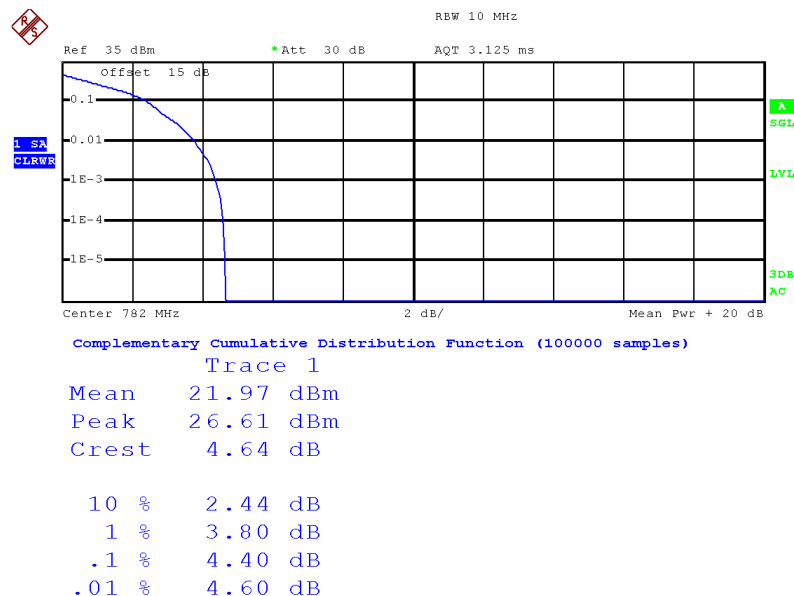


Date: 22.JUN.2015 18:07:04

QPSK_20MHz_FULL RB Middle Channel

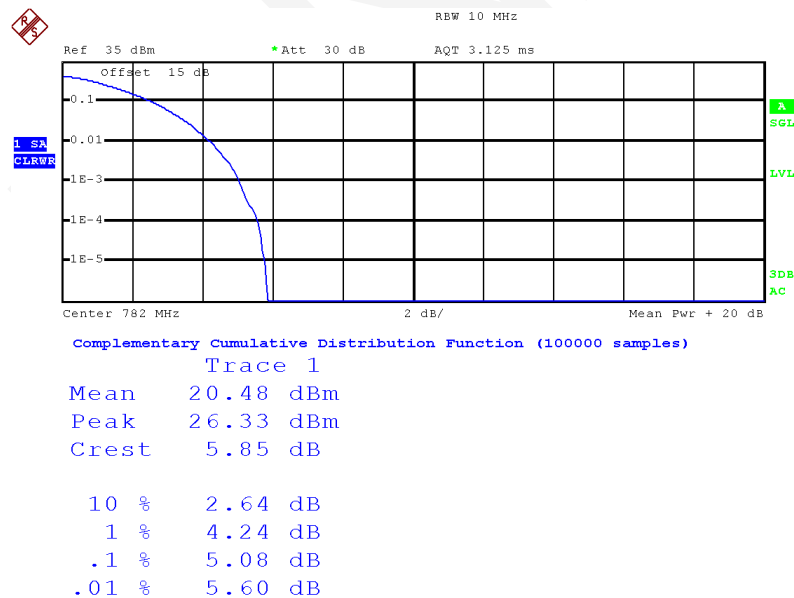

Date: 22.JUN.2015 18:08:01

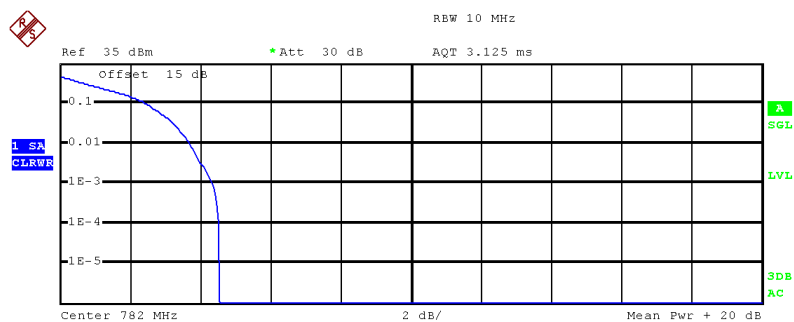16QAM 20MHz_1RB Middle Channel

Complementary Cumulative Distribution Function (100000 samples)

Trace 1

Mean 21.93 dBm

Peak 26.47 dBm

Crest 4.54 dB


10 % 2.48 dB

1 % 3.72 dB

.1 % 4.36 dB

.01 % 4.52 dB

Date: 22.JUN.2015 18:07:29

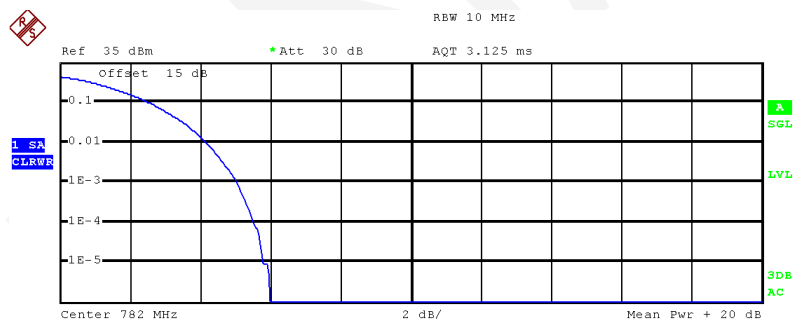16QAM 20MHz_FULL RB Middle Channel

Complementary Cumulative Distribution Function (100000 samples)

Trace 1

Mean 20.13 dBm

Peak 26.12 dBm

Crest 5.99 dB

10 % 2.60 dB

1 % 4.20 dB

.1 % 5.08 dB

.01 % 5.52 dB

Date: 22.JUN.2015 18:07:51

ERP & EIRP**CDMA 2000:**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			S.G. Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
BC0 1xRTT RC1+SO55 Middle Channel (836.52MHz)								
836.520	H	95.49	20.6	0.0	1	19.6	38.5	18.9
836.520	V	94.80	23	0.0	1	22.0	38.5	16.5
BC0 1xEvDO RTAP 153.6kbps Middle Channel (836.52MHz)								
836.520	H	96.14	21.2	0.0	1	20.2	38.5	18.3
836.520	V	95.35	23.6	0.0	1	22.6	38.5	15.9
BC1 1xRTT RC1+SO55 Middle Channel(1880MHz)								
1880.000	H	85.33	13.7	11.7	1.4	24.0	33.0	9.0
1880.000	V	81.02	9.6	11.7	1.4	19.9	33.0	13.1
BC1 1xEvDO RTAP 153.6kbps Middle Channel (1880MHz)								
1880.000	H	84.86	13.3	11.7	1.4	23.6	33.0	9.4
1880.000	V	81.71	10.3	11.7	1.4	20.6	33.0	12.4

LTE Band 13

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			S.G. Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK 5MHz Bandwidth Middle Channel (782MHz)								
782.000	H	95.03	19.5	0.0	0.9	18.6	30.0	11.4
782.000	V	93.98	21.4	0.0	0.9	20.5	30.0	9.5
QPSK 10MHz Bandwidth Middle Channel(782MHz)								
782.000	H	95.11	19.6	0.0	0.9	18.7	30.0	11.3
782.000	V	93.86	21.3	0.0	0.9	20.4	30.0	9.6
16QAM 5MHz Bandwidth Middle Channel (782MHz)								
782.000	H	94.88	19.3	0.0	0.9	18.4	30.0	11.6
782.000	V	93.42	20.8	0.0	0.9	19.9	30.0	10.1
16QAM 10MHz Bandwidth Middle Channel (782MHz)								
782.000	H	94.59	19.1	0.0	0.9	18.2	30.0	11.8
782.000	V	93.29	20.7	0.0	0.9	19.8	30.0	10.2

LTE Band 4

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBµV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			S.G. Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK 1.4MHz Bandwidth Middle Channel (1732.5MHz)								
1732.500	H	85.27	12.3	10.9	1.5	21.7	30.0	8.3
1732.500	V	85.94	12.6	10.9	1.5	22.0	30.0	8.0
QPSK 3Hz Bandwidth Middle Channel (1732.5MHz)								
1732.500	H	85.12	12.1	10.9	1.5	21.5	30.0	8.5
1732.500	V	85.87	12.5	10.9	1.5	21.9	30.0	8.1
QPSK 5MHz Bandwidth Middle Channel (1732.5MHz)								
1732.500	H	85.03	12	10.9	1.5	21.4	30.0	8.6
1732.500	V	85.61	12.3	10.9	1.5	21.7	30.0	8.3
QPSK 10MHz Bandwidth Middle Channel (1732.5MHz)								
1732.500	H	83.73	10.7	10.9	1.5	20.1	30.0	9.9
1732.500	V	85.14	11.8	10.9	1.5	21.2	30.0	8.8
QPSK 15MHz Bandwidth Middle Channel (1732.5MHz)								
1732.500	H	83.58	10.6	10.9	1.5	20.0	30.0	10.0
1732.500	V	84.74	11.4	10.9	1.5	20.8	30.0	9.2
QPSK 20MHz Bandwidth Middle Channel (1732.5MHz)								
1732.500	H	83.55	10.5	10.9	1.5	19.9	30.0	10.1
1732.500	V	84.36	11	10.9	1.5	20.4	30.0	9.6
16QAM 1.4MHz Bandwidth Middle Channel (1732.5MHz)								
1732.500	H	85.74	12.7	10.9	1.5	22.1	30.0	7.9
1732.500	V	86.95	13.6	10.9	1.5	23.0	30.0	7.0
16QAM 3Hz Bandwidth Middle Channel (1732.5MHz)								
1732.500	H	85.71	12.7	10.9	1.5	22.1	30.0	7.9
1732.500	V	86.92	13.6	10.9	1.5	23.0	30.0	7.0
16QAM 5MHz Bandwidth Middle Channel (1732.5MHz)								
1732.500	H	85.61	12.6	10.9	1.5	22.0	30.0	8.0
1732.500	V	86.86	13.5	10.9	1.5	22.9	30.0	7.1
16QAM 10MHz Bandwidth Middle Channel (1732.5MHz)								
1732.500	H	83.81	10.8	10.9	1.5	20.2	30.0	9.8
1732.500	V	84.95	11.6	10.9	1.5	21.0	30.0	9.0
16QAM 15MHz Bandwidth Middle Channel (1732.5MHz)								
1732.500	H	83.06	10.1	10.9	1.5	19.5	30.0	10.5
1732.500	V	84.32	11	10.9	1.5	20.4	30.0	9.6
16QAM 20MHz Bandwidth Middle Channel (1732.5MHz)								
1732.500	H	82.25	9.2	10.9	1.5	18.6	30.0	11.4
1732.500	V	83.69	10.4	10.9	1.5	19.8	30.0	10.2


FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53- OCCUPIED BANDWIDTH**Applicable Standard**

FCC §2.1049, §22.917, §22.905, §24.238 and §27.53.

Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The 26 dB & 99% bandwidth was recorded.

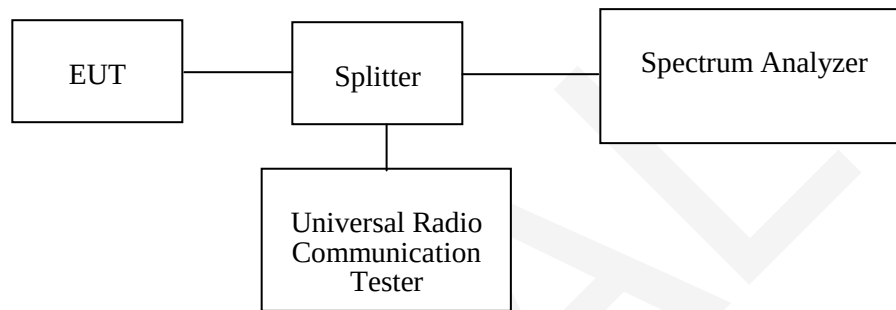**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2015-05-09	2016-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	25.3-26.1 °C
Relative Humidity:	53-57 %
ATM Pressure:	99.7~100.3 kPa

The testing was performed by Dean Liu from 2015-06-22 to 2015-06-29.

Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table and plots.

CDMA 2000:

Band	Channel	Configuration		99% Occupied Bandwidth	26 dB Bandwidth
				MHz	MHz
BC0	384	1xRTT	RC1+SO55	1.27	1.44
			RC3+SO55	1.27	1.44
		1xEvDO	RTAP 153.6kbps	1.27	1.44
BC1	600	1xRTT	RC1+SO55	1.28	1.45
			RC3+SO55	1.28	1.44
		1xEvDO	RTAP 153.6kbps	1.28	1.44

LTE Band 4:

Test Modulation	Test Bandwidth	Test Channel	99% Occupied Bandwidth	26 dB Bandwidth
			MHz	MHz
QPSK	1.4M	M	1.11	1.33
	3M		2.78	3.20
	5M		4.55	5.21
	10M		9.10	10.46
	15M		13.59	15.44
	20M		18.28	20.60
16-QAM	1.4M	M	1.12	1.33
	3M		2.77	3.25
	5M		4.55	5.23
	10M		9.10	10.42
	15M		13.59	15.15
	20M		18.28	20.20

LTE Band 13:

Test Modulation	Test Bandwidth	Test Channel	99% Occupied Bandwidth	26 dB Bandwidth
			MHz	MHz
QPSK	5M	M	4.53	5.13
	10M		8.94	9.78
16QAM	5M		4.53	5.15
	10M		8.94	9.78

[illegible]

Ref Lvl 33 dBm
 Delta 1 [T1] -3.32 dB
 1.43687375 MHz
 RBW 30 kHz
 VBW 100 kHz
 SWT 8.5 ms
 RF Att 30 dB
 Unit dBm

13 dB Offset
 D1 17.53 dBm
 D2 -8.47 dBm
 T1 835.81358717 MHz
 T2 835.89174349 MHz
 T3 837.16629259 MHz
 T4 837.16629259 MHz
 T5 837.16629259 MHz
 T6 837.16629259 MHz
 T7 837.16629259 MHz
 T8 837.16629259 MHz
 T9 837.16629259 MHz
 T10 837.16629259 MHz
 T11 837.16629259 MHz
 T12 837.16629259 MHz
 T13 837.16629259 MHz
 T14 837.16629259 MHz
 T15 837.16629259 MHz
 T16 837.16629259 MHz
 T17 837.16629259 MHz
 T18 837.16629259 MHz
 T19 837.16629259 MHz
 T20 837.16629259 MHz
 T21 837.16629259 MHz
 T22 837.16629259 MHz
 T23 837.16629259 MHz
 T24 837.16629259 MHz
 T25 837.16629259 MHz
 T26 837.16629259 MHz
 T27 837.16629259 MHz
 T28 837.16629259 MHz
 T29 837.16629259 MHz
 T30 837.16629259 MHz
 T31 837.16629259 MHz
 T32 837.16629259 MHz
 T33 837.16629259 MHz
 T34 837.16629259 MHz
 T35 837.16629259 MHz
 T36 837.16629259 MHz
 T37 837.16629259 MHz
 T38 837.16629259 MHz
 T39 837.16629259 MHz
 T40 837.16629259 MHz
 T41 837.16629259 MHz
 T42 837.16629259 MHz
 T43 837.16629259 MHz
 T44 837.16629259 MHz
 T45 837.16629259 MHz
 T46 837.16629259 MHz
 T47 837.16629259 MHz
 T48 837.16629259 MHz
 T49 837.16629259 MHz
 T50 837.16629259 MHz
 T51 837.16629259 MHz
 T52 837.16629259 MHz
 T53 837.16629259 MHz
 T54 837.16629259 MHz
 T55 837.16629259 MHz
 T56 837.16629259 MHz
 T57 837.16629259 MHz
 T58 837.16629259 MHz
 T59 837.16629259 MHz
 T60 837.16629259 MHz
 T61 837.16629259 MHz
 T62 837.16629259 MHz
 T63 837.16629259 MHz
 T64 837.16629259 MHz
 T65 837.16629259 MHz
 T66 837.16629259 MHz
 T67 837.16629259 MHz
 T68 837.16629259 MHz
 T69 837.16629259 MHz
 T70 837.16629259 MHz
 T71 837.16629259 MHz
 T72 837.16629259 MHz
 T73 837.16629259 MHz
 T74 837.16629259 MHz
 T75 837.16629259 MHz
 T76 837.16629259 MHz
 T77 837.16629259 MHz
 T78 837.16629259 MHz
 T79 837.16629259 MHz
 T80 837.16629259 MHz
 T81 837.16629259 MHz
 T82 837.16629259 MHz
 T83 837.16629259 MHz
 T84 837.16629259 MHz
 T85 837.16629259 MHz
 T86 837.16629259 MHz
 T87 837.16629259 MHz
 T88 837.16629259 MHz
 T89 837.16629259 MHz
 T90 837.16629259 MHz
 T91 837.16629259 MHz
 T92 837.16629259 MHz
 T93 837.16629259 MHz
 T94 837.16629259 MHz
 T95 837.16629259 MHz
 T96 837.16629259 MHz
 T97 837.16629259 MHz
 T98 837.16629259 MHz
 T99 837.16629259 MHz
 T100 837.16629259 MHz
 T101 837.16629259 MHz
 T102 837.16629259 MHz
 T103 837.16629259 MHz
 T104 837.16629259 MHz
 T105 837.16629259 MHz
 T106 837.16629259 MHz
 T107 837.16629259 MHz
 T108 837.16629259 MHz
 T109 837.16629259 MHz
 T110 837.16629259 MHz
 T111 837.16629259 MHz
 T112 837.16629259 MHz
 T113 837.16629259 MHz
 T114 837.16629259 MHz
 T115 837.16629259 MHz
 T116 837.16629259 MHz
 T117 837.16629259 MHz
 T118 837.16629259 MHz
 T119 837.16629259 MHz
 T120 837.16629259 MHz
 T121 837.16629259 MHz
 T122 837.16629259 MHz
 T123 837.16629259 MHz
 T124 837.16629259 MHz
 T125 837.16629259 MHz
 T126 837.16629259 MHz
 T127 837.16629259 MHz
 T128 837.16629259 MHz
 T129 837.16629259 MHz
 T130 837.16629259 MHz
 T131 837.16629259 MHz
 T132 837.16629259 MHz
 T133 837.16629259 MHz
 T134 837.16629259 MHz
 T135 837.16629259 MHz
 T136 837.16629259 MHz
 T137 837.16629259 MHz
 T138 837.16629259 MHz
 T139 837.16629259 MHz
 T140 837.16629259 MHz
 T141 837.16629259 MHz
 T142 837.16629259 MHz
 T143 837.16629259 MHz
 T144 837.16629259 MHz
 T145 837.16629259 MHz
 T146 837.16629259 MHz
 T147 837.16629259 MHz
 T148 837.16629259 MHz
 T149 837.16629259 MHz
 T150 837.16629259 MHz
 T151 837.16629259 MHz
 T152 837.16629259 MHz
 T153 837.16629259 MHz
 T154 837.16629259 MHz
 T155 837.16629259 MHz
 T156 837.16629259 MHz
 T157 837.16629259 MHz
 T158 837.16629259 MHz
 T159 837.16629259 MHz
 T160 837.16629259 MHz
 T161 837.16629259 MHz
 T162 837.16629259 MHz
 T163 837.16629259 MHz
 T164 837.16629259 MHz
 T165 837.16629259 MHz
 T166 837.16629259 MHz
 T167 837.16629259 MHz
 T168 837.16629259 MHz
 T169 837.16629259 MHz
 T170 837.16629259 MHz
 T171 837.16629259 MHz
 T172 837.16629259 MHz
 T173 837.16629259 MHz
 T174 837.16629259 MHz
 T175 837.16629259 MHz
 T176 837.16629259 MHz
 T177 837.16629259 MHz
 T178 837.16629259 MHz
 T179 837.16629259 MHz
 T180 837.16629259 MHz
 T181 837.

Ref Lvl 33 dBm

Delta 1 [T1] 0.16 dB

RBW 30 kHz

RF Att 30 dB

VBW 100 kHz

SWT 8.5 ms

Unit dBm

33 dBm

1.44288577 MHz

13 dB Offset

-D1 16.54 dBm

-D2 -9.36 dBm

IMAX

IMIN

1 [T1] 835.80757515 MHz 0.16 dB

2 [T1] 1.27454810 MHz 0.06 dB

3 [T1] 835.89174349 MHz 7.98 dBm

4 [T1] 837.16629259 MHz

Center 836.52 MHz

300 kHz

Span 3 MHz

Date: 29.JUN.2015 18:22:38

Ref Lvl 34.5 dBm Delta 1 [T1] -0.67 dB RBW 30 kHz RF Att 30 dB
 3.44889780 MHz SWT 8.5 ms Unit dBm

14.5 dB Offset

-D1 15.84 dBm

1MAX


-D2 -10.16 dBm

1MIN


Center 1.88 GHz 300 kHz Span 3 MHz

Date: 29.JUN.2015 21:11:28

BC1- RC3+SO55

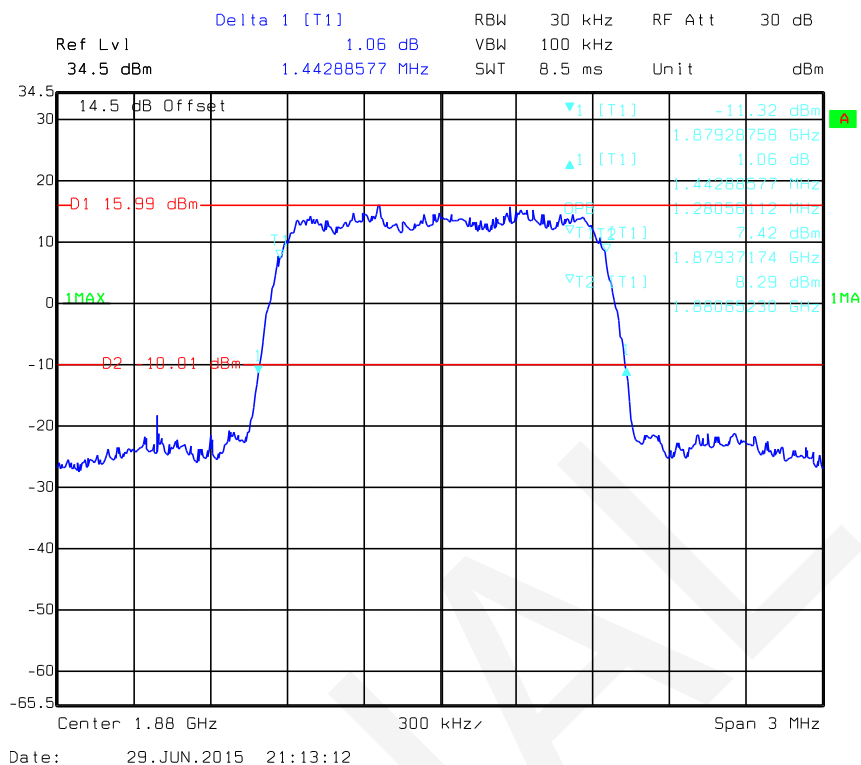


BC1- RTAP 153.6kbps

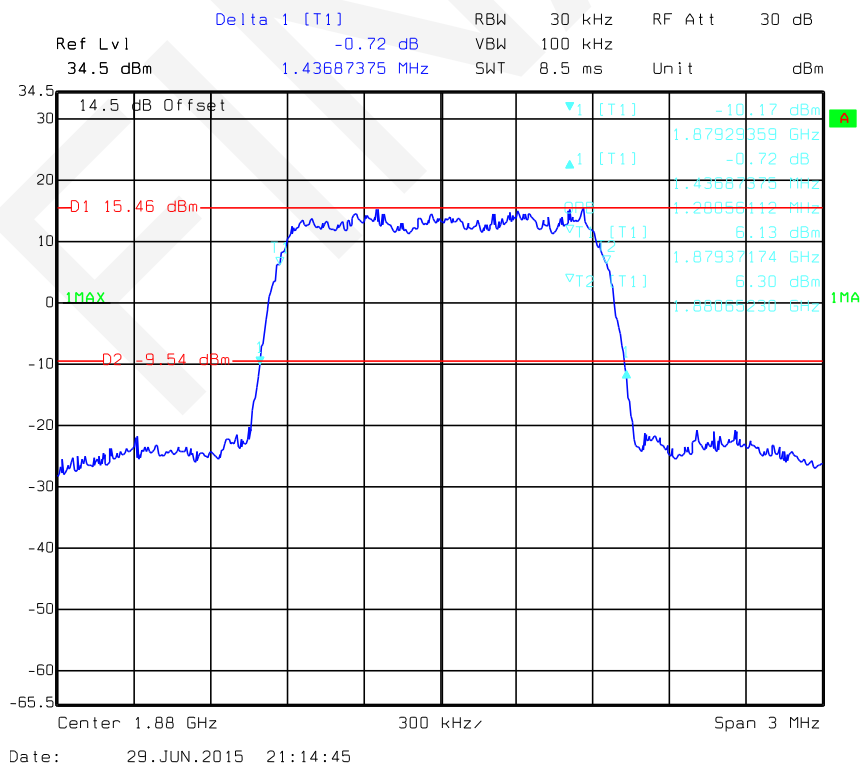


LTE Band 4


QPSK_1.4 MHz

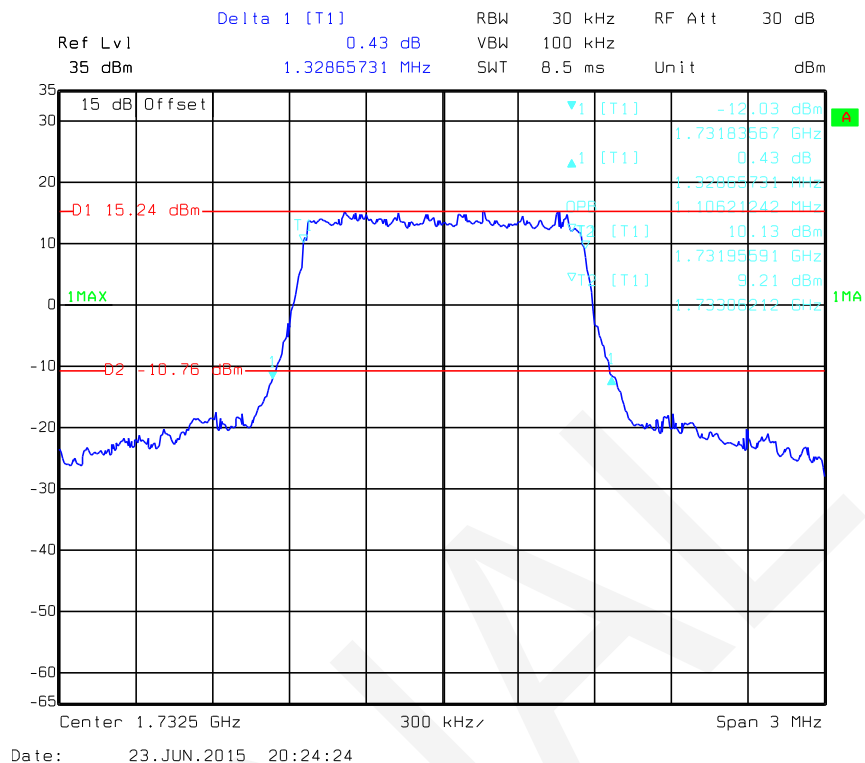


QPSK_3 MHz

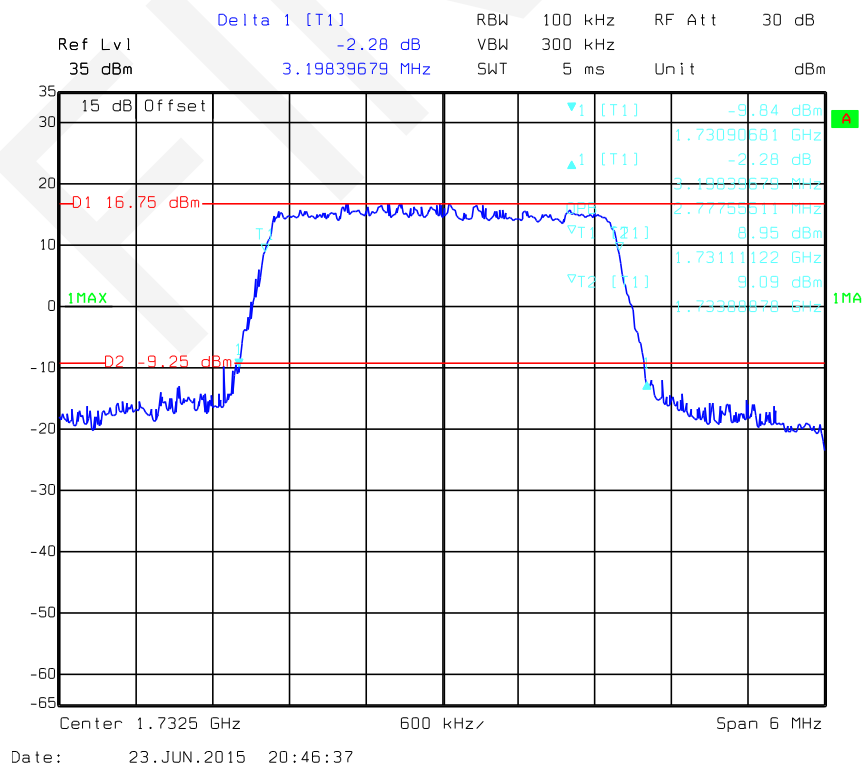


QPSK_5 MHz

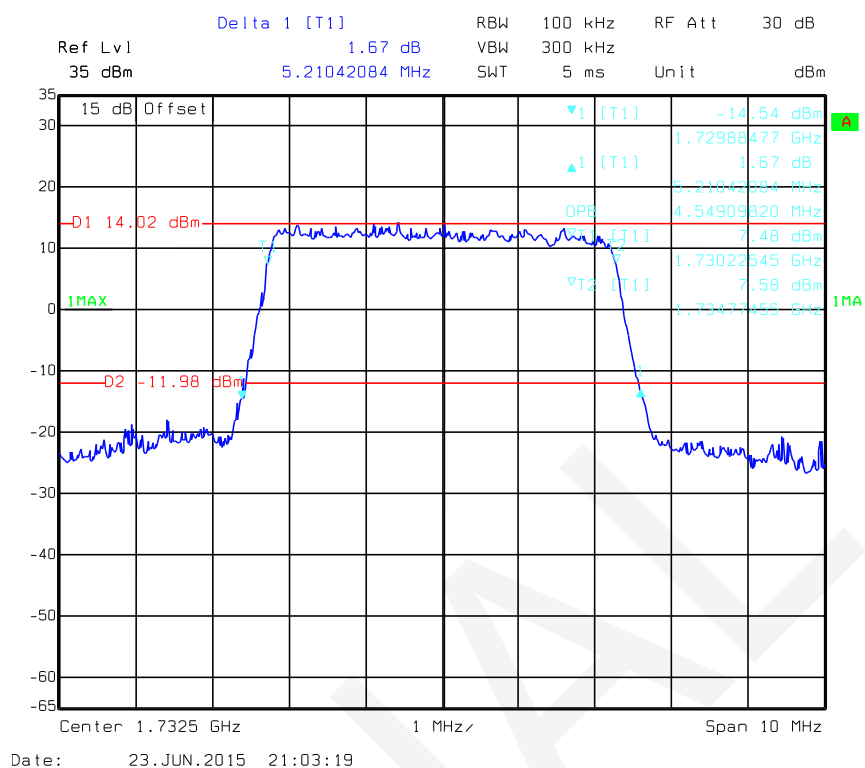


QPSK_10 MHz


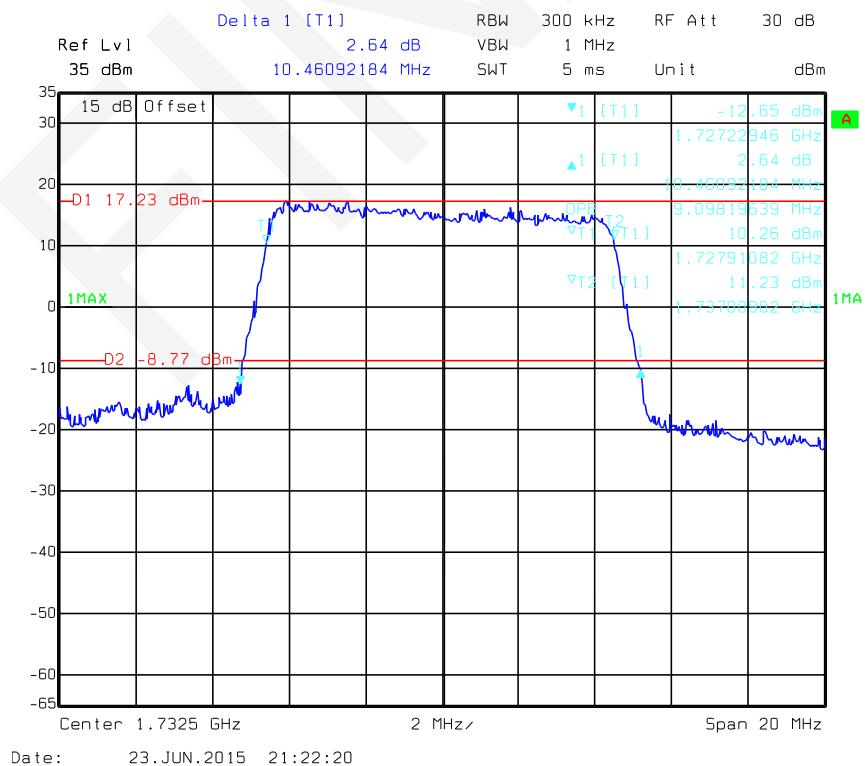




QPSK_15 MHz

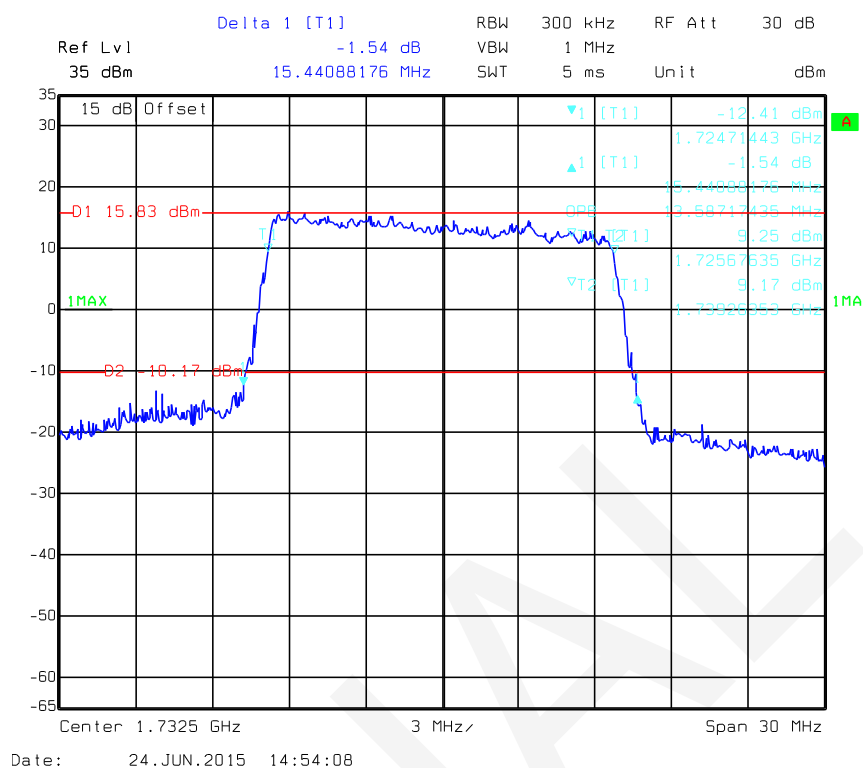


QPSK_20 MHz

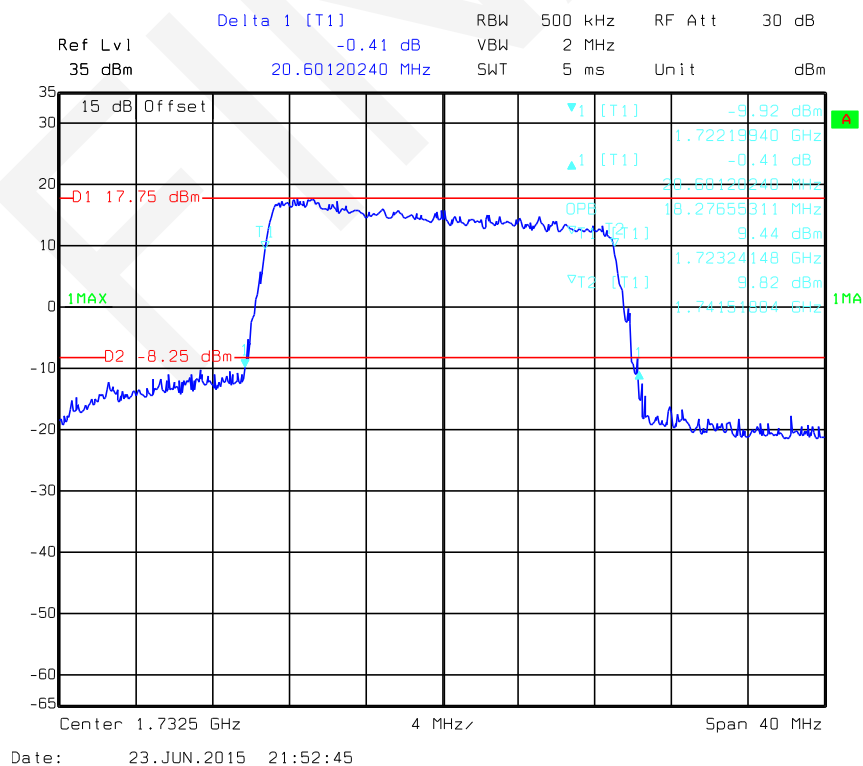

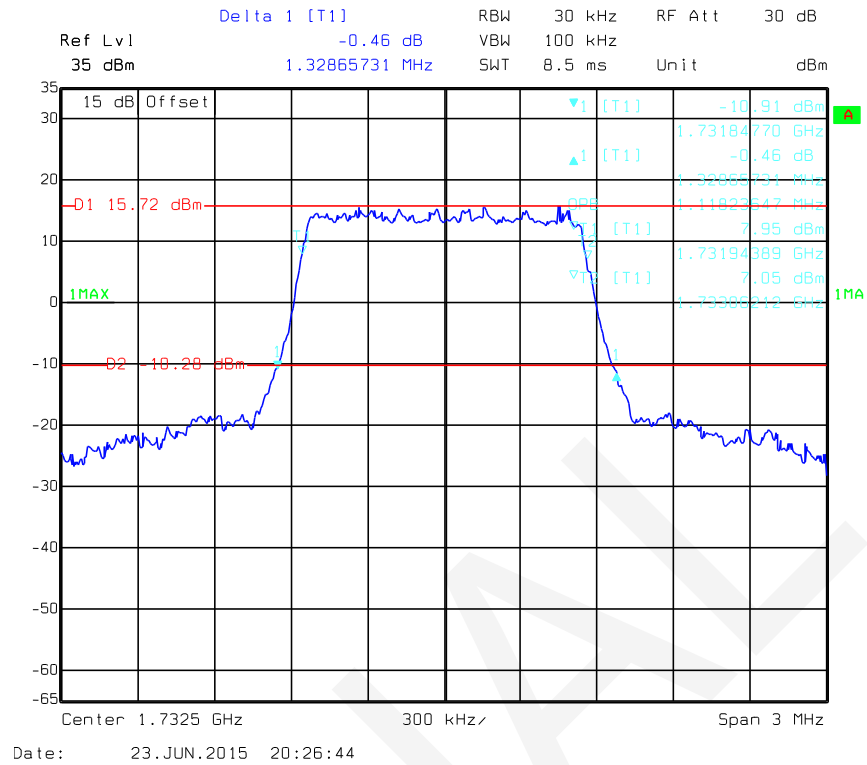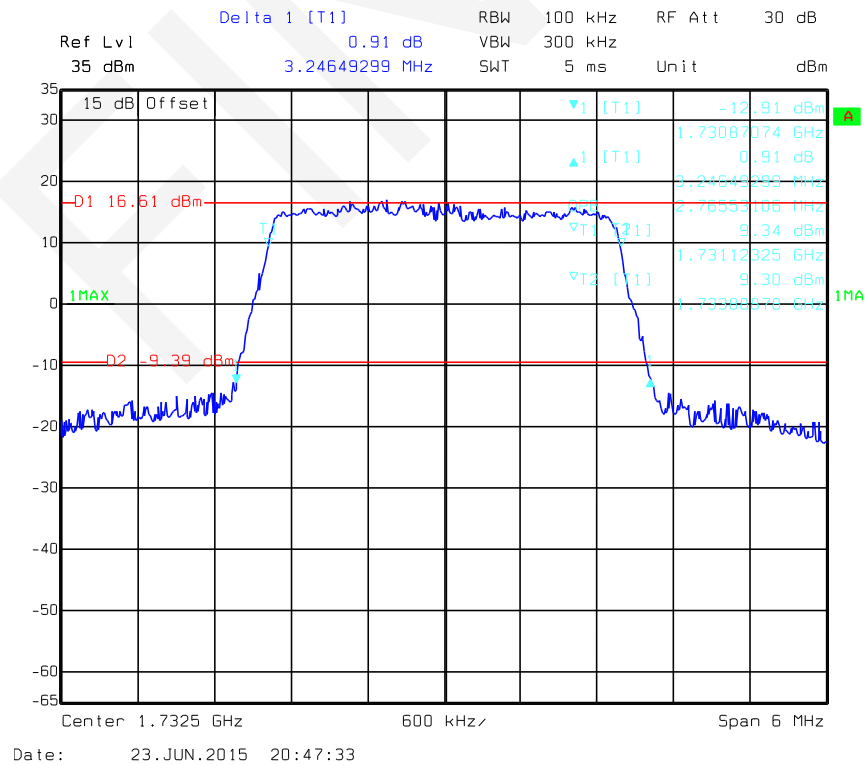
16QAM_1.4 MHz**16QAM_3 MHz**

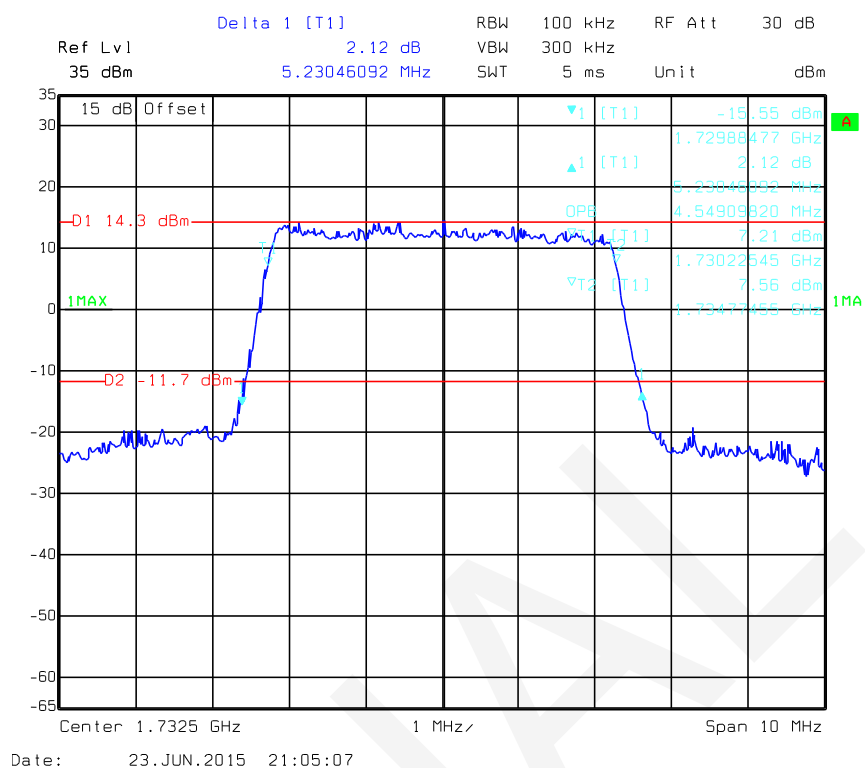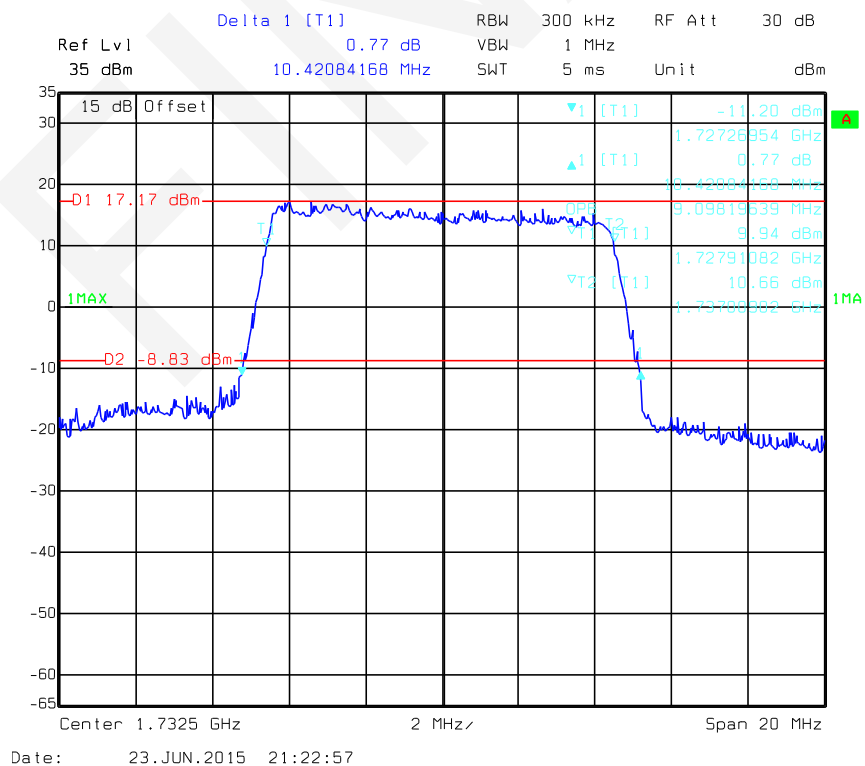16QAM_5 MHz**16QAM_10 MHz**


16QAM_15 MHz

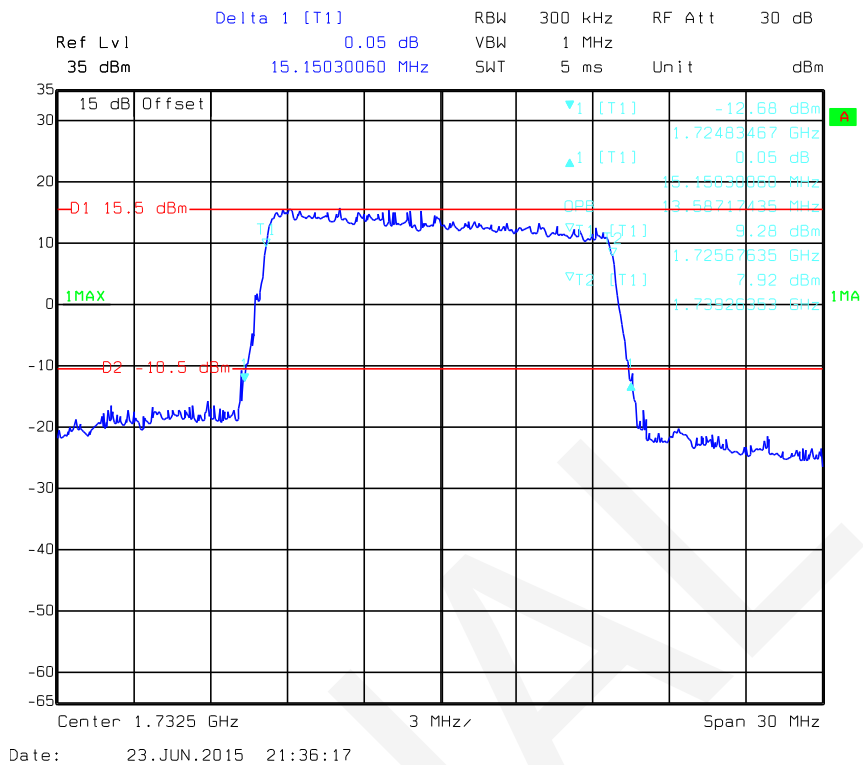


16QAM_20 MHz

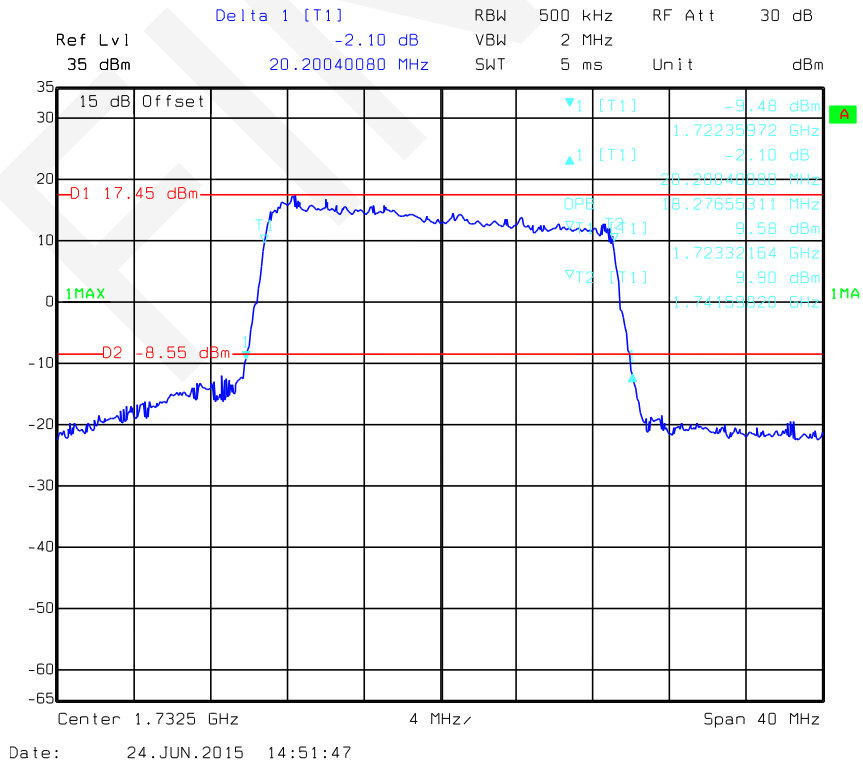


QPSK_5 MHz

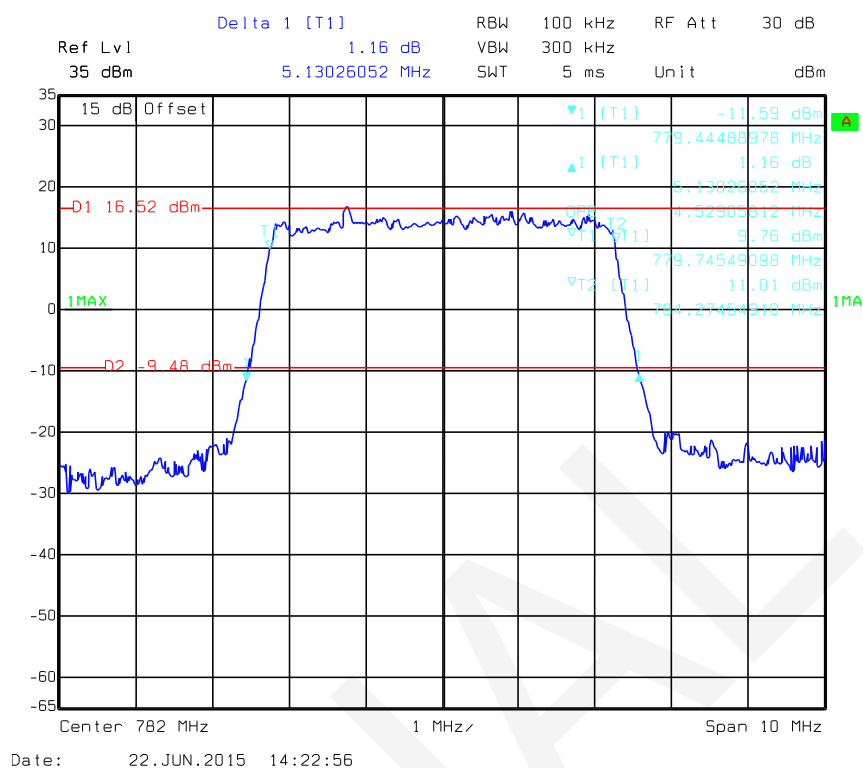


QPSK_10 MHz

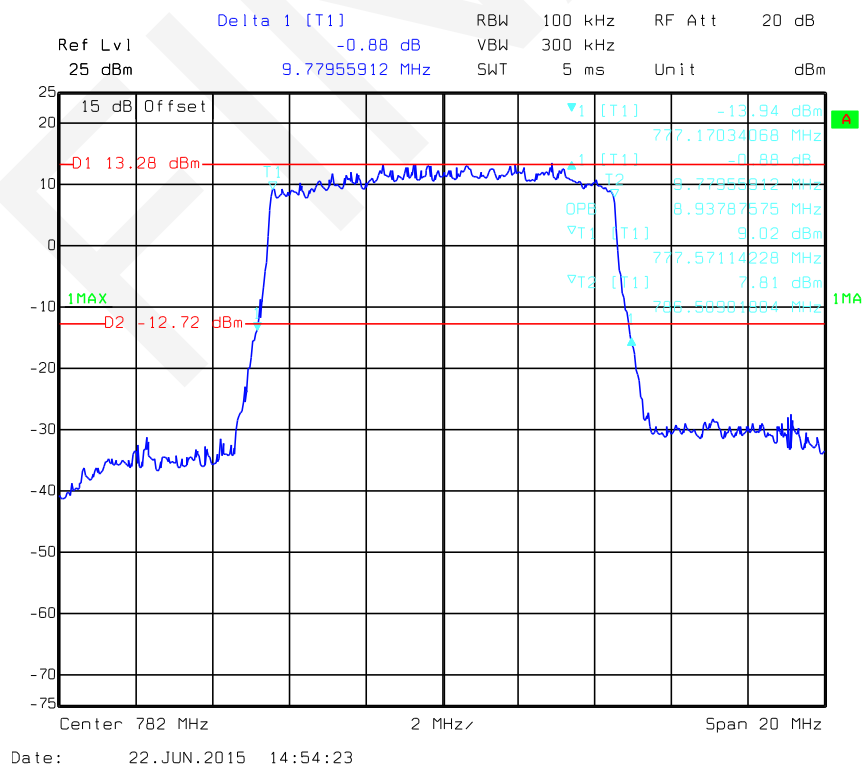

16QAM_5 MHz

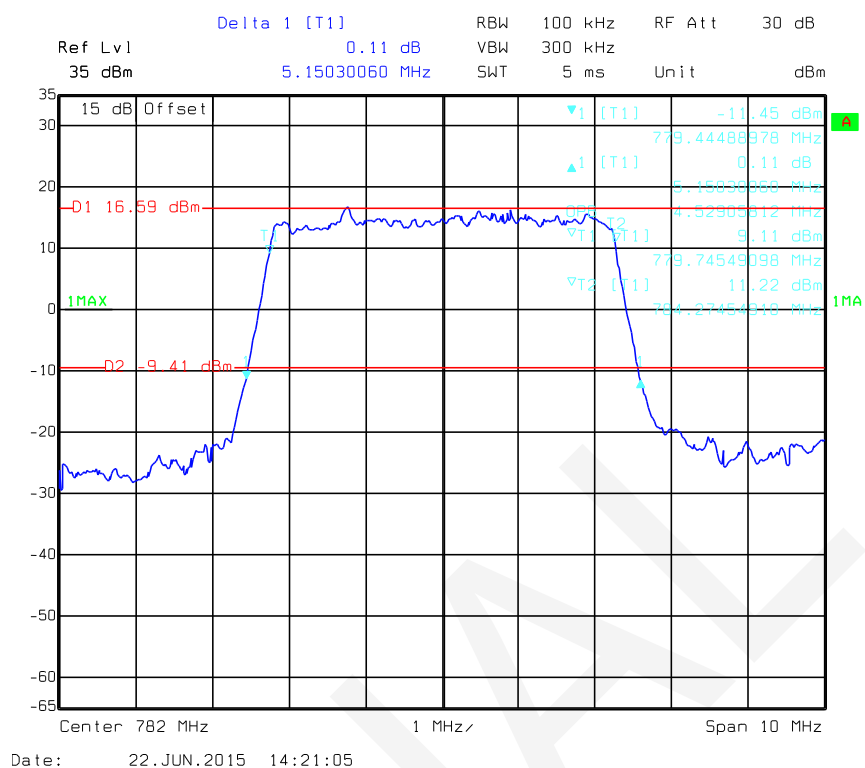

16QAM_10 MHz

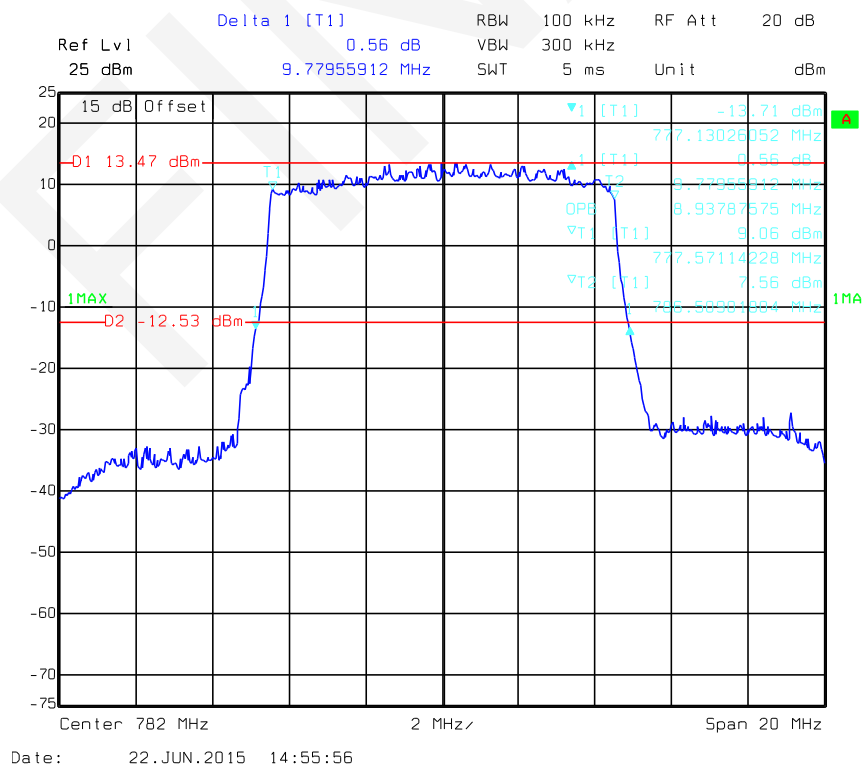

FCC §2.1051, §22.917(a) & §24.238(a) & §27.53- SPURIOUS EMISSIONS AT ANTENNA TERMINALS


Applicable Standard

FCC §2.1051, §22.917(a) , §24.238(a) and §27.53.

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in §2.1051.

Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

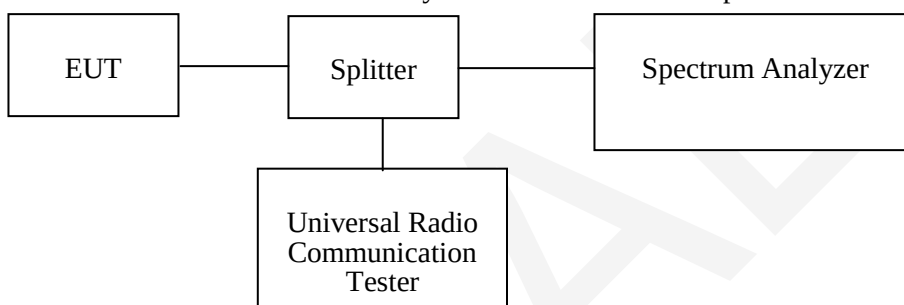

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2015-05-09	2016-05-09

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data



Environmental Conditions

Temperature:	25.3-26.1 °C
Relative Humidity:	53-57 %
ATM Pressure:	99.7~100.3 kPa



The testing was performed by Dean Liu from 2015-06-22 to 2015-06-29.

Please refer to the following plots.



BC0-RC1_Middle Channel

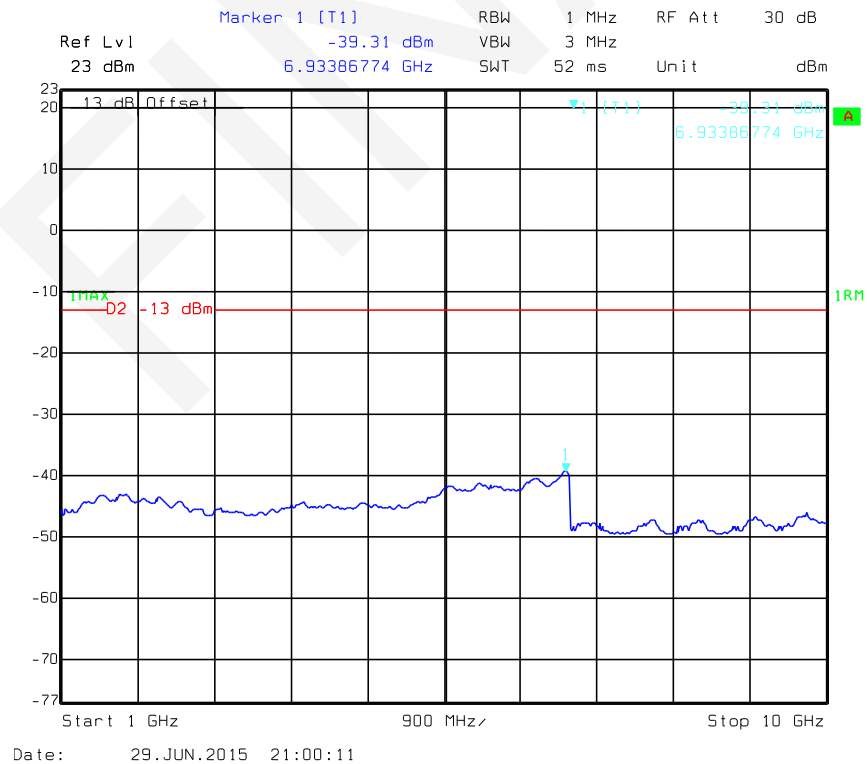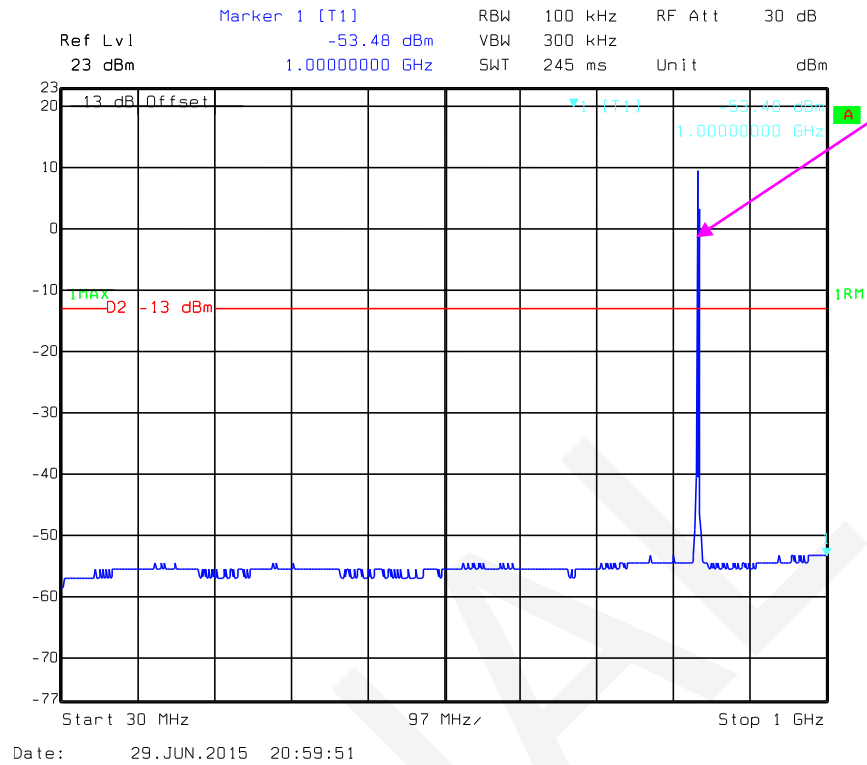


BC0-RC3_Middle Channel

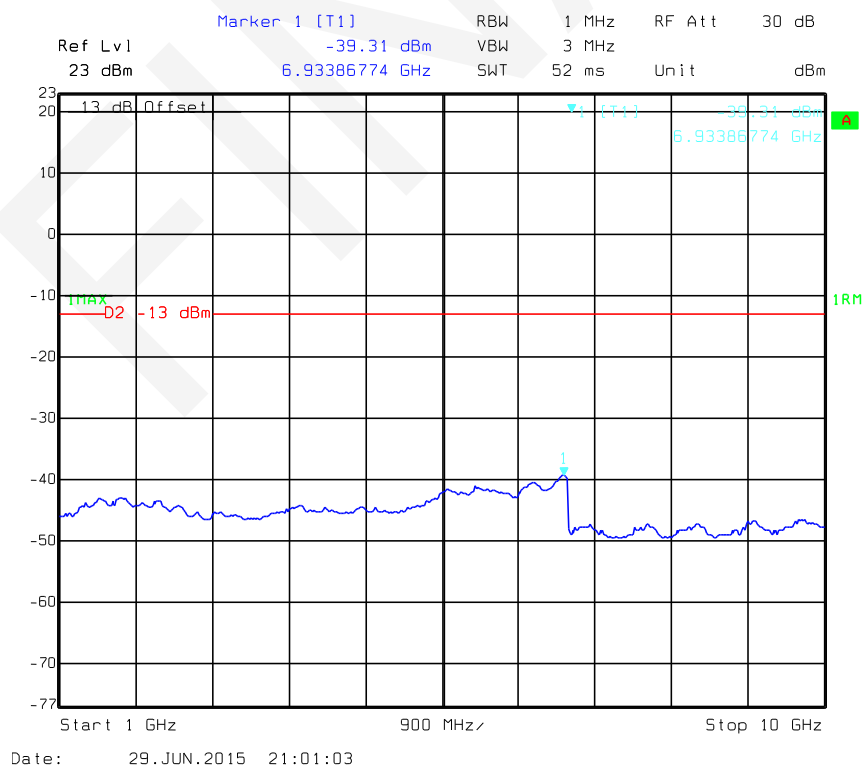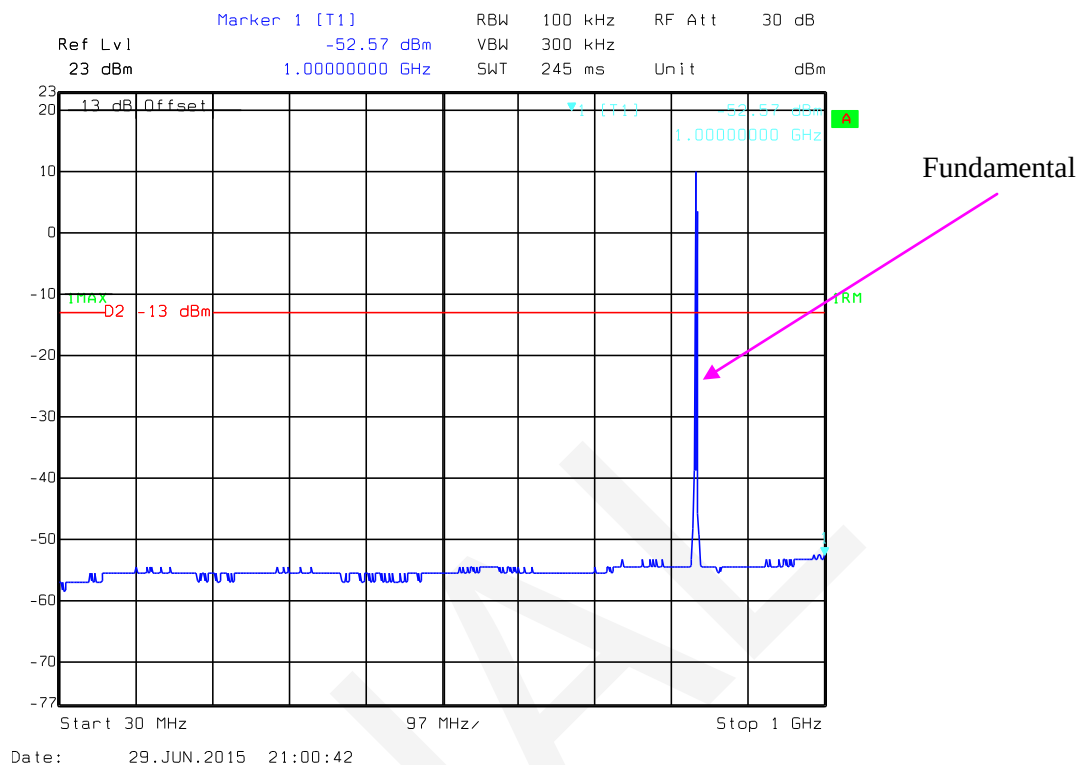


BC0- RTAP _Middle Channel

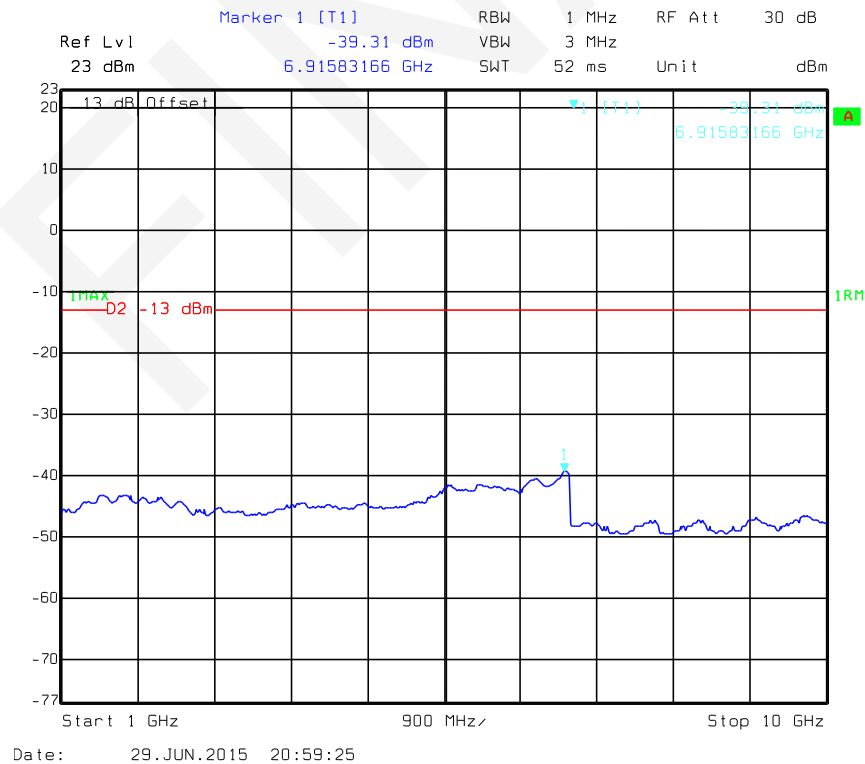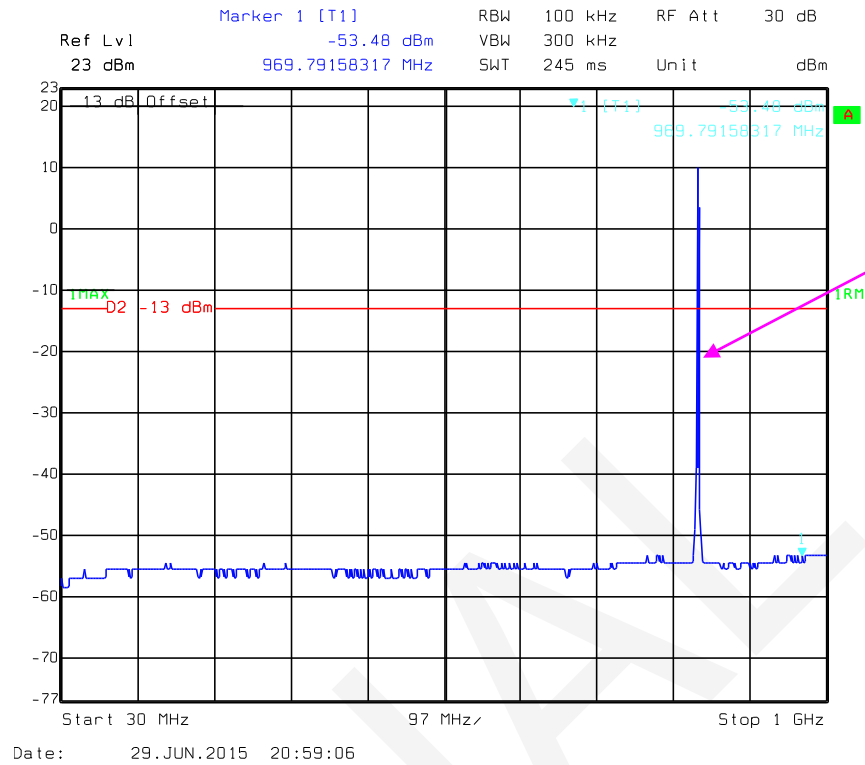


BC1-RC1_Middle Channel

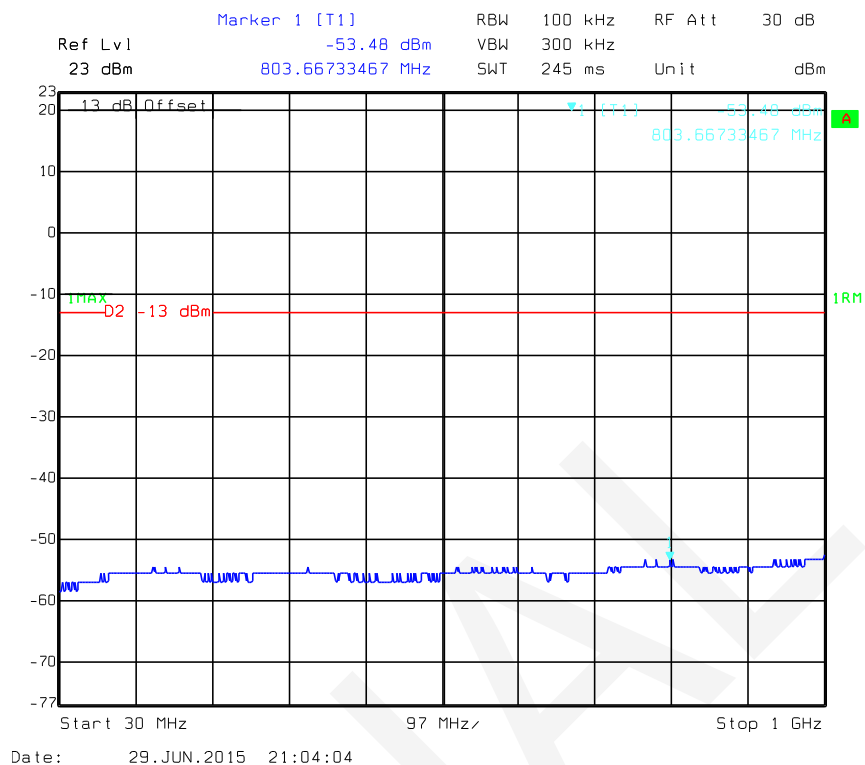


Fundamental

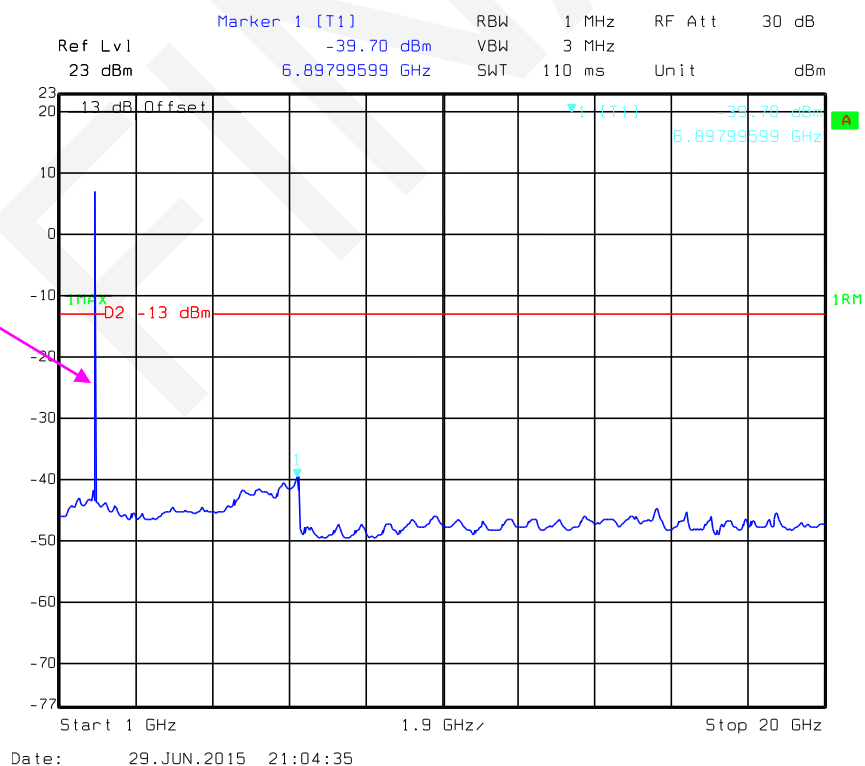


BC1-RC3 _Middle Channel

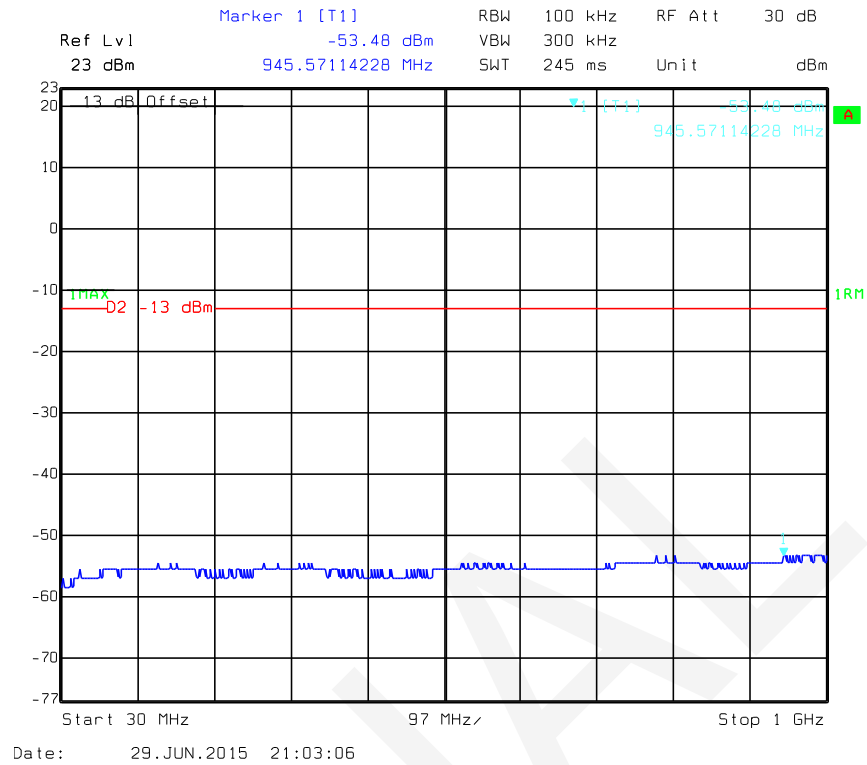


Fundamental

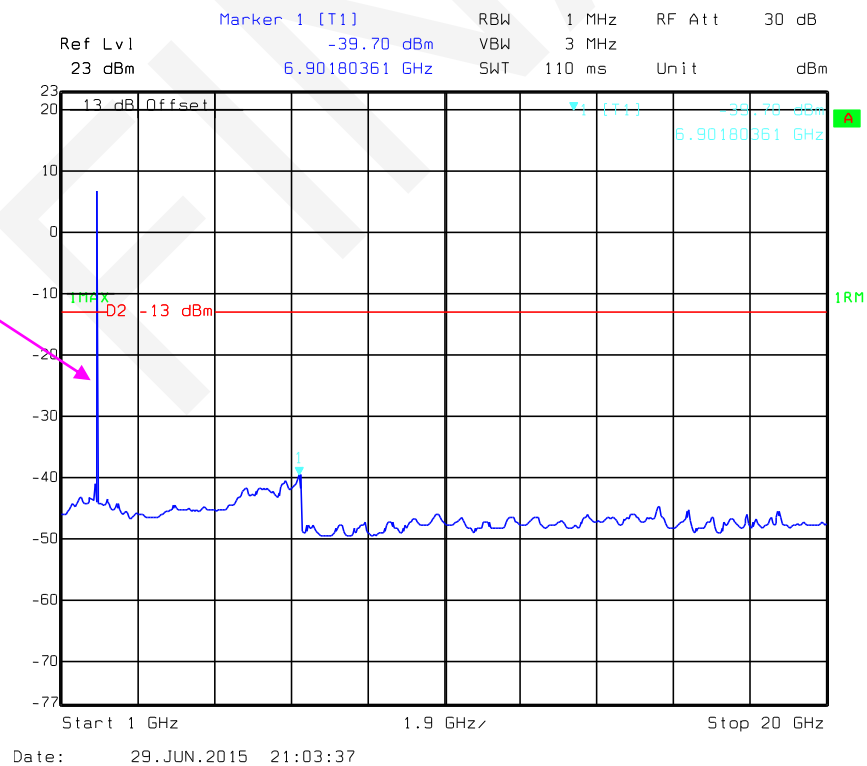

BC1- RTAP _Middle Channel

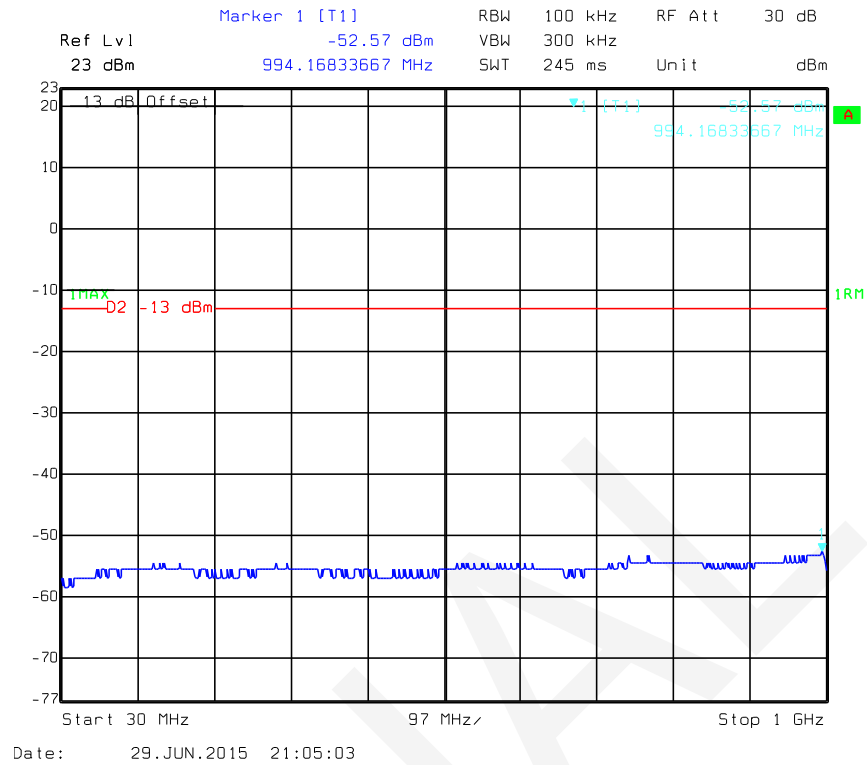


Fundamental

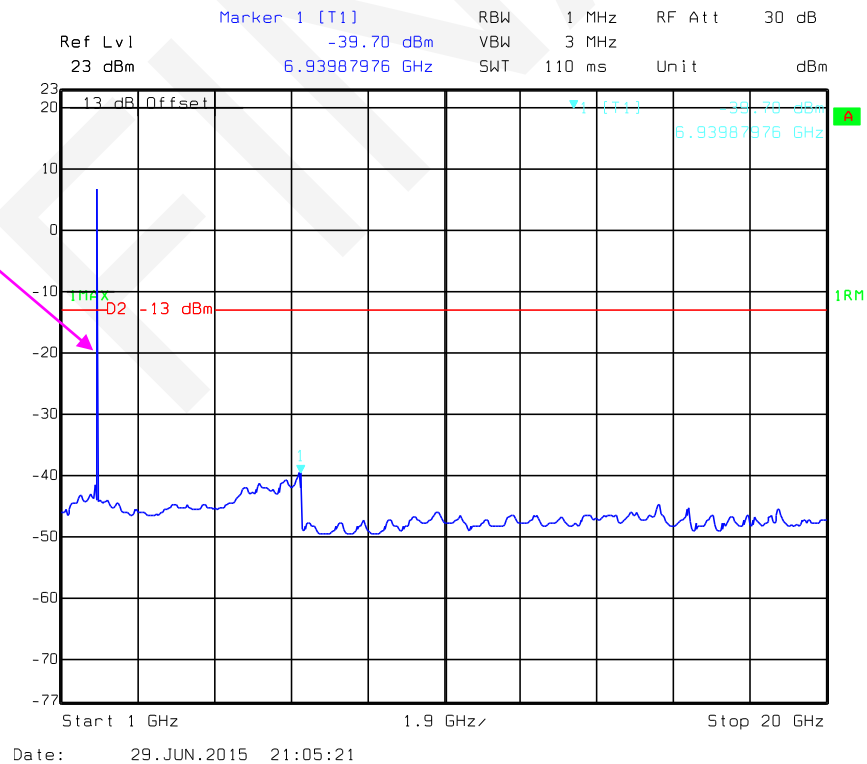


LTE Band 4, Middle Channel


QPSK-1.4 MHz

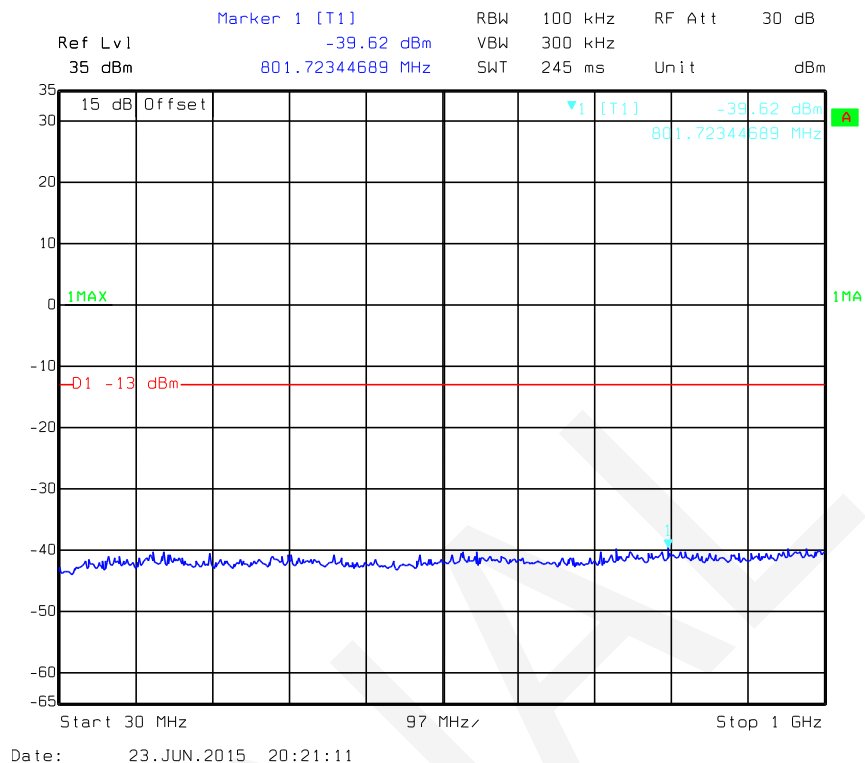


Fundamental

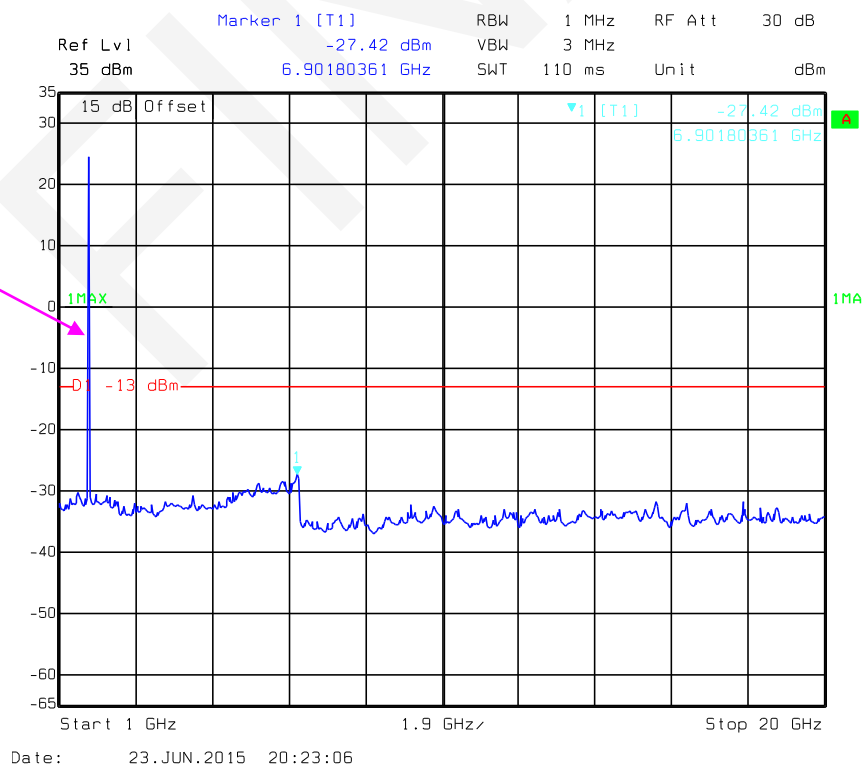


QPSK_3MHz

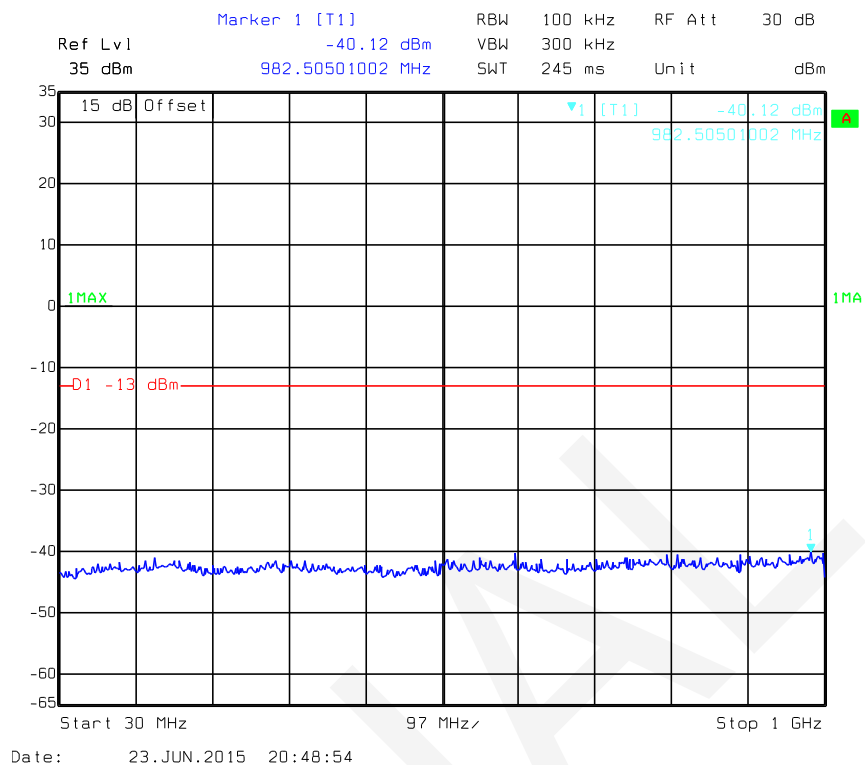


Fundamental

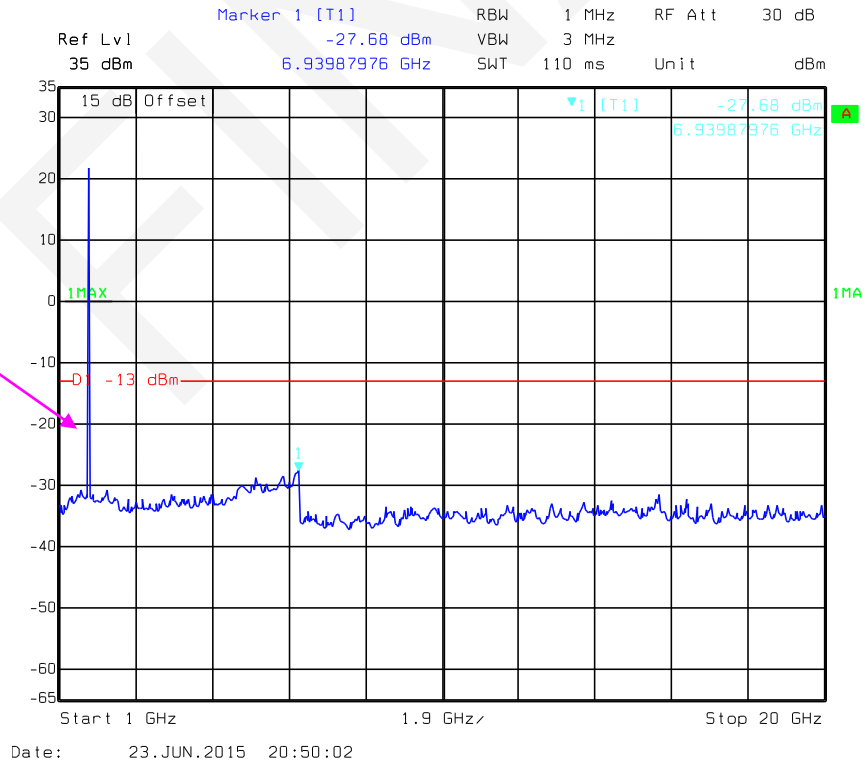


QPSK_5MHz

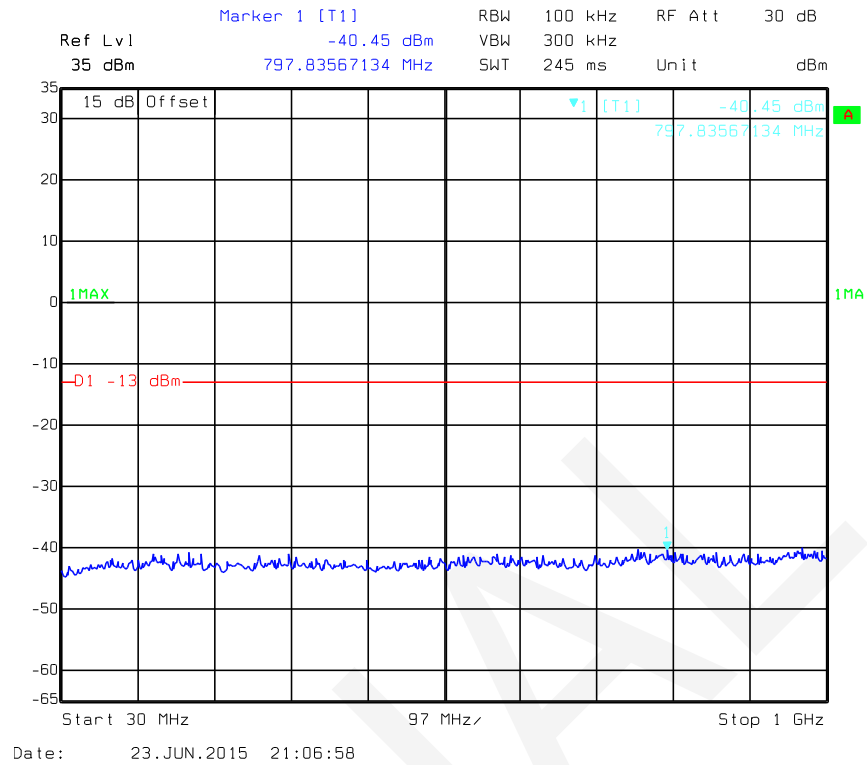


Fundamental

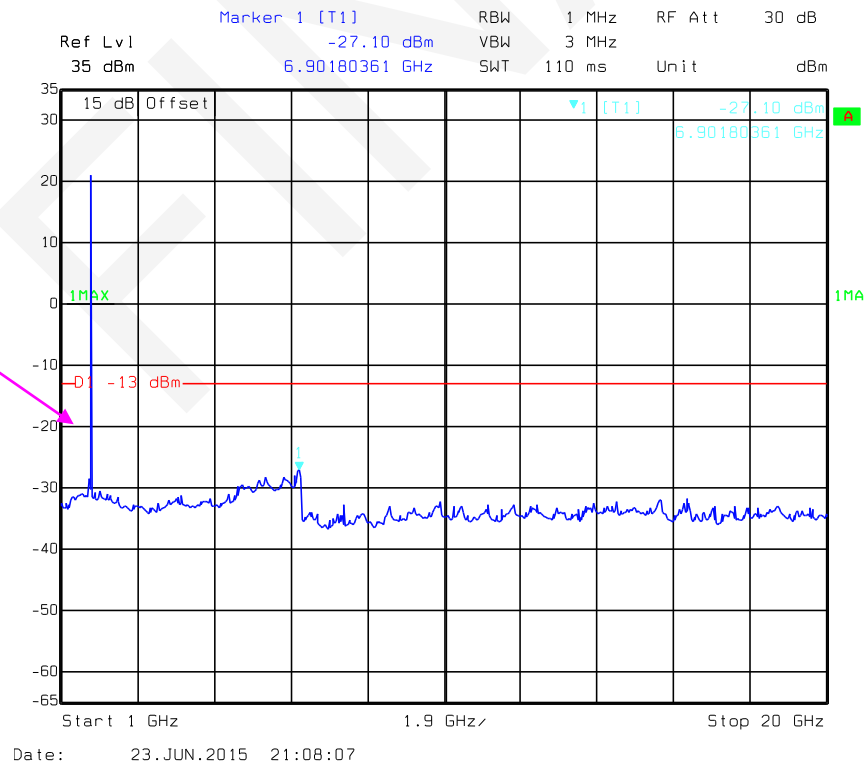


QPSK_10MHz

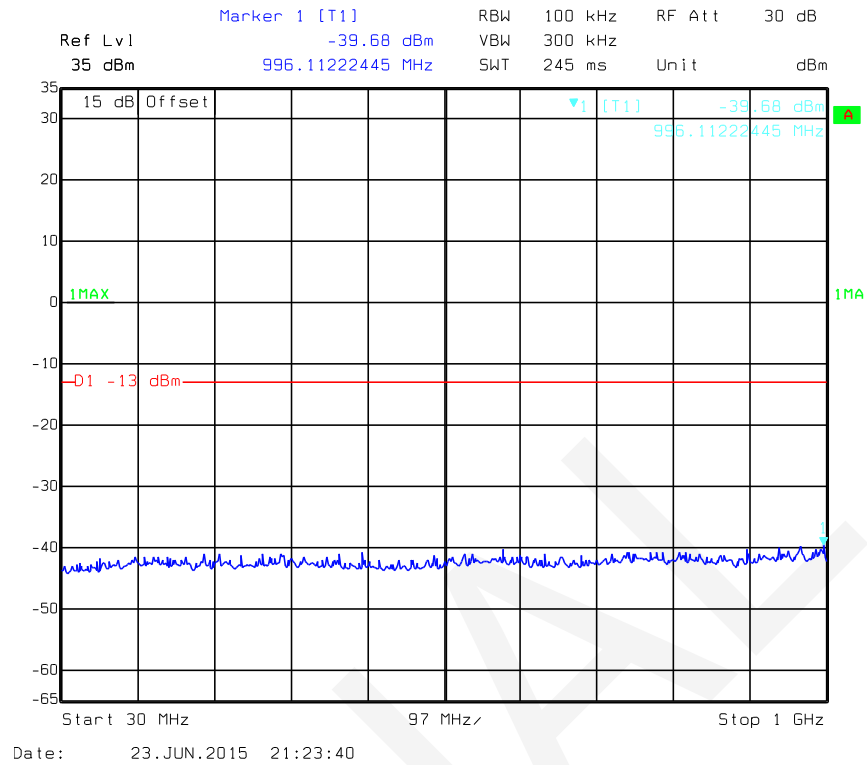


Fundamental

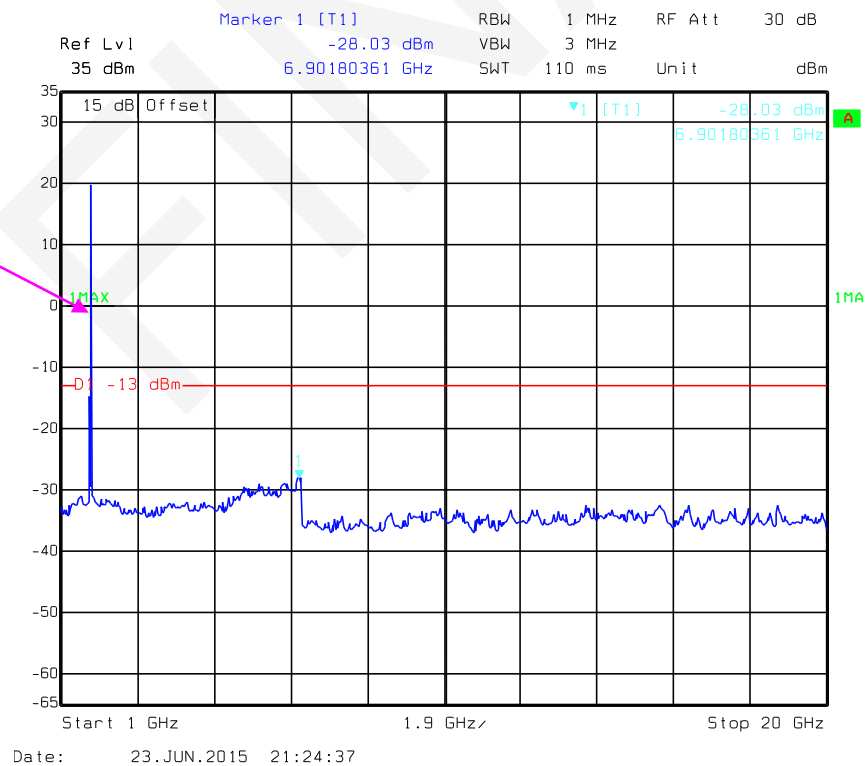


QPSK_15MHz

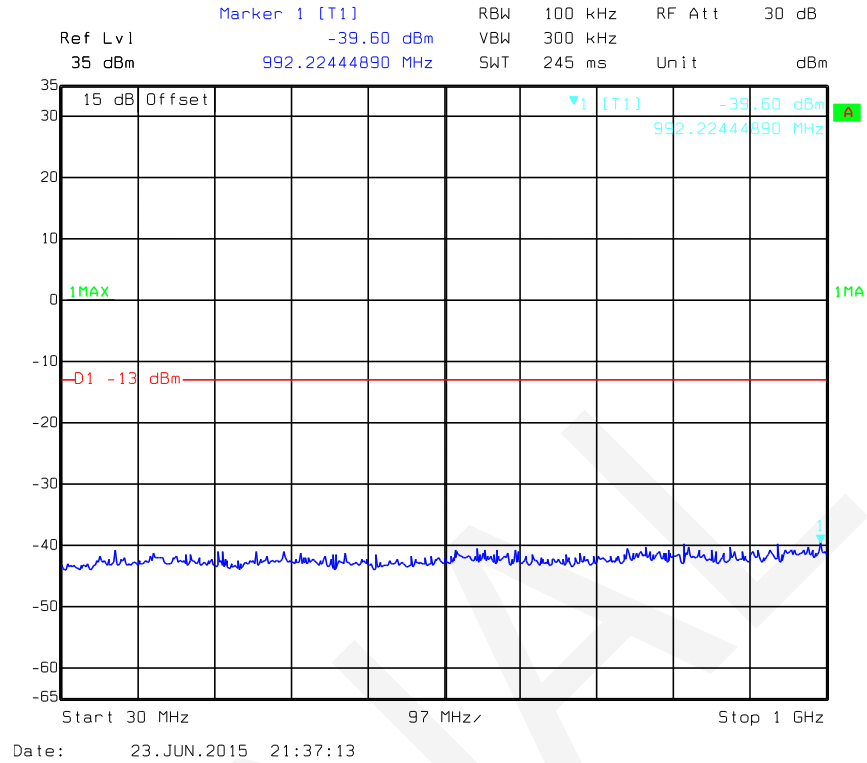


Fundamental

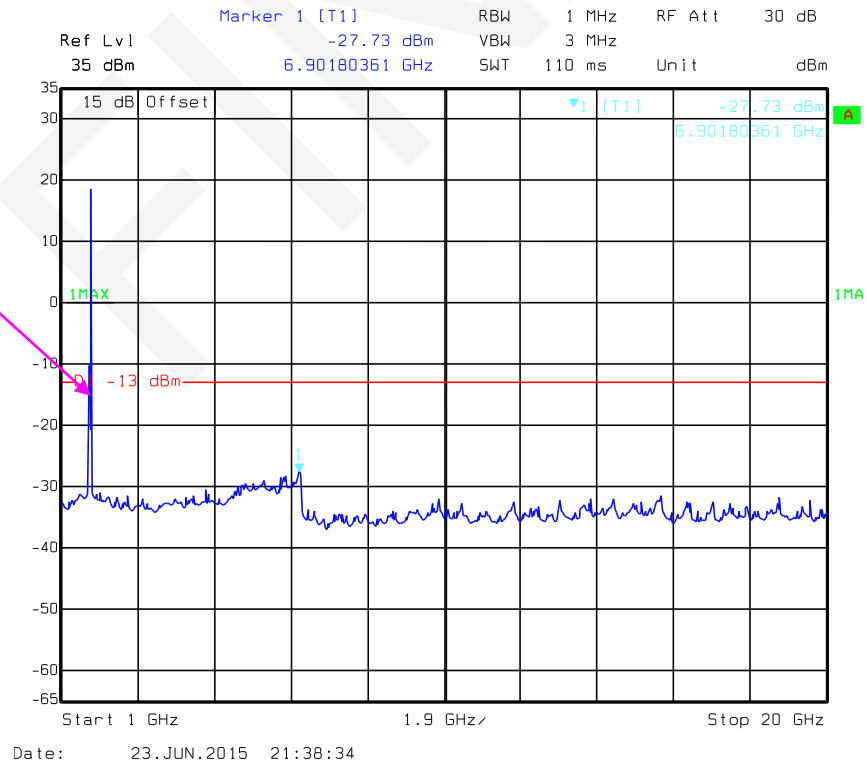


QPSK_20MHz

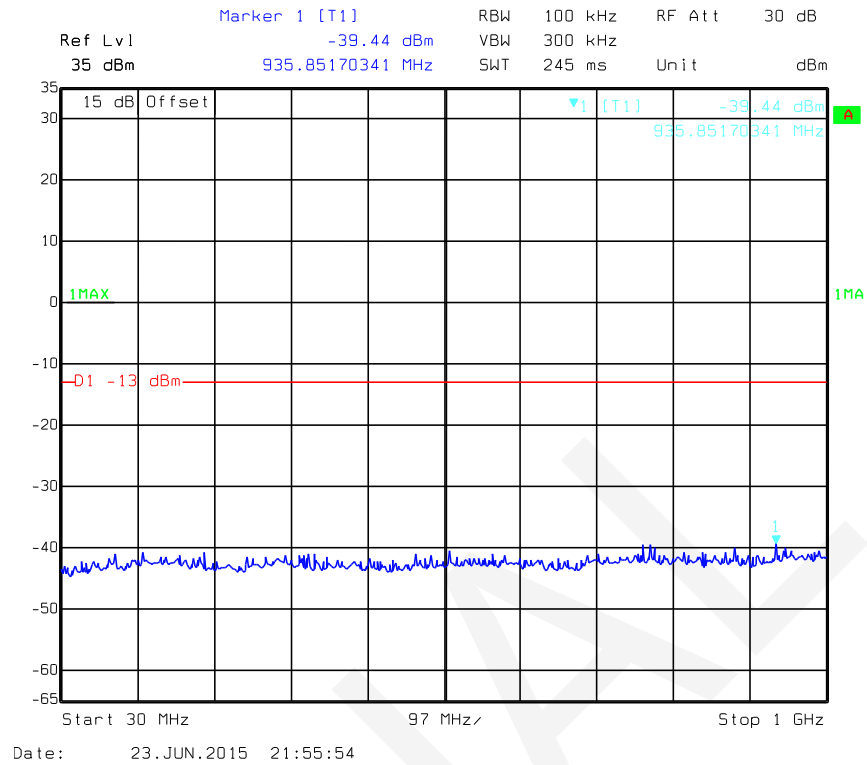


Fundamental

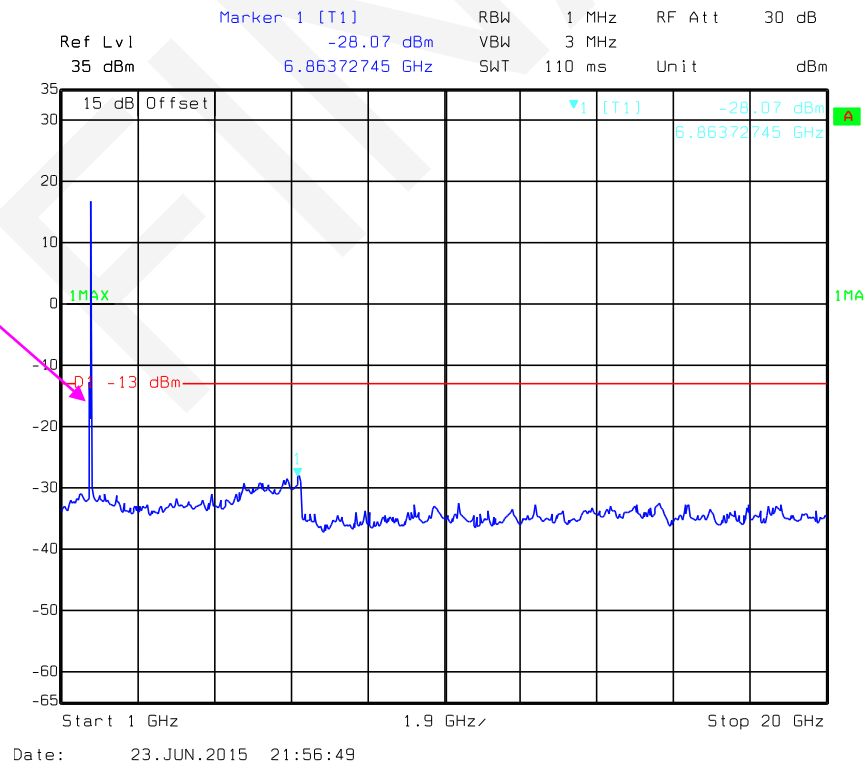



16QAM_1.4 MHz

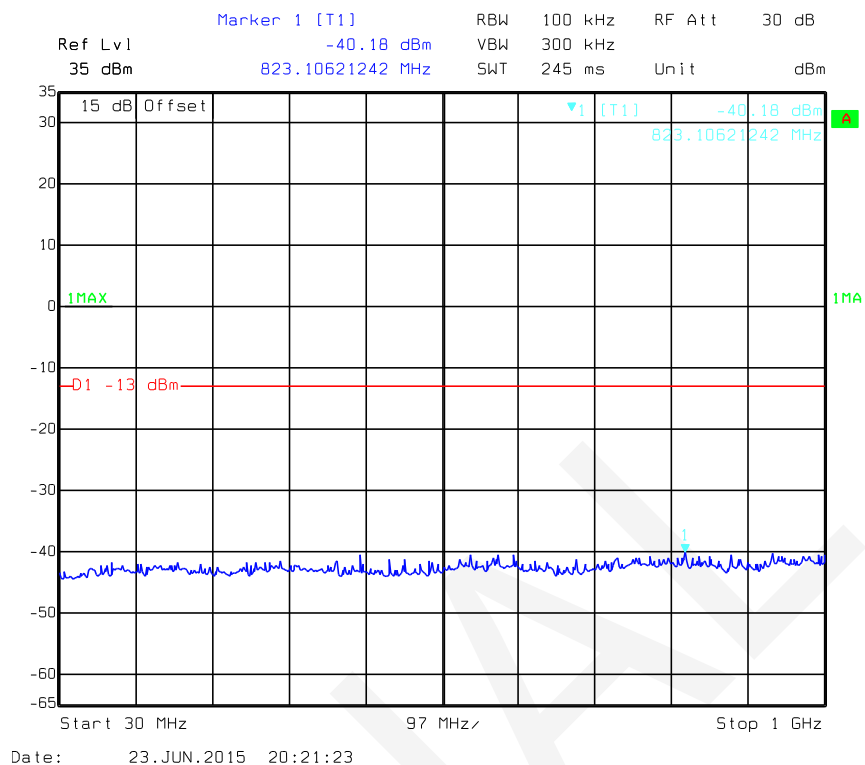


Fundamental

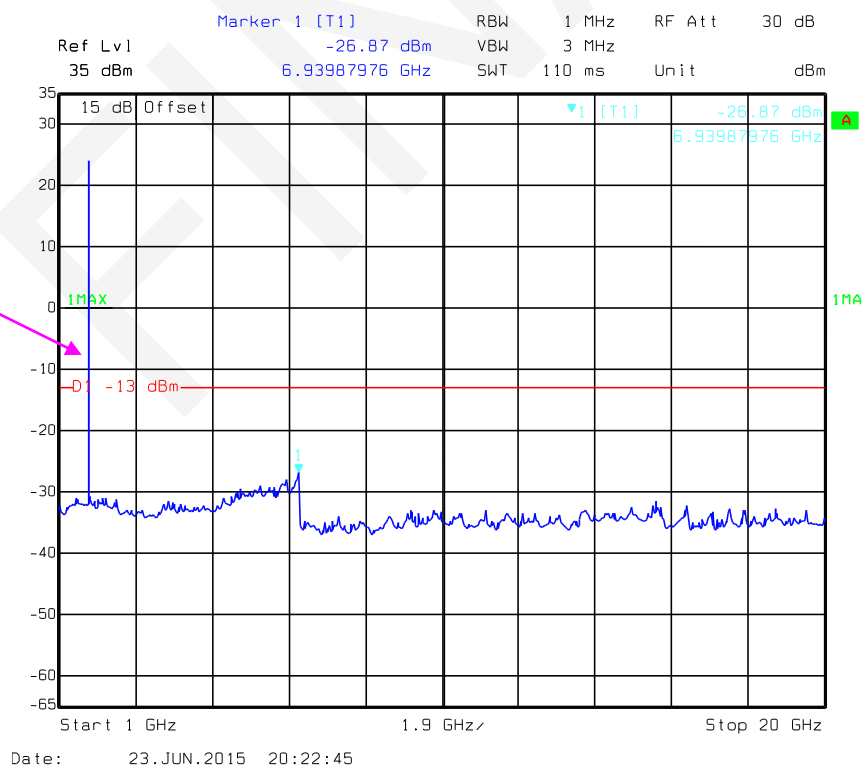


16QAM_3 MHz

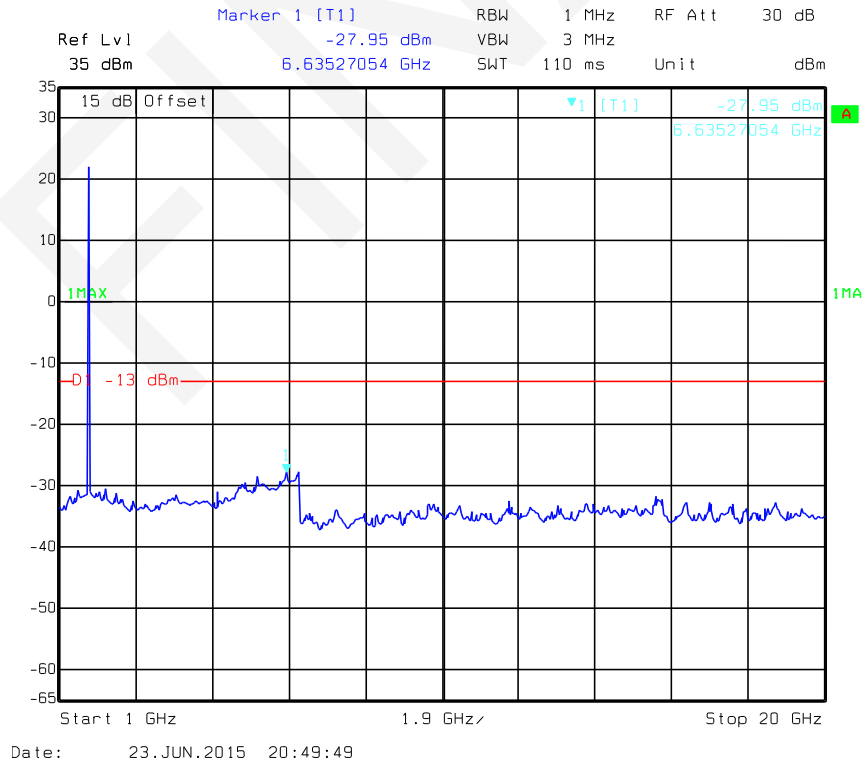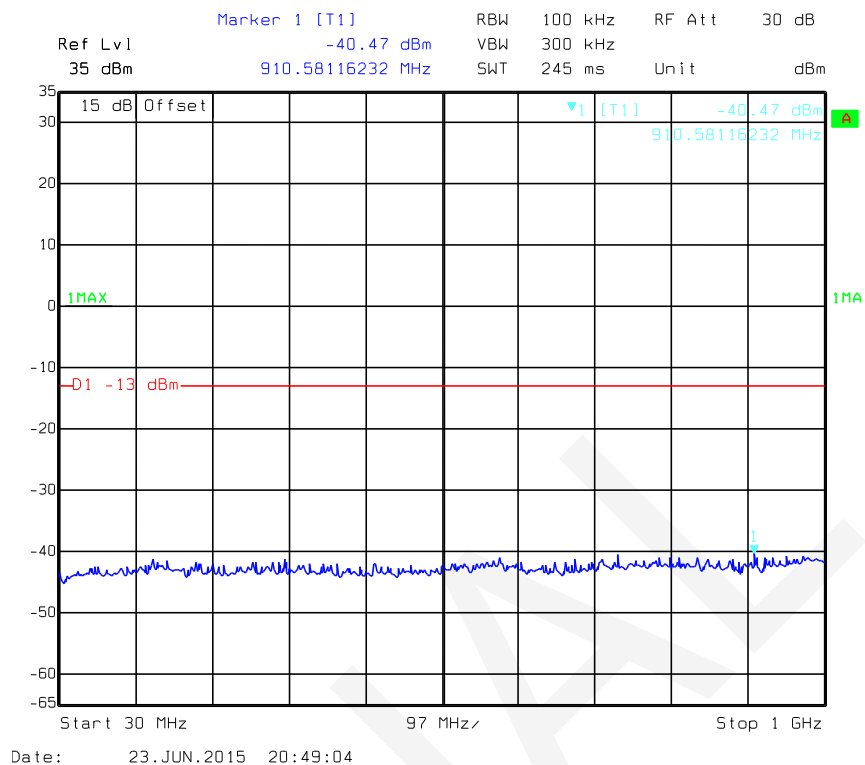


16QAM_5 MHz

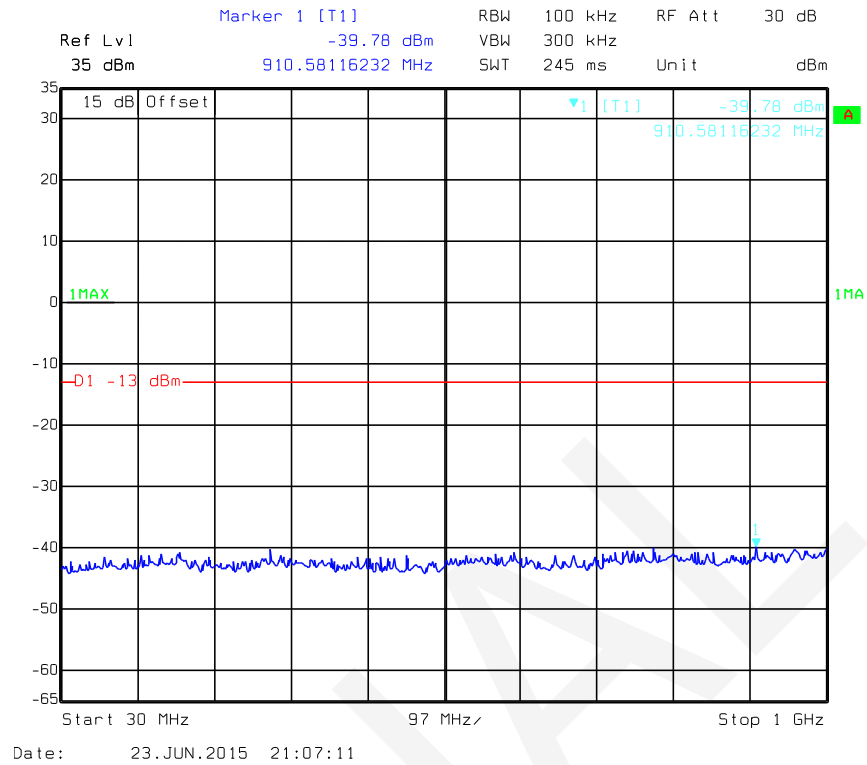


Fundamental

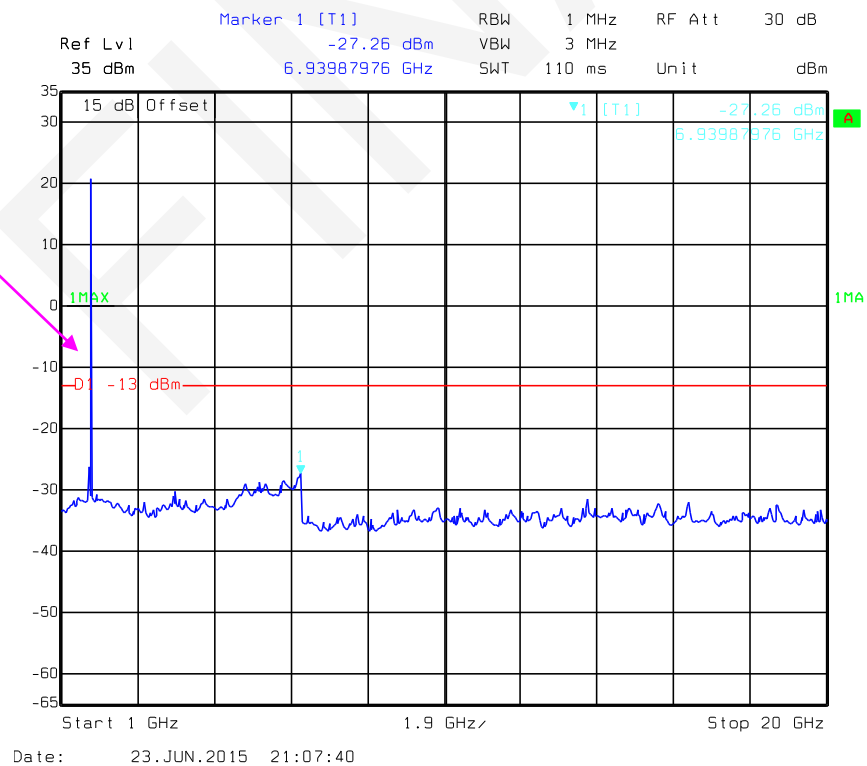


16QAM_10MHz

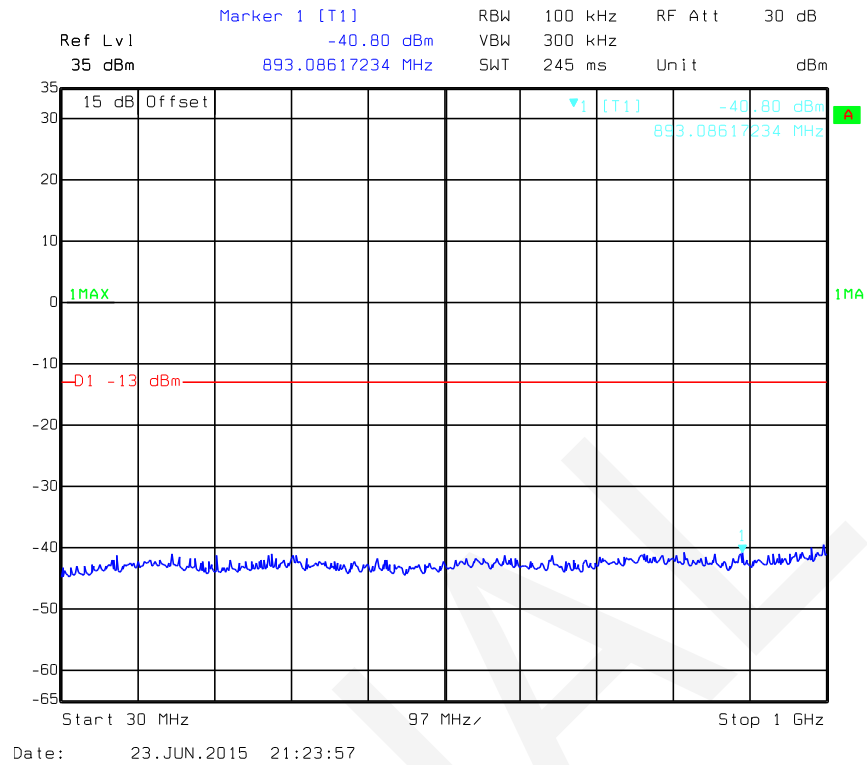


Fundamental

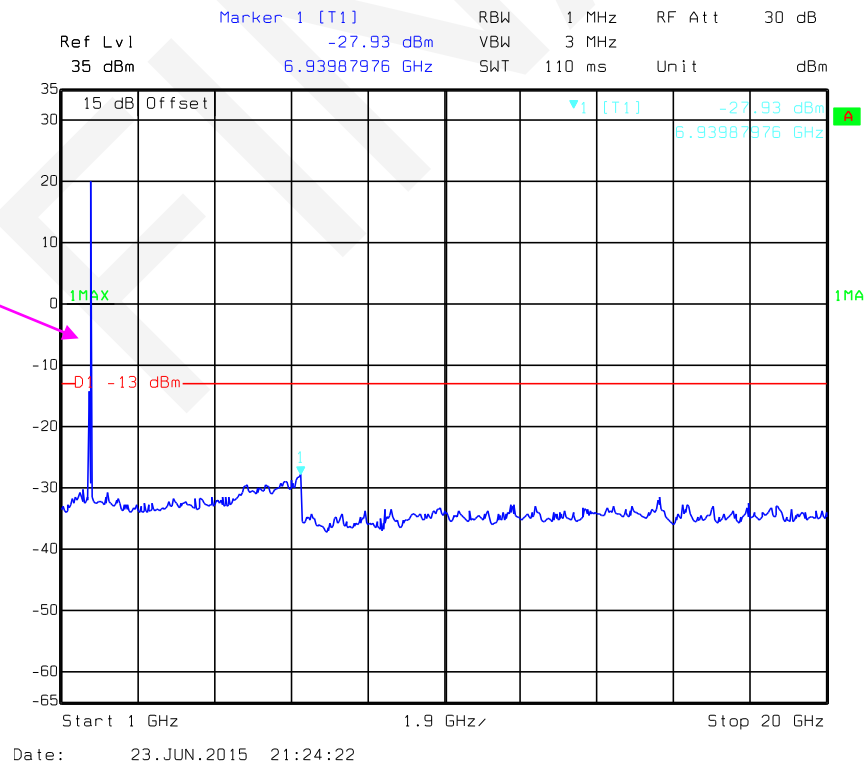


16QAM_15 MHz

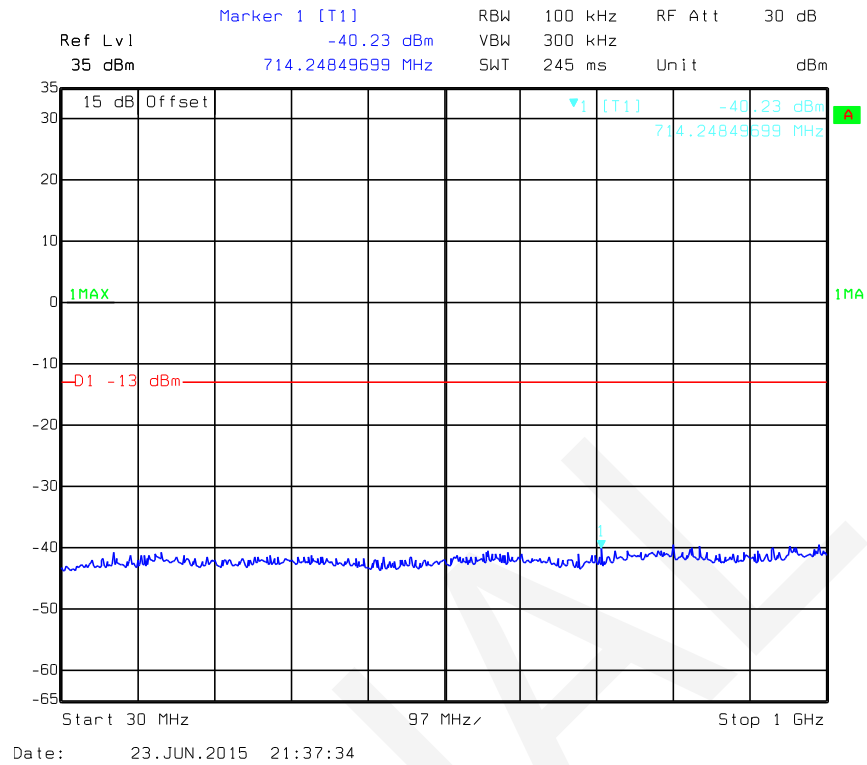


Fundamental

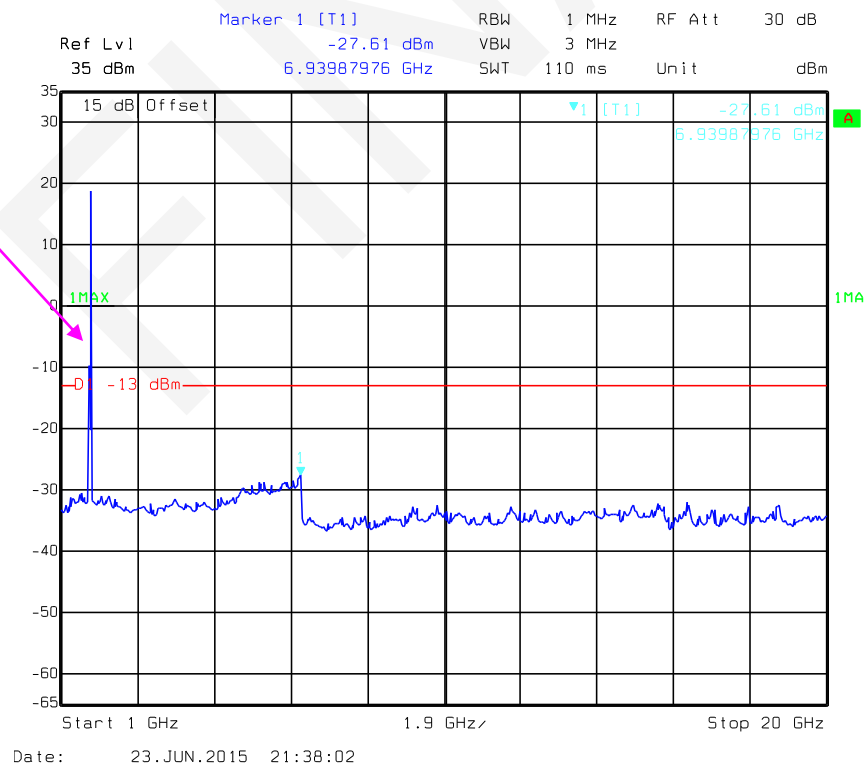

16QAM_20 MHz


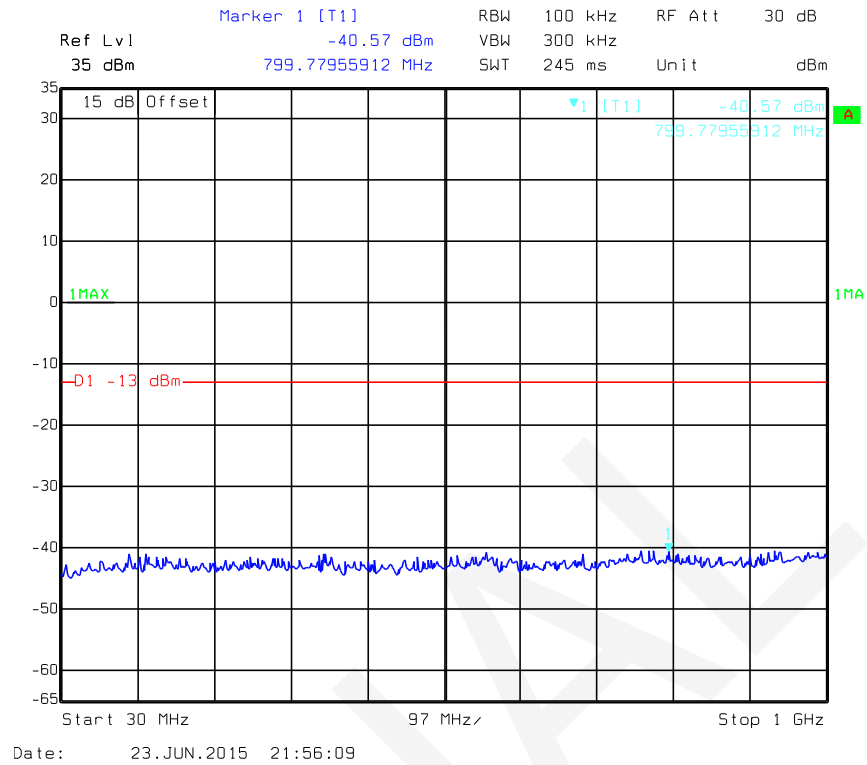


Fundamental


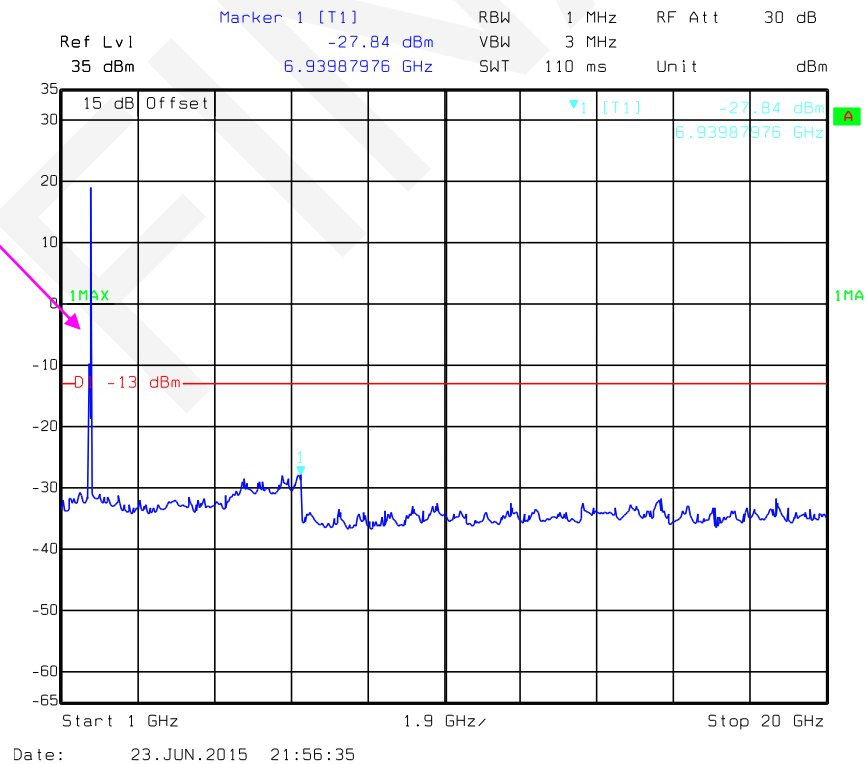


LTE BAND 13



QPSK_5MHz

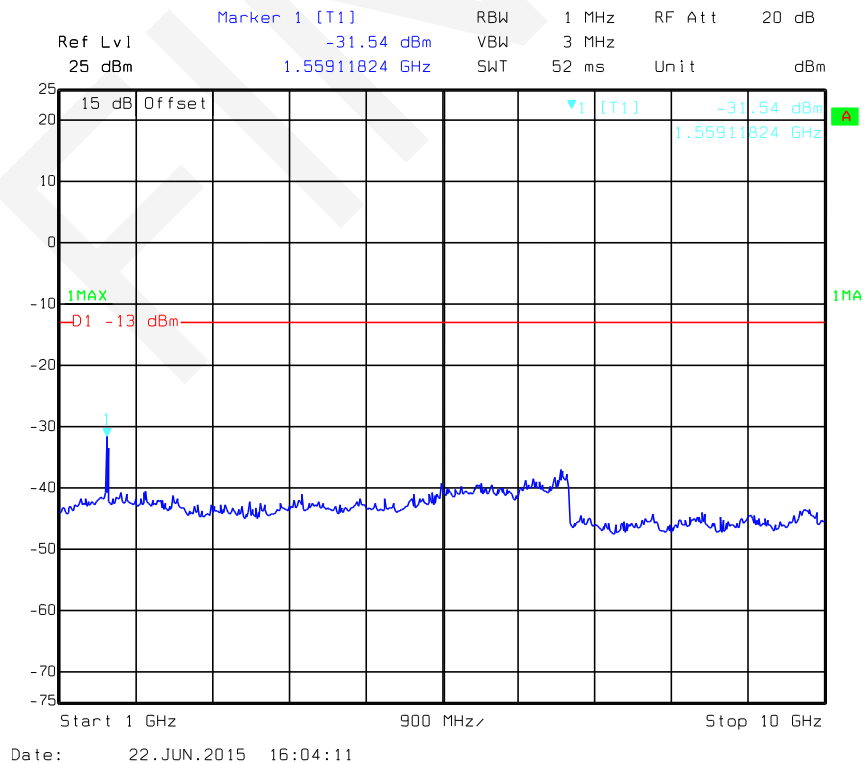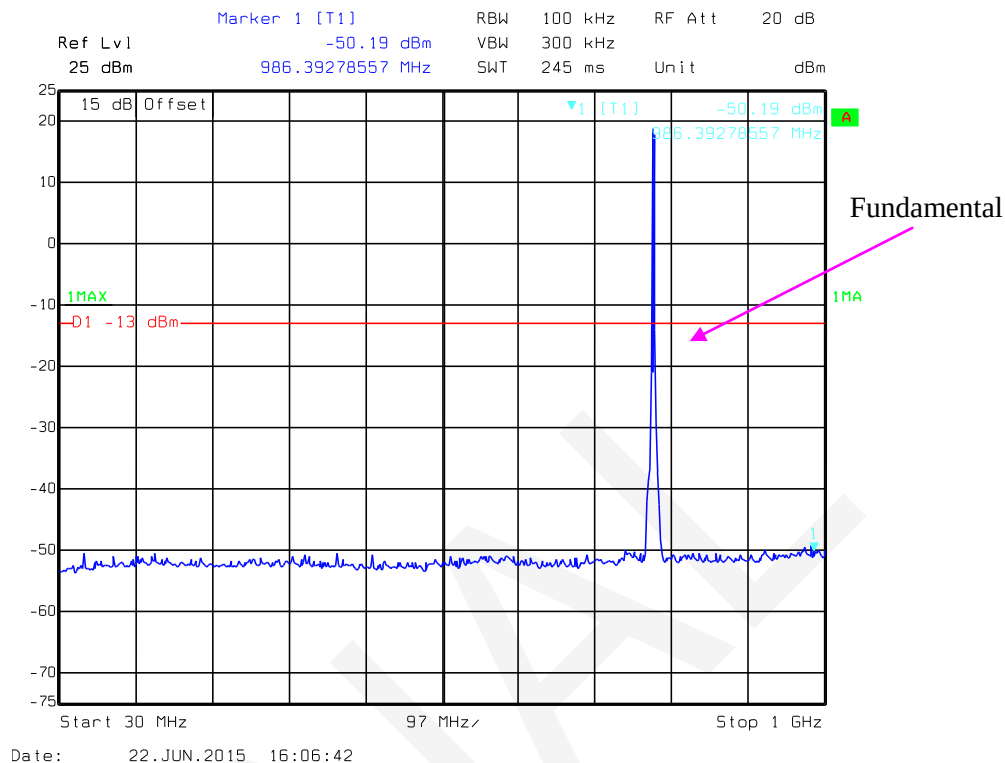



QPSK_10MHz

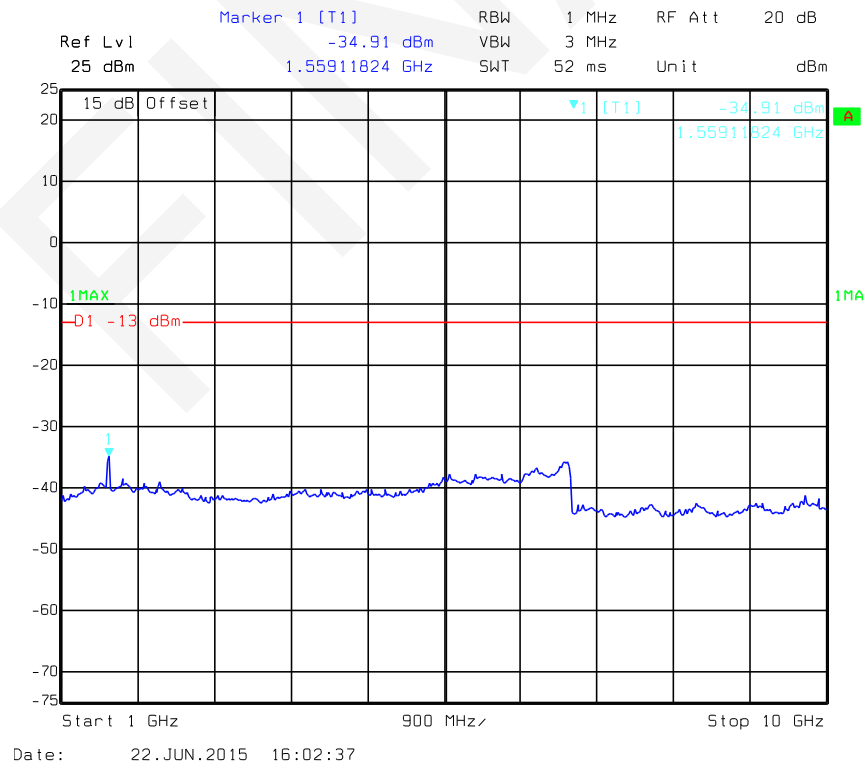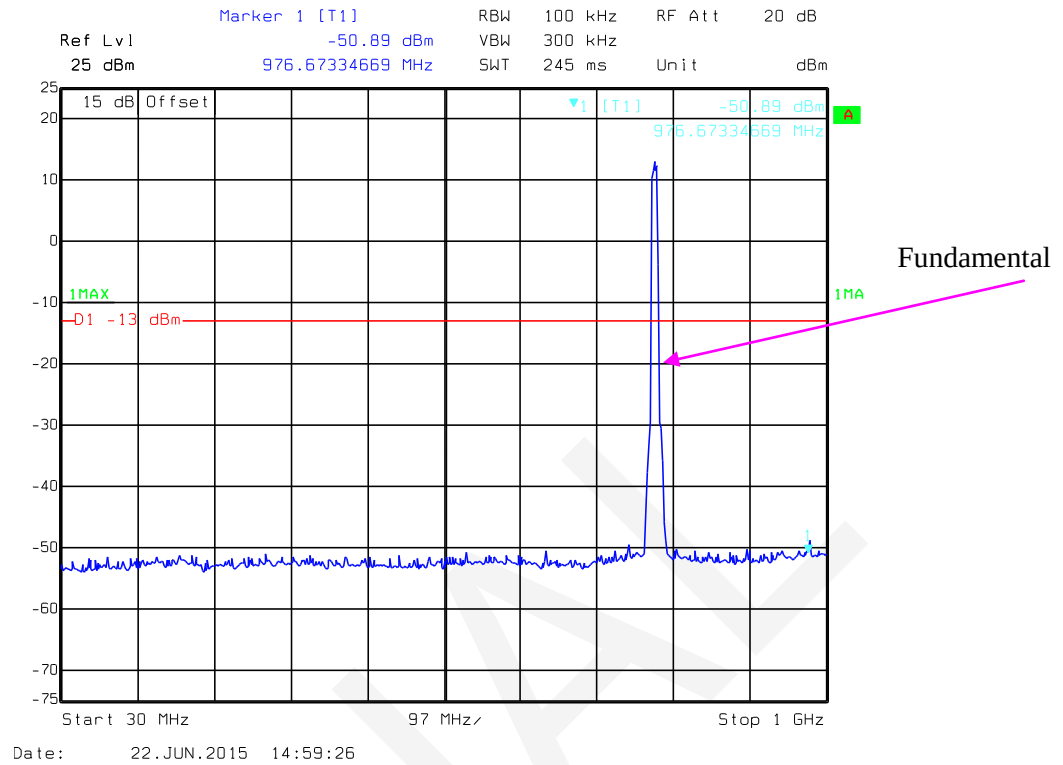

16QAM_5 MHz

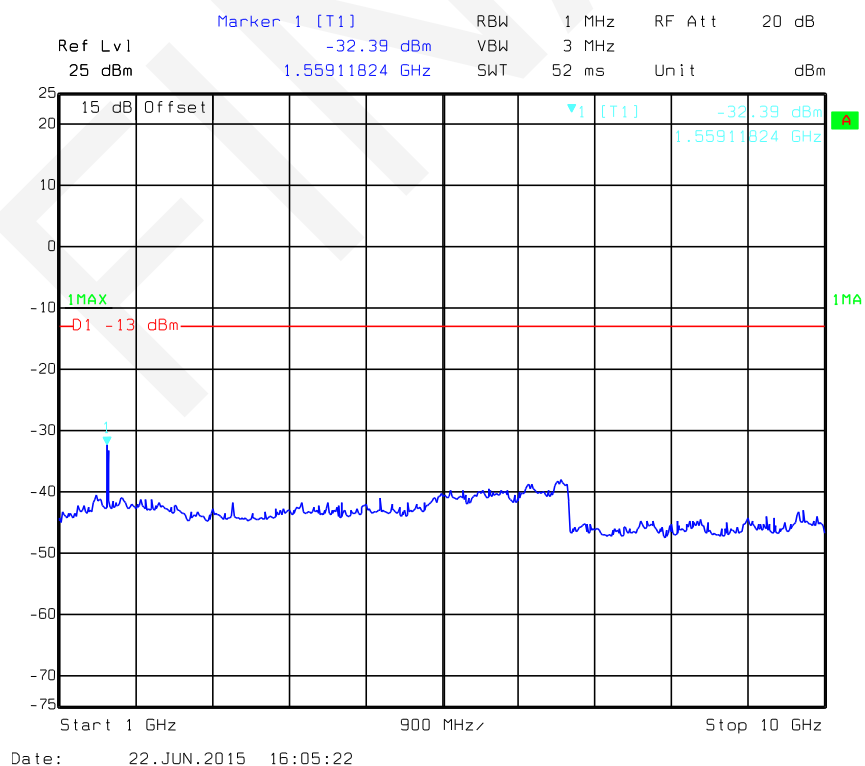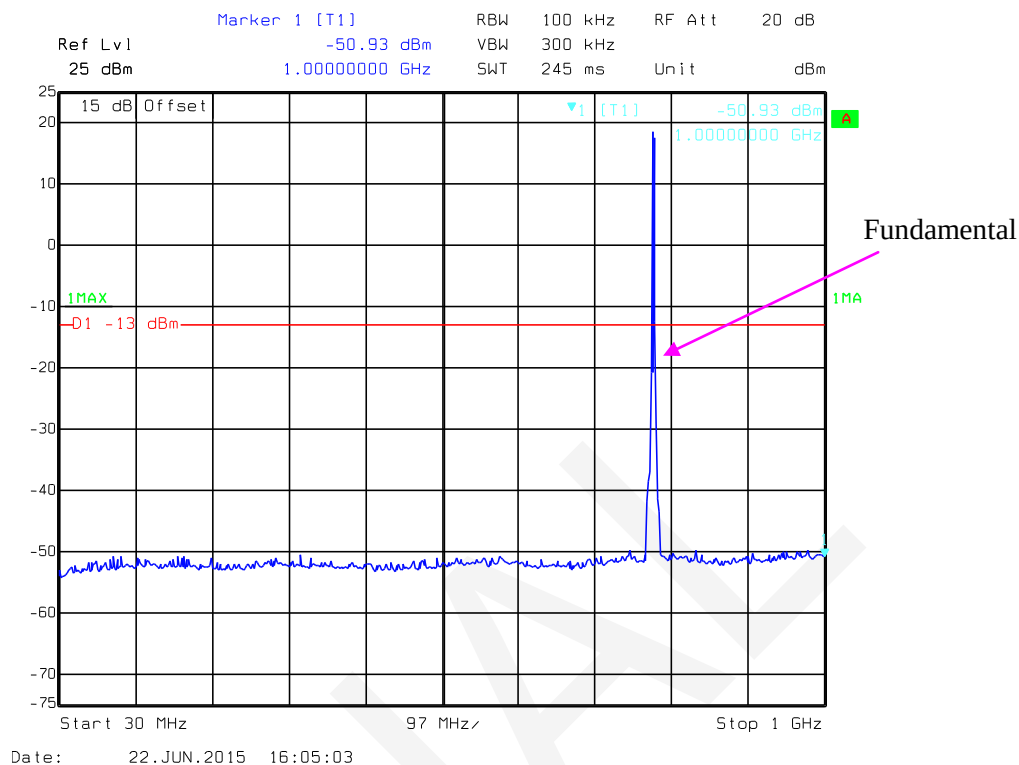

16QAM_10 MHz

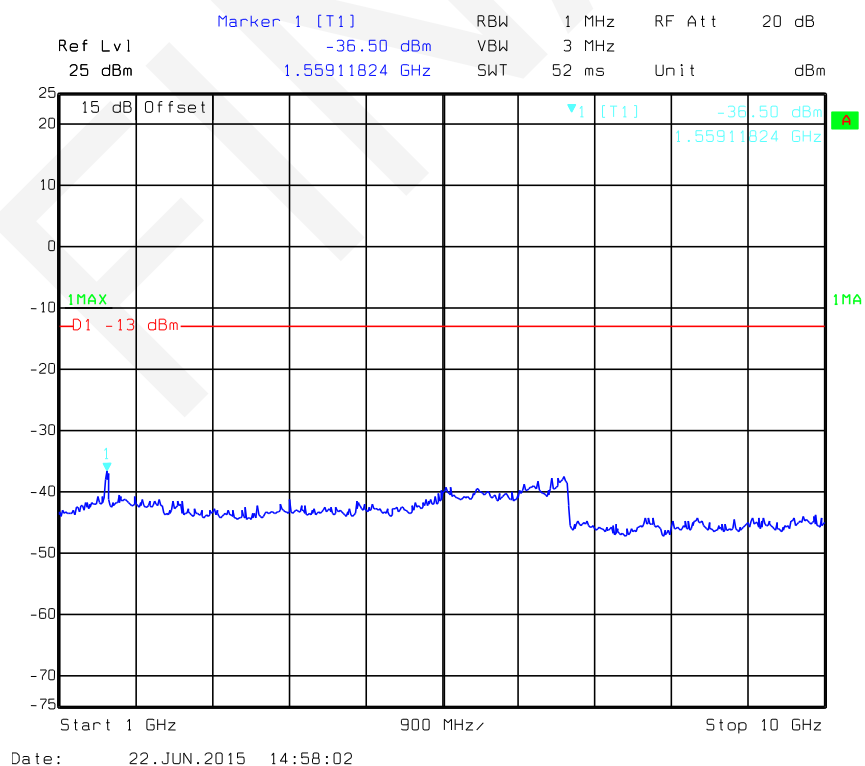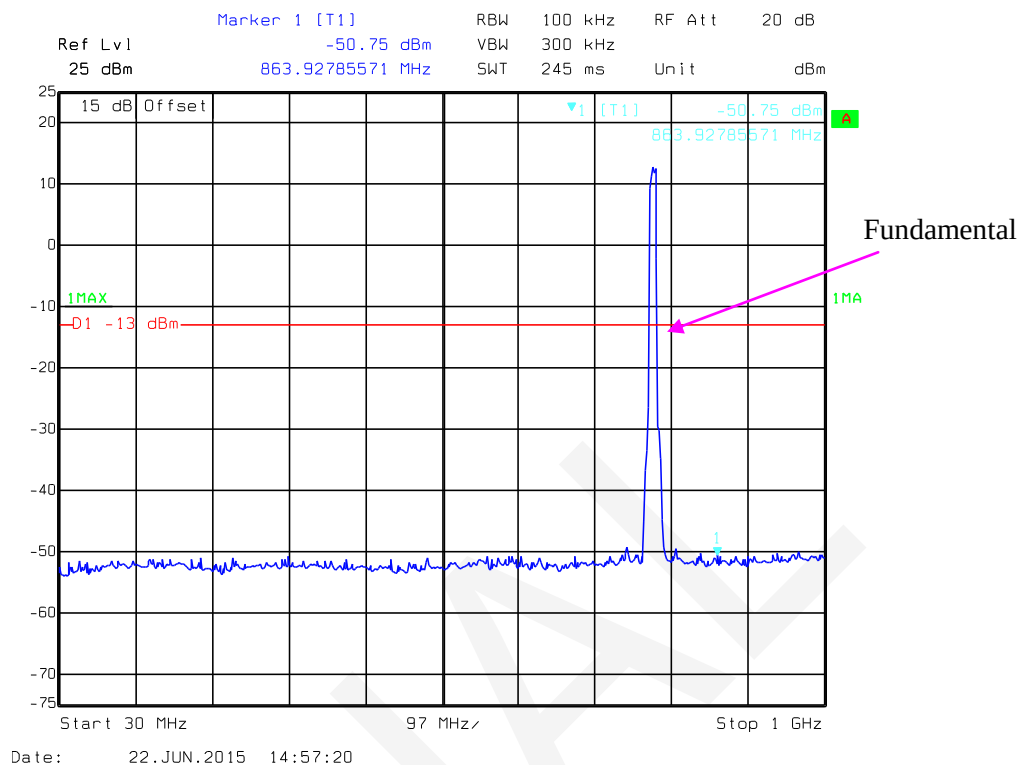

FCC §2.1053, §22.917 & §24.238 & §27.53- SPURIOUS RADIATED EMISSIONS

Applicable Standard

FCC § 2.1053, §22.917, § 24.238 and § 27.53.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = $10 \lg (\text{TXpwr in Watts}/0.001)$ – the absolute level

Spurious attenuation limit in dB = $43 + 10 \log_{10} (\text{power out in Watts})$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2015-05-09	2016-05-09
Sunol Sciences	Antenna	JB3	A060611-3	2014-07-28	2017-07-27
HP	Amplifier	8447E	2434A02181	2014-09-01	2015-09-01
R&S	Spectrum Analyzer	FSEM	DE31388	2015-05-09	2016-05-09
ETS LINDGREN	Horn Antenna	3115	000 527 35	2012-09-06	2015-09-06
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2015-02-19	2016-02-19
Giga	Signal Generator	1026	320408	2015-05-09	2016-05-09
EMCO	Adjustable Dipole Antenna	3121C	9109-753	N/A	N/A
TDK RF	Horn Antenna	HRN-0118	130 084	2012-09-06	2015-09-06

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	26.4°C
Relative Humidity:	51 %
ATM Pressure:	99.9kPa

The testing was performed by Dean Liu on 2015-06-24.

EUT Operation Mode: Transmitting

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			S.G. Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
BC0 RC1 Middle Channel (836.52MHz)								
1673.040	H	36.32	-64.8	10.6	1.5	-55.7	-13.0	42.7
1673.040	V	37.18	-64.2	10.6	1.5	-55.1	-13.0	42.1
2509.560	H	33.39	-64.6	13.1	2.8	-54.3	-13.0	41.3
2509.560	V	33.62	-63.5	13.1	2.8	-53.2	-13.0	40.2
195.300	H	38.04	-69.9	0.0	0.5	-70.4	-13.0	57.4
195.300	V	38.95	-66.8	0.0	0.5	-67.3	-13.0	54.3
BC0 RC3 Middle Channel (836.52MHz)								
1673.040	H	36.20	-64.9	10.6	1.5	-55.8	-13.0	42.8
1673.040	V	37.02	-64.4	10.6	1.5	-55.3	-13.0	42.3
2509.560	H	33.31	-64.7	13.1	2.8	-54.4	-13.0	41.4
2509.560	V	33.51	-63.6	13.1	2.8	-53.3	-13.0	40.3
195.300	H	38.19	-69.7	0.0	0.5	-70.2	-13.0	57.2
195.300	V	38.89	-66.8	0.0	0.5	-67.3	-13.0	54.3
BC0 RTAP Middle Channel (836.52MHz)								
1673.040	H	36.18	-64.9	10.6	1.5	-55.8	-13.0	42.8
1673.040	V	37.14	-64.2	10.6	1.5	-55.1	-13.0	42.1
2509.560	H	33.38	-64.7	13.1	2.8	-54.4	-13.0	41.4
2509.560	V	33.47	-63.6	13.1	2.8	-53.3	-13.0	40.3
195.300	H	37.96	-70	0.0	0.5	-70.5	-13.0	57.5
195.300	V	38.79	-66.9	0.0	0.5	-67.4	-13.0	54.4

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			S.G. Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
BC1 RC1 Middle Channel (1880MHz)								
3760.000	H	36.26	-58	13.8	2.9	-47.1	-13.0	34.1
3760.000	V	37.07	-56	13.8	2.9	-45.1	-13.0	32.1
5640.000	H	33.27	-58.4	14.0	2.1	-46.5	-13.0	33.5
5640.000	V	33.48	-58.2	14.0	2.1	-46.3	-13.0	33.3
195.300	H	38.08	-69.8	0.0	0.5	-70.3	-13.0	57.3
195.300	V	39.10	-66.6	0.0	0.5	-67.1	-13.0	54.1
BC1 RC3 Middle Channel (1880MHz)								
3760.000	H	36.33	-58	13.8	2.9	-47.1	-13.0	34.1
3760.000	V	36.92	-56.1	13.8	2.9	-45.2	-13.0	32.2
5640.000	H	33.43	-58.3	14.0	2.1	-46.4	-13.0	33.4
5640.000	V	33.62	-58	14.0	2.1	-46.1	-13.0	33.1
195.300	H	38.19	-69.7	0.0	0.5	-70.2	-13.0	57.2
195.300	V	39.00	-66.7	0.0	0.5	-67.2	-13.0	54.2
BC1 RTAP Middle Channel (1880MHz)								
3760.000	H	36.18	-58.1	13.8	2.9	-47.2	-13.0	34.2
3760.000	V	37.13	-55.9	13.8	2.9	-45.0	-13.0	32.0
5640.000	H	33.30	-58.4	14.0	2.1	-46.5	-13.0	33.5
5640.000	V	33.49	-58.2	14.0	2.1	-46.3	-13.0	33.3
195.300	H	37.81	-70.1	0.0	0.5	-70.6	-13.0	57.6
195.300	V	38.69	-67	0.0	0.5	-67.5	-13.0	54.5

LTE Band 4

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			S.G. Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK 20MHz Bandwidth Middle Channel (1732.5MHz)								
3465.000	H	36.05	-60.9	13.9	1.9	-48.9	-13.0	35.9
3465.000	V	36.91	-59.3	13.9	1.9	-47.3	-13.0	34.3
5197.500	H	33.10	-57.9	14.0	2.3	-46.2	-13.0	33.2
5197.500	V	33.28	-59.3	14.0	2.3	-47.6	-13.0	34.6
195.300	H	37.40	-70.5	0.0	0.5	-71.0	-13.0	58.0
195.300	V	38.36	-67.4	0.0	0.5	-67.9	-13.0	54.9
16-QAM 20MHz Bandwidth Middle Channel (1732.5MHz)								
3465.000	H	36.26	-60.7	13.9	1.9	-48.7	-13.0	35.7
3465.000	V	37.06	-59.1	13.9	1.9	-47.1	-13.0	34.1
5197.500	H	33.28	-57.7	14.0	2.3	-46.0	-13.0	33.0
5197.500	V	33.54	-59	14.0	2.3	-47.3	-13.0	34.3
195.300	H	38.03	-69.9	0.0	0.5	-70.4	-13.0	57.4
195.300	V	38.79	-66.9	0.0	0.5	-67.4	-13.0	54.4

LTE Band 13

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			S.G. Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK 10MHz Bandwidth Middle Channel (782MHz)								
1564.000	H	36.17	-65.1	9.9	1.4	-56.6	-13.0	43.6
1564.000	V	37.09	-64.8	9.9	1.4	-56.3	-13.0	43.3
2346.000	H	33.50	-63.1	11.7	2	-53.4	-13.0	40.4
2346.000	V	34.48	-61.3	11.7	2	-51.6	-13.0	38.6
195.300	H	38.98	-68.9	0.0	0.5	-69.4	-13.0	56.4
195.300	V	39.87	-65.9	0.0	0.5	-66.4	-13.0	53.4
16-QAM 10MHz Bandwidth Middle Channel (782MHz)								
1564.000	H	36.58	-64.7	9.9	1.4	-56.2	-13.0	43.2
1564.000	V	37.43	-64.5	9.9	1.4	-56.0	-13.0	43.0
2346.000	H	33.76	-62.8	11.7	2	-53.1	-13.0	40.1
2346.000	V	34.60	-61.2	11.7	2	-51.5	-13.0	38.5
195.300	H	38.61	-69.3	0.0	0.5	-69.8	-13.0	56.8
195.300	V	39.42	-66.3	0.0	0.5	-66.8	-13.0	53.8

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = SG Level - Cable loss + Antenna Gain
- 3) Margin = Limit-Absolute Level

FCC §22.917(a) & §24.238(a) & §27.53(h)- BAND EDGES

Applicable Standard

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §27.53 (h), AWS emission limits—(1) General protection levels. Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency.

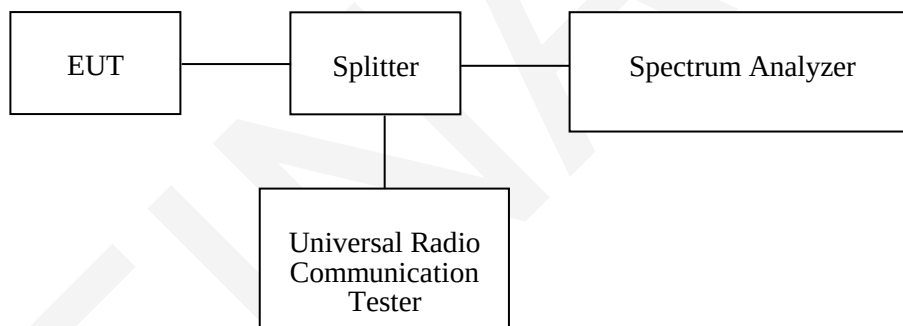

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2015-05-09	2016-05-09

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	25.3~26.1°C
Relative Humidity:	53~57 %
ATM Pressure:	99.7~100.3 kPa


The testing was performed by Dean Liu from 2015-06-22 to 2015-06-29.

Test Mode: Transmitting


Test Result: Compliant. Please refer to the following plots.

FINAL


BC0-RC1, Left Band Edge

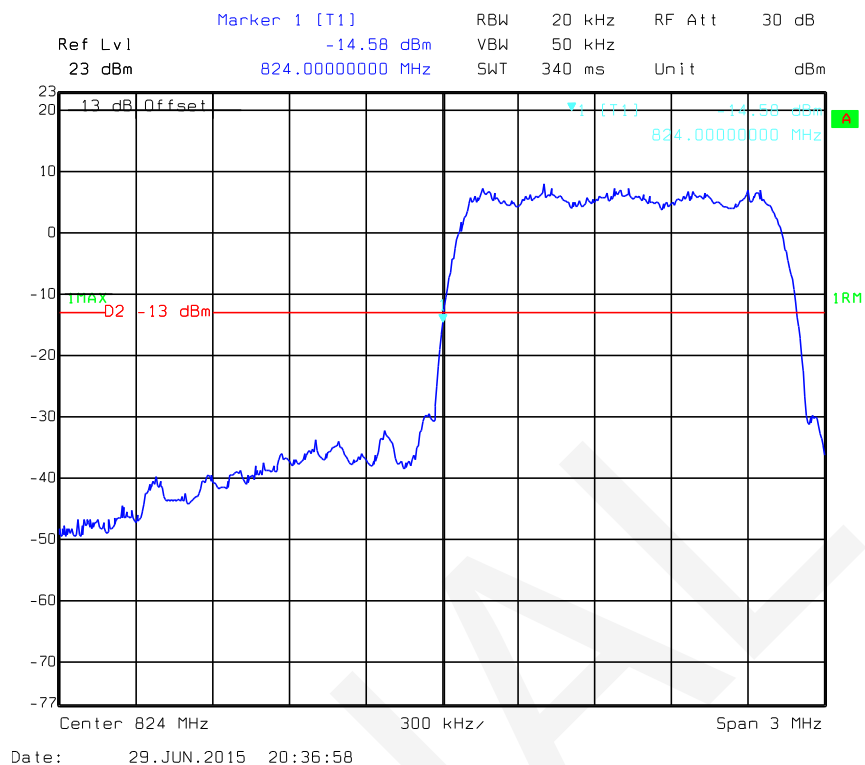


BC0-RC1, Right Band Edge

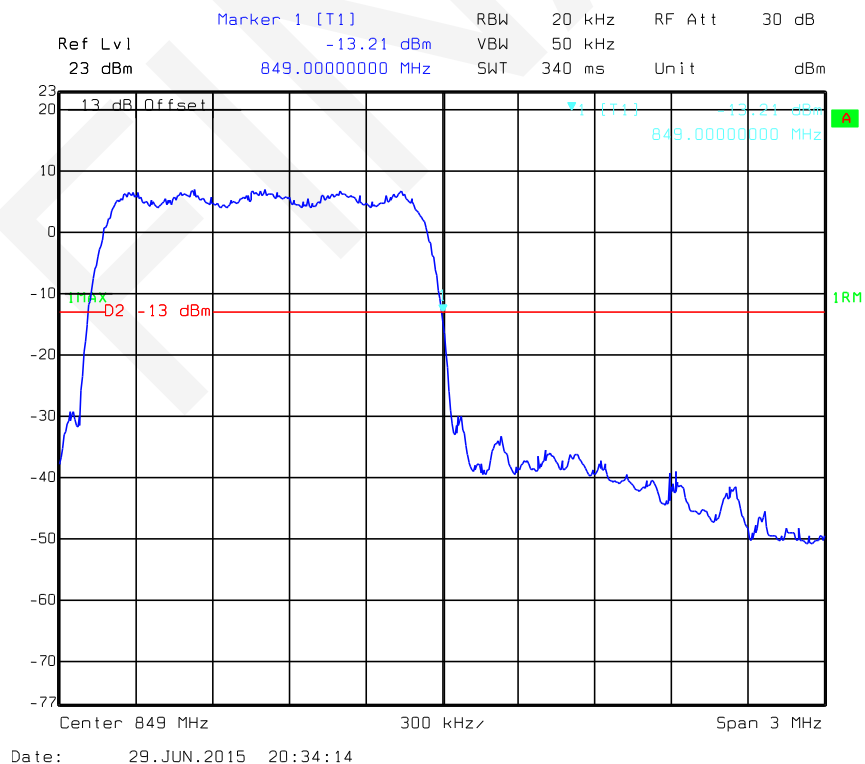


BC0-RC3, Left Band Edge

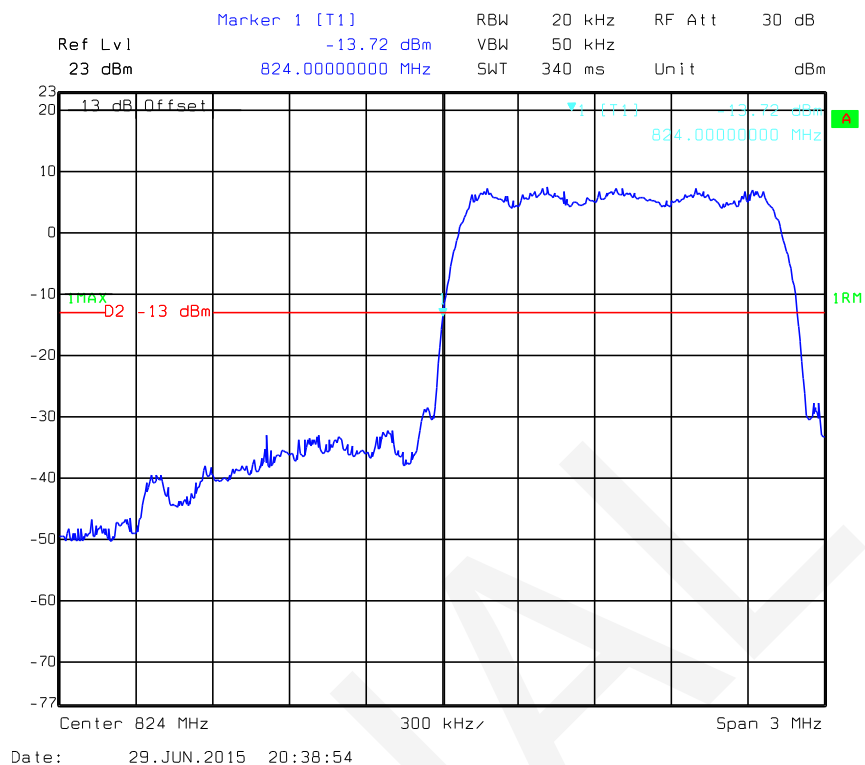


BC0-RC3, Right Band Edge

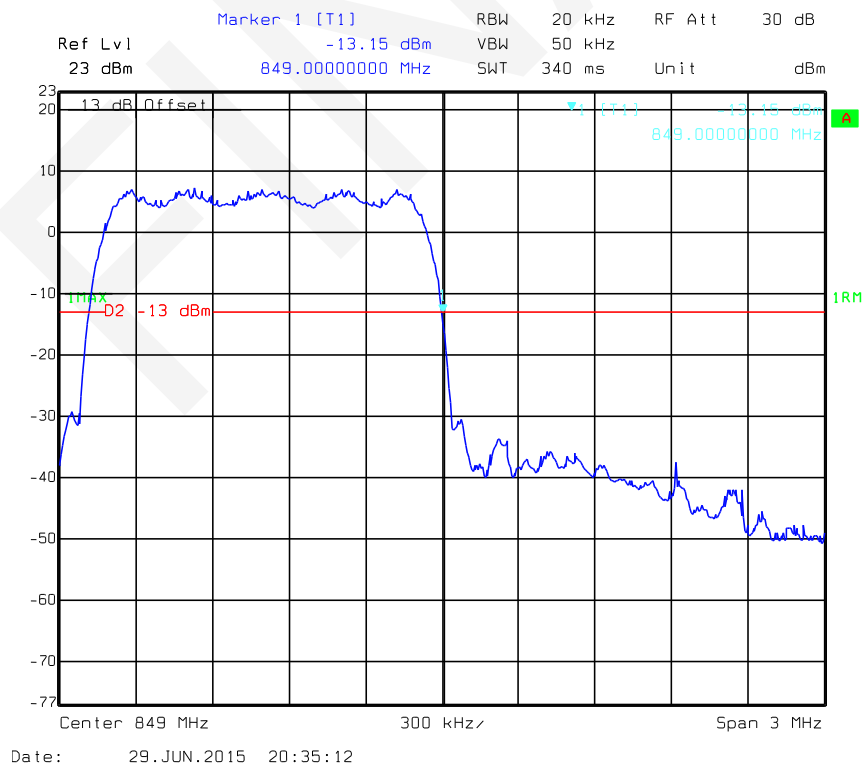


BC0-Rel. A, Left Band Edge

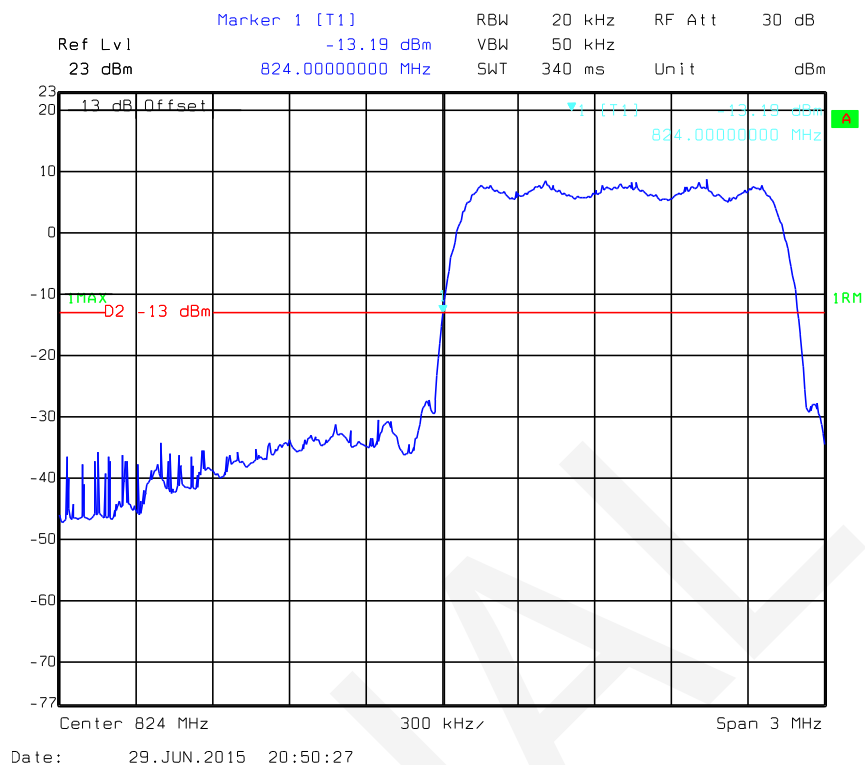


BC0-Rel. A, Right Band Edge

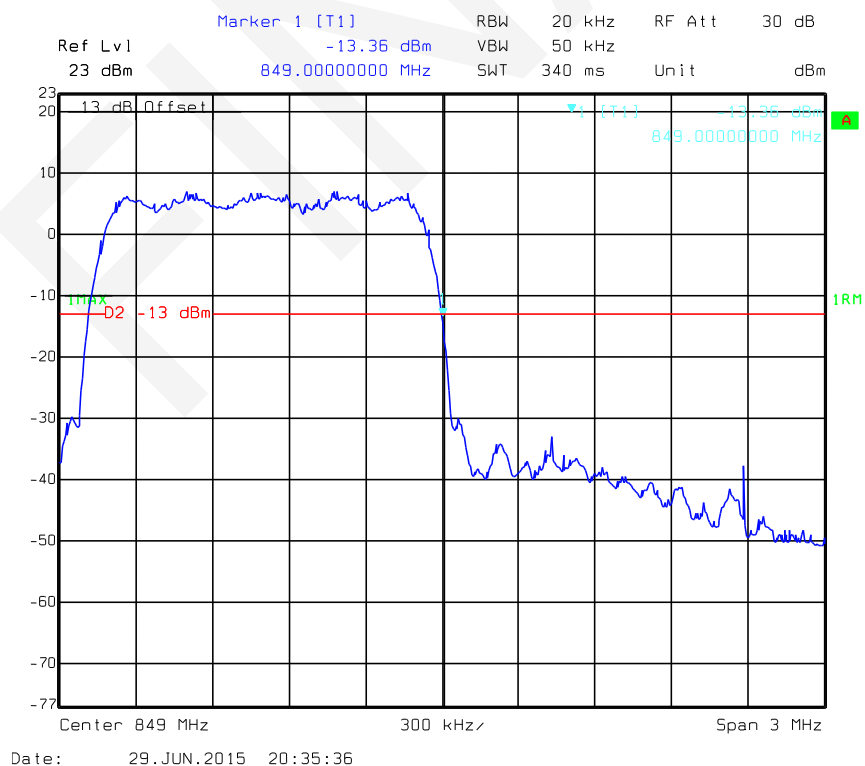

BC1-RC1, Left Band Edge

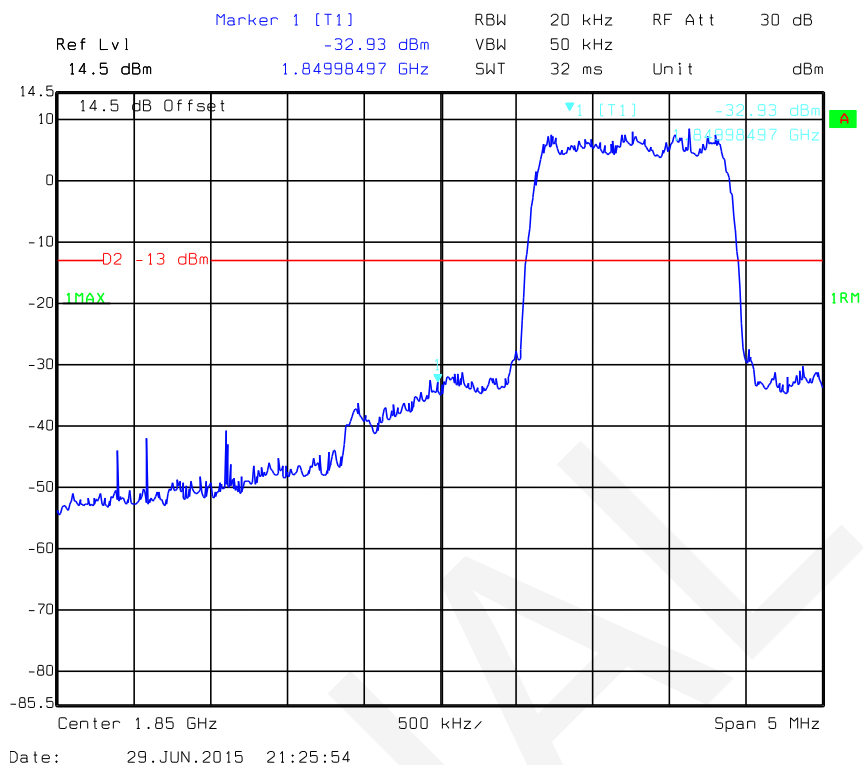

BC1-RC1, Right Band Edge

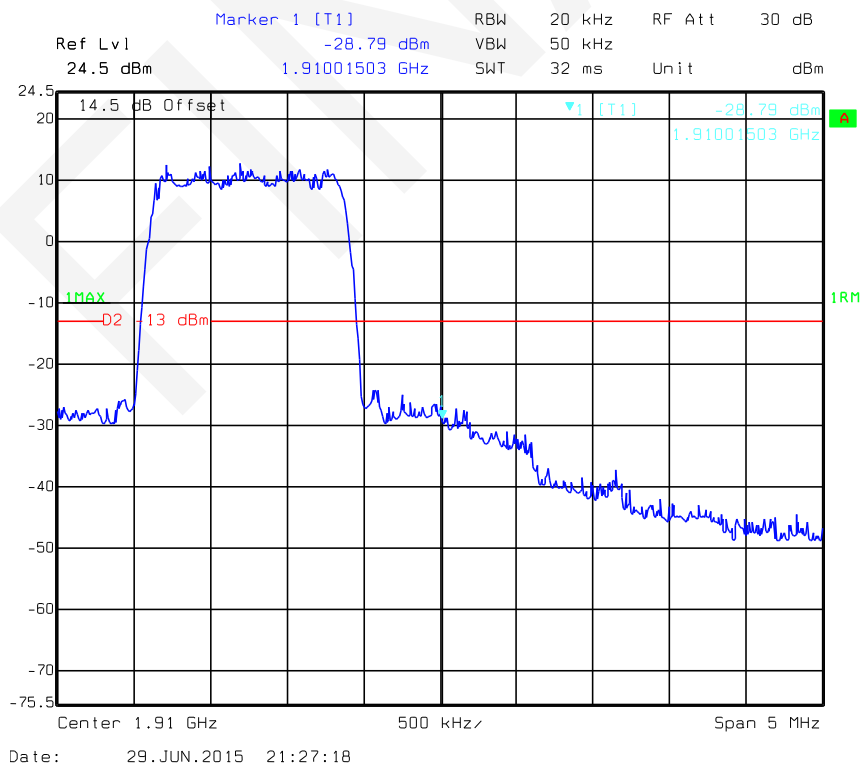

Marker 1 [T1]

Ref Lvl	-32.97 dBm	RBW	20 kHz	RF Att	30 dB
14.5 dBm	1.84995491 GHz	VBW	50 kHz	Unit	dBm
		SWT	32 ms		

14.5 dB Offset

▼1 [T1] -32.97 dBm

1.84995491 GHz

D2 -13 dBm

1MAX

1RM

Center 1.85 GHz

500 kHz

Span 5 MHz

Date: 29.JUN.2015 21:26:28

Ref Lvl 24.5 dBm

Marker 1 [T1] -28.65 dBm

RBW 20 kHz

VBW 50 kHz

SWT 32 ms

RF Att 30 dB

Unit dBm

14.5 dB Offset

1MAX

D2

13 dBm

1 [T1]

-28.65 dBm

1.91010521 GHz

1MIN


Center 1.91 GHz

500 kHz


Span 5 MHz



Date: 29.JUN.2015 21:27:43

BC1-Rel.A, Left Band Edge

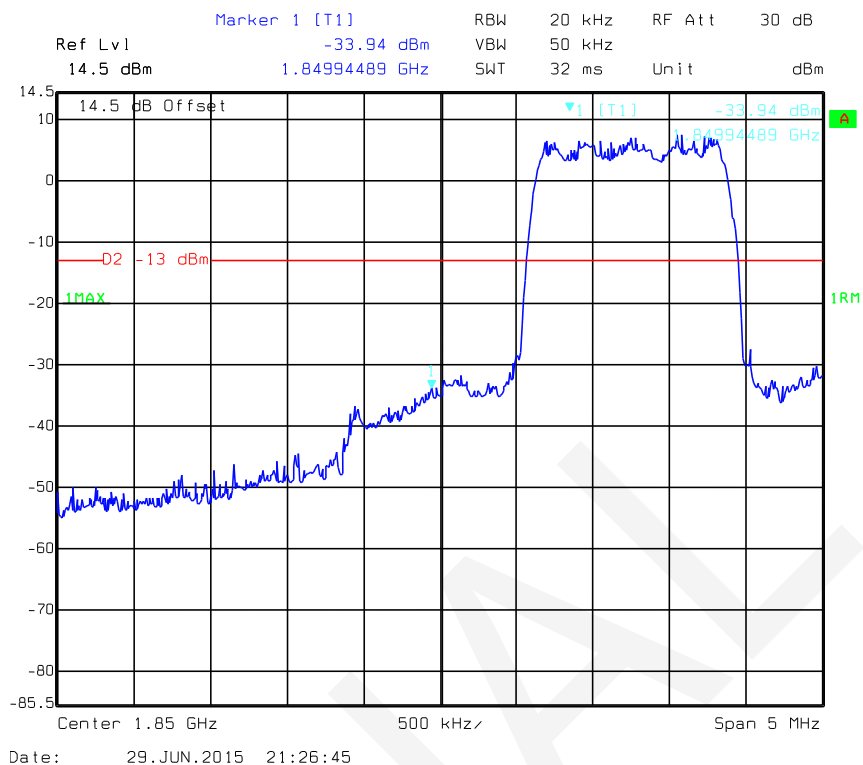


BC1-Rel.A, Right Band Edge

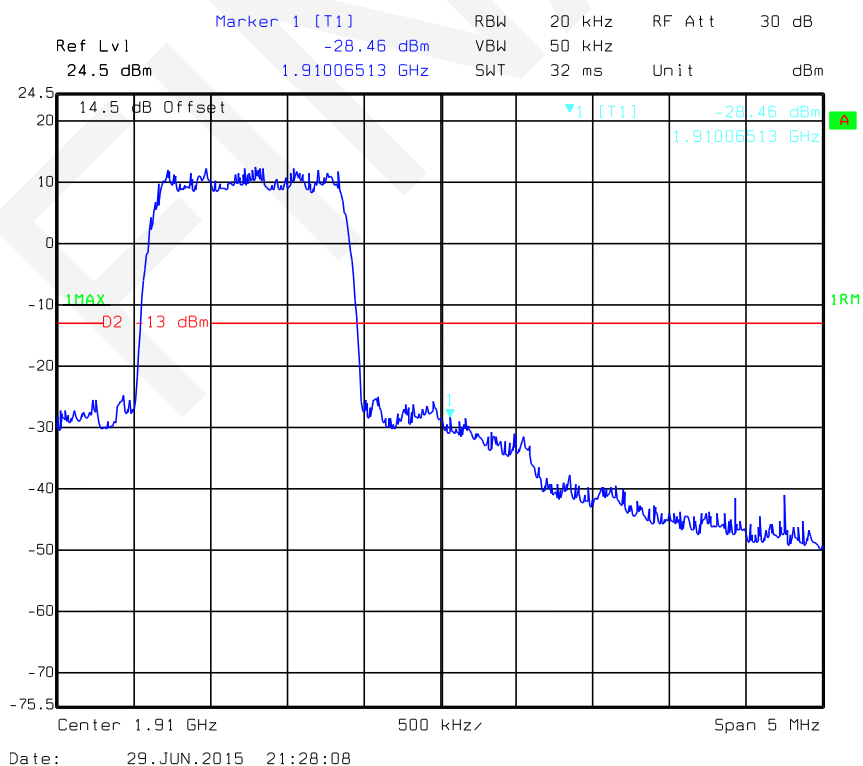


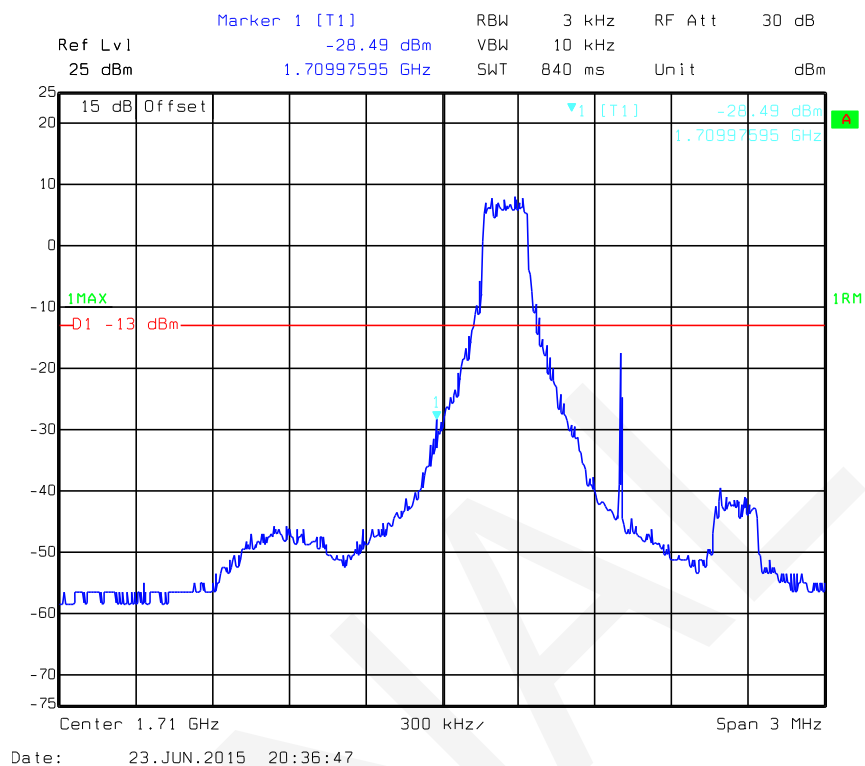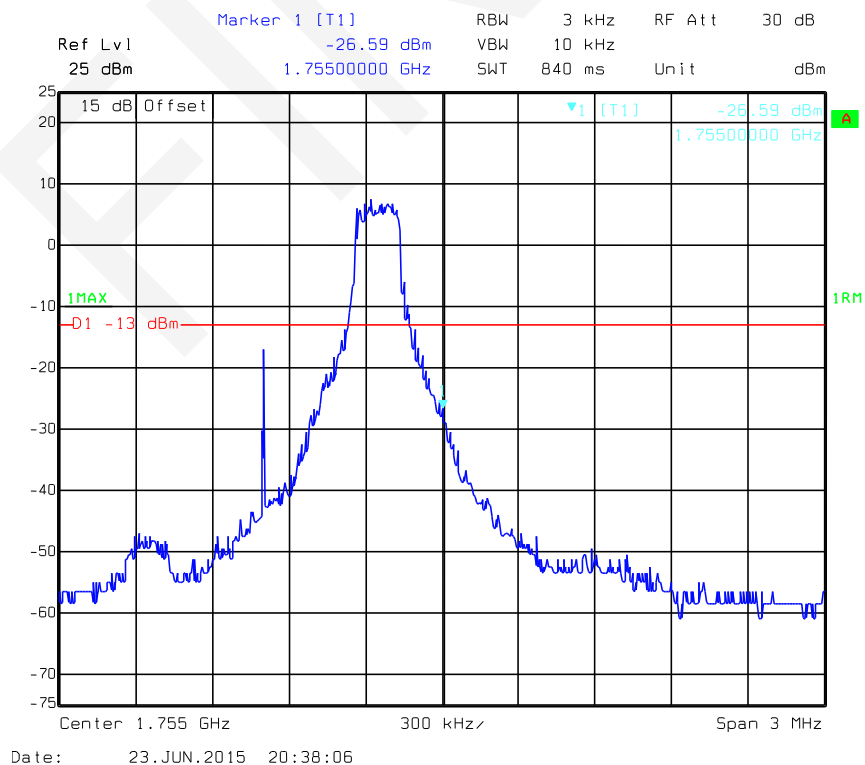LTE Band 4:**QPSK_1.4MHz_1RB_Left****QPSK_1.4MHz_1RB_Right**

QPSK_1.4MHz_FULL RB_Left

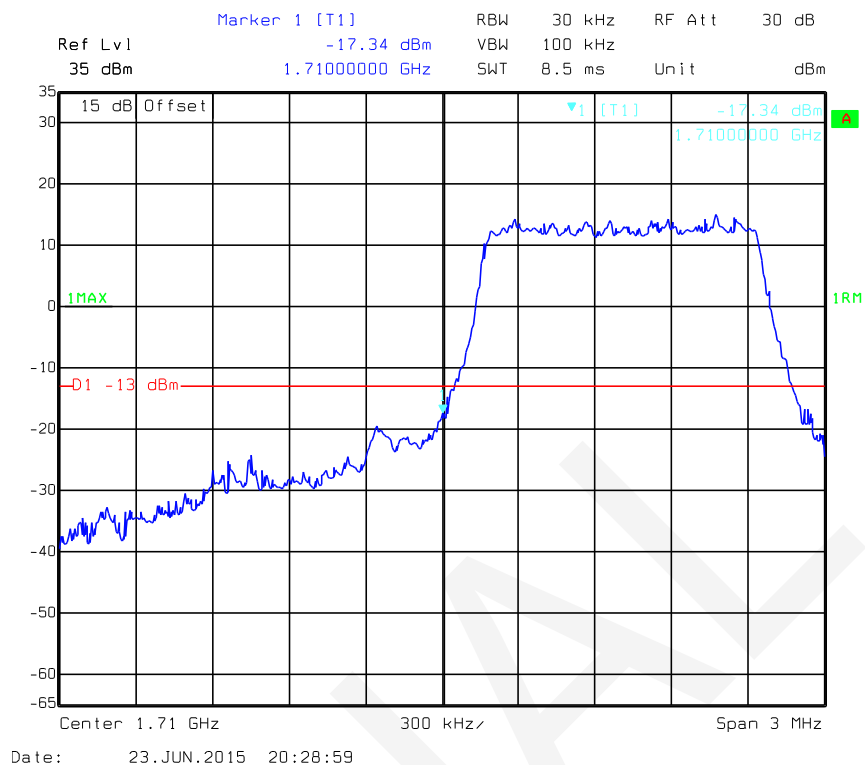

QPSK_1.4MHz_FULL RB_Right

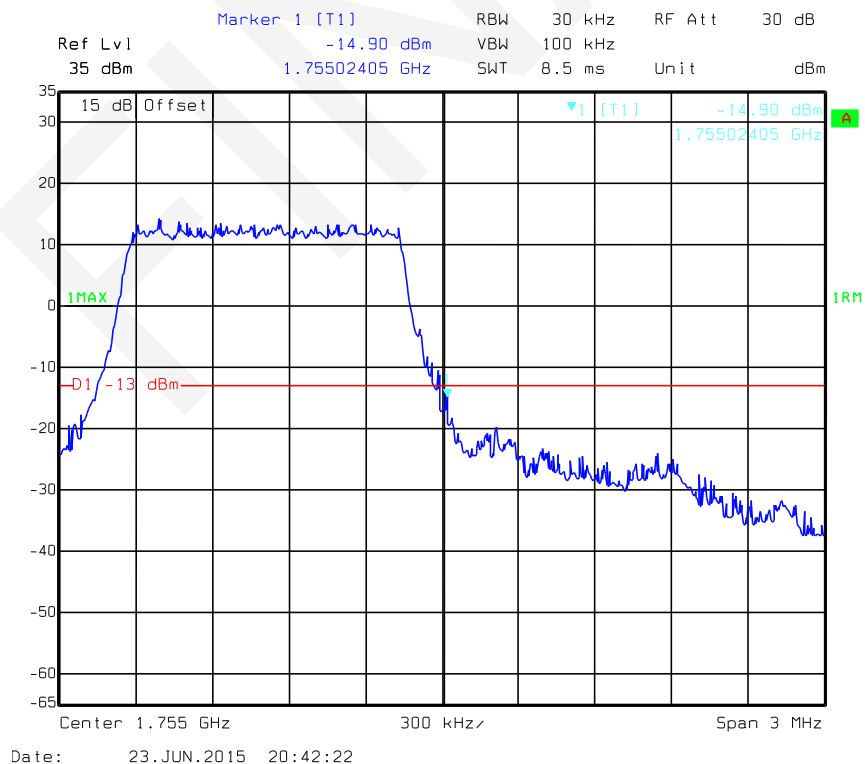

Marker 1 [T1]

Ref Lvl 15 dBm

RBW 3 kHz

VBW 10 kHz

SWT 2.8 s

RF Att 30 dB

Unit dBm

15 dB Offset

▼1 [T1] -29.11 dBm

1.71000000 GHz

D1 -13 dBm

1MAX

Center 1.71 GHz

1 MHz

Span 10 MHz

Date: 24.JUN.2015 15:01:44

Ref Lvl 15 dBm

Marker 1 [T1] -28.74 dBm

RBW 3 kHz RF Att 30 dB

VBW 10 kHz

SWT 2.8 s Unit dBm

15 dB Offset

▼1 [T1] -28.74 dBm

1.75500000 GHz

-01 -13 dBm


1MAX

1RM


Center 1.755 GHz 1 MHz/ Span 10 MHz

Date: 23.JUN.2015 20:57:44


QPSK_3MHz_FULL RB_Left

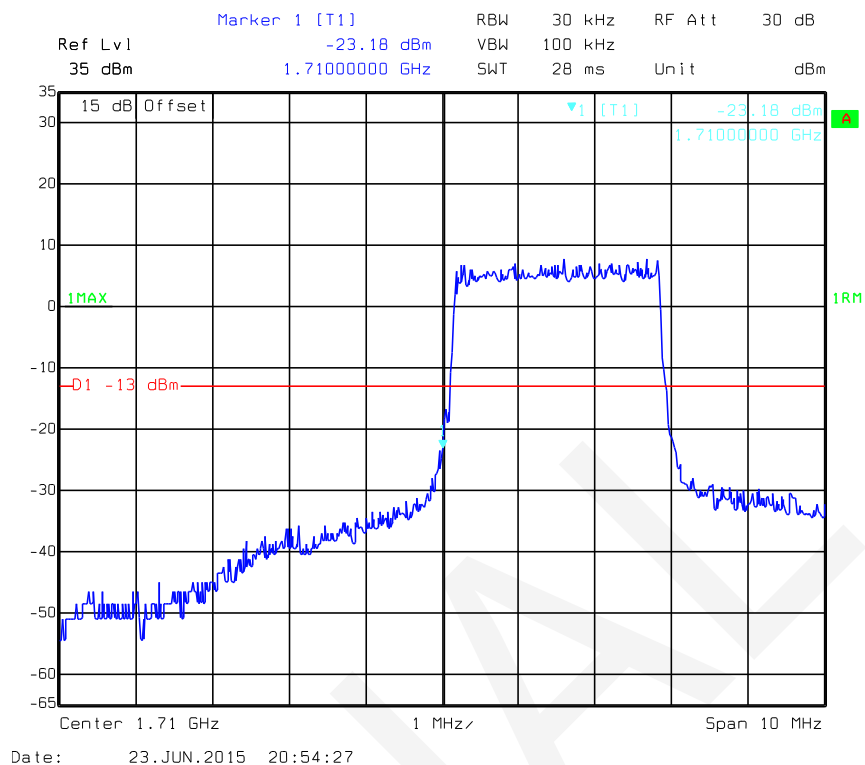


QPSK_3MHz_FULL RB_Right

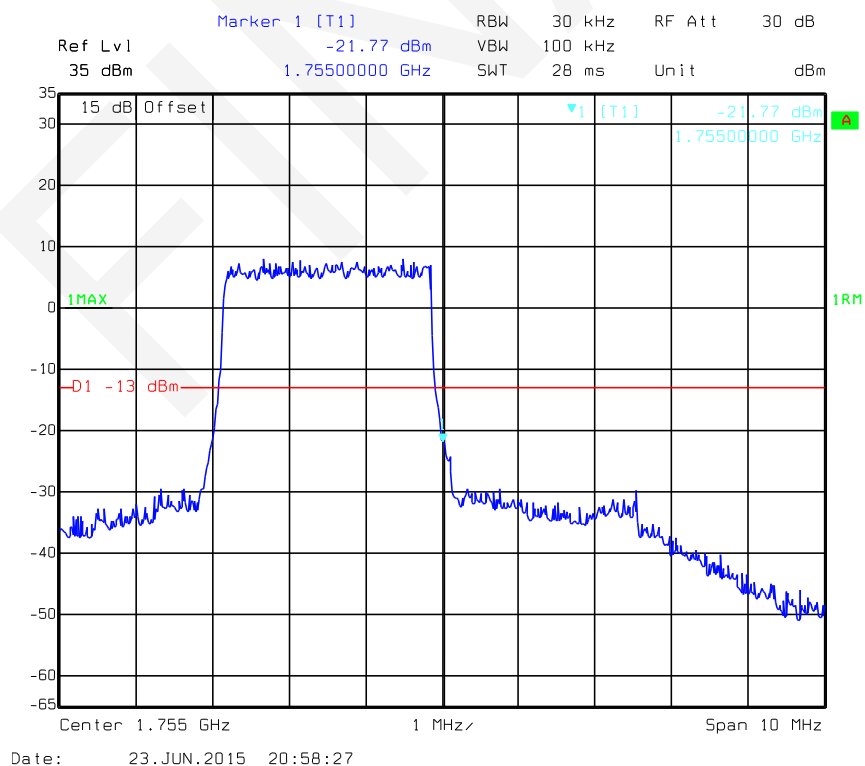


QPSK_5MHz_1RB_Left

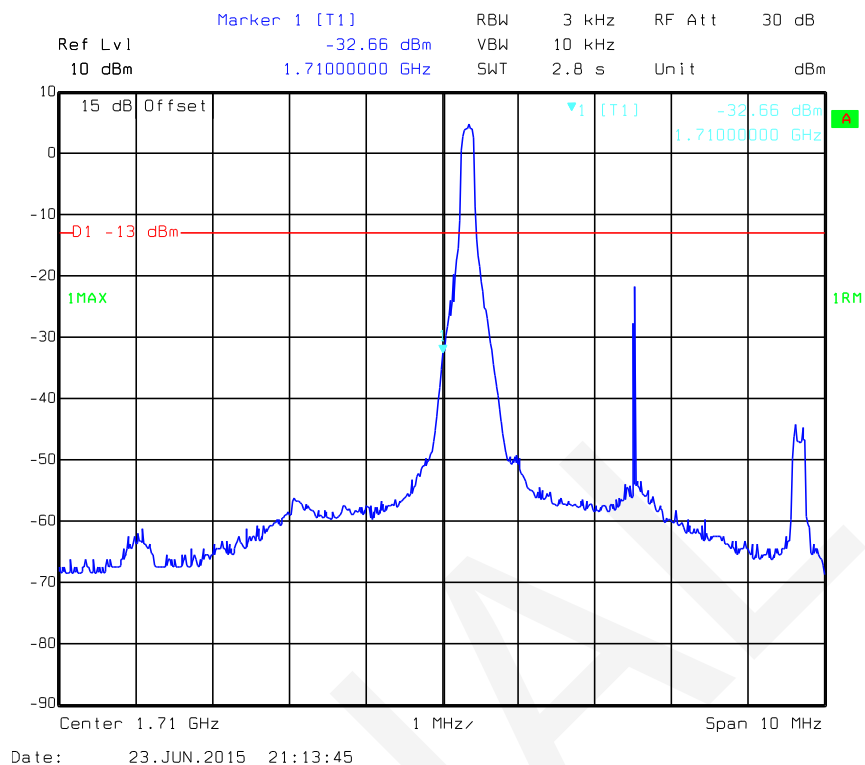


QPSK_5MHz_1RB_Right

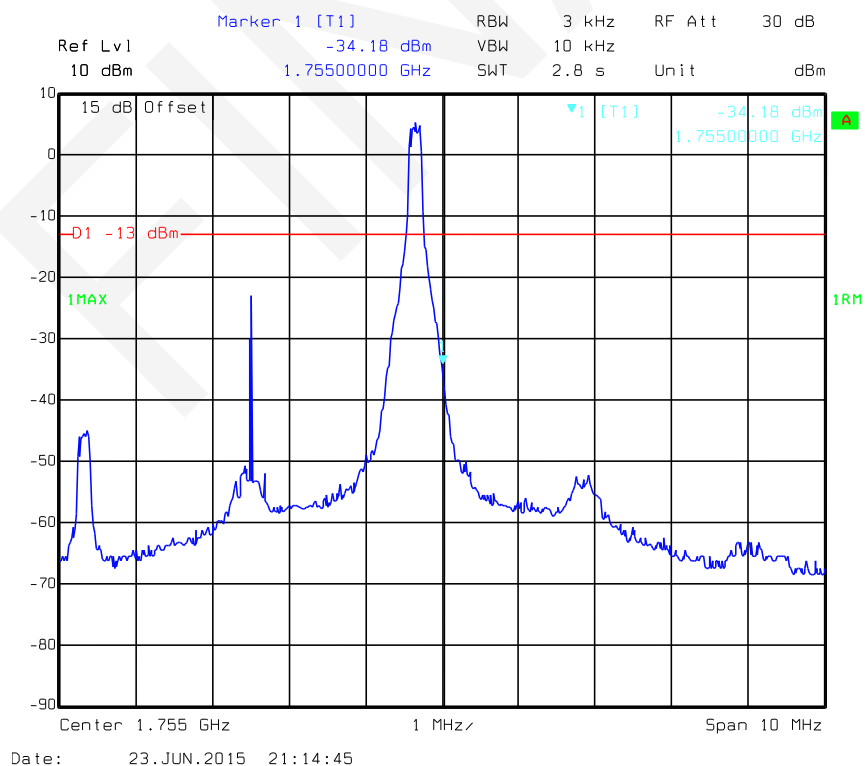


QPSK_5MHz_FULL RB_Left

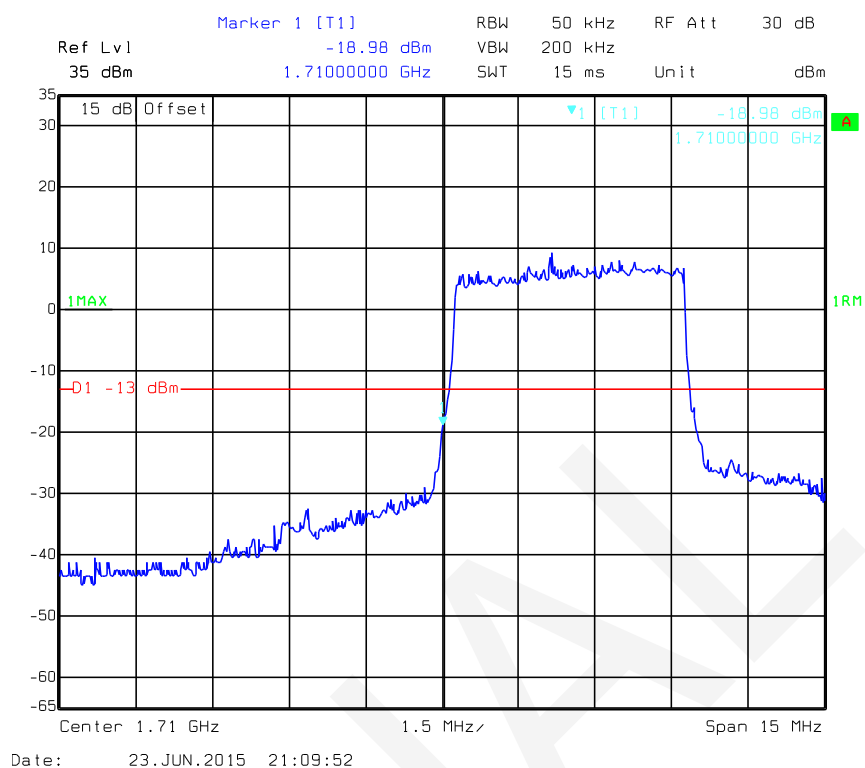


QPSK_5MHz_FULL RB_Right

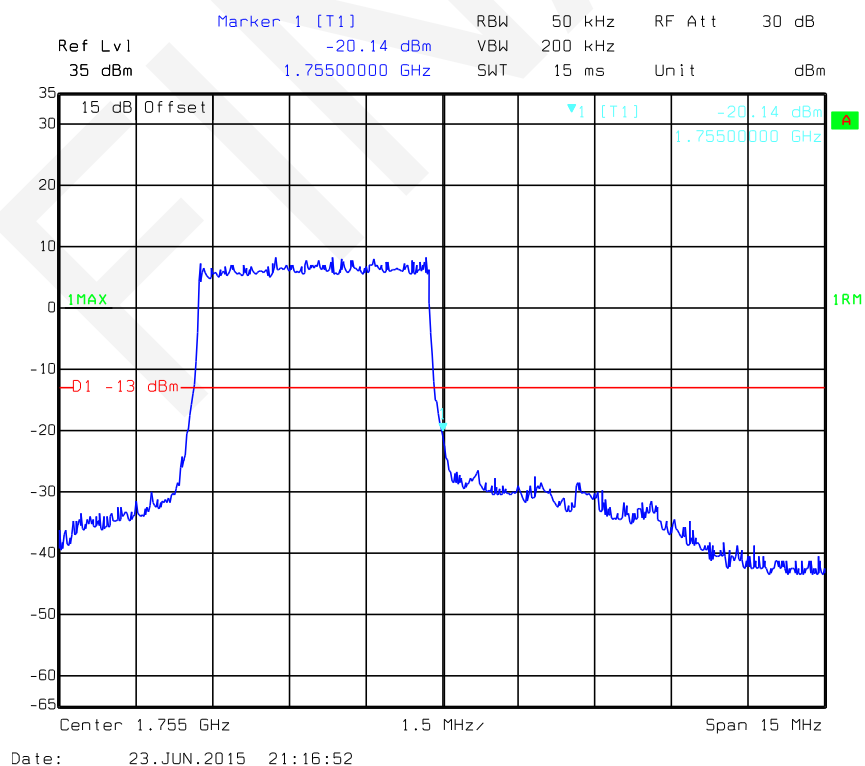


QPSK_10MHz_1RB_Left

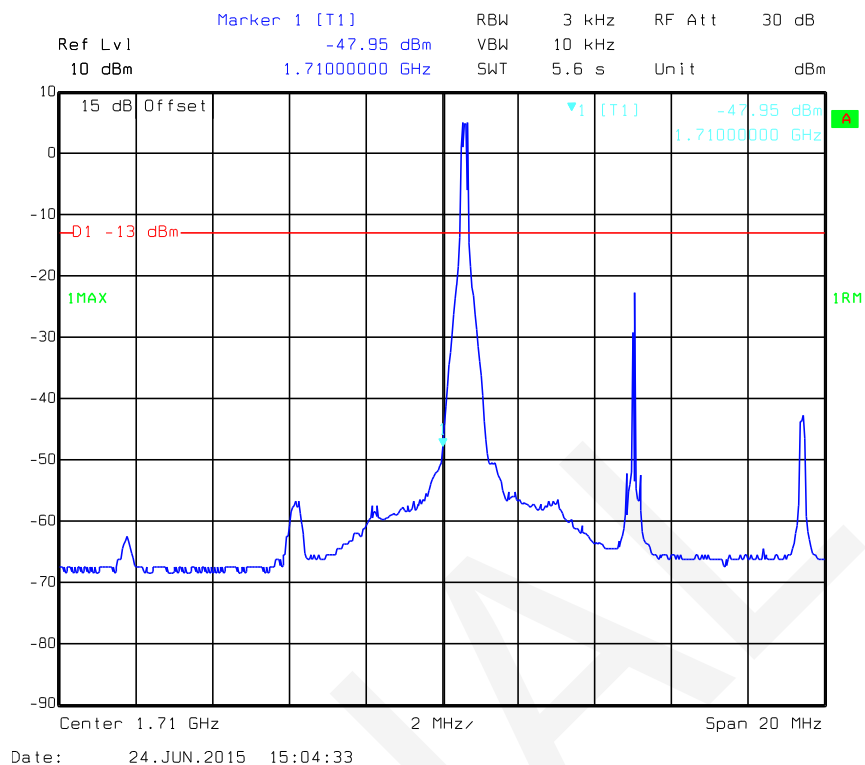


QPSK_10MHz_1RB_Right

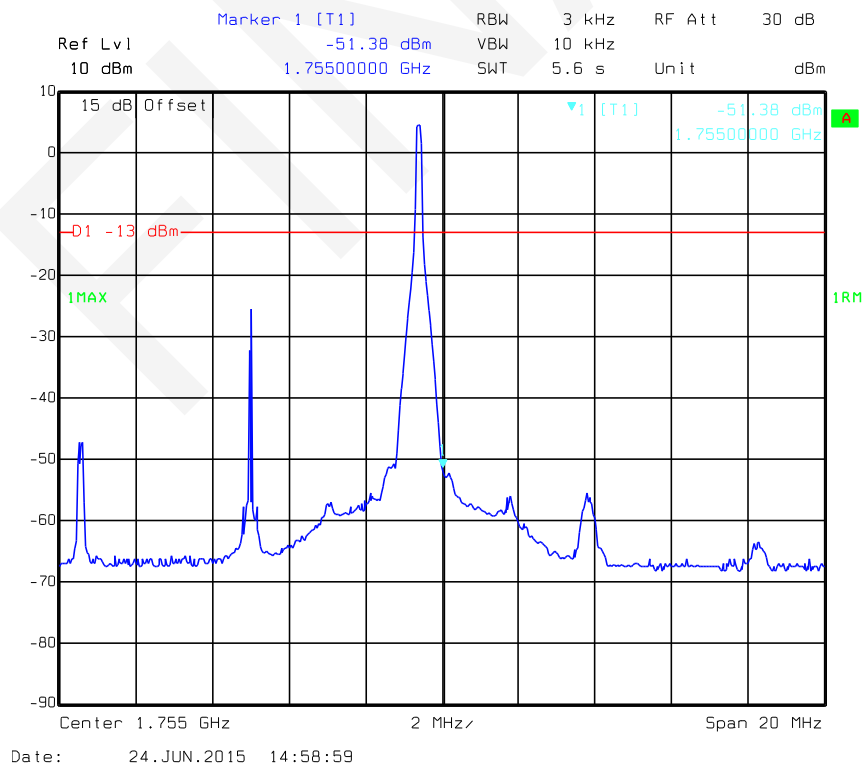


QPSK_10MHz_FULL RB_Left

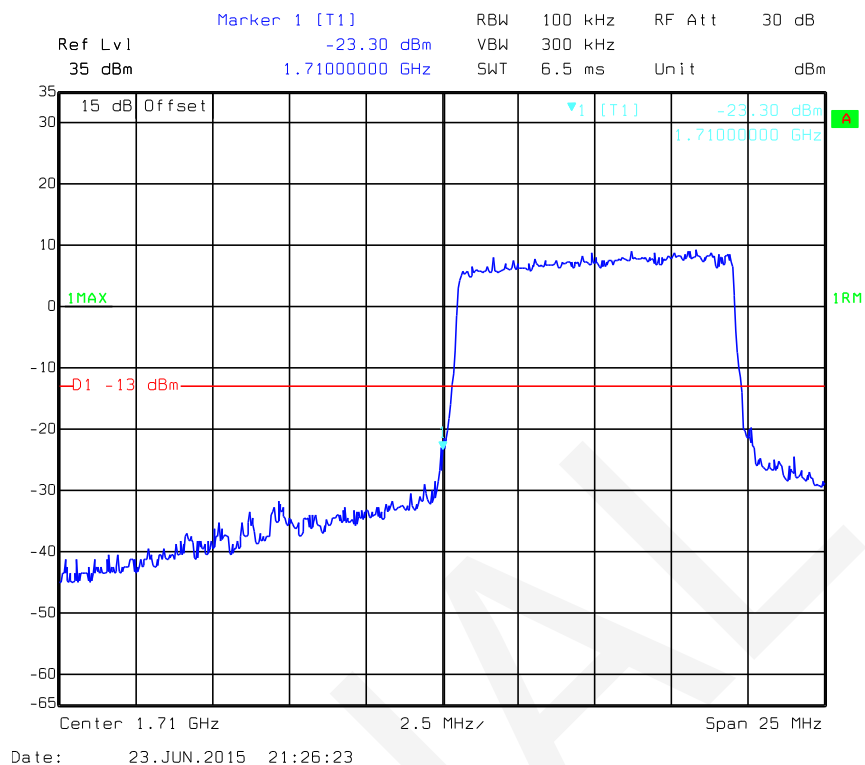


QPSK_10MHz_FULL RB_Right

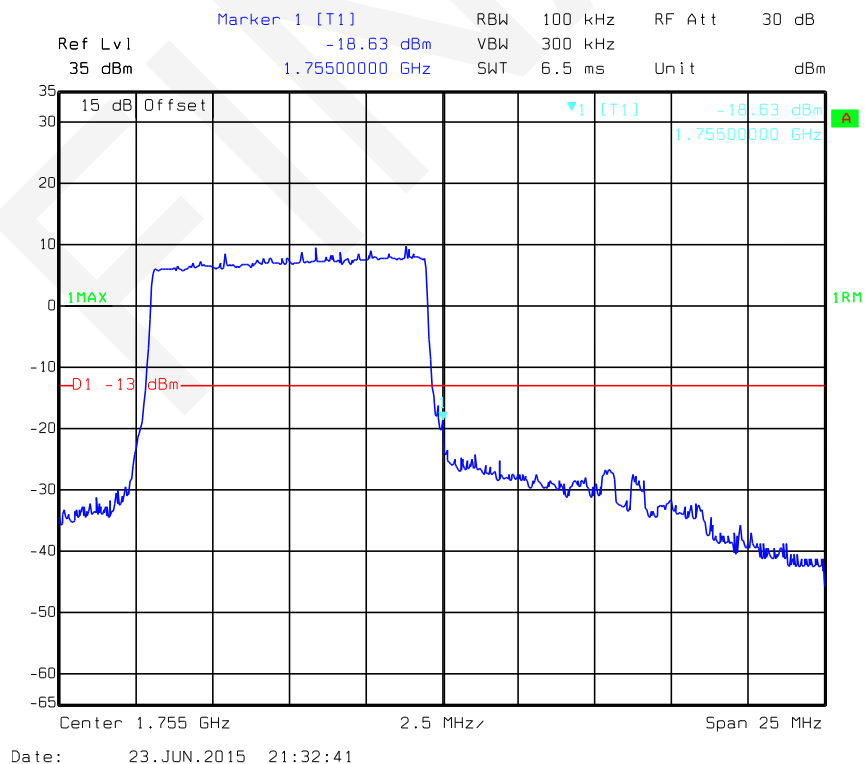


QPSK_15MHz_1RB_Left

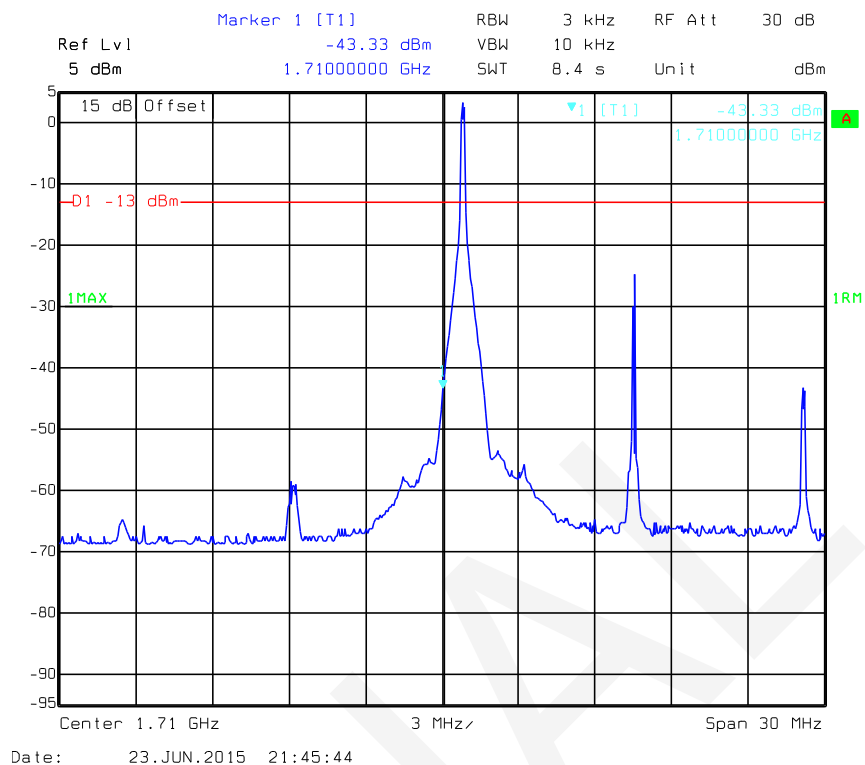


QPSK_15MHz_1RB_Right

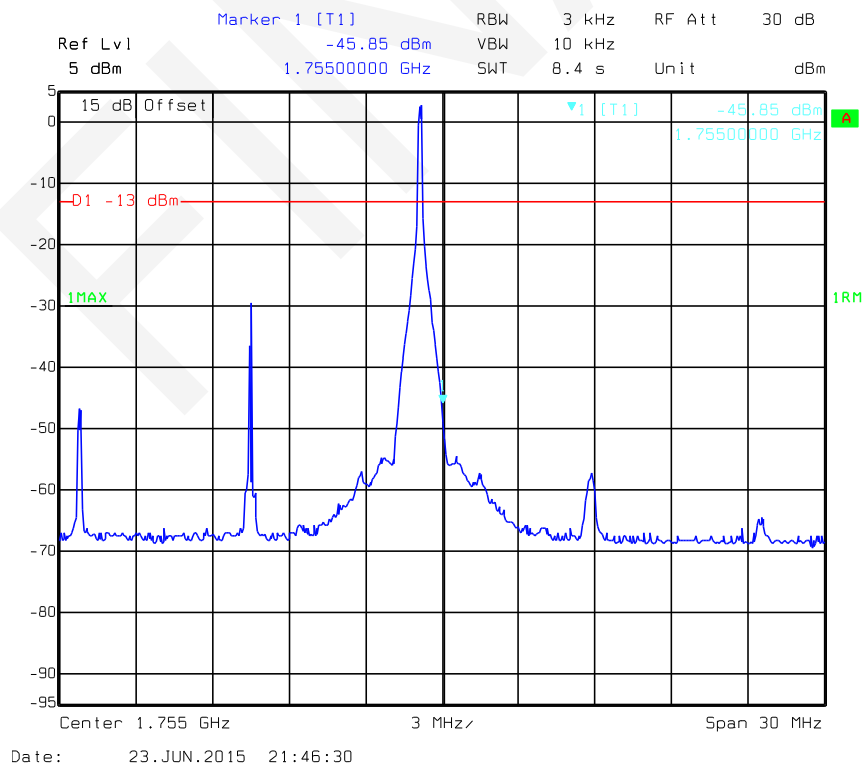


QPSK_15MHz_FULL RB_Left

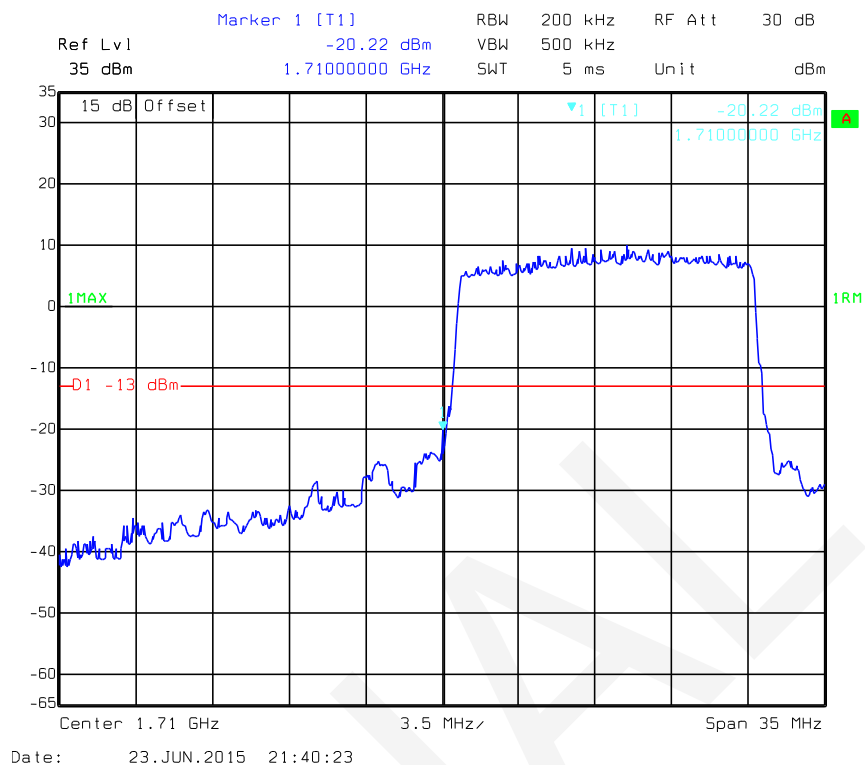


QPSK_15MHz_FULL RB_Right

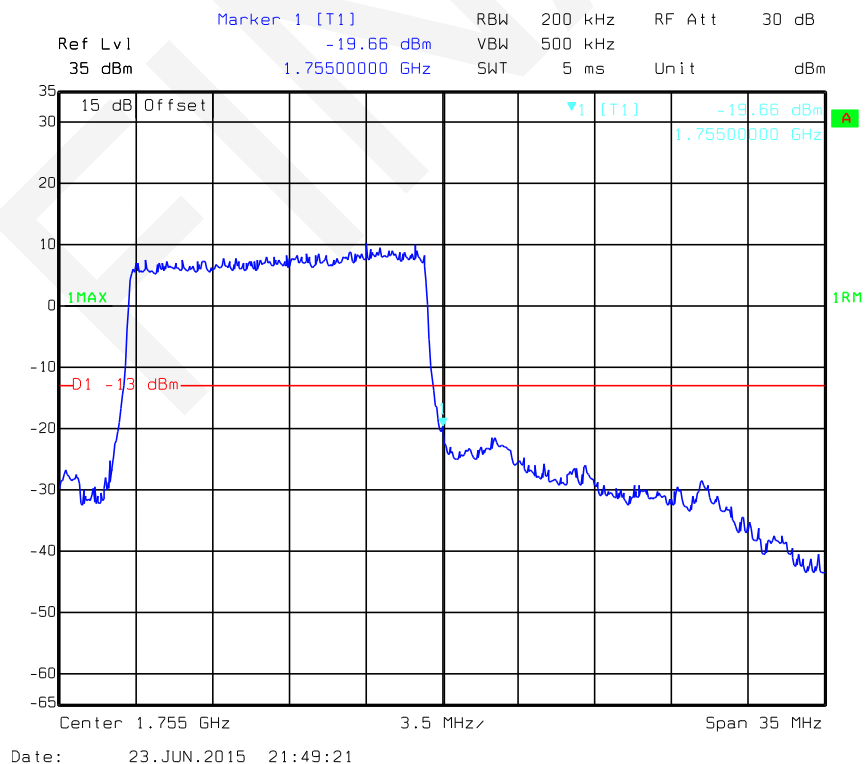


QPSK_20MHz_1RB_Left

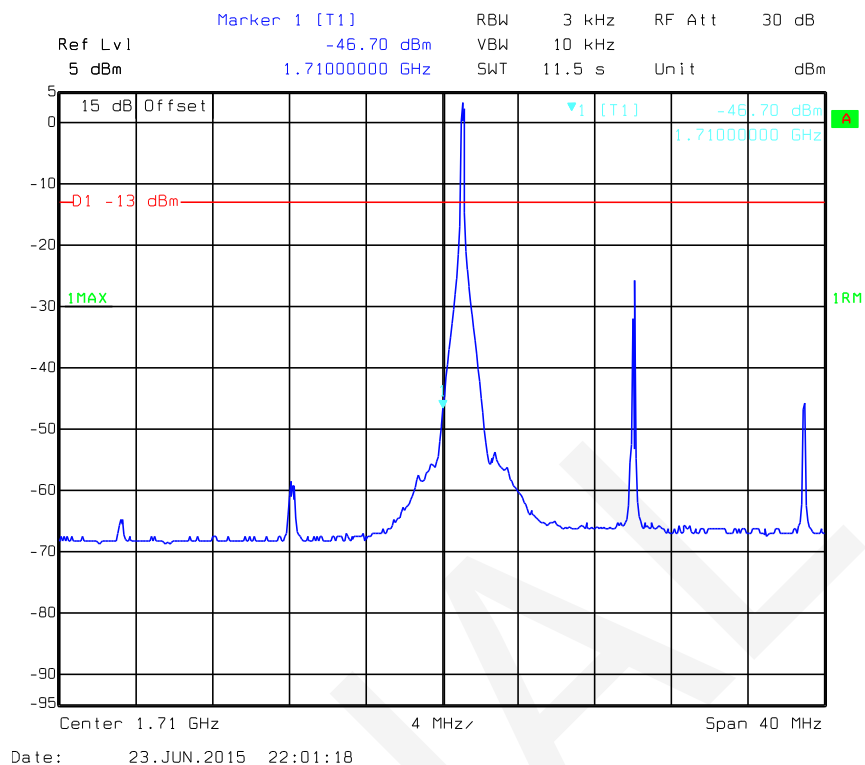


QPSK_10MHz_1RB_Right

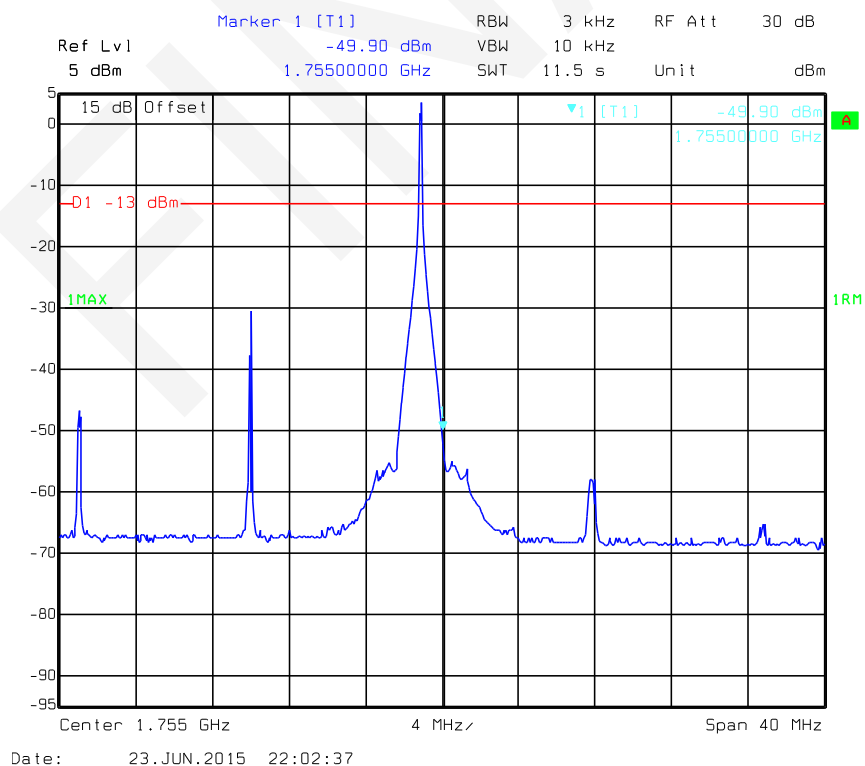


QPSK_20MHz_FULL RB_Left

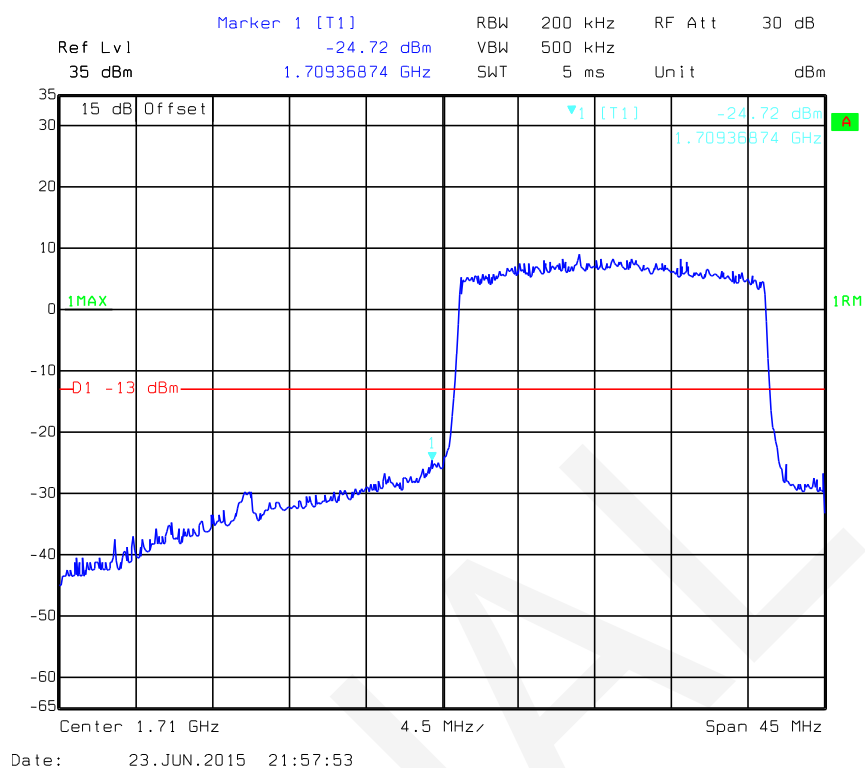


QPSK_20MHz_FULL RB_Right

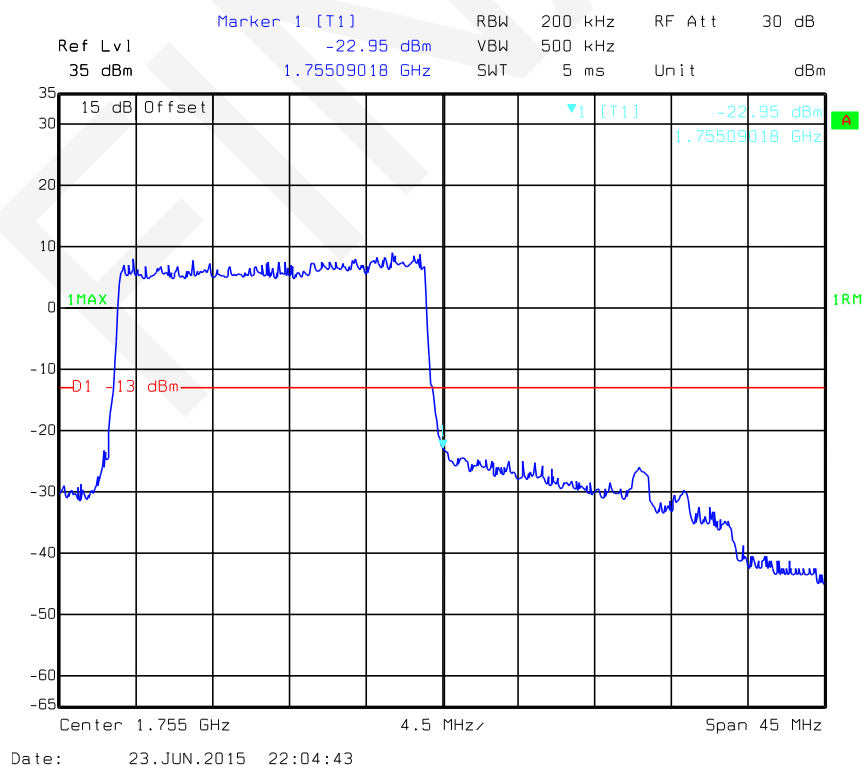


16QAM_1.4MHz_1RB_Left

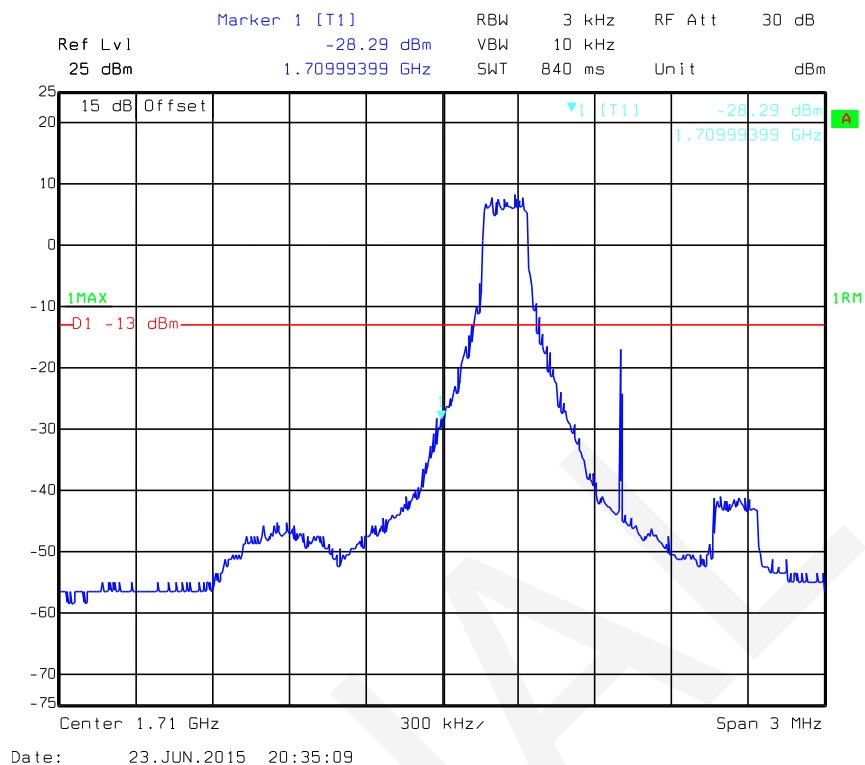


16QAM_1.4MHz_1RB_Right

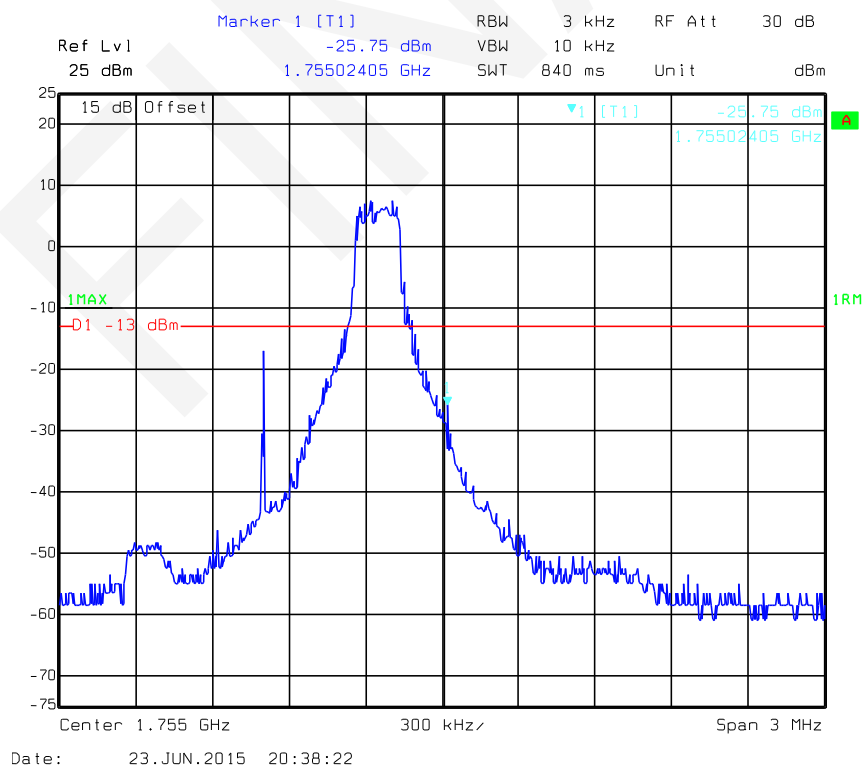


16QAM_1.4MHz_FULL RB_Left

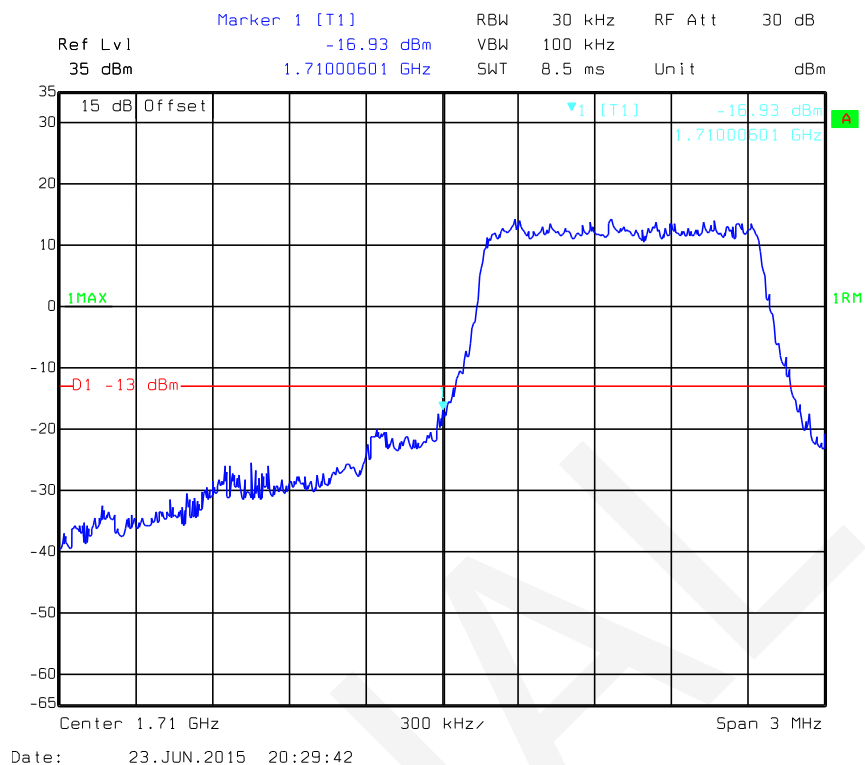


16QAM_1.4MHz_FULL RB_Right

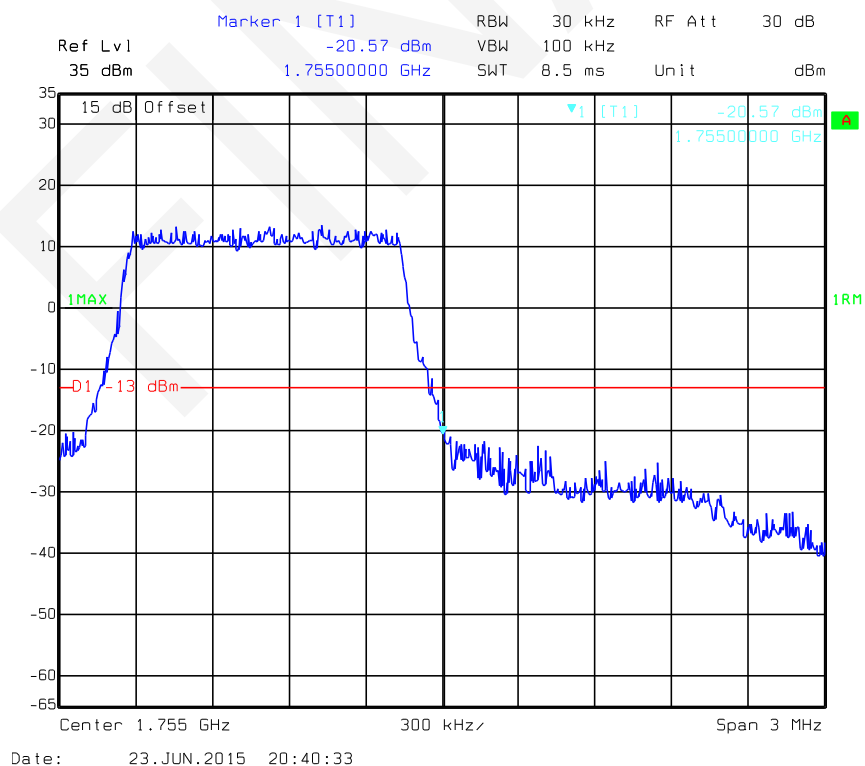


16QAMHz_3MHz_RB_Left

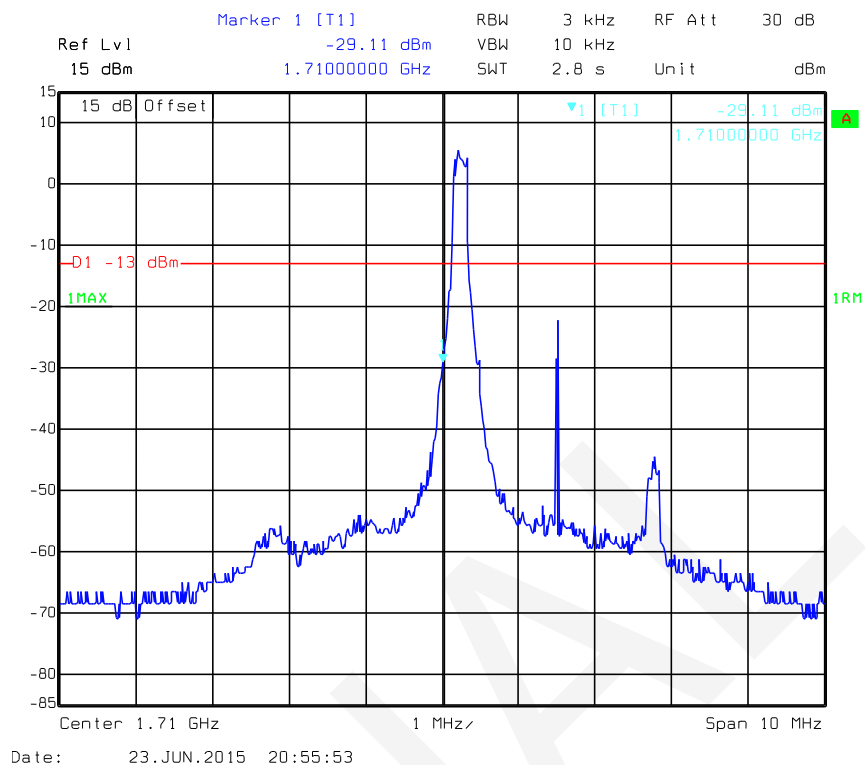


16QAMHz_3MHz_RB_Right

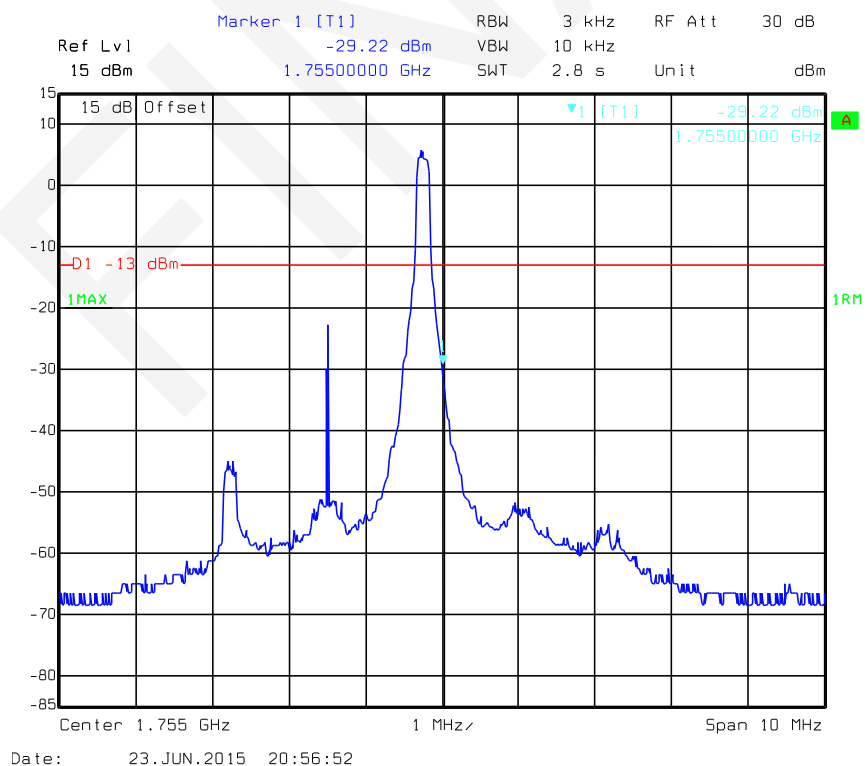


16QAM_3MHz_FULL RB_Left

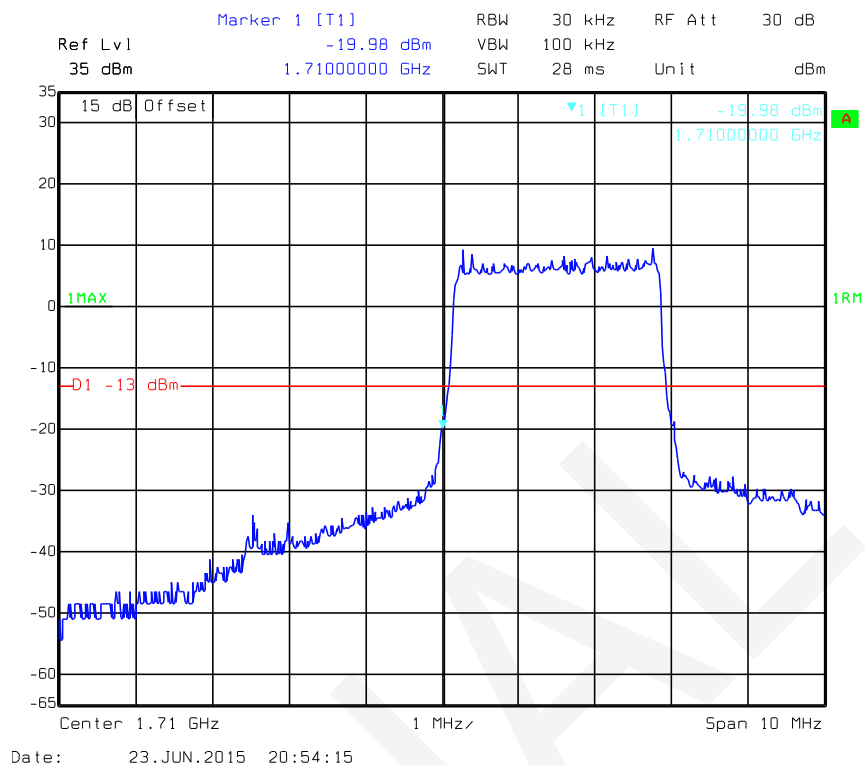


16QAM_3M_FULL RB_Right

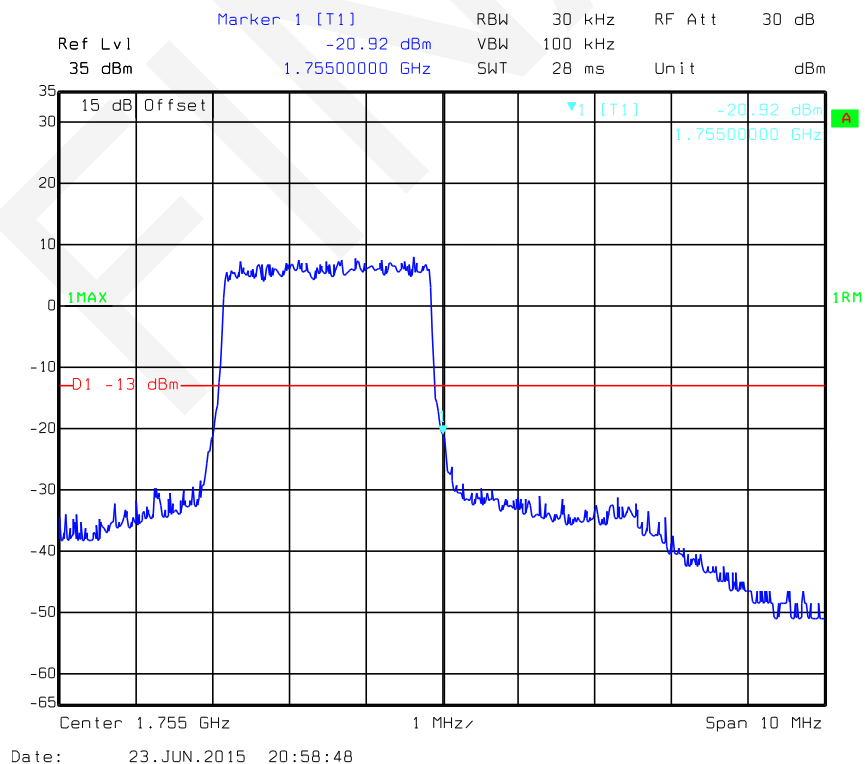


16QAM_5MHz_RB_Left

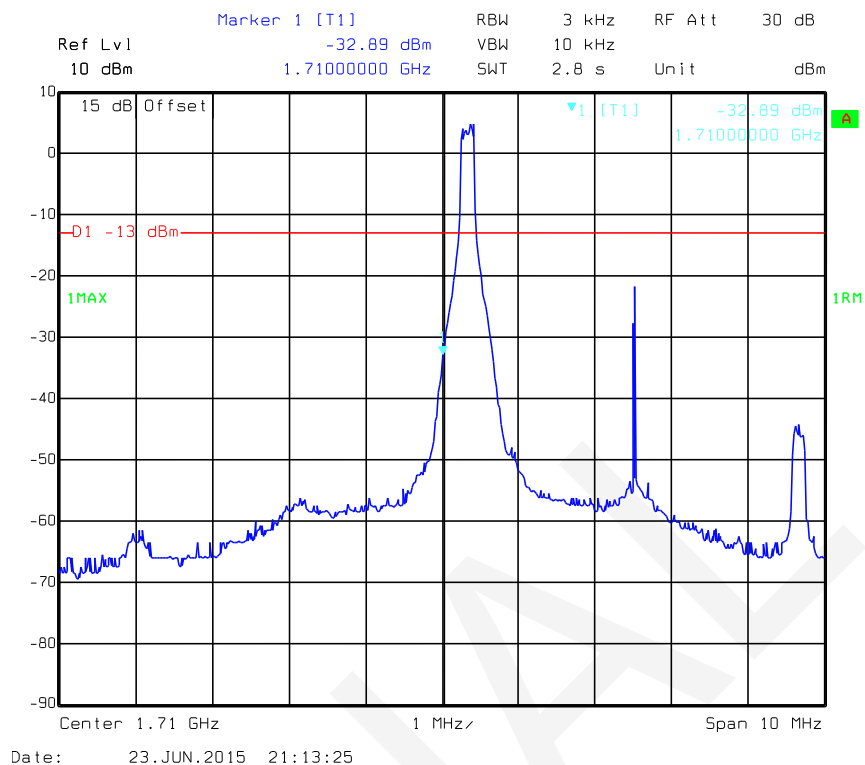


16QAM_5MHz_RB_Right

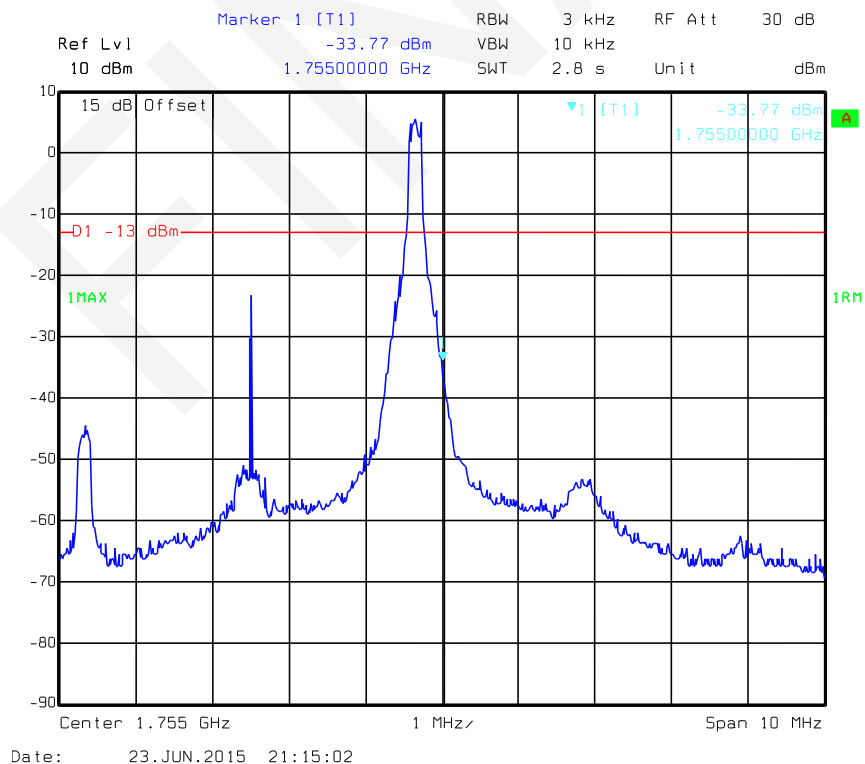


16QAM_5MHz_FULL RB_Left

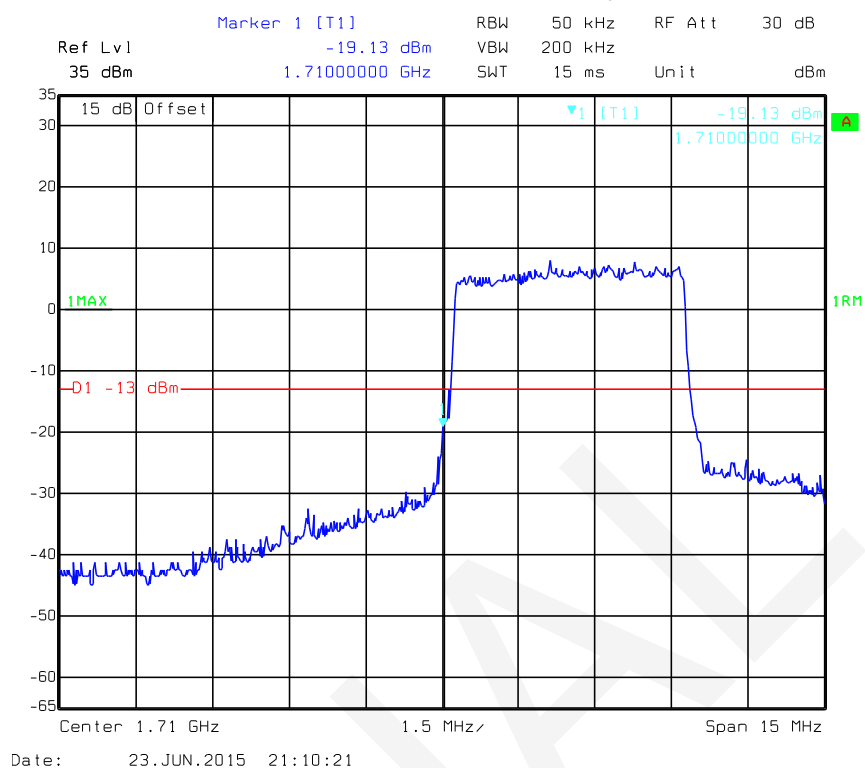


16QAM_5MHz_FULL RB_Right

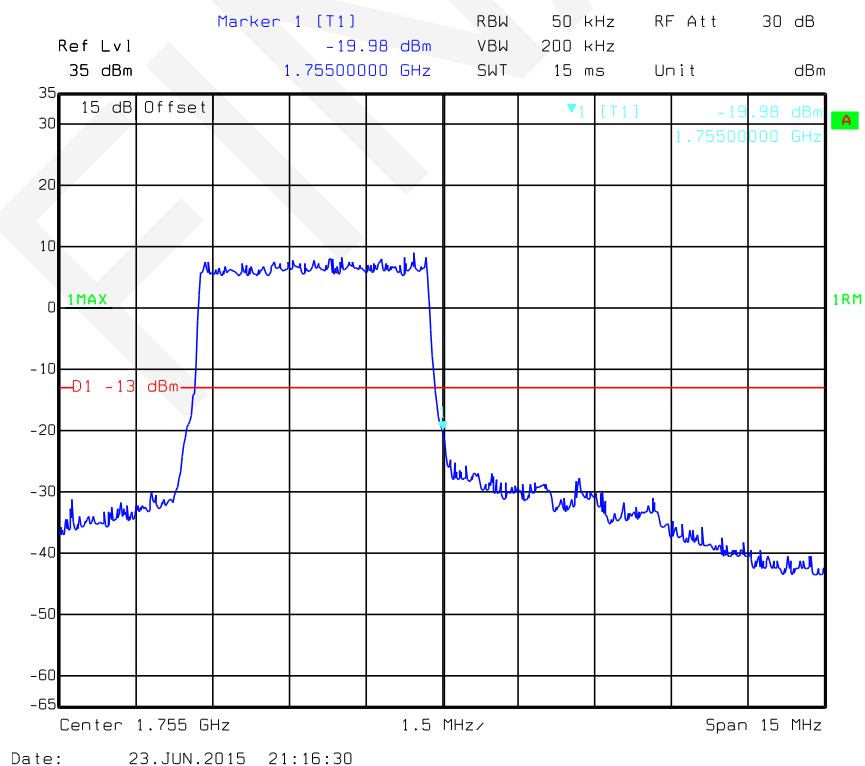


16QAM_10MHz_RB_Left

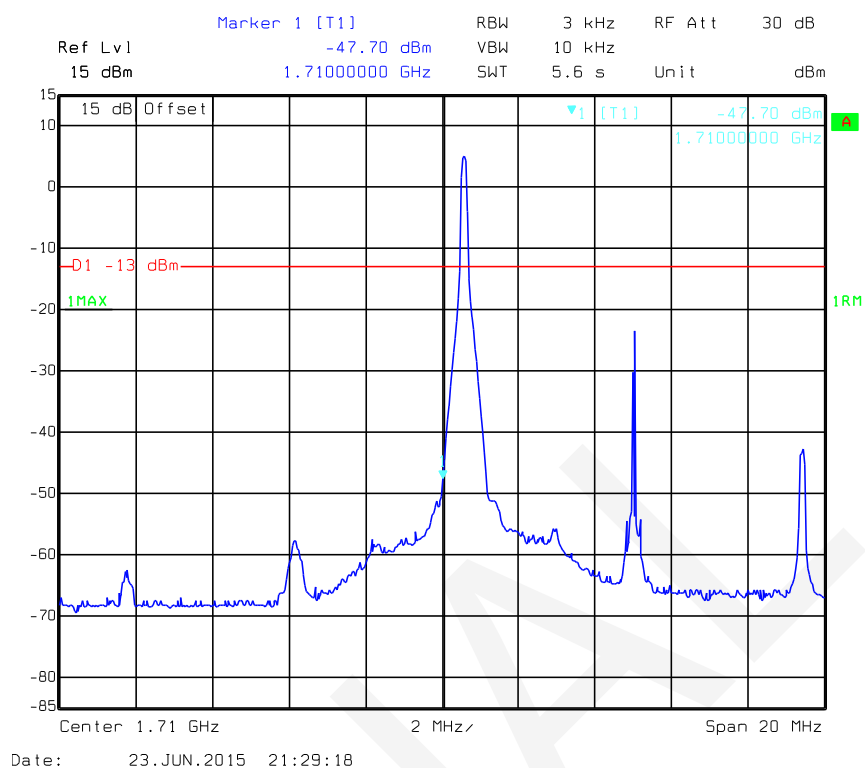


16QAM_10MHz_RB_Right

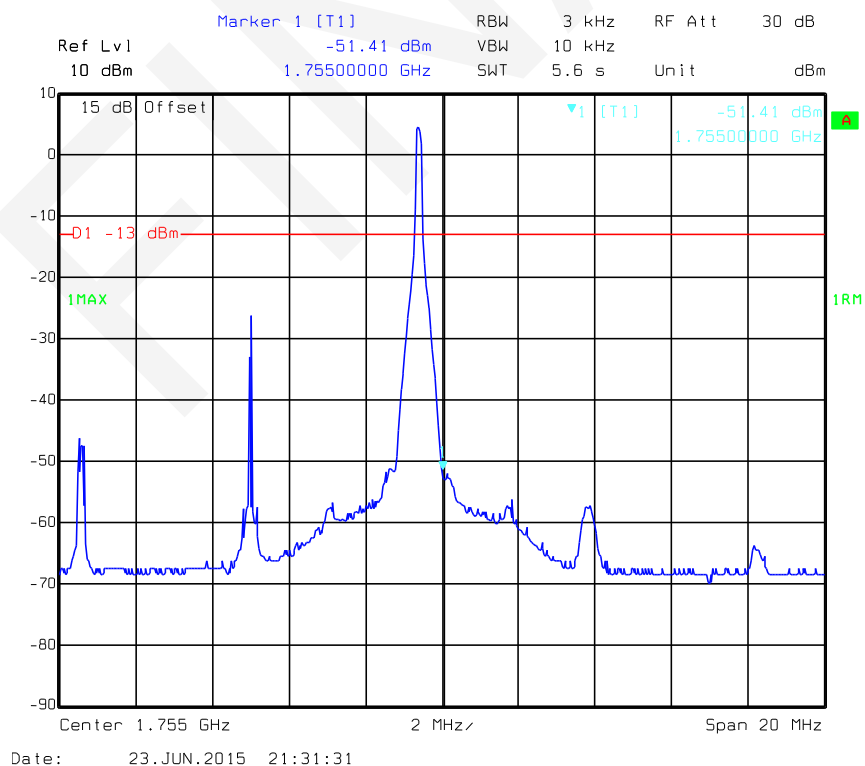


16QAM_10MHz_FULL RB_Left

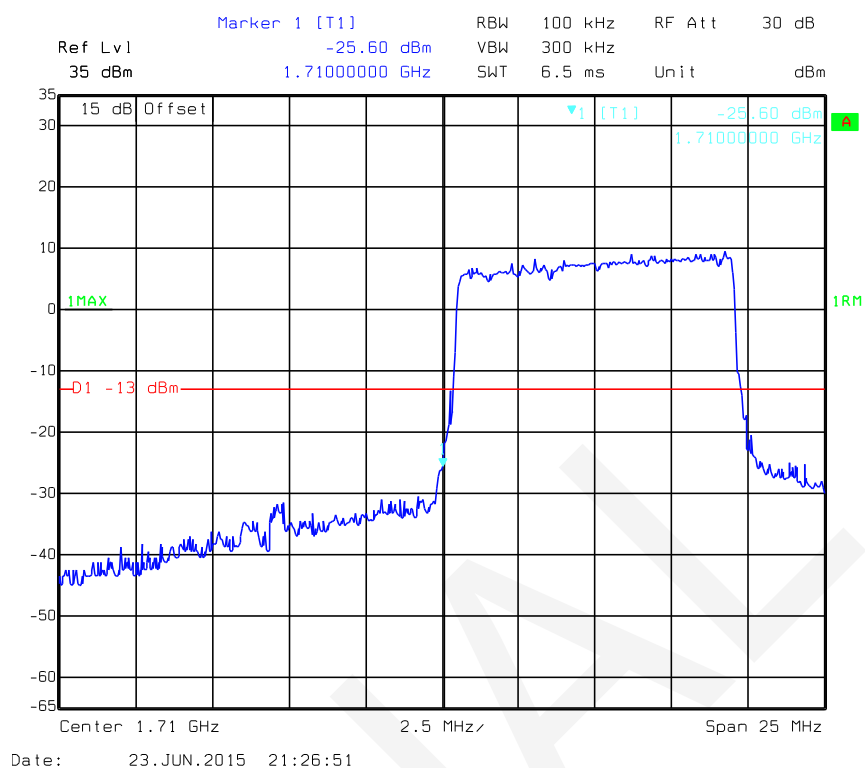


16QAM_10MHz_FULL RB_Right

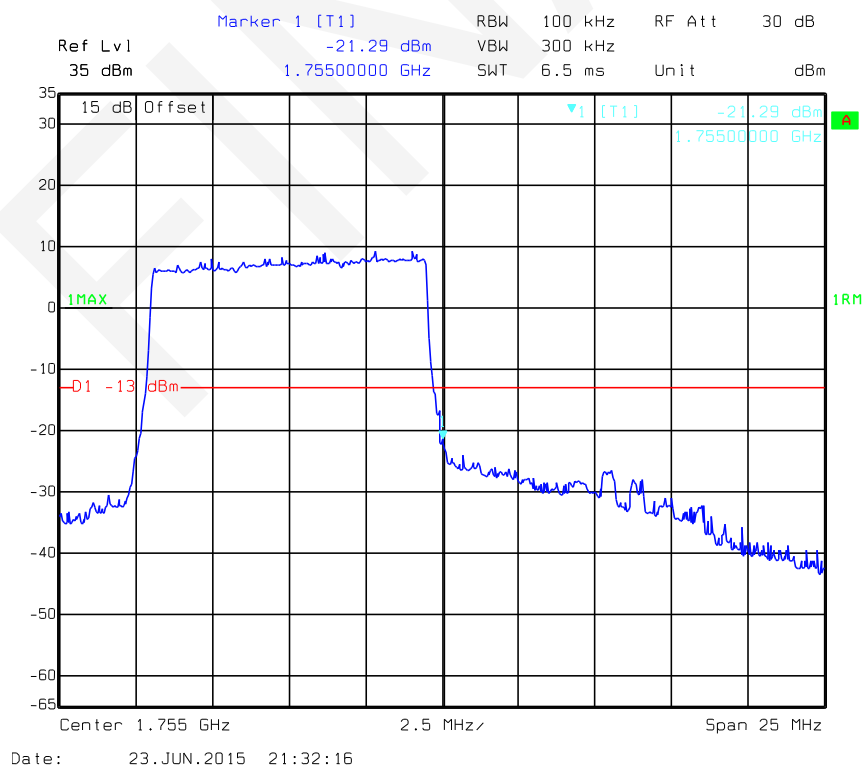


16QAM_15MHz_RB_Left

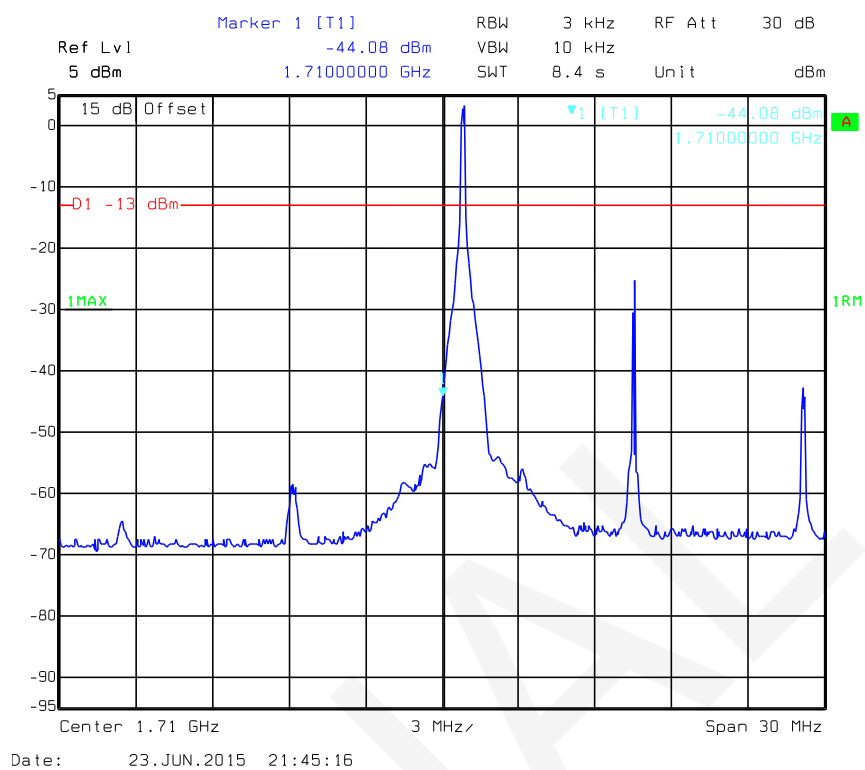


16QAM_15MHz_RB_Right

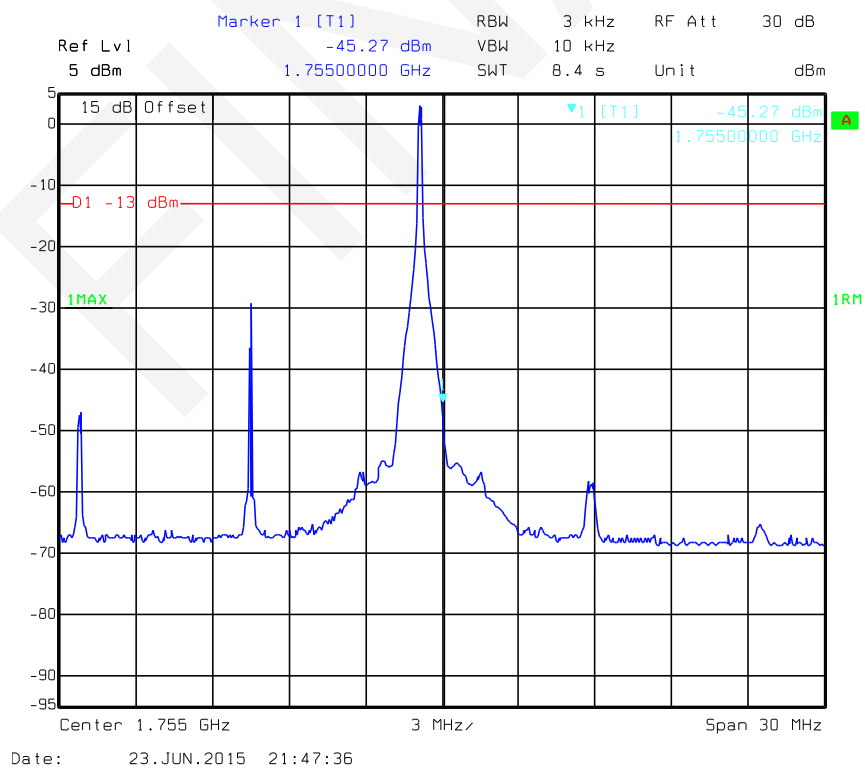


16QAM_15MHz_FULL RB_Left

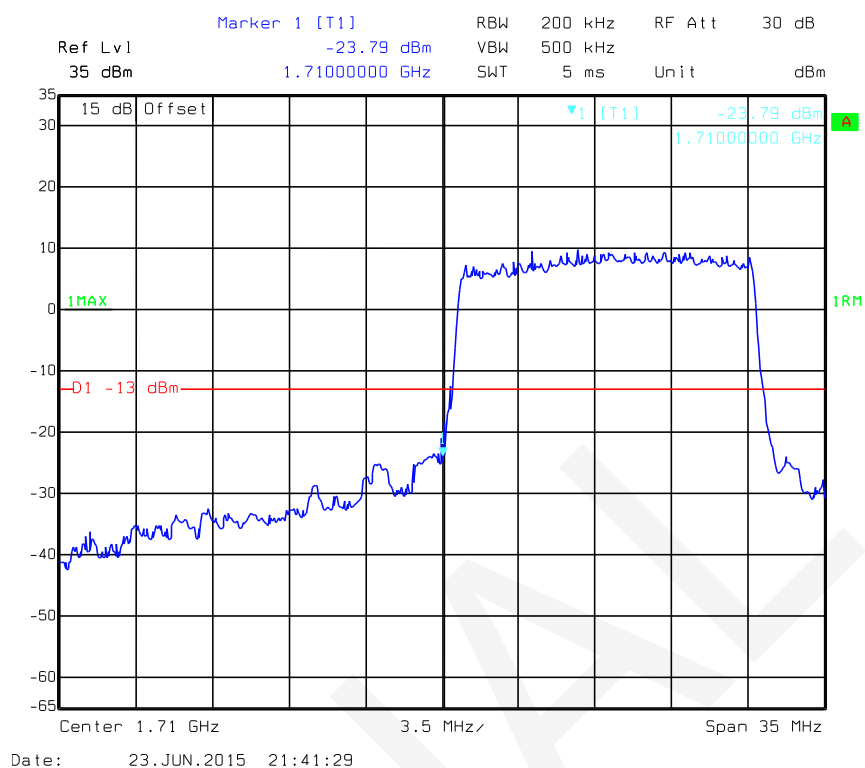


16QAM_15MHz_FULL RB_Right

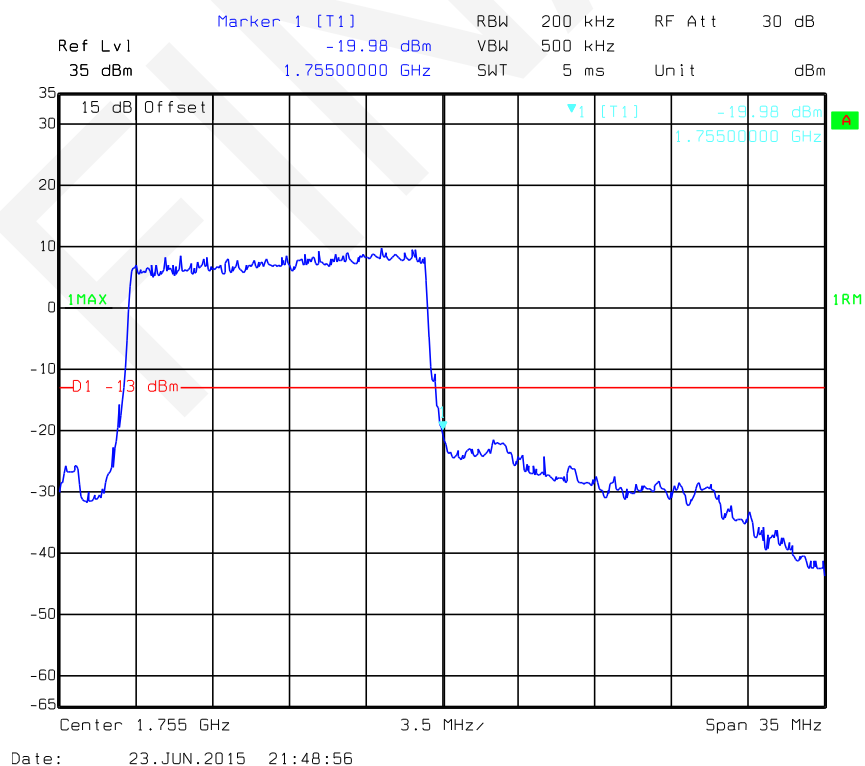


16QAM_20MHz_RB_Left

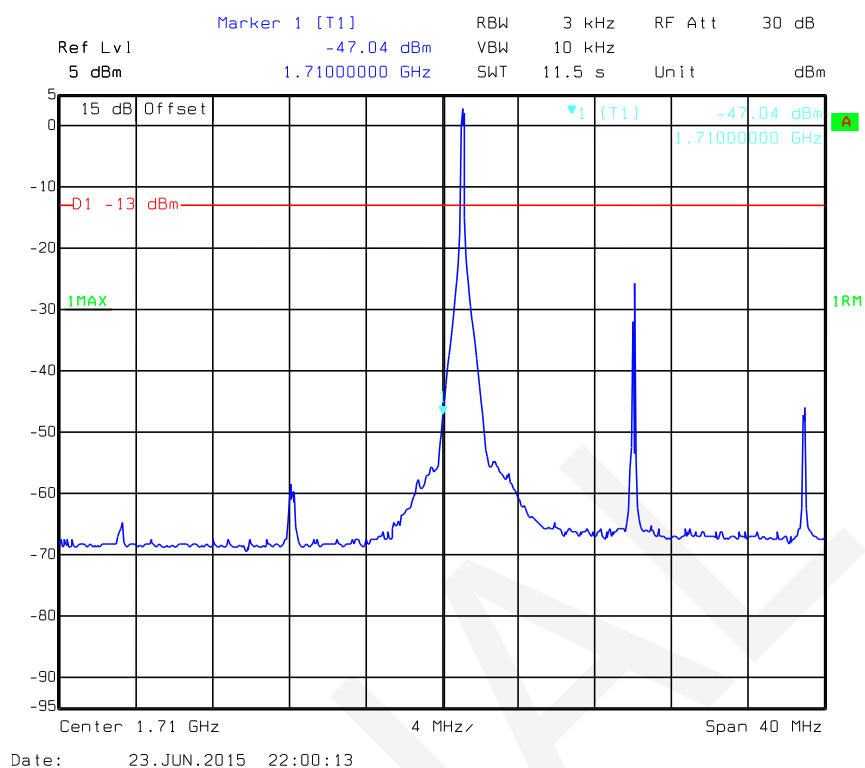


16QAM_20M_RB_Right

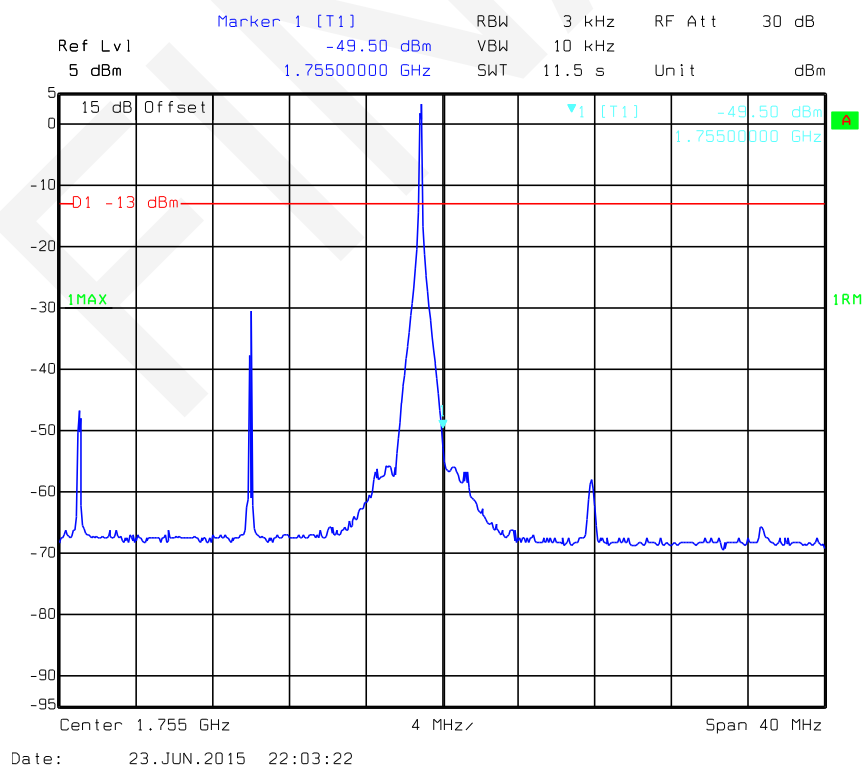

16QAM_20MHz_FULL RB_Left

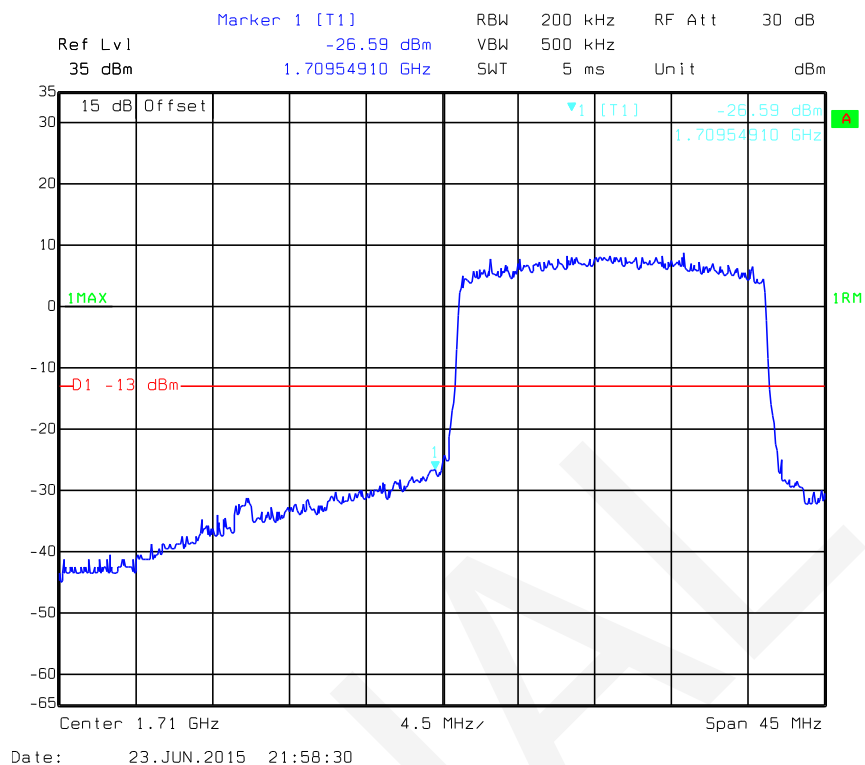


16QAM_20MHz_FULL RB_Right

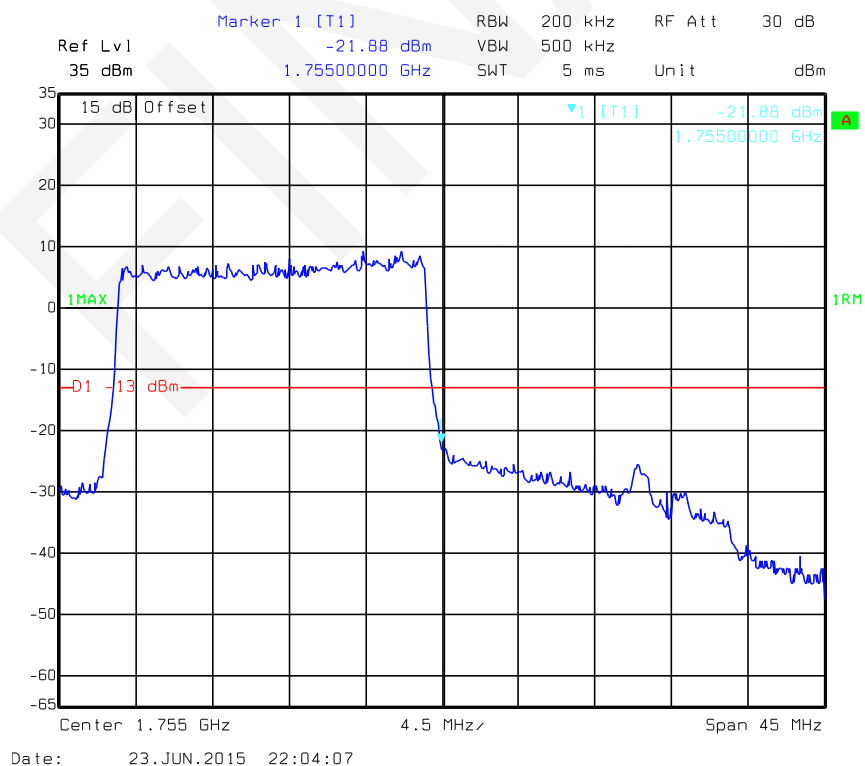


LTE Band 13

QPSK_5MHz_1RB_Left

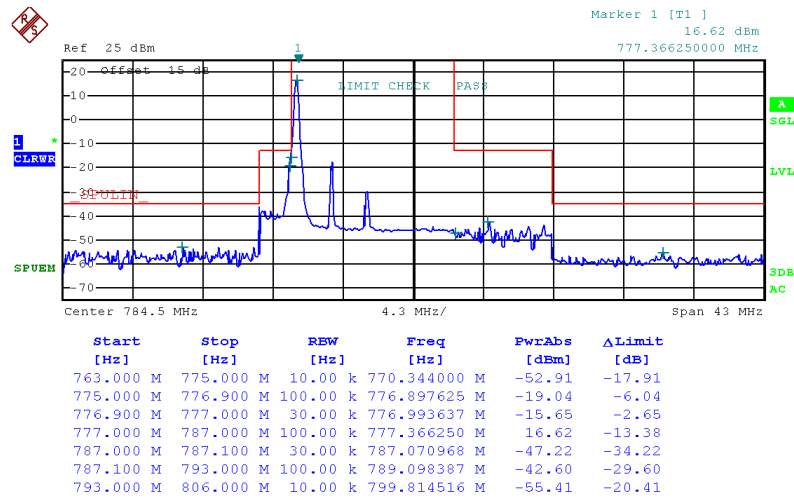


Date: 22.JUN.2015 17:27:54

QPSK_5MHz_1RB_Right

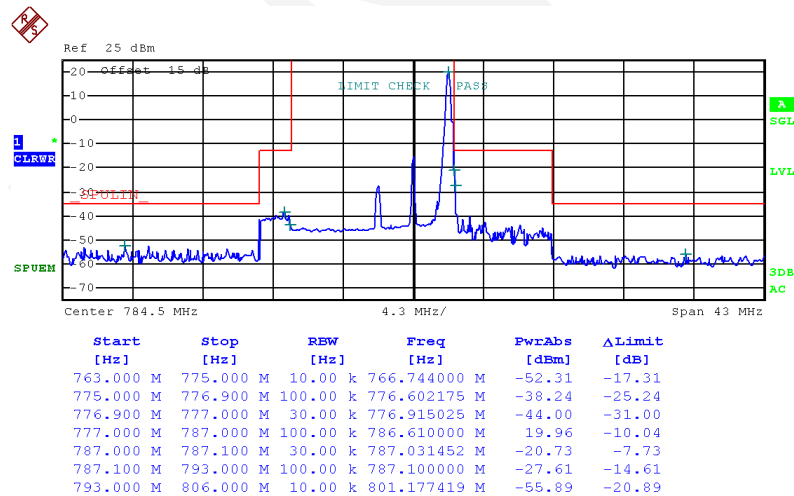


Date: 22.JUN.2015 17:32:19

QPSK_5MHz_FULL RB_Left

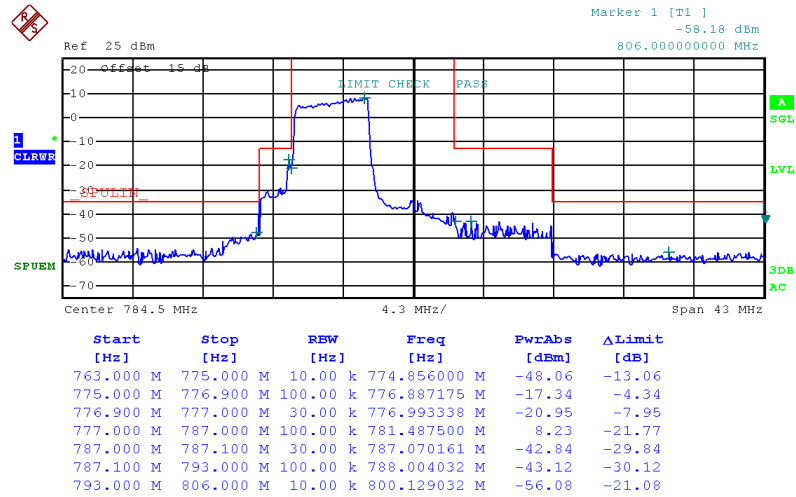


Date: 22.JUN.2015 17:19:28

QPSK_5MHz_FULL RB_Right

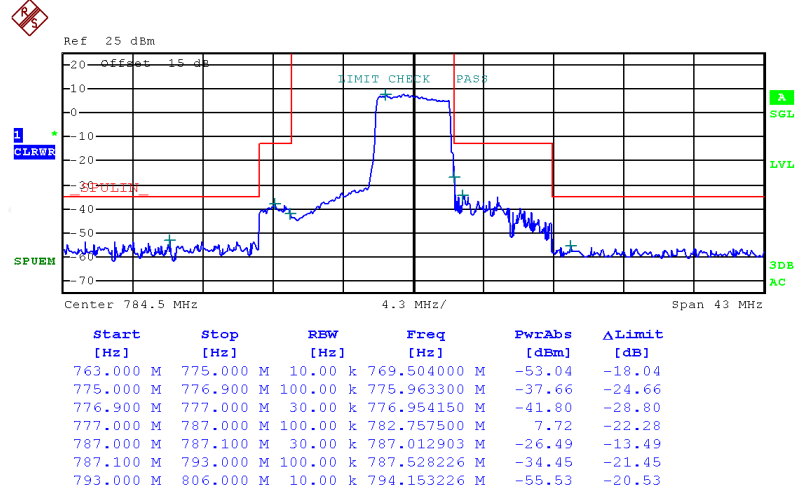


Date: 22.JUN.2015 17:52:01

QPSK_10MHz_1RB_Left

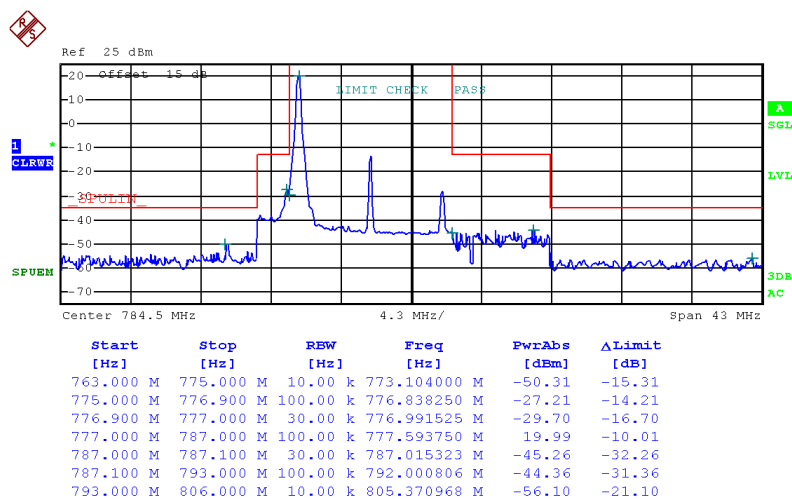


Date: 22.JUN.2015 17:55:38

QPSK_10MHz_1RB_Right

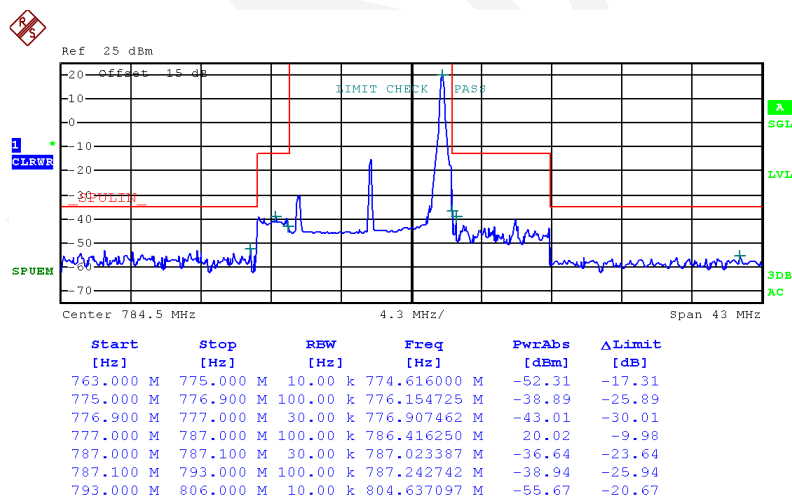


Date: 22.JUN.2015 17:54:03

QPSK_10MHz_FULL RB

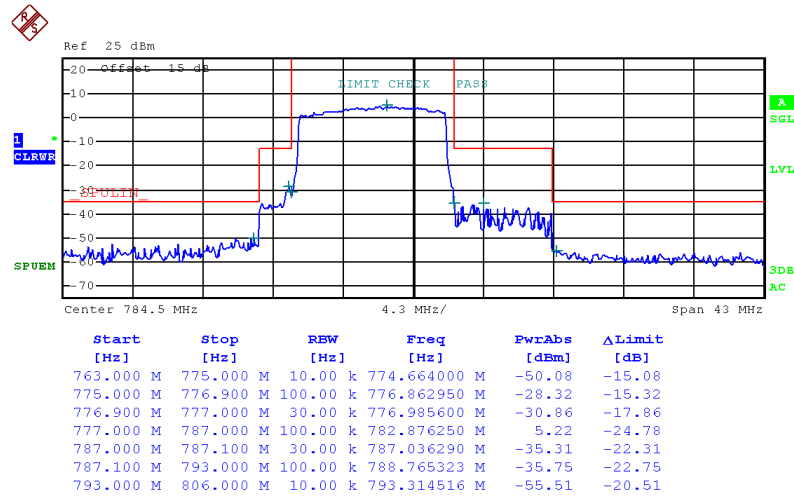


Date: 22.JUN.2015 17:52:35

16QAM_5MHz_RB_Left

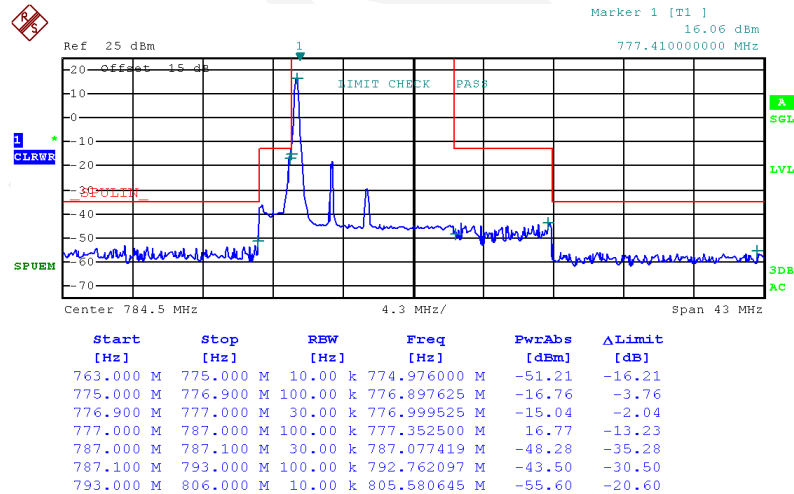


Date: 22.JUN.2015 17:29:07

16QAM_5MHz_RB_Right

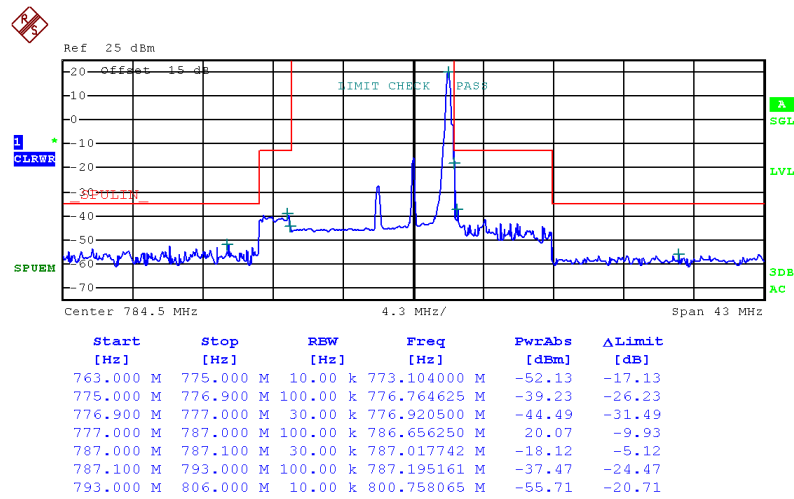

Date: 22.JUN.2015 17:32:55

16QAM_5MHz_FULL RB_Left

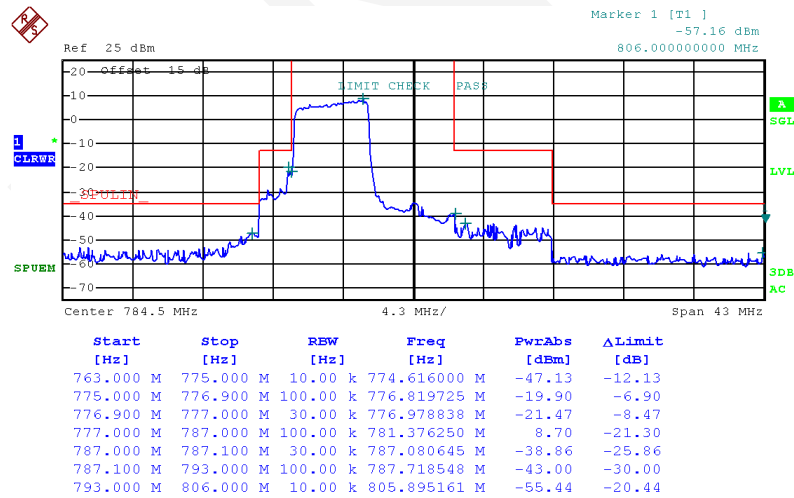

Date: 22.JUN.2015 17:19:03

Ref 25 dBm

Offset 15 dB

LIMIT CHECK PASS

30 dBS

Center 784.5 MHz

4.3 MHz/

Span 43 MHz

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]
763.000 M	775.000 M	10.00 k	763.528000 M	-53.00	-18.00
775.000 M	776.900 M	100.00 k	775.147250 M	-38.16	-25.16
776.900 M	777.000 M	30.00 k	776.915538 M	-42.29	-29.29
777.000 M	787.000 M	100.00 k	783.823750 M	7.83	-22.17
787.000 M	787.100 M	30.00 k	787.013710 M	-22.83	-9.83
787.100 M	793.000 M	100.00 k	787.100000 M	-27.48	-14.48
793.000 M	806.000 M	10.00 k	802.016129 M	-55.61	-20.61

Date: 22.JUN.2015 17:51:41

Ref 25 dBm

Offset 15 dB

LIMIT CHECK PASS

Center 784.5 MHz


4.3 MHz/

Span 43 MHz

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]
763.000 M	775.000 M	10.00 k	773.176000 M	-50.70	-15.70
775.000 M	776.900 M	100.00 k	776.877200 M	-28.97	-15.97
776.900 M	777.000 M	30.00 k	776.997125 M	-30.24	-17.24
777.000 M	787.000 M	100.00 k	777.585000 M	19.62	-10.38
787.000 M	787.100 M	30.00 k	787.031452 M	-45.34	-32.34
787.100 M	793.000 M	100.00 k	787.908871 M	-43.29	-30.29
793.000 M	806.000 M	10.00 k	802.854839 M	-54.56	-19.56


Date: 22.JUN.2015 17:54:26

16QAM_10MHz_RB_Right

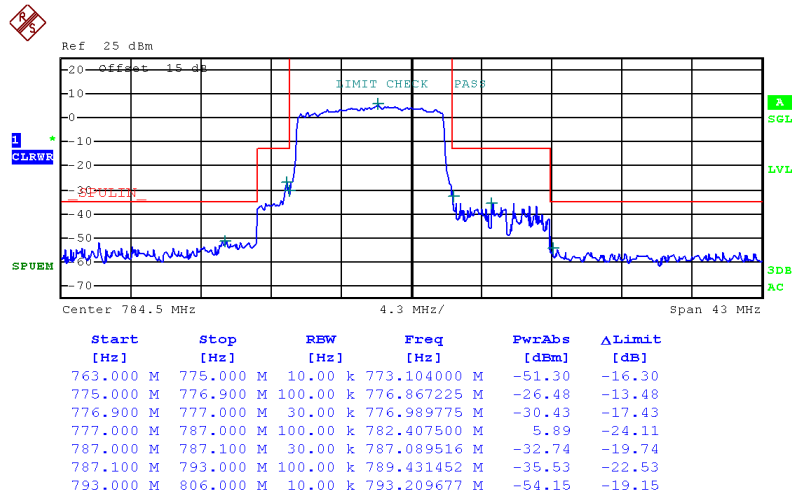

Date: 22.JUN.2015 17:52:50

16QAM_10MHz_FULL RB_Left

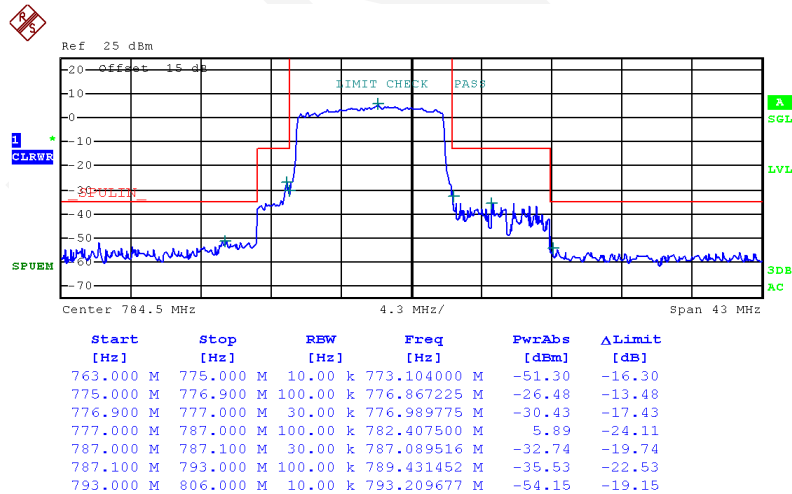

Date: 22.JUN.2015 17:52:50

FCC §2.1055, §22.355 & §24.235 & §27.54 - FREQUENCY STABILITY**Applicable Standard**

FCC § 2.1055 (a), § 2.1055 (d), §22.355, §24.235, §27.54

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency Range (MHz)	Base, fixed (ppm)	Mobile ≤ 3 watts (ppm)	Mobile ≤ 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A


According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: An external variable DC power supply was connected to the battery terminals of the equipment under test. The voltage was set from 85% to 115% of the nominal value and was then decreased until the transmitter light no longer illuminated; i.e., the battery end point. The output frequency was recorded for each battery voltage.

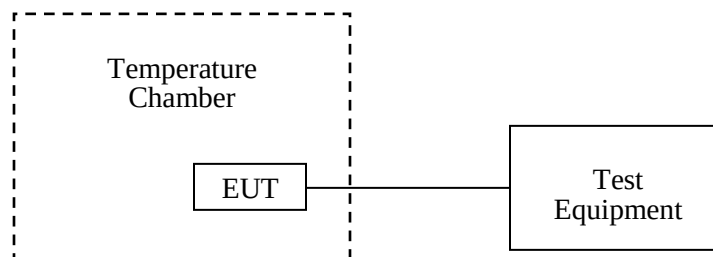

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Dongzhixu	High Temperature Test Chamber	DP1000	201105083-3	2014-08-01	2015-08-01
R&S	Universal Radio Communication Tester	CMU200	109 038	2015-05-09	2016-05-09
R&S	Wideband Radio Communication Tester	CMW500	106891	2014-11-23	2015-11-23

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	25.6 °C
Relative Humidity:	57%
ATM Pressure:	99.9kPa

The testing was performed by Dean Liu on 2015-06-24.

BC0 RC1,Middle Channel			
Power Supplied	Temperature	Frequency Error	Frequency Error
Vdc	°C	Hz	ppm
7.2	-30	-17.2	-0.0206
	-20	-15.6	-0.0186
	-10	-10.5	-0.0126
	0	-5.6	-0.0067
	10	-6.3	-0.0075
	20	-2.1	-0.0025
	30	-3.5	-0.0042
	40	-4.5	-0.0054
	50	-6.2	-0.0074
6.2	25	-8.9	-0.0106
8.3	25	-7.6	-0.0091

BC0Rel.A, Middle Channel,			
Power Supplied	Temperature	Frequency Error	Frequency Error
Vdc	°C	Hz	ppm
7.2	-30	-16.5	-0.0197
	-20	-11.8	-0.0141
	-10	-6.7	-0.0080
	0	-8.2	-0.0098
	10	-5.4	-0.0065
	20	-4.6	-0.0055
	30	-3.5	-0.0042
	40	-2.5	-0.0030
	50	-6.3	-0.0075
6.2	25	-7.1	-0.0085
8.3	25	-5.9	-0.0071

BC1 RC1,Middle Channel			
Power Supplied	Temperature	Frequency Error	Frequency Error
Vdc	°C	Hz	ppm
7.2	-30	-12.3	-0.0147
	-20	-14.9	-0.0178
	-10	-10.5	-0.0126
	0	-7.2	-0.0086
	10	-8	-0.0096
	20	-3.5	-0.0042
	30	-9.4	-0.0112
	40	-6.7	-0.0080
	50	-4.8	-0.0057
6.2	25	-7.7	-0.0092
8.3	25	-6.3	-0.0075

BC1 Rel.A, Middle Channel			
Power Supplied	Temperature	Frequency Error	Frequency Error
Vdc	°C	Hz	ppm
7.2	-30	-13.5	-0.0161
	-20	-4.9	-0.0059
	-10	-10.5	-0.0126
	0	-9.7	-0.0116
	10	-8.6	-0.0103
	20	-7.5	-0.0090
	30	-6.3	-0.0075
	40	-10.2	-0.0122
	50	-3.7	-0.0044
6.2	25	-9.3	-0.0111
8.3	25	-7.6	-0.0091

LTE Band 4:

10MHz,Middle Channel, QPSK			
Power Supplied	Temperature	Frequency Error	Frequency Error
Vdc	°C	Hz	ppm
3.7	-30	26	0.0111
	-20	29	0.0123
	-10	22	0.0094
	0	30	0.0128
	10	25	0.0106
	20	16	0.0068
	30	24	0.0102
	40	22	0.0094
	50	28	0.0119
3.5	25	26	0.0111
4.2	25	29	0.0123

10MHz,Middle Channel,16-QAM			
Power Supplied	Temperature	Frequency Error	Frequency Error
Vdc	℃	Hz	ppm
3.7	-30	13	0.0055
	-20	5	0.0021
	-10	8	0.0034
	0	12	0.0051
	10	16	0.0068
	20	14	0.0060
	30	11	0.0047
	40	10	0.0043
	50	13	0.0055
3.5	25	7	0.0030
4.2	25	14	0.0060

Band 13

10MHz,Middle Channel, QPSK			
Power Supplied	Temperature	Frequency Error	Frequency Error
Vdc	℃	Hz	ppm
3.7	-30	0	0.0000
	-20	-1	-0.0013
	-10	5	0.0064
	0	3	0.0038
	10	-4	-0.0051
	20	-2	-0.0026
	30	0	0.0000
	40	3	0.0038
	50	-1	-0.0013
3.5	25	4	0.0051
4.2	25	3	0.0038

10MHz,Middle Channel,16-QAM			
Power Supplied	Temperature	Frequency Error	Frequency Error
Vdc	°C	Hz	ppm
3.7	-30	2	0.0026
	-20	3	0.0038
	-10	4	0.0051
	0	-1	-0.0013
	10	0	0.0000
	20	-5	-0.0064
	30	-2	-0.0026
	40	-4	-0.0051
	50	-1	-0.0013
3.5	25	3	0.0038
4.2	25	2	0.0026

Note: The fundamental emissions stay within the authorized bands of operation based on the frequency deviation measured is small.

***** END OF REPORT *****