

TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: 47 CFR FCC Part 96
47 CFR FCC Part 2

Report No.: RFBCUN-WTW-P23030714-1

FCC ID: H8N46116A

Product: 5G small cell

Brand: ASKEY

Model No.: NR xCell 46116A

Received Date: 2023/3/31

Test Date: 2023/3/31 ~ 2023/5/12

Issued Date: 2023/6/26

Applicant: ASKEY COMPUTER CORP.

Address: 10F, NO. 119, JIANKANG RD., ZHONGHE DIST., NEW TAIPEI CITY
23585, TAIWAN, R.O.C.

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, TAIWAN

FCC Registration / 788550 / TW0003

Designation Number:

Approved by:

Jeremy Lin

Date:

2023/6/26

Jeremy Lin / Project Engineer

This test report consists of 101 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



Prepared by : Pettie Chen / Senior Specialist

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	4
1 Certificate.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Supplementary Information	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Antenna Description of EUT	8
3.3 Test Mode Applicability and Tested Channel Detail.....	9
3.4 Test Program Used and Operation Descriptions	11
3.5 Connection Diagram of EUT and Peripheral Devices	11
3.6 Configuration of Peripheral Devices and Cable Connections	12
4 Test Instruments	13
4.1 Maximum EIRP	13
4.2 Modulation Characteristics	13
4.3 Maximum Power Spectral Density	13
4.4 Peak to Average Ratio	14
4.5 Bandwidth.....	14
4.6 Conducted Spurious Emissions	14
4.7 Radiated Spurious Emissions below 1GHz.....	15
4.8 Radiated Spurious Emissions above 1GHz	16
4.9 Frequency Stability	17
5 Limits of Test Items.....	18
5.1 Maximum EIRP	18
5.2 Modulation Characteristics	18
5.3 Maximum Power Spectral Density	18
5.4 Peak to Average Ratio	18
5.5 Bandwidth.....	18
5.6 Conducted Spurious Emissions	18
5.7 Radiated Spurious Emissions below 1GHz.....	19
5.8 Radiated Spurious Emissions above 1GHz	19
5.9 Frequency Stability	19
6 Test Arrangements.....	20
6.1 Maximum EIRP	20
6.1.1 Test Setup	20
6.1.2 Test Procedure	20
6.2 Modulation Characteristics	21
6.2.1 Test Setup	21
6.2.2 Test Procedure	21
6.3 Maximum Power Spectral Density	21
6.3.1 Test Setup	21
6.3.2 Test Procedure	21
6.4 Peak to Average Ratio	22
6.4.1 Test Setup	22
6.4.2 Test Procedure	22
6.5 Bandwidth.....	22
6.5.1 Test Setup	22
6.5.2 Test Procedure	23
6.6 Conducted Spurious Emissions	25
6.6.1 Test Setup	25
6.6.2 Test Procedure	25
6.7 Radiated Spurious Emissions below 1GHz.....	26
6.7.1 Test Setup	26
6.7.2 Test Procedure	26

6.8	Radiated Spurious Emissions above 1GHz	27
6.8.1	Test Setup	27
6.8.2	Test Procedure	27
6.9	Frequency Stability	28
6.9.1	Test Setup	28
6.9.2	Test Procedure	28
7	Test Results of Test Item	29
7.1	Maximum EIRP	29
7.2	Modulation Characteristics	35
7.3	Maximum Power Spectral Density	36
7.4	Peak to Average Ratio	39
7.5	Bandwidth	43
7.6	Conducted Spurious Emissions	47
7.7	Radiated Spurious Emissions below 1GHz	79
7.8	Radiated Spurious Emissions above 1GHz	83
7.9	Frequency Stability	92
8	Pictures of Test Arrangements	100
9	Information of the Testing Laboratories	101

Release Control Record

Issue No.	Description	Date Issued
RFBCUN-WTW-P23030714-1	Original release.	2023/6/26

1 Certificate

Product: 5G small cell

Brand: ASKEY

Test Model: NR xCell 46116A

Sample Status: Engineering sample

Applicant: ASKEY COMPUTER CORP.

Test Date: 2023/5/2 ~ 2023/5/12

Standard: 47 CFR FCC Part 96
47 CFR FCC Part 2

Measurement ANSI/TIA/EIA-603-E 2016

procedure: ANSI C63.26-2015

KDB 971168 D01 Power Meas License Digital Systems v03r01

KDB 940660 D01 Part 96 CBRS Eqpt v03

KDB 662911 D01 Multiple Transmitter Output v02r01

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

2 Summary of Test Results

47 CFR FCC Part 96 & Part 2			
Standard / Clause	Test Item	Result	Remark
FCC 47 CFR Part 2.1046 FCC 47 CFR Part 96.41(b)	Maximum EIRP	Pass	Meet the requirement of limit.
FCC 47 CFR Part 2.1047	Modulation Characteristics	Pass	Meet the requirement of limit.
FCC 47 CFR Part 2.1046 FCC 47 CFR Part 96.41(b)	Maximum Power Spectral Density	Pass	Meet the requirement of limit.
FCC 47 CFR Part 96.41(g)	Peak to Average Ratio	Pass	Meet the requirement of limit.
FCC 47 CFR Part 2.1049	Bandwidth	Pass	Meet the requirement of limit.
FCC 47 CFR Part 2.1051 FCC 47 CFR Part 96.41(e)	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
FCC 47 CFR Part 2.1053 FCC 47 CFR Part 96.41(e)	Radiated Spurious Emissions below 1GHz	Pass	Minimum passing margin is -11.61 dB at 55.22 MHz
FCC 47 CFR Part 2.1053 FCC 47 CFR Part 96.41(e)	Radiated Spurious Emissions above 1GHz	Pass	Minimum passing margin is -0.17 dB at 7249.98 MHz
FCC 47 CFR Part 2.1055	Frequency Stability	Pass	Meet the requirement of limit.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Specification	Expanded Uncertainty (k=2) (±)
Radiated Spurious Emissions below 1GHz	9 kHz ~ 30 MHz	3.00 dB
	30 MHz ~ 1 GHz	2.93 dB
Radiated Spurious Emissions above 1GHz	1 GHz ~ 18 GHz	1.76 dB
	18 GHz ~ 40 GHz	1.77 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	5G small cell
Brand	ASKEY
Test Model	NR xCell 46116A
Status of EUT	Engineering sample
Power Supply Rating	12Vdc or 48Vdc (Adapter)

Note:

1. EUT Overview

Full Maximum EIRP (dBm/channel bandwidth)

Band / Bandwidth	TX Frequency Range (MHz)	Max. EIRP Power		
		QPSK	64QAM	256QAM
n48 (Channel Bandwidth 10MHz)	3555.00-3694.98	659.174mW (28.19dBm/10MHz)	650.130mW (28.13dBm/10MHz)	645.654mW (28.10dBm/10MHz)
n48 (Channel Bandwidth 20MHz)	3560.01-3690.00	1766.038mW (32.47dBm/20MHz)	1753.881mW (32.44dBm/20MHz)	1725.838mW (32.37dBm/20MHz)
n48 (Channel Bandwidth 30MHz)	3565.02-3684.99	1927.525mW (32.85dBm/30MHz)	1905.461mW (32.80dBm/30MHz)	1883.649mW (32.75dBm/30MHz)
n48 (Channel Bandwidth 40MHz)	3570.00-3679.98	1798.871mW (32.55dBm/40MHz)	1761.976mW (32.46dBm/40MHz)	1741.807mW (32.41dBm/40MHz)

Maximum EIRP (dBm/10MHz)

Band / Bandwidth	TX Frequency Range (MHz)	Max. EIRP Power		
		QPSK	64QAM	256QAM
n48 (Channel Bandwidth 10MHz)	3555.00-3694.98	659.174mW (28.19dBm/10MHz)	650.130mW (28.13dBm/10MHz)	645.654mW (28.10dBm/10MHz)
n48 (Channel Bandwidth 20MHz)	3560.01-3690.00	957.194mW (29.81dBm/10MHz)	950.605mW (29.78dBm/10MHz)	937.562mW (29.72dBm/10MHz)
n48 (Channel Bandwidth 30MHz)	3565.02-3684.99	669.885mW (28.26dBm/10MHz)	662.217mW (28.21dBm/10MHz)	648.634mW (28.12dBm/10MHz)
n48 (Channel Bandwidth 40MHz)	3570.00-3679.98	488.652mW (26.89dBm/10MHz)	483.059mW (26.84dBm/10MHz)	476.431mW (26.78dBm/10MHz)

Emission Designator

Band / Bandwidth	TX Frequency Range (MHz)	Emission Designator		
		QPSK	64QAM	256QAM
n48 (Channel Bandwidth 10MHz)	3555.00-3694.98	8M60G7D	8M60D7W	8M60D7W
n48 (Channel Bandwidth 20MHz)	3560.01-3690.00	18M2G7D	18M3D7W	18M3D7W
n48 (Channel Bandwidth 30MHz)	3565.02-3684.99	27M9G7D	27M9D7W	27M9D7W
n48 (Channel Bandwidth 40MHz)	3570.00-3679.98	37M9G7D	37M9D7W	37M9D7W

2. The EUT contains following accessory devices and PoE.

AC Adapter 1	Brand	FLYPOWER
	Model	PS65B120Y5000S
	AC Input	100-240Vac~, 15A, 50/60Hz
	DC Output	12.0Vdc, 5.0A
AC Adapter 2	Brand	Sunny
	Model	SYS1649-6548-T2
	AC Input	100-240Vac~, 15A, 50/60Hz
	DC Output	48.0Vdc, 1.35A
Bracket	Brand	LUNG TENG
	Model	MOD-SCE2200-Wall_Ceiling_Ploe-Mount-Sub

Power cord	Brand	WELL SHIN
	Model	1961-0048
PoE (Support unit)	Brand	CERiO
	Model	FPOE-DXG

3. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.
4. The EUT device does not support 16QAM modulation and only supports Full RB mode.

3.2 Antenna Description of EUT

1. The antenna information is listed as below.

Antenna Type	Antenna Gain(dBi)			Connector Type
	Frequency(MHz)	Ant 1	Ant 2	
Dipole	3300	5.54	4.80	I-PEX
	3550	4.79	5.05	
	3700	4.71	5.79	
	3800	5.14	6.20	

* The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan:	EUT can be used in the following ways: X-axis/ Y-axis/ Z-axis. Pre-scan these ways and find the worst case as a representative test condition.
Worst Case:	X-axis/ Y-axis/ Z-axis Worst Condition: Z-axis


Test Item	EUT Configure Mode	Tested Channel	Channel Bandwidth	Modulation	Mode
EIRP	A	637000 (3555.00 MHz) 641666 (3624.99 MHz) 646332 (3694.98 MHz)	10 MHz	QPSK / 64QAM / 256QAM	Full RB
	A	637334 (3560.01 MHz) 641666 (3624.99 MHz) 646000 (3690.00 MHz)	20 MHz	QPSK / 64QAM / 256QAM	Full RB
	A	637668 (3565.02 MHz) 641666 (3624.99 MHz) 645666 (3684.99 MHz)	30 MHz	QPSK / 64QAM / 256QAM	Full RB
	A	638000 (3570.00 MHz) 641666 (3624.99 MHz) 645332 (3679.98 MHz)	40 MHz	QPSK / 64QAM / 256QAM	Full RB
Modulation Characteristics	A	641666 (3624.99 MHz)	40 MHz	QPSK / 64QAM / 256QAM	Full RB
Maximum Power Spectral Density	A	637000 (3555.00 MHz) 641666 (3624.99 MHz) 646332 (3694.98 MHz)	10 MHz	QPSK / 64QAM / 256QAM	Full RB
	A	637334 (3560.01 MHz) 641666 (3624.99 MHz) 646000 (3690.00 MHz)	20 MHz	QPSK / 64QAM / 256QAM	Full RB
	A	637668 (3565.02 MHz) 641666 (3624.99 MHz) 645666 (3684.99 MHz)	30 MHz	QPSK / 64QAM / 256QAM	Full RB
	A	638000 (3570.00 MHz) 641666 (3624.99 MHz) 645332 (3679.98 MHz)	40 MHz	QPSK / 64QAM / 256QAM	Full RB
Peak to Average Ratio	A	637000 (3555.00 MHz) 641666 (3624.99 MHz) 646332 (3694.98 MHz)	10 MHz	QPSK / 64QAM / 256QAM	Full RB
	A	637334 (3560.01 MHz) 641666 (3624.99 MHz) 646000 (3690.00 MHz)	20 MHz	QPSK / 64QAM / 256QAM	Full RB
	A	637668 (3565.02 MHz) 641666 (3624.99 MHz) 645666 (3684.99 MHz)	30 MHz	QPSK / 64QAM / 256QAM	Full RB
	A	638000 (3570.00 MHz) 641666 (3624.99 MHz) 645332 (3679.98 MHz)	40 MHz	QPSK / 64QAM / 256QAM	Full RB

Test Item	EUT Configure Mode	Tested Channel	Channel Bandwidth	Modulation	Mode
Occupied Bandwidth	A	637000 (3555.00 MHz) 641666 (3624.99 MHz) 646332 (3694.98 MHz)	10 MHz	QPSK / 64QAM / 256QAM	Full RB
	A	637334 (3560.01 MHz) 641666 (3624.99 MHz) 646000 (3690.00 MHz)	20 MHz	QPSK / 64QAM / 256QAM	Full RB
	A	637668 (3565.02 MHz) 641666 (3624.99 MHz) 645666 (3684.99 MHz)	30 MHz	QPSK / 64QAM / 256QAM	Full RB
	A	638000 (3570.00 MHz) 641666 (3624.99 MHz) 645332 (3679.98 MHz)	40 MHz	QPSK / 64QAM / 256QAM	Full RB
Conducted Emission	A	637000 (3555.00 MHz) 641666 (3624.99 MHz) 646332 (3694.98 MHz)	10 MHz	QPSK	Full RB
	A	637334 (3560.01 MHz) 641666 (3624.99 MHz) 646000 (3690.00 MHz)	20 MHz	QPSK	Full RB
	A	637668 (3565.02 MHz) 641666 (3624.99 MHz) 645666 (3684.99 MHz)	30 MHz	QPSK	Full RB
	A	638000 (3570.00 MHz) 641666 (3624.99 MHz) 645332 (3679.98 MHz)	40 MHz	QPSK	Full RB
RE Below 1GHz	A, B	641666 (3624.99 MHz)	40 MHz	QPSK	Full RB
RE Above 1GHz	A	637000 (3555.00 MHz) 641666 (3624.99 MHz) 646332 (3694.98 MHz)	10 MHz	QPSK	Full RB
	A	637334 (3560.01 MHz) 641666 (3624.99 MHz) 646000 (3690.00 MHz)	20 MHz	QPSK	Full RB
	A	638000 (3570.00 MHz) 641666 (3624.99 MHz) 645332 (3679.98 MHz)	40 MHz	QPSK	Full RB
Frequency Stability	A	637000 (3555.00 MHz) 646332 (3694.98 MHz)	10 MHz	QPSK	Full RB
	A	637334 (3560.01 MHz) 646000 (3690.00 MHz)	20 MHz	QPSK	Full RB
	A	637668 (3565.02 MHz) 645666 (3684.99 MHz)	30 MHz	QPSK	Full RB
	A	638000 (3570.00 MHz) 645332 (3679.98 MHz)	40 MHz	QPSK	Full RB
EUT Configure Mode	Mode	Power			
	A	Power from Adapter 1			
	B	Power from Adapter 2			

3.4 Test Program Used and Operation Descriptions

There is no need to controlling software during the test, and the EUT can be paired with the 5G Wireless Test Platforms to test the connection when it is powered on.

3.5 Connection Diagram of EUT and Peripheral Devices

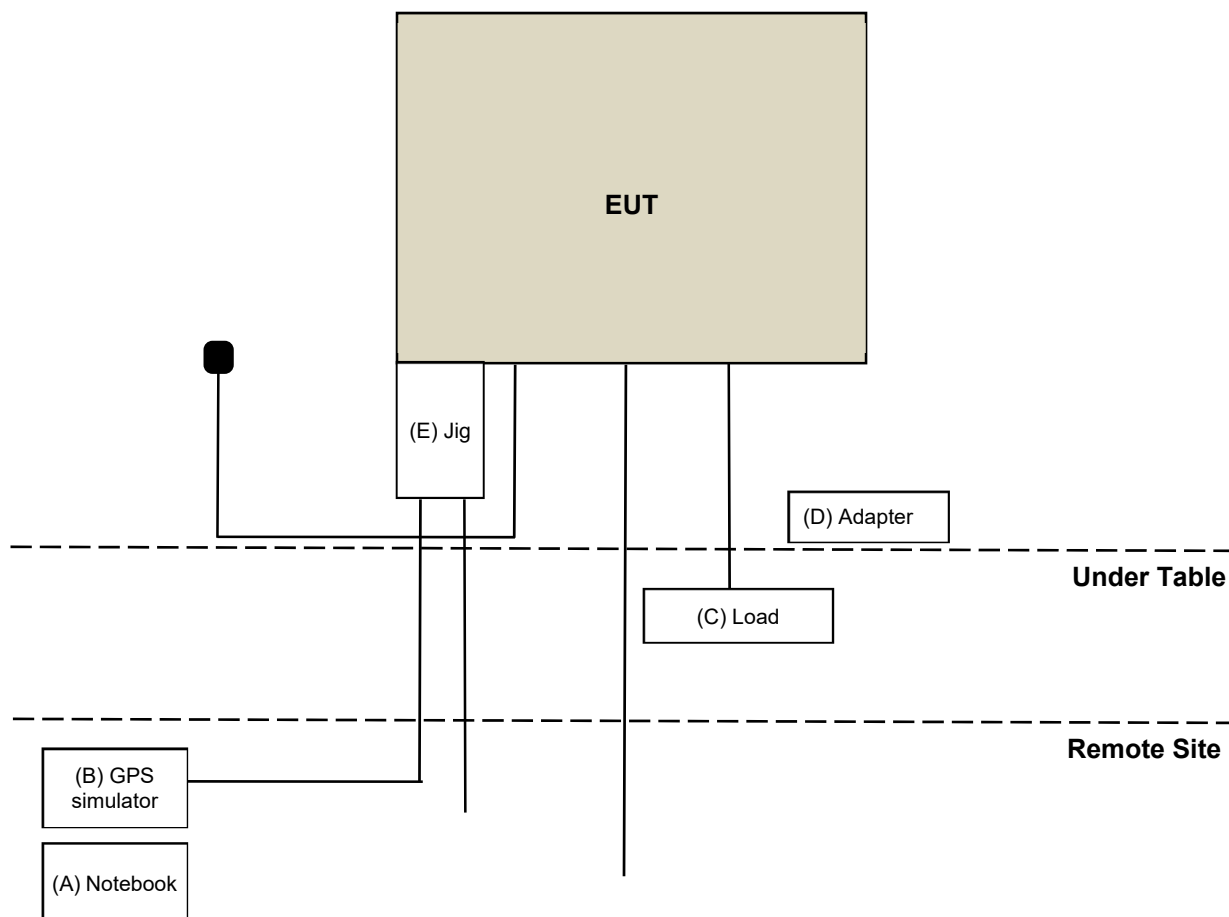

3.6 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Notebook	NA	NA	NA	NA	Supplied by applicant
B	GPS simulator	T&E Communication LTD.	GSG-5	201062	NA	Provided by Lab
C	Load	NA	NA	NA	NA	Provided by Lab
D	Adapter	FLYPOWER	PS65B120Y5000S	NA	NA	Accessory (Test Mode A)
		Sunny	SYS1649-6548-T2	NA	NA	Accessory (Test Mode B)
E	Jig	NA	NA	NA	NA	Supplied by applicant
F	GPS ANT	NA	NA	NA	NA	Supplied by applicant

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	RJ-45 Cable	1	6	N	N	Provided by Lab
2	RF Cable	1	6	N	N	Provided by Lab
3	RF Cable	1	6	N	N	Provided by Lab
4	Fiber optic cable	1	3	N	N	Provided by Lab
5	RJ-45 Cable	1	1.5	N	N	Provided by Lab

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 Maximum EIRP

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
PXA Signal Analyzer Keysight	N9030B	MY57140488	2023/3/6	2024/03/05
5G Wireless Test Platforms Keysight	E7515B	MY60102114	2022/5/20	2023/5/19
Software BV	ADT_RF Test Software V6.6.5.4	N/A	N/A	N/A

Notes:

1. The test was performed in Oven room.
2. Tested Date: 2023/5/5

4.2 Modulation Characteristics

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
PXA Signal Analyzer Keysight	N9030B	MY57140488	2023/3/6	2024/03/05
5G Wireless Test Platforms Keysight	E7515B	MY60102114	2022/5/20	2023/5/19
Software BV	ADT_RF Test Software V6.6.5.4	N/A	N/A	N/A

Notes:

1. The test was performed in Oven room.
2. Tested Date: 2023/5/4

4.3 Maximum Power Spectral Density

Refer to section 4.2 to get information of the instruments.

4.4 Peak to Average Ratio

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
PXA Signal Analyzer Keysight	N9030B	MY57140488	2023/3/6	2024/03/05
5G Wireless Test Platforms Keysight	E7515B	MY60102114	2022/5/20	2023/5/19
Software BV	ADT_RF Test Software V6.6.5.4	N/A	N/A	N/A

Notes:

1. The test was performed in Oven room.
2. Tested Date: 2023/3/31 ~ 2023/4/7

4.5 Bandwidth

Refer to section 4.4 to get information of the instruments.

4.6 Conducted Spurious Emissions

Refer to section 4.4 to get information of the instruments.

4.7 Radiated Spurious Emissions below 1GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	NA	NA	NA
Antenna Tower & Turn BV ADT	AT100	AT93021705	NA	NA
Turn Table BV ADT	TT100	TT93021705	NA	NA
Turn Table Controller BV ADT	SC100	SC93021705	NA	NA
Test Receiver Keysight	N9038A	MY55420137	2023/5/3	2024/5/2
Spectrum Analyzer R&S	FSW43	101867	2022/12/30	2023/12/29
Loop Antenna TESEQ	HLA 6121	45745	2022/7/27	2023/7/26
Loop Antenna EMCI	EM-6879	269	2022/9/19	2023/9/18
Pre-amplifier EMCI	EMC001340	980201	2022/9/23	2023/9/22
RF Coaxial Cable EMCI	5D-NM-BM	140903+140902	2023/1/7	2024/1/6
Preamplifier Agilent	8447D	2944A10638	2023/5/7	2024/5/6
Bi_Log Antenna Schwarbeck	VULB9168	9168-160	2022/10/20	2023/10/19
RF Coaxial Cable WOKEN	8D-FB	Cable-CH9-01	2023/5/7	2024/5/6

Notes:

1. The test was performed in HY - 966 chamber 4.
2. Tested Date: 2023/5/12

4.8 Radiated Spurious Emissions above 1GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	NA	NA	NA
Antenna Tower & Turn BV ADT	AT100	AT93021705	NA	NA
Turn Table BV ADT	TT100	TT93021705	NA	NA
Turn Table Controller BV ADT	SC100	SC93021705	NA	NA
Horn Antenna Schwarzbeck	9120D	9120D-1169	2022/11/13	2023/11/12
Preamplifier Agilent	8449B	3008A02367	2023/2/15	2024/2/14
RF Coaxial Cable HUBER+SUHNER&EMCI	SUCOFLEX 104& EMC104-SM-SM8000	CABLE-CH9-02 (248780+171006)	2023/1/7	2024/1/6
RF Coaxial Cable HUBER+SUHNER	SUCOFLEX 104	CABLE-CH9-(250795/4)	2023/1/7	2024/1/6
RF FLITER MICRO-TRONICS	BRM50716	060	2023/1/11	2024/1/10
RF FLITER MICRO-TRONICS	BRM17690	004	2023/1/11	2024/1/10
Pre-Amplifier EMCI	EMC 184045	980116	2022/10/1	2023/9/30
Horn Antenna Schwarzbeck	BBHA 9170	9170-480	2022/11/13	2023/11/12
Horn Antenna Schwarzbeck	BBHA 9170	BBHA9170243	2022/11/13	2023/11/12
RF Coaxial Cable EMCI	EMC102-KM-KM-3000	150929	2022/7/9	2023/7/8
RF Coaxial Cable EMCI	EMC102-KM-KM-600	150928	2022/7/9	2023/7/8
Boresight antenna tower fixture BV	BAF-02	5	NA	NA

Notes:

1. The test was performed in HY - 966 chamber 4.
2. Tested Date: 2023/5/12

4.9 Frequency Stability

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
3-channel DC power supply JIN YIH Technology	ODP3033	ODP30332128138	N/A	N/A
Digital Multimeter Fluke	87-III	70360742	2022/6/23	2023/6/22
Software BV	ADT_RF Test Software V6.6.5.4	N/A	N/A	N/A
Spectrum Analyzer R&S	FSV40	101544	2022/5/9	2023/5/8
Temperature & Humidity Chamber TERCHY	HRM-120RF	931022	2022/12/27	2023/12/26
5G Wireless Test Platforms Keysight	E7515B	MY60102114	2022/5/20	2023/5/19

Notes:

1. The test was performed in Oven room.
2. Tested Date: 2023/5/2 ~ 2023/5/4

5 Limits of Test Items

5.1 Maximum EIRP

Device		Maximum EIRP (dBm/10 MHz)
☐	End User Device	23
☒	Category A CBSD	30
☐	Category B CBSD	47

5.2 Modulation Characteristics

A curve or equivalent data which shows that the equipment will meet the modulation requirements of the rules under which the equipment is to be licensed.

5.3 Maximum Power Spectral Density

Device		Maximum PSD (dBm/MHz)
☐	End User Device	n/a
☒	Category A CBSD	20
☐	Category B CBSD	37

5.4 Peak to Average Ratio

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

5.5 Bandwidth

According to FCC 47 CFR part 2.1049, the occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5% of the total mean power radiated by a given emission.

5.6 Conducted Spurious Emissions

Power of any emissions outside the Fundamental	Limit
Within 0-10MHz above the Assigned Channel	-13 dBm/MHz
Within 0-10MHz below the Assigned Channel	
Greater than 10MHz above the Assigned Channel	-25 dBm/MHz
Greater than 10MHz below the Assigned Channel	
Power of any emission below 3530MHz	-40 dBm/MHz
Power of any emission above 3720MHz	

Note: The device has MIMO function, so the limit of conducted spurious emissions need to be reduced by $10\log(\text{Numbers}_{\text{ANT}})$ according to FCC KDB 662911 D01 guidance.

5.7 Radiated Spurious Emissions below 1GHz

Power of any emissions outside the Fundamental	Limit
Within 0-10MHz above the Assigned Channel	-13 dBm/MHz
Within 0-10MHz below the Assigned Channel	
Greater than 10MHz above the Assigned Channel	-25 dBm/MHz
Greater than 10MHz below the Assigned Channel	
Power of any emission below 3530MHz	-40 dBm/MHz
Power of any emission above 3720MHz	

5.8 Radiated Spurious Emissions above 1GHz

Power of any emissions outside the Fundamental	Limit
Within 0-10MHz above the Assigned Channel	-13 dBm/MHz
Within 0-10MHz below the Assigned Channel	
Greater than 10MHz above the Assigned Channel	-25 dBm/MHz
Greater than 10MHz below the Assigned Channel	
Power of any emission below 3530MHz	-40 dBm/MHz
Power of any emission above 3720MHz	

5.9 Frequency Stability


The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation (authorized frequency block).

6 Test Arrangements

6.1 Maximum EIRP

6.1.1 Test Setup

Conducted Power Measurement:

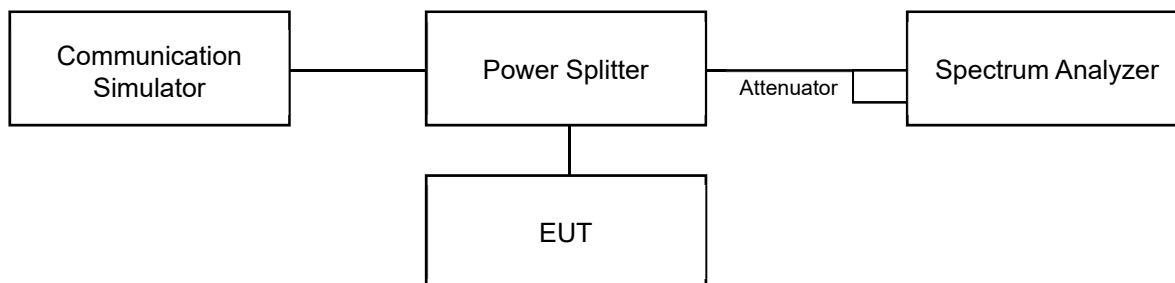

6.1.2 Test Procedure

Conducted Power Measurement:

The EUT is configured by test software or key-in commands to set data modulation and maximum power using WWAN technology and link to spectrum analyzer measurements. Set the EUT to transmit under low, middle and high channel and record the power level shown on spectrum analyzer. Power measurements use detector average (rms).

Measurement method refers to ANSI C63.26 section 5.2.4.4.

- Set span to $1.5 \times$ the OBW.
- Set RBW = 1% to 5% of the OBW.
- Set VBW $\geq 3 \times$ RBW.
- Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
- Set Sweep time = auto-couple.
- Detector = power averaging (rms).
- Set sweep trigger to "free run."
- Trace average at least 100 traces in power averaging (rms) mode.
- Compute power by integrating the spectrum across the OBW of the signal using the instrument's band or channel power measurement function with band/channel limits set equal to the OBW band edges.
- If Duty cycle < 98%, Add $10 \log (1/\text{duty cycle})$ to the measured power level to compute the average power during continuous transmission.
- For per 10MHz method, channel power integrating bandwidth 10MHz is used for bandwidth 20M and 40M. For full power method, channel power integrating bandwidth 20MHz is used for bandwidth 20M, integrating bandwidth 40MHz is used for bandwidth 40M.

Maximum EIRP / ERP

The relevant equation for determining the maximum ERP or EIRP from the measured RF output power is given in Equation as follows:

$$\text{EIRP} = P_{\text{Meas}} + G_T$$

$$\text{ERP} = P_{\text{Meas}} + G_T - 2.15$$

where

ERP or EIRP effective radiated power or equivalent isotropically radiated power, respectively


(expressed in the same units as P_{Meas} , e.g., dBm or dBW)

P_{Meas} measured transmitter output power or PSD, in dBm or dBW

G_T gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP)

6.2 Modulation Characteristics

6.2.1 Test Setup

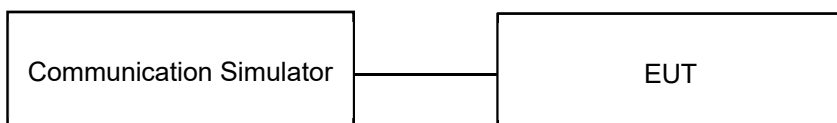


6.2.2 Test Procedure

Connect the EUT to Communication Simulator via the antenna connector, the frequency band is set as EUT supported Modulation and Channels, the EUT output is matched with 50 ohm load, the waveform quality and constellation of the EUT was tested.

6.3 Maximum Power Spectral Density

6.3.1 Test Setup




6.3.2 Test Procedure

- Connect the transmitter to the spectrum analyzer via coaxial cable while ensuring proper impedance matching.
- Set instrument center frequency to OBW center frequency.
- Set span to $2 \times$ to $3 \times$ the OBW.
- Set the RBW to the specified reference bandwidth (often 1 MHz).
- Set VBW $\geq 3 \times$ RBW.
- Detector = RMS (power averaging).
- Ensure that the number of measurement points in the sweep $\geq 2 \times$ span/RBW.
- Sweep time = auto couple.
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level within the reference bandwidth (PSD).

6.4 Peak to Average Ratio

6.4.1 Test Setup

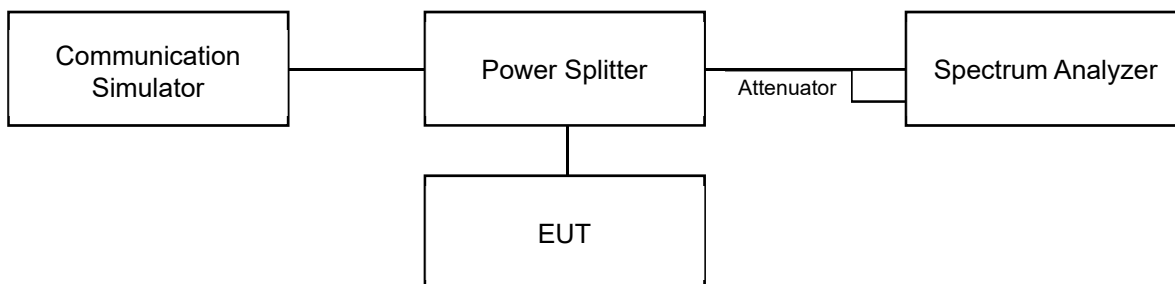


6.4.2 Test Procedure

- Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
- Set the number of counts to a value that stabilizes the measured CCDF curve;
- Record the maximum PAPR level associated with a probability of 0.1%.

6.5 Bandwidth

6.5.1 Test Setup

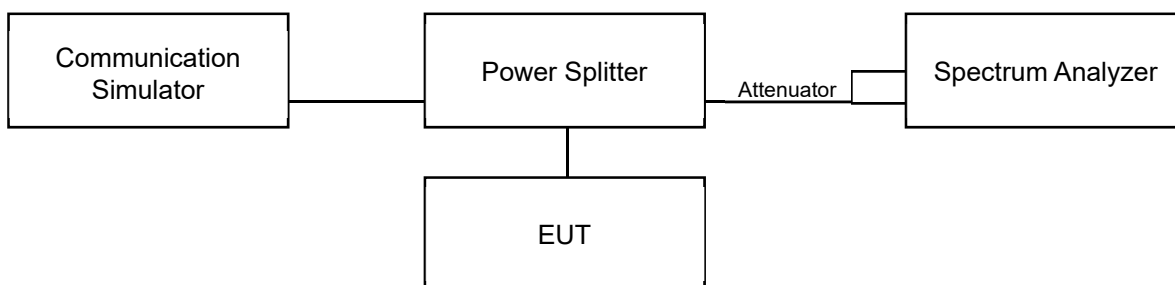

6.5.2 Test Procedure

For the 26 dBc bandwidth measurement method, please refer to section 5.4.3 of ANSI C63.26.


- a. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be wide enough to see sufficient roll off of the signal to make the measurement.
- b. The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set $\geq 3 \times$ RBW.
- c. Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation. See guidance provided in 4.2.3.
- d. The dynamic range of the spectrum analyzer at the selected RBW shall be more than 10 dB below the target “-X dB” requirement, i.e., if the requirement calls for measuring the -26 dB OBW, the spectrum analyzer noise floor at the selected RBW shall be at least 36 dB below the reference level.
- e. Set spectrum analyzer detection mode to peak, and the trace mode to max hold.
- f. Determine the following reference values: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).
- g. Determine the “-X dB amplitude” as equal to (Reference Value - X). Alternatively, this calculation can be performed on the spectrum analyzer using the delta-marker measurement function.
- h. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB amplitude” determined in step f). If a marker is below this “-X dB amplitude” value it should be as close as possible to this value. The OBW is the positive frequency difference between the two markers.
- i. The OBW shall be reported by providing plot(s) of the measuring instrument display, to include markers depicting the relevant frequency and amplitude information (e.g., marker table). The frequency and amplitude axis and scale shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

For the occupied bandwidth measurement method, please refer to section 5.4.4 of ANSI C63.26.

- a. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be wide enough to see sufficient roll off of the signal to make the measurement.
- b. The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set $\geq 3 \times$ RBW.
- c. Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation. See guidance provided in 4.2.3.
- d. The dynamic range of the spectrum analyzer at the selected RBW shall be more than 10 dB below the target “-X dB” requirement, i.e., if the requirement calls for measuring the -26 dB OBW, the spectrum analyzer noise floor at the selected RBW shall be at least 36 dB below the reference level.
- e. Set spectrum analyzer detection mode to peak, and the trace mode to max hold.
- f. Determine the reference value by either of the following:
 - g. 1) Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).
 - h. 2) Set the EUT to transmit an unmodulated carrier. Set the spectrum analyzer marker to the level of the carrier.
- i. Determine the “-X dB amplitude” as equal to (Reference Value - X). Alternatively, this calculation can be performed on the spectrum analyzer using the delta-marker measurement function.
- j. If the reference value was determined using an unmodulated carrier, turn the EUT modulation on, then either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise the trace from step f) shall be used for step i).
- k. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB amplitude” determined in step f). If a marker is below this “-X dB amplitude” value it should be as close as possible to this value. The OBW is the positive frequency difference between the two markers. The spectral envelope can cross the “-X dB amplitude” at multiple points. The lowest or highest frequency shall be selected as the frequencies that are the farthest away from the center frequency at which the spectral envelope crosses the “-X dB amplitude.”
- l. The OBW shall be reported by providing plot(s) of the measuring instrument display, to include markers depicting the relevant frequency and amplitude information (e.g., marker table). The frequency and amplitude axis and scale shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

6.6 Conducted Spurious Emissions

6.6.1 Test Setup

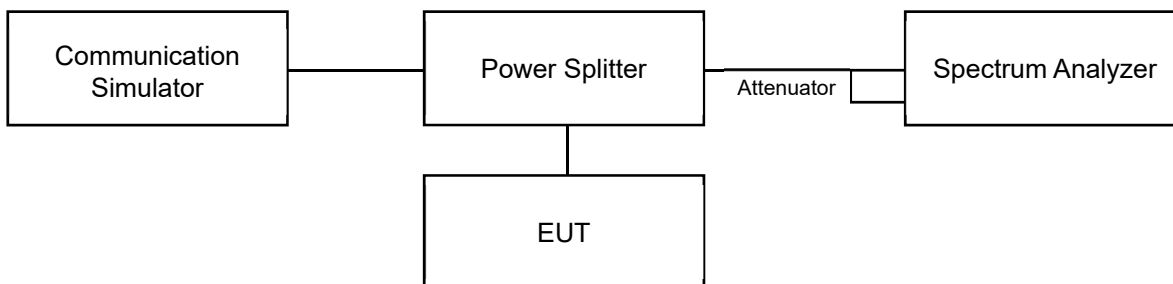


6.6.2 Test Procedure

- Measurement refer to ANSI C63.26 section 5.7.
- All measurements were done at 3 channels: low, middle and high operational frequency range.
- Measuring frequency range is from 9 kHz up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower. 20 dB attenuation pad is connected with spectrum.
- The fundamental frequency above 1 GHz, the spectrum set RBW = 1 MHz, VBW = 3 MHz, Detector = Average.
- The fundamental frequency below 1 GHz, the spectrum set RBW $\geq$ 100 kHz, VBW $\geq$ 3 x RBW, Detector = Average.
- Measuring frequency band edge, narrow RBW (no less than 1% of the OBW) is used for conducted emission measurement.

6.7 Radiated Spurious Emissions below 1GHz

6.7.1 Test Setup

For radiated emission 30 MHz to 1 GHz

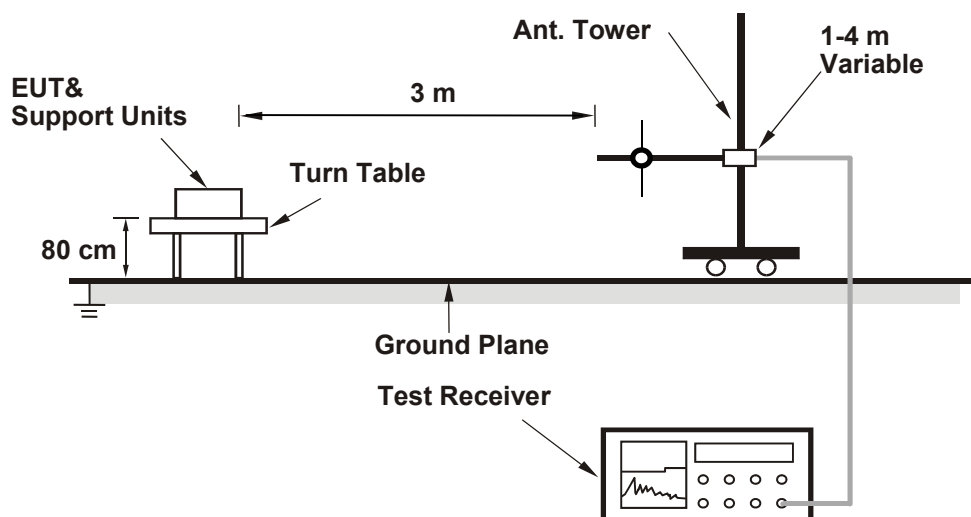

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.7.2 Test Procedure

The EUT is configured by test software or key-in commands to set data modulation and maximum power using WWAN technology.

- In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) height of turn table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- Perform a field strength measurement and record the worse read value, is the field strength value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor and then mathematically convert the measured field strength level to EIRP/ERP level.
- Following C63.26 section 5.5 and 5.2.7
- $EIRP (dBm) = E (dB\mu V/m) + 20\log(D) - 104.8$; where D is the measurement distance (in the far field region) in m.
- $ERP (dBm) = E (dB\mu V/m) + 20\log(D) - 104.8 - 2.15$; where D is the measurement distance (in the far field region) in m.


Note:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz/3 MHz. Set detector = average.
- The emission levels were against the limit of frequency range 9 kHz ~ 30 MHz:
The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

6.8 Radiated Spurious Emissions above 1GHz

6.8.1 Test Setup

For radiated emission above 1 GHz

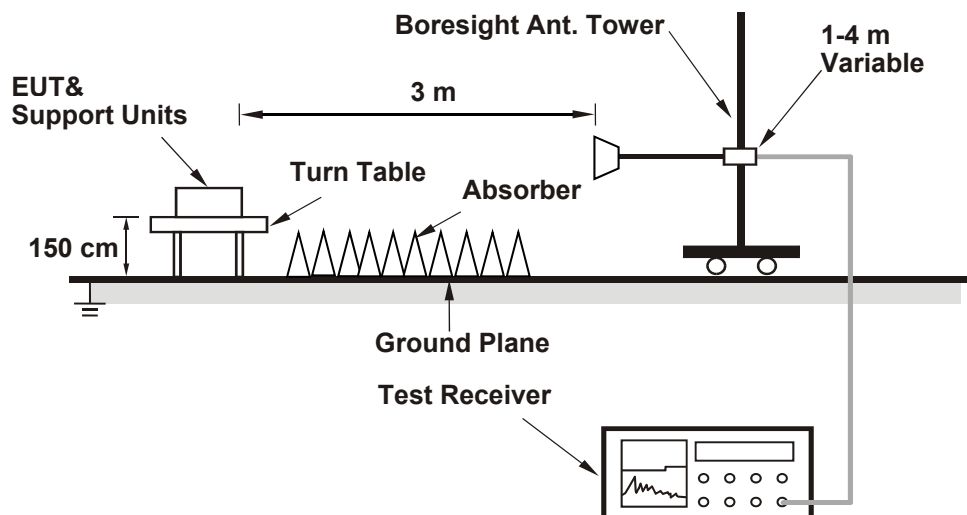

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.8.2 Test Procedure

The EUT is configured by test software or key-in commands to set data modulation and maximum power using WWAN technology.


- In the semi-anechoic chamber, EUT placed on the 1.5 m height of turn table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- Perform a field strength measurement and record the worse read value, is the field strength value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor and then mathematically convert the measured field strength level to EIRP/ERP level.
- Following C63.26 section 5.5 and 5.2.7
- $EIRP (dBm) = E (dB\mu V/m) + 20\log(D) - 104.8$; where D is the measurement distance (in the far field region) in m.
- $ERP (dBm) = E (dB\mu V/m) + 20\log(D) - 104.8 - 2.15$; where D is the measurement distance (in the far field region) in m.

Note:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz/3 MHz. Set detector = average.

6.9 Frequency Stability

6.9.1 Test Setup

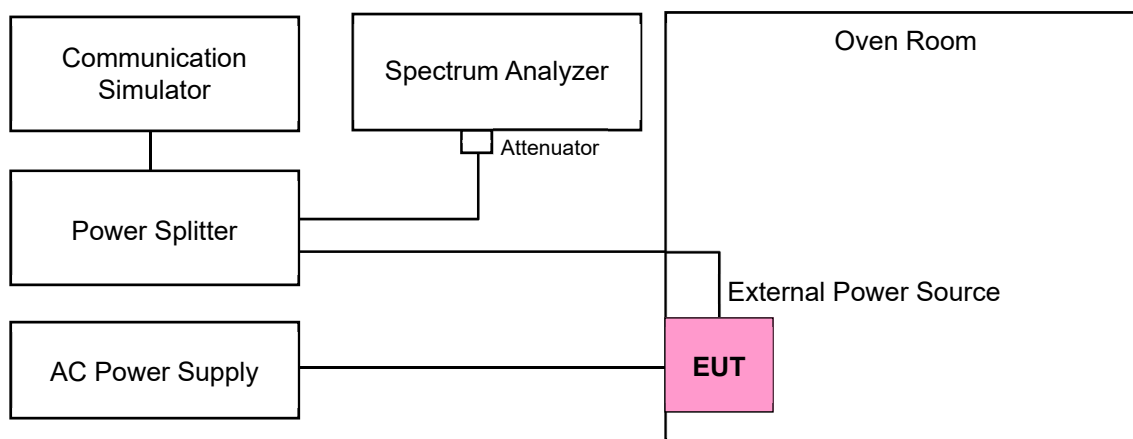

6.9.2 Test Procedure

The EUT is configured by test software or key-in commands to set data modulation and maximum power using WWAN technology.

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the AC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

Note: The frequency error was recorded frequency error from the communication simulator.

7 Test Results of Test Item

7.1 Maximum EIRP

Input Power:	120 Vac, 60Hz	Environmental Conditions:	22°C, 70% RH	Tested By:	James Yang
--------------	---------------	---------------------------	--------------	------------	------------

Per 10M Power

NR Band 48_Per 10M (dBm)					
BW	Channel	Chain	QPSK	64QAM	256QAM
40 MHz	638000 3570MHz	0	14.48	14.44	14.41
		1	16.44	16.38	16.31
		Total Power	18.58	18.53	18.47
		E.I.R.P.	26.89	26.84	26.78
		Power Setting	225		
	641666 3624.99MHz	0	13.44	13.39	13.30
		1	14.53	14.46	14.38
		Total Power	17.03	16.97	16.88
		E.I.R.P.	25.34	25.28	25.19
		Power Setting	220		
	645332 3679.98MHz	0	14.75	14.71	14.68
		1	16.07	16.03	15.99
		Total Power	18.47	18.43	18.39
		E.I.R.P.	26.78	26.74	26.70
		Power Setting	245		
BW	Channel	Chain	QPSK	64QAM	256QAM
30 MHz	637668 3565.02MHz	0	16.54	15.50	15.46
		1	16.84	16.79	16.72
		Total Power	19.70	19.20	19.15
		E.I.R.P.	28.01	27.51	27.46
		Power Setting	245		
	641666 3624.99MHz	0	17.09	17.02	16.94
		1	16.67	16.66	16.60
		Total Power	19.90	19.85	19.78
		E.I.R.P.	28.21	28.16	28.09
		Power Setting	245		
	645666 3684.99MHz	0	17.03	16.96	16.85
		1	16.85	16.82	16.75
		Total Power	19.95	19.90	19.81
		E.I.R.P.	28.26	28.21	28.12
		Power Setting	245		

*EIRP (dBm/10MHz) = Conducted Output Power (dBm/10MHz) + Directional Gain (dBi).


*Directional Gain (dBi) = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 10 \log[(10^{4.79/20} + 10^{5.79/20})^2/2] = 8.31 \text{ dBi}$

NR Band 48_Per 10M (dBm)					
BW	Channel	Chain	QPSK	64QAM	256QAM
20 MHz	637334 3560.01MHz	0	17.84	17.78	17.72
		1	18.26	18.21	18.00
		Total Power	21.07	21.01	20.87
		E.I.R.P.	29.38	29.32	29.18
		Power Setting	215		
	641666 3624.99MHz	0	17.54	17.48	14.41
		1	18.01	17.95	17.88
		Total Power	20.79	20.73	19.49
		E.I.R.P.	29.10	29.04	27.80
		Power Setting	225		
	646000 3690MHz	0	18.51	18.48	18.43
		1	18.47	18.44	18.36
		Total Power	21.50	21.47	21.41
		E.I.R.P.	29.81	29.78	29.72
		Power Setting	235		
BW	Channel	Chain	QPSK	64QAM	256QAM
10 MHz	637000 3555MHz	0	16.22	16.15	16.11
		1	17.15	17.09	17.04
		Total Power	19.72	19.66	19.61
		E.I.R.P.	28.03	27.97	27.92
		Power Setting	180		
	641666 3624.99MHz	0	16.53	16.48	16.42
		1	17.06	17.04	17.00
		Total Power	19.81	19.78	19.73
		E.I.R.P.	28.12	28.09	28.04
		Power Setting	190		
	646332 3694.98MHz	0	16.62	16.55	16.53
		1	17.10	17.06	17.01
		Total Power	19.88	19.82	19.79
		E.I.R.P.	28.19	28.13	28.10
		Power Setting	195		

*EIRP (dBm/10MHz) = Conducted Output Power (dBm/10MHz) + Directional Gain (dBi).

*Directional Gain (dBi) = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 10 \log[(10^{4.79/20} + 10^{5.79/20})^2/2] = 8.31 \text{ dBi}$

Spectrum Plot of Worst Value

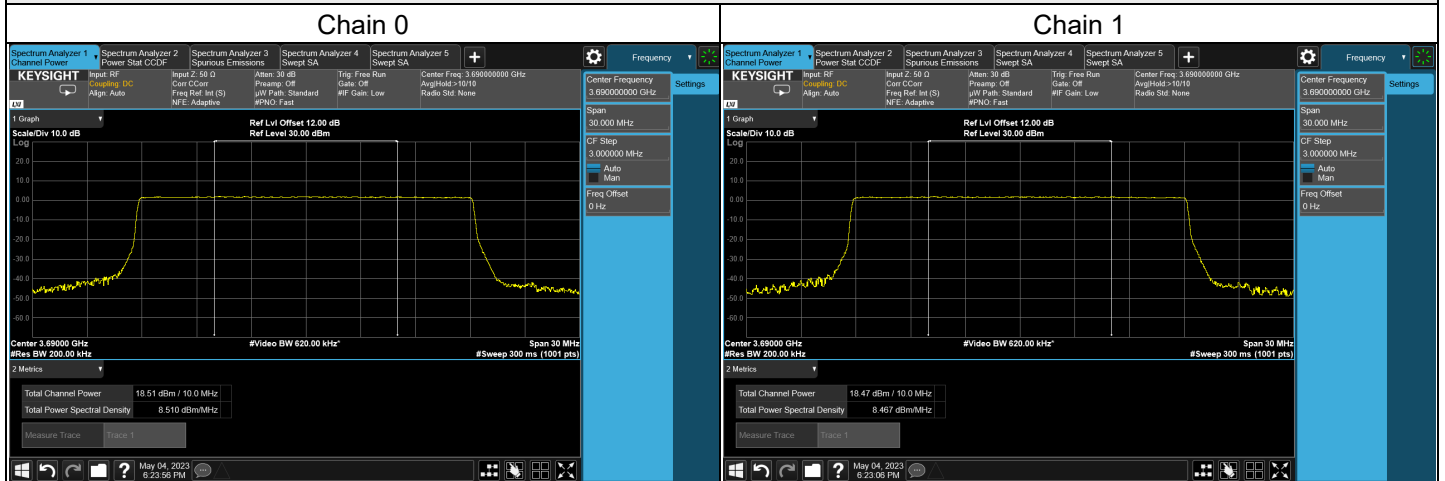

Full Power

NR Band 48_Full power (dBm/40MHz)					
BW	Channel	Chain	QPSK	64QAM	256QAM
40 MHz	638000 3570MHz	0	20.50	20.46	20.44
		1	21.54	21.50	21.47
		Total Power	24.06	24.02	24.00
		E.I.R.P.	32.37	32.33	32.31
		Power Setting	225		
	641666 3624.99MHz	0	19.61	19.60	19.53
		1	19.78	19.65	19.62
		Total Power	22.71	22.64	22.59
		E.I.R.P.	31.02	30.95	30.90
		Power Setting	245		
	645332 3679.98MHz	0	21.09	21.02	21.00
		1	21.36	21.26	21.17
		Total Power	24.24	24.15	24.10
		E.I.R.P.	32.55	32.46	32.41
		Power Setting	245		

*EIRP (dBm/40MHz) = Conducted Output Power (dBm/40MHz) + Directional Gain (dBi).

*Directional Gain (dBi) = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 10 \log[(10^{4.79/20} + 10^{5.79/20})^2/2] = 8.31 \text{ dBi}$

NR Band 48_Full power (dBm/30MHz)					
BW	Channel	Chain	QPSK	64QAM	256QAM
30 MHz	637668 3565.02MHz	0	21.09	21.02	20.96
		1	21.55	21.50	21.45
		Total Power	24.34	24.28	24.22
		E.I.R.P.	32.65	32.59	32.53
		Power Setting	245		
	641666 3624.99MHz	0	21.49	21.43	21.37
		1	21.24	21.20	21.13
		Total Power	24.38	24.33	24.26
		E.I.R.P.	32.69	32.64	32.57
		Power Setting	245		
	645666 3684.99MHz	0	21.63	21.55	21.49
		1	21.43	21.40	21.37
		Total Power	24.54	24.49	24.44
		E.I.R.P.	32.85	32.80	32.75
		Power Setting	245		

*EIRP (dBm/30MHz) = Conducted Output Power (dBm/30MHz) + Directional Gain (dBi).

*Directional Gain (dBi) = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 10 \log[(10^{4.79/20} + 10^{5.79/20})^2/2] = 8.31 \text{ dBi}$

NR Band 48_Full power (dBm/20MHz)					
NR Band 48_Full power					
BW	Channel	Chain	QPSK	64QAM	256QAM
20 MHz	637334 3560.01MHz	0	20.46	20.40	20.34
		1	20.88	20.81	20.73
		Total Power	23.69	23.62	23.55
		E.I.R.P.	32.00	31.93	31.86
		Power Setting	215		
	641666 3624.99MHz	0	20.28	20.22	20.16
		1	20.79	20.73	20.68
		Total Power	23.55	23.49	23.44
		E.I.R.P.	31.86	31.80	31.75
		Power Setting	225		
	646000 3690MHz	0	21.17	21.13	21.06
		1	21.13	21.11	21.03
		Total Power	24.16	24.13	24.06
		E.I.R.P.	32.47	32.44	32.37
		Power Setting	235		

*EIRP (dBm/20MHz) = Conducted Output Power (dBm/20MHz) + Directional Gain (dBi).


*Directional Gain (dBi) = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 10 \log[(10^{4.79/20} + 10^{5.79/20})^2/2] = 8.31 \text{ dBi}$

NR Band 48_Full power (dBm/10MHz)					
BW	Channel	Chain	QPSK	64QAM	256QAM
10 MHz	637000 3555MHz	0	16.22	16.15	16.11
		1	17.15	17.09	17.04
		Total Power	19.72	19.66	19.61
		E.I.R.P.	28.03	27.97	27.92
		Power Setting	180		
	641666 3624.99MHz	0	16.53	16.48	16.42
		1	17.06	17.04	17.00
		Total Power	19.81	19.78	19.73
		E.I.R.P.	28.12	28.09	28.04
		Power Setting	190		
	646332 3694.98MHz	0	16.62	16.55	16.53
		1	17.10	17.06	17.01
		Total Power	19.88	19.82	19.79
		E.I.R.P.	28.19	28.13	28.10
		Power Setting	195		

*EIRP (dBm/10MHz) = Conducted Output Power (dBm/10MHz) + Directional Gain (dBi).

*Directional Gain (dBi) = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 10 \log[(10^{4.79/20} + 10^{5.79/20})^2/2] = 8.31 \text{ dBi}$


Spectrum Plot of Worst Value

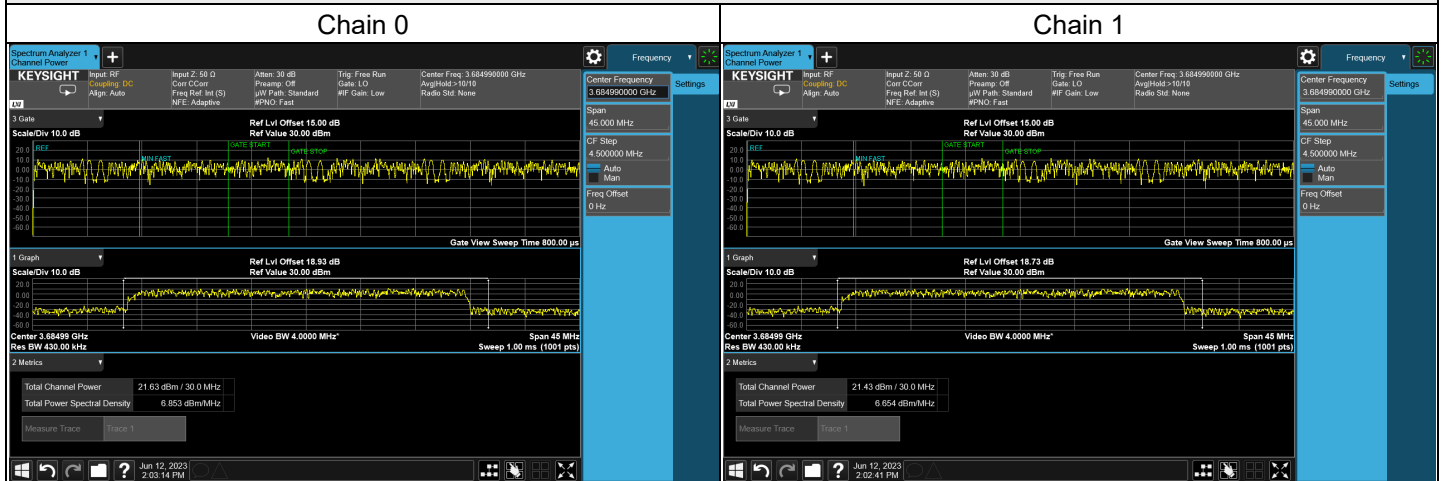

7.2 Modulation Characteristics

Input Power:	120 Vac, 60Hz	Environmental Conditions:	22°C, 70% RH	Tested By:	James Yang
--------------	---------------	---------------------------	--------------	------------	------------

NR n48 SCS 15 kHz, Channel Bandwidth: 40 MHz

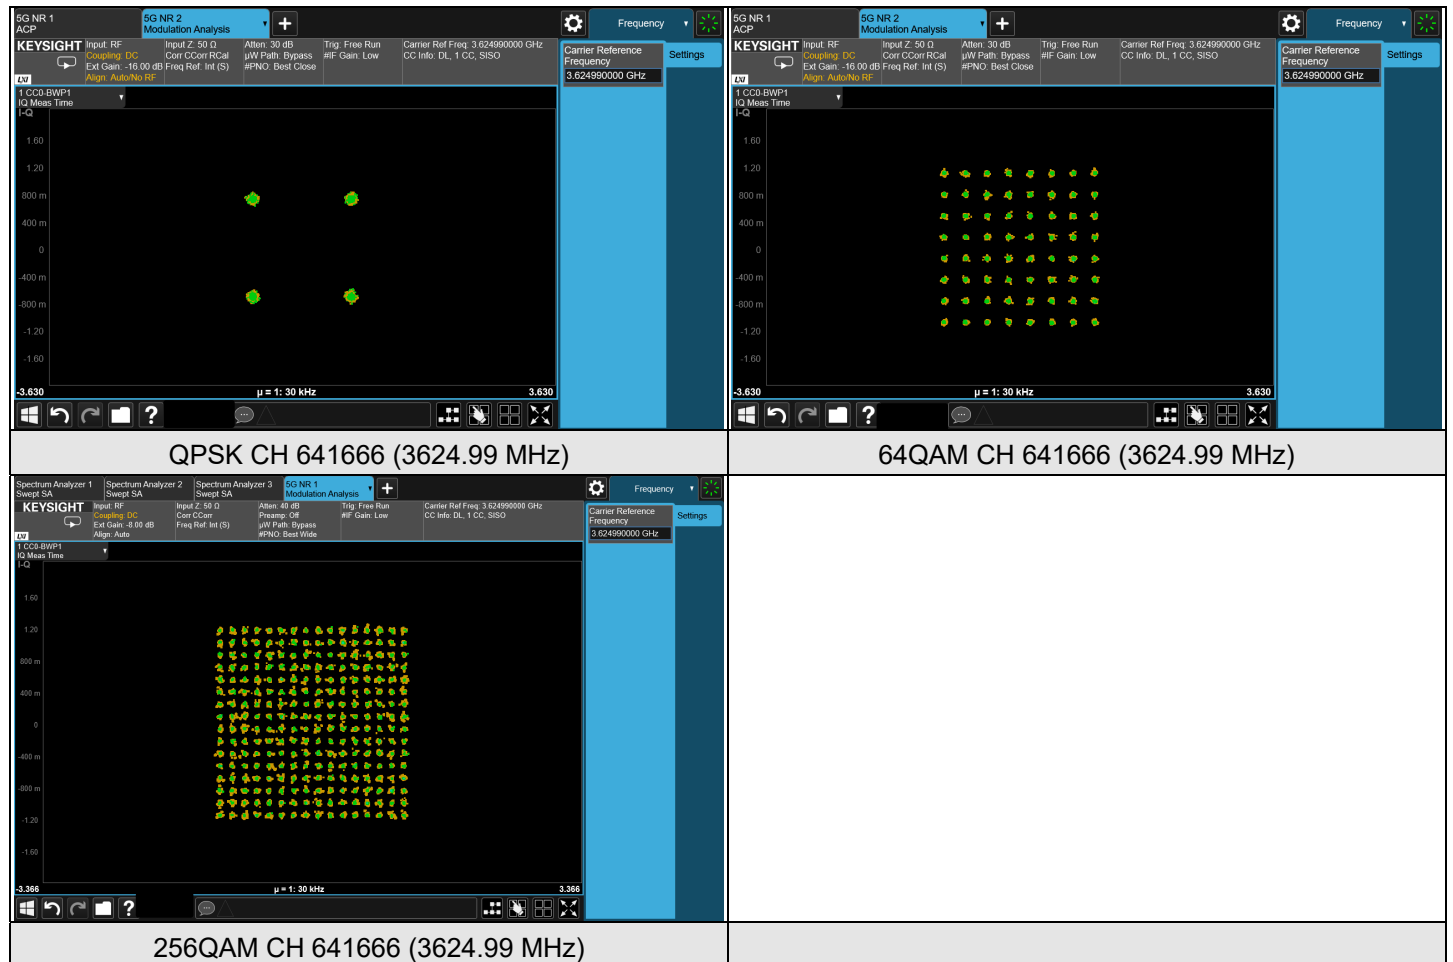

7.3 Maximum Power Spectral Density

Input Power:	120 Vac, 60Hz	Environmental Conditions:	22°C, 70% RH	Tested By:	James Yang
--------------	---------------	---------------------------	--------------	------------	------------

Power Spectral Density (dBm/MHz)

NR Band 48			
BW	Channel	Chain	QPSK
40 MHz	638000 3570MHz	0	5.42
		1	6.39
		Total	8.94
		E.I.R.P.	17.25
	641666 3624.99MHz	0	4.97
		1	5.05
		Total	8.02
		E.I.R.P.	16.33
	645332 3679.98MHz	0	6.00
		1	5.82
		Total	8.92
		E.I.R.P.	17.23
NR Band 48			
BW	Channel	Chain	QPSK
30 MHz	637668 3565.02MHz	0	6.99
		1	7.48
		Total	10.25
		E.I.R.P.	18.56
	641666 3624.99MHz	0	7.06
		1	7.03
		Total	10.06
		E.I.R.P.	18.37
	645666 3684.99MHz	0	7.13
		1	7.22
		Total	10.19
		E.I.R.P.	18.50

*EIRP (dBm/MHz) = Conducted (dBm/MHz) + Directional Gain (dBi).


*Directional Gain (dBi) = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 10 \log[(10^{4.79/20} + 10^{5.79/20})^2/2] = 8.31 \text{ dBi}$

NR Band 48			
BW	Channel	Chain	QPSK
20 MHz	637334 3560.01MHz	0	8.48
		1	8.39
		Total	11.45
		E.I.R.P.	19.76
	641666 3624.99MHz	0	7.90
		1	8.64
		Total	11.30
		E.I.R.P.	19.61
	646000 3690MHz	0	8.72
		1	8.45
		Total	11.60
		E.I.R.P.	19.91
NR Band 48			
BW	Channel	Chain	QPSK
10 MHz	637000 3555MHz	0	7.93
		1	8.53
		Total	11.25
		E.I.R.P.	19.57
	641666 3624.99MHz	0	7.94
		1	8.49
		Total	11.23
		E.I.R.P.	19.55
	646332 3694.98MHz	0	7.80
		1	8.58
		Total	11.22
		E.I.R.P.	19.53

*EIRP (dBm/MHz) = Conducted (dBm/MHz) + Directional Gain (dBi).

*Directional Gain (dBi) = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 10 \log[(10^{4.79/20} + 10^{5.79/20})^2/2] = 8.31 \text{ dBi}$

Spectrum Plot of Worst Value

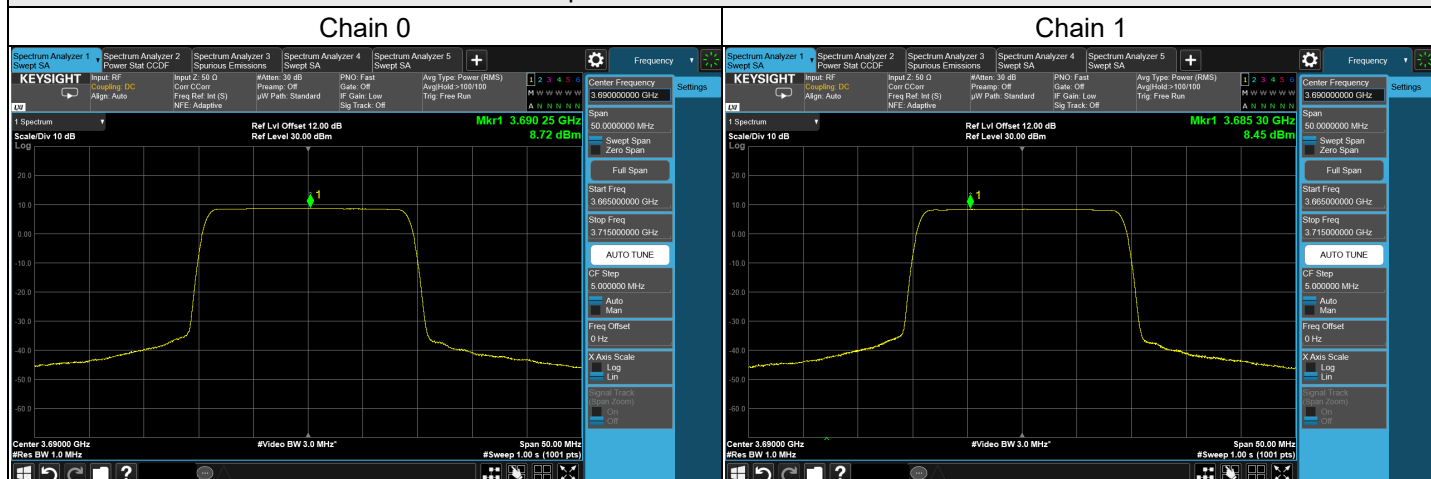


7.4 Peak to Average Ratio

Input Power:	120 Vac, 60Hz	Environmental Conditions:	22°C, 70% RH	Tested By:	James Yang
--------------	---------------	---------------------------	--------------	------------	------------


NR n48 SCS 30 kHz, Channel Bandwidth: 10 MHz

Channel	Frequency (MHz)	Peak to Average Ratio (dB)						Limit
		Chain 0			Chain 1			
		QPSK	64QAM	256QAM	QPSK	64QAM	256QAM	
637000	3555	8.53	8.90	8.87	8.90	8.88	8.72	13.00
641666	3624.99	8.56	8.77	8.54	9.24	8.74	8.72	
646333	3694.98	8.62	8.66	8.81	8.97	8.44	8.61	

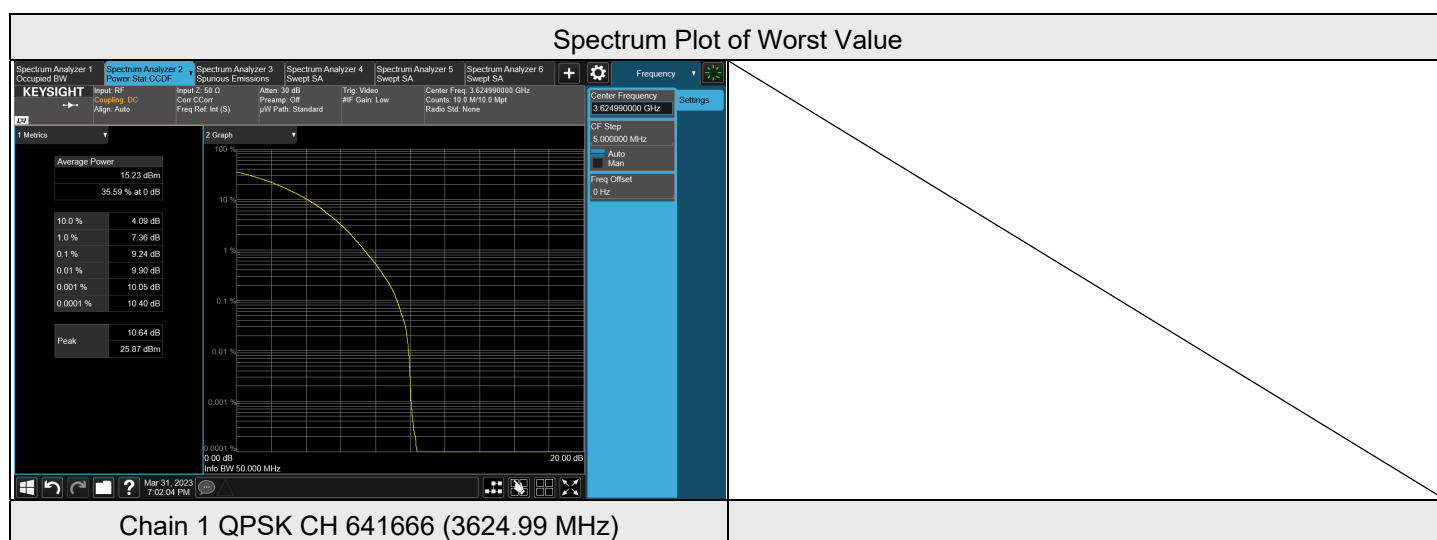


NR n48 SCS 30 kHz, Channel Bandwidth: 20 MHz

Channel	Frequency (MHz)	Peak to Average Ratio (dB)						Limit
		Chain 0			Chain 1			
		QPSK	64QAM	256QAM	QPSK	64QAM	256QAM	
637334	3560.01	8.71	8.81	8.86	8.81	8.87	9.09	13.00
641666	3624.99	8.78	8.57	8.77	8.75	8.62	8.67	
646000	3690	8.92	8.63	8.48	8.57	8.53	8.64	

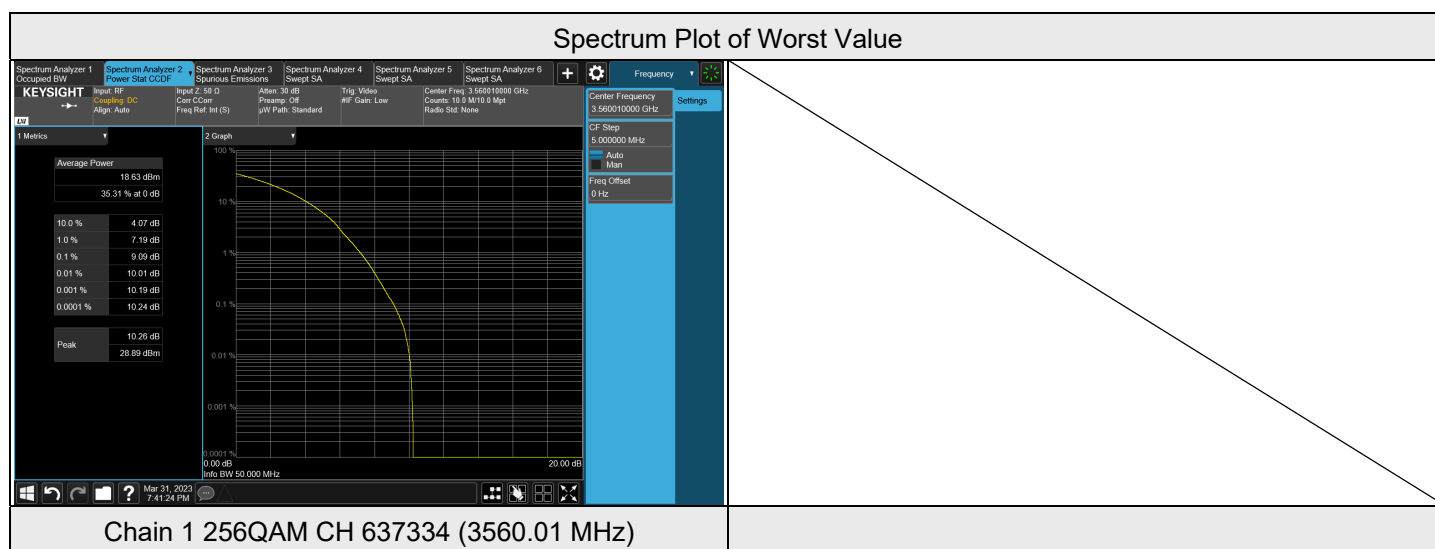


NR n48 SCS 30 kHz, Channel Bandwidth: 30 MHz

Channel	Frequency (MHz)	Peak to Average Ratio (dB)						Limit
		Chain 0			Chain 1			
		QPSK	64QAM	256QAM	QPSK	64QAM	256QAM	
637668	3565.02	8.91	8.72	8.67	8.52	8.51	8.67	13.00
641666	3624.99	8.49	8.67	8.57	8.81	8.70	8.64	
645666	3684.99	8.89	8.64	8.82	8.87	8.74	8.92	

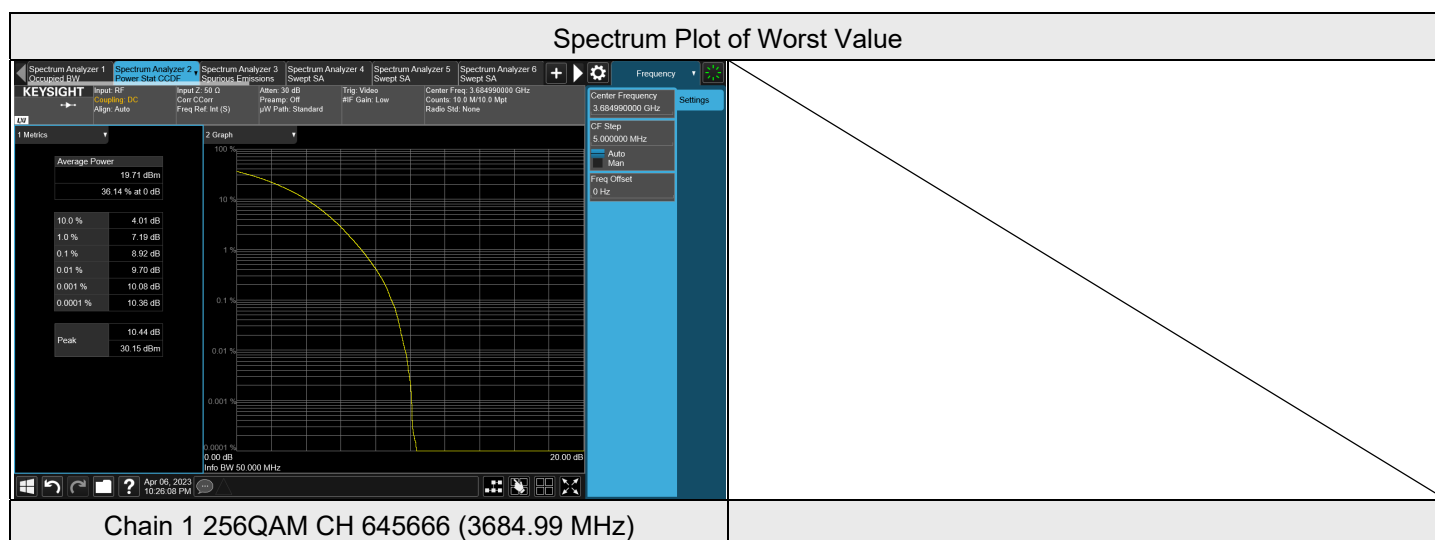

NR n48 SCS 30 kHz, Channel Bandwidth: 40 MHz

Channel	Frequency (MHz)	Peak to Average Ratio (dB)						Limit
		Chain 0			Chain 1			
		QPSK	64QAM	256QAM	QPSK	64QAM	256QAM	
638000	3570	8.54	8.70	8.62	8.71	8.85	8.74	13.00
641666	3624.99	8.55	8.45	8.52	8.50	8.43	8.58	
645332	3679.98	8.49	8.31	8.61	8.75	8.57	8.81	

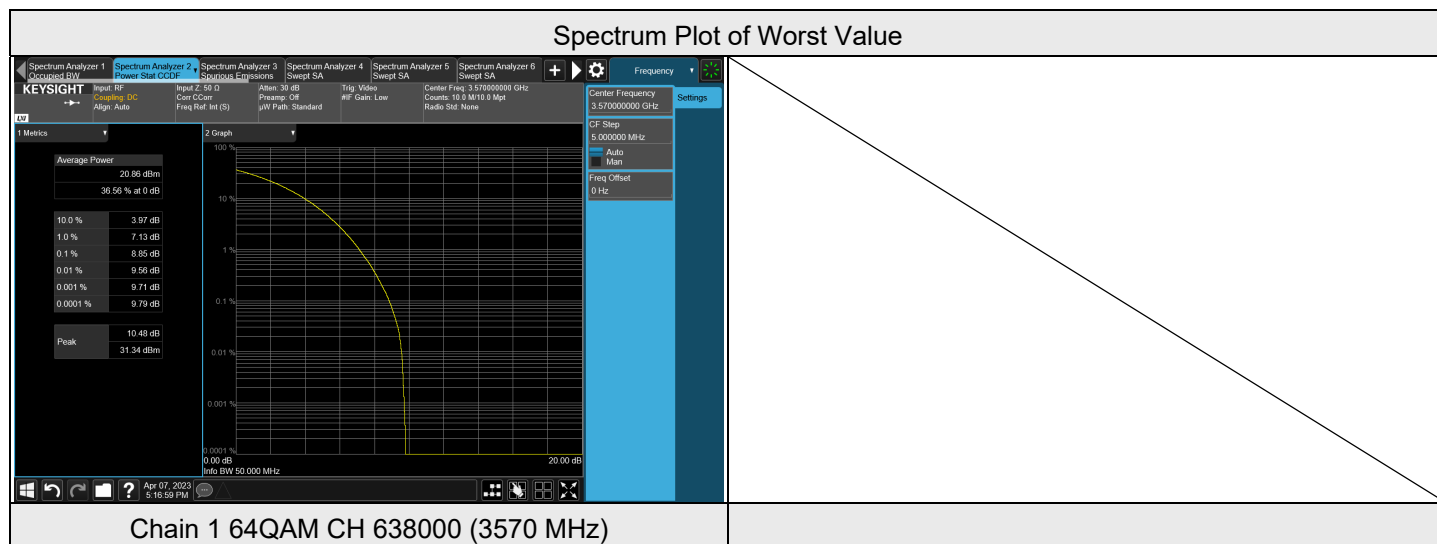


7.5 Bandwidth

Input Power:	120 Vac, 60Hz	Environmental Conditions:	22°C, 70% RH	Tested By:	James Yang
--------------	---------------	---------------------------	--------------	------------	------------

NR n48 SCS 30 kHz, Channel Bandwidth: 10 MHz

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)					
		Chain 0			Chain 1		
		QPSK	64QAM	256QAM	QPSK	64QAM	256QAM
637000	3555	8.587	8.564	8.585	8.586	8.602	8.603
641666	3624.99	8.585	8.572	8.569	8.600	8.604	8.604
646333	3694.98	8.590	8.576	8.570	8.588	8.576	8.570


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)					
		Chain 0			Chain 1		
		QPSK	64QAM	256QAM	QPSK	64QAM	256QAM
637000	3555	9.53	9.44	9.52	9.68	9.50	9.50
641666	3624.99	9.51	9.48	9.45	9.68	9.48	9.48
646333	3694.98	9.48	9.47	9.47	9.67	9.47	9.47

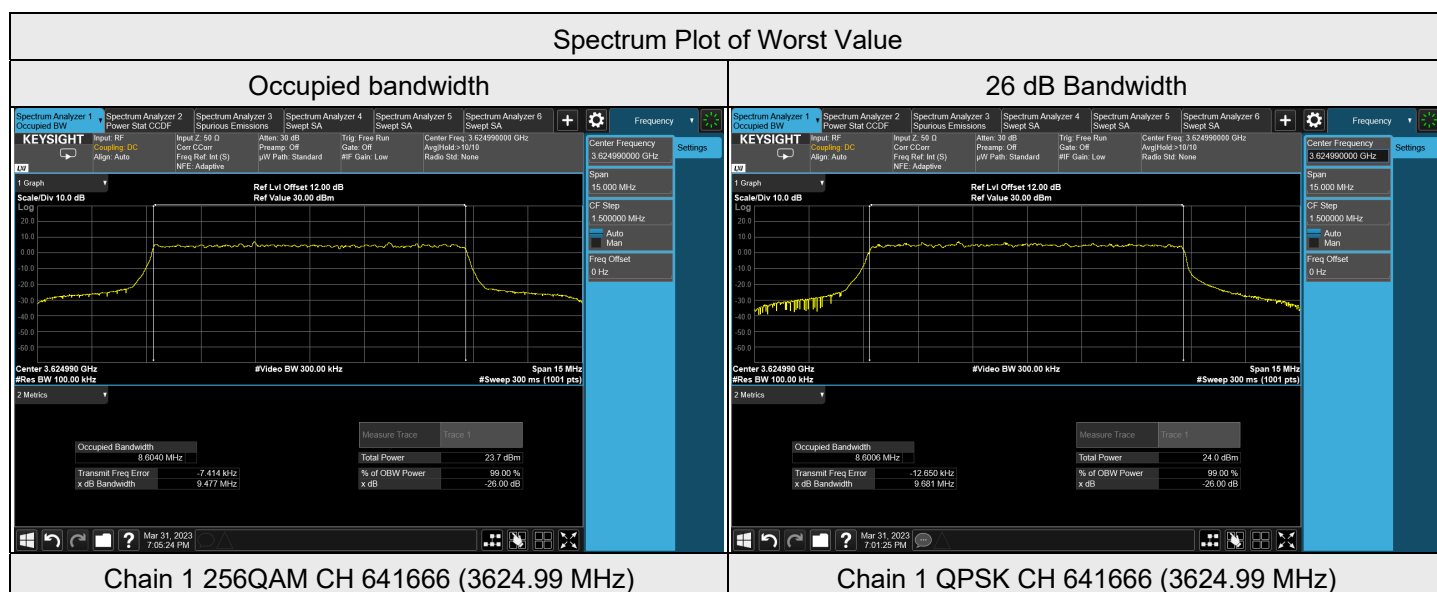

NR n48 SCS 30 kHz, Channel Bandwidth: 20 MHz

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)					
		Chain 0			Chain 1		
		QPSK	64QAM	256QAM	QPSK	64QAM	256QAM
637334	3560.01	18.206	18.194	18.187	18.189	18.251	18.252
641666	3624.99	18.182	18.245	18.247	18.203	18.242	18.245
646000	3690	18.196	18.253	18.250	18.237	18.234	18.233

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)					
		Chain 0			Chain 1		
		QPSK	64QAM	256QAM	QPSK	64QAM	256QAM
637334	3560.01	19.63	19.68	19.68	19.52	19.76	19.75
641666	3624.99	19.73	19.70	19.72	19.67	19.82	19.83
646000	3690	19.67	19.79	19.77	19.86	19.78	19.75

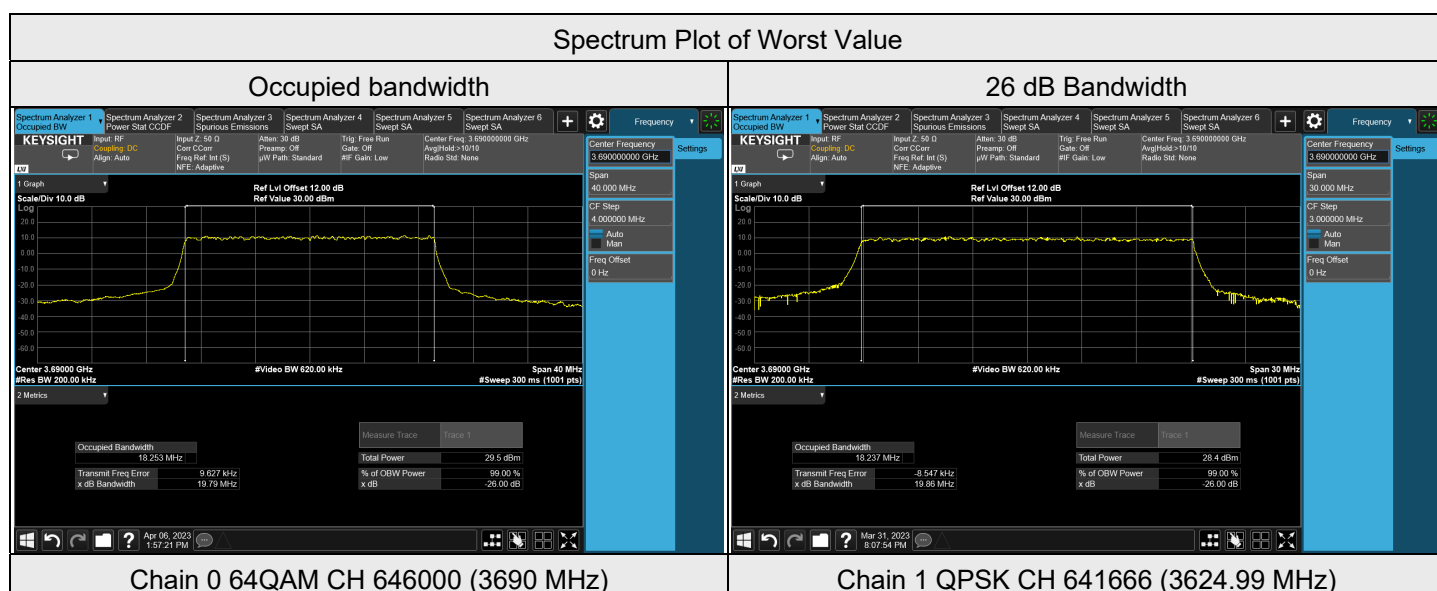


NR n48 SCS 30 kHz, Channel Bandwidth: 30 MHz

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)					
		Chain 0			Chain 1		
		QPSK	64QAM	256QAM	QPSK	64QAM	256QAM
637668	3565.02	27.820	27.823	27.824	27.883	27.892	27.876
641666	3624.99	27.855	27.841	27.842	27.879	27.887	27.892
645666	3684.99	27.843	27.826	27.828	27.879	27.883	27.876

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)					
		Chain 0			Chain 1		
		QPSK	64QAM	256QAM	QPSK	64QAM	256QAM
637668	3565.02	29.66	29.48	29.51	29.78	29.81	29.75
641666	3624.99	29.78	29.65	29.63	29.62	29.71	29.72
645666	3684.99	29.66	29.60	29.59	29.66	29.68	29.68


Spectrum Plot of Worst Value

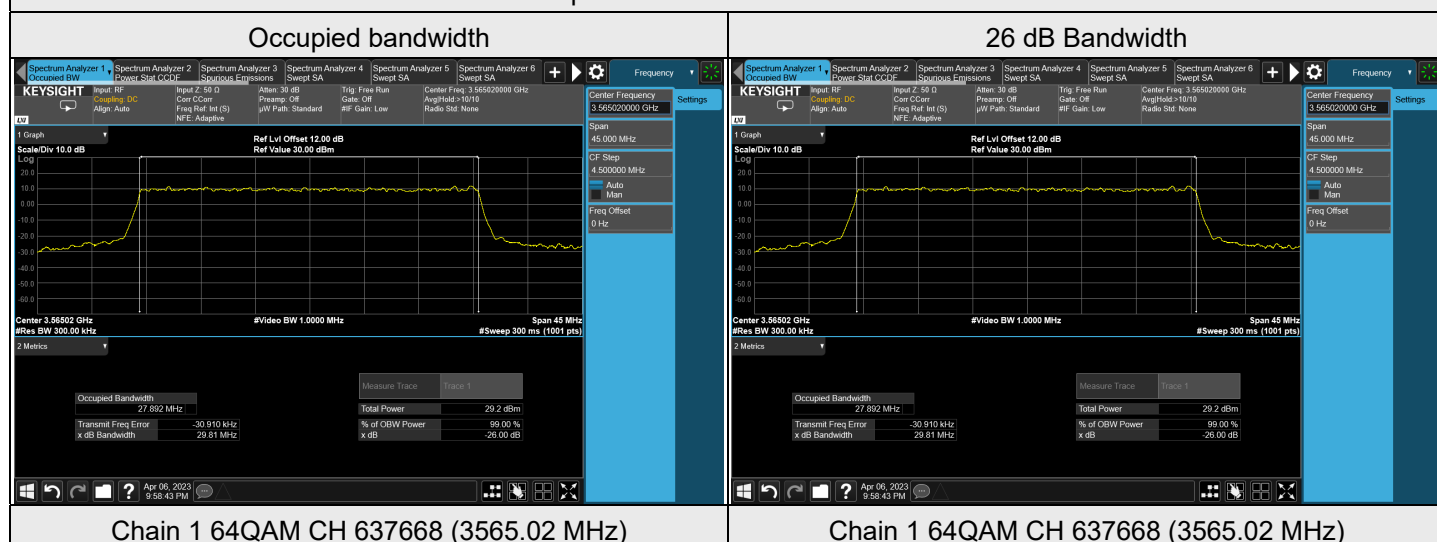

NR n48 SCS 30 kHz, Channel Bandwidth: 40 MHz

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)					
		Chain 0			Chain 1		
		QPSK	64QAM	256QAM	QPSK	64QAM	256QAM
638000	3570	37.848	37.846	37.848	37.914	37.904	37.909
641666	3624.99	37.852	37.851	37.852	37.901	37.905	37.902
645332	3679.98	37.863	37.862	37.858	37.904	37.909	37.916

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)					
		Chain 0			Chain 1		
		QPSK	64QAM	256QAM	QPSK	64QAM	256QAM
638000	3570	39.97	39.98	39.96	40.37	40.40	40.41
641666	3624.99	39.86	39.87	39.87	40.46	40.44	40.48
645332	3679.98	39.85	39.80	39.81	40.39	40.41	40.38

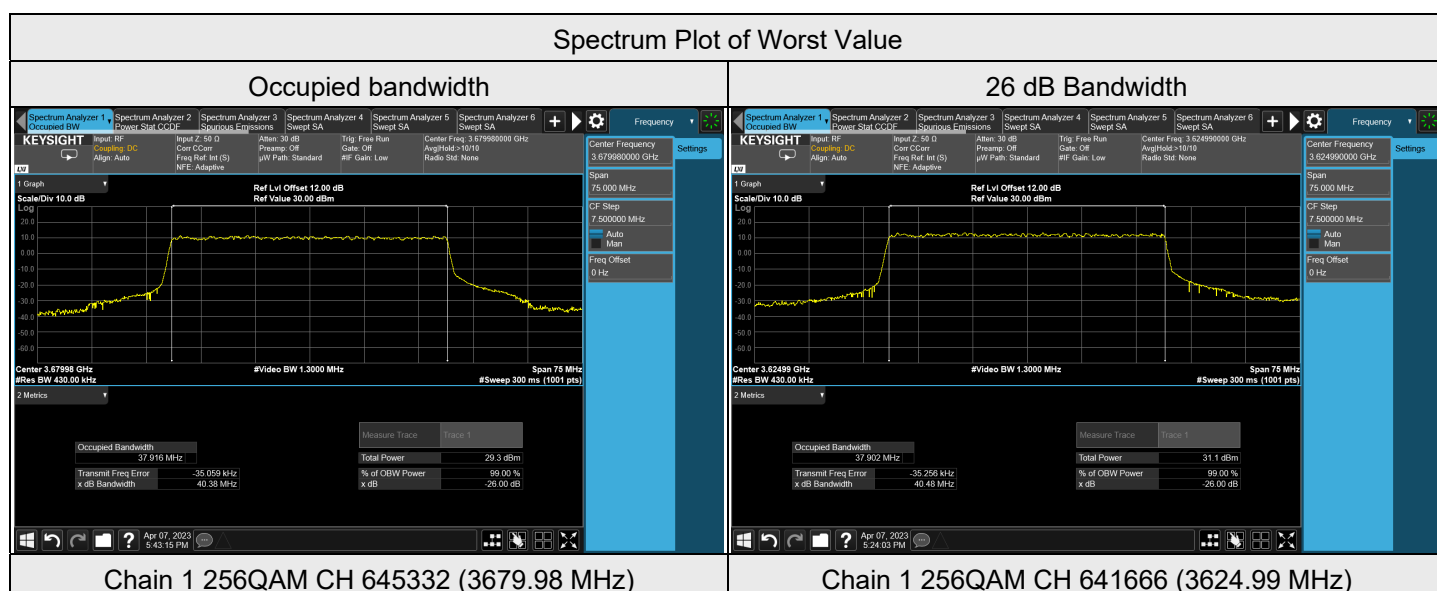


7.6 Conducted Spurious Emissions


Input Power:	120 Vac, 60Hz	Environmental Conditions:	22°C, 70% RH	Tested By:	James Yang
--------------	---------------	---------------------------	--------------	------------	------------

NR n48 SCS 30 kHz, Channel Bandwidth: 10 MHz


Chain 0

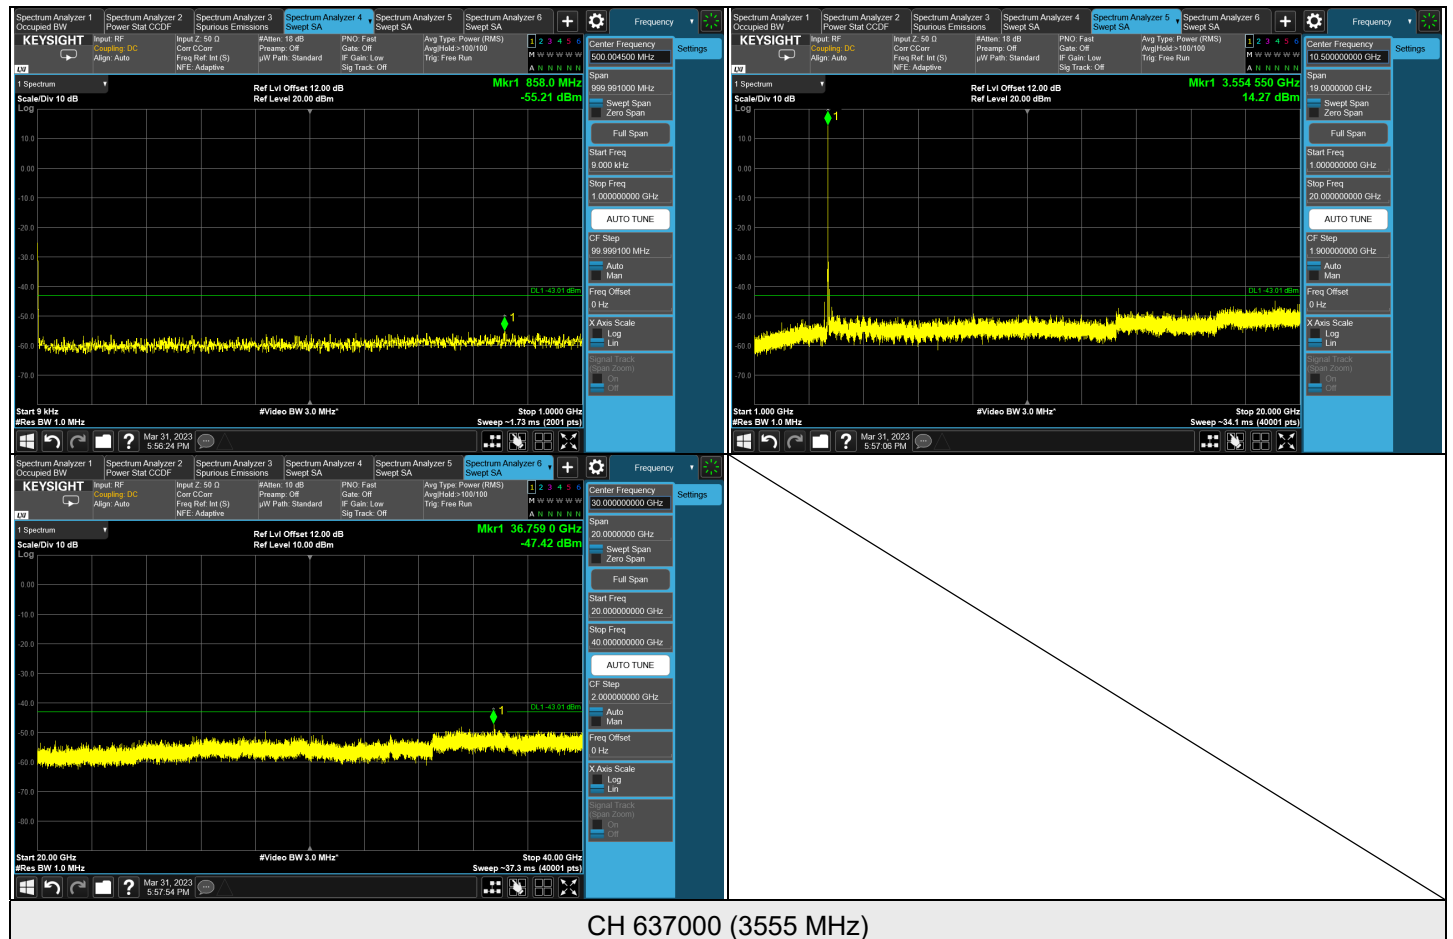

CH 637000 (3555 MHz)

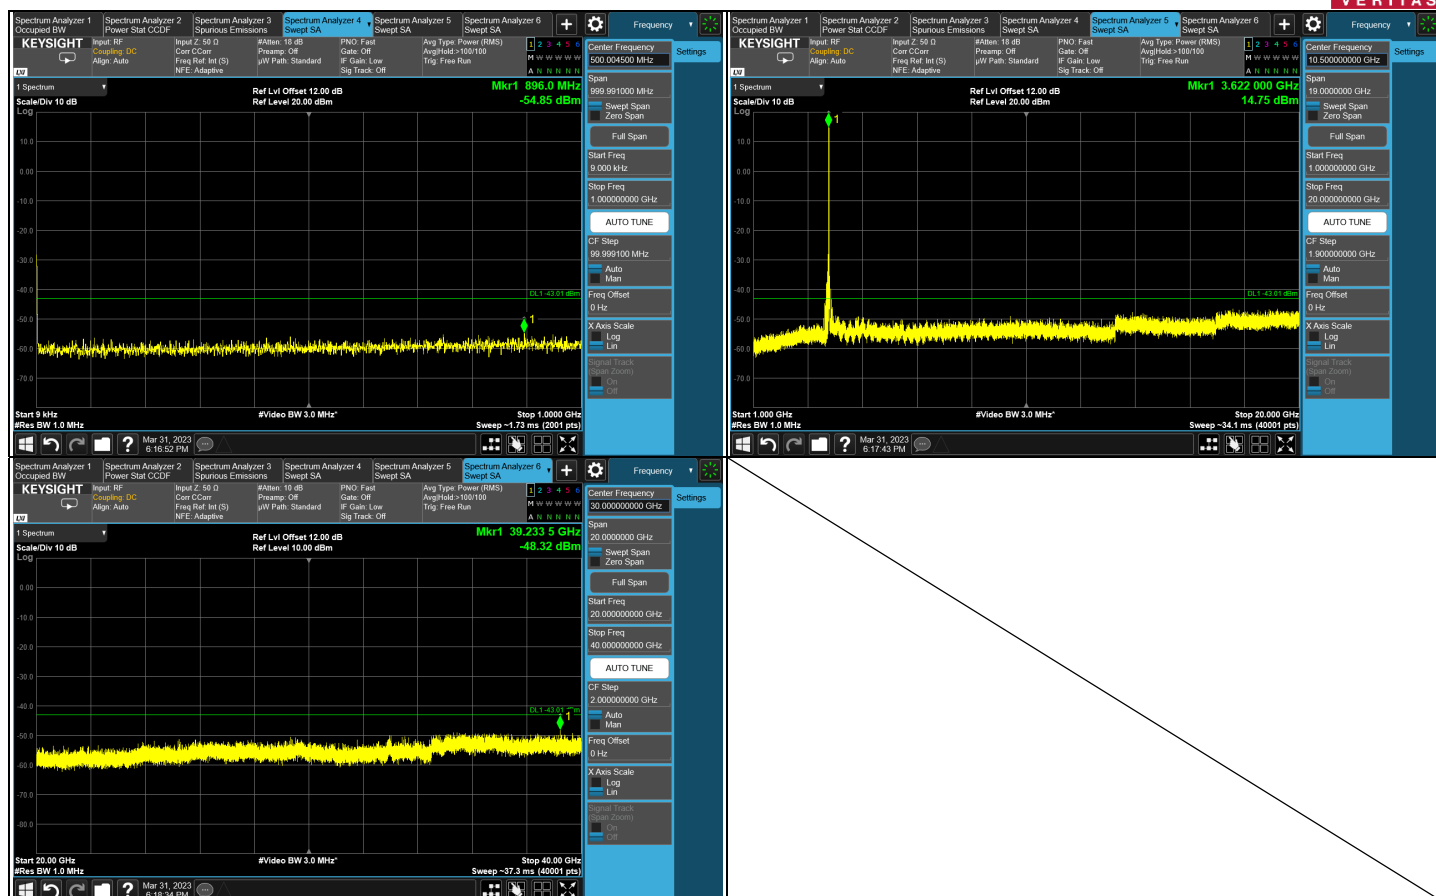



CH 641666 (3624.99 MHz)

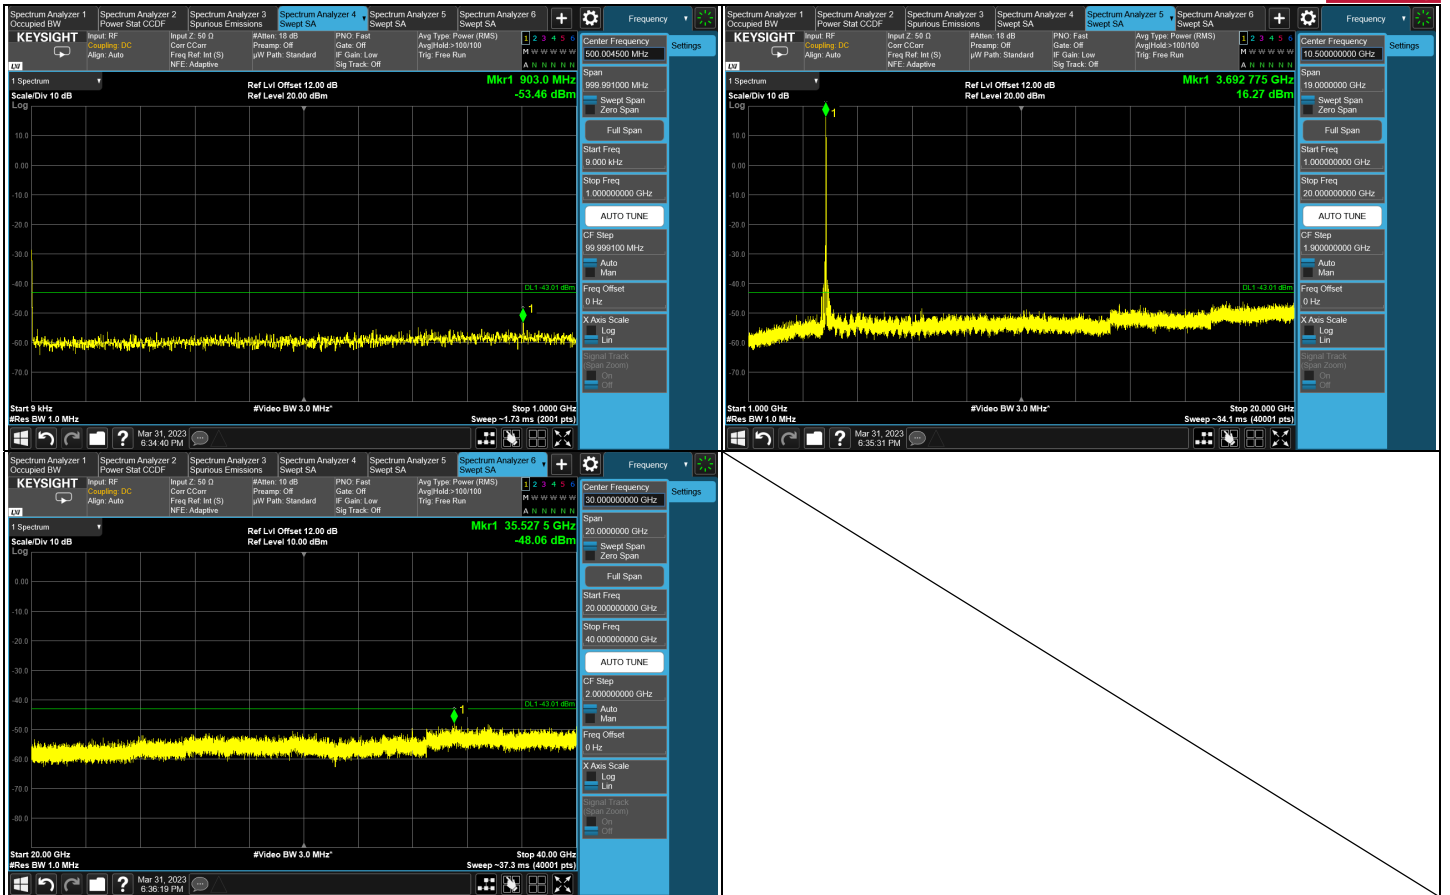


CH 646333 (3694.98 MHz)



BUREAU
VERITAS

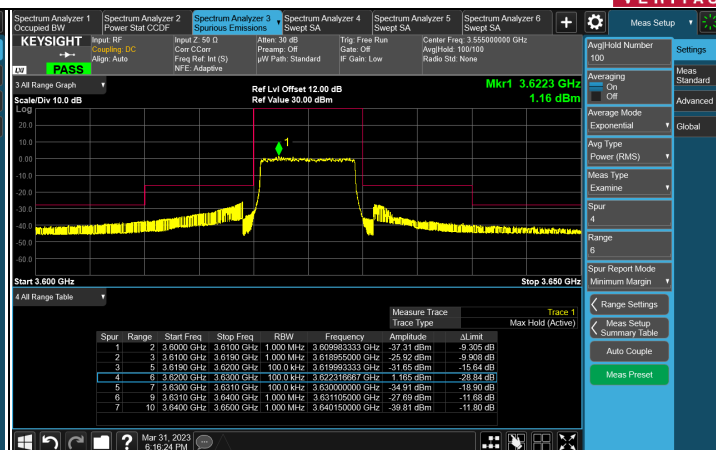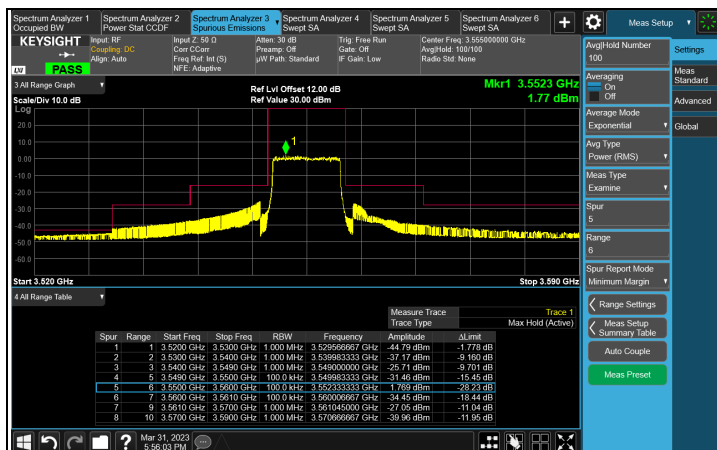


CH 637000 (3555 MHz)

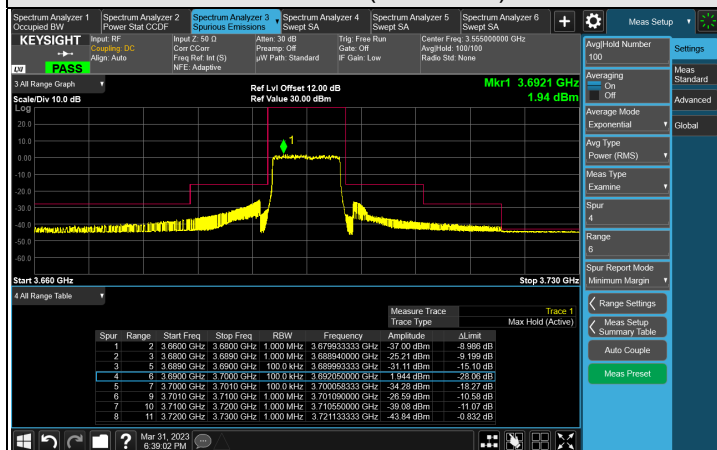


CH 646333 (3694.98 MHz)




Chain 1

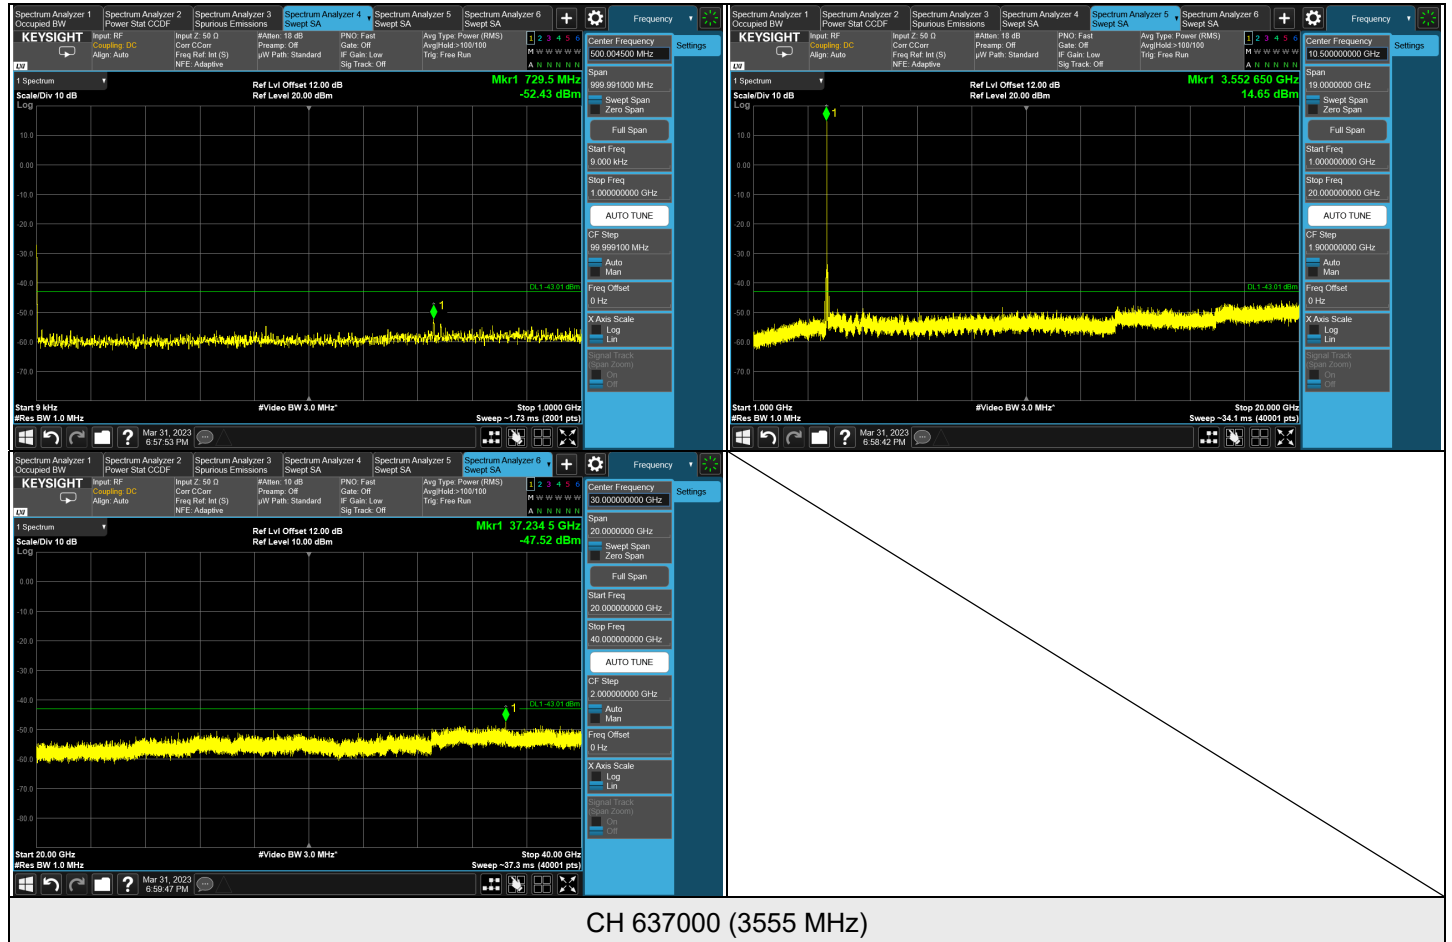

CH 637000 (3555 MHz)

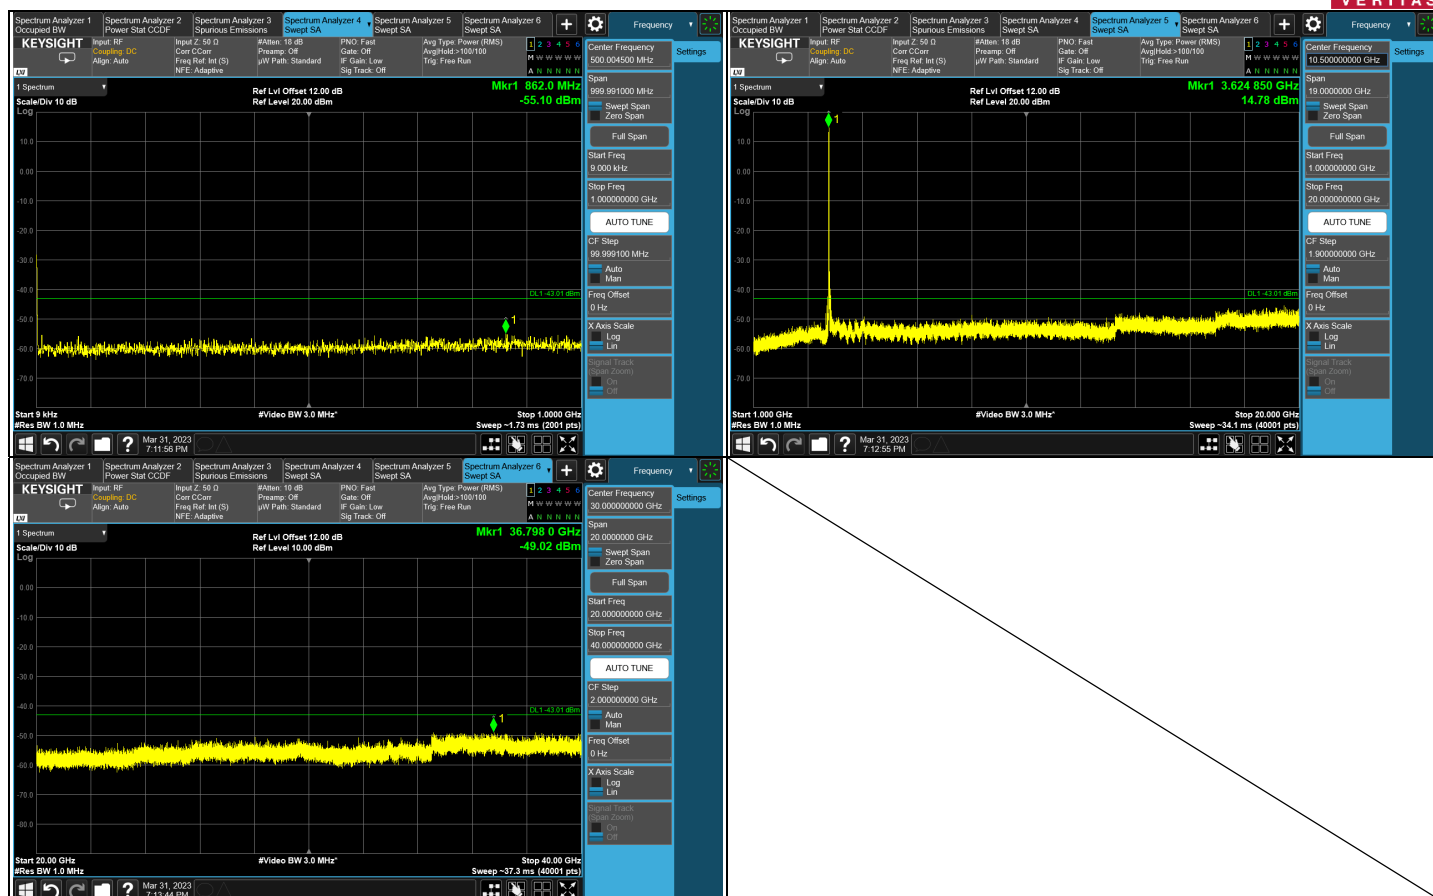

CH 641666 (3624.99 MHz)

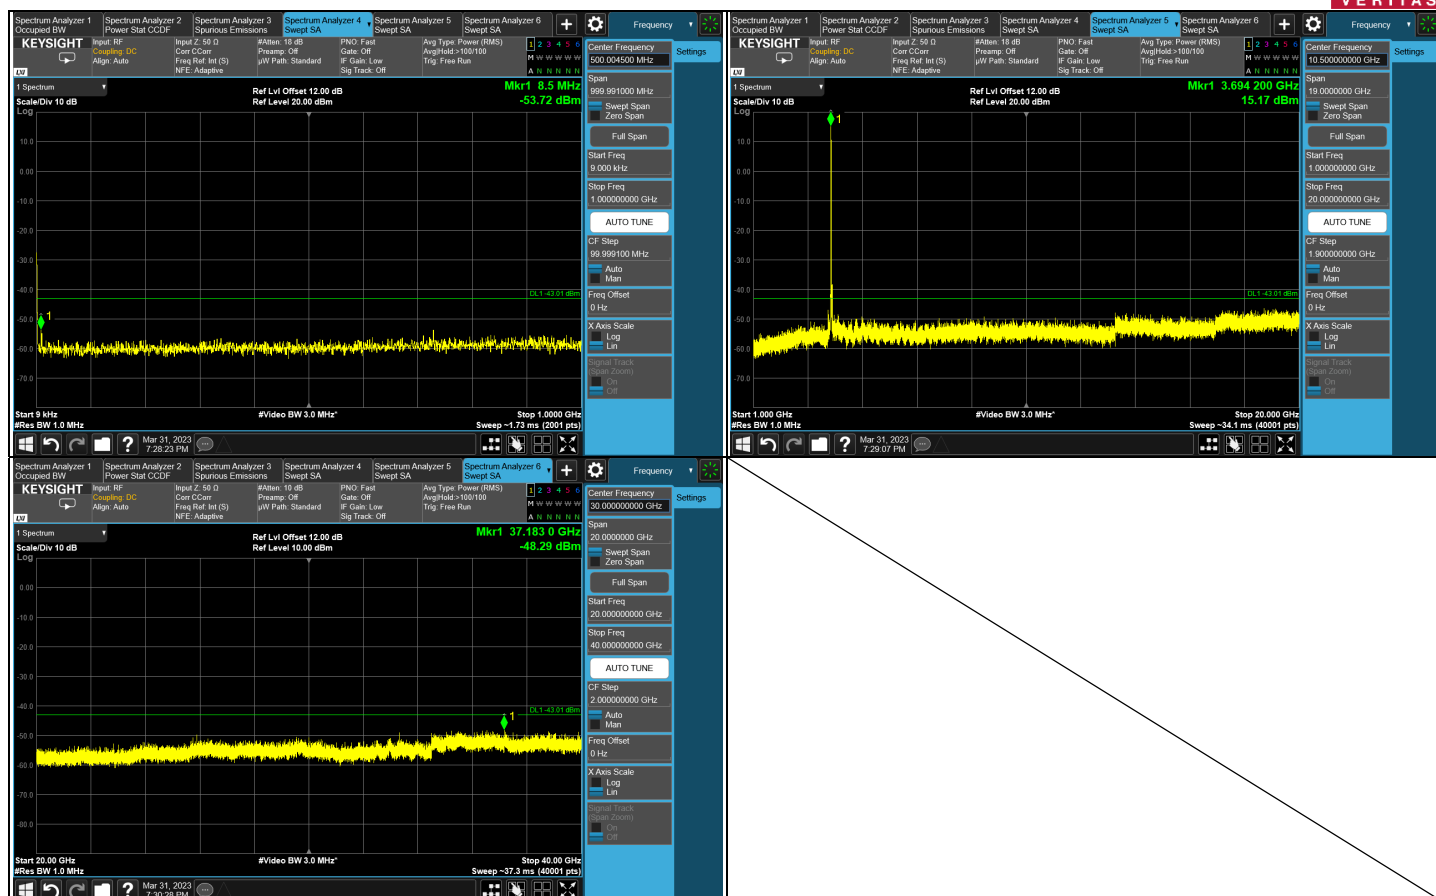

CH 646333 (3694.98 MHz)

