

Product Manual



Introduction

This product is a wireless display receiver. It supports AirPlay mirroring for Apple iOS and Mac systems, as well as Miracast standard protocol for Android and Windows systems. For synchronize screen on the display of mobile phones, tablets and notebooks for TV, projectors or screens and other big screens, enjoy the big screen fun. In addition, it is also suitable for home multimedia applications and DLNA mode of network players. This product's "screen sharing" concept is suitable for home entertainment, business meetings, party sharing and other scenarios, and enjoy the beauty of big screen sharing. This manual will guide you to unlock the powerful functions of this product.


Package Listing

Please check if the following supplies are included in the product package.

wireless display adapter	x1
AV adapter cable	x1
USB power cable	x1
HDMI cable	x1
User manual	x1

Hardware installation


1. Connect the wireless display adapter to the HDMI port of the TV with an HDMI cable, and connect the USB port of the TV with a USB power cable. If the power supply of the TV USB interface is insufficient, please use a minimum 5V/2A charger to supply power for the wireless display adapter. The headphone jack of the device can support 3.5mm to AV output for connecting to active speakers or TVs with AV input.
2. Adjust the TV signal source to the corresponding HDMI channel and you will see the boot screen of the display device.

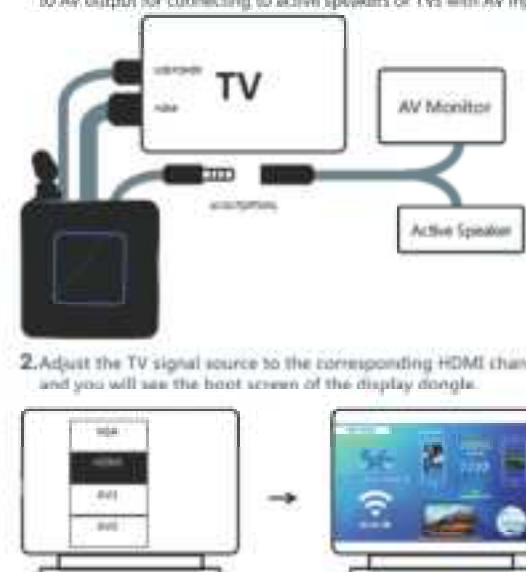

IOS system mirroring function

Mirroring screen is the core function of this product, which is suitable for mobile phones and tablets of IOS9.0 and above.

1. Keep the boot interface is in the IOS/MAC system dedicated mode interface.
2. As the picture shows, click the "screen mirroring" button, select and click the name of the Renchip device, and you can successfully share the screen.

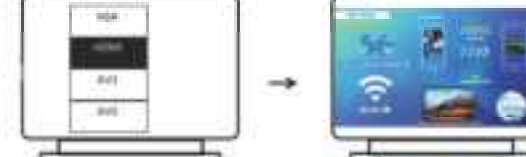

For MAC system mirroring

1. When using this product on MacBook, please keep it in the dedicated mode interface of IOS/MAC system.



For Android system mirroring

The Mirroring mode is the core function of this product, which is suitable for mobile phones and tablets with Android 4.4 and above that support the Miracast protocol. The Mirroring mode is the core function of this product, which is suitable for mobile phones and tablets with Android 4.4 and above that support the Miracast protocol.

1. Please confirm that the product is in the dedicated interface of Android/Windows system. (press the switch button on the front of the device to switch to the dedicated interface for Android/Windows system)
2. Turn on the Miracast function on your Android device. There are common shortcut key operations, such as Samsung SmartView, Huawei multi-screen interaction. For models without shortcut keys generally go to Settings->More Connection Settings->Screen Mirroring or Settings->Display->Screen Casting, or Settings->WLAN->More Settings->Screen Mirroring.



Windows system mirroring mode

The mirroring mode is the core function of this product, which is applicable for Windows 8.1 and above. Need the CPU, graphics, wireless network are all Intel. Before use, please make sure this laptop is in the Miracast mode.

1. Use the shortcut key Windows+P.



DLNA Function

To realize the DLNA function, firstly, you need to set up the network connection between the device and the router. This product is suitable for 2.4G/5G dual WiFi channels.

1. Select the "Connect to Wireless Display" option.



DLNA Function

To realize the DLNA function, firstly, you need to set up the network connection between the device and the router. This product is suitable for 2.4G/5G dual WiFi channels.

1. Select the "Connect to Wireless Display" option.



Android Mode

1. After searching for the surrounding routing signals, find your router name, click and enter the routing password. Wait for a while, the network connection is completed between the device and the router.



Android Mode

1. After searching for the surrounding routing signals, find your router name, click and enter the routing password. Wait for a while, the network connection is completed between the device and the router.



Notice

1. In the DLNA mode, you only need to set up the network for the first time, after that, it will automatically connect to the WiFi that was connected for the first time after it is turned on.
2. Please set the device connected to the 5G wifi, because 5G wifi response is faster.



Notice

1. In the DLNA mode, you only need to set up the network for the first time, after that, it will automatically connect to the WiFi that was connected for the first time after it is turned on.
2. Please set the device connected to the 5G wifi, because 5G wifi response is faster.



Common fault analysis

- Q: There is no boot screen, the screen shows no signal.
A: Please check whether the HDMI port connected to the device is consistent with the HDMI port selected by the TV signal source, or replace another HDMI port for data transmission. When the USB power supply port of the TV cannot meet 5V/2A, please choose another power supply method.
- Q: After use mirroring mode, the screen freezes and delays.
A: Check whether the power supply is 5V/2A, and check whether the WiFi channel connected to the mobile phone is the same with the device. If there is a certain interference in WiFi transmission, please stay away from microwave ovens, induction cookers and other household appliances that have interference. If the current WiFi environment is very noisy and the wireless signal interference is serious, please try to change the Wi-Fi channel of the router.



Common fault analysis

- Q: There is no boot screen, the screen shows no signal.
A: Please check whether the HDMI port connected to the device is consistent with the HDMI port selected by the TV signal source, or replace another HDMI port for data transmission. When the USB power supply port of the TV cannot meet 5V/2A, please choose another power supply method.
- Q: After use mirroring mode, the screen freezes and delays.
A: Check whether the power supply is 5V/2A, and check whether the WiFi channel connected to the mobile phone is the same with the device. If there is a certain interference in WiFi transmission, please stay away from microwave ovens, induction cookers and other household appliances that have interference. If the current WiFi environment is very noisy and the wireless signal interference is serious, please try to change the Wi-Fi channel of the router.



FCC Warning Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If the equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:


- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

The dealer or dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

RF Exposure Statement

To maintain compliance with FCC's RF Exposure guidelines, this equipment should be installed and operated with minimum distance of 20cm to the nearest body. The device and its antenna(s) must not be co-located or operation in conjunction with any other antenna or transmitter.

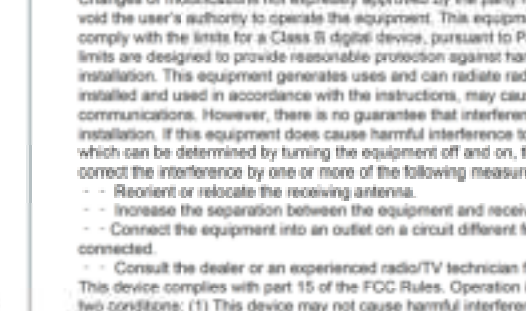

FCC Warning Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If the equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

The dealer or dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

RF Exposure Statement

To maintain compliance with FCC's RF Exposure guidelines, this equipment should be installed and operated with minimum distance of 20cm to the nearest body. The device and its antenna(s) must not be co-located or operation in conjunction with any other antenna or transmitter.

