SPEC NO.	SP03AC24508-0260	ISSUED DATE	2023.04.07	PUBLISHED BY
PRODUCT NAME	FDAH0I20	VERSION	03	
	FDAHUIZU	PAGE	1/5	

SPECIFICATION

SPEC NO. SP03AC24508-0260

PART NO. 03C15C030E040T

FDAH0I20 PRODUCT NAME

FR4 Dual-Band Antenna DESCRIPTION

RoHS Compliant Product

Cirocomm Technology Corp. COMPANY NAME

No.5, Industrial 2nd Road, PingZhen

Dist., Taoyuan City 324, Taiwan **ADDRESS**

(R.O.C.)

REVISION STATUS

VERSION	DATE	PAGE	REVISION DESCRIPTION	PREPARED	CHECKED	APPROVED
01	2022.10.19	Whole	New Issued.	翁秀惠	馬得淞	張敦信、吳佳宗
02	2023.03.28	P.1	Add Name & Address.	翁秀惠	馬得淞	張敦信、吳佳宗
03	2023.04.07	P.2&5	Updates.	翁秀惠	馬得淞	張敦信、吳佳宗

Prepared By	Checked By	Approved By
翁秀惠	馬得淞	張敦信 吳佳宗

2012.06.26 B400-010.05 This document is held by Cirocomm, cannot be reproduced without permission.

SPEC NO.	SP03AC24508-0260	ISSUED DATE	2023.04.07	PUBLISHED BY
PRODUCT NAME	FDAH0I20	VERSION	03	
	FDAHUIZU	PAGE	2/5	

CIROCOMM TECHNOLOGY.

PART NUMBER: 03C15C030E0040T

1 SCOPE

Cirocomm's customized FR4 Dual-Band Antenna covers the 2450/5800MHz.

2 Name of the product

This product is named "FR4 Dual-Band Antenna".

3 Electrical characteristics

3-1 Electrical characteristics of antenna


The antenna has the electrical characteristics given in Table 1 under the *cirocomm* standard installation conditions shown in the figure of Evaluation Board.

Table 1

No.	Parameter	Specification		
1	Working Frequency	2400~2500MHz		
i working Frequency		5150~5850MHz		
2	Dimension(PCB)	22*12*0.6 mm		
3	Polarization	Linear		
4	Operating Temperature	- 40°C to +85°C		

^{*} Actual value will depend on customer device.

Environment

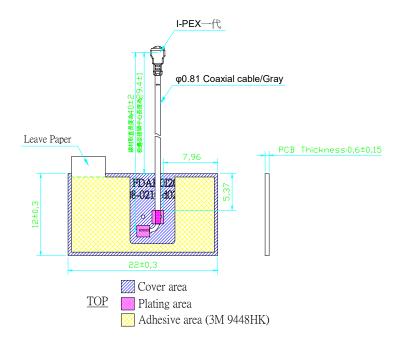





SPEC NO.	SP03AC24508-0260	ISSUED DATE	2023.04.07	PUBLISHED BY
DDODUGT NAME	ED ALIQUO	VERSION 03		
PRODUCT NAME	FDAH0I20	PAGE	3/5	


3-2 Antenna Performance


Frequency (MHz)	2400	2450	2500	5150	5550	5850
Efficiency (%)	40.11	42.29	39.81	54.10	54.02	51.71
Average Gain (dB)	-3.97	-3.74	-4.00	-2.67	-2.67	-2.86
Peak Gain (dBi)	0.29	1.56	1.18	5.21	5.62	4.56

Antenna 2D Pattern











Antenna 3D Pattern



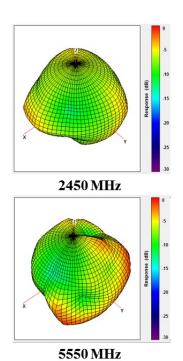



SPEC NO.	SP03AC24508-0260	ISSUED DATE	2023.04.07	PUBLISHED BY
PRODUCT NAME	ED A HOISO	VERSION	03	
	FDAH0I20	PAGE	4/5	

4 Environmental conditions

4-1 Operating conditions

The antenna has the electrical characteristics given in Tables 1 in the temperature range of -30°C to +80°C and under the environmental conditions of +40°C and 0-95% r.h..

4-2 Storage temperature range

The storage temperature range of product is -40°C to +85°C.

5 Reliability tests

The decision standard of the confirmation of the movement is doing the characteristic electric standard of the antenna module. And, the decision standard of the appearance isn't thought function problem become defect be.

5-1 Low-temperature test

Expose the specimen to -40°C for 16 hours and then to normal temperature/ humidity for 24 hours or more. After that examine the appearance and functions.

5-2 High-temperature test

Expose the specimen to +85°C for 16 hours and then to normal temperature/ humidity for 24 hours or more. After that examine the appearance and functions.

6 Inspection

As for the examination in the mass production, the receiving character of the ratio wave sent in a shield box from the standard antenna and VSWR are confirmed in the picking out examination.

7 Warranty


If any defect occurs form the product during proper use within a year after delivery, it will be repaired or replaced free of charge.

8 Other

Any question arising from this specification manual shall be solved by arrangement made by both parties.

9 Drawings (Unit: mm)

ANTENNA

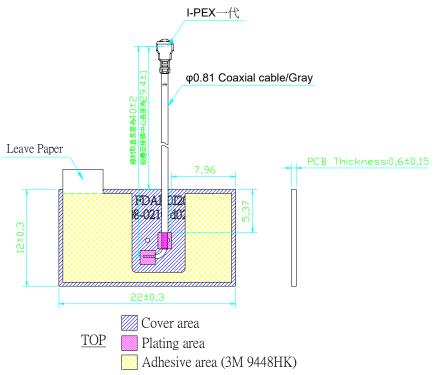




SPEC NO.	SP03AC24508-0260	ISSUED DATE	2023.04.07	PUBLISHED BY
PRODUCT NAME	FDAH0I20	VERSION	03	
	FDAHUIZU	PAGE	5/5	

10 Plugs Usage Precautions

10-1 Mating / unmating

- (1) To disconnect connectors, insert the end portion of I-PEX under the connector flanges and pull off vertically, in the direction of the connector mating axis.
- (2) To mate the connectors, the mating axes of both connectors must be aligned and the connectors can be mated. The "click" will confirm fully mated connection. Do not attempt to insert on an extreme angle.

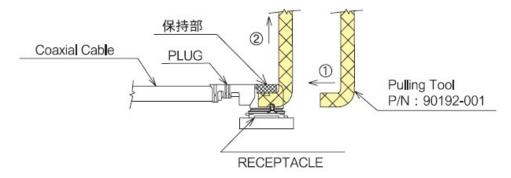

10-2 Pull forces on the cable after connectors are mated

After the connectors are mating, do not apply a load to the cable in excess of the values indicated in the diagram below.

