


# HEARING AID COMPATIBILITY RF EMISSIONS TEST REPORT

FCC ID : 2ABZ2-GM1915  
Equipment : Smart Phone  
Brand Name : ONEPLUS  
Model Name : GM1917  
M-Rating : M3  
Applicant : OnePlus Technology (shenzhen) Co., Ltd  
18C02, 18C03, 18C04 and 18C05, Shum Yip Terra  
Building, Binhe Avenue North, Futian District, Shenzhen  
Manufacturer : OnePlus Technology (shenzhen) Co., Ltd  
18C02, 18C03, 18C04 and 18C05, Shum Yip Terra  
Building, Binhe Avenue North, Futian District, Shenzhen  
Standard : FCC 47 CFR §20.19  
ANSI C63.19-2011

The product was received on Mar. 08, 2019 and testing was started from Mar. 19, 2019 and completed on Mar. 19, 2019. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Cona Huang / Deputy Manager

**SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory**  
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



## **Table of Contents**

|                                                       |           |
|-------------------------------------------------------|-----------|
| <b>1. General Information .....</b>                   | <b>4</b>  |
| <b>2. Testing Location.....</b>                       | <b>5</b>  |
| <b>3. Applied Standards .....</b>                     | <b>5</b>  |
| <b>4. RF Audio Interference Level.....</b>            | <b>5</b>  |
| <b>5. Air Interface and Operating Mode.....</b>       | <b>6</b>  |
| <b>6. Measurement System Specification .....</b>      | <b>7</b>  |
| 6.1 E-Field Probe System.....                         | 7         |
| 6.2 Data Storage and Evaluation.....                  | 8         |
| <b>7. RF Emissions Test Procedure.....</b>            | <b>9</b>  |
| <b>8. Test Equipment List .....</b>                   | <b>12</b> |
| <b>9. Measurement System Validation .....</b>         | <b>13</b> |
| <b>10. Modulation Interference Factor.....</b>        | <b>14</b> |
| <b>11. Conducted RF Output Power (Unit: dBm).....</b> | <b>15</b> |
| <b>12. HAC RF Emission Test Results.....</b>          | <b>15</b> |
| <b>13. Uncertainty Assessment .....</b>               | <b>16</b> |
| <b>14. References.....</b>                            | <b>18</b> |

**Appendix A. Plots of System Performance Check**

**Appendix B. Plots of RF Emission Measurement**

**Appendix C. DASY Calibration Certificate**

**Appendix D. Test Setup Photos**



## History of this test report

| Report No.   | Version | Description             | Issued Date   |
|--------------|---------|-------------------------|---------------|
| HA8D2526-02A | Rev. 01 | Initial issue of report | Apr. 02, 2019 |
|              |         |                         |               |
|              |         |                         |               |



## 1. General Information

| Product Feature & Specification                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Applicant Name                                                                                                                                                                                                                                                       | OnePlus Technology (shenzhen) Co., Ltd                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Equipment Name                                                                                                                                                                                                                                                       | Smart Phone                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Brand Name                                                                                                                                                                                                                                                           | ONEPLUS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Model Name                                                                                                                                                                                                                                                           | GM1917                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| FCC ID                                                                                                                                                                                                                                                               | 2ABZ2-GM1915                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| EUT Stage                                                                                                                                                                                                                                                            | Production Unit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Date Tested                                                                                                                                                                                                                                                          | 2019/3/19                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Frequency Band                                                                                                                                                                                                                                                       | GSM850: 824.2 MHz ~ 848.8 MHz<br>GSM1900: 1850.2 MHz ~ 1909.8 MHz<br>WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz<br>WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz<br>WCDMA Band V: 826.4 MHz ~ 846.6 MHz<br>CDMA2000 BC0: 824.7 MHz ~ 848.31 MHz<br>CDMA 2000 BC1: 1851.25 MHz ~ 1908.75 MHz<br>LTE Band 2: 1850.7 MHz ~ 1909.3 MHz<br>LTE Band 4: 1710.7 MHz ~ 1754.3 MHz<br>LTE Band 5: 824.7 MHz ~ 848.3 MHz<br>LTE Band 7: 2502.5 MHz ~ 2567.5 MHz<br>LTE Band 12: 699.7 MHz ~ 715.3 MHz<br>LTE Band 13: 779.5 MHz ~ 784.5 MHz<br>LTE Band 17: 706.5 MHz ~ 713.5 MHz<br>LTE Band 25: 1850.7 MHz ~ 1914.3 MHz<br>LTE Band 26: 814.7 MHz ~ 848.3 MHz<br>LTE Band 30: 2307.5 MHz ~ 2312.5 MHz<br>LTE Band 38: 2572.5 MHz ~ 2617.5 MHz<br>LTE Band 41: 2498.5 MHz ~ 2687.5 MHz<br>LTE Band 48: 3552.5 MHz ~ 3697.5 MHz<br>LTE Band 66: 1710.7 MHz ~ 1779.3 MHz<br>LTE Band 71: 665.5 MHz ~ 695.5 MHz<br>WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz<br>WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz<br>WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz<br>WLAN 5.5GHz Band: 5500 MHz ~ 5720 MHz<br>WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz<br>Bluetooth: 2402 MHz ~ 2480 MHz<br>NFC: 13.56 MHz |
| Mode                                                                                                                                                                                                                                                                 | GSM/GPRS/EGPRS<br>AMR / RMC 12.2Kbps<br>HSDPA<br>HSUPA<br>DC-HSDPA<br>HSPA+ (16QAM uplink)<br>CDMA2000 : 1xRTT/1xEv-Do(Rel.0)/1xEv-Do(Rev.A)<br>LTE: QPSK, 16QAM, 64QAM<br>802.11a/b/g/n/ac HT20/HT40/VHT20/VHT40/VHT80<br>Bluetooth BR/EDR/LE<br>NFC:ASK                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Remark:</b><br>1. Based on original report to adding dual SIM device version and 3rd part SIP calling VoIP application to include verification worst case found in the original report, FCC ID: 2ABZ2-GM1915 (Sporton Report No. HA8D2526-01A) performed testing. |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

Reviewed by: Jason Wang

Report Producer: Daisy Peng



## **2. Testing Location**

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test.

| Testing Laboratory |                                                                                                                     |
|--------------------|---------------------------------------------------------------------------------------------------------------------|
| Test Site          | SPORTON INTERNATIONAL INC.                                                                                          |
| Test Site Location | No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)<br>TEL: +886-3-327-3456<br>FAX: +886-3-328-4978 |
| Test Site No.      | Sporton Site No.:<br><b>SAR04-HY</b>                                                                                |

## **3. Applied Standards**

- FCC CFR47 Part 20.19
- ANSI C63.19-2011
- FCC KDB 285076 D01 HAC Guidance v05
- FCC KDB 285076 D02 T Coil testing v03
- FCC KDB 285076 D03 HAC FAQ v01

## **4. RF Audio Interference Level**

FCC wireless hearing aid compatibility rules ensure that consumers with hearing loss are able to access wireless communications services through a wide selection of handsets without experiencing disabling radio frequency (RF) interference or other technical obstacles.

To define and measure the hearing aid compatibility of handsets, in CFR47 part 20.19 ANSI C63.19 is referenced. A handset is considered hearing aid-compatible for acoustic coupling if it meets a rating of at least M3 under ANSI C63.19, and A handset is considered hearing aid compatible for inductive coupling if it meets a rating of at least T3. According to ANSI C63.19 2011 version, for acoustic coupling, the RF electric field emissions of wireless communication devices should be measured and rated according to the emission level as below.

| Emission Categories | E-field emissions |                   |
|---------------------|-------------------|-------------------|
|                     | <960Mhz           | >960Mhz           |
| M1                  | 50 to 55 dB (V/m) | 40 to 45 dB (V/m) |
| M2                  | 45 to 50 dB (V/m) | 35 to 40 dB (V/m) |
| M3                  | 40 to 45 dB (V/m) | 30 to 35 dB (V/m) |
| M4                  | <40 dB (V/m)      | <30 dB (V/m)      |

Table 5.1 Telephone near-field categories in linear units



### 5. Air Interface and Operating Mode


| Air Interface | Band MHz | Type | C63.19 Tested     | Simultaneous Transmitter | Name of Voice Service               | Power Reduction |
|---------------|----------|------|-------------------|--------------------------|-------------------------------------|-----------------|
| GSM           | GSM850   | VO   | Yes               | WLAN, BT                 | CMRS Voice                          | No              |
|               | GSM1900  |      |                   | WLAN, BT                 |                                     | No              |
|               | EDGE850  | VD   | Yes               | WLAN, BT                 | SIP Calling <sup>(2)</sup>          | No              |
|               | EDGE1900 |      |                   | WLAN, BT                 |                                     |                 |
| WCDMA         | WCDMA II | VO   | No <sup>(1)</sup> | WLAN, BT                 | CMRS Voice                          | No              |
|               | WCDMA IV |      |                   | WLAN, BT                 |                                     | No              |
|               | WCDMA V  |      |                   | WLAN, BT                 |                                     | No              |
|               | HSPA     | VD   | No <sup>(1)</sup> | WLAN, BT                 | SIP Calling <sup>(2)</sup>          | No              |
| CDMA          | BC0      | VO   | Yes               | WLAN, BT                 | CMRS Voice                          | No              |
|               | BC1      |      |                   | WLAN, BT                 |                                     | No              |
|               | EVDO     | VD   | No <sup>(1)</sup> | WLAN, BT                 | SIP Calling <sup>(2)</sup>          | No              |
| LTE (FDD)     | Band 2   | VD   | No <sup>(1)</sup> | WLAN, BT                 | VoLTE / SIP Calling <sup>(2)</sup>  | No              |
|               | Band 4   |      |                   | WLAN, BT                 |                                     | No              |
|               | Band 5   |      |                   | WLAN, BT                 |                                     | No              |
|               | Band 7   |      |                   | WLAN, BT                 |                                     | No              |
|               | Band 12  |      |                   | WLAN, BT                 |                                     | No              |
|               | Band 13  |      |                   | WLAN, BT                 |                                     | No              |
|               | Band 17  |      |                   | WLAN, BT                 |                                     | No              |
|               | Band 25  |      |                   | WLAN, BT                 |                                     | No              |
|               | Band 26  |      |                   | WLAN, BT                 |                                     | No              |
|               | Band 30  |      |                   | WLAN, BT                 |                                     | No              |
|               | Band 66  |      |                   | WLAN, BT                 |                                     | No              |
|               | Band 71  |      |                   | WLAN, BT                 |                                     | No              |
| LTE (TDD)     | Band 38  | VD   | Yes               | WLAN, BT                 | VoLTE / SIP Calling <sup>(2)</sup>  | No              |
|               | Band 41  |      |                   | WLAN, BT                 |                                     | No              |
|               | Band 48  | VD   | No <sup>(1)</sup> | WLAN, BT                 |                                     | No              |
| Wi-Fi         | 2450     | VD   | Yes               | GSM,CDMA,WCDMA,LTE       | VoWiFi / SIP Calling <sup>(2)</sup> | No              |
|               | 5200     |      |                   | GSM,CDMA,WCDMA,LTE       |                                     | No              |
|               | 5300     |      |                   | GSM,CDMA,WCDMA,LTE       |                                     | No              |
|               | 5500     |      |                   | GSM,CDMA,WCDMA,LTE       |                                     | No              |
|               | 5800     |      |                   | GSM,CDMA,WCDMA,LTE       |                                     | No              |
| BT            | 2450     | DT   | No                | GSM,CDMA,WCDMA,LTE       | NA                                  | No              |

Type Transport:  
VO= Voice only  
DT= Digital Transport only (no voice)  
VD= CMRS and IP Voice Service over Digital Transport

**Remark:**

- The air interface is exempted from testing by low power exemption that its average antenna input power plus its MIF is  $\leq 17$  dBm, and is rated as M4.
- The SIP calling is android internal auxiliary functions under the dialing program.

## 6. Measurement System Specification

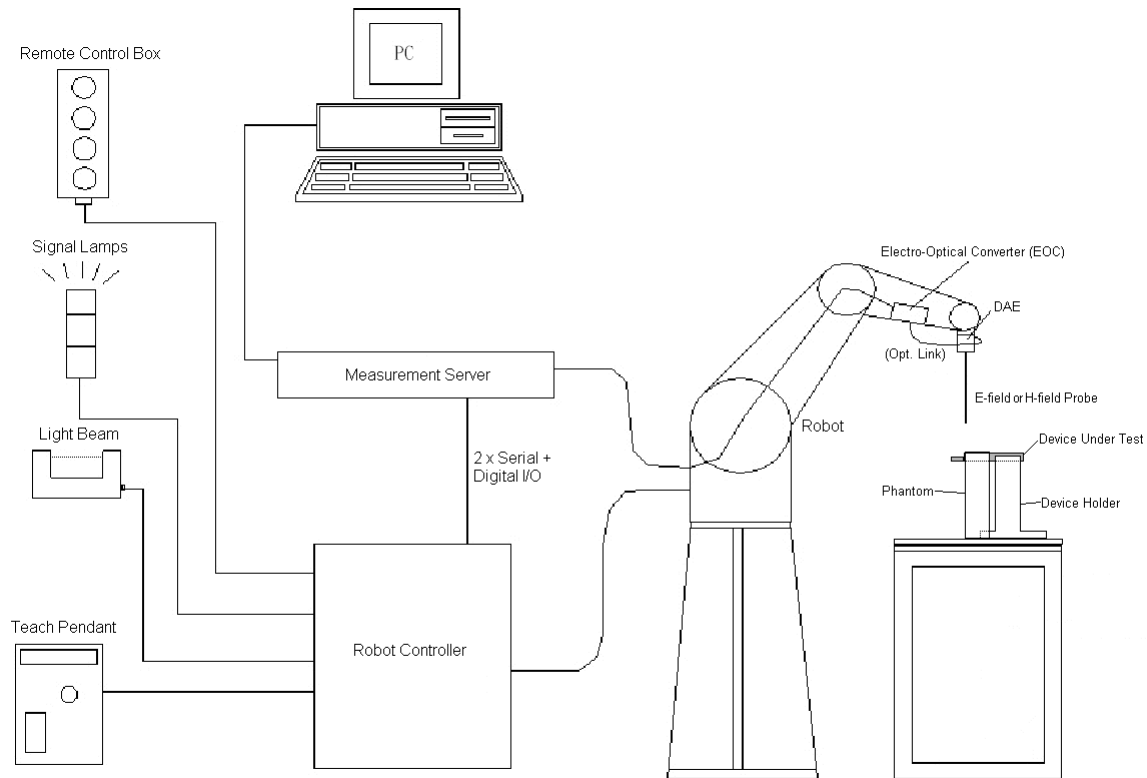

**Fig 5.1 System Configurations**

### 6.1 E-Field Probe System

#### E-Field Probe Specification

<ER3DV6>

|                      |                                                                                                                              |
|----------------------|------------------------------------------------------------------------------------------------------------------------------|
| <b>Construction</b>  | One dipole parallel, two dipoles normal to probe axis<br>Built-in shielding against static charges                           |
| <b>Calibration</b>   | In air from 100 MHz to 3.0 GHz<br>(absolute accuracy $\pm 6.0\%$ , $k=2$ )                                                   |
| <b>Frequency</b>     | 100 MHz to 6 GHz;<br>Linearity: $\pm 2.0$ dB (100 MHz to 3 GHz)                                                              |
| <b>Directivity</b>   | $\pm 0.2$ dB in air (rotation around probe axis)<br>$\pm 0.4$ dB in air (rotation normal to probe axis)                      |
| <b>Dynamic Range</b> | 2 V/m to 1000 V/m<br>(M3 or better device readings fall well below diode compression point)                                  |
| <b>Linearity</b>     | $\pm 0.2$ dB                                                                                                                 |
| <b>Dimensions</b>    | Overall length: 330 mm (Tip: 16 mm)<br>Tip diameter: 8 mm (Body: 12 mm)<br>Distance from probe tip to dipole centers: 2.5 mm |



**Fig 5.2 Photo of E-field Probe**

#### Probe Tip Description:

HAC field measurements take place in the close near field with high gradients. Increasing the measuring distance from the source will generally decrease the measured field values (in case of the validation dipole approx. 10% per mm).

## **6.2 Data Storage and Evaluation**

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, and device frequency and modulation data) in measurement files.

|                            |                           |                                                                         |
|----------------------------|---------------------------|-------------------------------------------------------------------------|
| <b>Probe parameters :</b>  | - Sensitivity             | Norm <sub>i</sub> , a <sub>i0</sub> , a <sub>i1</sub> , a <sub>i2</sub> |
|                            | - Conversion factor       | ConvF <sub>i</sub>                                                      |
|                            | - Diode compression point | dcp <sub>i</sub>                                                        |
| <b>Device parameters :</b> | - Frequency               | f                                                                       |
|                            | - Crest factor            | cf                                                                      |
| <b>Media parameters :</b>  | - Conductivity            | σ                                                                       |
|                            | - Density                 | ρ                                                                       |

The formula for each channel can be given as :

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with  $V_i$  = compensated signal of channel i, (i = x, y, z)  
 $U_i$  = input signal of channel i, (i = x, y, z)  
 cf = crest factor of exciting field (DASY parameter)  
 dcp<sub>i</sub> = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated :

$$\text{E-field Probes : } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

with  $V_i$  = compensated signal of channel i, (i = x, y, z)  
 Norm<sub>i</sub> = sensor sensitivity of channel i, (i = x, y, z),  $\mu\text{V}/(\text{V/m})^2$  for E-field Probes  
 ConvF = sensitivity enhancement in solution  
 f = carrier frequency [GHz]  
 $E_i$  = electric field strength of channel i in V/m

The RSS value of the field components gives the total field strength (Hermitian magnitude) :

$$E_{\text{tot}} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.





## **7. RF Emissions Test Procedure**

Referenced from ANSI C63.19 -2011 section 5.5.1

- a. Confirm the proper operation of the field probe, probe measurement system, and other instrumentation and the positioning system.
- b. Position the WD in its intended test position.
- c. Set the WD to transmit a fixed and repeatable combination of signal power and modulation characteristic that is representative of the worst case (highest interference potential) encountered in normal use. Transiently occurring start-up, changeover, or termination conditions, or other operations likely to occur less than 1% of the time during normal operation, may be excluded from consideration.
- d. The center sub-grid shall be centered on the T-Coil mode perpendicular measurement point or the acoustic output, as appropriate. Locate the field probe at the initial test position in the 50 mm by 50 mm grid, which is contained in the measurement plane, refer to illustrated in Figure 8.2. If the field alignment method is used, align the probe for maximum field reception.
- e. Record the reading at the output of the measurement system.
- f. Scan the entire 50 mm by 50 mm region in equality spaced increments and record the reading at each measurement point, The distance between measurement points shall be sufficient to assure the identification of the maximum reading.
- g. Identify the five contiguous sub-grids around the center sub-grid whose maximum reading is the lowest of all available choices. This eliminates the three sub-grids with the maximum readings. Thus, the six areas to be used to determine the WD's highest emissions are identified.
- h. Identify the maximum reading within the non-excluded sub-grids identified in step g).
- i. Indirect measurement method
- j. The RF audio interference level in dB (V/m) is obtained by adding the MIF (in dB) to the maximum steady-state rms field-strength reading, in dB (V/m)
- k. Compare this RF audio interference level with the categories in ANSI C63.19-2011 clause 8 and record the resulting WD category rating.
- l. For the T-Coil perpendicular measurement location is  $\geq 5.0$  mm from the center of the acoustic output, then two different 50 mm by 50 mm areas may need to be scanned, the first for the microphone mode assessment and the second for the T-Coil assessment.
- m. The second for the T-Coil assessment, with the grid shifted so that it is centered on the perpendicular measurement point. Record the WD category rating.

**Test Instructions**



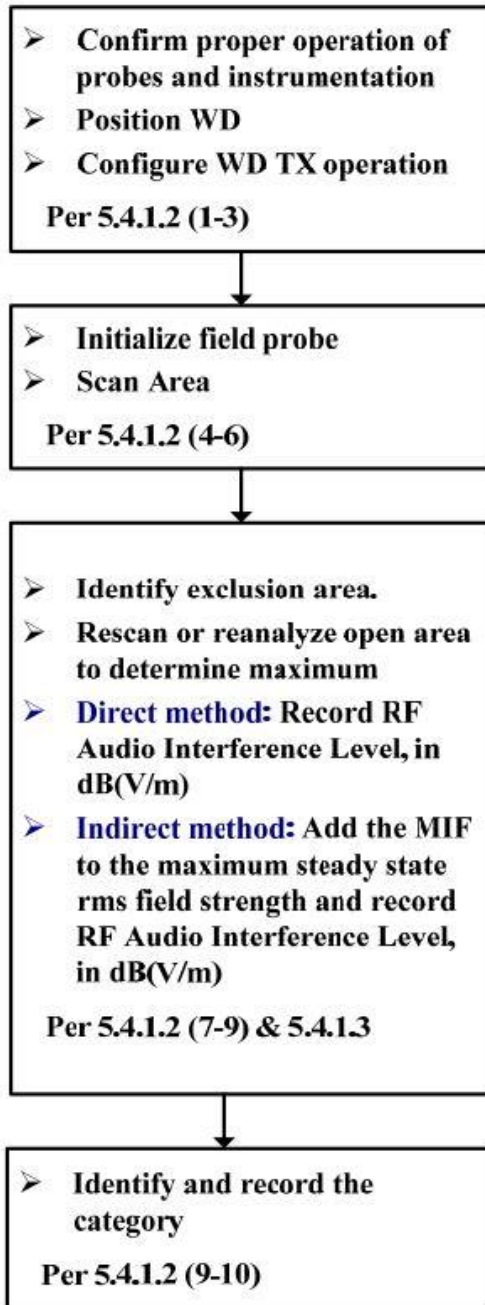


Figure 8.1 RF Emissions Flow Chart

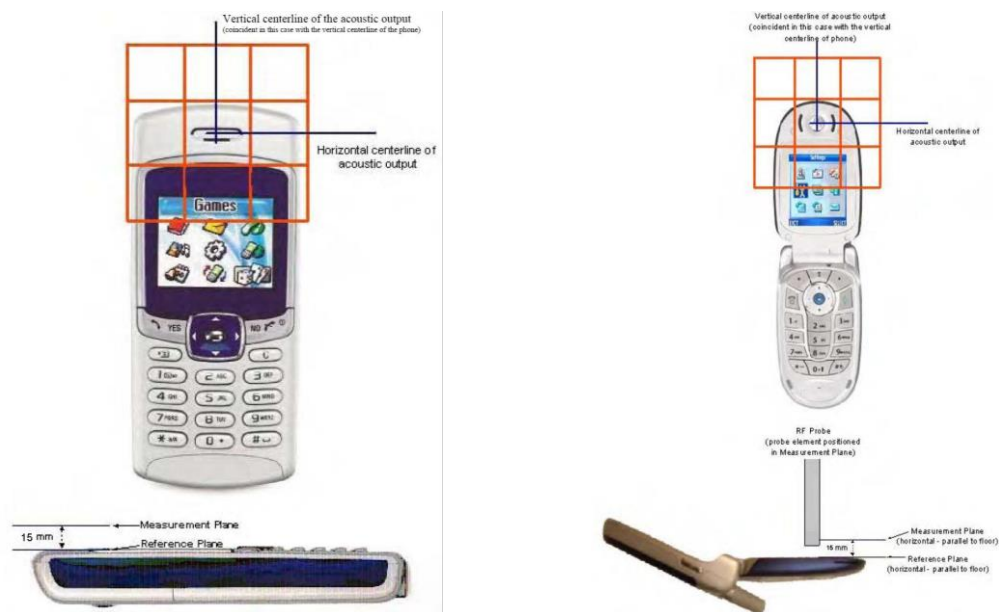

**Fig 8.2 EUT reference and plane for HAC RF emission measurements**

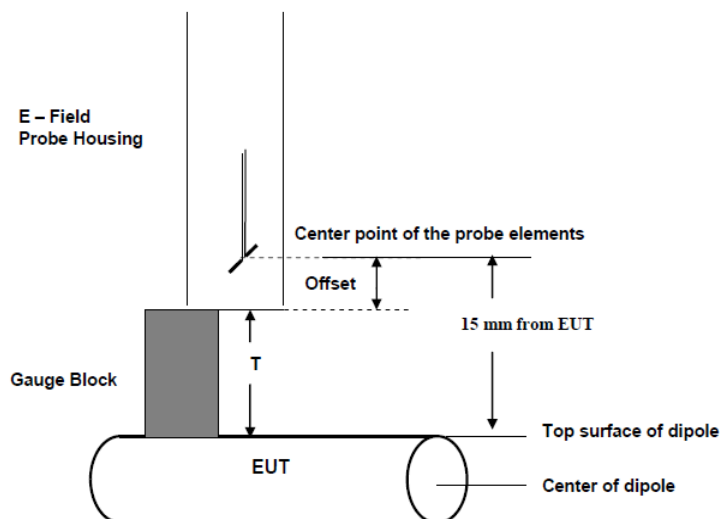

**Fig. 8.3 Gauge block with E-field probe**



## 8. Test Equipment List

| Manufacturer  | Name of Equipment            | Type/Model | Serial Number | Calibration   |               |
|---------------|------------------------------|------------|---------------|---------------|---------------|
|               |                              |            |               | Last Cal.     | Due Date      |
| SPEAG         | 1880MHz Calibration Dipole   | CD1880V3   | 1038          | Sep. 19, 2018 | Sep. 18, 2019 |
| SPEAG         | Isotropic E-Field Probe      | EF3DV3     | 4047          | Jan. 30, 2019 | Jan. 29, 2020 |
| SPEAG         | Data Acquisition Electronics | DAE4       | 854           | Jun. 14, 2018 | Jun. 13, 2019 |
| RCPTWN        | Thermometer                  | HTC-1      | TM685-1       | Nov. 12, 2018 | Nov. 11, 2019 |
| SPEAG         | Test Arch Phantom            | N/A        | N/A           | NCR           | NCR           |
| SPEAG         | Phone Positioner             | N/A        | N/A           | NCR           | NCR           |
| Anritsu       | Power Meter                  | ML2495A    | 1419002       | May. 18, 2018 | May. 17, 2019 |
| Anritsu       | Power Sensor                 | MA2411B    | 1339124       | May. 18, 2018 | May. 17, 2019 |
| Anritsu       | Signal Generator             | MG3710A    | 6201502524    | Dec. 11, 2018 | Dec. 10, 2019 |
| R&S           | Base Station                 | CMW500     | 115793        | May. 24, 2018 | May. 23, 2019 |
| ATM           | Dual Directional Coupler     | C122H-10   | P610410z-02   | NCR           | NCR           |
| Woken         | Attenuator                   | WK0602-XX  | N/A           | NCR           | NCR           |
| Mini-Circuits | Power Amplifier              | ZVE-8G+    | 6382          | Aug. 09, 2018 | Aug. 08, 2019 |
| Mini-Circuits | Power Amplifier              | ZHL-42W+   | 15542         | Aug. 09, 2018 | Aug. 08, 2019 |

**Note:**

1. NCR: "No-Calibration Required"


## 9. Measurement System Validation

Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the test Arch and a corresponding distance holder.

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal HAC measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

### <Test Setup>

1. In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator.
2. The center point of the probe element(s) is 15mm from the closest surface of the dipole elements.
3. The calibrated dipole must be placed beneath the arch phantom. The equipment setup is shown below:
4. The output power on dipole port must be calibrated to 20dBm (100mW) before dipole is connected.

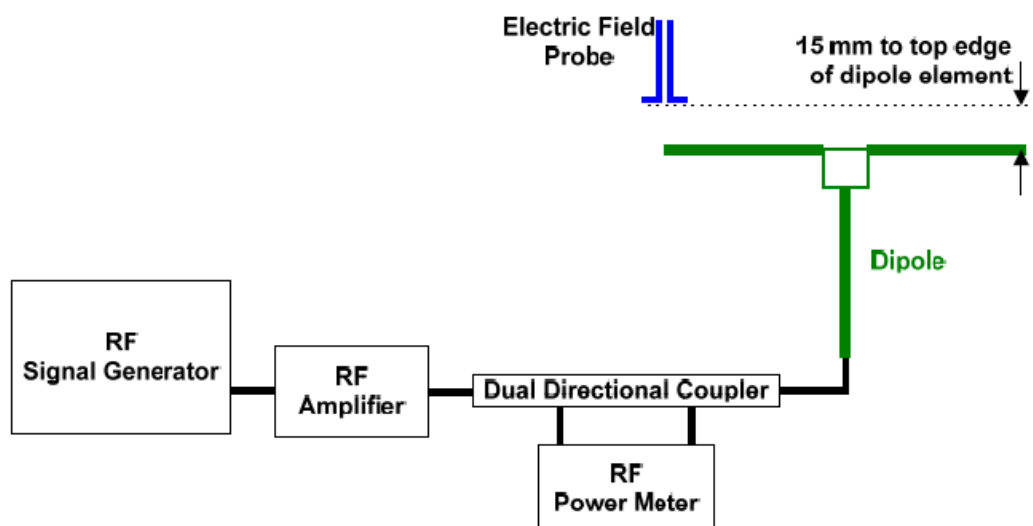

**Fig. 7.1 Setup Diagram**

### <Validation Results>

Comparing to the original E-field value provided by SPEAG, the verification data should be within its specification of 25 %. Table 6.1 shows the target value and measured value. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to appendix A of this report.

Deviation = ((Average E-field Value) - (Target value)) / (Target value) \* 100%

| Frequency (MHz) | Input Power (dBm) | Target Value (V/m) | E-Field 1 (V/m) | E-Field 2 (V/m) | Average Value (V/m) | Deviation (%) | Date         |
|-----------------|-------------------|--------------------|-----------------|-----------------|---------------------|---------------|--------------|
| 1880            | 20                | 89.5               | 86.98           | 87.45           | 87.22               | -2.55         | Mar 19, 2019 |



## **10. Modulation Interference Factor**

The HAC Standard ANSI C63.19-2011 defines a new scaling using the Modulation Interference Factor (MIF). For any specific fixed and repeatable modulated signal, a modulation interference factor (MIF, expressed in dB) may be developed that relates its interference potential to its steady-state rms signal level or average power level. This factor is a function only of the audio-frequency amplitude modulation characteristics of the signal and is the same for field-strength and conducted power measurements. It is important to emphasize that the MIF is valid only for a specific repeatable audio-frequency amplitude modulation characteristic. Any change in modulation characteristic requires determination and application of a new MIF

The Modulation Interference factor (MIF, in dB) is added to the measured average E-field (in dBV/m) and converts it to the RF Audio Interference level (in dBV/m). This level considers the audible amplitude modulation components in the RF E-field. CW fields without amplitude modulation are assumed to not interfere with the hearing aid electronics. Modulations without time slots and low fluctuations at low frequencies have low MIF values, TDMA modulations with narrow transmission and repetition rates of few 100 Hz have high MIF values and give similar classifications as ANSI C63.19-2011.

ER3D, EF3D and EU2D E-field probes have a bandwidth <10 kHz and can therefore not evaluate the RF envelope in the full audio band. DASY52 is therefore using the indirect measurement method according to ANSI C63.19-2011 which is the primary method. These near field probes read the averaged E-field measurement. Especially for the new high peak-to-average (PAR) signal types, the probes shall be linearized by PMR calibration in order to not overestimate the field reading. Probe Modulation Response (PMR) calibration linearizes the probe response over its dynamic range for specific modulations which are characterized by their UID and result in an uncertainty specified in the probe calibration certificate. The MIF is characteristic for a given waveform envelope and can be used as a constant conversion factor if the probe has been PMR calibrated.

The evaluation method for the MIF is defined in ANSI C63.19-2011 section D.7. An RMS demodulated RF signal is fed to a spectral filter (similar to an A weighting filter) and forwarded to a temporal filter acting as a quasi-peak detector. The averaged output of these filtering is scaled to a 1 kHz 80% AM signal as reference. MIF measurement requires additional instrumentation and is not well suited for evaluation by the end user with reasonable uncertainty. It may alternatively be determined through analysis and simulation, because it is constant and characteristic for a communication signal. DASY52 uses well-defined signals for PMR calibration. The MIF of these signals has been determined by simulation and it is automatically applied.

The MIF measurement uncertainty is estimated as follows, declared by HAC equipment provider SPEAG, for modulation frequencies from slotted waveforms with fundamental frequency and at least 2 harmonics within 10 kHz:

1. 0.2 dB for MIF: -7 to +5 dB
2. 0.5 dB for MIF: -13 to +11 dB
3. 1 dB for MIF: > -20 dB

MIF values applied in this test report were provided by the HAC equipment provider of SPEAG, and the worst values for all air interface are listed below to determine the Low-power Exemption.

| UID   | Communication System Name | MIF(dB) |
|-------|---------------------------|---------|
| 10021 | GSM-FDD(TDMA,GMSK)        | 3.63    |

**11. Conducted RF Output Power (Unit: dBm)**

&lt;UAT&gt;

| Average Antenna Input Power(dBm) |         |
|----------------------------------|---------|
| Band                             | GSM1900 |
| Channel                          | 512     |
| Frequency (MHz)                  | 1850.2  |
| GSM (GMSK, 1 Tx slot)            | 28.21   |

**12. HAC RF Emission Test Results**

| Plot No. | Air Interface | Modulation / Mode | Channel | Transmit Ant. | Average Antenna Input Power (dBm) | MIF  | E-Field (dBV/m) | Margin to FCC M3 limit (dB) | E-Field M Rating |
|----------|---------------|-------------------|---------|---------------|-----------------------------------|------|-----------------|-----------------------------|------------------|
| 01       | GSM1900       | GSM Voice         | 512     | UAT           | 28.21                             | 3.63 | 34.66           | 0.34                        | M3               |

**Remark:**

1. Based on original report to adding dual SIM device version and 3rd part SIP calling VoIP application (FCC ID: 2ABZ2-GM1915, report No.: HA8D2526-01A) to include verification worst case to show compliance, and the worst configuration and frequency band of air interface is GMS1900.
2. The HAC measurement system applies MIF value onto the measured RMS E-field, which is indirect method in ANSI C63.19 2011 version, and reports the RF audio interference level.
3. Phone Condition: Mute on; Backlight off; Max Volume

**Test Engineer :** Nick Yu.



### **13. Uncertainty Assessment**

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual “root-sum-squares” (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances. Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is showed in Table 12.1.

The judgment of conformity in the report is based on the measurement results excluding the measurement uncertainty.





| Error Description                  | Uncertainty Value (±%) | Probability Distribution | Divisor | Ci (E) | Standard Uncertainty (E) |
|------------------------------------|------------------------|--------------------------|---------|--------|--------------------------|
| <b>Measurement System</b>          |                        |                          |         |        |                          |
| Probe Calibration                  | 5.1                    | Normal                   | 1       | 1      | ± 5.1 %                  |
| Axial Isotropy                     | 4.7                    | Rectangular              | √3      | 1      | ± 2.7 %                  |
| Sensor Displacement                | 16.5                   | Rectangular              | √3      | 1      | ± 9.5 %                  |
| Boundary Effects                   | 2.4                    | Rectangular              | √3      | 1      | ± 1.4 %                  |
| Phantom Boundary Effects           | 7.2                    | Rectangular              | √3      | 1      | ± 4.1 %                  |
| Linearity                          | 4.7                    | Rectangular              | √3      | 1      | ± 2.7 %                  |
| Scaling with PMR Calibration       | 10.0                   | Rectangular              | √3      | 1      | ± 5.77 %                 |
| System Detection Limit             | 1.0                    | Rectangular              | √3      | 1      | ± 0.6 %                  |
| Readout Electronics                | 0.3                    | Normal                   | 1       | 1      | ± 0.3 %                  |
| Response Time                      | 0.8                    | Rectangular              | √3      | 1      | ± 0.5 %                  |
| Integration Time                   | 2.6                    | Rectangular              | √3      | 1      | ± 1.5 %                  |
| RF Ambient Conditions              | 3.0                    | Rectangular              | √3      | 1      | ± 1.7 %                  |
| RF Reflections                     | 12.0                   | Rectangular              | √3      | 1      | ± 6.9 %                  |
| Probe Positioner                   | 1.2                    | Rectangular              | √3      | 1      | ± 0.7 %                  |
| Probe Positioning                  | 4.7                    | Rectangular              | √3      | 1      | ± 2.7 %                  |
| Extrap. and Interpolation          | 1.0                    | Rectangular              | √3      | 1      | ± 0.6 %                  |
| <b>Test Sample Related</b>         |                        |                          |         |        |                          |
| Device Positioning Vertical        | 4.7                    | Rectangular              | √3      | 1      | ± 2.7 %                  |
| Device Positioning Lateral         | 1.0                    | Rectangular              | √3      | 1      | ± 0.6 %                  |
| Device Holder and Phantom          | 2.4                    | Rectangular              | √3      | 1      | ± 1.4 %                  |
| Power Drift                        | 5.0                    | Rectangular              | √3      | 1      | ± 2.9 %                  |
| <b>Phantom and Setup Related</b>   |                        |                          |         |        |                          |
| Phantom Thickness                  | 2.4                    | Rectangular              | √3      | 1      | ± 1.4 %                  |
| Combined Standard Uncertainty      |                        |                          |         |        | ± 16.30 %                |
| Coverage Factor for 95 %           |                        |                          |         |        | K = 2                    |
| Expanded Std. Uncertainty on Power |                        |                          |         |        | ± 32.6 %                 |
| Expanded Std. Uncertainty on Field |                        |                          |         |        | ± 16.3 %                 |

**Table 12.1 Uncertainty Budget of HAC free field assessment**



## **14. References**

- [1] ANSI C63.19-2011, "American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids", 27 May 2011.
- [2] FCC KDB 285076 D01v05, "Equipment Authorization Guidance for Hearing Aid Compatibility", Sep 2017
- [3] FCC KDB 285076 D02v03, "Guidance for performing T-Coil tests for air interfaces supporting voice over IP (e.g., LTE and WiFi) to support CMRS based telephone services", Sep 2017
- [4] FCC KDB 285076 D03v01, "Hearing aid compatibility frequently asked questions", Sep 2017
- [5] SPEAG DASY System Handbook