

Transmit power control Measurement

Test Mode	Data Rate	Frequency (MHz)	ANT-0+1+2+3				E.I.R.P. Limit (dBm)
			Max. Outup Power	Max. Gain	E.I.R.P.		
			(dBm)	(dBi)	(dBm)	(W)	
Mode 3	26 M	5260	12.27	11.28	23.55	0.227	≤ 24.00
		5280	12.10	11.28	23.38	0.218	≤ 24.00
		5300	11.97	11.28	23.25	0.211	≤ 24.00
		5320	12.22	11.28	23.50	0.224	≤ 24.00
		5500	13.13	10.67	23.80	0.240	≤ 24.00
		5520	13.19	10.67	23.86	0.243	≤ 24.00
		5540	13.21	10.67	23.88	0.245	≤ 24.00
		5560	13.20	10.67	23.87	0.244	≤ 24.00
		5580	13.16	10.67	23.83	0.241	≤ 24.00
		5660	13.11	10.67	23.78	0.239	≤ 24.00
		5680	13.08	10.67	23.75	0.237	≤ 24.00
		5700	13.01	10.67	23.68	0.234	≤ 24.00
Mode 4	54 M	5270	11.88	11.28	23.16	0.207	≤ 24.00
		5310	12.21	11.28	23.49	0.223	≤ 24.00
		5510	12.79	10.67	23.46	0.222	≤ 24.00
		5550	12.74	10.67	23.41	0.219	≤ 24.00
		5670	13.26	10.67	23.93	0.247	≤ 24.00
Mode 5	26 M	5260	12.45	11.28	23.73	0.236	≤ 24.00
		5280	12.27	11.28	23.55	0.226	≤ 24.00
		5300	12.16	11.28	23.44	0.221	≤ 24.00
		5320	12.38	11.28	23.66	0.232	≤ 24.00
		5500	13.30	10.67	23.97	0.250	≤ 24.00
		5520	13.32	10.67	23.99	0.251	≤ 24.00
		5540	13.30	10.67	23.97	0.249	≤ 24.00
		5560	13.29	10.67	23.96	0.249	≤ 24.00
		5580	13.31	10.67	23.98	0.250	≤ 24.00
		5660	13.27	10.67	23.94	0.248	≤ 24.00
		5680	13.25	10.67	23.92	0.246	≤ 24.00
		5700	13.16	10.67	23.83	0.241	≤ 24.00
Mode 6	54 M	5270	12.05	11.28	23.33	0.215	≤ 24.00
		5310	12.40	11.28	23.68	0.233	≤ 24.00
		5510	12.97	10.67	23.64	0.231	≤ 24.00
		5550	12.93	10.67	23.60	0.229	≤ 24.00
		5670	13.32	10.67	23.99	0.251	≤ 24.00
Mode 7	117.2 M	5290	12.40	11.28	23.68	0.234	≤ 24.00
		5530	13.28	10.67	23.95	0.248	≤ 24.00

Note: The relevant measured result has the offset with cable loss already.

Test Mode	Data Rate	Frequency (MHz)	ANT-0+1+2+3				E.I.R.P. Limit (dBm)
			Max. Outup Power	Max. Gain	E.I.R.P.		
			(dBm)	(dBi)	(dBm)	(W)	
Mode 8	MCS 0	5260	12.72	11.28	24.00	0.250	≤ 24.00
		5280	12.53	11.28	23.81	0.240	≤ 24.00
		5300	12.45	11.28	23.73	0.236	≤ 24.00
		5320	12.63	11.28	23.91	0.246	≤ 24.00
		5500	13.27	10.67	23.94	0.248	≤ 24.00
		5520	13.30	10.67	23.97	0.249	≤ 24.00
		5540	13.31	10.67	23.98	0.250	≤ 24.00
		5560	13.29	10.67	23.96	0.249	≤ 24.00
		5580	13.29	10.67	23.96	0.249	≤ 24.00
		5660	13.32	10.67	23.99	0.251	≤ 24.00
		5680	13.29	10.67	23.96	0.249	≤ 24.00
		5700	13.28	10.67	23.95	0.248	≤ 24.00
Mode 9	MCS 0	5270	12.42	11.28	23.70	0.235	≤ 24.00
		5310	12.55	11.28	23.83	0.242	≤ 24.00
		5510	13.25	10.67	23.92	0.247	≤ 24.00
		5550	13.32	10.67	23.99	0.250	≤ 24.00
		5670	13.31	10.67	23.98	0.250	≤ 24.00
Mode 10	MCS 0	5290	12.67	11.28	23.95	0.248	≤ 24.00
		5530	13.24	10.67	23.91	0.246	≤ 24.00

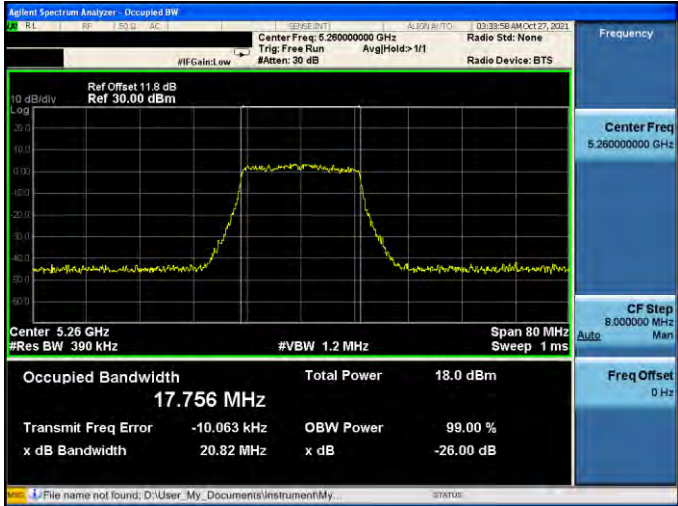
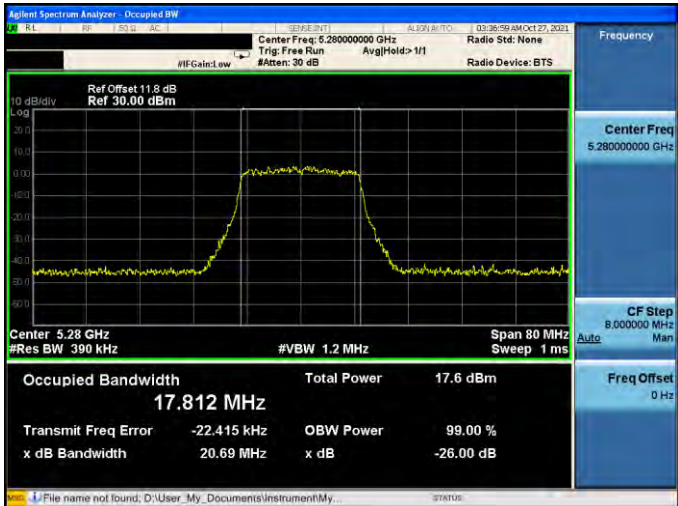
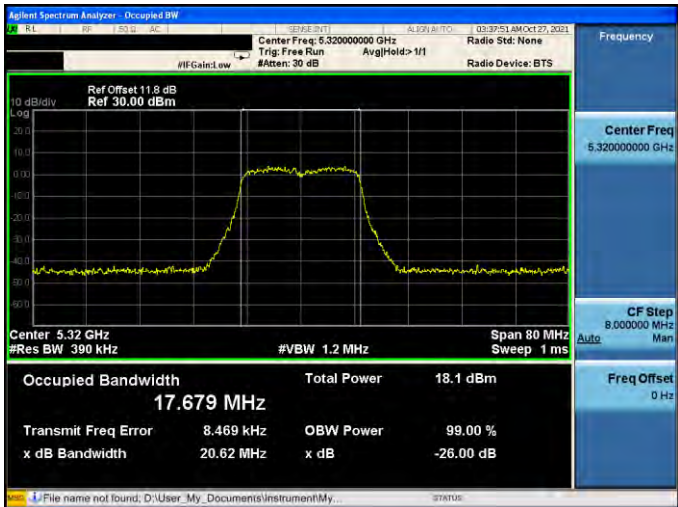
Note: The relevant measured result has the offset with cable loss already.

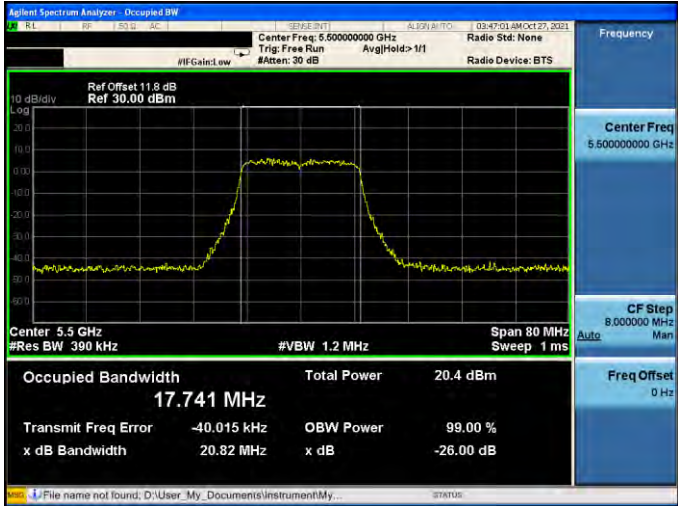
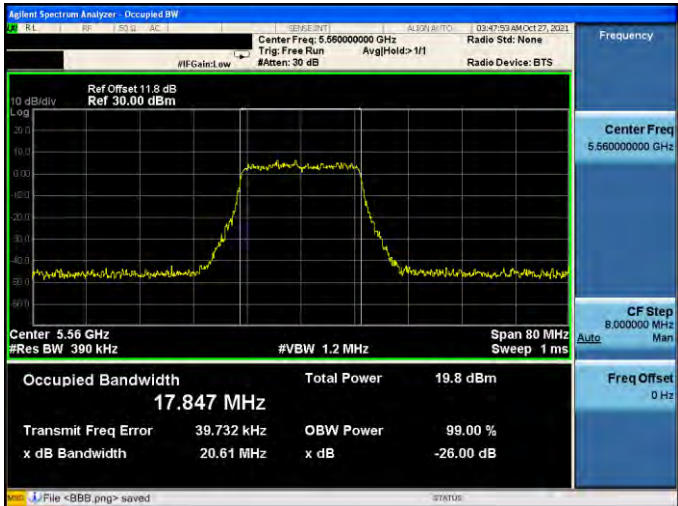
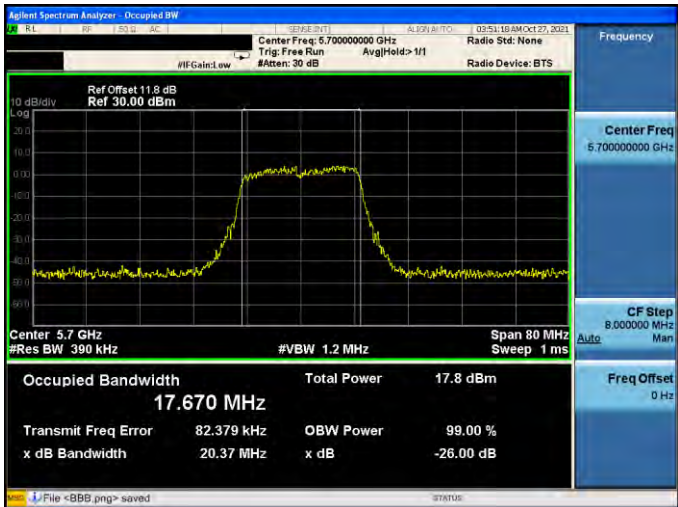
26 dB RF Bandwidth

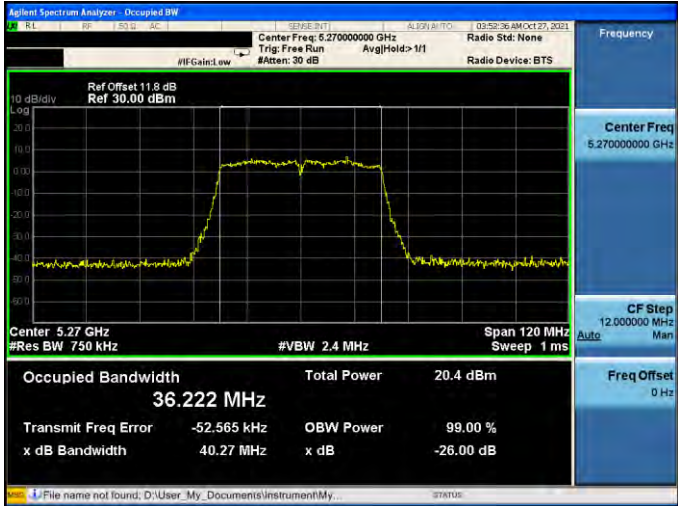
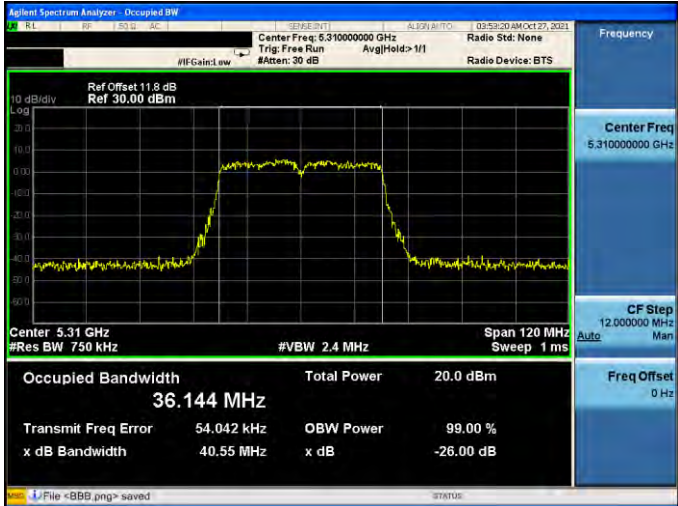
Test Mode	Frequency (MHz)	ANT-0	ANT-1	ANT-2	ANT-3
		Measurement Results (MHz)	Measurement Results (MHz)	Measurement Results (MHz)	Measurement Results (MHz)
Mode 3	5260	20.820	20.890	20.470	20.390
	5280	20.690	20.400	20.890	20.310
	5320	20.620	21.140	20.890	20.390
	5500	20.820	20.200	20.720	20.330
	5560	20.610	20.610	20.320	20.040
	5700	20.370	21.100	20.490	20.810
Mode 4	5270	40.270	40.150	40.130	40.420
	5310	40.550	40.590	40.010	40.590
	5510	40.500	40.290	40.430	40.390
	5550	40.690	41.020	40.520	40.180
	5670	40.270	39.890	40.690	40.550
Mode 5	5260	20.850	20.480	20.730	20.740
	5280	20.790	20.470	20.980	20.300
	5320	20.890	20.500	20.730	20.820
	5500	20.900	20.290	20.630	19.950
	5560	20.850	20.230	20.970	20.270
	5700	20.630	21.150	20.570	20.580
Mode 6	5270	40.670	40.230	40.540	40.480
	5310	40.340	40.690	40.560	40.550
	5510	40.110	40.170	40.450	40.260
	5550	40.750	40.890	40.560	40.630
	5670	40.570	39.600	40.560	40.180
Mode 7	5290	82.190	82.220	82.310	81.800
	5530	82.790	81.770	82.550	81.080

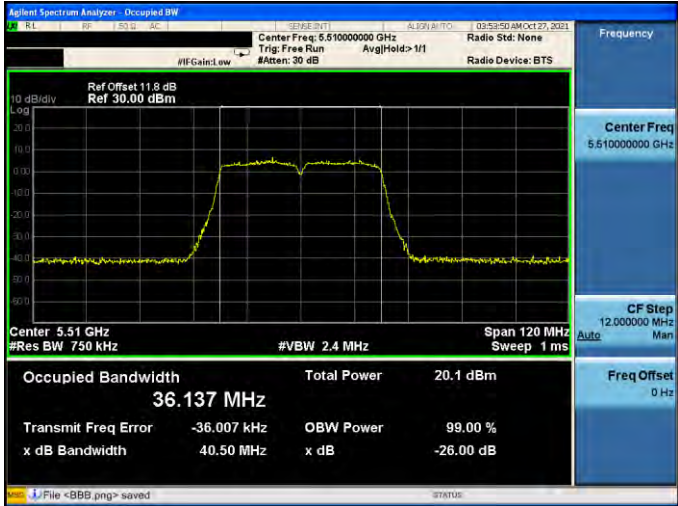
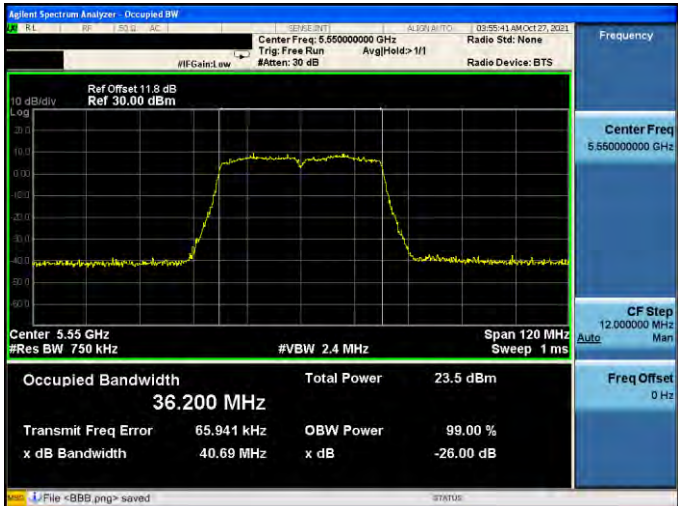
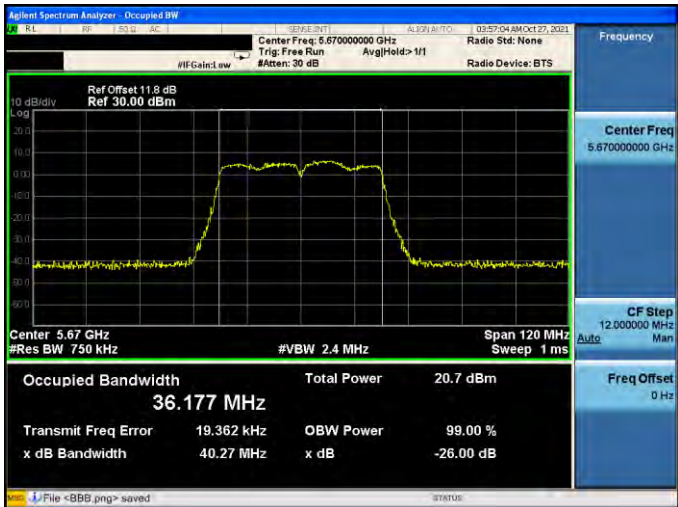
Test Mode	Frequency (MHz)	ANT-0	ANT-1	ANT-2	ANT-3
		Measurement Results (MHz)	Measurement Results (MHz)	Measurement Results (MHz)	Measurement Results (MHz)
Mode 8	5180	21.060	21.220	21.100	21.390
	5200	21.230	21.210	21.160	21.500
	5240	22.030	21.180	21.040	21.230
	5260	21.380	21.440	21.370	21.350
	5280	21.140	21.190	21.150	21.250
	5320	21.030	21.260	21.540	21.140
	5500	21.680	21.250	21.570	21.510
	5560	21.540	21.100	21.120	21.210
	5700	21.250	21.220	21.170	21.200
Mode 9	5190	40.990	41.110	40.880	41.260
	5230	41.060	41.160	40.860	41.460
	5270	41.320	41.020	41.030	40.960
	5310	41.370	41.280	41.120	40.380
	5510	40.390	41.400	40.830	40.630
	5550	41.690	40.910	40.950	41.030
	5670	41.030	40.360	40.720	40.620
Mode 10	5210	82.700	82.610	82.790	81.890
	5290	82.730	81.530	82.480	83.480
	5530	82.760	83.340	82.400	81.710

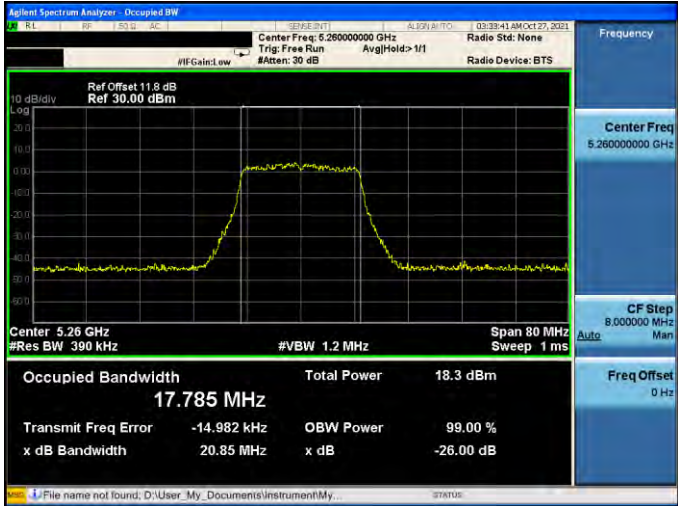
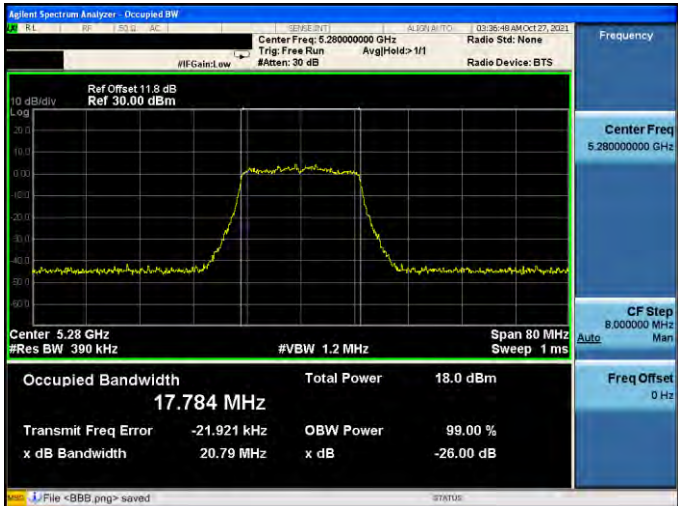
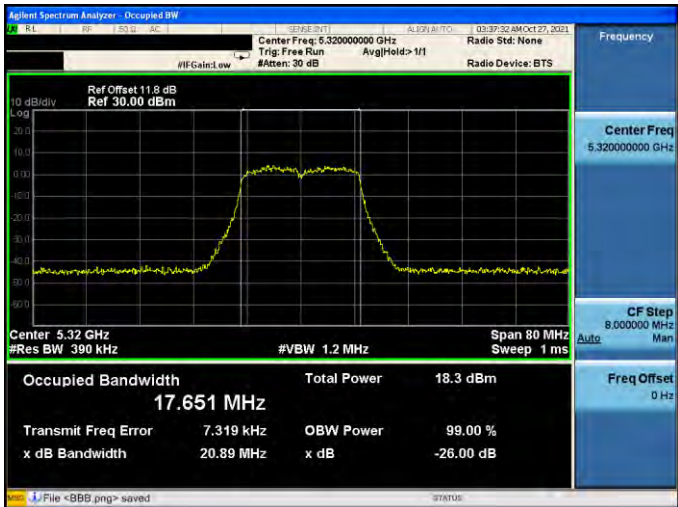
Test Graphs

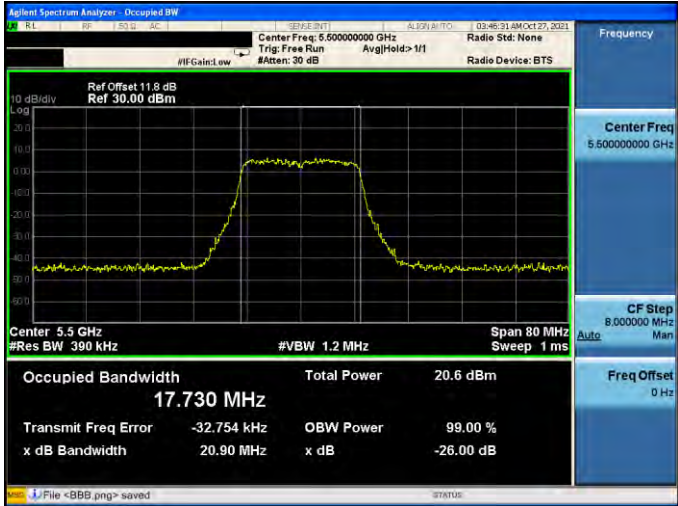
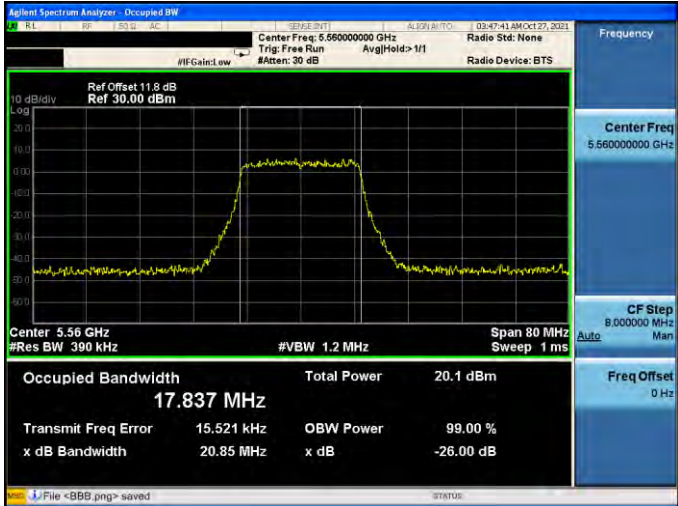
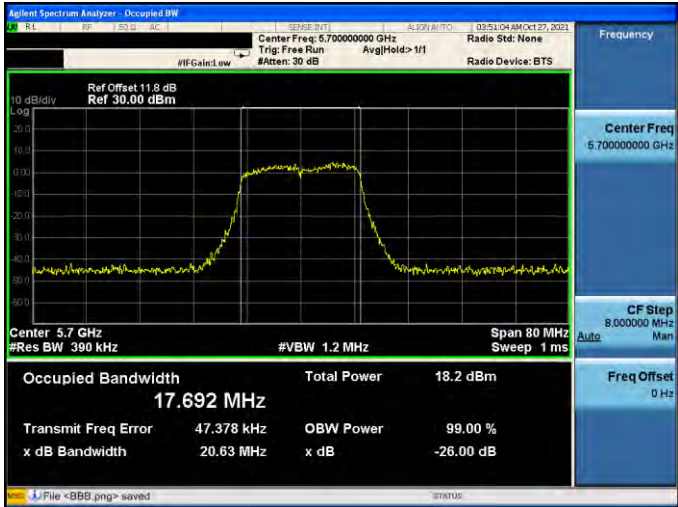
Mode 3: IEEE 802.11n 5 GHz 20 MHz Continuous TX Mode_ANT-0	
5260 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.26000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.26 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.756 MHz Total Power 18.0 dBm Transmit Freq Error -10.063 kHz OBW Power 99.00 % x dB Bandwidth 20.82 MHz x dB -26.00 dB Frequency Center Freq 5.26000000 GHz CF Step 8.000000 MHz Auto Man Freq Offset 0 Hz File name not found, D:\User_My_Documents\instrument\My...
5280 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.28000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.28 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.812 MHz Total Power 17.6 dBm Transmit Freq Error -22.415 kHz OBW Power 99.00 % x dB Bandwidth 20.69 MHz x dB -26.00 dB Frequency Center Freq 5.28000000 GHz CF Step 8.000000 MHz Auto Man Freq Offset 0 Hz File name not found, D:\User_My_Documents\instrument\My...
5320 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.32000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.32 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.679 MHz Total Power 18.1 dBm Transmit Freq Error 8.469 kHz OBW Power 99.00 % x dB Bandwidth 20.62 MHz x dB -26.00 dB Frequency Center Freq 5.32000000 GHz CF Step 8.000000 MHz Auto Man Freq Offset 0 Hz File name not found, D:\User_My_Documents\instrument\My...

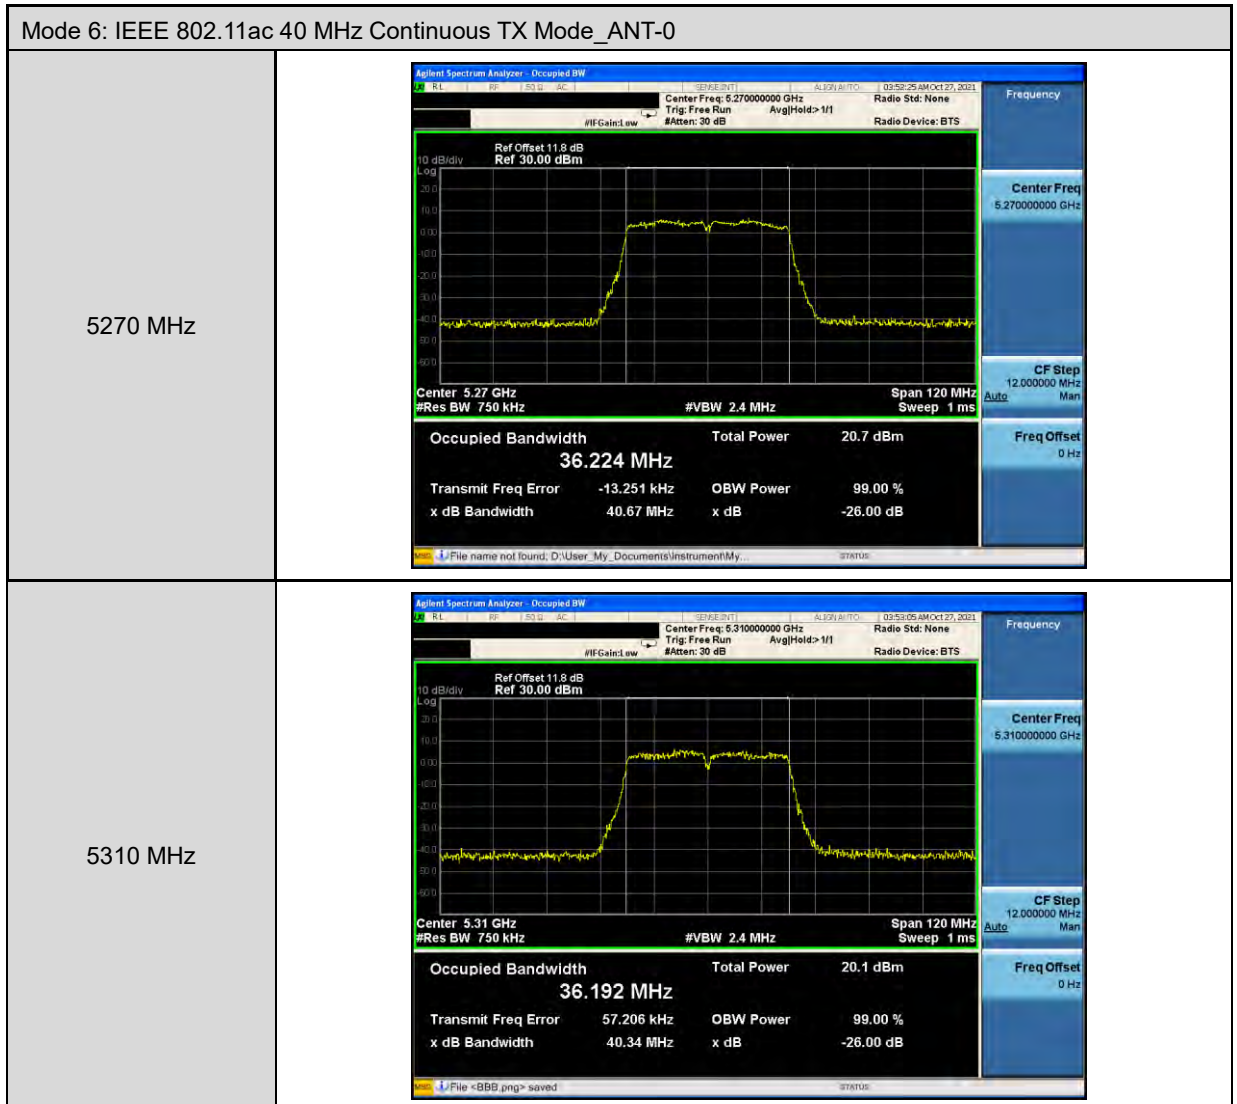
Mode 3: IEEE 802.11n 5 GHz 20 MHz Continuous TX Mode_ANT-0	
5500 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.50000000 GHz Span: 80 MHz Occupied Bandwidth: 17.741 MHz Total Power: 20.4 dBm Transmit Freq Error: -40.015 kHz OBW Power: 99.00 % x dB Bandwidth: 20.82 MHz x dB: -26.00 dB
5560 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.56000000 GHz Span: 80 MHz Occupied Bandwidth: 17.847 MHz Total Power: 19.8 dBm Transmit Freq Error: 39.732 kHz OBW Power: 99.00 % x dB Bandwidth: 20.61 MHz x dB: -26.00 dB
5700 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.70000000 GHz Span: 80 MHz Occupied Bandwidth: 17.670 MHz Total Power: 17.8 dBm Transmit Freq Error: 82.379 kHz OBW Power: 99.00 % x dB Bandwidth: 20.37 MHz x dB: -26.00 dB

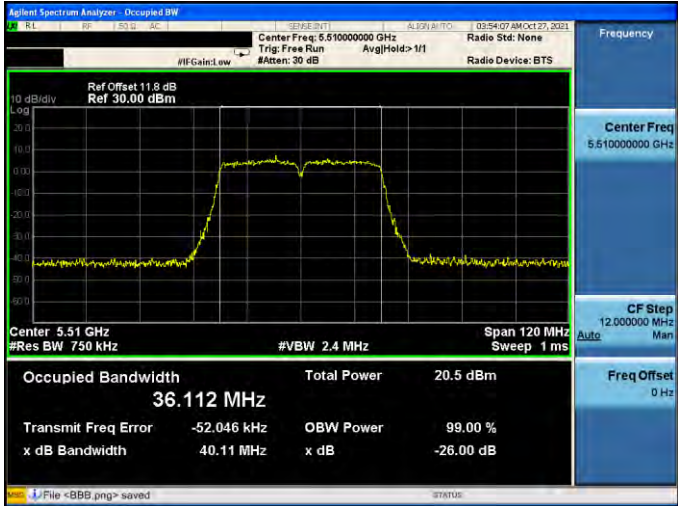
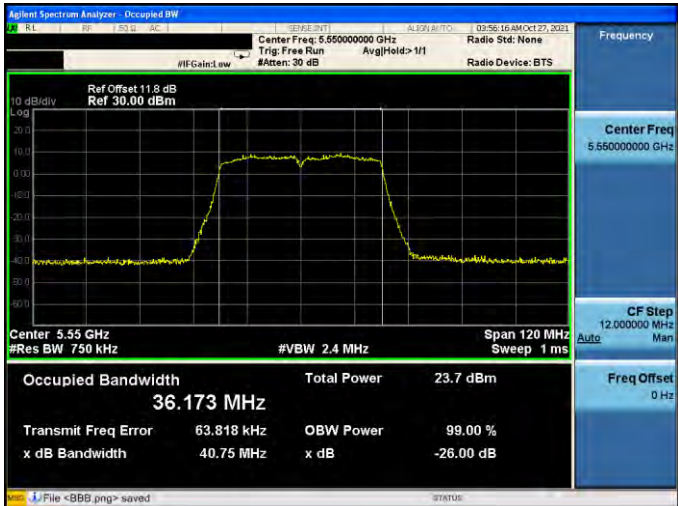
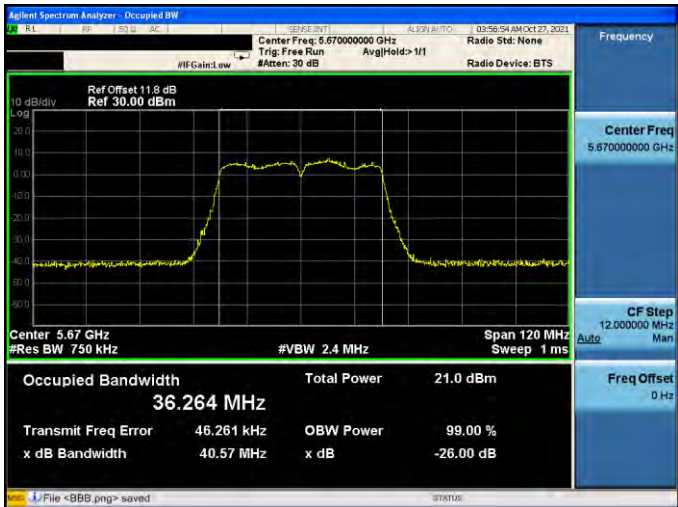
Mode 4: IEEE 802.11n 5 GHz 40 MHz Continuous TX Mode_ANT-0	
5270 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.27000000 GHz Trig: Free Run #Atten: 30 dB Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.27 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 36.222 MHz Total Power 20.4 dBm Transmit Freq Error -52.565 kHz OBW Power 99.00 % x dB Bandwidth 40.27 MHz x dB -26.00 dB File name not found, D:\User_My_Documents\instrumentMy...
5310 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.31000000 GHz Trig: Free Run #Atten: 30 dB Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.31 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 36.144 MHz Total Power 20.0 dBm Transmit Freq Error 54.042 kHz OBW Power 99.00 % x dB Bandwidth 40.55 MHz x dB -26.00 dB File <888.png> saved

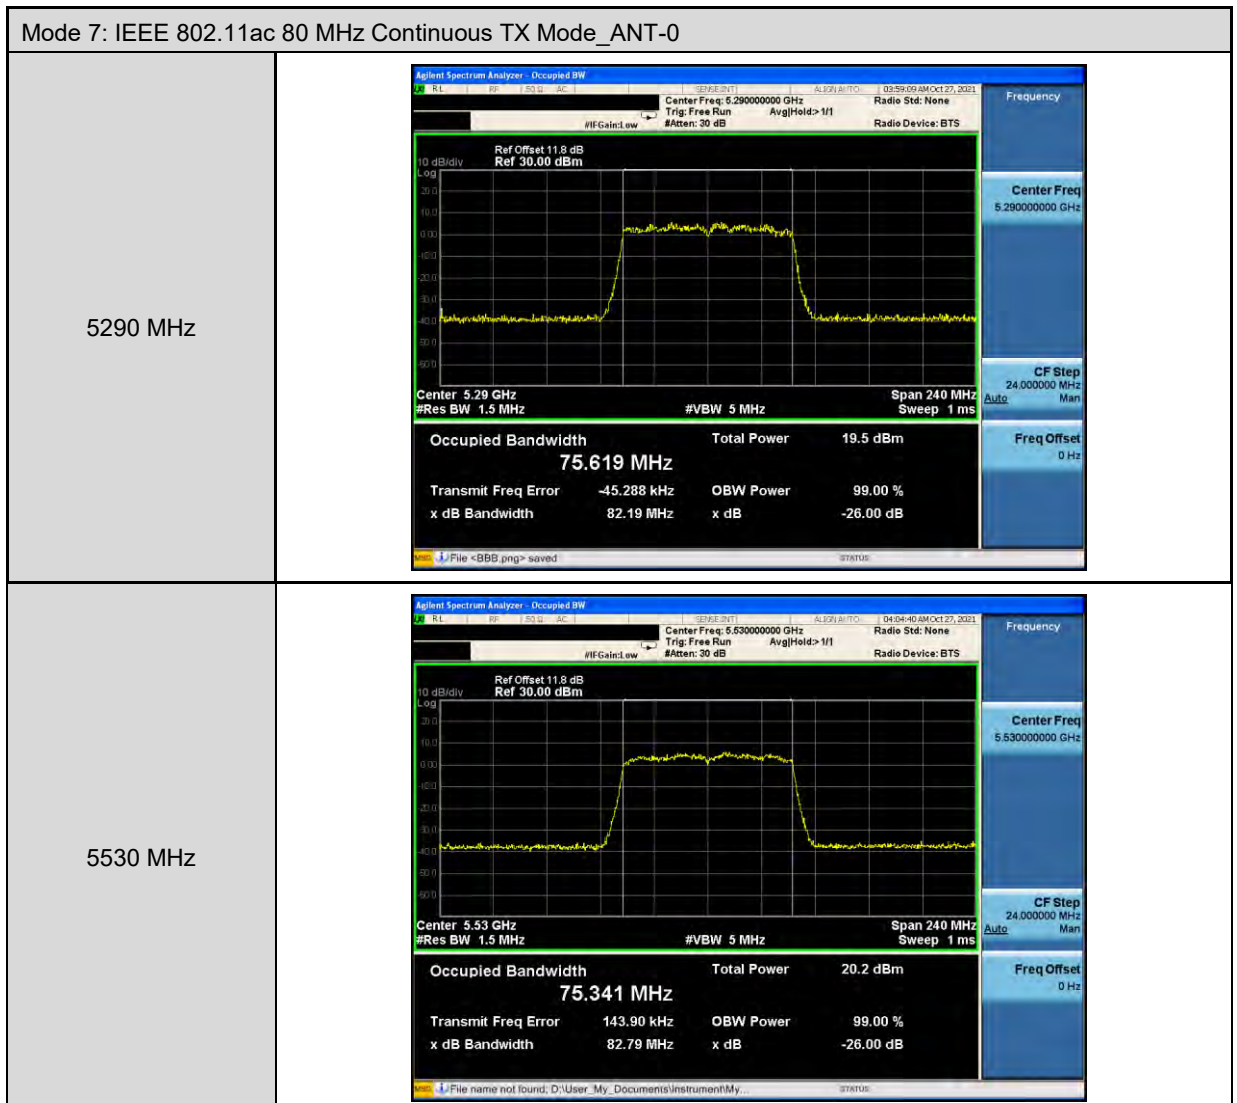
Mode 4: IEEE 802.11n 5 GHz 40 MHz Continuous TX Mode_ANT-0	
5510 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.510000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.51 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 36.137 MHz Total Power 20.1 dBm Transmit Freq Error -36.007 kHz OBW Power 99.00 % x dB Bandwidth 40.50 MHz x dB -26.00 dB File <888.png> saved
5550 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.550000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.55 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 36.200 MHz Total Power 23.5 dBm Transmit Freq Error 65.941 kHz OBW Power 99.00 % x dB Bandwidth 40.69 MHz x dB -26.00 dB File <888.png> saved
5670 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.670000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.67 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 36.177 MHz Total Power 20.7 dBm Transmit Freq Error 19.362 kHz OBW Power 99.00 % x dB Bandwidth 40.27 MHz x dB -26.00 dB File <888.png> saved

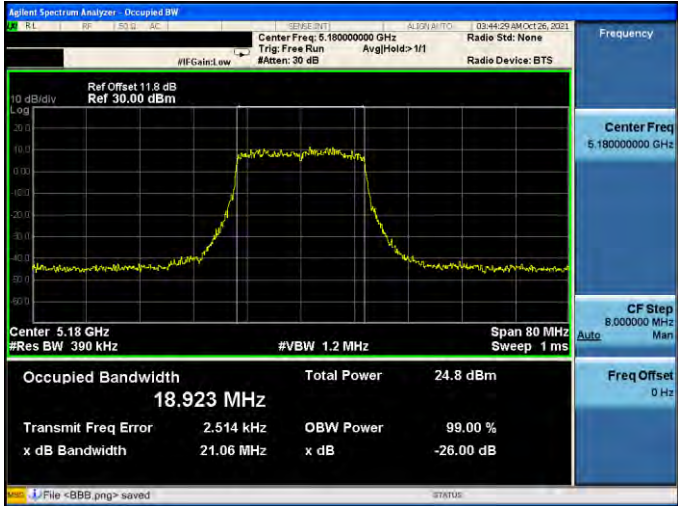
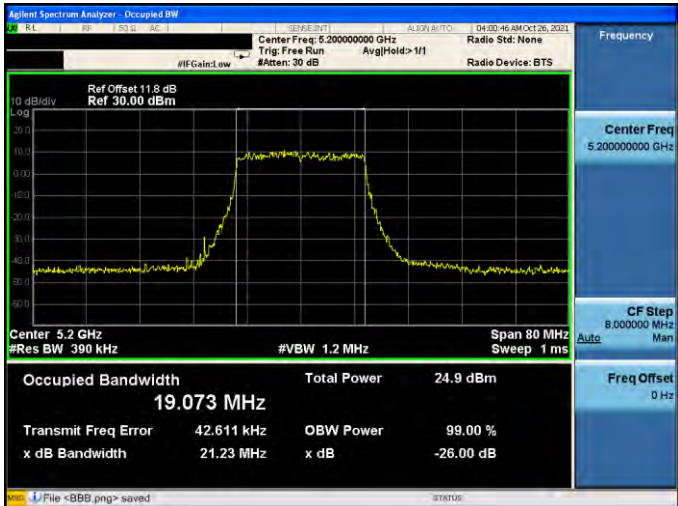
Mode 5: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-0	
5260 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.260000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.26 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.785 MHz Total Power 18.3 dBm Transmit Freq Error -14.982 kHz OBW Power 99.00 % x dB Bandwidth 20.85 MHz x dB -26.00 dB File name not found, D:\User_My_Documents\instrument\My...
5280 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.280000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.28 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.784 MHz Total Power 18.0 dBm Transmit Freq Error -21.921 kHz OBW Power 99.00 % x dB Bandwidth 20.79 MHz x dB -26.00 dB File <888.png> saved
5320 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.320000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.32 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.651 MHz Total Power 18.3 dBm Transmit Freq Error 7.319 kHz OBW Power 99.00 % x dB Bandwidth 20.89 MHz x dB -26.00 dB File <888.png> saved

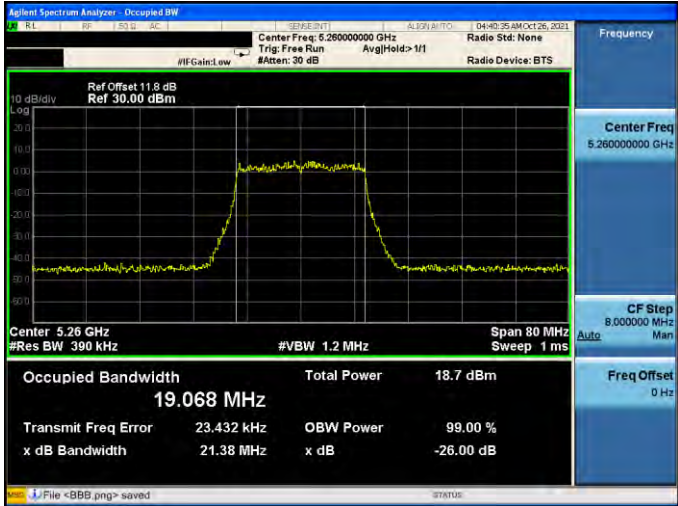
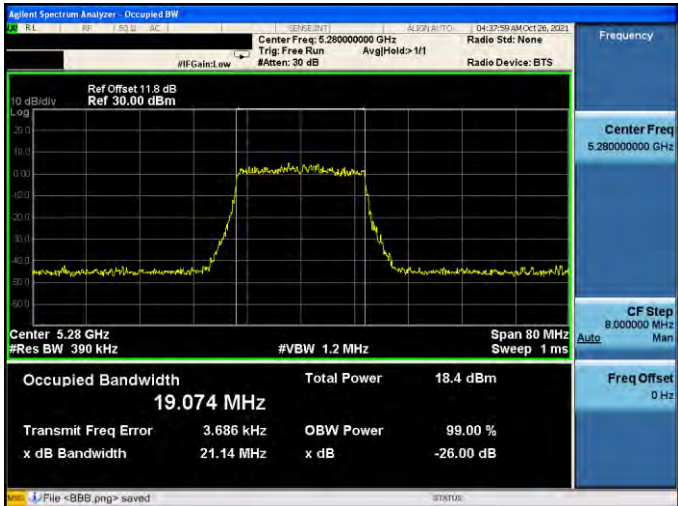
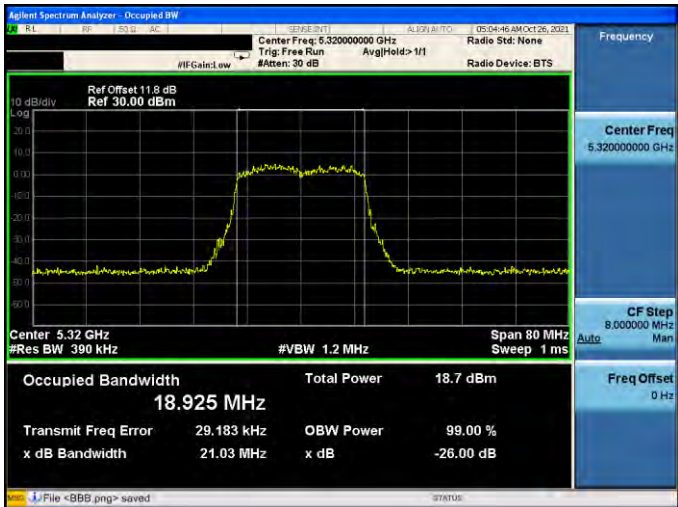
Mode 5: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-0	
5500 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.500000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.5 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.730 MHz Total Power 20.6 dBm Transmit Freq Error -32.754 kHz OBW Power 99.00 % x dB Bandwidth 20.90 MHz x dB -26.00 dB File <BBB.png> saved
5560 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.560000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.56 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.837 MHz Total Power 20.1 dBm Transmit Freq Error 15.521 kHz OBW Power 99.00 % x dB Bandwidth 20.85 MHz x dB -26.00 dB File <BBB.png> saved
5700 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.700000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.7 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.692 MHz Total Power 18.2 dBm Transmit Freq Error 47.378 kHz OBW Power 99.00 % x dB Bandwidth 20.63 MHz x dB -26.00 dB File <BBB.png> saved

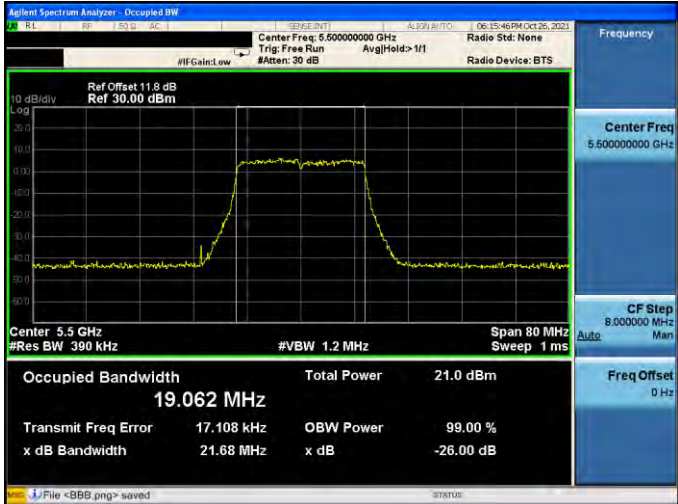
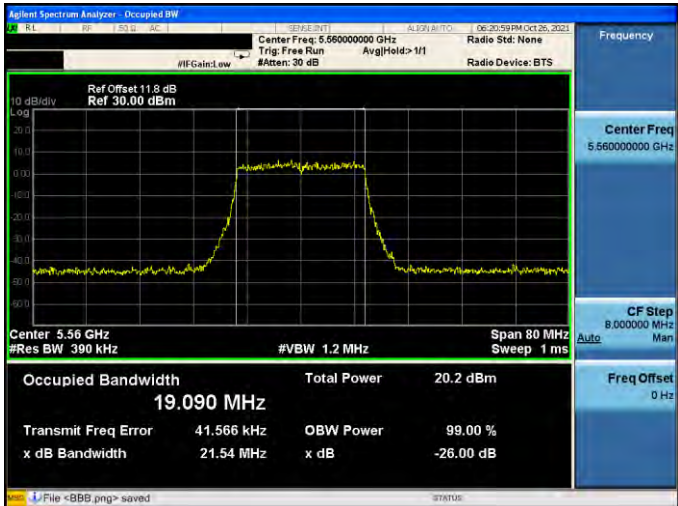
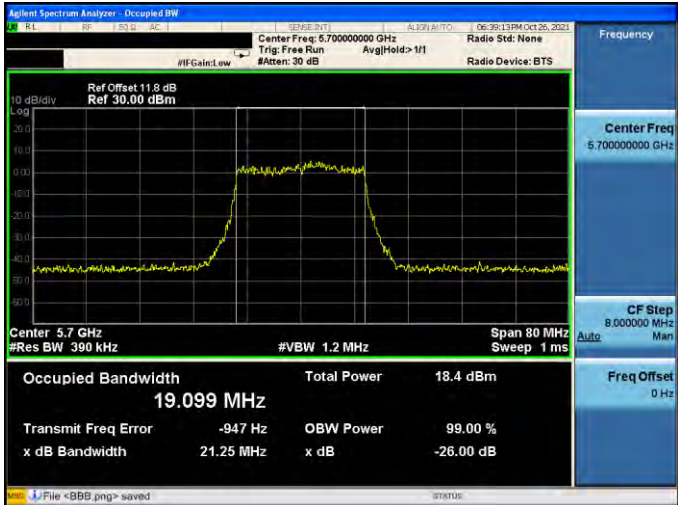


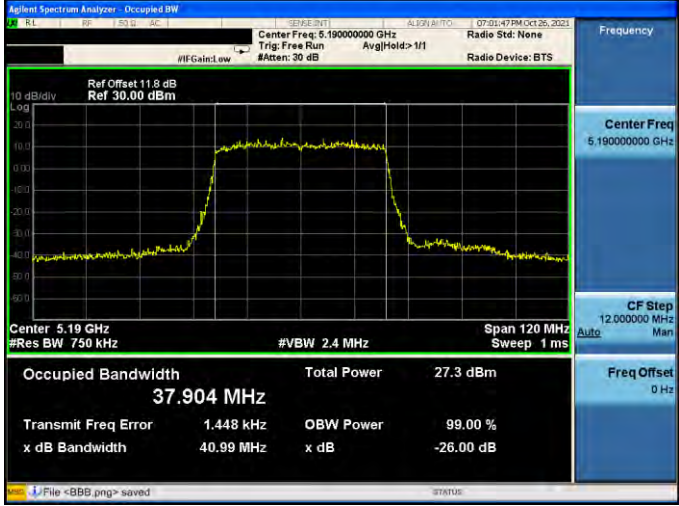
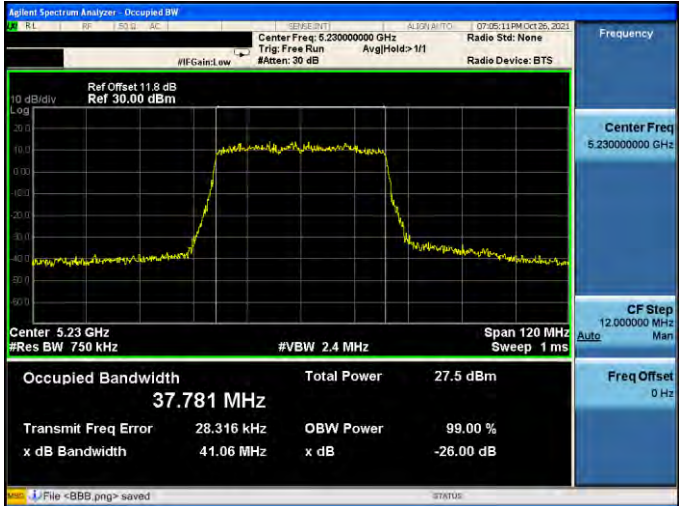
Mode 6: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-0	
5510 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.510000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.51 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 36.112 MHz Total Power 20.5 dBm Transmit Freq Error -52.046 kHz OBW Power 99.00 % x dB Bandwidth 40.11 MHz x dB -26.00 dB File <888.png> saved
5550 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.550000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.55 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 36.173 MHz Total Power 23.7 dBm Transmit Freq Error 63.818 kHz OBW Power 99.00 % x dB Bandwidth 40.75 MHz x dB -26.00 dB File <888.png> saved
5670 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.670000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.67 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 36.264 MHz Total Power 21.0 dBm Transmit Freq Error 46.261 kHz OBW Power 99.00 % x dB Bandwidth 40.57 MHz x dB -26.00 dB File <888.png> saved

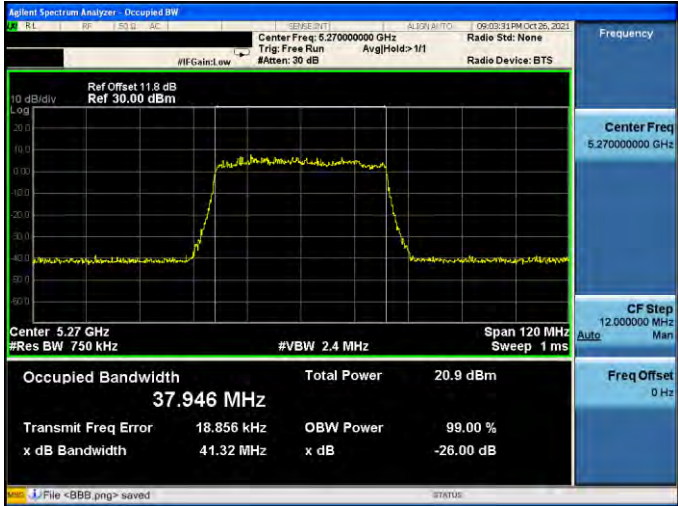
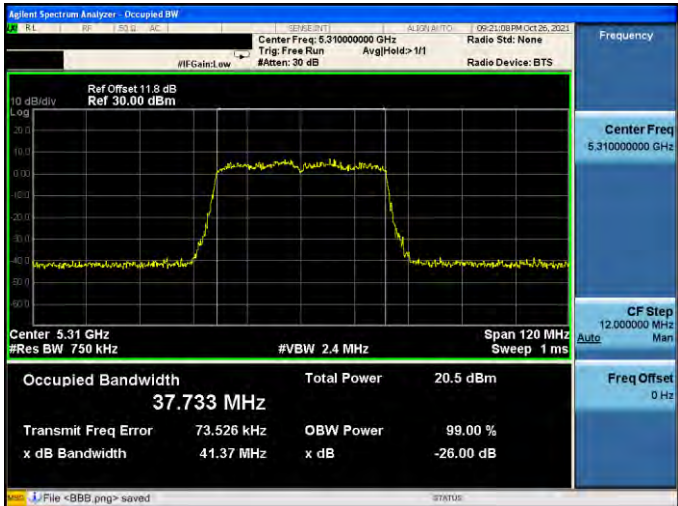


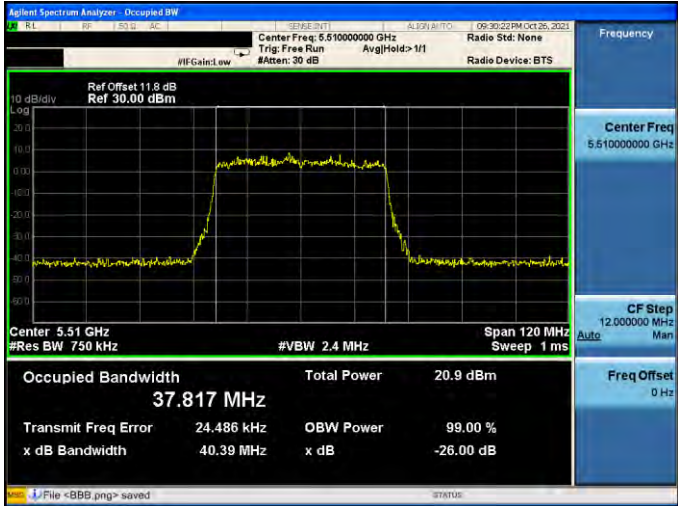
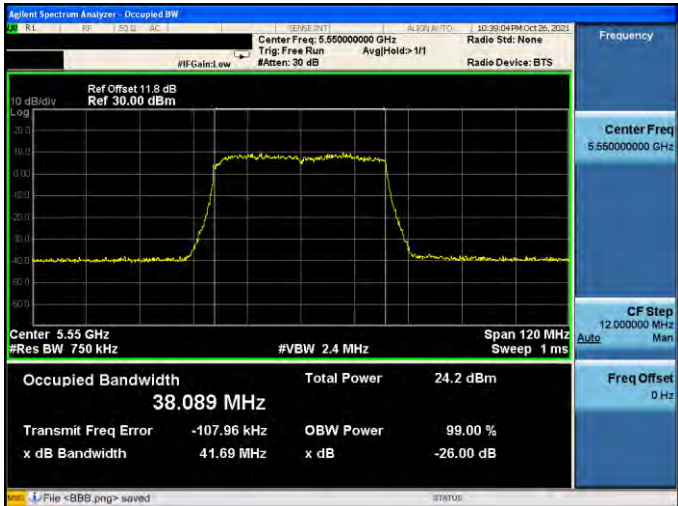
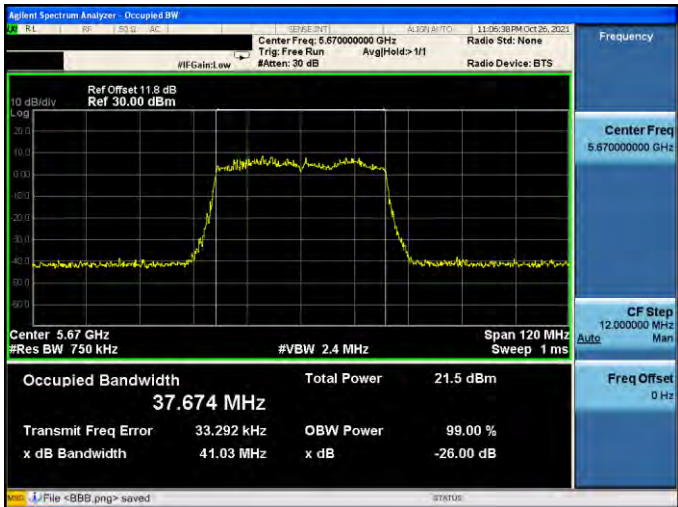
Mode 8: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-0	
5180 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.18000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.18 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 18.923 MHz Total Power 24.8 dBm Transmit Freq Error 2.514 kHz OBW Power 99.00 % x dB Bandwidth 21.06 MHz x dB -26.00 dB File <BBB.png> saved
5200 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.20000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.2 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 19.073 MHz Total Power 24.9 dBm Transmit Freq Error 42.611 kHz OBW Power 99.00 % x dB Bandwidth 21.23 MHz x dB -26.00 dB File <BBB.png> saved
5240 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.24000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.24 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 19.048 MHz Total Power 24.9 dBm Transmit Freq Error 14.090 kHz OBW Power 99.00 % x dB Bandwidth 22.03 MHz x dB -26.00 dB File <BBB.png> saved

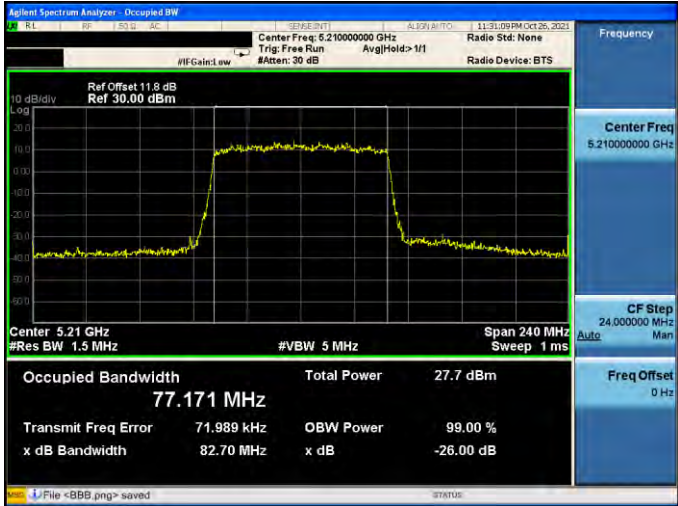
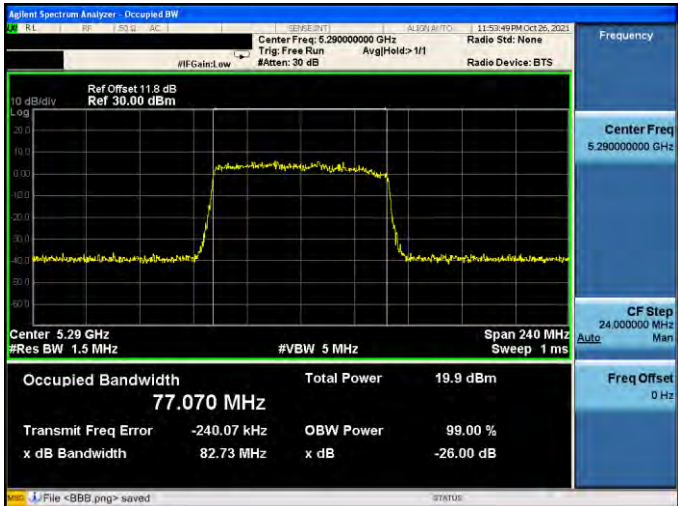
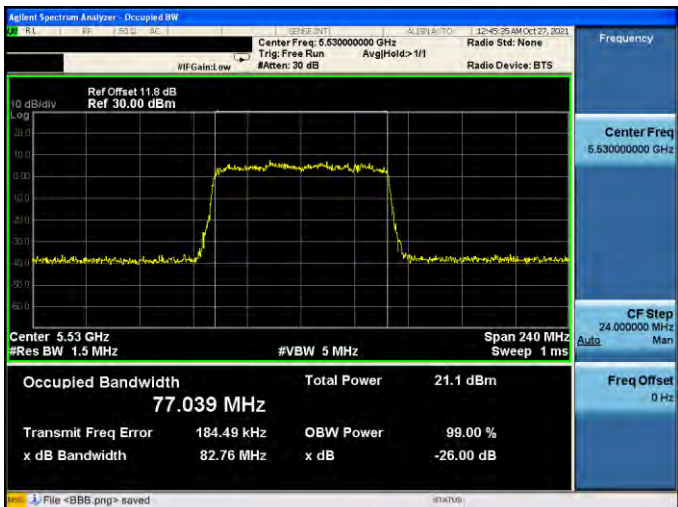
Mode 8: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-0	
5260 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.260000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.26 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 19.068 MHz Total Power 18.7 dBm Transmit Freq Error 23.432 kHz OBW Power 99.00 % x dB Bandwidth 21.38 MHz x dB -26.00 dB File <BBB.png> saved
5280 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.280000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.28 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 19.074 MHz Total Power 18.4 dBm Transmit Freq Error 3.686 kHz OBW Power 99.00 % x dB Bandwidth 21.14 MHz x dB -26.00 dB File <BBB.png> saved
5320 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.320000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.32 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 18.925 MHz Total Power 18.7 dBm Transmit Freq Error 29.183 kHz OBW Power 99.00 % x dB Bandwidth 21.03 MHz x dB -26.00 dB File <BBB.png> saved

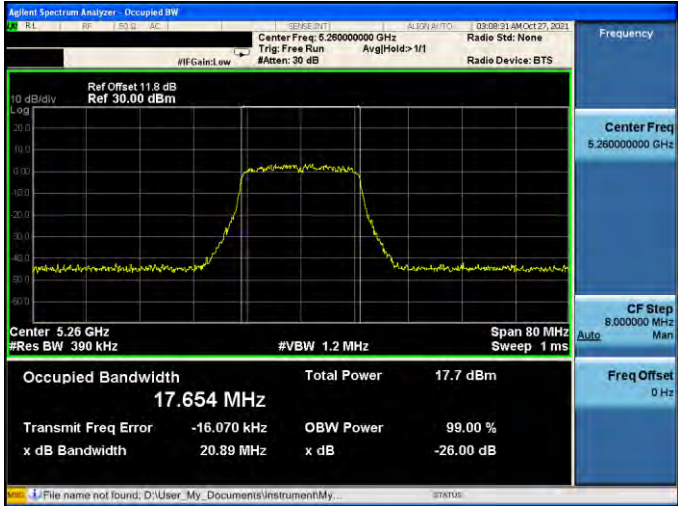
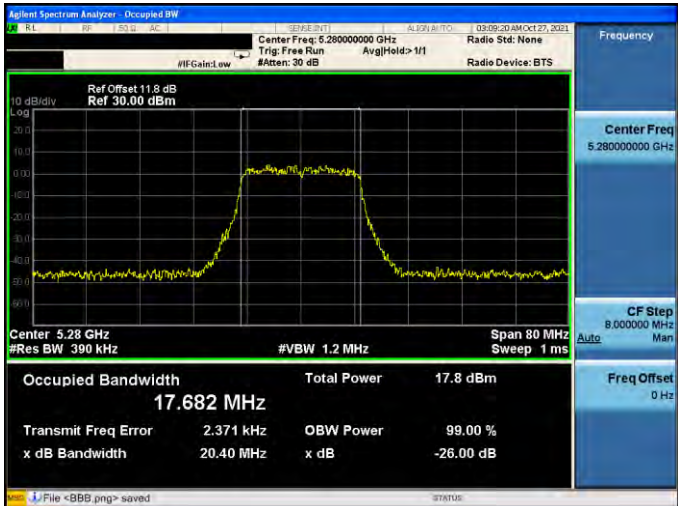
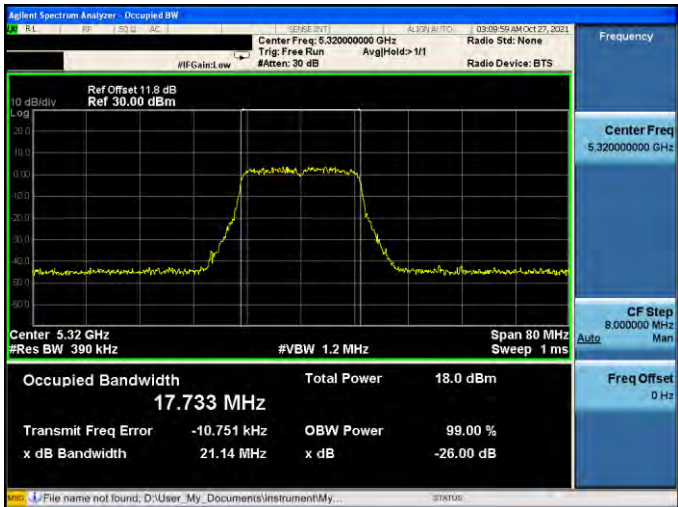
Mode 8: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-0	
5500 MHz	
5560 MHz	
5700 MHz	

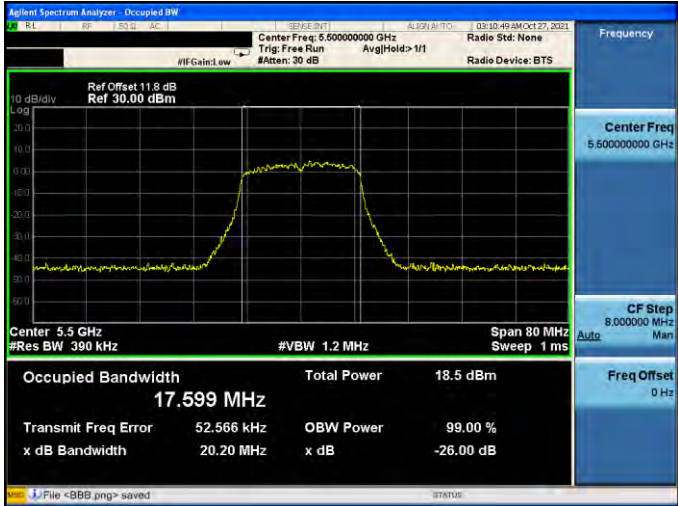
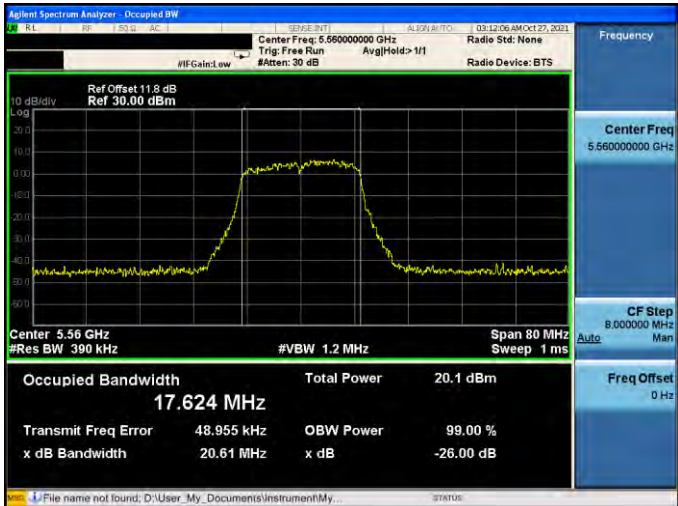
Mode 9: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-0	
5190 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.190000000 GHz Trig: Free Run #Atten: 30 dB Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.19 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 37.904 MHz Total Power 27.3 dBm Transmit Freq Error 1.448 kHz OBW Power 99.00 % x dB Bandwidth 40.99 MHz x dB -26.00 dB File <888.png> saved
5230 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.230000000 GHz Trig: Free Run #Atten: 30 dB Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.23 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 37.781 MHz Total Power 27.5 dBm Transmit Freq Error 28.316 kHz OBW Power 99.00 % x dB Bandwidth 41.06 MHz x dB -26.00 dB File <888.png> saved

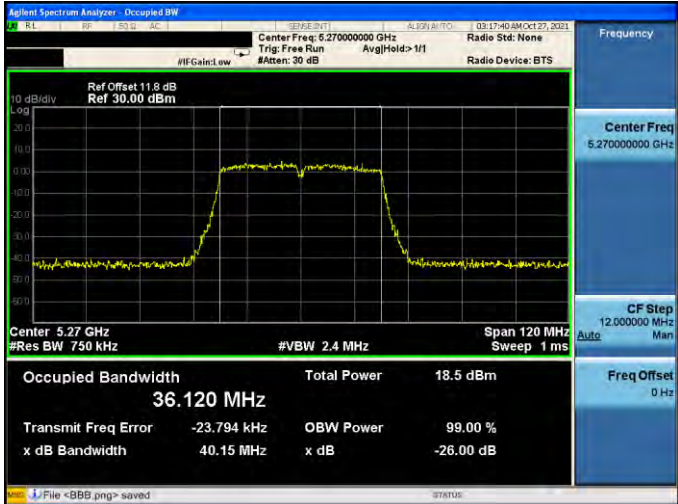
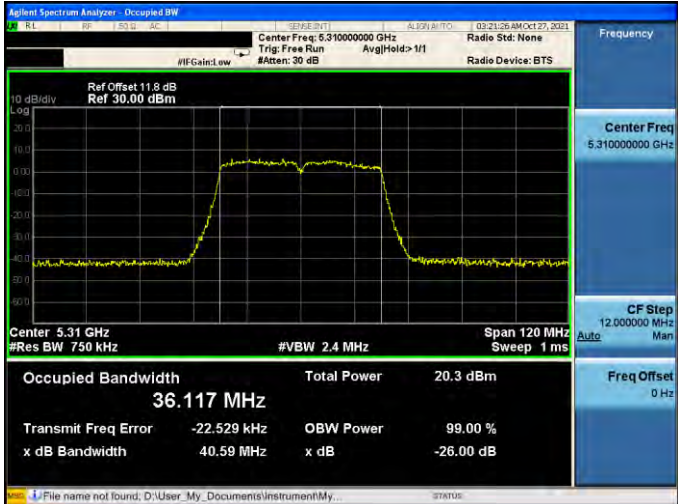
Mode 9: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-0	
5270 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.27000000 GHz Ref Offset 11.8 dB Ref 30.00 dBm Center 5.27 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 37.946 MHz Total Power 20.9 dBm Transmit Freq Error 18.856 kHz OBW Power 99.00 % x dB Bandwidth 41.32 MHz x dB -26.00 dB File <BBB.png> saved
5310 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.31000000 GHz Ref Offset 11.8 dB Ref 30.00 dBm Center 5.31 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 37.733 MHz Total Power 20.5 dBm Transmit Freq Error 73.526 kHz OBW Power 99.00 % x dB Bandwidth 41.37 MHz x dB -26.00 dB File <BBB.png> saved

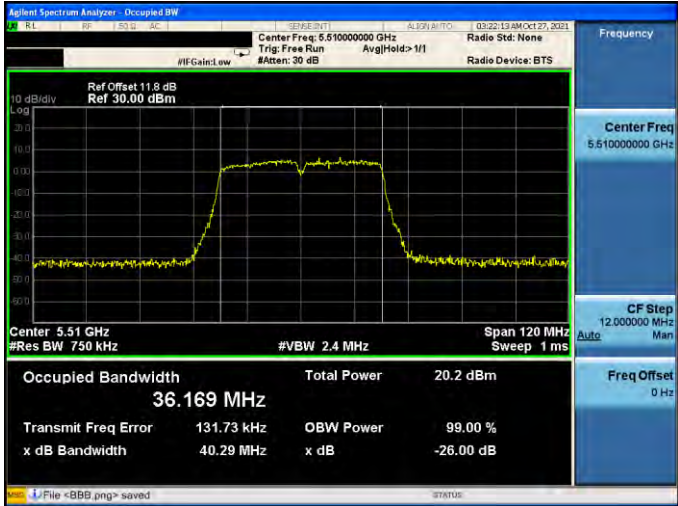
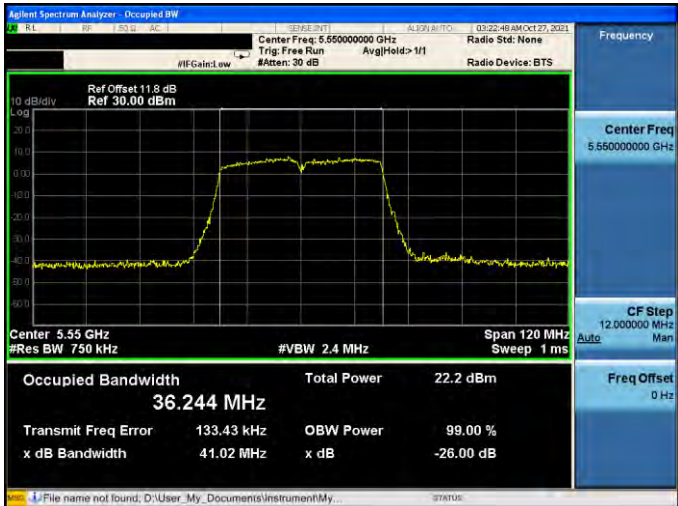
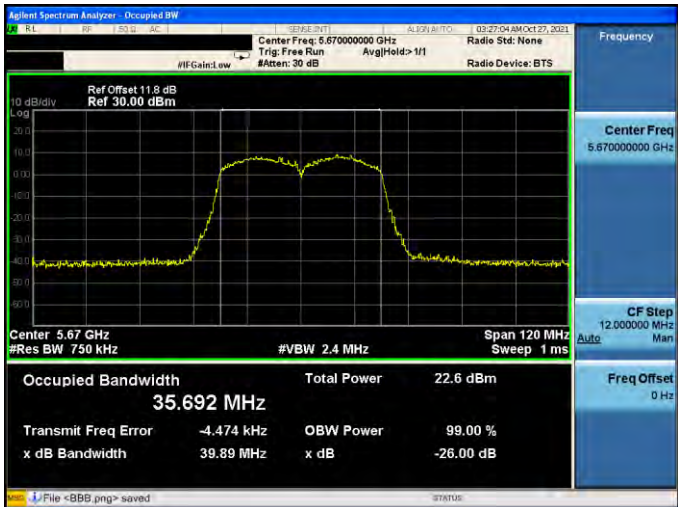
Mode 9: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-0	
5510 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.51000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.51 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 37.817 MHz Total Power 20.9 dBm Transmit Freq Error 24.486 kHz OBW Power 99.00 % x dB Bandwidth 40.39 MHz x dB -26.00 dB File <888.png> saved
5550 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.55000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.55 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 38.089 MHz Total Power 24.2 dBm Transmit Freq Error -107.96 kHz OBW Power 99.00 % x dB Bandwidth 41.69 MHz x dB -26.00 dB File <888.png> saved
5670 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.67000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.67 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 37.674 MHz Total Power 21.5 dBm Transmit Freq Error 33.292 kHz OBW Power 99.00 % x dB Bandwidth 41.03 MHz x dB -26.00 dB File <888.png> saved

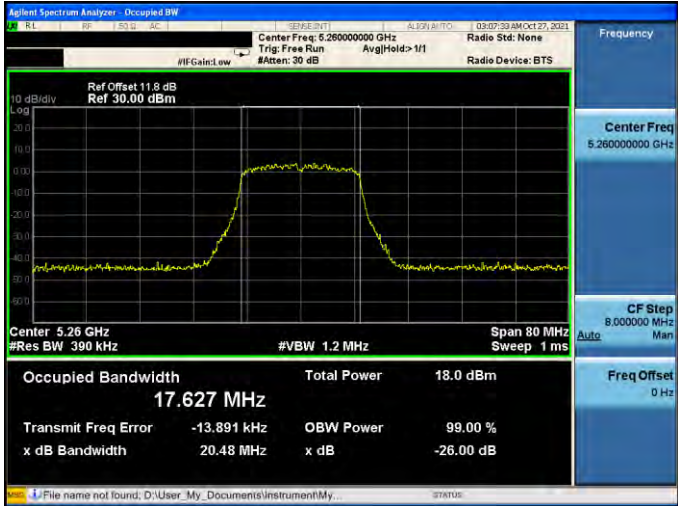
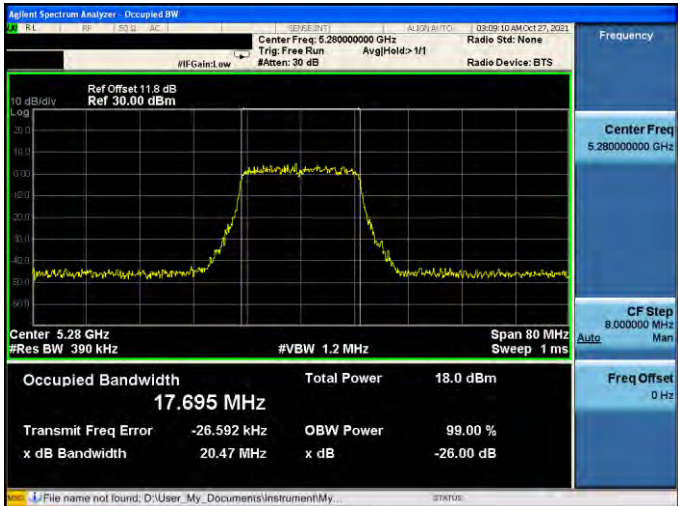
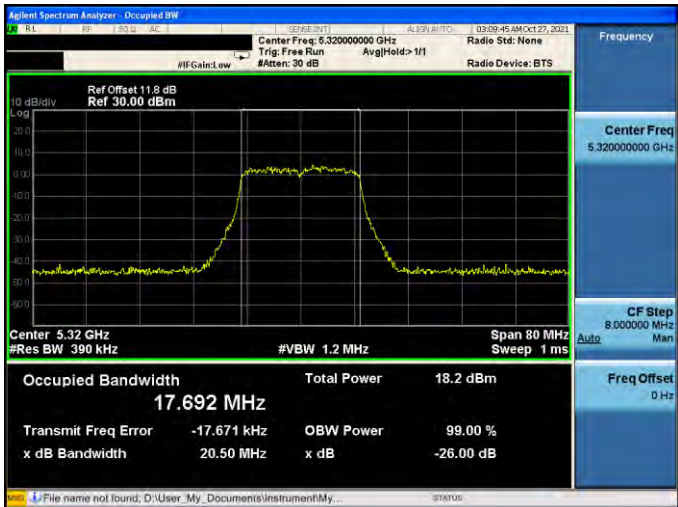
Mode 10: IEEE 802.11ax 80 MHz Continuous TX Mode_ANT-0	
5210 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.210000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.21 GHz #Res BW 1.5 MHz #VBW 5 MHz Span 240 MHz Sweep 1 ms Occupied Bandwidth 77.171 MHz Total Power 27.7 dBm Transmit Freq Error 71.989 kHz OBW Power 99.00 % x dB Bandwidth 82.70 MHz x dB -26.00 dB File <BBB.png> saved
5290 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.290000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.29 GHz #Res BW 1.5 MHz #VBW 5 MHz Span 240 MHz Sweep 1 ms Occupied Bandwidth 77.070 MHz Total Power 19.9 dBm Transmit Freq Error -240.07 kHz OBW Power 99.00 % x dB Bandwidth 82.73 MHz x dB -26.00 dB File <BBB.png> saved
5530 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.530000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.53 GHz #Res BW 1.5 MHz #VBW 5 MHz Span 240 MHz Sweep 1 ms Occupied Bandwidth 77.039 MHz Total Power 21.1 dBm Transmit Freq Error 184.49 kHz OBW Power 99.00 % x dB Bandwidth 82.76 MHz x dB -26.00 dB File <BBB.png> saved

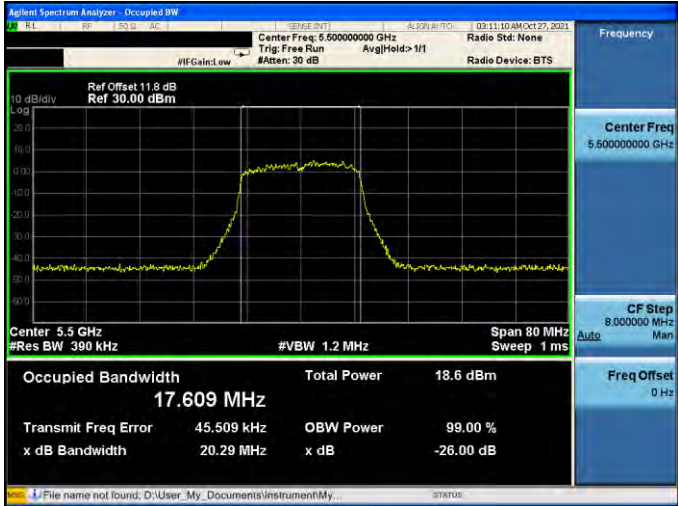
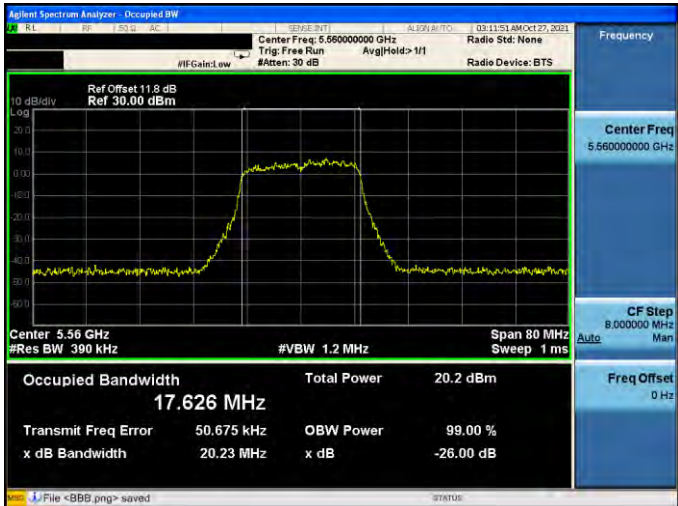
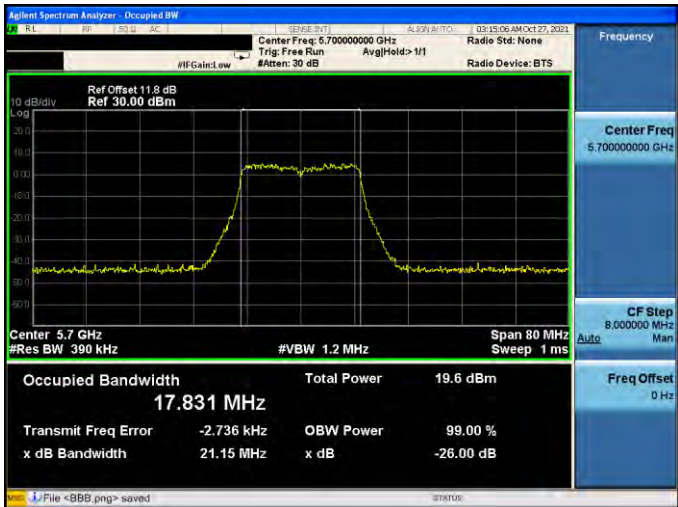
Mode 3: IEEE 802.11n 5 GHz 20 MHz Continuous TX Mode_ANT-1	
5260 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.26000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.26 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.654 MHz Total Power 17.7 dBm Transmit Freq Error -16.070 kHz OBW Power 99.00 % x dB Bandwidth 20.89 MHz x dB -26.00 dB File name not found, D:\User_My_Documents\instrumentMy...
5280 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.28000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.28 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.682 MHz Total Power 17.8 dBm Transmit Freq Error 2.371 kHz OBW Power 99.00 % x dB Bandwidth 20.40 MHz x dB -26.00 dB File <888.png> saved
5320 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.32000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.32 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.733 MHz Total Power 18.0 dBm Transmit Freq Error -10.751 kHz OBW Power 99.00 % x dB Bandwidth 21.14 MHz x dB -26.00 dB File name not found, D:\User_My_Documents\instrumentMy...

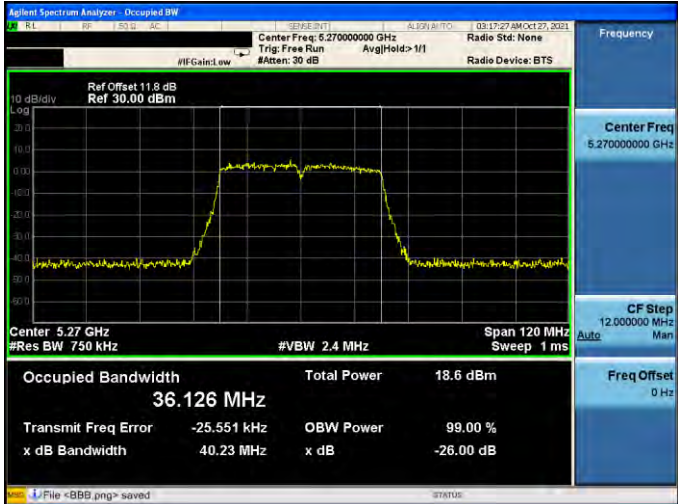
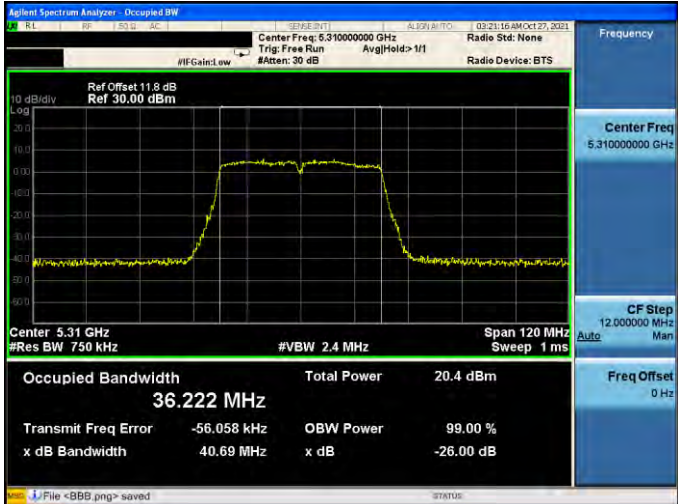
Mode 3: IEEE 802.11n 5 GHz 20 MHz Continuous TX Mode_ANT-1	
5500 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.500000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.5 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.599 MHz Total Power 18.5 dBm Transmit Freq Error 52.566 kHz OBW Power 99.00 % x dB Bandwidth 20.20 MHz x dB -26.00 dB File <BBB.png> saved
5560 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.560000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.56 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.624 MHz Total Power 20.1 dBm Transmit Freq Error 48.955 kHz OBW Power 99.00 % x dB Bandwidth 20.61 MHz x dB -26.00 dB File name not found: D:\User_My_Documents\instrument\My...
5700 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.700000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.7 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.859 MHz Total Power 19.5 dBm Transmit Freq Error 10.695 kHz OBW Power 99.00 % x dB Bandwidth 21.10 MHz x dB -26.00 dB File <BBB.png> saved

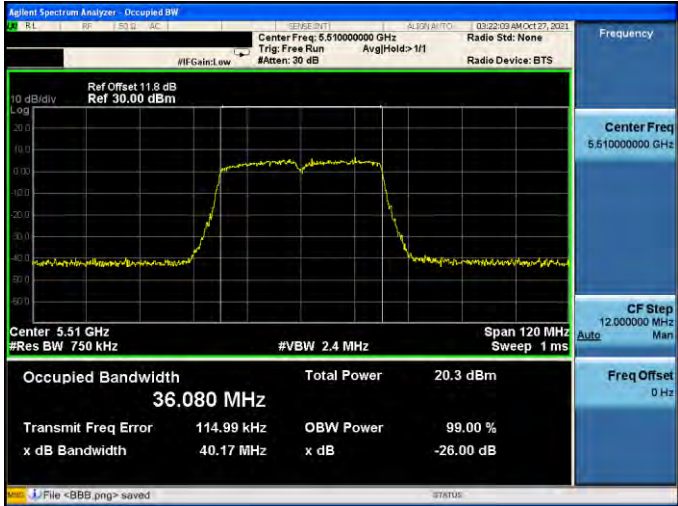
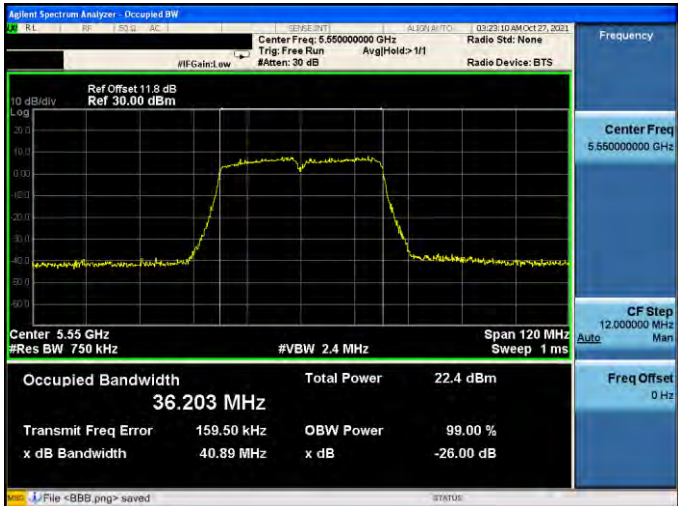
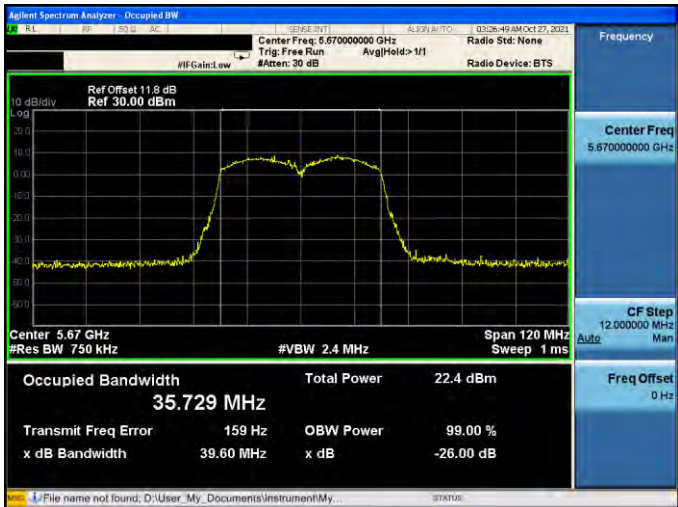
Mode 4: IEEE 802.11n 5 GHz 40 MHz Continuous TX Mode_ANT-1	
5270 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.27000000 GHz Ref Offset 11.8 dB Ref 30.00 dBm Center 5.27 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 36.120 MHz Total Power 18.5 dBm Transmit Freq Error -23.794 kHz OBW Power 99.00 % x dB Bandwidth 40.15 MHz x dB -26.00 dB File <BBB.png> saved
5310 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.31000000 GHz Ref Offset 11.8 dB Ref 30.00 dBm Center 5.31 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 36.117 MHz Total Power 20.3 dBm Transmit Freq Error -22.529 kHz OBW Power 99.00 % x dB Bandwidth 40.59 MHz x dB -26.00 dB File name not found; D:\User_My_Documents\instrument\My...

Mode 4: IEEE 802.11n 5 GHz 40 MHz Continuous TX Mode_ANT-1	
5510 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.510000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.51 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 36.169 MHz Total Power 20.2 dBm Transmit Freq Error 131.73 kHz OBW Power 99.00 % x dB Bandwidth 40.29 MHz x dB -26.00 dB File <BBB.png> saved
5550 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.550000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.55 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 36.244 MHz Total Power 22.2 dBm Transmit Freq Error 133.43 kHz OBW Power 99.00 % x dB Bandwidth 41.02 MHz x dB -26.00 dB File name not found: D:\User_My_Documents\instrument\My...
5670 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.670000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.67 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 35.692 MHz Total Power 22.6 dBm Transmit Freq Error -4.474 kHz OBW Power 99.00 % x dB Bandwidth 39.89 MHz x dB -26.00 dB File <BBB.png> saved

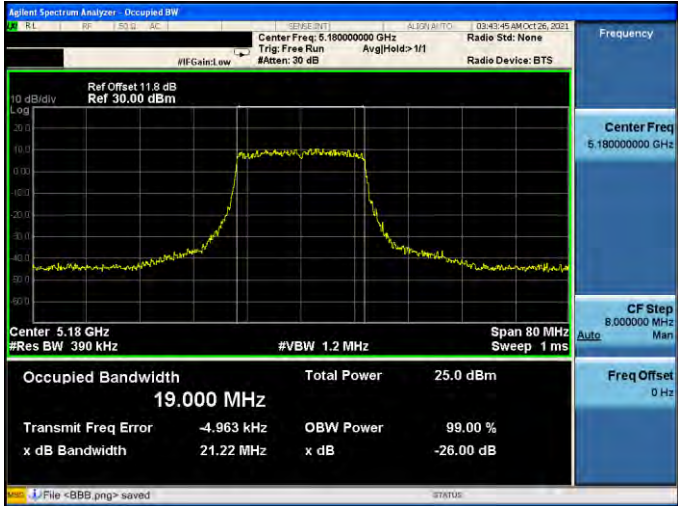
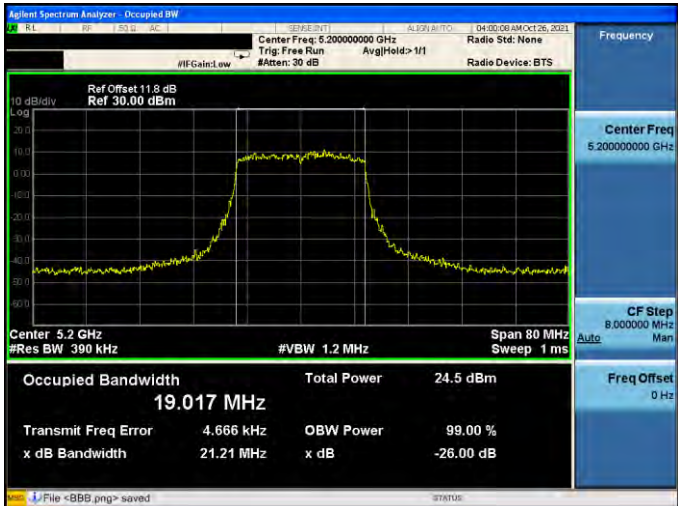
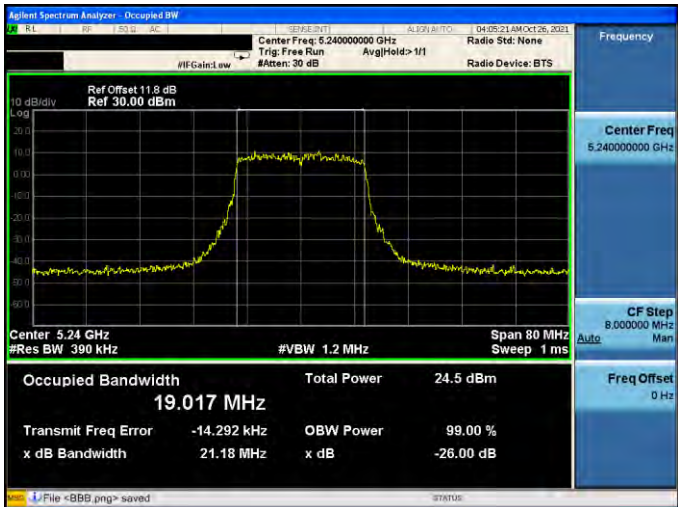
Mode 5: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-1	
5260 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.26000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.26 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.627 MHz Total Power 18.0 dBm Transmit Freq Error -13.891 kHz OBW Power 99.00 % x dB Bandwidth 20.48 MHz x dB -26.00 dB CF Step 8.000000 MHz Auto Man Freq Offset 0 Hz File name not found, D:\User_My_Documents\instrument\My...
5280 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.28000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.28 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.695 MHz Total Power 18.0 dBm Transmit Freq Error -26.592 kHz OBW Power 99.00 % x dB Bandwidth 20.47 MHz x dB -26.00 dB CF Step 8.000000 MHz Auto Man Freq Offset 0 Hz File name not found, D:\User_My_Documents\instrument\My...
5320 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.32000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.32 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.692 MHz Total Power 18.2 dBm Transmit Freq Error -17.671 kHz OBW Power 99.00 % x dB Bandwidth 20.50 MHz x dB -26.00 dB CF Step 8.000000 MHz Auto Man Freq Offset 0 Hz File name not found, D:\User_My_Documents\instrument\My...

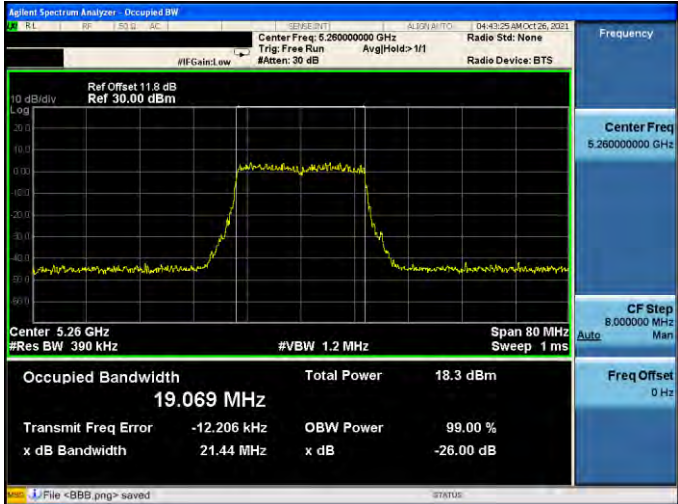
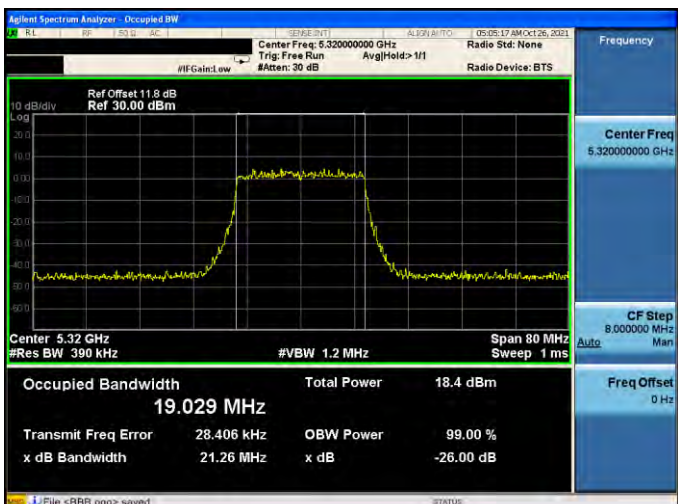
Mode 5: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-1	
5500 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.50000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.5 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.609 MHz Total Power 18.6 dBm Transmit Freq Error 45.509 kHz OBW Power 99.00 % x dB Bandwidth 20.29 MHz x dB -26.00 dB File name not found, D:\User_My_Documents\instrument\My...
5560 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.56000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.56 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.626 MHz Total Power 20.2 dBm Transmit Freq Error 50.675 kHz OBW Power 99.00 % x dB Bandwidth 20.23 MHz x dB -26.00 dB File <BBB.png> saved
5700 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.70000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.7 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.831 MHz Total Power 19.6 dBm Transmit Freq Error -2.736 kHz OBW Power 99.00 % x dB Bandwidth 21.15 MHz x dB -26.00 dB File <BBB.png> saved

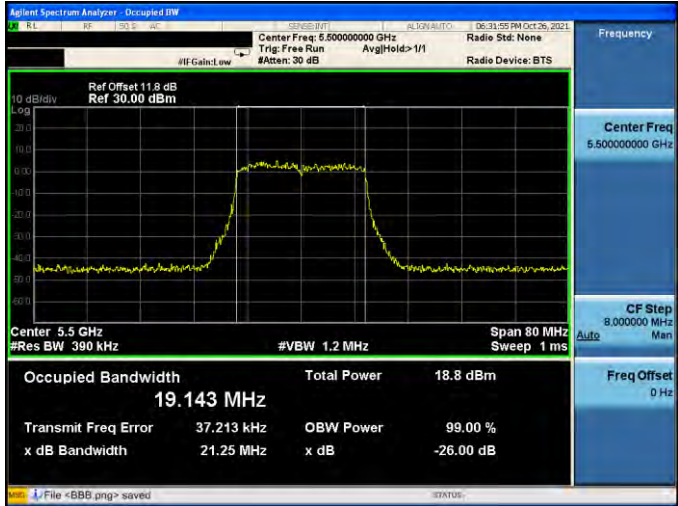
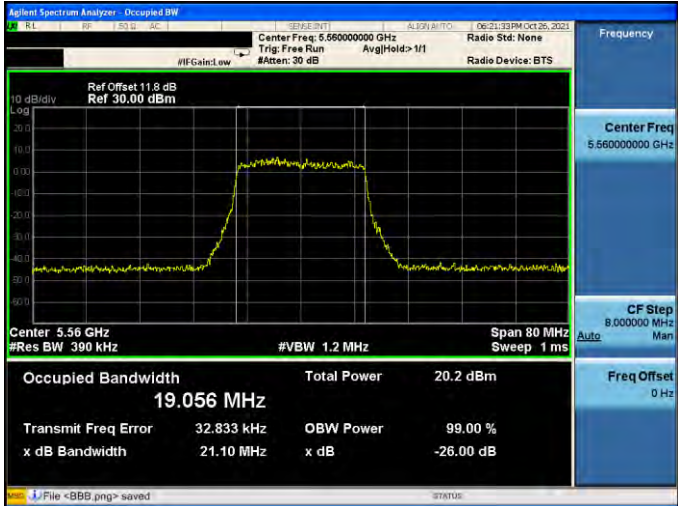
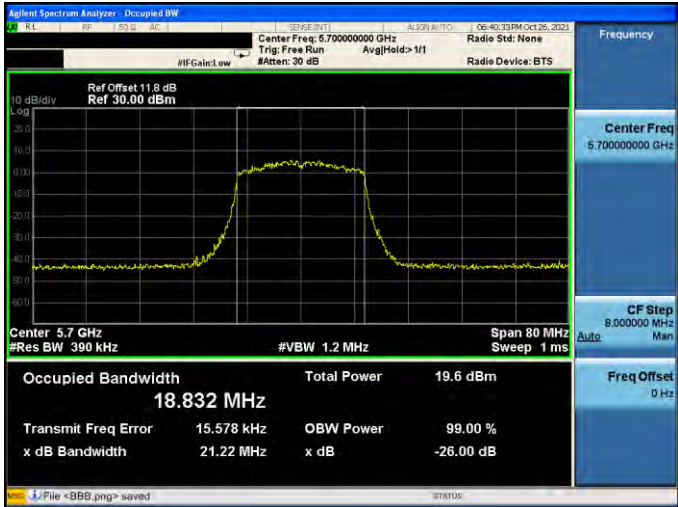
Mode 6: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-1	
5270 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.27000000 GHz Ref Offset 11.8 dB Ref 30.00 dBm Center 5.27 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 36.126 MHz Total Power 18.6 dBm Transmit Freq Error -25.551 kHz OBW Power 99.00 % x dB Bandwidth 40.23 MHz x dB -26.00 dB File <888.png> saved
5310 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.31000000 GHz Ref Offset 11.8 dB Ref 30.00 dBm Center 5.31 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 36.222 MHz Total Power 20.4 dBm Transmit Freq Error -56.058 kHz OBW Power 99.00 % x dB Bandwidth 40.69 MHz x dB -26.00 dB File <888.png> saved

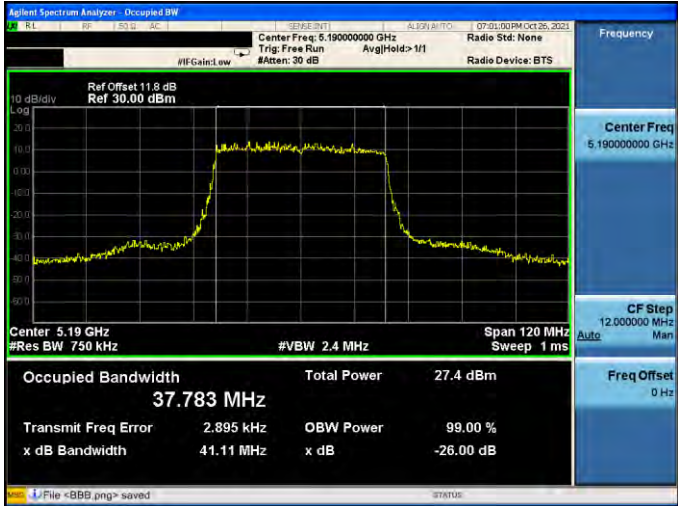
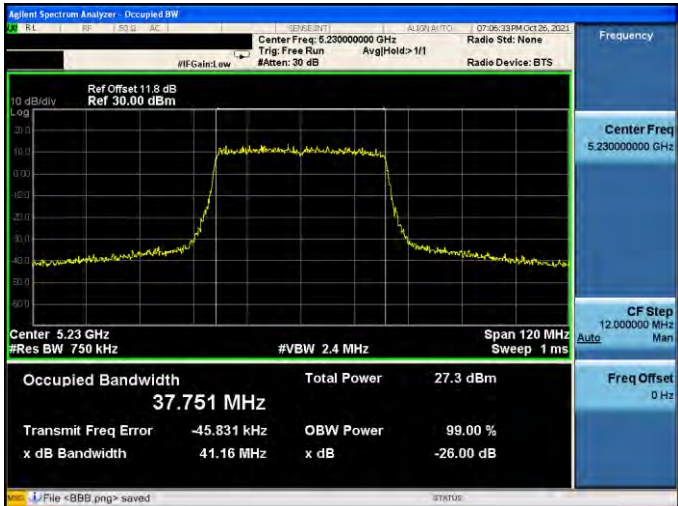
Mode 6: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-1	
5510 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.510000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.51 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 36.080 MHz Total Power 20.3 dBm Transmit Freq Error 114.99 kHz OBW Power 99.00 % x dB Bandwidth 40.17 MHz x dB -26.00 dB File <BBB.png> saved
5550 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.550000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.55 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 36.203 MHz Total Power 22.4 dBm Transmit Freq Error 159.50 kHz OBW Power 99.00 % x dB Bandwidth 40.89 MHz x dB -26.00 dB File <BBB.png> saved
5670 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.670000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.67 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 35.729 MHz Total Power 22.4 dBm Transmit Freq Error 159 Hz OBW Power 99.00 % x dB Bandwidth 39.60 MHz x dB -26.00 dB File name not found, D:\User_My_Documents\InstrumentMy...

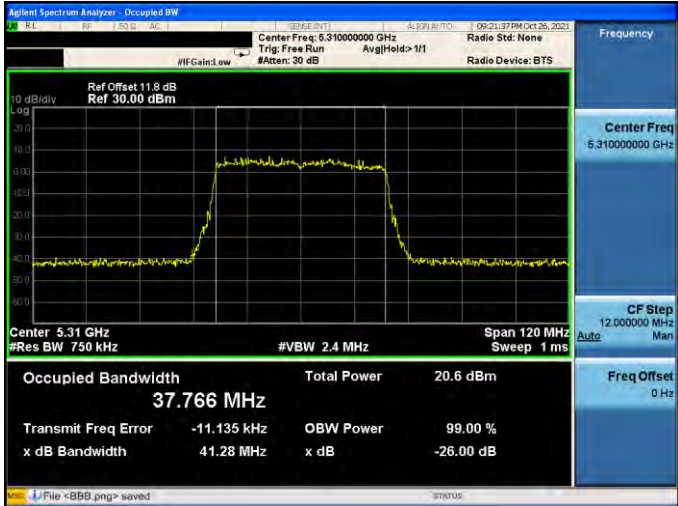
Mode 7: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT-1	
5290 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.290000000 GHz Trig: Free Run #Atten: 30 dB Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.29 GHz #Res BW 1.5 MHz #VBW 5 MHz Span 240 MHz Sweep 1 ms Occupied Bandwidth 75.326 MHz Total Power 19.3 dBm Transmit Freq Error -211.50 kHz OBW Power 99.00 % x dB Bandwidth 82.22 MHz x dB -26.00 dB Center Freq 5.290000000 GHz CF Step 24.000000 MHz Freq Offset 0 Hz File <BBB.png> saved
5530 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.530000000 GHz Trig: Free Run #Atten: 30 dB Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.53 GHz #Res BW 1.5 MHz #VBW 5 MHz Span 240 MHz Sweep 1 ms Occupied Bandwidth 75.210 MHz Total Power 20.7 dBm Transmit Freq Error 412.53 kHz OBW Power 99.00 % x dB Bandwidth 81.77 MHz x dB -26.00 dB Center Freq 5.530000000 GHz CF Step 24.000000 MHz Freq Offset 0 Hz File name not found: D:\User_My_Documents\instrument\My...

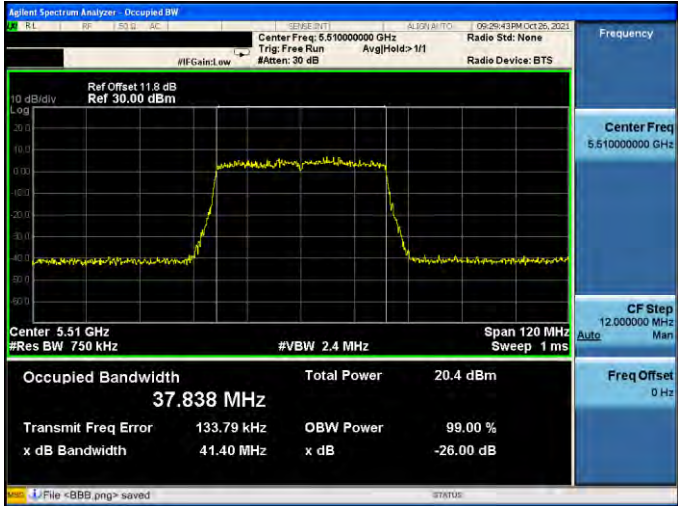
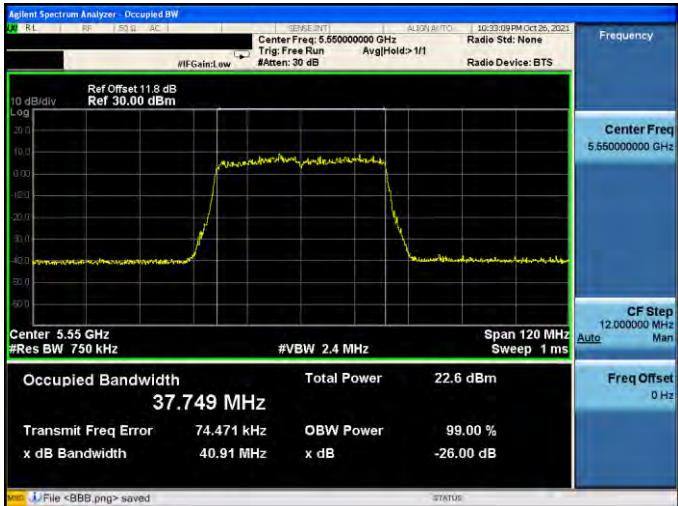
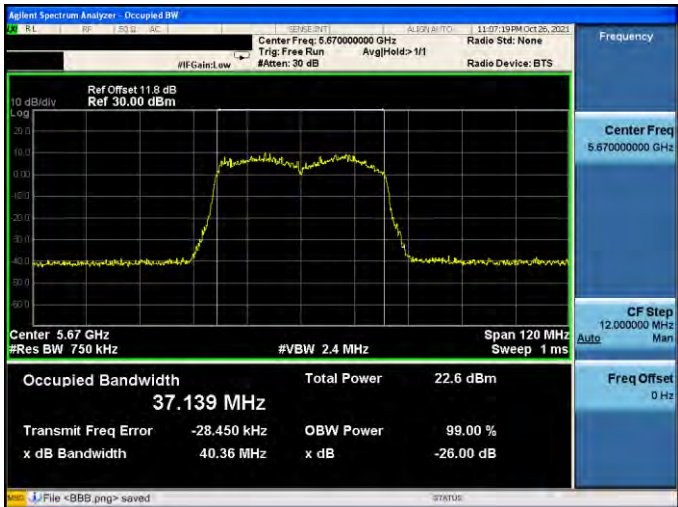
Mode 8: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-1	
5180 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.18000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.18 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 19.000 MHz Total Power 25.0 dBm Transmit Freq Error -4.963 kHz OBW Power 99.00 % x dB Bandwidth 21.22 MHz x dB -26.00 dB File <BBB.png> saved
5200 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.20000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.2 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 19.017 MHz Total Power 24.5 dBm Transmit Freq Error 4.666 kHz OBW Power 99.00 % x dB Bandwidth 21.21 MHz x dB -26.00 dB File <BBB.png> saved
5240 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.24000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.24 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 19.017 MHz Total Power 24.5 dBm Transmit Freq Error -14.292 kHz OBW Power 99.00 % x dB Bandwidth 21.18 MHz x dB -26.00 dB File <BBB.png> saved

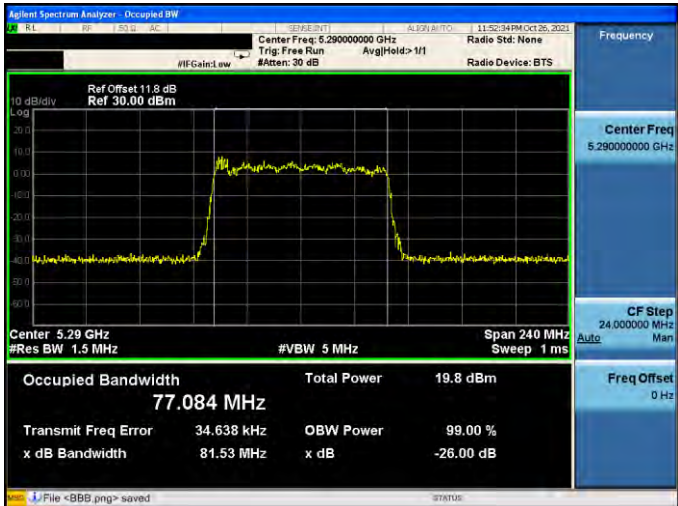
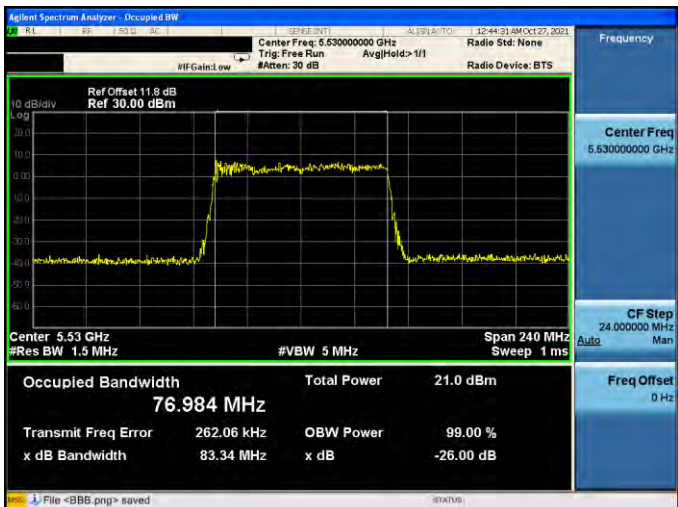
Mode 8: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-1	
5260 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.26000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.26 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 19.069 MHz Total Power 18.3 dBm Transmit Freq Error -12.206 kHz OBW Power 99.00 % x dB Bandwidth 21.44 MHz x dB -26.00 dB File <BBB.png> saved
5280 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.28000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.28 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 19.059 MHz Total Power 18.1 dBm Transmit Freq Error -44.510 kHz OBW Power 99.00 % x dB Bandwidth 21.19 MHz x dB -26.00 dB File <BBB.png> saved
5320 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.32000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.32 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 19.029 MHz Total Power 18.4 dBm Transmit Freq Error 28.406 kHz OBW Power 99.00 % x dB Bandwidth 21.26 MHz x dB -26.00 dB File <BBB.png> saved

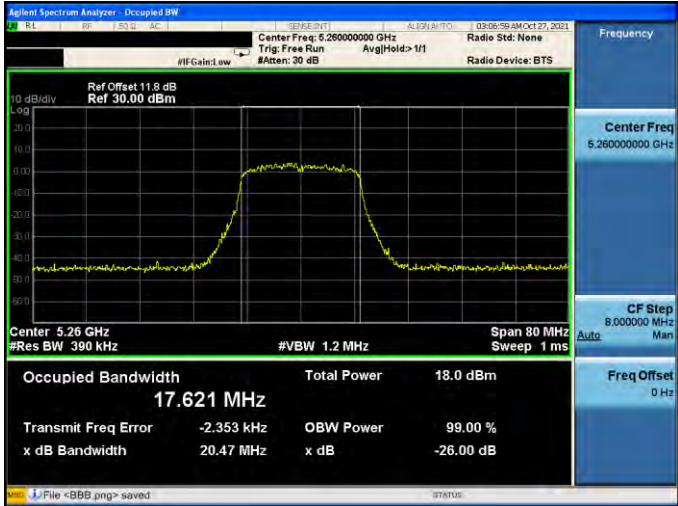
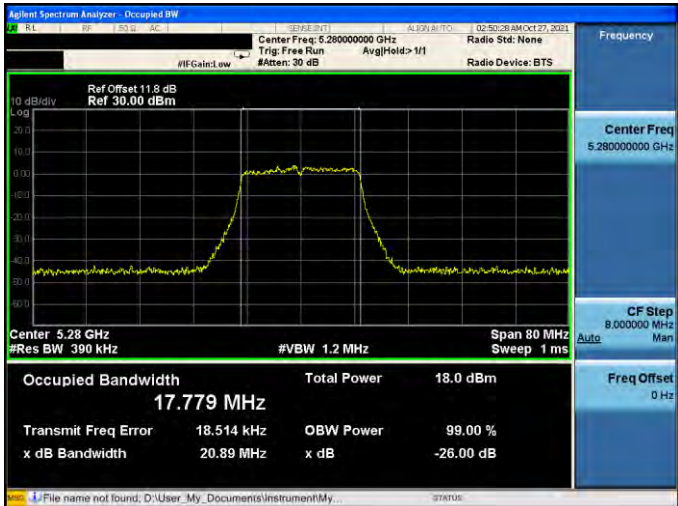
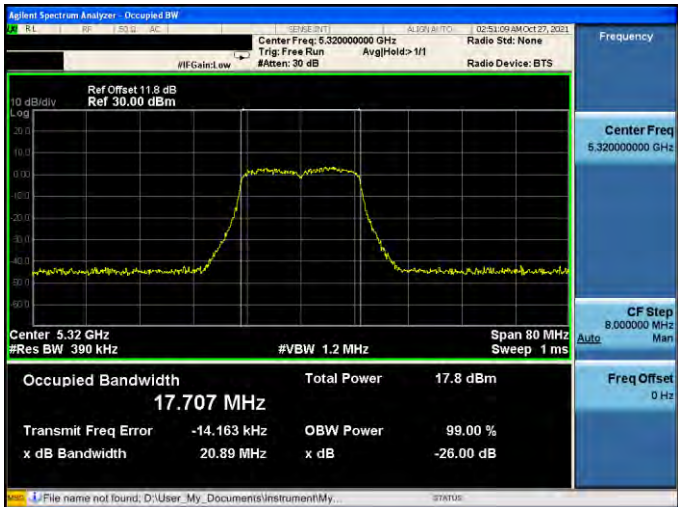
Mode 8: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-1	
5500 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.500000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.5 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 19.143 MHz Total Power 18.8 dBm Transmit Freq Error 37.213 kHz OBW Power 99.00 % x dB Bandwidth 21.25 MHz x dB -26.00 dB File <550.png> saved
5560 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.560000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.56 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 19.056 MHz Total Power 20.2 dBm Transmit Freq Error 32.833 kHz OBW Power 99.00 % x dB Bandwidth 21.10 MHz x dB -26.00 dB File <556.png> saved
5700 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.700000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.7 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 18.832 MHz Total Power 19.6 dBm Transmit Freq Error 15.578 kHz OBW Power 99.00 % x dB Bandwidth 21.22 MHz x dB -26.00 dB File <570.png> saved

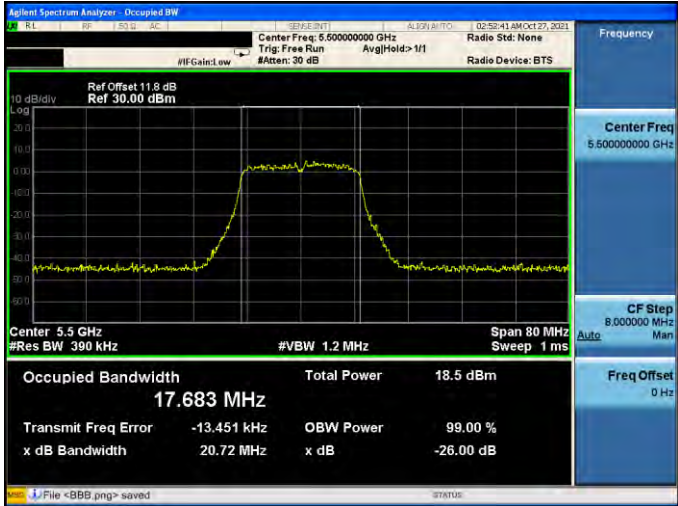
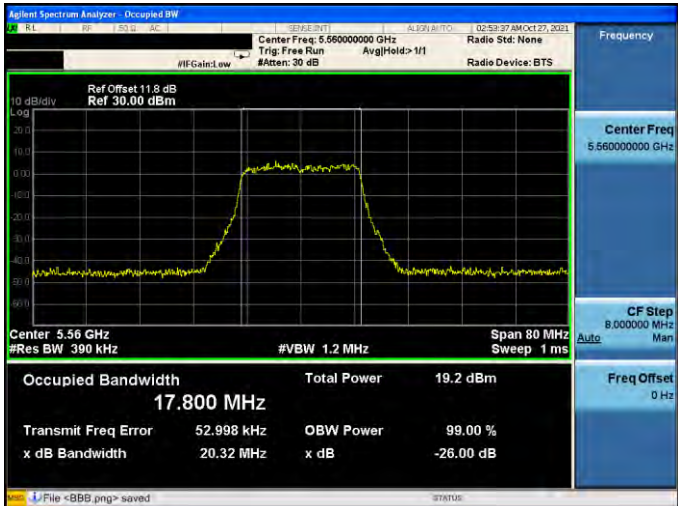
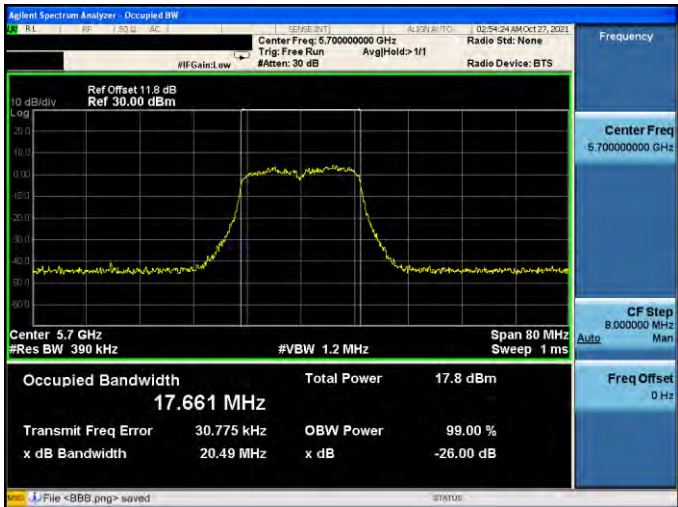
Mode 9: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-1	
5190 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.190000000 GHz Trig: Free Run #Atten: 30 dB Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.19 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 37.783 MHz Total Power 27.4 dBm Transmit Freq Error 2.895 kHz OBW Power 99.00 % x dB Bandwidth 41.11 MHz x dB -26.00 dB File <888.png> saved
5230 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.230000000 GHz Trig: Free Run #Atten: 30 dB Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.23 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 37.751 MHz Total Power 27.3 dBm Transmit Freq Error -45.831 kHz OBW Power 99.00 % x dB Bandwidth 41.16 MHz x dB -26.00 dB File <888.png> saved

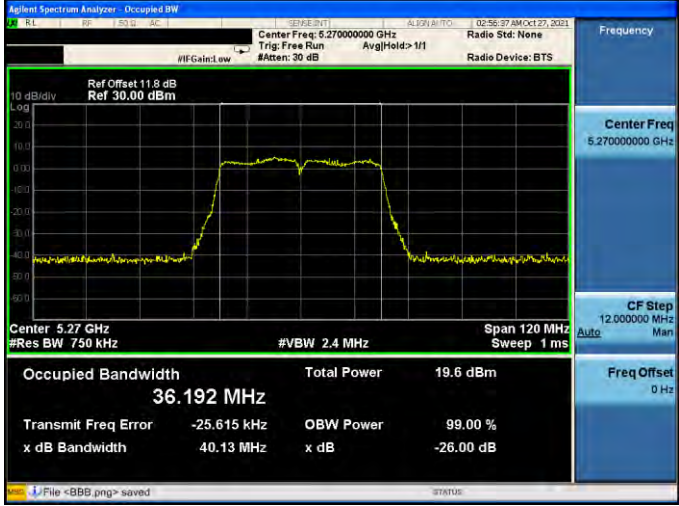
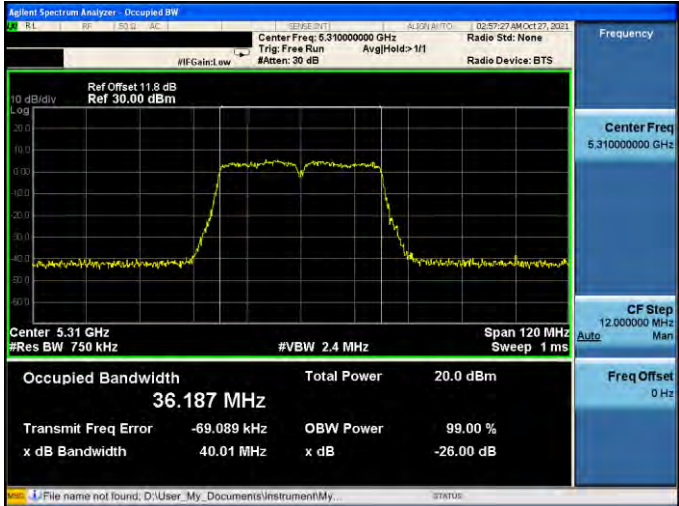
Mode 9: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-1	
5270 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.270000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.27 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 37.910 MHz Total Power 18.6 dBm Transmit Freq Error -45.280 kHz OBW Power 99.00 % x dB Bandwidth 41.02 MHz x dB -26.00 dB File <888.png> saved
5310 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.310000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.31 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 37.766 MHz Total Power 20.6 dBm Transmit Freq Error -11.135 kHz OBW Power 99.00 % x dB Bandwidth 41.28 MHz x dB -26.00 dB File <888.png> saved

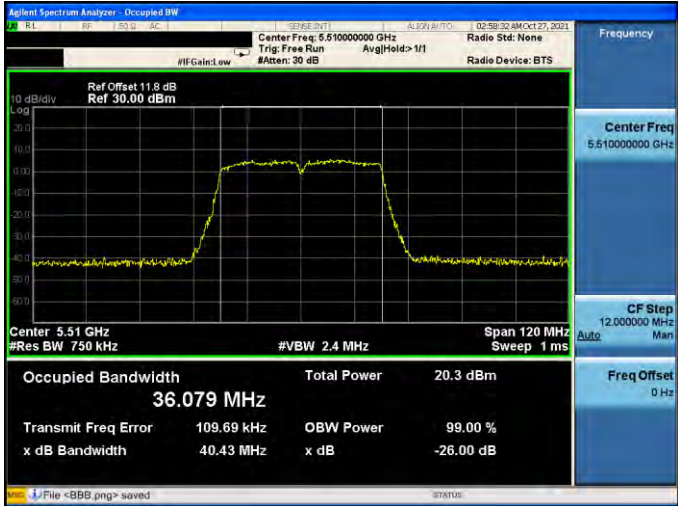
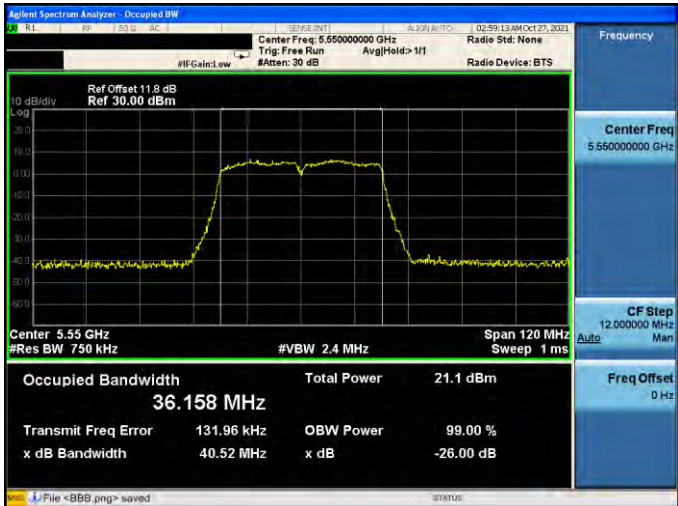
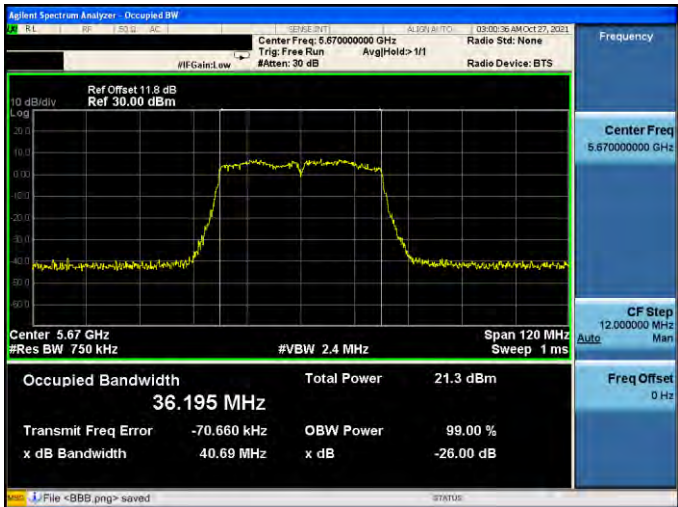
Mode 9: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-1	
5510 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.51000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.51 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 37.838 MHz Total Power 20.4 dBm Transmit Freq Error 133.79 kHz OBW Power 99.00 % x dB Bandwidth 41.40 MHz x dB -26.00 dB File <888.png> saved
5550 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.55000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.55 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 37.749 MHz Total Power 22.6 dBm Transmit Freq Error 74.471 kHz OBW Power 99.00 % x dB Bandwidth 40.91 MHz x dB -26.00 dB File <888.png> saved
5670 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.67000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.67 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 37.139 MHz Total Power 22.6 dBm Transmit Freq Error -28.450 kHz OBW Power 99.00 % x dB Bandwidth 40.36 MHz x dB -26.00 dB File <888.png> saved

Mode 10: IEEE 802.11ax 80 MHz Continuous TX Mode_ANT-1	
5210 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.210000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.21 GHz #Res BW 1.5 MHz #VBW 5 MHz Span 240 MHz Sweep 1 ms Occupied Bandwidth 77.316 MHz Total Power 27.9 dBm Transmit Freq Error -155.11 kHz OBW Power 99.00 % x dB Bandwidth 82.61 MHz x dB -26.00 dB File <BBB.png> saved
5290 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.290000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.29 GHz #Res BW 1.5 MHz #VBW 5 MHz Span 240 MHz Sweep 1 ms Occupied Bandwidth 77.084 MHz Total Power 19.8 dBm Transmit Freq Error 34.638 kHz OBW Power 99.00 % x dB Bandwidth 81.53 MHz x dB -26.00 dB File <BBB.png> saved
5530 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.530000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.53 GHz #Res BW 1.5 MHz #VBW 5 MHz Span 240 MHz Sweep 1 ms Occupied Bandwidth 76.984 MHz Total Power 21.0 dBm Transmit Freq Error 262.06 kHz OBW Power 99.00 % x dB Bandwidth 83.34 MHz x dB -26.00 dB File <BBB.png> saved

Mode 3: IEEE 802.11n 5 GHz 20 MHz Continuous TX Mode_ANT-2	
5260 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.26000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.26 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.621 MHz Total Power 18.0 dBm Transmit Freq Error -2.353 kHz OBW Power 99.00 % x dB Bandwidth 20.47 MHz x dB -26.00 dB File <BBB.png> saved
5280 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.28000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.28 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.779 MHz Total Power 18.0 dBm Transmit Freq Error 18.514 kHz OBW Power 99.00 % x dB Bandwidth 20.89 MHz x dB -26.00 dB File name not found; D:\User_My_Documents\instrument\My...
5320 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.32000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.32 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.707 MHz Total Power 17.8 dBm Transmit Freq Error -14.163 kHz OBW Power 99.00 % x dB Bandwidth 20.89 MHz x dB -26.00 dB File name not found; D:\User_My_Documents\instrument\My...

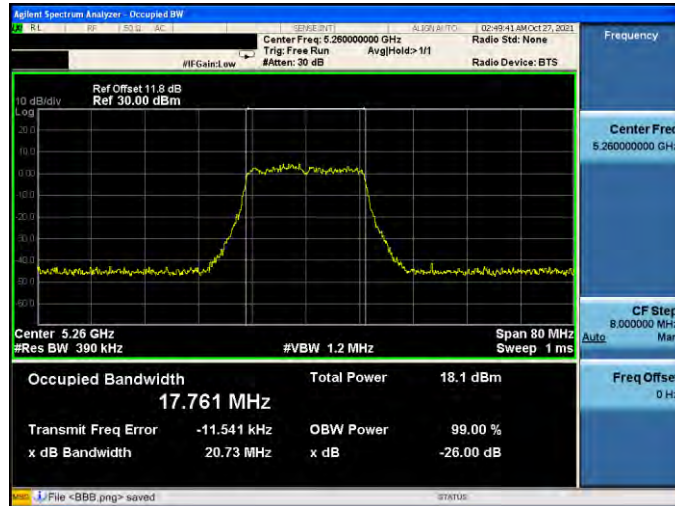
Mode 3: IEEE 802.11n 5 GHz 20 MHz Continuous TX Mode_ANT-2	
5500 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.50000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.5 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.683 MHz Total Power 18.5 dBm Transmit Freq Error -13.451 kHz OBW Power 99.00 % x dB Bandwidth 20.72 MHz x dB -26.00 dB File <BBB.png> saved
5560 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.56000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.56 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.800 MHz Total Power 19.2 dBm Transmit Freq Error 52.998 kHz OBW Power 99.00 % x dB Bandwidth 20.32 MHz x dB -26.00 dB File <BBB.png> saved
5700 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.70000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.7 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.661 MHz Total Power 17.8 dBm Transmit Freq Error 30.775 kHz OBW Power 99.00 % x dB Bandwidth 20.49 MHz x dB -26.00 dB File <BBB.png> saved

Mode 4: IEEE 802.11n 5 GHz 40 MHz Continuous TX Mode_ANT-2	
5270 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.27000000 GHz Trig: Free Run #Atten: 30 dB Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.27 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 36.192 MHz Total Power 19.6 dBm Transmit Freq Error -25.615 kHz OBW Power 99.00 % x dB Bandwidth 40.13 MHz x dB -26.00 dB File <BBB.png> saved
5310 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.31000000 GHz Trig: Free Run #Atten: 30 dB Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.31 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 36.187 MHz Total Power 20.0 dBm Transmit Freq Error -69.089 kHz OBW Power 99.00 % x dB Bandwidth 40.01 MHz x dB -26.00 dB File name not found: D:\User_My_Documents\instrument\My...

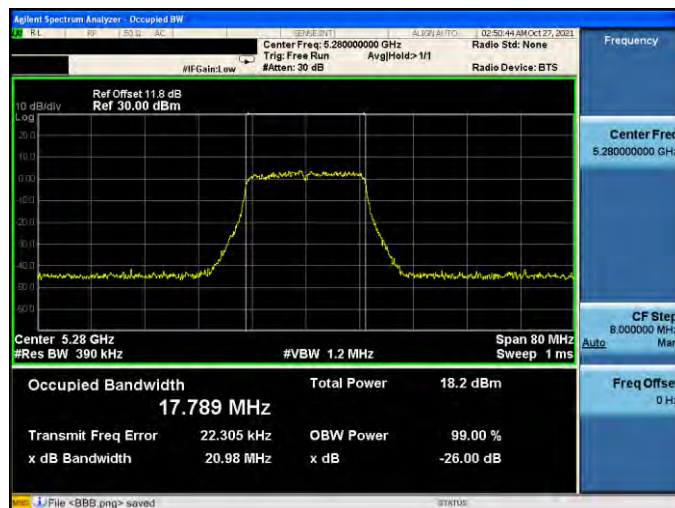
Mode 4: IEEE 802.11n 5 GHz 40 MHz Continuous TX Mode_ANT-2	
5510 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.510000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.51 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 36.079 MHz Total Power 20.3 dBm Transmit Freq Error 109.69 kHz OBW Power 99.00 % x dB Bandwidth 40.43 MHz x dB -26.00 dB File <BBB.png> saved
5550 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.550000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.55 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 36.158 MHz Total Power 21.1 dBm Transmit Freq Error 131.96 kHz OBW Power 99.00 % x dB Bandwidth 40.52 MHz x dB -26.00 dB File <BBB.png> saved
5670 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.670000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.67 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 36.195 MHz Total Power 21.3 dBm Transmit Freq Error -70.660 kHz OBW Power 99.00 % x dB Bandwidth 40.69 MHz x dB -26.00 dB File <BBB.png> saved

Mode 5: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-2

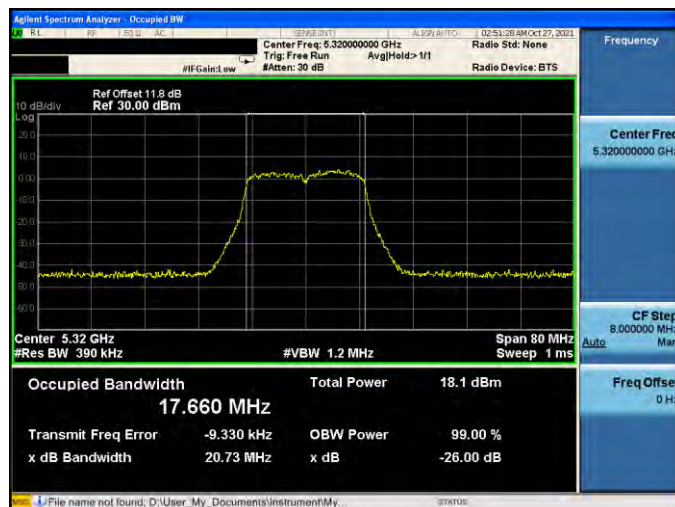
5260 MHz

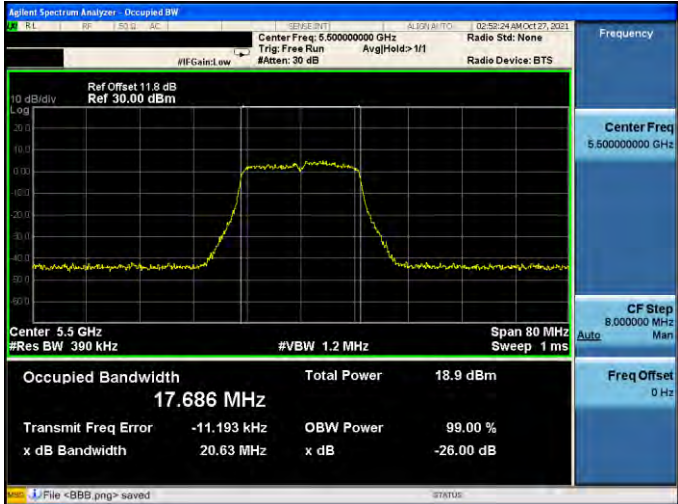
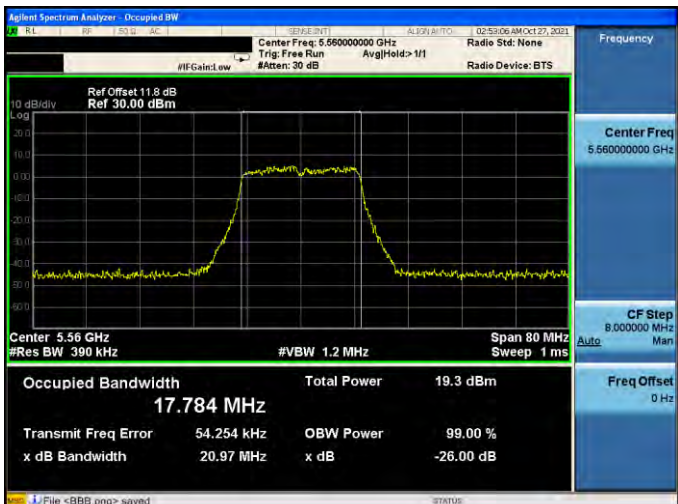
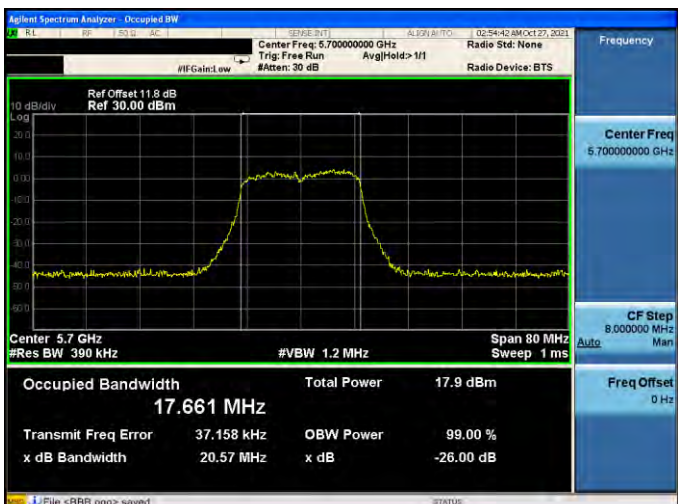


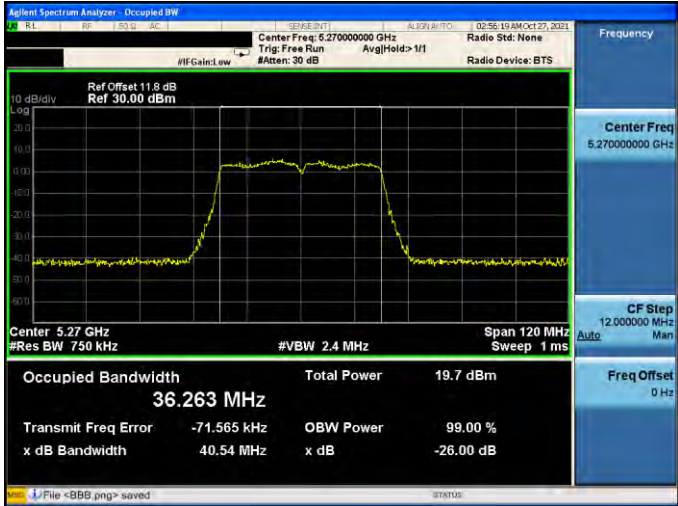
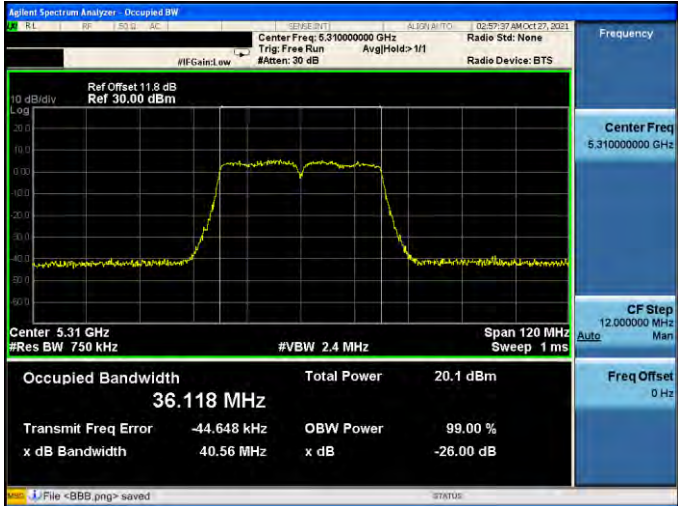
5280 MHz



5320 Hz

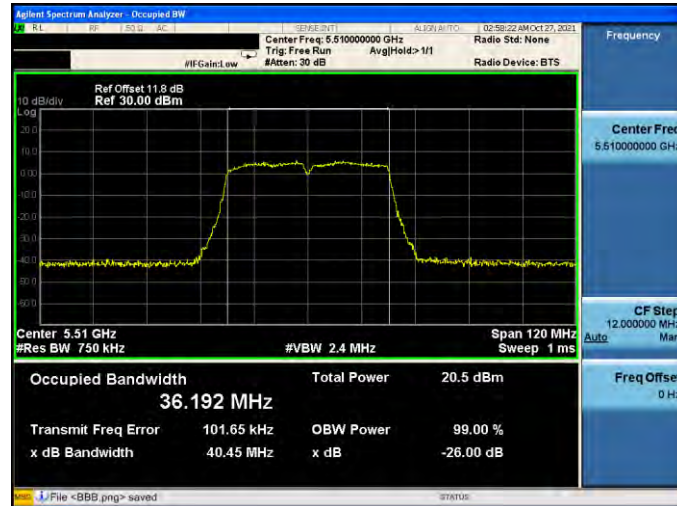


Mode 5: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-2	
5500 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.50000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.5 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.686 MHz Total Power 18.9 dBm Transmit Freq Error -11.193 kHz OBW Power 99.00 % x dB Bandwidth 20.63 MHz x dB -26.00 dB File <BBB.png> saved
5560 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.56000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.56 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.784 MHz Total Power 19.3 dBm Transmit Freq Error 54.254 kHz OBW Power 99.00 % x dB Bandwidth 20.97 MHz x dB -26.00 dB File <BBB.png> saved
5700 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.70000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.7 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.661 MHz Total Power 17.9 dBm Transmit Freq Error 37.158 kHz OBW Power 99.00 % x dB Bandwidth 20.57 MHz x dB -26.00 dB File <BBB.png> saved

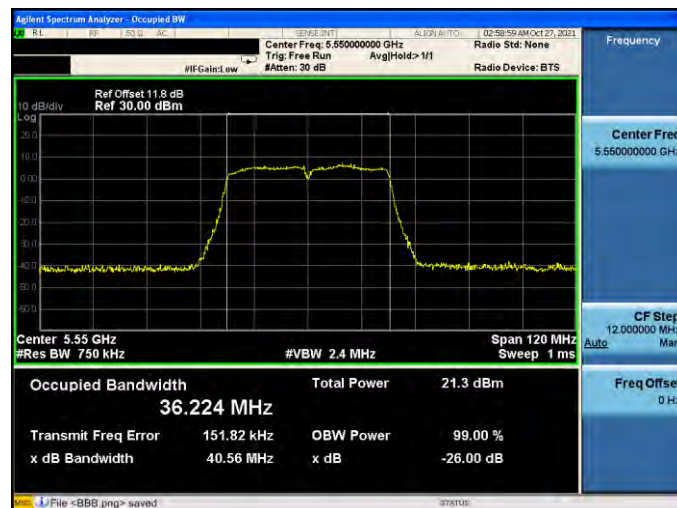
Mode 6: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-2	
5270 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.27000000 GHz Trig: Free Run #Atten: 30 dB Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.27 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 36.263 MHz Total Power 19.7 dBm Transmit Freq Error -71.565 kHz OBW Power 99.00 % x dB Bandwidth 40.54 MHz x dB -26.00 dB File <888.png> saved
5310 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.31000000 GHz Trig: Free Run #Atten: 30 dB Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.31 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 36.118 MHz Total Power 20.1 dBm Transmit Freq Error -44.648 kHz OBW Power 99.00 % x dB Bandwidth 40.56 MHz x dB -26.00 dB File <888.png> saved

Mode 6: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-2

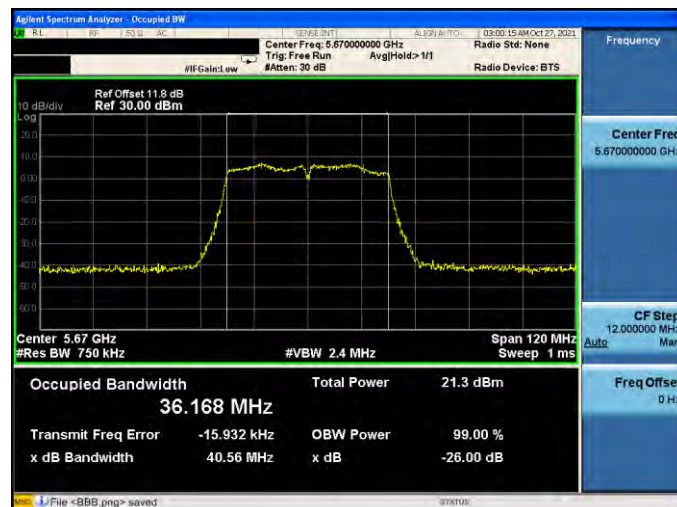
5510 MHz

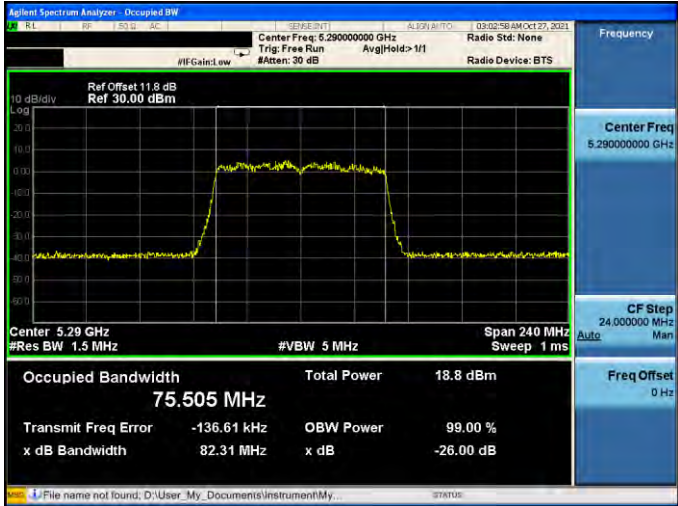
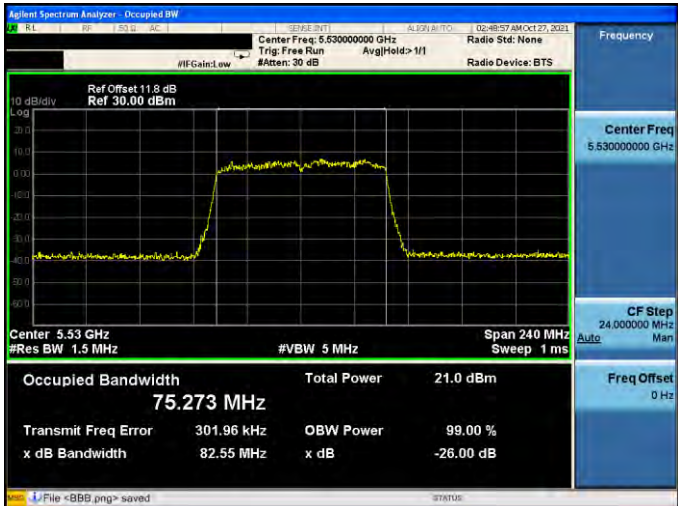


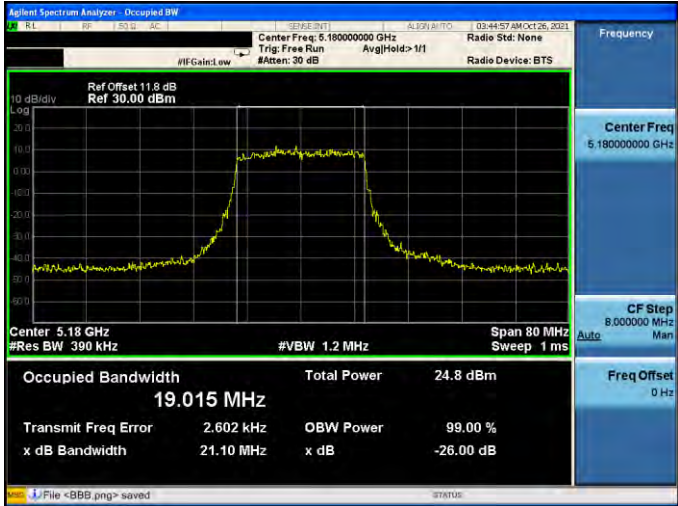
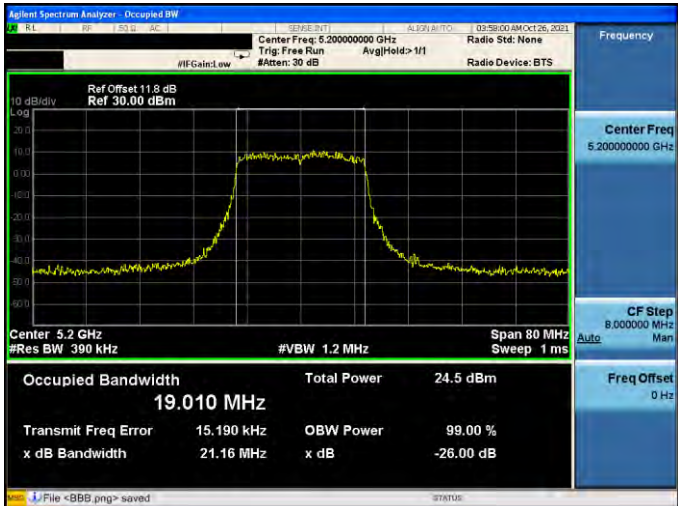
5550 MHz

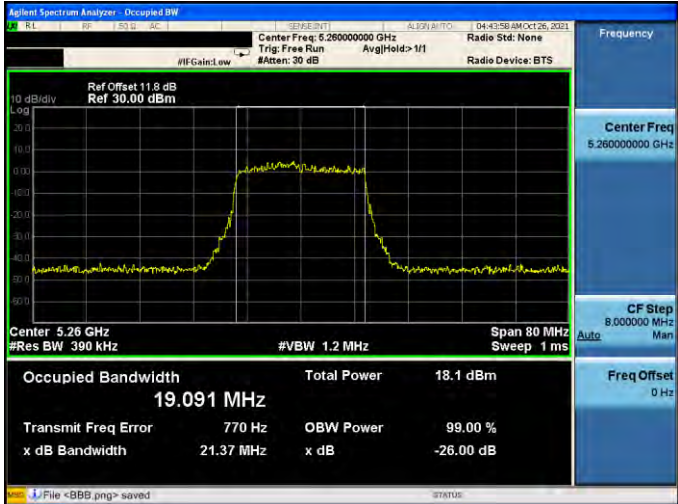
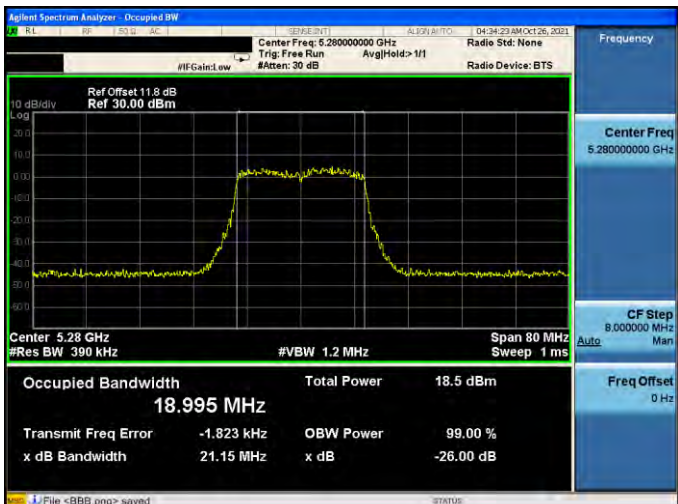
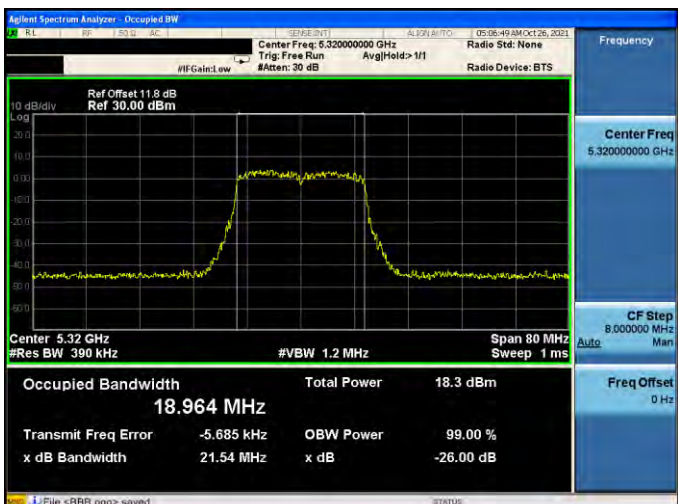


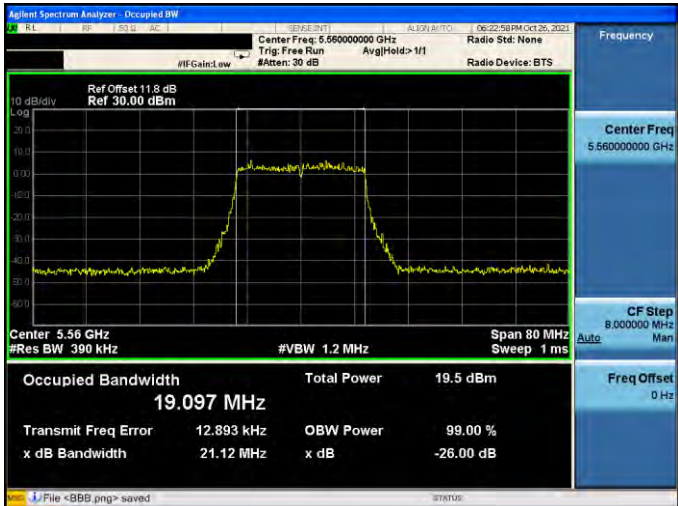
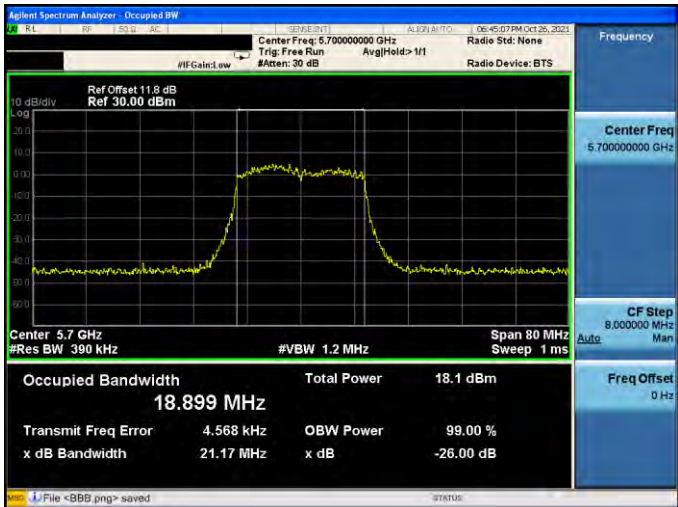
5670 MHz

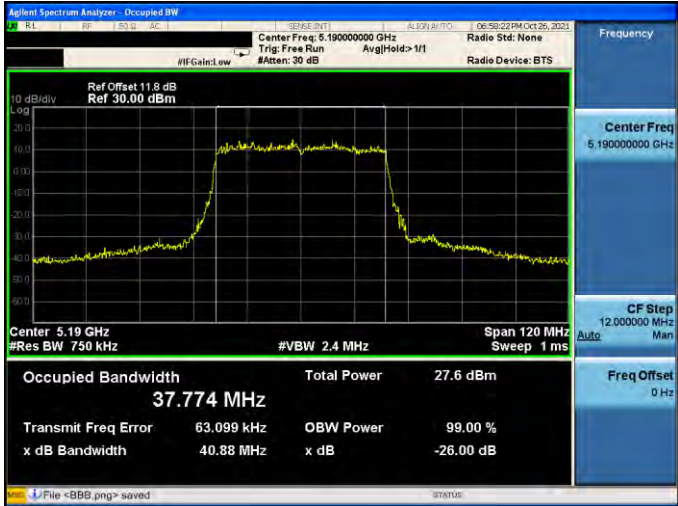
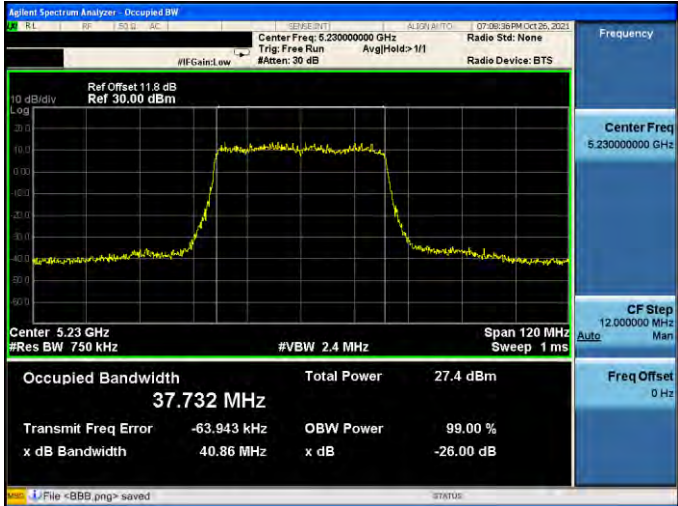


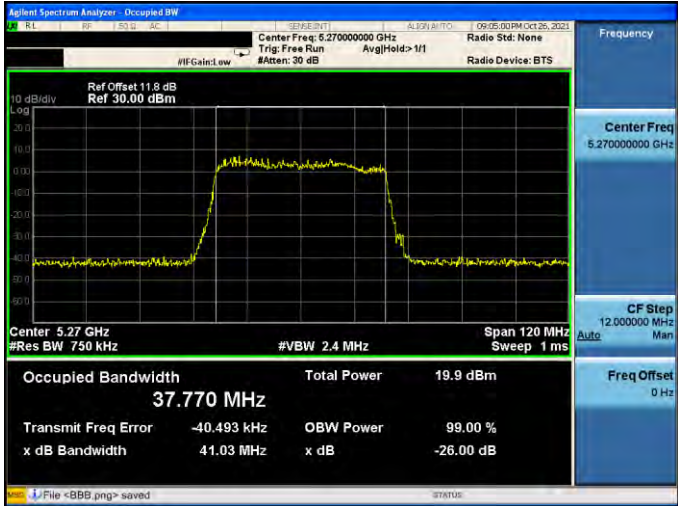
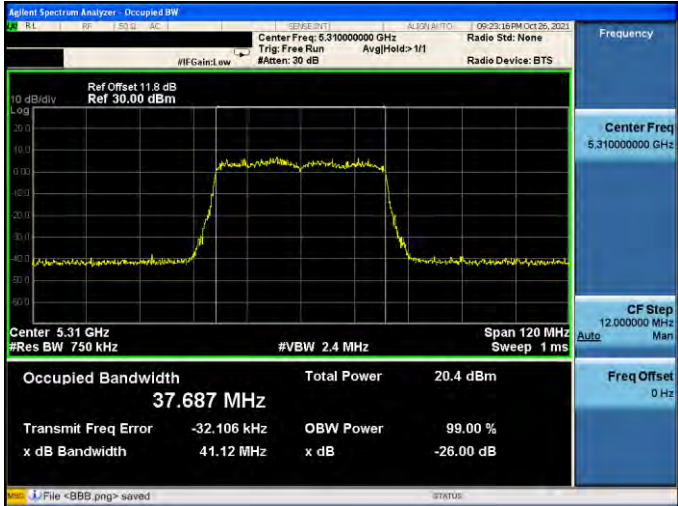
Mode 7: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT-2	
5290 MHz	
5530 MHz	

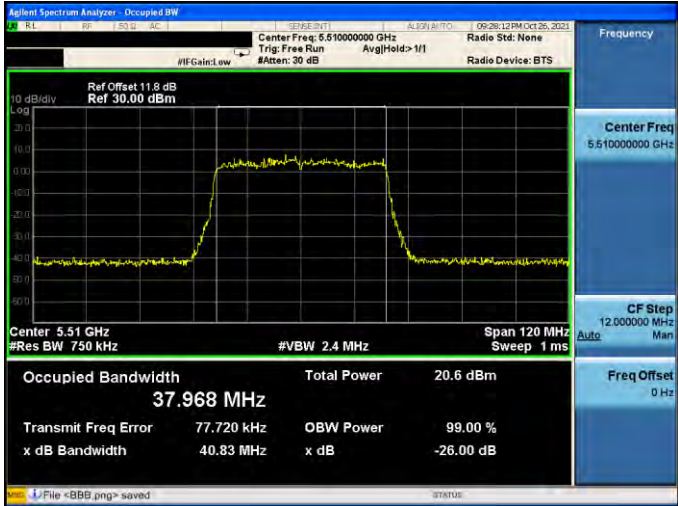
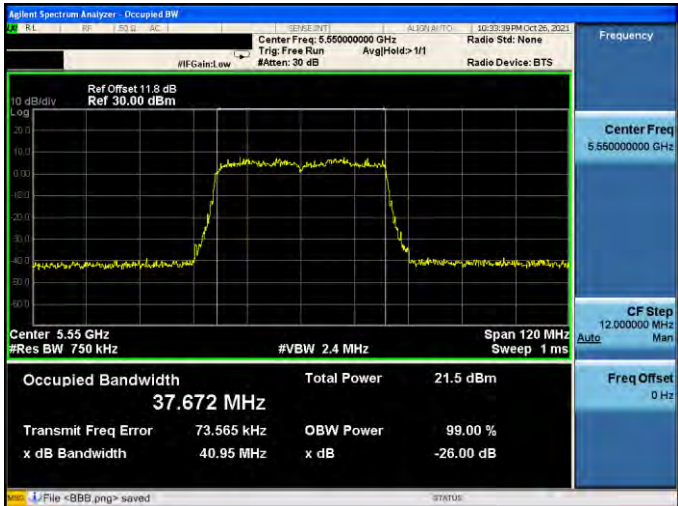
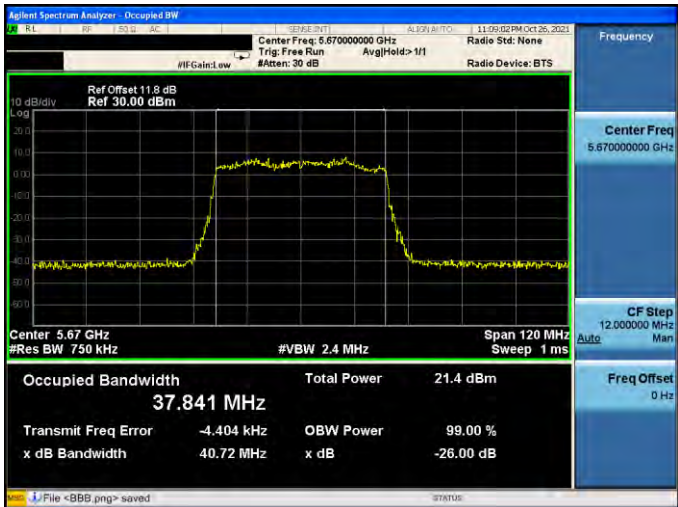
Mode 8: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-2	
5180 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.18000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.18 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 19.015 MHz Total Power 24.8 dBm Transmit Freq Error 2.602 kHz OBW Power 99.00 % x dB Bandwidth 21.10 MHz x dB -26.00 dB File <BBB.png> saved
5200 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.20000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.2 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 19.010 MHz Total Power 24.5 dBm Transmit Freq Error 15.190 kHz OBW Power 99.00 % x dB Bandwidth 21.16 MHz x dB -26.00 dB File <BBB.png> saved
5240 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.24000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.24 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 18.956 MHz Total Power 24.7 dBm Transmit Freq Error 1.996 kHz OBW Power 99.00 % x dB Bandwidth 21.04 MHz x dB -26.00 dB File <BBB.png> saved

Mode 8: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-2	
5260 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.260000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.26 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 19.091 MHz Total Power 18.1 dBm Transmit Freq Error 770 Hz OBW Power 99.00 % x dB Bandwidth 21.37 MHz x dB -26.00 dB File <BBB.png> saved
5280 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.280000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.28 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 18.995 MHz Total Power 18.5 dBm Transmit Freq Error -1.823 kHz OBW Power 99.00 % x dB Bandwidth 21.15 MHz x dB -26.00 dB File <BBB.png> saved
5320 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.320000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.32 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 18.964 MHz Total Power 18.3 dBm Transmit Freq Error -5.685 kHz OBW Power 99.00 % x dB Bandwidth 21.54 MHz x dB -26.00 dB File <BBB.png> saved

Mode 8: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-2	
5500 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.500000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.5 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 19.087 MHz Total Power 19.4 dBm Transmit Freq Error 27.316 kHz OBW Power 99.00 % x dB Bandwidth 21.57 MHz x dB -26.00 dB File <BBB.png> saved
5560 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.560000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.56 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 19.097 MHz Total Power 19.5 dBm Transmit Freq Error 12.893 kHz OBW Power 99.00 % x dB Bandwidth 21.12 MHz x dB -26.00 dB File <BBB.png> saved
5700 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.700000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.7 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 18.899 MHz Total Power 18.1 dBm Transmit Freq Error 4.568 kHz OBW Power 99.00 % x dB Bandwidth 21.17 MHz x dB -26.00 dB File <BBB.png> saved

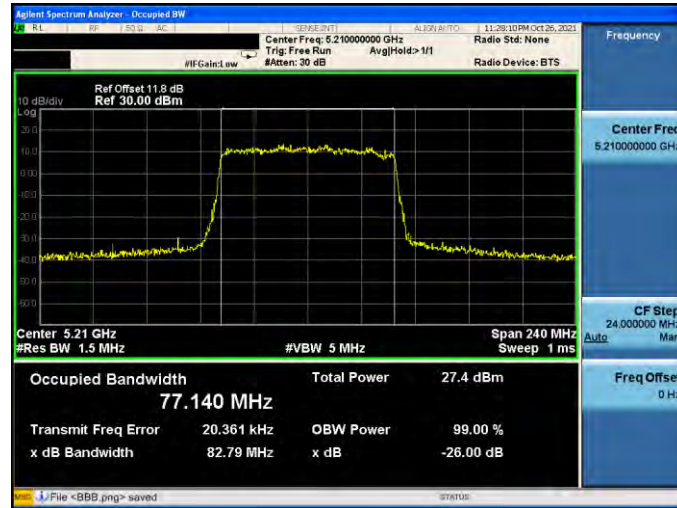
Mode 9: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-2	
5190 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.190000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.19 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 37.774 MHz Total Power 27.6 dBm Transmit Freq Error 63.099 kHz OBW Power 99.00 % x dB Bandwidth 40.88 MHz x dB -26.00 dB File <888.png> saved
5230 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.230000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.23 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 37.732 MHz Total Power 27.4 dBm Transmit Freq Error -63.943 kHz OBW Power 99.00 % x dB Bandwidth 40.86 MHz x dB -26.00 dB File <888.png> saved

Mode 9: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-2	
5270 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.27000000 GHz Ref Offset 11.8 dB Ref 30.00 dBm Center 5.27 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 37.77 MHz Total Power 19.9 dBm Transmit Freq Error -40.493 kHz OBW Power 99.00 % x dB Bandwidth 41.03 MHz x dB -26.00 dB File <888.png> saved
5310 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.31000000 GHz Ref Offset 11.8 dB Ref 30.00 dBm Center 5.31 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 37.687 MHz Total Power 20.4 dBm Transmit Freq Error -32.106 kHz OBW Power 99.00 % x dB Bandwidth 41.12 MHz x dB -26.00 dB File <888.png> saved

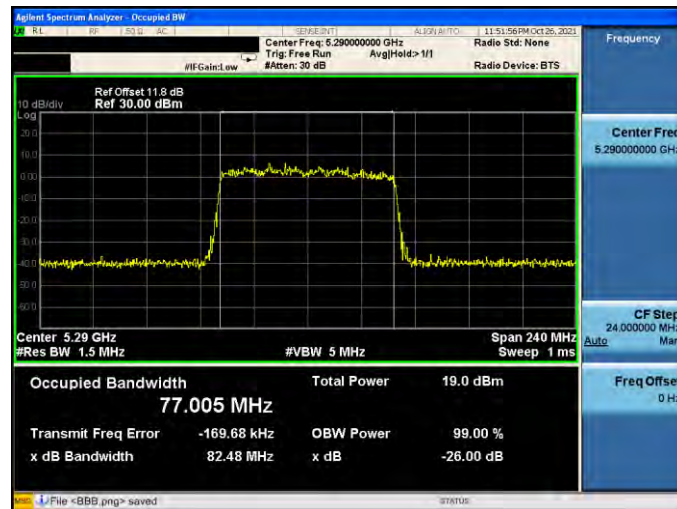
Mode 9: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-2	
5510 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.51000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.51 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 37.968 MHz Total Power 20.6 dBm Transmit Freq Error 77.720 kHz OBW Power 99.00 % x dB Bandwidth 40.83 MHz x dB -26.00 dB File <888.png> saved
5550 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.55000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.55 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 37.672 MHz Total Power 21.5 dBm Transmit Freq Error 73.565 kHz OBW Power 99.00 % x dB Bandwidth 40.95 MHz x dB -26.00 dB File <888.png> saved
5670 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.67000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.67 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 37.841 MHz Total Power 21.4 dBm Transmit Freq Error -4.404 kHz OBW Power 99.00 % x dB Bandwidth 40.72 MHz x dB -26.00 dB File <888.png> saved

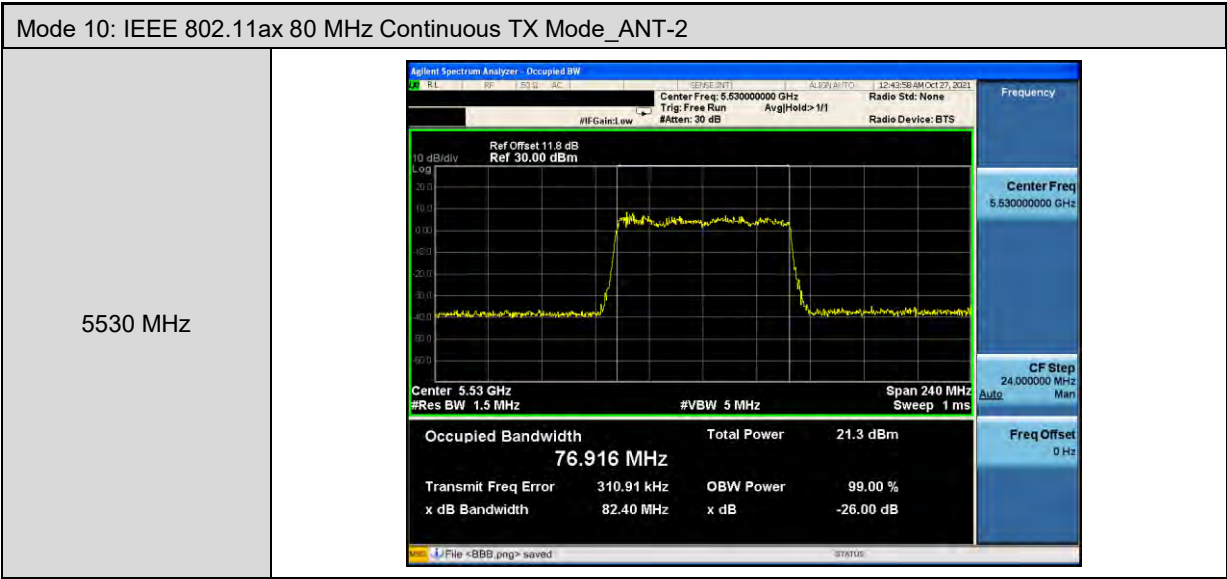
Mode 10: IEEE 802.11ax 80 MHz Continuous TX Mode_ANT-2

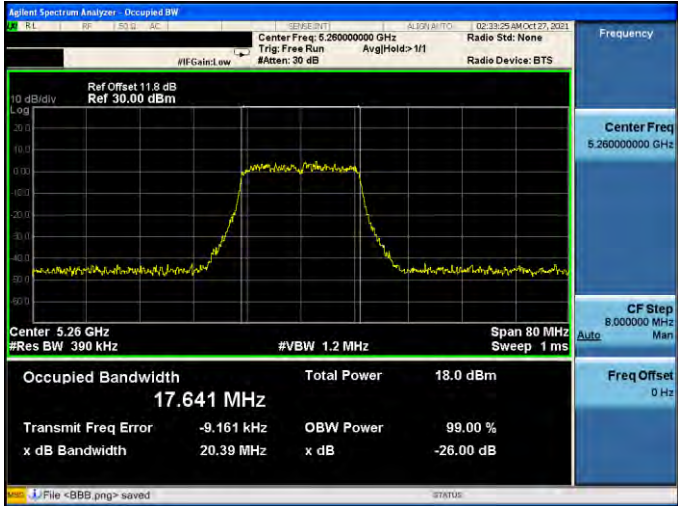
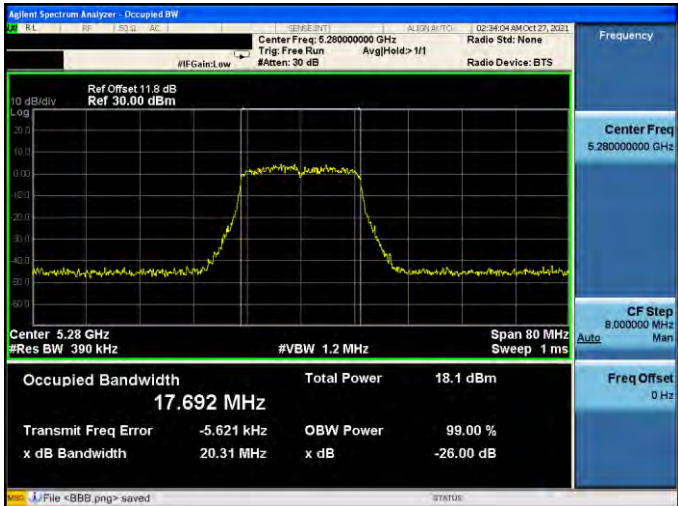
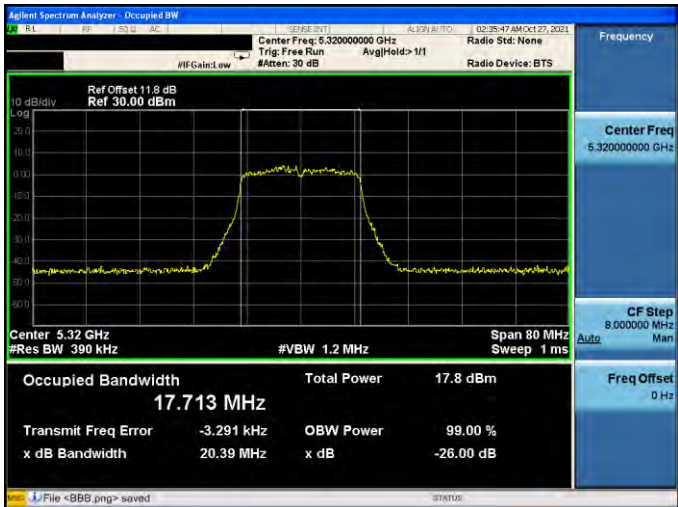
5210 MHz

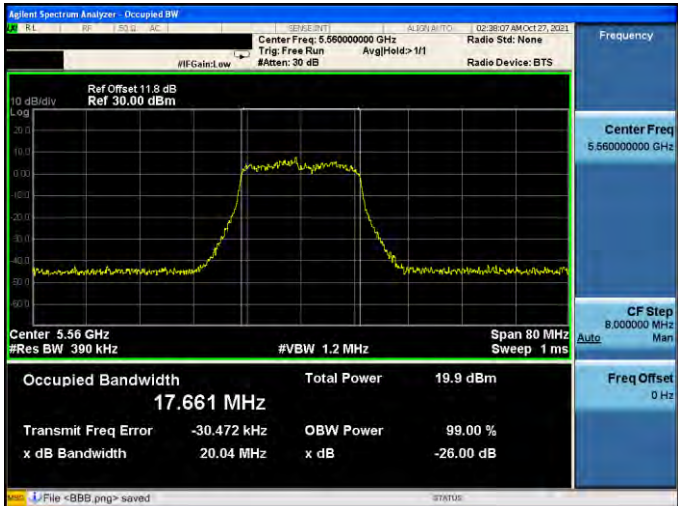
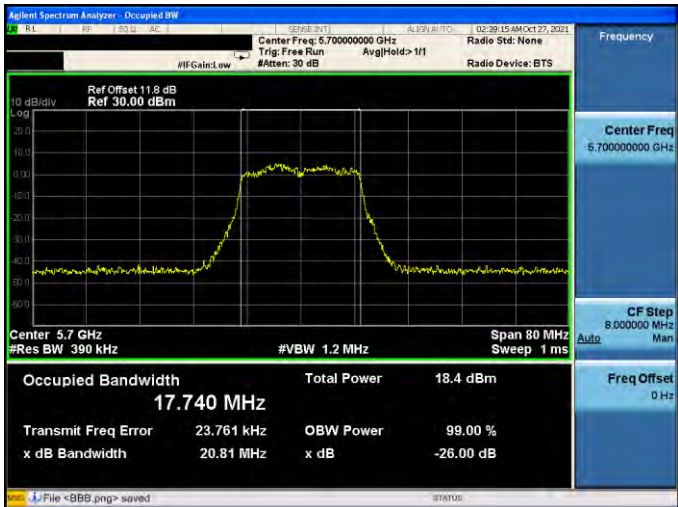


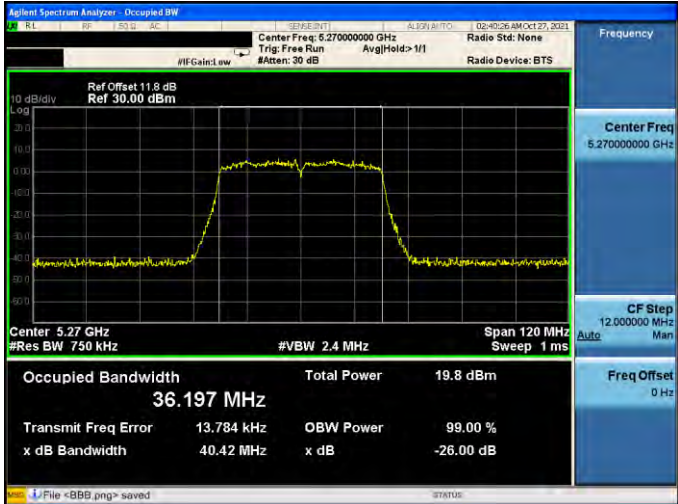
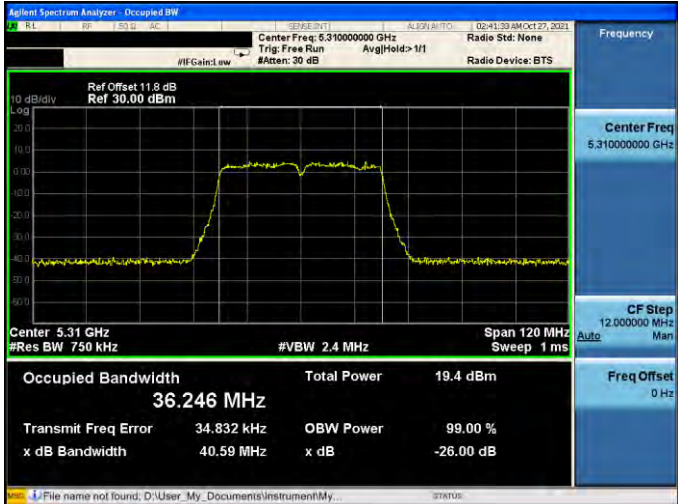
5290 MHz

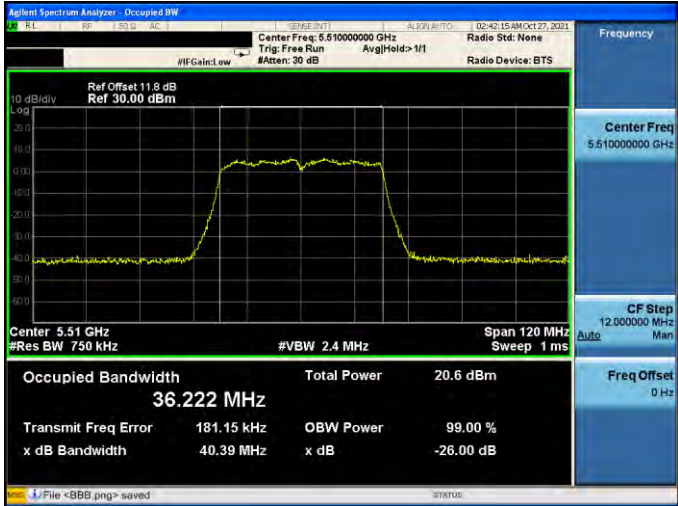
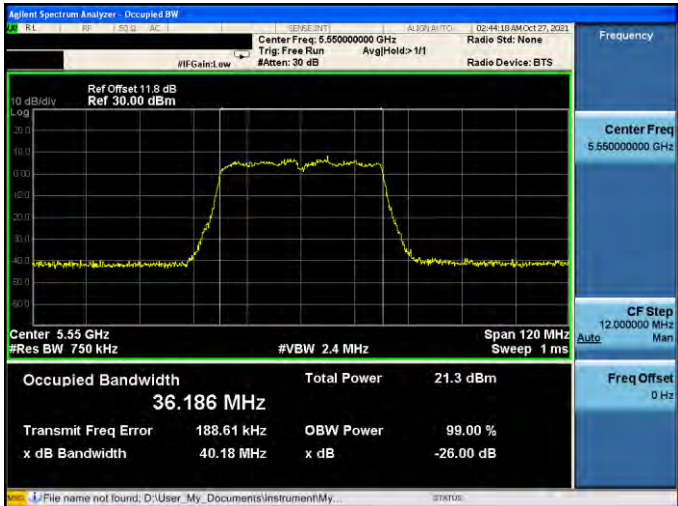
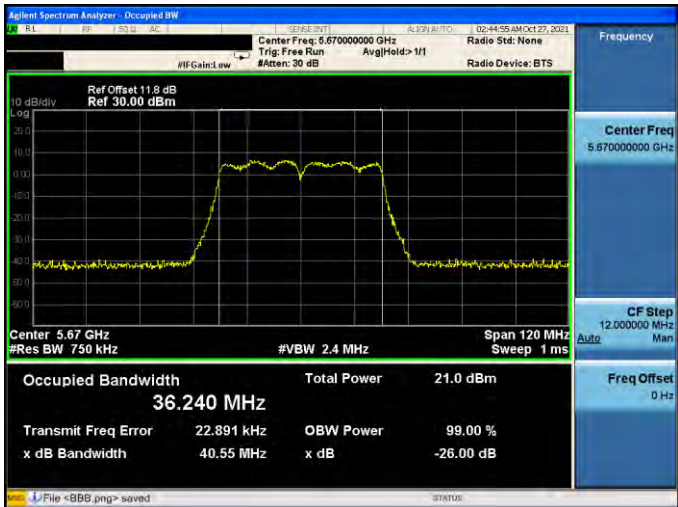


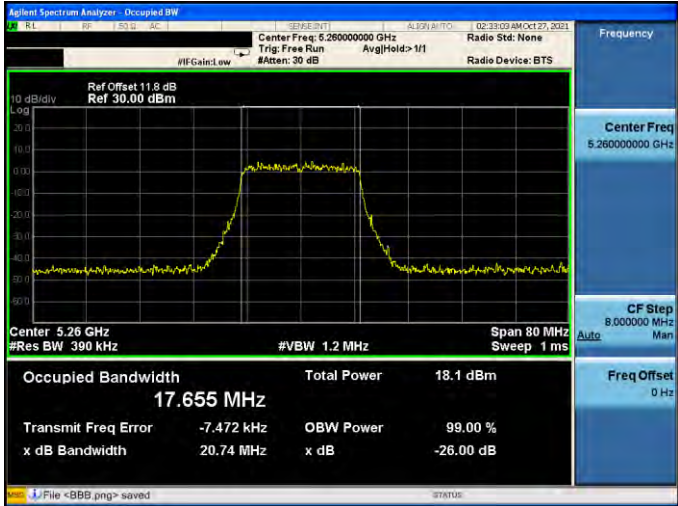
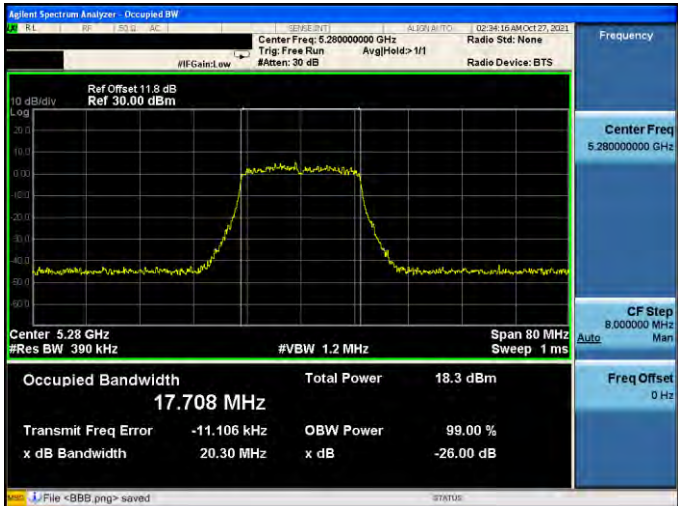


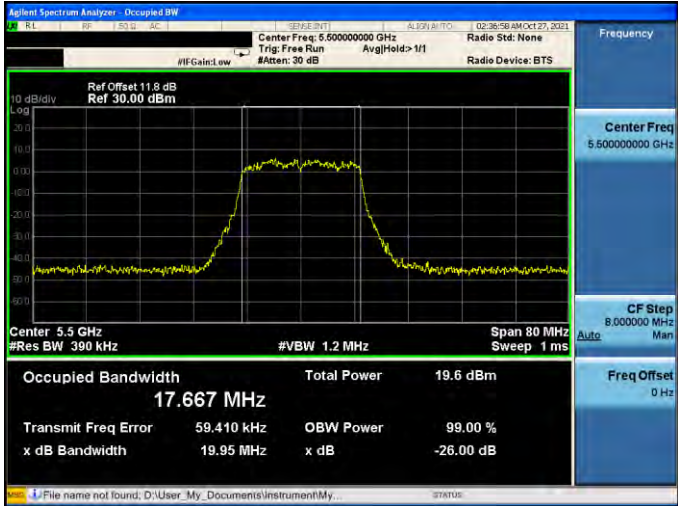
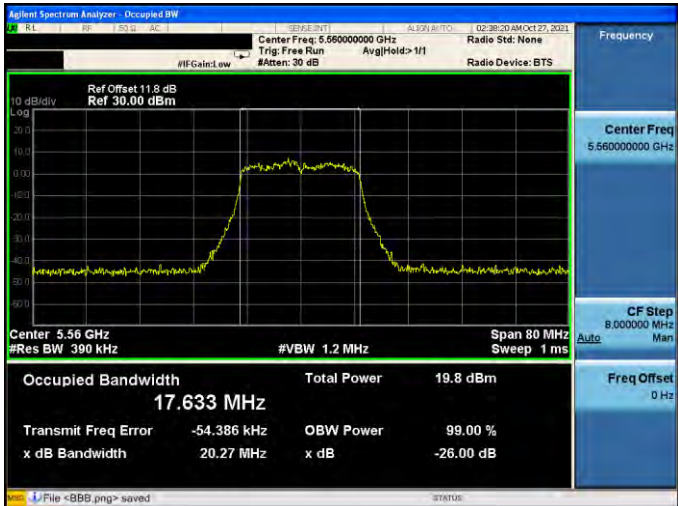
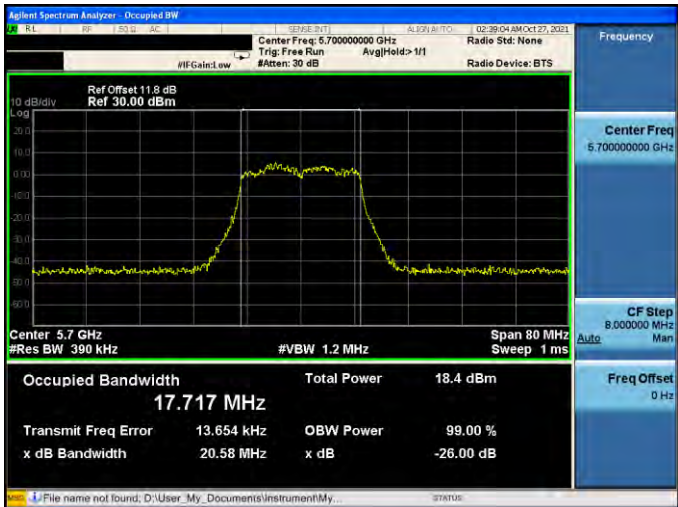
Mode 3: IEEE 802.11n 5 GHz 20 MHz Continuous TX Mode_ANT-3	
5260 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.260000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.26 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.641 MHz Total Power 18.0 dBm Transmit Freq Error -9.161 kHz OBW Power 99.00 % x dB Bandwidth 20.39 MHz x dB -26.00 dB File <BBB.png> saved
5280 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.280000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.28 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.692 MHz Total Power 18.1 dBm Transmit Freq Error -5.621 kHz OBW Power 99.00 % x dB Bandwidth 20.31 MHz x dB -26.00 dB File <BBB.png> saved
5320 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.320000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.32 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.713 MHz Total Power 17.8 dBm Transmit Freq Error -3.291 kHz OBW Power 99.00 % x dB Bandwidth 20.39 MHz x dB -26.00 dB File <BBB.png> saved

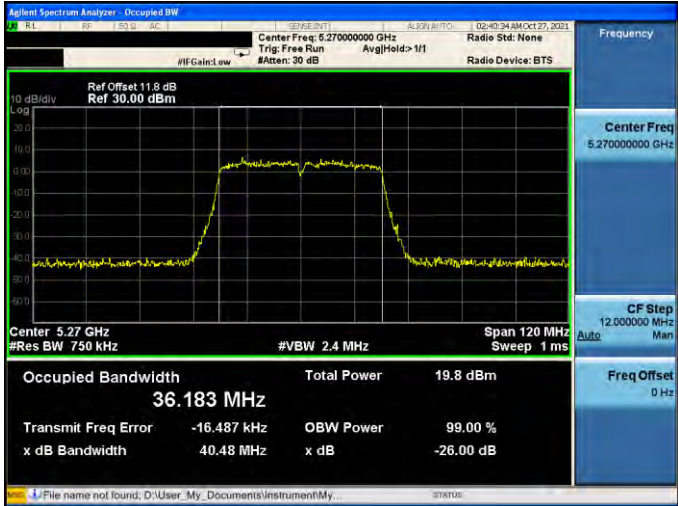
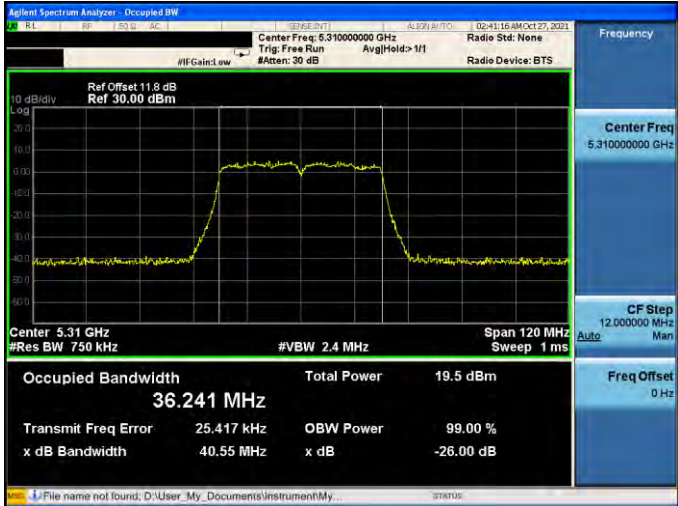
Mode 3: IEEE 802.11n 5 GHz 20 MHz Continuous TX Mode_ANT-3	
5500 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.500000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.5 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.696 MHz Total Power 19.8 dBm Transmit Freq Error 65.639 kHz OBW Power 99.00 % x dB Bandwidth 20.33 MHz x dB -26.00 dB File <BBB.png> saved
5560 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.560000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.56 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.661 MHz Total Power 19.9 dBm Transmit Freq Error -30.472 kHz OBW Power 99.00 % x dB Bandwidth 20.04 MHz x dB -26.00 dB File <BBB.png> saved
5700 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.700000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.7 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.740 MHz Total Power 18.4 dBm Transmit Freq Error 23.761 kHz OBW Power 99.00 % x dB Bandwidth 20.81 MHz x dB -26.00 dB File <BBB.png> saved

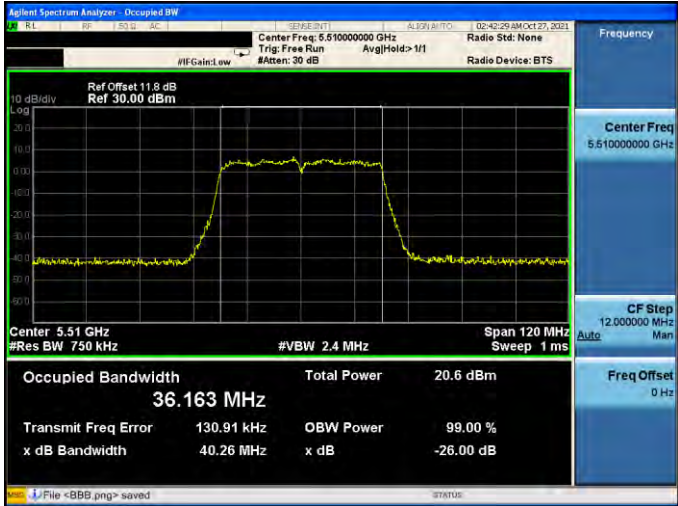
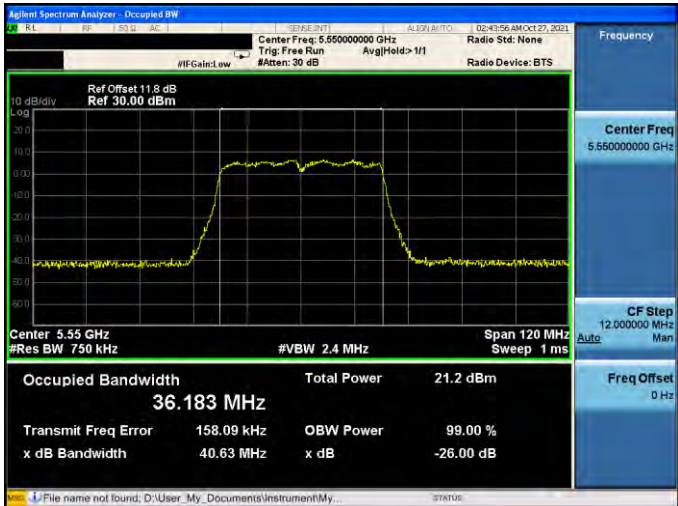
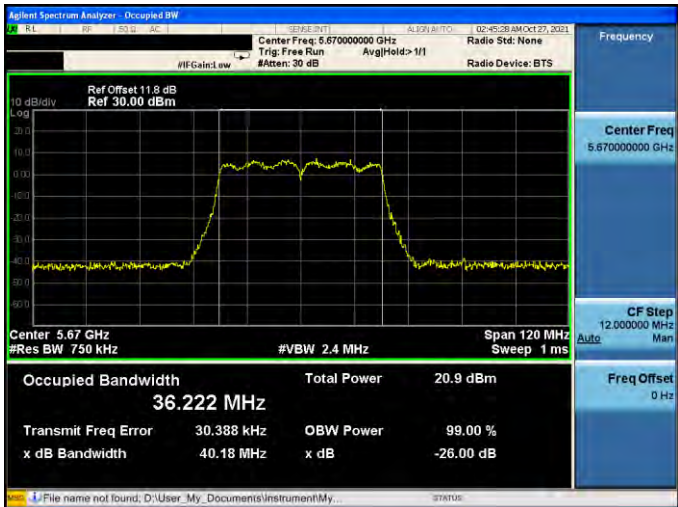
Mode 4: IEEE 802.11n 5 GHz 40 MHz Continuous TX Mode_ANT-3	
5270 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.27000000 GHz Trig: Free Run #Atten: 30 dB Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.27 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 36.197 MHz Total Power 19.8 dBm Transmit Freq Error 13.784 kHz OBW Power 99.00 % x dB Bandwidth 40.42 MHz x dB -26.00 dB File <B8B.png> saved
5310 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.31000000 GHz Trig: Free Run #Atten: 30 dB Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.31 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 36.246 MHz Total Power 19.4 dBm Transmit Freq Error 34.832 kHz OBW Power 99.00 % x dB Bandwidth 40.59 MHz x dB -26.00 dB File name not found; D:\User_My_Documents\instrument\My...

Mode 4: IEEE 802.11n 5 GHz 40 MHz Continuous TX Mode_ANT-3	
5510 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.510000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.51 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 36.222 MHz Total Power 20.6 dBm Transmit Freq Error 181.15 kHz OBW Power 99.00 % x dB Bandwidth 40.39 MHz x dB -26.00 dB File <BBB.png> saved
5550 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.550000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.55 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 36.186 MHz Total Power 21.3 dBm Transmit Freq Error 188.61 kHz OBW Power 99.00 % x dB Bandwidth 40.18 MHz x dB -26.00 dB File name not found: D:\User_My_Documents\instrument\My...
5670 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.670000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.67 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 36.240 MHz Total Power 21.0 dBm Transmit Freq Error 22.891 kHz OBW Power 99.00 % x dB Bandwidth 40.55 MHz x dB -26.00 dB File <BBB.png> saved

Mode 5: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-3	
5260 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.26000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.26 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.655 MHz Total Power 18.1 dBm Transmit Freq Error -7.472 kHz OBW Power 99.00 % x dB Bandwidth 20.74 MHz x dB -26.00 dB File <BBB.png> saved
5280 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.28000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.28 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.708 MHz Total Power 18.3 dBm Transmit Freq Error -11.106 kHz OBW Power 99.00 % x dB Bandwidth 20.30 MHz x dB -26.00 dB File <BBB.png> saved
5320 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.32000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.32 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.677 MHz Total Power 18.2 dBm Transmit Freq Error -347 Hz OBW Power 99.00 % x dB Bandwidth 20.82 MHz x dB -26.00 dB File name not found, D:\User_My_Documents\instrumentMy...

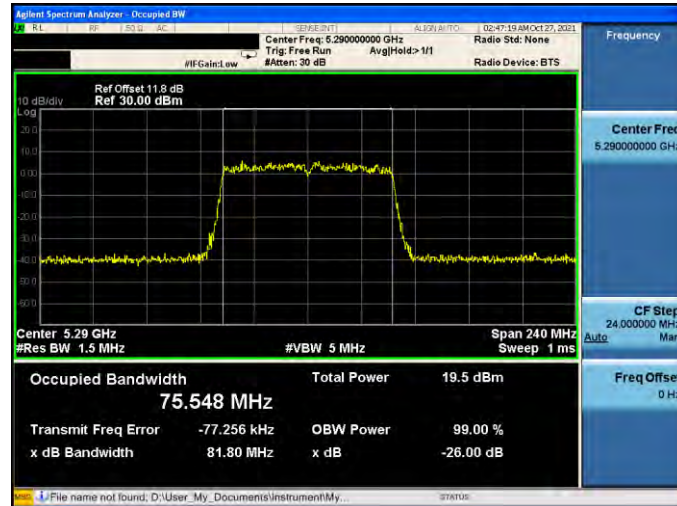
Mode 5: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-3	
5500 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.500000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.5 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.667 MHz Total Power 19.6 dBm Transmit Freq Error 59.410 kHz OBW Power 99.00 % x dB Bandwidth 19.95 MHz x dB -26.00 dB File name not found, D:\User_My_Documents\instrumentMy...
5560 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.560000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.56 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.633 MHz Total Power 19.8 dBm Transmit Freq Error -54.386 kHz OBW Power 99.00 % x dB Bandwidth 20.27 MHz x dB -26.00 dB File <888.png> saved
5700 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.700000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.7 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.717 MHz Total Power 18.4 dBm Transmit Freq Error 13.654 kHz OBW Power 99.00 % x dB Bandwidth 20.58 MHz x dB -26.00 dB File name not found, D:\User_My_Documents\instrumentMy...

Mode 6: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-3	
5270 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.27000000 GHz Trig: Free Run #Atten: 30 dB Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.27 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 36.183 MHz Total Power 19.8 dBm Transmit Freq Error -16.487 kHz OBW Power 99.00 % x dB Bandwidth 40.48 MHz x dB -26.00 dB Frequency Center Freq 5.27000000 GHz CF Step 12.000000 MHz Auto Man Freq Offset 0 Hz File name not found, D:\User_My_Documents\instrumentMy...
5310 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.31000000 GHz Trig: Free Run #Atten: 30 dB Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.31 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 36.241 MHz Total Power 19.5 dBm Transmit Freq Error 25.417 kHz OBW Power 99.00 % x dB Bandwidth 40.55 MHz x dB -26.00 dB Frequency Center Freq 5.31000000 GHz CF Step 12.000000 MHz Auto Man Freq Offset 0 Hz File name not found, D:\User_My_Documents\instrumentMy...

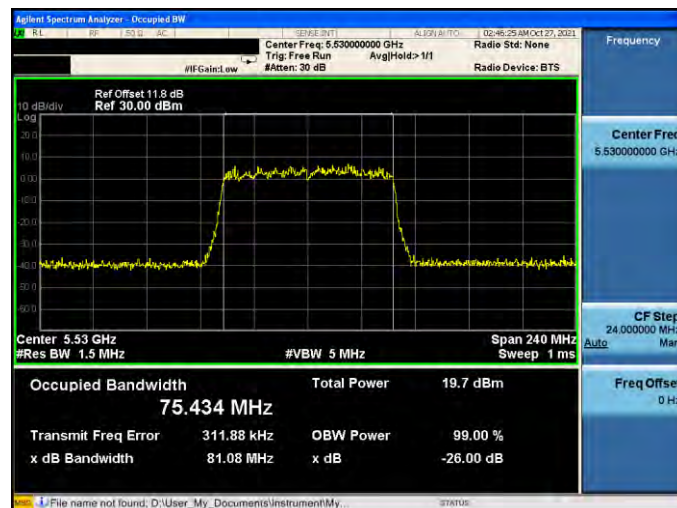
Mode 6: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-3	
5510 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.510000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.51 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 36.163 MHz Total Power 20.6 dBm Transmit Freq Error 130.91 kHz OBW Power 99.00 % x dB Bandwidth 40.26 MHz x dB -26.00 dB File <BBB.png> saved
5550 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.550000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.55 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 36.183 MHz Total Power 21.2 dBm Transmit Freq Error 158.09 kHz OBW Power 99.00 % x dB Bandwidth 40.63 MHz x dB -26.00 dB File name not found, D:\User_My_Documents\instrument\My...
5670 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.670000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.67 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 36.222 MHz Total Power 20.9 dBm Transmit Freq Error 30.388 kHz OBW Power 99.00 % x dB Bandwidth 40.18 MHz x dB -26.00 dB File name not found, D:\User_My_Documents\instrument\My...

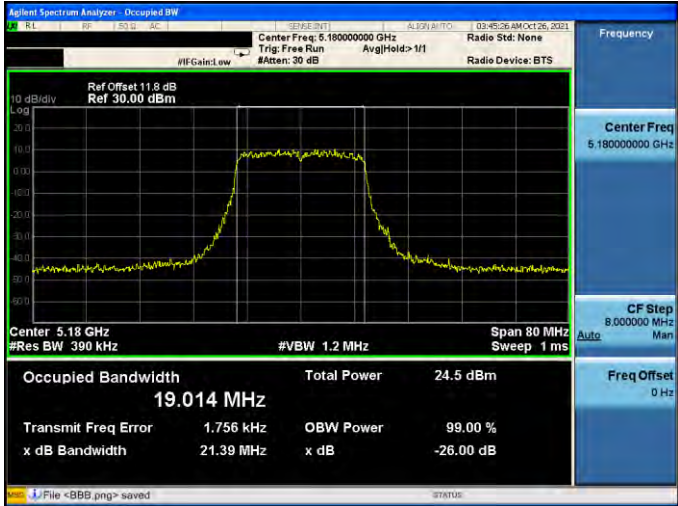
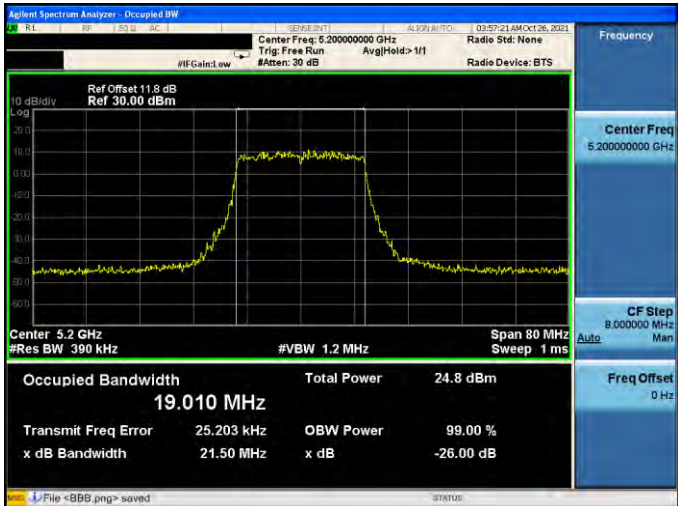
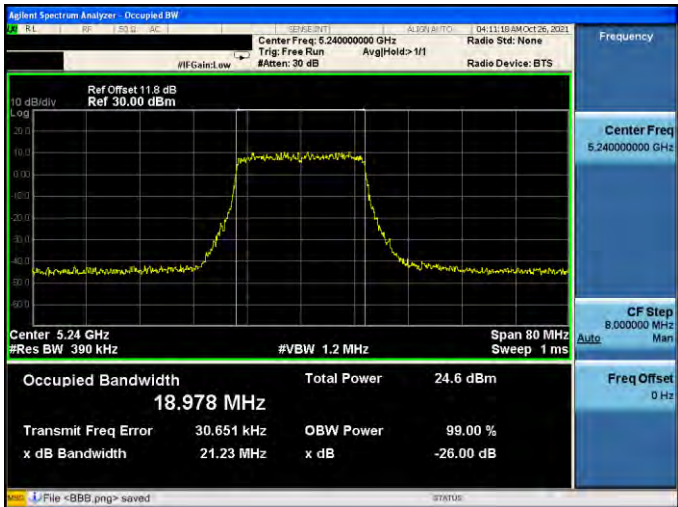
Mode 7: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT-3

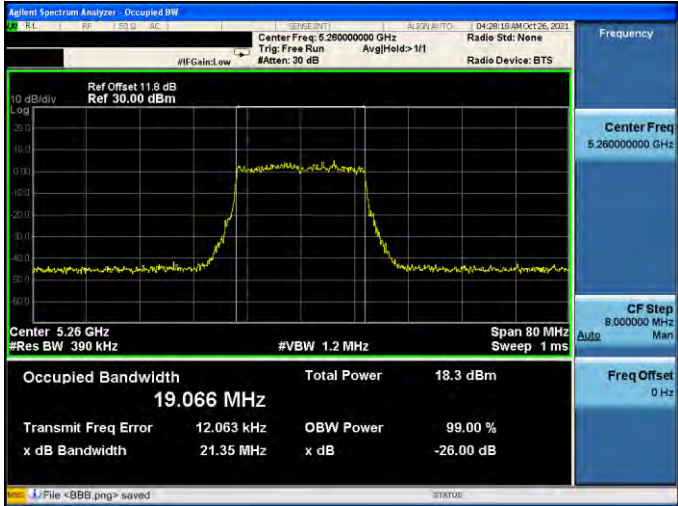
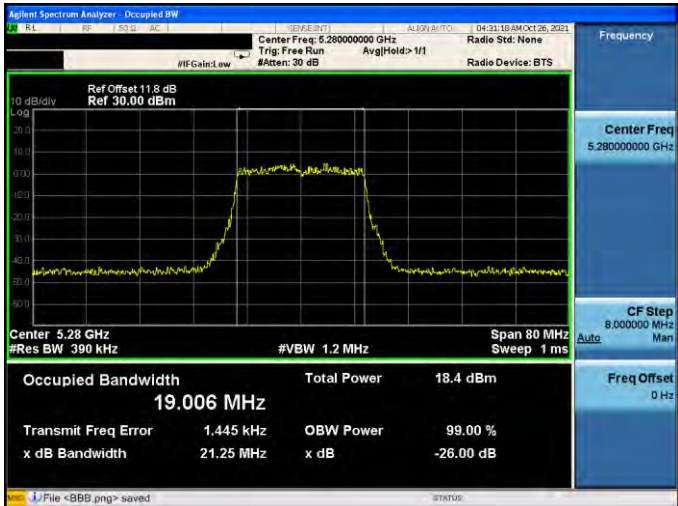
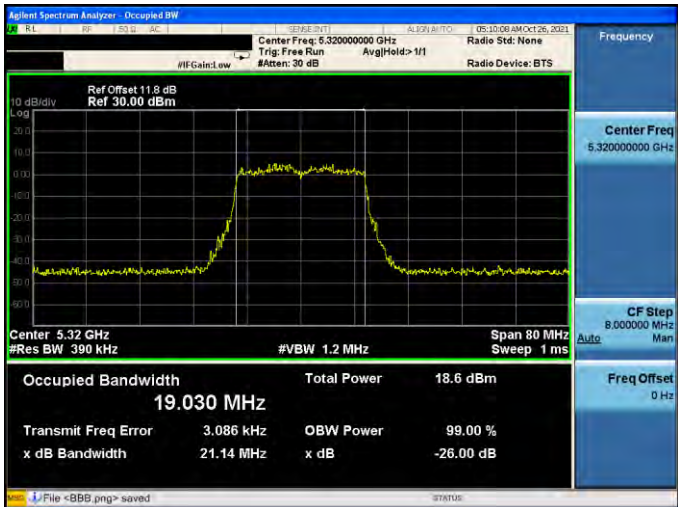
5290 MHz

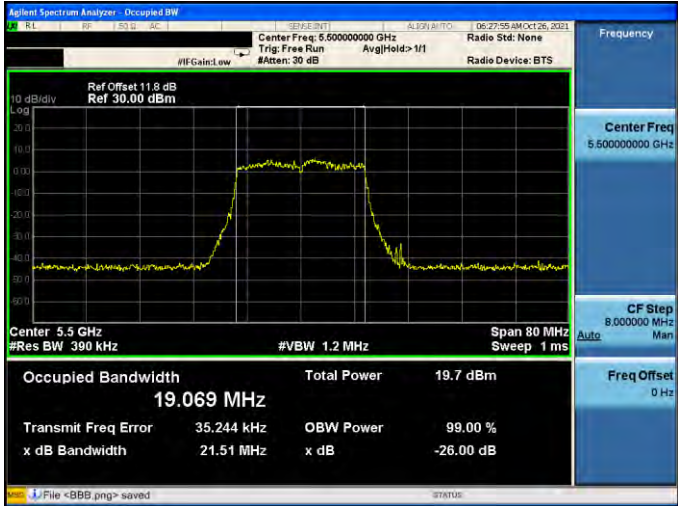
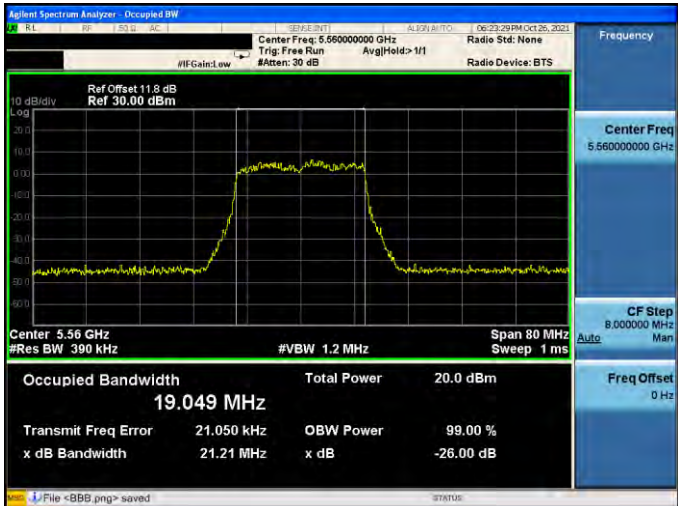
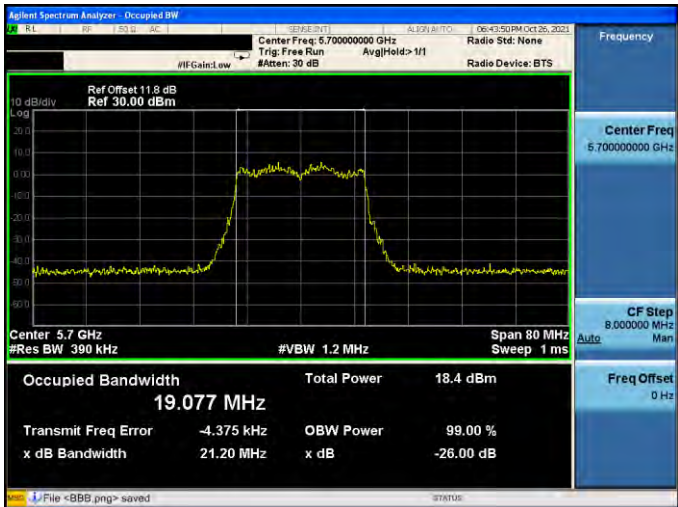


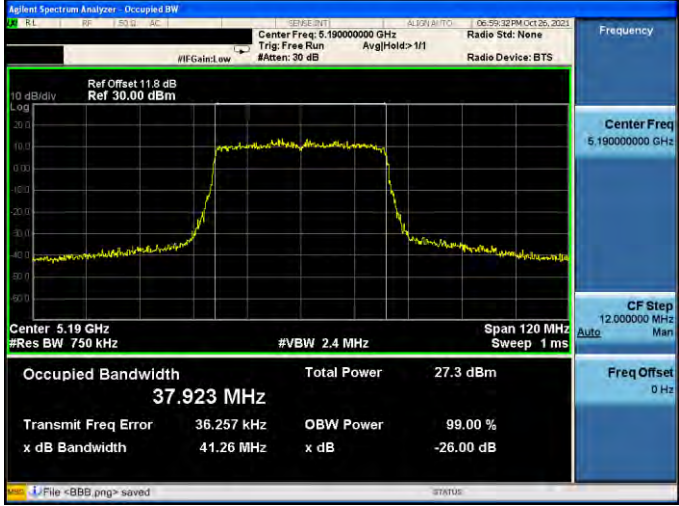
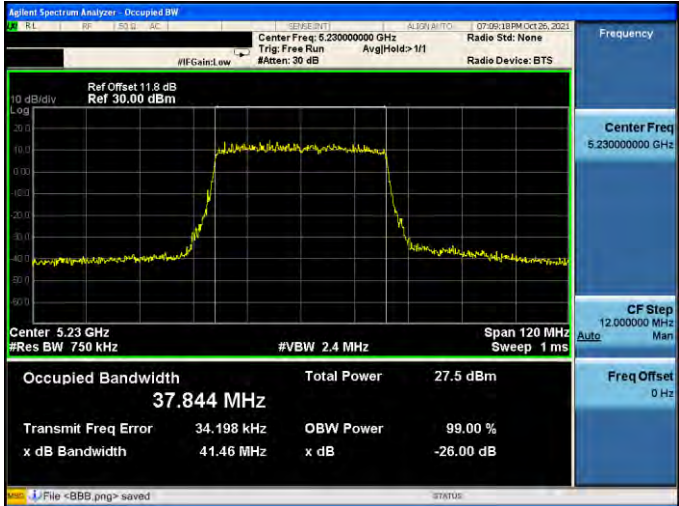
5530 MHz

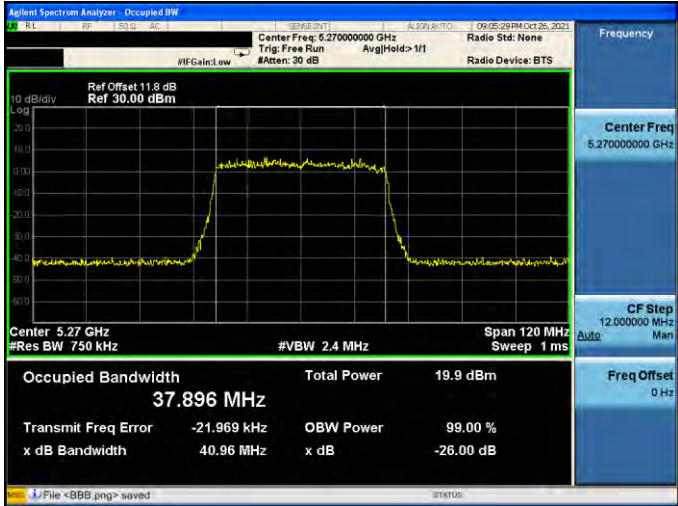
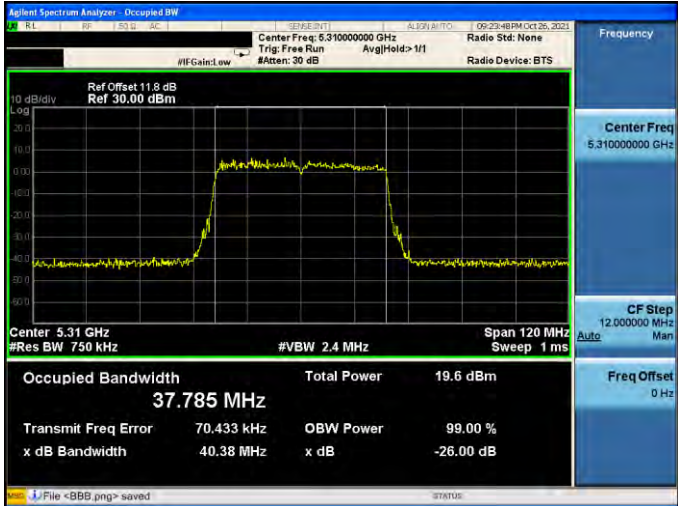


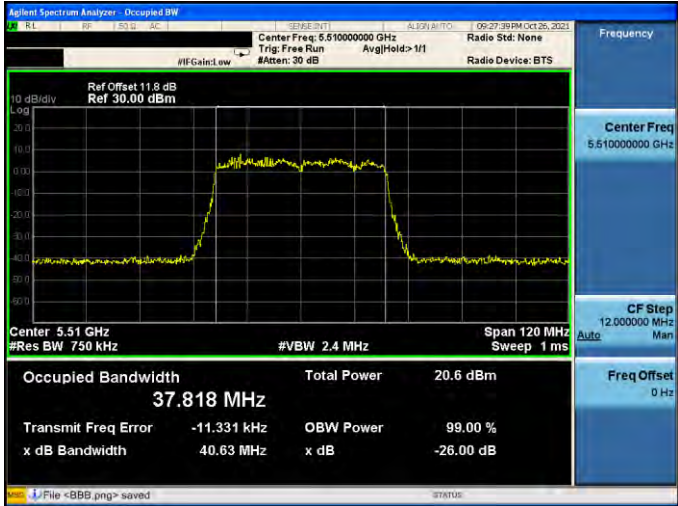
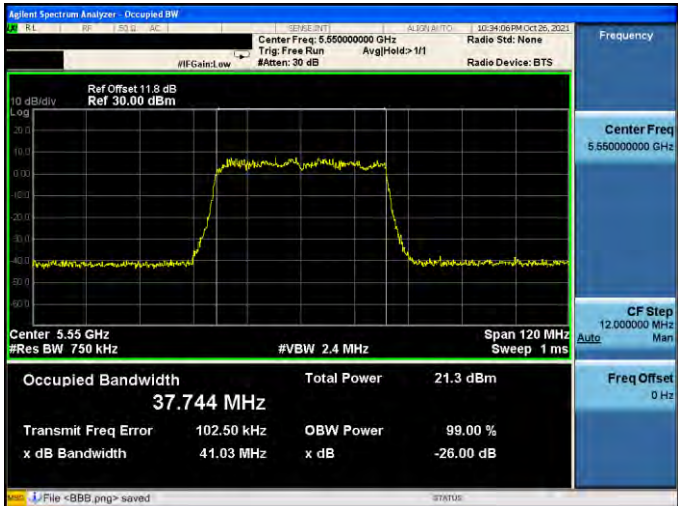
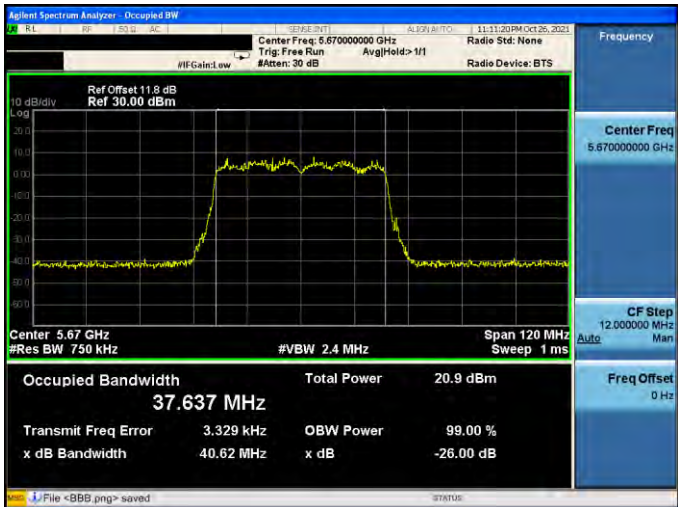
Mode 8: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-3	
5180 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.18000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.18 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 19.014 MHz Total Power 24.5 dBm Transmit Freq Error 1.756 kHz OBW Power 99.00 % x dB Bandwidth 21.39 MHz x dB -26.00 dB File <BBB.png> saved
5200 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.20000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.2 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 19.010 MHz Total Power 24.8 dBm Transmit Freq Error 25.203 kHz OBW Power 99.00 % x dB Bandwidth 21.50 MHz x dB -26.00 dB File <BBB.png> saved
5240 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.24000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.24 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 18.978 MHz Total Power 24.6 dBm Transmit Freq Error 30.651 kHz OBW Power 99.00 % x dB Bandwidth 21.23 MHz x dB -26.00 dB File <BBB.png> saved

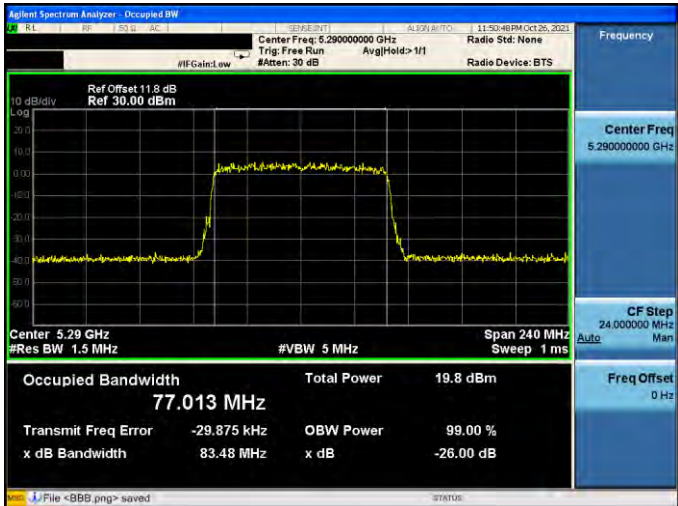
Mode 8: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-3	
5260 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.260000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.26 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 19.066 MHz Total Power 18.3 dBm Transmit Freq Error 12.063 kHz OBW Power 99.00 % x dB Bandwidth 21.35 MHz x dB -26.00 dB File <BBB.png> saved
5280 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.280000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.28 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 19.006 MHz Total Power 18.4 dBm Transmit Freq Error 1.445 kHz OBW Power 99.00 % x dB Bandwidth 21.25 MHz x dB -26.00 dB File <BBB.png> saved
5320 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.320000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.32 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 19.030 MHz Total Power 18.6 dBm Transmit Freq Error 3.086 kHz OBW Power 99.00 % x dB Bandwidth 21.14 MHz x dB -26.00 dB File <BBB.png> saved

Mode 8: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-3	
5500 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.500000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.5 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 19.069 MHz Total Power 19.7 dBm Transmit Freq Error 35.244 kHz OBW Power 99.00 % x dB Bandwidth 21.51 MHz x dB -26.00 dB File <BBB.png> saved
5560 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.560000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.56 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 19.049 MHz Total Power 20.0 dBm Transmit Freq Error 21.050 kHz OBW Power 99.00 % x dB Bandwidth 21.21 MHz x dB -26.00 dB File <BBB.png> saved
5700 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.700000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.7 GHz #Res BW 390 kHz #VBW 1.2 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 19.077 MHz Total Power 18.4 dBm Transmit Freq Error -4.375 kHz OBW Power 99.00 % x dB Bandwidth 21.20 MHz x dB -26.00 dB File <BBB.png> saved

Mode 9: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-3	
5190 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.190000000 GHz Trig: Free Run #Atten: 30 dB Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.19 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 37.923 MHz Total Power 27.3 dBm Transmit Freq Error 36.257 kHz OBW Power 99.00 % x dB Bandwidth 41.26 MHz x dB -26.00 dB File <888.png> saved
5230 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.230000000 GHz Trig: Free Run #Atten: 30 dB Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.23 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 37.844 MHz Total Power 27.5 dBm Transmit Freq Error 34.198 kHz OBW Power 99.00 % x dB Bandwidth 41.46 MHz x dB -26.00 dB File <888.png> saved

Mode 9: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-3	
5270 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.27000000 GHz Ref Offset 11.8 dB Ref 30.00 dBm Center 5.27 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 37.896 MHz Total Power 19.9 dBm Transmit Freq Error -21.969 kHz OBW Power 99.00 % x dB Bandwidth 40.96 MHz x dB -26.00 dB File <888.png> saved
5310 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.31000000 GHz Ref Offset 11.8 dB Ref 30.00 dBm Center 5.31 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 37.785 MHz Total Power 19.6 dBm Transmit Freq Error 70.433 kHz OBW Power 99.00 % x dB Bandwidth 40.38 MHz x dB -26.00 dB File <888.png> saved

Mode 9: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-3	
5510 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.51000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.51 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 37.818 MHz Total Power 20.6 dBm Transmit Freq Error -11.331 kHz OBW Power 99.00 % x dB Bandwidth 40.63 MHz x dB -26.00 dB File <888.png> saved
5550 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.55000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.55 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 37.744 MHz Total Power 21.3 dBm Transmit Freq Error 102.50 kHz OBW Power 99.00 % x dB Bandwidth 41.03 MHz x dB -26.00 dB File <888.png> saved
5670 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.67000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.67 GHz #Res BW 750 kHz #VBW 2.4 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 37.637 MHz Total Power 20.9 dBm Transmit Freq Error 3.329 kHz OBW Power 99.00 % x dB Bandwidth 40.62 MHz x dB -26.00 dB File <888.png> saved

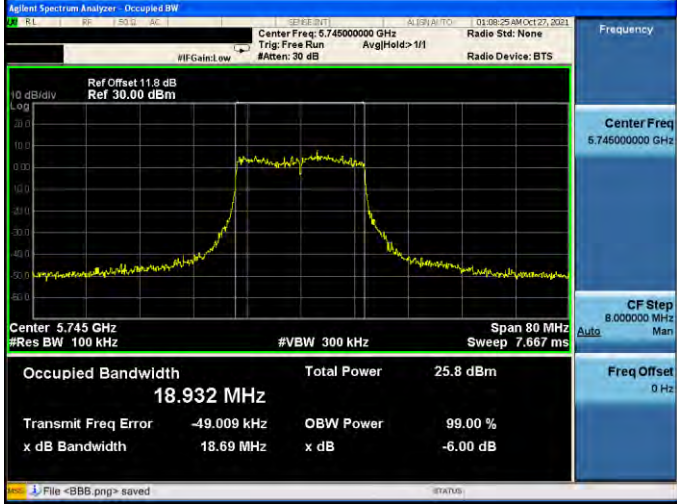
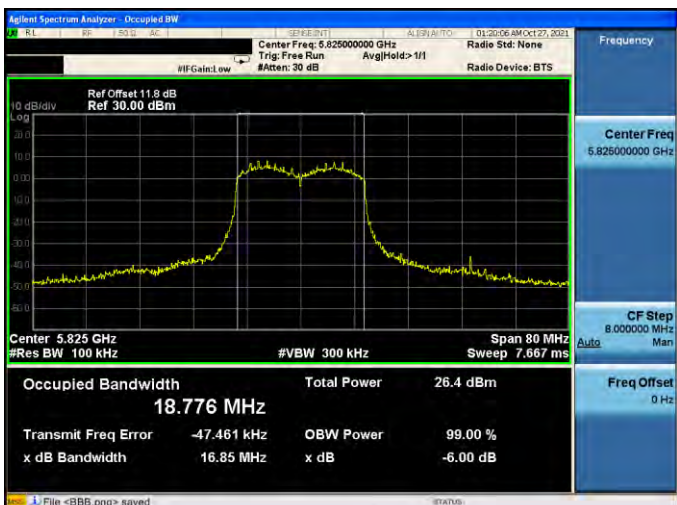
Mode 10: IEEE 802.11ax 80 MHz Continuous TX Mode_ANT-3	
5210 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.210000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.21 GHz #Res BW 1.5 MHz #VBW 5 MHz Span 240 MHz Sweep 1 ms Occupied Bandwidth 76.813 MHz Total Power 30.1 dBm Transmit Freq Error -80.667 kHz OBW Power 99.00 % x dB Bandwidth 81.89 MHz x dB -26.00 dB File <BBB.png> saved
5290 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.290000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.29 GHz #Res BW 1.5 MHz #VBW 5 MHz Span 240 MHz Sweep 1 ms Occupied Bandwidth 77.013 MHz Total Power 19.8 dBm Transmit Freq Error -29.875 kHz OBW Power 99.00 % x dB Bandwidth 83.48 MHz x dB -26.00 dB File <BBB.png> saved
5530 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.530000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 30.00 dBm Center 5.53 GHz #Res BW 1.5 MHz #VBW 5 MHz Span 240 MHz Sweep 1 ms Occupied Bandwidth 77.076 MHz Total Power 20.0 dBm Transmit Freq Error 345.85 kHz OBW Power 99.00 % x dB Bandwidth 81.71 MHz x dB -26.00 dB File <BBB.png> saved

6 dB RF Bandwidth Measurement

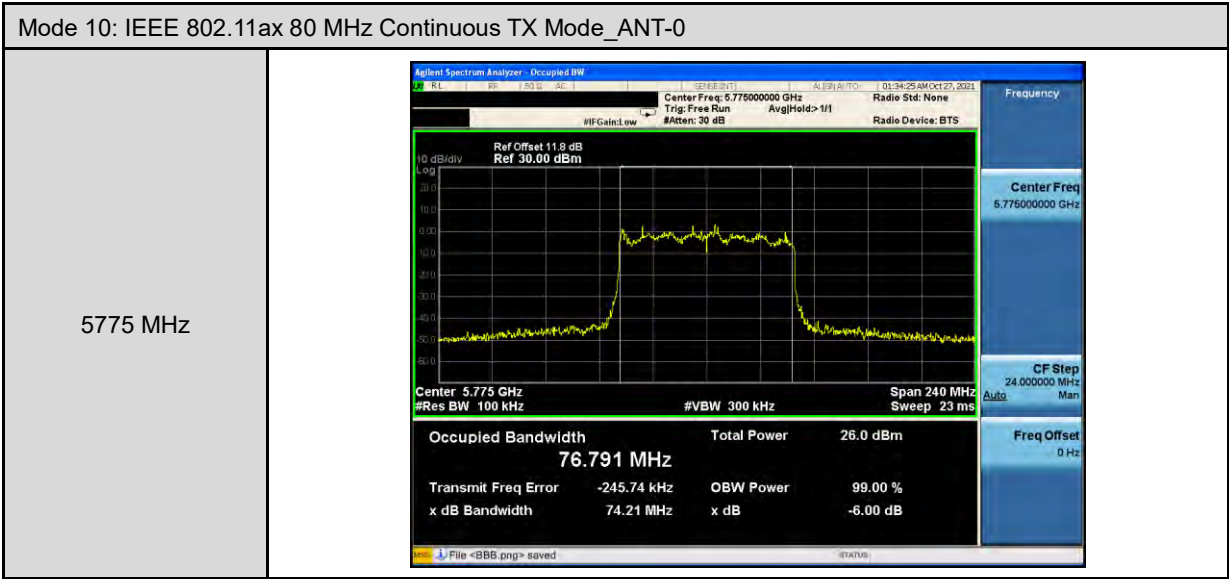
Test Mode	Frequency (MHz)	ANT-0	ANT-1	ANT-2	ANT-3	Limit (kHz)
		Measurement Results (kHz)	Measurement Results (kHz)	Measurement Results (kHz)	Measurement Results (kHz)	
Mode 8	5745	18690	16310	18030	18720	≥ 500
	5785	18070	18830	17270	18130	≥ 500
	5825	16850	18960	19040	18970	≥ 500
Mode 9	5755	37370	30930	35400	36840	≥ 500
	5795	36580	36410	34050	36330	≥ 500
Mode 10	5775	74210	75290	76390	75610	≥ 500

Test Graphs

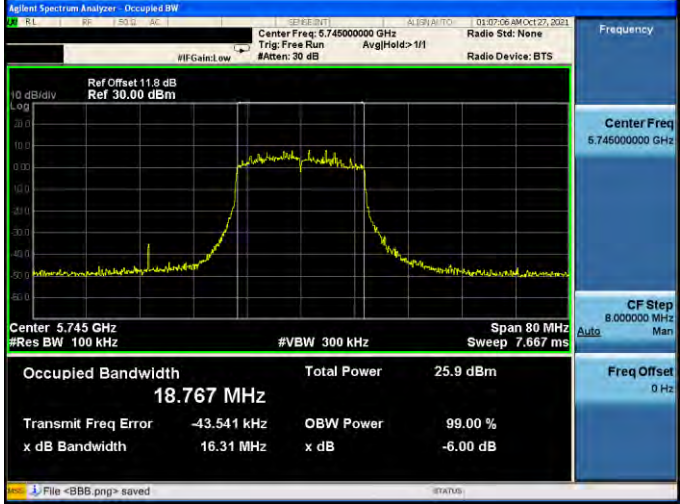
Mode 8: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-0

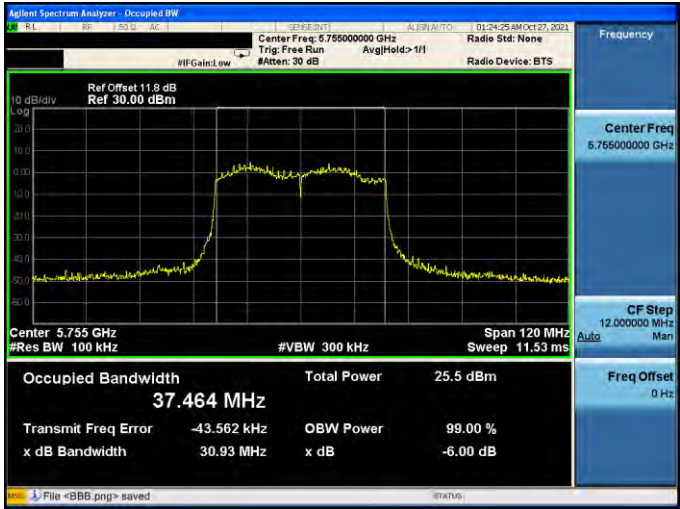
5745 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.74500000 GHz Ref Offset 11.8 dB Ref 30.00 dBm Center 5.745 GHz Res BW 100 kHz #VBW 300 kHz Span 80 MHz Sweep 7.667 ms Occupied Bandwidth: 18.932 MHz Total Power: 25.8 dBm Transmit Freq Error: -49.009 kHz x dB Bandwidth: 18.69 MHz OBW Power: 99.00 % x dB: -6.00 dB
5785 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.78500000 GHz Ref Offset 11.8 dB Ref 30.00 dBm Center 5.785 GHz Res BW 100 kHz #VBW 300 kHz Span 80 MHz Sweep 7.667 ms Occupied Bandwidth: 18.863 MHz Total Power: 26.4 dBm Transmit Freq Error: -47.179 kHz x dB Bandwidth: 18.07 MHz OBW Power: 99.00 % x dB: -6.00 dB
5825 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.82500000 GHz Ref Offset 11.8 dB Ref 30.00 dBm Center 5.825 GHz Res BW 100 kHz #VBW 300 kHz Span 80 MHz Sweep 7.667 ms Occupied Bandwidth: 18.776 MHz Total Power: 26.4 dBm Transmit Freq Error: -47.461 kHz x dB Bandwidth: 16.85 MHz OBW Power: 99.00 % x dB: -6.00 dB

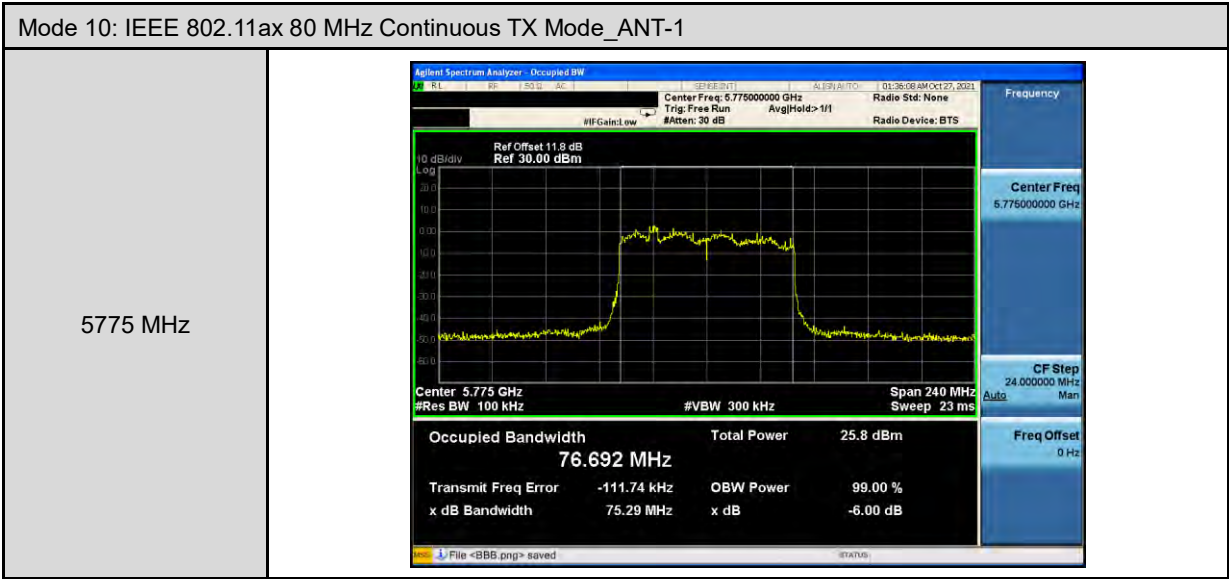
Mode 9: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-0	
5755 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.75500000 GHz Span: 120 MHz Res BW: 100 kHz Occupied Bandwidth: 37.659 MHz Total Power: 27.1 dBm Transmit Freq Error: -49.941 kHz x dB Bandwidth: 37.37 MHz
5795 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.79500000 GHz Span: 120 MHz Res BW: 100 kHz Occupied Bandwidth: 37.584 MHz Total Power: 26.3 dBm Transmit Freq Error: -114.79 kHz x dB Bandwidth: 36.58 MHz



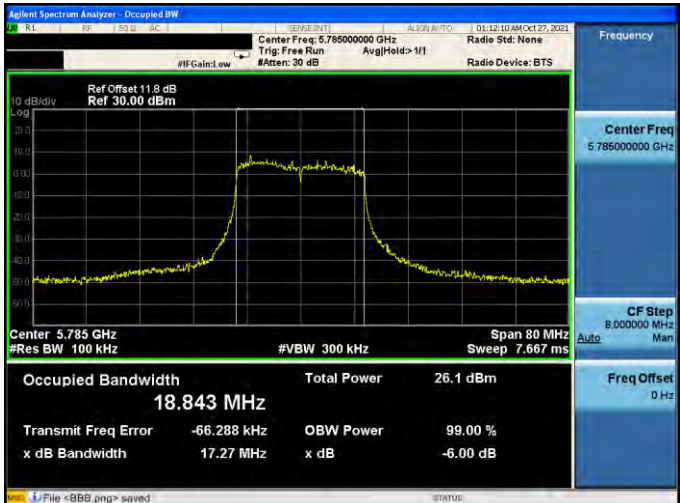
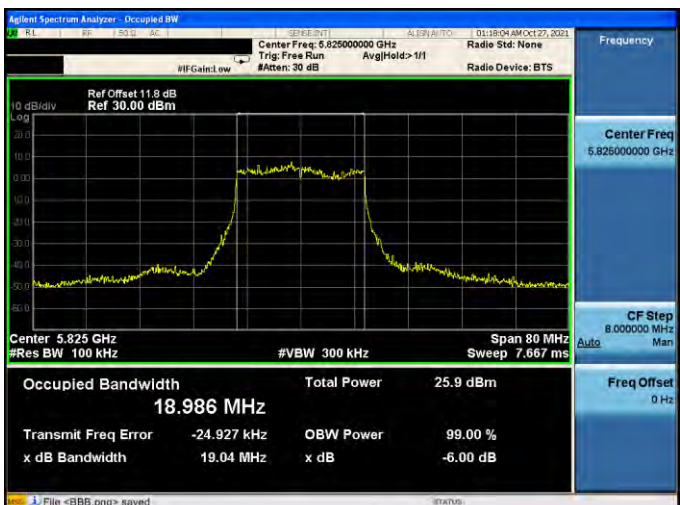
Mode 8: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-1

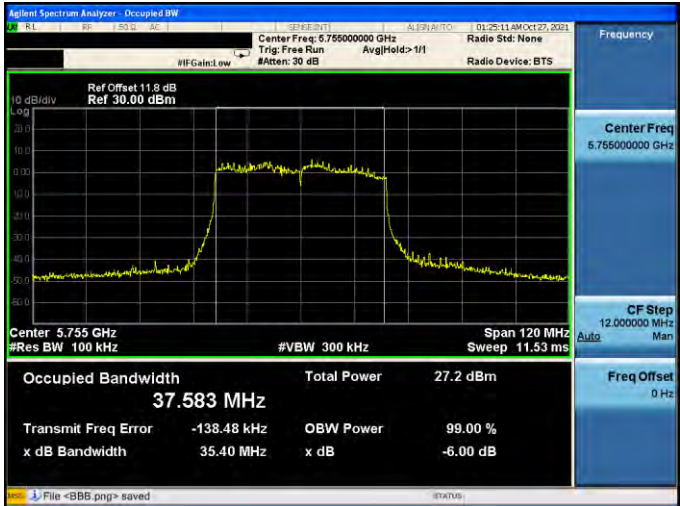
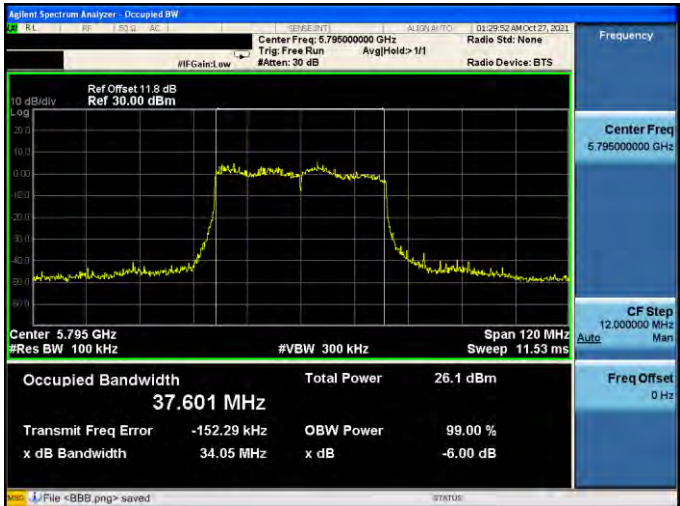
5745 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.74500000 GHz Ref Offset 11.8 dB Ref 30.00 dBm Center 5.745 GHz #Res BW 100 kHz #VBW 300 kHz Span 80 MHz Sweep 7.667 ms Occupied Bandwidth 18.767 MHz Total Power 25.9 dBm Transmit Freq Error -43.541 kHz OBW Power 99.00 % x dB Bandwidth 16.31 MHz x dB -6.00 dB
5785 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.78500000 GHz Ref Offset 11.8 dB Ref 30.00 dBm Center 5.785 GHz #Res BW 100 kHz #VBW 300 kHz Span 80 MHz Sweep 7.667 ms Occupied Bandwidth 18.869 MHz Total Power 25.3 dBm Transmit Freq Error -27.555 kHz OBW Power 99.00 % x dB Bandwidth 18.83 MHz x dB -6.00 dB
5825 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.82500000 GHz Ref Offset 11.8 dB Ref 30.00 dBm Center 5.825 GHz #Res BW 100 kHz #VBW 300 kHz Span 80 MHz Sweep 7.667 ms Occupied Bandwidth 18.959 MHz Total Power 25.9 dBm Transmit Freq Error -38.107 kHz OBW Power 99.00 % x dB Bandwidth 18.96 MHz x dB -6.00 dB

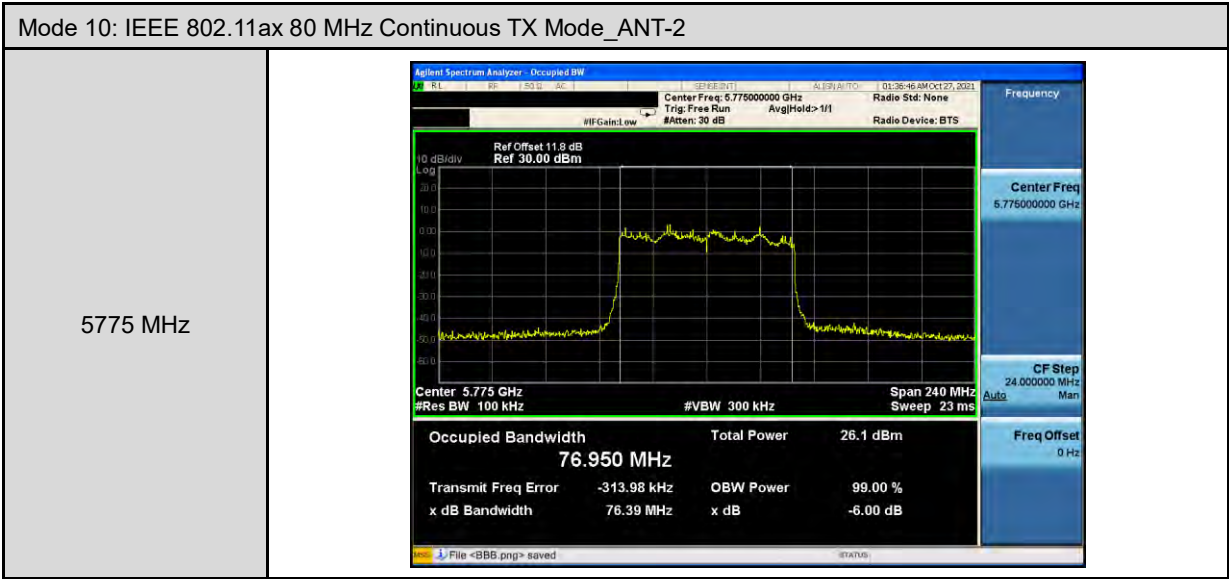
Mode 9: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-1	
5755 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.75500000 GHz Ref Offset 11.8 dB Ref 30.00 dBm Center 5.755 GHz #Res BW 100 kHz #VBW 300 kHz Span 120 MHz Sweep 11.53 ms Occupied Bandwidth 37.464 MHz Total Power 25.5 dBm Transmit Freq Error -43.562 kHz OBW Power 99.00 % x dB Bandwidth 30.93 MHz x dB -6.00 dB File <BBB.png> saved
5795 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.79500000 GHz Ref Offset 11.8 dB Ref 30.00 dBm Center 5.795 GHz #Res BW 100 kHz #VBW 300 kHz Span 120 MHz Sweep 11.53 ms Occupied Bandwidth 37.613 MHz Total Power 25.8 dBm Transmit Freq Error -58.670 kHz OBW Power 99.00 % x dB Bandwidth 36.41 MHz x dB -6.00 dB File <BBB.png> saved



Mode 8: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-2

5745 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.74500000 GHz Ref Offset 11.8 dB Ref 30.00 dBm Center 5.745 GHz Res BW 100 kHz #VBW 300 kHz Span 80 MHz Sweep 7.667 ms Occupied Bandwidth 18.851 MHz Total Power 25.9 dBm Transmit Freq Error 6.551 kHz OBW Power 99.00 % x dB Bandwidth 18.03 MHz x dB -6.00 dB File <BBB.png> saved
5785 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.78500000 GHz Ref Offset 11.8 dB Ref 30.00 dBm Center 5.785 GHz Res BW 100 kHz #VBW 300 kHz Span 80 MHz Sweep 7.667 ms Occupied Bandwidth 18.843 MHz Total Power 26.1 dBm Transmit Freq Error -66.288 kHz OBW Power 99.00 % x dB Bandwidth 17.27 MHz x dB -6.00 dB File <BBB.png> saved
5825 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.82500000 GHz Ref Offset 11.8 dB Ref 30.00 dBm Center 5.825 GHz Res BW 100 kHz #VBW 300 kHz Span 80 MHz Sweep 7.667 ms Occupied Bandwidth 18.986 MHz Total Power 25.9 dBm Transmit Freq Error -24.927 kHz OBW Power 99.00 % x dB Bandwidth 19.04 MHz x dB -6.00 dB File <BBB.png> saved

Mode 9: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-2	
5755 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.75500000 GHz Span: 120 MHz Res BW: 100 kHz Occupied Bandwidth: 37.583 MHz Total Power: 27.2 dBm Transmit Freq Error: -138.48 kHz x dB Bandwidth: 35.40 MHz
5795 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.79500000 GHz Span: 120 MHz Res BW: 100 kHz Occupied Bandwidth: 37.601 MHz Total Power: 26.1 dBm Transmit Freq Error: -152.29 kHz x dB Bandwidth: 34.05 MHz



Mode 8: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-3	
5745 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.74500000 GHz Ref Offset 11.8 dB Ref 30.00 dBm Center 5.745 GHz #Res BW 100 kHz #VBW 300 kHz Span 80 MHz Sweep 7.667 ms Occupied Bandwidth 18.820 MHz Total Power 25.3 dBm Transmit Freq Error -40.267 kHz OBW Power 99.00 % x dB Bandwidth 18.72 MHz x dB -6.00 dB File <BBB.png> saved
5785 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.78500000 GHz Ref Offset 11.8 dB Ref 30.00 dBm Center 5.785 GHz #Res BW 100 kHz #VBW 300 kHz Span 80 MHz Sweep 7.667 ms Occupied Bandwidth 18.813 MHz Total Power 25.1 dBm Transmit Freq Error -25.963 kHz OBW Power 99.00 % x dB Bandwidth 18.13 MHz x dB -6.00 dB File <BBB.png> saved
5825 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.82500000 GHz Ref Offset 11.8 dB Ref 30.00 dBm Center 5.825 GHz #Res BW 100 kHz #VBW 300 kHz Span 80 MHz Sweep 7.667 ms Occupied Bandwidth 18.971 MHz Total Power 26.3 dBm Transmit Freq Error -17.225 kHz OBW Power 99.00 % x dB Bandwidth 18.97 MHz x dB -6.00 dB File <BBB.png> saved