

FCC Measurement/Technical Report on

TOBY-L4006

FCC ID: XPY1EHQ37NN

IC: 8595A-1EHQ37NN

Test Report Reference: MDE_UBLOX_1717_FCCb

Test Laboratory:

7layers GmbH
Borsigstrasse 11
40880 Ratingen
Germany



Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7layers GmbH
Borsigstraße 11
40880 Ratingen, Germany
T +49 (0) 2102 749 0
F +49 (0) 2102 749 350

Geschäftsführer/
Managing Directors:
Frank Spiller
Bernhard Retka
Alexandre Norré-Oudard

Registergericht/registered:
Düsseldorf HRB 75554
USt-Id.-Nr./VAT-No. DE203159652
Steuer-Nr./TAX-No. 147/5869/0385

*a Bureau Veritas
Group Company*

www.7layers.com

Table of Contents

| | |
|--|-----------|
| 1 Applied Standards and Test Summary | 3 |
| 1.1 Applied Standards | 3 |
| 1.2 FCC-IC Correlation Table | 4 |
| 1.3 Measurement Summary / Signatures | 4 |
| 2 Administrative Data | 6 |
| 2.1 Testing Laboratory | 6 |
| 2.2 Project Data | 6 |
| 2.3 Applicant Data | 6 |
| 2.4 Manufacturer Data | 6 |
| 3 Test object Data | 7 |
| 3.1 General EUT Description | 7 |
| 3.2 EUT Main components | 7 |
| 3.3 Ancillary Equipment | 7 |
| 3.4 Auxiliary Equipment | 8 |
| 3.5 EUT Setups | 8 |
| 3.6 Operating Modes | 8 |
| 3.7 Product labelling | 9 |
| 4 Test Results | 10 |
| 4.1 Conducted Emissions at AC mains | 10 |
| 4.2 Radiated Emissions | 13 |
| 5 Test Equipment | 18 |
| 6 Antenna Factors, Cable Loss and Sample Calculations | 20 |
| 6.1 LISN R&S ESH3-Z5 (150 kHz – 30 MHz) | 20 |
| 6.2 Antenna R&S HFH2-Z2 (9 kHz – 30 MHz) | 21 |
| 6.3 Antenna R&S HL562 (30 MHz – 1 GHz) | 22 |
| 6.4 Antenna R&S HF907 (1 GHz – 18 GHz) | 23 |
| 6.5 Antenna EMCO 3160-09 (18 GHz – 26.5 GHz) | 24 |
| 6.6 Antenna EMCO 3160-10 (26.5 GHz – 40 GHz) | 25 |
| 7 Setup Drawings | 26 |
| 8 Measurement Uncertainties | 28 |
| 9 Photo Report | 28 |

1 APPLIED STANDARDS AND TEST SUMMARY

1.1 APPLIED STANDARDS

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 and 15 (10-1-15 Edition). The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 15, Subpart B – Unintentional Radiators

§ 15.107 Conducted limits

§ 15.109 Radiated emission limits; general requirements

Note:

ANSI C63.4–2014 is applied.

Summary Test Results:

The EUT complied with all performed tests as listed in chapter 1.3 Measurement Summary / Signatures.

1.2 FCC-IC CORRELATION TABLE

Correlation of measurement requirements for Information Technology Equipment (ITE) from FCC and IC

| Measurement | FCC reference | IC reference |
|--|---------------|-----------------------|
| Conducted Emissions (AC Power Line) | §15.107 | ICES-003 Issue 6: 6.1 |
| Radiated Spurious Emissions | §15.109 | ICES-003 Issue 6: 6.2 |

Remarks:

1. FCC Part 15 subpart B, ICES 003 and CISPR 22 contain different definitions of Class A and Class B limits, i.e. which class is applicable to which kind of EUT.
ICES 003 and CISPR 22 distinguish between the location where the EUT is intended to operate whilst FCC refers to the method of commercial distribution (distributive trades).
2. The correct assignment of the appropriate class to the concrete EUT is not scope of this test report!
3. A radio apparatus that is specifically subject to an Industry Canada Radio Standard Specification (RSS) and which contains an ITE is not subject to ICES-003 provided the ITE is used only to enable operation of the radio apparatus and the ITE does not control additional functions or capabilities.
4. ISM (Industrial, Scientific or Medical) radio frequency generators, though they may contain ITE, are excluded from the definition of ITE and are not subject to ICES-003. They are instead subject to the Interference-Causing Equipment Standard ICES-001, which specifically addresses ISM radio frequency generators.

1.3 MEASUREMENT SUMMARY / SIGNATURES

| 47 CFR CHAPTER I FCC PART 15 Subpart B | | § 15.107 Class A / Class B | | |
|--|----------|----------------------------|--------|--|
| Conducted Emissions at AC mains | | | | |
| The measurement was performed according to ANSI C63.4 | | Final Result | | |
| OP-Mode | Setup | FCC | IC | |
| AC mains connection, Test setup | | | | |
| via connected computer device, computer peripheral | S01_AM06 | Passed | Passed | |
| 47 CFR CHAPTER I FCC PART 15 Subpart B | | § 15.109 Class A / Class B | | |
| Radiated Emissions | | | | |
| The measurement was performed according to ANSI C63.4 | | Final Result | | |
| OP-Mode | Setup | FCC | IC | |
| AC mains connection, Measurement range, Test setup | | | | |
| via connected computer device, 1 GHz - 18 GHz, computer peripheral | S01_AM06 | Passed | Passed | |
| via connected computer device, 30 MHz - 1 GHz, computer peripheral | S01_AM06 | Passed | Passed | |

N/A: Not applicable
N/P: Not performed



(responsible for accreditation scope)
Dipl.-Ing. Marco Kullik



(responsible for testing and report)
Patrick Lomax



7 layers GmbH, Borsigstr. 11
40880 Ratingen, Germany
Phone +49 (0)2102 749 0

2 ADMINISTRATIVE DATA

2.1 TESTING LABORATORY

Company Name: 7layers GmbH
Address: Borsigstr. 11
40880 Ratingen
Germany

This facility has been fully described in a report submitted to the FCC and accepted under the registration number 96716.

This facility has been fully described in a report submitted to the IC and accepted under the registration number: Site# 3699A-1.

The test facility is also accredited by the following accreditation organisation:

Laboratory accreditation no: DAKKS D-PL-12140-01-00

Responsible for accreditation scope: Dipl.-Ing. Marco Kullik

Report Template Version: 2017-07-14

2.2 PROJECT DATA

Responsible for testing and report: Patrick Lomax

Employees who performed the tests: documented internally at 7Layers

Date of Report: 2017-07-24

Testing Period: 2017-07-14 to 2017-07-162

2.3 APPLICANT DATA

Company Name: u-blox AG
Address: Zürcherstrasse 68
CH-8800 Thalwil
Switzerland

Contact Person: Giulio Comar

2.4 MANUFACTURER DATA

Company Name: See Applicant data
Address:

3 TEST OBJECT DATA

3.1 GENERAL EUT DESCRIPTION

| | |
|--|--------------------------------|
| Kind of Device product description | Module |
| Product name | TOBY-L4006 |
| Type | L4006 |
| Declared EUT data by the supplier | |
| Power Supply Type | DC via AC/DC Wall Adapter |
| Comment | - |
| Nominal Voltage / Frequency | 60Hz |
| Test Voltage / Frequency | 110V AC Via AC/DC wall adapter |
| Highest internal frequency | Greater than 106 MHz |
| General Description | GSM/UMTS/LTE Module |
| Ports | - |
| Special software used for testing | - |

The main components of the EUT are listed and described in chapter 3.2 EUT Main components.

3.2 EUT MAIN COMPONENTS

| Sample Name | Sample Code | Description |
|------------------|-----------------|-----------------|
| AM06 | AM09 | Standard Sample |
| Sample Parameter | Value | |
| Serial No. | 355958080015191 | |
| HW Version | 294A02 | |
| SW Version | 40.12 | |
| Comment | - | |

NOTE: The short description is used to simplify the identification of the EUT in this test report.

3.3 ANCILLARY EQUIPMENT

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Ancillary Equipment can influence the test results.

| Device | Details (Manufacturer, Type Model, OUT Code) | Description |
|-----------|---|------------------------|
| Dev board | Ublox, EVB-WL3, DE1015050 | Motherboard for module |

3.4 AUXILIARY EQUIPMENT

For the purposes of this test report, auxiliary equipment is defined as equipment which is used temporarily to enable operational and control features especially used for the tests of the EUT which is not used during normal operation or equipment that is used during the tests in combination with the EUT but is not subject of this test report. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Auxiliary Equipment can influence the test results.

| Device | Details (Manufacturer, HW, SW, S/N) | Description |
|-------------------------------|--|------------------------|
| AC Adapter (for Laptop RE 02) | Fujitsu Ltd., -, -, 05335621F | Model SEB100P2-19.0 |
| Keyboard 1 (CHERRY) | CHERRY, -, -, G 0000273 2P28 | RS 6000 USB ON |
| Laptop RE 02 (Fujitsu) | Fujitsu Ltd., -, -, DSCM004672 | Lifebook E series E782 |
| Mouse 1 (Logitech) | Logitech, -, -, HC60915A2XC | M-BT58 |
| TFT Display EMC TFT 5 (LG) | LG, -, -, 412WAPLOU560 | L17MB-P |

3.5 EUT SETUPS

This chapter describes the combination of EUTs and equipment used for testing. The rationale for selecting the EUTs, ancillary and auxiliary equipment and interconnecting cables, is to test a representative configuration meeting the requirements of the referenced standards.

| Setup | Combination of EUTs | Description and Rationale |
|----------|---|-------------------------------|
| S01_AM06 | AM06, TFT Display EMC TFT 5 (LG), AC Adapter (for Laptop RE 02), Mouse 1 (Logitech), Keyboard 1 (CHERRY), Laptop RE 02 (Fujitsu), | Computer peripheral equipment |

3.6 OPERATING MODES

This chapter describes the operating modes of the EUTs used for testing.

3.6.1 TEST CHANNELS

3.7 PRODUCT LABELLING

3.7.1 FCC ID LABEL

Please refer to the documentation of the applicant.

3.7.2 LOCATION OF THE LABEL ON THE EUT

Please refer to the documentation of the applicant.

4 TEST RESULTS

4.1 CONDUCTED EMISSIONS AT AC MAINS

Standard **FCC Part 15 Subpart B**

The test was performed according to:
ANSI C63.4

4.1.1 TEST DESCRIPTION

The test set-up was made in accordance to the general provisions of ANSI C 63.4
The Equipment Under Test (EUT) was setup in a shielded room to perform the conducted emissions measurements in a typical installation configuration. The EUT was powered from 50 μ H || 50 Ohm Line Impedance Stabilization Network (LISN). The LISN's unused connections were terminated with 50 Ohm loads.

The measurement procedure consists of two steps. It is implemented into the EMI test software EMC-32 from R&S.

Step 1: Preliminary scan

Intention of this step is, to determine the conducted EMI-profile of the EUT.

EMI receiver settings:

- Detector: Peak – Maxhold & Average
- Frequency range: 150 kHz – 30 MHz
- Frequency steps: 2.5 kHz
- IF-Bandwidth: 9 kHz
- Measuring time / Frequency step: 100 ms (FFT-based)
- Measurement on phase + neutral lines of the power cords

On basis of this preliminary scan the highest amplitudes and the corresponding frequencies relative to the limit are identified. Emissions above the limit and emissions which are in the 10 dB range below the limit are considered.

Step 2: Final measurement

Intention of this step is, to determine the highest emissions with the settings defined in the test specification for the frequencies identified in step 1.

EMI receiver settings:

- Detector: Quasi-Peak
- IF Bandwidth: 9 kHz
- Measuring time: 1 s / frequency

At each frequency determined in step 1, four measurements are performed in the following combinations:

- 1) Neutral lead - reference ground (PE grounded)
- 2) Phase lead - reference ground (PE grounded)
- 3) Neutral lead - reference ground (PE floating)
- 4) Phase lead - reference ground (PE floating)

The highest value is reported.

4.1.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart B, §15.107

Class B:

| Frequency (MHz) | QP Limits (dBμV) | AV Limits (dBμV) |
|-----------------|------------------|------------------|
| 0.15 – 0.5 | 66 - 56 | 56 - 46 |
| 0.5 - 5 | 56 | 46 |
| 5 - 30 | 60 | 50 |

Class A:

| Frequency (MHz) | QP Limits (dBμV) | AV Limits (dBμV) |
|-----------------|------------------|------------------|
| 0.15 – 0.5 | 79 | 66 |
| 0.5 - 30 | 73 | 60 |


4.1.3 TEST PROTOCOL

Temperature: 26 °C
 Air Pressure: 1017 hPa
 Humidity: 40 %
 Computer Peripheral

| Power line | PE | Frequency [MHz] | Level [dBμV] | Detector | Limit [dBμV] | Margin [dB] |
|------------|-----|-----------------|--------------|----------|--------------|-------------|
| L1 | GND | 0 | 44 | QP | 57 | 13 |
| L1 | GND | 0 | 36 | AV | 47 | 11 |

Remark: Please see next sub-clause for the measurement plot.

4.1.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

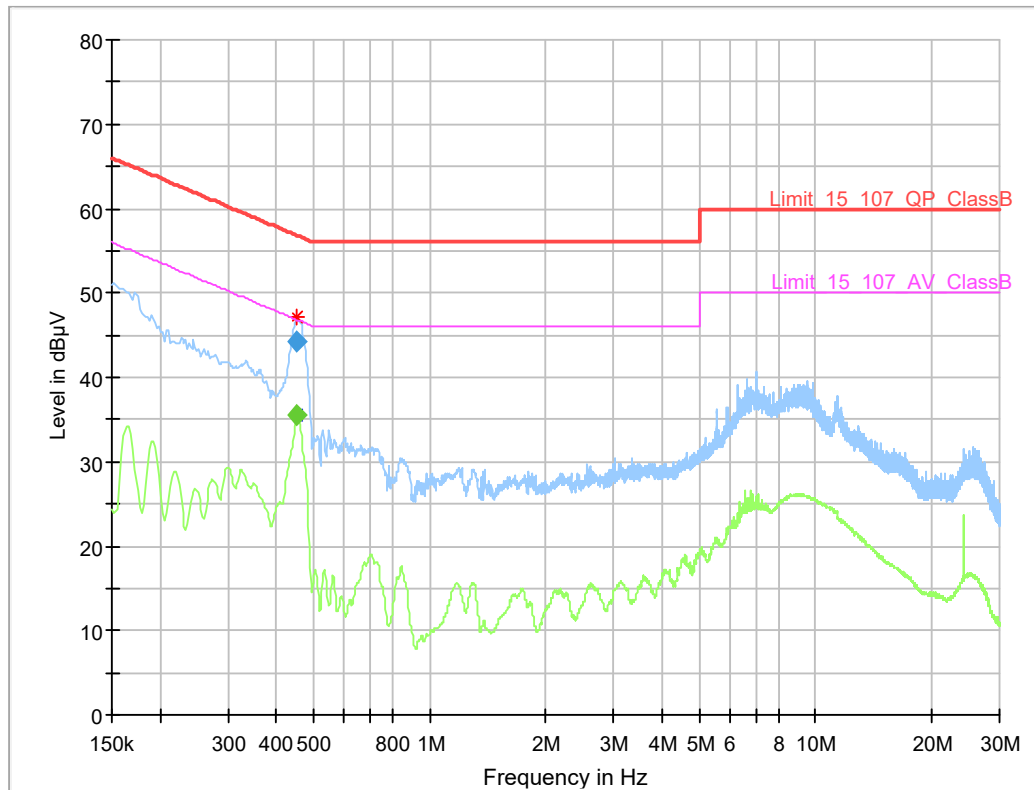

4.1.5 TEST EQUIPMENT USED

- Conducted Emissions FCC

4.2 RADIATED EMISSIONS

Standard **FCC Part 15 Subpart B**

The test was performed according to:
ANSI C63.4

4.2.1 TEST DESCRIPTION

The test set-up was made in accordance to the general provisions of ANSI C63.4 in a typical installation configuration. The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m² in the semi-anechoic chamber. The influence of the EUT support table that is used was evaluated. For the measurement above 1 GHz an absorber field with 30 cm pyramidal absorber is placed between EUT table and antenna (required to fulfil the CISPR 16.1.4 S-VSWR criteria).

The measurement procedure is implemented into the EMI test software EMC32 from R&S.

1. Measurement above 30 MHz and up to 1 GHz

Step 1: Preliminary scan

This is a preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Antenna distance: 3 m
- Detector: Peak-Maxhold / Quasipeak (FFT-based)
- Frequency range: 30 – 1000 MHz
- Frequency steps: 30 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 ms
- Turntable angle range: –180° to 90°
- Turntable step size: 90°
- Height variation range: 1 – 3 m
- Height variation step size: 2 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: Adjustment measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will slowly vary by $\pm 45^\circ$ around this value. During this action, the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position, the antenna height will also slowly vary by ± 100 cm around the antenna height determined. During this action, the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: $\pm 45^\circ$ around the determined value
- Height variation range: ± 100 cm around the determined value

- Antenna Polarisation: max. value determined in step 1

Step 3: Final measurement with QP detector

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s

2. Measurement above 1 GHz

Step 1: Preliminary scan

This is a preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Antenna distance: 3 m
- Detector: Peak-Maxhold / Average (up to 7 GHz FFT-based)
- Frequency range: 1 GHz – 18 GHz
- Frequency steps: 250 kHz
- IF-Bandwidth: 1 MHz
- Measuring time / Frequency step: 100 ms (up to 7 GHz) / 500µs (above 7 GHz)
- Turntable angle range: -180° to 135°
- Turntable step size: 45°
- Height variation range: 1 – 3.7 m (due to the small antenna lobe, a tilt-mast is used)
- Height variation step size: 0.9 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: Adjustment measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will slowly vary by $\pm 22.5^{\circ}$ around this value. During this action, the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position, the antenna height will also slowly vary by ± 45 cm around the antenna height determined. During this action, the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 1 MHz
- Measuring time: 100 ms
- Turntable angle range: $\pm 22.5^{\circ}$ around the determined value
- Height variation range: ± 45 cm around the determined value
- Antenna Polarisation: max. value determined in step 1

Step 3: Final measurement with Max-Peak / CISPR-Average detector

With the settings determined in step 2, the final measurement will be performed:

EMI receiver settings for step 3:

- Detector: Max-Peak / CISPR-Average
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 1 MHz
- Measuring time: 200 ms

After each measurement, a report will be generated which contains a diagram with the results of the preliminary scan and a table with the frequencies, values and polarisation of the results of the final measurement.

4.2.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart B, §15.109, Radiated Emission Limits

Class B:

| Frequency (MHz) | Limit (µV/m) | Measurement distance (m) | Limits (dBµV/m) |
|-----------------|--------------|--------------------------|-----------------|
| 30 – 88 | 100@3m | 3 | 40.0@3m |
| 88 – 216 | 150@3m | 3 | 43.5@3m |
| 216 – 960 | 200@3m | 3 | 46.0@3m |
| 960 - 26000 | 500@3m | 3 | 54.0@3m |
| 26000 - 40000 | 500@3m | 1 | 54.0@3m |

Class A:

| Frequency (MHz) | Limit (µV/m) | Measurement distance (m) | Limits (dBµV/m) |
|-----------------|--------------|--------------------------|-----------------|
| 30 – 88 | 90@10m | 3 | 39.1@10m |
| 88 – 216 | 150@10m | 3 | 43.5@10m |
| 216 – 960 | 210@10m | 3 | 46.4@10m |
| 960 - 26000 | 300@10m | 3 | 49.5@10m |
| 26000 - 40000 | 300@10m | 1 | 49.5@10m |

The measured values for Class A and for Class B (> 26 GHz) measurements are corrected with an inverse linear distance extrapolation factor (20 dB/decade).

§15.35(b) ..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: Limit (dBµV/m) = 20 log (Limit (µV/m)/1µV/m)

4.2.3 TEST PROTOCOL

Ambient temperature: 25 °C
 Air Pressure: 1011 hPa
 Humidity: 38 %
 Computer Peripheral Setup


| Spurious Freq. [MHz] | Spurious Level [dBµV/m] | Detector | RBW [kHz] | Limit [dBµV/m] | Margin to Limit [dB] |
|----------------------|-------------------------|----------|-----------|----------------|----------------------|
| 40.0 | 39.5 | QP | 120 | 40.0 | 0.5 |
| 42.6 | 38.4 | QP | 120 | 40.0 | 1.6 |
| 155.6 | 32.9 | QP | 120 | 43.5 | 10.6 |
| 194.8 | 34.3 | QP | 120 | 43.5 | 9.2 |
| 207.0 | 32.7 | QP | 120 | 43.5 | 10.8 |
| 277.0 | 25.7 | QP | 120 | 46.0 | 20.3 |
| 351.1 | 30.9 | QP | 120 | 46.0 | 15.1 |
| 665.1 | 27.0 | QP | 120 | 46.0 | 19.0 |
| 796.6 | 28.1 | QP | 120 | 46.0 | 17.9 |
| 1001.0 | - | - | 1000 | - | - |

Remark: Please see next sub-clause for the measurement plot.


4.2.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Common Information

| | |
|-----------------------|----------------------------------|
| Test Description: | radiated |
| Test Standard: | FCC15b Class B |
| EUT Code: | DE1015050am06 |
| Operating Conditions: | GSM 1900 idle mode + USB traffic |

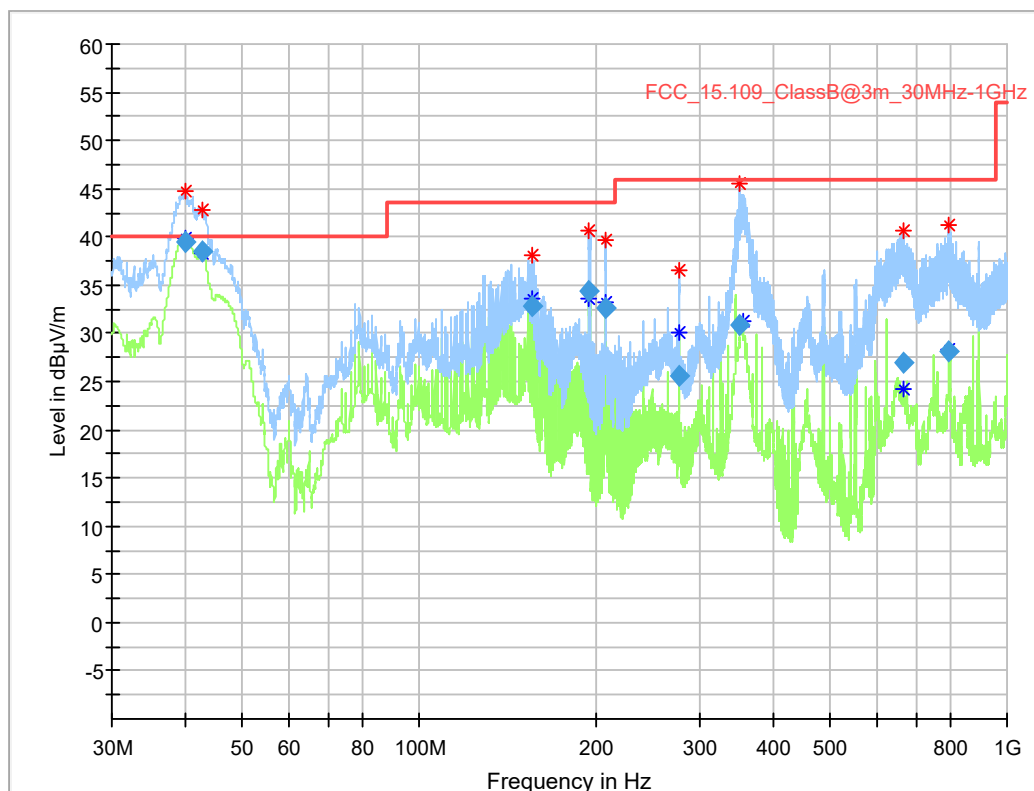

Green trace lone shows final measurement, Blue trace line shows pre-measurement.

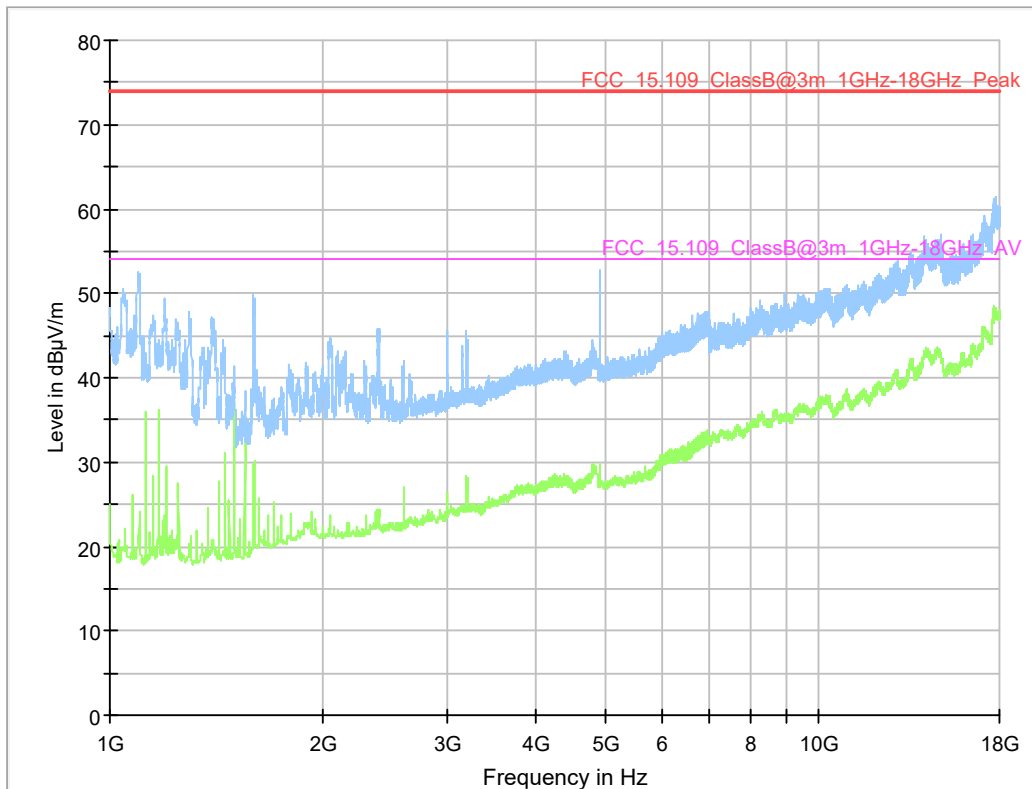

4.2.5 TEST EQUIPMENT USED

- Radiated Emissions

5 TEST EQUIPMENT

- 1 Conducted Emissions FCC
Conducted Emissions power line for FCC standards

| Ref.No. | Device Name | Description | Manufacturer | Serial Number | Last Calibration | Calibration Due |
|---------|-------------------------------|---|-----------------------------------|---------------|------------------|-----------------|
| 1.1 | Opus10 TPR (8253.00) | ThermoAirpressure Datalogger 13 (Environ) | Lufft Mess- und Regeltechnik GmbH | 13936 | 2017-04 | 2019-04 |
| 1.2 | Fluke 177 | Digital Multimeter 03 (Multimeter) | Fluke Europe B.V. | 86670383 | 2016-02 | 2018-02 |
| 1.3 | ESH 3-Z5 "AUX" S/N 828304/029 | Two-Line V-Network | Rohde & Schwarz | 828304/029 | 2017-05 | 2019-05 |
| 1.4 | EP 1200/B, NA/B1 | Amplifier with integrated variable Oscillator | Spitzenberger & Spieß | B6278 | 2015-07 | 2018-07 |
| 1.5 | Chroma 6404 | AC Power Source | Chroma ATE INC. | 64040001304 | | |
| 1.6 | Shielded Room 02 | Shielded Room for conducted testing, 12qm | Frankonia | - | | |
| 1.7 | ESH 3-Z5 "EUT" S/N 829996/002 | Two-Line V-Network | Rohde & Schwarz | 829996/002 | 2017-05 | 2019-05 |
| 1.8 | ESR 7 | EMI Receiver / Spectrum Analyzer | Rohde & Schwarz | 101424 | 2016-11 | 2018-11 |
| 1.9 | Opus10 THI (8152.00) | ThermoHygro Datalogger 02 (Environ) | Lufft Mess- und Regeltechnik GmbH | 7489 | 2017-04 | 2019-04 |
| 1.10 | ESIB 26 | Spectrum Analyzer | Rohde & Schwarz | 830482/004 | 2015-12 | 2017-12 |

- 2 Radiated Emissions
Lab to perform radiated emission tests

| Ref.No. | Device Name | Description | Manufacturer | Serial Number | Last Calibration | Calibration Due |
|---------|-----------------------|---|-----------------------------------|---------------|------------------|-----------------|
| 2.1 | NRV-Z1 | Sensor Head A | Rohde & Schwarz | 827753/005 | 2017-05 | 2018-05 |
| 2.2 | MFS | Rubidium Frequency Normal MFS | Datum GmbH | 002 | 2016-09 | 2017-09 |
| 2.3 | Opus10 TPR (8253.00) | ThermoAirpressure Datalogger 13 (Environ) | Lufft Mess- und Regeltechnik GmbH | 13936 | 2017-04 | 2019-04 |
| 2.4 | Anechoic Chamber | 10.58 x 6.38 x 6.00 m ³ | Frankonia | none | 2016-05 | 2019-05 |
| 2.5 | HL 562 | Ultralog new biconicals | Rohde & Schwarz | 830547/003 | 2015-06 | 2018-06 |
| 2.6 | 5HC2700/12750 -1.5-KK | High Pass Filter | Trilithic | 9942012 | | |
| 2.7 | ASP 1.2/1.8-10 kg | Antenna Mast | Maturo GmbH | - | | |

| Ref.No. | Device Name | Description | Manufacturer | Serial Number | Last Calibration | Calibration Due |
|---------|-------------------------------|---|-----------------------------------|------------------------|------------------|-----------------|
| 2.8 | Fully Anechoic Room | 8.80m x 4.60m x 4.05m (l x w x h) | Albatross Projects | P26971-647-001-PRB | 2015-06 | 2018-06 |
| 2.9 | Fluke 177 | Digital Multimeter 03 (Multimeter) | Fluke Europe B.V. | 86670383 | 2016-02 | 2018-02 |
| 2.10 | JS4-18002600-32-5P | Broadband Amplifier 18 GHz - 26 GHz | Miteq | 849785 | | |
| 2.11 | FSW 43 | Spectrum Analyzer | Rohde & Schwarz | 103779 | 2016-12 | 2018-12 |
| 2.12 | 3160-09 | Standard Gain / Pyramidal Horn Antenna 26.5 GHz | EMCO Elektronik GmbH | 00083069 | | |
| 2.13 | WHKX 7.0/18G-8SS | High Pass Filter | Wainwright | 09 | | |
| 2.14 | 4HC1600/12750-1.5-KK | High Pass Filter | Trilithic | 9942011 | | |
| 2.15 | Chroma 6404 | AC Power Source | Chroma ATE INC. | 64040001304 | | |
| 2.16 | JS4-00102600-42-5A | Broadband Amplifier 30 MHz - 26 GHz | Miteq | 619368 | | |
| 2.17 | TT 1.5 WI | Turn Table | Maturo GmbH | - | | |
| 2.18 | HL 562 Ultralog | Log.-per. Antenna | Rohde & Schwarz | 100609 | 2016-04 | 2019-04 |
| 2.19 | 3160-10 | Standard Gain / Pyramidal Horn Antenna 40 GHz | EMCO Elektronik GmbH | 00086675 | | |
| 2.20 | 5HC3500/18000-1.2-KK | High Pass Filter | Trilithic | 200035008 | | |
| 2.21 | HFH2-Z2 | Loop Antenna | Rohde & Schwarz | 829324/006 | 2014-11 | 2017-11 |
| 2.22 | Opus10 THI (8152.00) | ThermoHygro Datalogger 12 (Environ) | Lufft Mess- und Regeltechnik GmbH | 12482 | 2017-03 | 2019-03 |
| 2.23 | ESR 7 | EMI Receiver / Spectrum Analyzer | Rohde & Schwarz | 101424 | 2016-11 | 2018-11 |
| 2.24 | JS4-00101800-35-5P | Broadband Amplifier 30 MHz - 18 GHz | Miteq | 896037 | | |
| 2.25 | AS 620 P | Antenna mast | HD GmbH | 620/37 | | |
| 2.26 | Tilt device Maturo (Rohacell) | Antrieb TD1.5-10kg | Maturo GmbH | TD1.5-10kg/024/3790709 | | |
| 2.27 | ESIB 26 | Spectrum Analyzer | Rohde & Schwarz | 830482/004 | 2015-12 | 2017-12 |
| 2.28 | PAS 2.5 - 10 kg | Antenna Mast | Maturo GmbH | - | | |
| 2.29 | AM 4.0 | Antenna mast | Maturo GmbH | AM4.0/180/11920513 | | |
| 2.30 | HF 907 | Double-ridged horn | Rohde & Schwarz | 102444 | 2015-05 | 2018-05 |

The calibration interval is the time interval between "Last Calibration" and "Calibration Due"

6 ANTENNA FACTORS, CABLE LOSS AND SAMPLE CALCULATIONS

This chapter contains the antenna factors with their corresponding path loss of the used measurement path for all antennas as well as the insertion loss of the LISN.

6.1 LISN R&S ESH3-Z5 (150 KHZ – 30 MHZ)

| Frequency | | Corr. | LISN insertion loss ESH3-Z5 | cable loss (incl. 10 dB attenuator) |
|-----------|--|-------|-----------------------------|-------------------------------------|
| MHz | | dB | dB | dB |
| 0.15 | | 10.1 | 0.1 | 10.0 |
| 5 | | 10.3 | 0.1 | 10.2 |
| 7 | | 10.5 | 0.2 | 10.3 |
| 10 | | 10.5 | 0.2 | 10.3 |
| 12 | | 10.7 | 0.3 | 10.4 |
| 14 | | 10.7 | 0.3 | 10.4 |
| 16 | | 10.8 | 0.4 | 10.4 |
| 18 | | 10.9 | 0.4 | 10.5 |
| 20 | | 10.9 | 0.4 | 10.5 |
| 22 | | 11.1 | 0.5 | 10.6 |
| 24 | | 11.1 | 0.5 | 10.6 |
| 26 | | 11.2 | 0.5 | 10.7 |
| 28 | | 11.2 | 0.5 | 10.7 |
| 30 | | 11.3 | 0.5 | 10.8 |

Sample calculation

$U_{LISN} \text{ (dB } \mu\text{V)} = U \text{ (dB } \mu\text{V)} + \text{Corr. (dB)}$
 U = Receiver reading
 LISN Insertion loss = Voltage Division Factor of LISN
 Corr. = sum of single correction factors of used LISN, cables, switch units (if used)
 Linear interpolation will be used for frequencies in between the values in the table.

6.2 ANTENNA R&S HFH2-Z2 (9 KHZ – 30 MHZ)

| Frequency MHz | AF HFH-Z2) dB (1/m) | Corr. dB | cable loss 1 (inside chamber) dB | cable loss 2 (outside chamber) dB | cable loss 3 (switch unit) dB | cable loss 4 (to receiver) dB | distance corr. (-40 dB/ decade) dB | d _{Limit} (meas. distance (limit) m | d _{used} (meas. distance (used) m |
|------------------|---------------------------|-------------|--|---|---|---|--|--|--|
| 0.009 | 20.50 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.01 | 20.45 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.015 | 20.37 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.02 | 20.36 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.025 | 20.38 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.03 | 20.32 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.05 | 20.35 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.08 | 20.30 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.1 | 20.20 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.2 | 20.17 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.3 | 20.14 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.49 | 20.12 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.490001 | 20.12 | -39.6 | 0.1 | 0.1 | 0.1 | 0.1 | -40 | 30 | 3 |
| 0.5 | 20.11 | -39.6 | 0.1 | 0.1 | 0.1 | 0.1 | -40 | 30 | 3 |
| 0.8 | 20.10 | -39.6 | 0.1 | 0.1 | 0.1 | 0.1 | -40 | 30 | 3 |
| 1 | 20.09 | -39.6 | 0.1 | 0.1 | 0.1 | 0.1 | -40 | 30 | 3 |
| 2 | 20.08 | -39.6 | 0.1 | 0.1 | 0.1 | 0.1 | -40 | 30 | 3 |
| 3 | 20.06 | -39.6 | 0.1 | 0.1 | 0.1 | 0.1 | -40 | 30 | 3 |
| 4 | 20.05 | -39.5 | 0.2 | 0.1 | 0.1 | 0.1 | -40 | 30 | 3 |
| 5 | 20.05 | -39.5 | 0.2 | 0.1 | 0.1 | 0.1 | -40 | 30 | 3 |
| 6 | 20.02 | -39.5 | 0.2 | 0.1 | 0.1 | 0.1 | -40 | 30 | 3 |
| 8 | 19.95 | -39.5 | 0.2 | 0.1 | 0.1 | 0.1 | -40 | 30 | 3 |
| 10 | 19.83 | -39.4 | 0.2 | 0.1 | 0.2 | 0.1 | -40 | 30 | 3 |
| 12 | 19.71 | -39.4 | 0.2 | 0.1 | 0.2 | 0.1 | -40 | 30 | 3 |
| 14 | 19.54 | -39.4 | 0.2 | 0.1 | 0.2 | 0.1 | -40 | 30 | 3 |
| 16 | 19.53 | -39.3 | 0.3 | 0.1 | 0.2 | 0.1 | -40 | 30 | 3 |
| 18 | 19.50 | -39.3 | 0.3 | 0.1 | 0.2 | 0.1 | -40 | 30 | 3 |
| 20 | 19.57 | -39.3 | 0.3 | 0.1 | 0.2 | 0.1 | -40 | 30 | 3 |
| 22 | 19.61 | -39.3 | 0.3 | 0.1 | 0.2 | 0.1 | -40 | 30 | 3 |
| 24 | 19.61 | -39.3 | 0.3 | 0.1 | 0.2 | 0.1 | -40 | 30 | 3 |
| 26 | 19.54 | -39.3 | 0.3 | 0.1 | 0.2 | 0.1 | -40 | 30 | 3 |
| 28 | 19.46 | -39.2 | 0.3 | 0.1 | 0.3 | 0.1 | -40 | 30 | 3 |
| 30 | 19.73 | -39.1 | 0.4 | 0.1 | 0.3 | 0.1 | -40 | 30 | 3 |

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

distance correction = $-40 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values

6.3 ANTENNA R&S HL562 (30 MHZ – 1 GHZ)

($d_{\text{Limit}} = 3 \text{ m}$)

| Frequency | AF R&S HL562 | Corr. | cable loss 1 (inside chamber) | cable loss 2 (outside chamber) | cable loss 3 (switch unit) | cable loss 4 (to receiver) | distance corr. (-20 dB/ decade) | d_{Limit} (meas. distance (limit)) | d_{used} (meas. distance (used)) |
|-----------|--------------------|-------|--|---|-------------------------------------|-------------------------------------|--|--|--|
| MHz | dB (1/m) | dB | dB | dB | dB | dB | dB | m | m |
| 30 | 18.6 | 0.6 | 0.29 | 0.04 | 0.23 | 0.02 | 0.0 | 3 | 3 |
| 50 | 6.0 | 0.9 | 0.39 | 0.09 | 0.32 | 0.08 | 0.0 | 3 | 3 |
| 100 | 9.7 | 1.2 | 0.56 | 0.14 | 0.47 | 0.08 | 0.0 | 3 | 3 |
| 150 | 7.9 | 1.6 | 0.73 | 0.20 | 0.59 | 0.12 | 0.0 | 3 | 3 |
| 200 | 7.6 | 1.9 | 0.84 | 0.21 | 0.70 | 0.11 | 0.0 | 3 | 3 |
| 250 | 9.5 | 2.1 | 0.98 | 0.24 | 0.80 | 0.13 | 0.0 | 3 | 3 |
| 300 | 11.0 | 2.3 | 1.04 | 0.26 | 0.89 | 0.15 | 0.0 | 3 | 3 |
| 350 | 12.4 | 2.6 | 1.18 | 0.31 | 0.96 | 0.13 | 0.0 | 3 | 3 |
| 400 | 13.6 | 2.9 | 1.28 | 0.35 | 1.03 | 0.19 | 0.0 | 3 | 3 |
| 450 | 14.7 | 3.1 | 1.39 | 0.38 | 1.11 | 0.22 | 0.0 | 3 | 3 |
| 500 | 15.6 | 3.2 | 1.44 | 0.39 | 1.20 | 0.19 | 0.0 | 3 | 3 |
| 550 | 16.3 | 3.5 | 1.55 | 0.46 | 1.24 | 0.23 | 0.0 | 3 | 3 |
| 600 | 17.2 | 3.5 | 1.59 | 0.43 | 1.29 | 0.23 | 0.0 | 3 | 3 |
| 650 | 18.1 | 3.6 | 1.67 | 0.34 | 1.35 | 0.22 | 0.0 | 3 | 3 |
| 700 | 18.5 | 3.6 | 1.67 | 0.42 | 1.41 | 0.15 | 0.0 | 3 | 3 |
| 750 | 19.1 | 4.1 | 1.87 | 0.54 | 1.46 | 0.25 | 0.0 | 3 | 3 |
| 800 | 19.6 | 4.1 | 1.90 | 0.46 | 1.51 | 0.25 | 0.0 | 3 | 3 |
| 850 | 20.1 | 4.4 | 1.99 | 0.60 | 1.56 | 0.27 | 0.0 | 3 | 3 |
| 900 | 20.8 | 4.7 | 2.14 | 0.60 | 1.63 | 0.29 | 0.0 | 3 | 3 |
| 950 | 21.1 | 4.8 | 2.22 | 0.60 | 1.66 | 0.33 | 0.0 | 3 | 3 |
| 1000 | 21.6 | 4.9 | 2.23 | 0.61 | 1.71 | 0.30 | 0.0 | 3 | 3 |

($d_{\text{Limit}} = 10 \text{ m}$)

| | | | | | | | | | |
|------|------|------|------|------|------|------|-------|----|---|
| 30 | 18.6 | -9.9 | 0.29 | 0.04 | 0.23 | 0.02 | -10.5 | 10 | 3 |
| 50 | 6.0 | -9.6 | 0.39 | 0.09 | 0.32 | 0.08 | -10.5 | 10 | 3 |
| 100 | 9.7 | -9.2 | 0.56 | 0.14 | 0.47 | 0.08 | -10.5 | 10 | 3 |
| 150 | 7.9 | -8.8 | 0.73 | 0.20 | 0.59 | 0.12 | -10.5 | 10 | 3 |
| 200 | 7.6 | -8.6 | 0.84 | 0.21 | 0.70 | 0.11 | -10.5 | 10 | 3 |
| 250 | 9.5 | -8.3 | 0.98 | 0.24 | 0.80 | 0.13 | -10.5 | 10 | 3 |
| 300 | 11.0 | -8.1 | 1.04 | 0.26 | 0.89 | 0.15 | -10.5 | 10 | 3 |
| 350 | 12.4 | -7.9 | 1.18 | 0.31 | 0.96 | 0.13 | -10.5 | 10 | 3 |
| 400 | 13.6 | -7.6 | 1.28 | 0.35 | 1.03 | 0.19 | -10.5 | 10 | 3 |
| 450 | 14.7 | -7.4 | 1.39 | 0.38 | 1.11 | 0.22 | -10.5 | 10 | 3 |
| 500 | 15.6 | -7.2 | 1.44 | 0.39 | 1.20 | 0.19 | -10.5 | 10 | 3 |
| 550 | 16.3 | -7.0 | 1.55 | 0.46 | 1.24 | 0.23 | -10.5 | 10 | 3 |
| 600 | 17.2 | -6.9 | 1.59 | 0.43 | 1.29 | 0.23 | -10.5 | 10 | 3 |
| 650 | 18.1 | -6.9 | 1.67 | 0.34 | 1.35 | 0.22 | -10.5 | 10 | 3 |
| 700 | 18.5 | -6.8 | 1.67 | 0.42 | 1.41 | 0.15 | -10.5 | 10 | 3 |
| 750 | 19.1 | -6.3 | 1.87 | 0.54 | 1.46 | 0.25 | -10.5 | 10 | 3 |
| 800 | 19.6 | -6.3 | 1.90 | 0.46 | 1.51 | 0.25 | -10.5 | 10 | 3 |
| 850 | 20.1 | -6.0 | 1.99 | 0.60 | 1.56 | 0.27 | -10.5 | 10 | 3 |
| 900 | 20.8 | -5.8 | 2.14 | 0.60 | 1.63 | 0.29 | -10.5 | 10 | 3 |
| 950 | 21.1 | -5.6 | 2.22 | 0.60 | 1.66 | 0.33 | -10.5 | 10 | 3 |
| 1000 | 21.6 | -5.6 | 2.23 | 0.61 | 1.71 | 0.30 | -10.5 | 10 | 3 |

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$
 U = Receiver reading
 AF = Antenna factor
 $Corr.$ = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)
 $\text{distance correction} = -20 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$
 Linear interpolation will be used for frequencies in between the values in the table.
 Tables show an extract of values.

6.4 ANTENNA R&S HF907 (1 GHZ – 18 GHZ)

| Frequency | AF R&S HF907 | Corr. |
|-----------|--------------------|-------|
| MHz | dB (1/m) | dB |
| 1000 | 24.4 | -19.4 |
| 2000 | 28.5 | -17.4 |
| 3000 | 31.0 | -16.1 |
| 4000 | 33.1 | -14.7 |
| 5000 | 34.4 | -13.7 |
| 6000 | 34.7 | -12.7 |
| 7000 | 35.6 | -11.0 |

| cable loss 1 (relay + cable inside chamber) | cable loss 2 (outside chamber) | cable loss 3 (switch unit, atten- uator & pre-amp) | cable loss 4 (to receiver) | | |
|--|---|--|----------------------------------|--|--|
| dB | dB | dB | dB | | |
| 0.99 | 0.31 | -21.51 | 0.79 | | |
| 1.44 | 0.44 | -20.63 | 1.38 | | |
| 1.87 | 0.53 | -19.85 | 1.33 | | |
| 2.41 | 0.67 | -19.13 | 1.31 | | |
| 2.78 | 0.86 | -18.71 | 1.40 | | |
| 2.74 | 0.90 | -17.83 | 1.47 | | |
| 2.82 | 0.86 | -16.19 | 1.46 | | |

| Frequency | AF R&S HF907 | Corr. |
|-----------|--------------------|-------|
| MHz | dB (1/m) | dB |
| 3000 | 31.0 | -23.4 |
| 4000 | 33.1 | -23.3 |
| 5000 | 34.4 | -21.7 |
| 6000 | 34.7 | -21.2 |
| 7000 | 35.6 | -19.8 |

| cable loss 1 (relay inside chamber) | cable loss 2 (inside chamber) | cable loss 3 (outside chamber) | cable loss 4 (switch unit, atten- uator & pre-amp) | cable loss 5 (to receiver) | used for FCC 15.247 |
|---|--|---|--|----------------------------------|------------------------------|
| dB | dB | dB | dB | dB | |
| 0.47 | 1.87 | 0.53 | -27.58 | 1.33 | |
| 0.56 | 2.41 | 0.67 | -28.23 | 1.31 | |
| 0.61 | 2.78 | 0.86 | -27.35 | 1.40 | |
| 0.58 | 2.74 | 0.90 | -26.89 | 1.47 | |
| 0.66 | 2.82 | 0.86 | -25.58 | 1.46 | |

| Frequency | AF R&S HF907 | Corr. |
|-----------|--------------------|-------|
| MHz | dB (1/m) | dB |
| 7000 | 35.6 | -57.3 |
| 8000 | 36.3 | -56.3 |
| 9000 | 37.1 | -55.3 |
| 10000 | 37.5 | -56.2 |
| 11000 | 37.5 | -55.3 |
| 12000 | 37.6 | -53.7 |
| 13000 | 38.2 | -53.5 |
| 14000 | 39.9 | -56.3 |
| 15000 | 40.9 | -54.1 |
| 16000 | 41.3 | -54.1 |
| 17000 | 42.8 | -54.4 |
| 18000 | 44.2 | -54.7 |

| cable loss 1 (relay inside chamber) | cable loss 2 (High Pass) | cable loss 3 (pre- amp) | cable loss 4 (inside chamber) | cable loss 5 (outside chamber) | cable loss 6 (to receiver) |
|---|-----------------------------------|----------------------------------|--|---|-------------------------------------|
| dB | dB | dB | dB | dB | dB |
| 0.56 | 1.28 | -62.72 | 2.66 | 0.94 | 1.46 |
| 0.69 | 0.71 | -61.49 | 2.84 | 1.00 | 1.53 |
| 0.68 | 0.65 | -60.80 | 3.06 | 1.09 | 1.60 |
| 0.70 | 0.54 | -61.91 | 3.28 | 1.20 | 1.67 |
| 0.80 | 0.61 | -61.40 | 3.43 | 1.27 | 1.70 |
| 0.84 | 0.42 | -59.70 | 3.53 | 1.26 | 1.73 |
| 0.83 | 0.44 | -59.81 | 3.75 | 1.32 | 1.83 |
| 0.91 | 0.53 | -63.03 | 3.91 | 1.40 | 1.77 |
| 0.98 | 0.54 | -61.05 | 4.02 | 1.44 | 1.83 |
| 1.23 | 0.49 | -61.51 | 4.17 | 1.51 | 1.85 |
| 1.36 | 0.76 | -62.36 | 4.34 | 1.53 | 2.00 |
| 1.70 | 0.53 | -62.88 | 4.41 | 1.55 | 1.91 |

Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

Tables show an extract of values.

6.5 ANTENNA EMCO 3160-09 (18 GHZ – 26.5 GHZ)

| Frequency | AF EMCO 3160-09 | Corr. | cable loss 1 (inside chamber) | cable loss 2 (pre- amp) | cable loss 3 (inside chamber) | cable loss 4 (switch unit) | cable loss 5 (to receiver) |
|-----------|-----------------------|-------|--|----------------------------------|--|-------------------------------------|-------------------------------------|
| MHz | dB (1/m) | dB | dB | dB | dB | dB | dB |
| 18000 | 40.2 | -23.5 | 0.72 | -35.85 | 6.20 | 2.81 | 2.65 |
| 18500 | 40.2 | -23.2 | 0.69 | -35.71 | 6.46 | 2.76 | 2.59 |
| 19000 | 40.2 | -22.0 | 0.76 | -35.44 | 6.69 | 3.15 | 2.79 |
| 19500 | 40.3 | -21.3 | 0.74 | -35.07 | 7.04 | 3.11 | 2.91 |
| 20000 | 40.3 | -20.3 | 0.72 | -34.49 | 7.30 | 3.07 | 3.05 |
| 20500 | 40.3 | -19.9 | 0.78 | -34.46 | 7.48 | 3.12 | 3.15 |
| 21000 | 40.3 | -19.1 | 0.87 | -34.07 | 7.61 | 3.20 | 3.33 |
| 21500 | 40.3 | -19.1 | 0.90 | -33.96 | 7.47 | 3.28 | 3.19 |
| 22000 | 40.3 | -18.7 | 0.89 | -33.57 | 7.34 | 3.35 | 3.28 |
| 22500 | 40.4 | -19.0 | 0.87 | -33.66 | 7.06 | 3.75 | 2.94 |
| 23000 | 40.4 | -19.5 | 0.88 | -33.75 | 6.92 | 3.77 | 2.70 |
| 23500 | 40.4 | -19.3 | 0.90 | -33.35 | 6.99 | 3.52 | 2.66 |
| 24000 | 40.4 | -19.8 | 0.88 | -33.99 | 6.88 | 3.88 | 2.58 |
| 24500 | 40.4 | -19.5 | 0.91 | -33.89 | 7.01 | 3.93 | 2.51 |
| 25000 | 40.4 | -19.3 | 0.88 | -33.00 | 6.72 | 3.96 | 2.14 |
| 25500 | 40.5 | -20.4 | 0.89 | -34.07 | 6.90 | 3.66 | 2.22 |
| 26000 | 40.5 | -21.3 | 0.86 | -35.11 | 7.02 | 3.69 | 2.28 |
| 26500 | 40.5 | -21.1 | 0.90 | -35.20 | 7.15 | 3.91 | 2.36 |

Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values.

6.6 ANTENNA EMCO 3160-10 (26.5 GHZ – 40 GHZ)

| Frequency | AF EMCO 3160-10 | Corr. | cable loss 1 (inside chamber) | cable loss 2 (outside chamber) | cable loss 3 (switch unit) | cable loss 4 (to receiver) | distance corr. (-20 dB/ decade) | d _{Limit} (meas. distance (limit)) | d _{used} (meas. distance (used)) |
|-----------|-----------------------|-------|--|---|-------------------------------------|-------------------------------------|--|--|--|
| GHz | dB (1/m) | dB | dB | dB | dB | dB | dB | m | m |
| 26.5 | 43.4 | -11.2 | 4.4 | | | | -15.6 | 3 | 0.5 |
| 27.0 | 43.4 | -11.2 | 4.4 | | | | -15.6 | 3 | 0.5 |
| 28.0 | 43.4 | -11.1 | 4.5 | | | | -15.6 | 3 | 0.5 |
| 29.0 | 43.5 | -11.0 | 4.6 | | | | -15.6 | 3 | 0.5 |
| 30.0 | 43.5 | -10.9 | 4.7 | | | | -15.6 | 3 | 0.5 |
| 31.0 | 43.5 | -10.8 | 4.7 | | | | -15.6 | 3 | 0.5 |
| 32.0 | 43.5 | -10.7 | 4.8 | | | | -15.6 | 3 | 0.5 |
| 33.0 | 43.6 | -10.7 | 4.9 | | | | -15.6 | 3 | 0.5 |
| 34.0 | 43.6 | -10.6 | 5.0 | | | | -15.6 | 3 | 0.5 |
| 35.0 | 43.6 | -10.5 | 5.1 | | | | -15.6 | 3 | 0.5 |
| 36.0 | 43.6 | -10.4 | 5.1 | | | | -15.6 | 3 | 0.5 |
| 37.0 | 43.7 | -10.3 | 5.2 | | | | -15.6 | 3 | 0.5 |
| 38.0 | 43.7 | -10.2 | 5.3 | | | | -15.6 | 3 | 0.5 |
| 39.0 | 43.7 | -10.2 | 5.4 | | | | -15.6 | 3 | 0.5 |
| 40.0 | 43.8 | -10.1 | 5.5 | | | | -15.6 | 3 | 0.5 |

Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + \text{Corr. (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.


distance correction = $-20 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values.


7 SETUP DRAWINGS

Setup Drawings

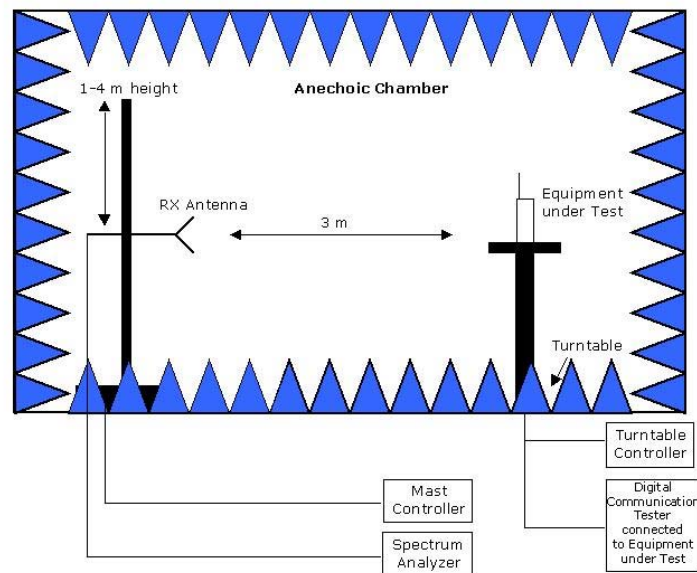

Remark: Depending on the frequency range suitable antenna types, attenuators or preamplifiers are used.

Setup in the Anechoic chamber. For measurements below 1 GHz the ground was replaced by a conducting ground plane.

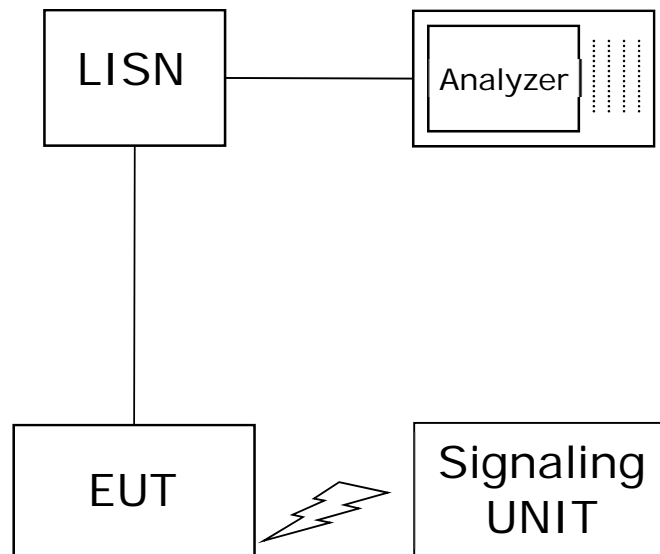

Setup in the shielded room for conducted measurements at AC mains port

8 MEASUREMENT UNCERTAINTIES

| Test Case | Parameter | Uncertainty |
|---------------------------------|----------------|--------------|
| Conducted Emissions at AC mains | Voltage | ± 3.4 dB |
| Radiated Emissions | Field Strength | ± 5.5 dB |

9 PHOTO REPORT

Please see separate photo report.