



## CEILING LAMP

### NB-TF014 User Manual

#### SAFETY INSTRUCTIONS

1. Prior to installation and maintenance of the lamps, please carefully review the assembly instructions. Keep these instructions safe for future reference.
2. The power supply used should not exceed the rated voltage (AC100-240V, 50/60HZ) for prolonged periods as it may cause overheating and damage to the lamp.
3. Before use, ensure that the cable and switch are in good condition and the local voltage aligns with the lamp's voltage requirement.
4. Always turn off the power before installing the lamp.
5. Avoid installing the lamp near high-temperature objects, such as stoves, gas burners, exhaust cylinders, etc., as these can damage the lamp.
6. Please refrain from modifying the lamps as it may lead to malfunction.
7. Regular cleaning and inspection are necessary. Ensure the power is off before cleaning. Use a dry cloth to clean the surface and avoid using acidic or alkaline chemical solvents, which can cause severe damage to the surface.

#### Specifications

Operate Voltage	AC 100-240V
LED Output Power	25-36W
Motor Rated Power	<25W
Wind Speed	1-6 Levels
Remote Distance	8-20 meters

#### MOUNTING THE BRACKET


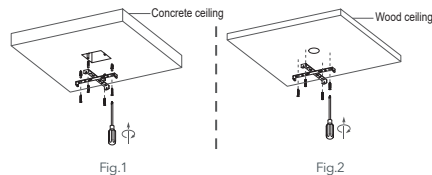


Fig.3

- (1) For a concrete ceiling:  
Drill two holes of appropriate depth using an 8mm drill bit. Insert two expansion screws into these holes. Next, fix the hanger bracket to the expansion screws using wood screws and secure it by tightening the nuts of the expansion screws. (See Fig.2)
- (2) For a wood ceiling:  
Fix the mounting bracket directly to the wood ceiling (with a minimum thickness of 7 cm) using four wood screws. (See Fig.3)

#### MOUNTING THE LAMP

- Step 1: Start by disassembling the lamp's hanging plate. Use this as a template to measure and locate the hole positions on the ceiling. Drill holes at the marked locations and use mesons to secure the hanging plate. If your ceiling is wooden rather than concrete, you can directly use self-tapping screws to fasten the cross-hanging panels.
- Step 2: Attach the fan light's safety buckle to the wire rope ring of the cross-hanging plate.
- Step 3: Connect the lamp wire to the power cable, starting with the ground wire, followed by the neutral and live wires. Check if the main line of the lamp body is working normally by connecting it to a 110V power supply. It's recommended that a professional electrician perform the lamp installation.
- Step 4: Install the lamp hub on the hanging plate, aligning with the pre-drilled holes. Please ensure that the lamp body and ceiling are securely connected.

#### REMOTE CONTROLLER


##### Remote Control Matching Code:

When powered on, press and hold the light switch button for a while (within 5s) to turn the light on, when you hear a beep or a light flashes, the code match is successful.

If you need to match the code a second time, wait for 30 seconds, power on, and repeat the above operation.

##### Warning Sign:


If the remote controller is not functioning effectively, please check the battery. If the remote is not in use for a long period, it's recommended to remove the battery.

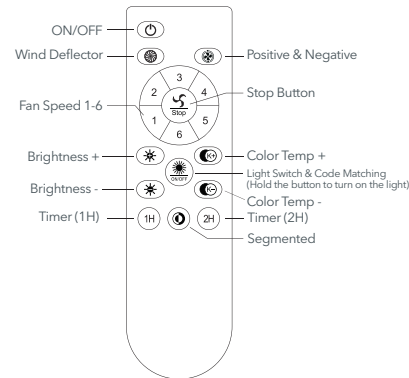

##### CAUTION!


The electronic switch is not an isolated product and needs to be operated by professional personnel during installation.


The electronic switch is triggered by the remote control, and the wireless frequency of the remote control transmitter is 2.4GHz.










## APP CONTROL



- ① Scan the QR code and download the APP.
- ② Open the APP, select a room, click , select "Ceiling Fan", enter a name for the fan, then click "OK".

1. Power on the device.
2. Within 5 seconds after powering on the device, press the "" button on the device.
3. Observe if the device flashes or beeps. If the device flashes or beeps, it indicates successful pairing between the device and your phone.
4. If not, please try the above steps again.
5. Now, control the device through the application on your phone.

## Menu

-  Language: Select a language
-  Scan (scan the other party's QR code to share device control)
-  My QR Code (you can share it with the other party)
-  Room Management (room name can be added)
-  Instructions (choose the second interface ceiling fan for instructions of symbols)
-  Check for Updates
-  Feedback

## Button Descriptions

-  Code Matching Button
-  Turn off the device at a preset time.
-  The fan blows wind like nature does.
-  Sleep mode
-  Oscillation
-  Change the direction of the wind.
-  The fan blows wind forward.
-  White and yellow light, 10% brightness
-  White and yellow light, max brightness
-  Yellow light, max brightness
-  White light, max brightness

## CLEANING AND MAINTENANCE

1. Before cleaning the ceiling fan, please disconnect the power supply. Use a damp soft cloth to wipe it clean, followed by a dry cloth. Avoid using cleaning agents, as they may cause discoloration or damage to the unit.
2. For safe and efficient use of this product, please ensure regular maintenance, including cleaning and inspection at least twice a year.

## FCC STATEMENT:

**Warning:** Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**NOTE:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device must not be co-located or operating in conjunction with any other antenna or transmitter.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation



## WEEE Compliance

Correct Disposal of This Product (Waste Electrical & Electronic Equipment)  
(Applicable in countries with separate collection systems)  
This marking on the product, accessories or literature indicates that the product and its electronic accessories should not be disposed of with other household waste at the end of their working life. To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate these items from other types of waste and recycle them responsibly to promote the sustainable reuse of material resources. Household users should contact either the retailer where they purchased this product, or their local government office, for details of where and how they can take these items for environmentally safe recycling. Business users should contact their supplier and check the terms and conditions of the purchase contract. This product and its electronic accessories should not be mixed with other commercial wastes for disposal.



lightlife@globlesupports.com



Manufacturer: Shenzhen Aspiren Technology Company Limited  
Address: 3rd Floor, Yiben Building, No.1063 Chaguang Road, Xili Street, Nanshan District, Shenzhen, Guangdong, China



Made in China