


Appendix B

RF power output conducted

FCC part 15.247

Peak output power conducted

EUT	Triple Band GSM GSM850 / DCS1800 / PCS 1900
Model	S100
Approval Holder	Pantech Co., Ltd.
Temperature / Voltage	25°C / Unom
Test Site / Operator	ETS
Test Specification	FCC part 15 section 247(b)
Comment 1	Peak output power
Comment 2	Channel.: 0 / 2402 MHz
Comment 3	

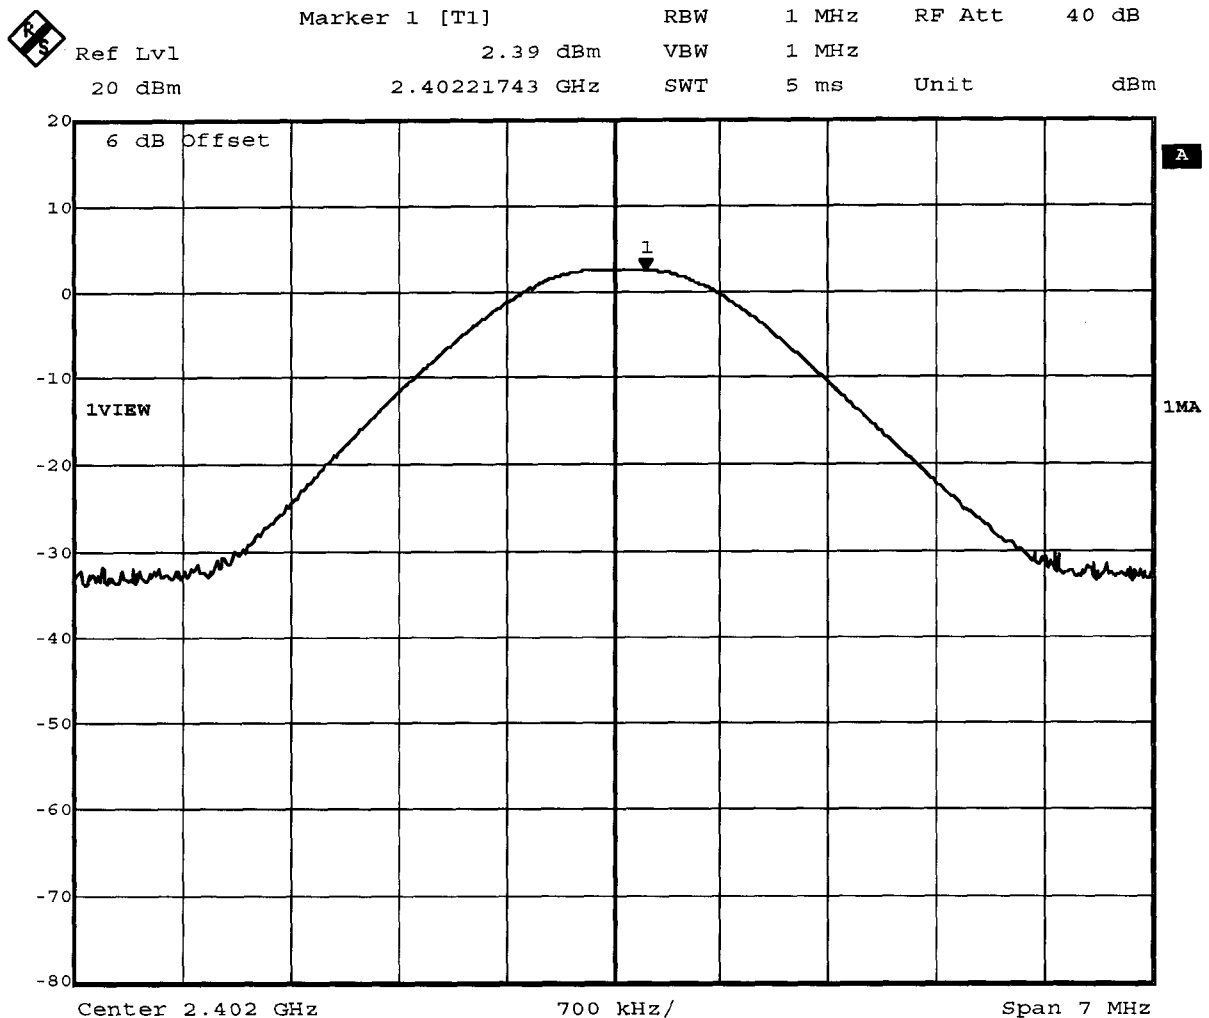

Comment A: Output power=2.39 dBm; verdict: PASS
Date: 14.NOV.2006 10:43:33

Measurement diagram


ETS Product Service AG
Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN

Page 1 of 1

FCC part 15.247

Peak output power conducted

EUT	Triple Band GSM GSM850 / DCS1800 / PCS 1900
Model	S100
Approval Holder	Pantech Co., Ltd.
Temperature / Voltage	25°C / Unom
Test Site / Operator	ETS
Test Specification	FCC part 15 section 247(b)
Comment 1	Peak output_power
Comment 2	Channel.: 39 / 2441 MHz
Comment 3	

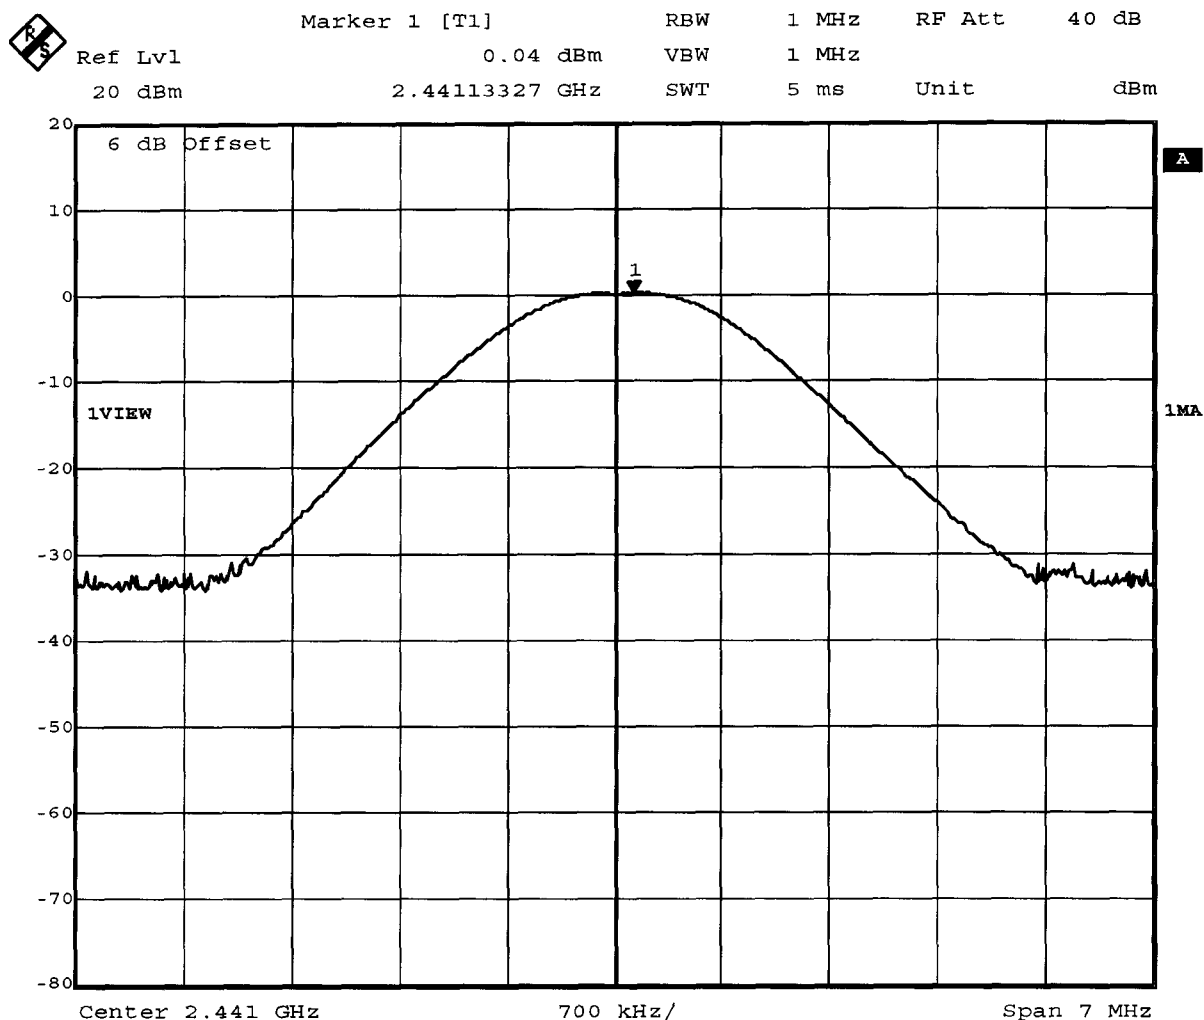

Comment A: Output power=0.04 dBm; verdict: PASS

Date: 14.NOV.2006 10:52:56

Measurement diagram


ETS Product Service AG
Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN

Page 1 of 1

FCC part 15.247

Peak output power conducted

EUT	Triple Band GSM GSM850 / DCS1800 / PCS 1900
Model	S100
Approval Holder	Pantech Co., Ltd.
Temperature / Voltage	25°C / Unom
Test Site / Operator	ETS
Test Specification	FCC part 15 section 247(b)
Comment 1	Peak output_power
Comment 2	Channel.: 78 / 2480 MHz
Comment 3	

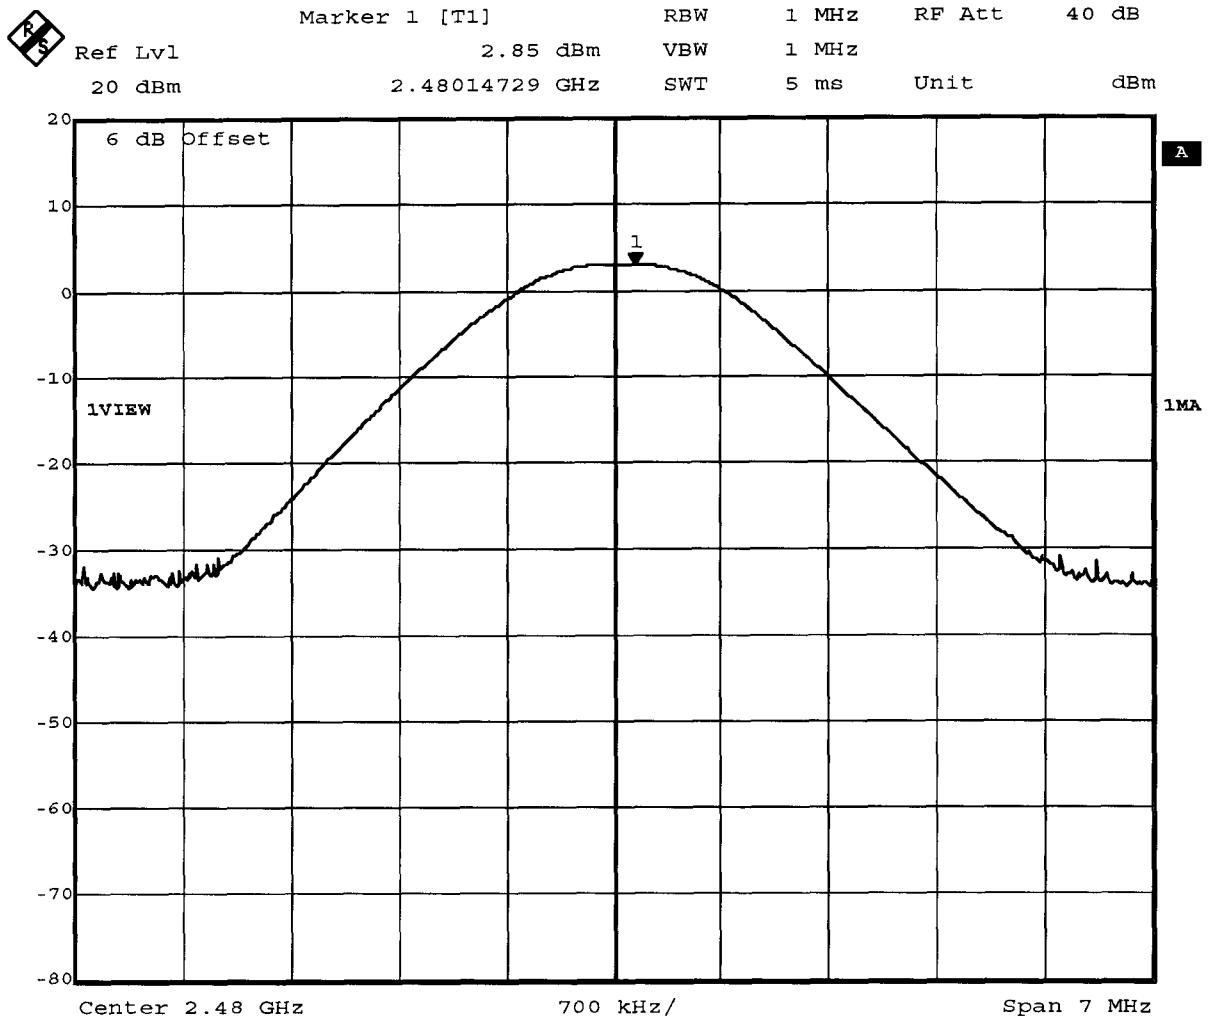

Comment A: Output power=2.85 dBm; verdict: PASS

Date: 14.NOV.2006 10:57:27

Measurement diagram


ETS Product Service AG
Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN

Page 1 of 1

FCC part 15.247

Peak output power conducted

EUT	Triple Band GSM GSM850 / DCS1800 / PCS 1900
Model	S100
Approval Holder	Pantech Co., Ltd.
Temperature / Voltage	25°C / Umin
Test Site / Operator	ETS
Test Specification	FCC part 15 section 247(b)
Comment 1	Peak output power
Comment 2	Channel.: 0 / 2402 MHz
Comment 3	

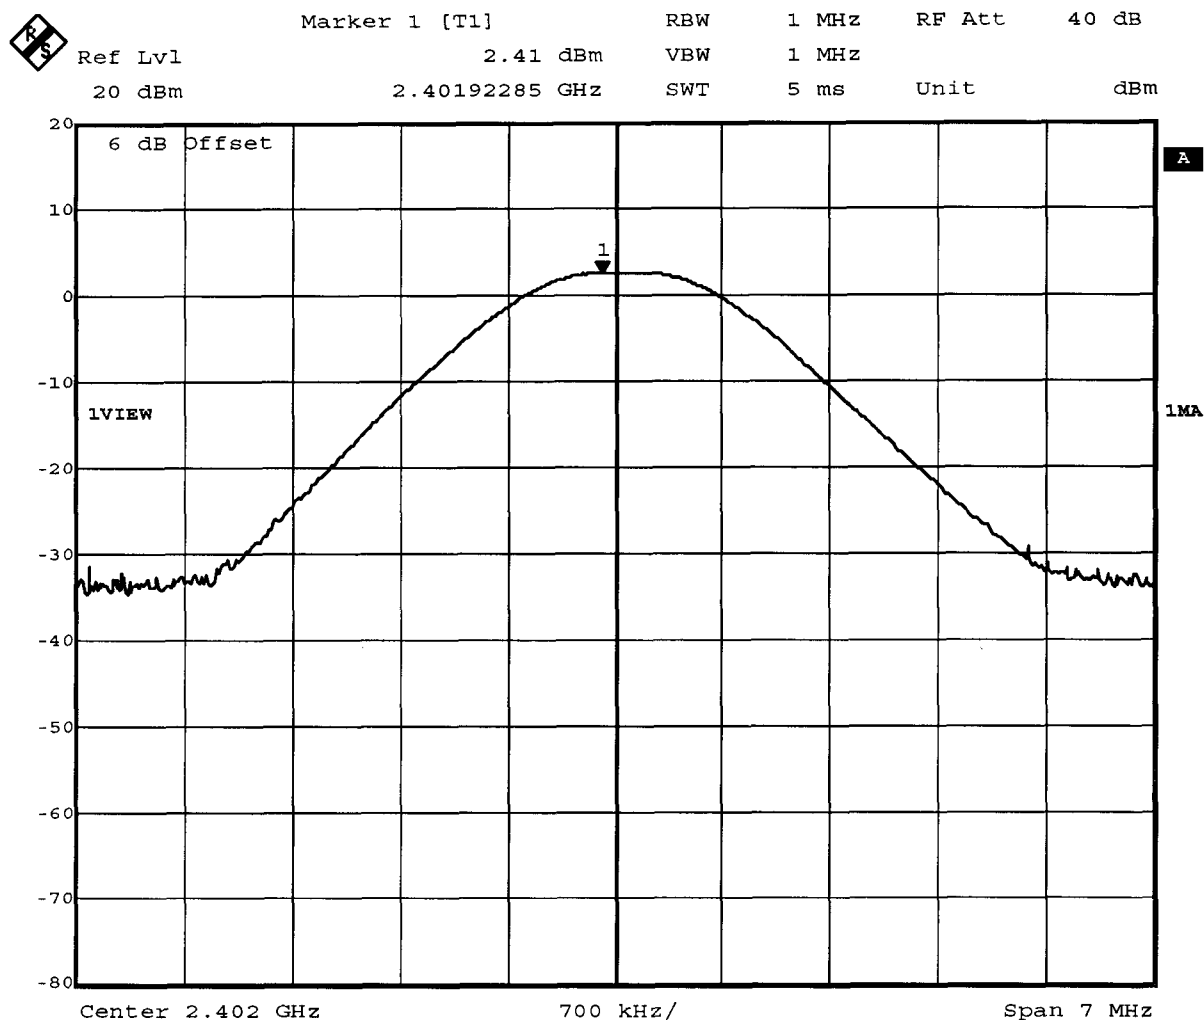

Comment A: Output power=2.41 dBm; verdict: PASS

Date: 14.NOV.2006 10:54:43


Measurement diagram

ETS Product Service AG
Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN

Page 1 of 1

FCC part 15.247**Peak output power conducted**

EUT	Triple Band GSM GSM850 / DCS1800 / PCS 1900
Model	S100
Approval Holder	Pantech Co., Ltd.
Temperature / Voltage	25°C / Umin
Test Site / Operator	ETS
Test Specification	FCC part 15 section 247(b)
Comment 1	Peak output_power
Comment 2	Channel.: 39 / 2441 MHz
Comment 3	

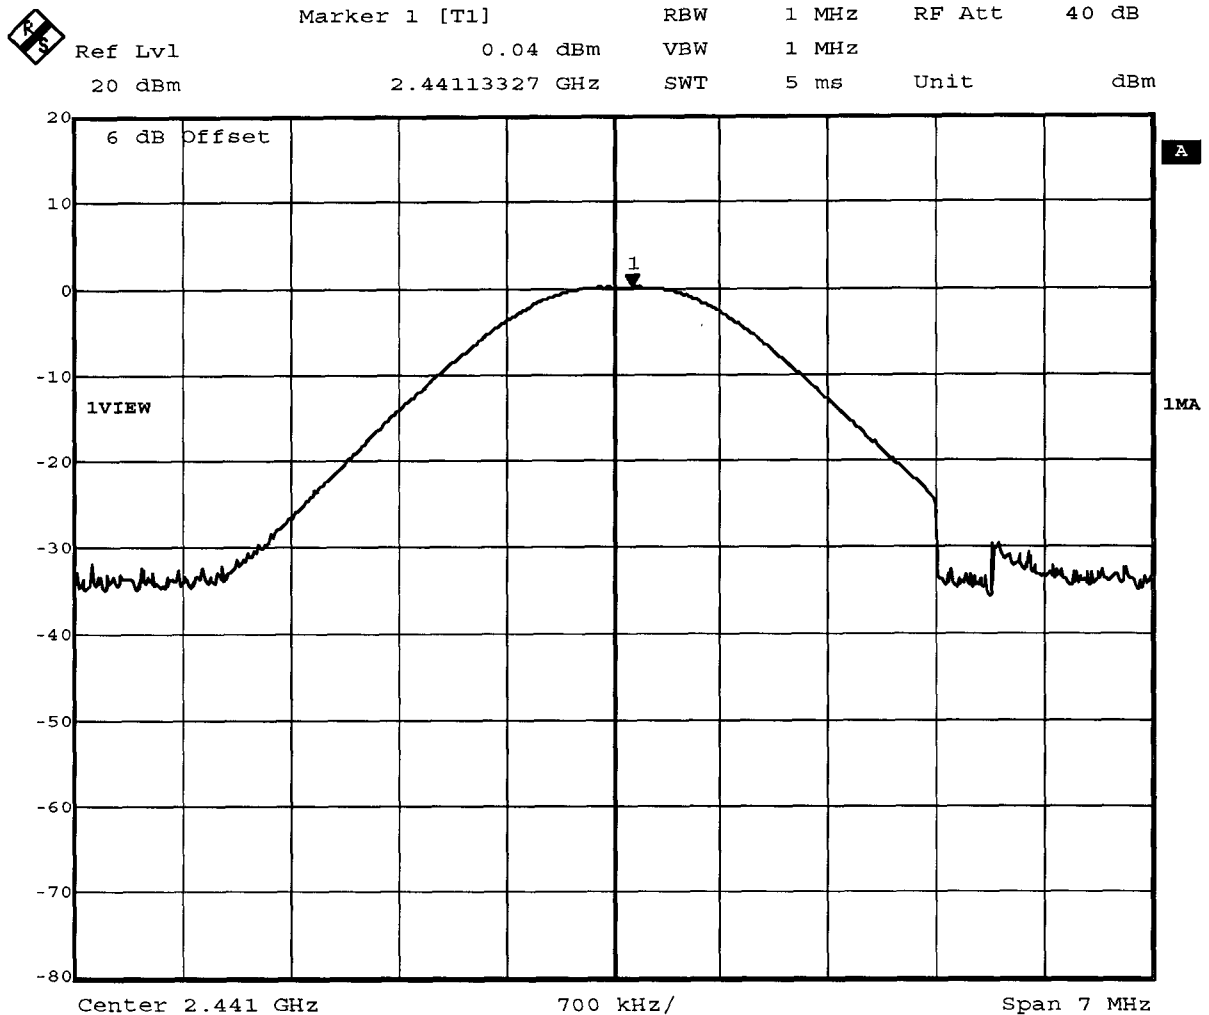

Comment A: Output power=0.04 dBm; verdict: PASS
Date: 14.NOV.2006 10:47:39

Measurement diagram


ETS Product Service AG
Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN

Page 1 of 1

FCC part 15.247

Peak output power conducted

EUT	Triple Band GSM GSM850 / DCS1800 / PCS 1900
Model	S100
Approval Holder	Pantech Co., Ltd.
Temperature / Voltage	25°C / Umin
Test Site / Operator	ETS
Test Specification	FCC part 15 section 247(b)
Comment 1	Peak output_power
Comment 2	Channel.: 78 / 2480 MHz
Comment 3	

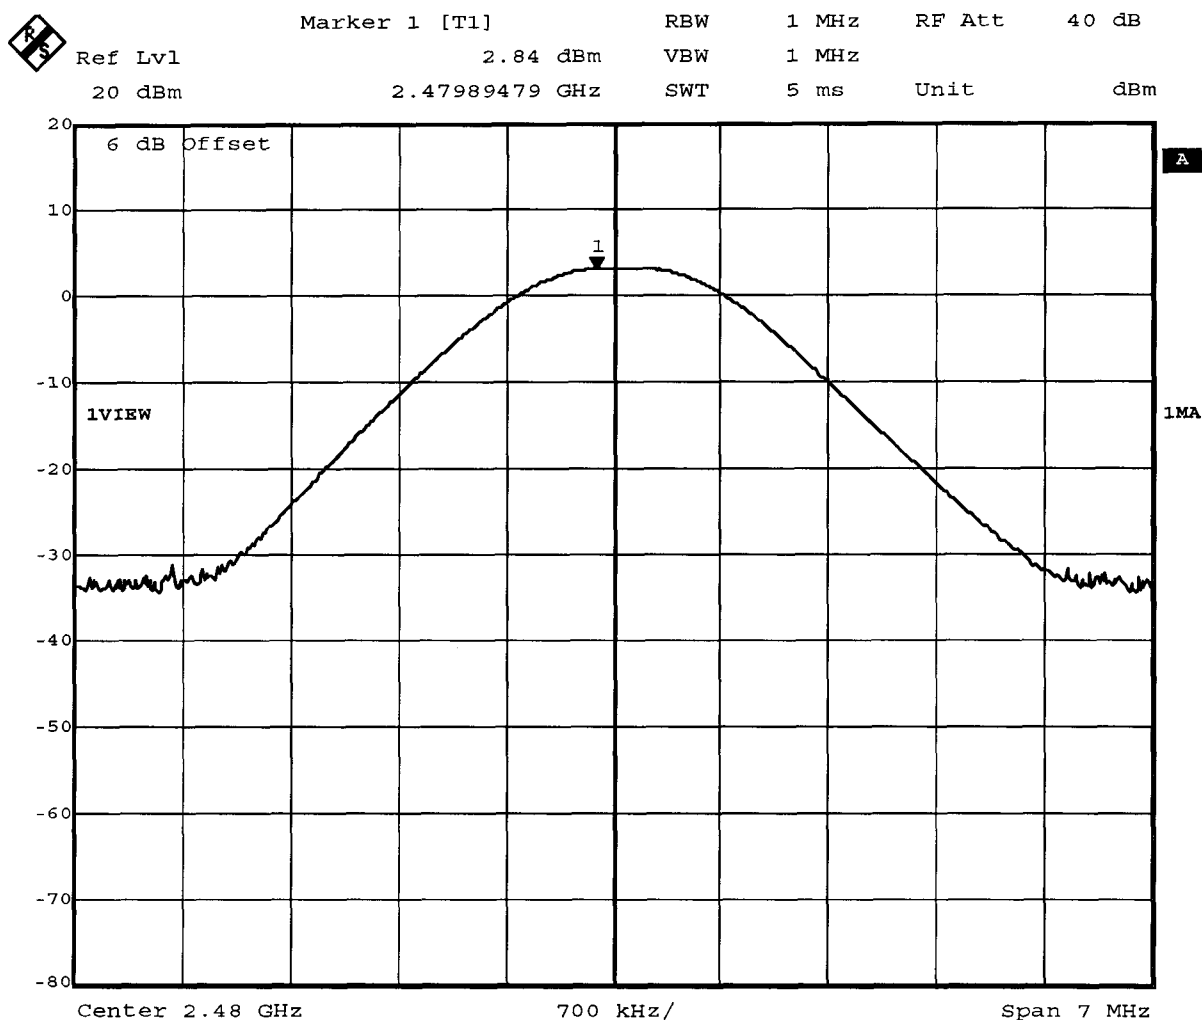

Comment A: Output power=2.84 dBm; verdict: PASS

Date: 14.NOV.2006 10:55:34

Measurement diagram


ETS Product Service AG
Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN

Page 1 of 1

FCC part 15.247

Peak output power conducted

EUT	Triple Band GSM GSM850 / DCS1800 / PCS 1900
Model	S100
Approval Holder	Pantech Co., Ltd.
Temperature / Voltage	25°C / Umax
Test Site / Operator	ETS
Test Specification	FCC part 15 section 247(b)
Comment 1	Peak output power
Comment 2	Channel.: 0 / 2402 MHz
Comment 3	

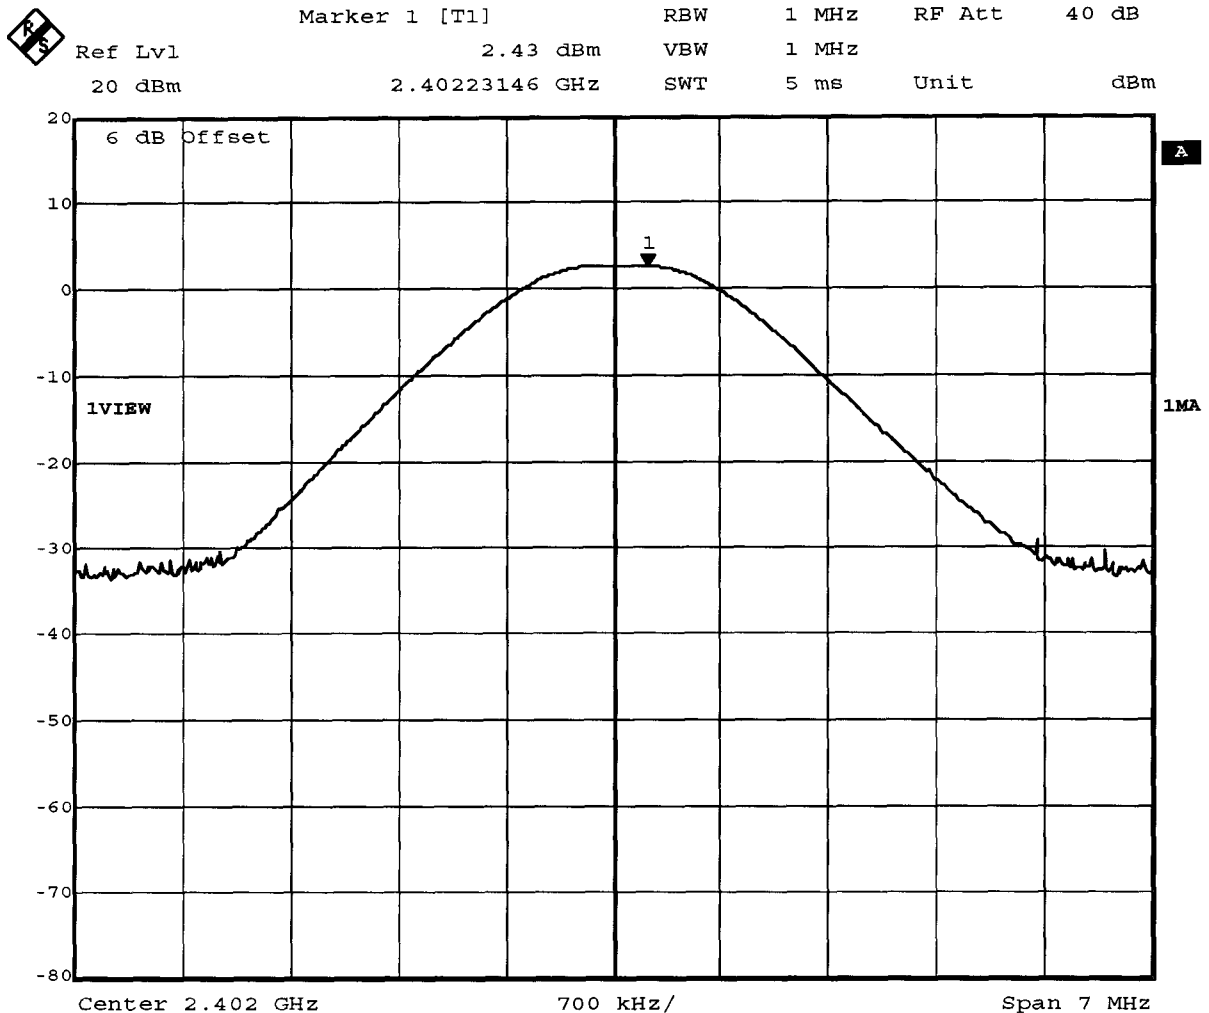

Comment A: Output power=2.43 dBm; verdict: PASS

Date: 14.NOV.2006 10:54:00


Measurement diagram

ETS Product Service AG
Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN

Page 1 of 1

FCC part 15.247**Peak output power conducted**

EUT	Triple Band GSM GSM850 / DCS1800 / PCS 1900
Model	S100
Approval Holder	Pantech Co., Ltd.
Temperature / Voltage	25°C / Umax
Test Site / Operator	ETS
Test Specification	FCC part 15 section 247(b)
Comment 1	Peak output_power
Comment 2	Channel.: 39 / 2441 MHz
Comment 3	

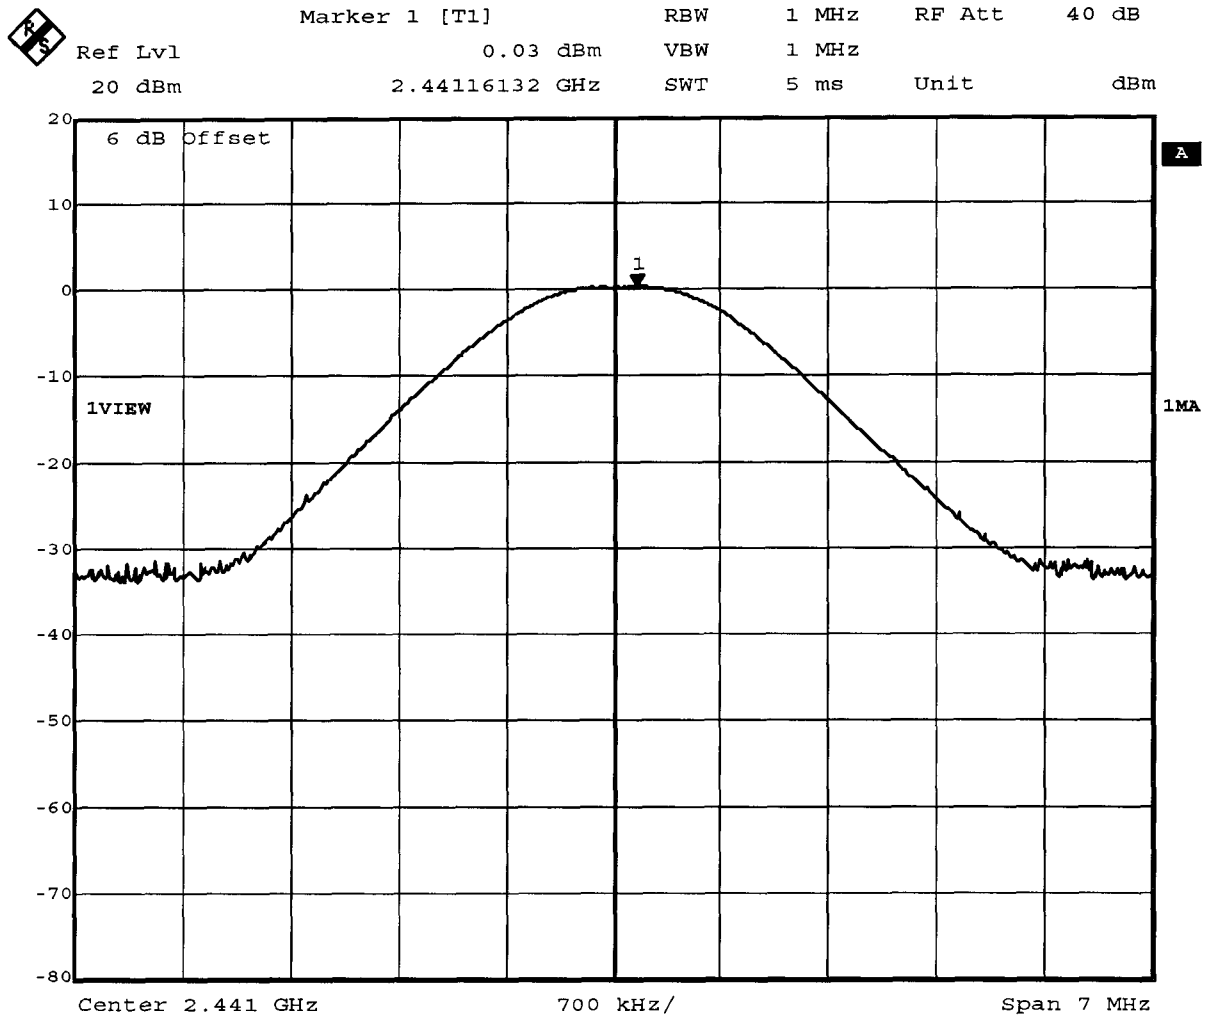

Comment A: Output power=0.03 dBm; verdict: PASS
Date: 14.NOV.2006 10:52:00

Measurement diagram


ETS Product Service AG
Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN

Page 1 of 1

FCC part 15.247

Peak output power conducted

EUT	Triple Band GSM GSM850 / DCS1800 / PCS 1900
Model	S100
Approval Holder	Pantech Co., Ltd.
Temperature / Voltage	25°C / Umax
Test Site / Operator	ETS
Test Specification	FCC part 15 section 247(b)
Comment 1	Peak output_power
Comment 2	Channel.: 78 / 2480 MHz
Comment 3	

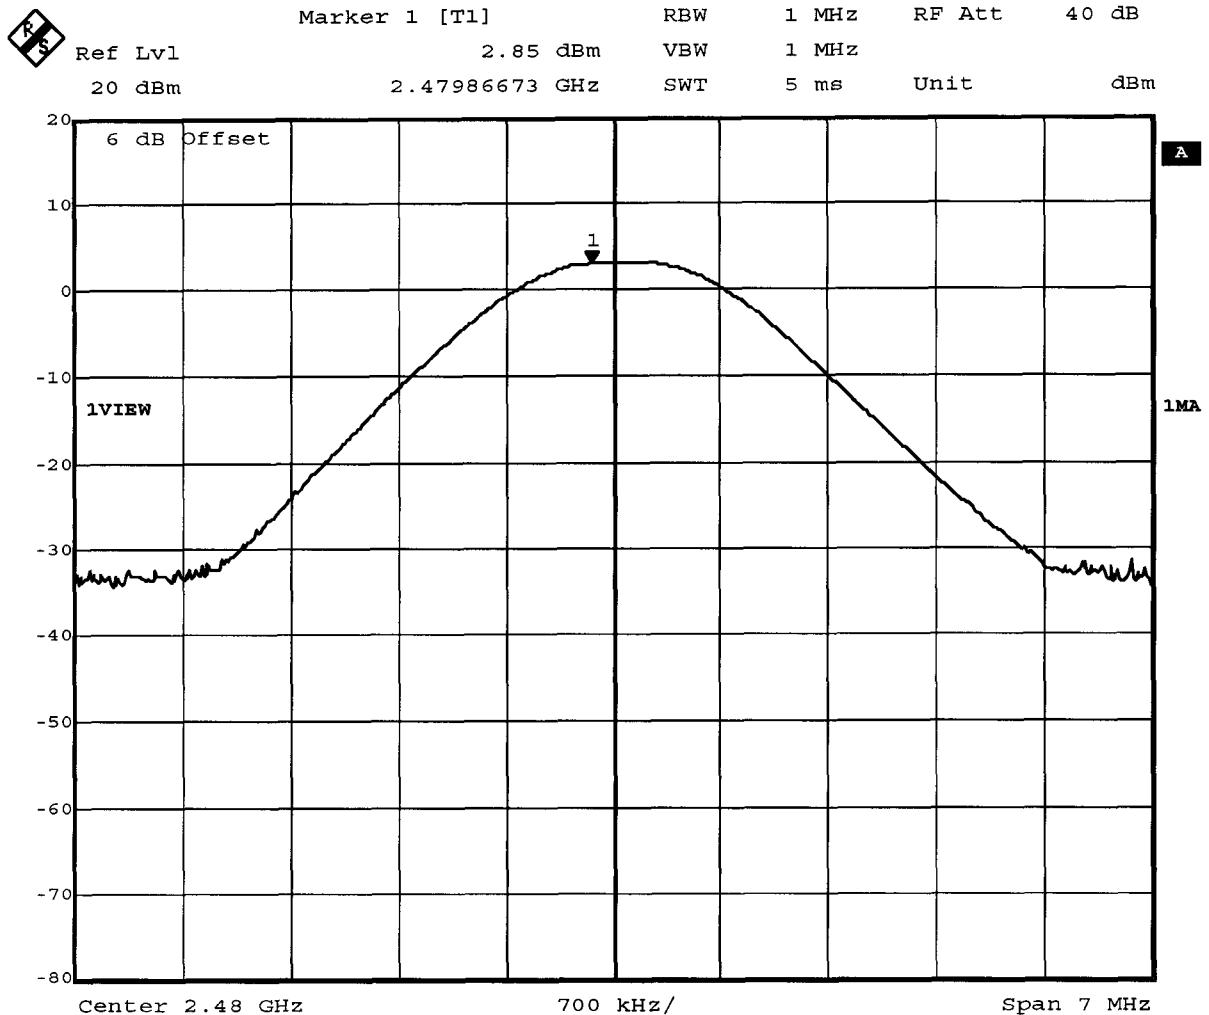

Comment A: Output power=2.85 dBm; verdict: PASS

Date: 14.NOV.2006 10:56:29

Measurement diagram

ETS Product Service AG
Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN

Page 1 of 1

Appendix C


RF power output radiated (EIRP)

Appendix D

20 dB bandwidth

FCC part 15.247
20 dB bandwidth

EUT	Triple Band GSM GSM850 / DCS1800 / PCS 1900
Model	S100
Approval Holder	Pantech Co., Ltd.
Temperature / Voltage	25°C
Test Site / Operator	ETS
Test Specification	FCC part 15 section 247(a)
Comment 1	20 dB bandwidth
Comment 2	Channel.: 0 / 2402 MHz
Comment 3	

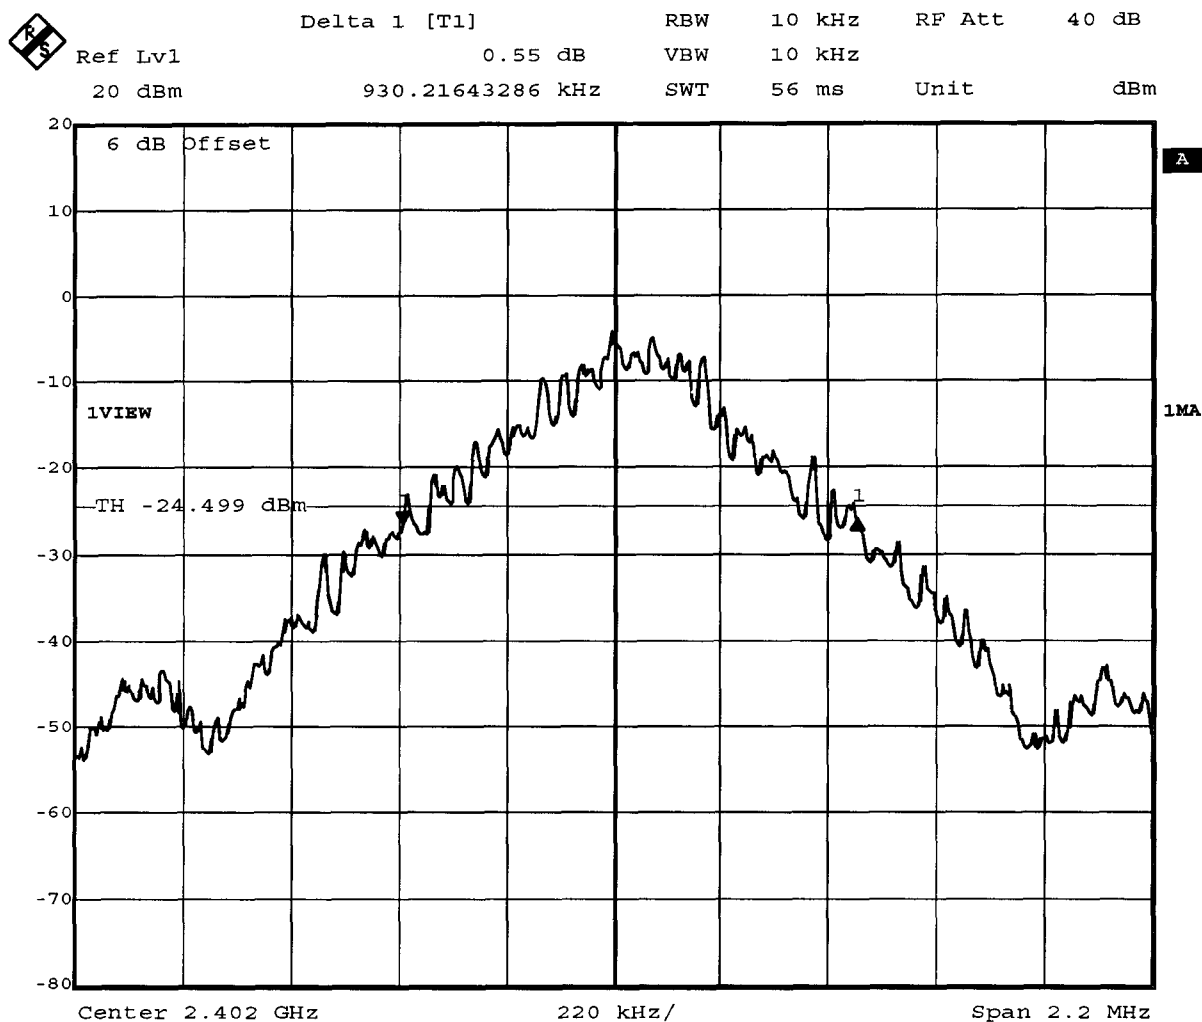

Comment A: 20 dB bandwidth: 930.2 KHz < 1MHz; verdict: PASS
Date: 13.NOV.2006 15:38:33


Measurement diagram

ETS Product Service AG
Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN

Page 1 of 1

FCC part 15.247
20 dB bandwidth

EUT	Triple Band GSM GSM850 / DCS1800 / PCS 1900
Model	S100
Approval Holder	Pantech Co., Ltd.
Temperature / Voltage	25°C
Test Site / Operator	ETS
Test Specification	FCC part 15 section 247(a)
Comment 1	20 dB bandwidth
Comment 2	Channel.: 39 / 2441 MHz
Comment 3	

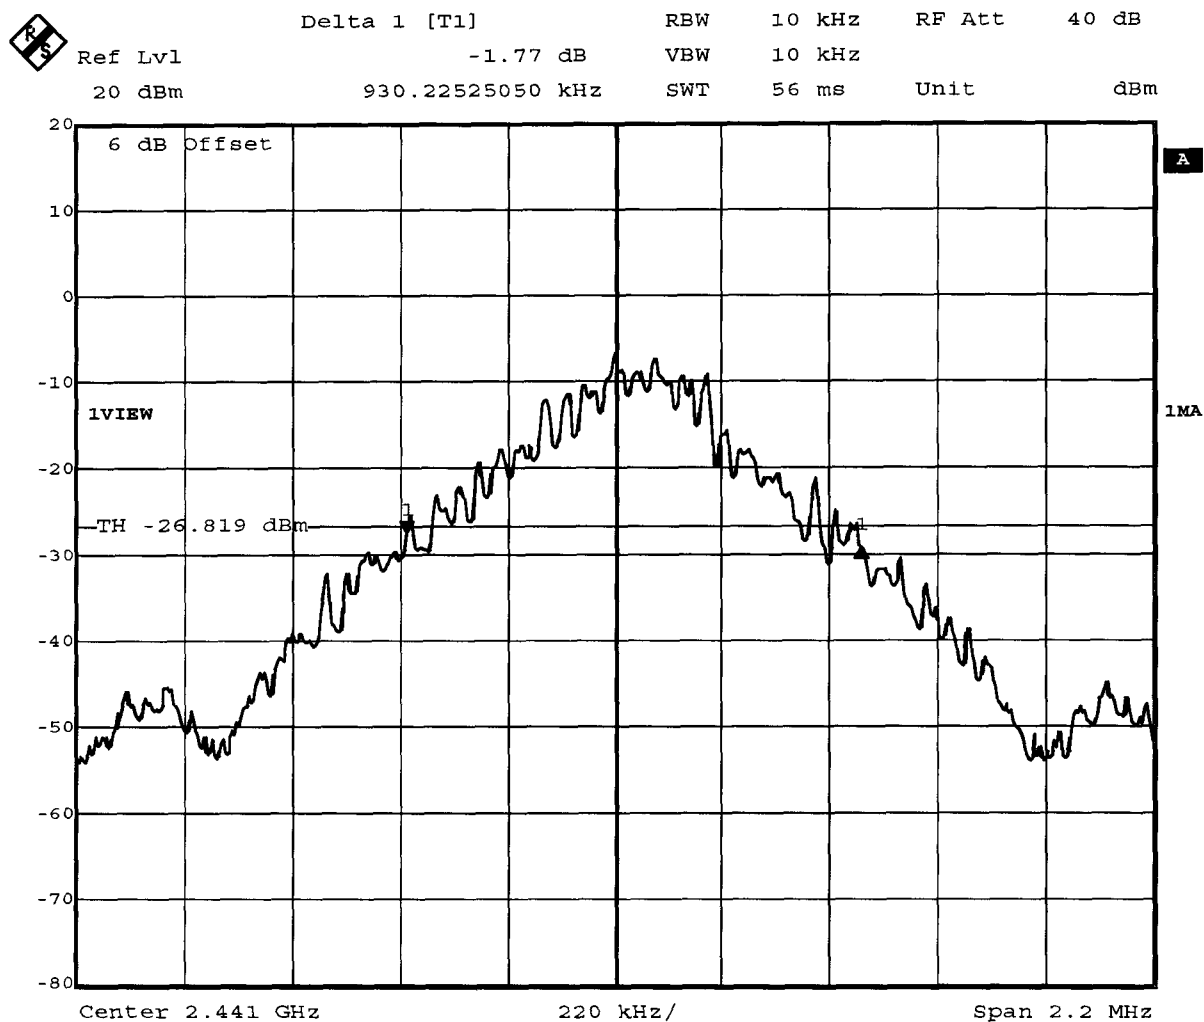

Comment A: 20 dB bandwidth: 930.2 KHz < 1MHz; verdict: PASS

Date: 13.NOV.2006 15:43:06


Measurement diagram

ETS Product Service AG
Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN

Page 1 of 1

FCC part 15.247
20 dB bandwidth

EUT	Triple Band GSM GSM850 / DCS1800 / PCS 1900
Model	S100
Approval Holder	Pantech Co., Ltd.
Temperature / Voltage	25°C
Test Site / Operator	ETS
Test Specification	FCC part 15 section 247(a)
Comment 1	20 dB bandwidth
Comment 2	Channel.: 78 / 2480 MHz
Comment 3	

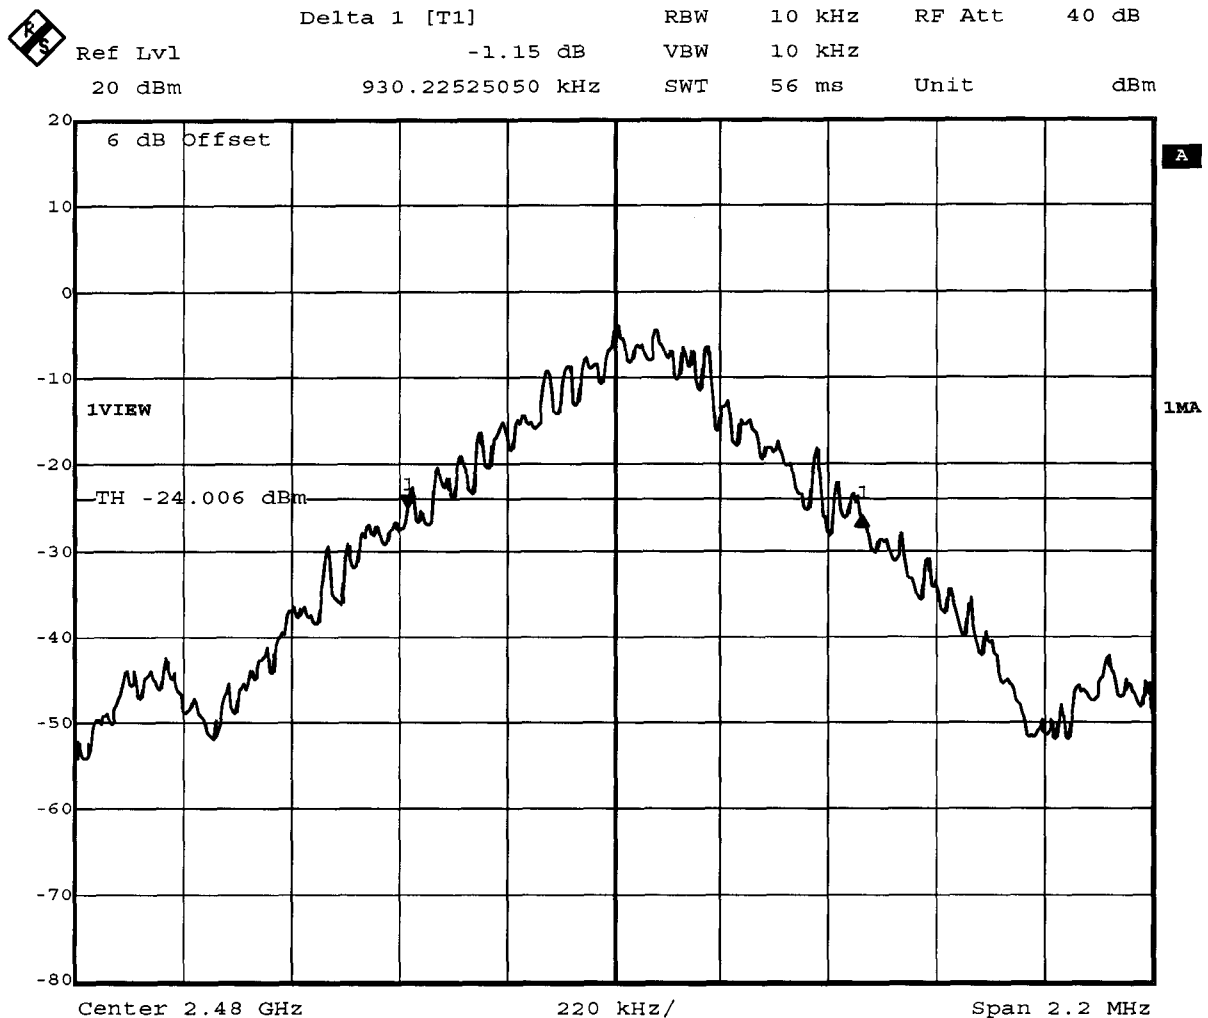

Comment A: 20 dB bandwidth: 930.2 KHz < 1MHz;

verdict: PASS

Date: 13.NOV.2006 15:47:49

Measurement diagram

ETS Product Service AG

Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN

Page 1 of 1


Appendix E

Time of occupancy (dwell time)

FCC part 15.247

Time of occupancy (dwell time)

EUT	Triple Band GSM GSM850 / DCS1800 / PCS 1900
Model	S100
Approval Holder	Pantech Co., Ltd.
Temperature / Voltage	25°C
Test Site / Operator	ETS
Test Specification	FCC part 15 section 247(a)
Comment 1	Time of occupancy
Comment 2	Channel.: 39 / 2441 MHz (Hopping mode)
Comment 3	63 events * 2.892 ms result: 182.2 ms

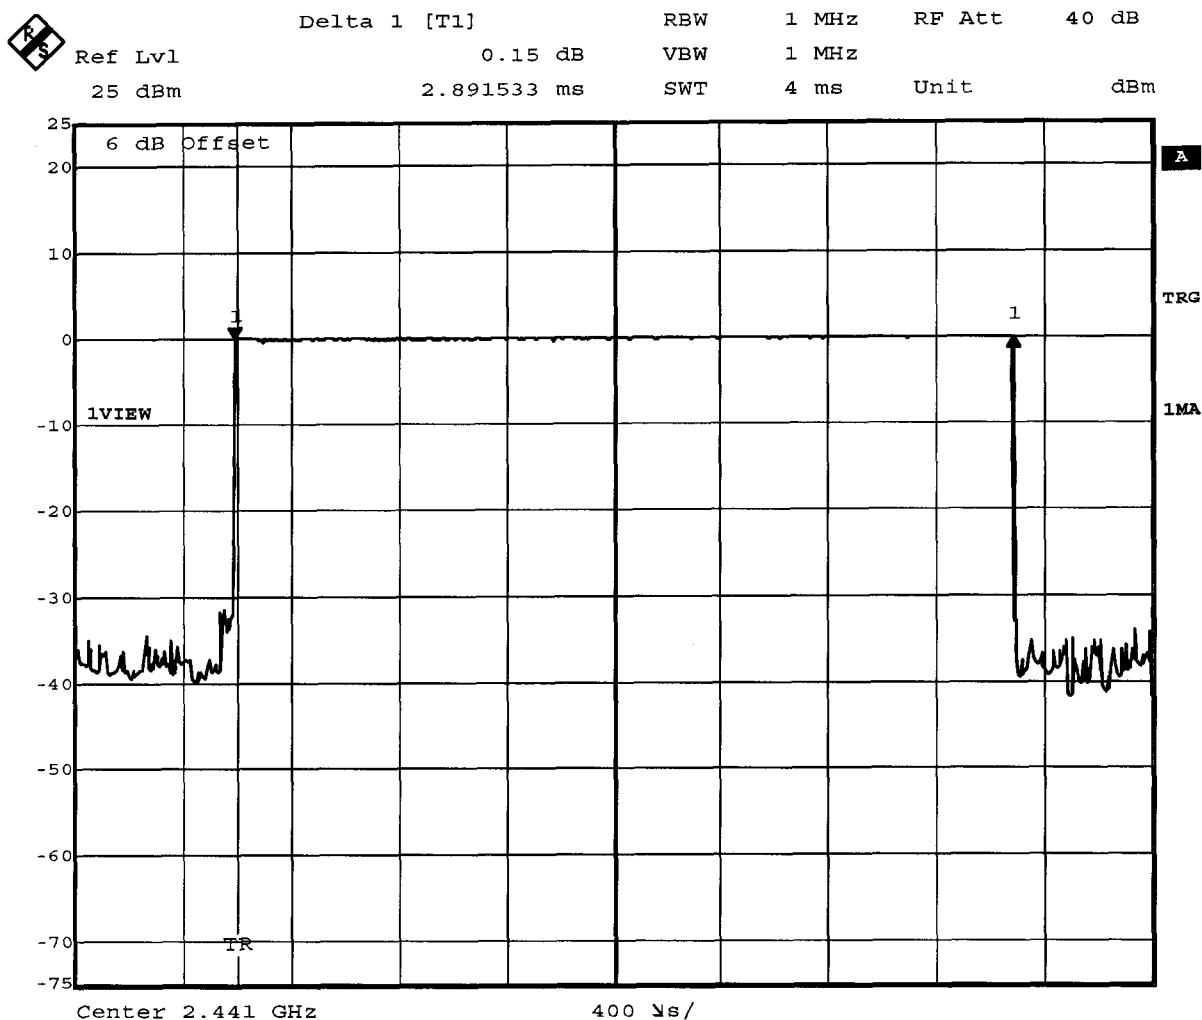

Comment A: Burst length=2.89153 ms

Date: 14.NOV.2006 09:14:47

Measurement diagram

ETS Product Service AG
Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN

Page 1 of 1


Appendix F

Number of hopping frequencies

FCC part 15.247

Number of hopping frequencies

EUT	Triple Band GSM GSM850 / DCS1800 / PCS 1900
Model	S100
Approval Holder	Pantech Co., Ltd.
Temperature / Voltage	25°C
Test Site / Operator	ETS
Test Specification	FCC part 15 section 247(a)
Comment 1	Number of hopping frequencies
Comment 2	Channel.: 0-13
Comment 3	

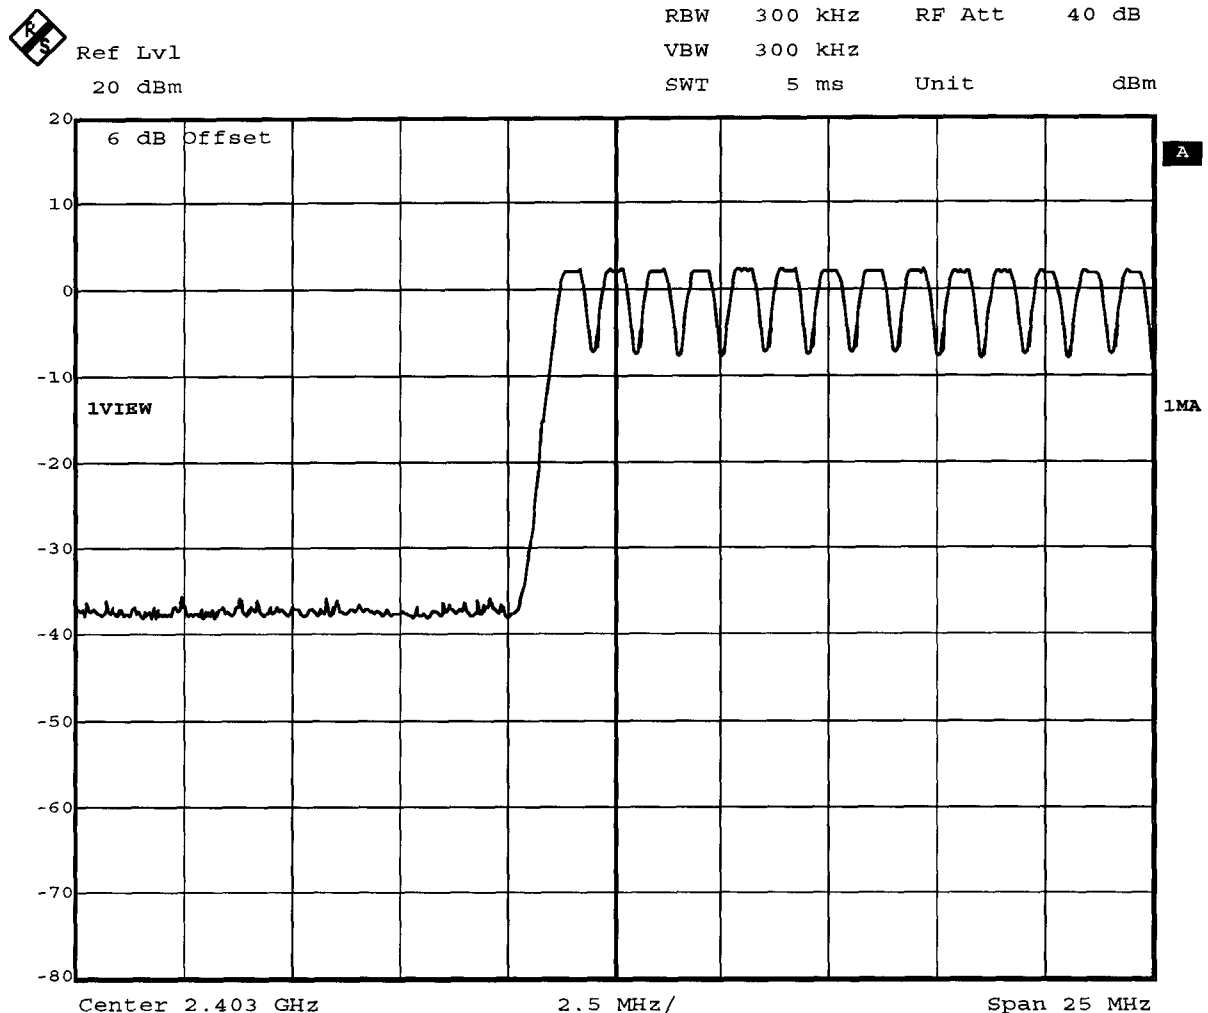

Comment A: Number of hopping frequencies

Date: 14.NOV.2006 09:19:33


Measurement diagram

ETS Product Service AG
Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN

Page 1 of 1

FCC part 15.247**Number of hopping frequencies**

EUT	Triple Band GSM GSM850 / DCS1800 / PCS 1900
Model	S100
Approval Holder	Pantech Co., Ltd.
Temperature / Voltage	25°C
Test Site / Operator	ETS
Test Specification	FCC part 15 section 247(a)
Comment 1	Number of hopping frequencies
Comment 2	Channel.: 14-38
Comment 3	

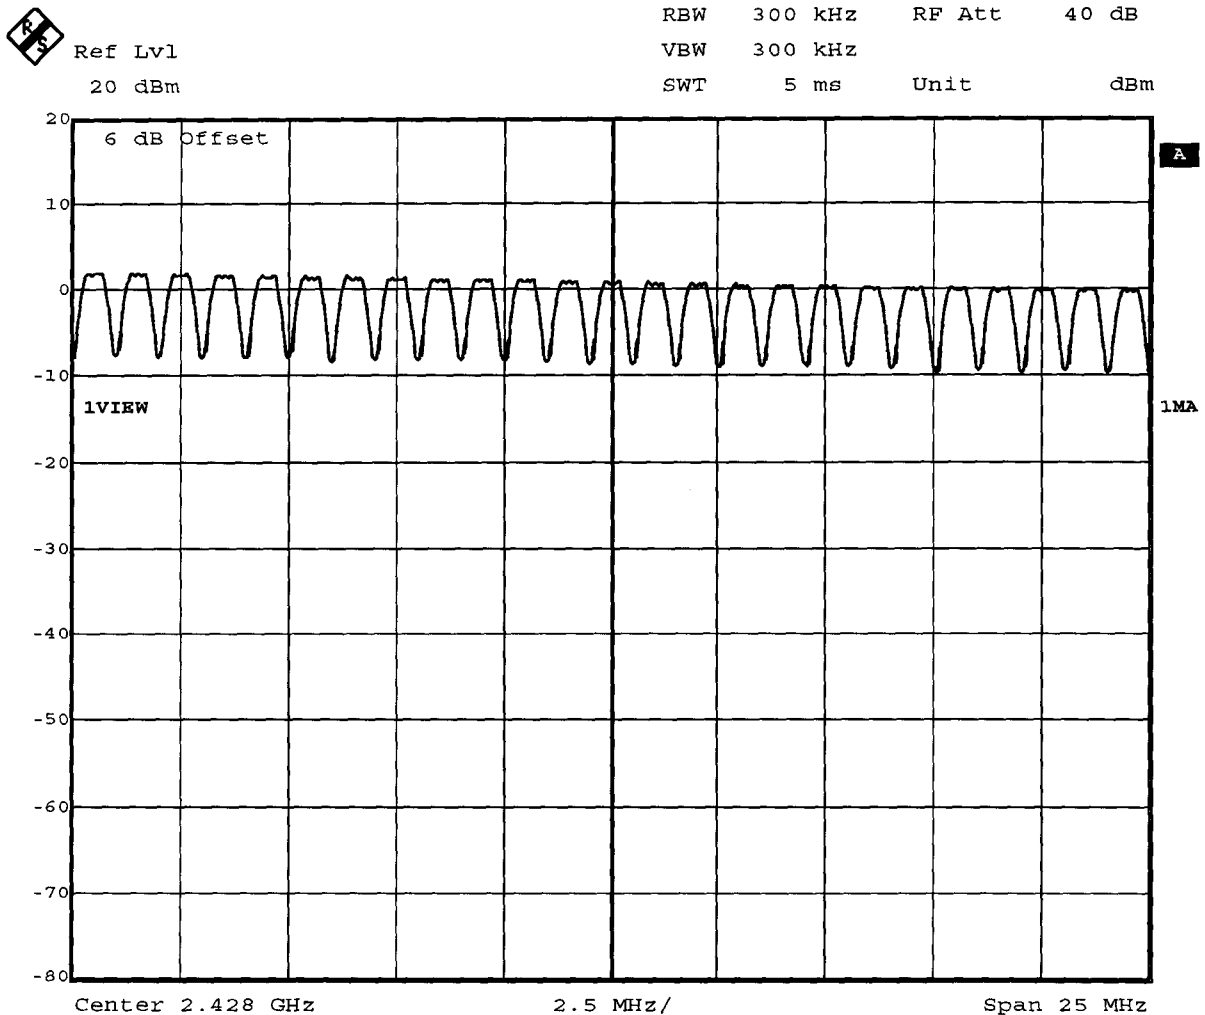

Comment A: Number of hopping frequencies

Date: 14.NOV.2006 09:24:00


Measurement diagram

ETS Product Service AG
Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN

Page 1 of 1

FCC part 15.247
Number of hopping frequencies

EUT	Triple Band GSM GSM850 / DCS1800 / PCS 1900
Model	S100
Approval Holder	Pantech Co., Ltd.
Temperature / Voltage	25°C
Test Site / Operator	ETS
Test Specification	FCC part 15 section 247(a)
Comment 1	Number of hopping frequencies
Comment 2	Channel.:39-63
Comment 3	

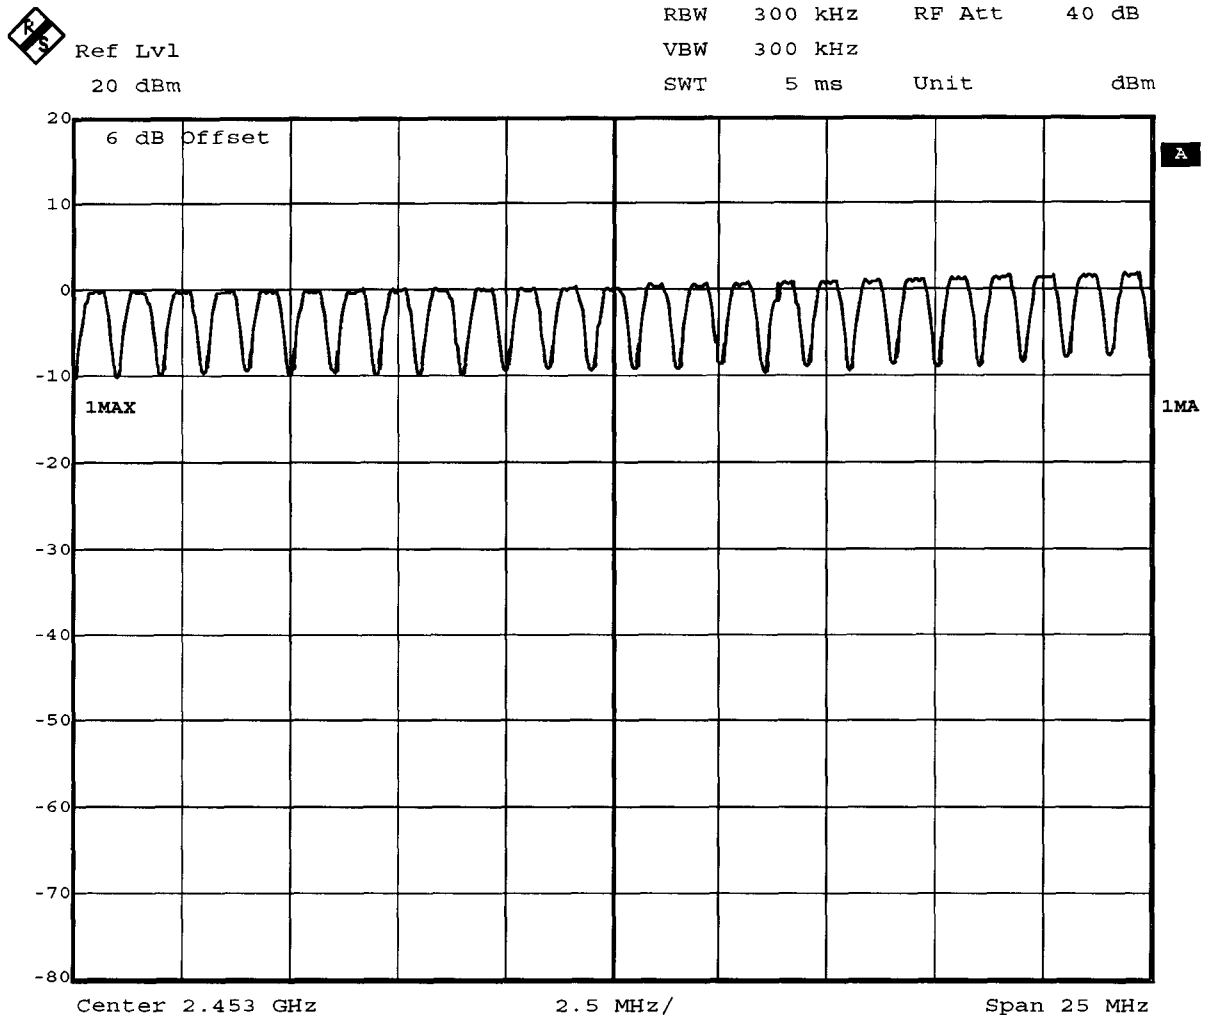

Date: 14.NOV.2006 09:26:25


Measurement diagram

ETS Product Service AG
Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN

Page 1 of 1

FCC part 15.247**Number of hopping frequencies**

EUT	Triple Band GSM GSM850 / DCS1800 / PCS 1900
Model	S100
Approval Holder	Pantech Co., Ltd.
Temperature / Voltage	25°C
Test Site / Operator	ETS
Test Specification	FCC part 15 section 247(a)
Comment 1	Number of hopping frequencies
Comment 2	Channel.: 64-78
Comment 3	

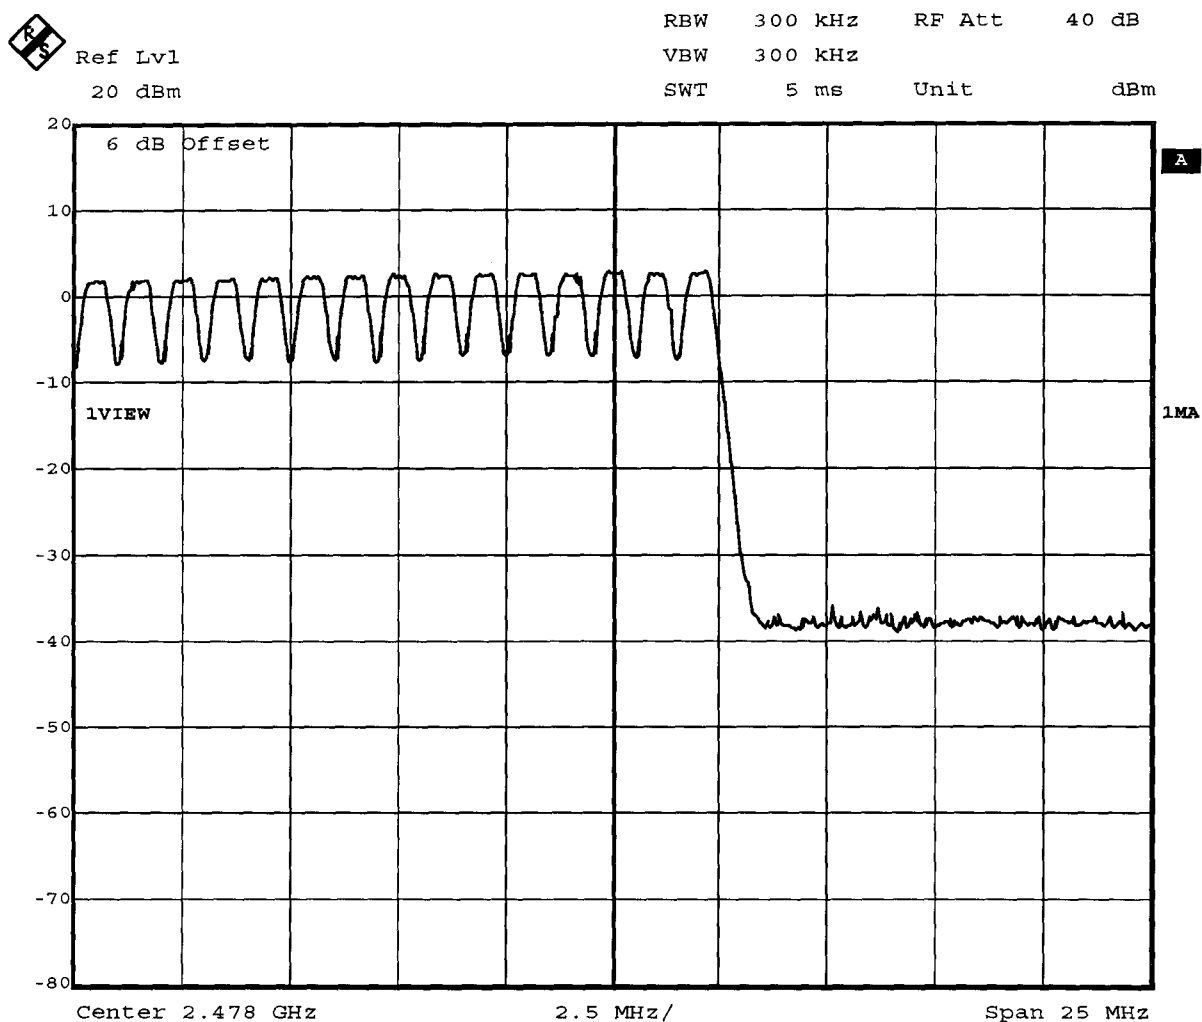

Comment A: Number of hopping frequencies

Date: 14.NOV.2006 09:29:09

Measurement diagram

ETS Product Service AG

Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN


Page 1 of 1

Appendix G

Carrier frequency separation

FCC part 15.247
Carrier frequency separation

EUT	Triple Band GSM GSM850 / DCS1800 / PCS 1900
Model	S100
Approval Holder	Pantech Co., Ltd.
Temperature / Voltage	25°C
Test Site / Operator	ETS
Test Specification	FCC part 15 section 247(b)
Comment 1	Carrier frequency separation
Comment 2	Channel.: 39/40 / 2441/2442 MHz
Comment 3	Hopping mode

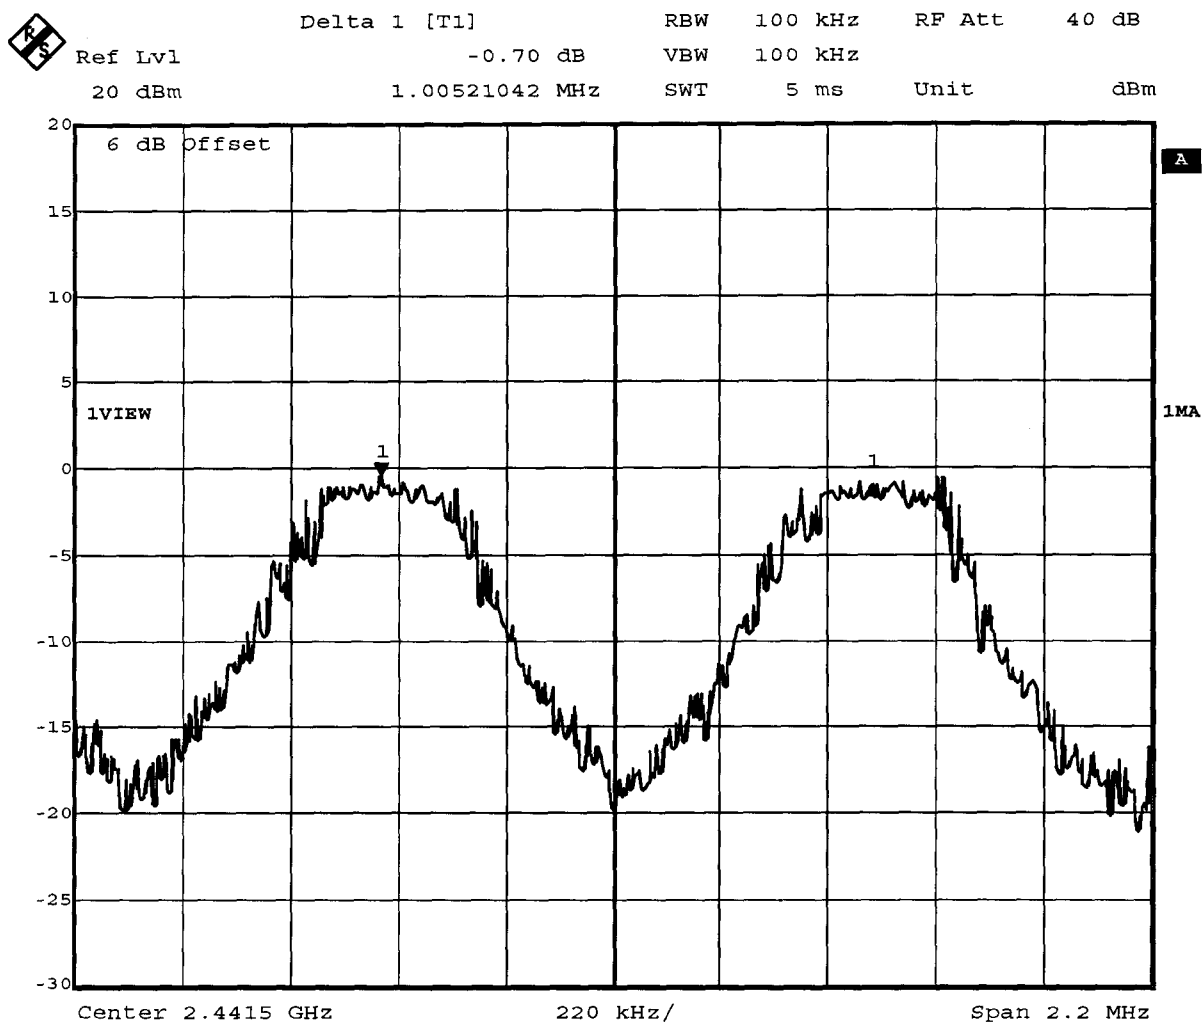

Comment A: Limit: > two-thirds of the 20 dB bandwidth ; Result: Pass
Date: 14.NOV.2006 09:03:26

Measurement diagram

ETS Product Service AG
Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN

Page 1 of 1

Appendix H

Spurious emission conducted


Appendix I

Spurious emission radiated

Carrier power (Field Strength)

FCC RULES PART 15, SUBPART C


Approval Holder: Pantech Co., Ltd
EUT: Triple Band GSM850/DCS1800/PCS1900 (with WAP&GPRS)
Model: S100 / Bluetooth / 2402 MHz
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom.: 4.0 V DC
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Emax: 97.67dBμV/m, RBW: 100kHz

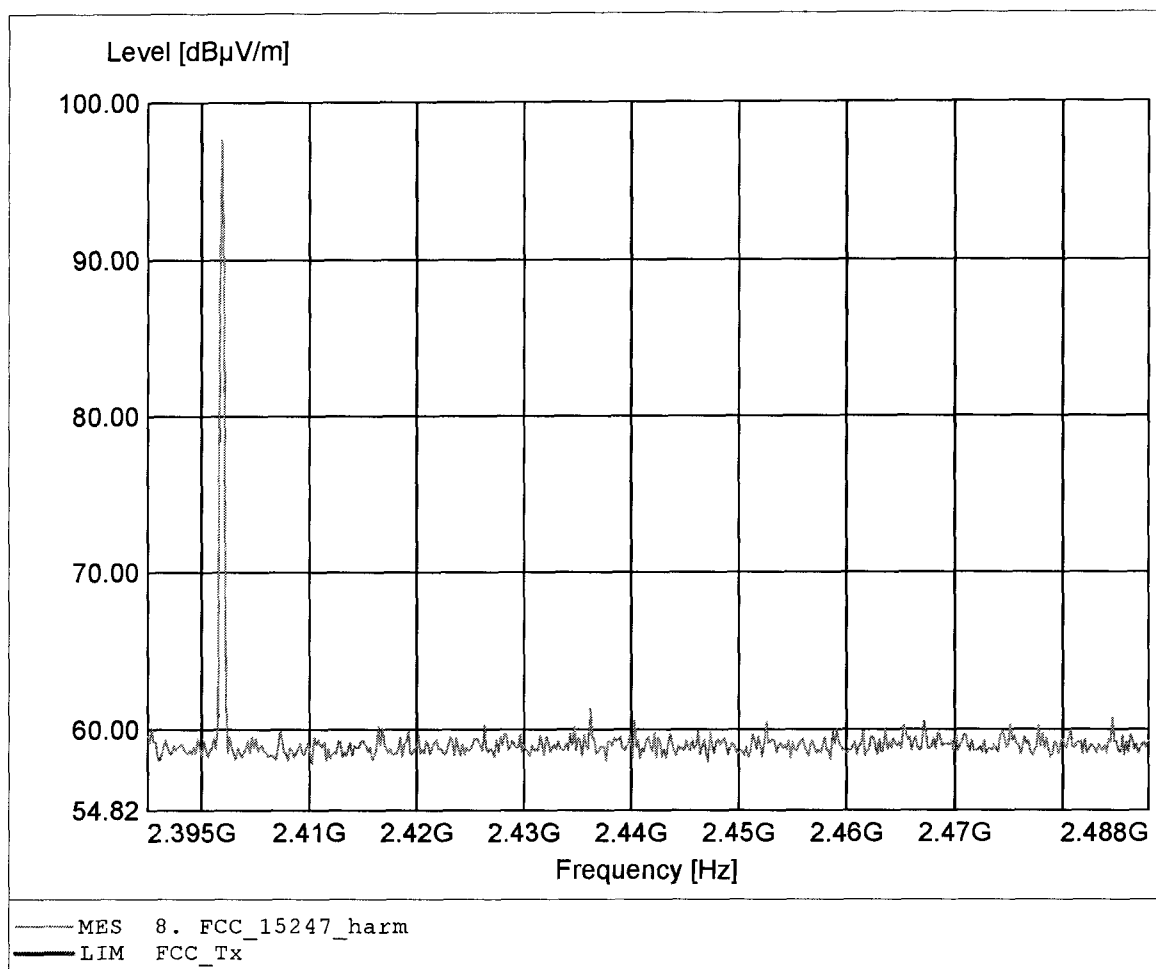

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Pantech Co., Ltd
EUT: Triple Band GSM850/DCS1800/PCS1900 (with WAP&GPRS)
Model: S100 / Bluetooth / 2402 MHz
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom.: 4.0 V DC
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 179.218MHz, Emax: 32.48dBμV/m, RBW: 100kHz

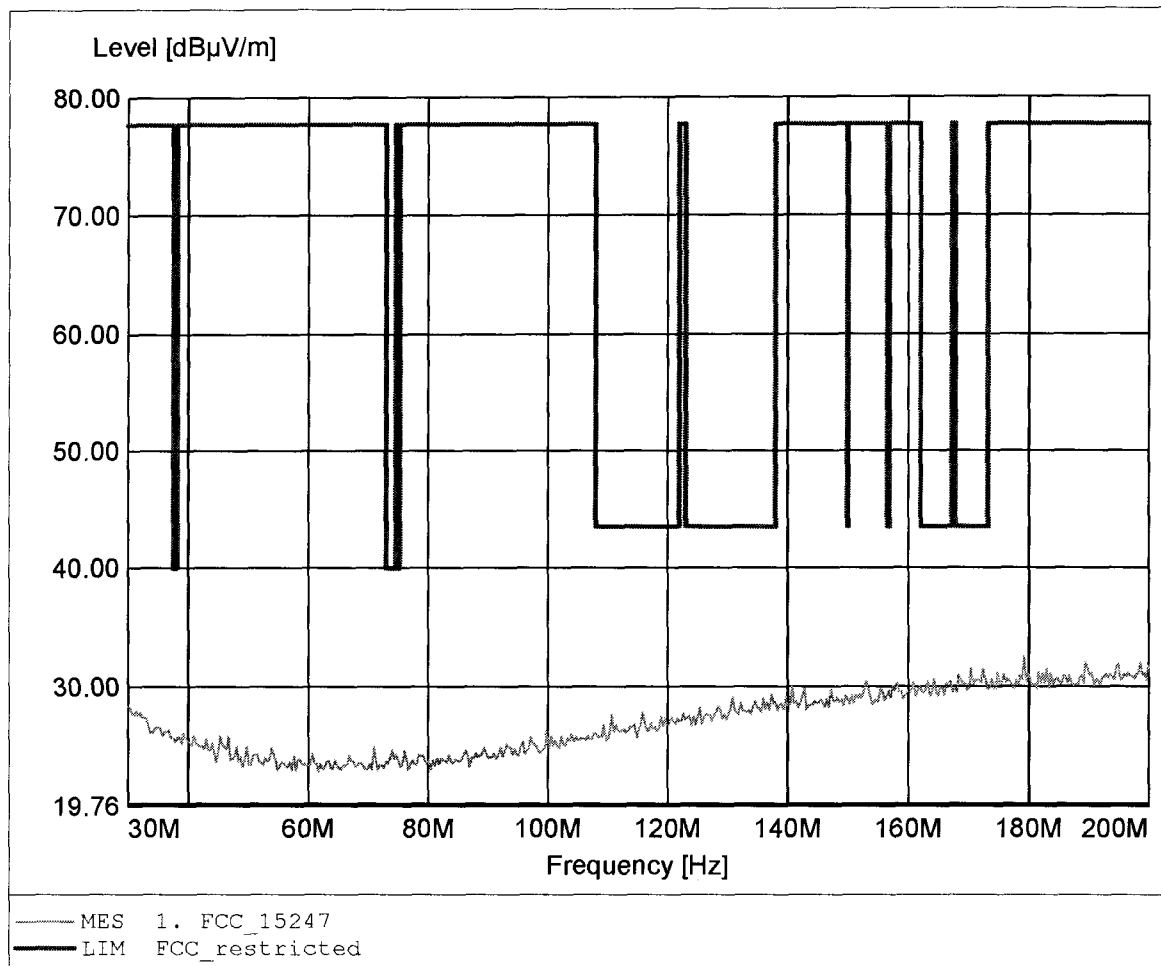

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Pantech Co., Ltd
EUT: Triple Band GSM850/DCS1800/PCS1900 (with WAP&GPRS)
Model: S100 / Bluetooth / 2402 MHz
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom.: 4.0 V DC
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 198.297MHz, Emax: 31.77dBμV/m, RBW: 100kHz

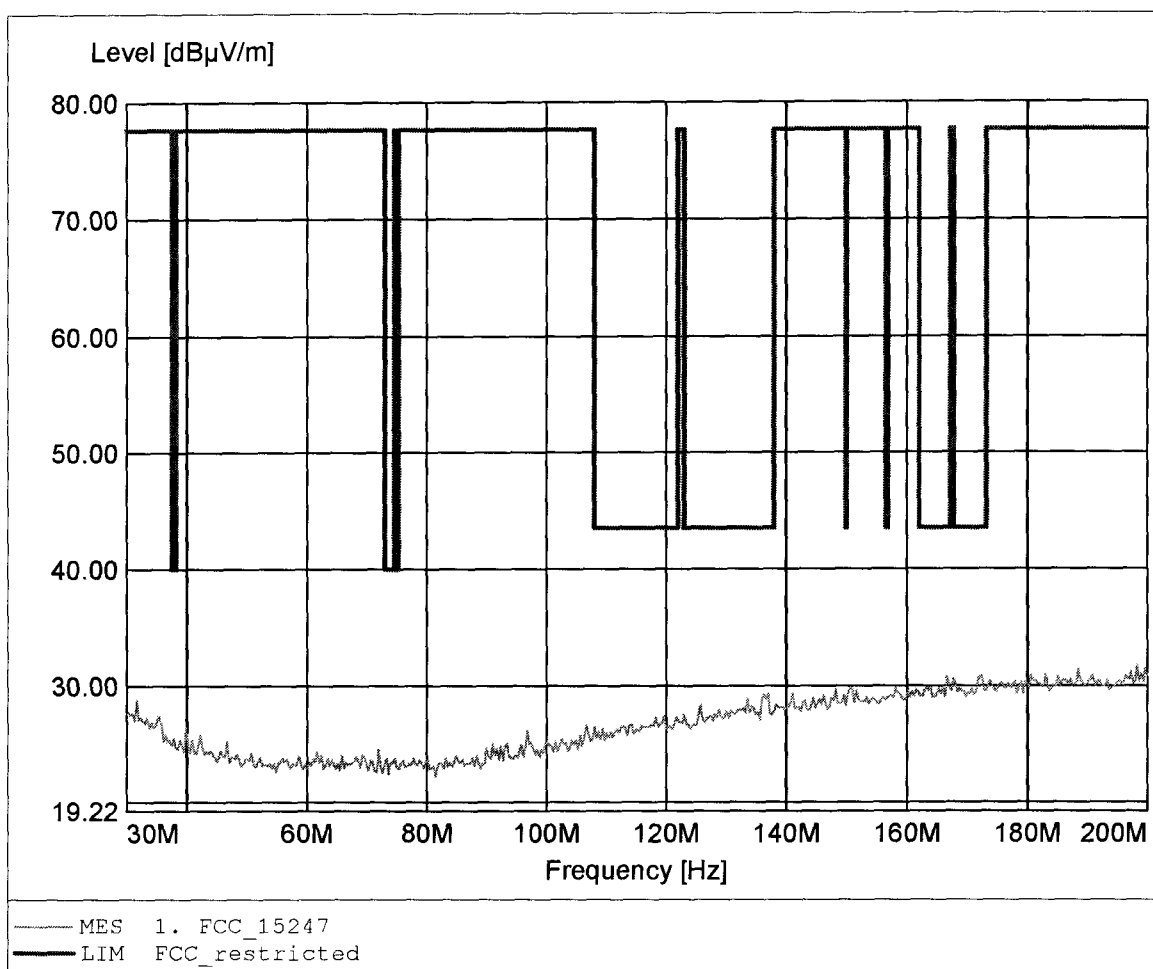

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Pantech Co., Ltd
EUT: Triple Band GSM850/DCS1800/PCS1900 (with WAP&GPRS)
Model: S100 / Bluetooth / 2402 MHz
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom.: 4.0 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 987.174MHz, Emax: 22.03dBµV/m, RBW: 100kHz

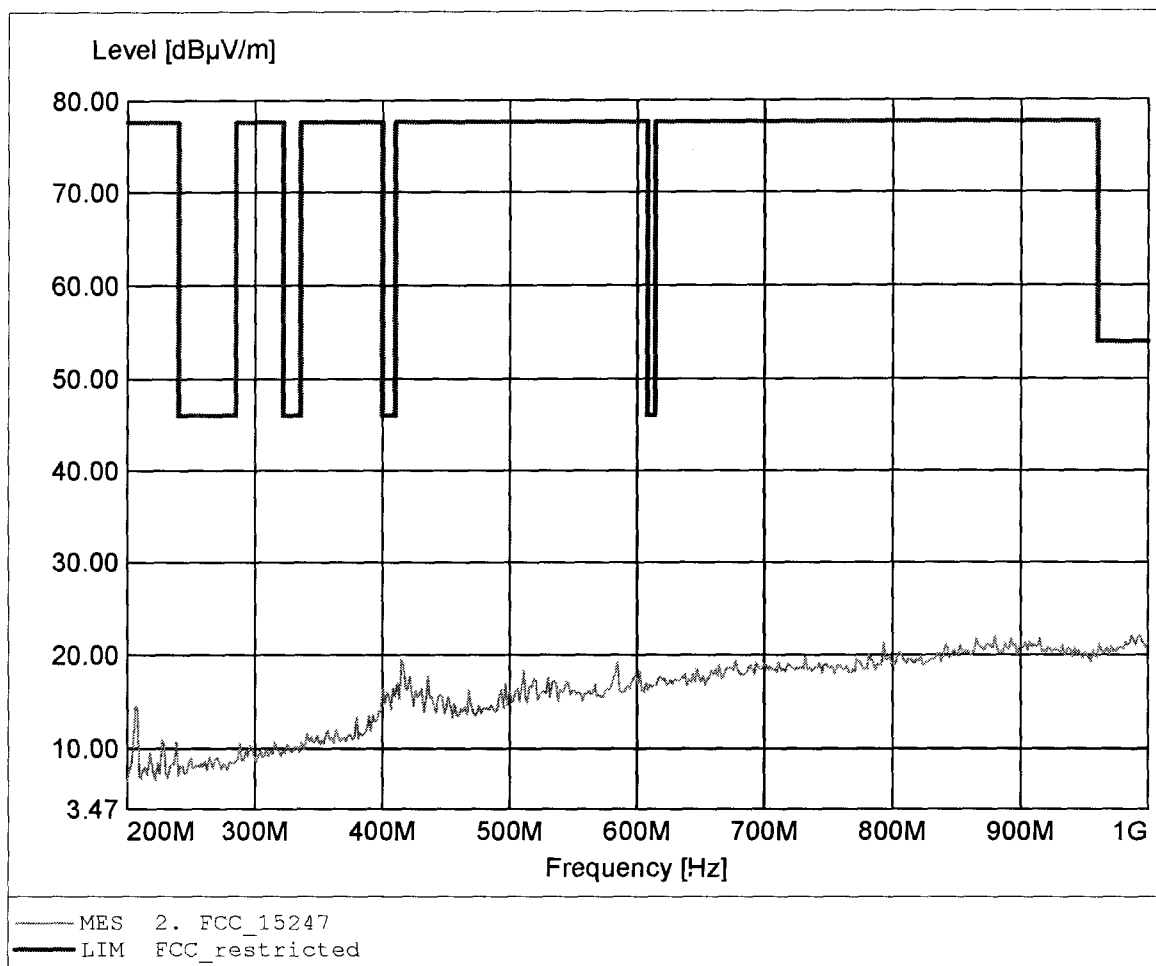

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Pantech Co., Ltd
EUT: Triple Band GSM850/DCS1800/PCS1900 (with WAP&GPRS)
Model: S100 / Bluetooth / 2402 MHz
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom.: 4.0 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 987.174MHz, Emax: 23.12dBμV/m, RBW: 100kHz

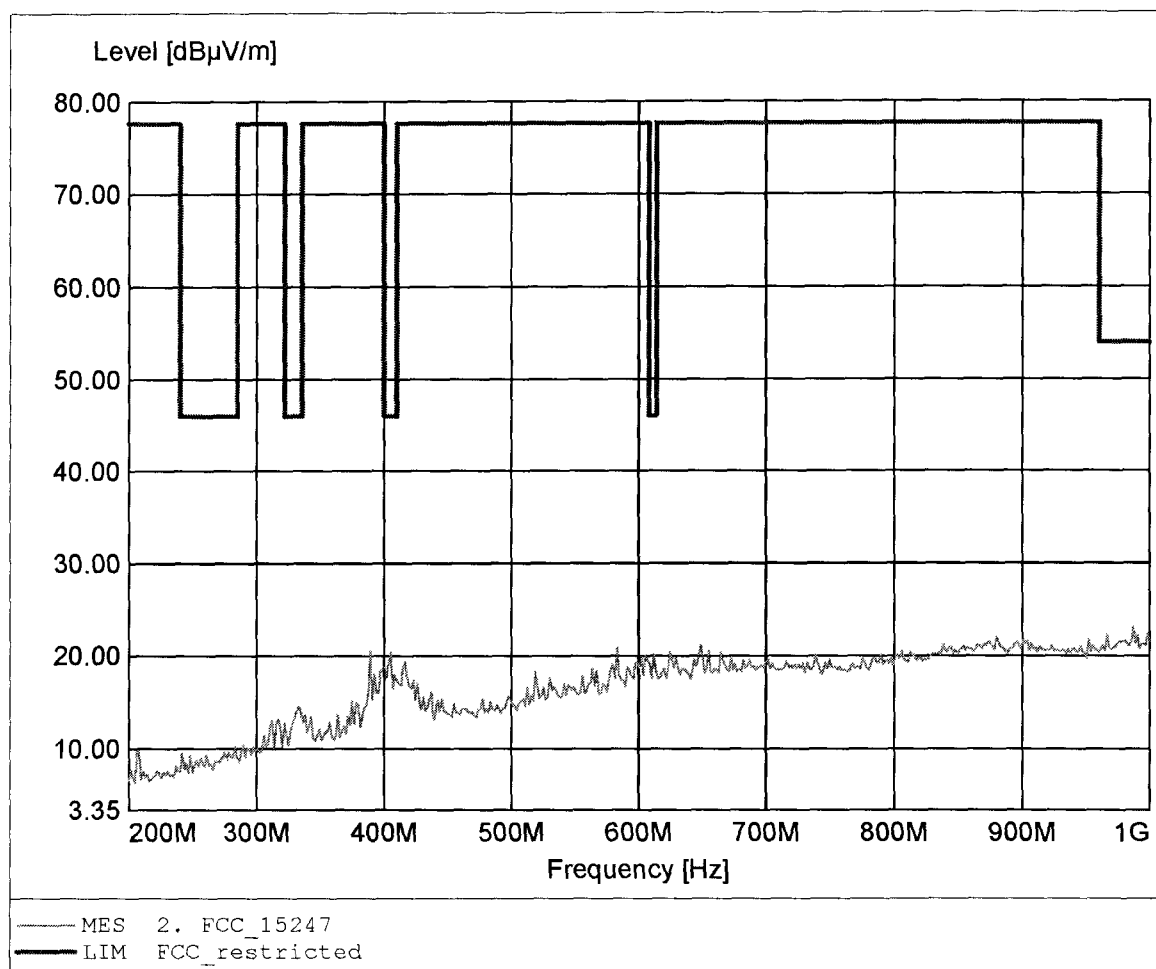

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Pantech Co., Ltd
EUT: Triple Band GSM850/DCS1800/PCS1900 (with WAP&GPRS)
Model: S100 / Bluetooth / 2402 MHz
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom.: 4.0 V DC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 68.20dBμV/m, RBW: 1MHz

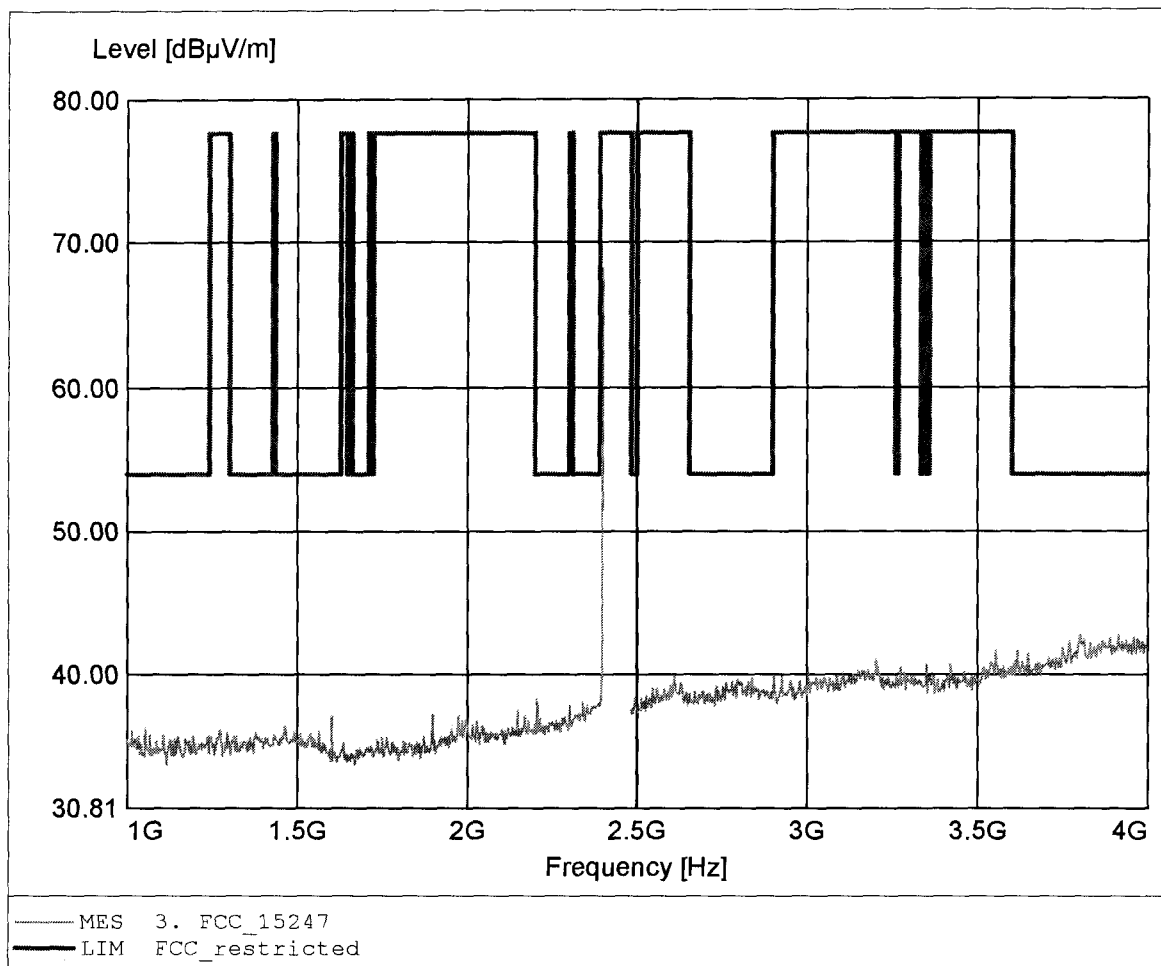

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Pantech Co., Ltd
EUT: Triple Band GSM850/DCS1800/PCS1900 (with WAP&GPRS)
Model: S100 / Bluetooth / 2402 MHz
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom.: 4.0 V DC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 68.20dBμV/m, RBW: 1MHz

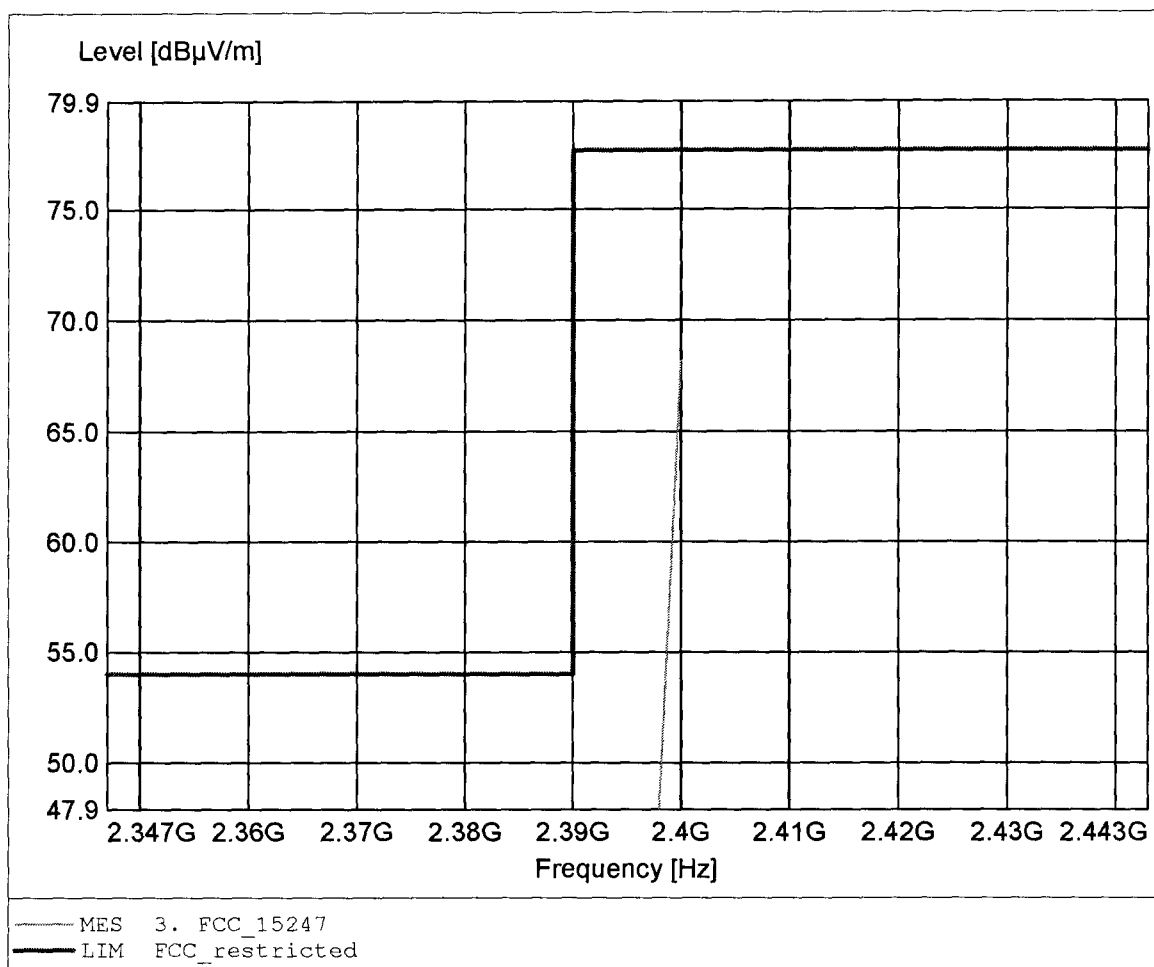

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Pantech Co., Ltd
EUT: Triple Band GSM850/DCS1800/PCS1900 (with WAP&GPRS)
Model: S100 / Bluetooth / 2402 MHz
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom.: 4.0 V DC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 68.80dBμV/m, RBW: 1MHz

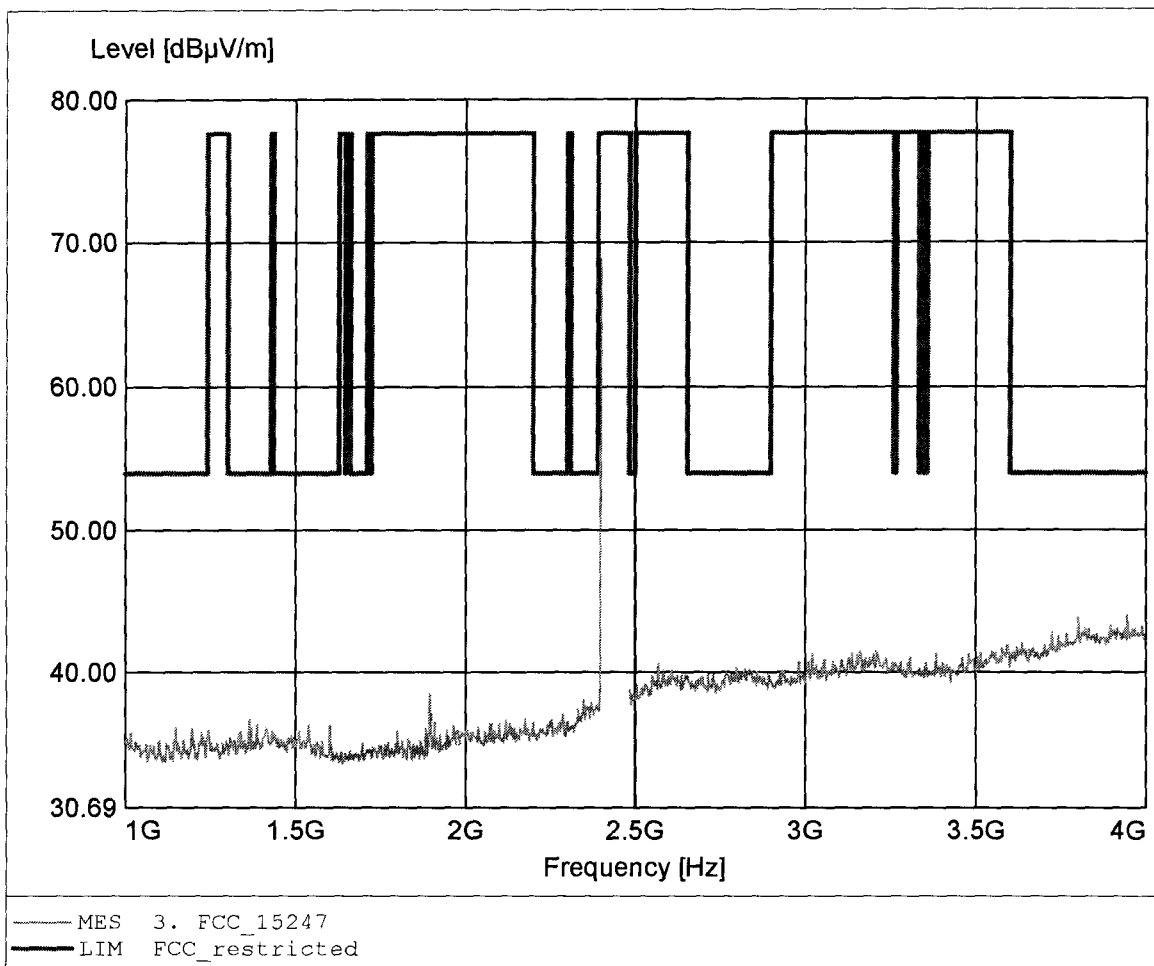

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Pantech Co., Ltd
EUT: Triple Band GSM850/DCS1800/PCS1900 (with WAP&GPRS)
Model: S100 / Bluetooth / 2402 MHz
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom.: 4.0 V DC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 68.80dBuV/m, RBW: 1MHz

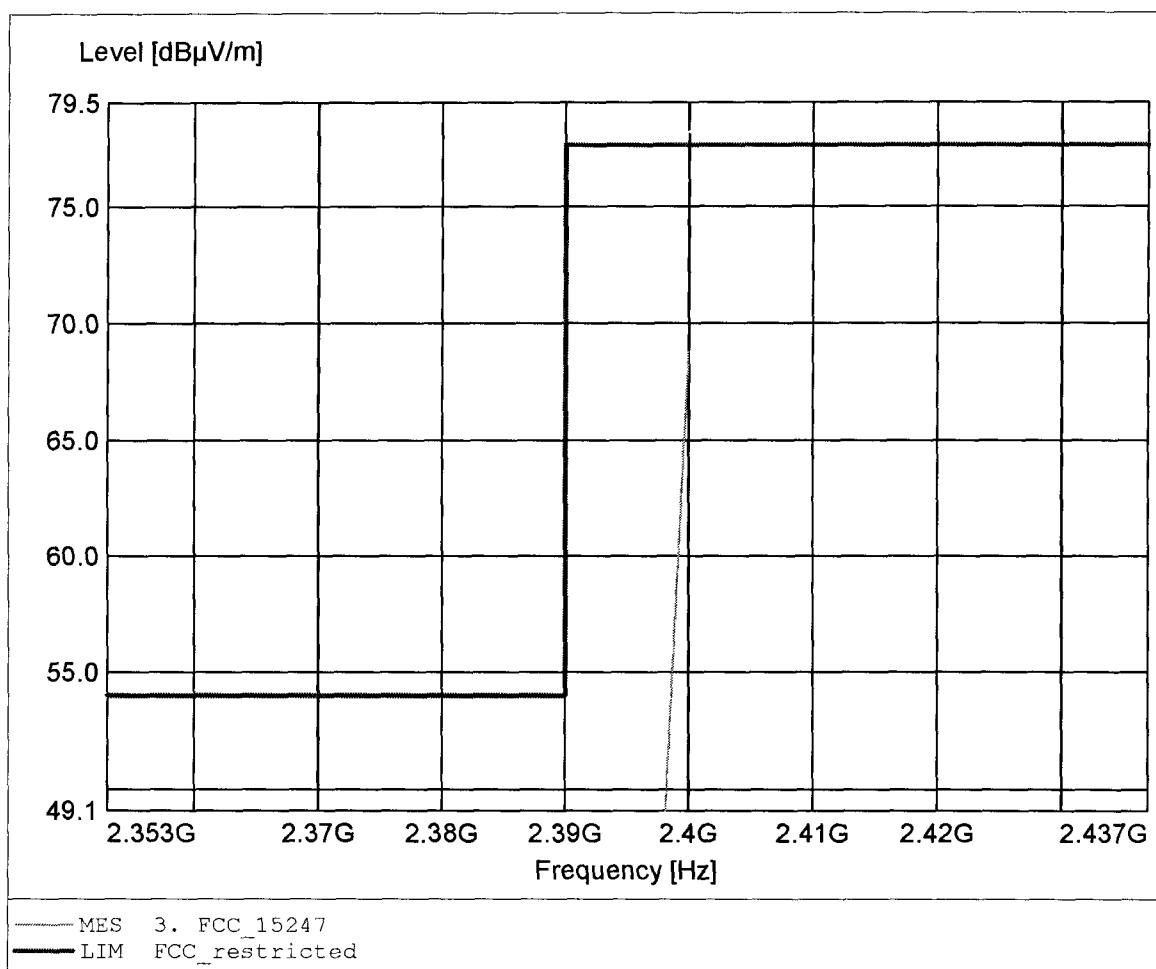

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Pantech Co., Ltd
EUT: Triple Band GSM850/DCS1800/PCS1900 (with WAP&GPRS)
Model: S100 / Bluetooth / 2402 MHz
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom.: 4.0 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.206GHz, Emax: 50.35dBμV/m, RBW: 1MHz

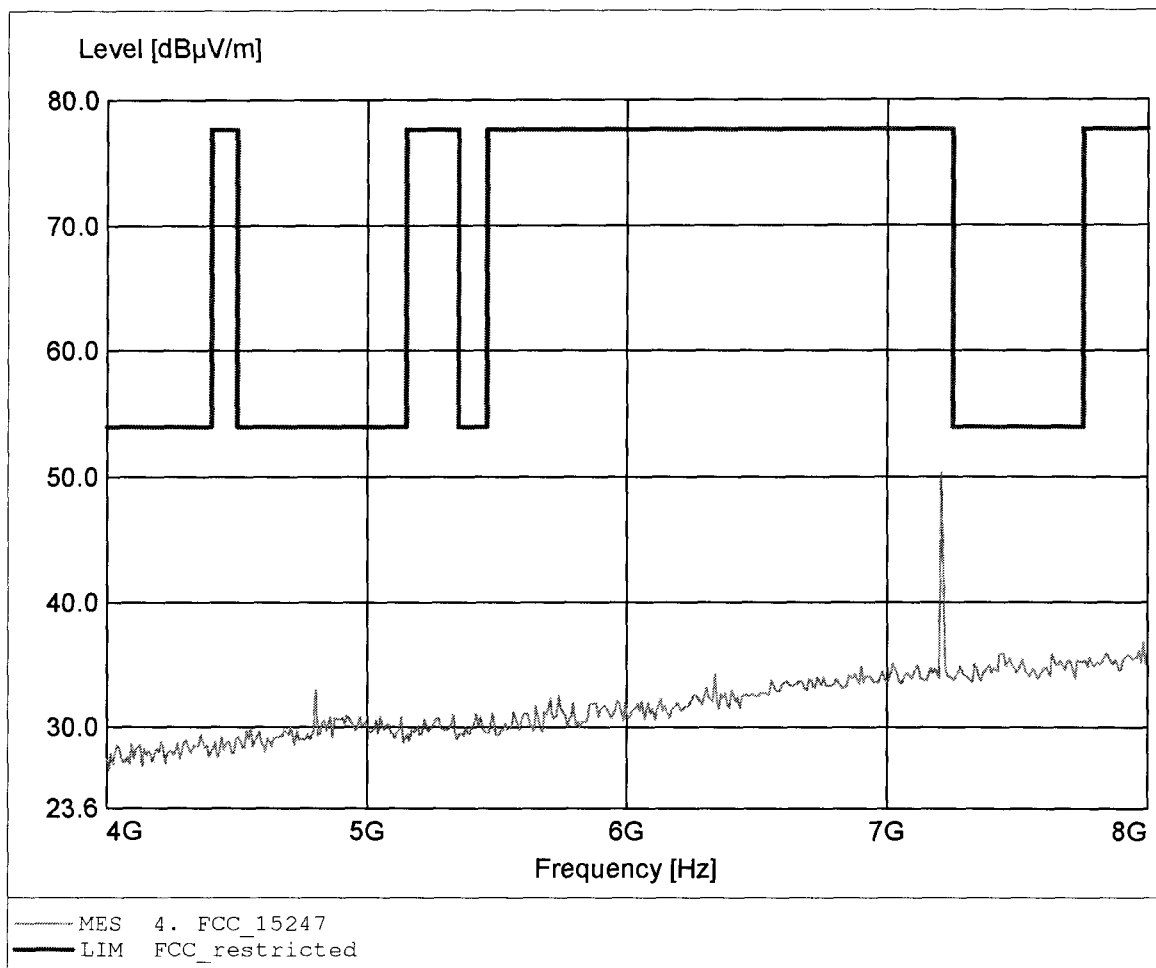

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Pantech Co., Ltd
EUT: Triple Band GSM850/DCS1800/PCS1900 (with WAP&GPRS)
Model: S100 / Bluetooth / 2402 MHz
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom.: 4.0 V DC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.206GHz, Emax: 49.12dBuV/m, RBW: 1MHz

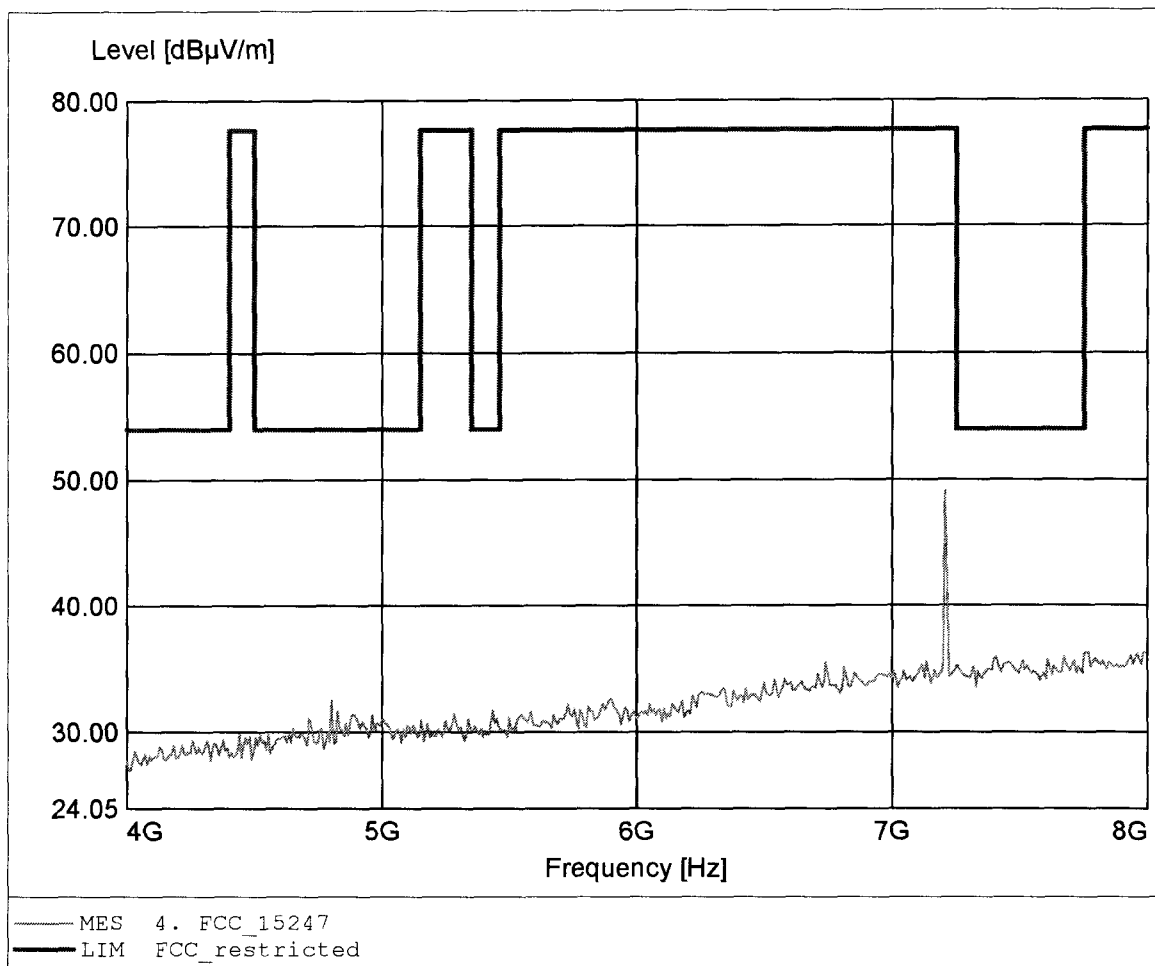

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Pantech Co., Ltd
EUT: Triple Band GSM850/DCS1800/PCS1900 (with WAP&GPRS)
Model: S100 / Bluetooth / 2402 MHz
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom.: 4.0 V DC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 9.611GHz, Emax: 48.74dBμV/m, RBW: 1MHz

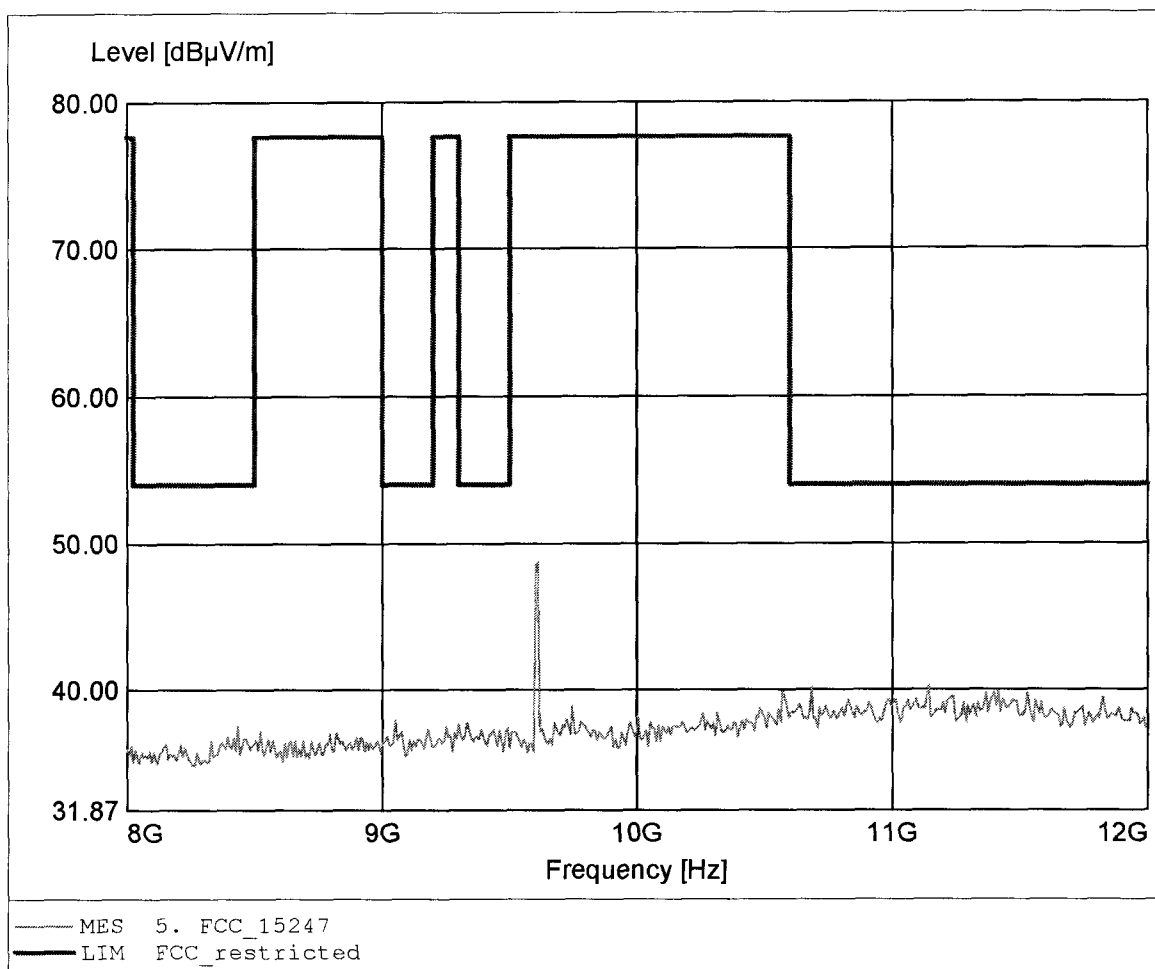

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Pantech Co., Ltd
EUT: Triple Band GSM850/DCS1800/PCS1900 (with WAP&GPRS)
Model: S100 / Bluetooth / 2402 MHz
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom.: 4.0 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 9.611GHz, Emax: 47.43dBμV/m, RBW: 1MHz

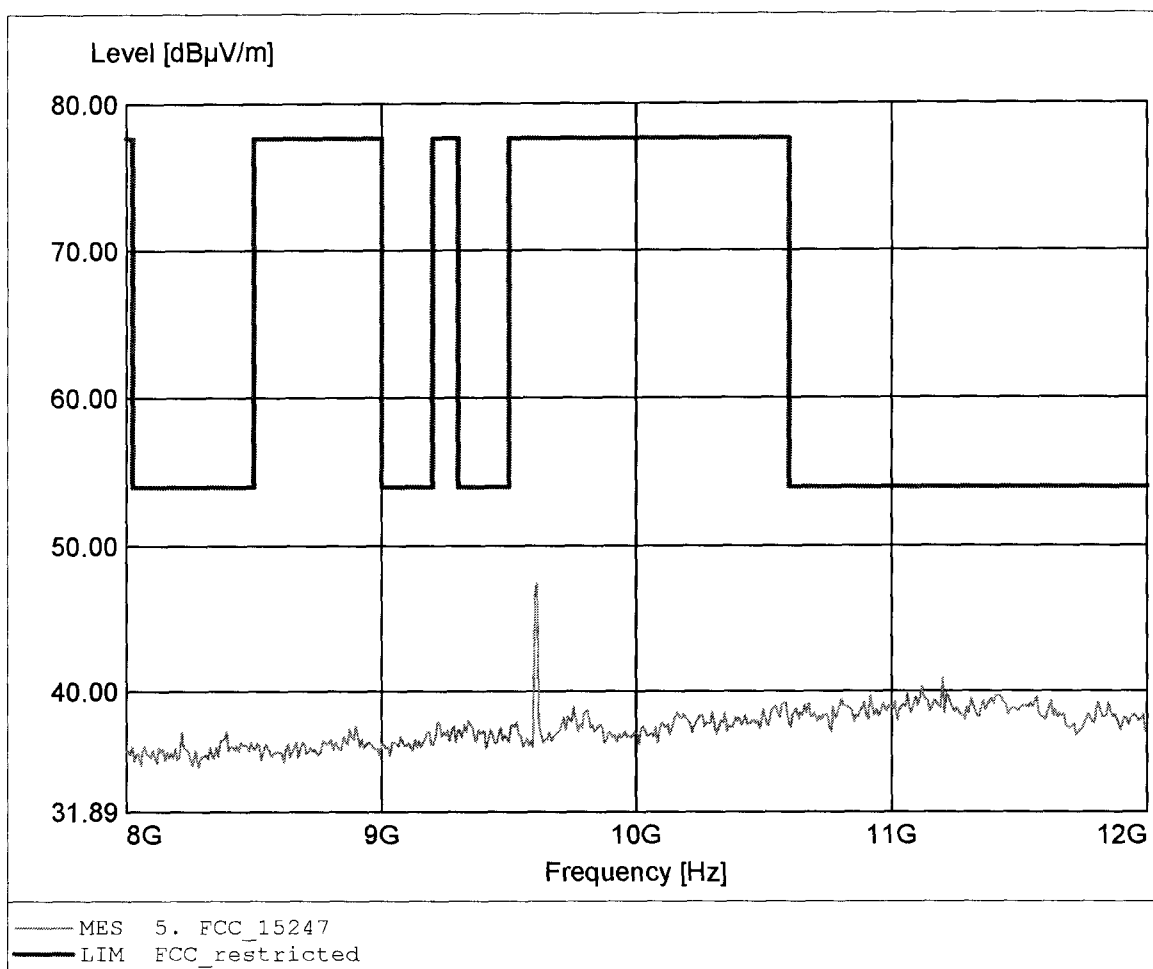

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Pantech Co., Ltd
EUT: Triple Band GSM850/DCS1800/PCS1900 (with WAP&GPRS)
Model: S100 / Bluetooth / 2402 MHz
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom.: 4.0 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.615GHz, Emax: 42.25dBμV/m, RBW: 1MHz

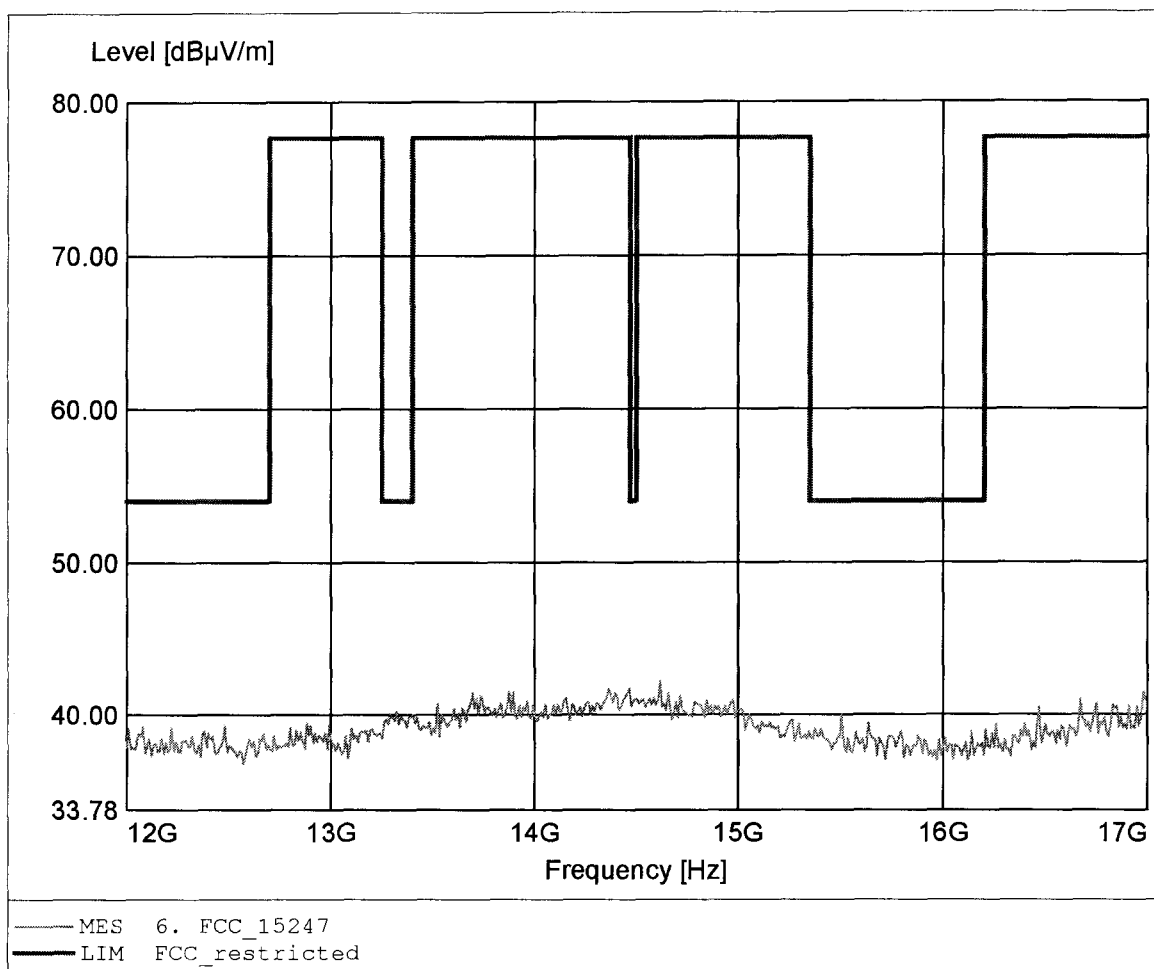

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Pantech Co., Ltd
EUT: Triple Band GSM850/DCS1800/PCS1900 (with WAP&GPRS)
Model: S100 / Bluetooth / 2402 MHz
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom.: 4.0 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.846GHz, Emax: 42.30dBμV/m, RBW: 1MHz

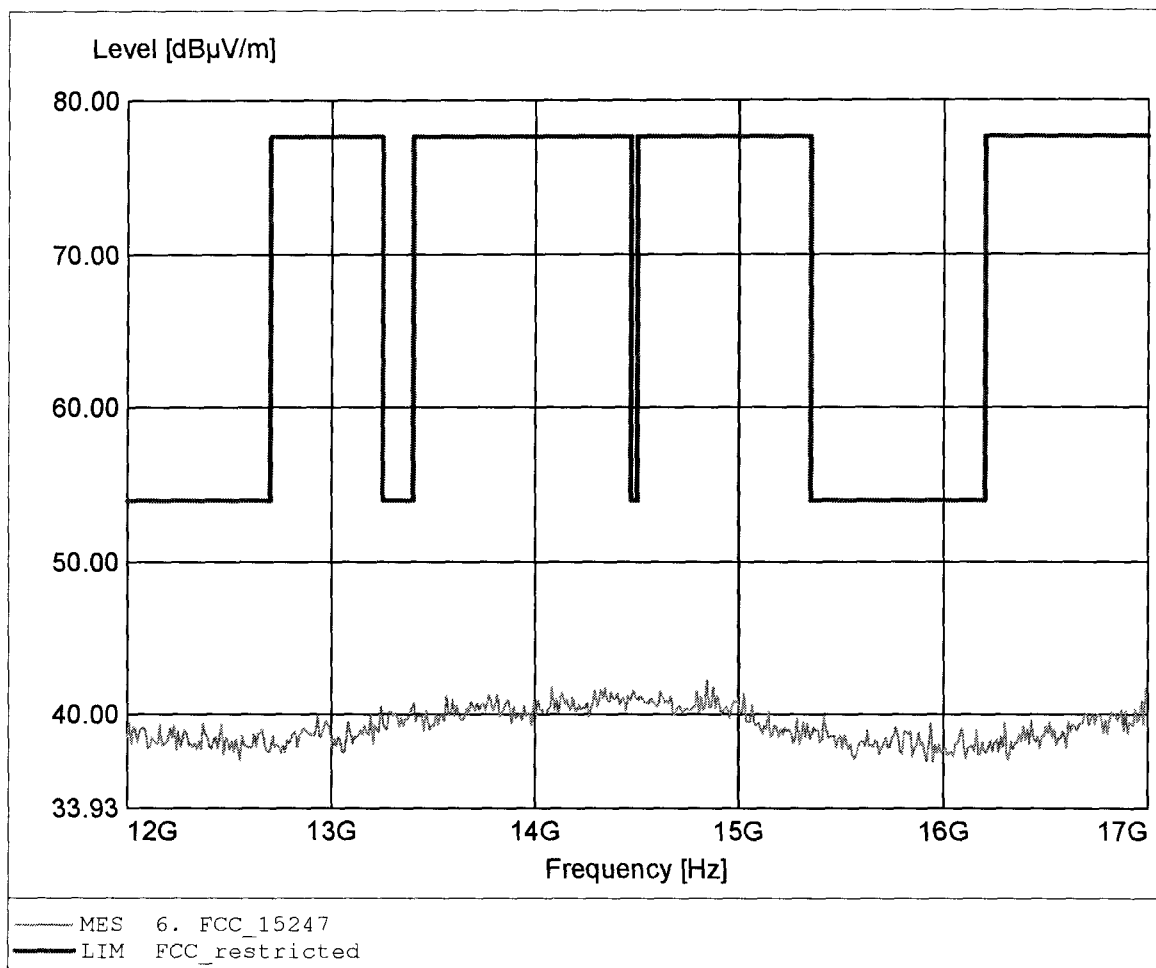

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Pantech Co., Ltd
EUT: Triple Band GSM850/DCS1800/PCS1900 (with WAP&GPRS)
Model: S100 / Bluetooth / 2402 MHz
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom.: 4.0 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 24.634GHz, Emax: 47.70dBuV/m, RBW: 1MHz

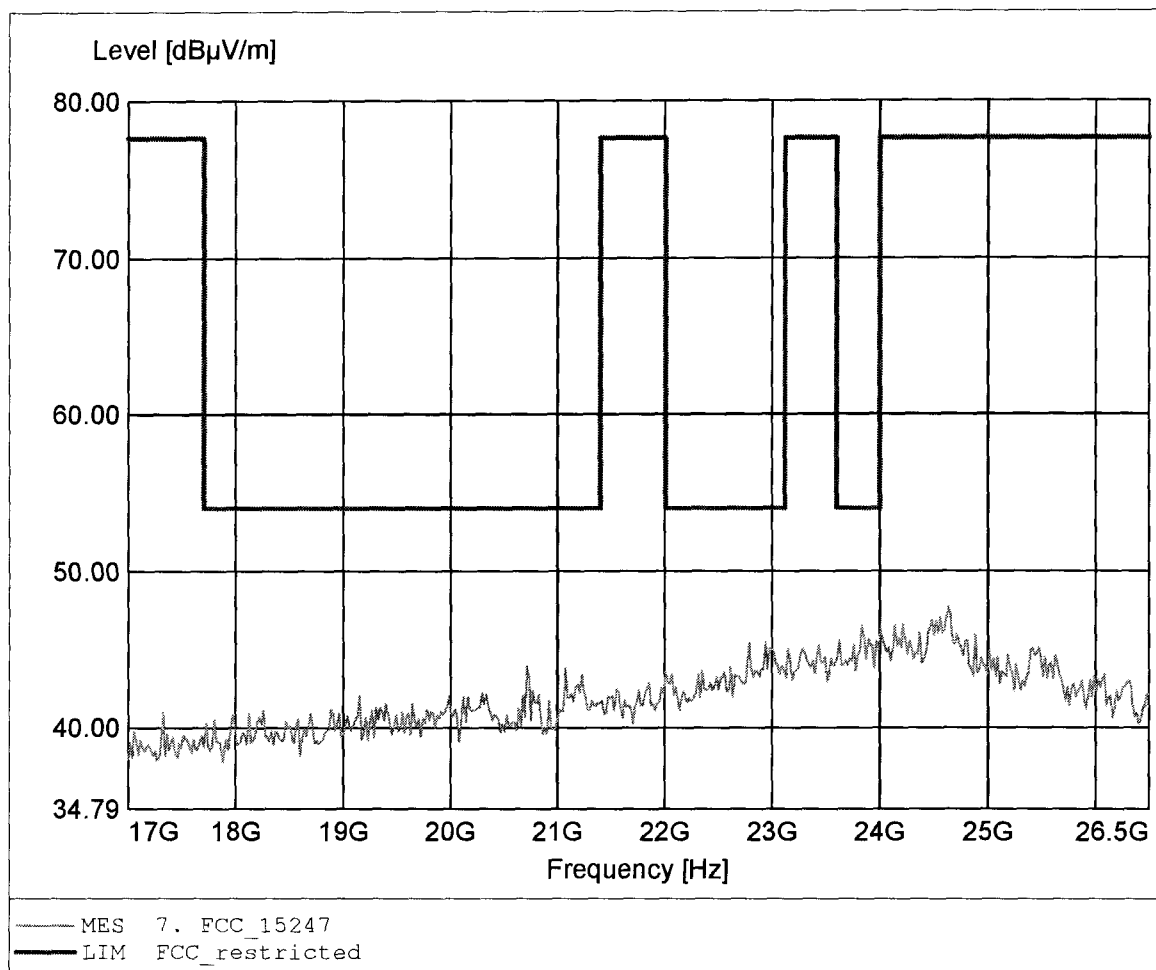

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Pantech Co., Ltd
EUT: Triple Band GSM850/DCS1800/PCS1900 (with WAP&GPRS)
Model: S100 / Bluetooth / 2402 MHz
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom.: 4.0 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 24.577GHz, Emax: 47.97dBuV/m, RBW: 1MHz

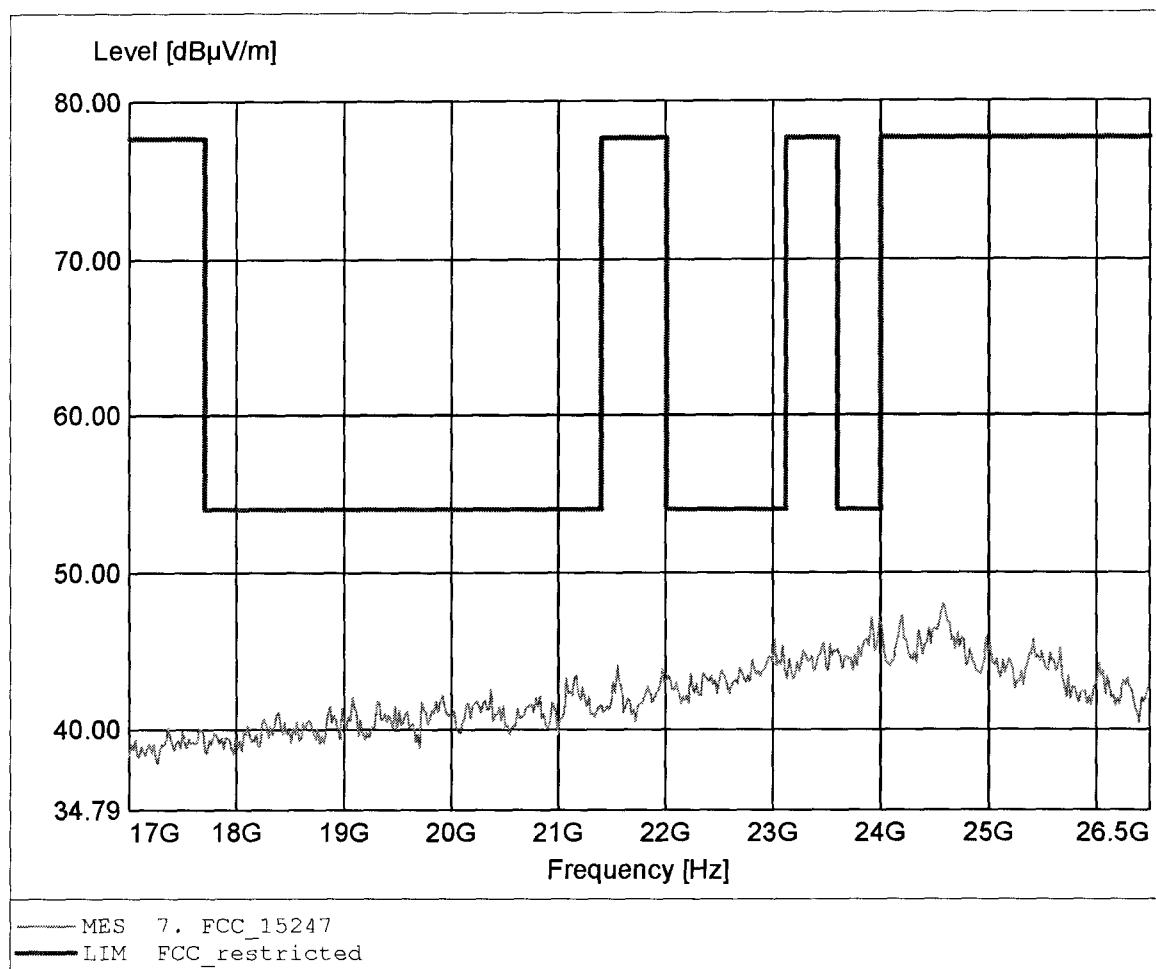

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Pantech Co., Ltd
EUT: Triple Band GSM850/DCS1800/PCS1900 (with WAP&GPRS)
Model: S100 / Bluetooth / 2441 MHz
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom.: 4.0 V DC
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 186.032MHz, Emax: 31.59dBμV/m, RBW: 100kHz

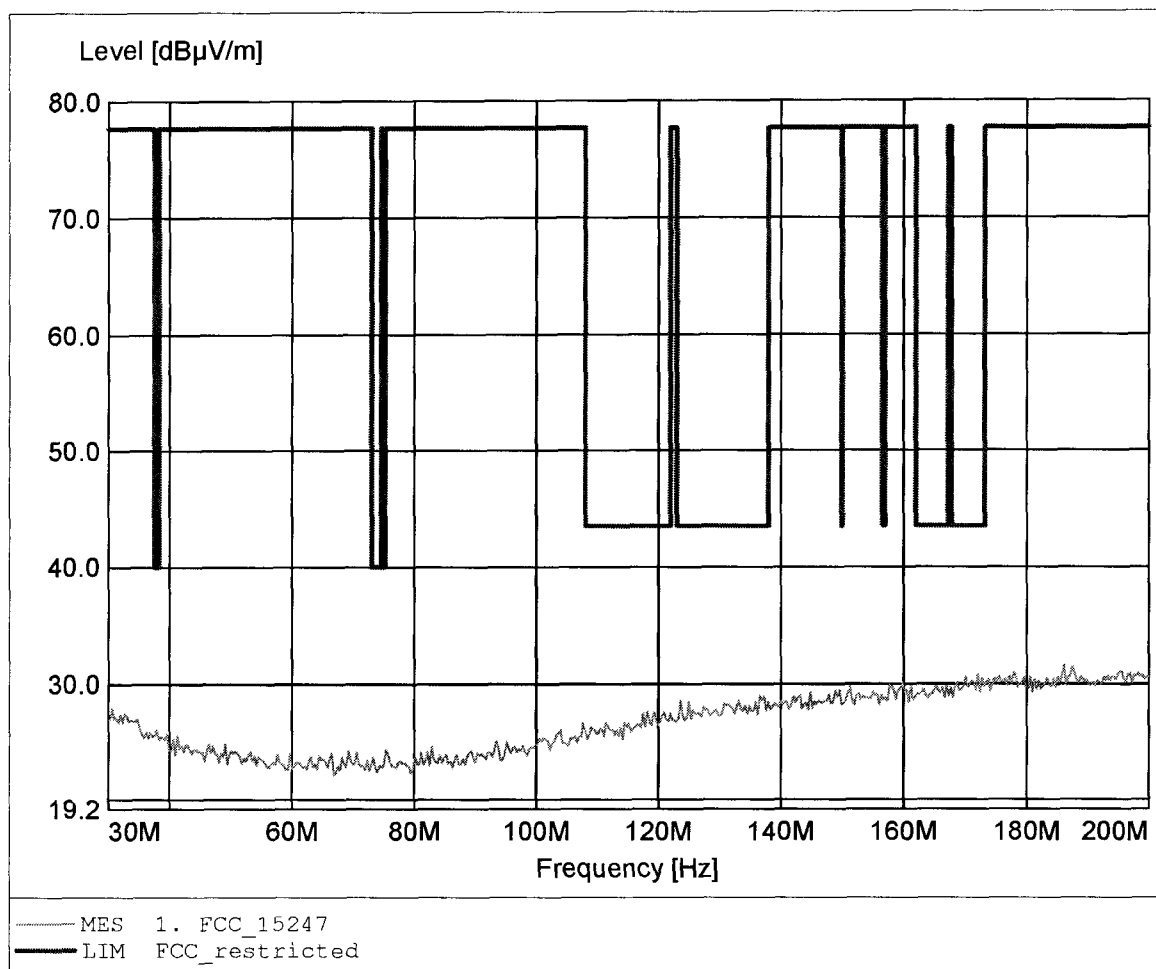

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Pantech Co., Ltd
EUT: Triple Band GSM850/DCS1800/PCS1900 (with WAP&GPRS)
Model: S100 / Bluetooth / 2441 MHz
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom.: 4.0 V DC
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 198.978MHz, Emax: 31.98dBμV/m, RBW: 100kHz

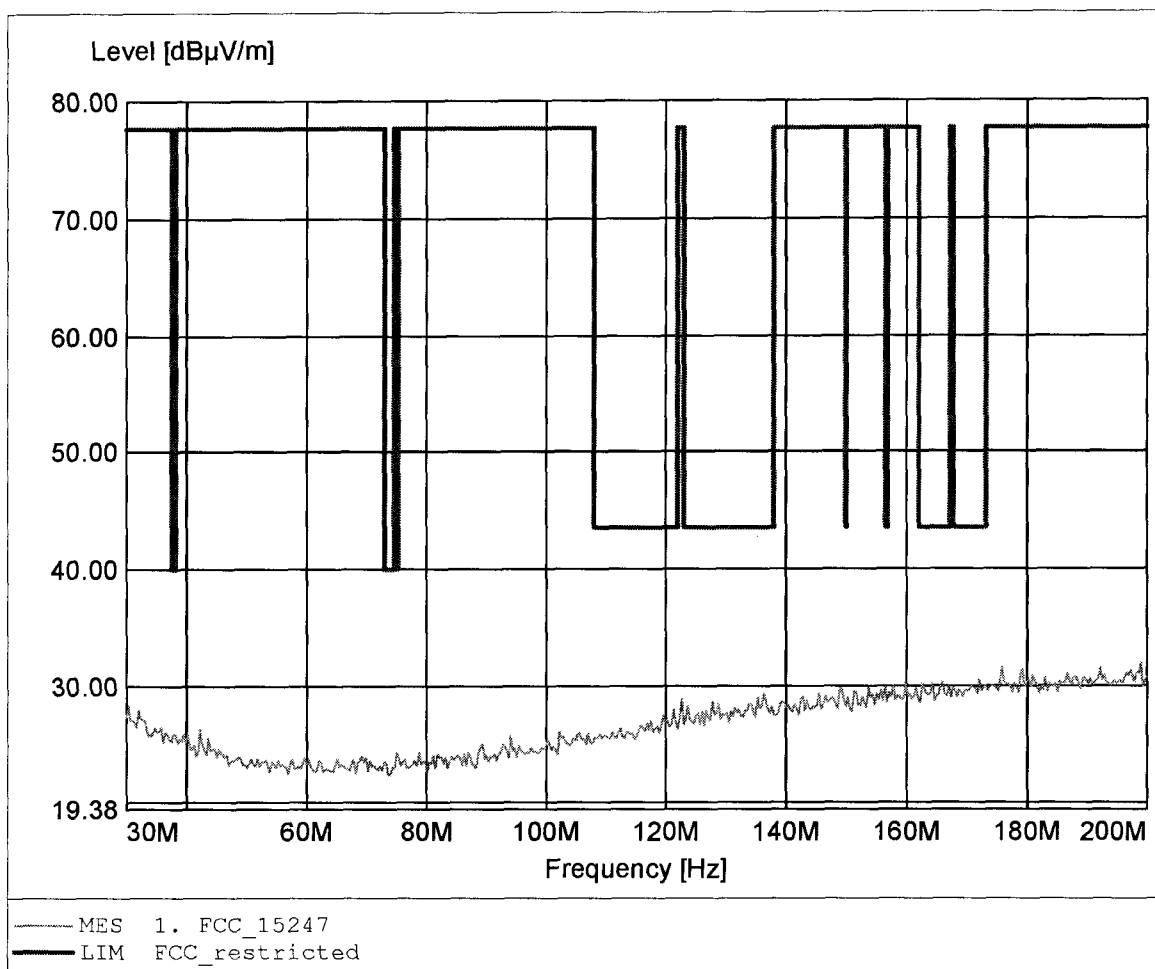

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Pantech Co., Ltd
EUT: Triple Band GSM850/DCS1800/PCS1900 (with WAP&GPRS)
Model: S100 / Bluetooth / 2441 MHz
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom.: 4.0 V DC
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 990.381MHz, Emax: 22.12dBμV/m, RBW: 100kHz

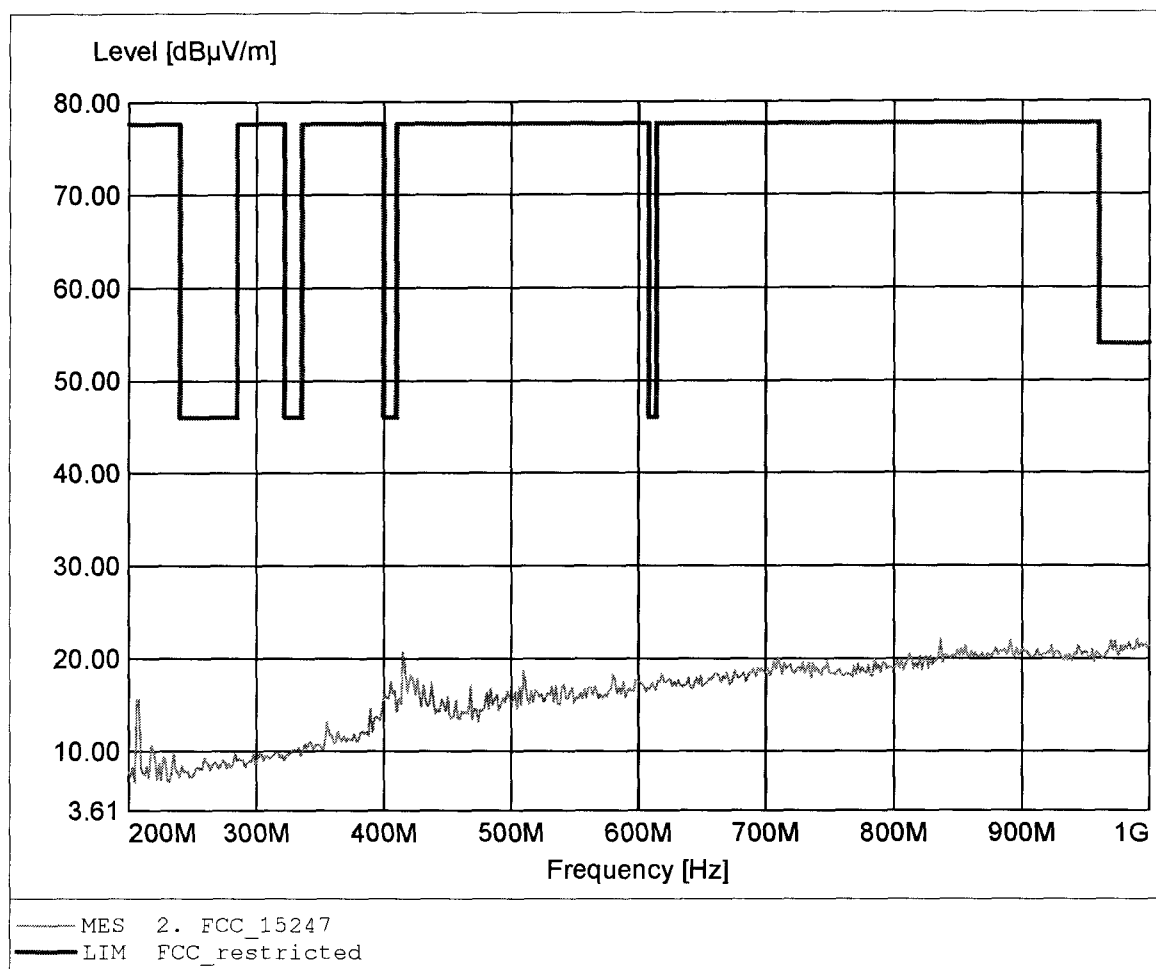

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Pantech Co., Ltd
EUT: Triple Band GSM850/DCS1800/PCS1900 (with WAP&GPRS)
Model: S100 / Bluetooth / 2441 MHz
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom.: 4.0 V DC
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 995.190MHz, Emax: 22.01dBμV/m, RBW: 100kHz

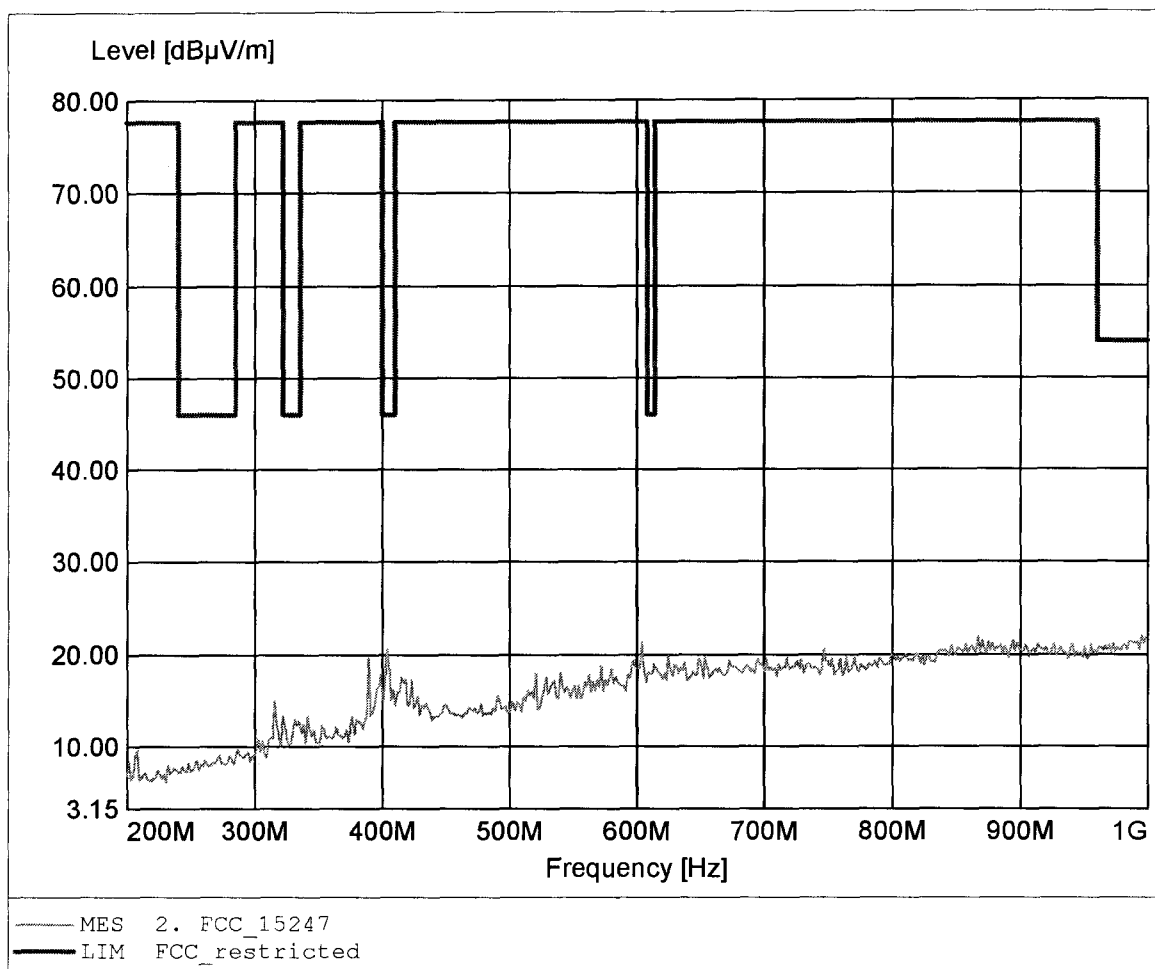

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Pantech Co., Ltd
EUT: Triple Band GSM850/DCS1800/PCS1900 (with WAP&GPRS)
Model: S100 / Bluetooth / 2441 MHz
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom.: 4.0 V DC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 4.000GHz, Emax: 42.74dBμV/m, RBW: 1MHz

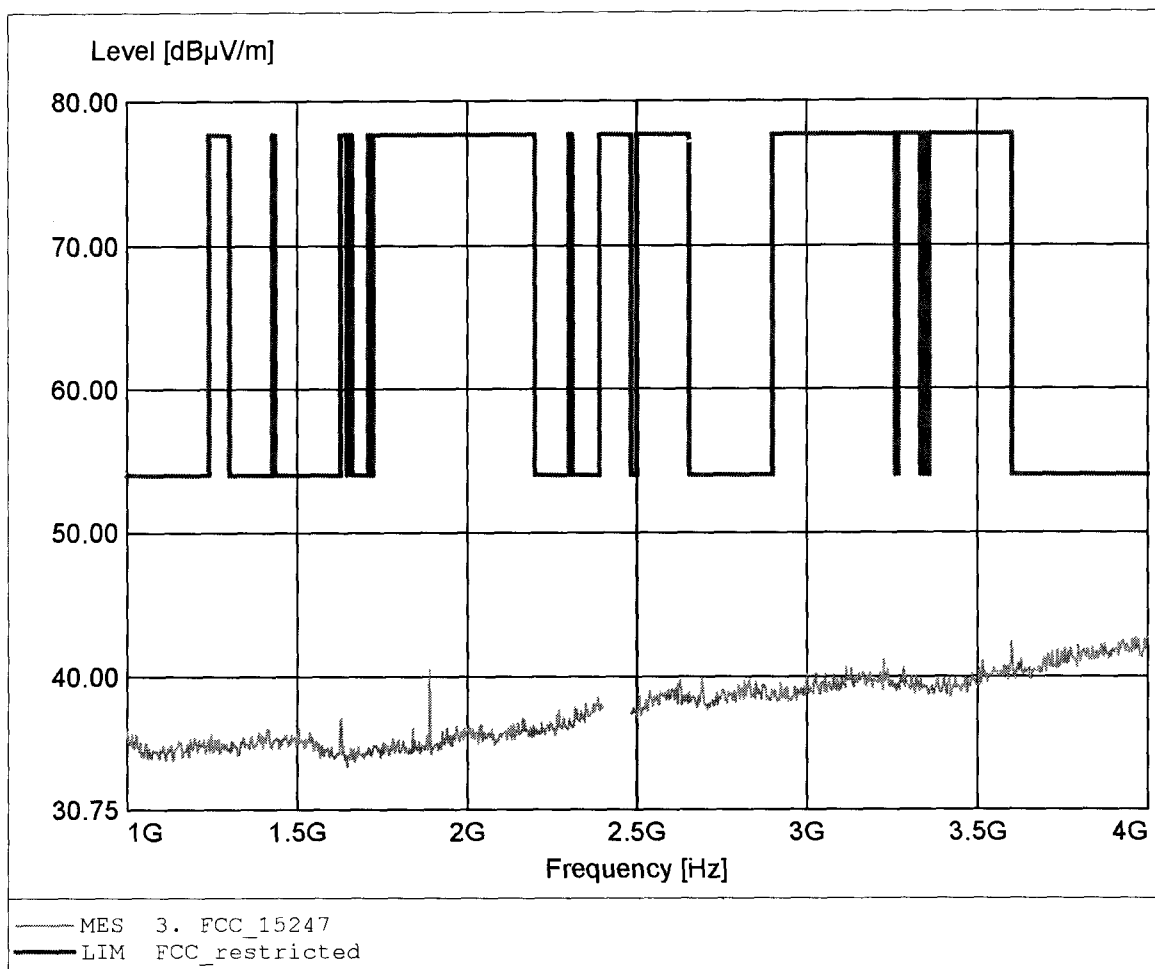

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Pantech Co., Ltd
EUT: Triple Band GSM850/DCS1800/PCS1900 (with WAP&GPRS)
Model: S100 / Bluetooth / 2441 MHz
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom.: 4.0 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.933GHz, Emax: 43.61dBμV/m, RBW: 1MHz

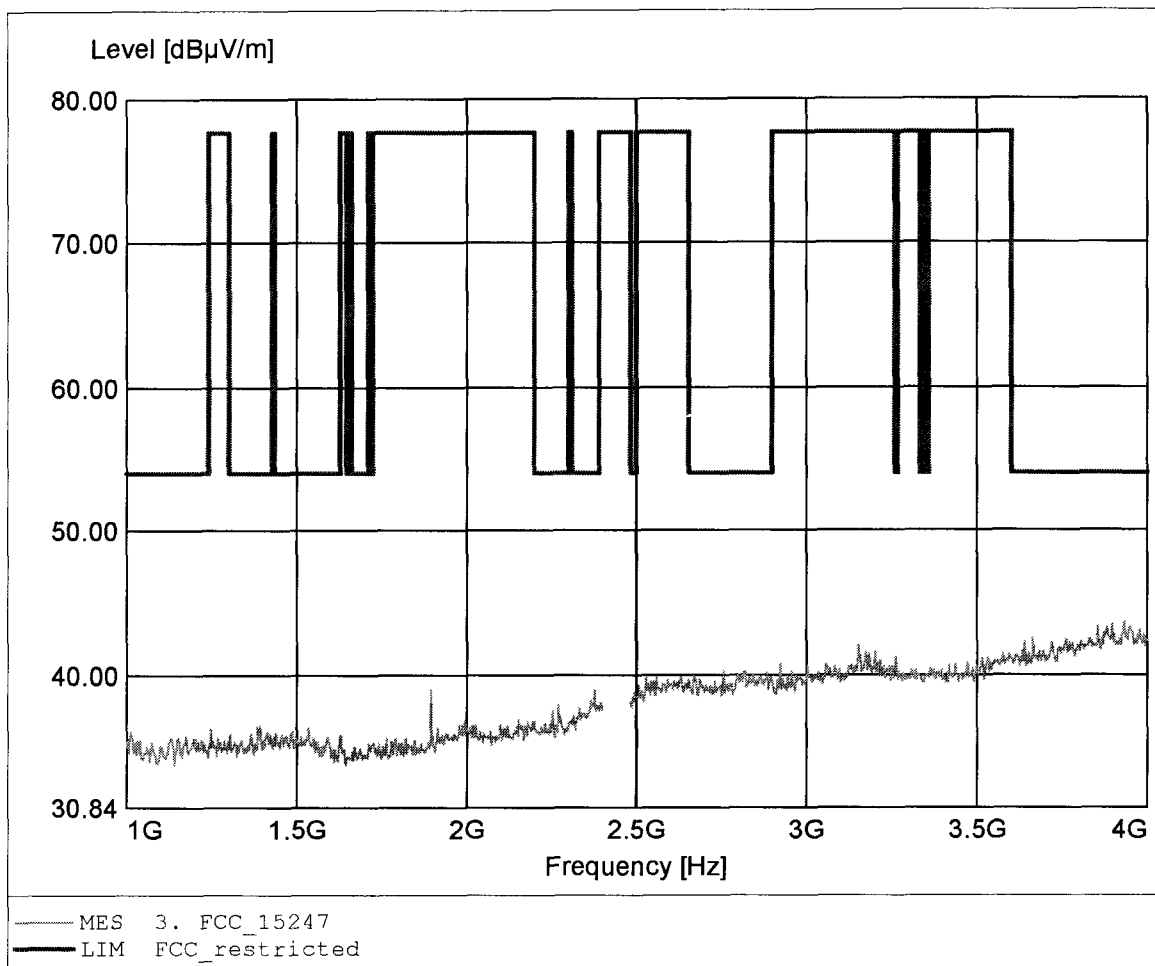

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Pantech Co., Ltd
EUT: Triple Band GSM850/DCS1800/PCS1900 (with WAP&GPRS)
Model: S100 / Bluetooth / 2441 MHz
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom.: 4.0 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.327GHz, Emax: 51.37dBμV/m, RBW: 1MHz

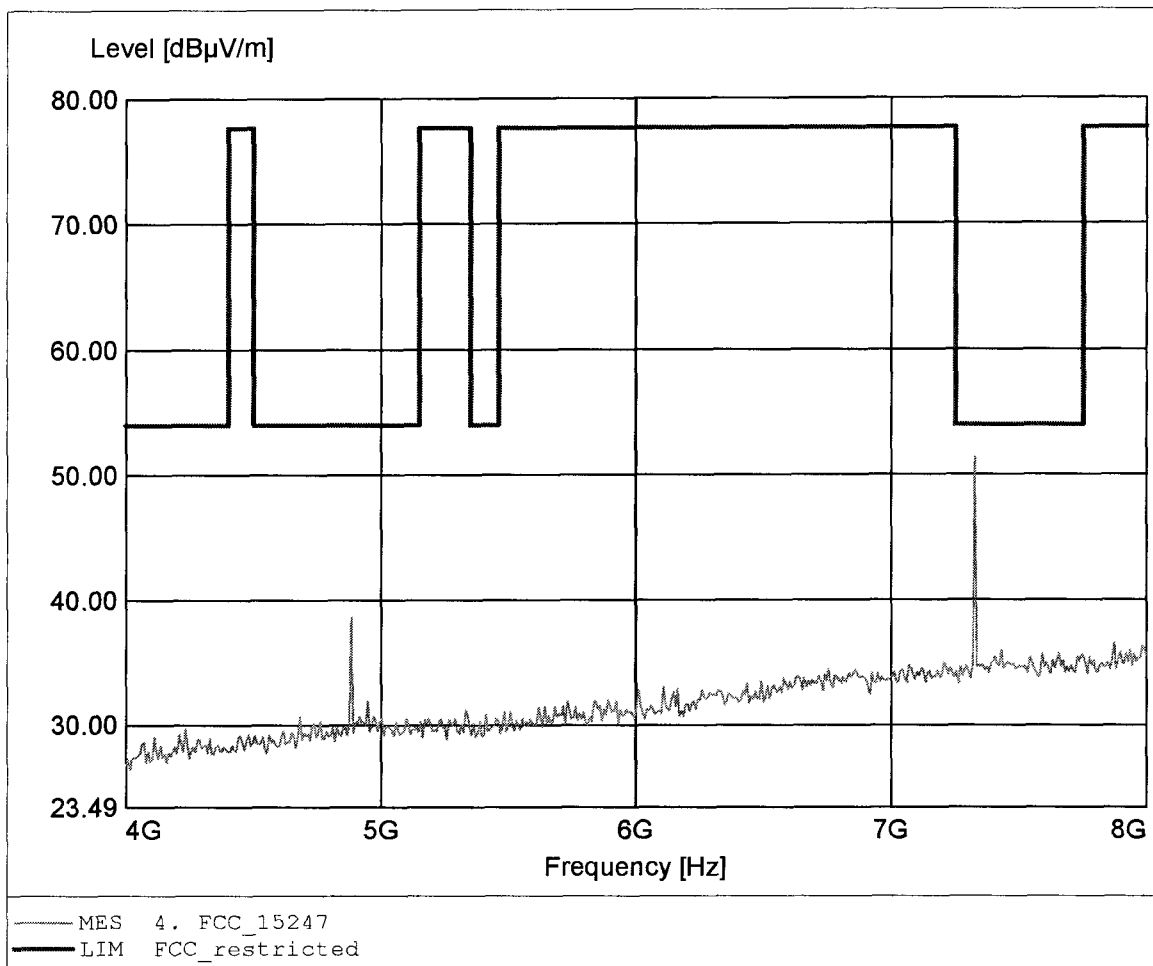

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Pantech Co., Ltd
EUT: Triple Band GSM850/DCS1800/PCS1900 (with WAP&GPRS)
Model: S100 / Bluetooth / 2441 MHz
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom.: 4.0 V DC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.327GHz, Emax: 50.68dBuV/m, RBW: 1MHz

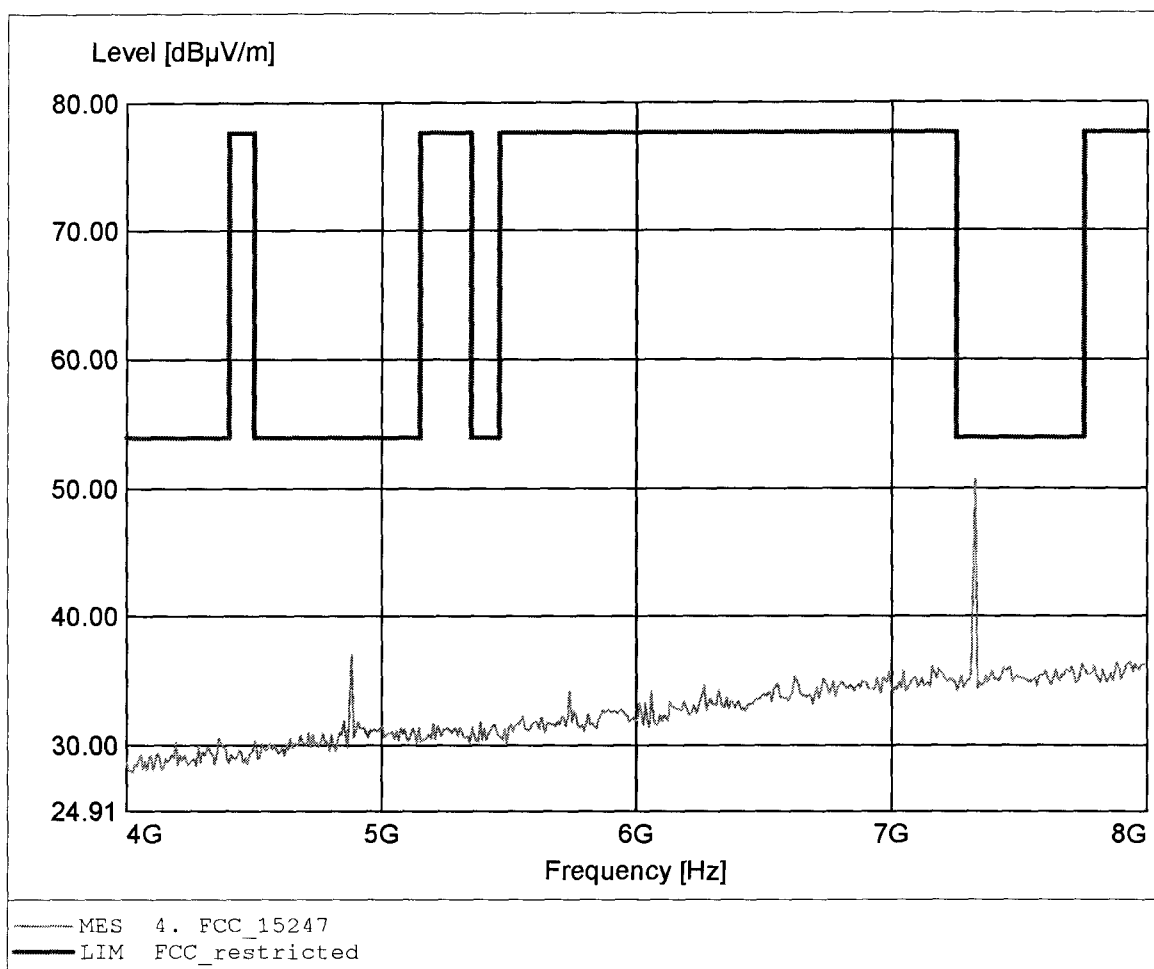

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Pantech Co., Ltd
EUT: Triple Band GSM850/DCS1800/PCS1900 (with WAP&GPRS)
Model: S100 / Bluetooth / 2441 MHz
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom.: 4.0 V DC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 9.764GHz, Emax: 43.64dBμV/m, REW: 1MHz

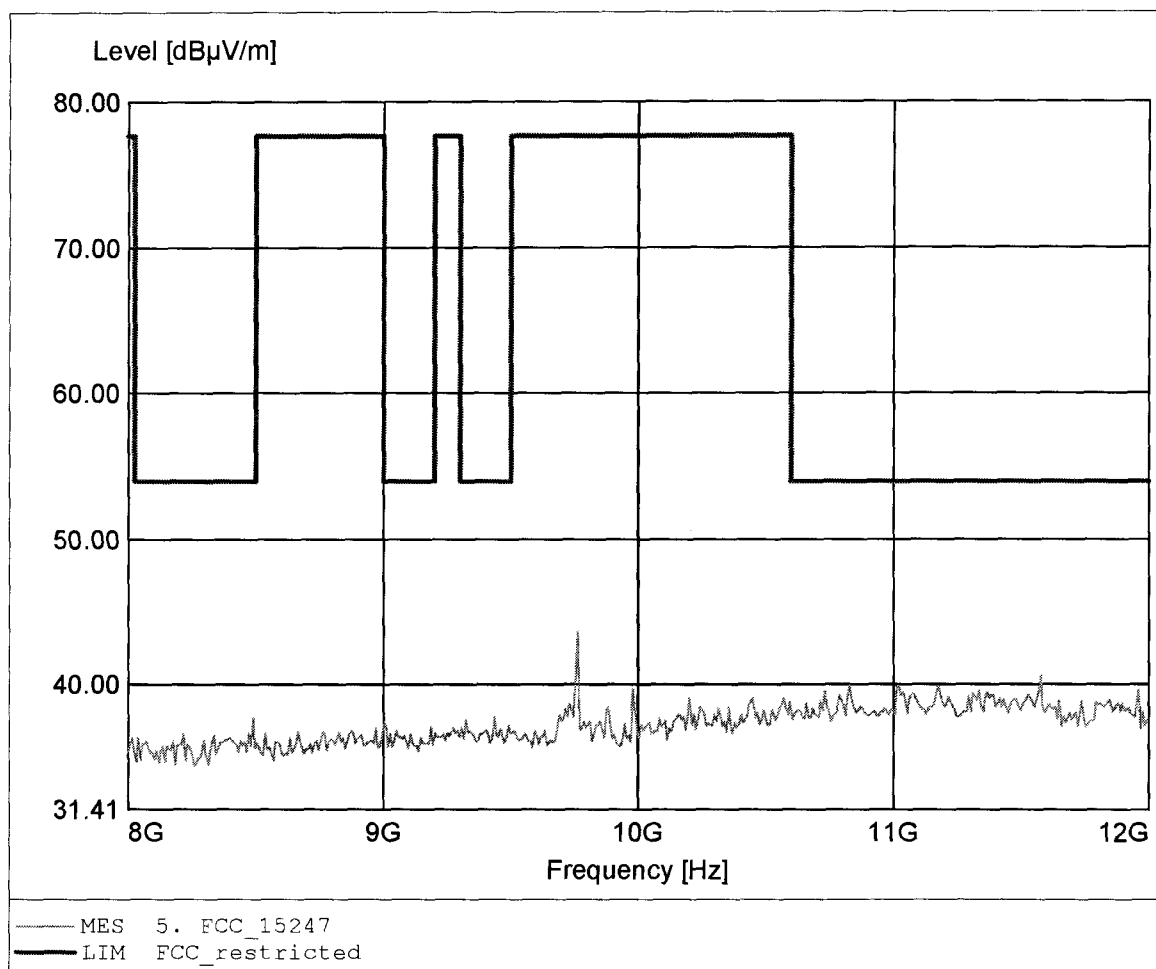

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Pantech Co., Ltd
EUT: Triple Band GSM850/DCS1800/PCS1900 (with WAP&GPRS)
Model: S100 / Bluetooth / 2441 MHz
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom.: 4.0 V DC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 9.764GHz, Emax: 45.37dBμV/m, RBW: 1MHz

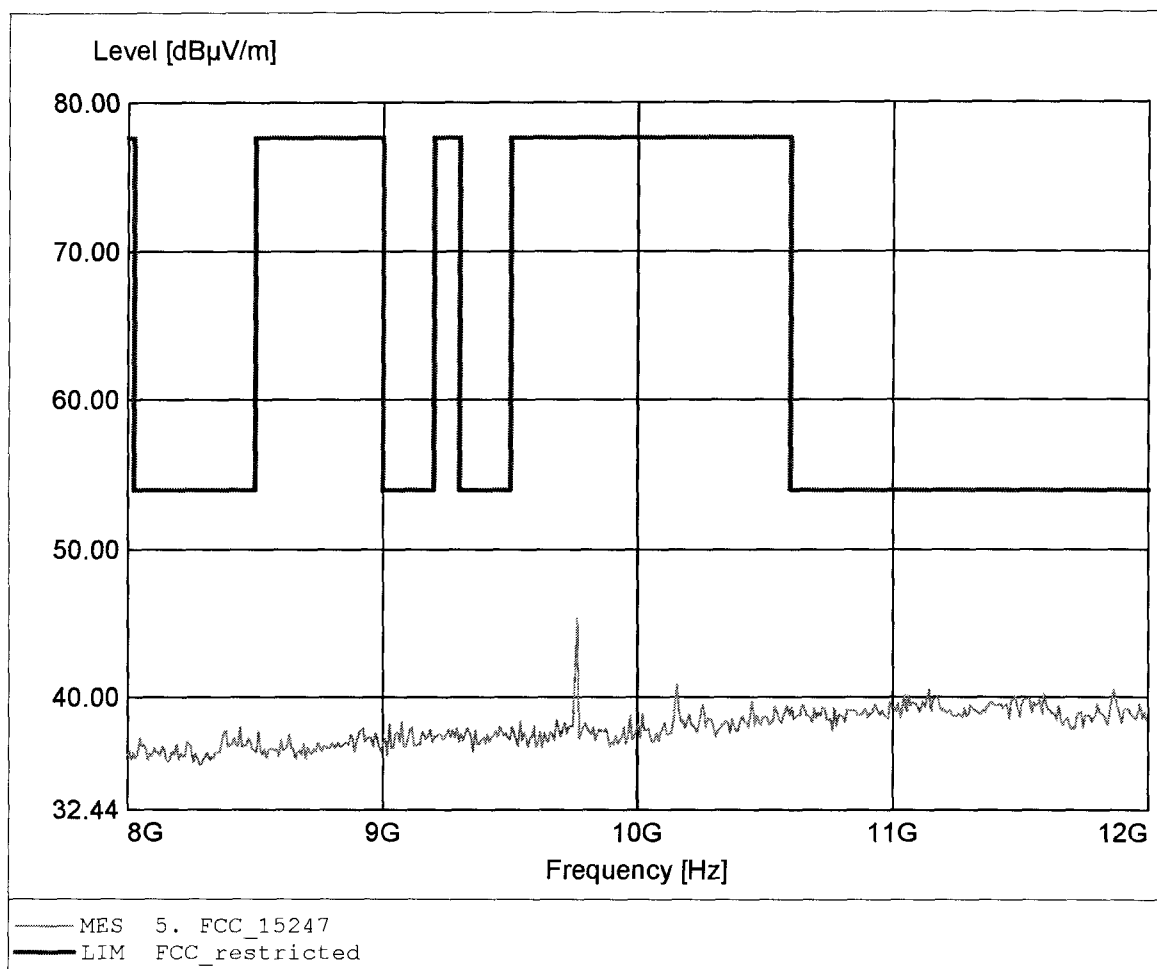

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Pantech Co., Ltd
EUT: Triple Band GSM850/DCS1800/PCS1900 (with WAP&GPRS)
Model: S100 / Bluetooth / 2441 MHz
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom.: 4.0 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.415GHz, Emax: 42.57dBμV/m, RBW: 1MHz

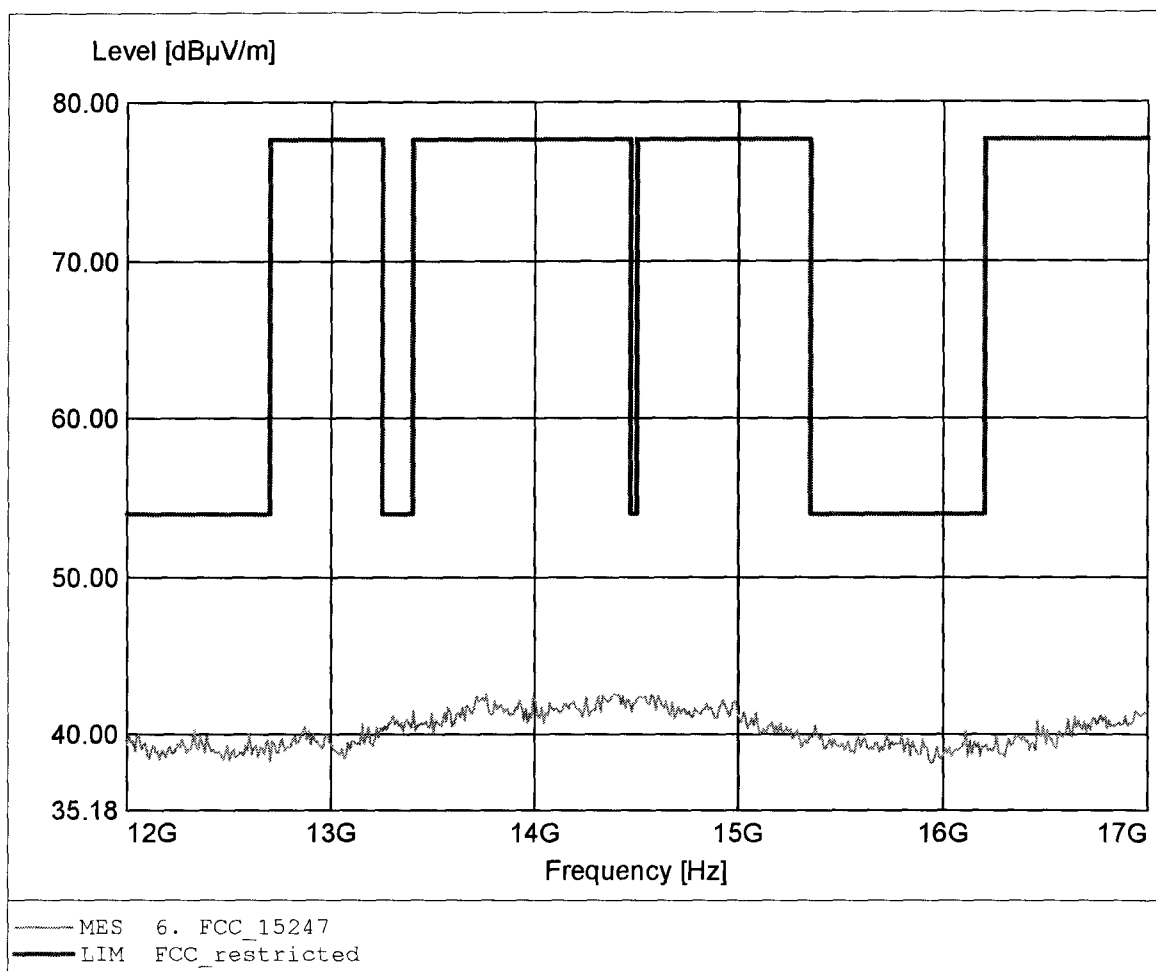

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Pantech Co., Ltd
EUT: Triple Band GSM850/DCS1800/PCS1900 (with WAP&GPRS)
Model: S100 / Bluetooth / 2441 MHz
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom.: 4.0 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.635GHz, Emax: 42.95dBμV/m, RBW: 1MHz

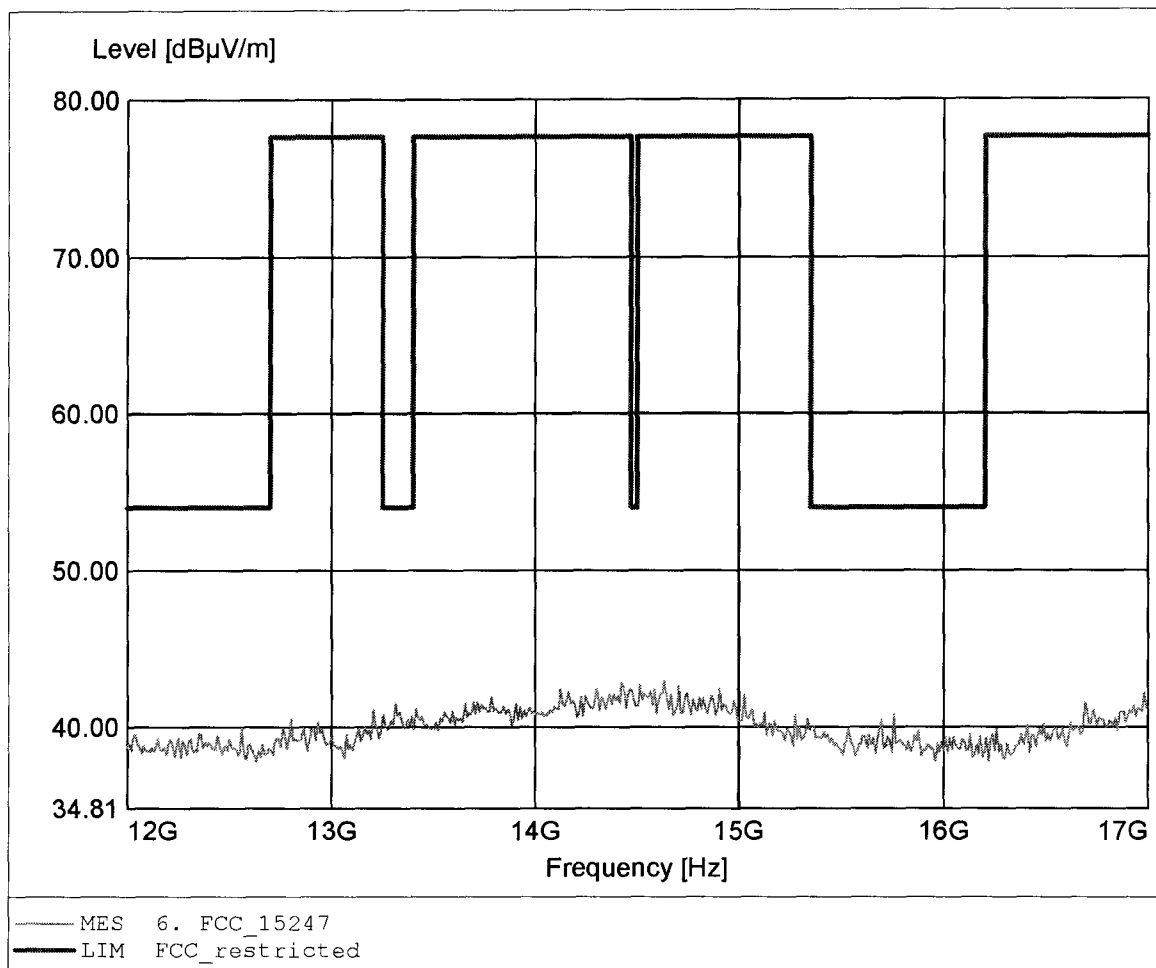

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Pantech Co., Ltd
EUT: Triple Band GSM850/DCS1800/PCS1900 (with WAP&GPRS)
Model: S100 / Bluetooth / 2441 MHz
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom.: 4.0 V DC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 24.501GHz, Emax: 48.51dBuV/m, RBW: 1MHz

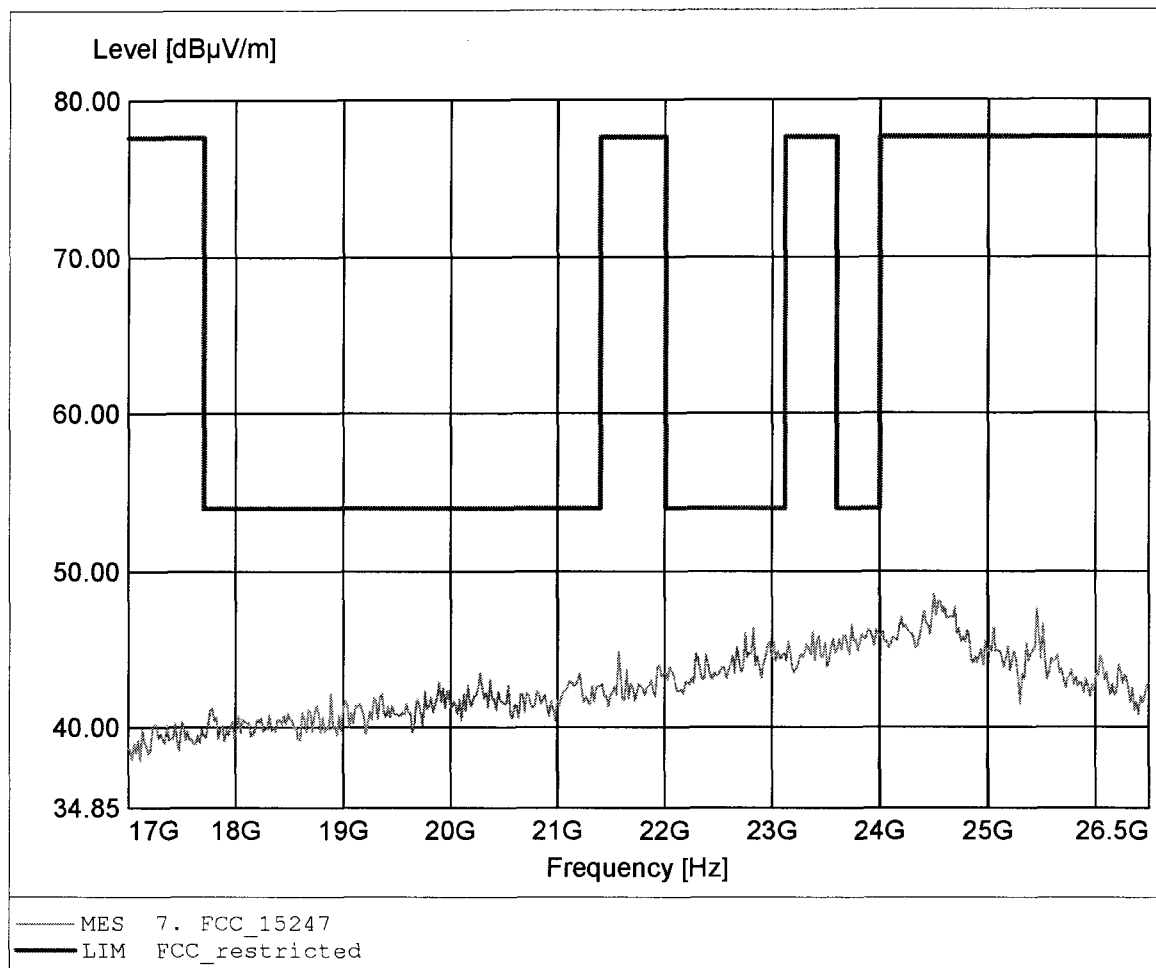

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Pantech Co., Ltd
EUT: Triple Band GSM850/DCS1800/PCS1900 (with WAP&GPRS)
Model: S100 / Bluetooth / 2480 MHz
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom.: 4.0 V DC
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 182.285MHz, Emax: 32.05dBμV/m, RBW: 100kHz

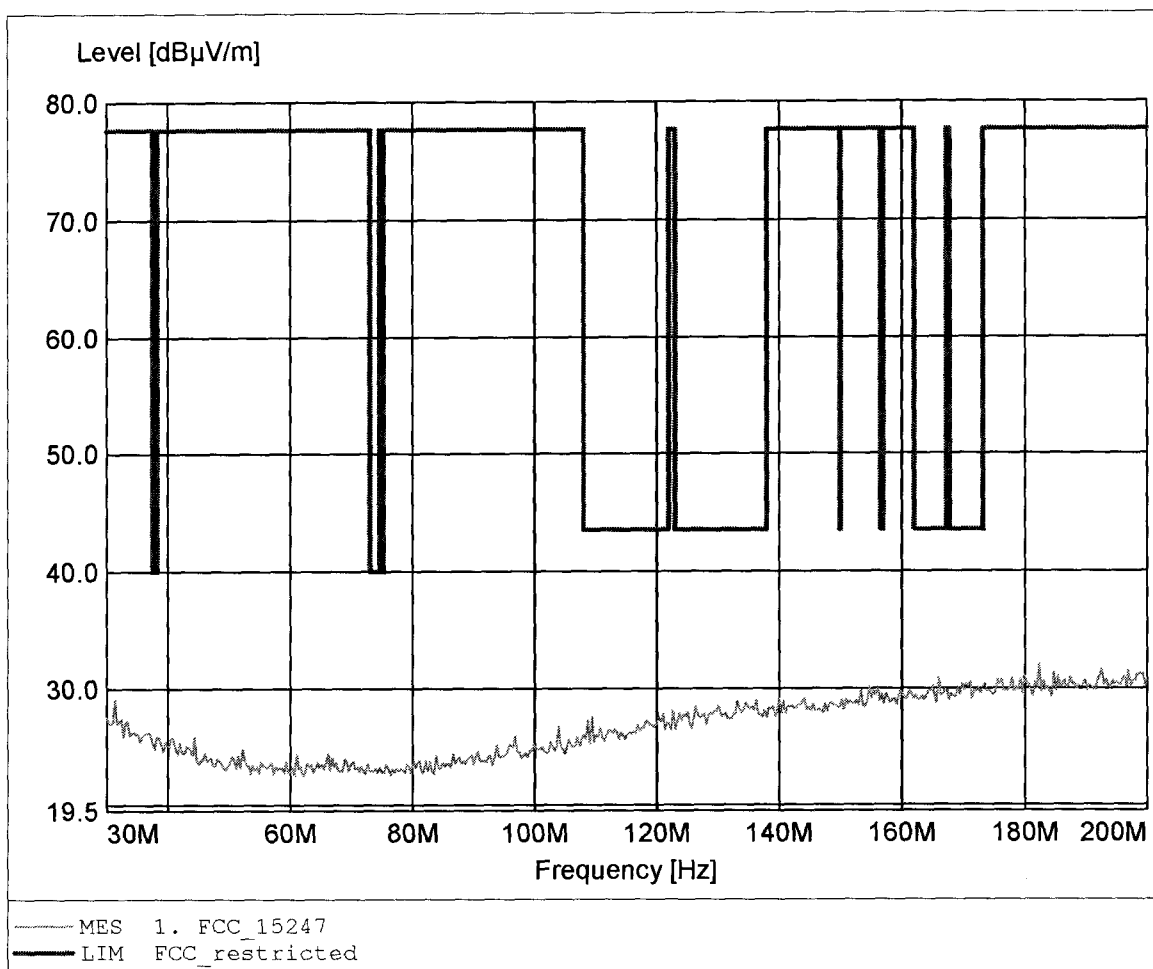

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Pantech Co., Ltd
EUT: Triple Band GSM850/DCS1800/PCS1900 (with WAP&GPRS)
Model: S100 / Bluetooth / 2441 MHz
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom.: 4.0 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 24.615GHz, Emax: 47.91dBμV/m, RBW: 1MHz

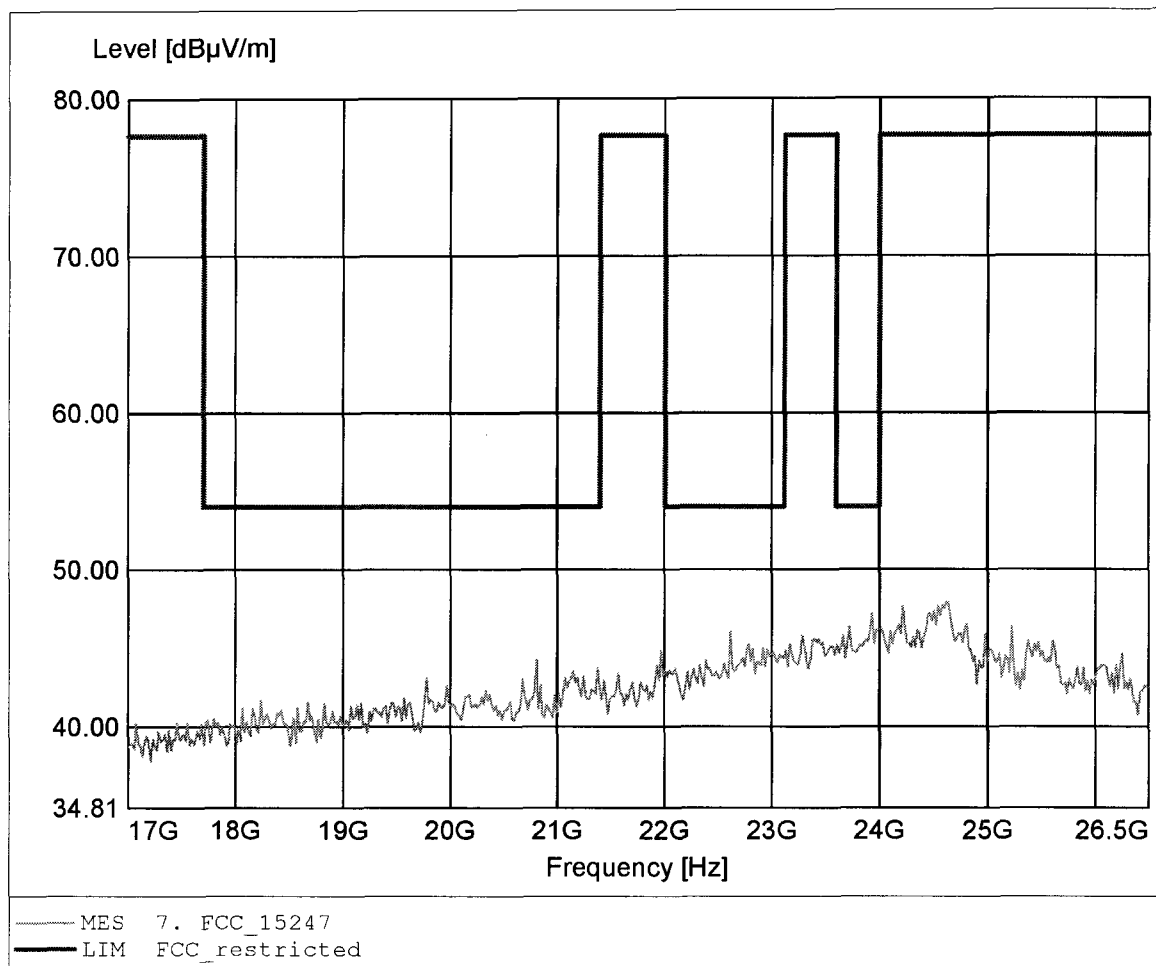

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Pantech Co., Ltd
EUT: Triple Band GSM850/DCS1800/PCS1900 (with WAP&GPRS)
Model: S100 / Bluetooth / 2480 MHz
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom.: 4.0 V DC
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 198.297MHz, Emax: 32.23dBμV/m, RBW: 100kHz

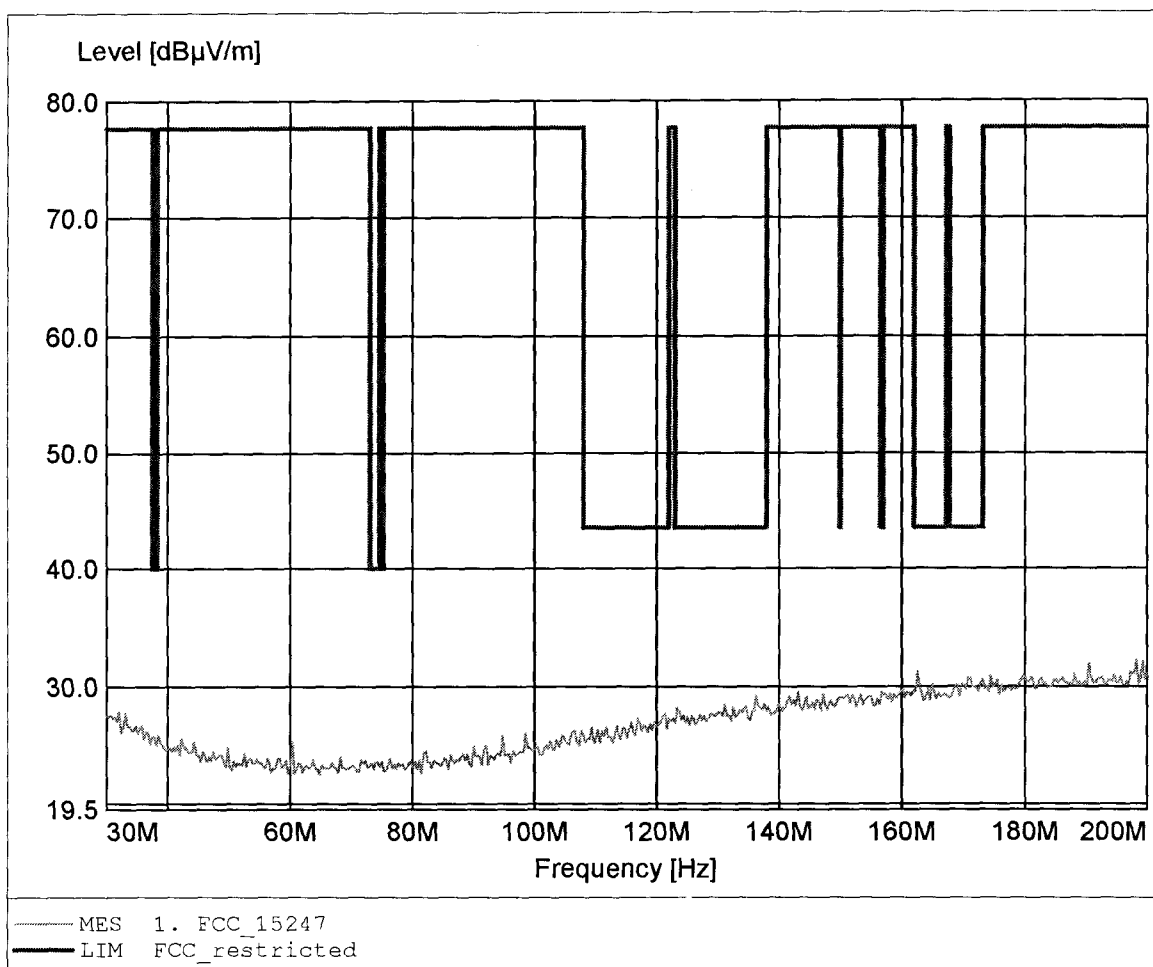

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Pantech Co., Ltd
EUT: Triple Band GSM850/DCS1800/PCS1900 (with WAP&GPRS)
Model: S100 / Bluetooth / 2480 MHz
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom.: 4.0 V DC
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 945.491MHz, Emax: 22.58dBµV/m, RBW: 100kHz

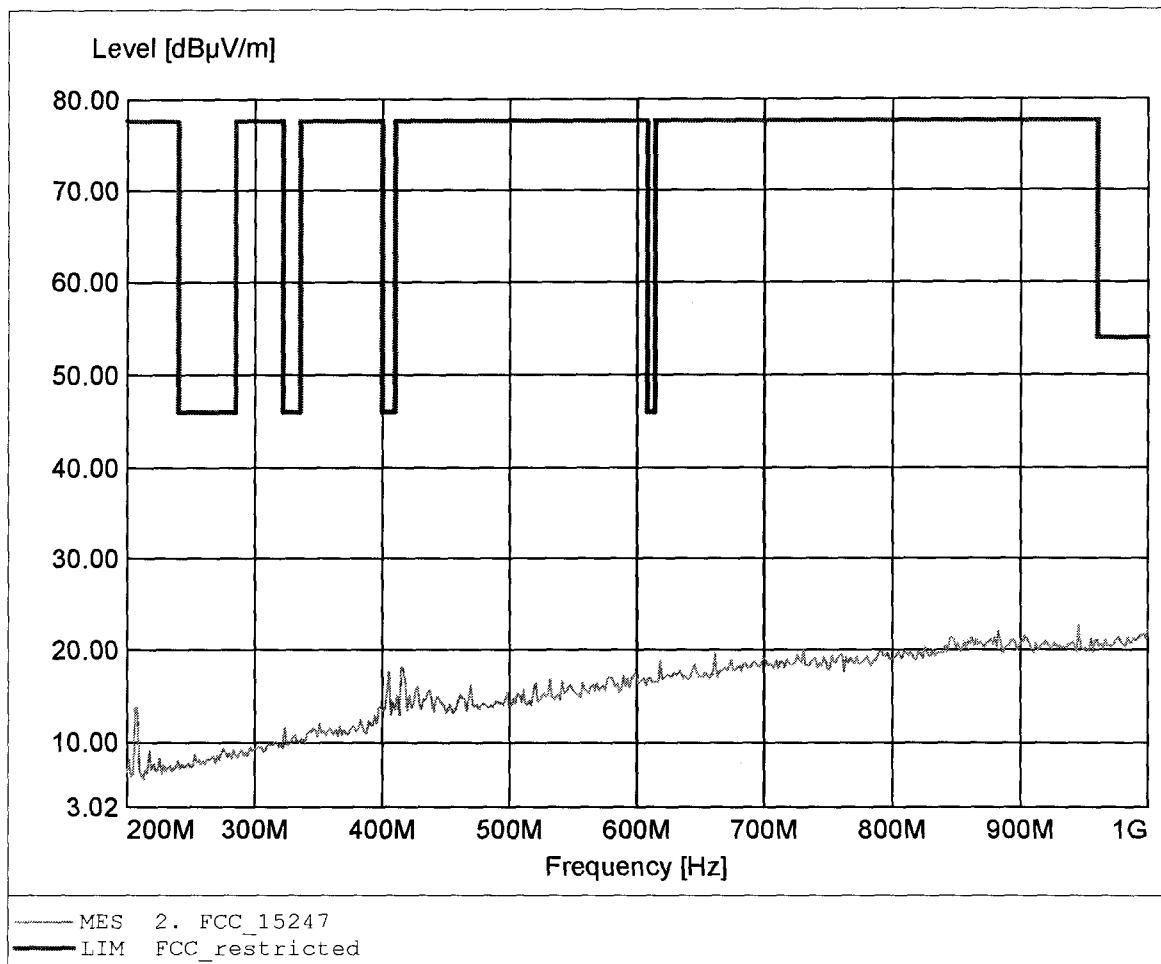

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Pantech Co., Ltd
EUT: Triple Band GSM850/DCS1800/PCS1900 (with WAP&GPRS)
Model: S100 / Bluetooth / 2480 MHz
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom.: 4.0 V DC
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 874.950MHz, Emax: 22.02dBμV/m, RBW: 100kHz

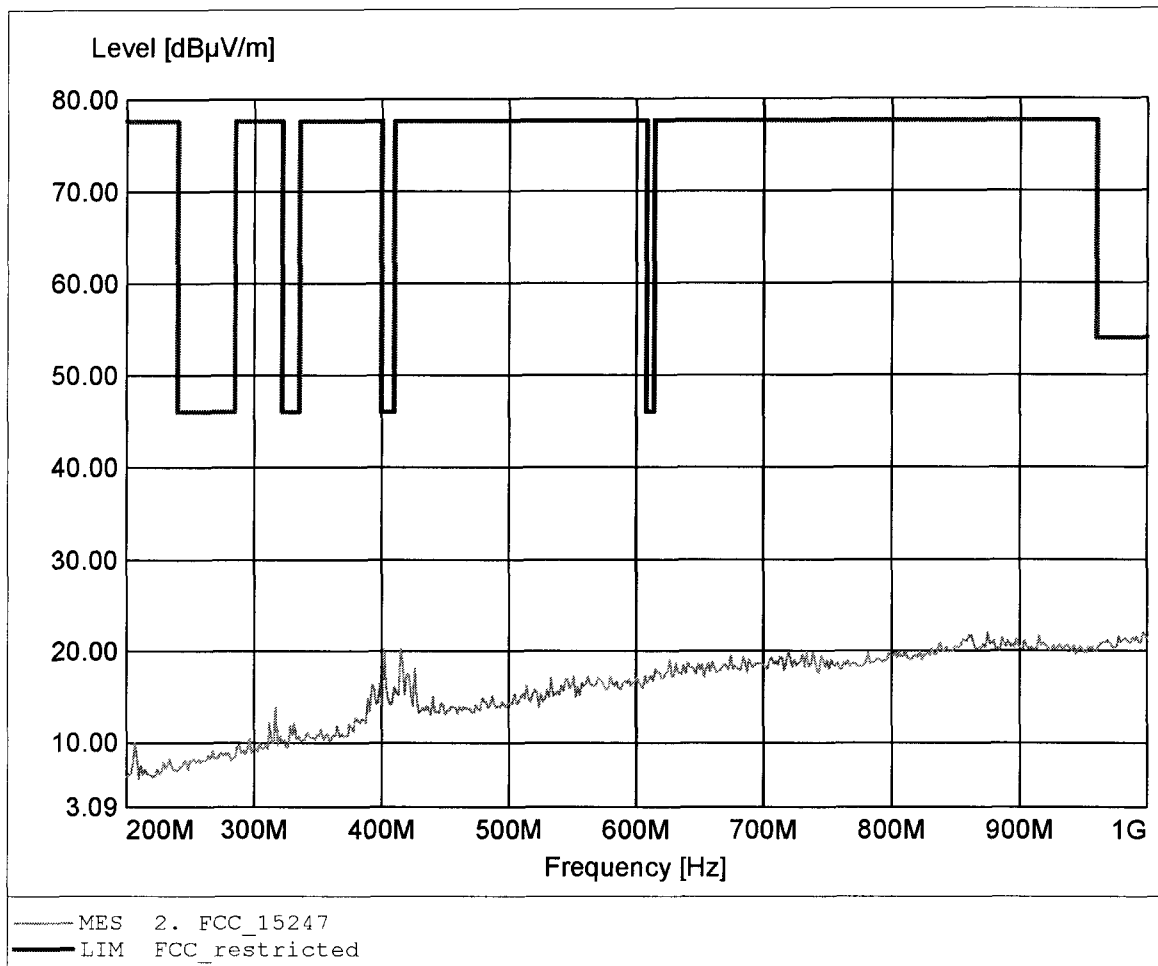

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Pantech Co., Ltd
EUT: Triple Band GSM850/DCS1800/PCS1900 (with WAP&GPRS)
Model: S100 / Bluetooth / 2480 MHz
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom.: 4.0 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 46.91dBuV/m, RBW: 1MHz

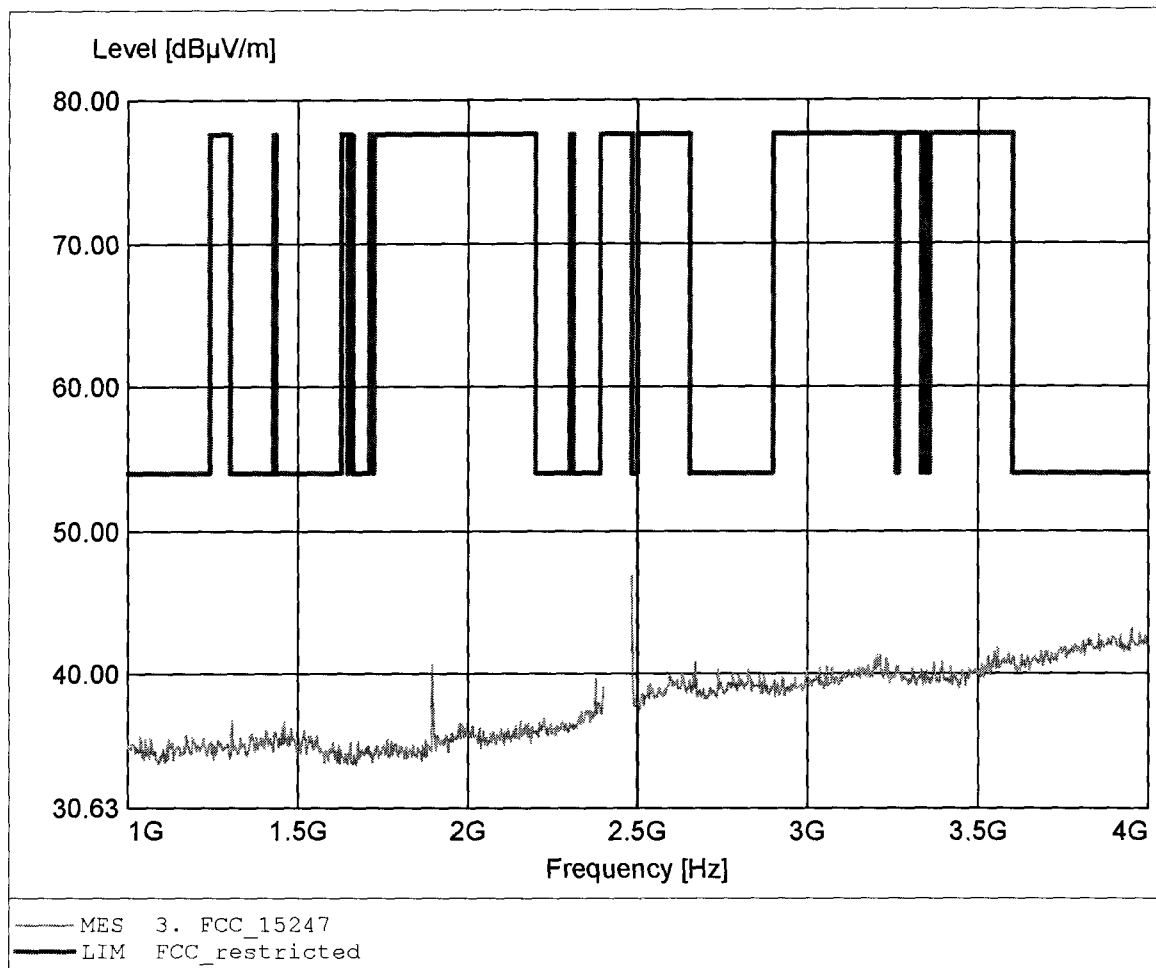

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Pantech Co., Ltd
EUT: Triple Band GSM850/DCS1800/PCS1900 (with WAP&GPRS)
Model: S100 / Bluetooth / 2480 MHz
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom.: 4.0 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.991GHz, Emax: 43.48dBμV/m, RBW: 1MHz

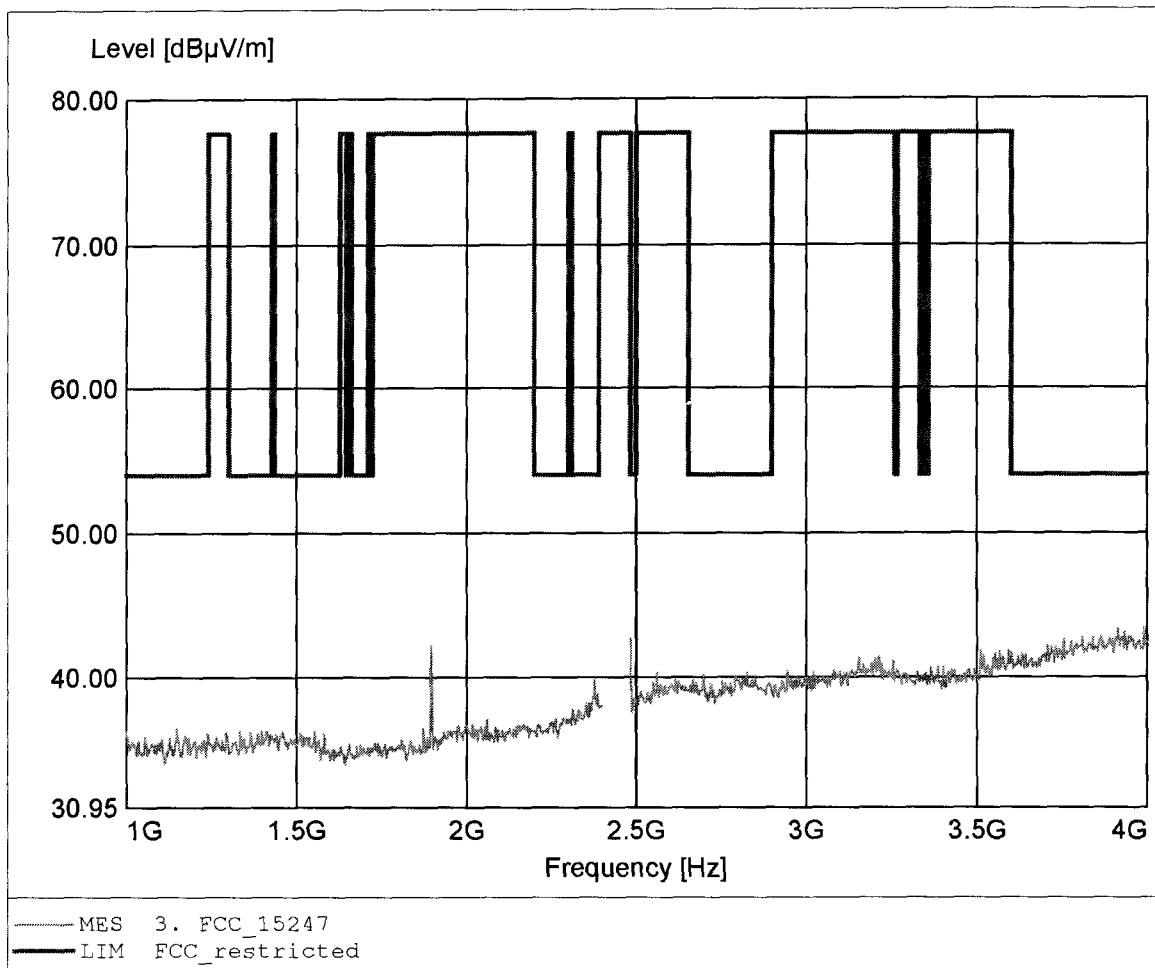

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Pantech Co., Ltd
EUT: Triple Band GSM850/DCS1800/PCS1900 (with WAP&GPRS)
Model: S100 / Bluetooth / 2480 MHz
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom.: 4.0 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.447GHz, Emax: 50.29dBμV/m, RBW: 1MHz

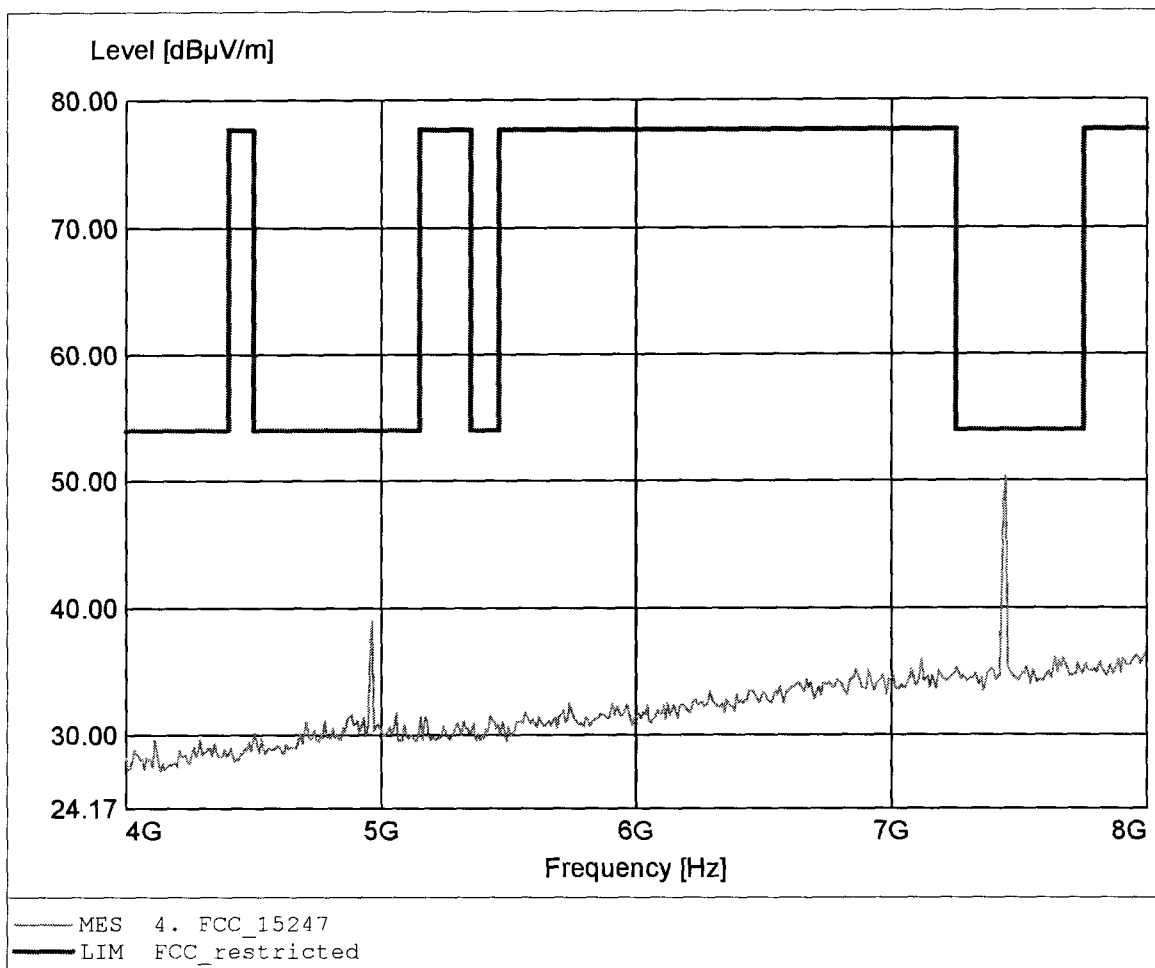

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Pantech Co., Ltd
EUT: Triple Band GSM850/DCS1800/PCS1900 (with WAP&GPRS)
Model: S100 / Bluetooth / 2480 MHz
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom.: 4.0 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.447GHz, Emax: 50.19dBμV/m, RBW: 1MHz

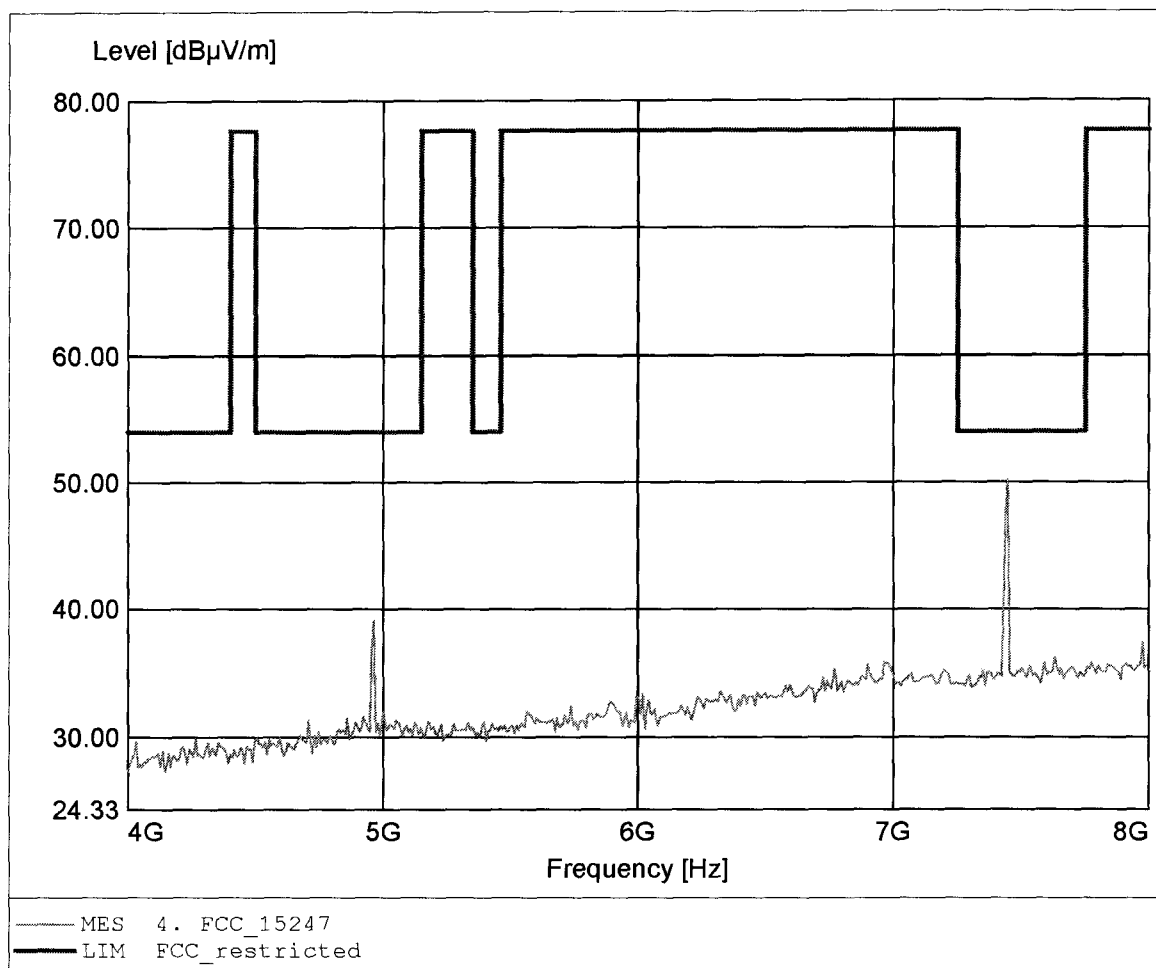

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Pantech Co., Ltd
EUT: Triple Band GSM850/DCS1800/PCS1900 (with WAP&GPRS)
Model: S100 / Bluetooth / 2480 MHz
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom.: 4.0 V DC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 9.924GHz, Emax: 41.64dBμV/m, REW: 1MHz

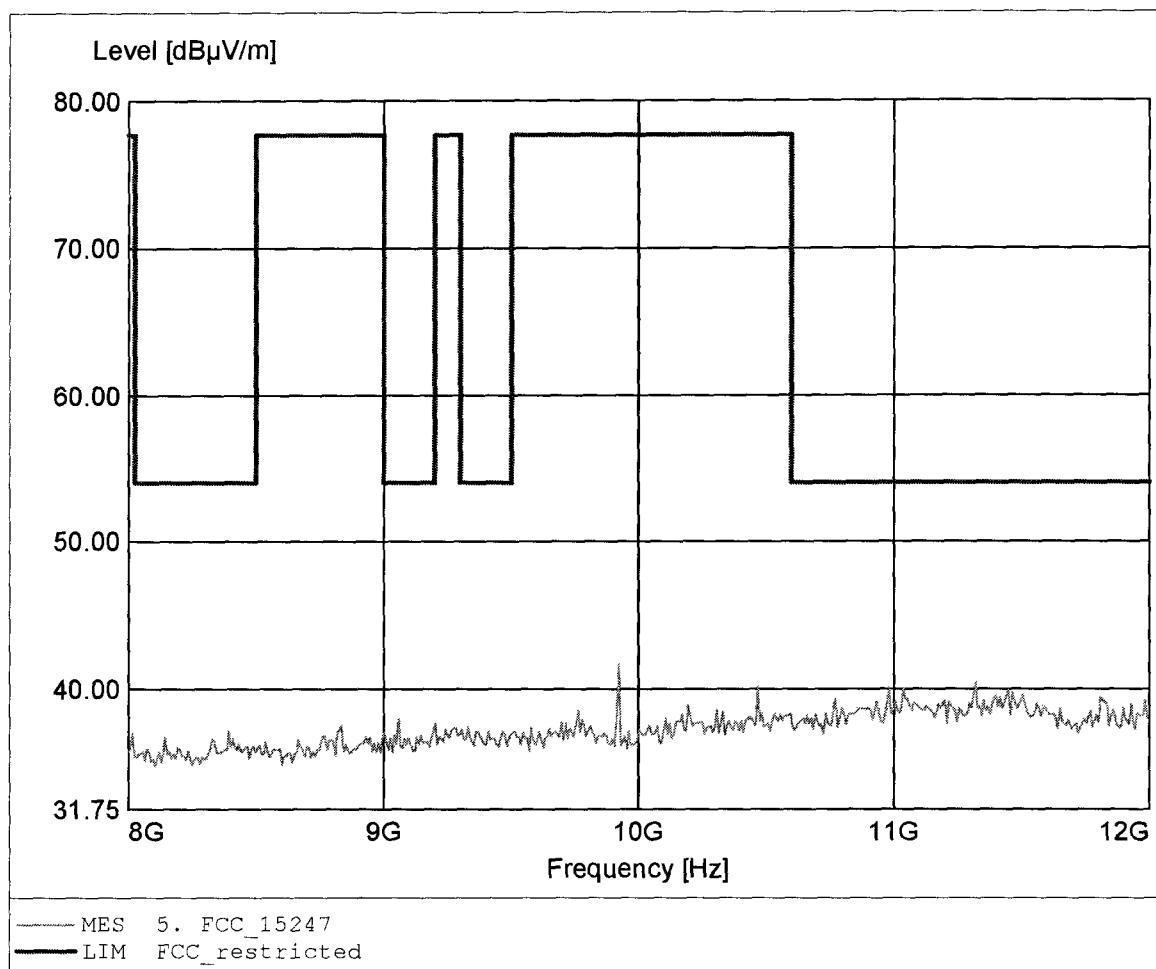

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Pantech Co., Ltd
EUT: Triple Band GSM850/DCS1800/PCS1900 (with WAP&GPRS)
Model: S100 / Bluetooth / 2480 MHz
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom.: 4.0 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 9.924GHz, Emax: 40.86dBμV/m, RBW: 1MHz

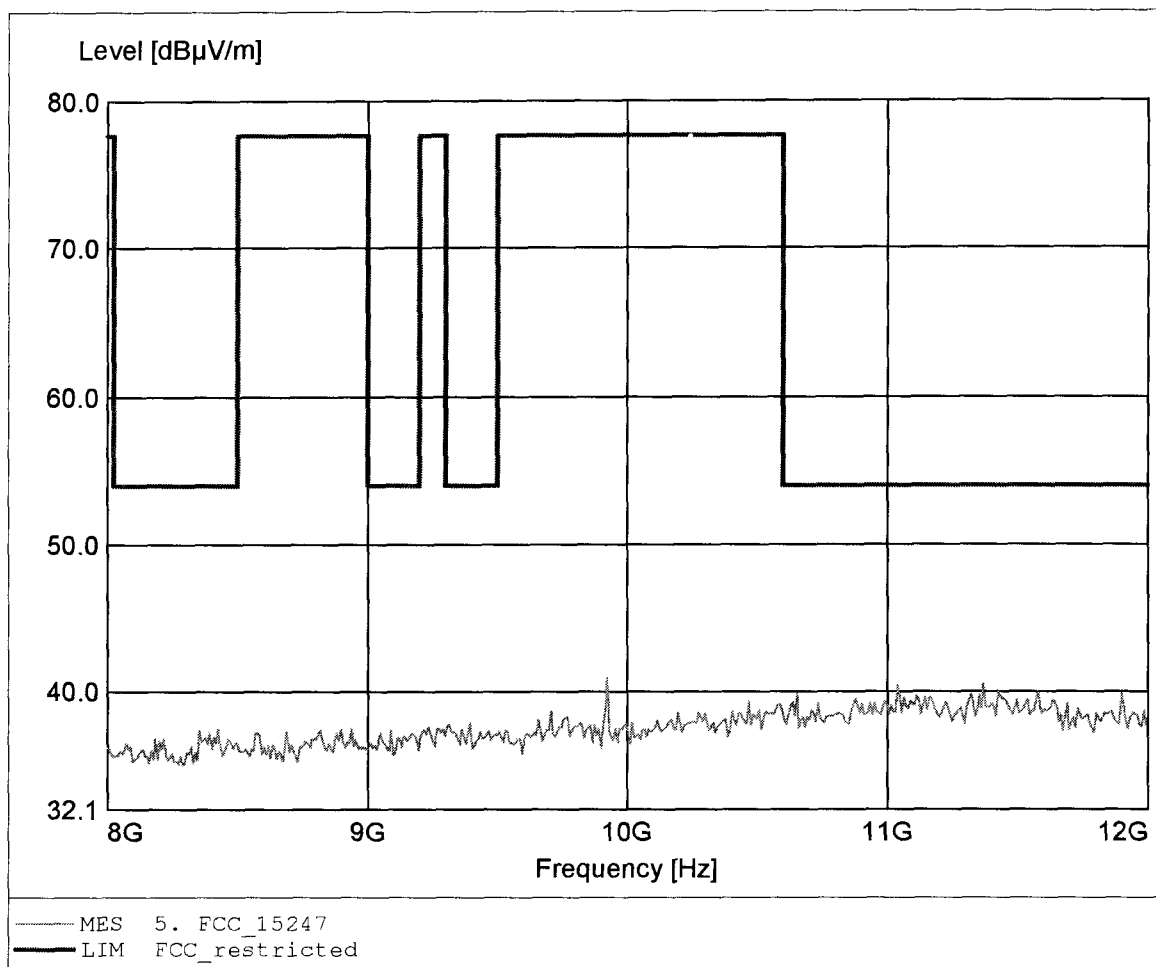

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Pantech Co., Ltd
EUT: Triple Band GSM850/DCS1800/PCS1900 (with WAP&GPRS)
Model: S100 / Bluetooth / 2480 MHz
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom.: 4.0 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.074GHz, Emax: 42.62dBuV/m, RBW: 1MHz

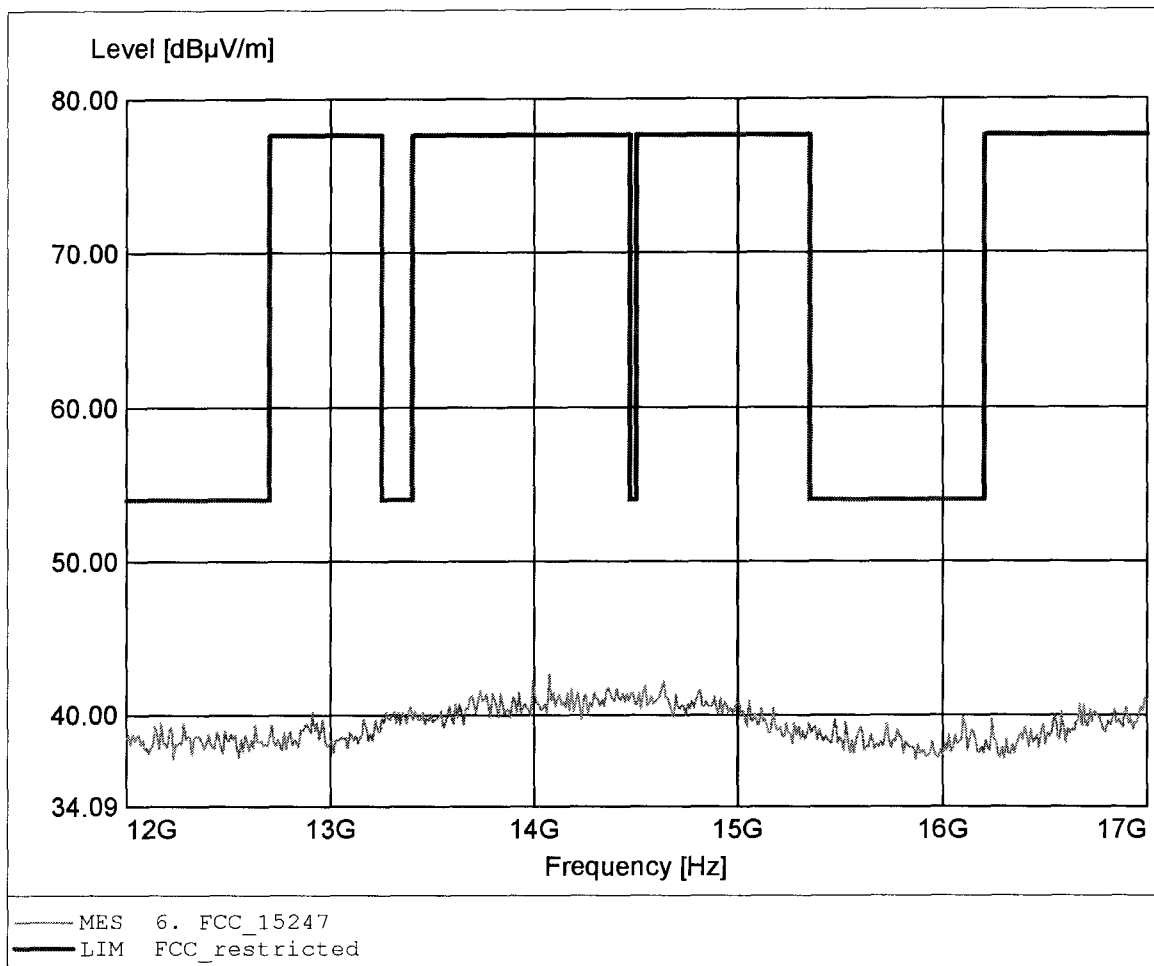

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Pantech Co., Ltd
EUT: Triple Band GSM850/DCS1800/PCS1900 (with WAP&GPRS)
Model: S100 / Bluetooth / 2480 MHz
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom.: 4.0 V DC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.455GHz, Emax: 42.16dBuV/m, RBW: 1MHz

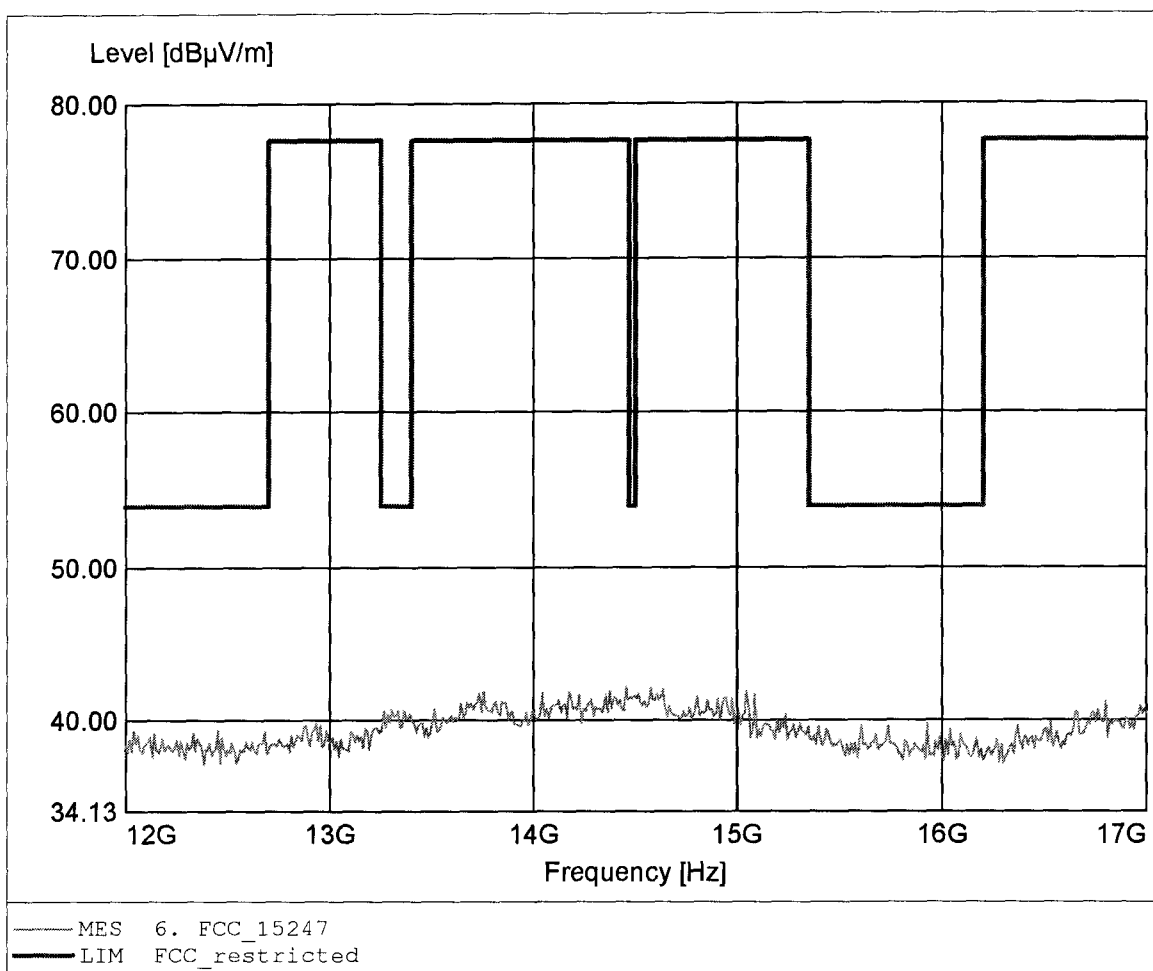

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Pantech Co., Ltd
EUT: Triple Band GSM850/DCS1800/PCS1900 (with WAP&GPRS)
Model: S100 / Bluetooth / 2480 MHz
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom.: 4.0 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 24.196GHz, Emax: 48.19dBμV/m, RBW: 1MHz

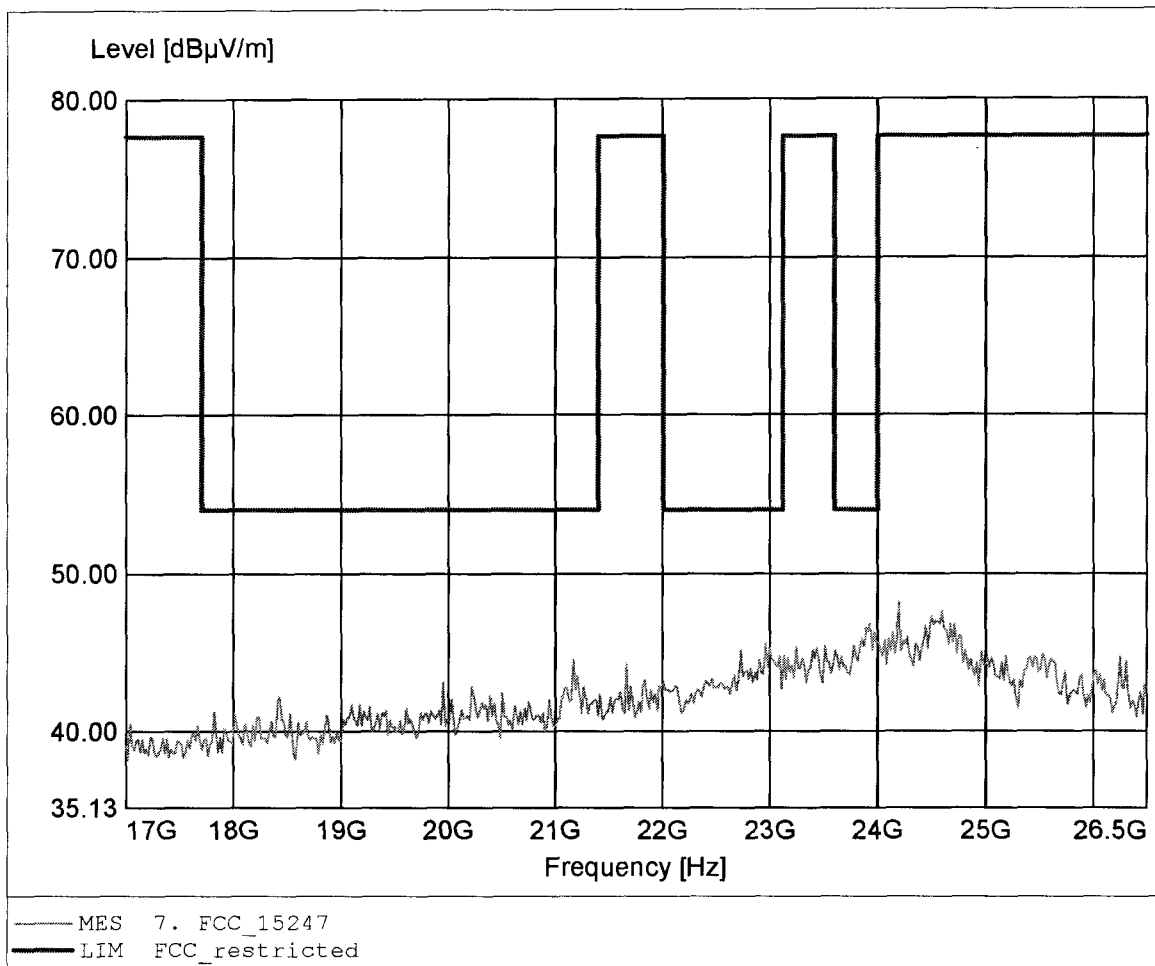

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C

Approval Holder: Pantech Co., Ltd
EUT: Triple Band GSM850/DCS1800/PCS1900 (with WAP&GPRS)
Model: S100 / Bluetooth / 2480 MHz
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom.: 4.0 V DC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 24.539GHz, Emax: 49.08dBμV/m, RBW: 1MHz

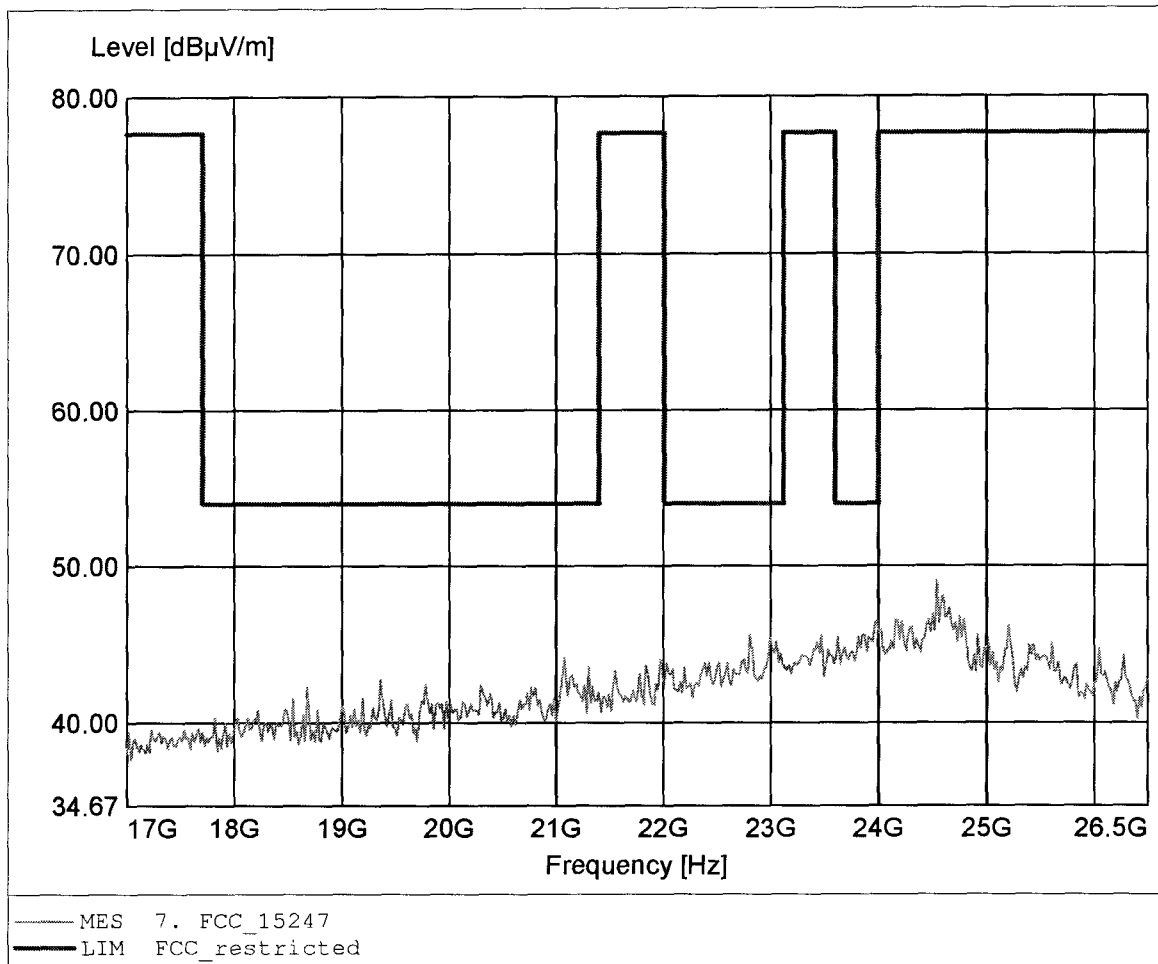


Appendix J

Band-edge compliance

FCC part 15.247**Band-edge compliance of RF conducted emissions**

EUT	Triple Band GSM GSM850 / DCS1800 / PCS 1900
Model	S100
Approval Holder	Pantech Co., Ltd.
Temperature / Voltage	25°C
Test Site / Operator	ETS
Test Specification	FCC part 15 section 247(c)
Comment 1	Band-edge compliance
Comment 2	Channel.: 0 / 2402 MHz
Comment 3	Single frequency mode

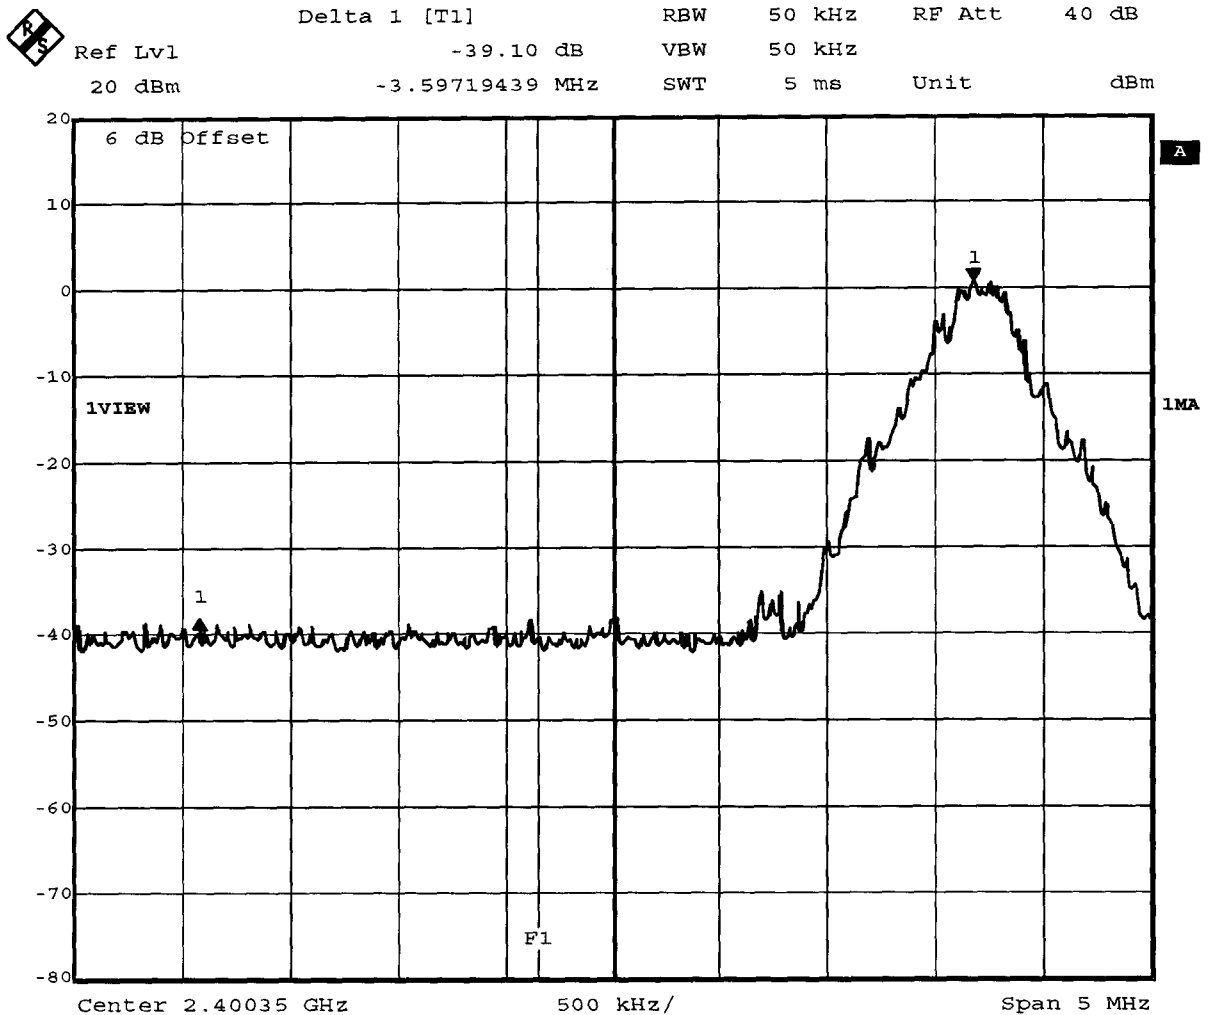

Comment A: Limit: Marker Delta value >20 dB; Result: PASS

Date: 14.NOV.2006 08:04:59


Measurement diagram

ETS Product Service AG
Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN

Page 1 of 1

FCC part 15.247**Band-edge compliance of RF conducted emissions**

EUT	Triple Band GSM GSM850 / DCS1800 / PCS 1900
Model	S100
Approval Holder	Pantech Co., Ltd.
Temperature / Voltage	25°C
Test Site / Operator	ETS
Test Specification	FCC part 15 section 247(c)
Comment 1	Band-edge compliance
Comment 2	Channel.: 78 / 2480 MHz
Comment 3	Single frequency mode

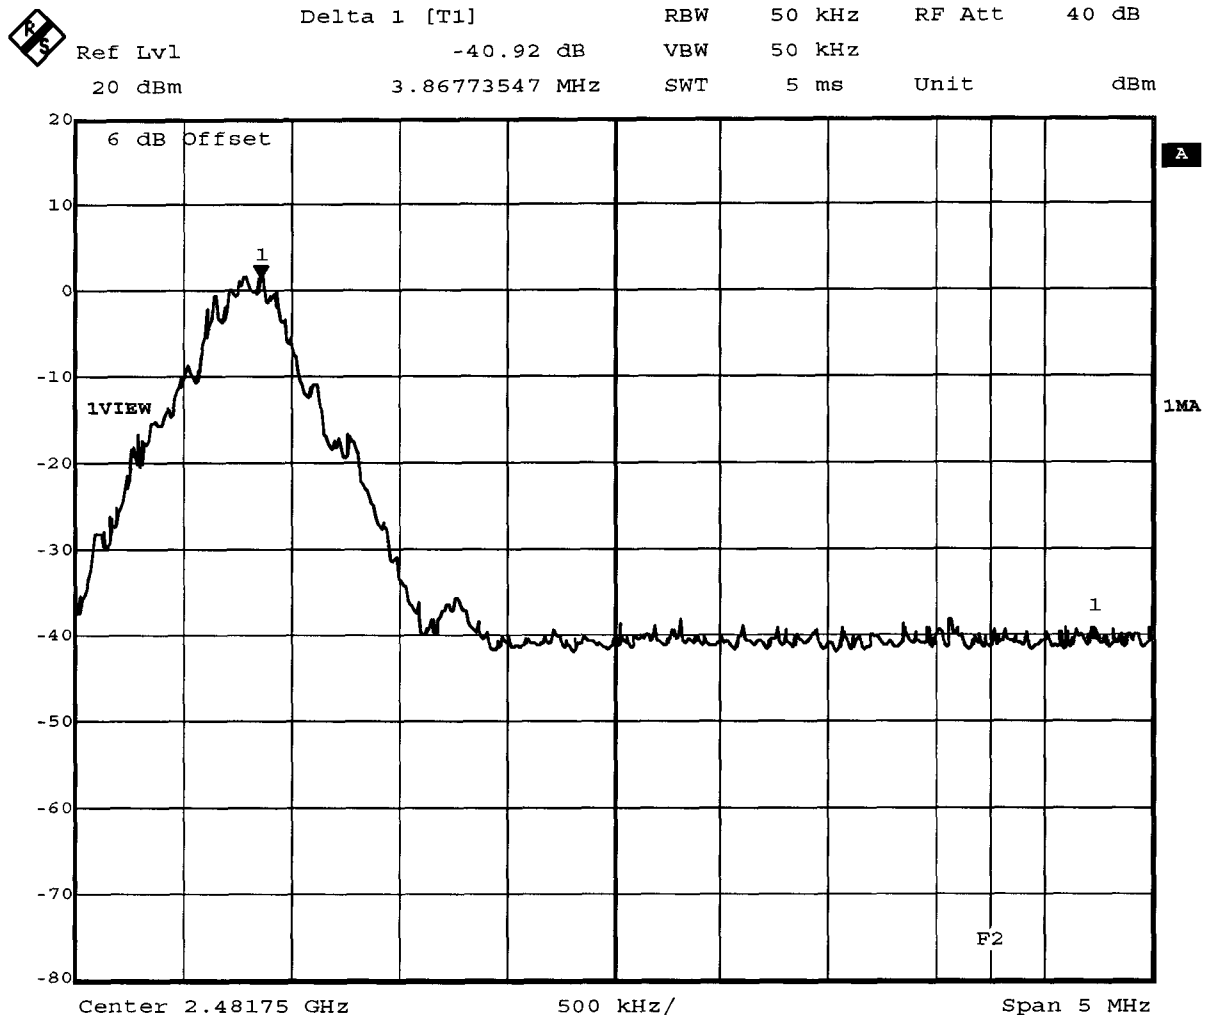

Comment A: Limit: Marker Delta value >20 dB; Result: PASS

Date: 14.NOV.2006 08:08:53

Measurement diagram


ETS Product Service AG
Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN

Page 1 of 1

FCC part 15.247

Band-edge compliance of RF conducted emissions

EUT	Triple Band GSM GSM850 / DCS1800 / PCS 1900
Model	S100
Approval Holder	Pantech Co., Ltd.
Temperature / Voltage	25°C
Test Site / Operator	ETS
Test Specification	FCC part 15 section 247(c)
Comment 1	Band-edge compliance
Comment 2	Channel.: 0 / 2402 MHz
Comment 3	Hopping mode

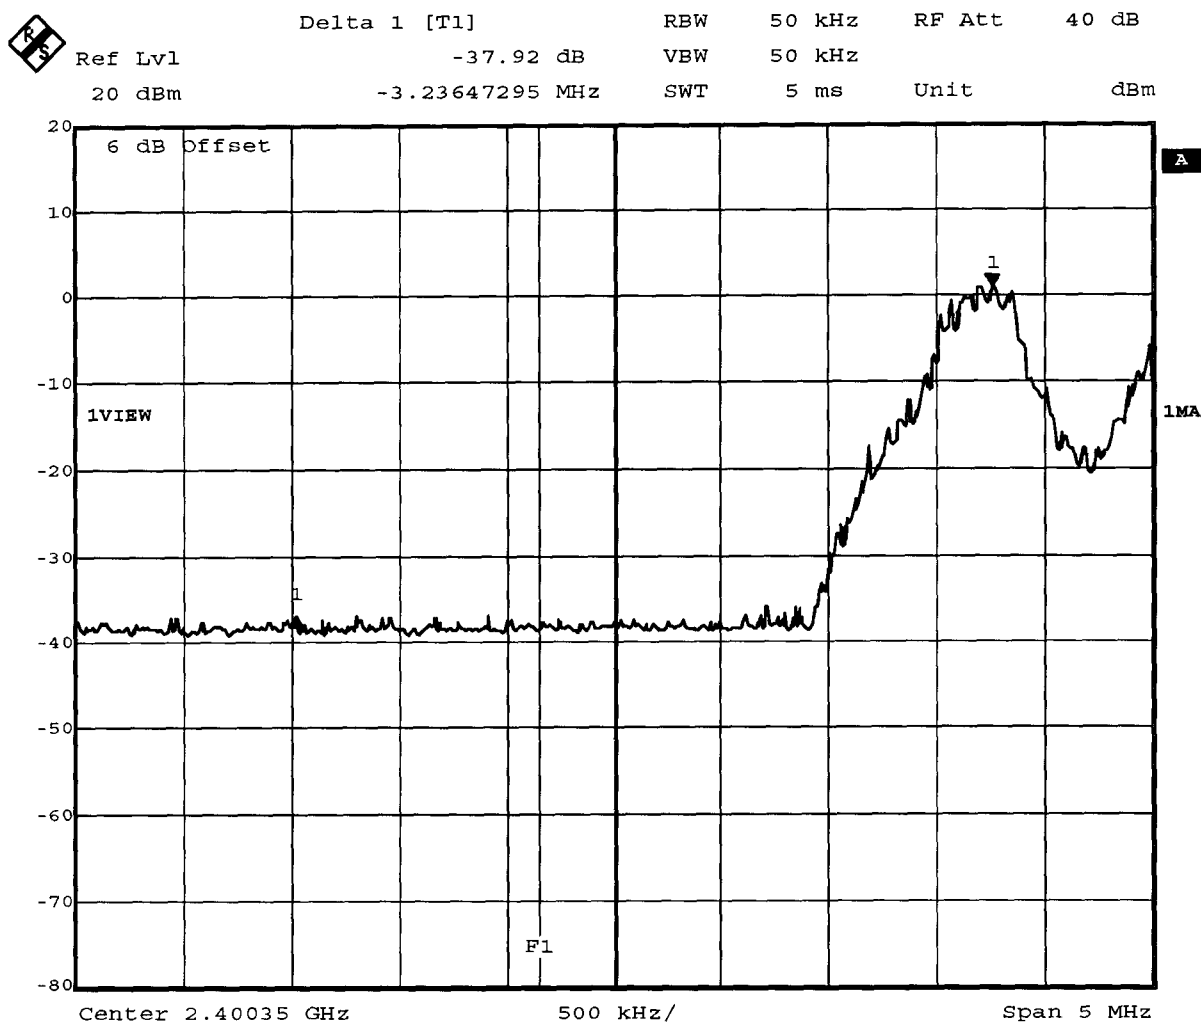

Comment A: Limit: Marker Delta value >20 dB; Result: PASS

Date: 14.NOV.2006 08:32:58


Measurement diagram

ETS Product Service AG
Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN

Page 1 of 1

FCC part 15.247**Band-edge compliance of RF conducted emissions**

EUT	Triple Band GSM GSM850 / DCS1800 / PCS 1900
Model	S100
Approval Holder	Pantech Co., Ltd.
Temperature / Voltage	25°C
Test Site / Operator	ETS
Test Specification	FCC part 15 section 247(c)
Comment 1	Band-edge compliance
Comment 2	Channel: 78 / 2480 MHz
Comment 3	Hopping mode

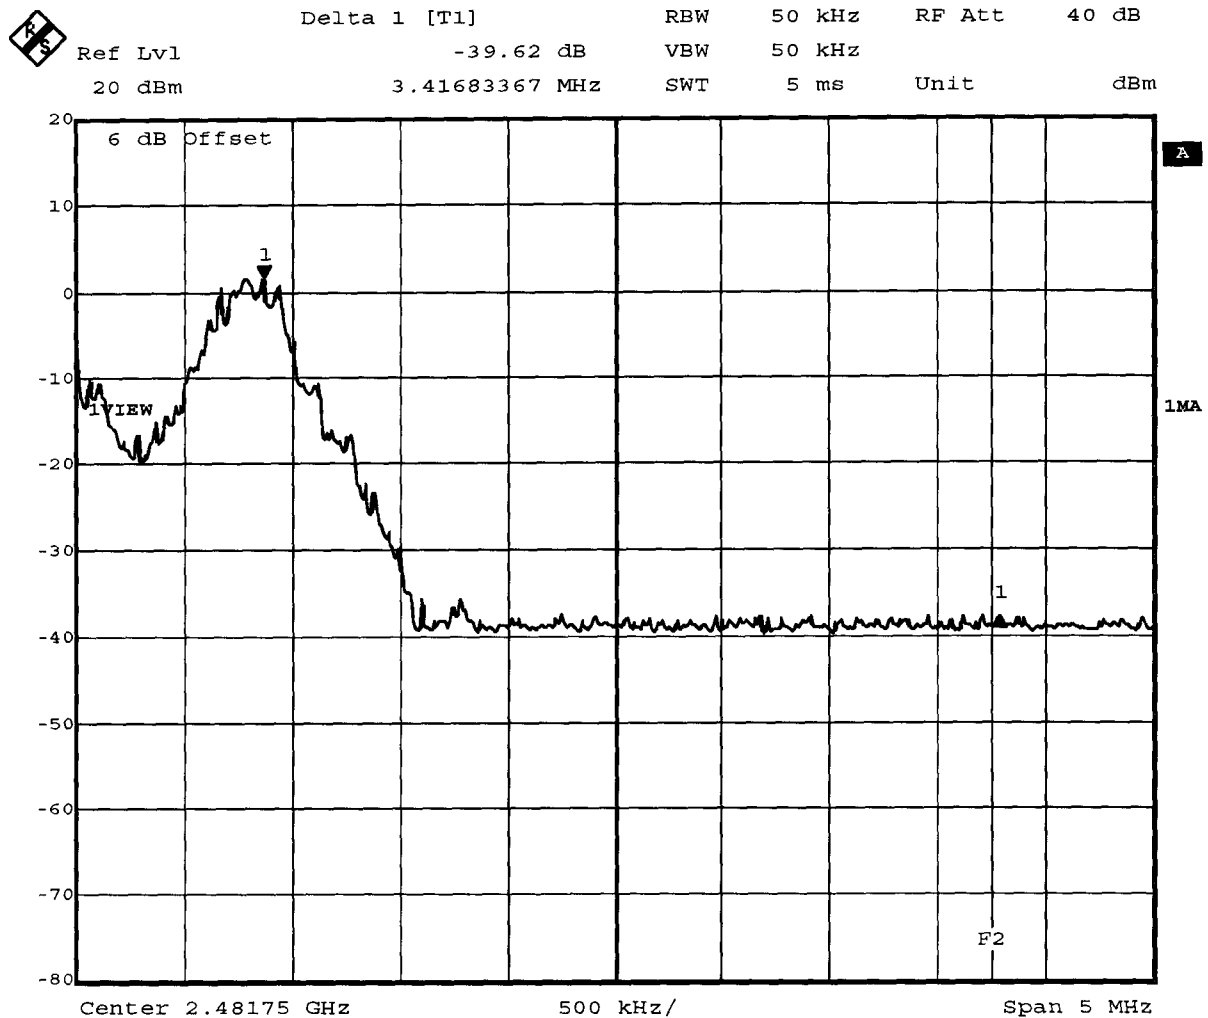

Comment A: Limit: Marker Delta value >20 dB; Result: PASS

Date: 14.NOV.2006 08:56:11

Measurement diagram

ETS Product Service AG

Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN


Page 1 of 1

Appendix K

AC power line conducted emissions


EMI voltage test in the ac-mains according to FCC part 15

EUT: Triple Band GSM 850 /DCS 1800/ PCS 1900 (with WAP & GPRS)
Manufacturer: Pantech Co., Ltd.
Operating Condition: Unom: 120V AC (AC/DC adaptor), Tnom: 23°C
Test Site: ETS
Operator: Mr. Meng
Test Specification: V-Network: ESH2-Z5 (L1)
Comment: model: S100
ADAPTOR: TA-11E

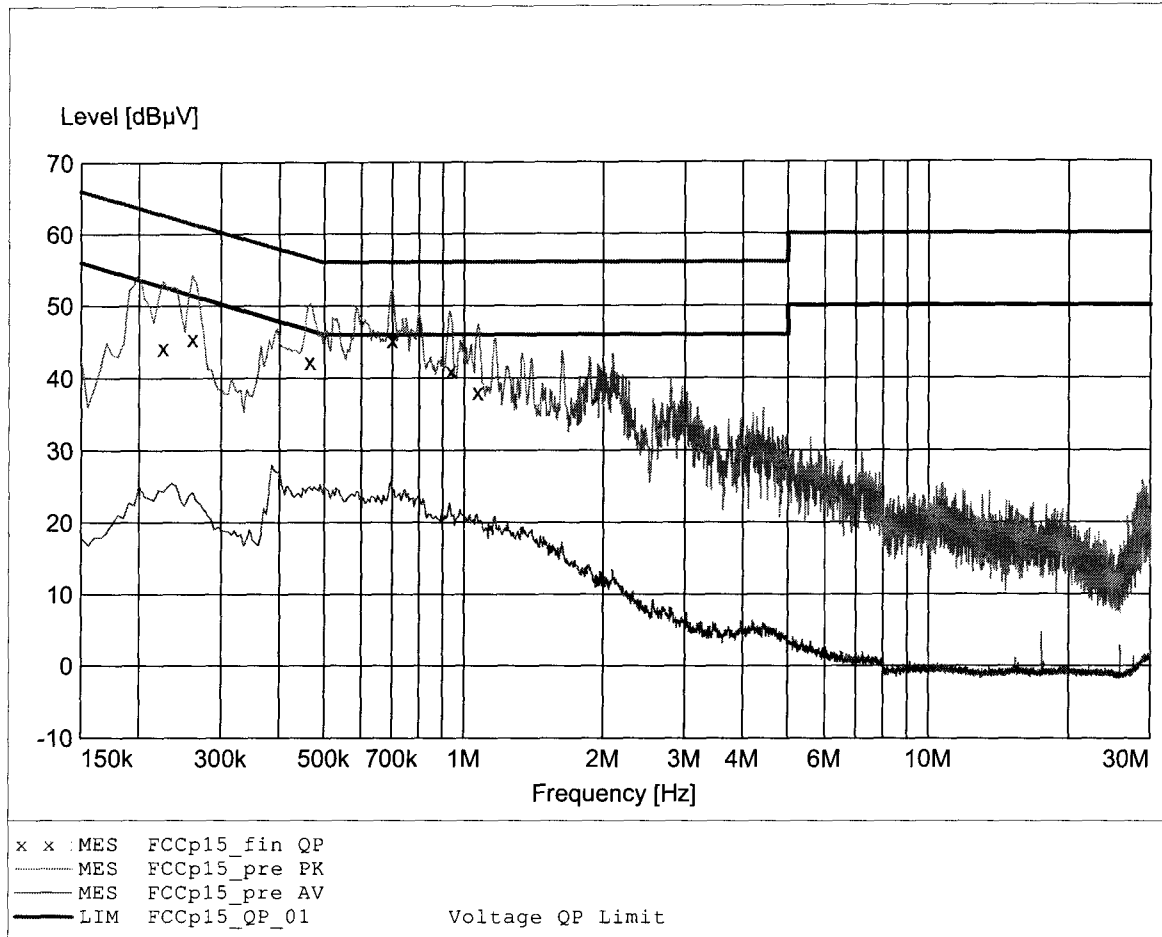

EMI voltage test in the ac-mains according to FCC part 15

EUT: Triple Band GSM 850 /DCS 1800/ PCS 1900 (with WAP & GPRS)
Manufacturer: Pantech Co., Ltd.
Operating Condition: Unom: 120V AC (AC/DC adaptor), Tnom: 23°C
Test Site: ETS
Operator: Mr. Meng
Test Specification: V-Network: ESH2-Z5 (N)
Comment: model: S100
ADAPTOR: TA-11E

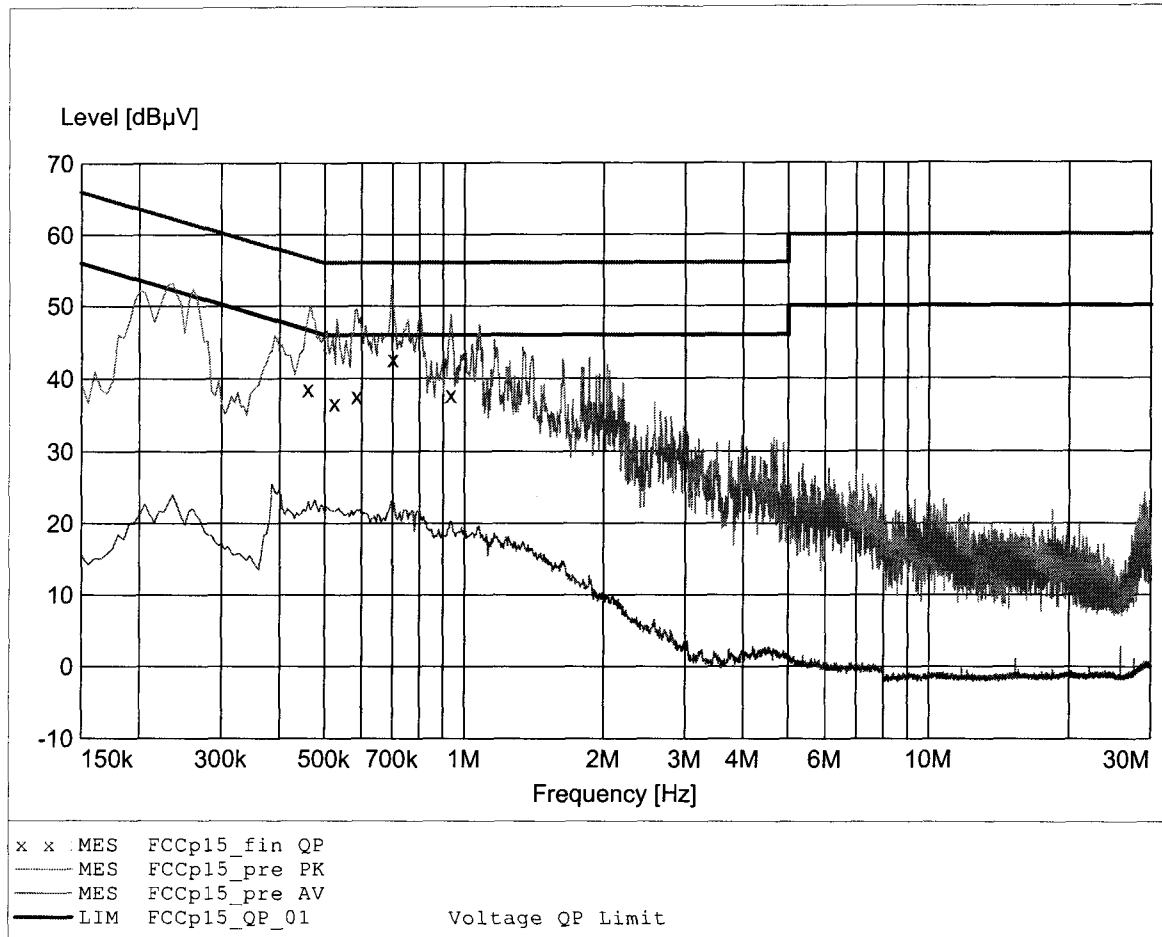


Appendix L

Receiver radiated emissions

Field Strength under normal conditions

Standards Industry Canada, RSS-GEN


Approval Holder: Pantech Co., Ltd
EUT: Triple Band GSM850/DCS1800/PCS1900 (with WAP&GPRS)
Model: S100 / Bluetooth / 2441 MHz
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom.: 4.0 V DC
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:195.912MHz Emax:31.80dBμV/m RBW: 100 kHz

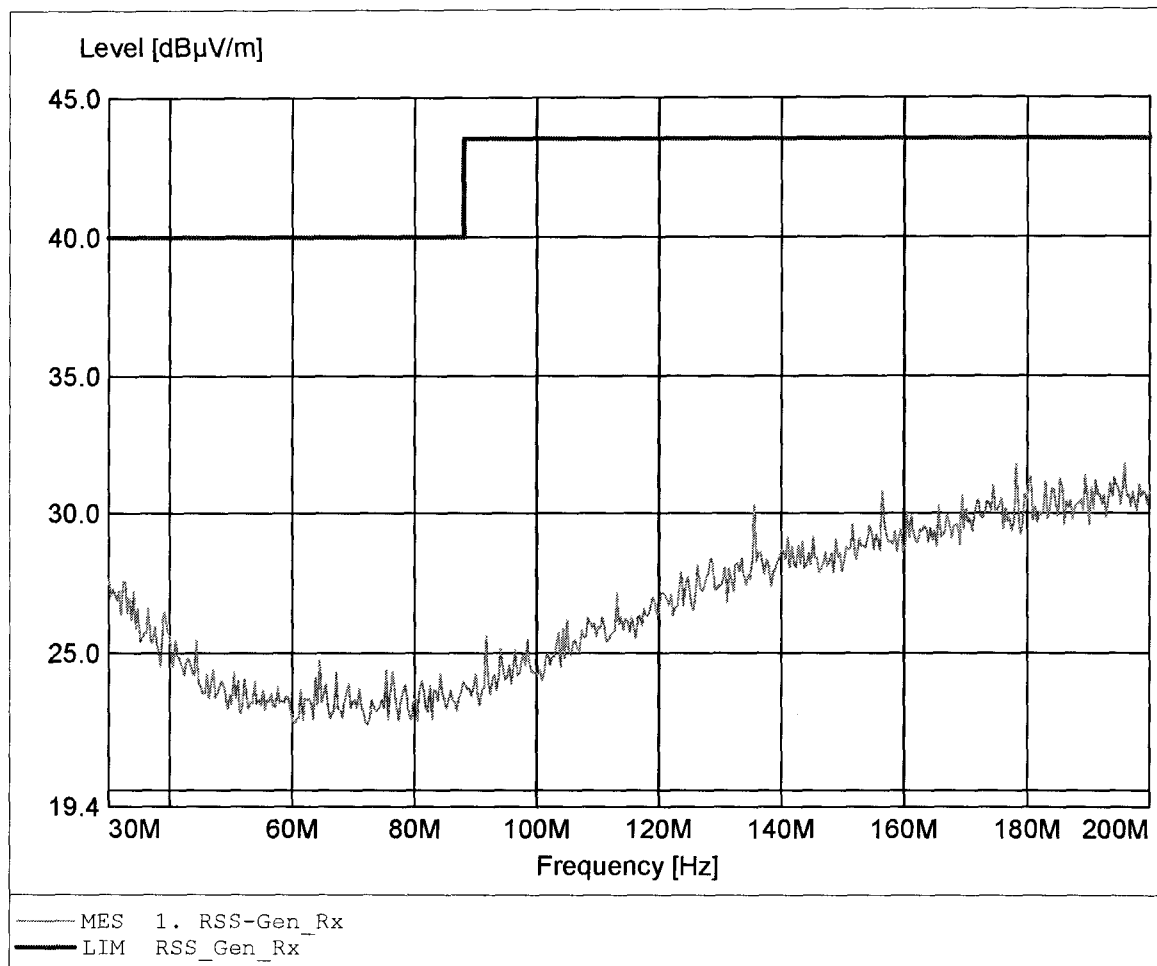

Field Strength under normal conditions

Standards Industry Canada, RSS-GEN


Approval Holder: Pantech Co., Ltd
EUT: Triple Band GSM850/DCS1800/PCS1900 (with WAP&GPRS)
Model: S100 / Bluetooth / 2441 MHz
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom.: 4.0 V DC
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:196.253MHz Emax:32.52dBuV/m RBW: 100 kHz

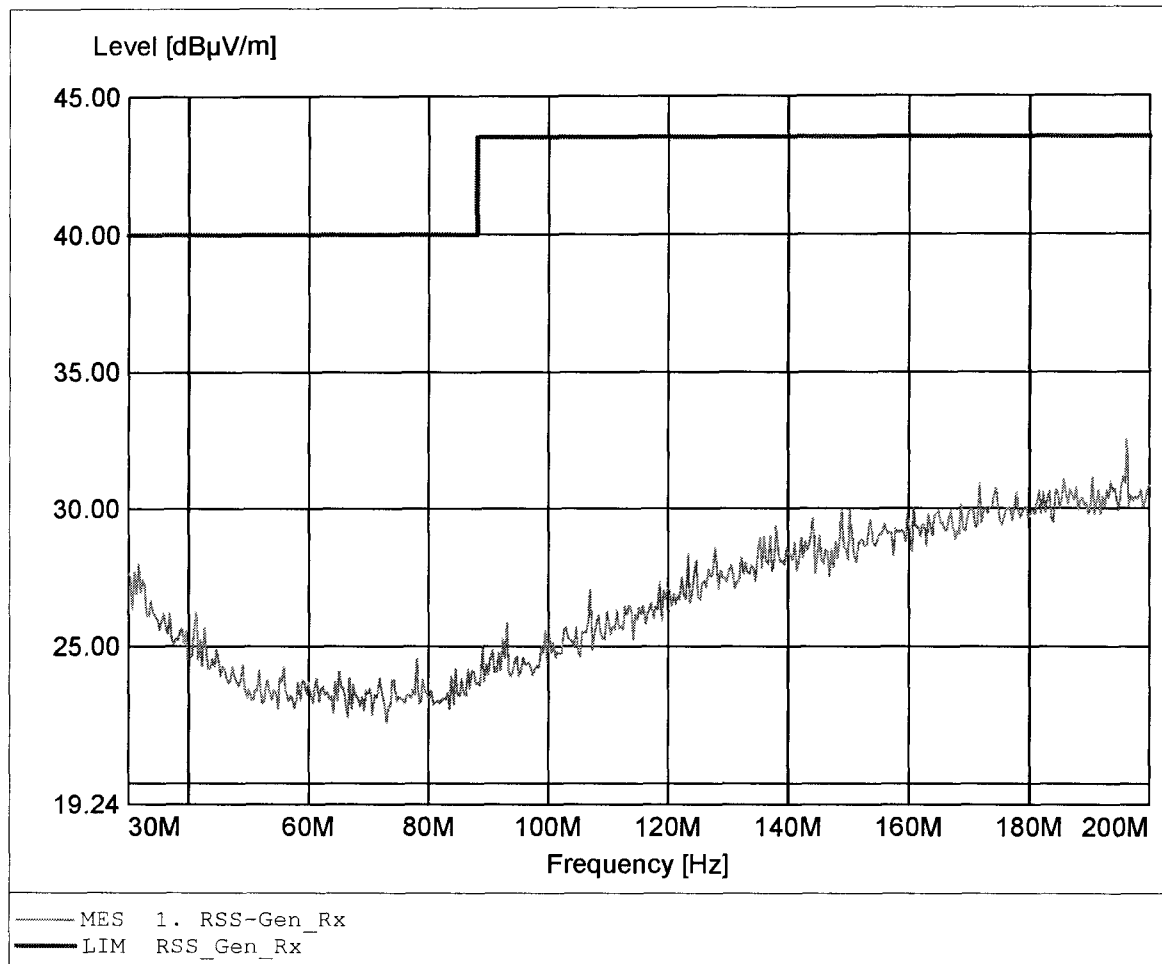

Field Strength under normal conditions

Standards Industry Canada, RSS-GEN


Approval Holder: Pantech Co., Ltd
EUT: Triple Band GSM850/DCS1800/PCS1900 (with WAP&GPRS)
Model: S100 / Bluetooth / 2441 MHz
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom.: 4.0 V DC
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq: 894.188MHz Emax:22.20dBμV/m RBW: 100 kHz

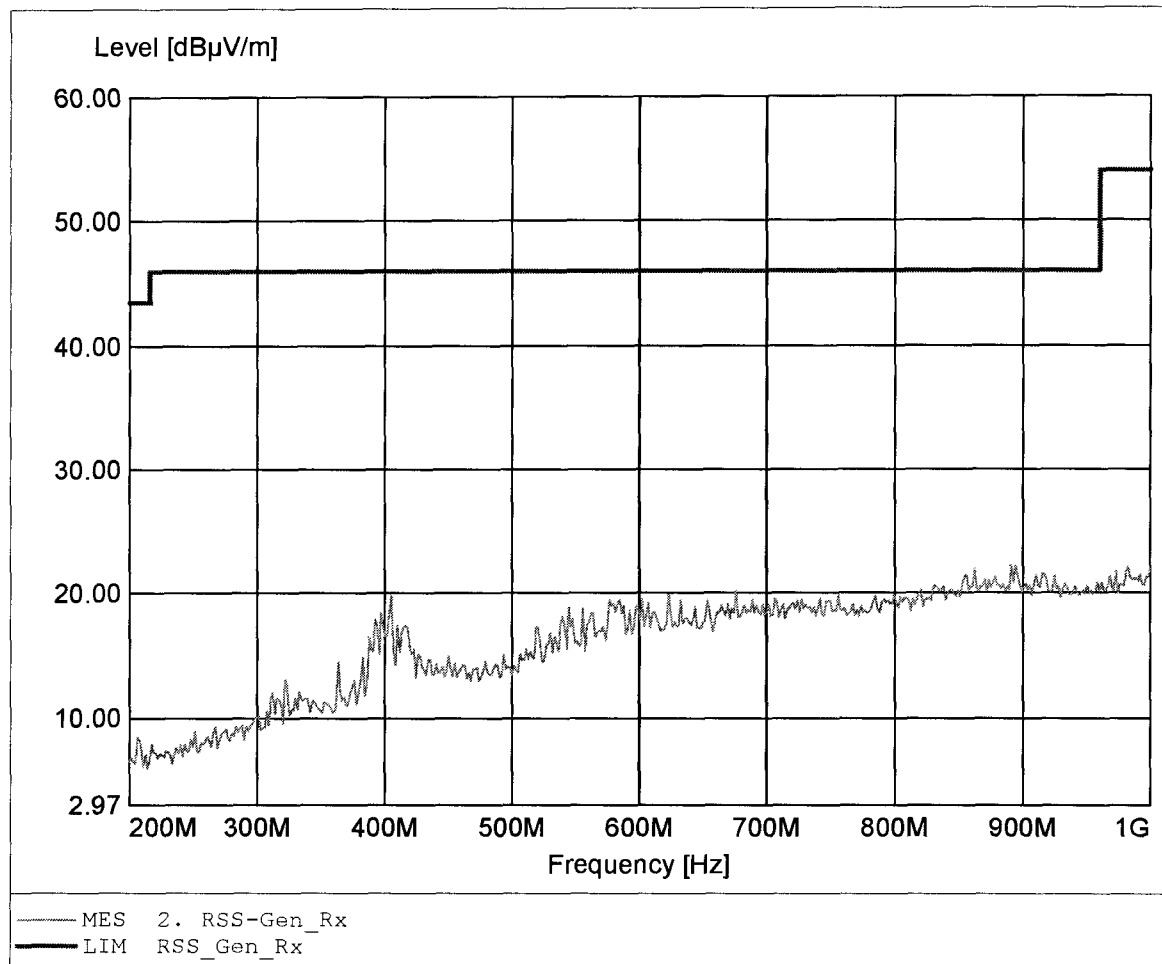

Field Strength under normal conditions

Standards Industry Canada, RSS-GEN


Approval Holder: Pantech Co., Ltd
EUT: Triple Band GSM850/DCS1800/PCS1900 (with WAP&GPRS)
Model: S100 / Bluetooth / 2441 MHz
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom.: 4.0 V DC
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq:975.952MHz Emax:23.19dBμV/m RBW: 100 kHz

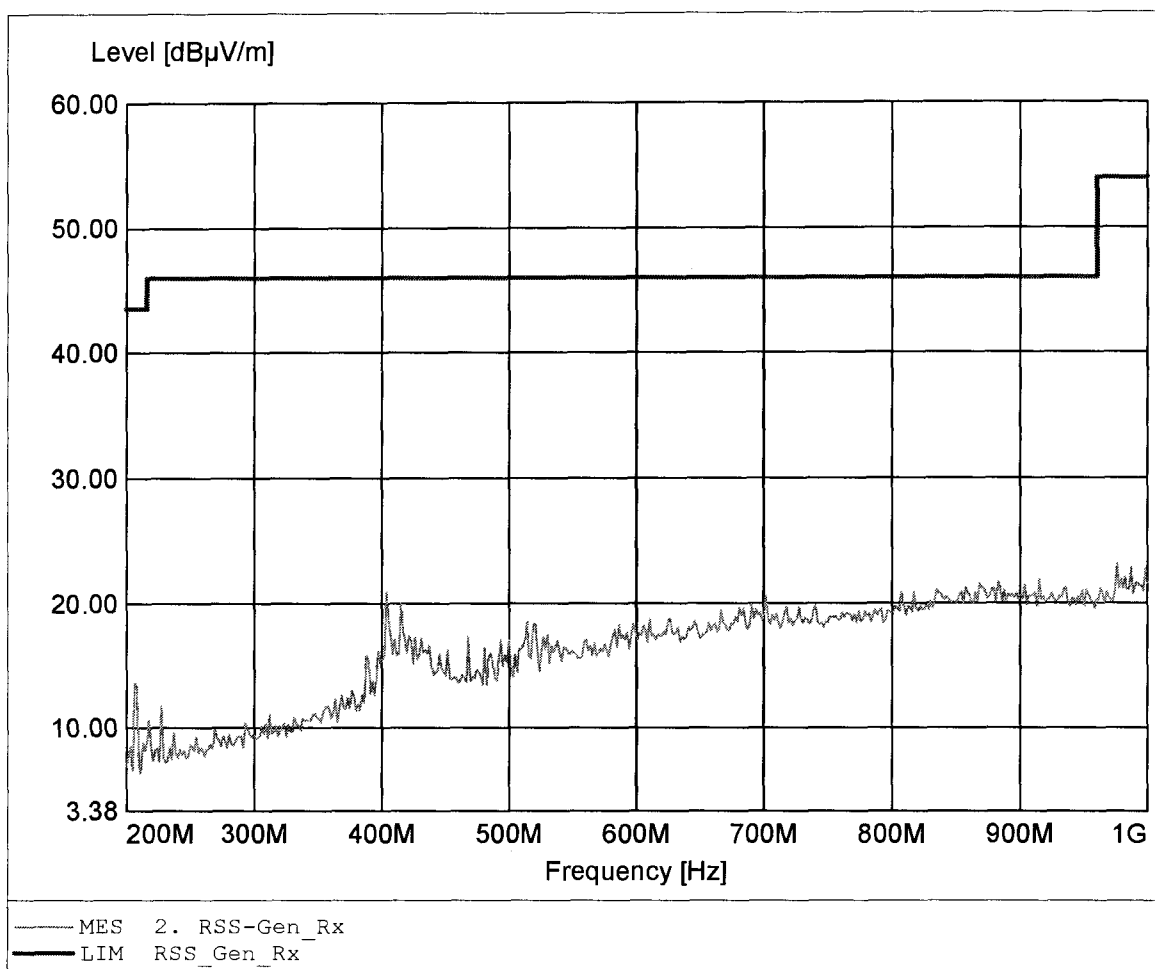

Field Strength under normal conditions

Standards Industry Canada, RSS-GEN


Approval Holder: Pantech Co., Ltd
EUT: Triple Band GSM850/DCS1800/PCS1900 (with WAP&GPRS)
Model: S100 / Bluetooth / 2441 MHz
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom.: 4.0 V DC
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.
Comment 2: Freq:3.850GHz Emax:42.78dBμV/m RBW: 1 MHz

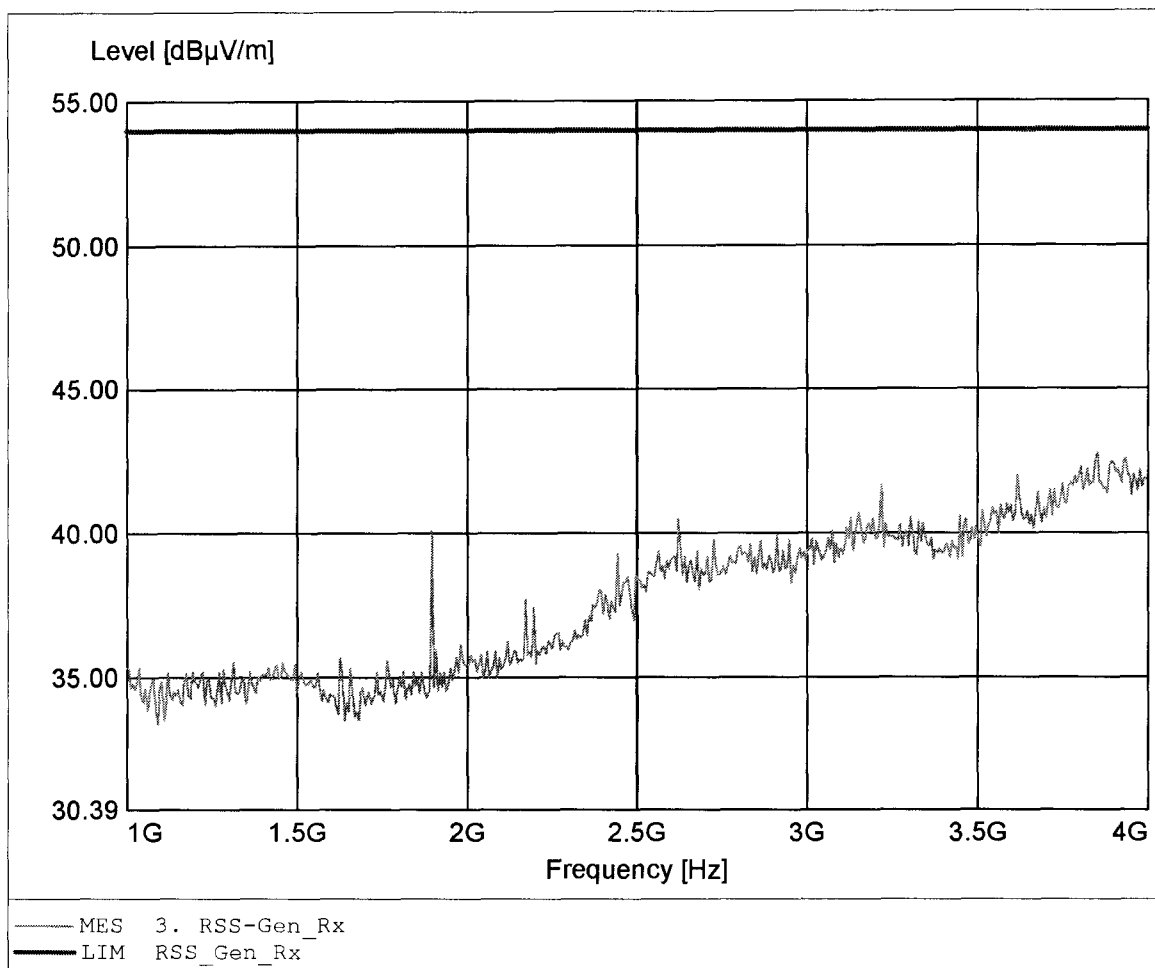

Field Strength under normal conditions

Standards Industry Canada, RSS-GEN


Approval Holder: Pantech Co., Ltd
EUT: Triple Band GSM850/DCS1800/PCS1900 (with WAP&GPRS)
Model: S100 / Bluetooth / 2441 MHz
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom.: 4.0 V DC
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.
Comment 2: Freq:3.988GHz Emax:43.35dBμV/m RBW: 1 MHz

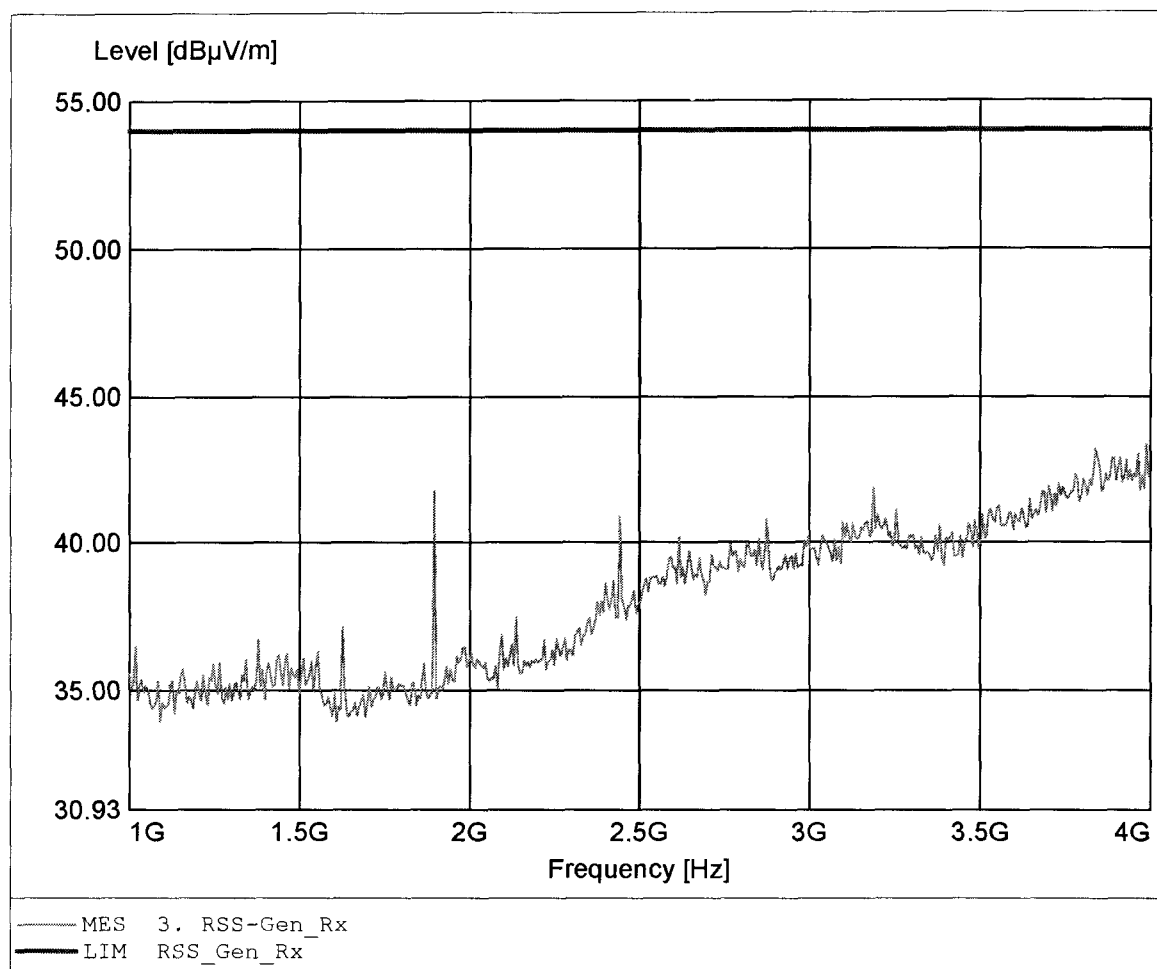

Field Strength under normal conditions

Standards Industry Canada, RSS-GEN

Approval Holder: Pantech Co., Ltd
EUT: Triple Band GSM850/DCS1800/PCS1900 (with WAP&GPRS)
Model: S100 / Bluetooth / 2441 MHz
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom.: 4.0 V DC
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.
Comment 2: Freq:7.912GHz Emax:47.22dBμV/m RBW: 1 MHz

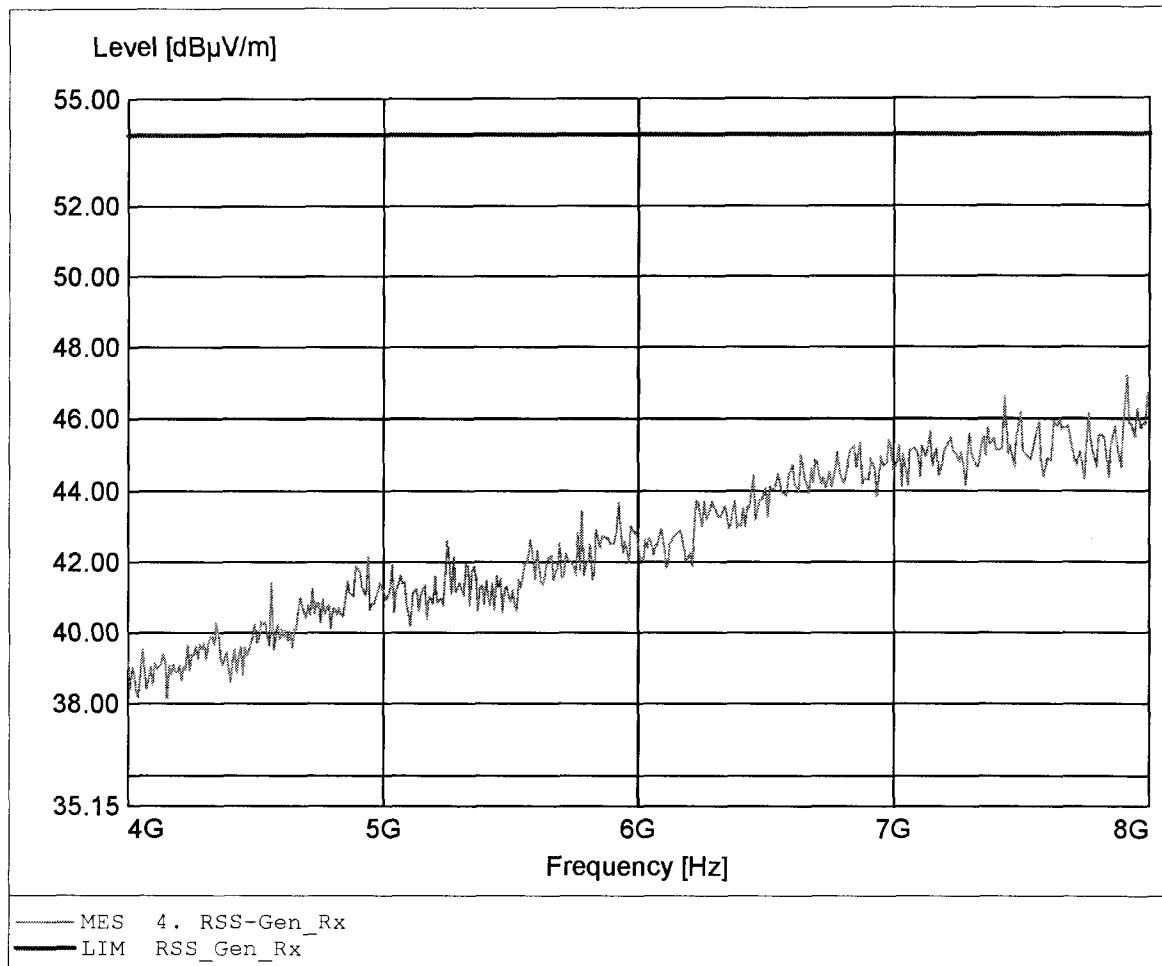

Field Strength under normal conditions

Standards Industry Canada, RSS-GEN

Approval Holder: Pantech Co., Ltd
EUT: Triple Band GSM850/DCS1800/PCS1900 (with WAP&GPRS)
Model: S100 / Bluetooth / 2441 MHz
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom.: 4.0 V DC
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.
Comment 2: Freq:7.960GHz Emax:47.98dBμV/m RBW: 1 MHz

