




Quick Start Guide

REMOTE ID



 +1(855) 888-6699


 www.holystone.com

 usa@holystone.com (USA)
ca@holystone.com (CA)

eu@holystone.com (EU)
jp@holystone.com (JP)



DIAGRAM

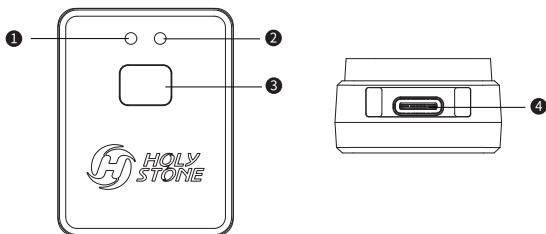

❶ Battery Indicator

- **Solid green:** Battery is full.
- **Flashes green:** Battery is low, or being charged.

❷ Status Indicator

- **Solid green:** Writing (saving the user information to the app when connected to the cellphone's bluetooth).
- **Quickly flashes green:** Performing self-check.
- **Slowly flashes green:** Sending (sending out the previously written user information).
- **Out:** Malfunctioning.


❸ Power Switch

- **Hold:** To switch the device on/off.
- **Short press:** To delete the previously written user information (when in Self-Test mode).

❹ Charging Port

Connect with the charging cable to charge.

CHARGING

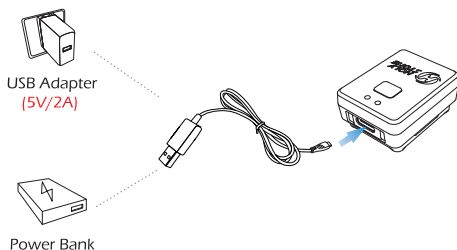

1. How to charge

- (1) Insert the Type-C plug of the charging cable into the charging port.
- (2) Plug the other end of the cable into a USB adapter (5V/2A) or powerbank to start charging.

2. Charging status

- (1) When charging, the battery indicator flashes green.
- (2) When fully charged, the battery indicator is solid green.



3. Charging time

About 30 minutes. A fully charged remote ID provides about 30 minutes of usage time.



- Please use the original charging cable to charge the battery.
- Always charge it on a fireproof surface and away from combustible materials. DO NOT charge on surfaces that can catch fire, including wood, cloth, and carpet.



THE INITIAL WRITE



1. Hold the power switch for 2 seconds to turn on the remote ID. Wait for the status indicator to turn from flashing quickly to solid.

2. Turn on bluetooth on your phone. Run the remote ID app. Enter the requested user information.


Note: Please make sure that bluetooth is turned ON.



3. After confirming that the information was written successfully, hold the power switch for 2 seconds to switch off the remote ID.

4. Restart the remote ID. The status indicator will turn from flashing quickly to flashing slowly, which means the ID is sending out the previously written information.


TO ALTER USER INFORMATION




1. Hold the power switch for 2 seconds to turn on the remote ID.




2. Short press the power switch once to delete the previously written information.



3. Turn on bluetooth on your phone. Run the remote ID app. Follow the prompts to rewrite the user information.



4. After confirming that the information was written successfully, hold the power switch for 2 seconds to switch off the remote ID.



5. Restart the remote ID. The status indicator will turn from flashing quickly to flashing slowly, which means the ID is sending out the newly recorded information.

CONTACT US

Please do not hesitate to contact us if you need further support.



4:00 PM ~ 7:00 AM (PST)



usa@holystone.com (America)

ca@holystone.com (Canada)

eu@holystone.com (Europe)

jp@holystone.com (Japan)



+1 (855) 888-6699



For online support, please scan
this code with Live Chat

GENERAL INFORMATION

FCC Notice:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

The Supplier's Declaration of Conformity is available at the following address:
https://www.holystone.com/Download/US/RemoteID_FCC_sDoC.pdf

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

GENERAL INFORMATION

WARNING: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

RF Exposure

The equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This device should be installed and operated with minimum distance 20cm between the radiator & your body. This part belongs to the drone.

RF warning for Portable device: The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction. This part belongs to the transmitter.