FCC PART 15, SUBPART B and C; FCC 15.231; and RSS-210 & RSS GEN TEST REPORT

for

MOTION DETECTOR

Model: WST-740

Prepared for

ECOLINK INTELLIGENT TECHNOLOGY, INC. 2055 CORTE DEL NOGAL CARLSBAD, CALIFORNIA 92011

Prepared by:	
	KYLE FUJIMOTO
Approved by:_	
	JAMES ROSS

COMPATIBLE ELECTRONICS INC. 114 OLINDA DRIVE BREA, CALIFORNIA 92823 (714) 579-0500

DATE: MAY 16, 2022

	REPORT		APPENDICES			TOTAL	
	BODY	\boldsymbol{A}	В	C	D	E	
PAGES	22	2	2	2	11	26	65

This report shall not be reproduced except in full, without the written approval of Compatible Electronics.



Model: WST-740

TABLE OF CONTENTS

Section	/ Title	PAGE
GENERA	AL REPORT SUMMARY	4
SUMMA	RY OF TEST RESULTS	5
	RPOSE	6
1.1	Decision Rule & Risk	7
2. AD 2.1	MINISTRATIVE DATA Location of Testing	8 8
2.2	Traceability Statement	8
2.3	Cognizant Personnel	8
2.4	Date Test Sample was Received	8
2.5	Disposition of the Test Sample	8
2.6	Abbreviations and Acronyms	8
3. AP	PLICABLE DOCUMENTS	9
4. DE	SCRIPTION OF TEST CONFIGURATION	10
4.1	Description of Test Configuration – Emissions	10
4.1.1	Cable Construction and Termination	10
5. LIS	STS OF EUT, ACCESSORIES AND TEST EQUIPMENT	11
5.1	EUT and Accessory List	11
5.2	Emissions Test Equipment	12
6. TE	ST SITE DESCRIPTION	13
6.1	Test Facility Description	13
6.2	EUT Mounting, Bonding and Grounding	13
6.3	Measurement Uncertainty	13
7. TE	ST PROCEDURES	14
7.1	RF Emissions	14
7.1.1	Conducted Emissions Test	14
7.1.2	Radiated Emissions Test	15
7.1.3	RF Emissions Test Results	17
7.1.4	Sample Calculations	18
7.1.5	Duty Cycle Calculation	19
7.1.6	99 % Bandwidth	20
7.1.7	-20 dB Bandwidth	20
7.1.8	Transmission Time	21
7.1.9	Variation of the Input Power	21
8. CC	ONCLUSIONS	22

Model: WST-740

LIST OF APPENDICES

APPENDIX	TITLE		
A	Laboratory Accreditations and Recognitions		
В	Modifications to the EUT		
С	Models Covered Under This Report		
D	Diagrams, Charts, and Photos		
	Test Setup Diagrams		
	Antenna and Effective Gain Factors		
	Radiated and Conducted Emissions Photos		
Е	Data Sheets		

LIST OF FIGURES

FIGURE	TITLE	
1	Conducted Emissions Test Setup	
2	Layout of the Semi-Anechoic Test Chamber	

LIST OF TABLES

TABLE	TITLE
1	Radiated Emission Results

FCC Part 15 Subpart B and C; FCC Section 15.231; and RSS-210 and RSS-GEN Test Report **Motion Detector** Model: WST-740

GENERAL REPORT SUMMARY

This electromagnetic emission test report is generated by Compatible Electronics Inc., which is an independent testing and consulting firm. The test report is based on testing performed by Compatible Electronics personnel according to the measurement procedures described in the test specifications given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced without the written permission of Compatible Electronics, unless done so in full.

This report must not be used by the client to claim product certification, approval or endorsement by NVLAP, NIST or any agency of the United States government.

Device Tested: Motion Detector

Model: WST-740

S/N: N/A

Product Description: The equipment under test is a Motion Detector that uses RF technology. The transmit

frequency is 433.92 MHz.

The clock oscillator is 13.56 MHz.

Dimensions: 2.3 cm (L) x 9.2 cm (W) x 13.7 cm (H).

Modifications: The EUT was not modified to meet the specifications.

Customer: Ecolink Intelligent Technology, Inc.

> 2055 Corte Del Nogal Carlsbad, California 92011

Test Dates: May 4, 2022

Test Specifications covered by accreditation:

Test Specifications: Emissions requirements

CFR Title 47, Part 15, Subpart B;

CFR Title 47, Part 15, Subpart C, sections 15.205, 15.207, 15.209, and 15.231;

RSS-210 and RSS-Gen



Test Procedures: ANSI C63.4 and ANSI C63.10

Test Deviations: The test procedure was not deviated from during the testing.

SUMMARY OF TEST RESULTS

TEST	DESCRIPTION	RESULTS
1	Conducted RF Emissions, 150 kHz – 30 MHz	This test was not performed because the EUT operates on battery power only and cannot be plugged into the AC public mains.
2	Spurious Radiated RF Emissions, 9 kHz – 4.34 GHz (Transmitter and Digital portion)	Complies with the Class B limits of CFR Title 47, Part 15 Subpart B; the limits of CFR Title 47, Part 15 Subpart C, sections 15.205, 15.209, and 15.231; and the limits of RSS-210 and RSS-Gen Highest reading in relation to spec limit 77.57 dBuV/m (AVG) @ 433.92 MHz (*U = 3.30 dB)
3	-20 dB Bandwidth	Complies with limits of CFR Title 47, Part 15 Subpart C, section 15.231 (c); and the limits of RSS-210
4	Transmission Time	Complies with limits of CFR Title 47, Part 15 Subpart C, section 15.231 (a)(1) and (a)(2); and the limits of RSS-210

^{*}U = Expanded Uncertainty with a coverage factor of k=2

Report Number: **B20504D1** Page 6 of 22



Motion Detector Model: WST-740

PURPOSE 1.

This document is a qualification test report based on the emissions tests performed on the Motion The emissions measurements were performed according to the Detector, Model: WST-740. measurement procedure described in ANSI C63.4 and ANSI C63.10. The tests were performed to determine whether the electromagnetic emissions from the equipment under test, referred to as EUT hereafter, are within the Class B specification limits defined by CFR Title 47, Part 15 Subpart B section, 15.109; the specification limits defined by CFR Title 47, Part 15 Subpart C sections 15.205, 15.209 and 15.231; and the specifications limits defined by RSS-210 and RSS-Gen.

1.1 Decision Rule & Risk

If a measured value exceeds a specification limit it implies non-compliance. If the value is below a specification limit it implies compliance. Measurement uncertainty of the laboratory is reported with all measurement results but generally not taken into consideration unless a standard, rule or law requires it to be considered.

Qualification test reports are only produced for products that are in compliance with the test requirements, therefore results are always in conformity. Otherwise, an engineering report or just the data is provided to the customer.

When performing a measurement and making a statement of conformity, in or out-of-specification to manufacturer's specifications or Pass/Fail against a requirement, there are two possible outcomes:

- The result is reported as conforming with the specification
- The result is reported as not conforming with the specification

The decision rule is defined below.

When the test result is found to be below the limit but within our measurement uncertainty of the limit, it is our policy that the final acceptance decision is left to the customer, after discussing the implications and potential risks of the decision.

When the test result is found to be exactly on the specification, it is our policy, in the case of unwanted emissions measurements to consider the result non-compliant, however, the final decision is left to the customer, after discussing the implications and potential risks of the decision.

When the test result is found to be over the specification limit under any condition, it is our policy to consider the result non-compliant.

In terms of uncertainty of measurement, the laboratory is a calibrated and tightly controlled environment and generally exceptionally stable, the measurement uncertainties are evaluated without the considering of the test sample. When it comes to the test sample however, as most testing is performed on a single sample rather than a sample population, and that sample is often a preproduction representation of the final product, that test sample represents a significantly higher source of measurement uncertainty. We advise our customers of this and that when in doubt (small test to limit margins), they may wish to perform statistical sampling on a population to gain a higher confidence in the results. All lab reported results are that of a single sample in any event.

2. ADMINISTRATIVE DATA

2.1 **Location of Testing**

The emissions tests described herein were performed at the test facility of Compatible Electronics, 114 Olinda Drive, Brea, California 92823.

2.2 **Traceability Statement**

The calibration certificates of all test equipment used during the test are on file at the location of the test. The calibration is traceable to the National Institute of Standards and Technology (NIST).

2.3 **Cognizant Personnel**

Ecolink Intelligent Technology, Inc.

David Shepard Product Compliance/QA Specialist

Director of Engineering Jay Stone

Compatible Electronics Inc.

Kyle Fujimoto Senior Test Engineer James Ross Senior Test Engineer

2.4 **Date Test Sample was Received**

The test sample was received prior to the date of this report.

2.5 **Disposition of the Test Sample**

The test sample has not been returned to Ecolink Intelligent Technology, Inc. as of the date of this report.

2.6 **Abbreviations and Acronyms**

The following abbreviations and acronyms may be used in this document.

EMI Electromagnetic Interference **EUT Equipment Under Test**

P/N Part Number S/N Serial Number

FCC Federal Communications Commission

Declaration of Conformity DoC

N/A Not Applicable Tx **Transmit** Receive Rx Incorporated Inc

Radio Standards Specification RSS

RFRadio Frequency **BLE** Bluetooth Low Energy Code of Federal Regulations **CFR**

PCB Printed Circuit Board

DC Direct Current

LED Light Emitting Diode

3. APPLICABLE DOCUMENTS

The following documents are referenced or used in the preparation of this emission Test Report.

SPEC	TITLE
FCC Title 47, Part 15 Subpart B	FCC Rules – Radio frequency devices (including digital devices) – Unintentional Radiators
FCC Title 47, Part 15 Subpart C	FCC Rules – Radio frequency devices (including digital devices) – Intentional Radiators
RSS-210 Issue 10: 2019 + Amendment (April 2020)	License-exempt Radio Apparatus: Category I Equipment
RSS-Gen Issue 5: 2018 + Amendment 1: 2019 + Amendment 2: 2021	General Requirements for Compliance of Radio Apparatus
ANSI C63.4: 2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI C63.10: 2013	American National Standard of procedure for compliance testing of unlicensed wireless devices

DESCRIPTION OF TEST CONFIGURATION

4.1 **Description of Test Configuration – Emissions**

The Motion Detector, Model: WST-740 (EUT) tested as a stand alone unit and placed in the middle of the turntable. The EUT was transmtting at 433.92 MHz on a continuous basis.

The EUT was tested for emissions while in the X, Y and Z axis. The X orientation is when the EUT is parallel to the ground. The Y orientation is when the EUT is perpendicular to the ground mounted vertically. The Z orientation is when the EUT is perpendicular to the ground mounted horizontally.

The EUT had fresh batteries installed prior to the testing.

The firmware inside the EUT allowed the EUT to continuously transmit at 433.92 MHz.

The firmware is stored on the company's servers.

The final radiated emissions data for the EUT was taken in the configuration described above. Please see Appendix E for the data sheets.

4.1.1 **Cable Construction and Termination**

There were no external cables connected to the EUT.

LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT **5.**

5.1 EUT and Accessory List

EQUIPMENT	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	FCC ID
MOTION DETECTOR (EUT)	ECOLINK INTELLIGENT TECHNOLOGY, INC.	WST-740	N/A	XQC-WST740 IC: 9863B-WST740
FIRMWARE	ECOLINK INTELLIGENT TECHNOLOGY, INC.	1.0	N/A	N/A

5.2 **Emissions Test Equipment**

EQUIPMENT TYPE	MANU- FACTURER	MODEL NUMBER	SERIAL NUMBER	CAL. DATE	CAL. CYCLE
	RF RADIATED A	ND CONDUCED E	MISSIONS TEST	EQUIPMENT	
TDK TestLab	TDK RF Solutions, Inc.	9.22	700145	N/A	N/A
MXE EMI Receiver, 20 Hz – 26.5 GHz	Keysight Technologies, Inc.	N9038A	MY51210150	September 17, 2021	2 Year
System Controller	Sunol Sciences Corporation	SC110V	112213-1	N/A	N/A
Turntable	Sunol Sciences Corporation	2011VS	N/A	N/A	N/A
Antenna-Mast	Sunol Sciences Corporation	TWR95-4	112213-3	N/A	N/A
Loop Antenna	Com-Power	AL-130R	121090	February 10 2022	3 Year
CombiLog Antenna	Com-Power	AC-220	61093	December 14, 2021	2 Year
Horn Antenna	Com-Power	AH-118	10050113	December 16, 2021	2 Year
Preamplifier	Com-Power	PAM-118	181653	March 7, 2022	1 Year
Computer	Hewlett Packard	p6716f	MXX1030PX0	N/A	N/A
LCD Monitor	Hewlett Packard	52031a	3CQ046N3MG	N/A	N/A

FCC Part 15 Subpart B and C; FCC Section 15.231; and RSS-210 and RSS-GEN Test Report **Motion Detector** Model: WST-740

TEST SITE DESCRIPTION 6.

6.1 **Test Facility Description**

Please refer to section 2.1 of this report for emissions test location.

6.2 EUT Mounting, Bonding and Grounding

For frequencies 1 GHz and below: The EUT was mounted on a 0.6 by 1.2 meter non-conductive table 0.8 meters above the ground plane.

For frequencies above 1 GHz: The EUT was mounted on a 0.6 by 1.2 meter non-conductive table 1.5 meters above the ground plane.

The EUT was not grounded.

6.3 **Measurement Uncertainty**

Compatible Electronics' U_{lab} value is less than U_{cispr}, thus based on this – compliance is deemed to occur if no measured disturbance exceeds the disturbance limit

$$u_{\mathsf{c}}(y) = \sqrt{\sum_{i} c_{i}^{2} \ u^{2}(x_{i})}$$

Measi	$\mathbf{U}_{\mathbf{cispr}}$	$U_{\text{lab}} = 2 \ uc \ (y)$	
Conducted disturbance (mains port)	(150 kHz – 30 MHz)	3.4 dB	2.72 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(30 MHz – 1 000 MHz)	6.3 dB	3.32 dB (Vertical) 3.30 dB (Horizontal)
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(1 GHz - 6 GHz)	5.2 dB	4.06 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(6 GHz – 18 GHz)	5.5 dB	4.06 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(18 GHz – 26.5 GHz)	N/A	4.43 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(26.5 GHz – 40 GHz)	N/A	4.57 dB

Report Number: B20504D1 Page 14 of 22

Motion Detector Model: WST-740

TEST PROCEDURES 7.

The following sections describe the test methods and the specifications for the tests. Test results are also included in this section.

7.1 **RF Emissions**

7.1.1 **Conducted Emissions Test**

The EMI Receiver was used as a measuring meter. A quasi-peak and/or average reading was taken only where indicated in the data sheets. A 10 dB attenuator was used for the protection of the EMI Receiver input stage, and the offset was adjusted accordingly to read the actual data measured. The LISN output was measured using the EMI Receiver. The output of the second LISN was terminated by a 50-ohm termination. The effective measurement bandwidth used for this test was 9 kHz.

Please see section 6.2 of this report for mounting, bonding, and grounding of the EUT. The EUT was powered through the LISN, which was bonded to the ground plane. The LISN power was filtered and the filter was bonded to the ground plane. The EUT was set up with the minimum distances from any conductive surfaces as specified in ANSI 63:4. The excess power cord was wrapped in a figure eight pattern to form a bundle not exceeding 0.4 meters in length.

The conducted emissions from the EUT were maximized for operating mode as well as cable placement. The final data was collected under program control by computer software. The final qualification data is located in Appendix E.

Test Results:

This test was not performed because the EUT operates on battery power only and cannot be plugged into the AC public mains.

7.1.2 **Radiated Emissions Test**

The EMI Receiver was used as the measuring meter. An internal preamplifier was used to increase the sensitivity of the instrument during emissions tests up to 1000 MHz, and an external preamplifier was used to increase the sensitivity of the instrument during emissions tests above 1 GHz. The EMI Receiver was initially used with the Analyzer mode feature activated. In this mode, the EMI receiver can then record the actual frequency to be measured. This final reading is then taken accurately in the EMI Receiver mode, which considers the cable loss, amplifier gain and antenna factors, so that a true reading is compared to the true limit. The effective measurement bandwidth used for the radiated emissions test was according to the frequency measured.

The frequencies below 1 GHz, except for the fundamental frequency and the 2nd harmonic of the fundamental frequency, were quasi-peaked using the quasi-peak detector of the EMI Receiver.

The harmonic frequencies above 1 GHz, the fundamental frequency, and the 2nd harmonic were averaged using the duty cycle correction calculation.

All other frequencies above 1 GHz were averaged using the average detector of the EMI Receiver.

The EMI test chamber of Compatible Electronics, Inc. was used for radiated emissions testing. This test site is in full compliance with ANSI C63.4. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Data was collected in the worst case (highest emission) configuration of the EUT. At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters (for E field radiated field strength). The gunsight method was used when measuring with the horn antenna to ensure accurate results.

The EUT was tested at a 3-meter test distance. The six highest emissions are listed in Table 1.

Radiated Emissions Test (Continued)

The measurement bandwidths and transducers used for the radiated emissions test were:

FREQUENCY RANGE	EFFECTIVE MEASUREMENT BANDWIDTH	TRANSDUCER
9 kHz to 150 kHz	200 Hz	Loop Antenna
150 kHz to 30 MHz	9 kHz	Loop Antenna
30 MHz to 1 GHz	120 kHz	CombiLog Antenna
1 GHz to 4.34 GHz	1 MHz	Horn Antenna

Test Results:

The EUT complies with the Class B limits of CFR Title 47, Part 15, Subpart B; the limits of CFR Title 47, Part 15, Subpart C sections 15.205, 15.209 and 15.231; and the limits of RSS-210 and RSS-Gen for radiated emissions.



7.1.3 **RF Emissions Test Results**

RADIATED EMISSION RESULTS Table 1 Motion Detector, Model: WST-740

Frequency MHz	Corrected Reading*	Specification Limit	Delta (Cor. Reading – Spec. Limit) dB
433.92 (H) (X-Axis)	77.57 (AV)	80.82	-3.25
433.92 (H) (Z-Axis)	76.47 (AV)	80.82	-4.35
433.92 (V) (Y-Axis)	75.65 (AV)	80.82	-5.17
1301.76 (V) (Z-Axis)	47.83 (AV)	53.97	-6.14
433.92 (V) (Z-Axis)	74.58 (AV)	80.82	-6.24
433.92 (H) (Y-Axis)	71.56 (AV)	80.82	-9.27

Notes:

- The complete emissions data is given in Appendix E of this report.
- Vertical (V)
- (H) Horizontal
- (AV) Average

7.1.4 **Sample Calculations**

A correction factor for the antenna, cable and a distance factor (if any) must be applied to the meter reading before a true field strength reading can be obtained. This Corrected Meter Reading is then compared to the specification limit in order to determine compliance with the limits.

Conversion to logarithmic terms: Specification limit (μ V/m) log x 20 = Specification Limit in dBuV/m

To correct for distance when measuring at a distance other than the specification

For measurements below 30 MHz: (Specification distance / test distance) log x 40 = distance factor

For measurements above 30 MHz: (Specification distance / test distance) log x 20 = distance factor

Note: When using an Active Antenna, the Antenna factor shall be subtracted due to the combination of the internal amplification and antenna loss.

Corrected Meter Reading = meter reading + F - A + C

where: F = antenna factor

> A= amplifier gain C = cable loss

The correction factors for the antenna and the amplifier gain are attached in Appendix D of this report. The data sheets are attached in Appendix E.

The distance factor D is 0 when the test is performed at the required specification distance.

When the limit is in terms of magnetic field, the following equation applies:

$$H[dB(\mu A/m)] = V[dB(\mu V)] + L_{C}\left[dB\right] - G_{PA}\left[dB\right] + AF^{H}\left[dB(S/m)\right]$$

where: H is the magnetic field strength (to be compared with the limit),

V is the voltage level measured by the receiver or spectrum analyzer.

 L_C is the cable loss,

 G_{PA} is the gain of the preamplifier (if used), and

 AF^{H} is the magnetic antenna factor.

The G_{PA} term is only included in the equation when an external preamplifier is used in the measurement chain, in front of the receiver or spectrum analyzer. An external preamplifier is not usually necessary (or even advisable, due to risk of saturating the input mixer of the receiver) when an active loop antenna is used. In that case, the antenna factor of the loop already includes the gain of its built-in preamplifier.

If the "electrical" antenna factor is used instead, the above equation becomes:

$$H[dB(\mu A/m)] = V[dB(\mu V)] + L_C[dB] - G_{PA}[dB] + AF^E[dB(m^{-1})] - 51.5[dB\Omega]$$

 AF^{E} is the "electric" antenna factor, as provided by the antenna calibration where:

laboratory.

When the limit is in terms of electric field, the following equation applies:

$$E[dB(\mu V/m)] = V[dB(\mu V)] + L_C[dB] - G_{PA}[dB] + AF^E[dB(m^{-1})]$$
 or, if the magnetic antenna factor is used:

$$E[dB(\mu V/m)] = V[dB(\mu V)] + L_C[dB] - G_{PA}[dB] + AF^H[dB(S/m)] + 51.5[dB\Omega]$$

The display of the receiver (or spectrum analyzer) shall not be configured in units of current, e.g. μA or $dB(\mu A)$. That conversion is calculated inside the receiver (or spectrum analyzer) using its input impedance, which is 50 Ω , while the magnetic field calculation is based on the free-space impedance of 377 Ω .

7.1.5 **Duty Cycle Calculation**

The fundamental and harmonics were measured at a 3-meter test distance. The EMI Receiver was used to obtain the final test data. The final qualification data sheets are in Appendix E.

Where

$$\delta(dB) = 20 \log \left[\sum (nt_1 + mt_2 + ... + \xi t_x) / T \right]$$

n is the number of pulses of duration t_1 m is the number of pulses of duration t_2 ξ is the number of pulses of duration t_x

T is the period of the pulse train or 100 ms if the pulse train length is greater than 100 ms

Duty Cycle Correction Factor = -19.84 dB

Time of One Small Pulse = $275 \mu s$

Time of One Large Pulse = $2750 \mu s$

Number of Small Pulses = 27

Number of Large Pulses = 1

Total On Time = $10175 \mu s = 10.175 ms$

The time between pulses is greater than 100 ms

Duty Cycle = 10.175 ms / 100 ms = 10.175 %

7.1.6 99 % Bandwidth

The 99 % bandwidth was measured using an EMI Receiver.

The following steps were performed for measuring the 99 % bandwidth per RSS-GEN, Issue 5, clause 6.7:

- 1. Set RBW to 1% to 5% of the actual occupied bandwidth.
- 2. Set VBW to greater than 3 times the RBW.
- 3. Set the EMI Receiver to the occupied bandwidth Function set at 99 %
- 4. Set the peak detector to max hold.
- 5. Set the sweep time to auto
- 6. Allow the trace to stabilize.

Please note that this was only used to determine the emission bandwidth and that there are no limits or pass/fail criteria for this test. Please see the data sheets located in Appendix E.

7.1.7 -20 dB Bandwidth

The -20 dB bandwidth was measured using an EMI Receiver.

The following steps were performed for measuring the -20 dB bandwidth:

- 1. Set RBW from 1% to 5% of the Occupied Bandwidth.
- 2. Set the span to 100 kHz.
- 3. Set VBW to greater than 3 times the RBW.
- 4. Set the peak detector to max hold.
- 5. Set the sweep time to auto
- 6. Allow the trace to stabilize.
- 7. Set the markers to -20 dB of the peak fundamental emission

Test Results:

The EUT complies with limits of CFR Title 47, Part 15, Subpart C section 15.231 (c); and the limits of RSS-210.

7.1.8 **Transmission Time**

The transmission time was measured using an EMI Receiver.

The following steps were performed for measuring transmission time:

- 1. Set RBW = 120 kHz
- 2. Set VBW = 510 kHz
- 3. Span = 0 Hz
- 4. Set the sweep time to 7 seconds
- 5. Push a button on the EUT, which automatically activated the transmitter.
- 6. Allow the trace to stabilize.
- 7. Set the 1st marker to start of the transmission
- 8. Set the 2nd marker for 5 seconds after the start of the transmission
- 9. Verify the transmission does not go beyond the 2nd marker.

Test Results:

The EUT complies with limits of CFR Title 47, Part 15, Subpart C section 15.231 (a)(1) and (a)(2); and the limits of RSS-210.

7.1.9 Variation of the Input Power

The variation of the input power test was performed using the EMI Receiver. The EUT input power was varied between 85% and 115% of the nominal rated supply voltage. The carrier frequency was monitored for any change in amplitude.

Test Results:

This test was not performed because the EUT is battery power only.

Report Number: B20504D1 Page 22 of 22



Motion Detector Model: WST-740

8. **CONCLUSIONS**

The Motion Detector, Model: WST-740 (EUT), as tested, meets all the specification limits defined in RSS-210, RSS-Gen, the Class B specification limits defined in CFR Title 47, Part 15, Subpart B; and the specification limits defined in CFR Title 47, Part, 15, Subpart C, sections 15.205, 15.207, 15.209 and 15.231.

Model: WST-740

APPENDIX A

LABORATORY ACCREDITATIONS AND RECOGNITIONS

LABORATORY ACCREDITATIONS AND RECOGNITIONS



For US, Canada, Australia/New Zealand, Japan, Taiwan, Korea, and the European Union, Compatible Electronics is currently accredited by NVLAP to ISO/IEC 17025.

> For the most up-to-date version of our scopes and certificates please visit http://celectronics.com/quality/scope/

Quote from ISO-ILAC-IAF Communiqué on the Management Systems Requirements of ISO/IEC 17025, General Requirements for the competence of testing and calibration laboratories:

"A laboratory's fulfilment of the requirements of ISO/IEC 17025 means the laboratory meets both the technical competence requirements and management system requirements that are necessary for it to consistently deliver technically valid test results and calibrations. The management system requirements in ISO/IEC 17025 are written in language relevant to laboratory operations and operate generally in accordance with the principles of ISO 9001"

Innovation, Science and Economic Development Canada Lab Code 2154A

Model: WST-740

APPENDIX B

MODIFICATIONS TO THE EUT

MODIFICATIONS TO THE EUT

The modifications listed below were made to the EUT to pass FCC Subpart B, FCC 15.231, RSS-210, and RSS-Gen specifications.

All the rework described below was implemented during the test in a method that could be reproduced in all the units by the manufacturer.

No modifications were made to the EUT during the testing.



Model: WST-740

APPENDIX C

MODELS COVERED UNDER THIS REPORT

Model: WST-740

MODELS COVERED UNDER THIS REPORT

USED FOR THE PRIMARY TEST

Motion Detector Model: WST-740 S/N: N/A

There are no additional models or part numbers covered under this report.



APPENDIX D

DIAGRAMS, CHARTS, AND PHOTOS

FIGURE 1: CONDUCTED EMISSIONS TEST SETUP


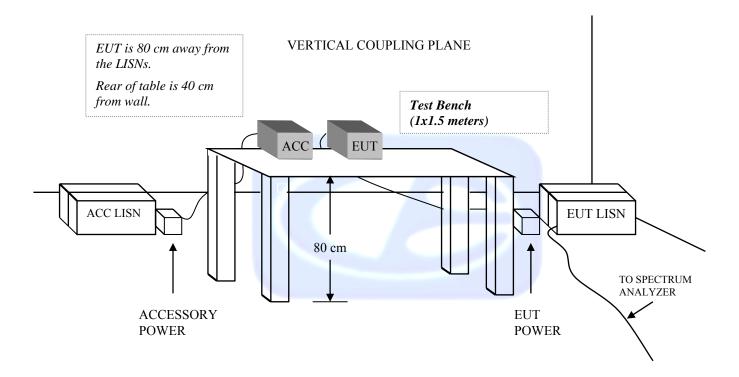


FIGURE 2: LAYOUT OF THE SEMI -ANECHOIC TEST CHAMBER

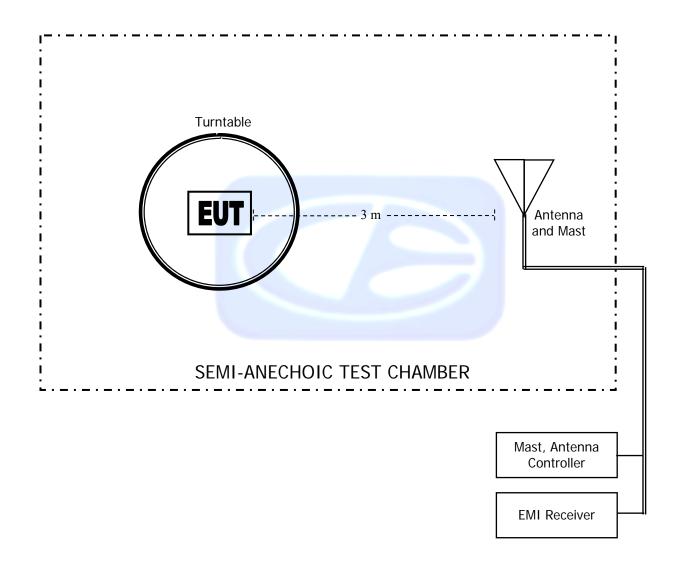

COM-POWER AL-130R LOOP ANTENNA

S/N: 121090

CALIBRATION DATE: FEBRUARY 10, 2022

	CALIBRATION DATE: FEBRUARY 10, 2022				
FREQUENCY (MHz)	MAGNETIC (dB/m)	ELECTRIC (dB/m)			
0.009	15.6	-35.8			
0.01	15.8	-35.6			
0.02	14.8	-36.6			
0.03	15.6	-35.9			
0.04	15.0	-36.5			
0.05	14.4	-37.1			
0.06	14.6	-36.9			
0.07	14.3	-37.2			
0.08	14.3	-37.2			
0.09	14.4	-37.0			
0.10	14.1	-37.4			
0.20	14.1	-37.4			
0.30	14.0	-37.5			
0.40	13.9	-37.6			
0.50	14.1	-37.3			
0.60	14.1	-37.3			
0.70	14.2	-37.3			
0.80	14.2	-37.3			
0.90	14.2	-37.2			
1.00	14.4	-37.0			
2.00	14.6	-36.9			
3.00	14.6	-36.8			
4.00	14.9	-36.6			
5.00	14.9	-36.7			
6.00	14.8	-36.7			
7.00	14.6	-36.8			
8.00	14.5	-37.0			
9.00	14.3	-37.2			
10.00	14.5	-37.0			
11.00	14.6	-36.9			
12.00	14.7	-36.7			
13.00	14.9	-36.6			
14.00	15.0	-36.5			
15.00	14.9	-36.6			
16.00	14.9	-36.6			
17.00	14.6	-36.8			
18.00	14.4	-37.1			
19.00	14.5	-37.0			
20.00	14.5	-37.0			
21.00	14.2	-37.3			
22.00	13.9	-37.5			
23.00	13.9	-37.5			
24.00	13.8	-37.7			
25.00	13.4	-38.0			
26.00	13.4	-38.2			
27.00	13.2	-38.3			
28.00	13.2	-38.7			
29.00	12.7	-38.8			
30.00	12.7	-39.0			
30.00	12.4	-37.0			

COM-POWER AC-220

COMBILOG ANTENNA

S/N: 61093

CALIBRATION DATE: DECEMBER 14, 2021

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
30	22.50	200	16.00
35	21.40	250	17.40
40	21.00	300	19.70
45	20.60	350	20.00
50	19.70	400	22.20
60	16.10	450	22.40
70	12.80	500	23.10
80	12.50	550	23.40
90	14.20	600	24.90
100	15.40	650	25.30
120	16.50	700	25.40
125	16.80	750	26.40
140	15.90	800	26.70
150	16.60	850	27.10
160	18.50	900	27.90
175	15.90	950	28.00
180	15.50	1000	28.00

COM POWER AH-118

HORN ANTENNA

S/N: 10050113

CALIBRATION DATE: DECEMBER 16, 2021

FREQUENCY	FACTOR	FREQUENCY	FACTOR
(GHz)	(dB)	(GHz)	(dB)
1.0	23.86	10.0	38.91
1.5	25.67	10.5	39.94
2.0	28.25	11.0	39.10
2.5	29.17	11.5	39.70
3.0	29.78	12.0	40.29
3.5	30.88	12.5	41.93
4.0	31.21	13.0	41.34
4.5	32.96	13.5	40.57
5.0	33.30	14.0	40.23
5.5	34.24	14.5	42.25
6.0	34.57	15.0	43.63
6.5	35.61	15.5	39.96
7.0	36.60	16.0	40.38
7.5	37.49	16.5	40.56
8.0	37.44	17.0	40.93
8.5	37.98	17.5	42.27
9.0	38.01	18.0	43.77
9.5	38.53		

COM-POWER PAM-118

PREAMPLIFIER

S/N: 181653

CALIBRATION DATE: MARCH 7, 2022

FREQUENCY (GHz)	FACTOR (dB)	FREQUENCY (GHz)	FACTOR (dB)
1.0	40.02	6.0	38.84
1.1	39.72	6.5	39.20
1.2	39.93	7.0	39.46
1.3	39.98	7.5	39.67
1.4	39.99	8.0	39.28
1.5	40.20	8.5	38.63
1.6	40.05	9.0	38.96
1.7	40.15	9.5	39.33
1.8	40.20	10.0	39.58
1.9	40.33	11.0	38.25
2.0	40.33	12.0	40.03
2.5	40.60	13.0	40.55
3.0	40.76	14.0	40.36
3.5	40.87	15.0	39.34
4.0	40.39	16.0	37.34
4.5	39.55	17.0	42.14
5.0	40.34	18.0	42.54
5.5	39.45		



FRONT VIEW

ECOLINK INTELLIGENT TECHNOLOGY, INC. MOTION DETECTOR MODEL: WST-740

FCC SUBPART B AND C; RSS-210 AND RSS-GEN - RADIATED EMISSIONS - BELOW 1 GHz


PHOTOGRAPH SHOWING THE EUT CONFIGURATION FOR MAXIMUM EMISSIONS



REAR VIEW

ECOLINK INTELLIGENT TECHNOLOGY, INC. MOTION DETECTOR MODEL: WST-740 FCC SUBPART B AND C; RSS-210 AND RSS-GEN - RADIATED EMISSIONS - BELOW 1 GHz


PHOTOGRAPH SHOWING THE EUT CONFIGURATION FOR MAXIMUM EMISSIONS

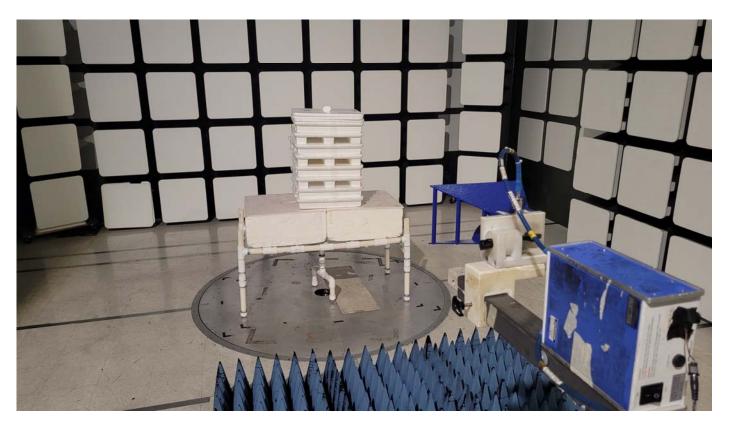

FRONT VIEW

ECOLINK INTELLIGENT TECHNOLOGY, INC. MOTION DETECTOR MODEL: WST-740 FCC SUBPART B AND C; RSS-210 AND RSS-GEN – RADIATED EMISSIONS – ABOVE 1 GHz

PHOTOGRAPH SHOWING THE EUT CONFIGURATION FOR MAXIMUM EMISSIONS

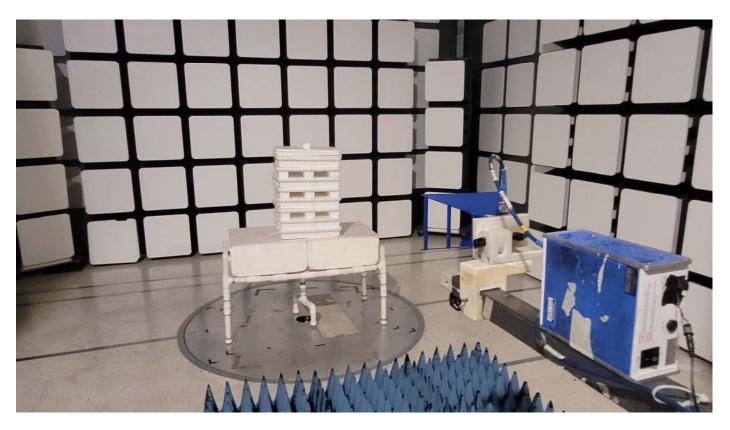

REAR VIEW

ECOLINK INTELLIGENT TECHNOLOGY, INC. MOTION DETECTOR MODEL: WST-740 FCC SUBPART B AND C; RSS-210 AND RSS-GEN - RADIATED EMISSIONS - ABOVE 1 GHz

PHOTOGRAPH SHOWING THE EUT CONFIGURATION FOR MAXIMUM EMISSIONS

APPENDIX E

DATA SHEETS

RADIATED EMISSIONS

DATA SHEETS

5/4/2022 10:49:02 AM Sequence: Preliminary Scan

Report Number: B20504D1



Model: WST-740

Title: Pre-Scan - FCC Class B File: 1 - LF - Pre-Scan - FCC Class B - 05-04-2022.set

Operator: Kyle Fujimoto


EUT Type: Motton Detector EUT Condition: The EUT is continuously transmitting at 433.92 MHz


Company: Ecolink Intelligent Technologies, Inc.

Model: WST-740

Note: The frequencies at 433.92 MHz and 867.84 MHz are subject to the limits of FCC 15.231 (a) instead. X-Axis Worst Case S/N: N/A

FCC Class B



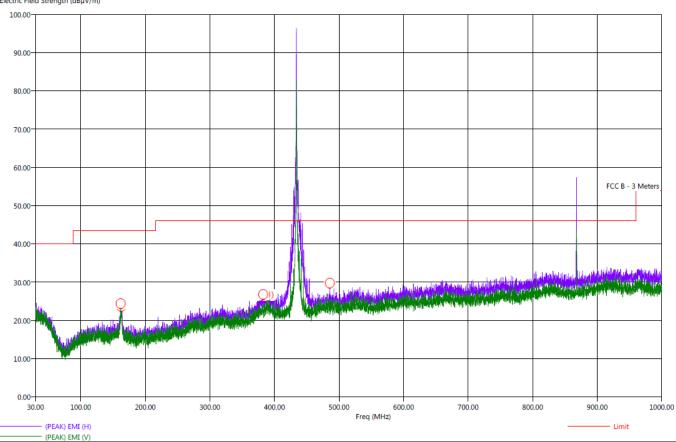



Title: Radiated Final - FCC Class B File: 1 - LF - Final Scan - FCC Class B - 05-04-2022.set Operator: Kyle Fujimoto EUT Type: Motion Detector EUT Condition: The EUT is continuously transmitting at 433.92 MHz Company: Ecolink Intelligent Technologies, Inc. Model: WST-740 S/N: N/A

5/4/2022 10:59:42 AM Sequence: Final Measurements

FCC Class B

Freq	Pol	(PEAK) EMI	(QP) EMI	(PEAK) Margin	(QP) Margin	Limit	Transducer	Cable	Ttbl Agl	Twr Ht
(MHz)		$(dB\mu V/m)$	(dBµV/m)	(dB)	(dB)	(dBµV/m)	(dB)	(dB)	(deg)	(cm)
161.90	Н	31.31	25.98	-12.19	-17.52	43.50	22.52	1.07	275.00	111.52
162.80	Н	31.39	26.03	-12.11	-17.47	43.50	22.57	1.07	157.50	174.92
382.50	Н	33.33	27.92	-12.67	-18.08	46.00	22.83	1.67	359.75	302.56
385.80	н	33.58	28.05	-12.42	-17.95	46.00	22.97	1.68	178.00	366.20
390.90	Н	35.23	28.48	-10.77	-17.52	46.00	23.39	1.69	147.75	382.02
485.80	н	34.25	28.68	-11.75	-17.32	46.00	23.62	1.82	77.75	397.73



FUNDAMENTAL AND HARMONICS

DATA SHEETS

Report Number: **B20504D1**



Model: WST-740

FCC 15.231

Ecolink Intelligent Technology, Inc. Date: 05/04/2022

Motion Detector Lab: D

Model: WST-740 Tested By: Kyle Fujimoto

Fundamental

				1				
					Peak /	Table	Ant.	
	Level	Pol			QP/	Angle	Height	
Freq. (MHz)	(dBuV/m)	(v/h)	Limit	Margin	Avg	(deg)	(cm)	Comments
433.92	87.88	V	100.82	-12.94	Peak	0.00	270.98	X-Axis
433.92	68.04	V	80.82	-12.78	Avg	0.00	270.98	Vertical Polarization
433.92	95.49	V	100.82	-5.33	Peak	94.25	157.73	Y-Axis
433.92	75.65	V	80.82	-5.17	Avg	94.25	157.73	Vertical Polarization
433.92	94.42	V	100.82	-6.40	Peak	352.00	117.91	Z-Axis
433.92	74.58	V	80.82	-6.24	Avg	352.00	117.91	Vertical Polarization
433.92	97.41	Ι	100.82	-3.41	Peak	114.50	100.00	X-Axis
433.92	77.57	Η	80.82	-3.25	Avg	114.50	100.00	Horizontal Polarization
433.92	91.40	Н	100.82	-9.43	Peak	174.75	196.89	Y-Axis
433.92	71.56	Ι	80.82	-9.27	Avg	174.75	196.89	Horizontal Polarization
433.92	96.31	Η	100.82	-4.51	Peak	267.50	100.00	Z-Axis
433.92	76.47	Ι	80.82	-4.35	Avg	267.50	100.00	Horizontal Polarization

Report Number: **B20504D1**



Model: WST-740

FCC 15.231

Ecolink Intelligent Technology, Inc. Date: 05/04/2022

Motion Detector Lab: D

Model: WST-740 Tested By: Kyle Fujimoto

Harmonics

Transmit Mode - X-Axis

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
867.84	49.74	V	80.82	-31.08	Peak	172.50	191.10	
867.84	29.90	V	60.82	-30.92	Avg	172.50	191.10	
1301.76	52.23	V	73.97	-21.74	Peak	134.75	222.92	
1301.76	32.39	V	53.97	-21.58	Avg	134.75	222.92	
1735.68	60.91	V	80.82	-19.91	Peak	134.50	207.10	
1735.68	41.07	V	60.82	-19.75	Avg	134.50	207.10	
2169.60	60.84	V	80.82	-19.98	Peak	103.50	143.82	
2169.60	41.00	V	60.82	-19.82	Avg	103.50	143.82	
2603.52	57.97	V	80.82	-22.85	Peak	290.25	143.22	
2603.52	38.13	V	60.82	-22.69	Avg	290.25	143.22	
3037.44	59.45	V	80.82	-21.37	Peak	296.25	143.70	
3037.44	39.61	V	60.82	-21.21	Avg	296.25	143.70	
3471.36	61.46	V	80.82	-19.36	Peak	148.50	158.86	
3471.36	41.62	V	60.82	-19.20	Avg	148.50	158.86	
3905.28	47.25	V	73.97	-26.72	Peak	228.25	126.68	
3905.28	27.41	V	53.97	-26.56	Avg	228.25	126.68	
4339.20	49.20	V	73.97	-24.77	Peak	74.50	190.86	
4339.20	29.36	V	53.97	-24.61	Avg	74.50	190.86	

Report Number: **B20504D1**



Model: WST-740

FCC 15.231

Ecolink Intelligent Technology, Inc. Date: 05/04/2022

Motion Detector Lab: D

Model: WST-740 Tested By: Kyle Fujimoto

Harmonics

Transmit Mode - Y-Axis

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
867.84	57.13	V	80.82	-23.70	Peak	290.50	130.80	
867.84	37.29	V	60.82	-23.54	Avg	290.50	130.80	
1301.76	52.09	V	73.97	-21.88	Peak	195.50	175.16	
1301.76	32.25	V	53.97	-21.72	Avg	195.50	175.16	
1735.68	60.23	V	80.82	-20.59	Peak	65.75	127.52	
1735.68	40.39	V	60.82	-20.43	Avg	65.75	127.52	_
2169.60	65.98	V	80.82	-14.84	Peak	115.00	127.46	
2169.60	46.14	V	60.82	-14.68	Avg	115.00	127.46	
2603.52	59.18	V	80.82	-21.64	Peak	253.50	127.34	
2603.52	39.34	V	60.82	-21.48	Avg	253.50	127.34	
3037.44	59.67	V	80.82	-21.15	Peak	238.00	223.10	
3037.44	39.83	V	60.82	-20.99	Avg	238.00	223.10	
3471.36	61.63	V	80.82	-19.19	Peak	120.50	143.04	
3471.36	41.79	V	60.82	-19.03	Avg	120.50	143.04	
3905.28	52.14	V	73.97	-21.83	Peak	75.00	127.40	
3905.28	32.30	V	53.97	-21.67	Avg	75.00	127.40	
4339.20	51.90	V	73.97	-22.07	Peak	95.75	143.28	
4339.20	32.06	V	53.97	-21.91	Avg	95.75	143.28	





FCC 15.231

Ecolink Intelligent Technology, Inc.

Date: 05/04/2022

Motion Detector Lab: D

Model: WST-740 Tested By: Kyle Fujimoto

Harmonics

Transmit Mode - Z-Axis

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
867.84	51.65	V	80.82	-29.17	Peak	178.50	182.44	
867.84	31.81	V	60.82	-29.01	Avg	178.50	182.44	
1301.76	67.67	V	73.97	-6.30	Peak	201.75	127.34	
1301.76	47.83	V	53.97	-6.14	Avg	201.75	127.34	
1735.68	67.67	V	80.82	-13.15	Peak	201.75	127.34	
1735.68	47.83	V	60.82	-12.99	Avg	201.75	127.34	
2169.60	68.19	V	80.82	-12.63	Peak	114.00	127.40	
2169.60	48.35	V	60.82	-12.47	Avg	114.00	127.40	
2603.52	61.32	V	80.82	-19.50	Peak	229.75	127.46	
2603.52	41.48	V	60.82	-19.34	Avg	229.75	127.46	
3037.44	67.57	V	80.82	-13.25	Peak	332.25	127.76	
3037.44	47.73	V	60.82	-13.09	Avg	332.25	127.76	
3471.36	67.97	V	80.82	-12.85	Peak	163.50	111.34	
3471.36	48.13	V	60.82	-12.69	Avg	163.50	111.34	
3905.28	55.00	V	73.97	-18.97	Peak	299.75	127.34	
3905.28	35.16	V	53.97	-18.81	Avg	299.75	127.34	
4339.20	51.77	V	73.97	-22.20	Peak	310.75	206.92	
4339.20	31.93	V	53.97	-22.04	Avg	310.75	206.92	





FCC 15.231

Ecolink Intelligent Technology, Inc.

Date: 05/04/2022

Motion Detector Lab: D

Model: WST-740 Tested By: Kyle Fujimoto

Harmonics

Transmit Mode - X-Axis

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
867.84	59.09	H	80.82	-21.73	Peak	262.75	101.85	
867.84	39.25	Н	60.82	-21.57	Avg	262.75	101.85	
1301.76	58.01	Н	73.97	-15.96	Peak	181.00	161.13	
1301.76	38.17	Н	53.97	-15.80	Avg	181.00	161.13	
1735.68	69.65	Н	80.82	-11.17	Peak	175.75	111.22	
1735.68	49.81	Н	60.82	-11.01	Avg	175.75	111.22	
					110			
2169.60	66.59	Η	80.82	-14.23	Peak	36.00	143.34	
2169.60	46.75	Η	60.82	-14.07	Avg	36.00	143.34	
		N.		110				
2603.52	56.43	Н	80.82	-24.39	Peak	219.75	143.16	
2603.52	36.59	Н	60.82	-24.23	Avg	219.75	143.16	
3037.44	66.45	Н	80.82	-14.37	Peak	342.50	143.34	
3037.44	46.61	Н	60.82	-14.21	Avg	342.50	143.34	
3471.36	68.63	Η	80.82	-12.19	Peak	151.25	111.46	
3471.36	48.79	Н	60.82	-12.03	Avg	151.25	111.46	
3905.28	49.90	Н	73.97	-24.07	Peak	79.50	175.28	
3905.28	30.06	Н	53.97	-23.91	Avg	79.50	175.28	
	1							
4339.20	47.47	Н	73.97	-26.50	Peak	83.25	158.86	
4339.20	27.63	Н	53.97	-26.34	Avg	83.25	158.86	





FCC 15.231

Ecolink Intelligent Technology, Inc. Date: 05/04/2022

Motion Detector Lab: D

Model: WST-740 Tested By: Kyle Fujimoto

Harmonics

Transmit Mode - Y-Axis

	Level	Pol			Peak / QP /	Table Angle	Ant. Height	_
Freq. (MHz)	(dBuV/m)	(v/h)	Limit	Margin	Avg	(deg)	(cm)	Comments
867.84	48.83	Н	80.82	-32.00	Peak	10.00	158.32	
867.84	28.99	Н	60.82	-31.84	Avg	10.00	158.32	
1301.76	55.23	Н	73.97	-18.74	Peak	348.25	144.11	
1301.76	35.39	Н	53.97	-18.58	Avg	348.25	144.11	
1735.68	56.22	Н	80.82	-24.60	Peak	30.00	177.61	
1735.68	36.38	Η	60.82	-24.44	Avg	30.00	177.61	
					2 - 10			
2169.60	64.48	Η	80.82	-16.34	Peak	0.00	175.40	
2169.60	44.64	Ι	60.82	-16.18	Avg	0.00	175.40	
2603.52	62.58	Н	80.82	-18.24	Peak	185.50	111.40	
2603.52	42.74	I	60.82	-18.08	Avg	185.50	111.40	
3037.44	55.34	Ι	80.82	-25.48	Peak	306.00	111.46	
3037.44	35.50	Ι	60.82	-25.32	Avg	306.00	111.46	
3471.36	66.24	Ι	80.82	-14.58	Peak	192.50	111.28	
3471.36	46.40	Ι	60.82	-14.42	Avg	192.50	111.28	
3905.28	53.31	Η	73.97	-20.66	Peak	109.75	143.28	
3905.28	33.47	Η	53.97	-20.50	Avg	109.75	143.28	
4339.20	54.12	Η	73.97	-19.85	Peak	107.00	159.22	
4339.20	34.28	Η	53.97	-19.69	Avg	107.00	159.22	





FCC 15.231

Ecolink Intelligent Technology, Inc.

Date: 05/04/2022


Motion Detector Lab: D

Model: WST-740 Tested By: Kyle Fujimoto

Harmonics

Transmit Mode - Z-Axis

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
867.84	57.78	Н	80.82	-23.04	Peak	70.75	165.79	
867.84	37.94	Н	60.82	-22.88	Avg	70.75	165.79	
1301.76	48.79	Н	73.97	-25.18	Peak	118.50	143.34	
1301.76	28.95	Н	53.97	-25.02	Avg	118.50	143.34	
1735.68	63.83	Н	80.82	-16.99	Peak	118.75	143.22	
1735.68	43.99	Н	60.82	-16.83	Avg	118.75	143.22	
2169.60	70.85	Н	80.82	-9.97	Peak	275.50	111.46	
2169.60	51.01	Н	60.82	-9.81	Avg	275.50	111.46	
				//				
2603.52	59.36	Η	80.82	-21.46	Peak	111.52	76.50	
2603.52	39.52	Н	60.82	-21.30	Avg	111.52	76.50	
3037.44	63.80	Н	80.82	-17.02	Peak	66.75	111.28	
3037.44	43.96	Н	60.82	-16.86	Avg	66.75	111.28	
3471.36	67.52	Н	80.82	-13.30	Peak	207.00	110.68	
3471.36	47.68	Н	60.82	-13.14	Avg	207.00	110.68	
3905.28	47.38	Н	73.97	-26.59	Peak	181.00	174.08	
3905.28	27.54	Н	53.97	-26.43	Avg	181.00	174.08	
4339.20	50.31	Н	73.97	-23.66	Peak	182.25	111.28	
4339.20	30.47	Н	53.97	-23.50	Avg	182.25	111.28	



FCC 15.231

Ecolink Intelligent Technology, Inc.

Date: 05/04/2022


Motion Detector Lab: D

Model: WST-740 Tested By: Kyle Fujimoto

Non Harmonic Emissions from the Tx and Digital Portion - 9 kHz to 30 MHz Non Harmonic Emissions from the Tx and Digital Portion - 1 GHz To 4.34 GHz

Freq.	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
								No Emissions Detected
								from 9 kHz to 30 MHz
								for the digital portion
								of the EUT
								of the EOT
								No Emissions Detected
								from 1 GHz to 4.34 GHz
								for the digital portion
						an reference of the cold		of the EUT
								No Emissions Detected
								from 9 kHz to 30 MHz
								for the Non-Harmonic Emissions
								of the Transmitter for the EUT
								No Emissions Detected
								from 1 GHz to 4.34 GHz
								for the Non-Harmonic Emissions
								of the Transmitter for the EUT
								Investigated in the X-Axis,
								Y-Axis, and Z-Axis

-20 dB BANDWIDTH PLOT DATA SHEET

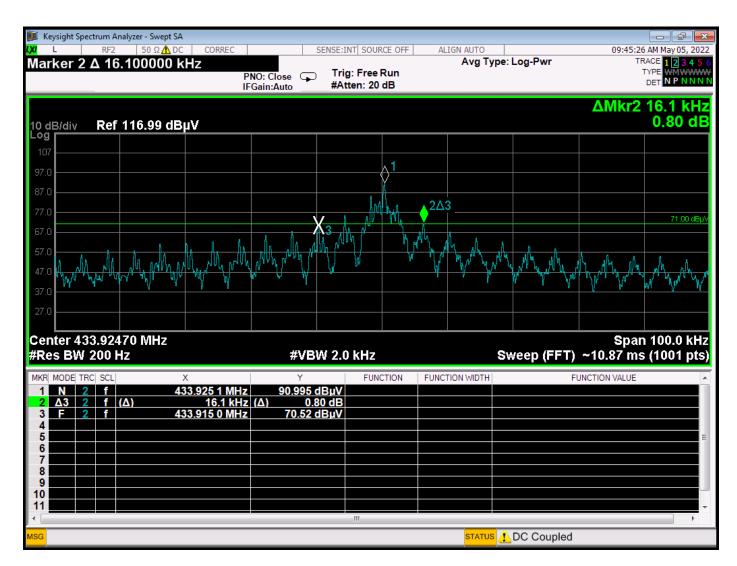


-20 dB Bandwidth Plot






TRANSMISSION TIME DATA SHEET

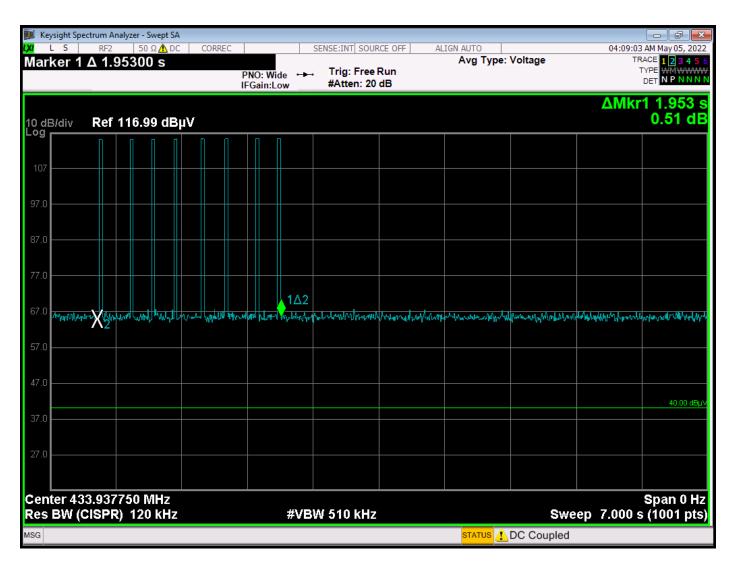

The total on time of the transmission is 1.953 seconds.

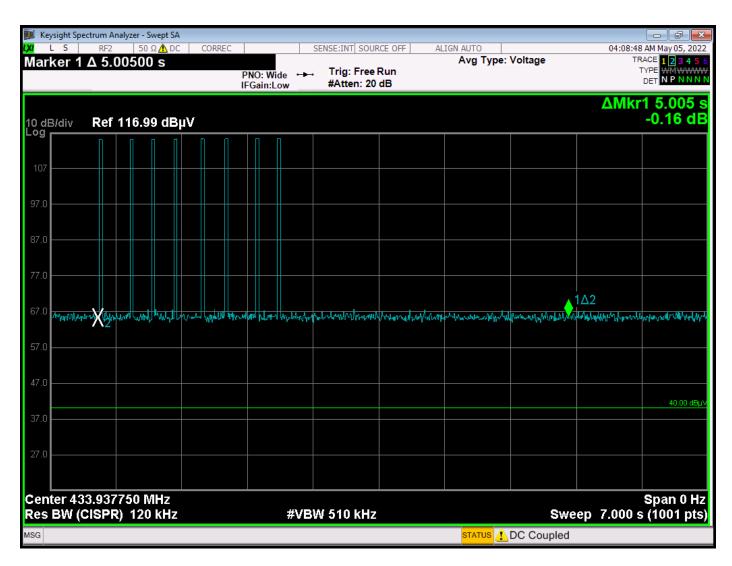

Plot showing the transmission time is less than 5 seconds






99% BANDWIDTH DATA SHEET




99% Bandwidth Plot

DUTY CYCLE


DATA SHEETS

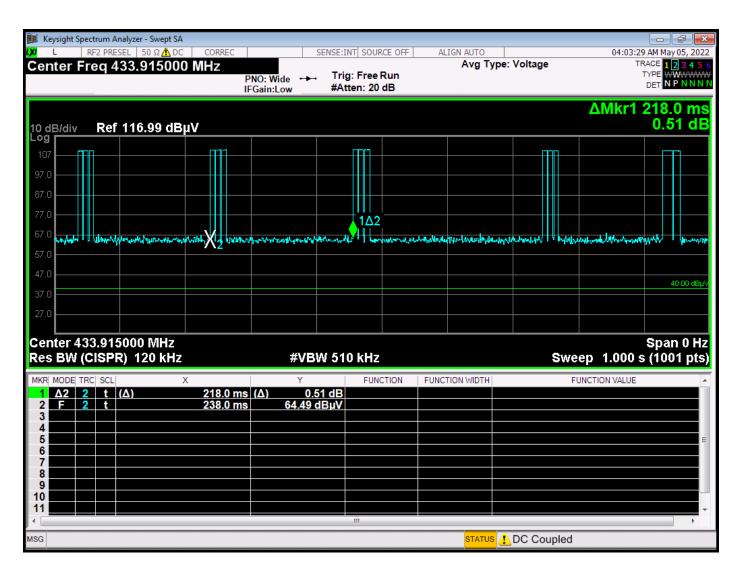


The pulse train only repeats at an interval that is greater than 100 ms

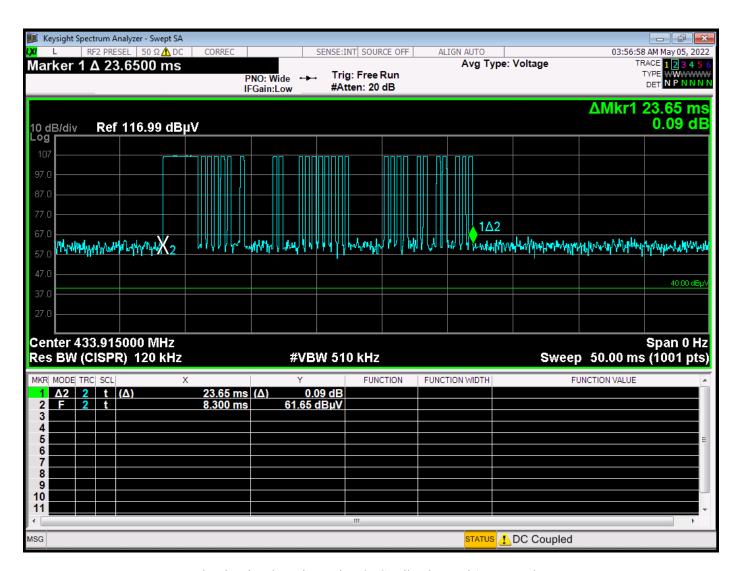


Plot showing the Pulse Train – 27 Small Pulses and 1 Large Pulse

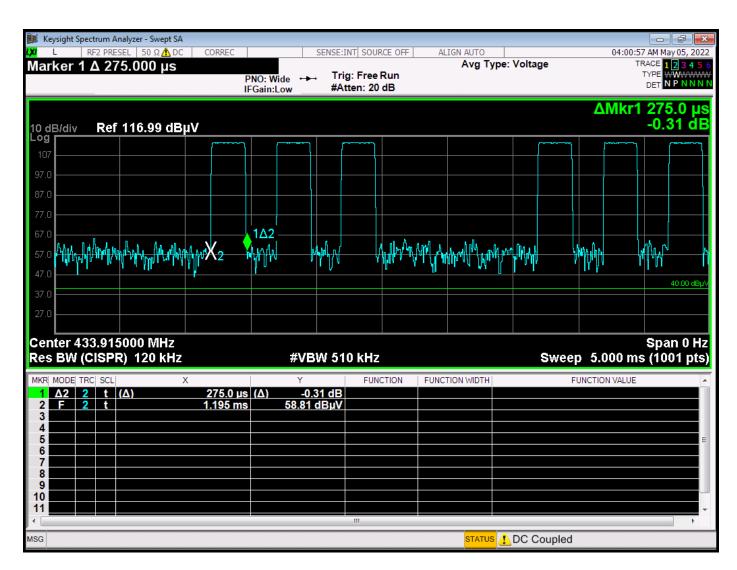

Time of Small Pulse = 275 us

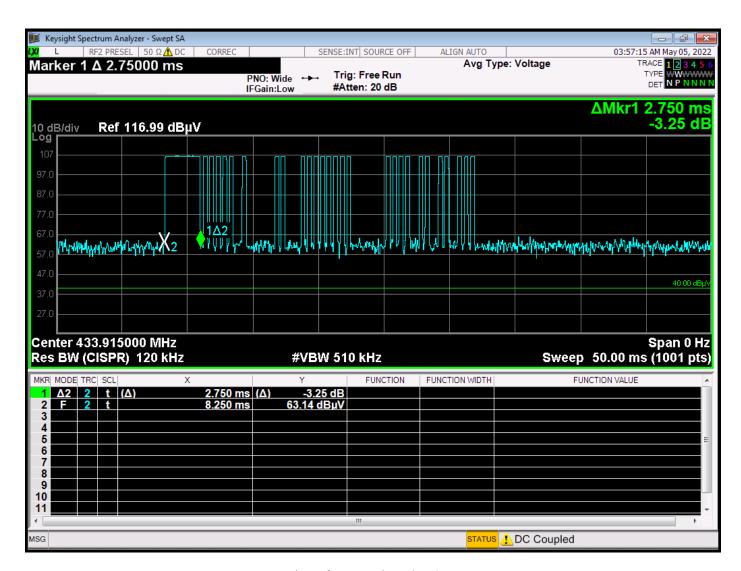

Time of Large Pulse = 2.750 ms

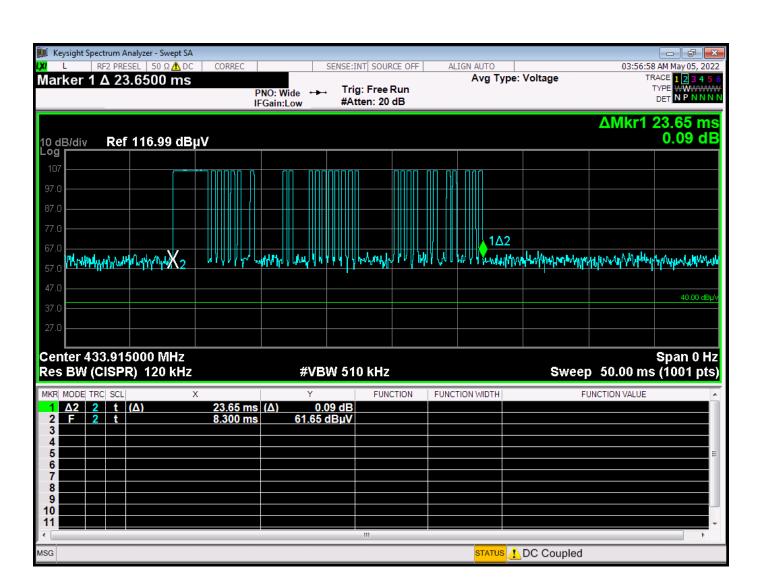

Number of Small Pulses = 27 = (27*275 us) = 7425 usNumber of Large Pulses = 1 = (1*2750 us) = 2750 us

Total On Time = 10175 us = 10.175 ms

Duty Cycle = 10.175 ms / 100 ms = 10.175%

The peak to average ratio is -19.84 dB