

FCC Radio Test Report

FCC ID: Q78-B820CA15

This report concerns: Original Grant

Project No.	:	2108H060
Equipment	:	Hybrid STB
Brand Name	:	ZTE
Test Model	:	ZXV10 B820C-A15
Series Model	:	N/A
Applicant	:	ZTE Corporation
Address	:	ZTE Plaza, Hi-Tech Park, Nanshan District, Shenzhen, Guangdong, P.R.China
Manufacturer	:	ZTE Corporation
Address	:	ZTE Plaza, Hi-Tech Park, Nanshan District, Shenzhen, Guangdong, P.R.China
Date of Receipt	:	Sep. 03, 2021
Date of Test	:	Sep. 03, 2021~Sep. 23, 2021
Issued Date	:	Sep. 29, 2021
Report Version	:	R00
Test Sample	:	Engineering Sample No.: EUT(MTK7661): SH20210903181-1 for radiated, SH20210903181-10 for conducted. EUT(MTK7663): SH20210903181 for radiated, SH20210903181-9 for conducted. Adapter: SH20210903181-6
Standard(s)	:	FCC CFR Title 47, Part 15, Subpart C FCC KDB 558074 D01 15.247 Meas Guidance v05r02 ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

Maker Qi

Prepared by : Maker Qi

Ryan. Wang

Approved by : Ryan Wang



TESTING CERT #5123.03

Add: No. 29, Jintang Road, Tangzhen Industry Park, Pudong New Area, Shanghai 201210, China

TEL: +86-021-61765666

Web: www.newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, A2LA, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REPORT ISSUED HISTORY	6
1 . SUMMARY OF TEST RESULTS	7
1.1 TEST FACILITY	8
1.2 MEASUREMENT UNCERTAINTY	8
1.3 TEST ENVIRONMENT CONDITIONS	8
2 . GENERAL INFORMATION	9
2.1 GENERAL DESCRIPTION OF EUT	9
2.2 DESCRIPTION OF TEST MODES	11
2.3 PARAMETERS OF TEST SOFTWARE	12
2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	13
2.5 SUPPORT UNITS	13
3 . AC POWER LINE CONDUCTED EMISSIONS	14
3.1 LIMIT	14
3.2 TEST PROCEDURE	14
3.3 DEVIATION FROM TEST STANDARD	14
3.4 TEST SETUP	15
3.5 EUT OPERATING CONDITIONS	15
3.6 TEST RESULTS	15
4 . RADIATED EMISSIONS	16
4.1 LIMIT	16
4.2 TEST PROCEDURE	17
4.3 DEVIATION FROM TEST STANDARD	18
4.4 TEST SETUP	18
4.5 EUT OPERATING CONDITIONS	19
4.6 TEST RESULTS - 9 KHZ TO 30 MHZ	19
4.7 TEST RESULTS - 30 MHZ TO 1000 MHZ	19
4.8 TEST RESULTS - ABOVE 1000 MHZ	19
5 . NUMBER OF HOPPING FREQUENCY	20
5.1 LIMIT	20
5.2 TEST PROCEDURE	20
5.3 DEVIATION FROM STANDARD	20
5.4 TEST SETUP	20
5.5 EUT OPERATION CONDITIONS	20

Table of Contents	Page
5.6 TEST RESULTS	20
6 . AVERAGE TIME OF OCCUPANCY	21
6.1 LIMIT	21
6.2 TEST PROCEDURE	21
6.3 DEVIATION FROM STANDARD	21
6.4 TEST SETUP	21
6.5 EUT OPERATION CONDITIONS	21
6.6 TEST RESULTS	21
7 . HOPPING CHANNEL SEPARATION	22
7.1 LIMIT	22
7.2 TEST PROCEDURE	22
7.3 DEVIATION FROM STANDARD	22
7.4 TEST SETUP	22
7.5 EUT OPERATION CONDITIONS	22
7.6 TEST RESULTS	22
8 . BANDWIDTH	23
8.1 LIMIT	23
8.2 TEST PROCEDURE	23
8.3 DEVIATION FROM STANDARD	23
8.4 TEST SETUP	23
8.5 EUT OPERATION CONDITIONS	23
8.6 TEST RESULTS	23
9 . MAXIMUM OUTPUT POWER	24
9.1 LIMIT	24
9.2 TEST PROCEDURE	24
9.3 DEVIATION FROM STANDARD	24
9.4 TEST SETUP	24
9.5 EUT OPERATION CONDITIONS	24
9.6 TEST RESULTS	24
10 . CONDUCTED SPURIOUS EMISSION	25
10.1 LIMIT	25
10.2 TEST PROCEDURE	25
10.3 DEVIATION FROM STANDARD	25
10.4 TEST SETUP	25

Table of Contents	Page
10.5 EUT OPERATION CONDITIONS	25
10.6 TEST RESULTS	25
11 . MEASUREMENT INSTRUMENTS LIST	26
12 . EUT TEST PHOTO	28
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	31
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	37
APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ	42
APPENDIX E - NUMBER OF HOPPING FREQUENCY	91
APPENDIX F - AVERAGE TIME OF OCCUPANCY	93
APPENDIX G - HOPPING CHANNEL SEPARATION	96
APPENDIX H - BANDWIDTH	98
APPENDIX I - MAXIMUM OUTPUT POWER	100
APPENDIX J - CONDUCTED SPURIOUS EMISSION	105
APPENDIX K - DECLARATION FOR BLUETOOTH DEVICE	110

REPORT ISSUED HISTORY

Report Version	Description	Issued Date
R00	Original Issue.	Sep. 29, 2021

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart C				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.247(d) 15.205(a) 15.209(a)	Radiated Emission	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.247 (a)(1)(iii)	Number of Hopping Frequency	APPENDIX E	PASS	-----
15.247 (a)(1)(iii)	Average Time of Occupancy	APPENDIX F	PASS	-----
15.247(a)(1)	Hopping Channel Separation	APPENDIX G	PASS	-----
15.247(a)(1)	Bandwidth	APPENDIX H	PASS	-----
15.247(a)(1)	Maximum Output Power	APPENDIX I	PASS	-----
15.247(d)	Conducted Spurious Emission	APPENDIX J	PASS	-----
15.203	Antenna Requirement	-----	PASS	Note(2)

Note:

- (1) "N/A" denotes test is not applicable in this test report
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

1.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No. 29, Jintang Road, Tangzhen Industry Park, Pudong New Area, Shanghai 201210,China
BTL's Test Firm Registration Number for FCC: 476765
BTL's Designation Number for FCC: CN1241

1.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$))
The BTL measurement uncertainty as below table:

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U, (dB)
SH-C01	CISPR	150 kHz ~ 30 MHz	2.64

B. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
SH-CB02	CISPR	9 KHz~30 MHz	-	2.16
		30 MHz~200 MHz	V	4.04
		30 MHz~200 MHz	H	2.90
		200 MHz~1,000 MHz	V	3.76
		200 MHz~1,000 MHz	H	3.82
		1GHz ~ 6GHz	-	4.56
		6GHz ~ 18GHz	-	4.14
		18 ~ 26.5 GHz	-	3.48

C. Conducted test:

Parameter	U
Output Power	±0.95 dB
Occupied Channel Bandwidth	±3.8 %
Conducted Spurious Emission	±2.71 dB
Temperature	±0.08 °C
Humidity	±1.5 %
Supply voltages	±0.3 %

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
AC Power Line Conducted Emissions	22°C	54%	AC 120V/60Hz	Vera Wei
Radiated Emissions-9 kHz to 30 MHz	26°C	61%	AC 120V/60Hz	Forest Li
Radiated Emissions-30 MHz to 1000 MHz	26°C	61%	AC 120V/60Hz	Forest Li
Radiated Emissions-Above 1000 MHz	26°C	61%	AC 120V/60Hz	Forest Li
Number of Hopping Frequency	26°C	35%	AC 120V/60Hz	Danny Dang
Average Time of Occupancy	26°C	35%	AC 120V/60Hz	Danny Dang
Hopping Channel Separation	26°C	35%	AC 120V/60Hz	Danny Dang
Bandwidth	26°C	35%	AC 120V/60Hz	Danny Dang
Maximum Output Power	26°C	35%	AC 120V/60Hz	Danny Dang
Conducted Spurious Emission	26°C	35%	AC 120V/60Hz	Danny Dang

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Hybrid STB
Brand Name	ZTE
Test Model	ZXV10 B820C-A15
Series Model	N/A
Model Difference(s)	N/A
Power Source	DC Voltage supplied from AC/DC adapter. #1 Brand / Model: Ruide/ RD1201000-C55-35MGD #2 Brand / Model: Castec/ MN012E-L120100
Power Rating	#1 I/P: AC 100-240V~ 50-60Hz 0.6 A MAX O/P: 12V --- 1.0 A #2 I/P: AC 100-240V~ 50-60Hz 0.6 A MAX O/P: 12.0V --- 1.0 A
Operation Frequency	2402 MHz ~ 2480 MHz
Modulation Type	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Bit Rate of Transmitter	1Mbps, 2Mbps, 3Mbps
Max. Output Power-MTK7661	1 Mbps: 9.48 dBm (0.00887 W) 2 Mbps: 9.38 dBm (0.00867 W) 3 Mbps: 9.51 dBm (0.00893 W)
Max. Output Power-MTK7663	1 Mbps: 9.19 dBm (0.00830 W) 2 Mbps: 8.95 dBm (0.00785 W) 3 Mbps: 9.01 dBm (0.00796 W)

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. The equipment have two alternate material (MTK7661 and MTK7663), only used as a separate shipping area, both the two models have been tested.

3. Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

4. Table for Filed Antenna:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	Onboard Antenna	N/A	1.9

Note:

The antenna gain is provided by the manufacturer.

2.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX Mode_1Mbps Channel 00/39/78
Mode 2	TX Mode_2Mbps Channel 00/39/78
Mode 3	TX Mode_3Mbps Channel 00/39/78

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 1	TX Mode_1Mbps Channel 00
Mode 3	TX Mode_3Mbps Channel 00

Radiated emissions test - Below 1GHz	
Final Test Mode	Description
Mode 1	TX Mode_1Mbps Channel 00
Mode 3	TX Mode_3Mbps Channel 00

Radiated emissions test - Above 1GHz	
Final Test Mode	Description
Mode 1	TX Mode_1Mbps Channel 00/39/78
Mode 3	TX Mode_3Mbps Channel 00/39/78

Maximum Output Power	
Final Test Mode	Description
Mode 1	TX Mode_1Mbps Channel 00/39/78
Mode 2	TX Mode_2Mbps Channel 00/39/78
Mode 3	TX Mode_3Mbps Channel 00/39/78

Other Conducted test	
Final Test Mode	Description
Mode 1	TX Mode_1Mbps Channel 00/39/78
Mode 3	TX Mode_3Mbps Channel 00/39/78

Note:


- (1) The measurements for Output Power were tested with DH1/3/5 during 1Mbps, 2Mbps and 3Mbps, the worst case were 1Mbps (DH5) and 3Mbps (DH5), only worst case were documented for other test items except Average Time of Occupancy.
- (2) This product has the mode of BT AFH, which was considered during testing, but this mode is not the worst case mode, and this report only shows the worst case mode.
- (3) For AC power line conducted emissions and radiated spurious emissions below 1 GHz test, the 3Mbps Channel 00 of MTK7661 and the 1Mbps Channel 00 of MTK7663 are found to be the worst case and recorded.
- (4) For radiated emission below 1 GHz and AC Power Line Conducted Emissions test, all adapters had been pre-tested and in this report only recorded the worst case.

2.3 PARAMETERS OF TEST SOFTWARE

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

Test Software Version	QA TOOL		
Frequency (MHz)	2402	2441	2480
1Mbps	default	default	default
2Mbps	default	default	default
3Mbps	default	default	default

2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

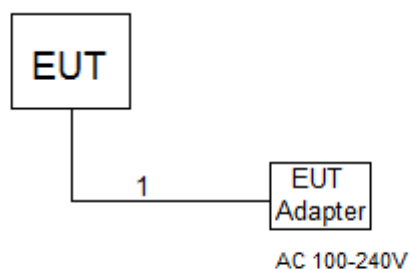

2.5 SUPPORT UNITS

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	DC	N/A	N/A	1M

3. AC POWER LINE CONDUCTED EMISSIONS

3.1 LIMIT

Frequency of Emission (MHz)	Limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.


The following table is the setting of the receiver:

Receiver Parameters	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.3 DEVIATION FROM TEST STANDARD

No deviation.

3.4 TEST SETUP

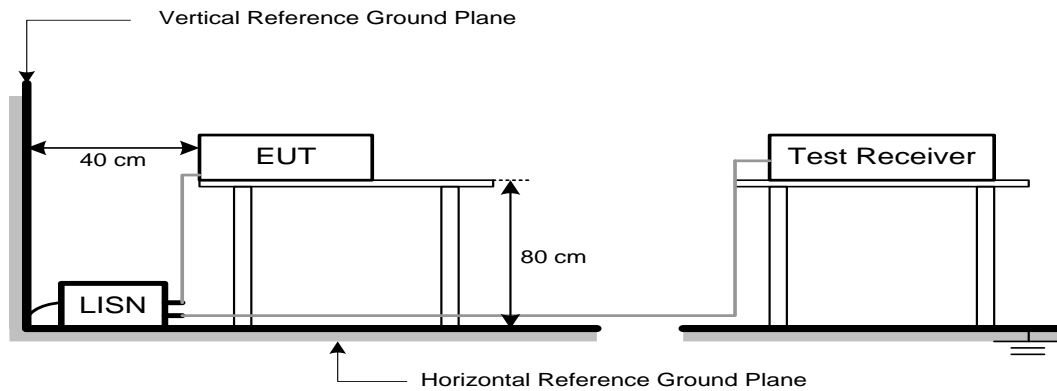

3.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical function (as a customer would normally use it), EUT was programmed to be in continuously transmitting data or hopping on mode.

3.6 TEST RESULTS

Please refer to the APPENDIX A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』 . If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform in this case, a “*” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150 kHz to 30 MHz.

4. RADIATED EMISSIONS

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	(dBuV/m at 3 m)	
	Peak	Average
Above 1000	74	54

Note:

- (1) The limit for radiated test was performed according to FCC CFR Title 47, Part 15, Subpart C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

4.2 TEST PROCEDURE

- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1 GHz)
- The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
(below 1 GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

The following table is the setting of the receiver:

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz

Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for PK value 1 MHz / 1/T Hz for AVG value


Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector
Start ~ Stop Frequency	1 GHz~26.5 GHz for PK/AVG detector

4.3 DEVIATION FROM TEST STANDARD


No deviation.


4.4 TEST SETUP

9 kHz to 30 MHz

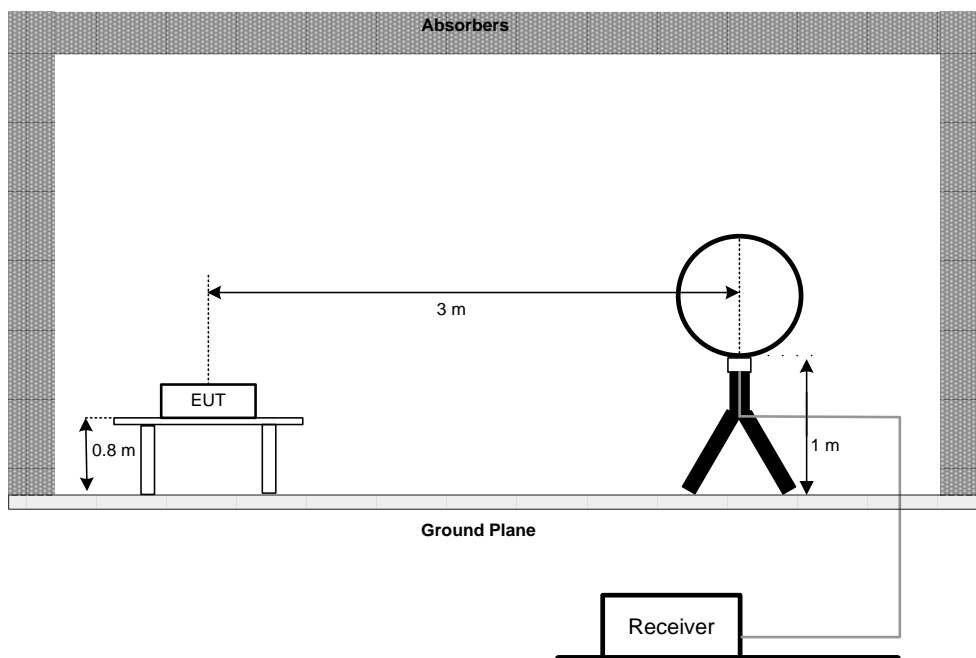

30 MHz to 1 GHz

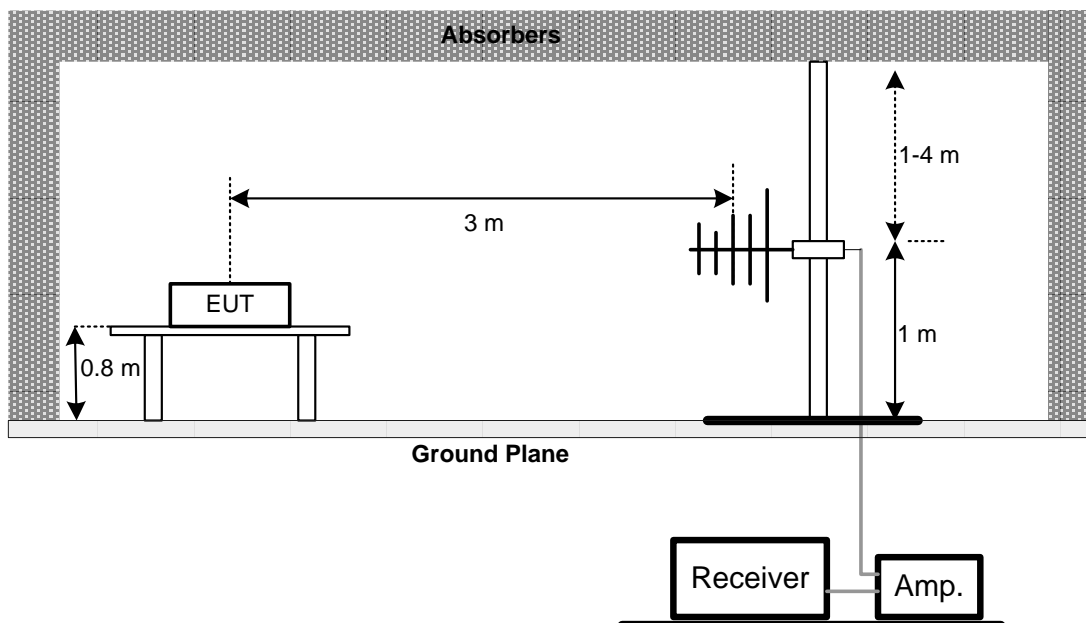

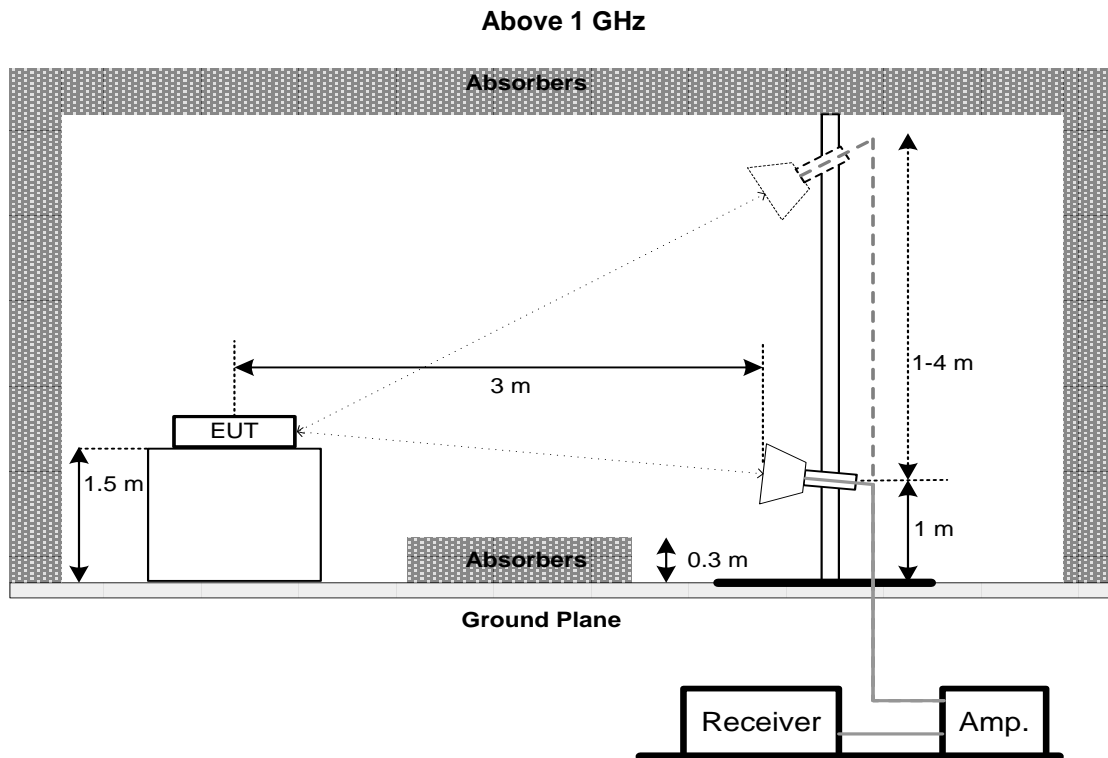

4.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.6 TEST RESULTS - 9 kHz TO 30 MHz

Please refer to the APPENDIX B.

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.7 TEST RESULTS - 30 MHz TO 1000 MHz

Please refer to the APPENDIX C.

4.8 TEST RESULTS - ABOVE 1000 MHz

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. NUMBER OF HOPPING FREQUENCY

5.1 LIMIT

Section	Test Item	Limit
FCC 15.247(a)(1)(iii)	Number of Hopping Frequency	15

5.2 TEST PROCEDURE


- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Span Frequency	> Operating Frequency Range
RBW	100 kHz
VBW	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP

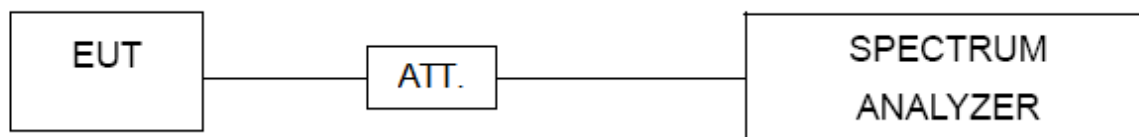

5.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULTS

Please refer to the APPENDIX E.

6. AVERAGE TIME OF OCCUPANCY

6.1 LIMIT

Section	Test Item	Limit
FCC 15.247(a)(1)(iii)	Average Time of Occupancy	0.4sec

6.2 TEST PROCEDURE

- Set the EUT for DH1, DH3 and DH5 packet transmitting.
- Measure the maximum time duration of one single pulse.
- DH1 Packet permit maximum $1600 / 79 / 2 = 10.12$ hops per second in each channel (1 time slot TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $10.12 \times 31.6 = 320$ within 31.6 seconds.
- DH3 Packet permit maximum $1600 / 79 / 4 = 5.06$ hops per second in each channel (3 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $5.06 \times 31.6 = 160$ within 31.6 seconds.
- DH5 Packet permit maximum $1600 / 79 / 6 = 3.37$ hops per second in each channel (5 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $3.37 \times 31.6 = 106.6$ within 31.6 seconds.
- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Span Frequency	0 MHz
RBW	1 MHz
VBW	1 MHz
Detector	Peak
Trace	Max Hold
Sweep Time	As necessary to capture the entire dwell time per hopping channel

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX F.

7. HOPPING CHANNEL SEPARATION

7.1 LIMIT

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

7.2 TEST PROCEDURE


- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Span Frequency	Wide enough to capture the peaks of two adjacent channels
RBW	30 kHz
VBW	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

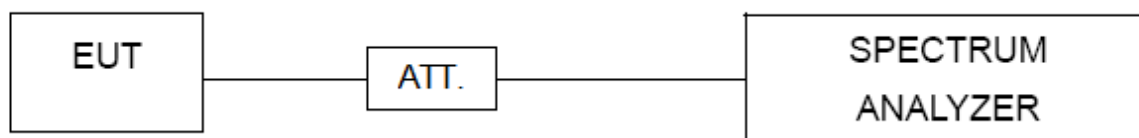

7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULTS

Please refer to the APPENDIX G.

8. BANDWIDTH

8.1 LIMIT

Section	Test Item
FCC 15.247(a)(1)	Bandwidth

8.2 TEST PROCEDURE


- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Span Frequency	> Measurement Bandwidth
RBW	30 kHz
VBW	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP

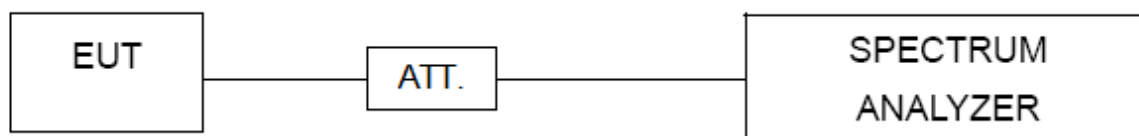

8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULTS

Please refer to the APPENDIX H.

9. MAXIMUM OUTPUT POWER

9.1 LIMIT

Section	Test Item	Limit
FCC 15.247(a)(1)	Maximum Output Power	0.1250 Watt or 20.97 dBm

Note: Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

9.2 TEST PROCEDURE


- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Span Frequency	Approximately five times the 20 dB bandwidth, centered on a hopping channel.
RBW	3 MHz
VBW	3 MHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP

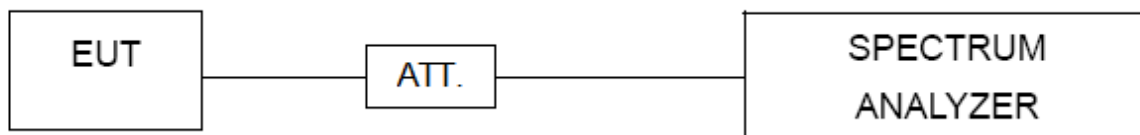

9.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

9.6 TEST RESULTS

Please refer to the APPENDIX I.

10. CONDUCTED SPURIOUS EMISSION

10.1 LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required.

10.2 TEST PROCEDURE


- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Start Frequency	30 MHz
Stop Frequency	26.5 GHz
RBW	100 kHz
VBW	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

10.3 DEVIATION FROM STANDARD

No deviation.

10.4 TEST SETUP

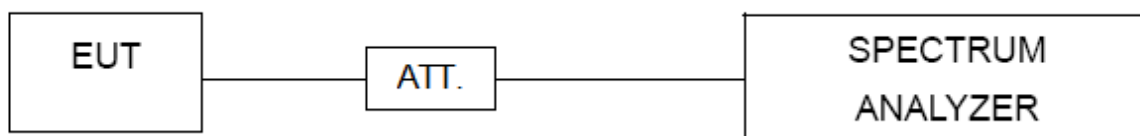

10.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

10.6 TEST RESULTS

Please refer to the APPENDIX J.

11. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Line Impedance Stabilisation Network	Schwarzbeck	NNLK 8121	8121-822	Mar. 20, 2022
2	TWO-LINE V-NETWORK	R&S	ENV216	101340	Aug. 23, 2022
3	Test Cable	emci	EMCRG400-BM-N M-10000	170628	April. 11, 2022
4	EMI Test Receiver	R&S	ESCI	100082	Mar. 21, 2022
5	50Ω Terminator	SHX	TF2-1G-A	17051602	Mar. 20, 2022
6	50Ω coaxial switch	Anritsu	MP59B	6201750902	Mar. 21, 2022
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emissions - 9 kHz to 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Loop Antenna	EMCI	EMCI LPA600	275	May. 20, 2022
2	MXE EMI Receiver	Keysight	N9038A	MY56400088	Mar. 21, 2022
3	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TRILOG Broadband Antenna	Schwarzbeck	VULB 9160	9160-3233	Mar. 26, 2022
2	Pre-Amplifier	emci	EMC9135	980401	Mar. 20, 2022
3	MXE EMI Receiver	Keysight	N9038A	MY56400088	Mar. 21, 2022
4	Test Cable	emci	EMC104-SM-SM-7 000	181020	Apr. 11, 2022
5	Test Cable	emci	EMC104-SM-SM-2 500	170618	Apr. 11, 2022
6	Test Cable	emci	EMC104-SM-SM-8 00	170647	Apr. 11, 2022
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emissions - Above 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-1817	Mar. 26, 2022
2	Pre-Amplifier	emci	EMC051845SE	980725	Aug. 23, 2022
3	EXA Spectrum Analyzer	Keysight	N9010A	MY56480579	Mar. 21, 2022
4	Test Cable	emci	EMC104-SM-SM-7000	181020	Apr. 11, 2022
5	Test Cable	emci	EMC104-SM-SM-2500	170618	Apr. 11, 2022
6	Test Cable	emci	EMC104-SM-SM-800	170647	Apr. 11, 2022
7	Double-Ridged Waveguide Horn Antenna	ETS-Lindgren	3116C	00203919	May 19, 2022
8	Pre-Amplifier	emci	EMC184045B	980265	Apr. 11, 2022
9	Test Cable	emci	EMC102-SM-SM-800	170335	Apr. 11, 2022
10	Test Cable	emci	EMC102-KM-KM-2500	170627	Apr. 11, 2022
11	MXE EMI Receiver	Keysight	N9038A	MY5640088	Mar. 21, 2022
12	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Number of Hopping Frequency					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100626	May 29, 2022
2	Attenuator	JUK	ATT-2W6G-S-10	N/A	N/A

Average Time of Occupancy					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100626	May 29, 2022
2	Attenuator	JUK	ATT-2W6G-S-10	N/A	N/A

Hopping Channel Separation Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100626	May 29, 2022
2	Attenuator	JUK	ATT-2W6G-S-10	N/A	N/A

Bandwidth					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100626	May 29, 2022
2	Attenuator	JUK	ATT-2W6G-S-10	N/A	N/A



Maximum Output Power					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100626	May 29, 2022
2	Attenuator	JUK	ATT-2W6G-S-10	N/A	N/A

Antenna Conducted Spurious Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100626	May 29, 2022
2	Attenuator	JUK	ATT-2W6G-S-10	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.



All calibration period of equipment list is one year.

12. EUT TEST PHOTO**AC Power Line Conducted Emissions Test Photos**

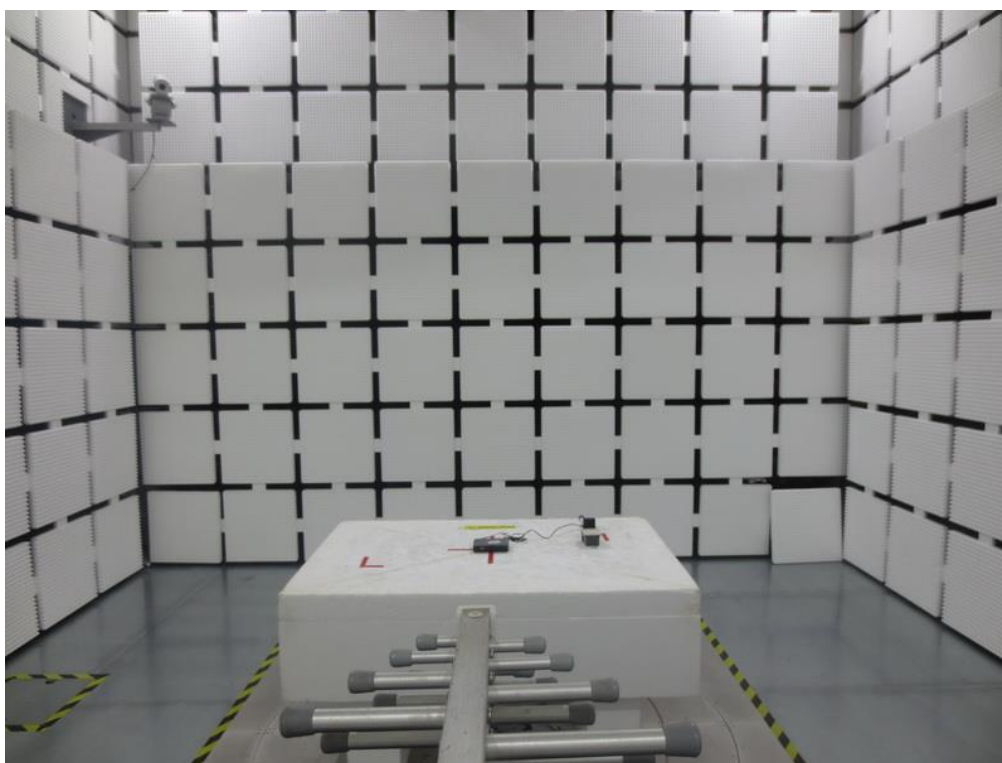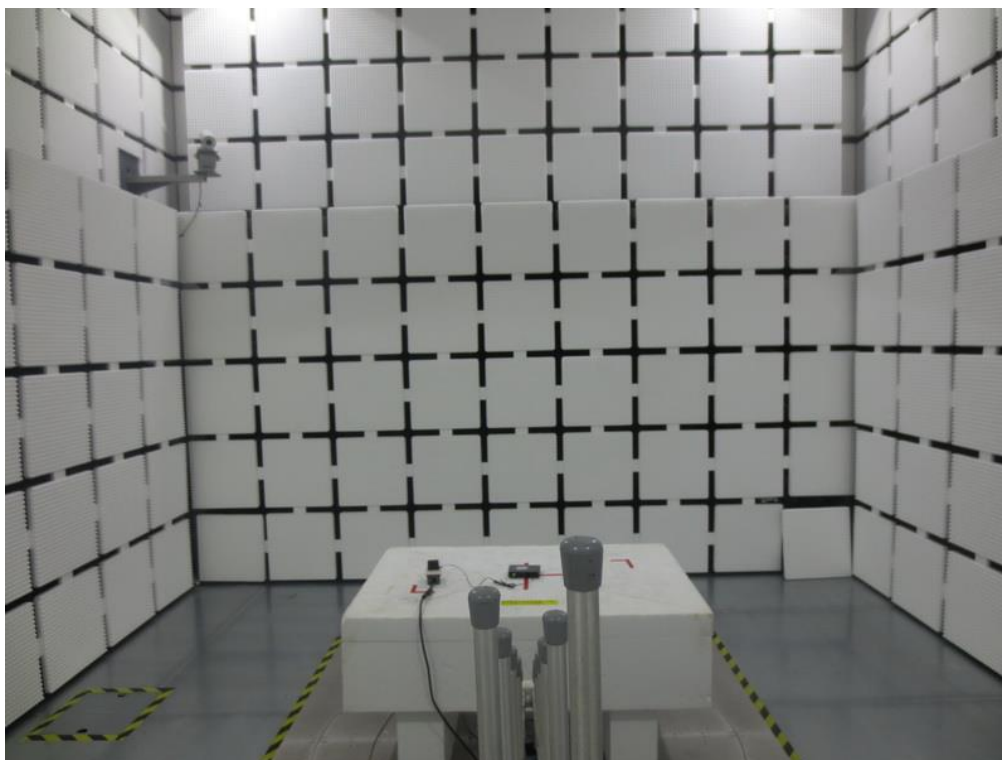Radiated Emissions Test Photos**30 MHz to 1 GHz**

Radiated Emissions Test Photos


Above 1 GHz

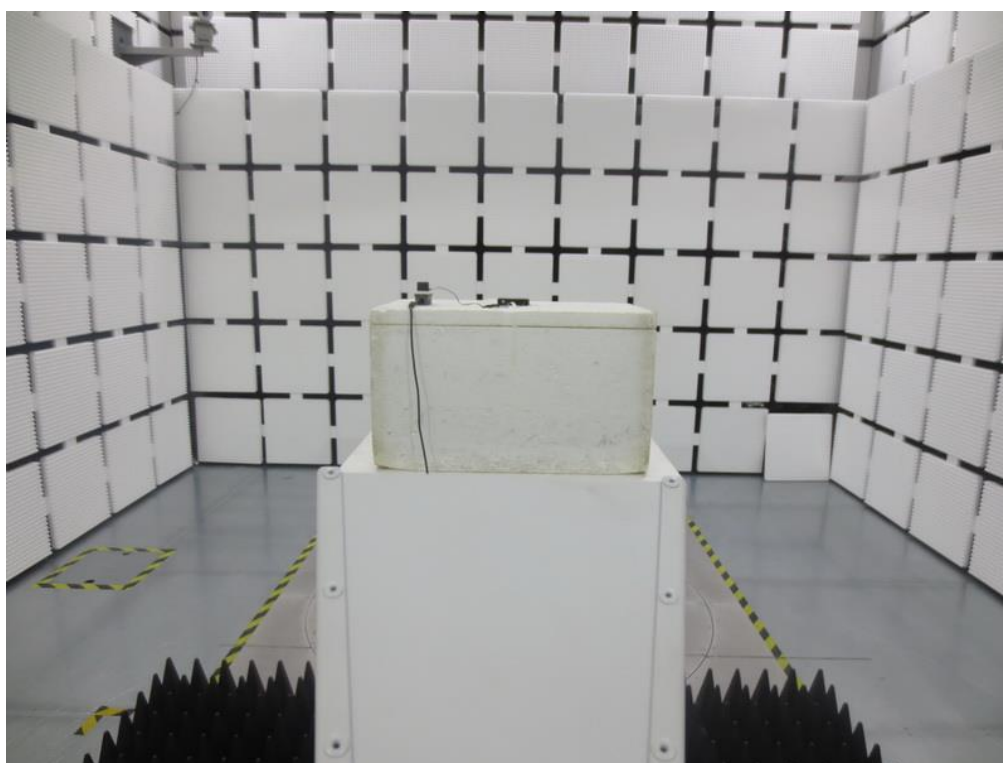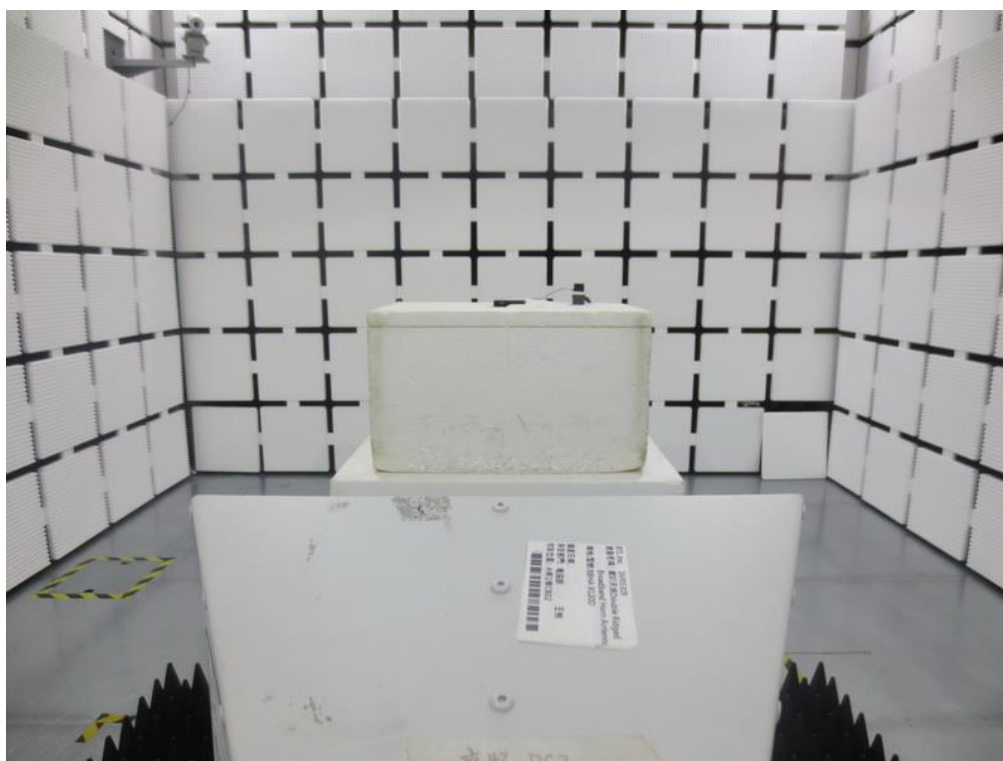

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

MTK7661

Test Mode	TX Mode_3Mbps Channel 00	Phase	Line
-----------	--------------------------	-------	------

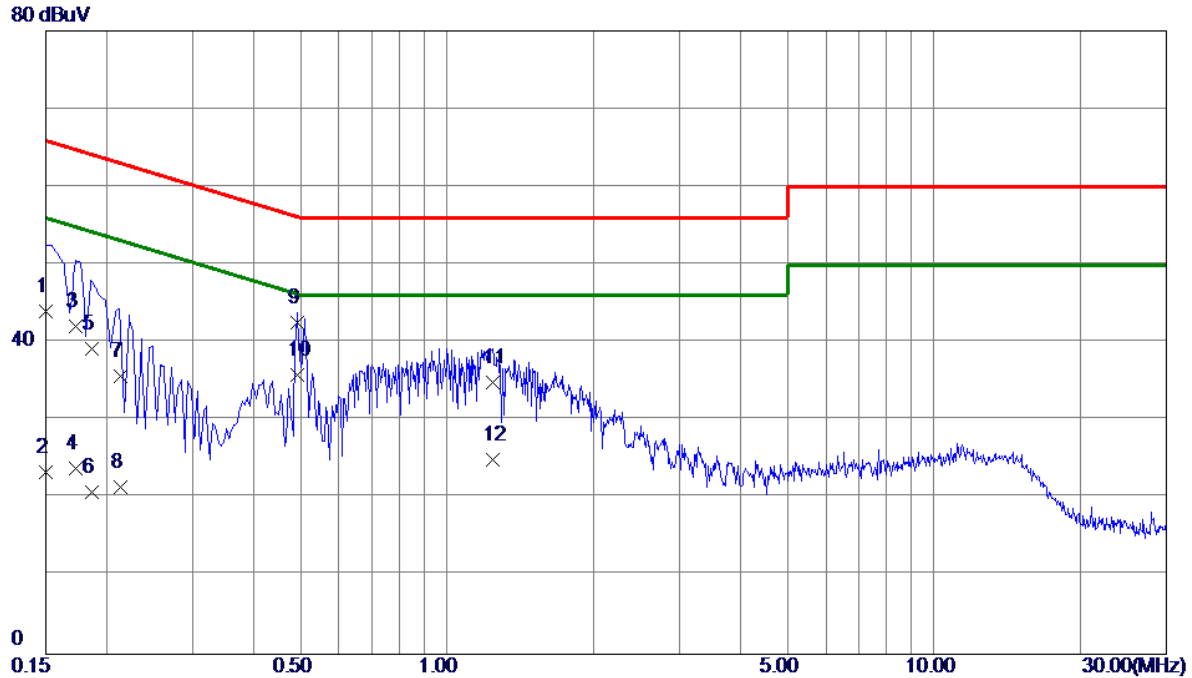


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1500	34.30	9.71	44.01	66.00	-21.99	QP	
2	0.1500	13.70	9.71	23.41	56.00	-32.59	AVG	
3	0.1725	32.30	9.73	42.03	64.84	-22.81	QP	
4	0.1725	14.10	9.73	23.83	54.84	-31.01	AVG	
5	0.1860	29.40	9.73	39.13	64.21	-25.08	QP	
6	0.1860	11.00	9.73	20.73	54.21	-33.48	AVG	
7	0.2130	26.00	9.74	35.74	63.09	-27.35	QP	
8	0.2130	11.70	9.74	21.44	53.09	-31.65	AVG	
9	0.4920	32.70	9.79	42.49	56.13	-13.64	QP	
10 *	0.4920	26.10	9.79	35.89	46.13	-10.24	AVG	
11	1.2390	25.10	9.85	34.95	56.00	-21.05	QP	
12	1.2390	15.10	9.85	24.95	46.00	-21.05	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_3Mbps Channel 00	Phase	Neutral
-----------	--------------------------	-------	---------

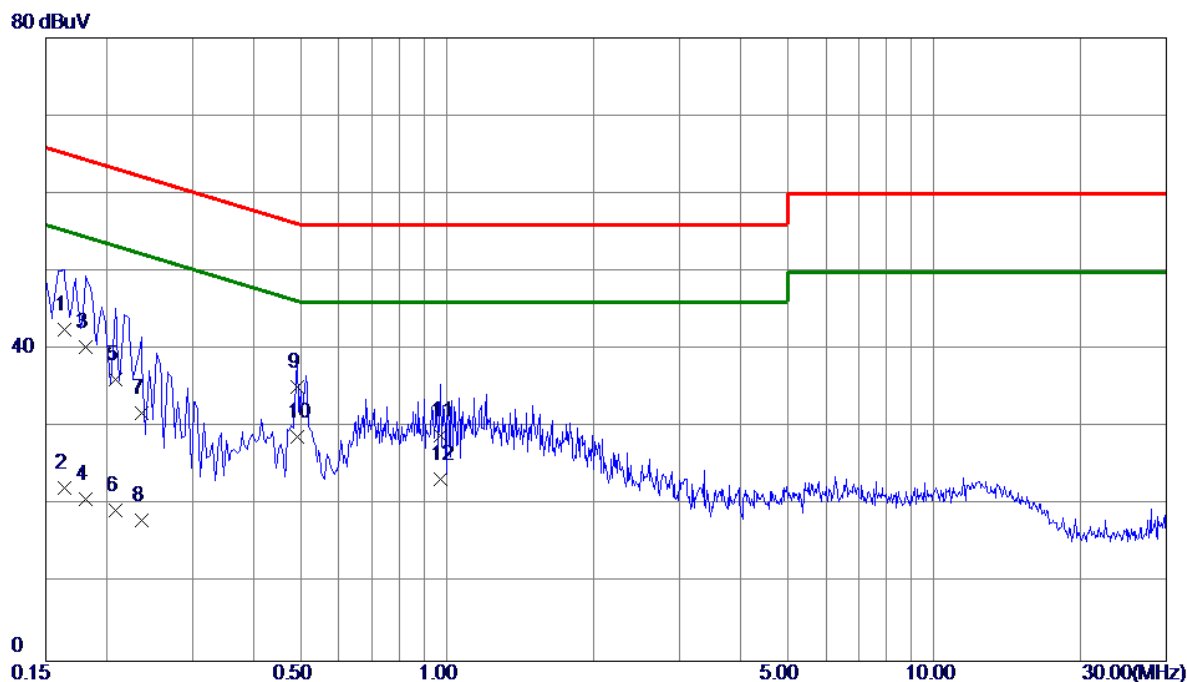

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1635	32.91	9.69	42.60	65.28	-22.68	QP	
2	0.1635	12.61	9.69	22.30	55.28	-32.98	AVG	
3	0.1815	30.60	9.70	40.30	64.42	-24.12	QP	
4	0.1815	11.10	9.70	20.80	54.42	-33.62	AVG	
5	0.2085	26.40	9.71	36.11	63.26	-27.15	QP	
6	0.2085	9.60	9.71	19.31	53.26	-33.95	AVG	
7	0.2355	22.19	9.72	31.91	62.25	-30.34	QP	
8	0.2355	8.39	9.72	18.11	52.25	-34.14	AVG	
9	0.4920	25.40	9.77	35.17	56.13	-20.96	QP	
10 *	0.4920	19.00	9.77	28.77	46.13	-17.36	AVG	
11	0.9690	19.10	9.81	28.91	56.00	-27.09	QP	
12	0.9690	13.60	9.81	23.41	46.00	-22.59	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

MTK7663

Test Mode	TX Mode_1Mbps Channel 00	Phase	Line
-----------	--------------------------	-------	------

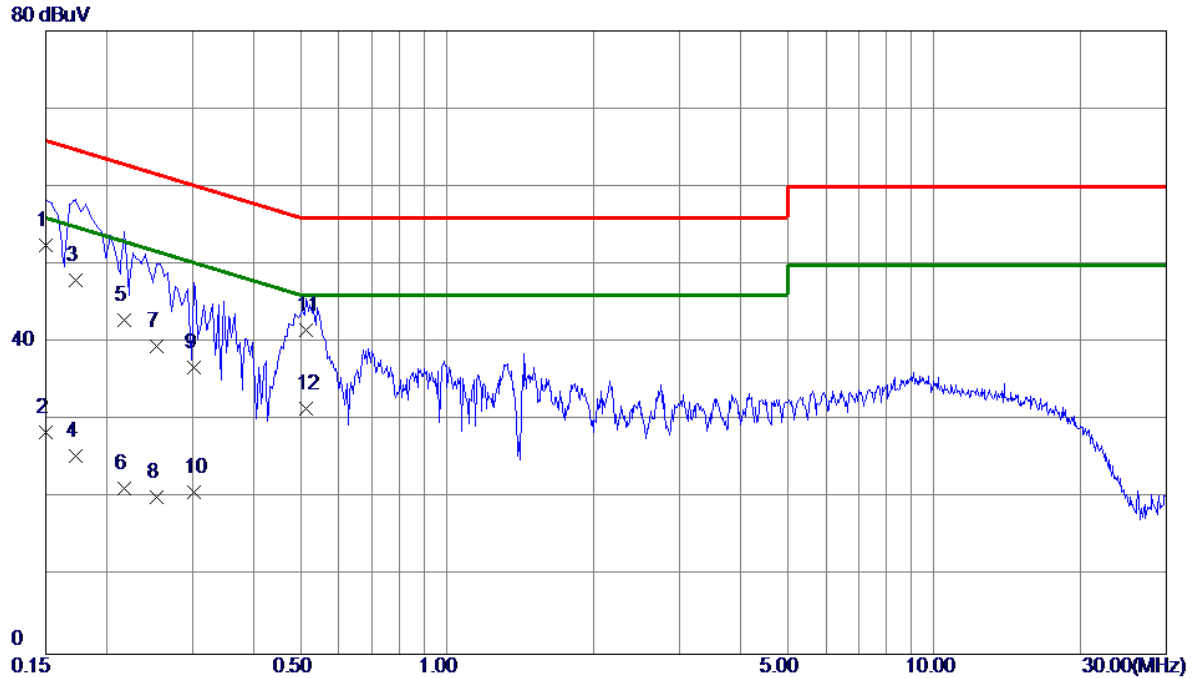


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1 *	0.1500	42.80	9.71	52.51	66.00	-13.49	QP	
2	0.1500	18.80	9.71	28.51	56.00	-27.49	AVG	
3	0.1725	38.20	9.73	47.93	64.84	-16.91	QP	
4	0.1725	15.70	9.73	25.43	54.84	-29.41	AVG	
5	0.2175	33.20	9.74	42.94	62.91	-19.97	QP	
6	0.2175	11.60	9.74	21.34	52.91	-31.57	AVG	
7	0.2535	29.81	9.75	39.56	61.64	-22.08	QP	
8	0.2535	10.41	9.75	20.16	51.64	-31.48	AVG	
9	0.3030	27.00	9.76	36.76	60.16	-23.40	QP	
10	0.3030	11.00	9.76	20.76	50.16	-29.40	AVG	
11	0.5144	31.80	9.79	41.59	56.00	-14.41	QP	
12	0.5144	21.70	9.79	31.49	46.00	-14.51	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_1Mbps Channel 00	Phase	Neutral
-----------	--------------------------	-------	---------

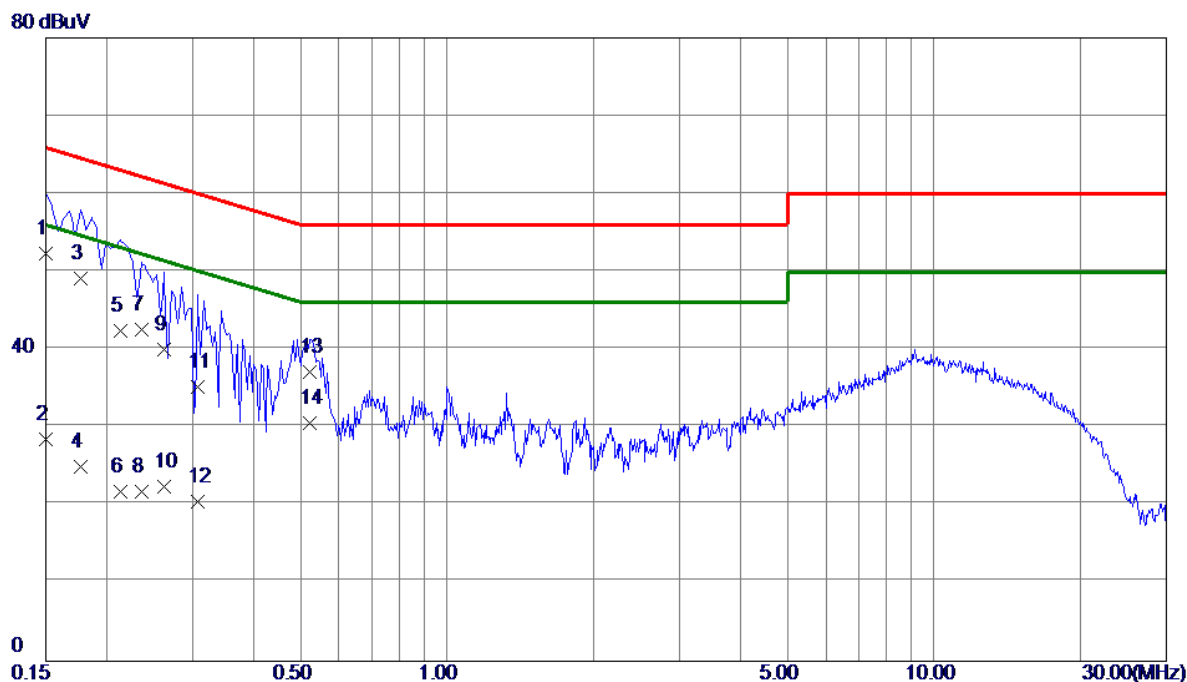

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1 *	0.1500	42.70	9.68	52.38	66.00	-13.62	QP	
2	0.1500	18.80	9.68	28.48	56.00	-27.52	AVG	
3	0.1770	39.40	9.70	49.10	64.63	-15.53	QP	
4	0.1770	15.30	9.70	25.00	54.63	-29.63	AVG	
5	0.2130	32.70	9.71	42.41	63.09	-20.68	QP	
6	0.2130	12.00	9.71	21.71	53.09	-31.38	AVG	
7	0.2355	32.79	9.72	42.51	62.25	-19.74	QP	
8	0.2355	11.99	9.72	21.71	52.25	-30.54	AVG	
9	0.2625	30.31	9.72	40.03	61.35	-21.32	QP	
10	0.2625	12.71	9.72	22.43	51.35	-28.92	AVG	
11	0.3075	25.39	9.74	35.13	60.04	-24.91	QP	
12	0.3075	10.69	9.74	20.43	50.04	-29.61	AVG	
13	0.5235	27.29	9.78	37.07	56.00	-18.93	QP	
14	0.5235	20.79	9.78	30.57	46.00	-15.43	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ


Note: The measured value have enough margin over 20dB than the limit, therefore they are not reported.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

MTK7661

Test Mode	TX Mode_3Mbps Channel 00	Polarization	Vertical
-----------	--------------------------	--------------	----------

80 dBuV/m

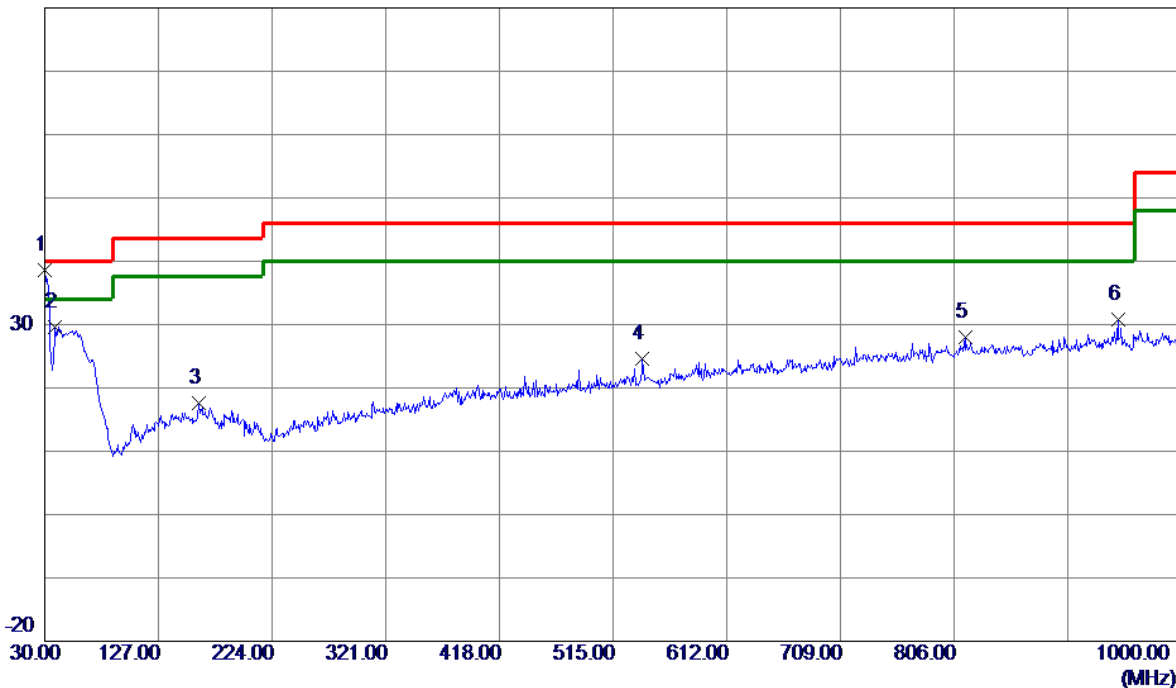

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	30.0000	56.97	-18.45	38.52	40.00	-1.48	Peak	
2	38.7300	47.12	-17.56	29.56	40.00	-10.44	Peak	
3	161.9200	33.72	-16.11	17.61	43.50	-25.89	Peak	
4	540.2199	35.14	-10.62	24.52	46.00	-21.48	Peak	
5	815.2150	34.44	-6.48	27.96	46.00	-18.04	Peak	
6	946.1650	36.00	-5.18	30.82	46.00	-15.18	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_3Mbps Channel 00	Polarization	Horizontal
-----------	--------------------------	--------------	------------

80 dBuV/m

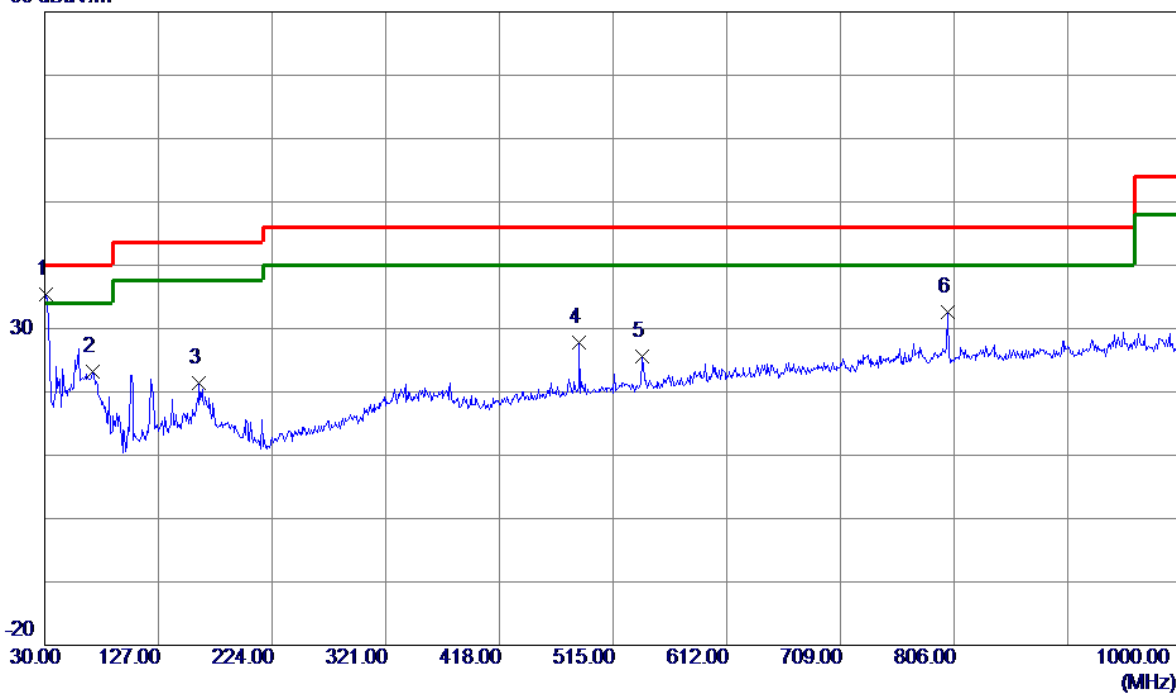

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	31.4550	53.85	-18.37	35.48	40.00	-4.52	Peak	
2	70.7400	41.95	-18.75	23.20	40.00	-16.80	Peak	
3	161.9200	37.58	-16.11	21.47	43.50	-22.03	Peak	
4	485.9000	39.18	-11.43	27.75	46.00	-18.25	Peak	
5	540.2199	36.13	-10.62	25.51	46.00	-20.49	Peak	
6	800.1800	39.18	-6.53	32.65	46.00	-13.35	Peak	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

MTK7663

Test Mode	TX Mode_1Mbps Channel 00	Polarization	Vertical
-----------	--------------------------	--------------	----------

80 dBuV/m

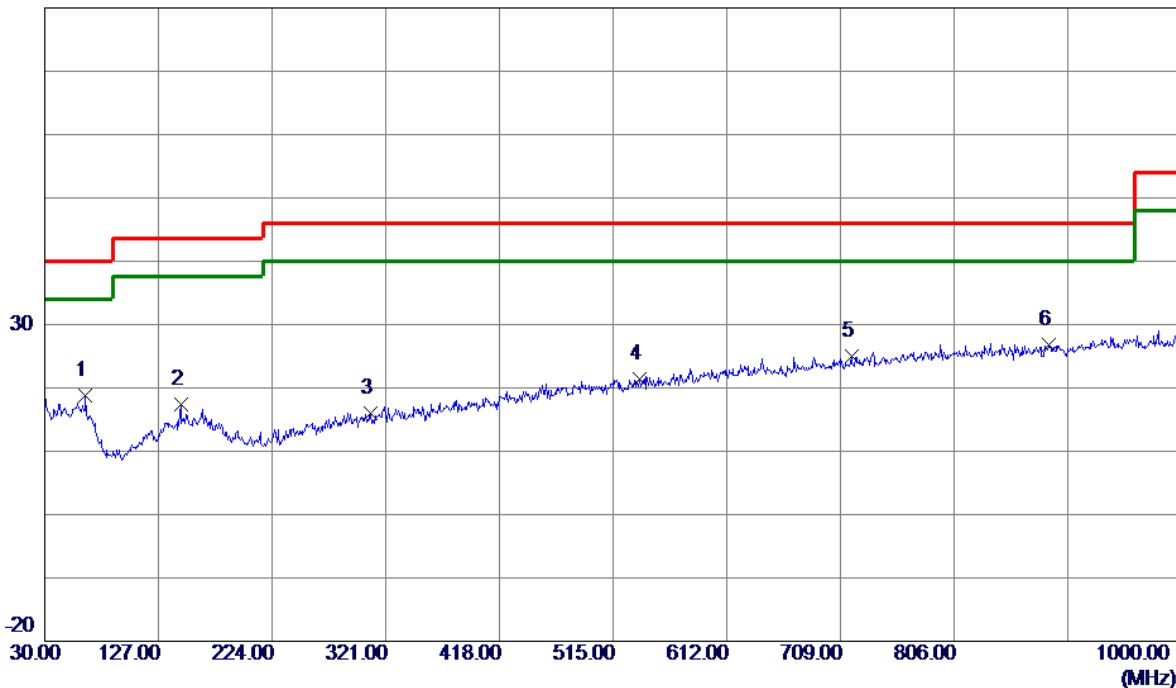

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	64.9200	36.55	-17.75	18.80	40.00	-21.20	Peak	
2	145.9149	33.96	-16.48	17.48	43.50	-26.02	Peak	
3	308.3900	31.45	-15.39	16.06	46.00	-29.94	Peak	
4	537.3100	32.15	-10.66	21.49	46.00	-24.51	Peak	
5	718.2150	32.73	-7.72	25.01	46.00	-20.99	Peak	
6 *	886.5100	32.80	-6.06	26.74	46.00	-19.26	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_1Mbps Channel 00	Polarization	Horizontal
-----------	--------------------------	--------------	------------

80 dBuV/m

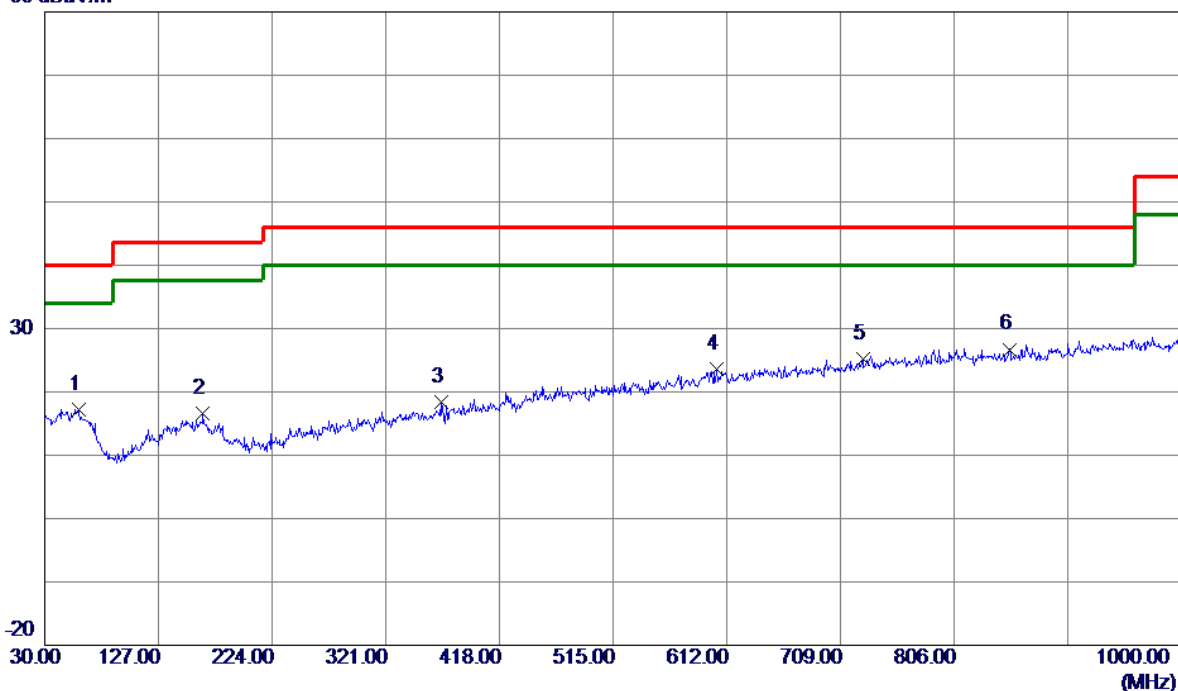

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	58.6150	34.36	-17.11	17.25	40.00	-22.75	Peak	
2	164.8300	32.78	-16.19	16.59	43.50	-26.91	Peak	
3	368.0450	32.44	-14.12	18.32	46.00	-27.68	Peak	
4	603.2700	32.67	-9.13	23.54	46.00	-22.46	Peak	
5	727.9150	32.78	-7.53	25.25	46.00	-20.75	Peak	
6 *	853.0450	33.05	-6.35	26.70	46.00	-19.30	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.


(2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ

MTK7661

Test Mode	TX 2402 MHz _CH00_1Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

120 dBuV/m

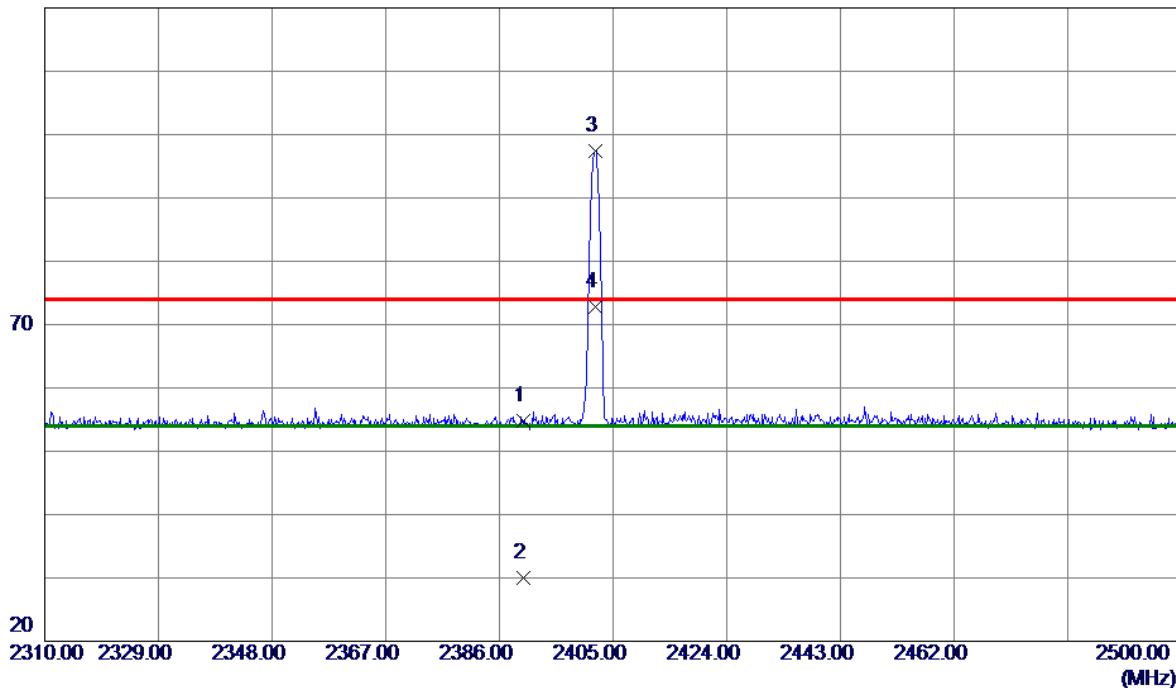

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	22.97	31.74	54.71	74.00	-19.29	Peak	
2	2390.0000	-1.76	31.74	29.98	54.00	-24.02	AVG	
3 *	2402.0080	65.75	31.72	97.47	74.00	23.47	Peak	No limit
4	2402.0080	41.02	31.72	72.74	54.00	18.74	AVG	No limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz _CH00_1Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

86.9 dBuV/m

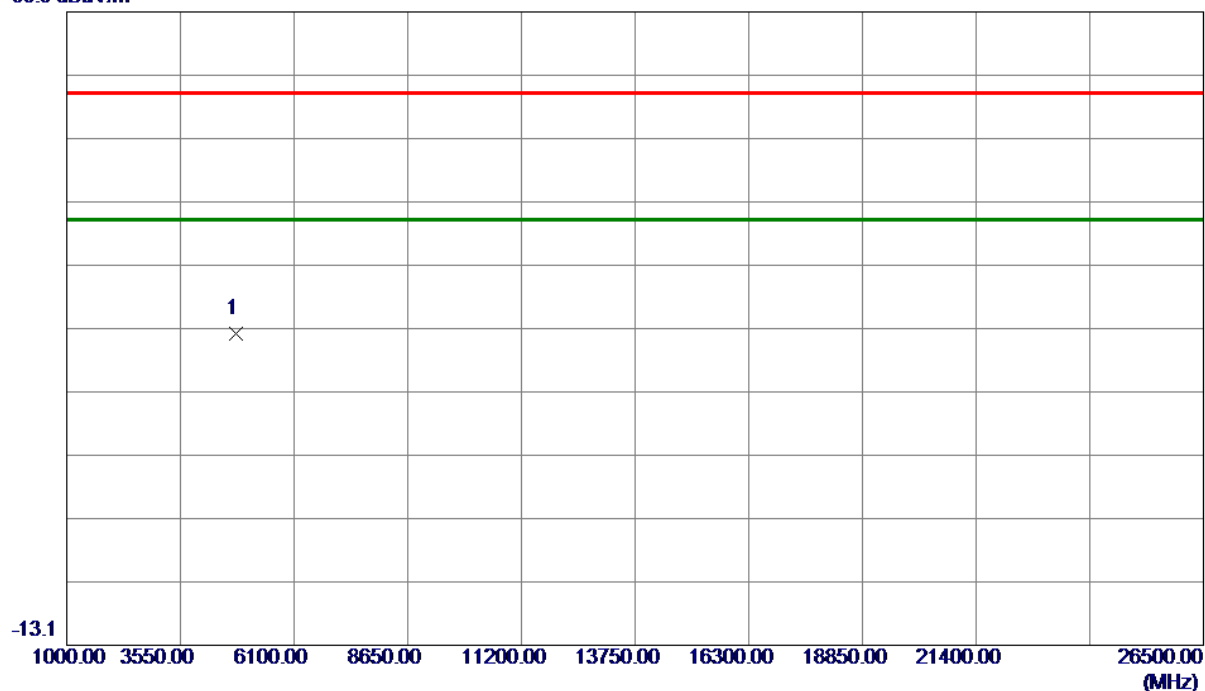


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4804.0000	53.04	-17.01	36.03	74.00	-37.97	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz _CH00_1Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

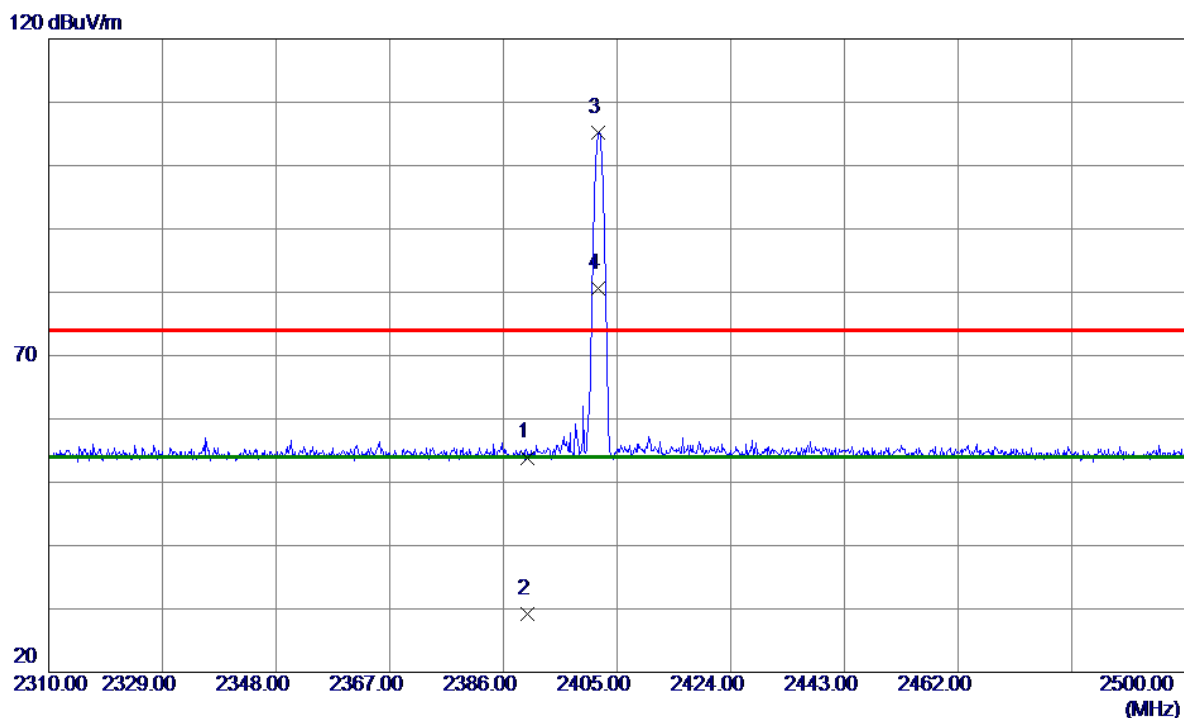

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	22.16	31.74	53.90	74.00	-20.10	Peak	
2	2390.0000	-2.57	31.74	29.17	54.00	-24.83	AVG	
3 *	2401.9220	73.52	31.72	105.24	74.00	31.24	Peak	No limit
4	2401.9220	48.79	31.72	80.51	54.00	26.51	AVG	No limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz _CH00_1Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

86.9 dBuV/m

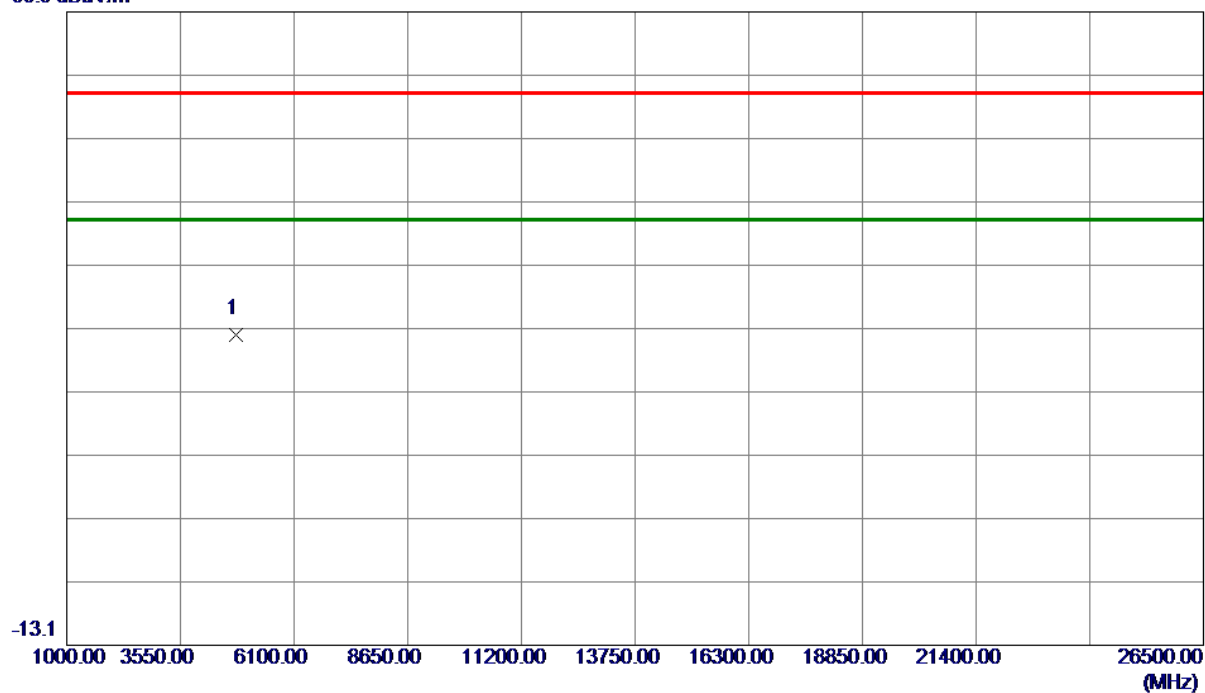


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	4804.0000	53.01	-17.01	36.00	74.00	-38.00	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2441 MHz _CH39_1Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

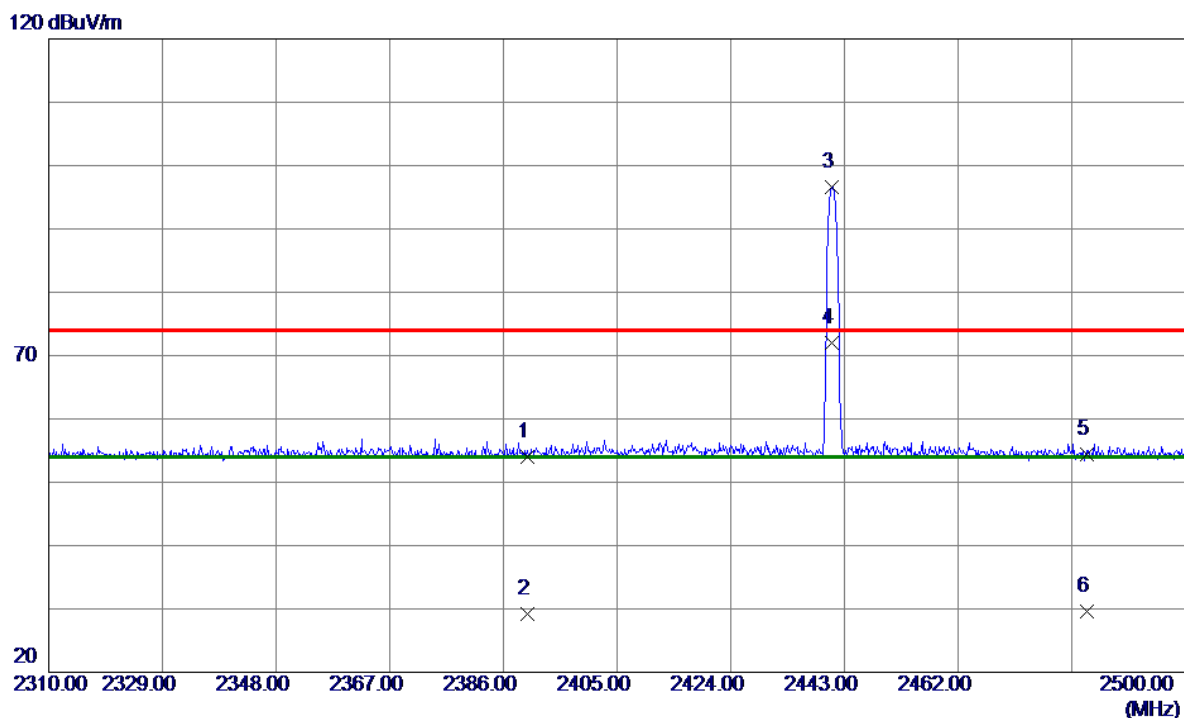

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	22.27	31.74	54.01	74.00	-19.99	Peak	
2	2390.0000	-2.46	31.74	29.28	54.00	-24.72	AVG	
3 *	2440.9860	64.92	31.72	96.64	74.00	22.64	Peak	No limit
4	2440.9860	40.19	31.72	71.91	54.00	17.91	AVG	No limit
5	2483.5000	22.67	31.71	54.38	74.00	-19.62	Peak	
6	2483.5000	-2.06	31.71	29.65	54.00	-24.35	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2441 MHz _CH39_1Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

86.9 dBuV/m




No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4882.0000	53.73	-16.89	36.84	74.00	-37.16	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2441 MHz _CH39_1Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

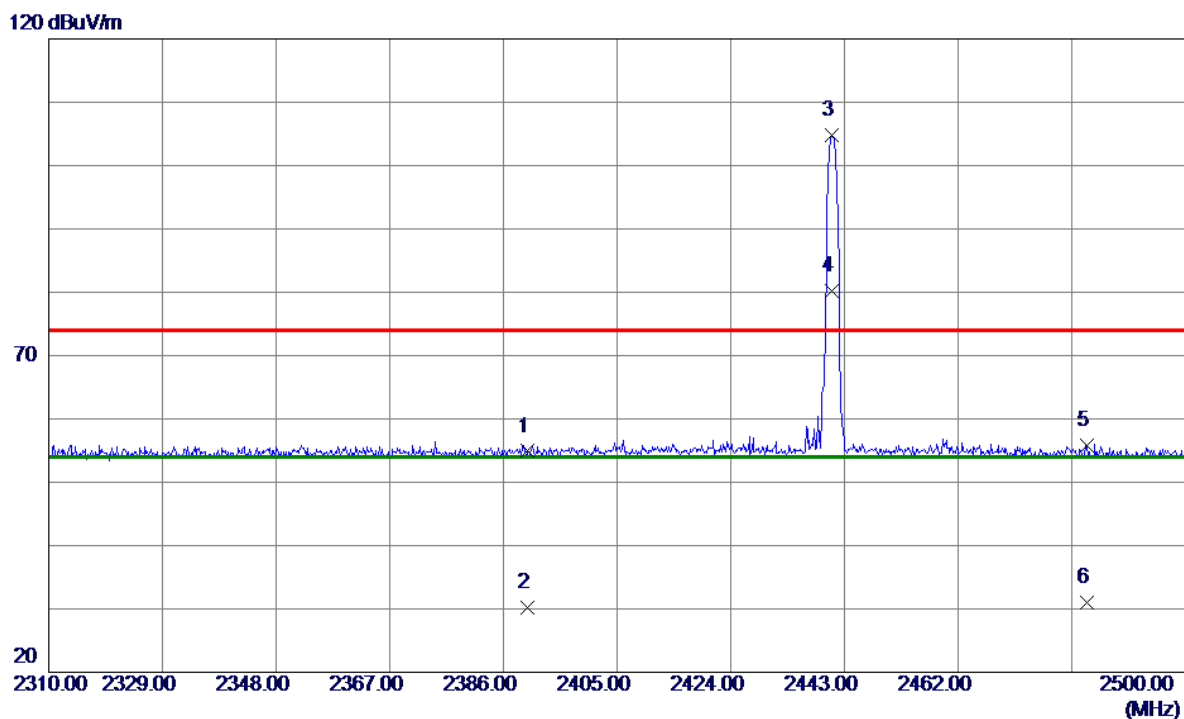


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	23.16	31.74	54.90	74.00	-19.10	Peak	
2	2390.0000	-1.57	31.74	30.17	54.00	-23.83	AVG	
3 *	2440.9670	73.14	31.72	104.86	74.00	30.86	Peak	No limit
4	2440.9670	48.41	31.72	80.13	54.00	26.13	AVG	No limit
5	2483.5000	24.09	31.71	55.80	74.00	-18.20	Peak	
6	2483.5000	-0.64	31.71	31.07	54.00	-22.93	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2441 MHz _CH39_1Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

86.9 dBuV/m

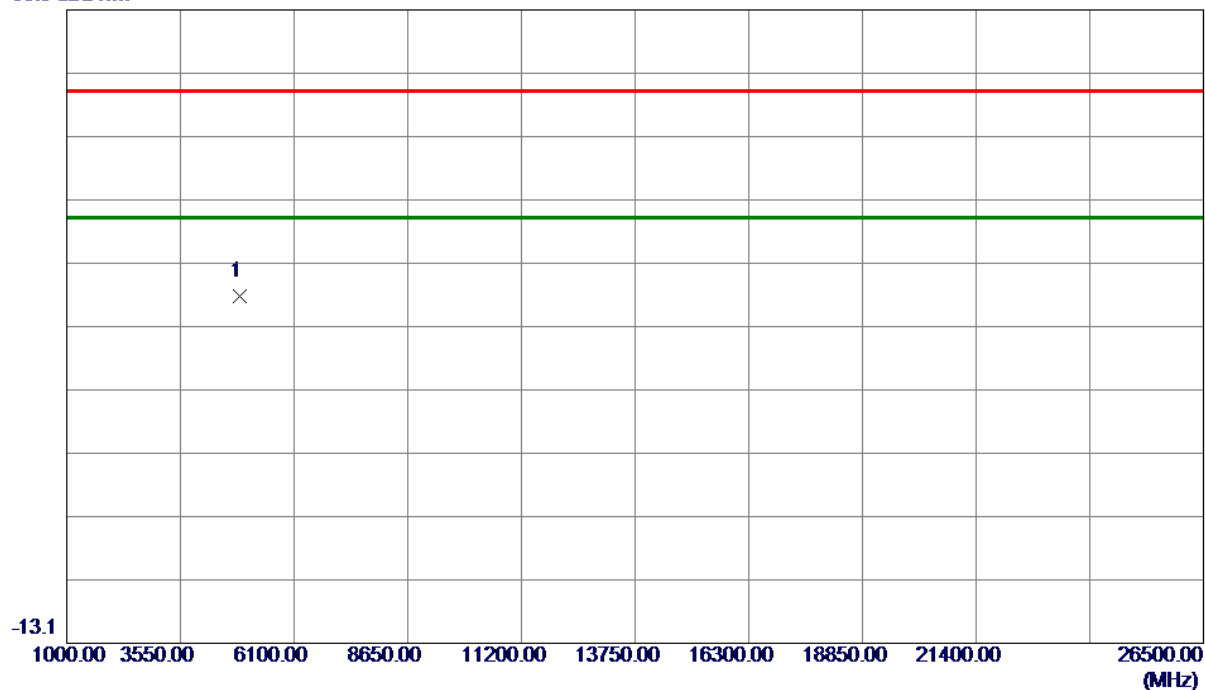


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	4882.0000	58.58	-16.89	41.69	74.00	-32.31	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz _CH78_1Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

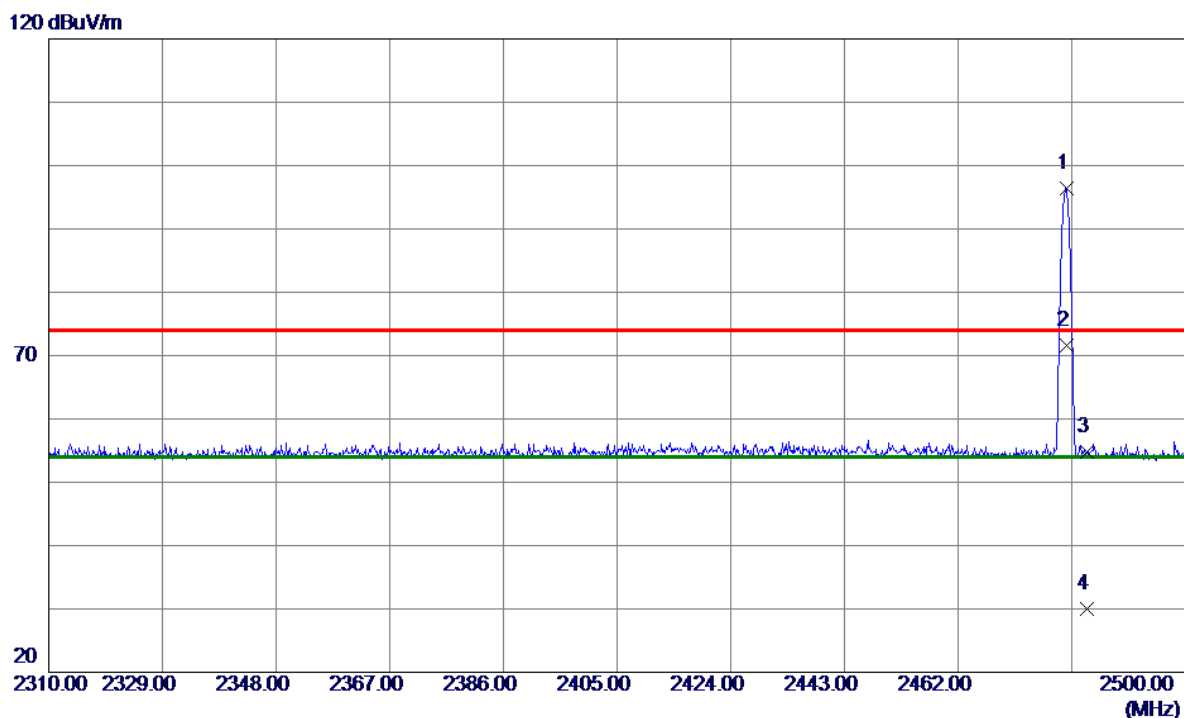

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2480.0500	64.63	31.71	96.34	74.00	22.34	Peak	No limit
2	2480.0500	39.90	31.71	71.61	54.00	17.61	AVG	No limit
3	2483.5000	23.04	31.71	54.75	74.00	-19.25	Peak	
4	2483.5000	-1.69	31.71	30.02	54.00	-23.98	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz _CH78_1Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

86.9 dBuV/m

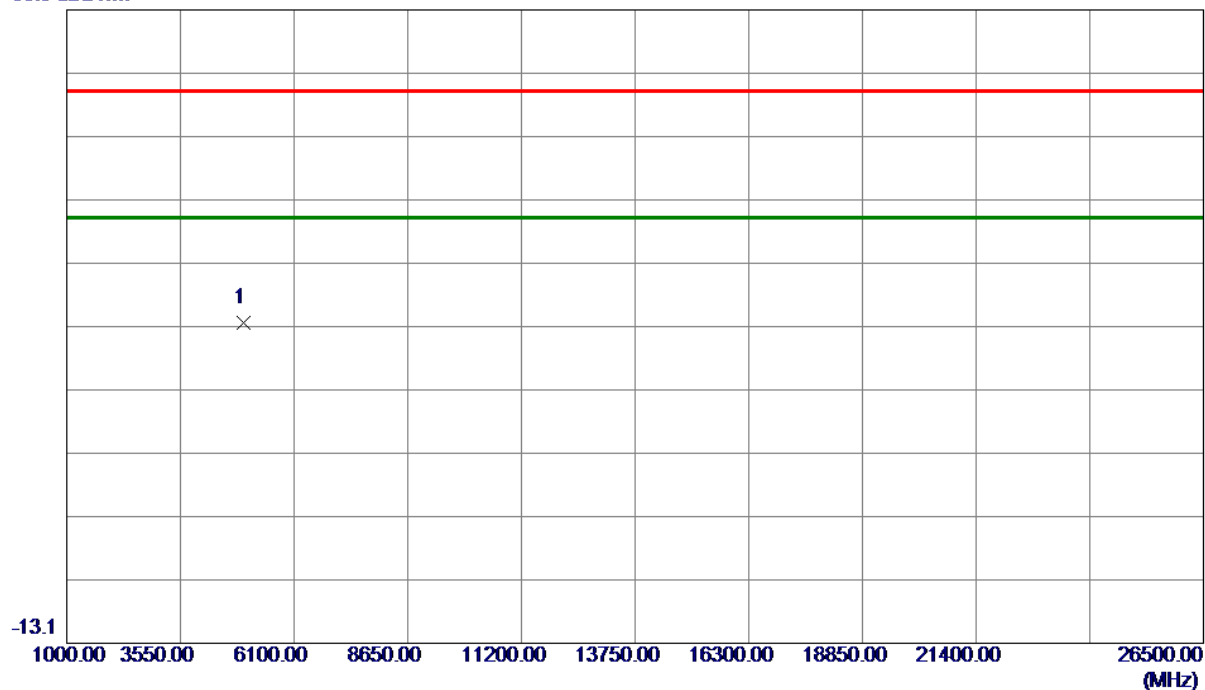


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	4960.0000	54.05	-16.63	37.42	74.00	-36.58	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz _CH78_1Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

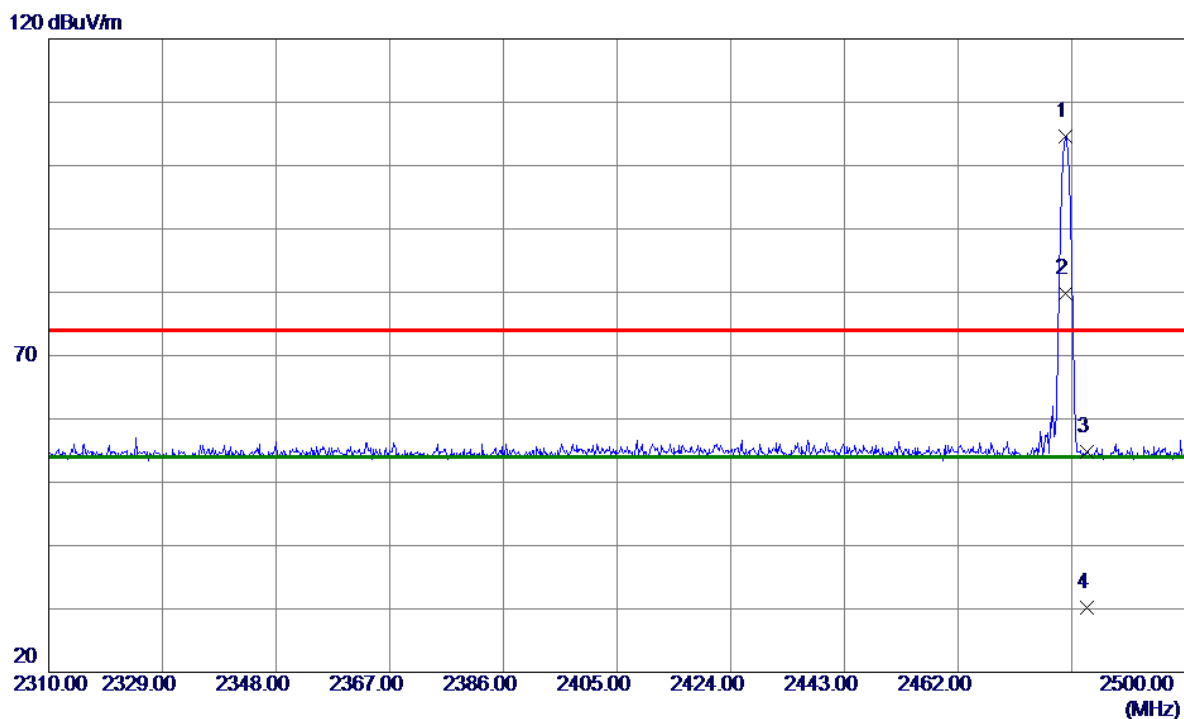


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2480.0209	72.82	31.71	104.53	74.00	30.53	Peak	No limit
2	2480.0209	48.09	31.71	79.80	54.00	25.80	AVG	No limit
3	2483.5000	23.13	31.71	54.84	74.00	-19.16	Peak	
4	2483.5000	-1.60	31.71	30.11	54.00	-23.89	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz _CH78_1Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

86.9 dBuV/m

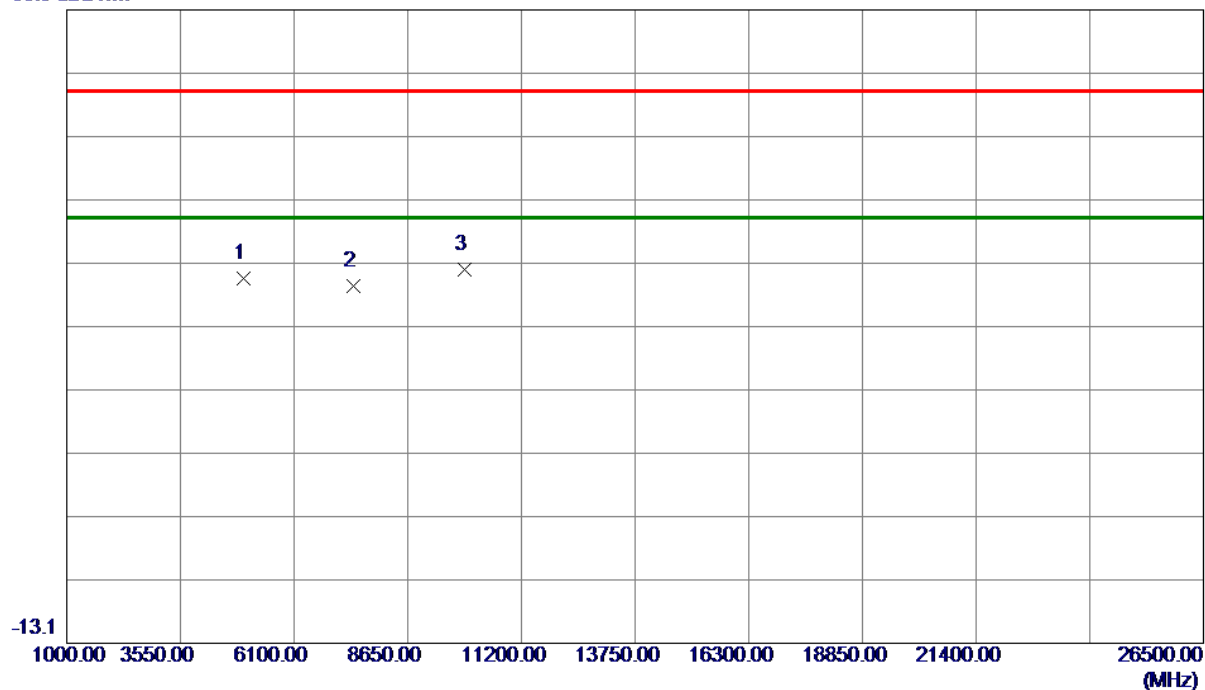


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4960.0000	61.19	-16.63	44.56	74.00	-29.44	Peak	
2	7440.0250	56.17	-12.79	43.38	74.00	-30.62	Peak	
3 *	9919.9000	56.15	-10.21	45.94	74.00	-28.06	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz _CH00_3Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

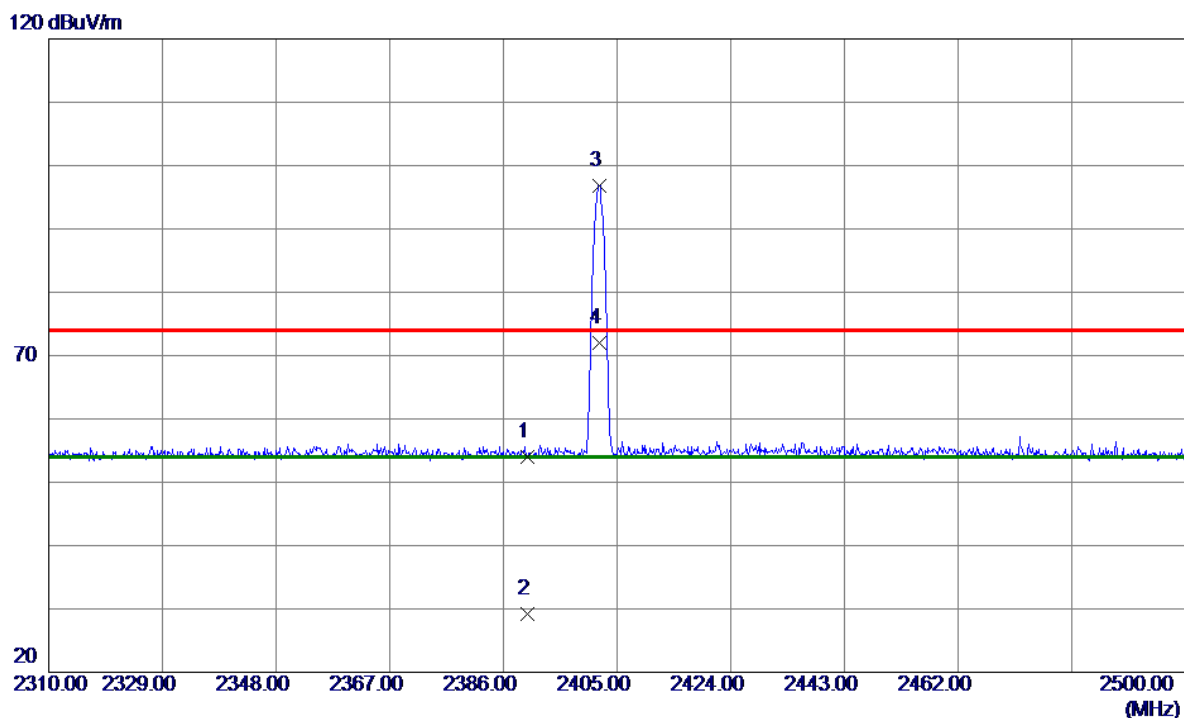

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	22.33	31.74	54.07	74.00	-19.93	Peak	
2	2390.0000	-2.49	31.74	29.25	54.00	-24.75	AVG	
3 *	2402.0260	65.17	31.72	96.89	74.00	22.89	Peak	No limit
4	2402.0260	40.35	31.72	72.07	54.00	18.07	AVG	No limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz _CH00_3Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

86.9 dBuV/m

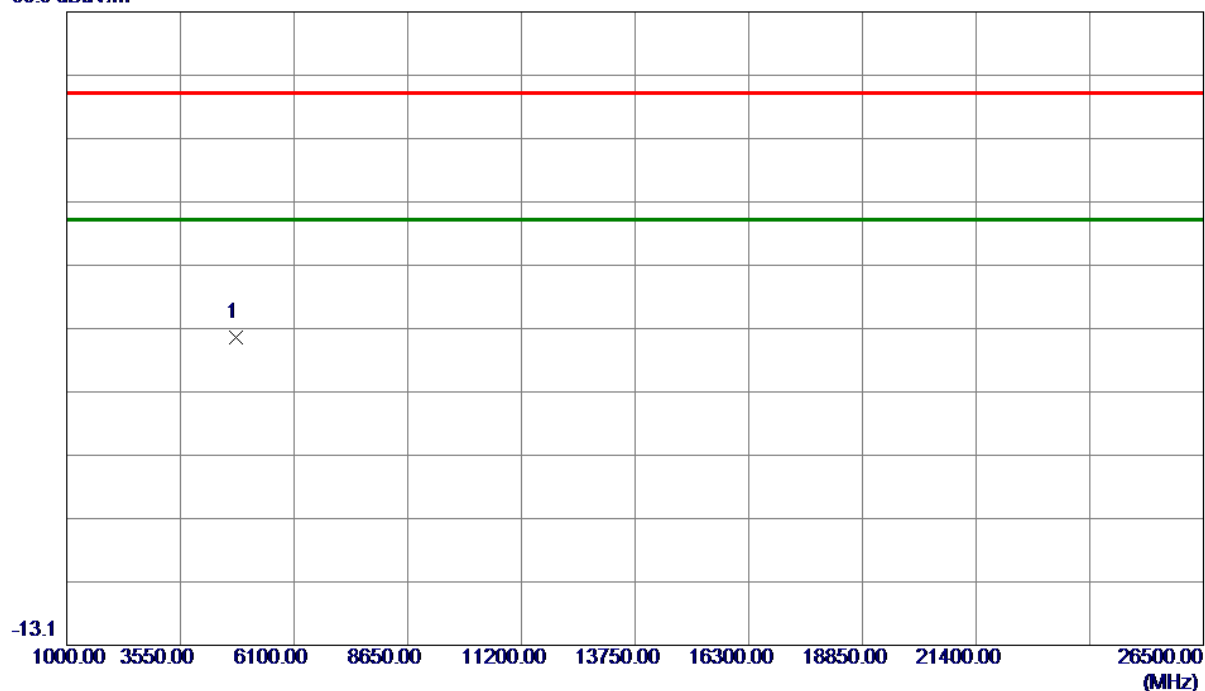


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4804.0000	52.53	-17.01	35.52	74.00	-38.48	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz _CH00_3Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

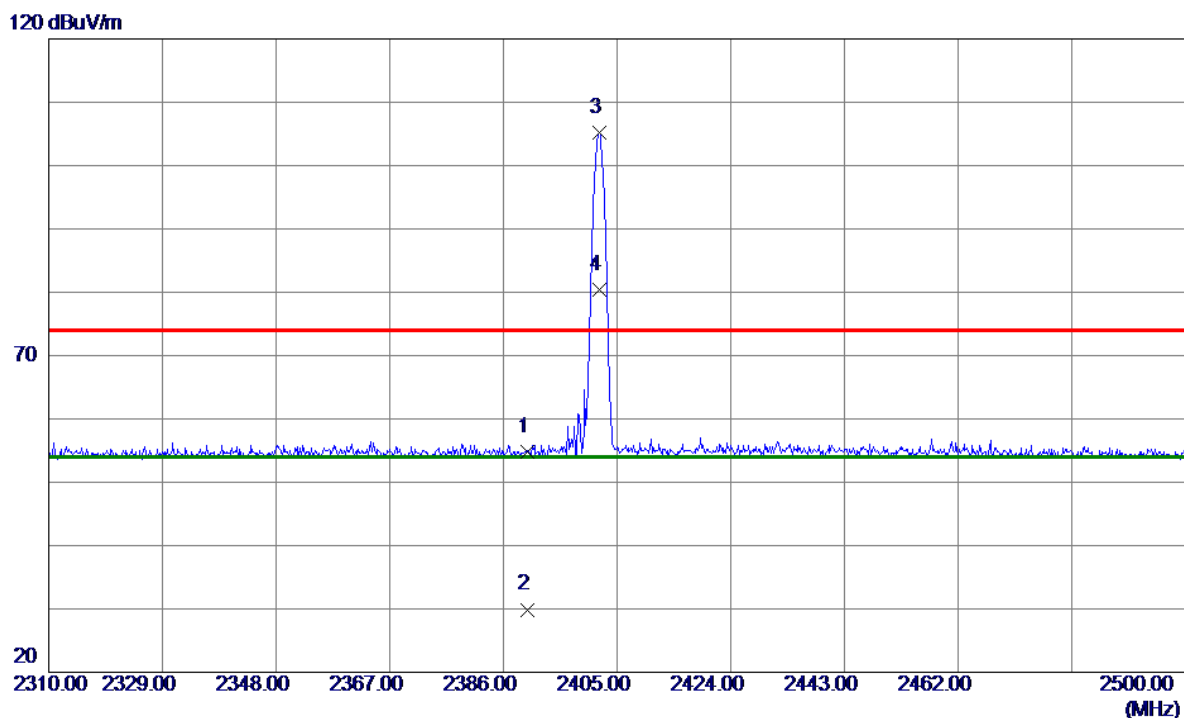

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	22.98	31.74	54.72	74.00	-19.28	Peak	
2	2390.0000	-1.84	31.74	29.90	54.00	-24.10	AVG	
3 *	2402.0740	73.47	31.72	105.19	74.00	31.19	Peak	No limit
4	2402.0740	48.65	31.72	80.37	54.00	26.37	AVG	No limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz _CH00_3Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

86.9 dBuV/m

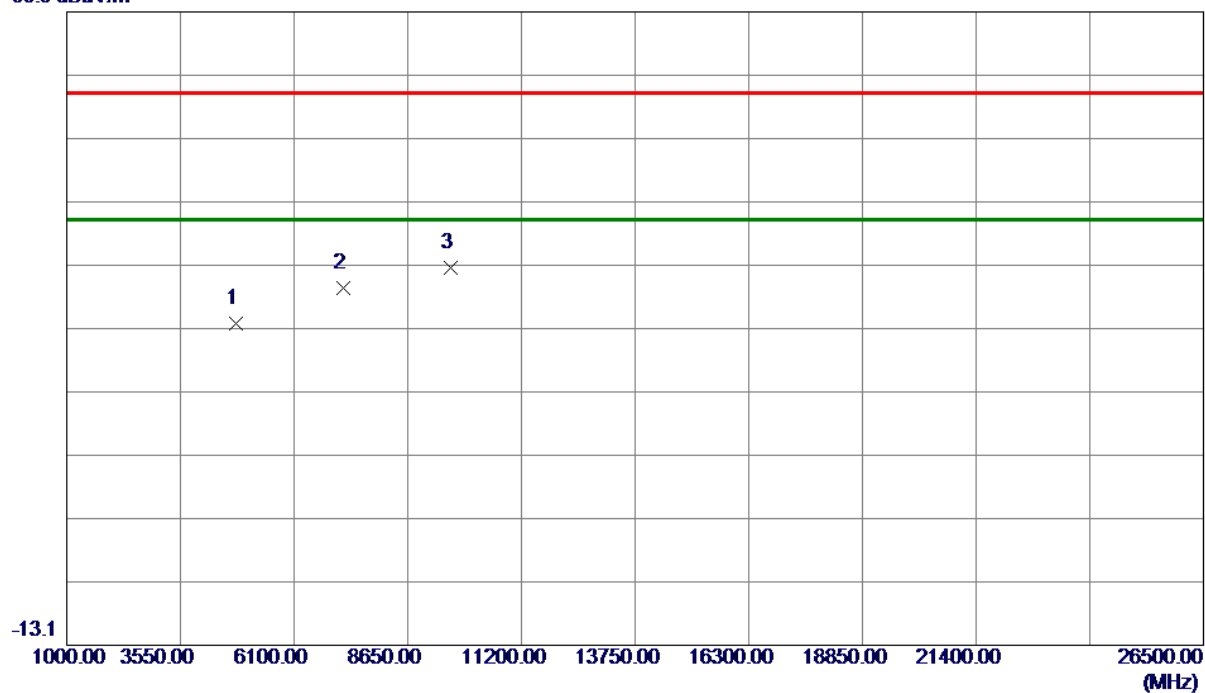


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4804.0000	54.70	-17.01	37.69	74.00	-36.31	Peak	
2	7205.4250	56.25	-12.91	43.34	74.00	-30.66	Peak	
3 *	9607.5250	57.14	-10.71	46.43	74.00	-27.57	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2441 MHz _CH39_3Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

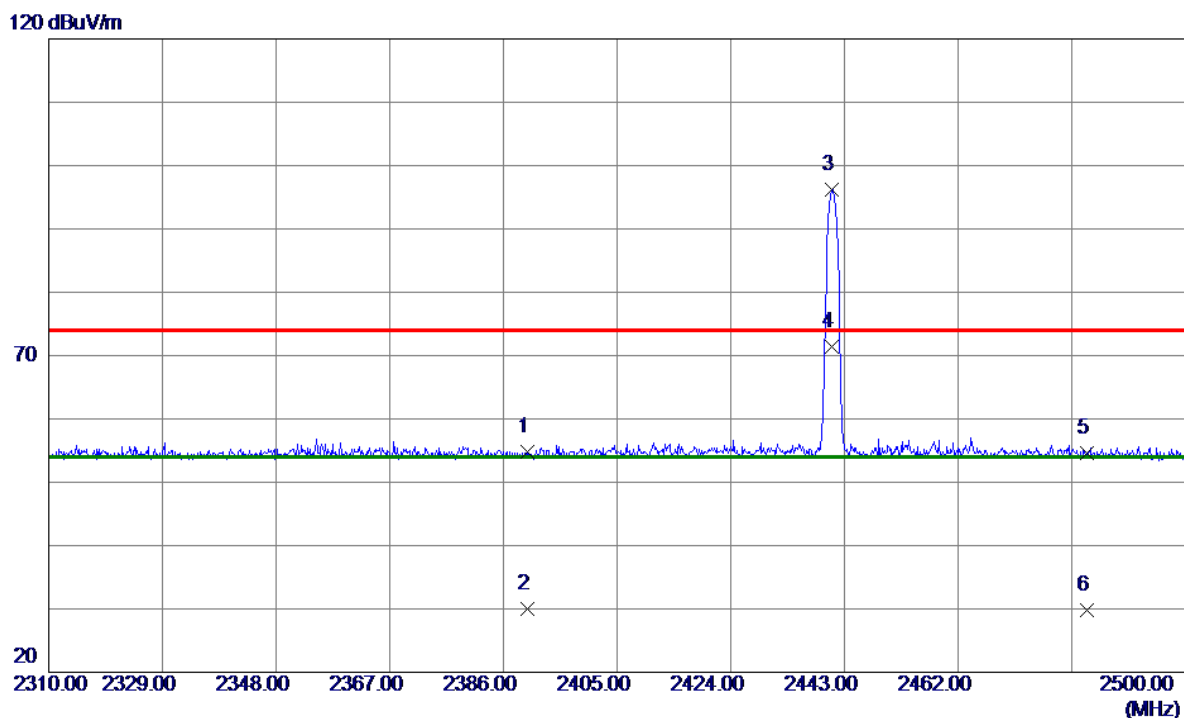

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	22.99	31.74	54.73	74.00	-19.27	Peak	
2	2390.0000	-1.83	31.74	29.91	54.00	-24.09	AVG	
3 *	2440.8530	64.48	31.72	96.20	74.00	22.20	Peak	No limit
4	2440.8530	39.66	31.72	71.38	54.00	17.38	AVG	No limit
5	2483.5000	22.86	31.71	54.57	74.00	-19.43	Peak	
6	2483.5000	-1.96	31.71	29.75	54.00	-24.25	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2441 MHz _CH39_3Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

86.9 dBuV/m

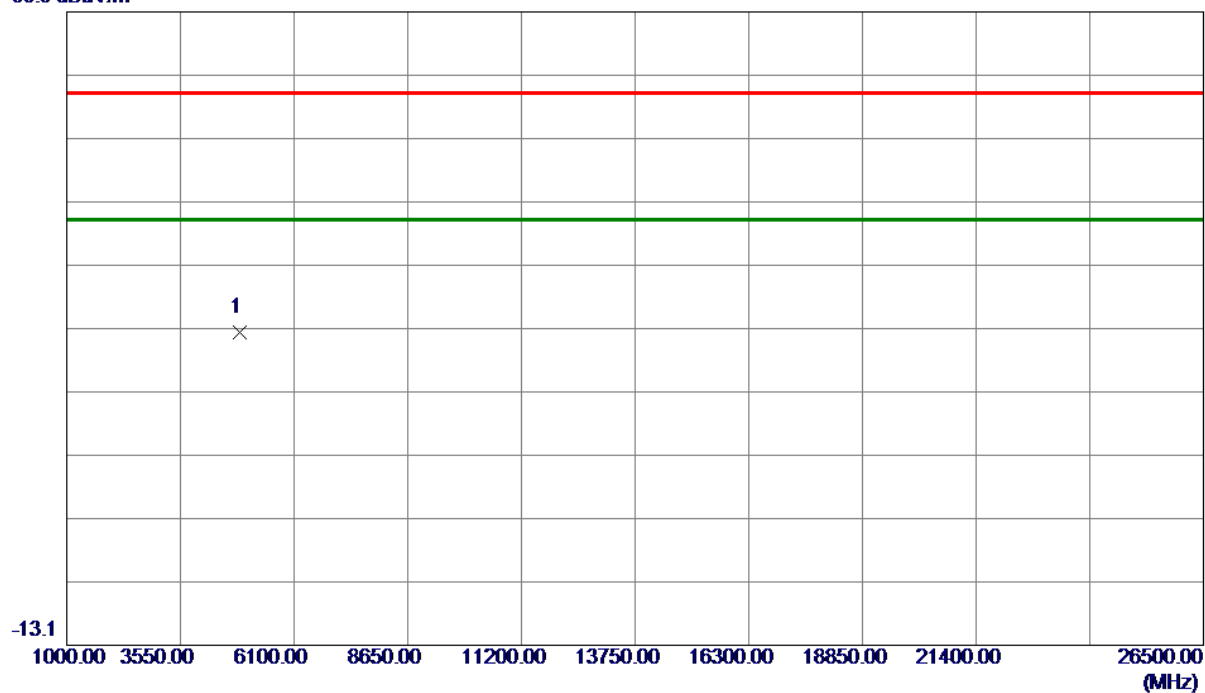


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4882.0000	53.16	-16.89	36.27	74.00	-37.73	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2441 MHz _CH39_3Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

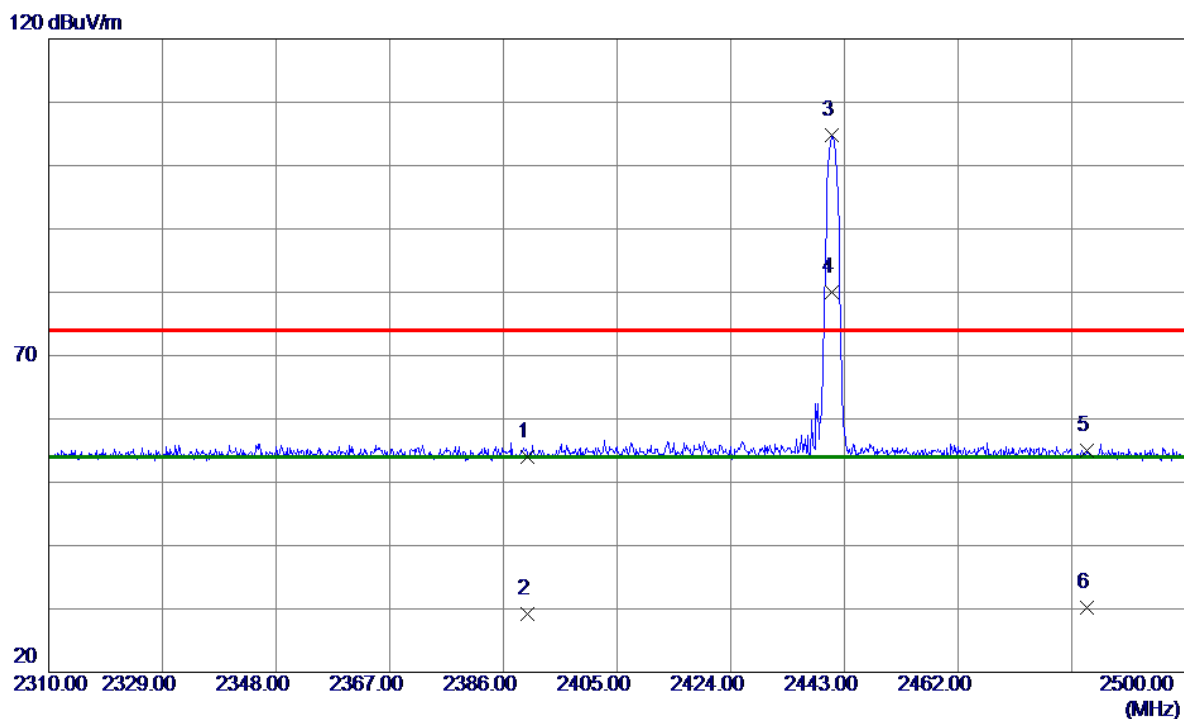


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	22.24	31.74	53.98	74.00	-20.02	Peak	
2	2390.0000	-2.58	31.74	29.16	54.00	-24.84	AVG	
3 *	2440.8340	73.00	31.72	104.72	74.00	30.72	Peak	No limit
4	2440.8340	48.18	31.72	79.90	54.00	25.90	AVG	No limit
5	2483.5000	23.25	31.71	54.96	74.00	-19.04	Peak	
6	2483.5000	-1.57	31.71	30.14	54.00	-23.86	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2441 MHz _CH39_3Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

86.9 dBuV/m

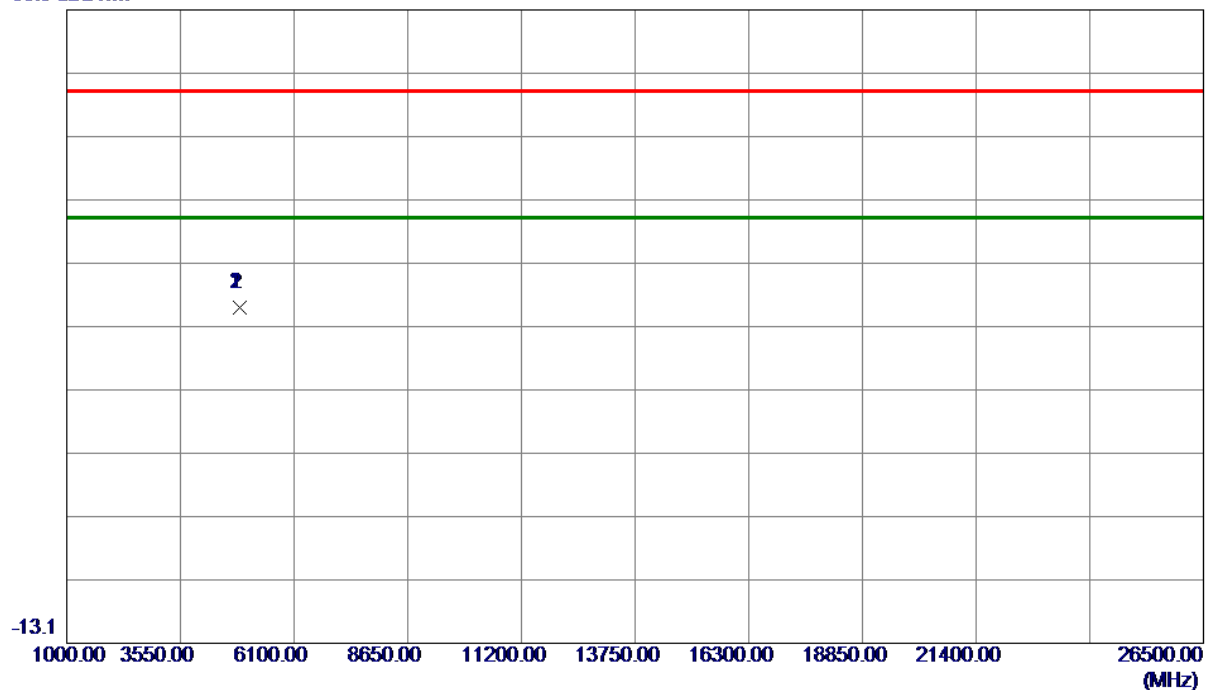


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4882.0000	56.87	-16.89	39.98	74.00	-34.02	Peak	
2	4882.0000	56.87	-16.89	39.98	74.00	-34.02	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz _CH78_3Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

120 dBuV/m

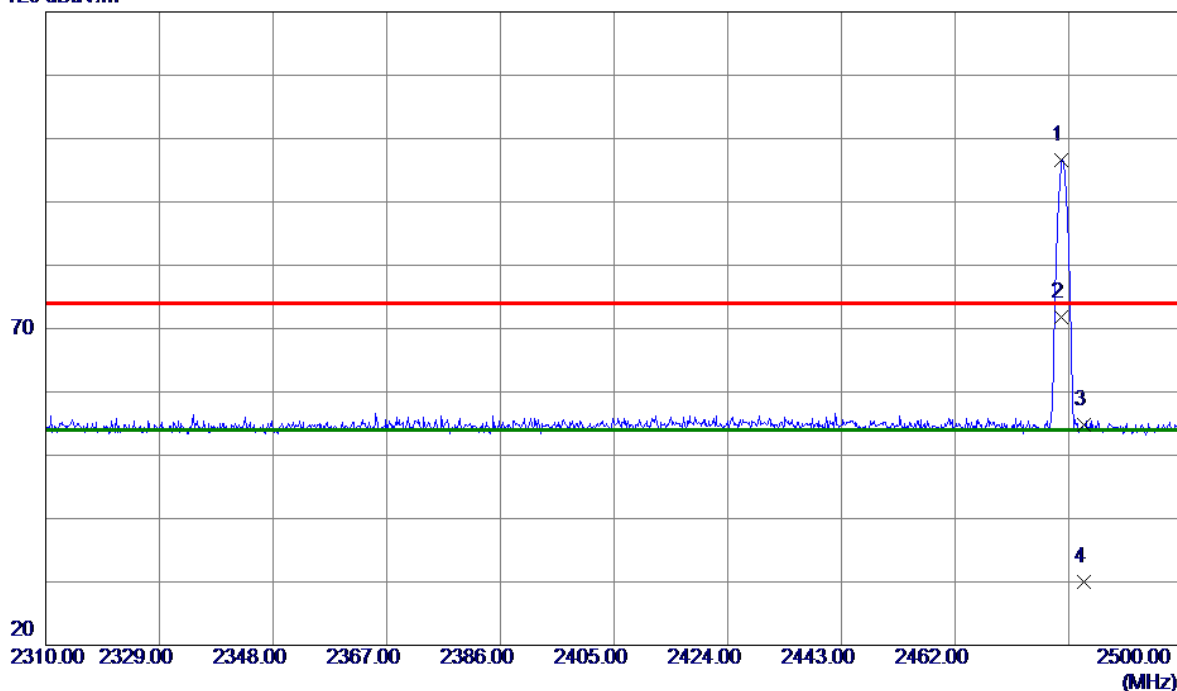

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2479.8310	64.86	31.71	96.57	74.00	22.57	Peak	No limit
2	2479.8310	40.04	31.71	71.75	54.00	17.75	AVG	No limit
3	2483.5000	23.17	31.71	54.88	74.00	-19.12	Peak	
4	2483.5000	-1.65	31.71	30.06	54.00	-23.94	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz _CH78_3Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

86.9 dBuV/m

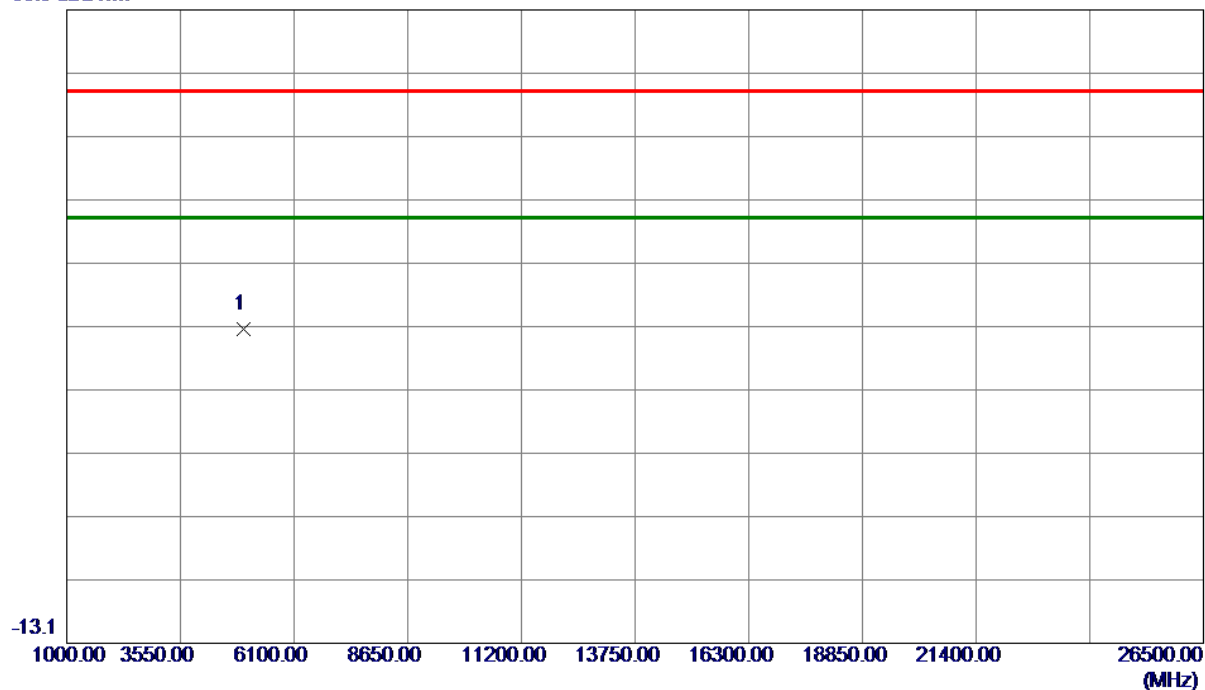


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	4960.0000	53.12	-16.63	36.49	74.00	-37.51	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz _CH78_3Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

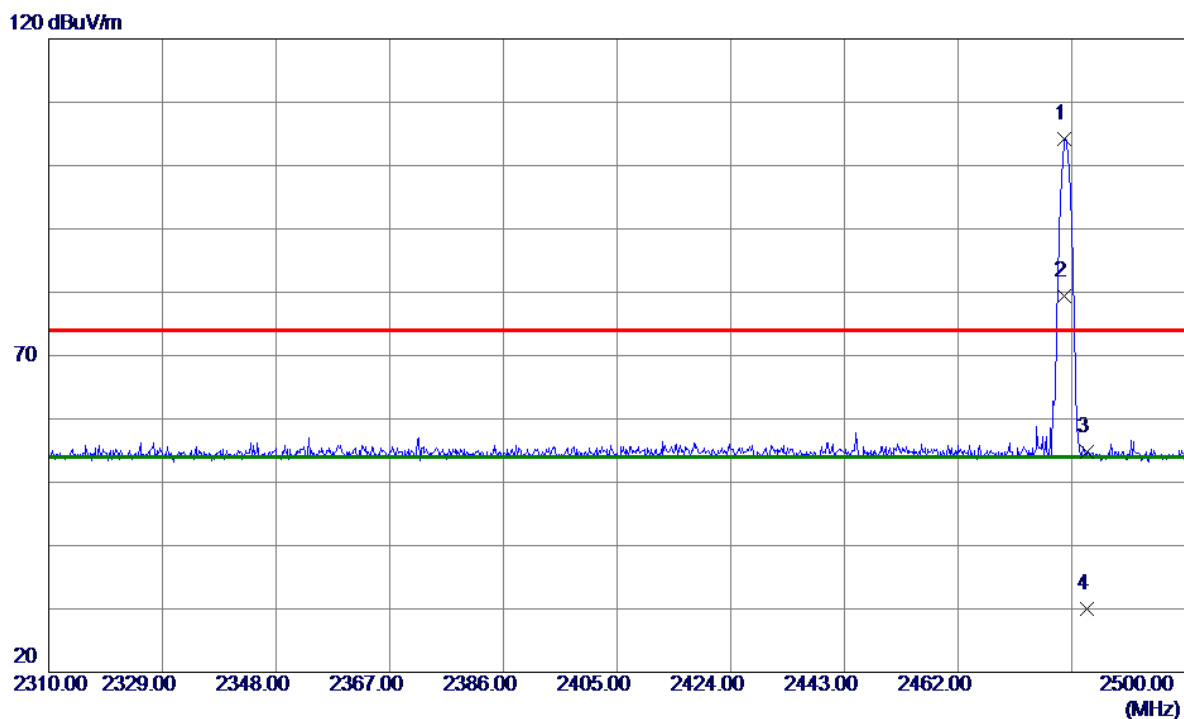


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2479.8130	72.50	31.71	104.21	74.00	30.21	Peak	No limit
2	2479.8130	47.68	31.71	79.39	54.00	25.39	AVG	No limit
3	2483.5000	23.03	31.71	54.74	74.00	-19.26	Peak	
4	2483.5000	-1.79	31.71	29.92	54.00	-24.08	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz _CH78_3Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

86.9 dBuV/m

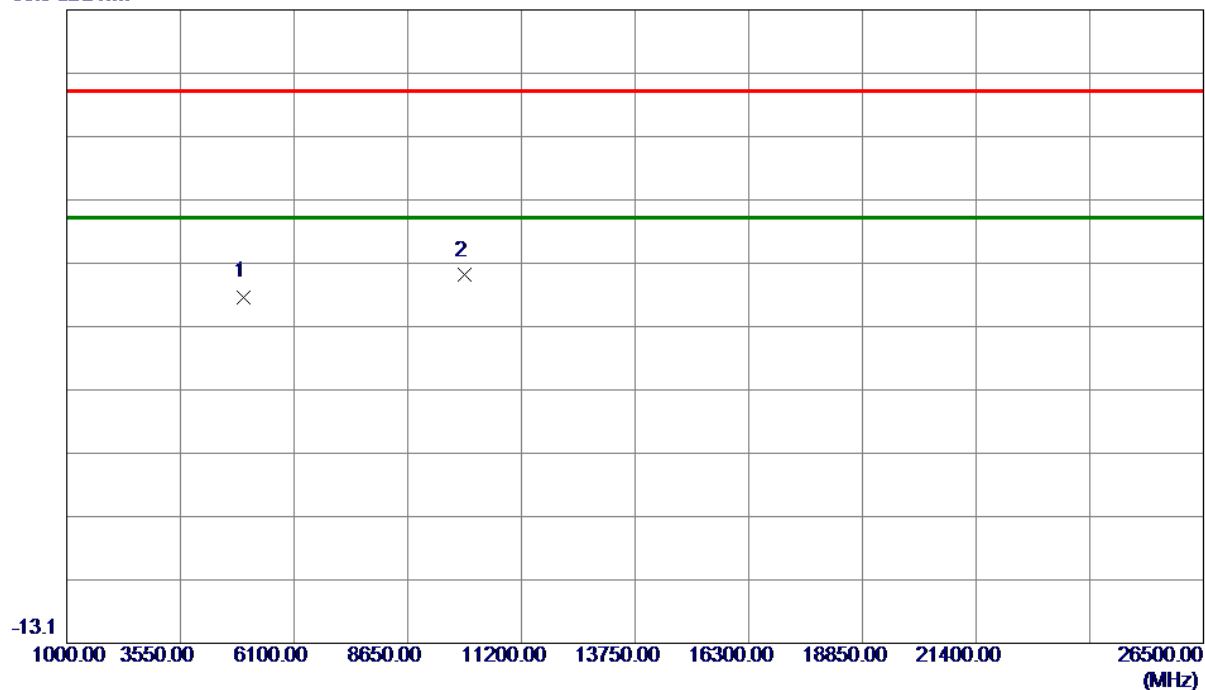

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4960.0000	58.23	-16.63	41.60	74.00	-32.40	Peak	
2 *	9921.1750	55.21	-10.21	45.00	74.00	-29.00	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

MTK7663

Test Mode	TX 2402 MHz _CH00_1Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

120 dBuV/m

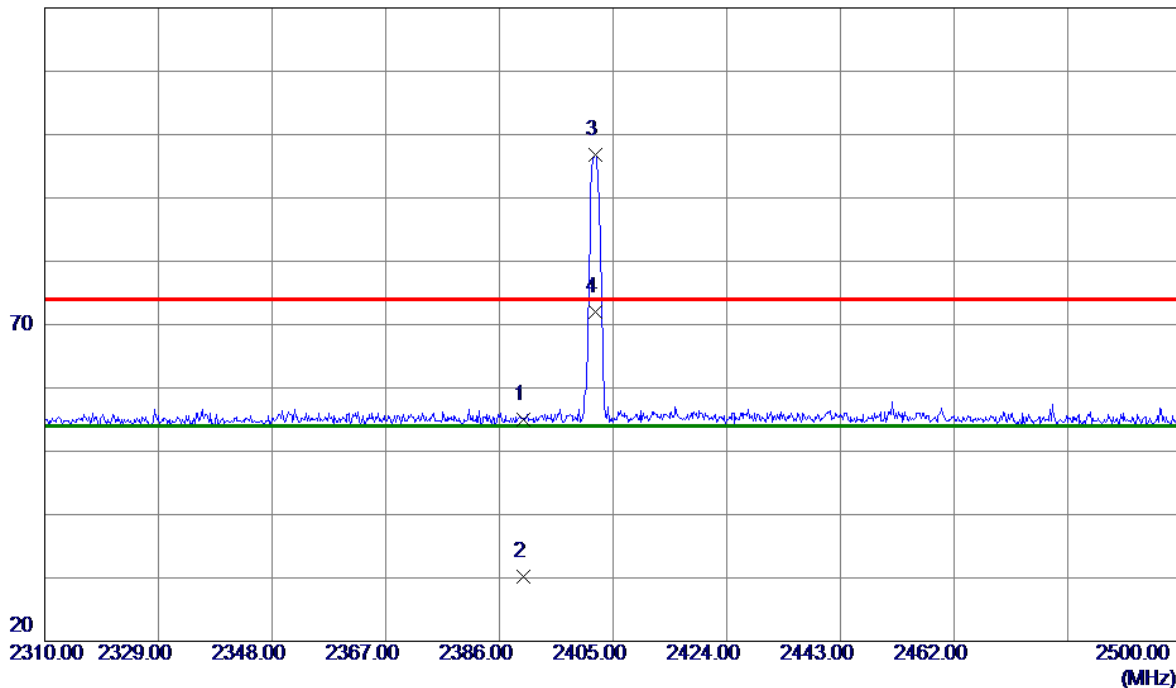

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	23.25	31.74	54.99	74.00	-19.01	Peak	
2	2390.0000	-1.48	31.74	30.26	54.00	-23.74	AVG	
3 *	2401.9600	65.01	31.72	96.73	74.00	22.73	Peak	NO limit
4	2401.9600	40.28	31.72	72.00	54.00	18.00	AVG	NO limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz _CH00_1Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

80 dBuV/m

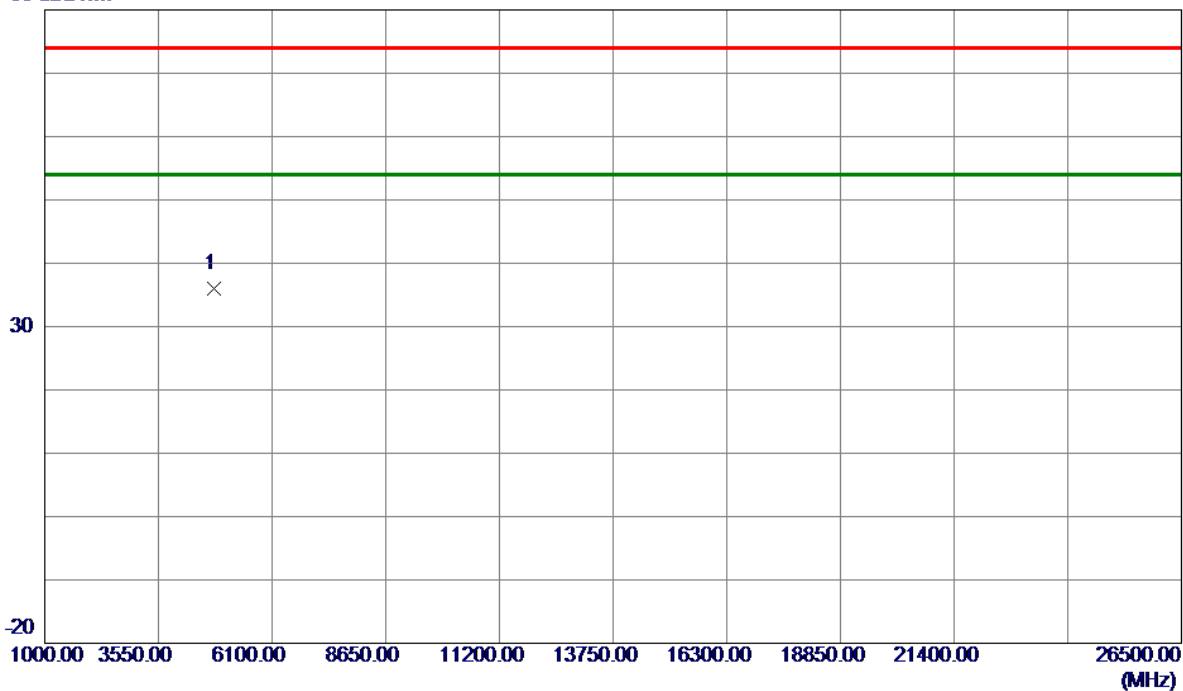


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	4804.0000	53.07	-17.01	36.06	74.00	-37.94	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz _CH00_1Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

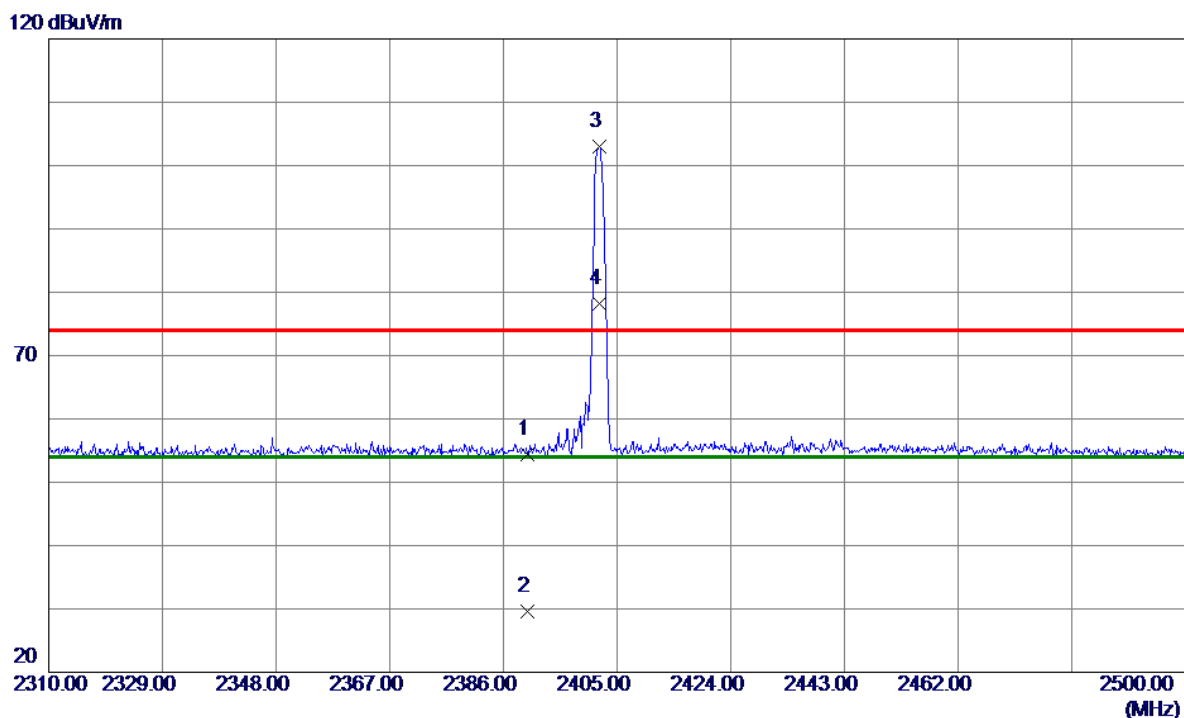

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	22.65	31.74	54.39	74.00	-19.61	Peak	
2	2390.0000	-2.08	31.74	29.66	54.00	-24.34	AVG	
3 *	2401.9600	71.24	31.72	102.96	74.00	28.96	Peak	NO limit
4	2401.9600	46.51	31.72	78.23	54.00	24.23	AVG	NO limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz _CH00_1Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

80 dBuV/m

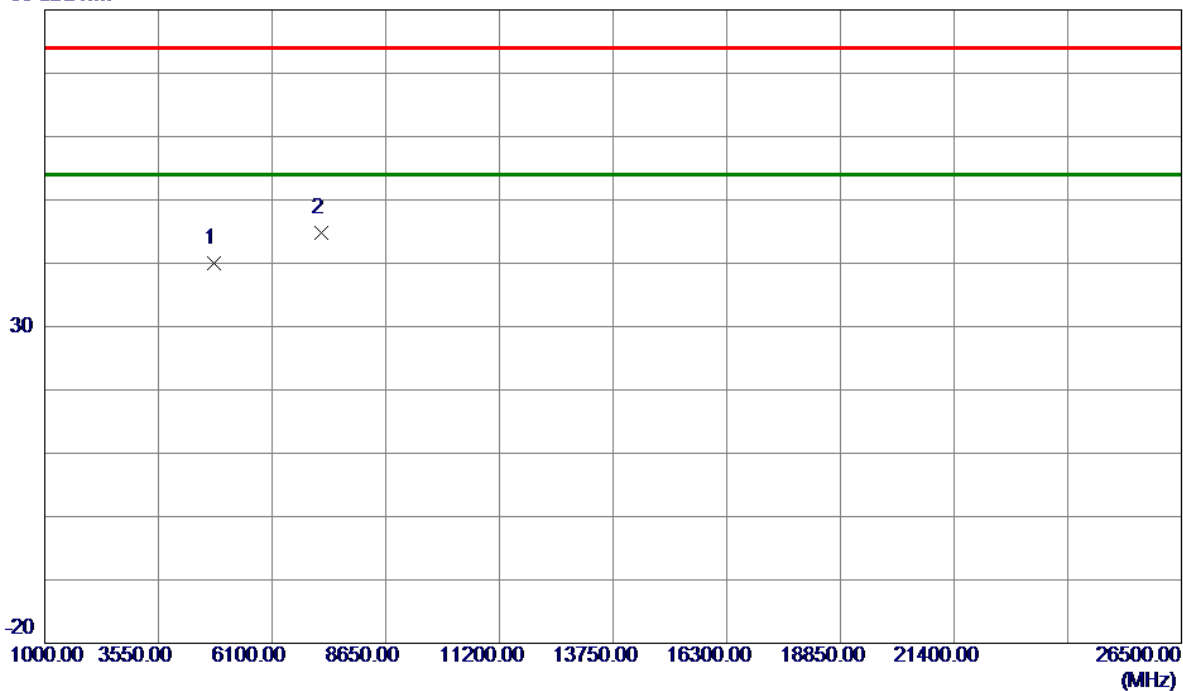

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4804.6000	57.04	-17.01	40.03	74.00	-33.97	Peak	
2 *	7205.4250	57.69	-12.91	44.78	74.00	-29.22	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2441 MHz _CH39_1Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

120 dBuV/m

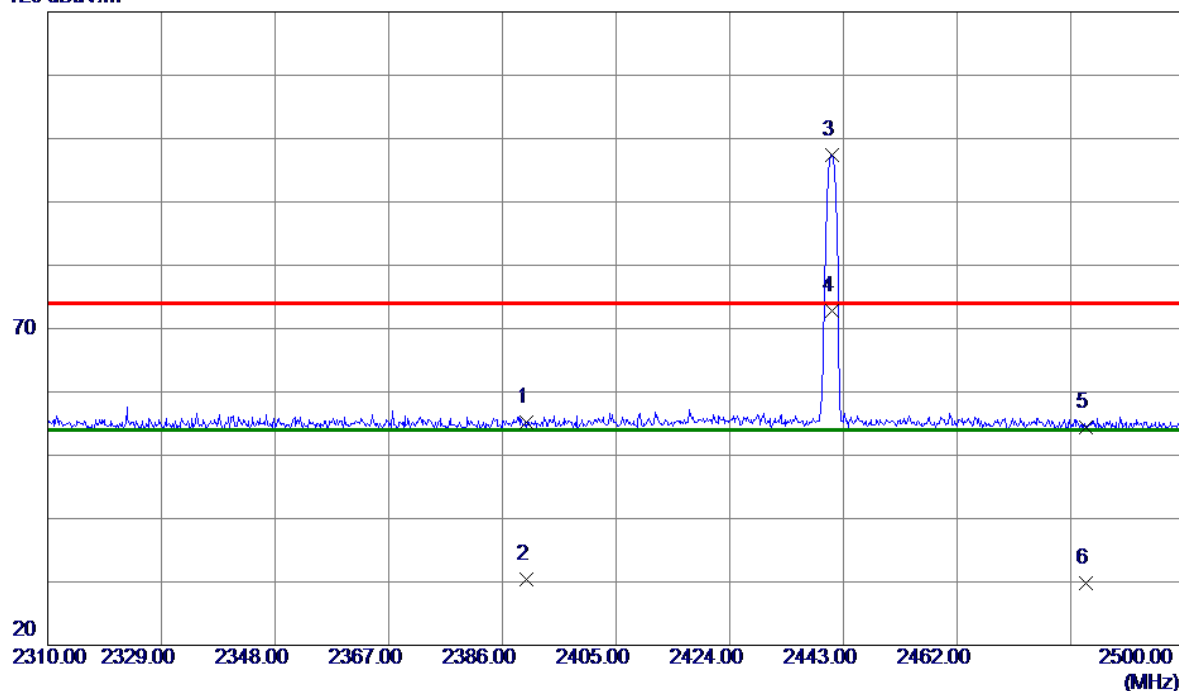

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	23.37	31.74	55.11	74.00	-18.89	Peak	
2	2390.0000	-1.36	31.74	30.38	54.00	-23.62	AVG	
3 *	2441.0049	65.76	31.72	97.48	74.00	23.48	Peak	NO limit
4	2441.0049	41.03	31.72	72.75	54.00	18.75	AVG	NO limit
5	2483.5000	22.75	31.71	54.46	74.00	-19.54	Peak	
6	2483.5000	-1.98	31.71	29.73	54.00	-24.27	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2441 MHz _CH39_1Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

80 dBuV/m

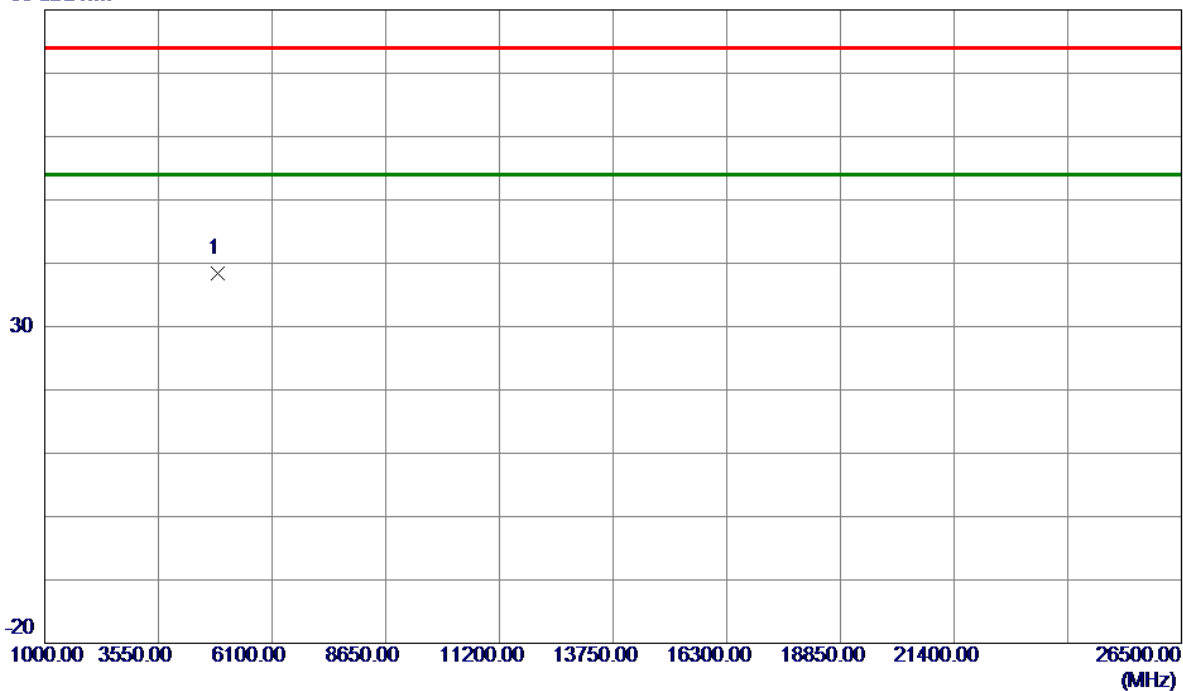


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4882.0000	55.35	-16.89	38.46	74.00	-35.54	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2441 MHz _CH39_1Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

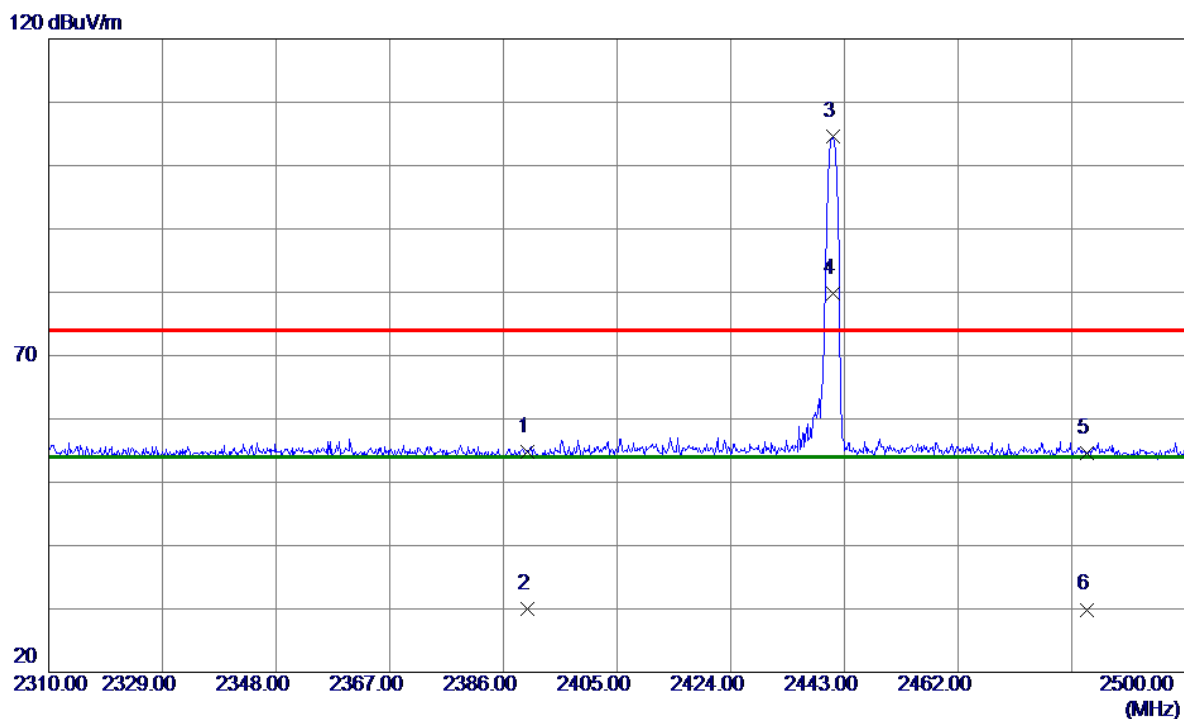


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	22.97	31.74	54.71	74.00	-19.29	Peak	
2	2390.0000	-1.76	31.74	29.98	54.00	-24.02	AVG	
3 *	2441.0049	72.85	31.72	104.57	74.00	30.57	Peak	NO limit
4	2441.0049	48.12	31.72	79.84	54.00	25.84	AVG	NO limit
5	2483.5000	22.92	31.71	54.63	74.00	-19.37	Peak	
6	2483.5000	-1.81	31.71	29.90	54.00	-24.10	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2441 MHz _CH39_1Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

80 dBuV/m

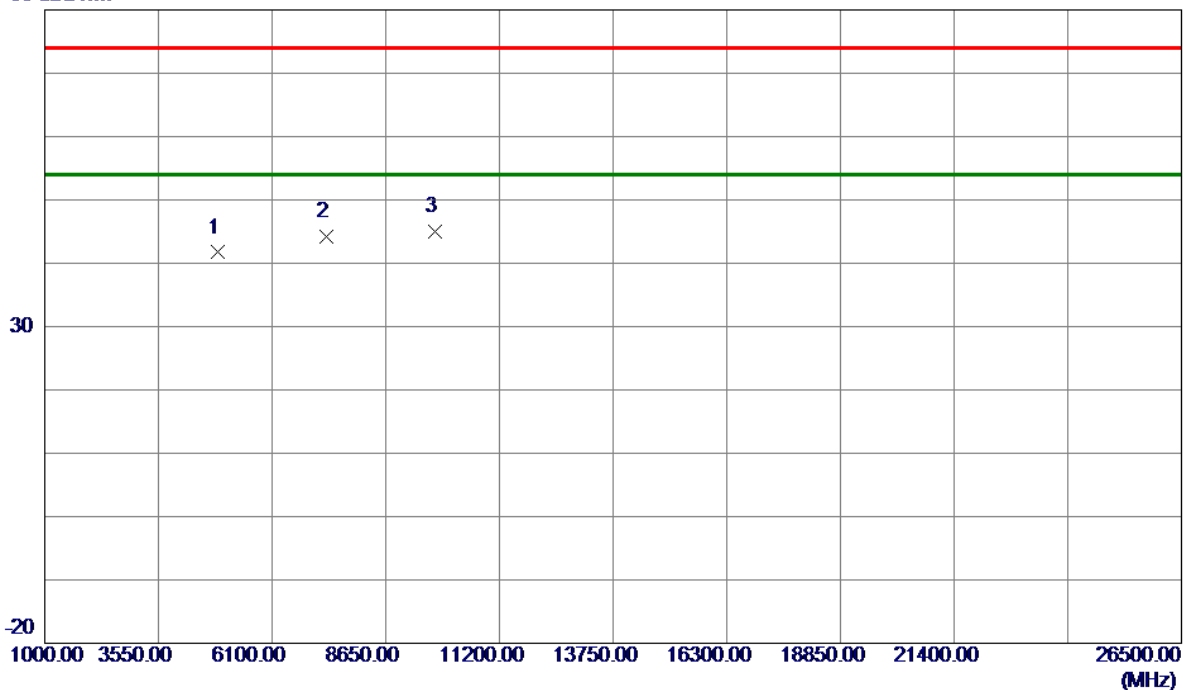


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4882.3750	58.59	-16.89	41.70	74.00	-32.30	Peak	
2	7324.0000	56.94	-12.83	44.11	74.00	-29.89	Peak	
3 *	9764.3500	55.19	-10.20	44.99	74.00	-29.01	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz _CH78_1Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

120 dBuV/m

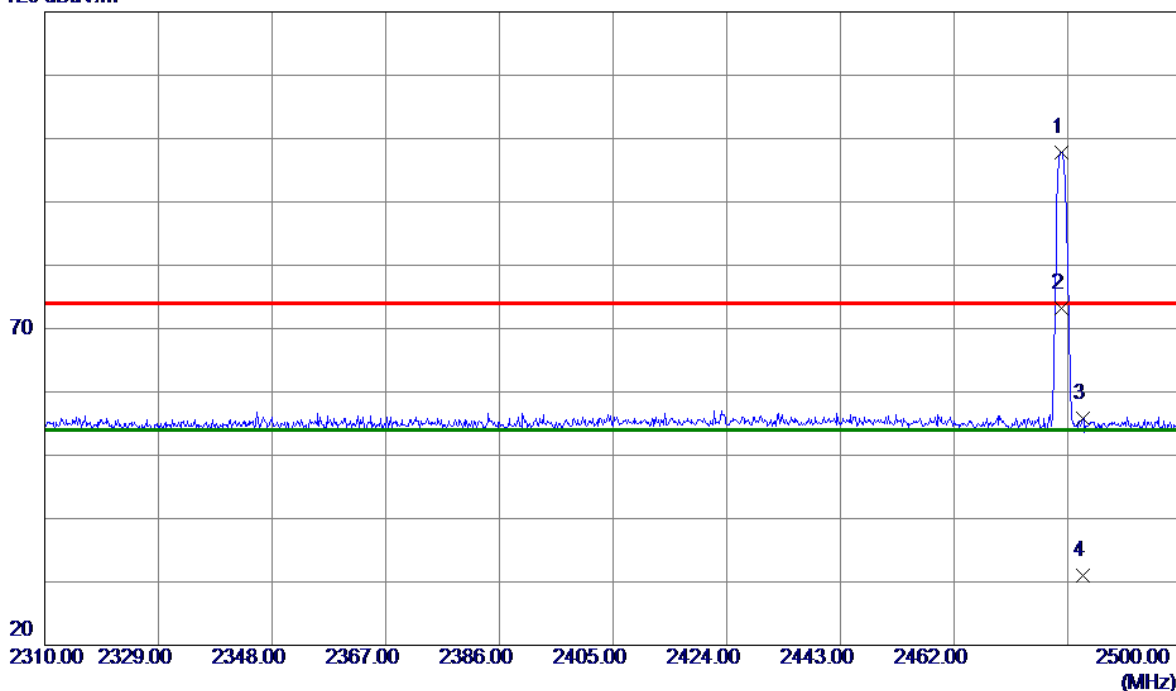

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2479.9550	66.18	31.71	97.89	74.00	23.89	Peak	NO limit
2	2479.9550	41.45	31.71	73.16	54.00	19.16	AVG	NO limit
3	2483.5000	24.11	31.71	55.82	74.00	-18.18	Peak	
4	2483.5000	-0.62	31.71	31.09	54.00	-22.91	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz _CH78_1Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

80 dBuV/m

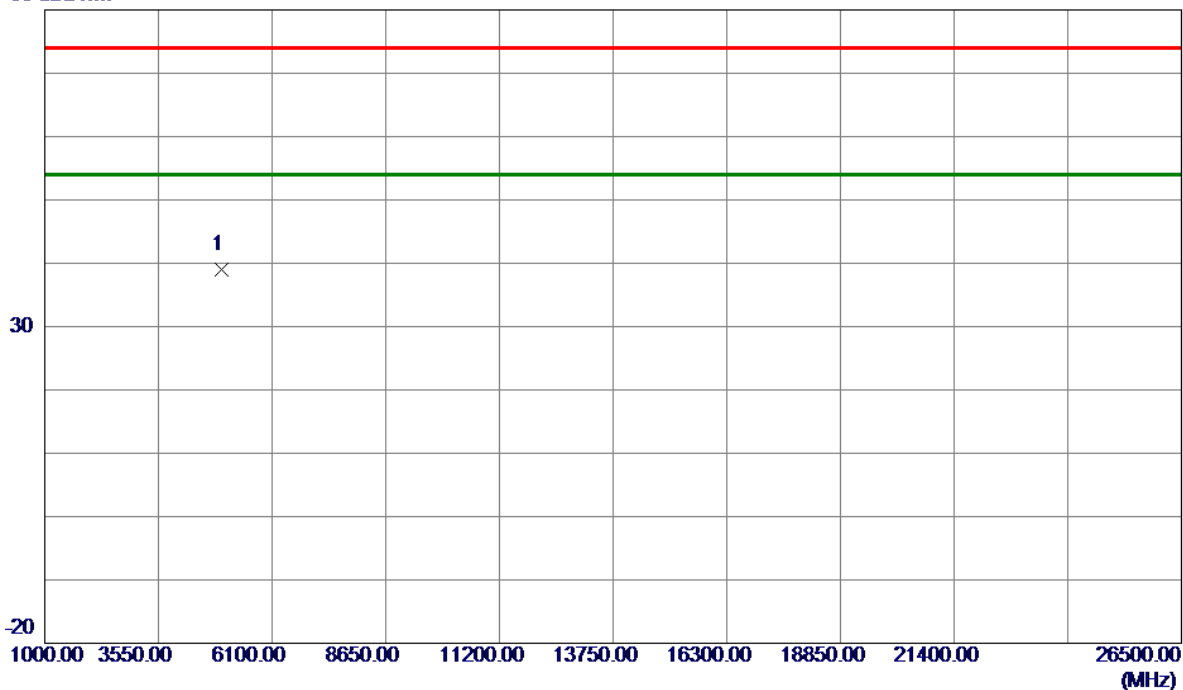


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	4960.1500	55.62	-16.63	38.99	74.00	-35.01	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz _CH78_1Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

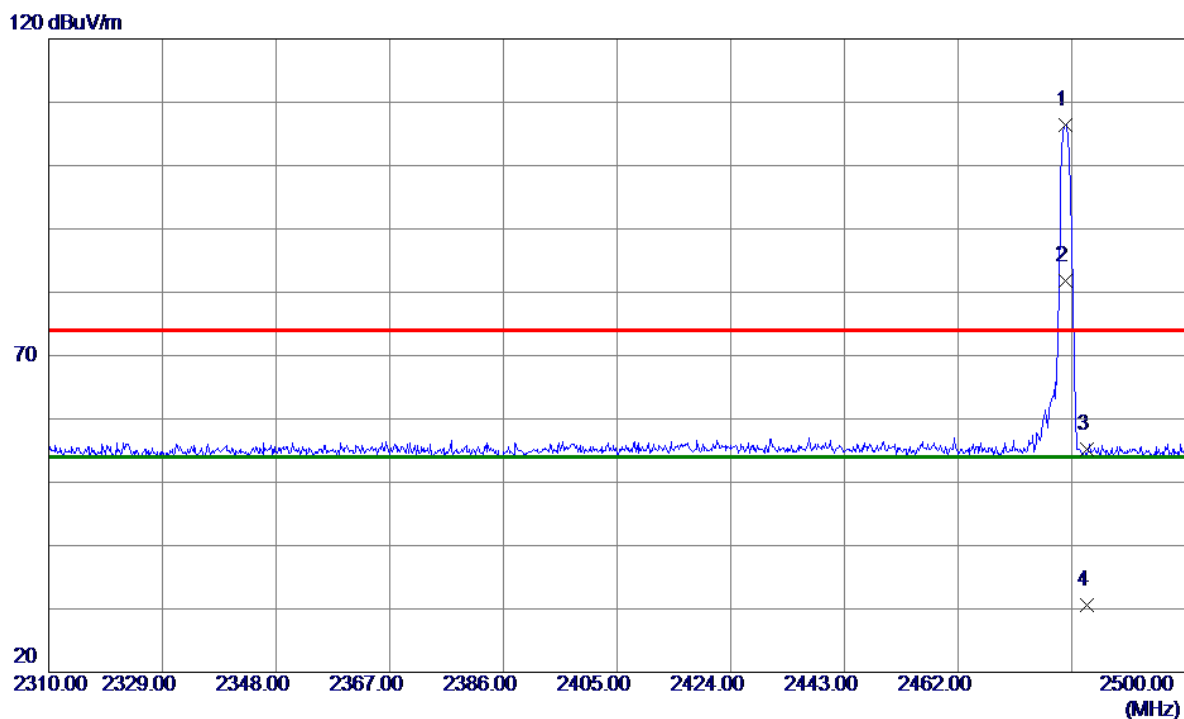


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2479.9550	74.74	31.71	106.45	74.00	32.45	Peak	NO limit
2	2479.9550	50.01	31.71	81.72	54.00	27.72	AVG	NO limit
3	2483.5000	23.55	31.71	55.26	74.00	-18.74	Peak	
4	2483.5000	-1.18	31.71	30.53	54.00	-23.47	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz _CH78_1Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

80 dBuV/m

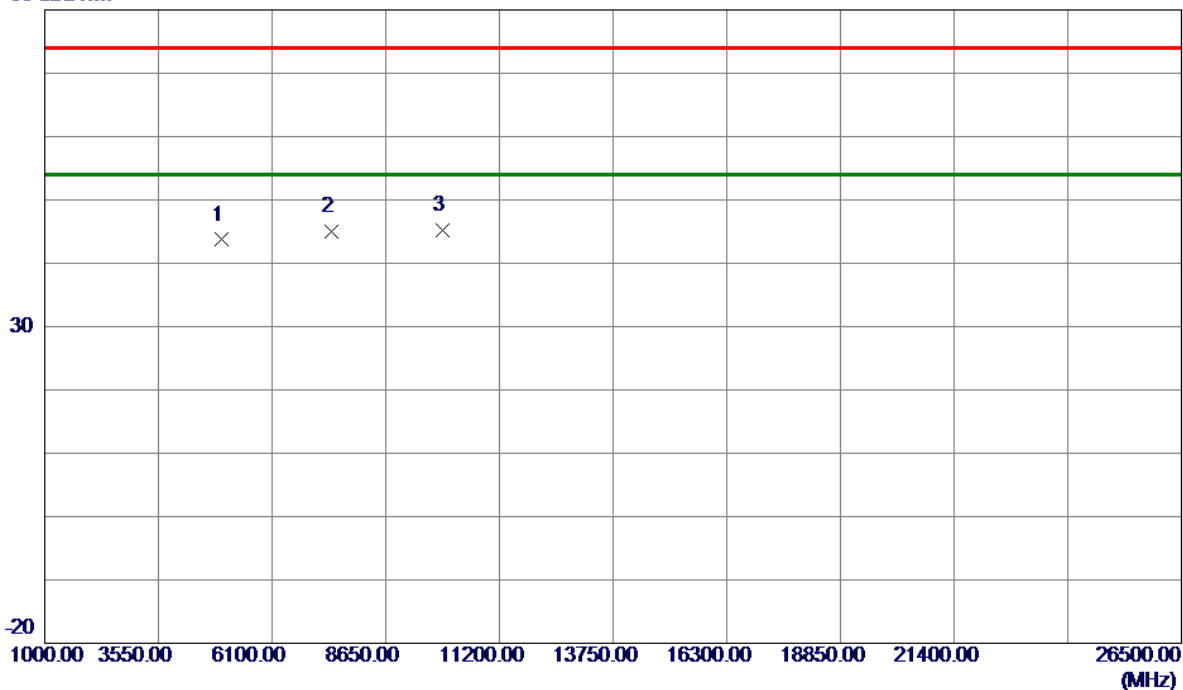


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4960.1500	60.33	-16.63	43.70	74.00	-30.30	Peak	
2	7440.0250	57.78	-12.79	44.99	74.00	-29.01	Peak	
3 *	9919.9000	55.40	-10.21	45.19	74.00	-28.81	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz _CH00_3Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

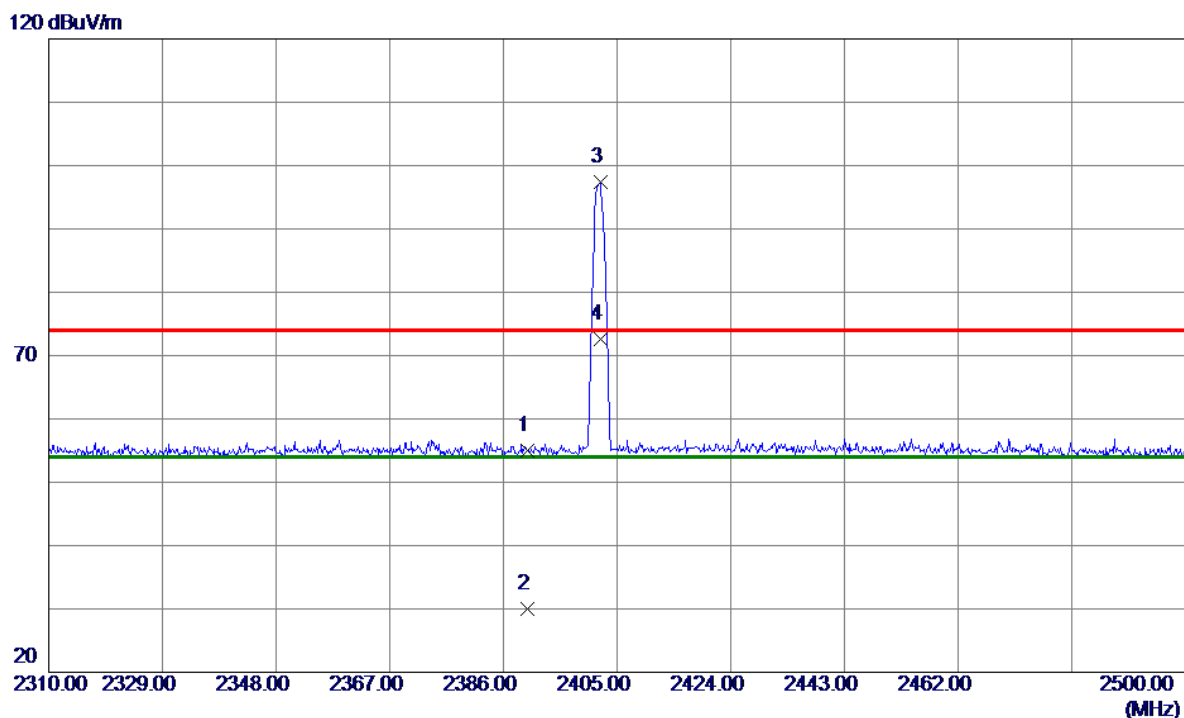

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	23.17	31.74	54.91	74.00	-19.09	Peak	
2	2390.0000	-1.65	31.74	30.09	54.00	-23.91	AVG	
3 *	2402.1500	65.61	31.72	97.33	74.00	23.33	Peak	NO limit
4	2402.1500	40.79	31.72	72.51	54.00	18.51	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz _CH00_3Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

80 dBuV/m

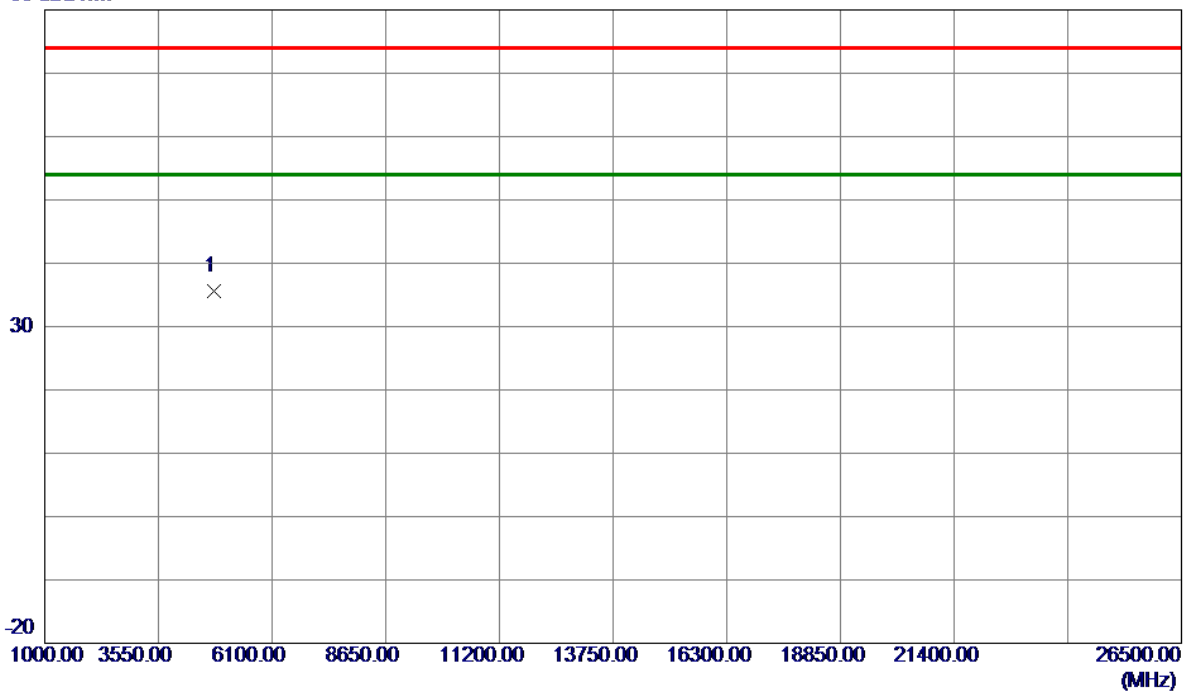


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4804.0000	52.55	-17.01	35.54	74.00	-38.46	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz _CH00_3Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

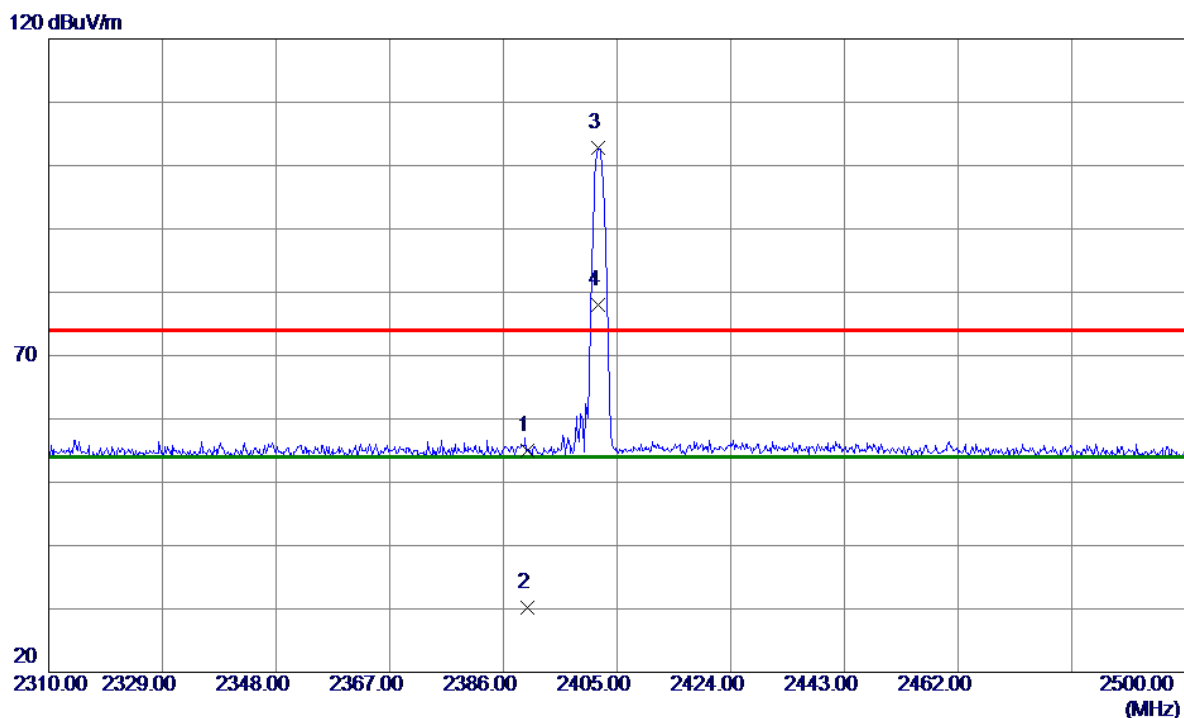

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	23.31	31.74	55.05	74.00	-18.95	Peak	
2	2390.0000	-1.51	31.74	30.23	54.00	-23.77	AVG	
3 *	2401.8650	71.04	31.72	102.76	74.00	28.76	Peak	NO limit
4	2401.8650	46.22	31.72	77.94	54.00	23.94	AVG	NO limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz _CH00_3Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

80 dBuV/m

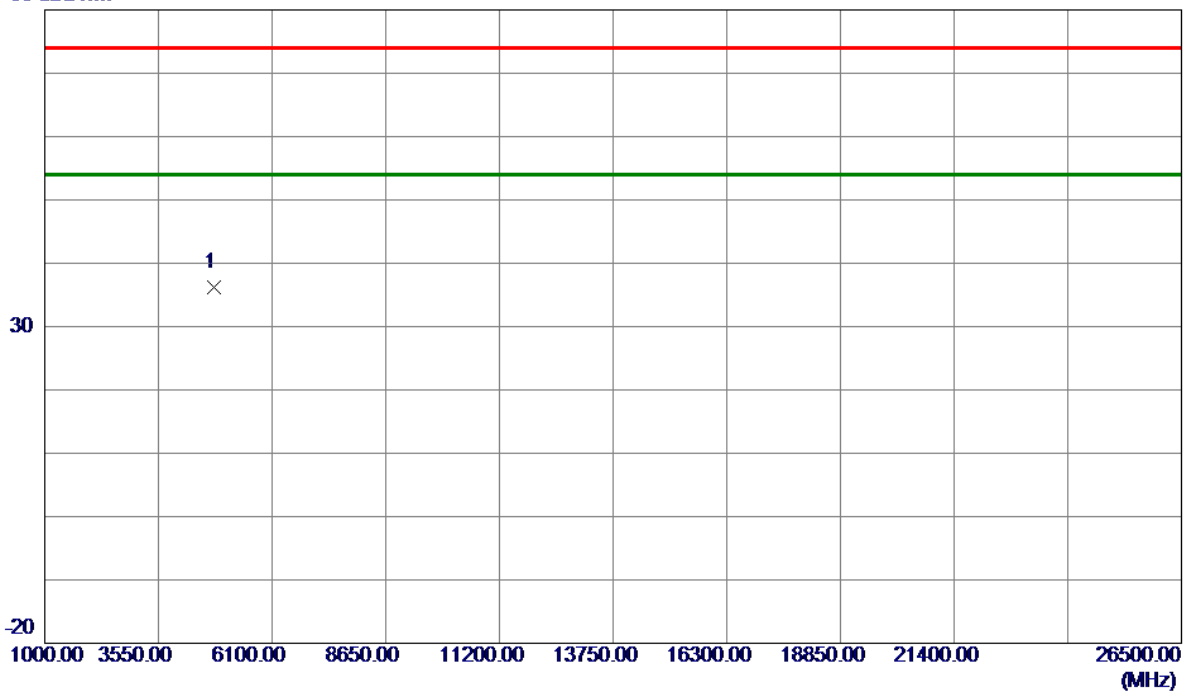


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	4804.0000	53.28	-17.01	36.27	74.00	-37.73	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2441 MHz _CH39_3Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

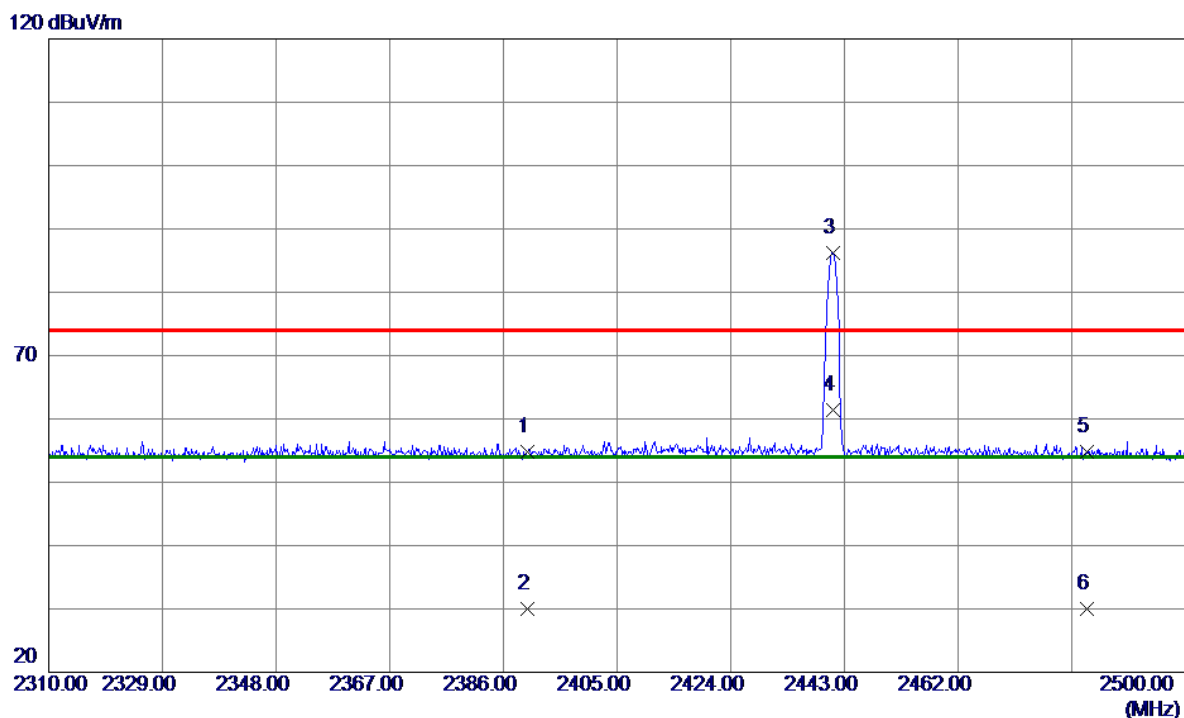

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	23.15	31.74	54.89	74.00	-19.11	Peak	
2	2390.0000	-1.67	31.74	30.07	54.00	-23.93	AVG	
3 *	2441.1000	54.52	31.72	86.24	74.00	12.24	Peak	NO limit
4	2441.1000	29.70	31.72	61.42	54.00	7.42	AVG	NO limit
5	2483.5000	23.17	31.71	54.88	74.00	-19.12	Peak	
6	2483.5000	-1.65	31.71	30.06	54.00	-23.94	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2441 MHz _CH39_3Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

80 dBuV/m

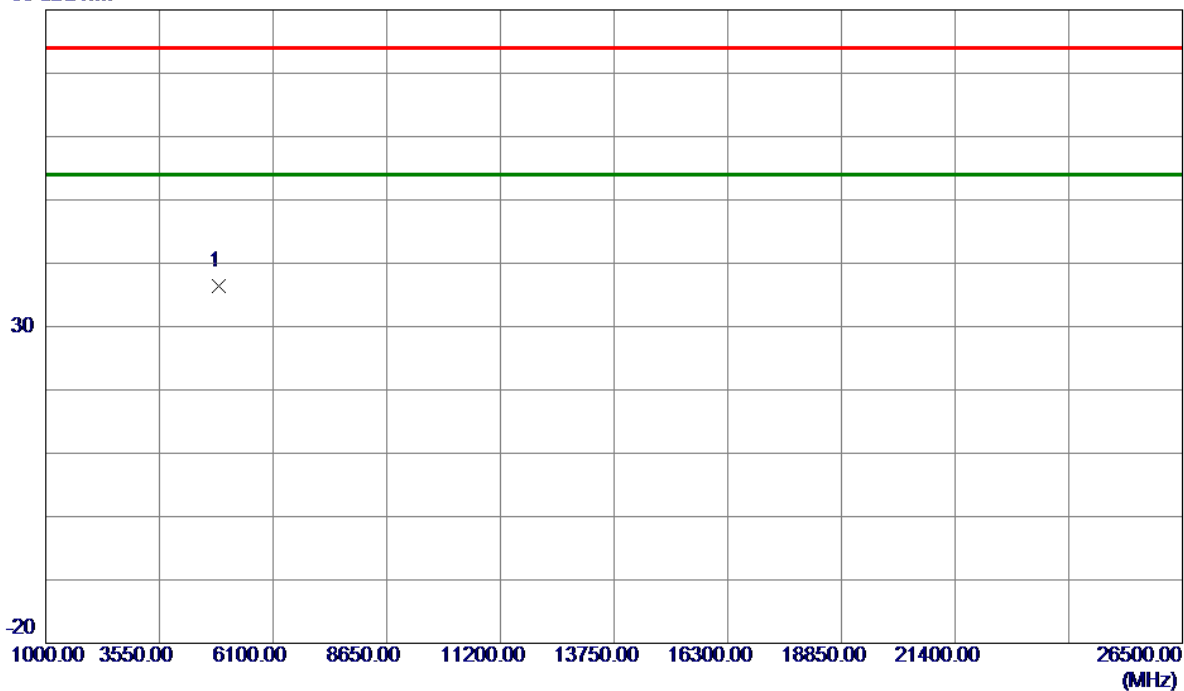


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4882.0000	53.27	-16.89	36.38	74.00	-37.62	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2441 MHz _CH39_3Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

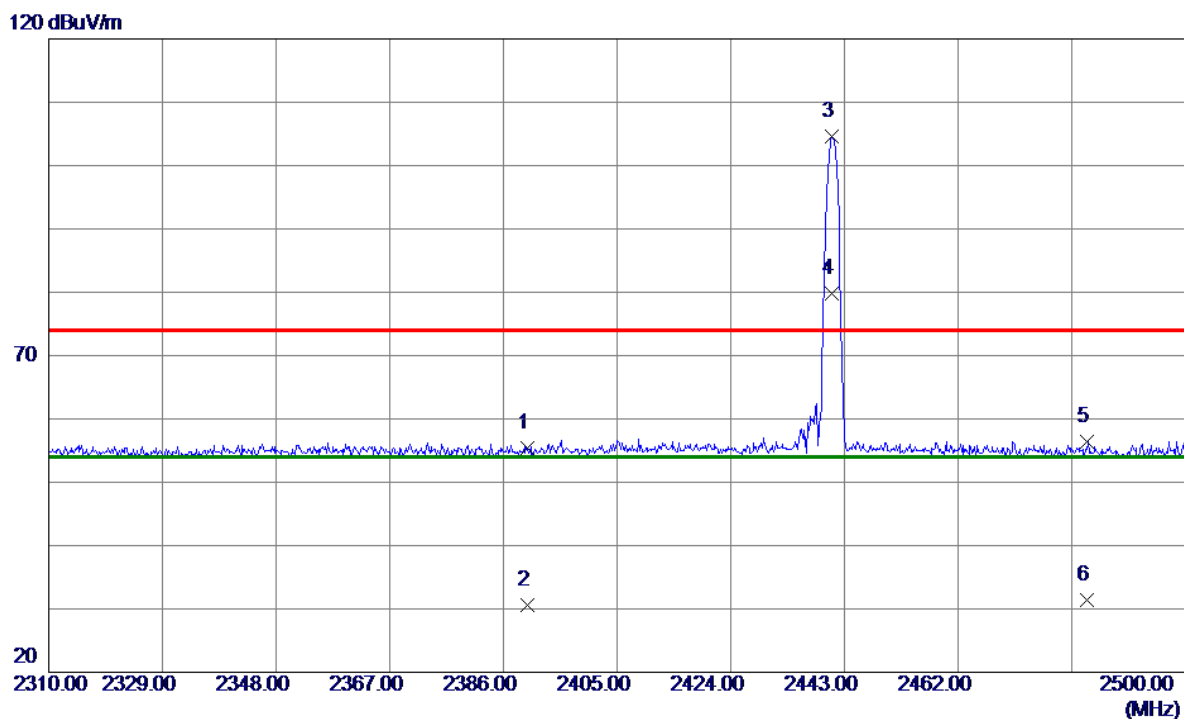


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	23.61	31.74	55.35	74.00	-18.65	Peak	
2	2390.0000	-1.21	31.74	30.53	54.00	-23.47	AVG	
3 *	2440.8150	72.87	31.72	104.59	74.00	30.59	Peak	NO limit
4	2440.8150	48.05	31.72	79.77	54.00	25.77	AVG	NO limit
5	2483.5000	24.60	31.71	56.31	74.00	-17.69	Peak	
6	2483.5000	-0.22	31.71	31.49	54.00	-22.51	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2441 MHz _CH39_3Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

80 dBuV/m

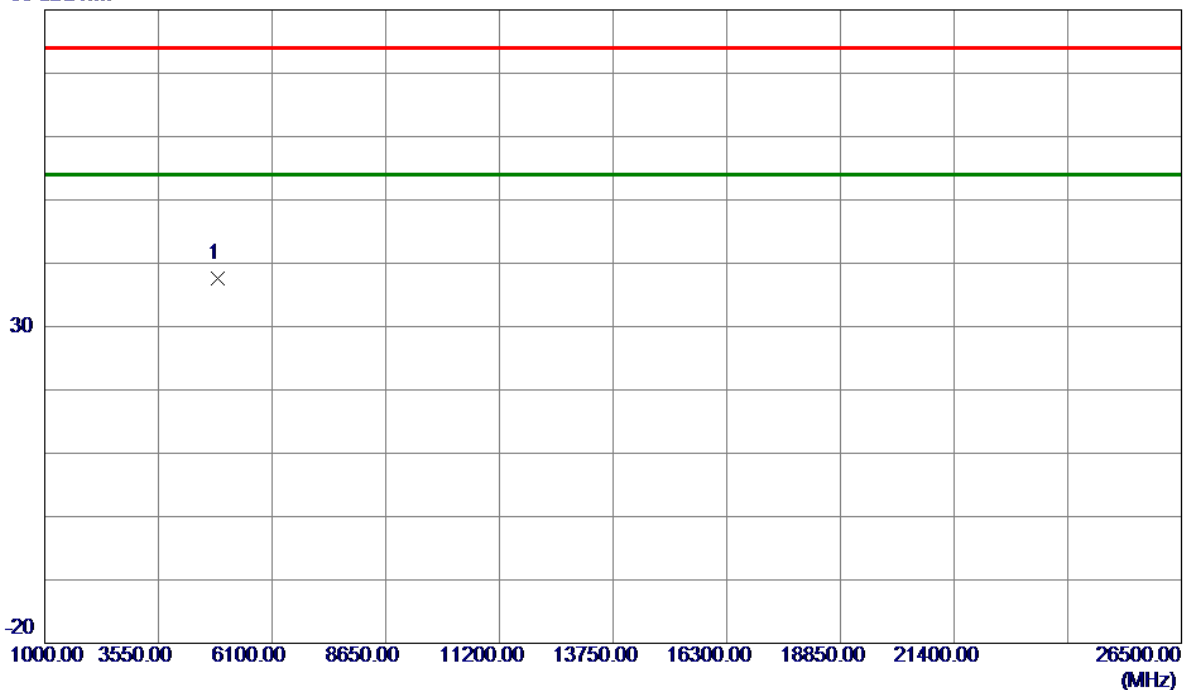


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	4882.0000	54.40	-16.89	37.51	74.00	-36.49	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz _CH78_3Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

120 dBuV/m

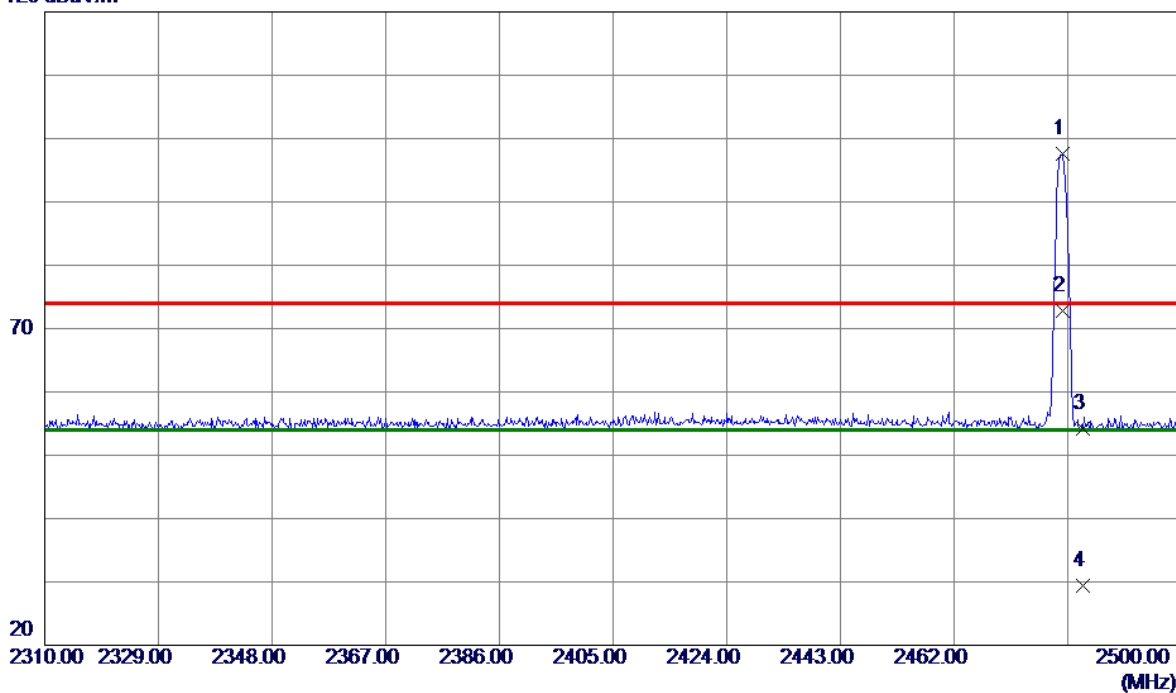

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2480.1450	65.84	31.71	97.55	74.00	23.55	Peak	NO limit
2	2480.1450	41.02	31.71	72.73	54.00	18.73	AVG	NO limit
3	2483.5000	22.46	31.71	54.17	74.00	-19.83	Peak	
4	2483.5000	-2.36	31.71	29.35	54.00	-24.65	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz _CH78_3Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

80 dBuV/m

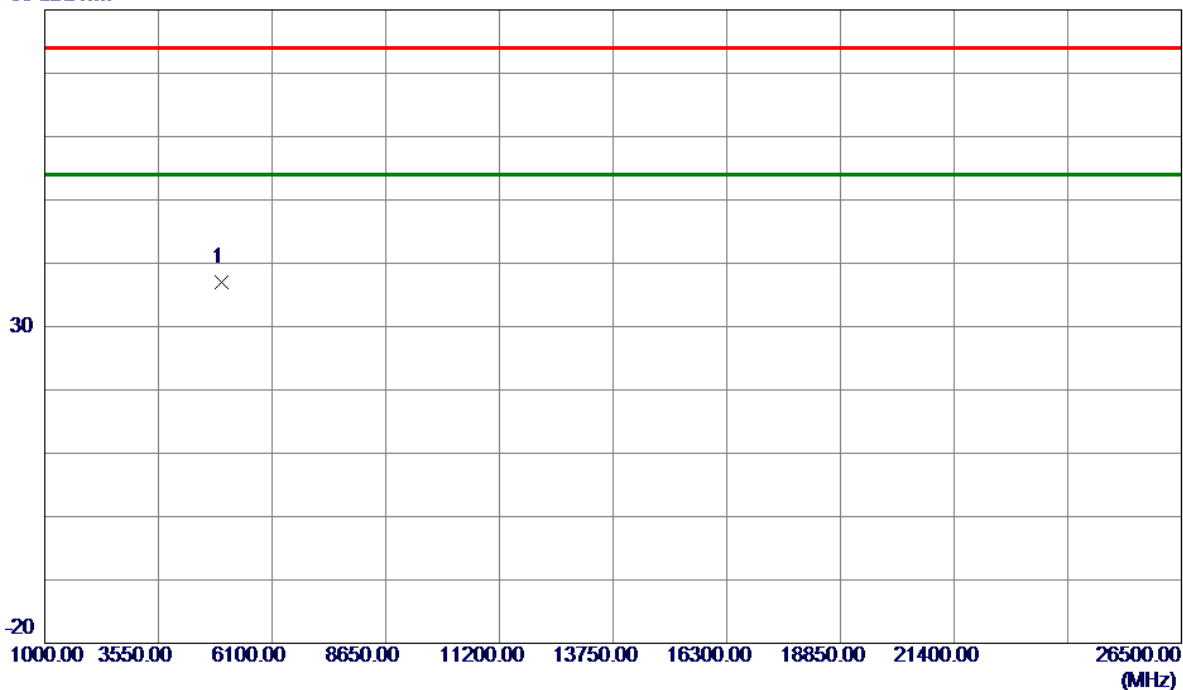


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	4960.0000	53.63	-16.63	37.00	74.00	-37.00	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz _CH78_3Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

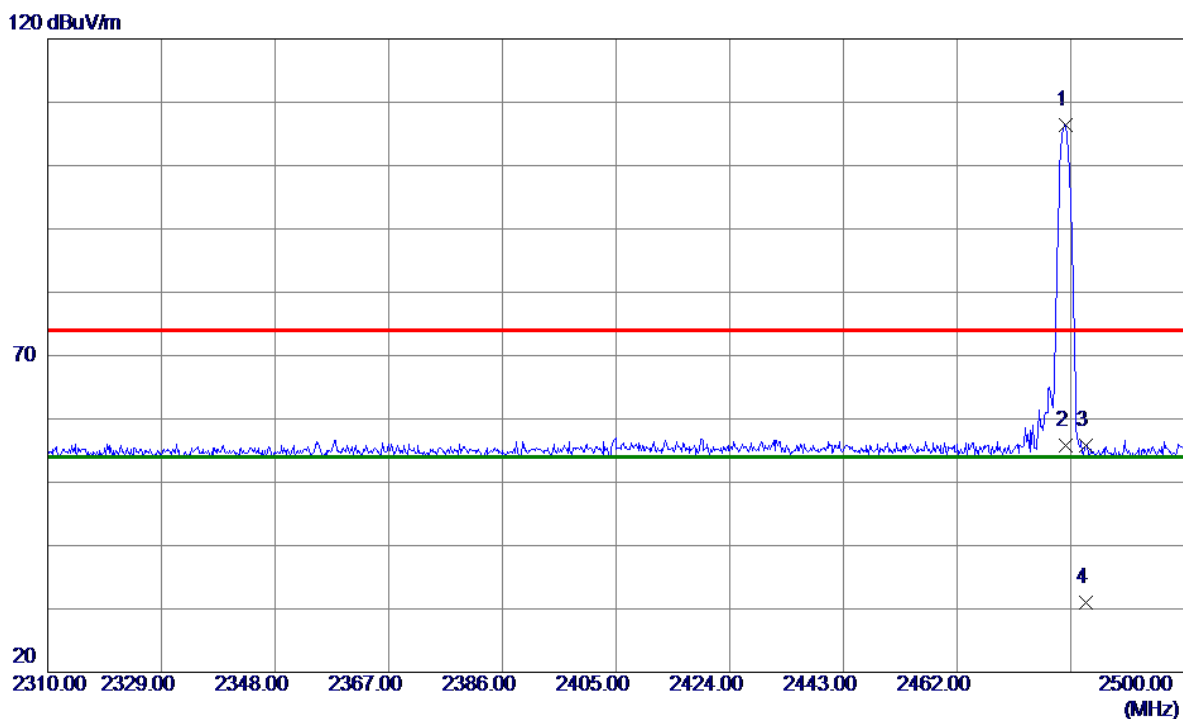


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2480.0500	74.74	31.71	106.45	74.00	32.45	Peak	NO limit
2	2480.0500	24.12	31.71	55.83	54.00	1.83	AVG	NO limit
3	2483.5000	24.13	31.71	55.84	74.00	-18.16	Peak	
4	2483.5000	-0.69	31.71	31.02	54.00	-22.98	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz _CH78_3Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

80 dBuV/m

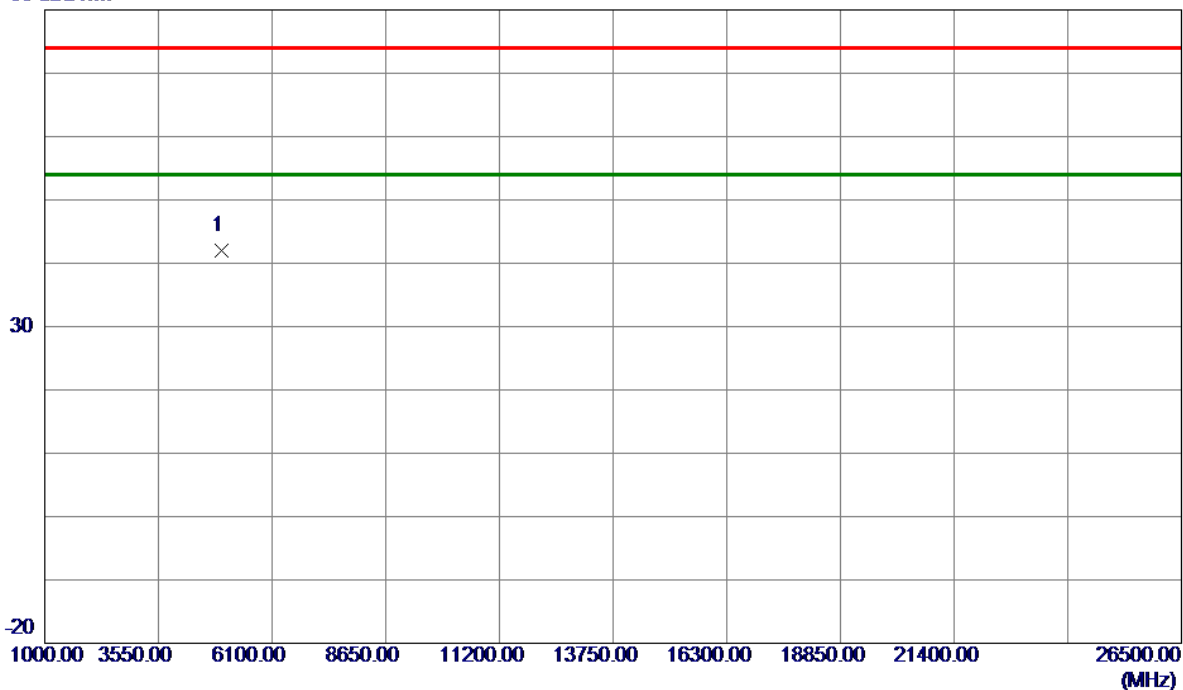

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	4960.0000	58.69	-16.63	42.06	74.00	-31.94	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - NUMBER OF HOPPING FREQUENCY

Test Mode:	TX Mode_1Mbps
------------	---------------


Test Mode	Hopping Mode_1Mbps	Limit	Test Result
Number of Hopping Frequency	79	15	Pass

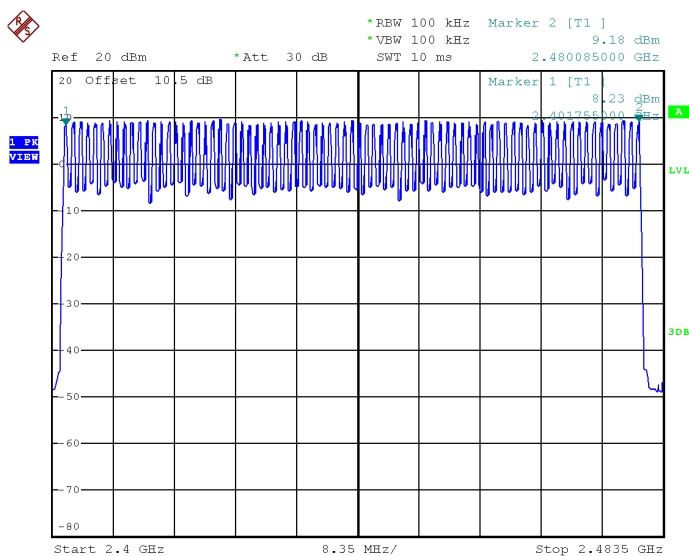

Date: 23.SEP.2021 17:44:08

Test Mode:	TX Mode_3Mbps
------------	---------------

Test Mode	Hopping Mode_3Mbps	Limit	Test Result
Number of Hopping Frequency	79	15	Pass

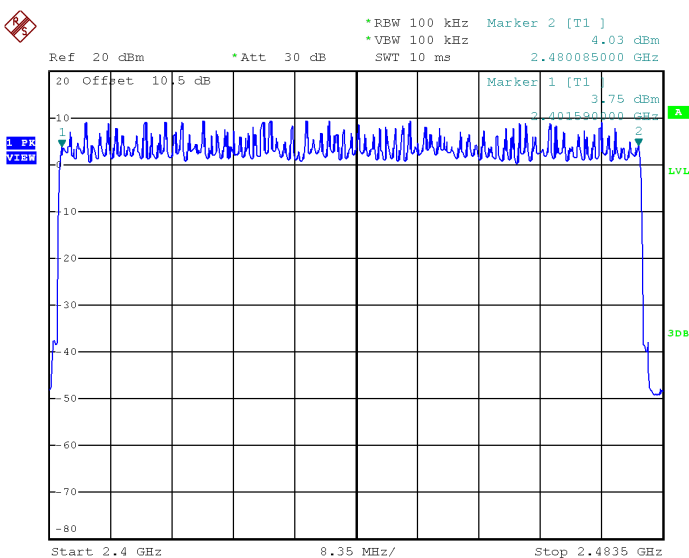


Date: 23.SEP.2021 18:12:44

APPENDIX F - AVERAGE TIME OF OCCUPANCY

Test Mode	Hopping Mode_1Mbps
-----------	--------------------


Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (s)	Limits (s)	Test Result
DH1	2402	0.380	0.1216	0.4000	Pass
DH3	2402	1.640	0.2624	0.4000	Pass
DH5	2402	2.880	0.3072	0.4000	Pass
DH1	2441	0.375	0.1200	0.4000	Pass
DH3	2441	1.620	0.2592	0.4000	Pass
DH5	2441	2.880	0.3072	0.4000	Pass
DH1	2480	0.380	0.1216	0.4000	Pass
DH3	2480	1.640	0.2624	0.4000	Pass
DH5	2480	2.880	0.3072	0.4000	Pass

CH00-DH1

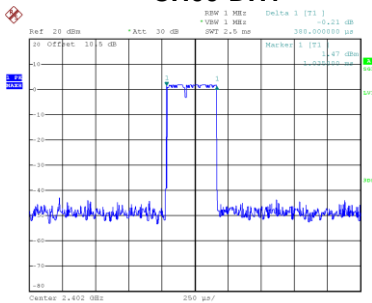


Date: 23.SEP.2021 17:37:32

CH39-DH1

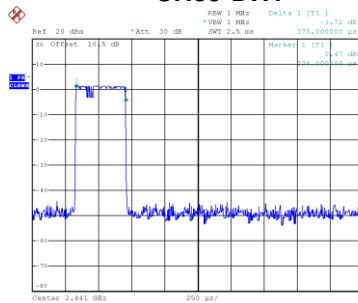


Date: 23.SEP.2021 17:37:42

CH78-DH1

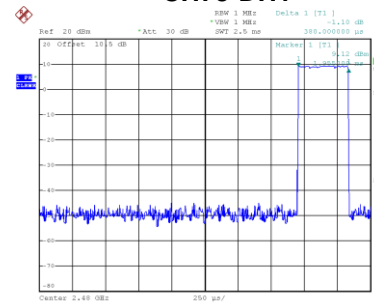


Date: 23.SEP.2021 17:37:45

CH00-DH3

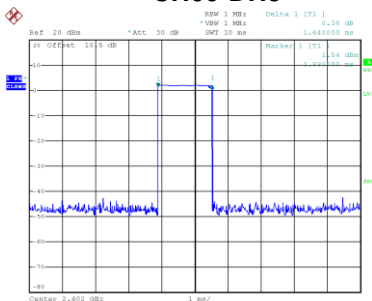


Date: 23.SEP.2021 17:38:19

CH39-DH3

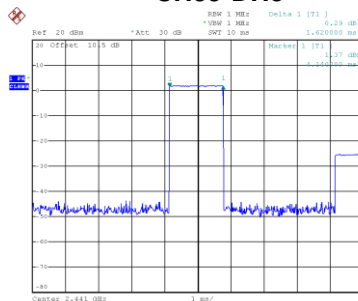


Date: 23.SEP.2021 17:38:24

CH78-DH3

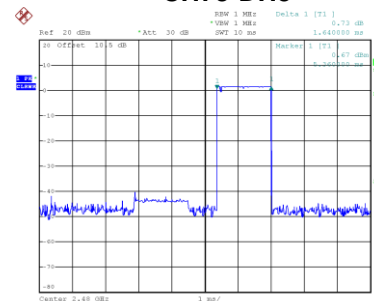


Date: 23.SEP.2021 17:38:28

H00-DH5

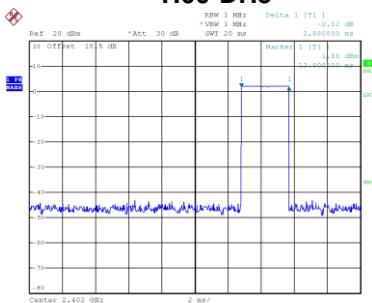


Date: 23.SEP.2021 17:45:134

CH39-DH5

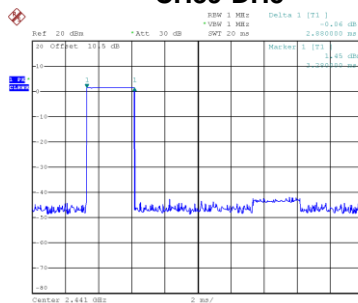

Date: 23.SEP.2021 17:45:140


CH78-DH5

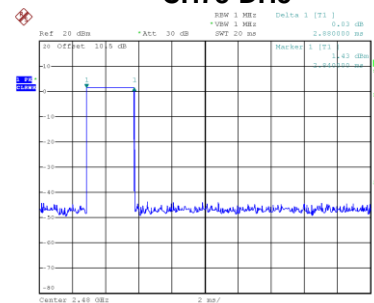


Date: 23.SEP.2021 17:45:145

Test Mode	Hopping Mode_3Mbps
-----------	--------------------


Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (s)	Limits (s)	Test Result
3DH1	2402	0.385	0.1232	0.4000	Pass
3DH3	2402	1.640	0.2624	0.4000	Pass
3DH5	2402	2.880	0.3072	0.4000	Pass
3DH1	2441	0.380	0.1216	0.4000	Pass
3DH3	2441	1.640	0.2624	0.4000	Pass
3DH5	2441	2.880	0.3072	0.4000	Pass
3DH1	2480	0.390	0.1248	0.4000	Pass
3DH3	2480	1.640	0.2624	0.4000	Pass
3DH5	2480	2.880	0.3072	0.4000	Pass

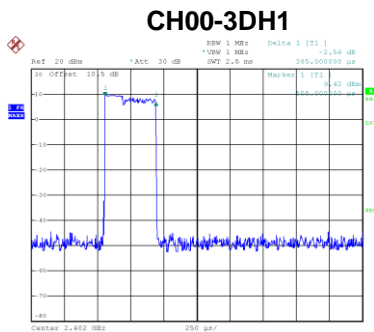


Date: 23.SEP.2021 18:06:28

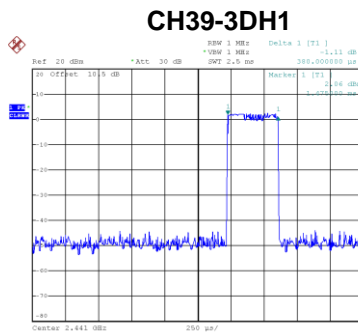


Date: 23.SEP.2021 18:06:37

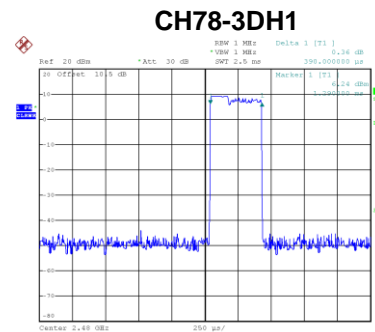


Date: 23.SEP.2021 18:06:42

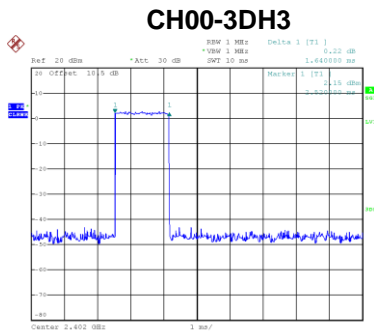


Date: 23.SEP.2021 18:07:06

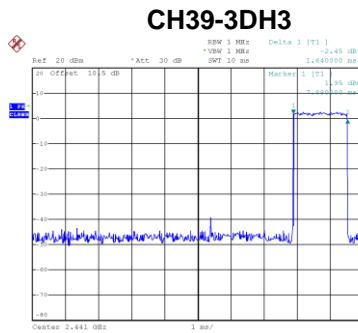


Date: 23.SEP.2021 18:07:10

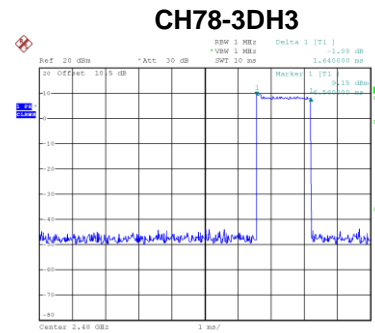


Date: 23.SEP.2021 18:07:14

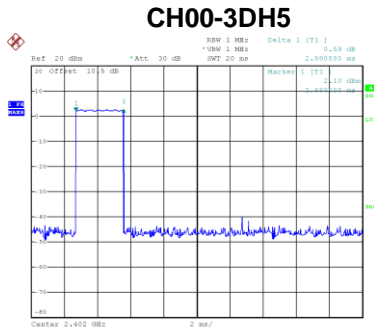

Date: 23.SEP.2021 18:17:39

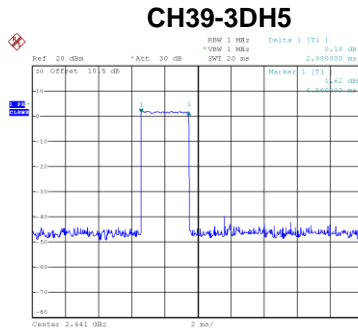

Date: 23.SEP.2021 18:17:42

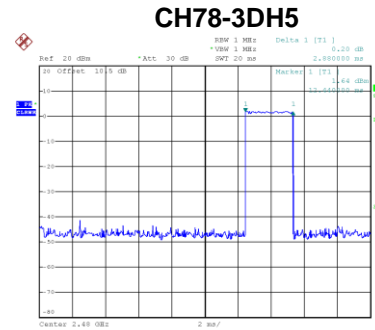


Date: 23.SEP.2021 18:17:51


APPENDIX G - HOPPING CHANNEL SEPARATION

Test Mode	Hopping Mode_1Mbps
-----------	--------------------


Channel	Frequency (MHz)	Channel Separation (MHz)	2/3 of 20 dB Bandwidth (MHz)	Test Result
00	2402	1.032	0.560	Pass
39	2441	0.993	0.571	Pass
78	2480	1.044	0.571	Pass

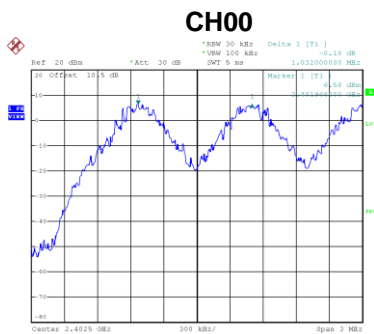

Date: 23-SEP-2021 17:40:08

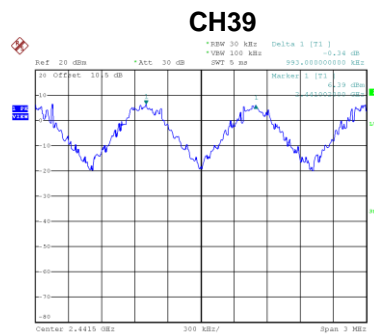


Date: 23-SEP-2021 17:41:17

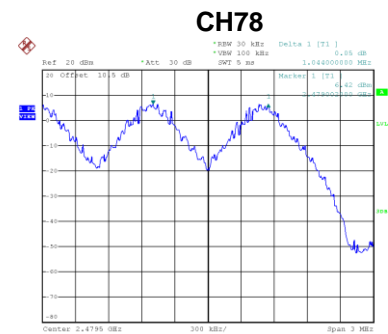


Date: 23-SEP-2021 17:42:20

Test Mode	Hopping Mode_3Mbps
-----------	--------------------


Channel	Frequency (MHz)	Channel Separation (MHz)	2/3 of 20 dB Bandwidth (MHz)	Test Result
00	2402	0.990	0.853	Pass
39	2441	0.999	0.868	Pass
78	2480	0.993	0.853	Pass

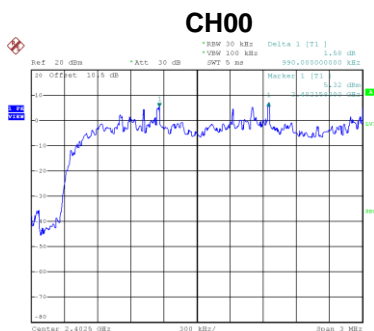

Date: 23-SEP-2021 18:08:39

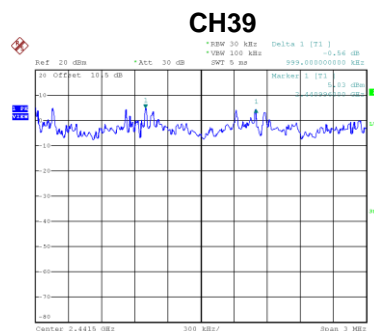

Date: 23-SEP-2021 18:09:47

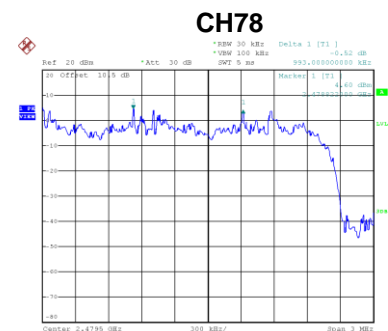

Date: 23-SEP-2021 18:10:56


APPENDIX H - BANDWIDTH

APPENDIX I - MAXIMUM OUTPUT POWER


MTK7661

Test Mode	TX Mode _1Mbps
-----------	----------------


Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Test Result
00	2402	9.48	20.97	0.1250	Pass
39	2441	9.35	20.97	0.1250	Pass
78	2480	9.32	20.97	0.1250	Pass

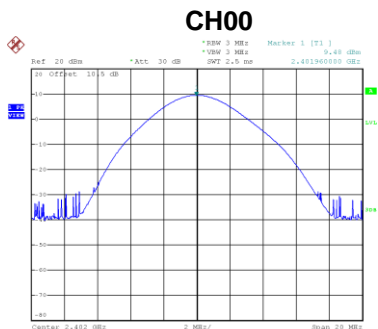

Date: 23.8BP.2021 17:29:56

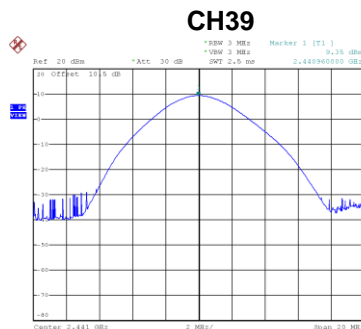


Date: 23.SEP.2021 17:34:39

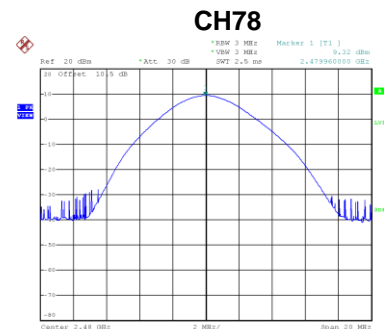


Date: 23.SEP.2021 17:36:12

Test Mode	TX Mode_2Mbps
-----------	---------------


Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Test Result
00	2402	9.38	20.97	0.1250	Pass
39	2441	9.24	20.97	0.1250	Pass
78	2480	9.31	20.97	0.1250	Pass

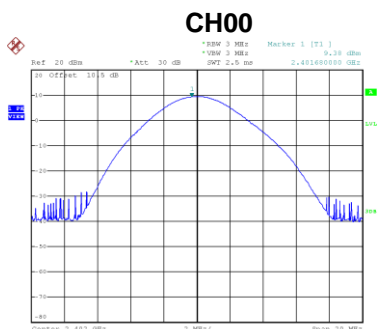

Date: 23.8BP.2021 17:48:02

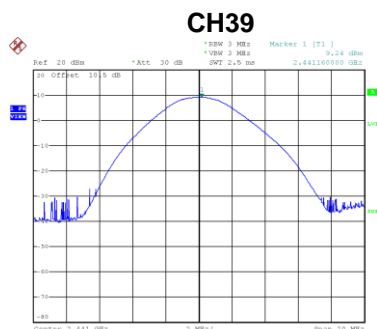


Date: 23.SEP.2021 17:49:25

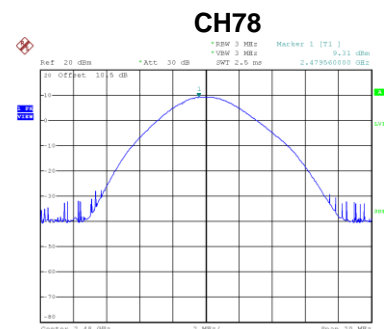


Date: 23.SEP.2021 17:51:39

Test Mode	TX Mode _3Mbps
-----------	----------------


Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Test Result
00	2402	9.51	20.97	0.1250	Pass
39	2441	9.51	20.97	0.1250	Pass
78	2480	9.45	20.97	0.1250	Pass

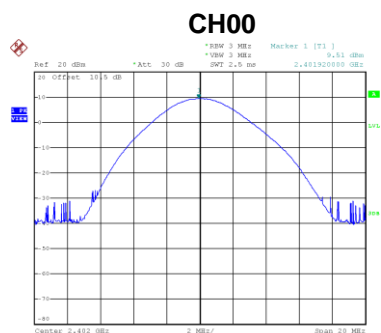

Date: 23.08P.2021 18:02:26

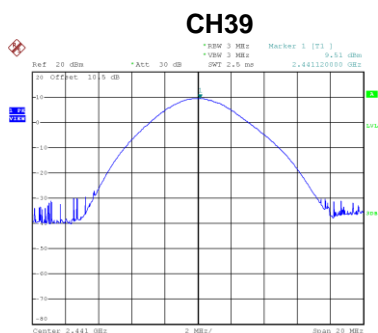

Date: 23.08P.2021 18:03:49

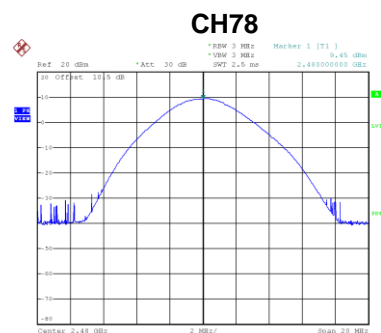


Date: 23.08P.2021 18:05:51


MTK7663

Test Mode	TX Mode _1Mbps
-----------	----------------


Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Test Result
00	2402	9.19	20.97	0.1250	Pass
39	2441	9.01	20.97	0.1250	Pass
78	2480	8.95	20.97	0.1250	Pass

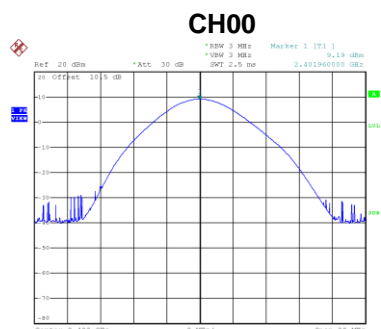

Date: 23.SEP.2021 18:37:18

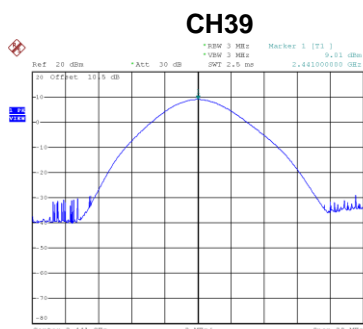


Date: 23.SEP.2021 18:38:01

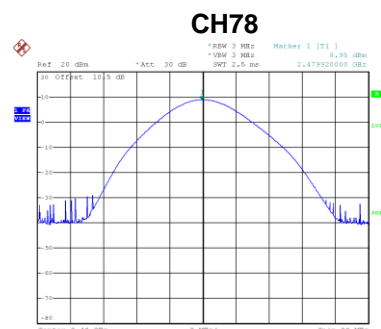


Date: 23.SEP.2021 18:38:17

Test Mode	TX Mode _2Mbps
-----------	----------------


Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Test Result
00	2402	8.95	20.97	0.1250	Pass
39	2441	8.88	20.97	0.1250	Pass
78	2480	8.92	20.97	0.1250	Pass

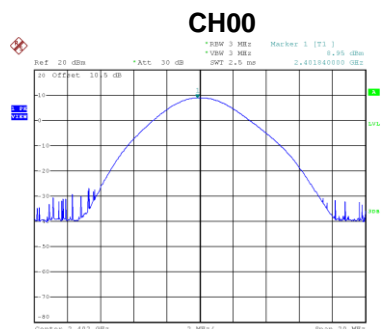

Date: 23.SEP.2021 18:38:49

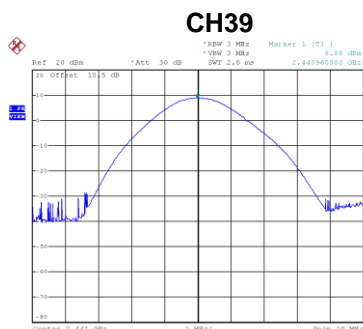


Date: 23.SEP.2021 18:39:09

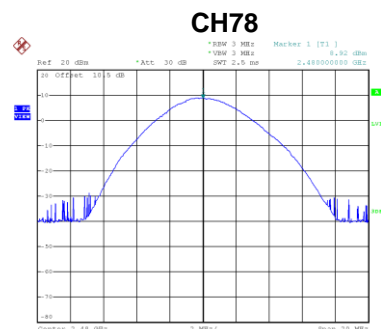


Date: 23.SEP.2021 18:39:24

Test Mode	TX Mode _3Mbps
-----------	----------------


Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Test Result
00	2402	8.97	20.97	0.1250	Pass
39	2441	8.96	20.97	0.1250	Pass
78	2480	9.01	20.97	0.1250	Pass

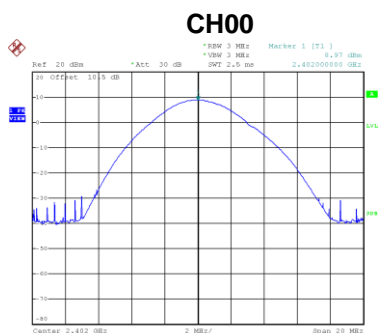

Date: 23.SEP.2021 18:40:12

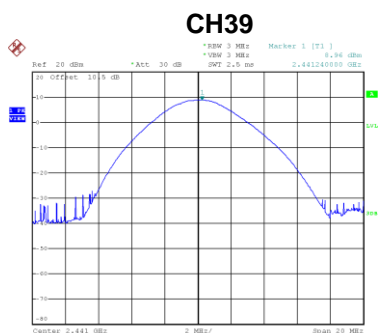

Date: 23.SEP.2021 18:40:31

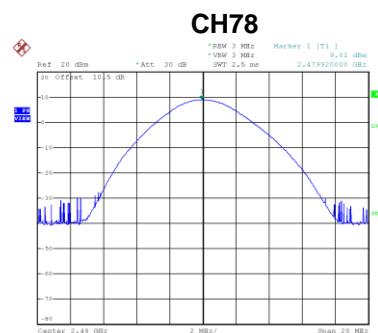


Date: 23.SEP.2021 18:40:46

APPENDIX J - CONDUCTED SPURIOUS EMISSION


Test Mode TX Mode _1Mbps

Bandedge CH00 (Lower)

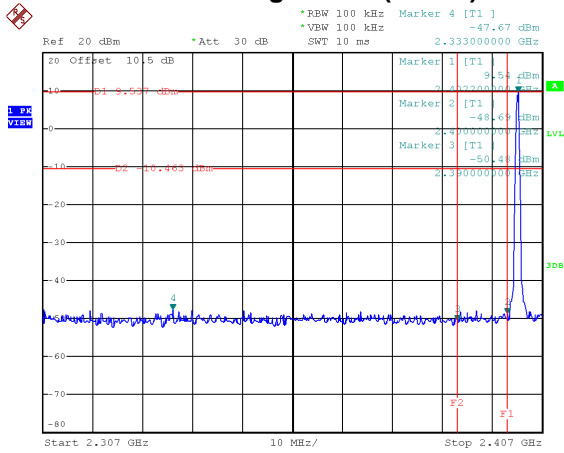


Date: 23.SEP.2021 17:28:43

Bandedge CH78 (Upper)

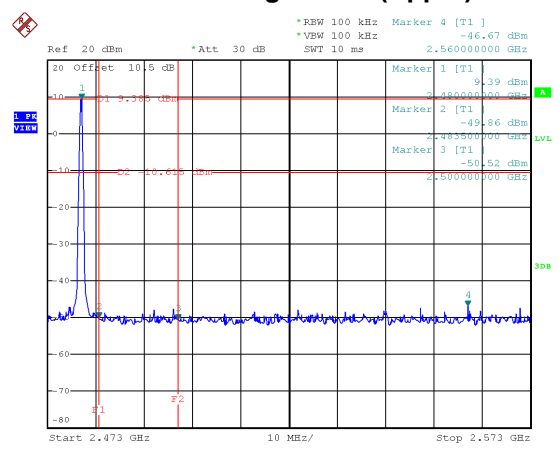


Date: 23.SEP.2021 17:35:03

Hopping on mode (Lower)

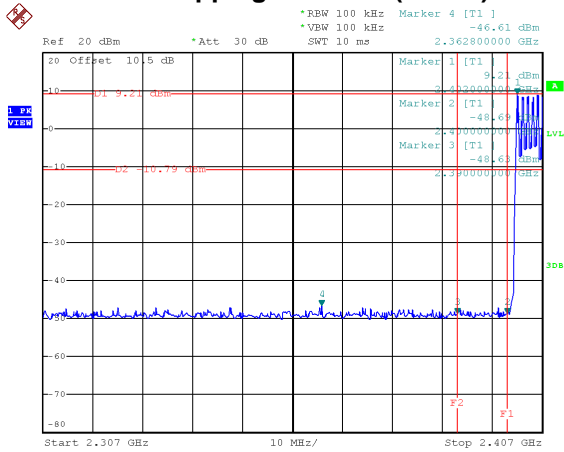


Date: 23.SEP.2021 17:44:42

Hopping on mode (Upper)

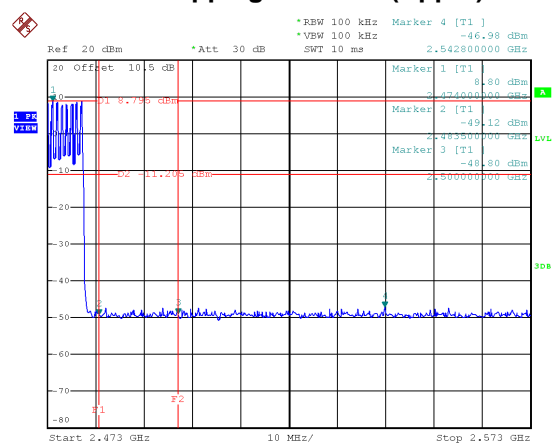


Date: 23.SEP.2021 17:45:16


CH00 – 10th Harmonic of the fundamental frequency

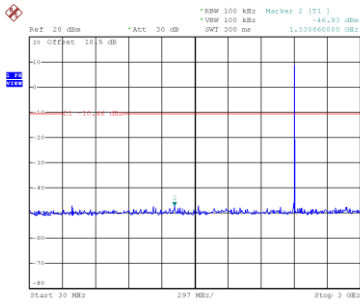

Date: 23.SEP.2021 17:29:36

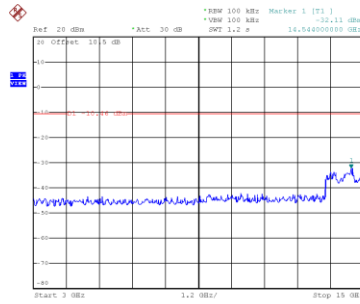


Date: 23.SEP.2021 17:29:43

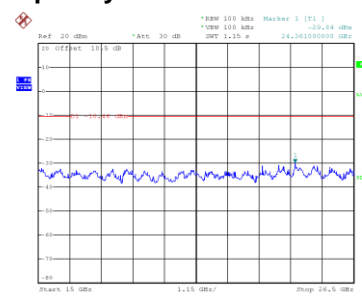


Date: 23.SEP.2021 17:29:50


CH39 – 10th Harmonic of the fundamental frequency

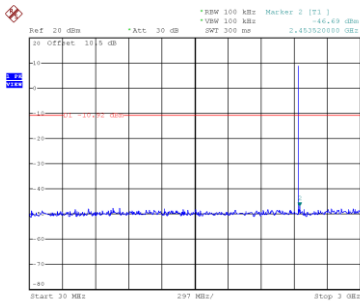

Date: 23.SEP.2021 17:33:46

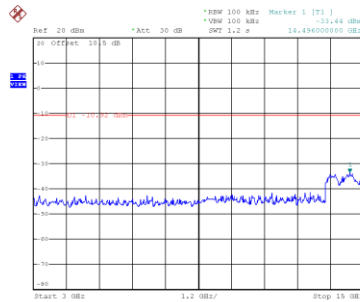


Date: 23.SEP.2021 17:33:53

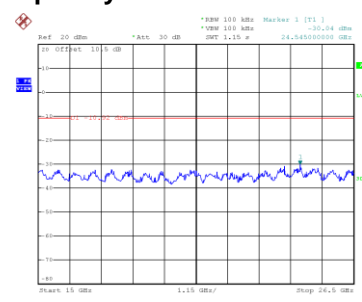


Date: 23.SEP.2021 17:34:01


CH78 – 10th Harmonic of the fundamental frequency

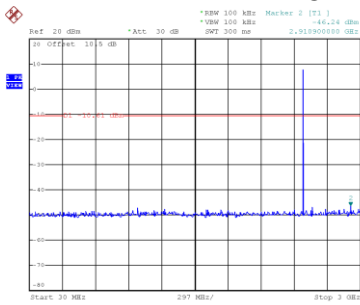

Date: 23.SEP.2021 17:35:52

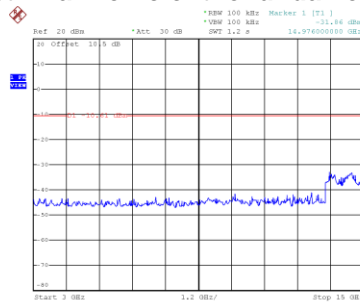


Date: 23.SEP.2021 17:35:59

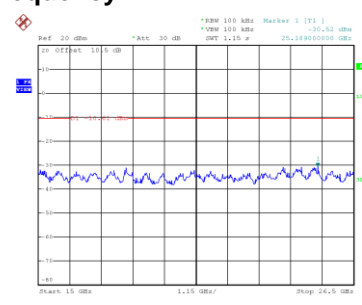

Date: 23.SEP.2021 17:36:06


Test Mode TX Mode _3Mbps

Bandedge CH00 (Lower)

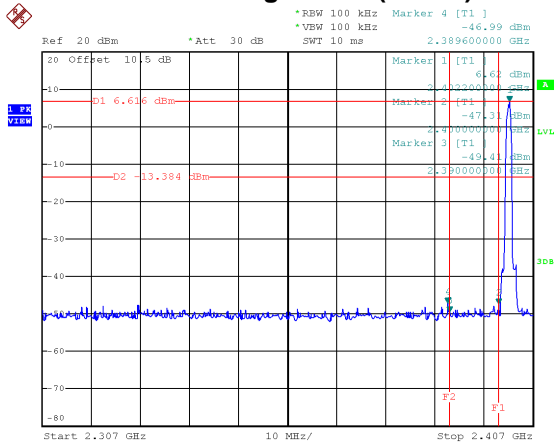


Date: 23.SEP.2021 18:01:29

Bandedge CH78 (Upper)

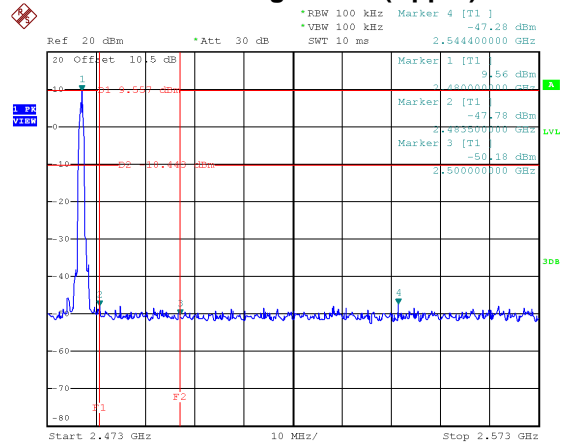


Date: 23.SEP.2021 18:04:18

Hopping on mode (Lower)

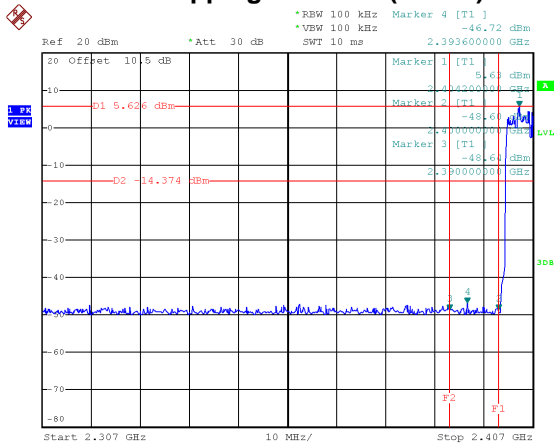


Date: 23.SEP.2021 18:16:11

Hopping on mode (Upper)

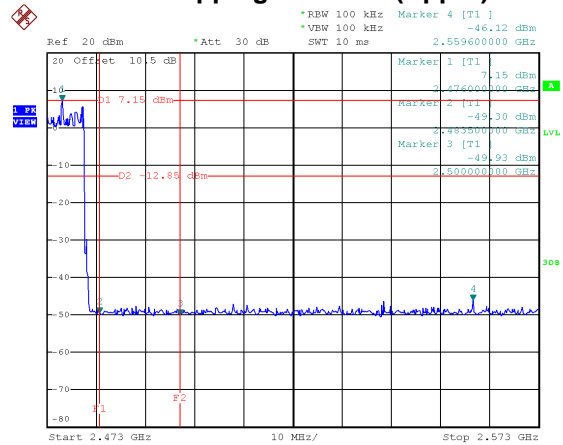

Date: 23.SEP.2021 18:16:45

CH00 – 10th Harmonic of the fundamental frequency

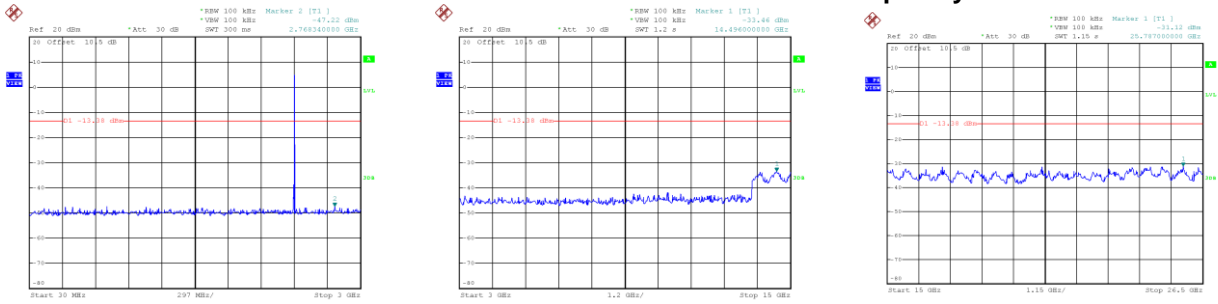


Date: 23.SEP.2021 18:02:06

Date: 23.SEP.2021 18:02:13

Date: 23.SEP.2021 18:02:20

CH39 – 10th Harmonic of the fundamental frequency

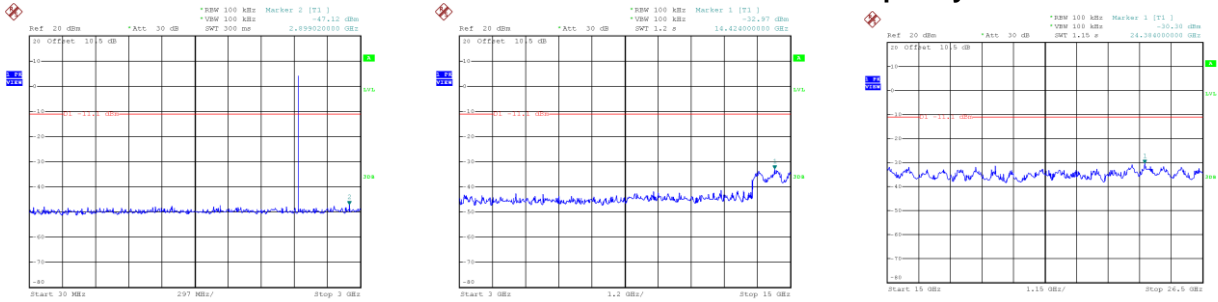


Date: 23.SEP.2021 18:03:03

Date: 23.SEP.2021 18:03:11

Date: 23.SEP.2021 18:03:18

CH78 – 10th Harmonic of the fundamental frequency

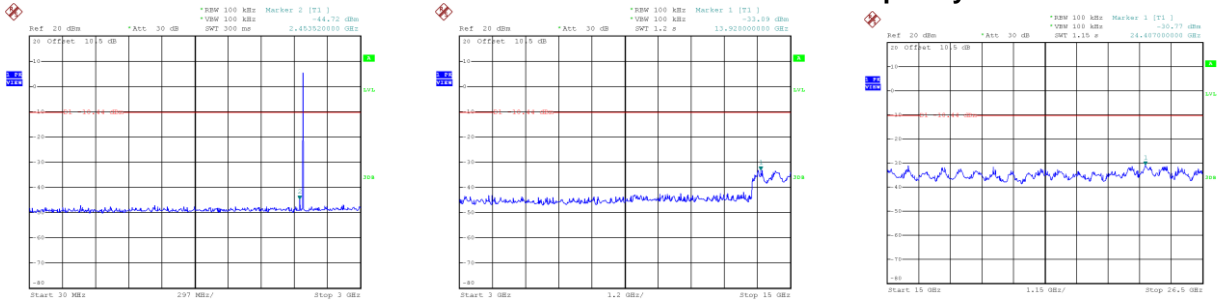

Date: 23.SEP.2021 18:05:31

Date: 23.SEP.2021 18:05:38

Date: 23.SEP.2021 18:05:45

APPENDIX K - DECLARATION FOR BLUETOOTH DEVICE

1. Output power and channel separation of a Bluetooth device in the different operating modes:

The different operating modes (data-mode, acquisition-mode) of a Bluetooth device has no influence on the output power and the channel spacing. There is only one transmitter which is driven by identical input parameters concerning these two parameters.

Only a different hopping sequence will be used. For this reason the check of these RF parameters in one op-mode is sufficient.

2. Frequency range of a Bluetooth device:

Hereby we declare that the maximum frequency of this device is: 2402 - 2480MHz. This is according to the Bluetooth Core Specification (+ critical errata) for devices which will be operated in the USA.

This was checked during the Bluetooth Qualification tests (Test Case: TRM/CA/04-E). Other frequency ranges (e.g. for Spain, France, Japan) which are allowed according the Core Specification are not supported by this device.

3. Co-ordination of the hopping sequence in data mode to avoid simultaneous occupancy by multiple transmitters:

Bluetooth units which want to communicate with other units must be organised in a structure called piconet. This piconet consist of max. 8 Bluetooth units. One unit is the master the other seven are the slaves. The master co-ordinates frequency occupation in this piconet for all units. As the master hop sequence is derived from its BD address which is unique for each Bluetooth device, additional masters intending to establish new piconets will always use different hop sequences.

4. Example of a hopping sequence in data mode:

Example of a 79 hopping sequence in data mode:

40, 21, 44, 23, 42, 53, 46, 55, 48, 33, 52, 35, 50, 65, 54, 67, 56, 37, 60, 39, 58, 69, 62, 71, 64, 25, 68, 27, 66, 57, 70, 59, 72, 29, 76, 31, 74, 61, 78, 63, 01, 41, 05, 43, 03, 73, 07, 75, 09, 45, 13, 47, 11, 77, 15, 00, 64, 49, 66, 53, 68, 02, 70, 06, 01, 51, 03, 55, 05, 04

5. Equally average use of frequencies in data mode and behaviour for short transmissions:

The generation of the hopping sequence in connection mode depends essentially on two input values:

- a) LAP/UAP of the master of the connection.
- b) Internal master clock.

The LAP (lower address part) are the 24 LSB's of the 48 BD_ADDRESS. The BD_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP (upper address part) are the 24 MSB's of the 48 BD_ADDRESS.

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For synchronisation with other units only offset are used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5 μ s. The clock has a cycle of about one day (23h30). In most case it is implemented as 28 bit counter. For the deriving of the hopping sequence the entire.

LAP (24 bits), 4 LSB's (4 bits) (Input 1) and the 27 MSB's of the clock (Input 2) are used. With this input values different mathematical procedures (permutations, additions, XOR- operations) are performed to generate the sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behaviour:

The first connection between the two devices is established, a hopping sequence was generated. For transmitting the wanted data the complete hopping sequence was not used. The connection ended.

The second connection will be established. A new hopping sequence is generated. Due to the fact that the Bluetooth clock has a different value, because the period between the two transmission is longer (and it cannot be shorter) than the minimum resolution of the clock (312.5 μ s). The hopping sequence will always differ from the first one.

6. Receiver input bandwidth and behaviour for repeated single or multiple packets:

The input bandwidth of the receiver is 1 MHz. In every connection one Bluetooth device is the master and the other one is the slave. The master determines the hopping sequence (see chapter 5). The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master.

Additionally the type of connection (e.g. single or multislot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also the slave of the connection will use these settings.

Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

End of Test Report