


15.10 SAR test plots for CDMA Band 10

CDMA BC10 1xEVDO Rel.0 Main Ant Position 2 9mm Full power 820.10MHz

Communication System: UID 0, CDMA2000 (0); Communication System Band: Secondary 800;
Frequency: 820.1 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 820.1$ MHz; $\sigma = 0.95$ S/m; $\epsilon_r = 54.135$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3825; ConvF(9.41, 9.41, 9.41); Calibrated: 2013/12/13;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn509; Calibrated: 2013/07/16
Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045
Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Area Scan (61x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.224 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 15.665 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 0.264 W/kg
SAR(1 g) = 0.176 W/kg; SAR(10 g) = 0.114 W/kg
Maximum value of SAR (measured) = 0.221 W/kg

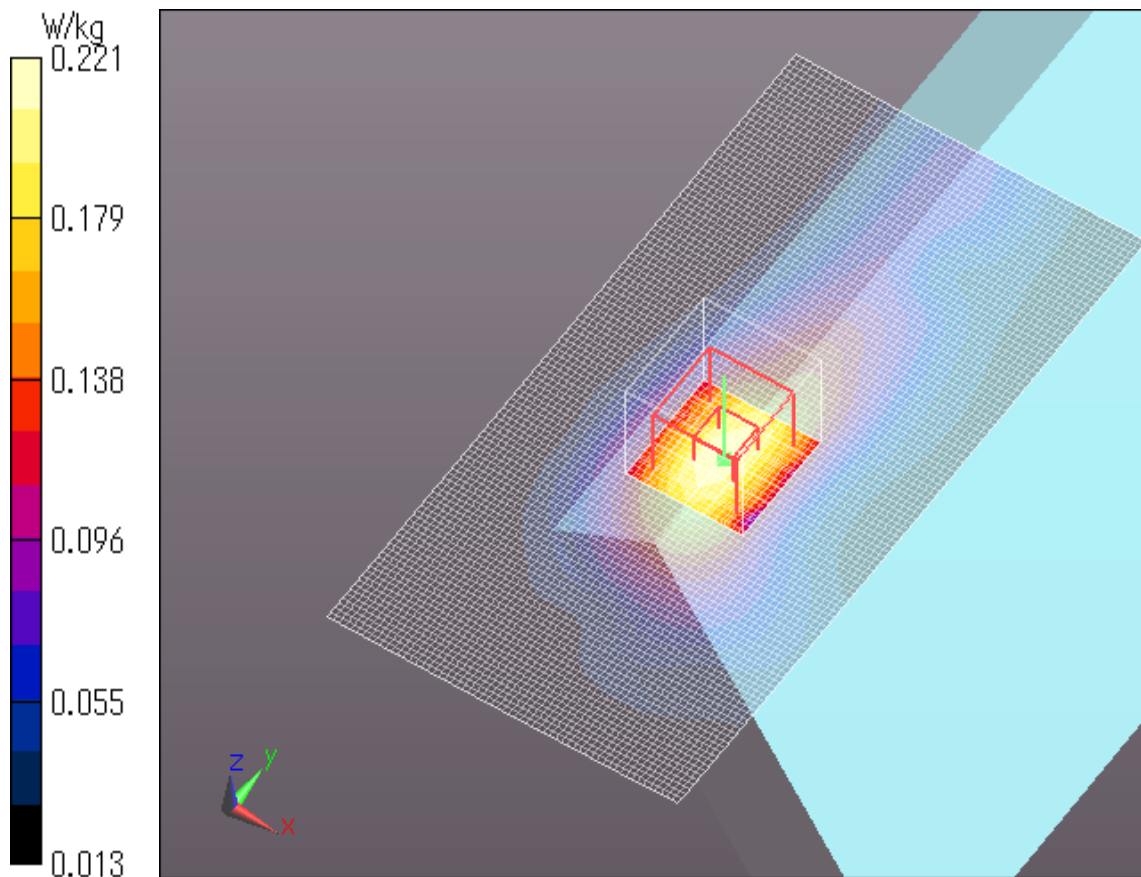


Plot No.1

CDMA BC10 1xEVDO Rel.0 Main Ant Position 4 6mm Full power 820.10MHz

Communication System: UID 0, CDMA2000 (0); Communication System Band: Secondary 800;
Frequency: 820.1 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 820.1$ MHz; $\sigma = 0.95$ S/m; $\epsilon_r = 54.135$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3825; ConvF(9.41, 9.41, 9.41); Calibrated: 2013/12/13;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn509; Calibrated: 2013/07/16
Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045
Measurement SW: DASYS2, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Area Scan (161x101x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.0774 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 9.009 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 0.0850 W/kg
SAR(1 g) = 0.060 W/kg; SAR(10 g) = 0.043 W/kg
Maximum value of SAR (measured) = 0.0718 W/kg

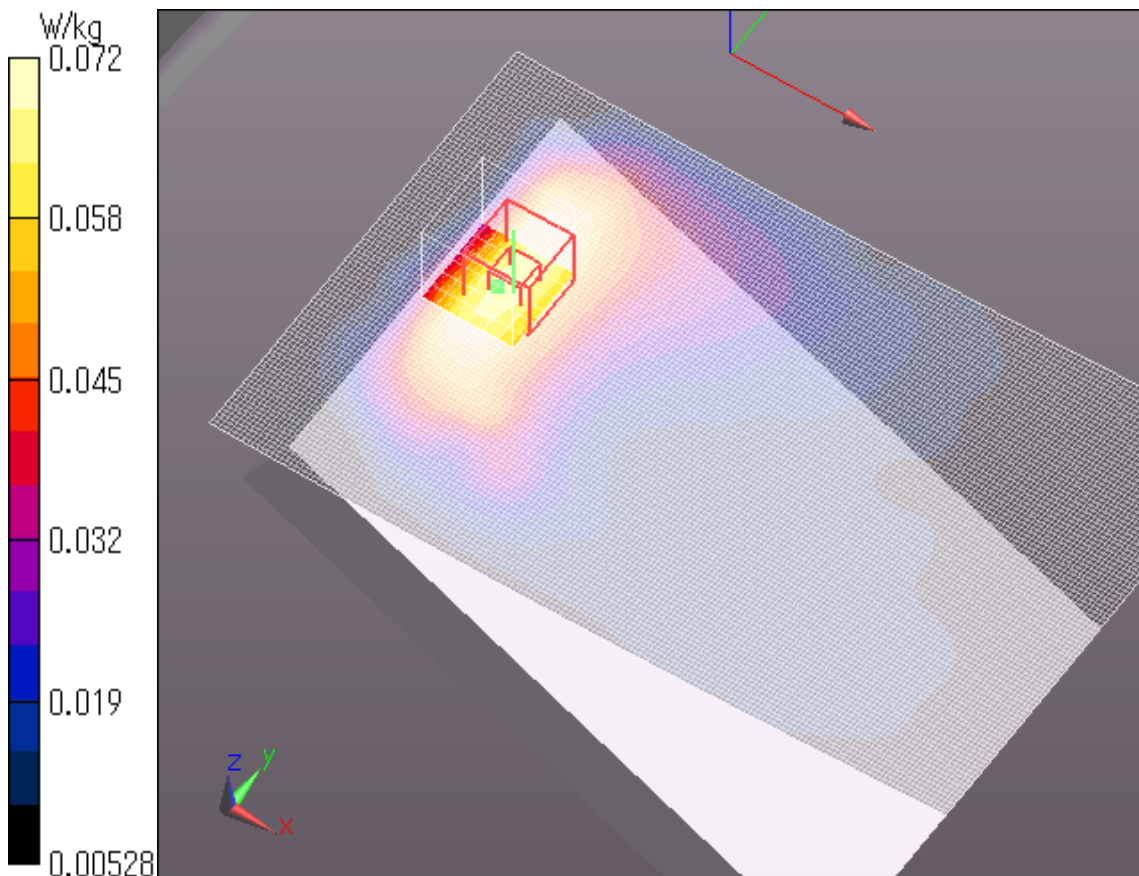

Plot No.2