



## **ELECTROMAGNETIC INTERFERENCE TEST REPORT**

Company : ZyXEL COMMUNICATIONS CORPORATION.  
Address : NO.6, Innovation Rd. II, Science- Based Industrial Park,  
Hsin-Chu, Taiwan , R.O.C.  
Sample Name : Internet Access Router  
Model : Prestige 100WH  
Date Received : JUN. 02, 1998  
Date Tested : JUN. 12, 1998

### **MEASUREMENT PROCEDURE USED :**

**FCC RULES AND REGULATION PART 15 SUBPART B  
CLASS B OCTOBER 1996 AND ANSI C63.4 MAY 1992**

WE HEREBY CERTIFY THAT: The measurements shown in the attachment were made in accordance with the procedures indicated, and the energy emitted by the equipment was found to be within the limits applicable. We assume full responsibility for the accuracy and completeness of these measurements and vouch for the qualifications of all persons taking them.

	Name	Signature	Date
Testing Engineer	C.F.Wu/NVLAP	C.F.Wu	JUL. 07, 1998
Approving Manager	Paul Y. Liao/NVLAP	Paul Y. Liao	Jul. 10, 1998

### **Notes :**

1. This report will be invalid if duplicated or photocopied in part.
2. This report refers only to the specimen(s) submitted to test, and is invalid as separately used.
3. This report is invalid without examination stamp and signature of this institute.
4. The tested specimen(s) will be preserved for thirty days from the date issued.
5. This is a NIST/NVLAP accredited report but not constituted and endorsed by US government.



## TABLE OF CONTENTS

### TITLE

### PAGE NO.

<b>1. GENERAL INFORMATION.....</b>	<b>3</b>
1.1 DESCRIPTION OF EUT .....	3
1.2 DESCRIPTION OF PERIPHERALS.....	4-5
1.3 EUT & PERIPHERALS SETUP DIAGRAM.....	6
1.4 EUT OPERATING CONDITION.....	7
1.5 DESCRIPTION OF TEST SITE .....	7
<b>2. CONDUCTED POWERLINE TEST .....</b>	<b>8</b>
2.1 TEST EQUIPMENTS .....	8
2.2 TEST SETUP.....	8
2.3 CONDUCTED POWER LINE EMISSION LIMIT.....	9
2.4 TEST PROCEDURE .....	9
2.5 UNCERTAINTY OF CONDUCTED EMISSION .....	9
2.6 LINE CONDUCTED RF VOLTAGE MEASUREMENT .....	10
2.7 PHOTOS OF CONDUCTION TEST.....	10
<b>3. RADIATED EMISSION TEST.....</b>	<b>10</b>
3.1 TEST EQUIPMENTS .....	10
3.2 TEST SETUP.....	10
3.3 RADIATION LIMIT .....	10
3.4 TEST PROCEDURE .....	10
3.5 UNCERTAINTY OF RADIATED EMISSION.....	10
3.6 RADIATED RF NOISE MEASUREMENT .....	10
3.7 PHOTOS OF OPEN SITE.....	10-16



**Industrial Technology Research Institute**

*Electronics Research & Service Organization*

Bldg. 17, 195-4 Sec. 4, Chung Hsing Rd., Chutung, Hsinchu, 310  
Taiwan, Republic Of China  
TEL : 886-3-5917069 FAX : 886-3-5825720

FCC ID : I88PRESTIGE100WH

Report No. : 500-8706-005

Page 3 of 16

---

## 1. GENERAL INFORMATION

### 1.1 DESCRIPTION OF EUT

MANUFACTURER : ZyXEL COMMUNICATIONS CORPORATION.

SAMPLE NAME : Internet Access Router

MODEL NUMBER : Prestige 100WH

SERIAL NO. : -----

POWER SUPPLY : 16VAC(From Power Adaptor)



## **1.2 DESCRIPTION OF PERIPHERALS**

### **(1) PC**

MODEL NUMBER : POWERMATE 486SX/25e  
SERIAL NUMBER : -----  
MANUFACTURER : NEC CORP.  
F.C.C. ID : B7ZA72  
POWER CORD : Unshielded , Detachable , 1.8m

### **(2) MONITOR**

MODEL NUMBER : JC-1571VMA-2  
SERIAL NUMBER : 6Z01162EA  
MANUFACTURER : NEC CORP.  
F.C.C. ID : A3DJC-1571VMA-2  
POWER CORD : Unshielded , Detachable , 1.8m

### **(3) KEYBOARD**

PRODUCT NUMBER : KB-8923  
SERIAL NUMBER : 0081513  
MANUFACTURER : IBM CORP.  
F.C.C. ID : E8HKB-5923  
POWER CABLE : +5VDC (From PC)

### **(4) PRINTER**

MODEL NUMBER : 5152-002  
SERIAL NUMBER : 0754365  
MANUFACTURER : IBM CORP.  
F.C.C. ID : BKM9A85152002



**(5) MODEM**

MODEL NUMBER : 4007AM  
SERIAL NUMBER : A10740073303  
MANUFACTURER : Hayes CORP.  
F.C.C. ID : BFJ4000AM

**(6) MODEM**

MODEL NUMBER : Comet 336  
SERIAL NUMBER : -----  
MANUFACTURER : ZyXEL Communications Corp.  
FCC ID : -----

**(7) PSTN HUB Router**

MODEL NUMBER : Prestige 100MH  
SERIAL NUMBER : R2P00I000ZZ  
MANUFACTURER : ZyXEL Communications Corp.  
FCC ID : I88PRESTIGE100MH  
POWER SOURCE : 16VAC(from Power Adapter)

**(8) Telephone Line Emulator**


MODEL NUMBER : TLE101- II  
MANUFACTURER : ASC II Corp.  
FCC ID : -----

**(9) Cable**

NO.	TYPE	Connector	Shielded	Length
A	D Type	RS232, metal	No	1.5m
B	WAN cable	RJ-45, plastic	No	10m
C	LAN cable	RJ-45, plastic	No	10m
D	Line cable	RJ-45,plestic	No	10m



### 1.3 EUT & PERIPHERALS SETUP DIAGRAM

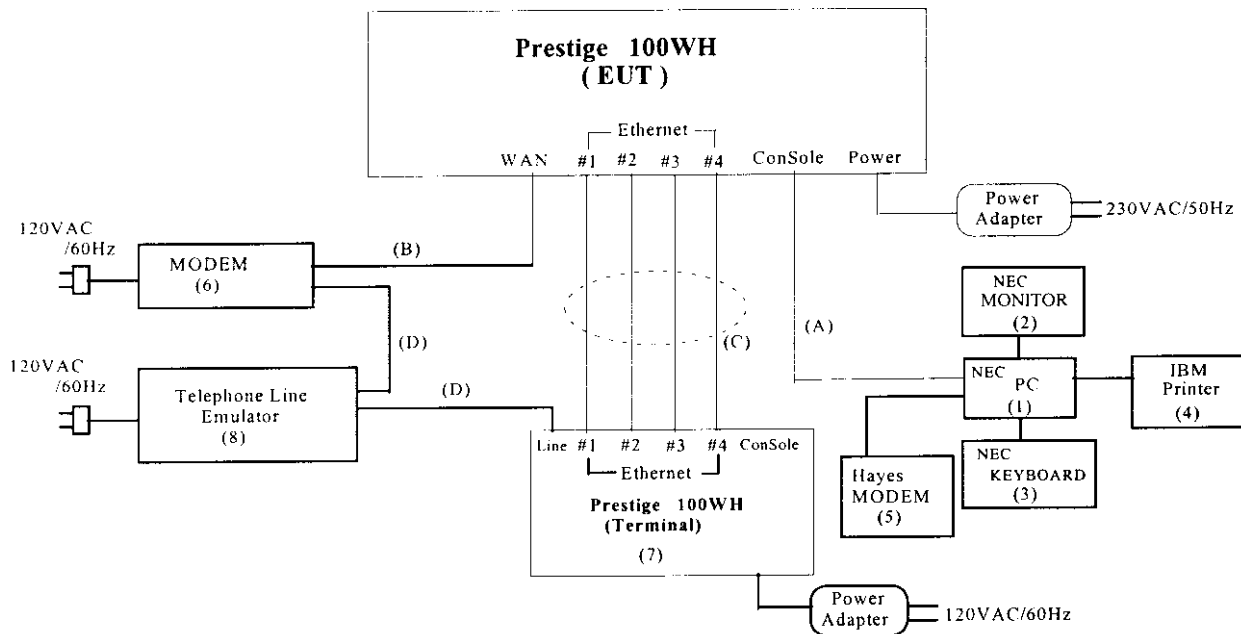

The indicated numbers (1)(2)(A)(B)----please refer to item 1.2.



## 1.4 EUT OPERATING CONDITION

1. Turned on EUT's power.
2. EUT will send/receive pockets to/from MODEM via WAN cable.
3. MODEM will send/receive pockets to/from Terminal via Telephone Line Emulator.
4. EUT will send/receive pockets to/from Terminal via Ethernet#1 cable.
5. EUT will send/receive pockets to/from Terminal via Ethernet#2 cable.
6. EUT will send/receive pockets to/from Terminal via Ethernet#3 cable.
7. EUT will send/receive pockets to/from Terminal via Ethernet#4 cable.
8. EUT will send/receive pockets to/from WAN via Telephone Line Emulator.
9. EUT will show statistics message to PC via RS-232 cable.
10. Repeat step 2~6.

## 1.5 DESCRIPTION OF TEST SITE

SITE DESCRIPTION	: FCC certificate NO. :31040/SIT DNV certificate NO. :510-96-1016 TUV certificate NO. : I9664582-9610 Lloyd's certificate NO. :LA003 BCIQ certificate NO. :SL2-IN-E-02 NVLAP Lab code : 200118-0 CNLA certificate NO. : CNLA-ZL97018 VCCI certificate NO. : R-629, C-650
NAME OF SITE	: Electronics Research & Service Organization Industrial Technology Research Institute
SITE LOCATION	: K500, 195-4 , sec. 4, Chung Hsing Rd., Chu-Tung Chen. Hsin-Chu, Taiwan 31015 R.O.C.




## 2. CONDUCTED POWERLINE TEST

### 2.1 TEST EQUIPMENTS

The following test equipments are used during the conducted powerline tests :

MANUFACTURER OR TYPE	MODEL No	SERIAL NO.	DATE OF CALIBRATION
SPECTRUM ANALYZER & DISPLAY	HP 8568A	2235A02320	MAR. 05, 1998
QUASI-PEAK ADAPTER	HP 85650 A	2341A00672	MAR. 05, 1998
ISOLATION TRANSFORMER	SOLAR 7032-1	N/A	N/A
L.I.S.N.	EMCO 3850/2	9311-1025 9401-1028	MAR. 24, 1998
TEST RECEIVER	R/S ESH3	8720791118	MAR. 13, 1998
SHIELDED ROOM	KEENE 5983	N/A	N/A

### 2.2 TEST SETUP

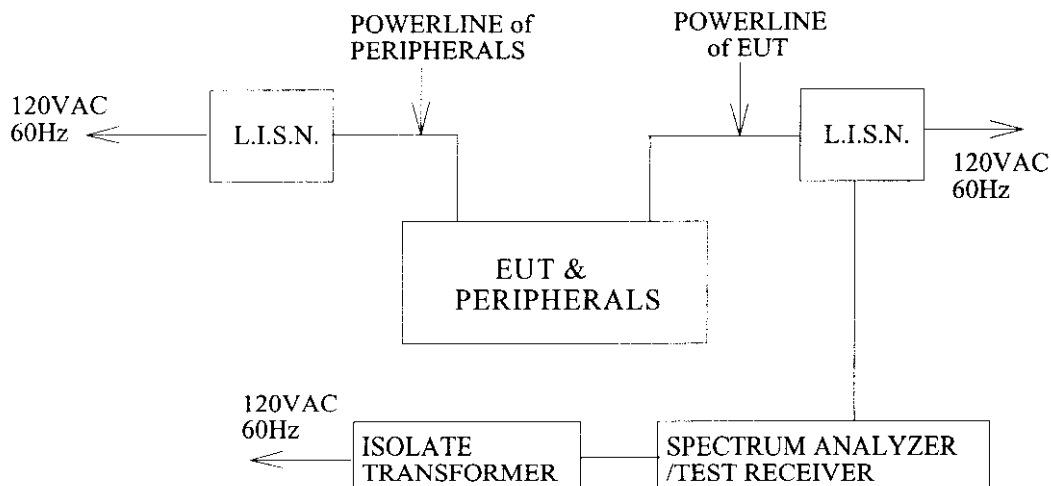





## 2.3 CONDUCTED POWER LINE EMISSION LIMIT

FREQUENCY (MHz)	MAXIMUM RF LINE VOLTAGE (dB $\mu$ V)	
	CLASS A	CLASS B
0.45 - 1.705	60	48
1.705 - 30.0	69.5	48

## 2.4 TEST PROCEDURE

The test procedure is performed in a 12ft $\times$ 12ft $\times$ 8ft(L $\times$ W $\times$ H) shielded room.

the EUT along with its peripherals were placed on a 1.0m(W) $\times$  1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

## 2.5 UNCERTAINTY OF CONDUCTED EMISSION

The uncertainty of conducted emission is  $\pm 1.36$ dB.



## 2.6 LINE CONDUCTED RF VOLTAGE MEASUREMENT

The frequency spectrum from 0.45 MHz to 30 MHz was investigated. All emissions not reported below are more than 20 dB below the prescribed limits.

All readings are Quasi-peak values.

Temperature : 22 °C

Humidity : 60 % RH

FREQUENCY (MHz)	READING(dB $\mu$ V)		LIMITS (dB $\mu$ V)
	ONE END & GRD'D Q.P.	THE OTHER END & GRD'D Q.P.	
0.450	*	*	48.00
0.915	*	31.03	48.00
0.975	32.33	*	48.00
1.008	*	31.73	48.00
1.286	32.15	*	48.00
4.401	34.61	*	48.00
4.514	*	33.61	48.00
4.992	38.71	*	48.00
4.998	*	31.60	48.00
10.025	35.55	35.65	48.00
14.940	*	32.67	48.00
15.066	34.47	*	48.00
20.130	35.48	*	48.00
20.300	*	34.88	48.00
23.318	39.59	*	48.00
23.713	*	34.59	48.00
26.338	36.59	35.19	48.00
30.000	*	*	48.00

REMARKS : 1. \* Undetectable



### 3. RADIATED EMISSION TEST


#### 3.1 TEST EQUIPMENTS

The following test equipments are utilized in making the measurements contained in this report.

MANUFACTURER OR TYPE	MODEL NO	SERIAL NO	DATE OF CALIBRATION
CHASE BI-LOG ANTENNA	CBL6111A	1546	MAY.23, 1998
R/S TEST RECEIVER	ESMI	842088/005 841978/008	MAY.29, 1998
OPEN SITE	-----	No.1	JUL. 18, 1998

#### 3.2 TEST SETUP

The diagram below shows the test setup which is utilized to make these measurements.

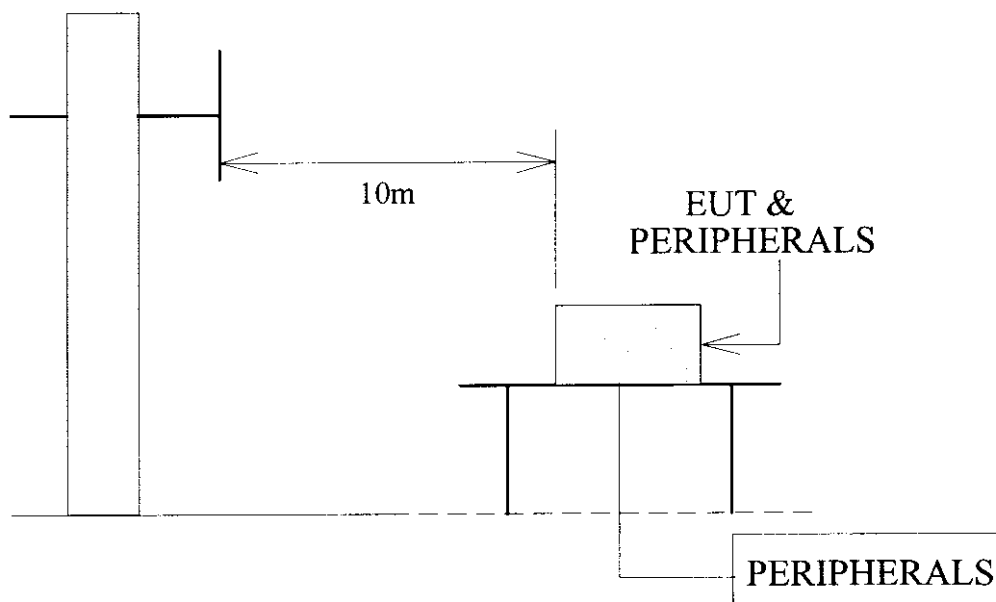

Antenna Elevation Variable



### 3.3 RADIATION LIMIT

All emanation from a class B computing device or system , including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified below :

FREQUENCY (MHz)	FIELD STRENGTHS(dB $\mu$ V/M)	
	CLASS A(10m)	CLASS B(3m)
30—88	39.0	40.0
88—216	43.5	43.5
216—960	46.4	46.0
960—1000	49.5	54.0

Note : (1)The tighter limit shall apply at the edge between two frequency bands.

(2)Distance refers to the distance in meters between the measuring instrument antenna and the closest point of any part of the device or system.

### 3.4 TEST PROCEDURE

The devices under test were placed on a rotatable table top 0.8 meter above ground. The table was rotated 360 degrees to determine the position of the highest radiation. EUT is set 10 meters from the interference receiving antenna which is mounted on the top of a variable height mast. The antenna height is varied between one meter and four meters above ground to find the maximum value of the field strength Both horizontal polarization and vertical polarization of the antenna are set to make the measurement.

The bandwidth setting on the E.M.I. meter (R/S TEST RECEIVER ESMI) is 120 KHz.

The levels are quasi peak value readings. The frequency spectrum from 30MHz to 1000MHz was investigated.

### 3.5 UNCERTAINTY OF RADIATED EMISSION

The uncertainty of radiated emission is  $\pm 2.72$ dB.



### 3.6 RADIATED RF NOISE MEASUREMENT

The frequency spectrum from 30 MHz to 1000 MHz was investigated. All emissions not reported below are more than 20 dB below the prescribed limits.

All readings are quasi-peak values.

Temperature : 30 °C

Humidity : 88% RH

FREQ- UENCY (MHz)	ANTENNA FACTOR (dB)	CABLE LOSS (dB)	METER READING AT10m (dB $\mu$ V/M)		LIMITS (dB $\mu$ V/M)	EMISSION LEVEL AT3m (dB $\mu$ V/M)	
			HORIZON- TAL	VERTICAL		HORIZON- TAL	VERTICAL
30.00	*	*	*	*	40.00	*	*
47.85	9.15	1.46	*	10.52	40.00	*	31.13
122.88	11.46	2.26	5.20	8.28	43.50	28.92	32.00
130.00	11.57	2.33	3.52	5.20	43.50	27.42	29.10
150.00	11.15	2.50	8.28	8.84	43.50	31.93	32.49
184.02	9.03	2.72	*	4.92	43.50	*	26.67
184.20	9.03	2.72	3.52	*	43.50	25.27	*
190.00	9.09	2.75	5.76	12.76	43.50	27.60	34.60
210.00	9.75	2.86	8.56	6.04	43.50	31.17	28.65
220.00	10.31	2.92	*	7.72	46.00	*	30.95
225.00	10.59	2.95	6.32	8.00	46.00	29.86	31.54
233.24	11.03	3.00	*	5.48	46.00	*	29.51
400.00	15.71	3.80	9.68	16.40	46.00	39.19	45.91
450.00	16.50	4.00	*	9.68	46.00	*	40.18
575.01	18.89	4.42	*	5.20	46.00	*	38.51
1000.00	*	*	*	*	54.00	*	*

REMARKS : 1. \* Undetectable

2. Emission level (dB  $\mu$  V/M) = Antenna Factor (dB) + Cable loss (dB)  
+ Meter Reading (dB  $\mu$  V/M) + transferred factor 10(dB)

3. 10m measured data are transferred to 3m by the formula

$L2 = L1(d1/d2) \mu$  V/M from CISPR 22

$20\text{Log}L2 = 20\text{Log}L1 + 20\text{Log}(d1/d2)$  dB  $\mu$  V/M

4. The test data marked in gray background means the EUT emission data is located in the margin uncertainty range of emission limits.