


English

Micro4


Slider Motor

AA-E3

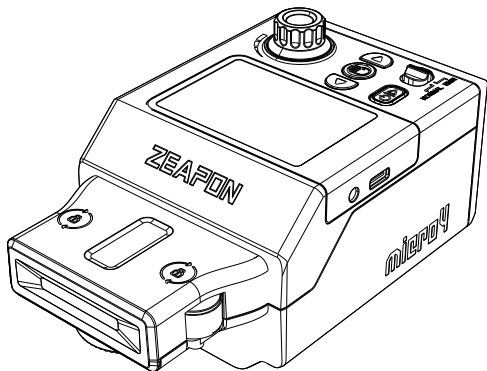


Manual

Description

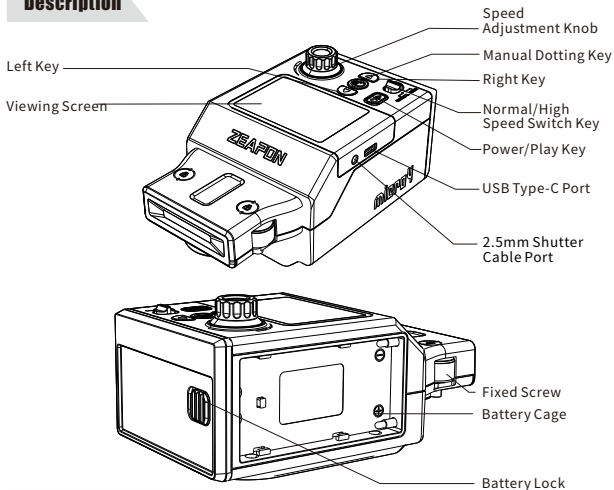

UI Interface Description

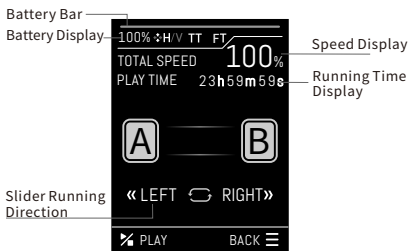

Function Introduction

Name	Function
Left Key	Can make the slider move left
Right Key	Can make the slider move right
Touch Screen	Operated and displayed via touch screen
Fixed Screw	For fixing between the slider and motor
Speed Adjustment Knob	Real-time speed adjustment in normal or high speed mode
Manual Dotting Key	Switch to manual dotting mode
Normal/High Speed Switch Key	Switch between normal speed and high speed
Power/Play Key	Power switch/Play/Pause
USB Type-C Port	Power the motor (PD charger: 9V/3A, 12V/2.5A)
2.5mm Shutter Cable Port	Can connect to a camera via shutter cable for slider-controlled camera photography
Battery Cage	Compatible with F550/F750/F970 lithium batteries
Battery Lock	Fixing between battery and battery cage



Function	Key Action	Beep
Power On/Off	Press and hold the Power/Play key for 3 seconds	/
Move left/right	Press and hold the left/right direction key	/
Speed Adjustment	Rotate the speed adjustment knob	/
Create waypoints	/	Create point A, one beep
		Create point B, two beeps
Delete AB waypoints	Press both left and right direction keys together	One long beep
Run/Pause	Tap the Power/Play key	/
Loop Playback	/	/
Automatic left/right movement	Double tap left/right key	/
Low Battery	When the battery is below 20%, the battery bar on the touch screen turns red	/

Power Supply Method	PD Quick Charger (9V~3A/12V~2.5A)	12 kg/423.28 oz / 26.45 lbs	4.5 kg/158.73 oz / 9.92 lbs	12 kg/423.28 oz / 26.45 lbs	2 kg/70.54 oz / 4.4 lbs
	Battery (7.2V~8.4V)	12 kg/423.28 oz / 26.45 lbs	4.5 kg/158.73 oz / 9.92 lbs	12 kg/423.28 oz / 26.45 lbs	2 kg/70.54 oz / 4.4 lbs


Operating Temperature: -10°C~60°C

The Micro4 motor is compatible with Micro4 M500/M700/M1000 slider lengths


Motor Installation



Operating Scenarios




Horizontal Mode




Vertical/Inclined Mode

Delete AB Points



Press both left and right direction keys to delete

Instantaneous Speed Adjustment



1%~100% Display


Speed Adjustment Knob

Rotate the speed adjustment knob, and the speed will be displayed in real-time from 1% to 100%

Single Device: In video mode, you can adjust speed instantly during operation

Multiple Devices: Speed adjustment is not available during operation

High Speed Switch





High Speed Icon


Press the "Normal/High Speed Switch Key" on the motor to switch from standard to high Speed mode. The corresponding high Speed icon will appear on the screen


Note: When switching to high speed, pay attention to the load changes

Normal/High Speed Switch Key

Point whit APP

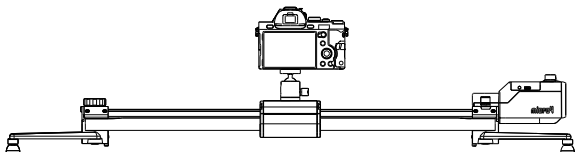

- 1 Long press  for 3 seconds to turn on
- 2 Open the app and connect to the corresponding slider
- 3 Click Point A to set Point A
- 4 Slide the left and right ICONS of the APP to the appropriate position to release

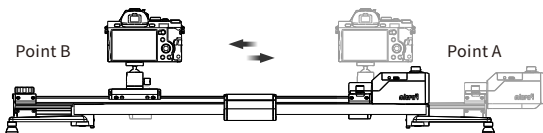

- 5 Click Point B to set Point B
- 6 Click the play button

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Radiation Exposure Statement.

The device has been evaluated to meet general RF exposure requirement. in portable exposure condition without restriction.

Tips

Download the Zeapon Lab app from major app markets or the official ZEAPON website!



Download App from Zeapon web

Please note: This product does not include batteries or battery chargers. If needed, please purchase separately!

Thank you for using!

✕ Unauthorized disassembly of the motor's internal structure will void the warranty!