


Test Mode: UNII-2A/TX AC20 Mode\_CH52/CH60/CH64

| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|------------------------------|
| CH52    | 5260            | 24.89                 | 18.30                        |
| CH60    | 5300            | 24.90                 | 18.20                        |
| CH64    | 5320            | 24.49                 | 18.30                        |

Note:


The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10log B, where B is the 26dB Bandwidth in megahertz.

TX CH52

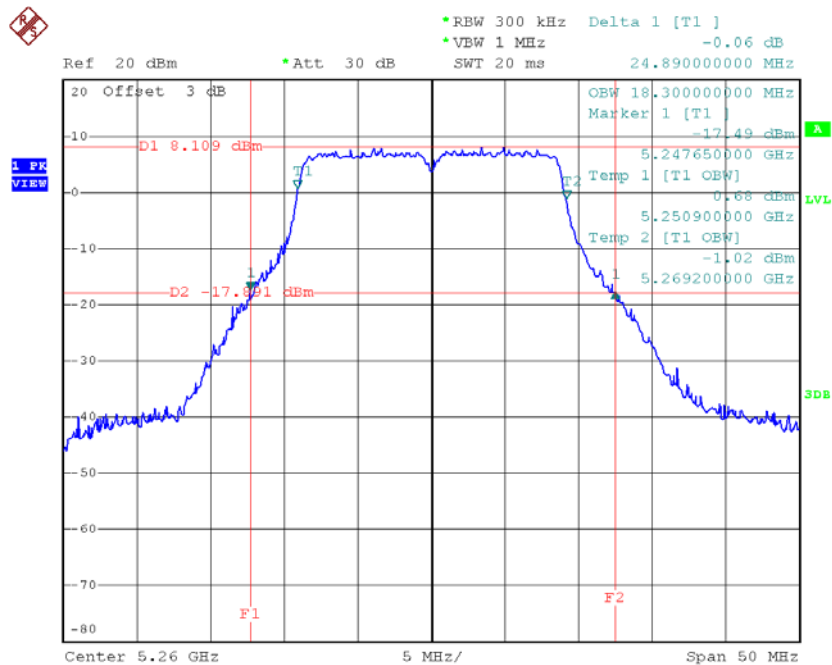


Date: 26.NOV.2018 18:00:29

# TX CH60

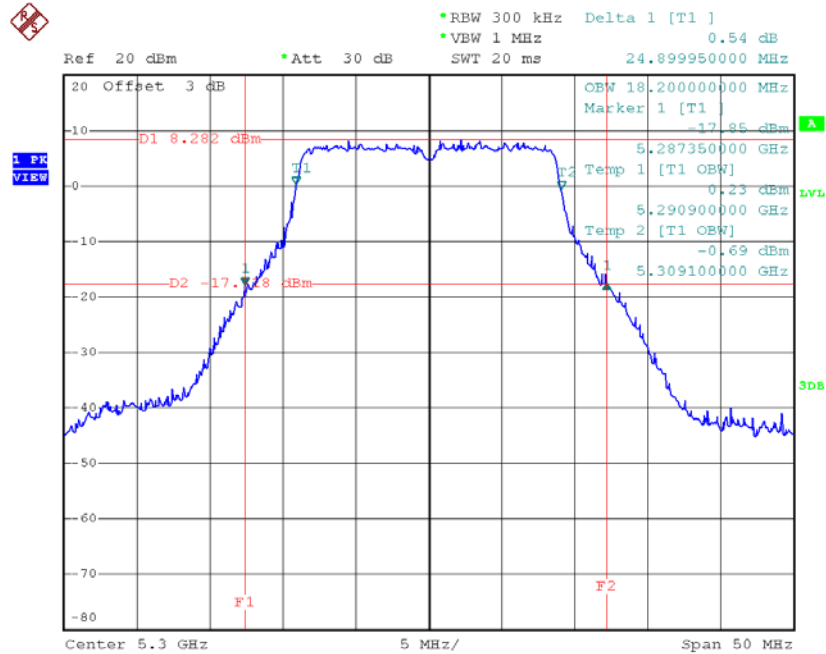

Date: 26.NOV.2018 18:01:30

# TX CH64

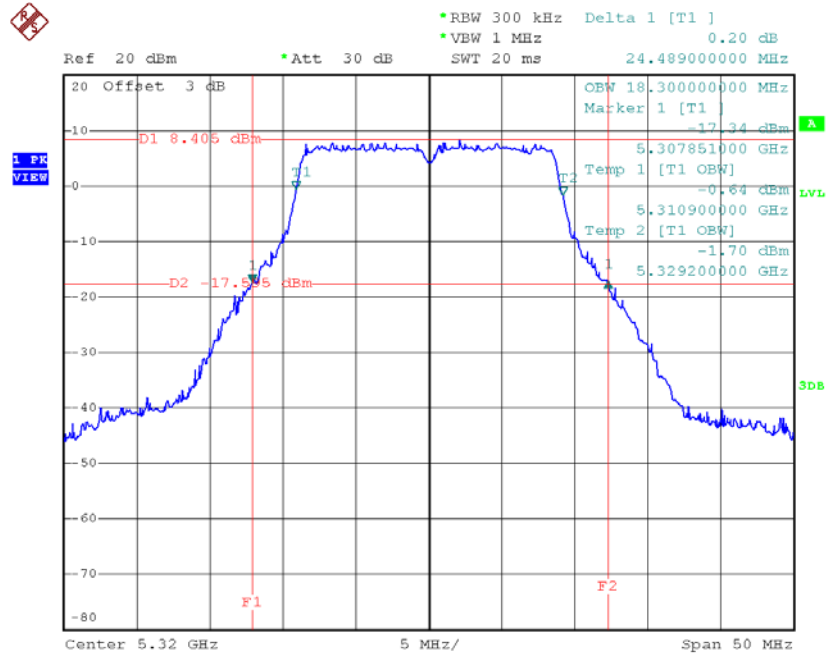


Date: 26.NOV.2018 18:02:47

**Test Mode: UNII-2A/TX AC40 Mode\_CH54/CH62**

| Channel | Frequency<br>(MHz) | 26 dB Bandwidth<br>(MHz) | 99% Occupied Bandwidth<br>(MHz) |
|---------|--------------------|--------------------------|---------------------------------|
| CH54    | 5270               | 44.61                    | 37.20                           |
| CH62    | 5310               | 43.90                    | 37.20                           |


Note:  
 The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10\log B$ , where B is the 26dB Bandwidth in megahertz.

### TX CH54

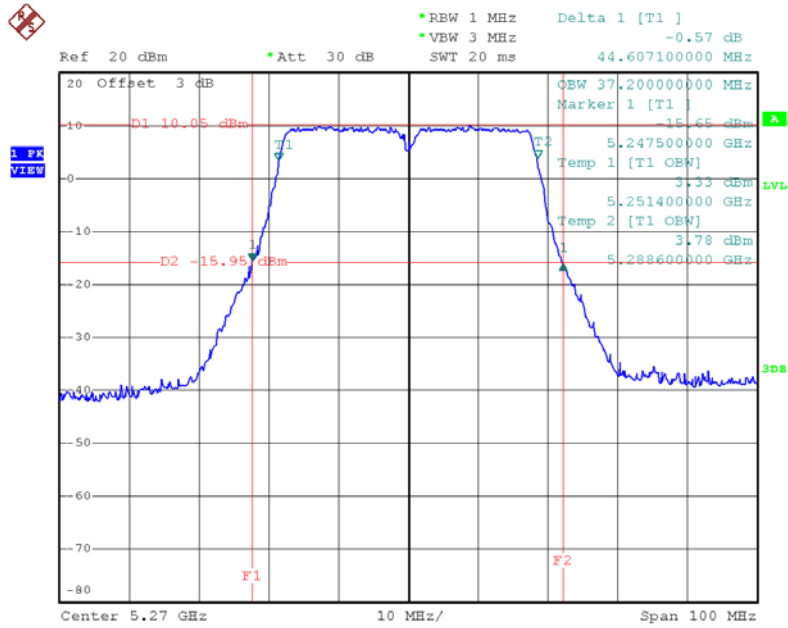

Date: 28.NOV.2018 15:05:30

### TX CH62

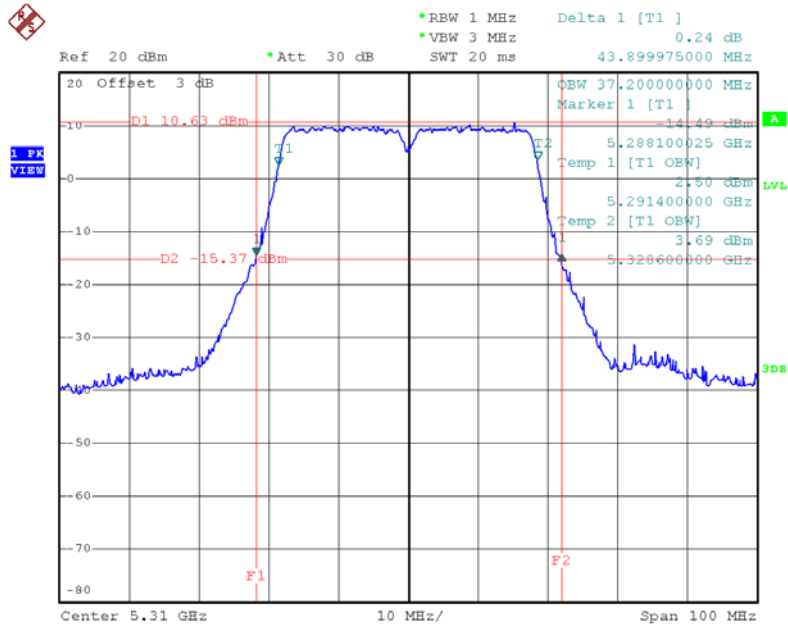

Date: 28.NOV.2018 15:06:37


**Test Mode: UNII-2A/TX AC80 Mode\_CH58**

| Channel | Frequency<br>(MHz) | 26 dB Bandwidth<br>(MHz) | 99% Occupied Bandwidth<br>(MHz) |
|---------|--------------------|--------------------------|---------------------------------|
| CH58    | 5290               | 89.80                    | 75.20                           |

Note:

The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10log B, where B is the 26dB Bandwidth in megahertz.

**TX CH58**

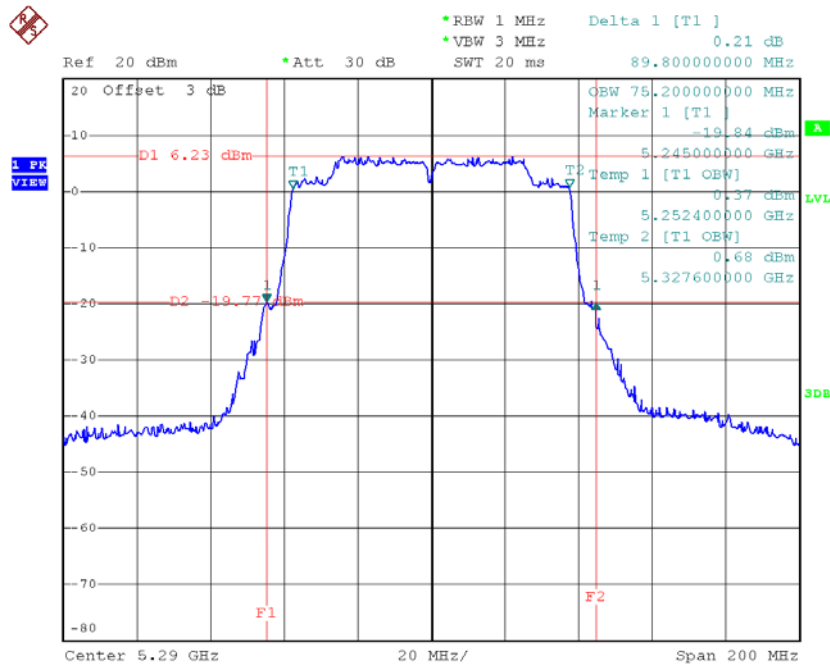


Date: 26.NOV.2018 19:27:49

**Test Mode: UNII-2C/TX AC20 Mode\_CH100/CH116/CH140**

| Channel | Frequency<br>(MHz) | 26 dB Bandwidth<br>(MHz) | 99% Occupied Bandwidth<br>(MHz) |
|---------|--------------------|--------------------------|---------------------------------|
| CH100   | 5500               | 25.25                    | 18.10                           |
| CH116   | 5580               | 24.45                    | 18.20                           |
| CH140   | 5700               | 24.50                    | 18.20                           |


Note:

The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10\log B$ , where B is the 26dB Bandwidth in megahertz.

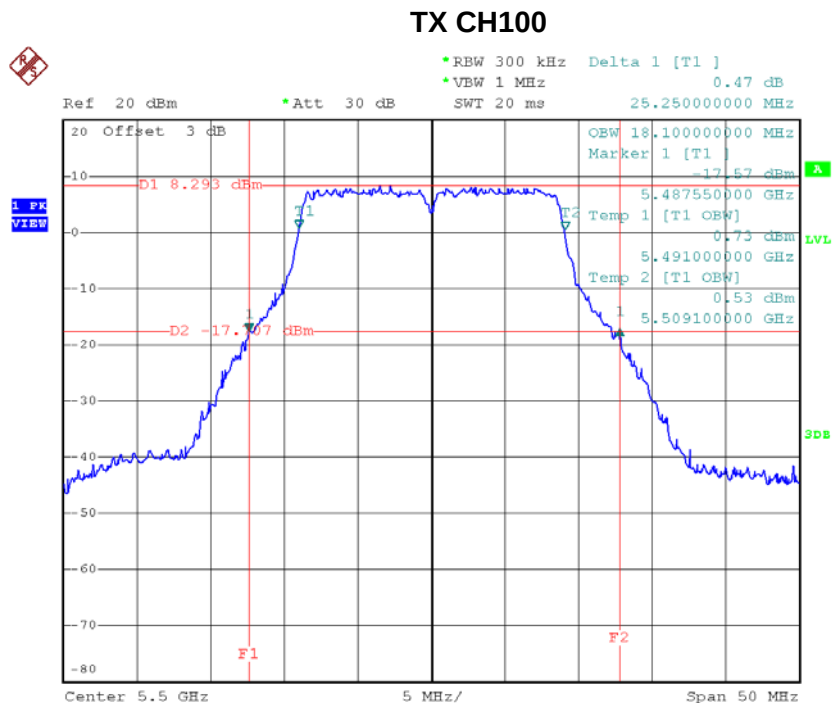


Date: 26.NOV.2018 18:03:44

### TX CH116

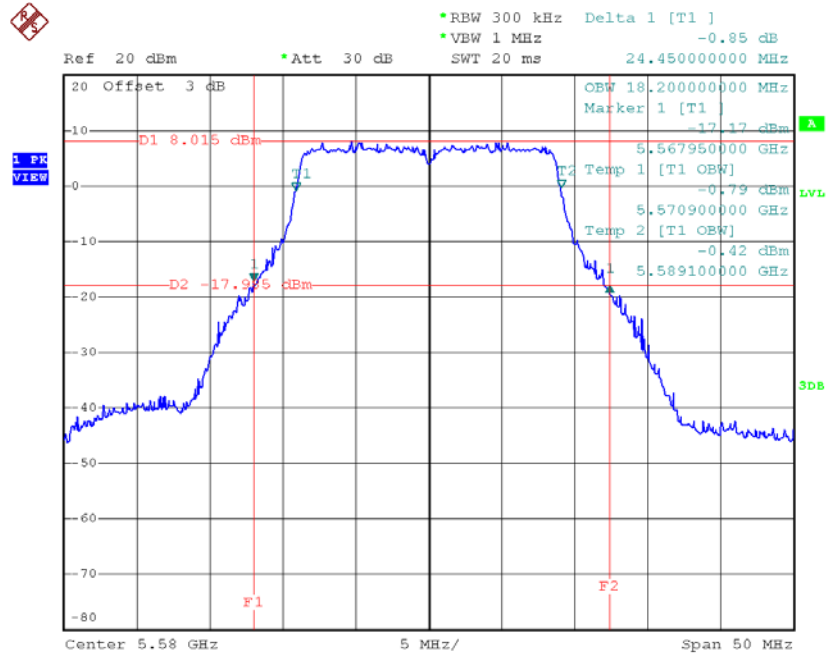

Date: 26.NOV.2018 18:04:48

### TX CH140

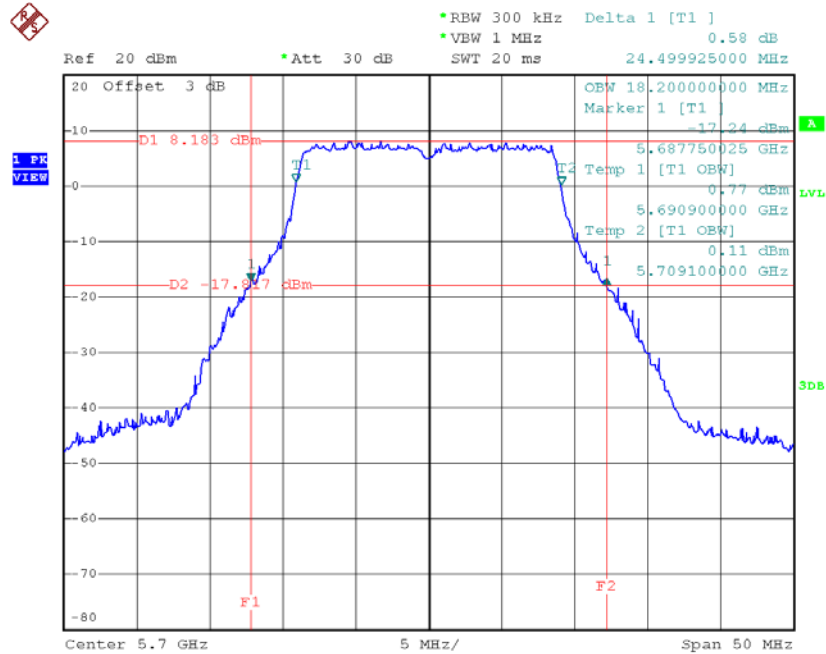

Date: 26.NOV.2018 18:05:50


**Test Mode: UNII-2C/TX AC40 Mode\_CH102/CH110/CH134**

| Channel | Frequency<br>(MHz) | 26 dB Bandwidth<br>(MHz) | 99% Occupied Bandwidth<br>(MHz) |
|---------|--------------------|--------------------------|---------------------------------|
| CH102   | 5510               | 45.10                    | 37.20                           |
| CH110   | 5550               | 44.50                    | 37.20                           |
| CH134   | 5670               | 45.50                    | 37.20                           |

Note:

The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10log B, where B is the 26dB Bandwidth in megahertz.


**TX CH102**

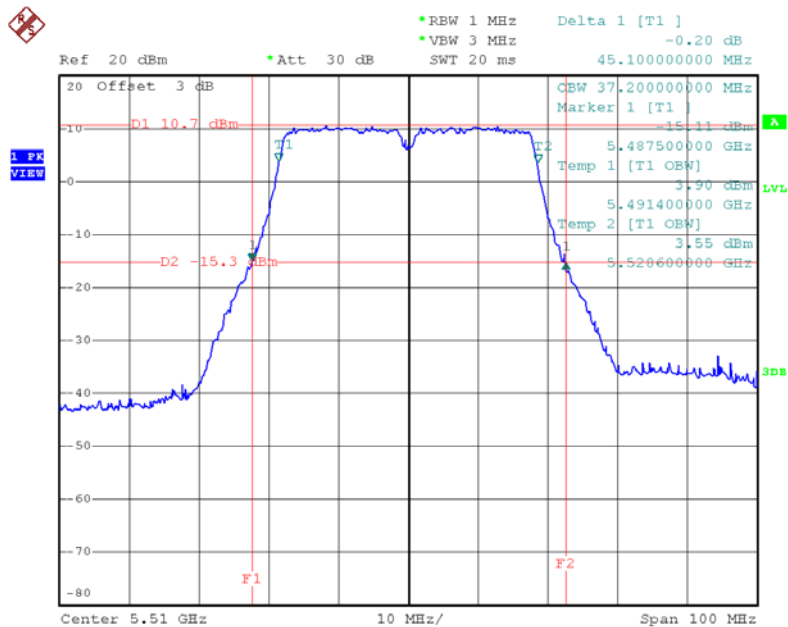

Date: 28.NOV.2018 15:07:43




### TX CH110

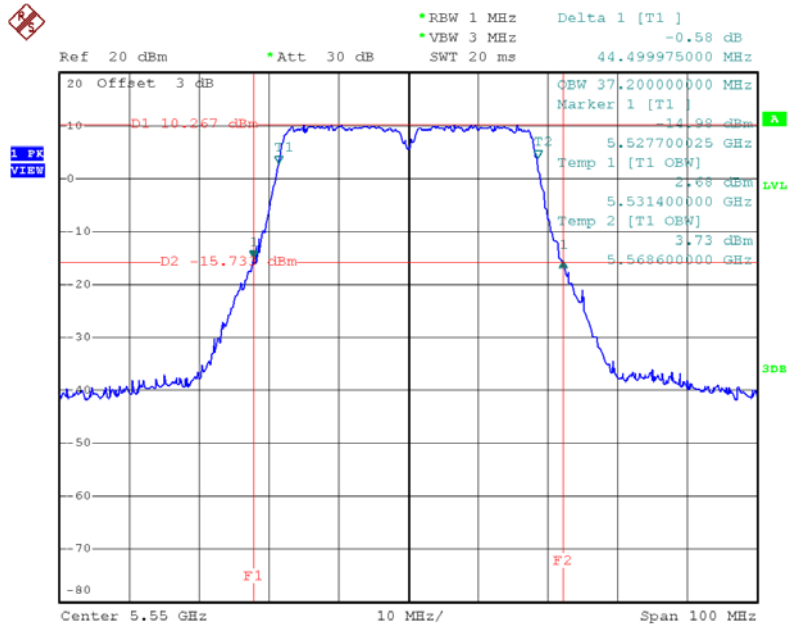

Date: 28.NOV.2018 15:08:56

### TX CH134

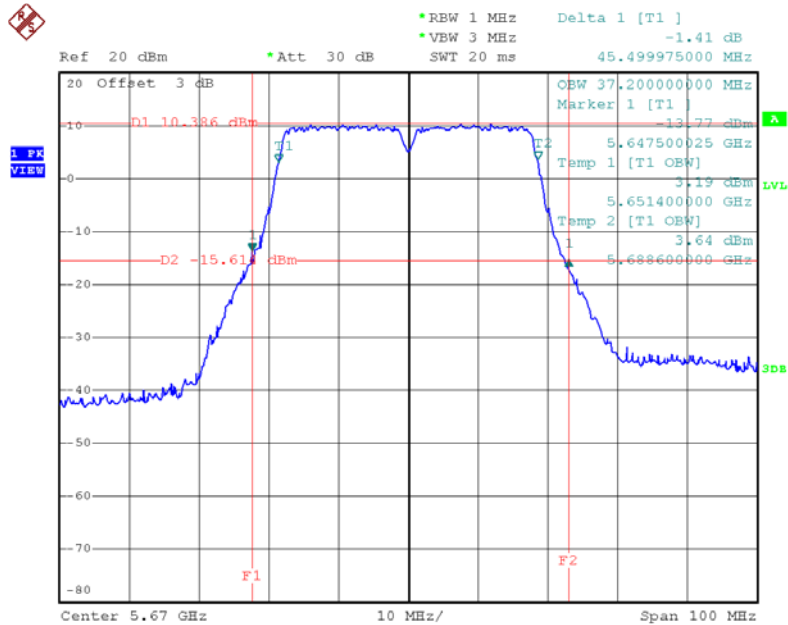

Date: 28.NOV.2018 15:10:02


**Test Mode: UNII-2C/TX AC80 Mode\_CH106/CH122**

| Channel | Frequency<br>(MHz) | 26 dB Bandwidth<br>(MHz) | 99% Occupied Bandwidth<br>(MHz) |
|---------|--------------------|--------------------------|---------------------------------|
| CH106   | 5530               | 85.40                    | 75.20                           |
| CH122   | 5610               | 88.00                    | 75.20                           |

## Note:


The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10log B, where B is the 26dB Bandwidth in megahertz.

### TX CH106

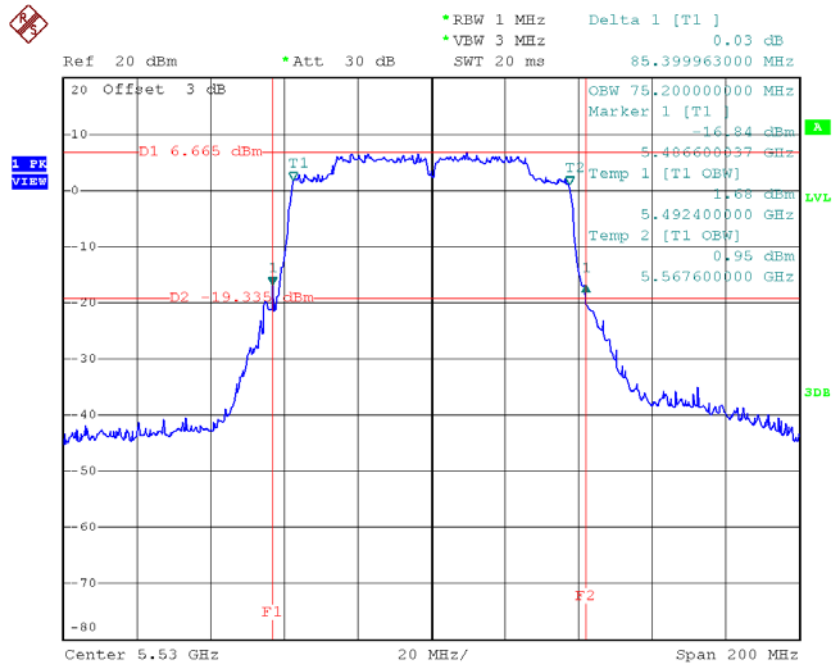

Date: 26.NOV.2018 19:30:52

### TX CH122

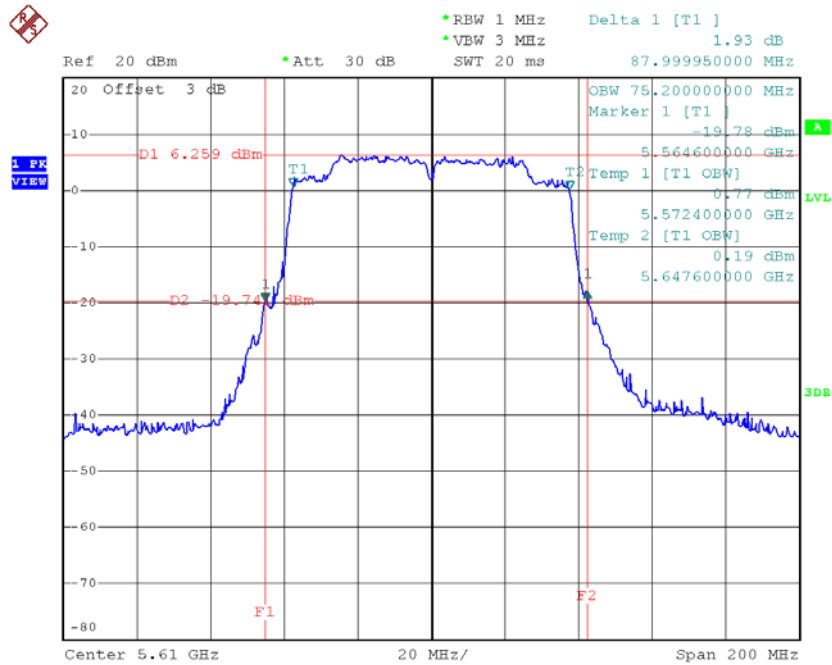

Date: 26.NOV.2018 19:32:08


Test Mode: UNII-2C/TX AC160 Mode\_CH114

| Channel | Frequency<br>(MHz) | 26dB Bandwidth<br>(MHz) | 99% Occupied Bandwidth<br>(MHz) |
|---------|--------------------|-------------------------|---------------------------------|
| CH114   | 5570               | 162.56                  | 153.60                          |

Note:

The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10log B, where B is the 26dB Bandwidth in megahertz.

TX CH114

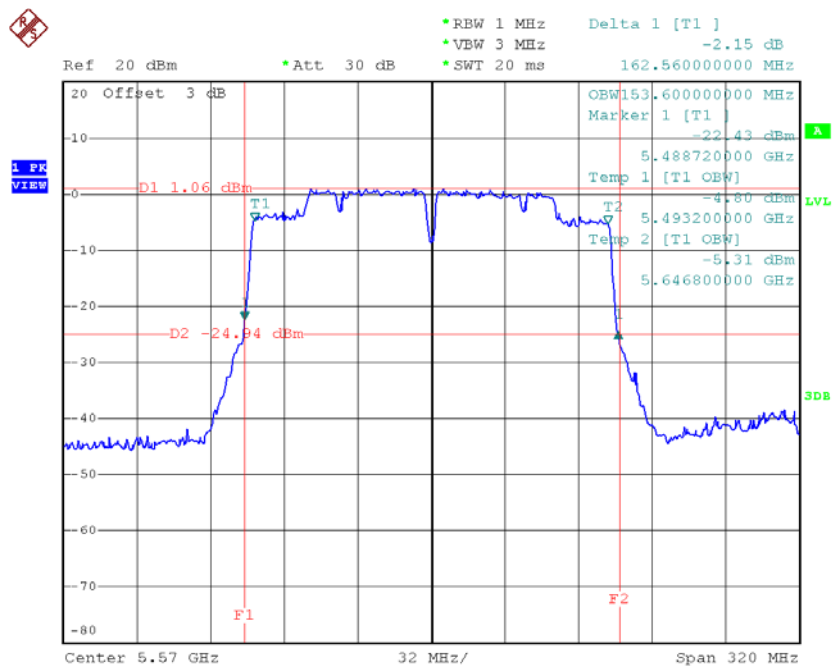


Date: 26.NOV.2018 19:50:15

Test Mode: UNII-3/ TX AC20 Mode\_CH149/CH157/CH165


| Channel | Frequency (MHz) | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Limit (kHz) |
|---------|-----------------|---------------------|------------------------------|-------------|
| CH149   | 5745            | 17.65               | 17.80                        | >=500       |
| CH157   | 5785            | 17.65               | 17.80                        | >=500       |
| CH165   | 5825            | 17.65               | 17.80                        | >=500       |

TX CH 149

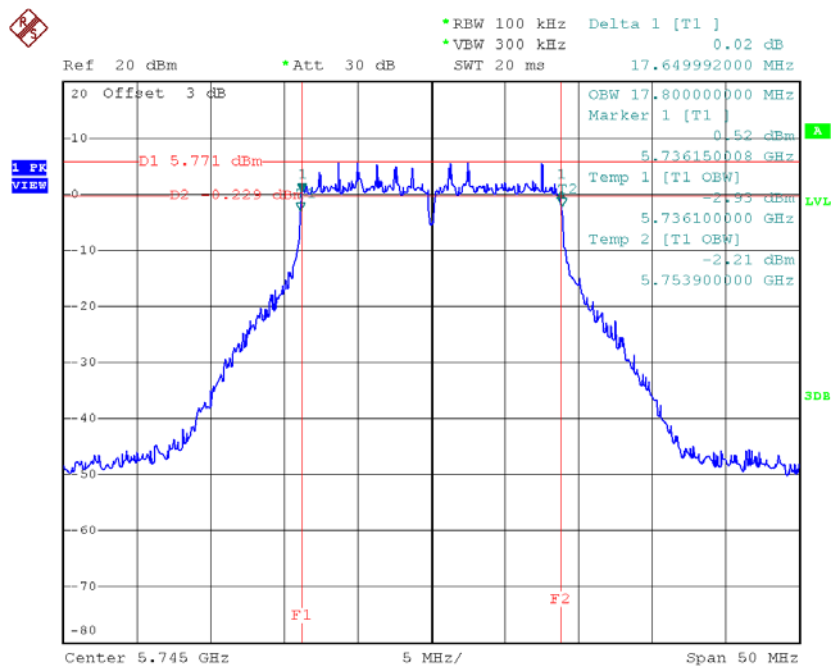


Date: 26.NOV.2018 18:06:57

### TX CH 157

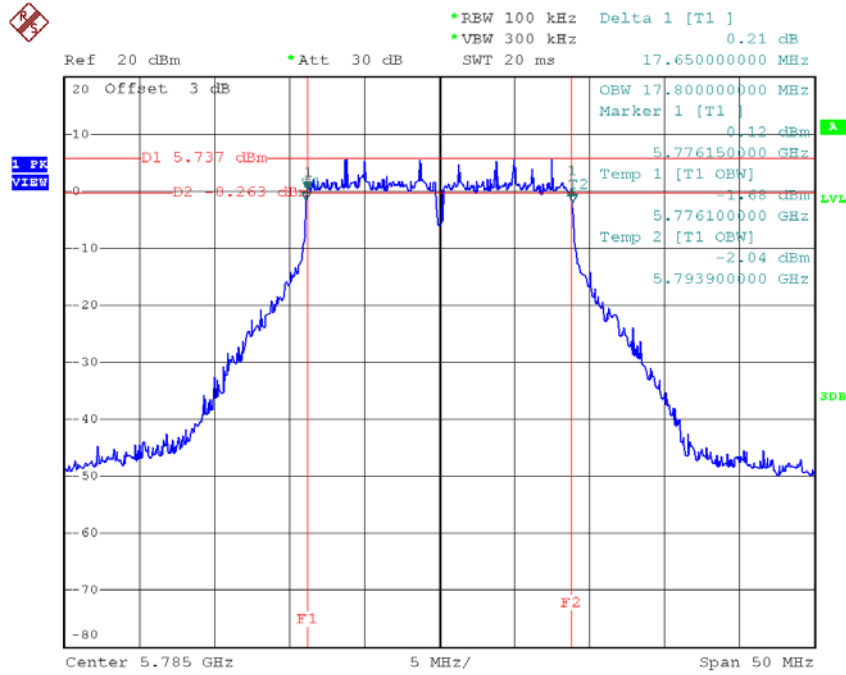

Date: 26.NOV.2018 18:08:02

### TX CH 165

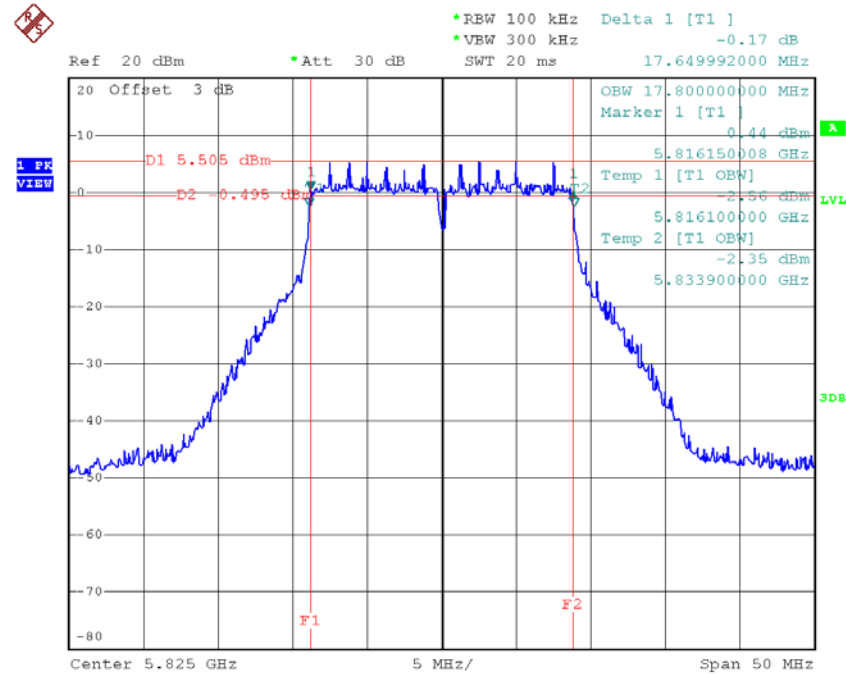


Date: 26.NOV.2018 18:09:11

**Test Mode: UNII-3/ TX AC40 Mode\_CH151/CH159**


| Channel | Frequency<br>(MHz) | 6dB Bandwidth<br>(MHz) | 99% Occupied Bandwidth<br>(MHz) | Limit<br>(kHz) |
|---------|--------------------|------------------------|---------------------------------|----------------|
| CH151   | 5755               | 36.50                  | 36.40                           | $\geq 500$     |
| CH159   | 5795               | 36.50                  | 36.40                           | $\geq 500$     |

### TX CH 151

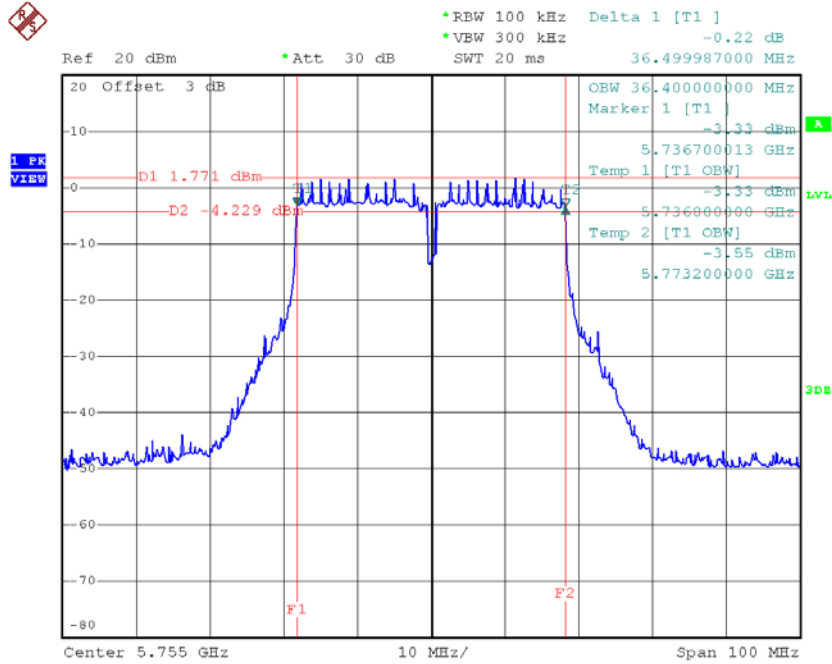

Date: 28.NOV.2018 15:11:15

### TX CH 159

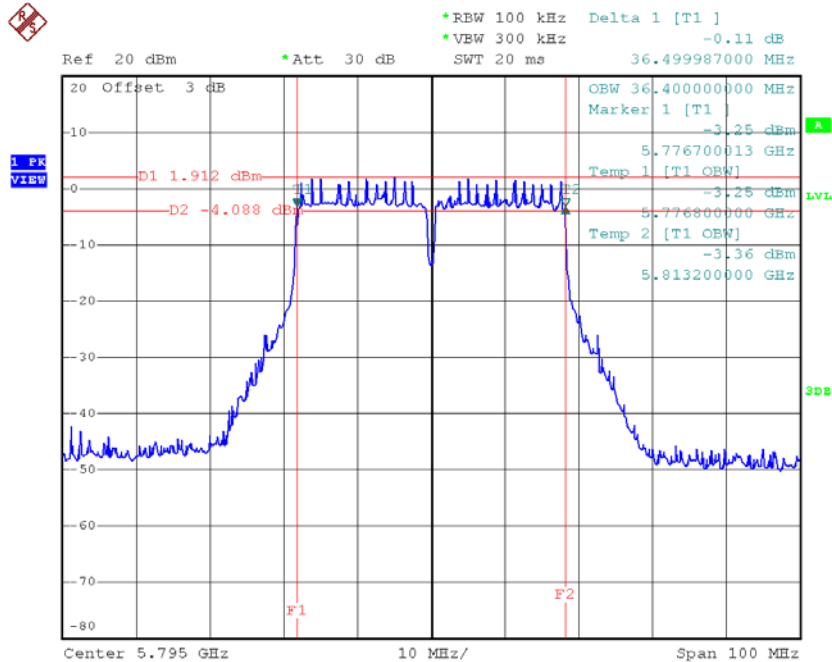


Date: 28.NOV.2018 15:12:18



Test Mode: UNII-3/ TX AC80 Mode\_CH155

| Channel | Frequency<br>(MHz) | 6dB Bandwidth<br>(MHz) | 99% Occupied Bandwidth<br>(MHz) | Limit<br>(kHz) |
|---------|--------------------|------------------------|---------------------------------|----------------|
| CH155   | 5775               | 74.20                  | 75.20                           | >=500          |

TX CH 155

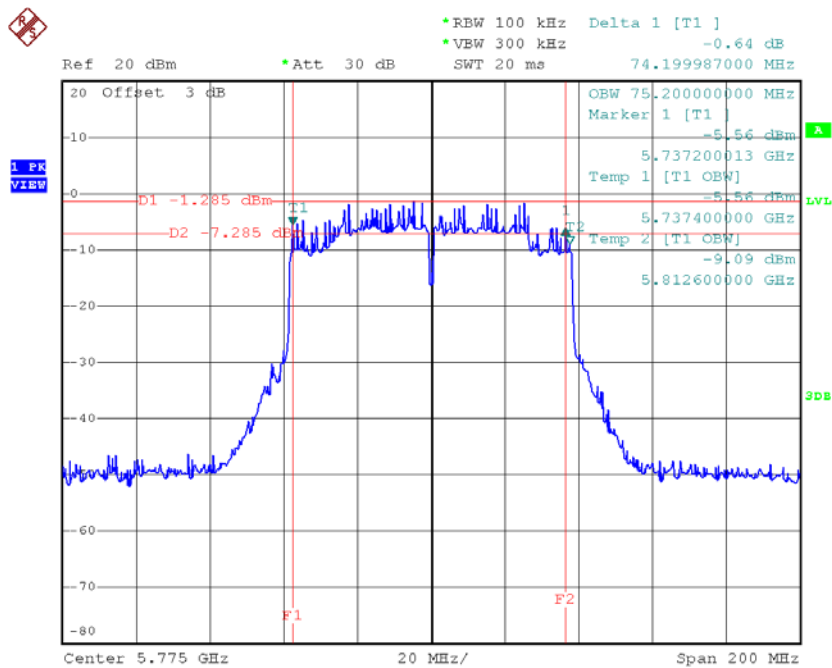

Date: 26.NOV.2018 19:33:28

## APPENDIX F - MAXIMUM OUTPUT POWER

**Test Mode: UNII-1/TX A Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH36    | 5180            | 15.66              | 0.13        | 15.79                            | 22.30       | 0.17         |
| CH40    | 5200            | 15.74              | 0.13        | 15.87                            | 22.30       | 0.17         |
| CH48    | 5240            | 15.97              | 0.13        | 16.10                            | 22.30       | 0.17         |

**Test Mode: UNII-1/TX A Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH36    | 5180            | 15.73              | 0.13        | 15.86                            | 22.30       | 0.17         |
| CH40    | 5200            | 15.66              | 0.13        | 15.79                            | 22.30       | 0.17         |
| CH48    | 5240            | 15.82              | 0.13        | 15.95                            | 22.30       | 0.17         |

**Test Mode: UNII-1/TX A Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH36    | 5180            | 18.84              | 22.30       | 0.17         |
| CH40    | 5200            | 18.84              | 22.30       | 0.17         |
| CH48    | 5240            | 19.04              | 22.30       | 0.17         |

**Test Mode: UNII-1/TX N20 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH36    | 5180            | 15.88              | 0.13        | 16.01                            | 22.30       | 0.17         |
| CH40    | 5200            | 15.85              | 0.13        | 15.98                            | 22.30       | 0.17         |
| CH48    | 5240            | 15.86              | 0.13        | 15.99                            | 22.30       | 0.17         |

**Test Mode: UNII-1/TX N20 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH36    | 5180            | 15.79              | 0.13        | 15.92                            | 22.30       | 0.17         |
| CH40    | 5200            | 15.89              | 0.13        | 16.02                            | 22.30       | 0.17         |
| CH48    | 5240            | 15.84              | 0.13        | 15.97                            | 22.30       | 0.17         |

**Test Mode: UNII-1/TX N20 Mode \_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH36    | 5180            | 18.97              | 22.30       | 0.17         |
| CH40    | 5200            | 19.01              | 22.30       | 0.17         |
| CH48    | 5240            | 18.99              | 22.30       | 0.17         |

**Test Mode: UNII-1/TX N40 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH38    | 5190            | 14.72              | 0.29        | 15.01                            | 22.30       | 0.17         |
| CH46    | 5230            | 14.78              | 0.29        | 15.07                            | 22.30       | 0.17         |

**Test Mode: UNII-1/TX N40 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH38    | 5190            | 14.32              | 0.29        | 14.61                            | 22.30       | 0.17         |
| CH46    | 5230            | 14.27              | 0.29        | 14.56                            | 22.30       | 0.17         |

**Test Mode: UNII-1/TX N40 Mode \_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH38    | 5190            | 17.83              | 22.30       | 0.17         |
| CH46    | 5230            | 17.84              | 22.30       | 0.17         |

**Test Mode: UNII-2A/TX A Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH52    | 5260            | 15.83              | 0.13        | 15.96                            | 22.30       | 0.17         |
| CH60    | 5300            | 15.84              | 0.13        | 15.97                            | 22.30       | 0.17         |
| CH64    | 5320            | 15.82              | 0.13        | 15.95                            | 22.30       | 0.17         |

**Test Mode: UNII-2A/TX A Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH52    | 5260            | 15.88              | 0.13        | 16.01                            | 22.30       | 0.17         |
| CH60    | 5300            | 15.86              | 0.13        | 15.99                            | 22.30       | 0.17         |
| CH64    | 5320            | 15.92              | 0.13        | 16.05                            | 22.30       | 0.17         |

**Test Mode: UNII-2A/TX A Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH52    | 5260            | 19.00              | 22.30       | 0.17         |
| CH60    | 5300            | 18.99              | 22.30       | 0.17         |
| CH64    | 5320            | 19.01              | 22.30       | 0.17         |

**Test Mode: UNII-2A/TX N20 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH52    | 5260            | 15.91              | 0.13        | 16.04                            | 22.30       | 0.17         |
| CH60    | 5300            | 15.78              | 0.13        | 15.91                            | 22.30       | 0.17         |
| CH64    | 5320            | 15.84              | 0.13        | 15.97                            | 22.30       | 0.17         |

**Test Mode: UNII-2A/TX N20 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH52    | 5260            | 15.86              | 0.13        | 15.99                            | 22.30       | 0.17         |
| CH60    | 5300            | 15.85              | 0.13        | 15.98                            | 22.30       | 0.17         |
| CH64    | 5320            | 15.81              | 0.13        | 15.94                            | 22.30       | 0.17         |

**Test Mode: UNII-2A/TX N20 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH52    | 5260            | 19.02              | 22.30       | 0.17         |
| CH60    | 5300            | 18.95              | 22.30       | 0.17         |
| CH64    | 5320            | 18.96              | 22.30       | 0.17         |

**Test Mode: UNII-2A/TX N40 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH54    | 5270            | 14.62              | 0.29        | 14.91                            | 22.30       | 0.17         |
| CH62    | 5310            | 14.67              | 0.29        | 14.96                            | 22.30       | 0.17         |

**Test Mode: UNII-2A/TX N40 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH54    | 5270            | 14.31              | 0.29        | 14.60                            | 22.30       | 0.17         |
| CH62    | 5310            | 14.42              | 0.29        | 14.71                            | 22.30       | 0.17         |

**Test Mode: UNII-2A/TX N40 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH54    | 5270            | 17.77              | 22.30       | 0.17         |
| CH62    | 5310            | 17.85              | 22.30       | 0.17         |



**Test Mode: UNII-2C/TX A Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH100   | 5500            | 15.93              | 0.13        | 16.06                            | 22.30       | 0.17         |
| CH116   | 5580            | 15.81              | 0.13        | 15.94                            | 22.30       | 0.17         |
| CH140   | 5700            | 15.84              | 0.13        | 15.97                            | 22.30       | 0.17         |

**Test Mode: UNII-2C/TX A Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH100   | 5500            | 15.92              | 0.13        | 16.05                            | 22.30       | 0.17         |
| CH116   | 5580            | 15.89              | 0.13        | 16.02                            | 22.30       | 0.17         |
| CH140   | 5700            | 15.91              | 0.13        | 16.04                            | 22.30       | 0.17         |

**Test Mode: UNII-2C/TX A Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH100   | 5500            | 19.07              | 22.30       | 0.17         |
| CH116   | 5580            | 18.99              | 22.30       | 0.17         |
| CH140   | 5700            | 19.02              | 22.30       | 0.17         |

**Test Mode: UNII-2C/TX N20 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH100   | 5500            | 15.89              | 0.13        | 16.02                            | 22.30       | 0.17         |
| CH116   | 5580            | 15.79              | 0.13        | 15.92                            | 22.30       | 0.17         |
| CH140   | 5700            | 15.86              | 0.13        | 15.99                            | 22.30       | 0.17         |

**Test Mode: UNII-2C/TX N20 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH100   | 5500            | 15.92              | 0.13        | 16.05                            | 22.30       | 0.17         |
| CH116   | 5580            | 15.95              | 0.13        | 16.08                            | 22.30       | 0.17         |
| CH140   | 5700            | 15.89              | 0.13        | 16.02                            | 22.30       | 0.17         |

**Test Mode: UNII-2C/TX N20 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH100   | 5500            | 19.04              | 22.30       | 0.17         |
| CH116   | 5580            | 19.01              | 22.30       | 0.17         |
| CH140   | 5700            | 19.01              | 22.30       | 0.17         |

**Test Mode: UNII-2C/TX N40 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH102   | 5510            | 14.53              | 0.29        | 14.82                            | 22.30       | 0.17         |
| CH110   | 5550            | 14.46              | 0.29        | 14.75                            | 22.30       | 0.17         |
| CH134   | 5670            | 14.73              | 0.29        | 15.02                            | 22.30       | 0.17         |

**Test Mode: UNII-2C/TX N40 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH102   | 5510            | 14.12              | 0.29        | 14.41                            | 22.30       | 0.17         |
| CH110   | 5550            | 14.13              | 0.29        | 14.42                            | 22.30       | 0.17         |
| CH134   | 5670            | 14.31              | 0.29        | 14.60                            | 22.30       | 0.17         |

**Test Mode: UNII-2C/TX N40 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH102   | 5510            | 17.64              | 22.30       | 0.17         |
| CH110   | 5550            | 17.60              | 22.30       | 0.17         |
| CH134   | 5670            | 17.83              | 22.30       | 0.17         |

**Test Mode: UNII-3/ TX A Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH149   | 5745            | 15.88              | 0.13        | 16.01                            | 28.30       | 0.68         |
| CH157   | 5785            | 15.91              | 0.13        | 16.04                            | 28.30       | 0.68         |
| CH165   | 5825            | 15.86              | 0.13        | 15.99                            | 28.30       | 0.68         |

**Test Mode: UNII-3/ TX A Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH149   | 5745            | 15.94              | 0.13        | 16.07                            | 28.30       | 0.68         |
| CH157   | 5785            | 15.92              | 0.13        | 16.05                            | 28.30       | 0.68         |
| CH165   | 5825            | 15.75              | 0.13        | 15.88                            | 28.30       | 0.68         |

**Test Mode: UNII-3/ TX A Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH149   | 5745            | 19.05              | 28.30       | 0.68         |
| CH157   | 5785            | 19.06              | 28.30       | 0.68         |
| CH165   | 5825            | 18.95              | 28.30       | 0.68         |

**Test Mode: UNII-3/TX N20 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH149   | 5745            | 15.91              | 0.13        | 16.04                            | 28.30       | 0.68         |
| CH157   | 5785            | 15.92              | 0.13        | 16.05                            | 28.30       | 0.68         |
| CH165   | 5825            | 15.91              | 0.13        | 16.04                            | 28.30       | 0.68         |

**Test Mode: UNII-3/TX N20 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH149   | 5745            | 15.84              | 0.13        | 15.97                            | 28.30       | 0.68         |
| CH157   | 5785            | 15.93              | 0.13        | 16.06                            | 28.30       | 0.68         |
| CH165   | 5825            | 15.85              | 0.13        | 15.98                            | 28.30       | 0.68         |

**Test Mode: UNII-3/TX N20 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH149   | 5745            | 19.01              | 28.30       | 0.68         |
| CH157   | 5785            | 19.06              | 28.30       | 0.68         |
| CH165   | 5825            | 19.02              | 28.30       | 0.68         |

**Test Mode: UNII-3/ TX N40 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH151   | 5755            | 14.82              | 0.29        | 15.11                            | 28.30       | 0.68         |
| CH159   | 5795            | 14.89              | 0.29        | 15.18                            | 28.30       | 0.68         |

**Test Mode: UNII-3/ TX N40 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH151   | 5755            | 14.41              | 0.29        | 14.70                            | 28.30       | 0.68         |
| CH159   | 5795            | 14.38              | 0.29        | 14.67                            | 28.30       | 0.68         |

**Test Mode: UNII-3/ TX N40 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH151   | 5755            | 17.93              | 28.30       | 0.68         |
| CH159   | 5795            | 17.95              | 28.30       | 0.68         |

**Test Mode: UNII-1/TX AC20 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH36    | 5180            | 15.93              | 0.26        | 16.19                            | 22.30       | 0.17         |
| CH40    | 5200            | 15.87              | 0.26        | 16.13                            | 22.30       | 0.17         |
| CH48    | 5240            | 15.62              | 0.26        | 15.88                            | 22.30       | 0.17         |

**Test Mode: UNII-1/TX AC20 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH36    | 5180            | 15.86              | 0.26        | 16.12                            | 22.30       | 0.17         |
| CH40    | 5200            | 15.91              | 0.26        | 16.17                            | 22.30       | 0.17         |
| CH48    | 5240            | 15.84              | 0.26        | 16.10                            | 22.30       | 0.17         |

**Test Mode: UNII-1/TX AC20 Mode \_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH36    | 5180            | 19.16              | 22.30       | 0.17         |
| CH40    | 5200            | 19.16              | 22.30       | 0.17         |
| CH48    | 5240            | 19.00              | 22.30       | 0.17         |

**Test Mode: UNII-1/TX AC40 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH38    | 5190            | 14.69              | 0.68        | 15.37                            | 22.30       | 0.17         |
| CH46    | 5230            | 14.71              | 0.68        | 15.39                            | 22.30       | 0.17         |

**Test Mode: UNII-1/TX AC40 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH38    | 5190            | 14.11              | 0.68        | 14.79                            | 22.30       | 0.17         |
| CH46    | 5230            | 14.08              | 0.68        | 14.76                            | 22.30       | 0.17         |

**Test Mode: UNII-1/TX AC40 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH38    | 5190            | 18.10              | 22.30       | 0.17         |
| CH46    | 5230            | 18.10              | 22.30       | 0.17         |



**Test Mode: UNII-1/TX AC80 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH42    | 5210            | 12.73              | 1.39        | 14.12                            | 22.30       | 0.17         |

**Test Mode: UNII-1/TX AC80 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH42    | 5210            | 12.83              | 1.39        | 14.22                            | 22.30       | 0.17         |

**Test Mode: UNII-1/TX AC80 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH42    | 5210            | 17.18              | 22.30       | 0.17         |

**Test Mode: UNII-1/TX AC160 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH50    | 5250            | 10.81              | 1.00        | 11.81                            | 22.19       | 0.17         |

**Test Mode: UNII-1/TX AC160 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH50    | 5250            | 10.58              | 1.00        | 11.58                            | 22.19       | 0.17         |

**Test Mode: UNII-1/TX AC160 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH50    | 5250            | 14.70              | 22.19       | 0.17         |

**Test Mode: UNII-2A/TX AC20 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH52    | 5260            | 15.89              | 0.26        | 16.15                            | 22.30       | 0.17         |
| CH60    | 5300            | 15.83              | 0.26        | 16.09                            | 22.30       | 0.17         |
| CH64    | 5320            | 15.71              | 0.26        | 15.97                            | 22.30       | 0.17         |

**Test Mode: UNII-2A/TX AC20 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH52    | 5260            | 15.85              | 0.26        | 16.11                            | 22.30       | 0.17         |
| CH60    | 5300            | 15.87              | 0.26        | 16.13                            | 22.30       | 0.17         |
| CH64    | 5320            | 15.95              | 0.26        | 16.21                            | 22.30       | 0.17         |

**Test Mode: UNII-2A/TX AC20 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH52    | 5260            | 19.14              | 22.30       | 0.17         |
| CH60    | 5300            | 19.12              | 22.30       | 0.17         |
| CH64    | 5320            | 19.10              | 22.30       | 0.17         |

**Test Mode: UNII-2A/TX AC40 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH54    | 5270            | 14.66              | 0.68        | 15.34                            | 22.30       | 0.17         |
| CH62    | 5310            | 14.64              | 0.68        | 15.32                            | 22.30       | 0.17         |

**Test Mode: UNII-2A/TX AC40 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH54    | 5270            | 14.21              | 0.68        | 14.89                            | 22.30       | 0.17         |
| CH62    | 5310            | 14.31              | 0.68        | 14.99                            | 22.30       | 0.17         |

**Test Mode: UNII-2A/TX AC40 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH54    | 5270            | 18.13              | 22.30       | 0.17         |
| CH62    | 5310            | 18.17              | 22.30       | 0.17         |

**Test Mode: UNII-2A/TX AC80 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH58    | 5290            | 12.59              | 1.39        | 13.98                            | 22.30       | 0.17         |

**Test Mode: UNII-2A/TX AC80 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH58    | 5290            | 12.92              | 1.39        | 14.31                            | 22.30       | 0.17         |

**Test Mode: UNII-2A/TX AC80 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH58    | 5290            | 17.16              | 22.30       | 0.17         |

**Test Mode: UNII-2C/TX AC20 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH100   | 5500            | 15.79              | 0.26        | 16.05                            | 22.30       | 0.17         |
| CH116   | 5580            | 15.86              | 0.26        | 16.12                            | 22.30       | 0.17         |
| CH140   | 5700            | 15.77              | 0.26        | 16.03                            | 22.30       | 0.17         |

**Test Mode: UNII-2C/TX AC20 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH100   | 5500            | 15.89              | 0.26        | 16.15                            | 22.30       | 0.17         |
| CH116   | 5580            | 15.91              | 0.26        | 16.17                            | 22.30       | 0.17         |
| CH140   | 5700            | 15.82              | 0.26        | 16.08                            | 22.30       | 0.17         |

**Test Mode: UNII-2C/TX AC20 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH100   | 5500            | 19.11              | 22.30       | 0.17         |
| CH116   | 5580            | 19.15              | 22.30       | 0.17         |
| CH140   | 5700            | 19.06              | 22.30       | 0.17         |

**Test Mode: UNII-2C/TX AC40 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH102   | 5510            | 14.56              | 0.68        | 15.24                            | 22.30       | 0.17         |
| CH110   | 5550            | 14.14              | 0.68        | 14.82                            | 22.30       | 0.17         |
| CH134   | 5670            | 14.46              | 0.68        | 15.14                            | 22.30       | 0.17         |

**Test Mode: UNII-2C/TX AC40 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH102   | 5510            | 13.96              | 0.68        | 14.64                            | 22.30       | 0.17         |
| CH110   | 5550            | 13.92              | 0.68        | 14.60                            | 22.30       | 0.17         |
| CH134   | 5670            | 14.13              | 0.68        | 14.81                            | 22.30       | 0.17         |

**Test Mode: UNII-2C/TX AC40 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH102   | 5510            | 17.96              | 22.30       | 0.17         |
| CH110   | 5550            | 17.72              | 22.30       | 0.17         |
| CH134   | 5670            | 17.99              | 22.30       | 0.17         |

**Test Mode: UNII-2C/TX AC80 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH106   | 5530            | 12.73              | 1.39        | 14.12                            | 22.30       | 0.17         |
| CH122   | 5610            | 12.85              | 1.39        | 14.24                            | 22.30       | 0.17         |

**Test Mode: UNII-2C/TX AC80 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH106   | 5530            | 12.86              | 1.39        | 14.25                            | 22.30       | 0.17         |
| CH122   | 5610            | 12.64              | 1.39        | 14.03                            | 22.30       | 0.17         |

**Test Mode: UNII-2C/TX AC80 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH106   | 5530            | 17.20              | 22.30       | 0.17         |
| CH122   | 5610            | 17.15              | 22.30       | 0.17         |



**Test Mode: UNII-2C/TX AC160 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH114   | 5570            | 10.60              | 1.00        | 11.60                            | 22.19       | 0.17         |

**Test Mode: UNII-2C/TX AC160 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH114   | 5570            | 10.85              | 1.00        | 11.85                            | 22.19       | 0.17         |

**Test Mode: UNII-2C/TX AC160 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH114   | 5570            | 14.73              | 22.19       | 0.17         |

**Test Mode: UNII-3/TX AC20 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH149   | 5745            | 15.84              | 0.26        | 16.10                            | 28.30       | 0.68         |
| CH157   | 5785            | 15.88              | 0.26        | 16.14                            | 28.30       | 0.68         |
| CH165   | 5825            | 15.79              | 0.26        | 16.05                            | 28.30       | 0.68         |

**Test Mode: UNII-3/TX AC20 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH149   | 5745            | 15.89              | 0.26        | 16.15                            | 28.30       | 0.68         |
| CH157   | 5785            | 15.84              | 0.26        | 16.10                            | 28.30       | 0.68         |
| CH165   | 5825            | 15.84              | 0.26        | 16.10                            | 28.30       | 0.68         |

**Test Mode: UNII-3/TX AC20 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH149   | 5745            | 19.13              | 28.30       | 0.68         |
| CH157   | 5785            | 19.13              | 28.30       | 0.68         |
| CH165   | 5825            | 19.08              | 28.30       | 0.68         |

**Test Mode: UNII-3/TX AC40 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH151   | 5755            | 14.41              | 0.68        | 15.09                            | 28.30       | 0.68         |
| CH159   | 5795            | 14.42              | 0.68        | 15.10                            | 28.30       | 0.68         |

**Test Mode: UNII-3/TX AC40 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH151   | 5755            | 14.38              | 0.68        | 15.06                            | 28.30       | 0.68         |
| CH159   | 5795            | 14.17              | 0.68        | 14.85                            | 28.30       | 0.68         |

**Test Mode: UNII-3/TX AC40 Mode\_Total**

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH151   | 5755            | 18.09              | 28.30       | 0.68         |
| CH159   | 5795            | 17.99              | 28.30       | 0.68         |

**Test Mode: UNII-3/TX AC80 Mode\_ANT 1**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH155   | 5775            | 12.94              | 1.39        | 14.33                            | 28.30       | 0.68         |

**Test Mode: UNII-3/TX AC80 Mode\_ANT 2**

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor | Output Power + Duty Factor (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|----------------------------------|-------------|--------------|
| CH155   | 5775            | 12.77              | 1.39        | 14.16                            | 28.30       | 0.68         |

**Test Mode: UNII-3/TX AC80 Mode\_Total**


| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Limit (Watt) |
|---------|-----------------|--------------------|-------------|--------------|
| CH155   | 5775            | 17.26              | 28.30       | 0.68         |

## APPENDIX G - POWER SPECTRAL DENSITY

**Test Mode: UNII-1/ TX A Mode\_CH36/CH40/CH48\_ANT 1**


| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH36    | 5180            | 4.90                    | 0.13        | 5.03                                  | 9.30            |
| CH40    | 5200            | 4.96                    | 0.13        | 5.09                                  | 9.30            |
| CH48    | 5240            | 5.27                    | 0.13        | 5.40                                  | 9.30            |

**CH36**

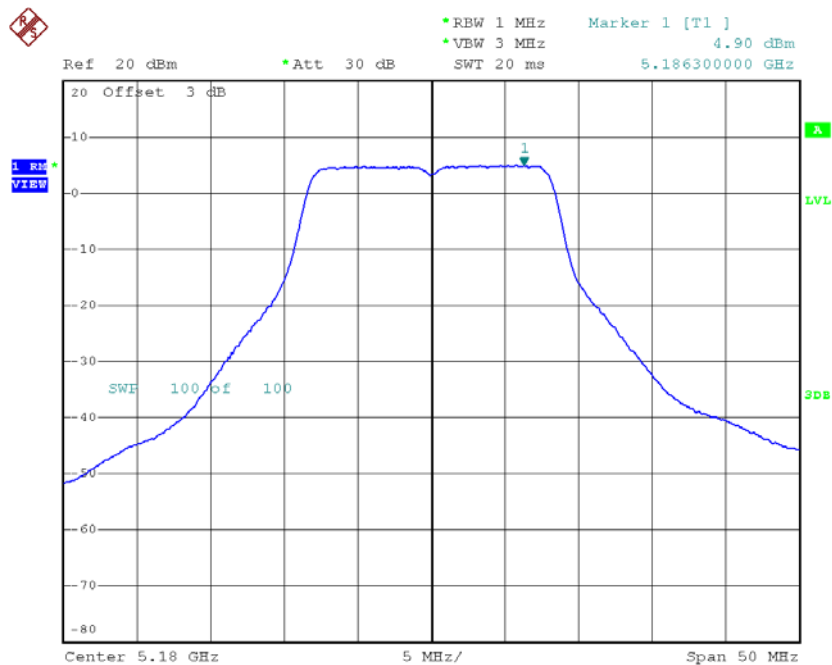


Date: 26.NOV.2018 14:03:30

### CH40

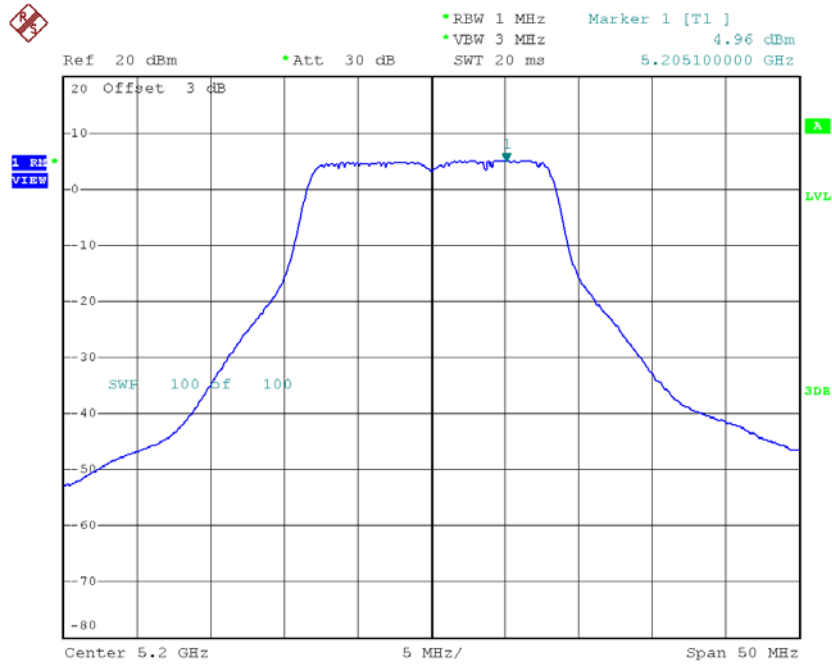

Date: 26.NOV.2018 14:06:19


### CH48

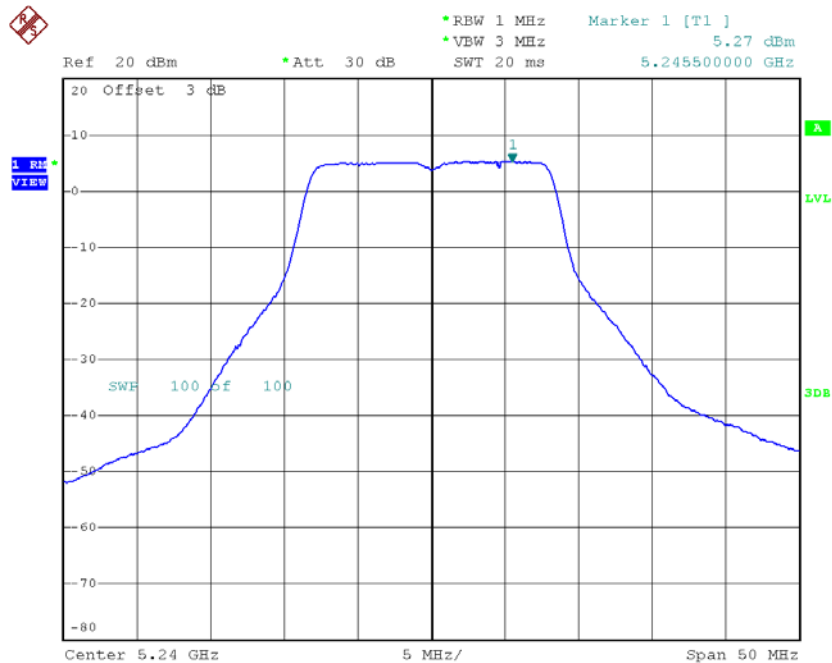

Date: 26.NOV.2018 14:17:48

**Test Mode: UNII-1/ TX A Mode\_CH36/CH40/CH48\_ANT 2**


| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH36    | 5180            | 3.99                    | 0.13        | 4.12                                  | 9.30            |
| CH40    | 5200            | 4.00                    | 0.13        | 4.13                                  | 9.30            |
| CH48    | 5240            | 4.17                    | 0.13        | 4.30                                  | 9.30            |

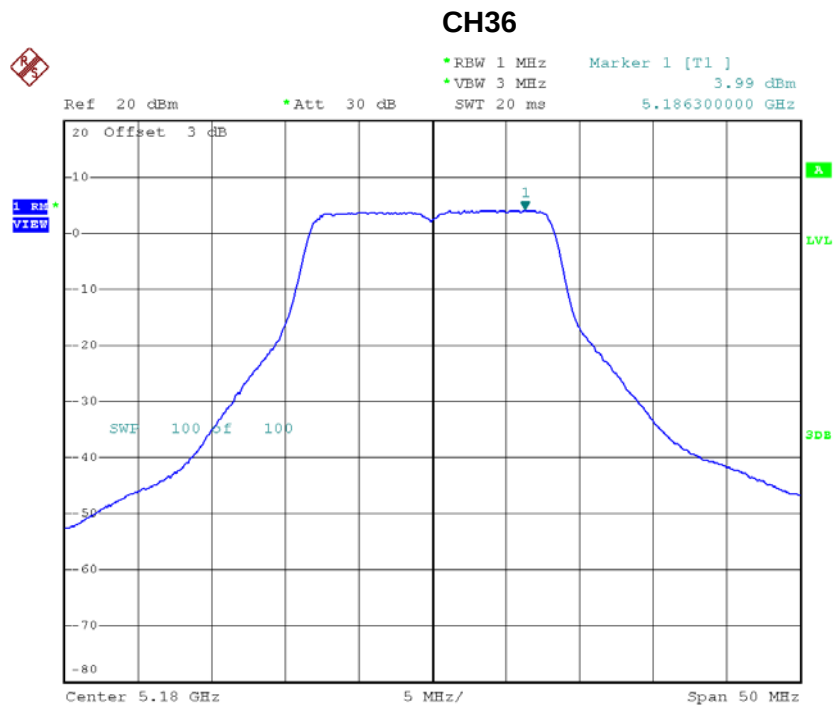

Date: 26.NOV.2018 15:16:13




### CH40

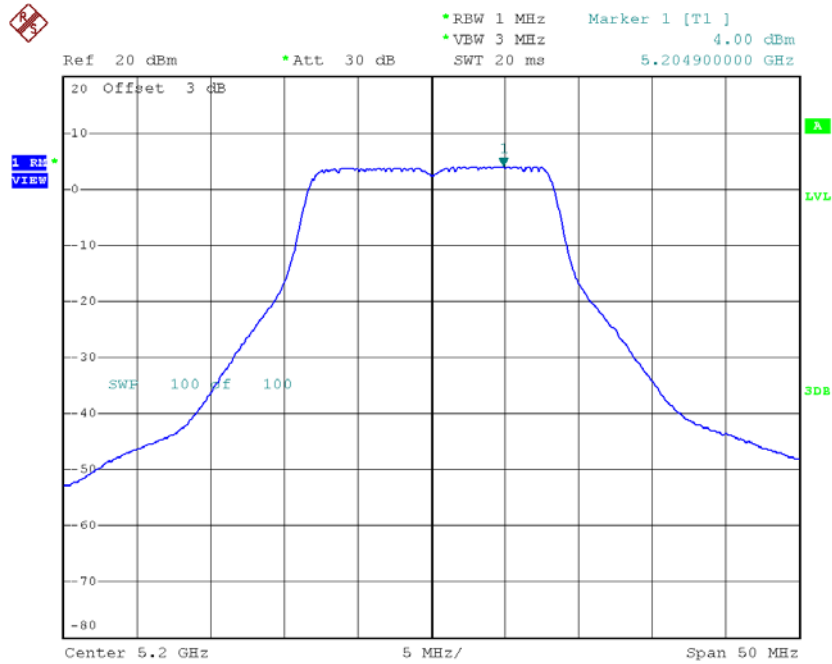

Date: 26.NOV.2018 15:17:43

### CH48

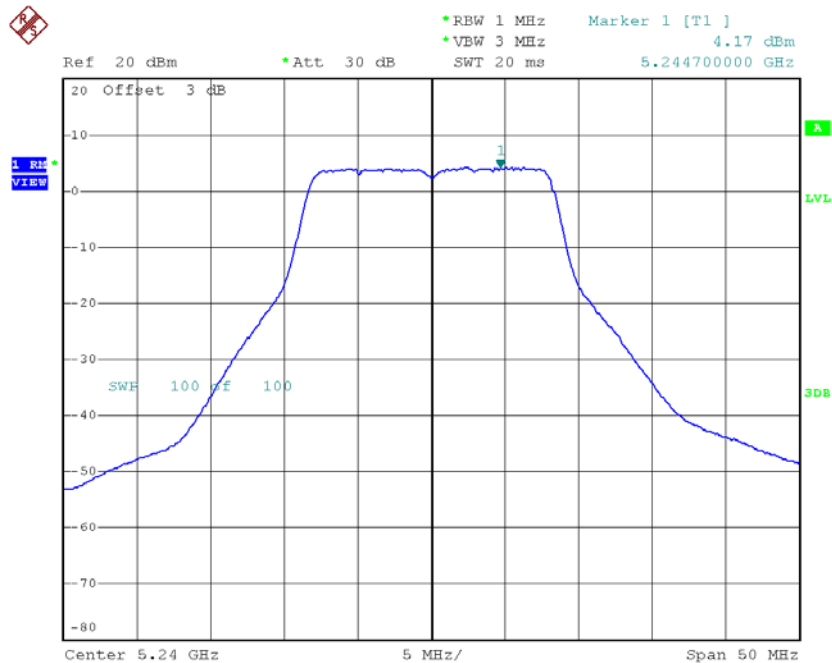


Date: 26.NOV.2018 15:18:38

**Test Mode: UNII-1/ TX A Mode\_CH36/CH40/CH48\_Total**

| Channel | Frequency<br>(MHz) | Power Density<br>(dBm/MHz) | Limit<br>(dBm/MHz) |
|---------|--------------------|----------------------------|--------------------|
| CH36    | 5180               | 7.61                       | 9.30               |
| CH40    | 5200               | 7.65                       | 9.30               |
| CH48    | 5240               | 7.90                       | 9.30               |


**Test Mode: UNII-1/TX N20 Mode\_CH36/CH40/CH48\_ANT 1**

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH36    | 5180            | 4.86                    | 0.13        | 4.99                                  | 9.30            |
| CH40    | 5200            | 5.01                    | 0.13        | 5.14                                  | 9.30            |
| CH48    | 5240            | 4.66                    | 0.13        | 4.79                                  | 9.30            |

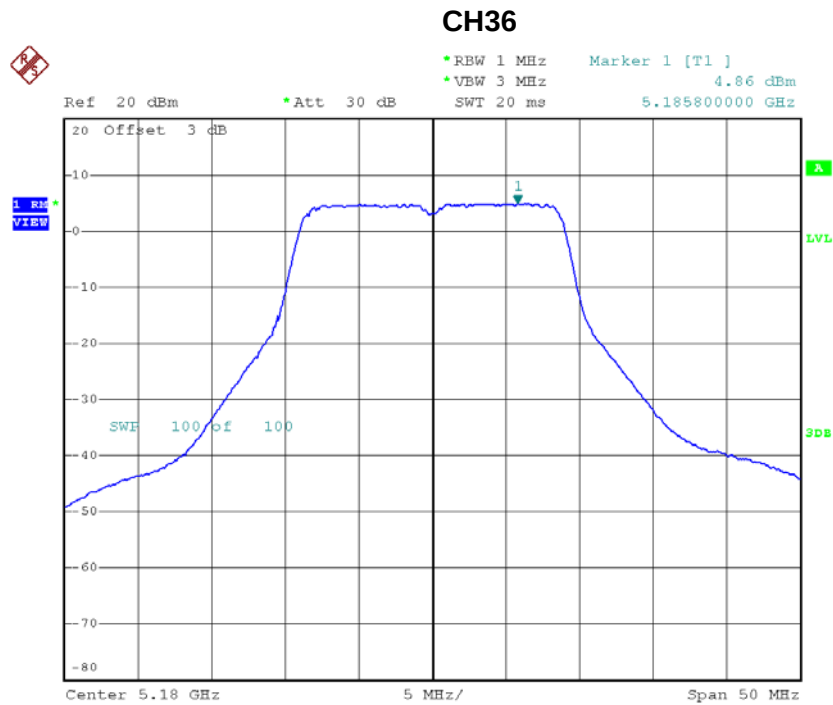


Date: 26.NOV.2018 15:48:37

### CH40

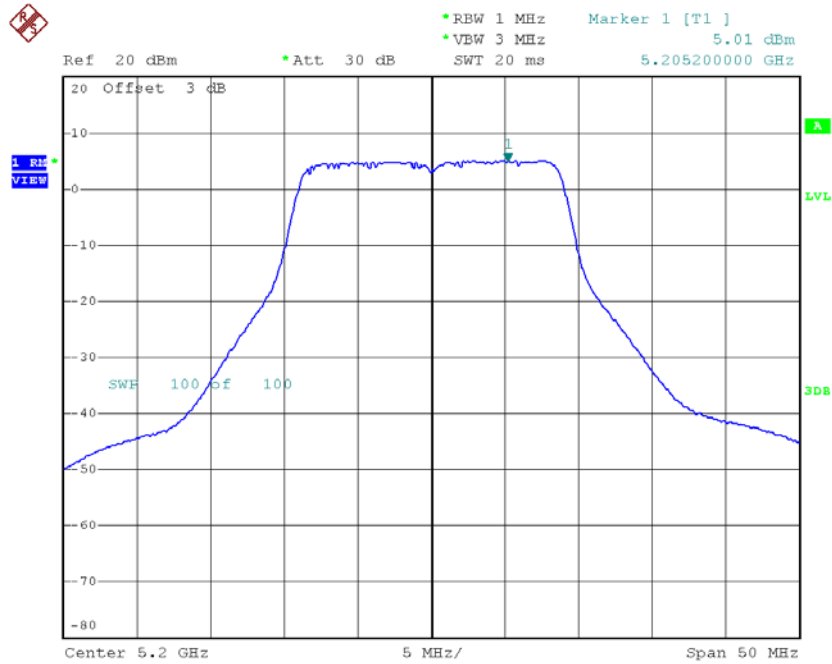

Date: 26.NOV.2018 15:49:36


### CH48

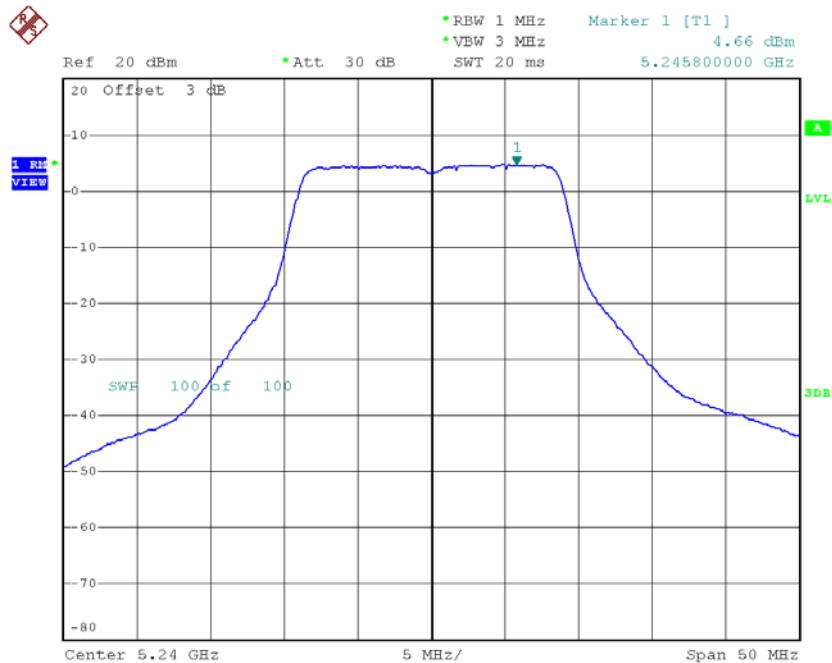

Date: 26.NOV.2018 16:27:21


Test Mode: UNII-1/TX N20 Mode\_CH36/CH40/CH48\_ANT 2

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH36    | 5180            | 3.55                    | 0.13        | 3.68                                  | 9.30            |
| CH40    | 5200            | 3.50                    | 0.13        | 3.63                                  | 9.30            |
| CH48    | 5240            | 3.76                    | 0.13        | 3.89                                  | 9.30            |

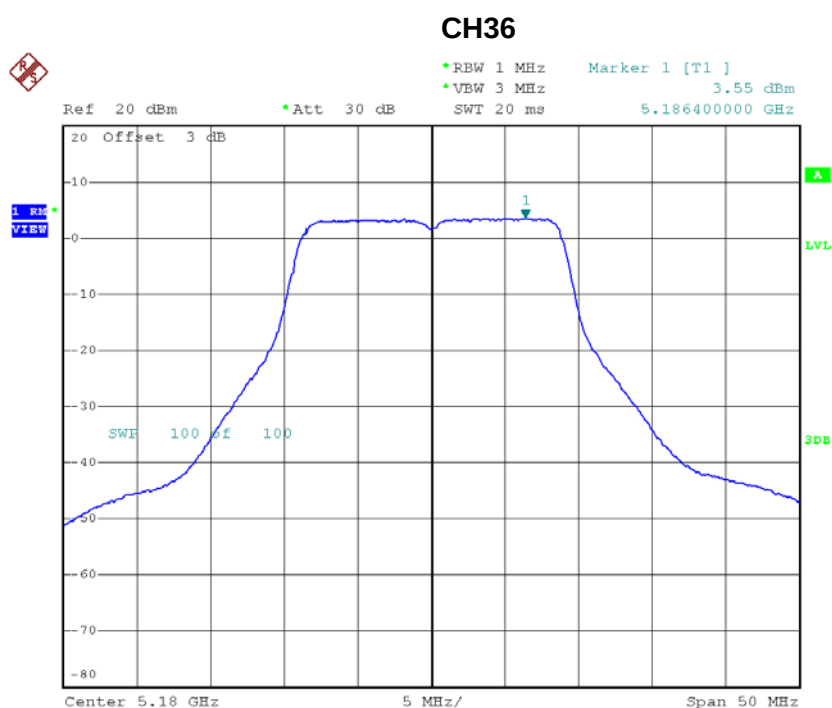


Date: 26.NOV.2018 16:39:21

### CH40

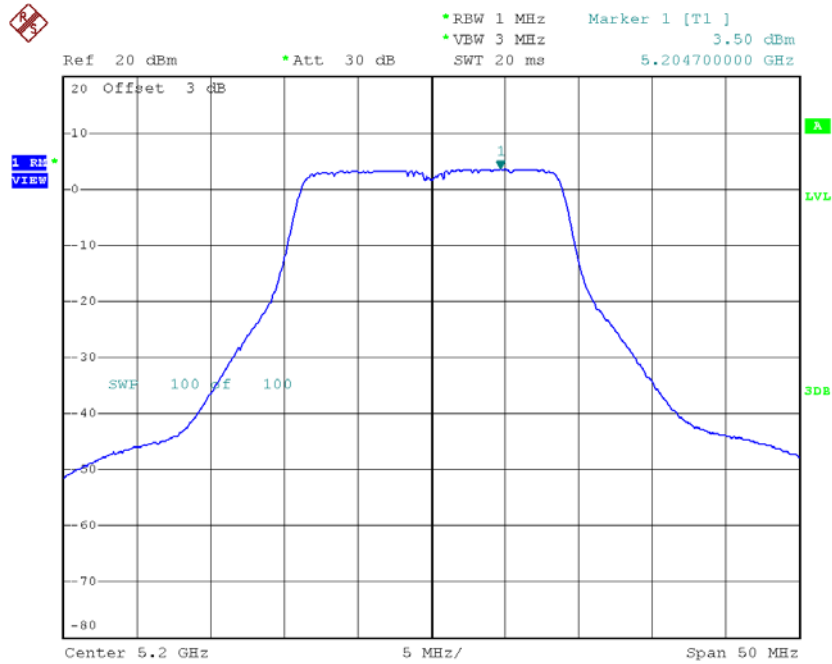

Date: 26.NOV.2018 16:40:22

### CH48

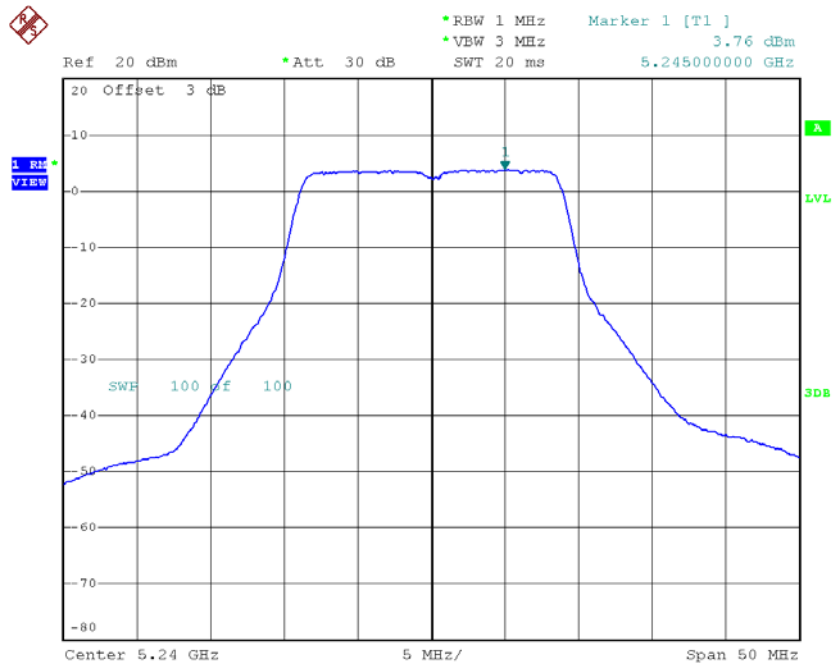

Date: 26.NOV.2018 16:41:18

**Test Mode: UNII-1/TX N20 Mode\_CH36/CH40/CH48\_Total**


| Channel | Frequency<br>(MHz) | Power Density<br>(dBm/MHz) | Limit<br>(dBm/MHz) |
|---------|--------------------|----------------------------|--------------------|
| CH36    | 5180               | 7.39                       | 9.30               |
| CH40    | 5200               | 7.46                       | 9.30               |
| CH48    | 5240               | 7.37                       | 9.30               |

**Test Mode: UNII-1/TX N40 Mode\_CH38/CH46\_ANT 1**

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH38    | 5190            | 1.12                    | 0.29        | 1.41                                  | 9.30            |
| CH46    | 5230            | 1.01                    | 0.29        | 1.30                                  | 9.30            |




### CH38

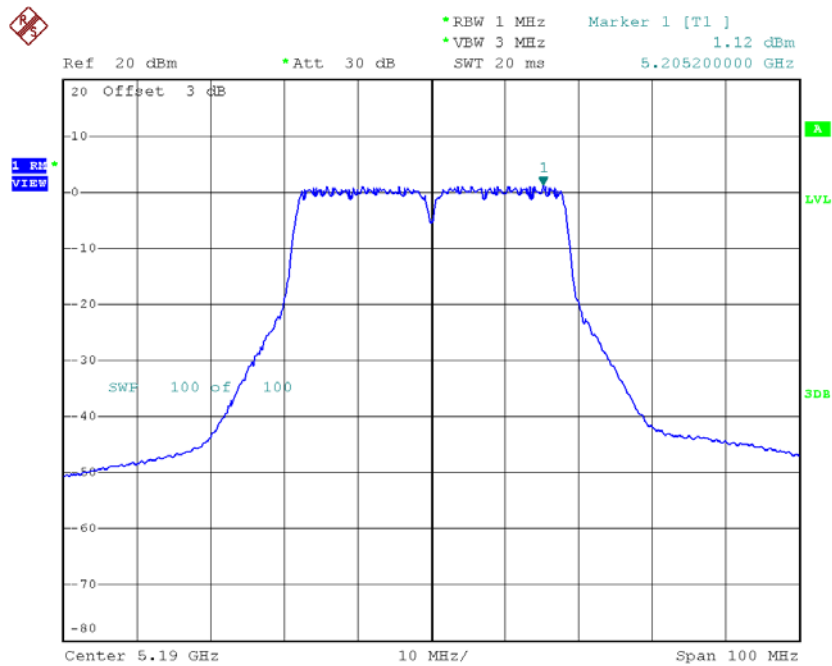

Date: 28.NOV.2018 15:14:06

### CH46

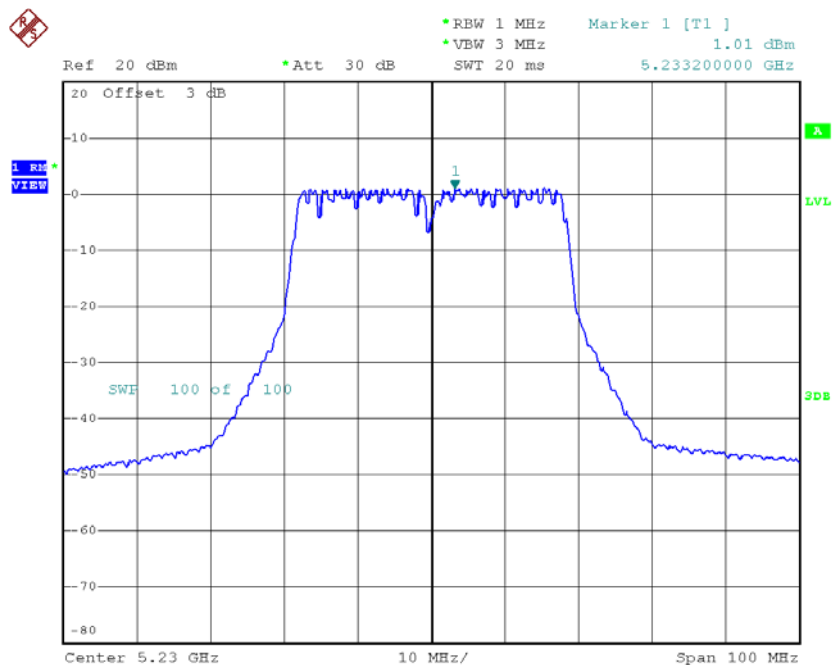


Date: 28.NOV.2018 15:15:31

**Test Mode: UNII-1/TX N40 Mode\_CH38/CH46\_ANT 2**


| Channel | Frequency<br>(MHz) | Power Density<br>(dBm/MHz) | Duty Factor | Power Density +<br>Duty Factor<br>(dBm/MHz) | Limit<br>(dBm/MHz) |
|---------|--------------------|----------------------------|-------------|---------------------------------------------|--------------------|
| CH38    | 5190               | 0.07                       | 0.29        | 0.36                                        | 9.30               |
| CH46    | 5230               | -0.17                      | 0.29        | 0.12                                        | 9.30               |

### CH38

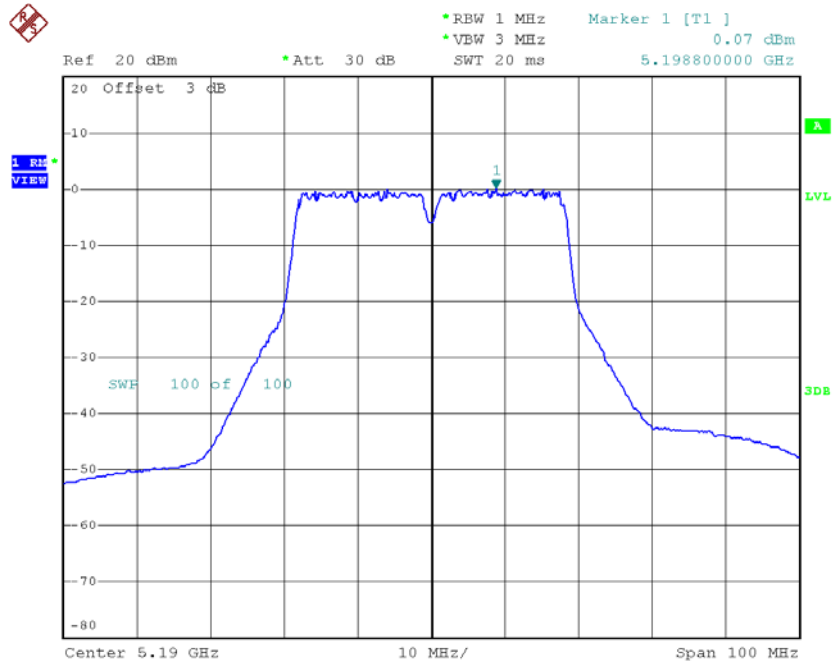

Date: 28.NOV.2018 15:27:03

### CH46

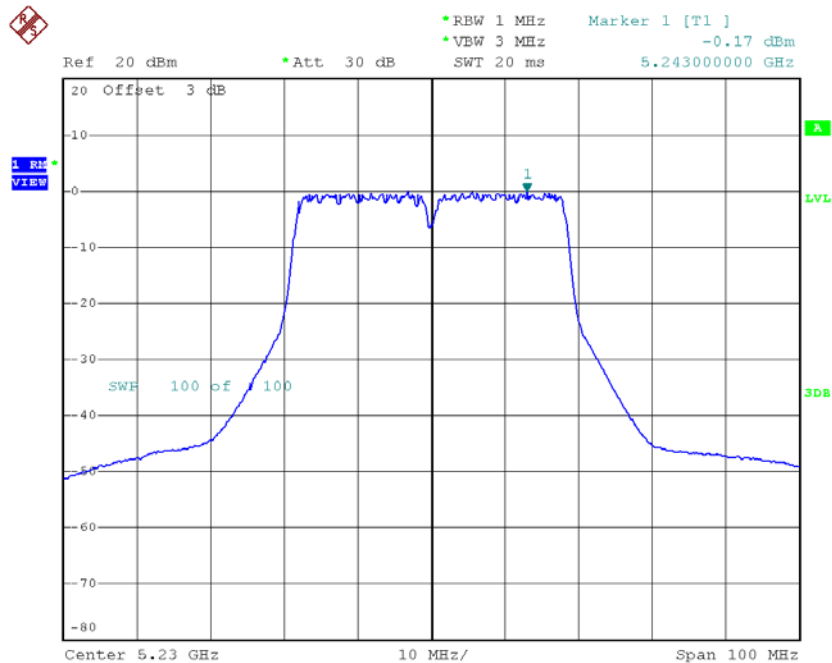


Date: 28.NOV.2018 15:28:03

**Test Mode: UNII-1/TX N40 Mode\_CH38/CH46\_Total**

| Channel | Frequency<br>(MHz) | Power Density<br>(dBm/MHz) | Limit<br>(dBm/MHz) |
|---------|--------------------|----------------------------|--------------------|
| CH38    | 5190               | 3.93                       | 9.30               |
| CH46    | 5230               | 3.77                       | 9.30               |


**Test Mode: UNII-2A/ TX A Mode\_CH52/CH60/CH64\_ANT 1**

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH52    | 5260            | 4.90                    | 0.13        | 5.03                                  | 9.30            |
| CH60    | 5300            | 5.05                    | 0.13        | 5.18                                  | 9.30            |
| CH64    | 5320            | 4.90                    | 0.13        | 5.03                                  | 9.30            |

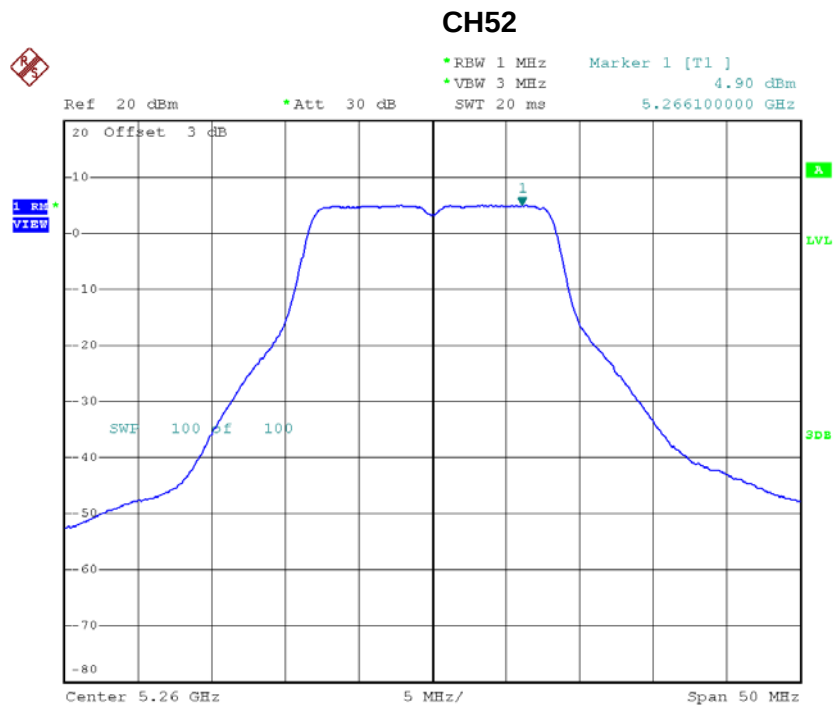


Date: 26.NOV.2018 14:24:50

### CH60

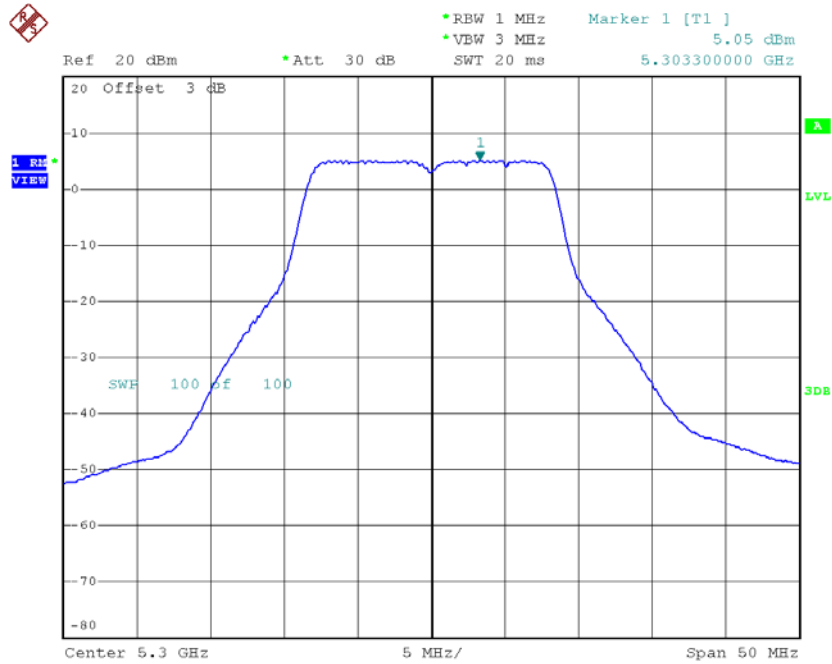

Date: 26.NOV.2018 14:25:48


### CH64

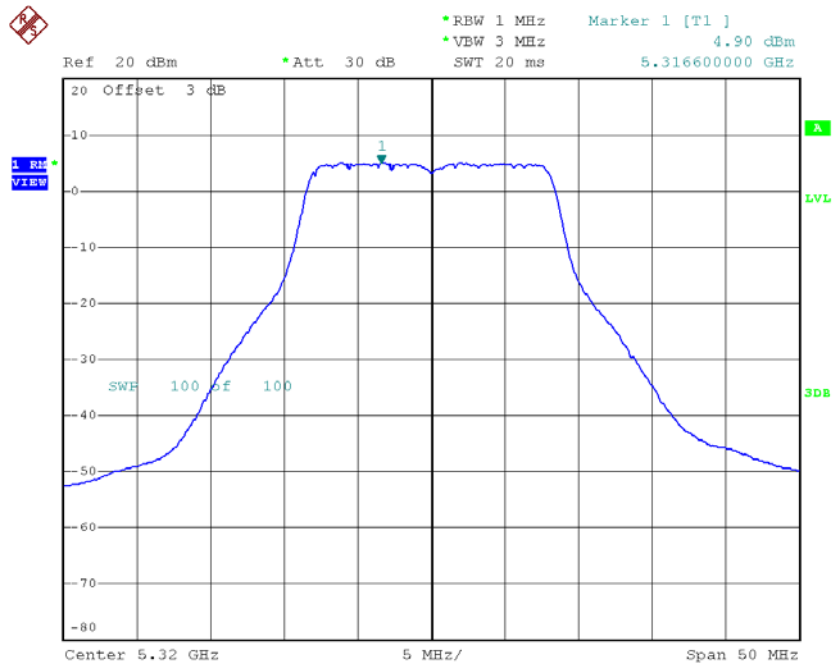

Date: 26.NOV.2018 14:28:50


**Test Mode: UNII-2A/ TX A Mode\_CH52/CH60/CH64\_ANT 2**

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH52    | 5260            | 4.15                    | 0.13        | 4.28                                  | 9.30            |
| CH60    | 5300            | 4.11                    | 0.13        | 4.24                                  | 9.30            |
| CH64    | 5320            | 4.11                    | 0.13        | 4.24                                  | 9.30            |

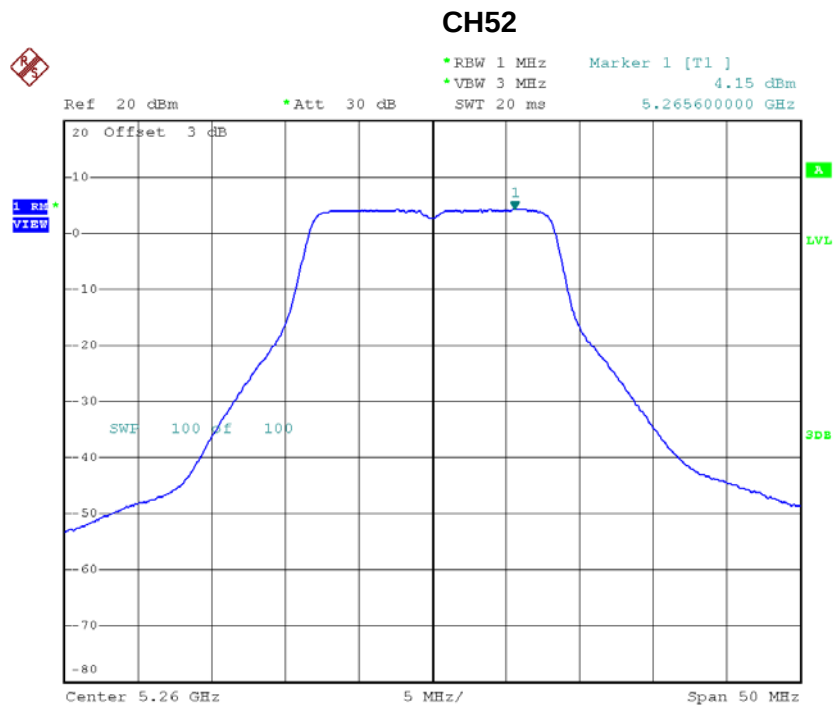


Date: 26.NOV.2018 15:20:12

### CH60

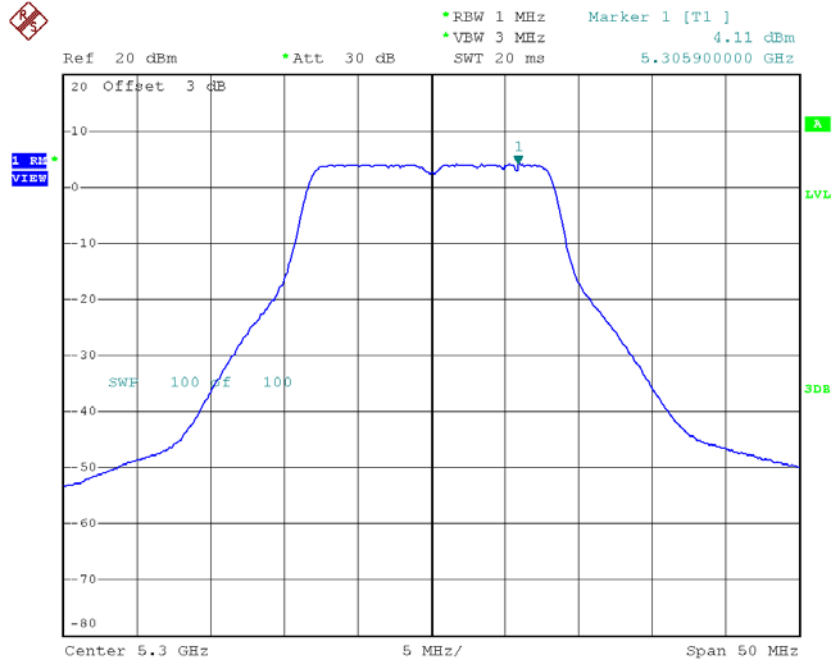

Date: 26.NOV.2018 15:21:10

### CH64

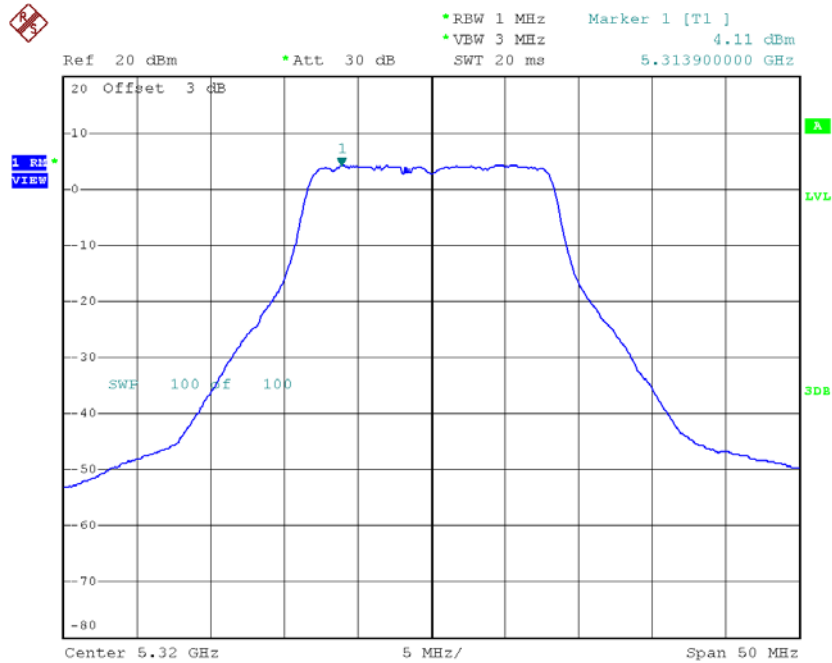

Date: 26.NOV.2018 15:22:04




**Test Mode: UNII-2A/ TX A Mode\_CH52/CH60/CH64\_Total**

| Channel | Frequency<br>(MHz) | Power Density<br>(dBm/MHz) | Limit<br>(dBm/MHz) |
|---------|--------------------|----------------------------|--------------------|
| CH52    | 5260               | 7.69                       | 9.30               |
| CH60    | 5300               | 7.75                       | 9.30               |
| CH64    | 5320               | 7.67                       | 9.30               |


**Test Mode: UNII-2A/TX N20 Mode\_CH52/CH60/CH64\_ANT 1**

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH52    | 5260            | 4.22                    | 0.13        | 4.35                                  | 9.30            |
| CH60    | 5300            | 4.36                    | 0.13        | 4.49                                  | 9.30            |
| CH64    | 5320            | 4.33                    | 0.13        | 4.46                                  | 9.30            |

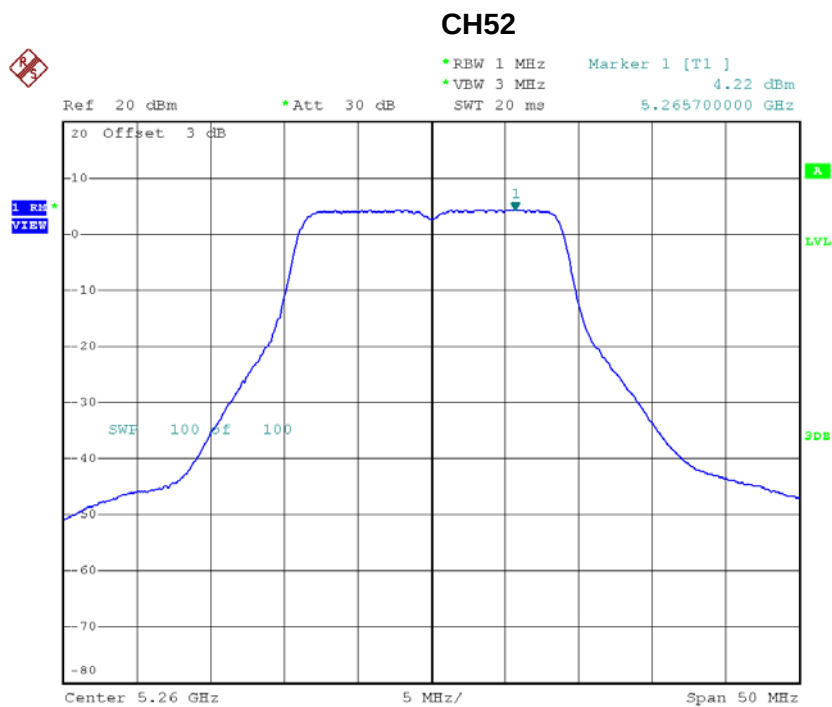


Date: 26.NOV.2018 16:28:28

### CH60

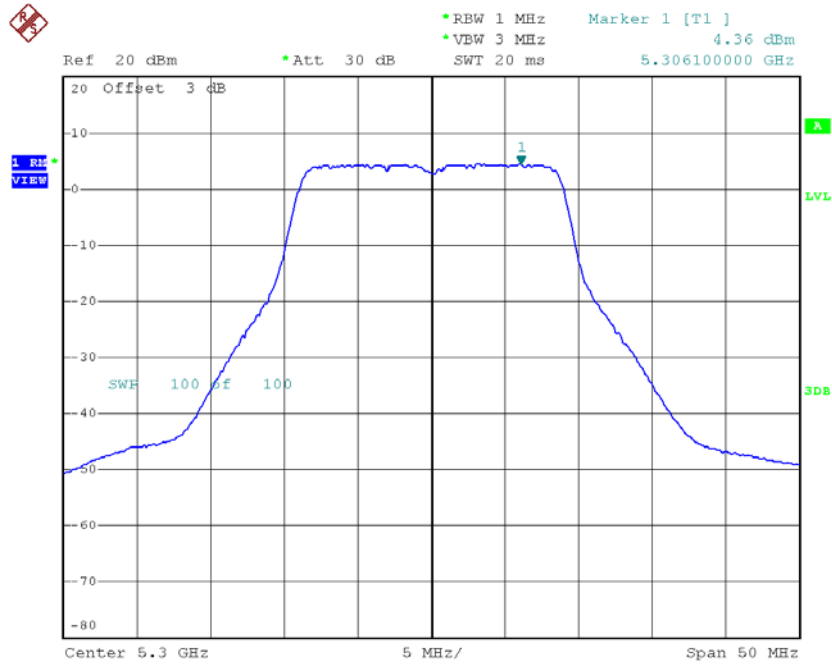

Date: 26.NOV.2018 16:29:33


### CH64

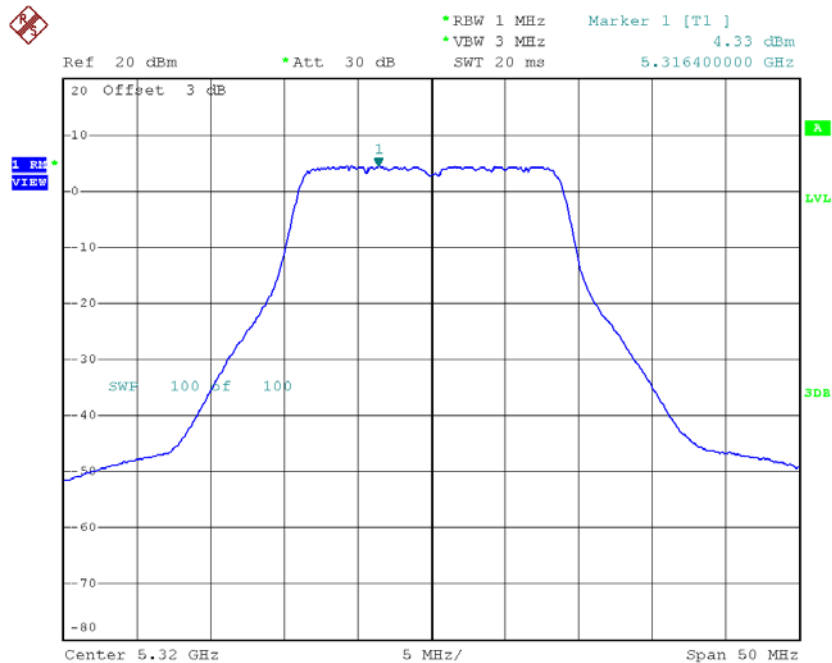

Date: 26.NOV.2018 16:30:49


Test Mode: UNII-2A/TX N20 Mode\_CH52/CH60/CH64\_ANT 2

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH52    | 5260            | 3.63                    | 0.13        | 3.76                                  | 9.30            |
| CH60    | 5300            | 3.63                    | 0.13        | 3.76                                  | 9.30            |
| CH64    | 5320            | 3.70                    | 0.13        | 3.83                                  | 9.30            |

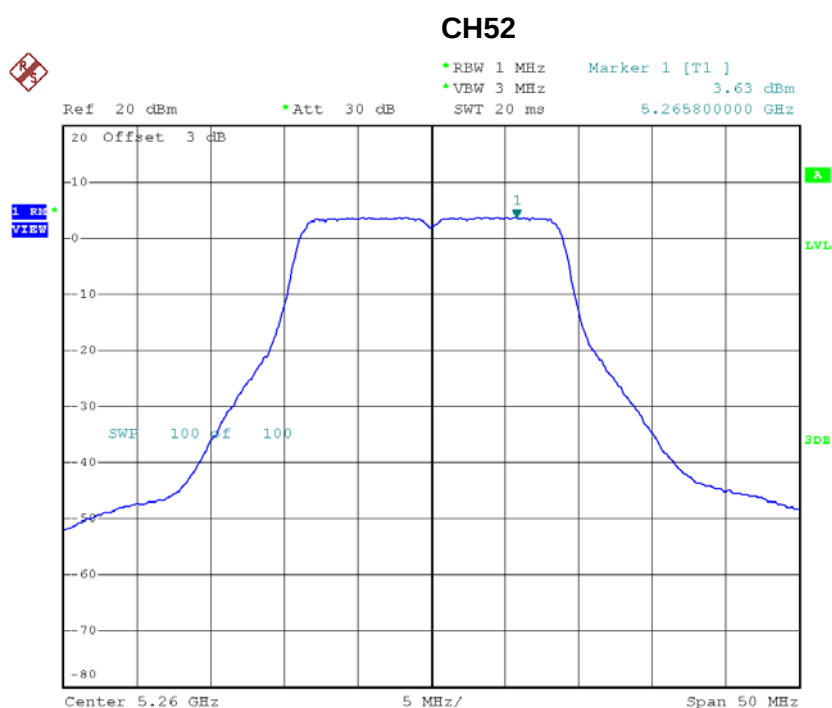


Date: 26.NOV.2018 16:42:20

### CH60

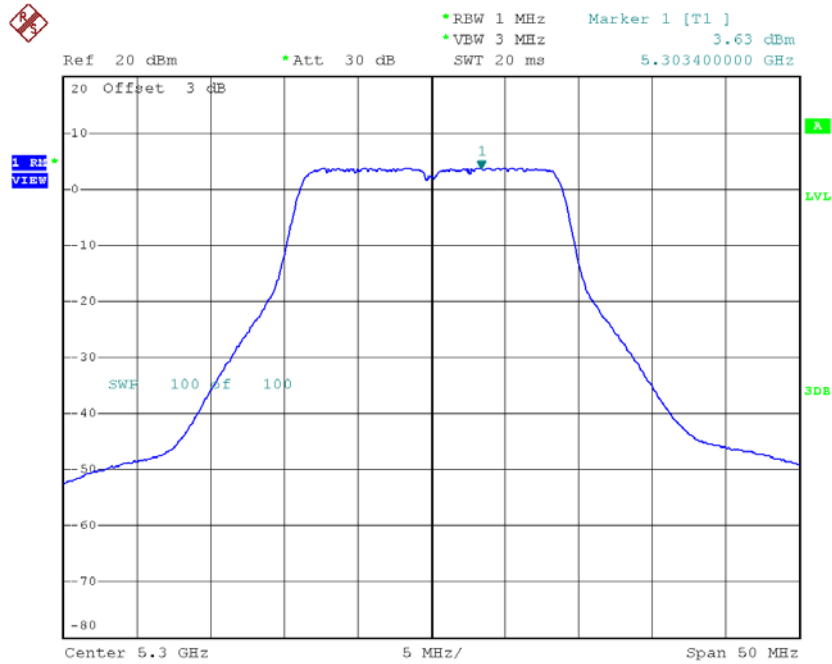

Date: 26.NOV.2018 16:43:47

### CH64

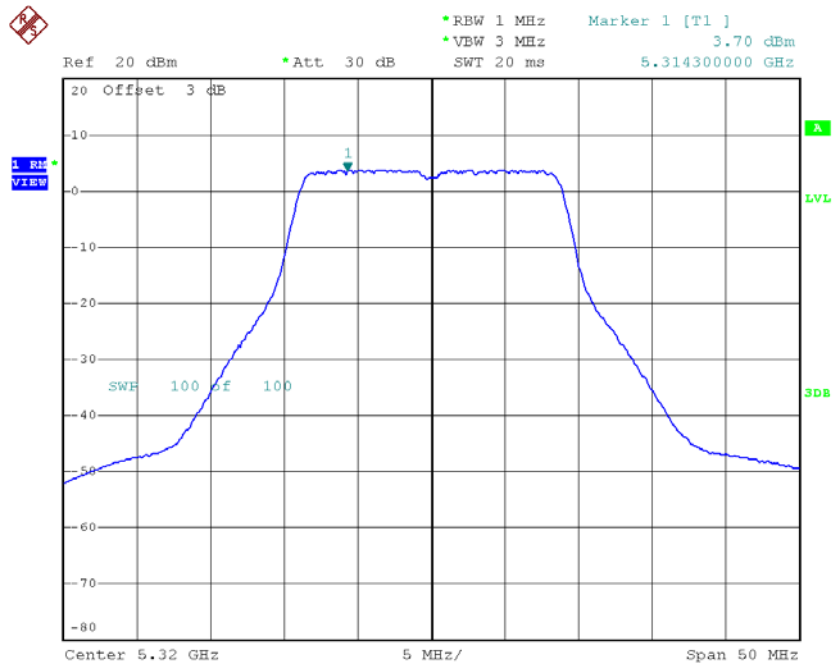

Date: 26.NOV.2018 16:44:50


**Test Mode: UNII-2A/TX N20 Mode\_CH52/CH60/CH64\_Total**

| Channel | Frequency<br>(MHz) | Power Density<br>(dBm/MHz) | Limit<br>(dBm/MHz) |
|---------|--------------------|----------------------------|--------------------|
| CH52    | 5260               | 7.07                       | 9.30               |
| CH60    | 5300               | 7.15                       | 9.30               |
| CH64    | 5320               | 7.16                       | 9.30               |

**Test Mode: UNII-2A/TX N40 Mode\_CH54/CH62\_ANT 1**


| Channel | Frequency<br>(MHz) | Power Density<br>(dBm/MHz) | Duty Factor | Power Density +<br>Duty Factor<br>(dBm/MHz) | Limit<br>(dBm/MHz) |
|---------|--------------------|----------------------------|-------------|---------------------------------------------|--------------------|
| CH54    | 5270               | 0.30                       | 0.29        | 0.59                                        | 9.30               |
| CH62    | 5310               | 0.42                       | 0.29        | 0.71                                        | 9.30               |

### CH54

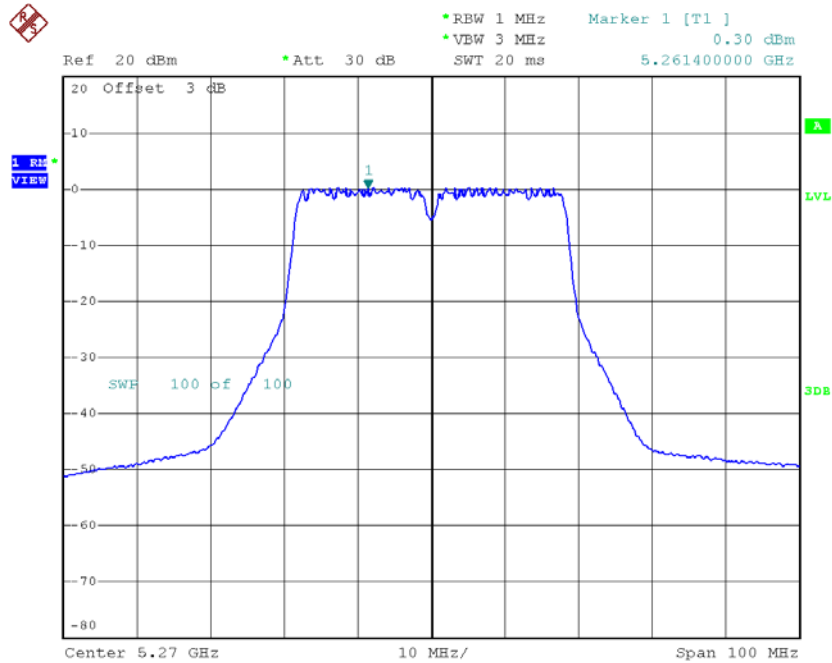

Date: 28.NOV.2018 15:16:36

### CH62

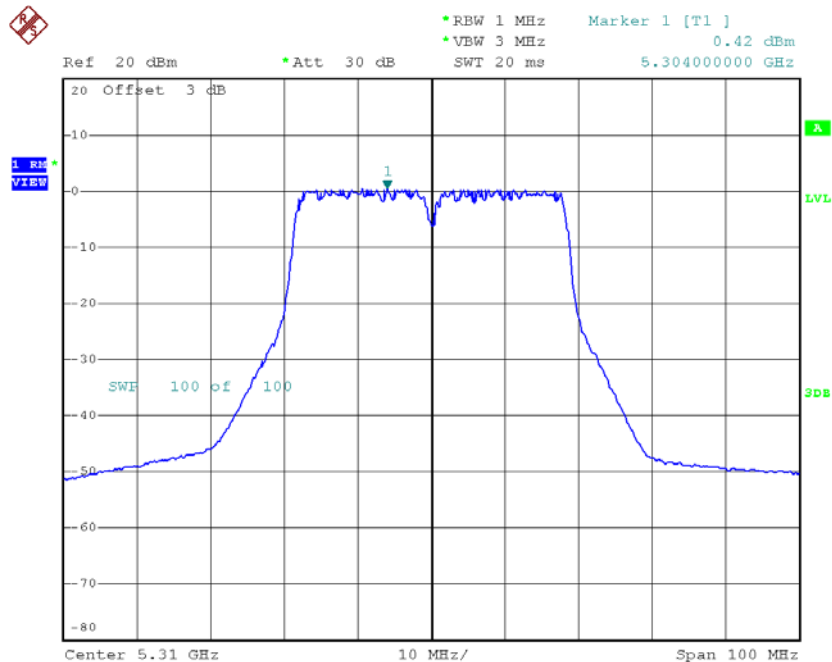


Date: 28.NOV.2018 15:17:43



**Test Mode: UNII-2A/TX N40 Mode\_CH54/CH62\_ANT 2**


| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH54    | 5270            | -0.22                   | 0.29        | 0.07                                  | 9.30            |
| CH62    | 5310            | -0.23                   | 0.29        | 0.06                                  | 9.30            |

### CH54

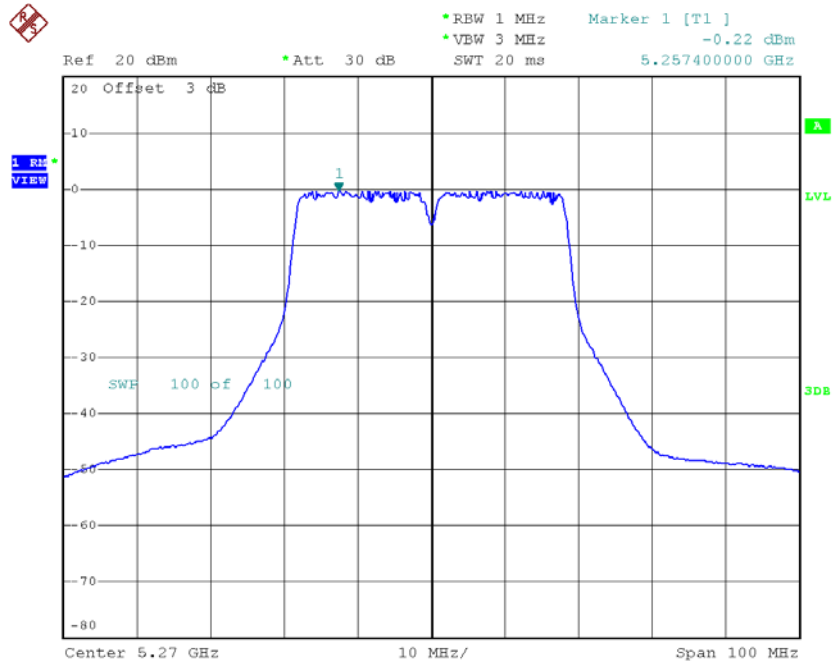

Date: 28.NOV.2018 15:29:45

### CH62

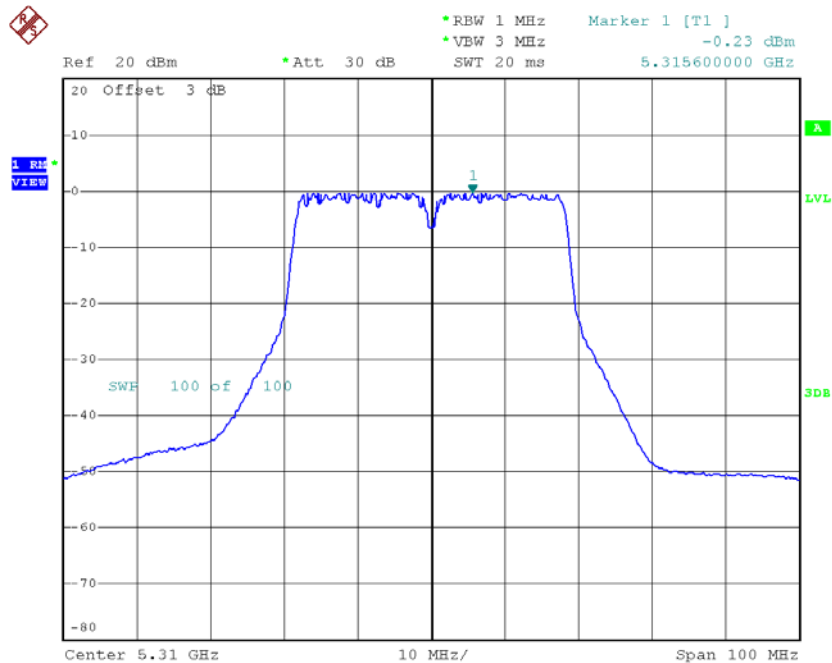

Date: 28.NOV.2018 15:31:14


**Test Mode: UNII-2A/TX N40 Mode\_CH54/CH62\_Total**

| Channel | Frequency<br>(MHz) | Power Density<br>(dBm/MHz) | Limit<br>(dBm/MHz) |
|---------|--------------------|----------------------------|--------------------|
| CH54    | 5270               | 3.35                       | 9.30               |
| CH62    | 5310               | 3.41                       | 9.30               |

**Test Mode: UNII-2C/ TX A Mode\_CH100/CH116/CH140\_ANT 1**


| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH100   | 5500            | 5.03                    | 0.13        | 5.16                                  | 9.30            |
| CH116   | 5580            | 4.75                    | 0.13        | 4.88                                  | 9.30            |
| CH140   | 5700            | 4.91                    | 0.13        | 5.04                                  | 9.30            |

**CH100**

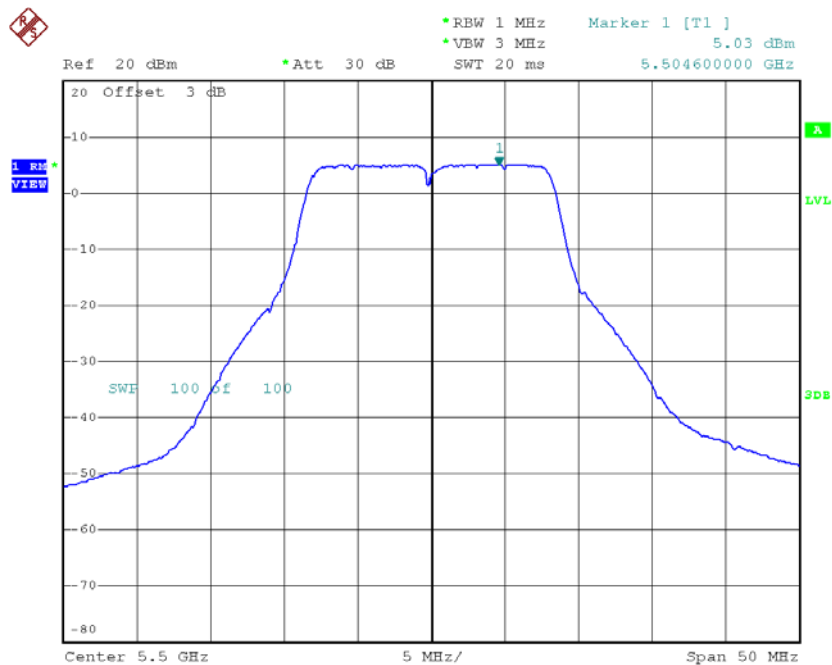


Date: 26.NOV.2018 14:30:33

### CH116

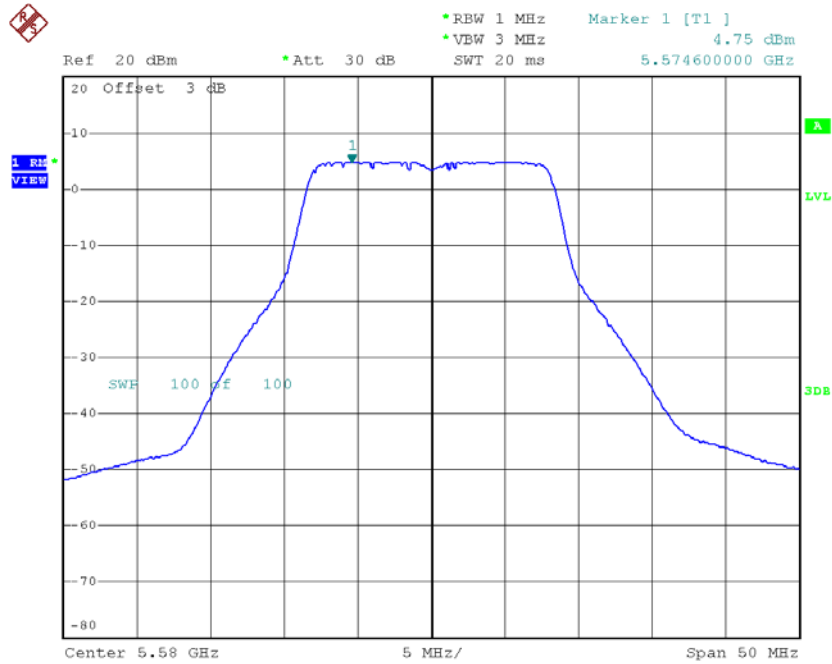

Date: 26.NOV.2018 14:31:35

### CH140

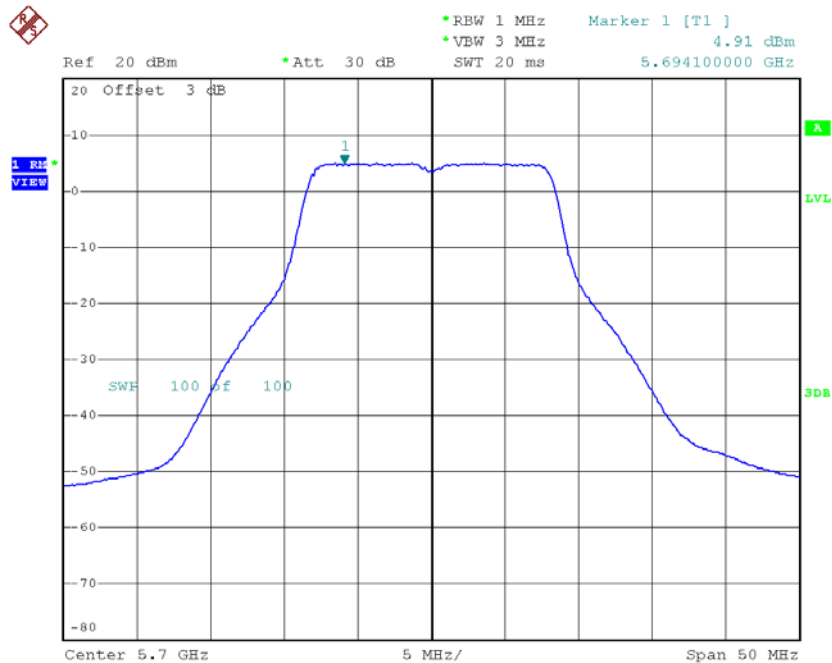


Date: 26.NOV.2018 14:32:36

**Test Mode: UNII-2C/ TX A Mode\_CH100/CH116/CH140\_ANT 2**


| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH100   | 5500            | 4.87                    | 0.13        | 5.00                                  | 9.30            |
| CH116   | 5580            | 4.67                    | 0.13        | 4.80                                  | 9.30            |
| CH140   | 5700            | 4.91                    | 0.13        | 5.04                                  | 9.30            |

**CH100**

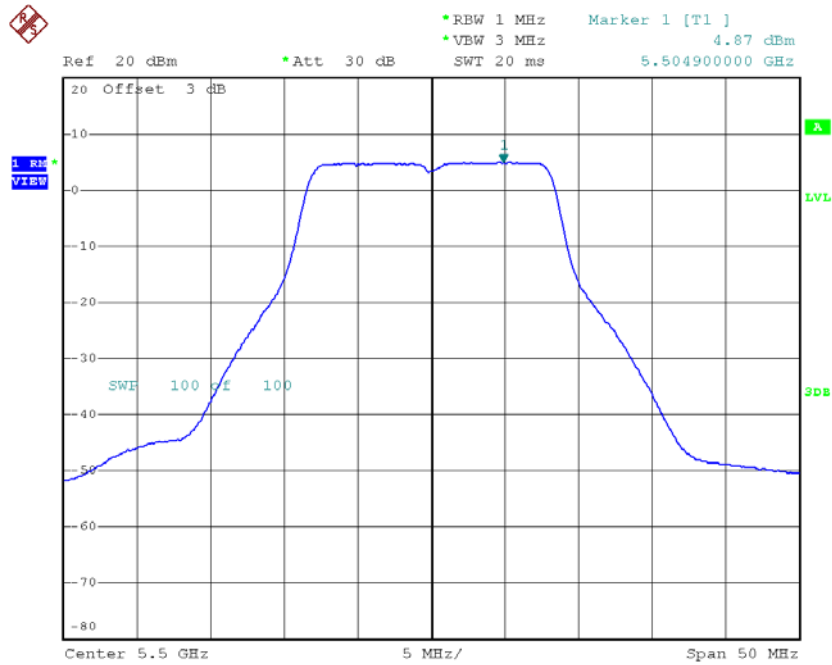


Date: 26.NOV.2018 15:23:08

### CH116

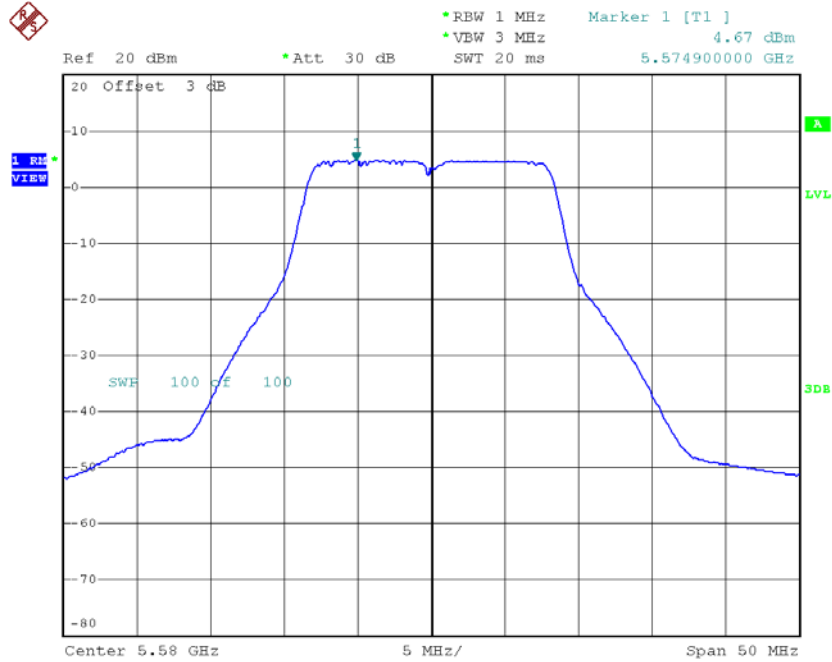

Date: 26.NOV.2018 15:24:25

### CH140

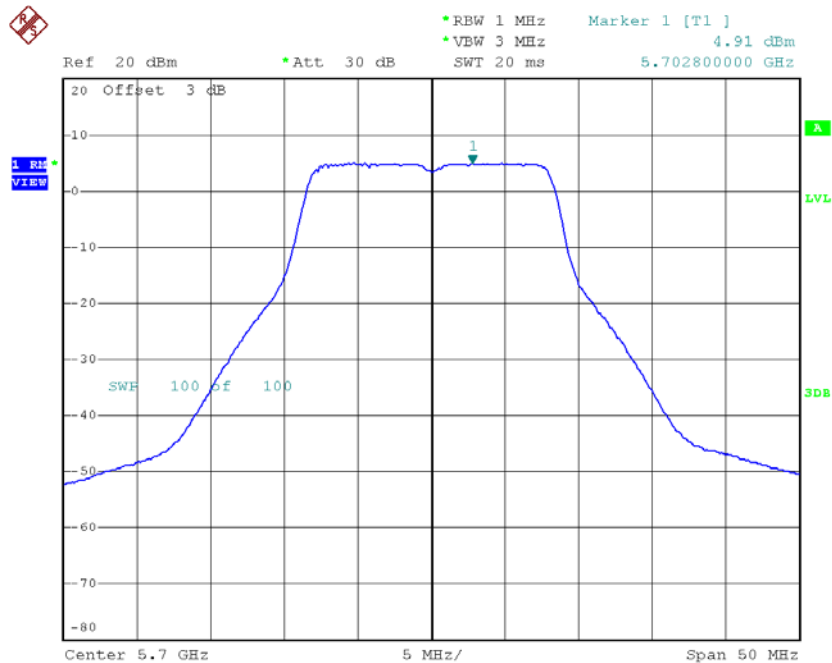

Date: 26.NOV.2018 15:25:45

**Test Mode: UNII-2C/ TX A Mode\_CH100/CH116/CH140\_Total**


| Channel | Frequency<br>(MHz) | Power Density<br>(dBm/MHz) | Limit<br>(dBm/MHz) |
|---------|--------------------|----------------------------|--------------------|
| CH100   | 5500               | 8.09                       | 9.30               |
| CH116   | 5580               | 7.85                       | 9.30               |
| CH140   | 5700               | 8.05                       | 9.30               |



**Test Mode: UNII-2C/TX N20 Mode\_CH100/CH116/CH140\_ANT 1**


| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH100   | 5500            | 4.56                    | 0.13        | 4.69                                  | 9.30            |
| CH116   | 5580            | 4.30                    | 0.13        | 4.43                                  | 9.30            |
| CH140   | 5700            | 4.41                    | 0.13        | 4.54                                  | 9.30            |

**CH100**

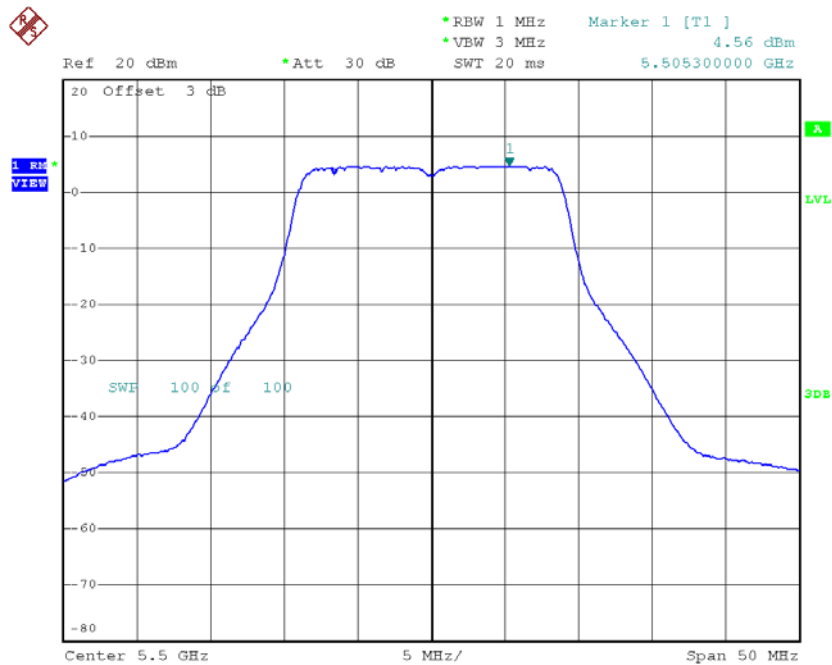


Date: 26.NOV.2018 16:31:51

### CH116

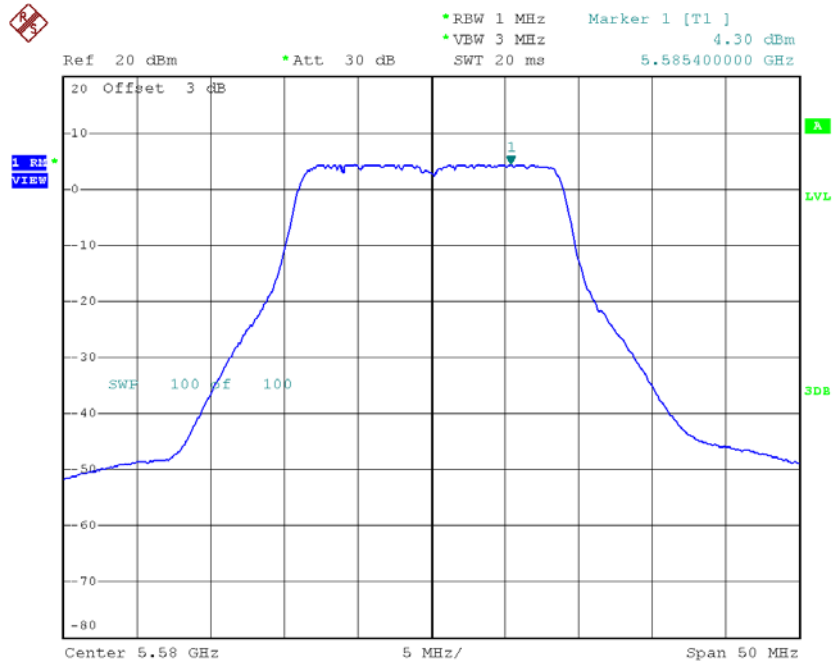

Date: 26.NOV.2018 16:32:55

### CH140

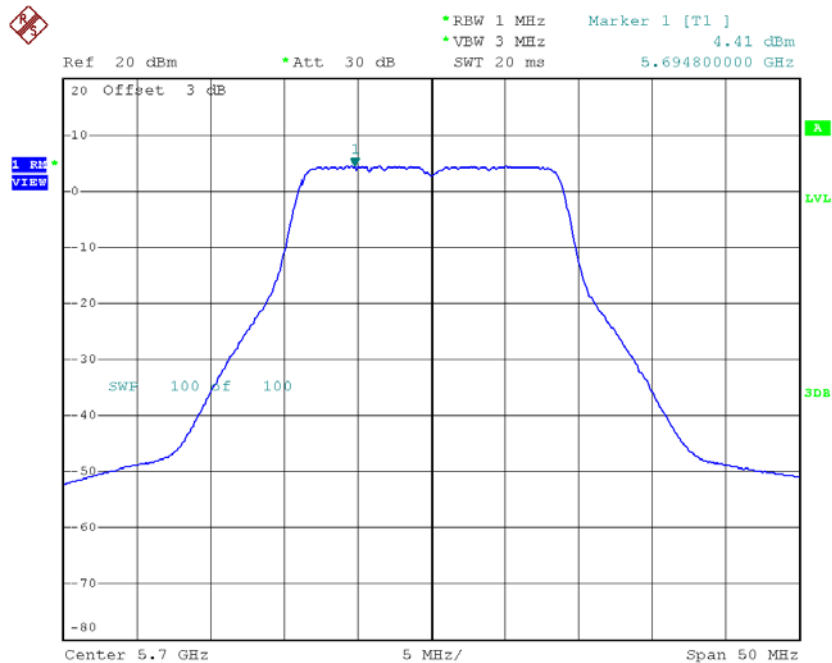


Date: 26.NOV.2018 16:34:05

**Test Mode: UNII-2C/TX N20 Mode\_CH100/CH116/CH140\_ANT 2**


| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH100   | 5500            | 4.47                    | 0.13        | 4.60                                  | 9.30            |
| CH116   | 5580            | 4.44                    | 0.13        | 4.57                                  | 9.30            |
| CH140   | 5700            | 4.53                    | 0.13        | 4.66                                  | 9.30            |

**CH100**

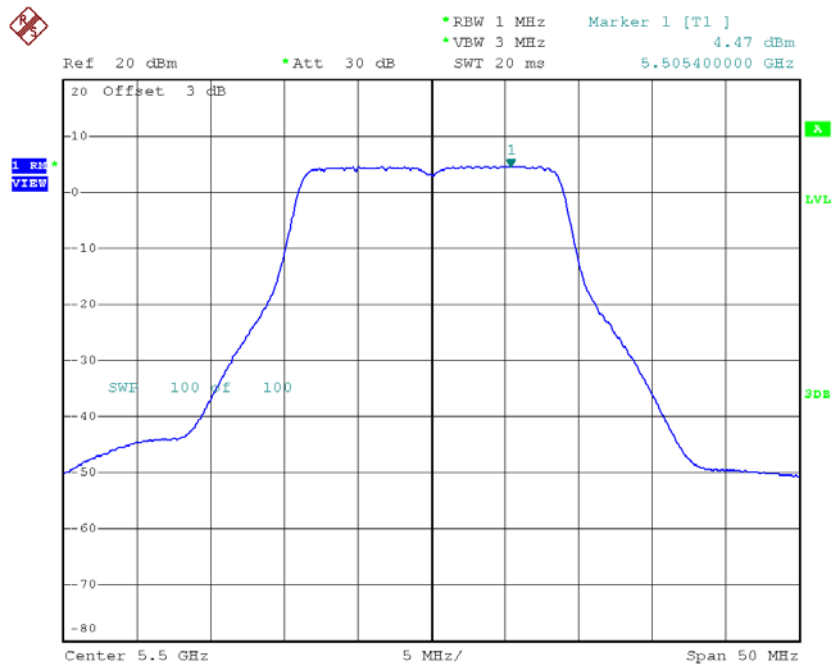


Date: 26.NOV.2018 16:45:47

### CH116

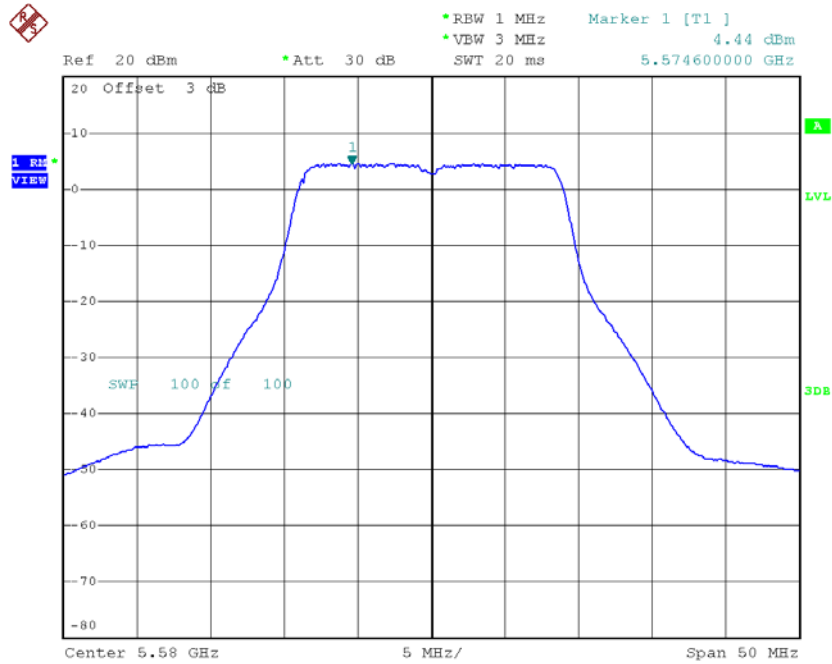

Date: 26.NOV.2018 16:47:15

### CH140

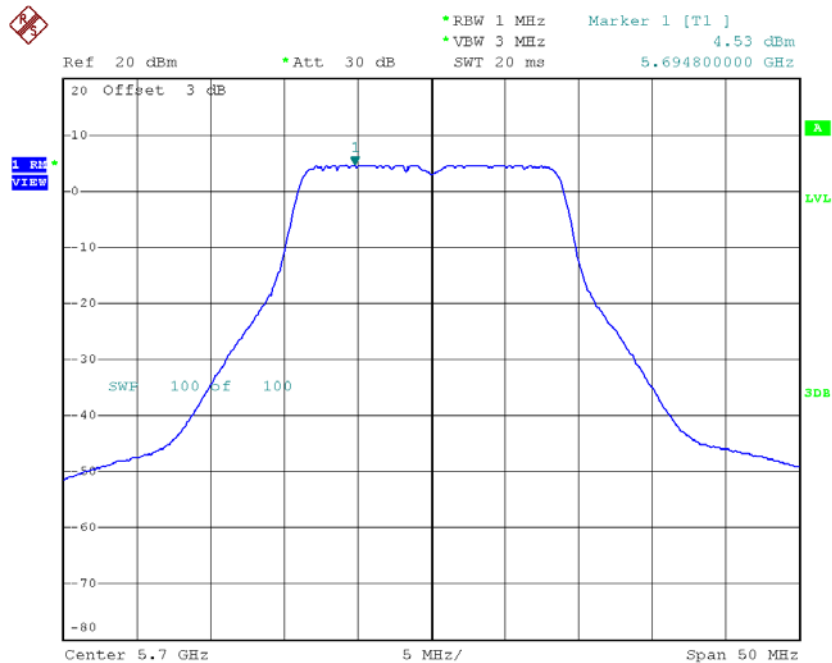


Date: 26.NOV.2018 16:48:12

**Test Mode: UNII-2C/TX N20 Mode\_CH100/CH116/CH140\_Total**

| Channel | Frequency<br>(MHz) | Power Density<br>(dBm/MHz) | Limit<br>(dBm/MHz) |
|---------|--------------------|----------------------------|--------------------|
| CH100   | 5500               | 7.65                       | 9.30               |
| CH116   | 5580               | 7.51                       | 9.30               |
| CH140   | 5700               | 7.61                       | 9.30               |


**Test Mode: UNII-2C/TX N40 Mode\_CH102/CH110/CH134\_ANT 1**

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH102   | 5510            | 0.82                    | 0.29        | 1.11                                  | 9.30            |
| CH110   | 5550            | 0.65                    | 0.29        | 0.94                                  | 9.30            |
| CH134   | 5670            | 0.59                    | 0.29        | 0.88                                  | 9.30            |

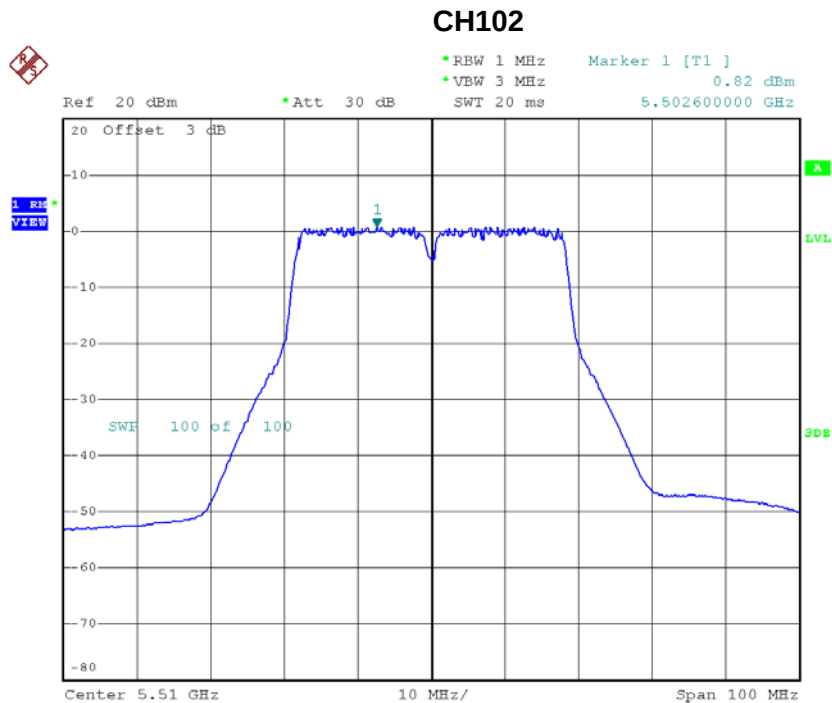


Date: 28.NOV.2018 15:19:05

### CH110

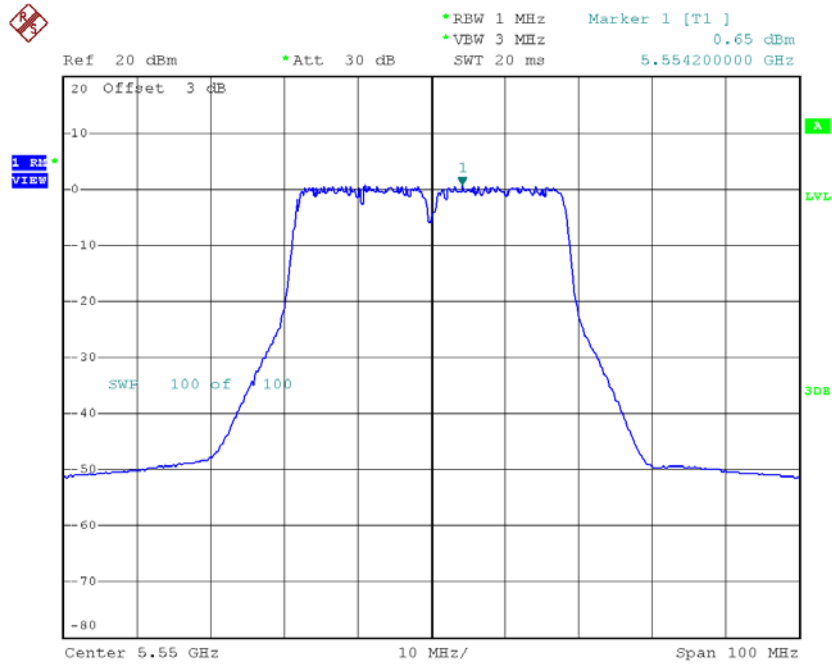

Date: 28.NOV.2018 15:20:09

### CH134

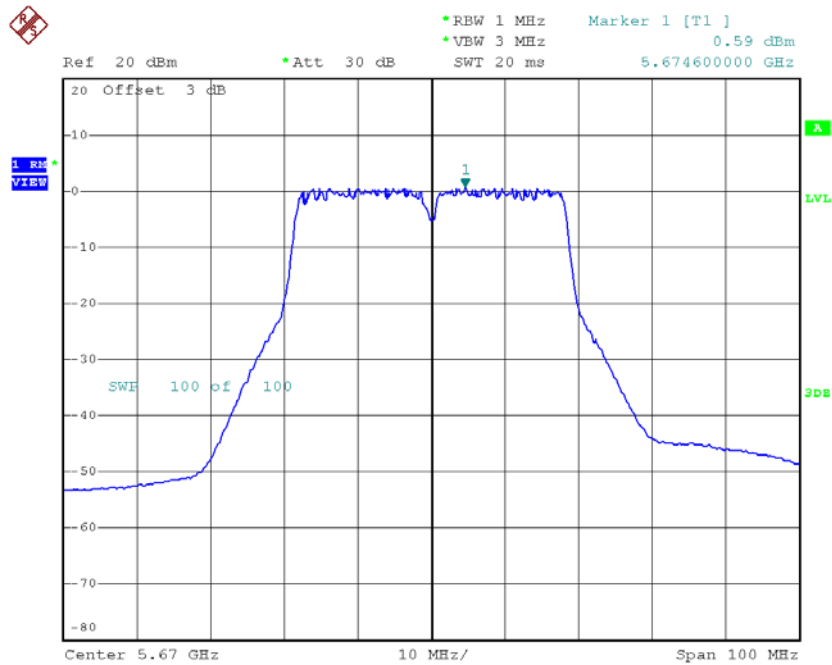


Date: 28.NOV.2018 15:21:08

**Test Mode: UNII-2C/TX N40 Mode\_CH102/CH110/CH134\_ANT 2**

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH102   | 5510            | -0.03                   | 0.29        | 0.26                                  | 9.30            |
| CH110   | 5550            | 0.11                    | 0.29        | 0.40                                  | 9.30            |
| CH134   | 5670            | -0.37                   | 0.29        | -0.08                                 | 9.30            |


**CH102**

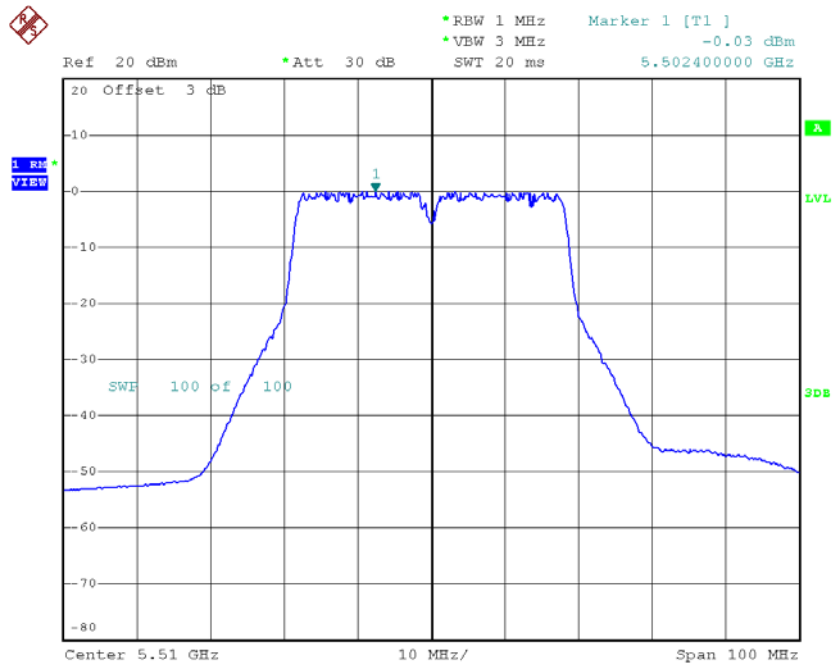

Date: 28.NOV.2018 15:32:13




### CH110

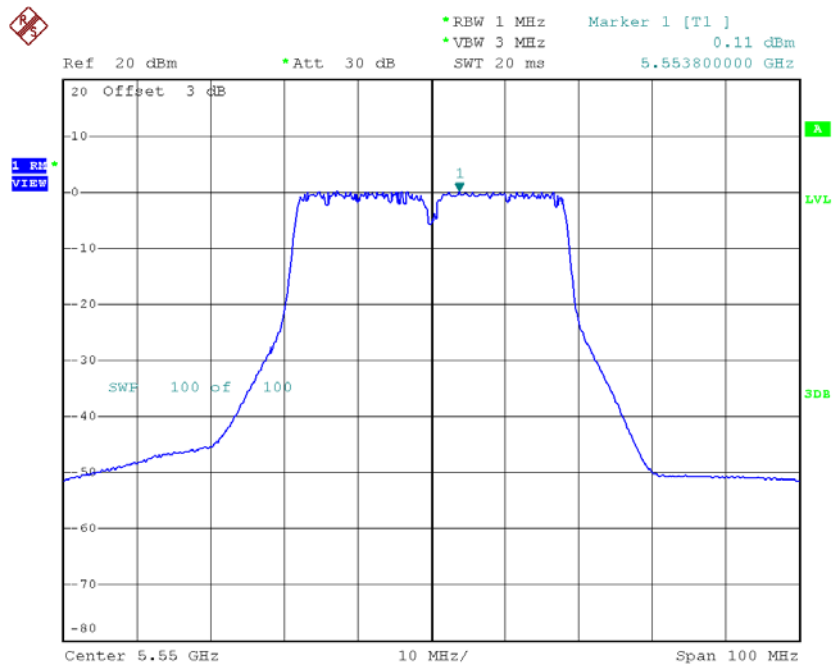

Date: 28.NOV.2018 15:33:11

### CH134

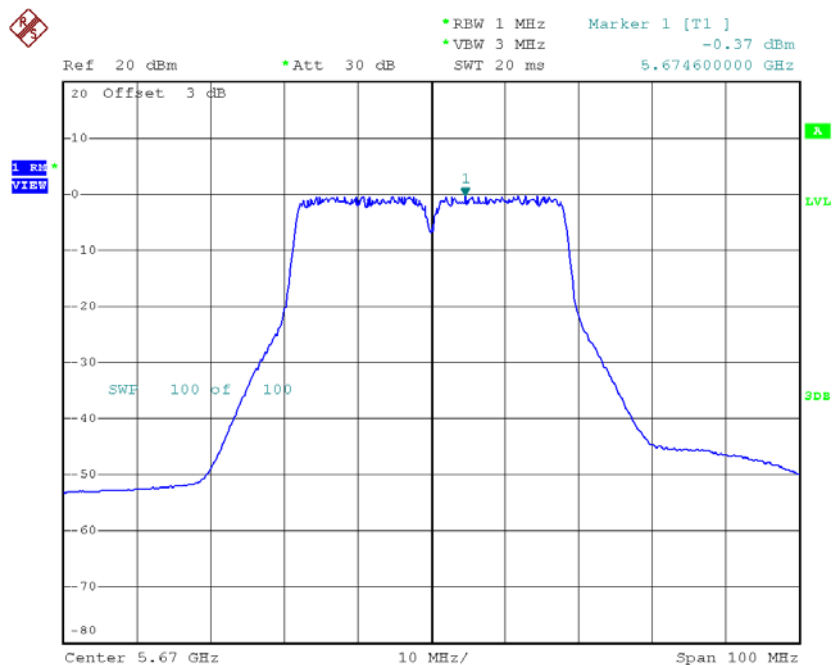

Date: 28.NOV.2018 15:34:42


**Test Mode: UNII-2C/TX N40 Mode\_CH102/CH110/CH134\_Total**

| Channel | Frequency<br>(MHz) | Power Density<br>(dBm/MHz) | Limit<br>(dBm/MHz) |
|---------|--------------------|----------------------------|--------------------|
| CH102   | 5510               | 3.72                       | 9.30               |
| CH110   | 5550               | 3.69                       | 9.30               |
| CH134   | 5670               | 3.44                       | 9.30               |

**Test Mode: UNII-3/TX A Mode\_CH149/CH157/CH165\_ANT 1**


| Channel | Frequency (MHz) | Power Density (dBm/500kHz) | Duty Factor | Power Density + Duty Factor (dBm/500kHz) | Limit (dBm/500kHz) |
|---------|-----------------|----------------------------|-------------|------------------------------------------|--------------------|
| CH149   | 5745            | 2.18                       | 0.13        | 2.31                                     | 28.30              |
| CH157   | 5785            | 2.13                       | 0.13        | 2.26                                     | 28.30              |
| CH165   | 5825            | 1.88                       | 0.13        | 2.01                                     | 28.30              |

**TX CH149**

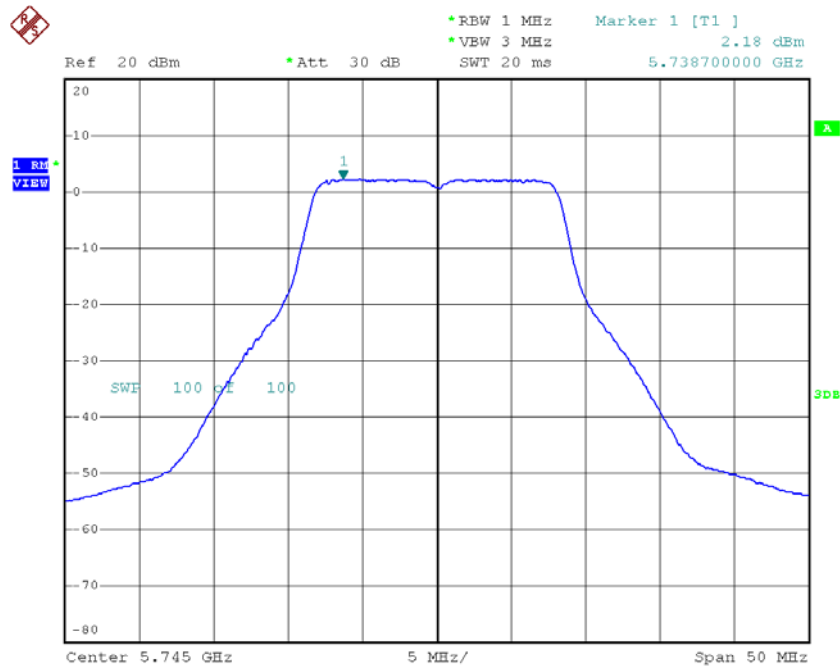


Date: 26.NOV.2018 14:34:17

### TX CH157

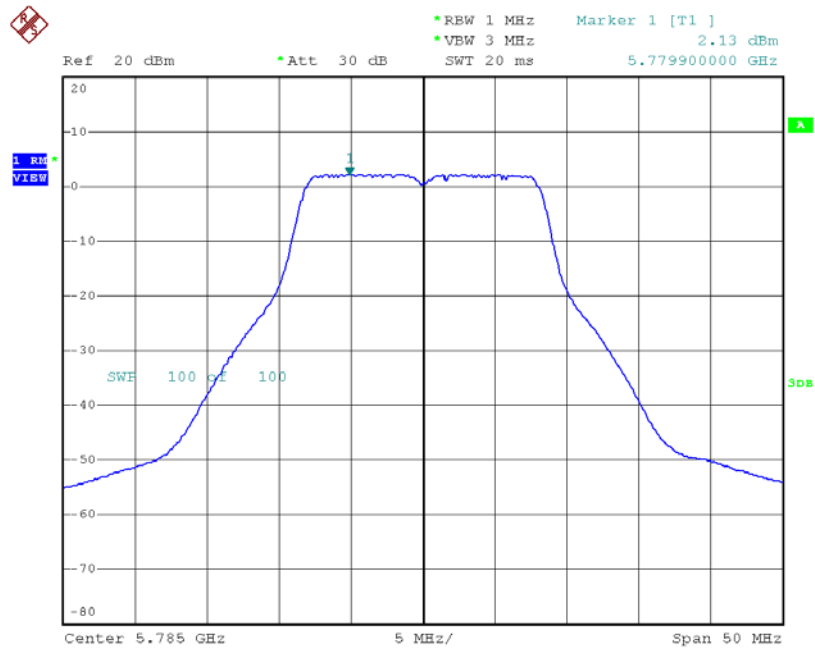

Date: 26.NOV.2018 14:35:24

### TX CH165

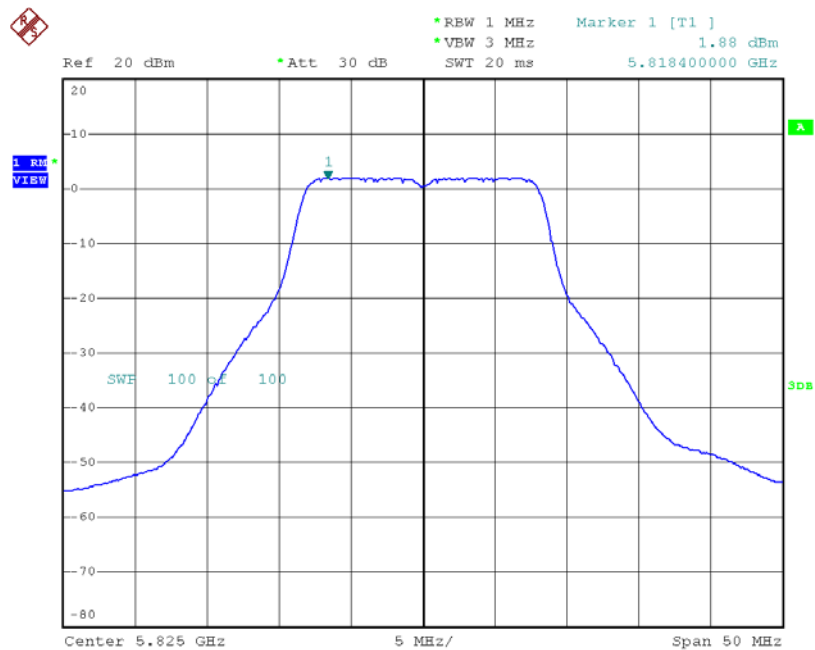


Date: 26.NOV.2018 14:36:27

**Test Mode: UNII-3/TX A Mode\_CH149/CH157/CH165\_ANT 2**


| Channel | Frequency (MHz) | Power Density (dBm/500kHz) | Duty Factor | Power Density + Duty Factor (dBm/500kHz) | Limit (dBm/500kHz) |
|---------|-----------------|----------------------------|-------------|------------------------------------------|--------------------|
| CH149   | 5745            | 0.17                       | 0.13        | 0.30                                     | 28.30              |
| CH157   | 5785            | 0.13                       | 0.13        | 0.26                                     | 28.30              |
| CH165   | 5825            | -0.34                      | 0.13        | -0.21                                    | 28.30              |

**TX CH149**

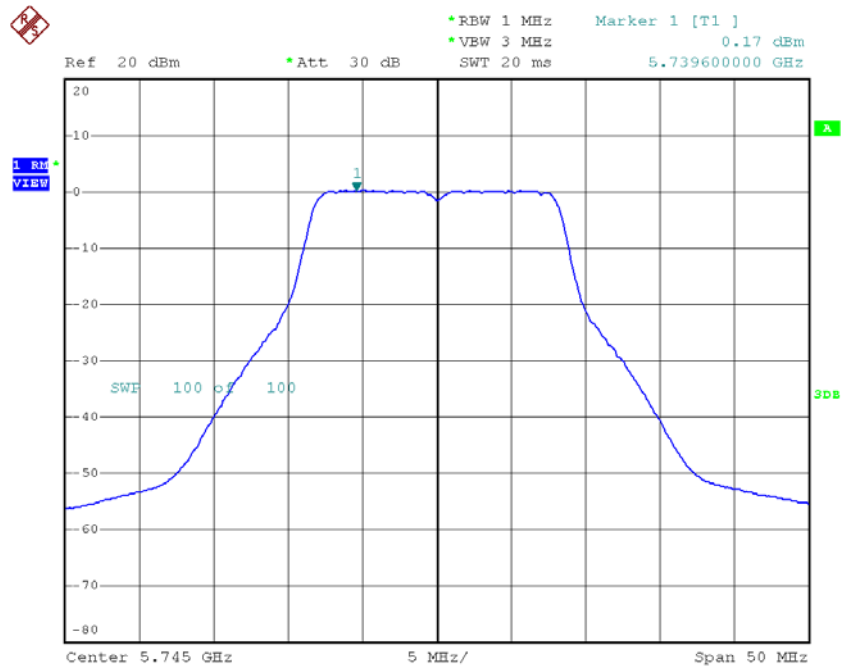


Date: 26.NOV.2018 15:26:55

### TX CH157

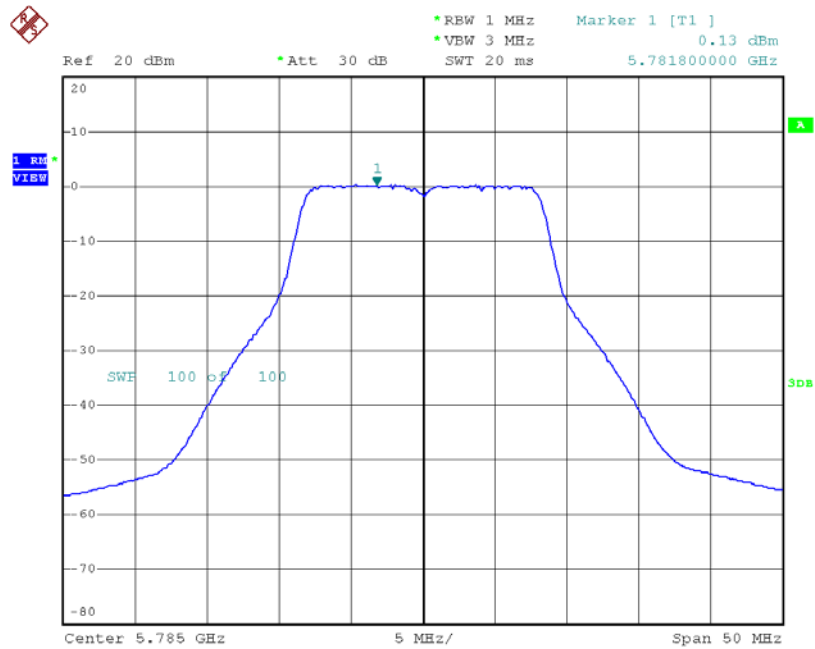

Date: 26.NOV.2018 15:28:03

### TX CH165

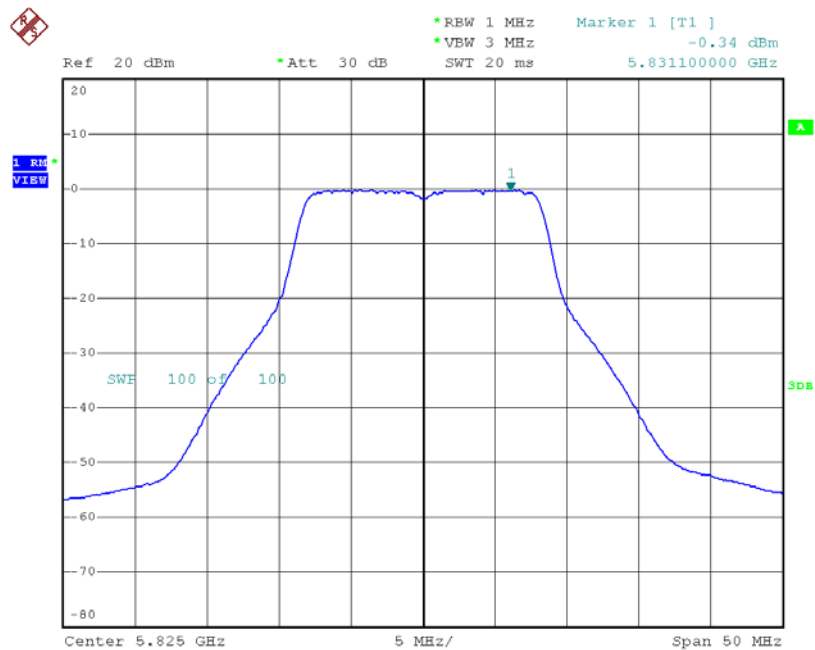

Date: 26.NOV.2018 15:29:11


**Test Mode: UNII-3/TX A Mode\_CH149/CH157/CH165\_Total**

| Channel | Frequency<br>(MHz) | Power Density<br>(dBm/500kHz) | Limit<br>(dBm/500kHz) |
|---------|--------------------|-------------------------------|-----------------------|
| CH149   | 5745               | 4.43                          | 28.30                 |
| CH157   | 5785               | 4.39                          | 28.30                 |
| CH165   | 5825               | 4.05                          | 28.30                 |

**Test Mode: UNII-3/ TX N20 Mode\_CH149/CH157/CH165\_ANT 1**

| Channel | Frequency (MHz) | Power Density (dBm/500kHz) | Duty Factor | Power Density + Duty Factor (dBm/500kHz) | Limit (dBm/500kHz) |
|---------|-----------------|----------------------------|-------------|------------------------------------------|--------------------|
| CH149   | 5745            | 1.66                       | 0.13        | 1.79                                     | 28.30              |
| CH157   | 5785            | 1.63                       | 0.13        | 1.76                                     | 28.30              |
| CH165   | 5825            | 1.28                       | 0.13        | 1.41                                     | 28.30              |


**TX CH149**

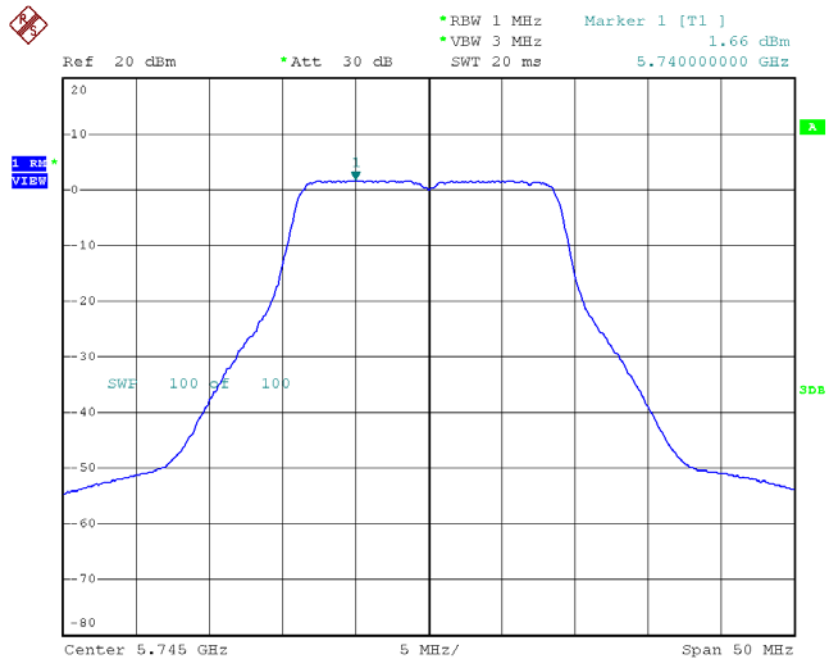

Date: 26.NOV.2018 16:35:14




### TX CH157

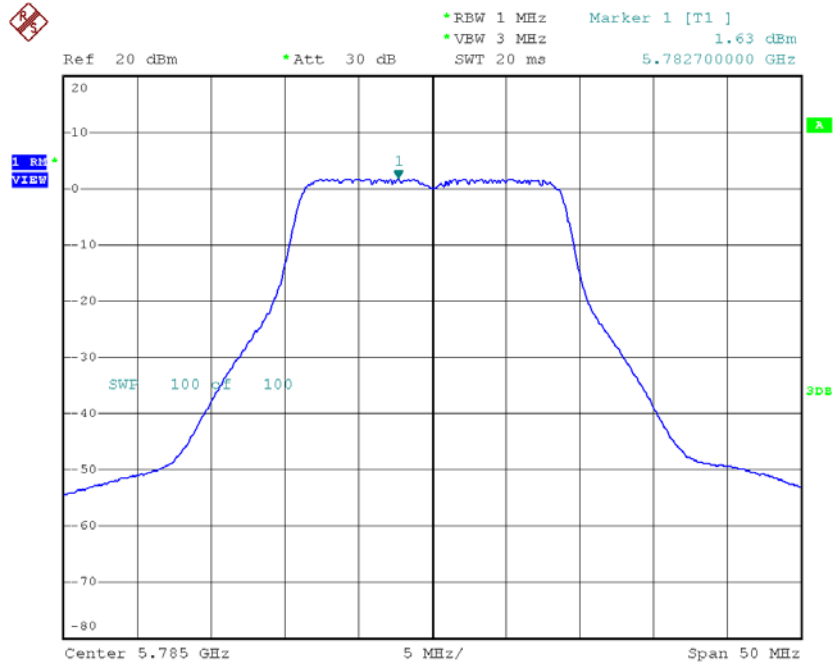

Date: 26.NOV.2018 16:36:20

### TX CH165

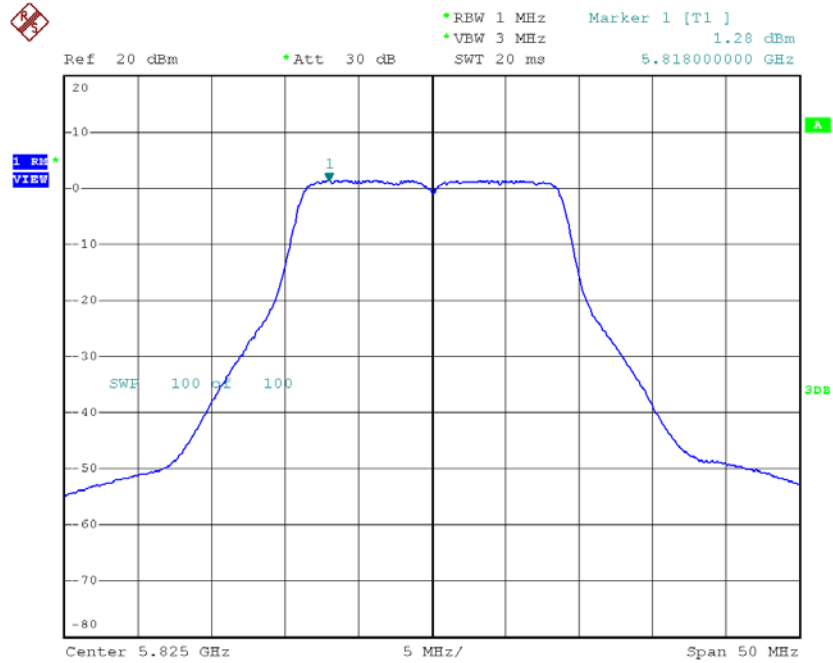


Date: 26.NOV.2018 16:37:22

Test Mode: UNII-3/ TX N20 Mode\_CH149/CH157/CH165\_ANT 2


| Channel | Frequency (MHz) | Power Density (dBm/500kHz) | Duty Factor | Power Density + Duty Factor (dBm/500kHz) | Limit (dBm/500kHz) |
|---------|-----------------|----------------------------|-------------|------------------------------------------|--------------------|
| CH149   | 5745            | -0.12                      | 0.13        | 0.01                                     | 28.30              |
| CH157   | 5785            | -0.22                      | 0.13        | -0.09                                    | 28.30              |
| CH165   | 5825            | -0.67                      | 0.13        | -0.54                                    | 28.30              |

TX CH149

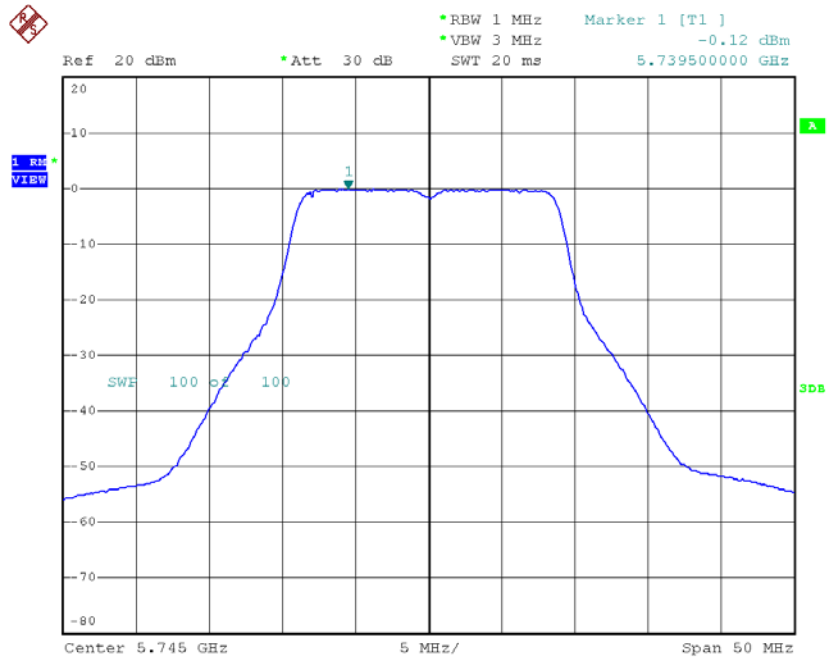


Date: 26.NOV.2018 16:49:15

### TX CH157

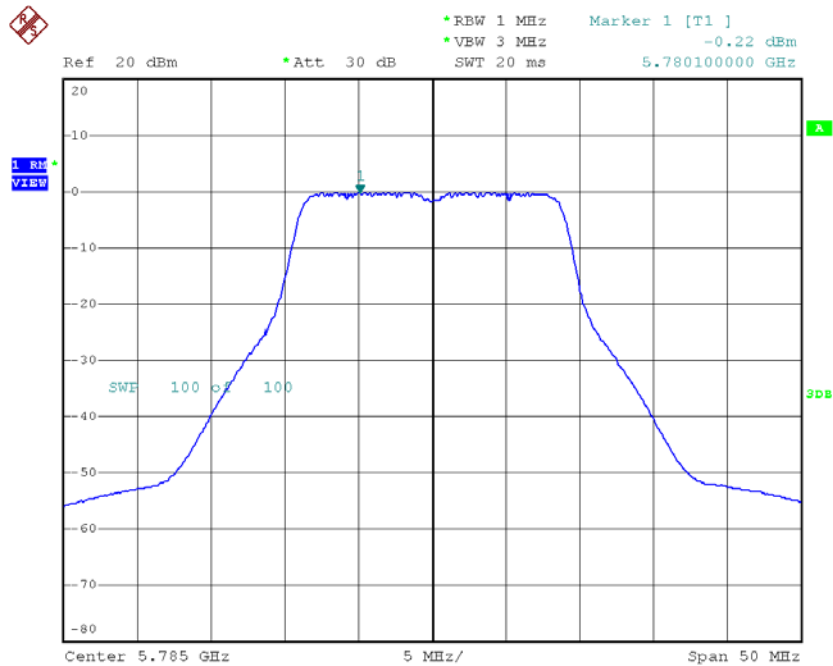

Date: 26.NOV.2018 16:50:18

### TX CH165

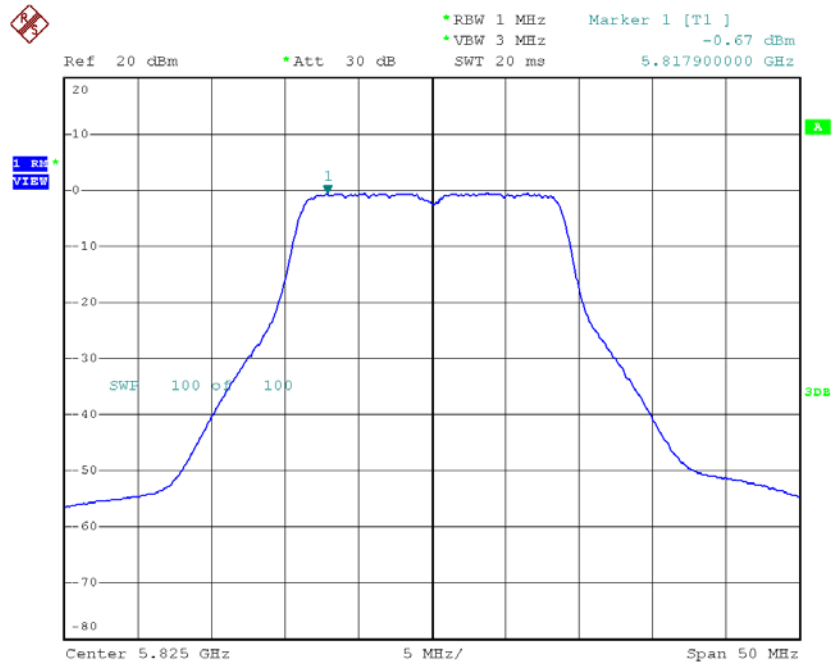

Date: 26.NOV.2018 16:51:19


**Test Mode: UNII-3/ TX N20 Mode\_CH149/CH157/CH165\_Total**

| Channel | Frequency<br>(MHz) | Power Density<br>(dBm/500kHz) | Limit<br>(dBm/500kHz) |
|---------|--------------------|-------------------------------|-----------------------|
| CH149   | 5745               | 4.00                          | 28.30                 |
| CH157   | 5785               | 3.94                          | 28.30                 |
| CH165   | 5825               | 3.55                          | 28.30                 |

**Test Mode: UNII-3/ TX N40 Mode\_CH151/CH159\_ANT 1**


| Channel | Frequency<br>(MHz) | Power Density<br>(dBm/500kHz) | Duty Factor | Power Density +<br>Duty Factor<br>(dBm/500kHz) | Limit<br>(dBm/500kHz) |
|---------|--------------------|-------------------------------|-------------|------------------------------------------------|-----------------------|
| CH151   | 5755               | -2.20                         | 0.29        | -1.91                                          | 28.30                 |
| CH159   | 5795               | -2.12                         | 0.29        | -1.83                                          | 28.30                 |

### TX CH151

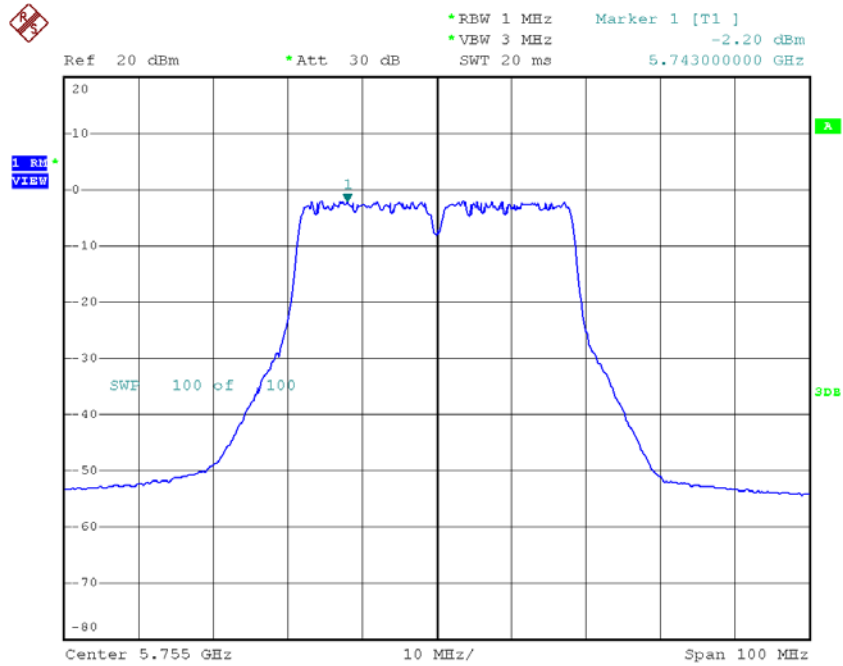

Date: 28.NOV.2018 15:22:17

### TX CH159

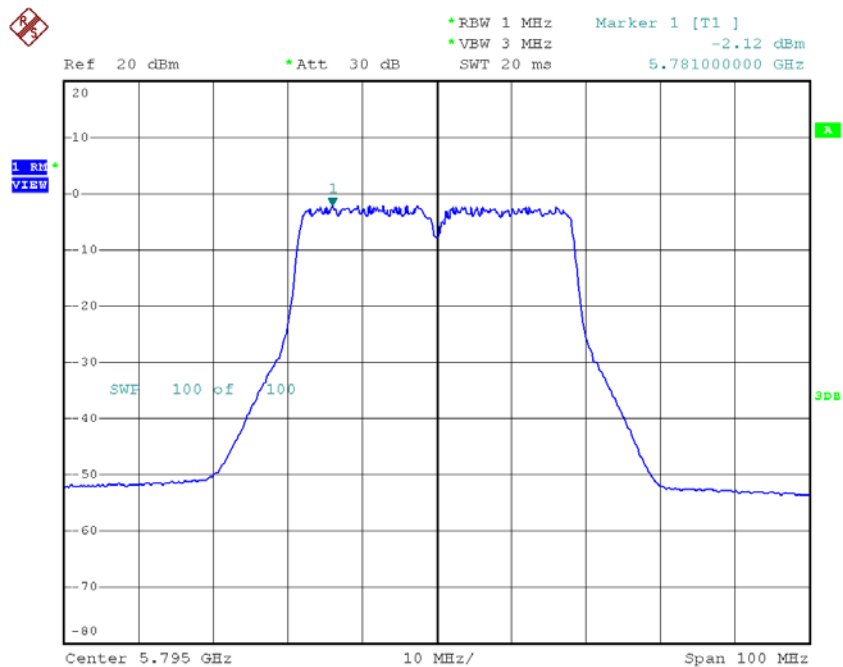


Date: 28.NOV.2018 15:23:22

**Test Mode: UNII-3/ TX N40 Mode\_CH151/CH159\_ANT 2**


| Channel | Frequency<br>(MHz) | Power Density<br>(dBm/500kHz) | Duty Factor | Power Density +<br>Duty Factor<br>(dBm/500kHz) | Limit<br>(dBm/500kHz) |
|---------|--------------------|-------------------------------|-------------|------------------------------------------------|-----------------------|
| CH151   | 5755               | -2.78                         | 0.29        | -2.49                                          | 28.30                 |
| CH159   | 5795               | -2.96                         | 0.29        | -2.67                                          | 28.30                 |

### TX CH151

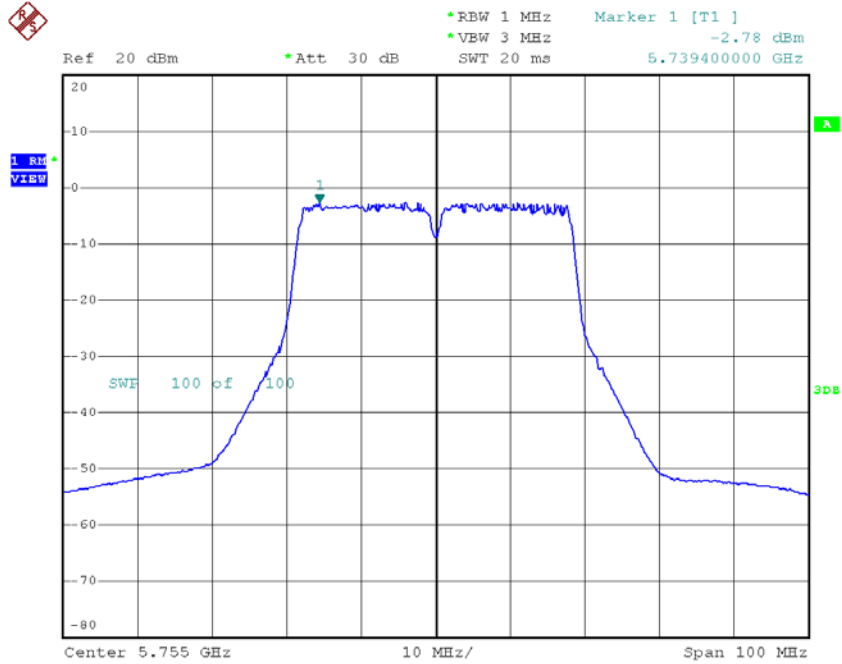

Date: 28.NOV.2018 15:35:49

### TX CH159

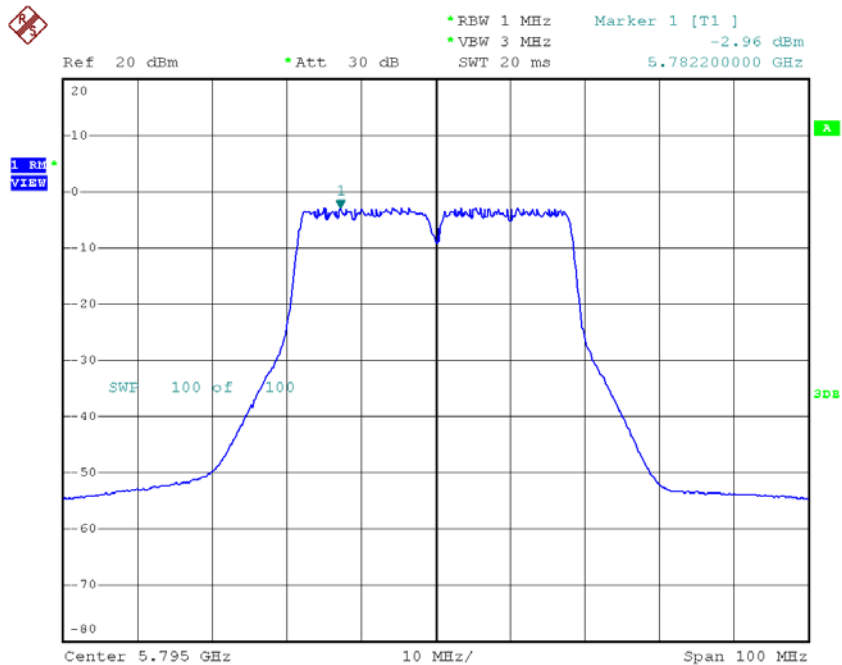

Date: 28.NOV.2018 15:36:52




**Test Mode: UNII-3/ TX N40 Mode\_CH151/CH159\_Total**

| Channel | Frequency<br>(MHz) | Power Density<br>(dBm/500kHz) | Limit<br>(dBm/500kHz) |
|---------|--------------------|-------------------------------|-----------------------|
| CH151   | 5755               | 0.82                          | 28.30                 |
| CH159   | 5795               | 0.79                          | 28.30                 |


**Test Mode: UNII-1/TX AC20 Mode\_CH36/CH40/CH48\_ANT 1**

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH36    | 5180            | 4.85                    | 0.26        | 5.11                                  | 9.30            |
| CH40    | 5200            | 5.01                    | 0.26        | 5.27                                  | 9.30            |
| CH48    | 5240            | 4.83                    | 0.26        | 5.09                                  | 9.30            |

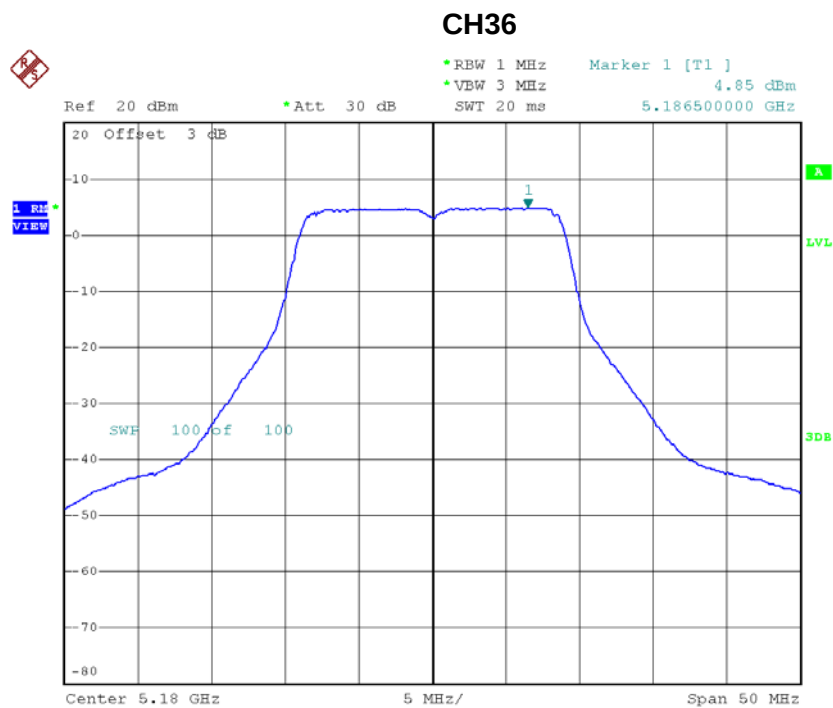


Date: 26.NOV.2018 17:51:34

### CH40

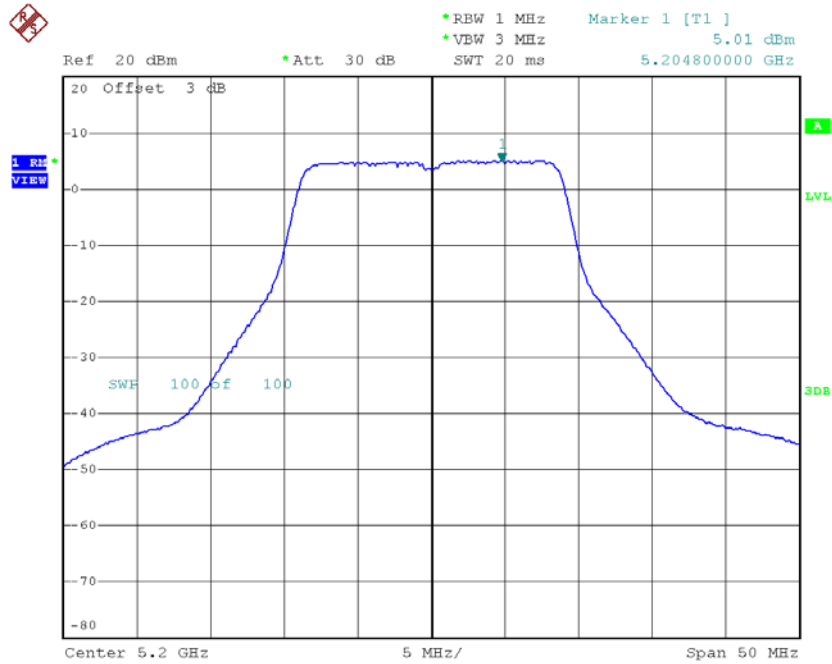

Date: 26.NOV.2018 17:54:10


### CH48

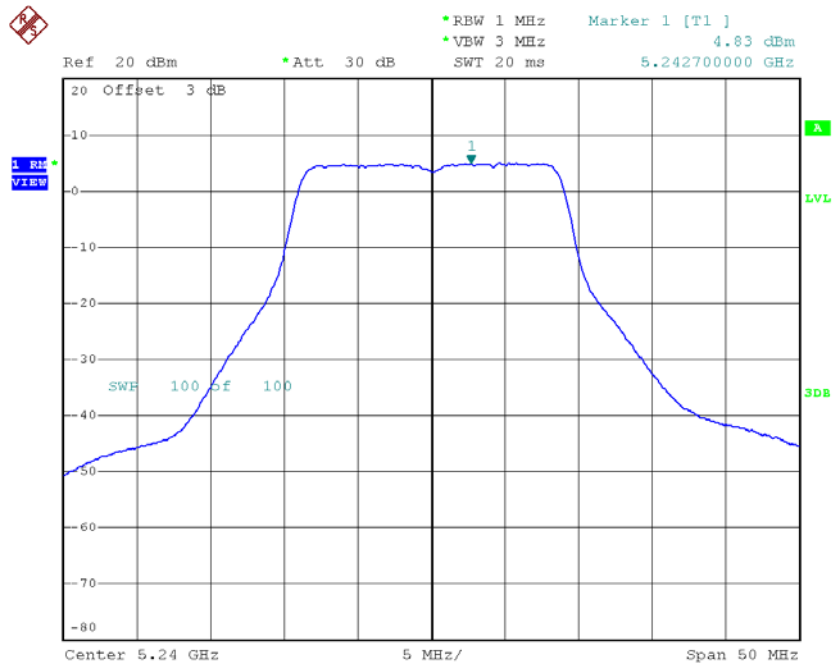

Date: 26.NOV.2018 17:58:56


**Test Mode: UNII-1/TX AC20 Mode\_CH36/CH40/CH48\_ANT 2**

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH36    | 5180            | 3.56                    | 0.26        | 3.82                                  | 9.30            |
| CH40    | 5200            | 3.59                    | 0.26        | 3.85                                  | 9.30            |
| CH48    | 5240            | 3.77                    | 0.26        | 4.03                                  | 9.30            |

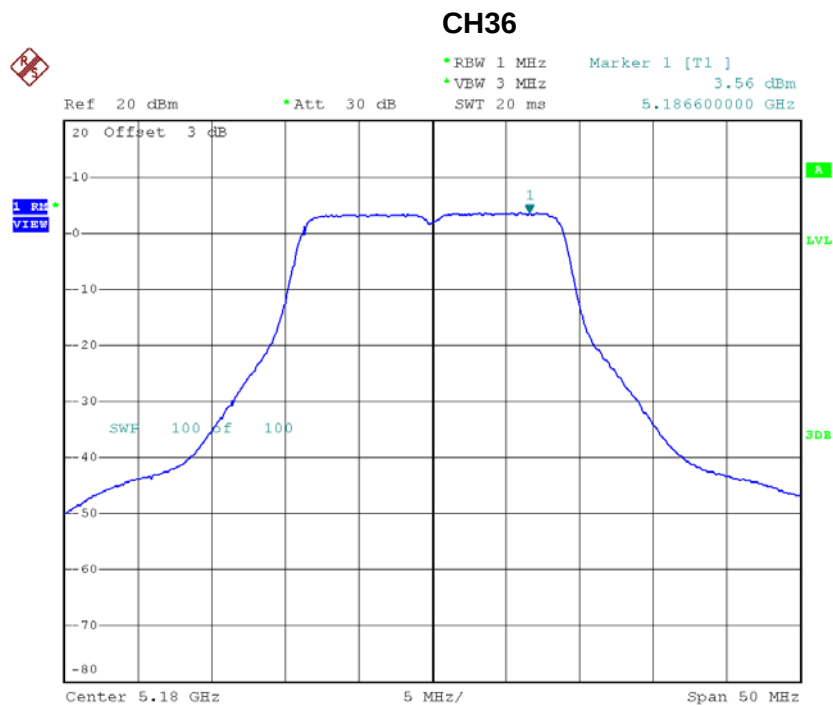


Date: 26.NOV.2018 16:53:04

### CH40

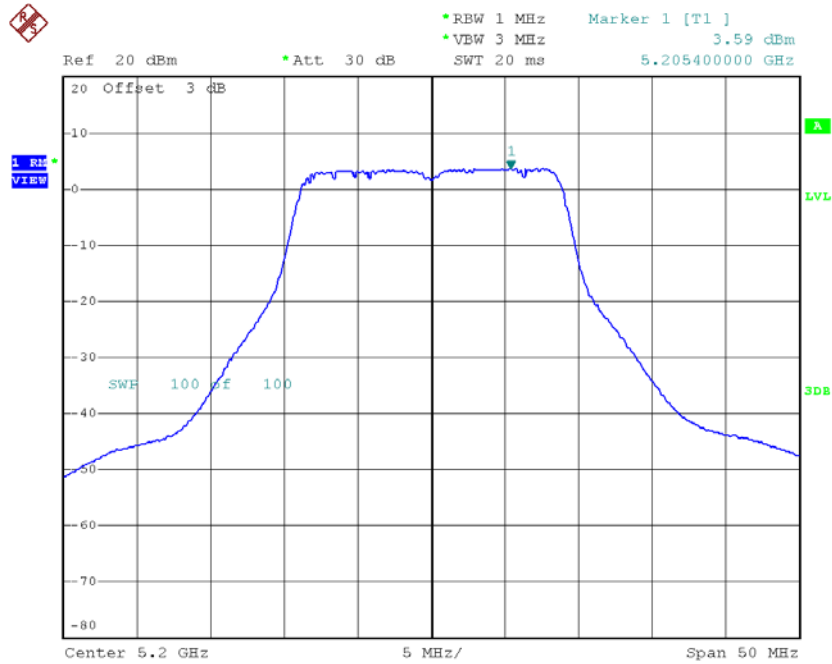

Date: 26.NOV.2018 16:54:05

### CH48

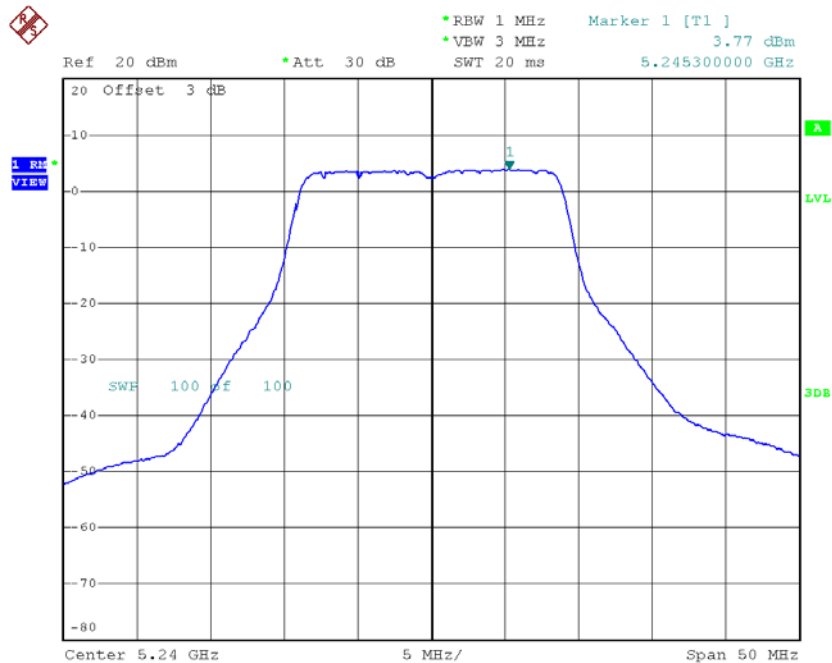

Date: 26.NOV.2018 16:55:03


**Test Mode: UNII-1/TX AC20 Mode\_CH36/CH40/CH48\_Total**

| Channel | Frequency<br>(MHz) | Power Density<br>(dBm/MHz) | Limit<br>(dBm/MHz) |
|---------|--------------------|----------------------------|--------------------|
| CH36    | 5180               | 7.52                       | 9.30               |
| CH40    | 5200               | 7.63                       | 9.30               |
| CH48    | 5240               | 7.60                       | 9.30               |

**Test Mode: UNII-1/TX AC40 Mode\_CH38/CH46\_ANT 1**


| Channel | Frequency<br>(MHz) | Power Density<br>(dBm/MHz) | Duty Factor | Power Density +<br>Duty Factor<br>(dBm/MHz) | Limit<br>(dBm/MHz) |
|---------|--------------------|----------------------------|-------------|---------------------------------------------|--------------------|
| CH38    | 5190               | 0.56                       | 0.68        | 1.24                                        | 9.30               |
| CH46    | 5230               | 0.33                       | 0.68        | 1.01                                        | 9.30               |

### CH38

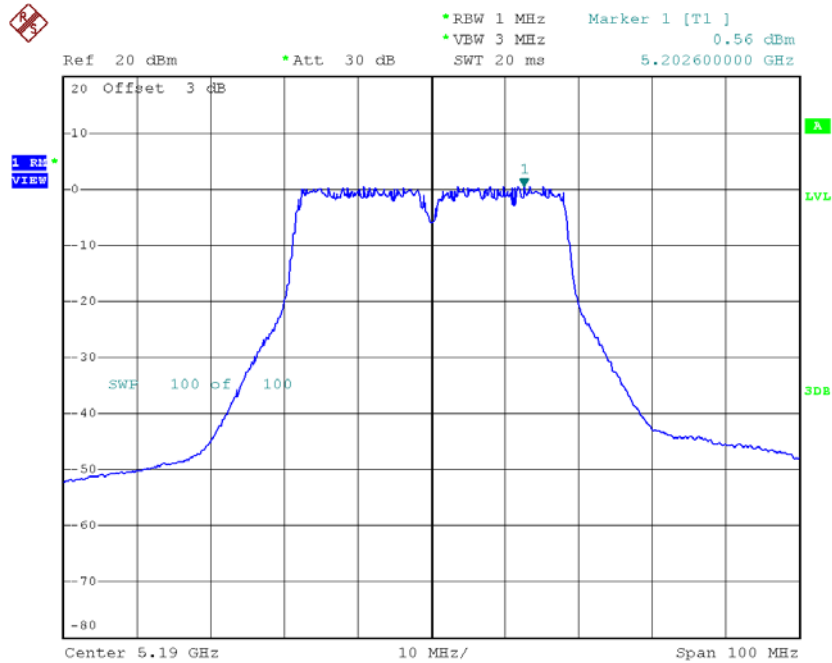

Date: 28.NOV.2018 15:02:59

### CH46

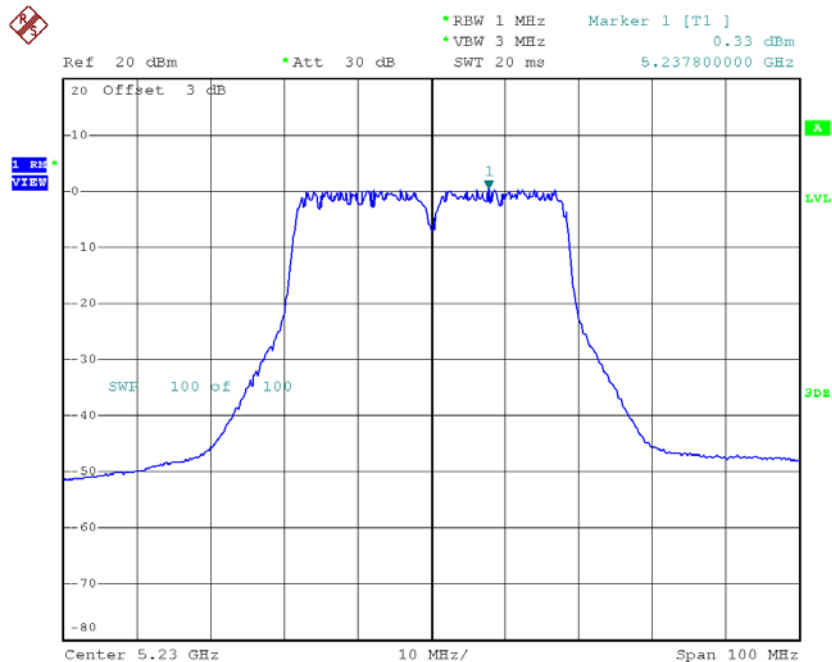


Date: 28.NOV.2018 15:04:42



**Test Mode: UNII-1/TX AC40 Mode\_CH38/CH46\_ANT 2**


| Channel | Frequency<br>(MHz) | Power Density<br>(dBm/MHz) | Duty Factor | Power Density +<br>Duty Factor<br>(dBm/MHz) | Limit<br>(dBm/MHz) |
|---------|--------------------|----------------------------|-------------|---------------------------------------------|--------------------|
| CH38    | 5190               | 0.28                       | 0.68        | 0.96                                        | 9.30               |
| CH46    | 5230               | -0.79                      | 0.68        | -0.11                                       | 9.30               |

### CH38

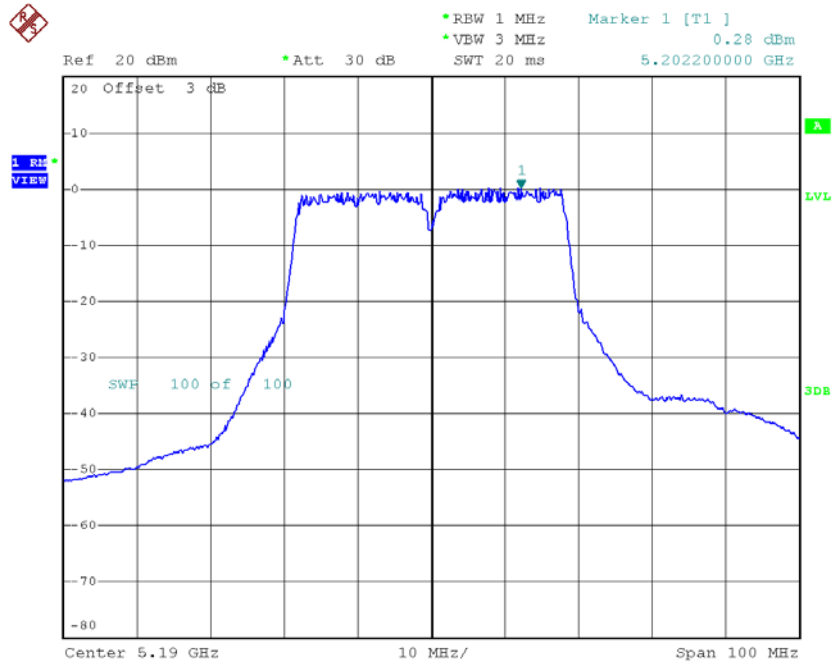

Date: 28.NOV.2018 14:51:42

### CH46

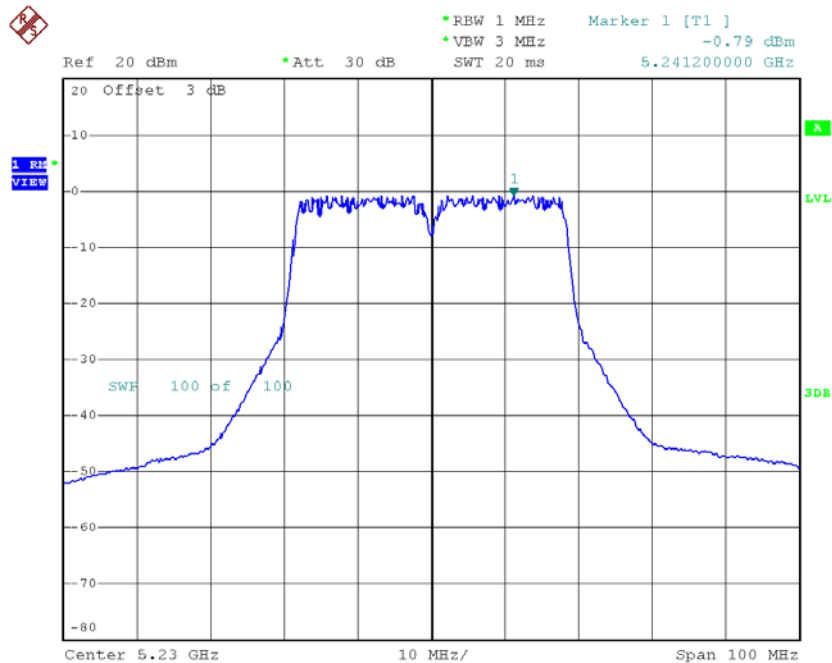


Date: 28.NOV.2018 14:53:26

**Test Mode: UNII-1/TX AC40 Mode\_CH38/CH46\_Total**

| Channel | Frequency<br>(MHz) | Power Density<br>(dBm/MHz) | Limit<br>(dBm/MHz) |
|---------|--------------------|----------------------------|--------------------|
| CH38    | 5190               | 4.12                       | 9.30               |
| CH46    | 5230               | 3.50                       | 9.30               |

**Test Mode: UNII-1/TX AC80 Mode\_CH42\_ANT 1**


| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH42    | 5210            | -3.65                   | 1.39        | -2.26                                 | 9.30            |

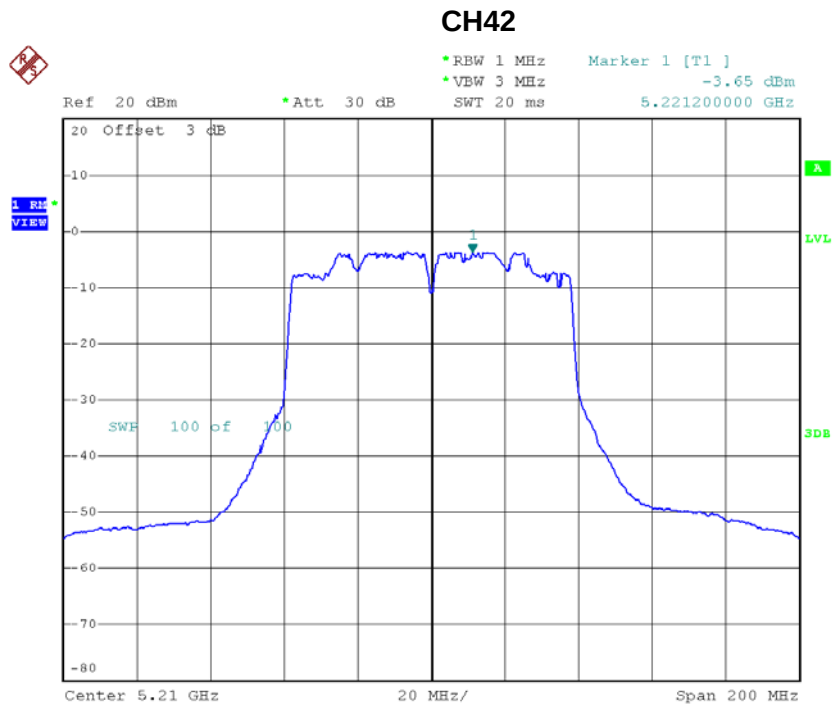

Date: 26.NOV.2018 19:26:27

**Test Mode: UNII-1/TX AC80 Mode\_CH42\_ANT 2**

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH42    | 5210            | -3.47                   | 1.39        | -2.08                                 | 9.30            |

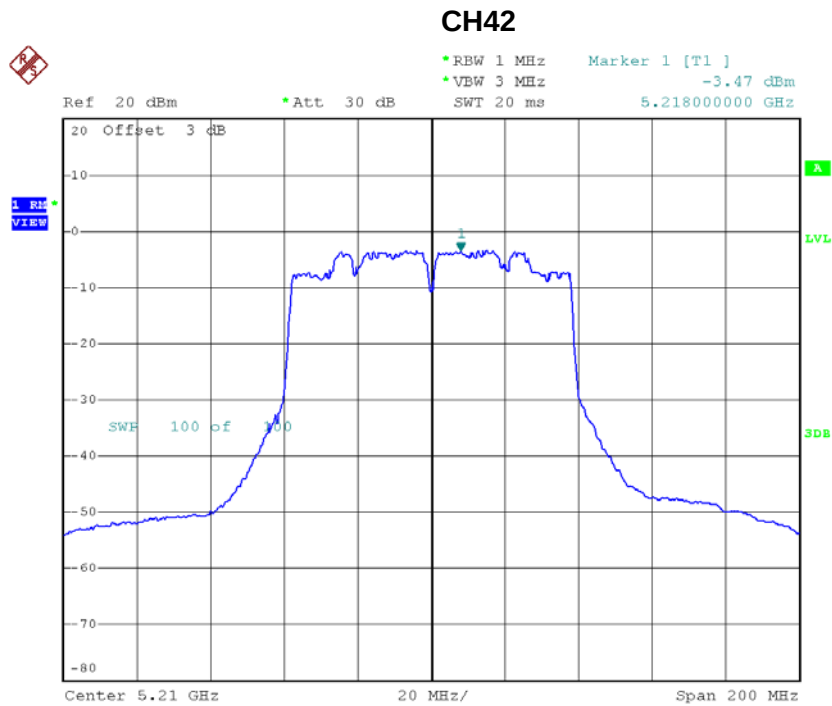


Date: 26.NOV.2018 19:18:20

**Test Mode: UNII-1/TX AC80 Mode\_CH42\_Total**

| Channel | Frequency<br>(MHz) | Power Density<br>(dBm/MHz) | Limit<br>(dBm/MHz) |
|---------|--------------------|----------------------------|--------------------|
| CH42    | 5210               | 0.84                       | 9.30               |

**Test Mode: UNII-1/TX AC160 Mode\_CH50\_ANT 1**


| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH50    | 5250            | -6.96                   | 1.00        | -5.96                                 | 9.19            |

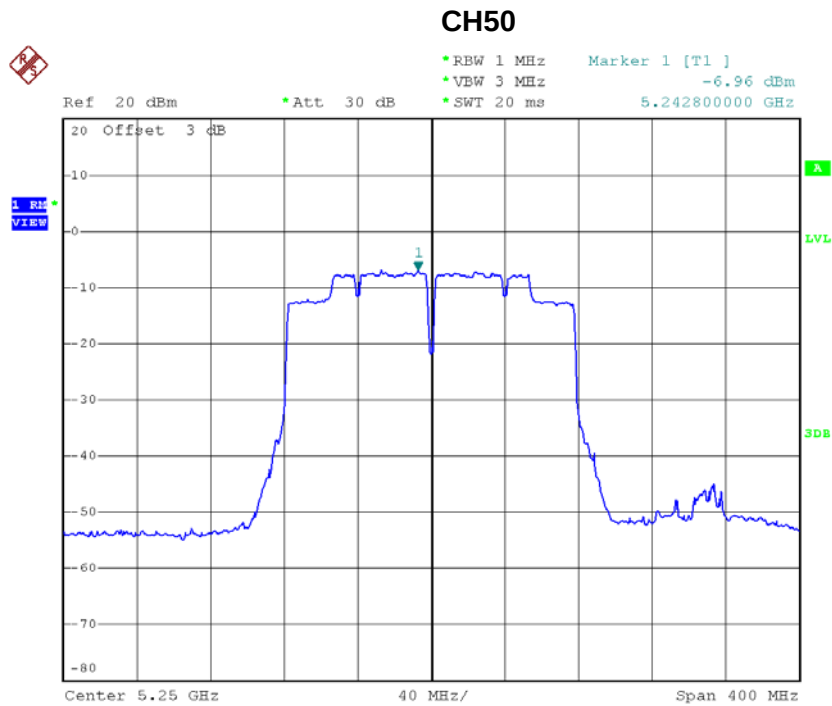

Date: 26.NOV.2018 19:56:24

**Test Mode: UNII-1/TX AC160 Mode\_CH50\_ANT 2**

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH50    | 5250            | -6.82                   | 1.00        | -5.82                                 | 9.19            |

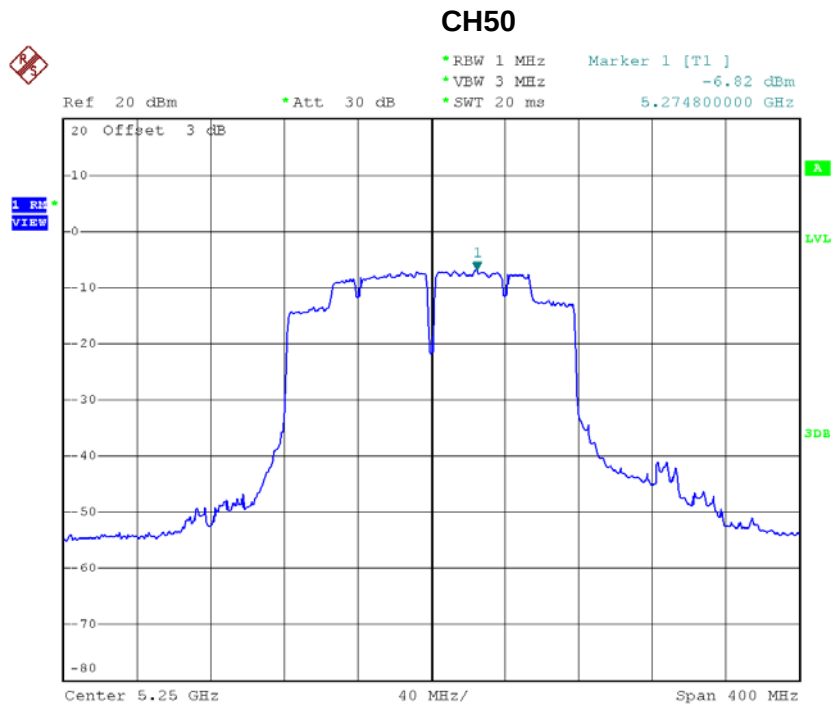

Date: 26.NOV.2018 19:57:08




**Test Mode: UNII-1/TX AC160 Mode\_CH50\_Total**

| Channel | Frequency<br>(MHz) | Power Density<br>(dBm/MHz) | Limit<br>(dBm/MHz) |
|---------|--------------------|----------------------------|--------------------|
| CH50    | 5250               | -2.88                      | 9.19               |


**Test Mode: UNII-2A/TX AC20 Mode\_CH52/CH60/CH64\_ANT 1**

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH52    | 5260            | 4.47                    | 0.26        | 4.73                                  | 9.30            |
| CH60    | 5300            | 4.49                    | 0.26        | 4.75                                  | 9.30            |
| CH64    | 5320            | 4.46                    | 0.26        | 4.72                                  | 9.30            |

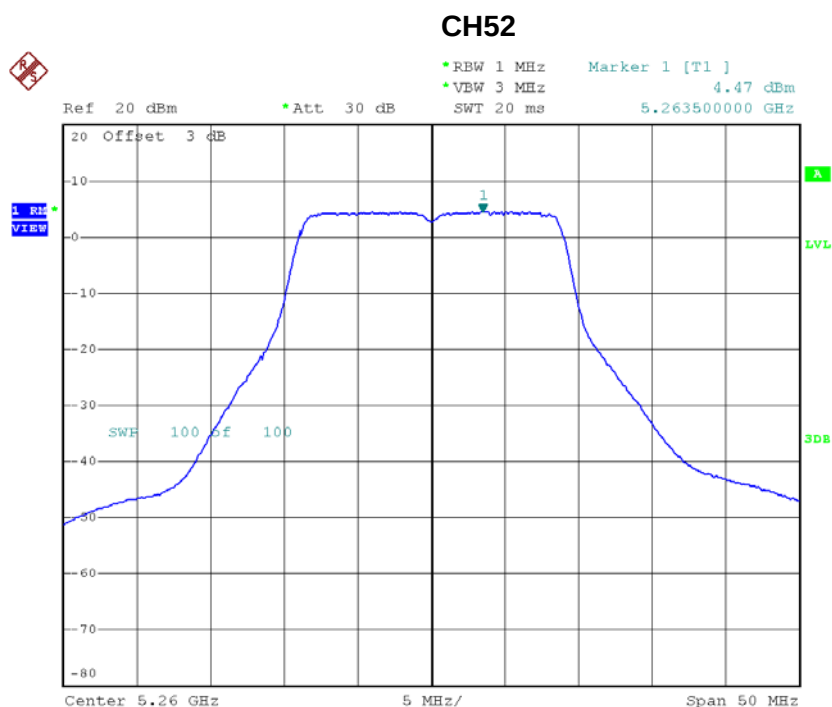


Date: 26.NOV.2018 18:00:40

### CH60

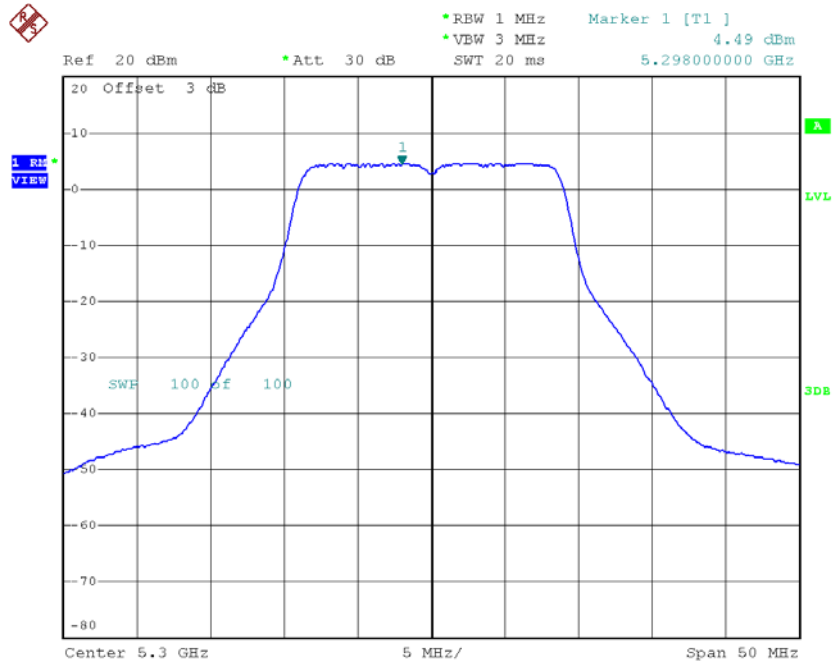

Date: 26.NOV.2018 18:01:40


### CH64

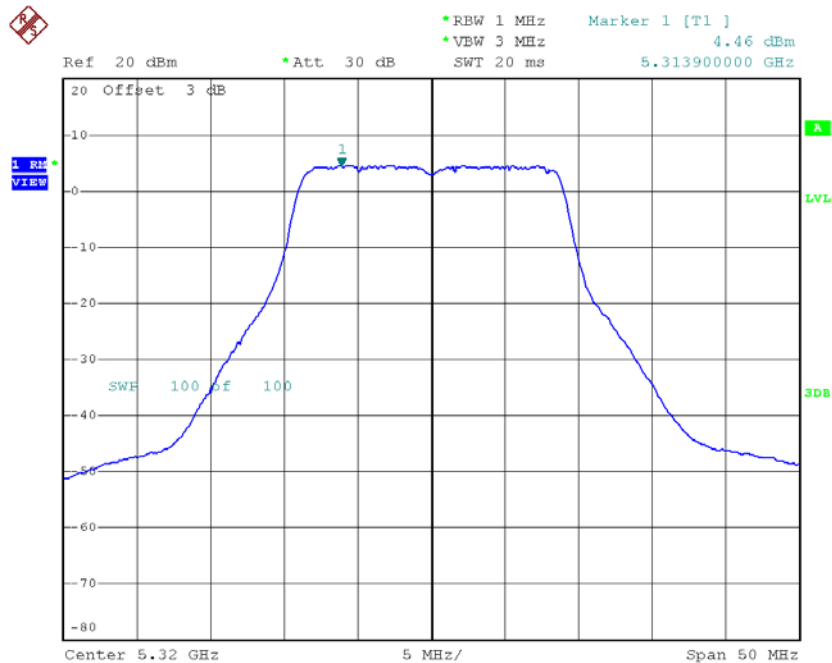

Date: 26.NOV.2018 18:02:57


**Test Mode: UNII-2A/TX AC20 Mode\_CH52/CH60/CH64\_ANT 2**

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH52    | 5260            | 3.65                    | 0.26        | 3.91                                  | 9.30            |
| CH60    | 5300            | 3.62                    | 0.26        | 3.88                                  | 9.30            |
| CH64    | 5320            | 3.68                    | 0.26        | 3.94                                  | 9.30            |

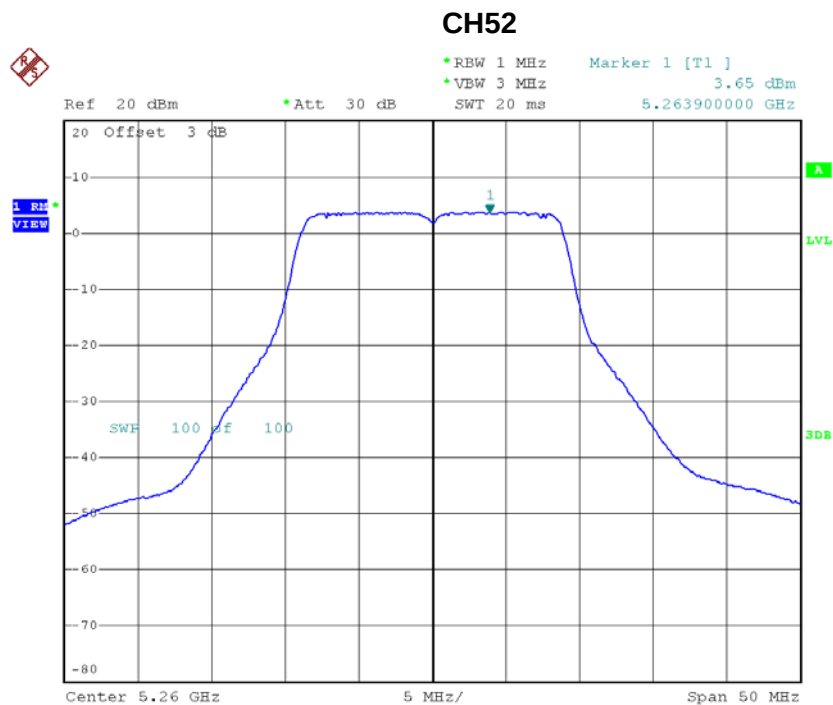


Date: 26.NOV.2018 16:56:11

### CH60

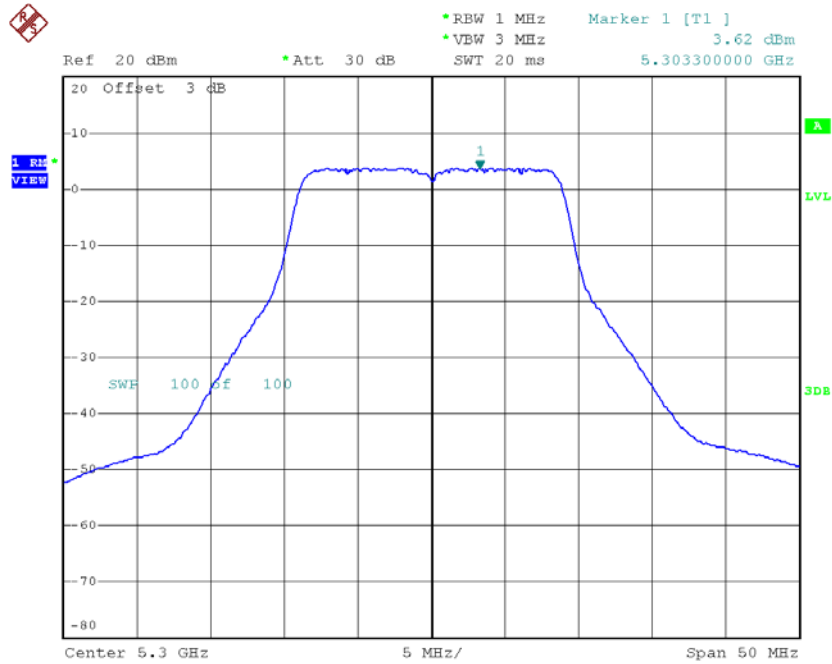

Date: 26.NOV.2018 16:57:09

### CH64

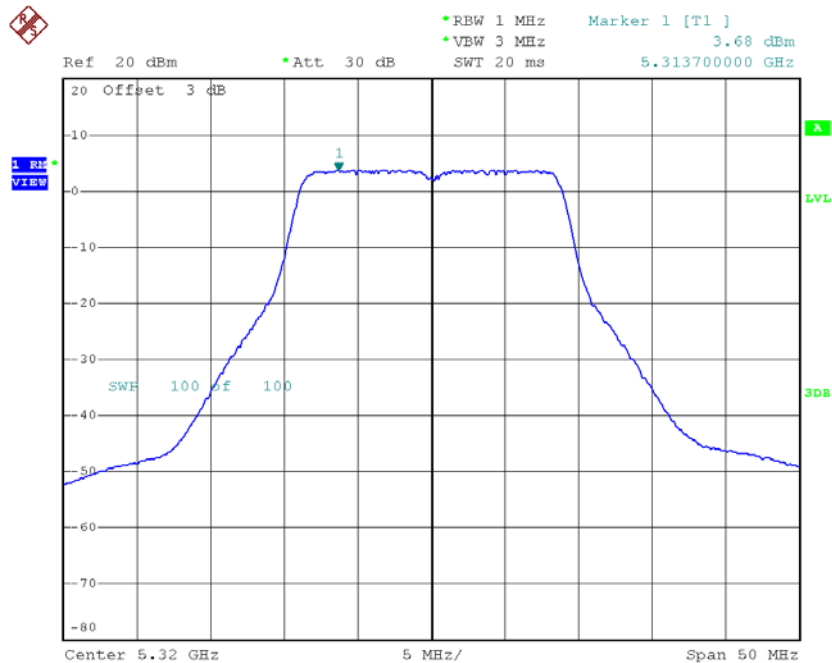

Date: 26.NOV.2018 16:58:14


**Test Mode: UNII-2A/TX AC20 Mode\_CH52/CH60/CH64\_Total**

| Channel | Frequency<br>(MHz) | Power Density<br>(dBm/MHz) | Limit<br>(dBm/MHz) |
|---------|--------------------|----------------------------|--------------------|
| CH52    | 5260               | 7.35                       | 9.30               |
| CH60    | 5300               | 7.35                       | 9.30               |
| CH64    | 5320               | 7.36                       | 9.30               |

**Test Mode: UNII-2A/TX AC40 Mode\_CH54/CH62\_ANT 1**


| Channel | Frequency<br>(MHz) | Power Density<br>(dBm/MHz) | Duty Factor | Power Density +<br>Duty Factor<br>(dBm/MHz) | Limit<br>(dBm/MHz) |
|---------|--------------------|----------------------------|-------------|---------------------------------------------|--------------------|
| CH54    | 5270               | 0.00                       | 0.68        | 0.68                                        | 9.30               |
| CH62    | 5310               | 0.14                       | 0.68        | 0.82                                        | 9.30               |

### CH54

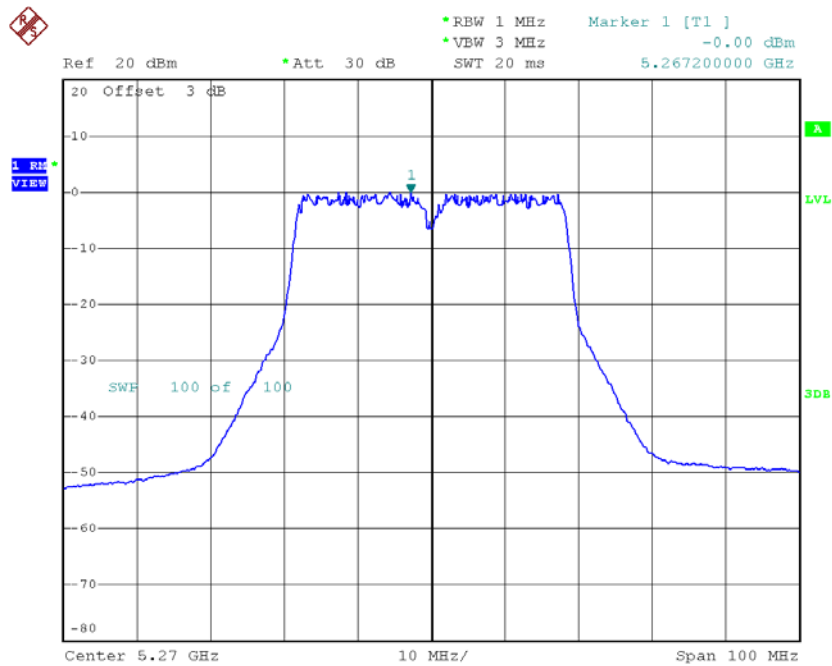

Date: 28.NOV.2018 15:05:43

### CH62

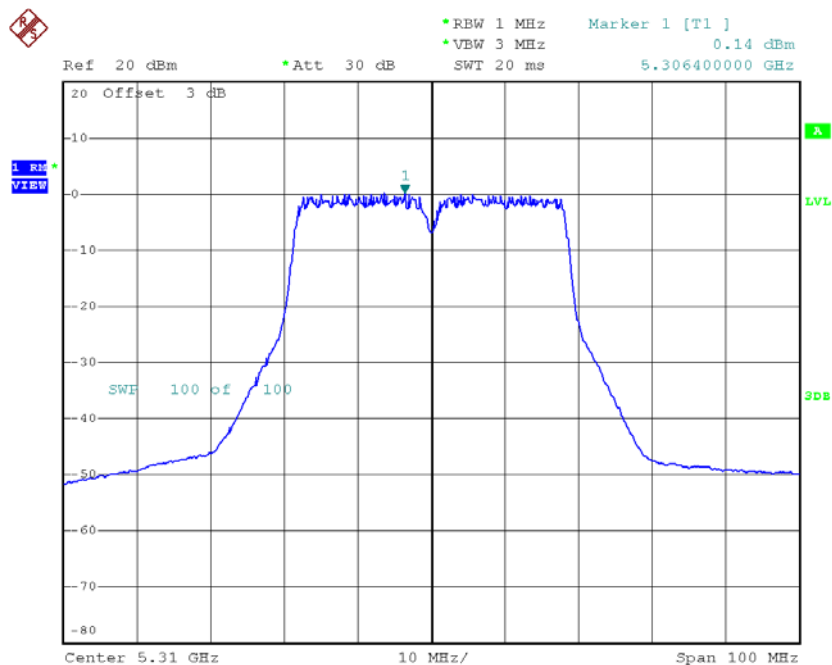


Date: 28.NOV.2018 15:06:50



**Test Mode: UNII-2A/TX AC40 Mode\_CH54/CH62\_ANT 2**


| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH54    | 5270            | -0.44                   | 0.68        | 0.24                                  | 9.30            |
| CH62    | 5310            | -0.45                   | 0.68        | 0.23                                  | 9.30            |

### CH54

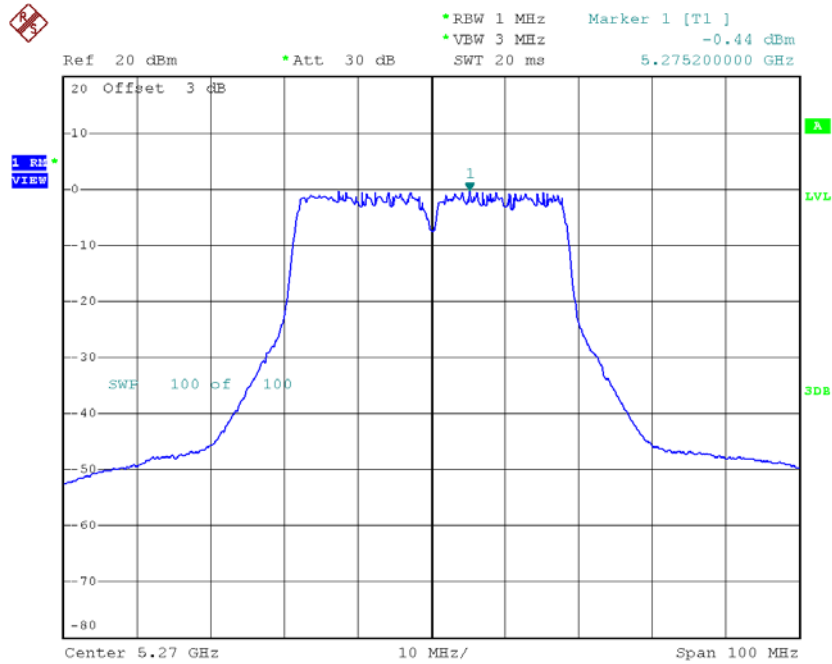

Date: 28.NOV.2018 14:54:31

### CH62

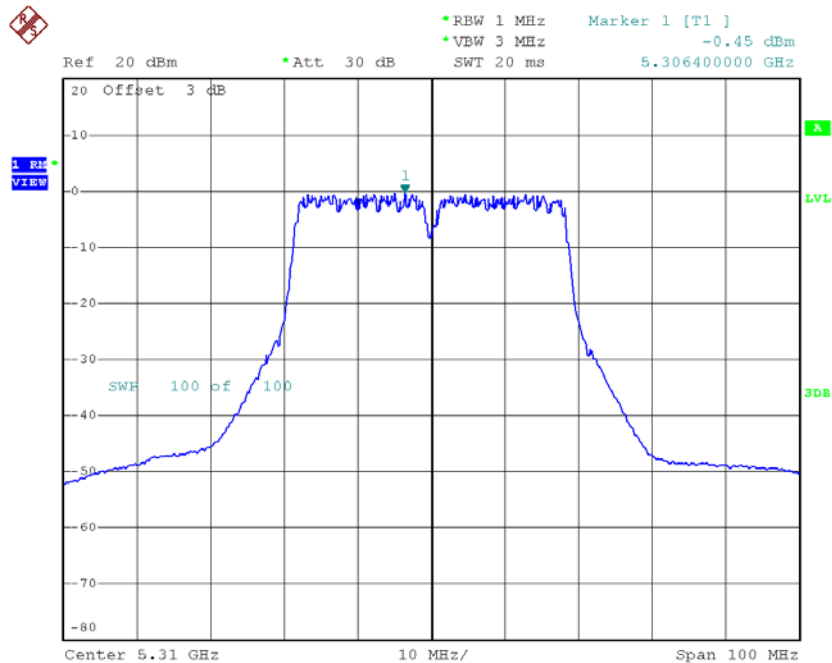


Date: 28.NOV.2018 14:55:36

**Test Mode: UNII-2A/TX AC40 Mode\_CH54/CH62\_Total**

| Channel | Frequency<br>(MHz) | Power Density<br>(dBm/MHz) | Limit<br>(dBm/MHz) |
|---------|--------------------|----------------------------|--------------------|
| CH54    | 5270               | 3.48                       | 9.30               |
| CH62    | 5310               | 3.55                       | 9.30               |

**Test Mode: UNII-2A/TX AC80 Mode\_CH58\_ANT 1**


| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH58    | 5290            | -3.98                   | 1.39        | -2.59                                 | 9.30            |

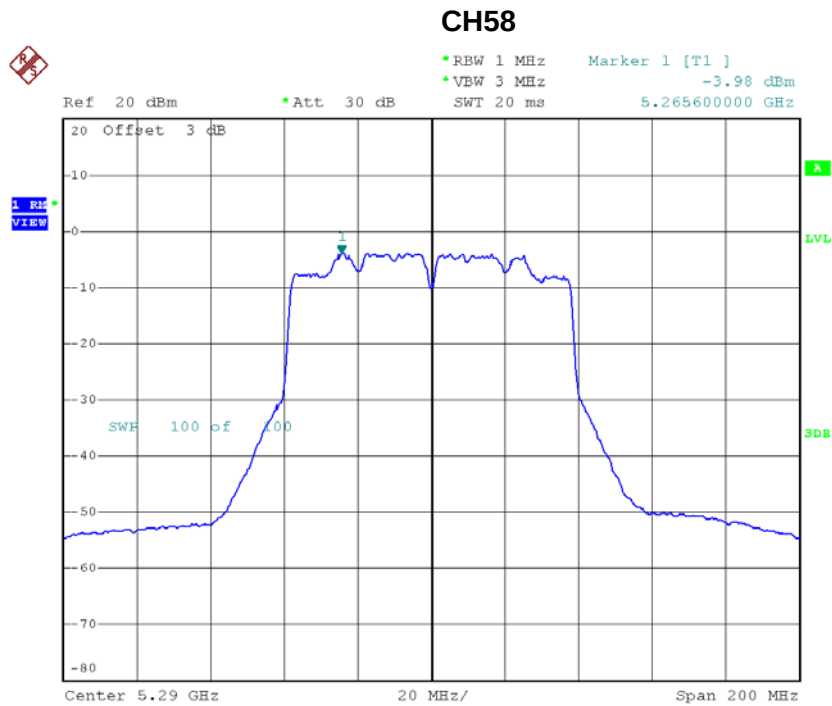

Date: 26.NOV.2018 19:28:03

**Test Mode: UNII-2A/TX AC80 Mode\_CH58\_ANT 2**

| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH58    | 5290            | -3.03                   | 1.39        | -1.64                                 | 9.30            |

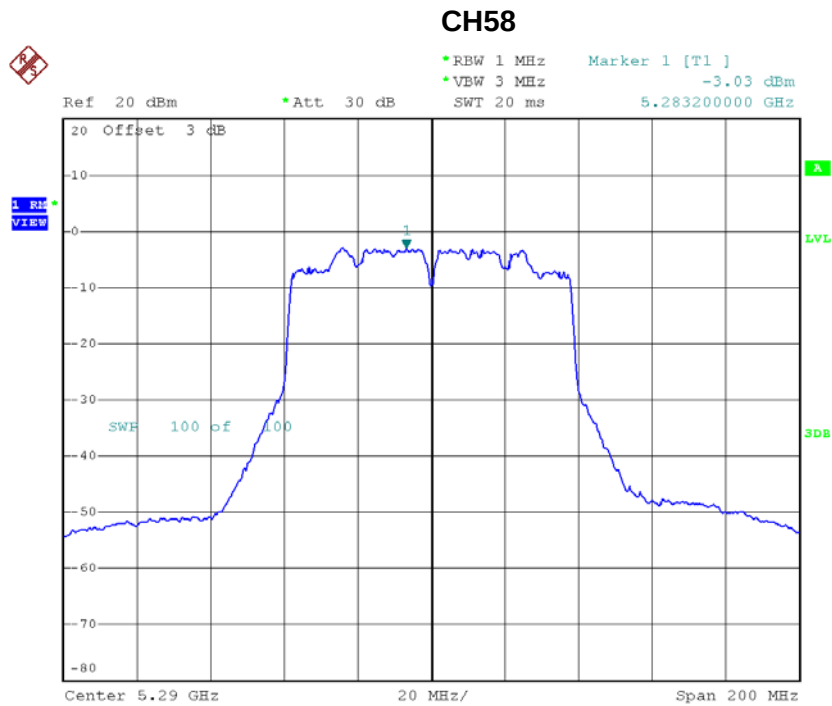

Date: 26.NOV.2018 19:19:49


**Test Mode: UNII-2A/TX AC80 Mode\_CH58\_Total**

| Channel | Frequency<br>(MHz) | Power Density<br>(dBm/MHz) | Limit<br>(dBm/MHz) |
|---------|--------------------|----------------------------|--------------------|
| CH58    | 5290               | 0.92                       | 9.30               |

**Test Mode: UNII-2C/TX AC20 Mode\_CH100/CH116/CH140\_ANT 1**


| Channel | Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor | Power Density + Duty Factor (dBm/MHz) | Limit (dBm/MHz) |
|---------|-----------------|-------------------------|-------------|---------------------------------------|-----------------|
| CH100   | 5500            | 4.66                    | 0.26        | 4.92                                  | 9.30            |
| CH116   | 5580            | 4.31                    | 0.26        | 4.57                                  | 9.30            |
| CH140   | 5700            | 4.55                    | 0.26        | 4.81                                  | 9.30            |

**CH100**

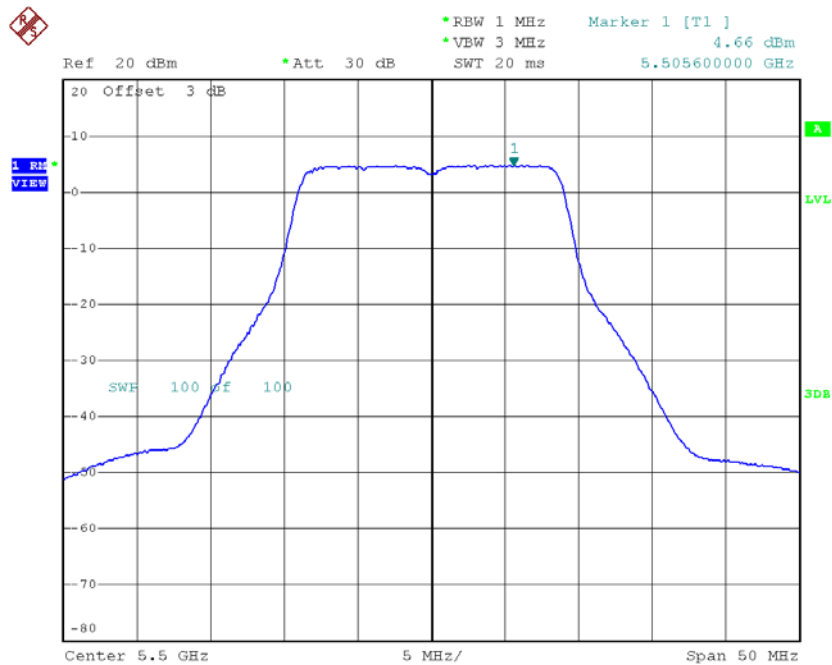


Date: 26.NOV.2018 18:03:54

### CH116

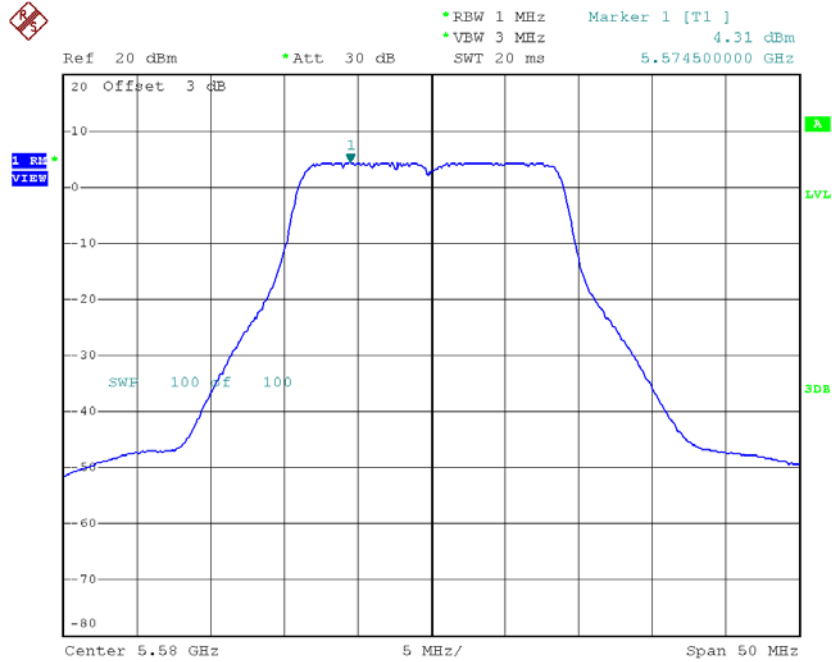

Date: 26.NOV.2018 18:04:58

### CH140

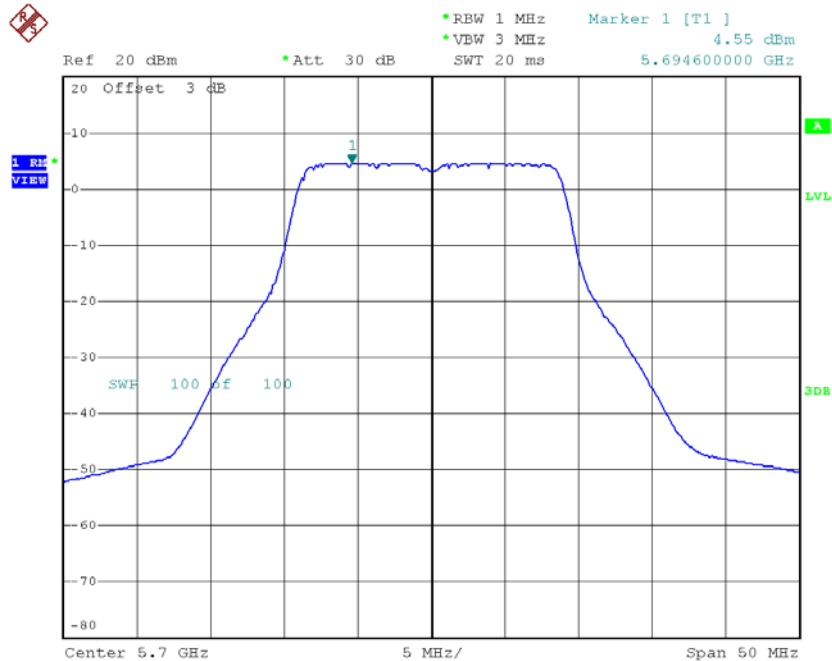

Date: 26.NOV.2018 18:06:01