


Appendix B

Peak Output Power




Marker 1 [T1] RBW 1 MHz RF Att 60 dB
Ref Lvl 26.23 dBm VBW 1 MHz
35 dBm 2.40093006 GHz SWT 5 ms Unit dBm

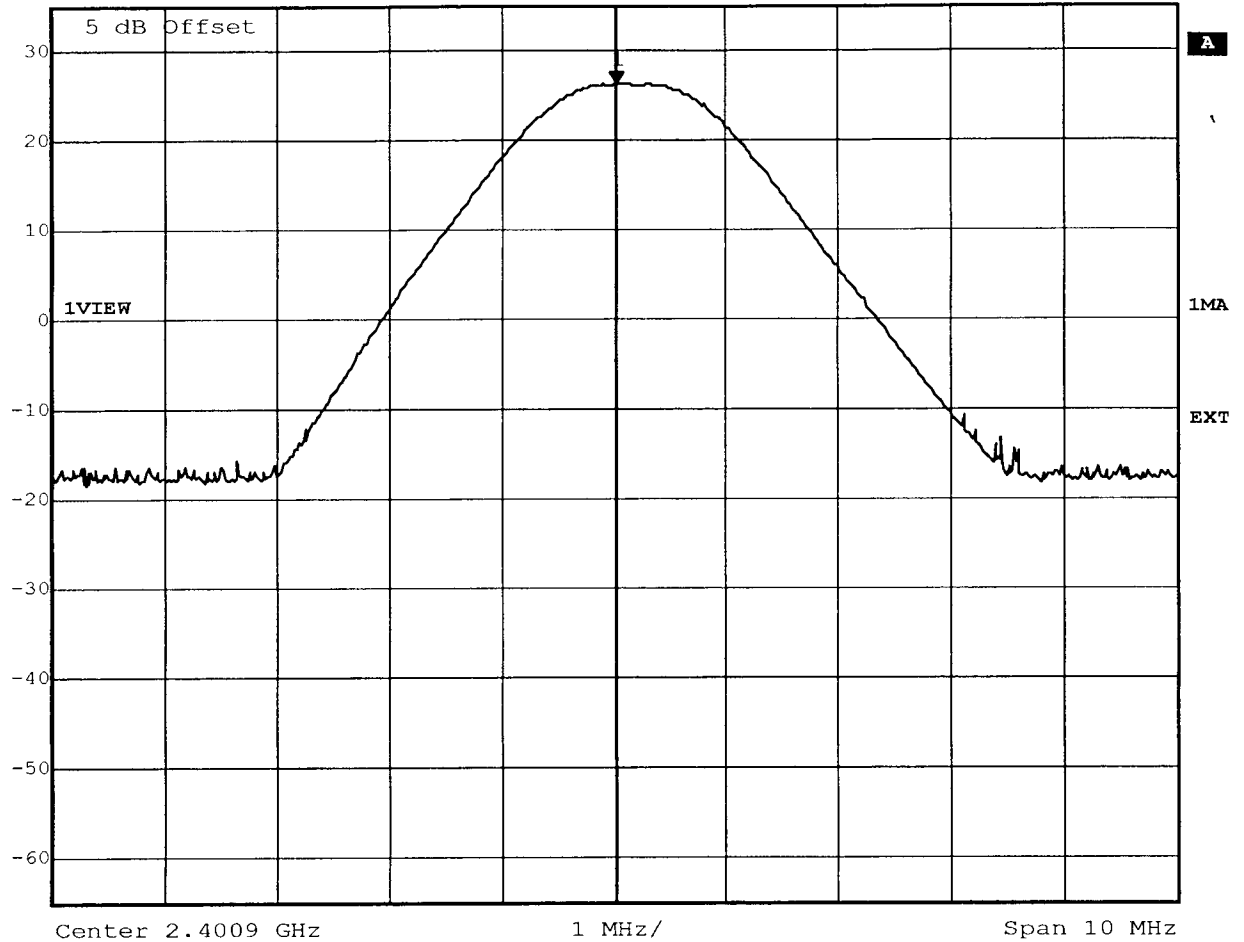

Title: Peak Output Power Conducted Ch.: 0 Unom
Comment A: GN Netcom Cordless Headset Gn 9050 Base
Date: 26.OCT.2001 08:12:46




Marker 1 [T1] RBW 1 MHz RF Att 60 dB
Ref Lvl 26.21 dBm VBW 1 MHz
35 dBm 2.40091002 GHz SWT 5 ms Unit dBm

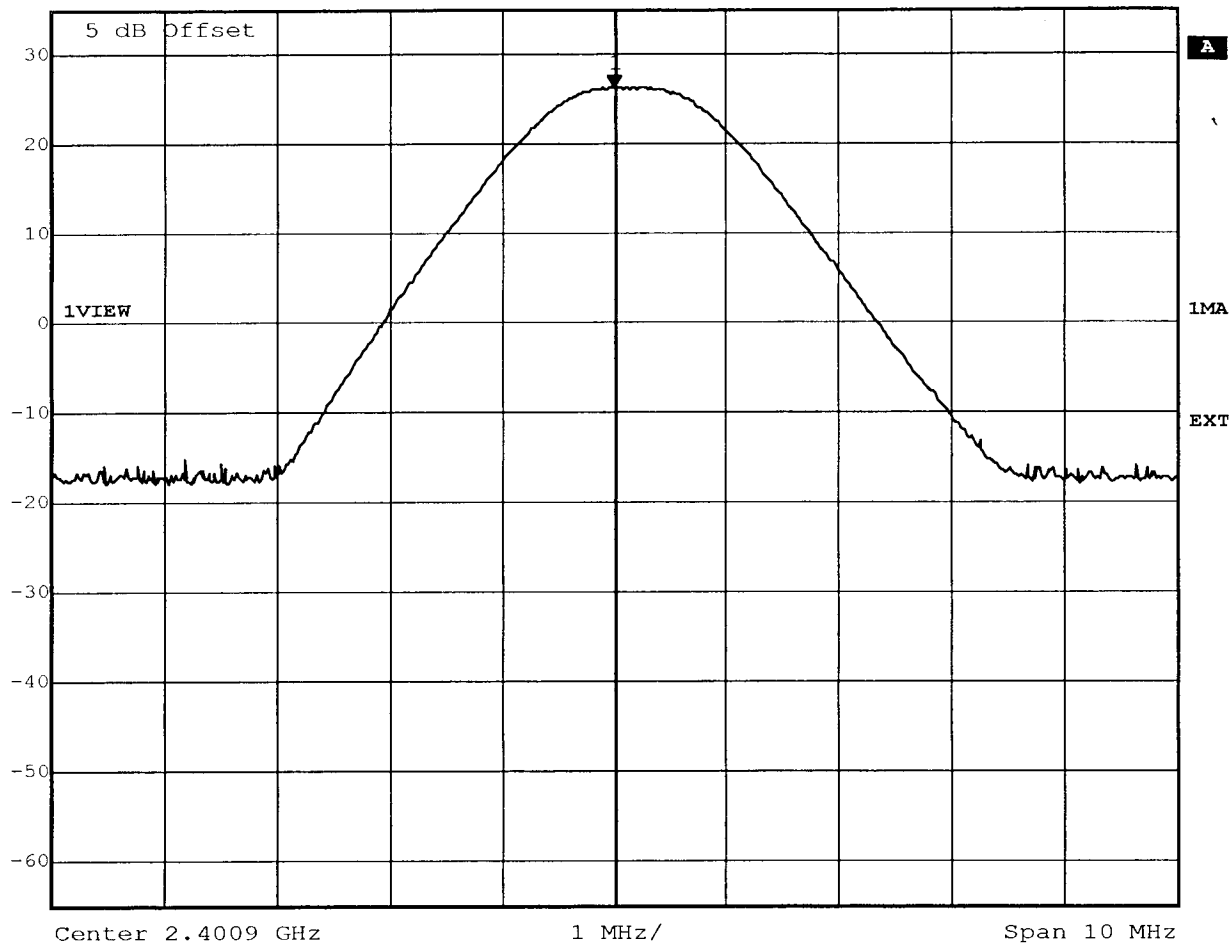

Title: Peak Output Power Conducted Ch.: 0 Unom-15%
Comment A: GN Netcom Cordless Headset Gn 9050 Base
Date: 26.OCT.2001 08:12:02



Marker 1 [T1] RBW 1 MHz RF Att 60 dB
Ref Lvl 26.16 dBm VBW 1 MHz
35 dBm 2.40109038 GHz SWT 5 ms Unit dBm

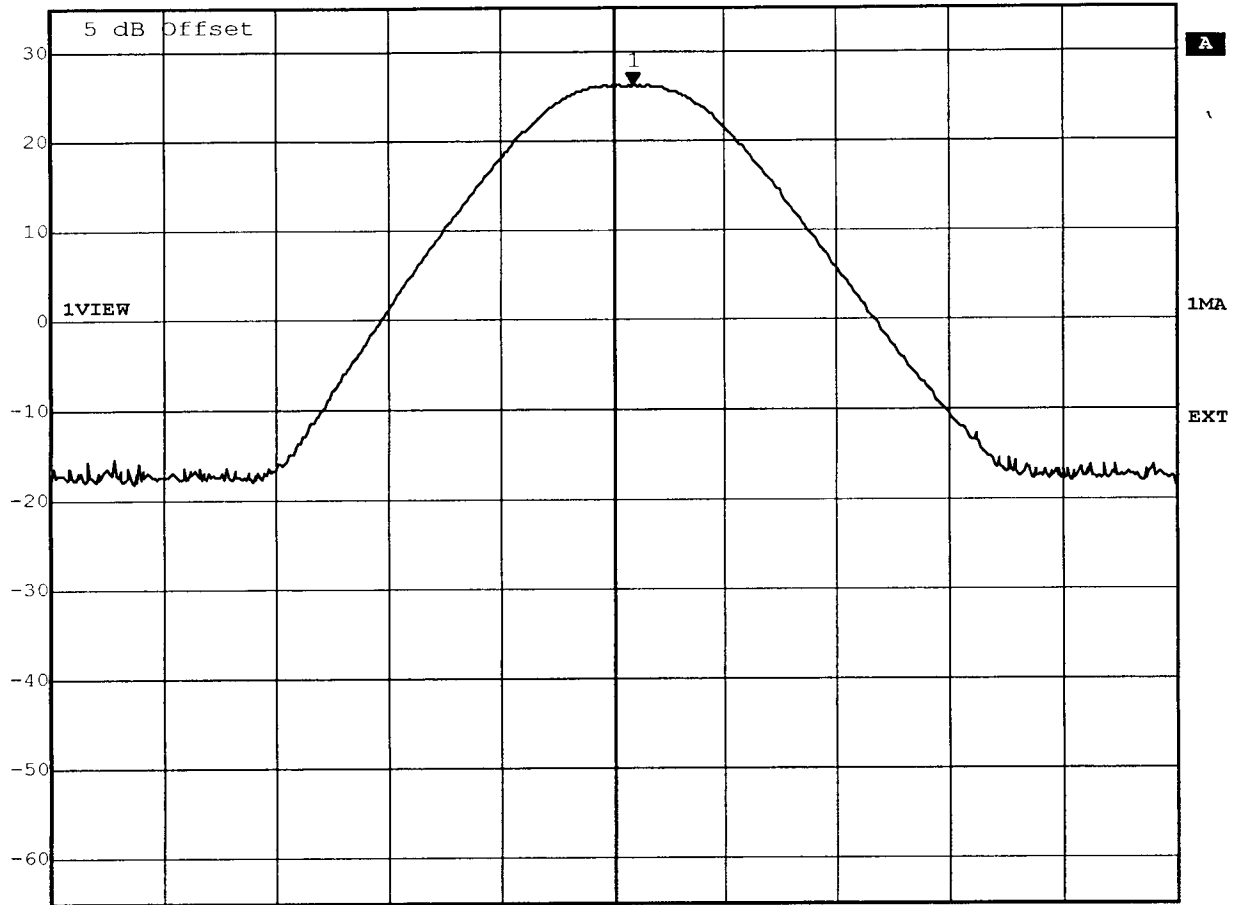

Center 2.4009 GHz

1 MHz/

Span 10 MHz


Title: Peak Output Power Conducted Ch.: 0 Unom+15%

Comment A: GN Netcom Cordless Headset Gn 9050 Base

Date: 26.OCT.2001 08:10:47




Marker 1 [T1] RBW 1 MHz RF Att 60 dB
Ref Lvl 25.38 dBm VBW 1 MHz
35 dBm 2.44246246 GHz SWT 5 ms Unit dBm

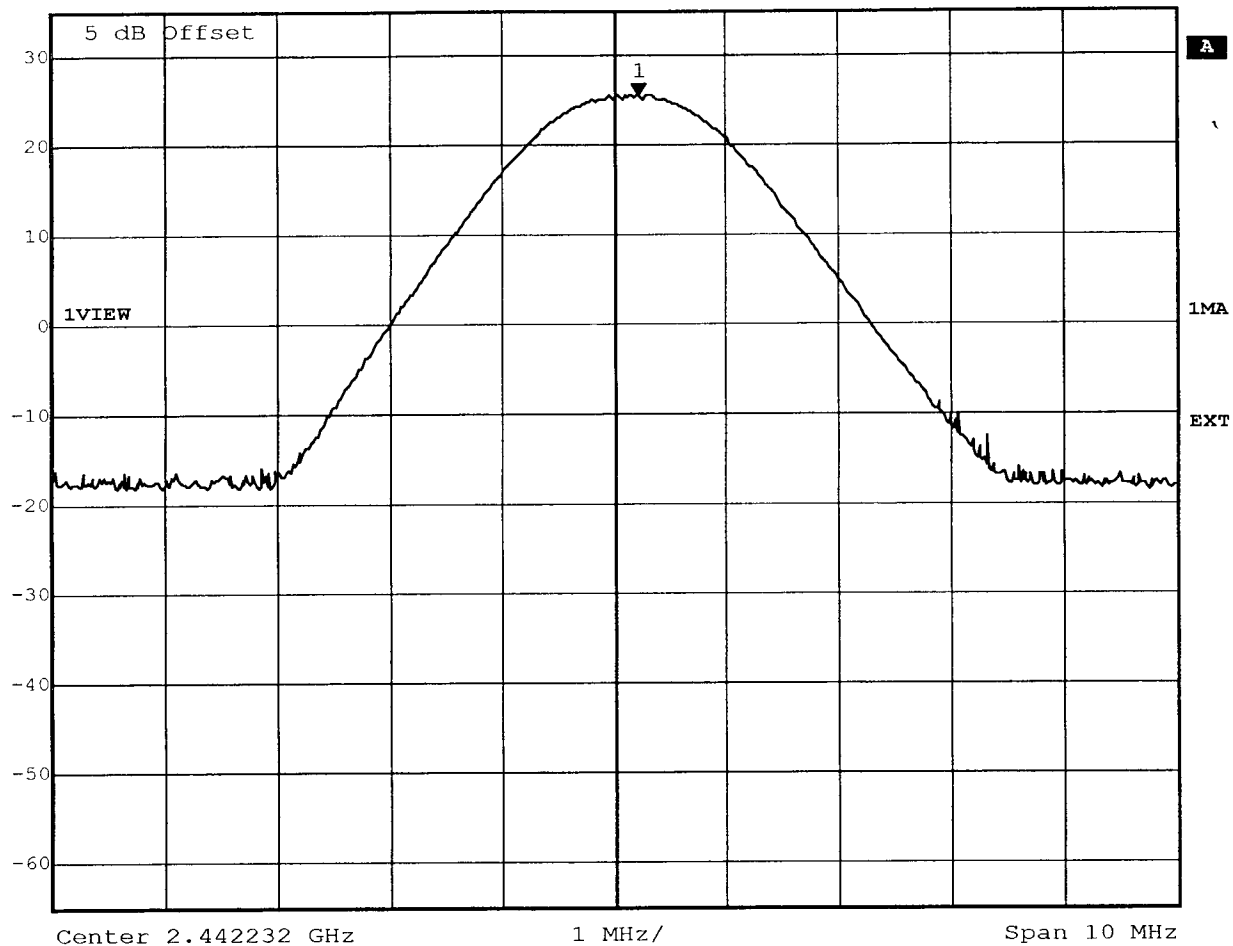

Title: Peak Output Power Conducted Ch.: 40 Unom
Comment A: GN Netcom Cordless Headset Gn 9050 Base
Date: 26.OCT.2001 07:53:34




Marker 1 [T1] RBW 1 MHz RF Att 60 dB
Ref Lvl 25.39 dBm VBW 1 MHz
35 dBm 2.44248250 GHz SWT 5 ms Unit dBm

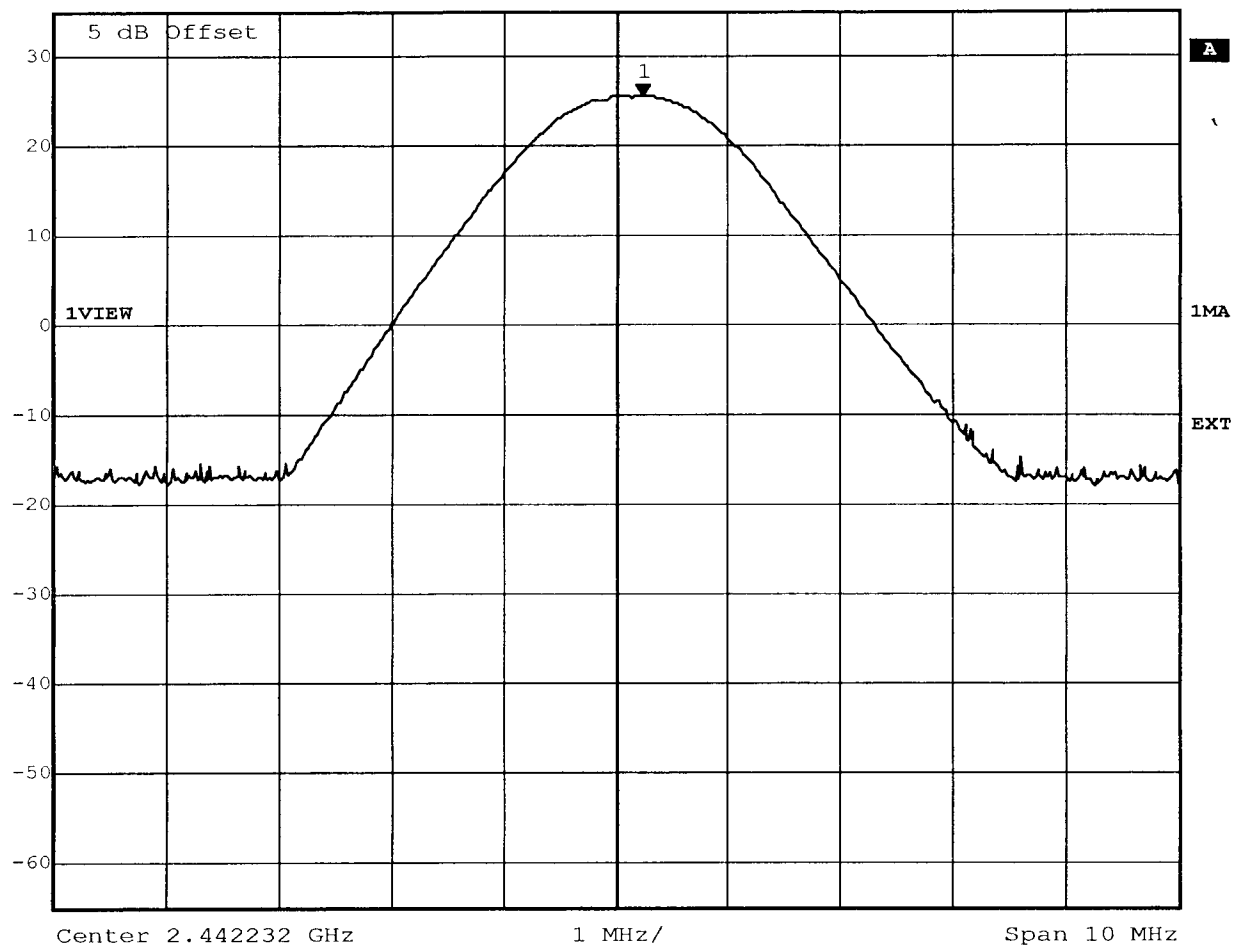

Title: Peak Output Power Conducted Ch.: 40 Unom-15%
Comment A: GN Netcom Cordless Headset Gn 9050 Base
Date: 26.OCT.2001 07:52:02



Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	60 dB
35 dBm	25.36 dBm	VBW	1 MHz		
	2.44248250 GHz	SWT	5 ms	Unit	dBm

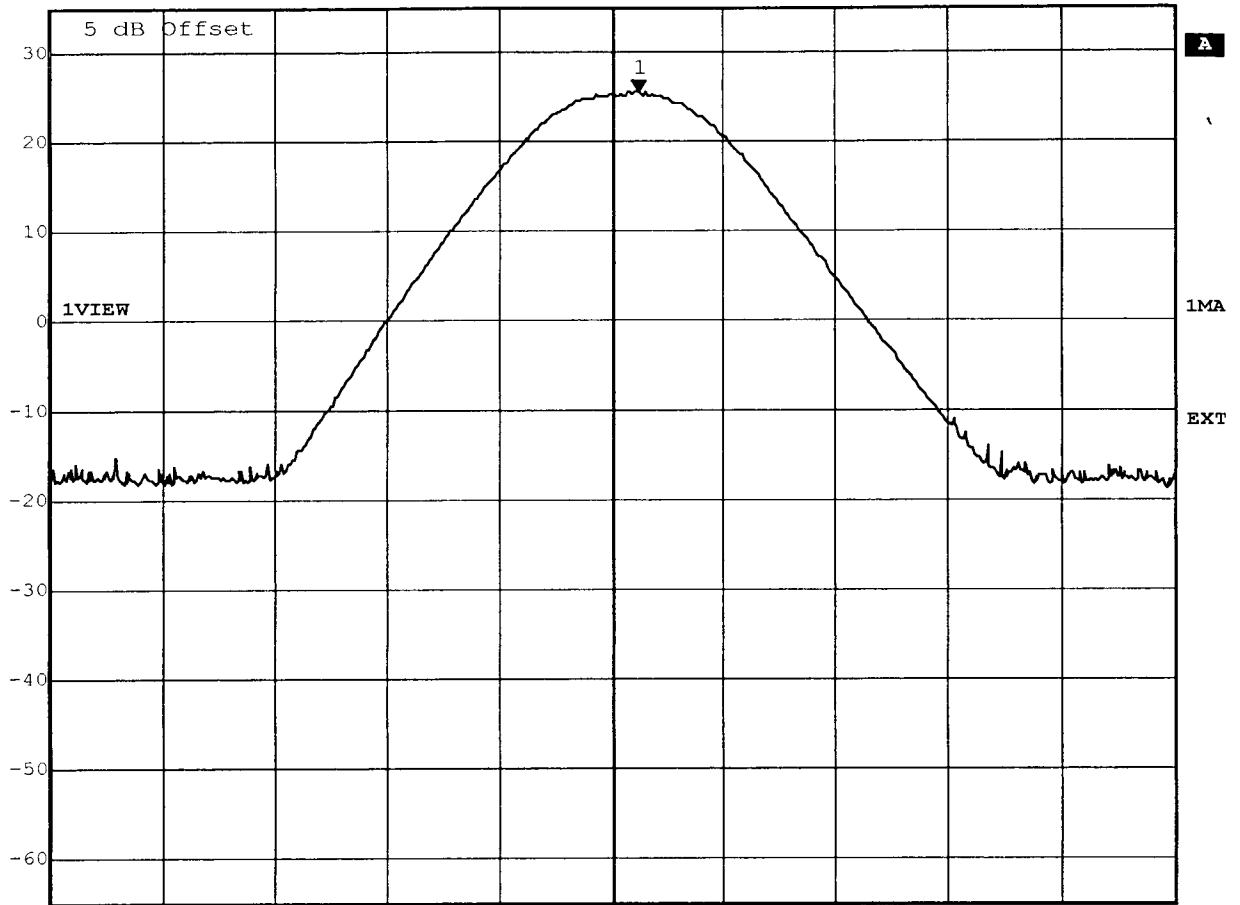


Center 2.442232 GHz 1 MHz/ Span 10 MHz

Title: Peak Output Power Conducted Ch.: 40 Unom+15%
Comment A: GN Netcom Cordless Headset Gn 9050 Base
Date: 26.OCT.2001 07:54:28



Marker 1 [T1] RBW 1 MHz RF Att 60 dB
Ref Lvl 25.91 dBm VBW 1 MHz
35 dBm 2.48173038 GHz SWT 5 ms Unit dBm

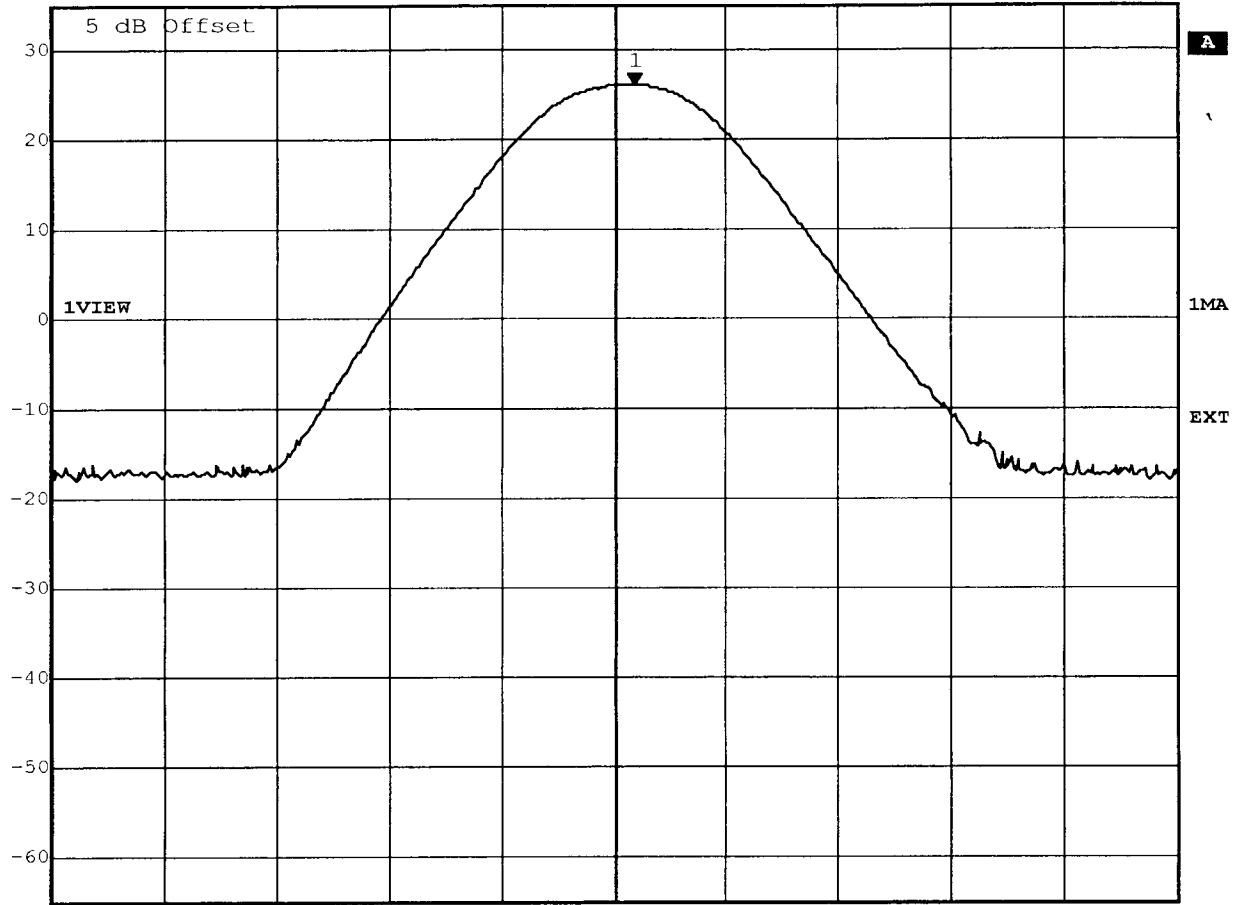

Center 2.48154 GHz


1 MHz/

Span 10 MHz

Title: Peak Output Power Conducted Ch.: 78 Unom
Comment A: GN Netcom Cordless Headset Gn 9050 Base
Date: 26.OCT.2001 08:16:56




Marker 1 [T1] RBW 1 MHz RF Att 60 dB
Ref Lvl 25.93 dBm VBW 1 MHz
35 dBm 2.48179050 GHz SWT 5 ms Unit dBm

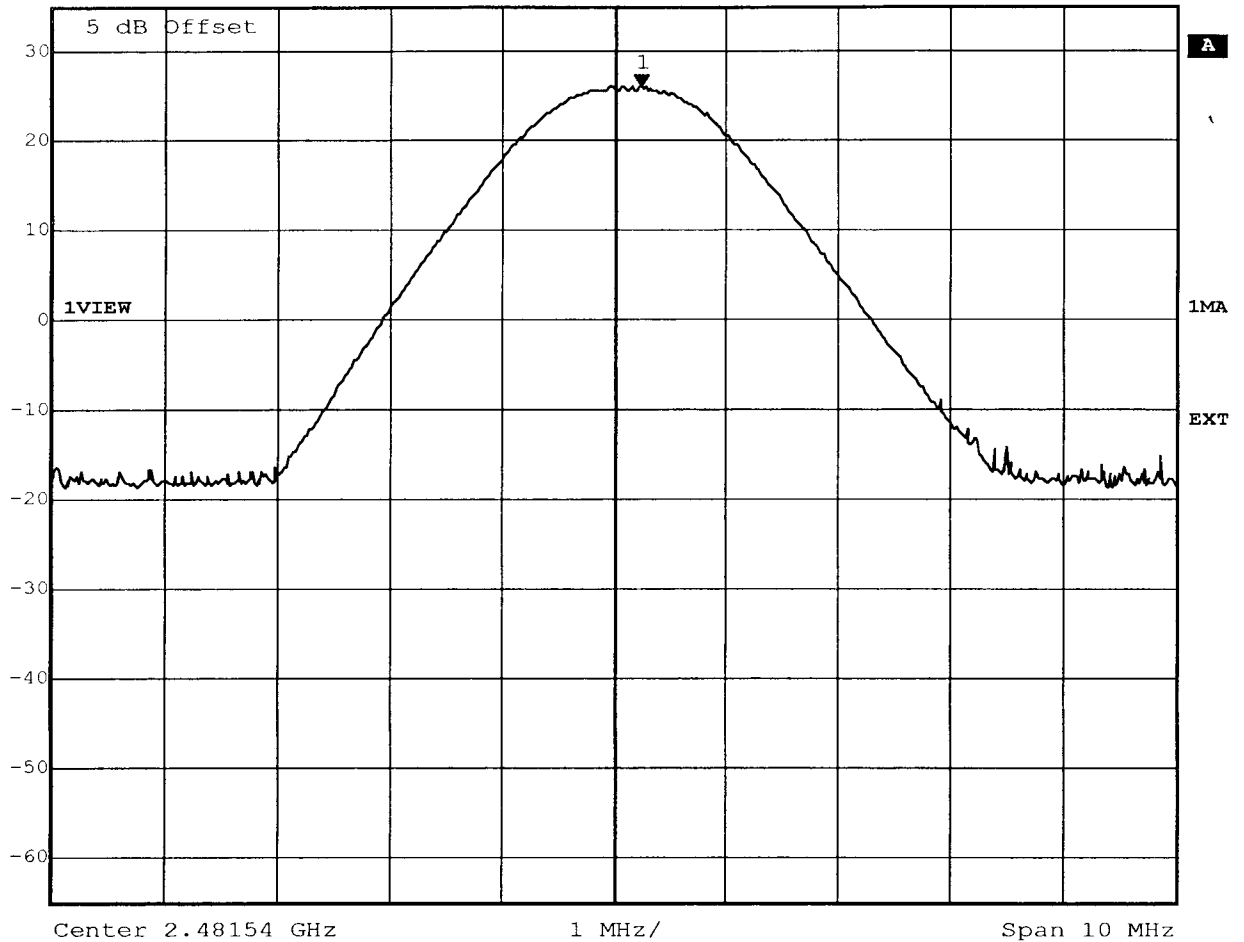

Title: Peak Output Power Conducted Ch.: 78 Unom-15%
Comment A: GN Netcom Cordless Headset Gn 9050 Base
Date: 26.OCT.2001 08:17:55




Marker 1 [T1] RBW 1 MHz RF Att 60 dB
Ref Lvl 25.93 dBm VBW 1 MHz
35 dBm 2.48173038 GHz SWT 5 ms Unit dBm

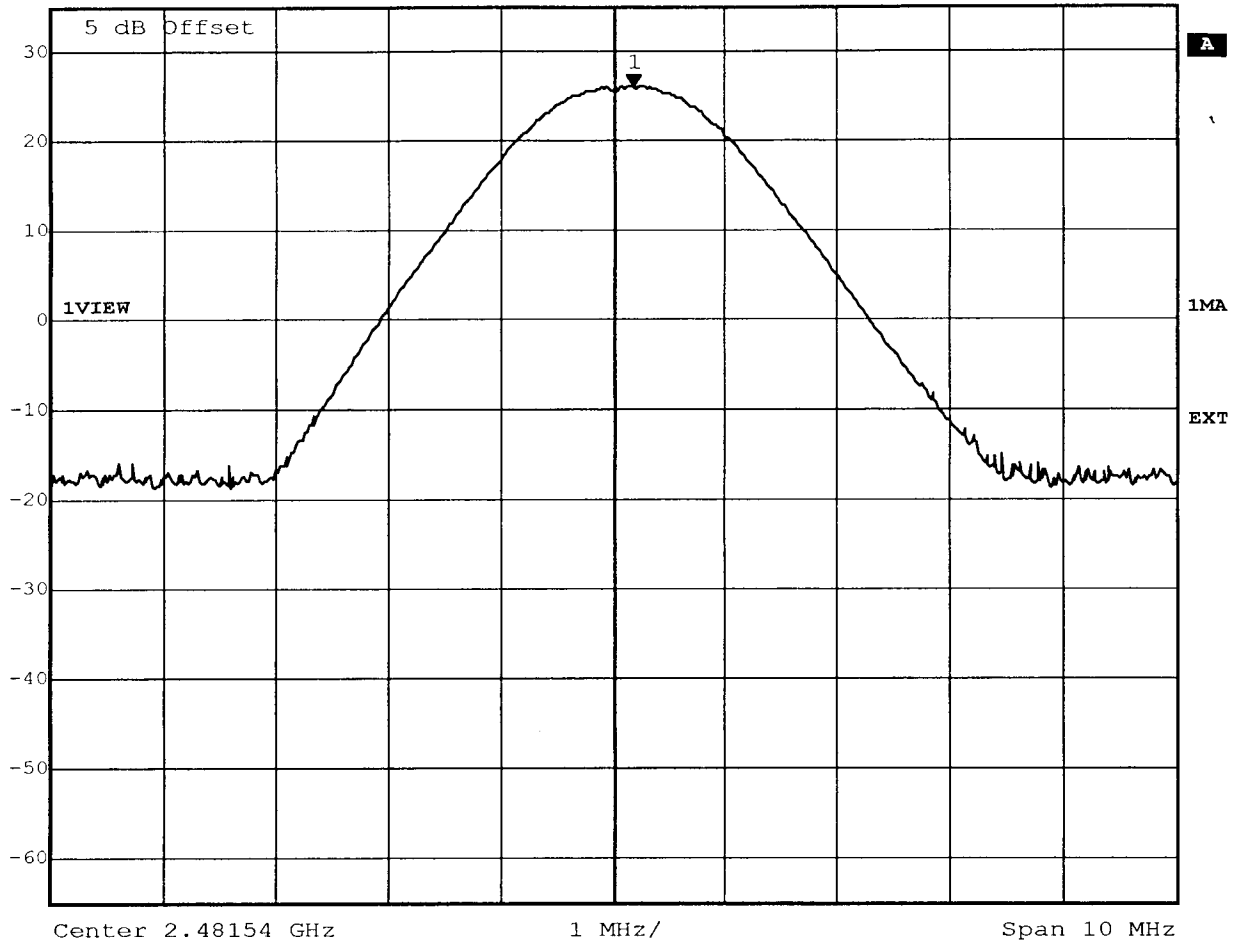

Title: Peak Output Power Conducted Ch.: 78 Unom+15%
Comment A: GN Netcom Cordless Headset Gn 9050 Base
Date: 26.OCT.2001 08:18:58


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.401GHz Pmax:17.03dBm RBW: 5 MHz

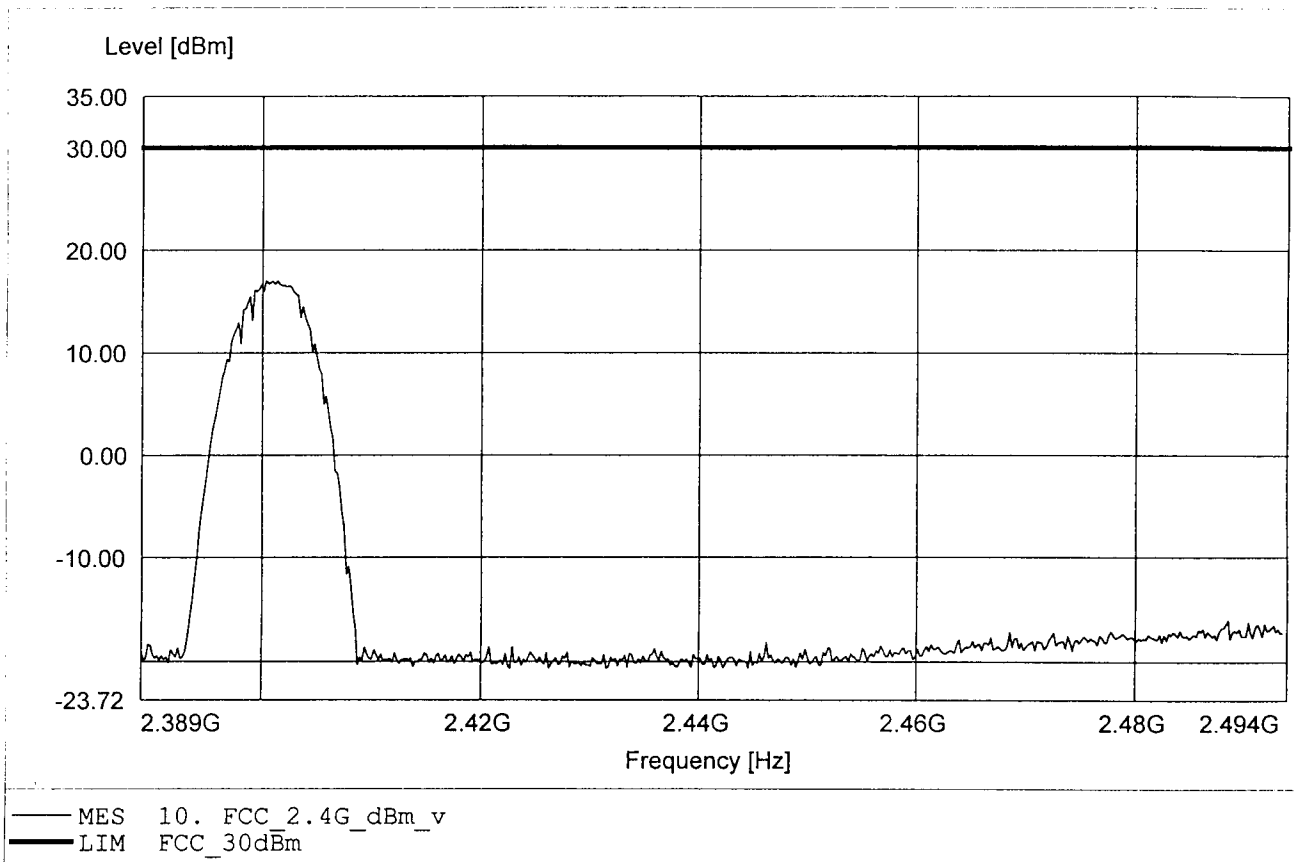


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.401GHz Pmax:23.76dBm RBW: 5 MHz

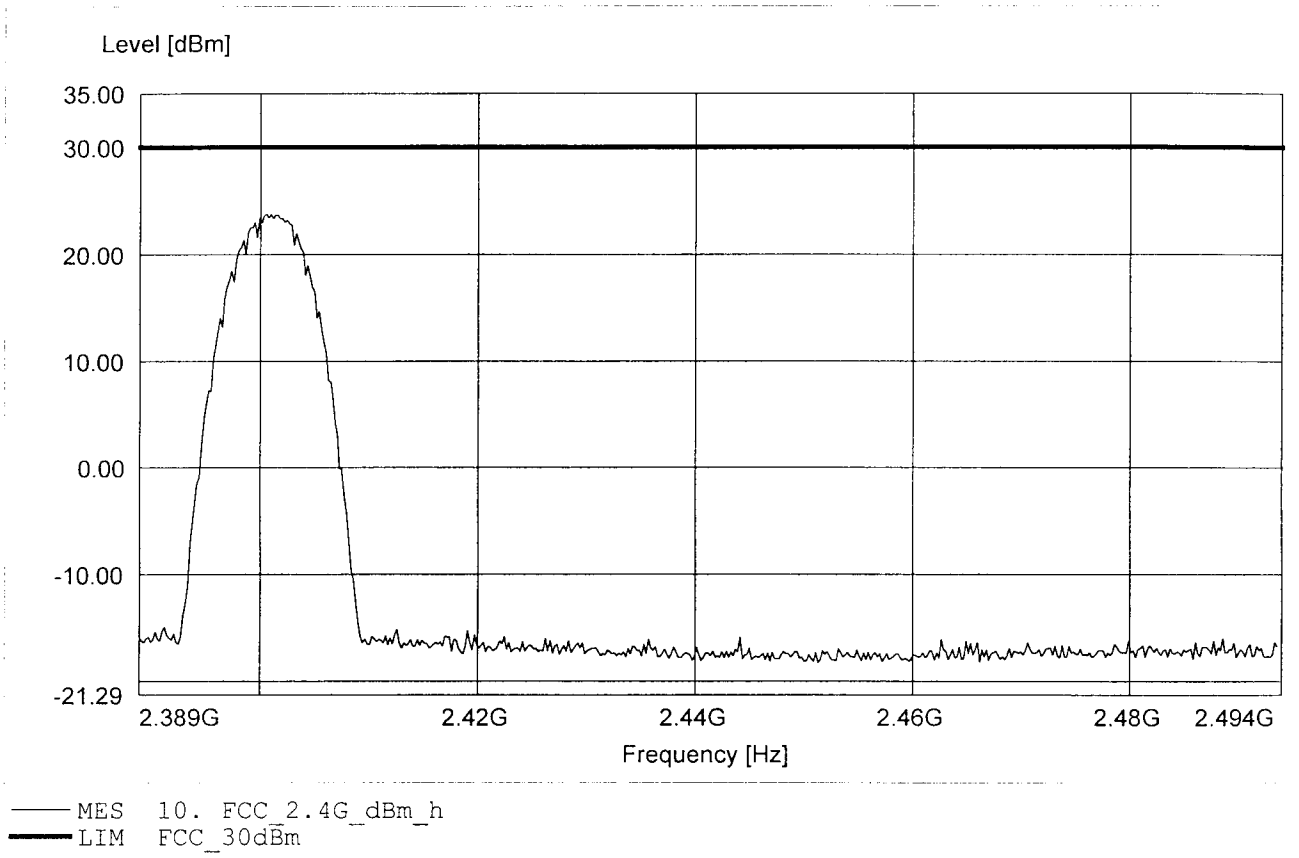


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC -15% (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.401GHz Pmax:16.62dBm RBW: 5 MHz

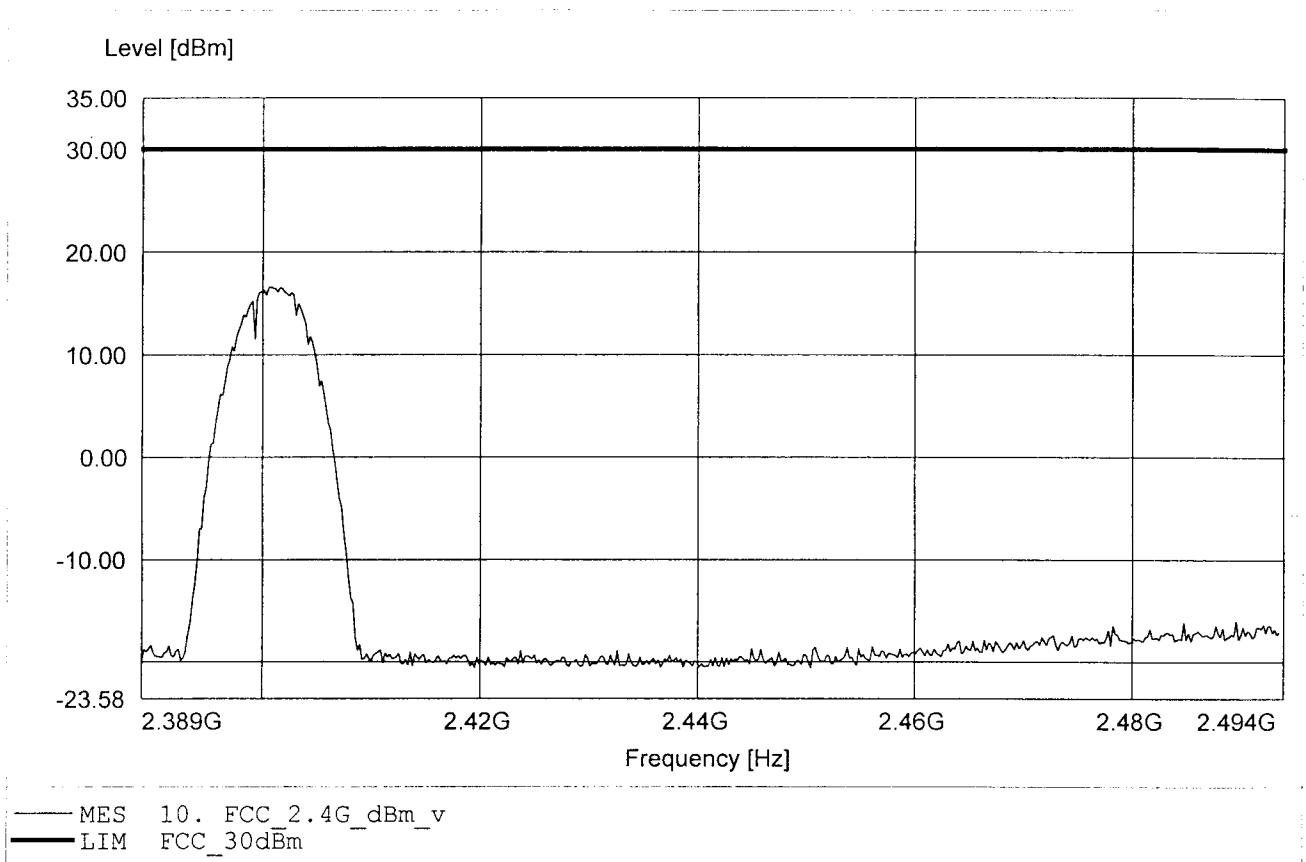


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC -15% (AC/DC adaptor), Thom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.401GHz Pmax:23.75dBm RBW: 5 MHz

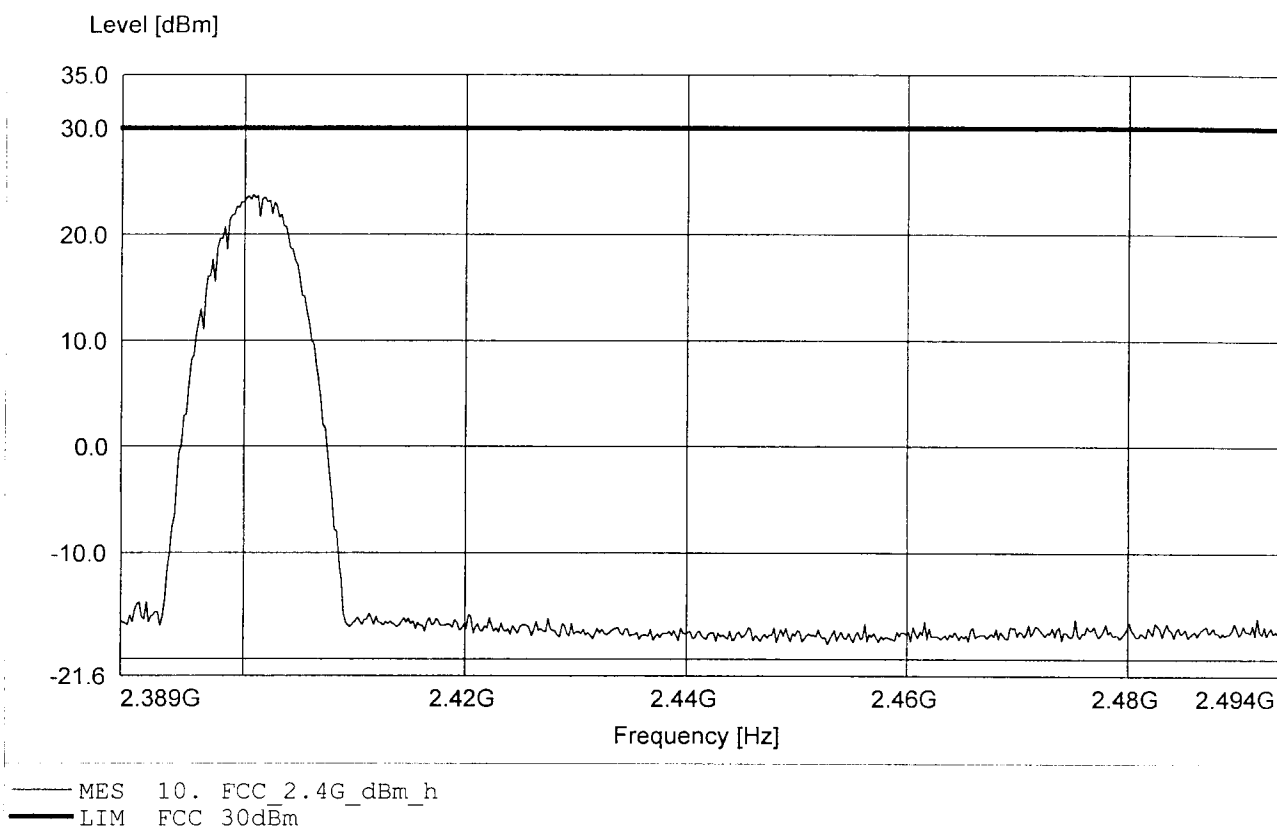


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC +15% (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.401GHz Pmax:16.63dBm RBW: 5 MHz

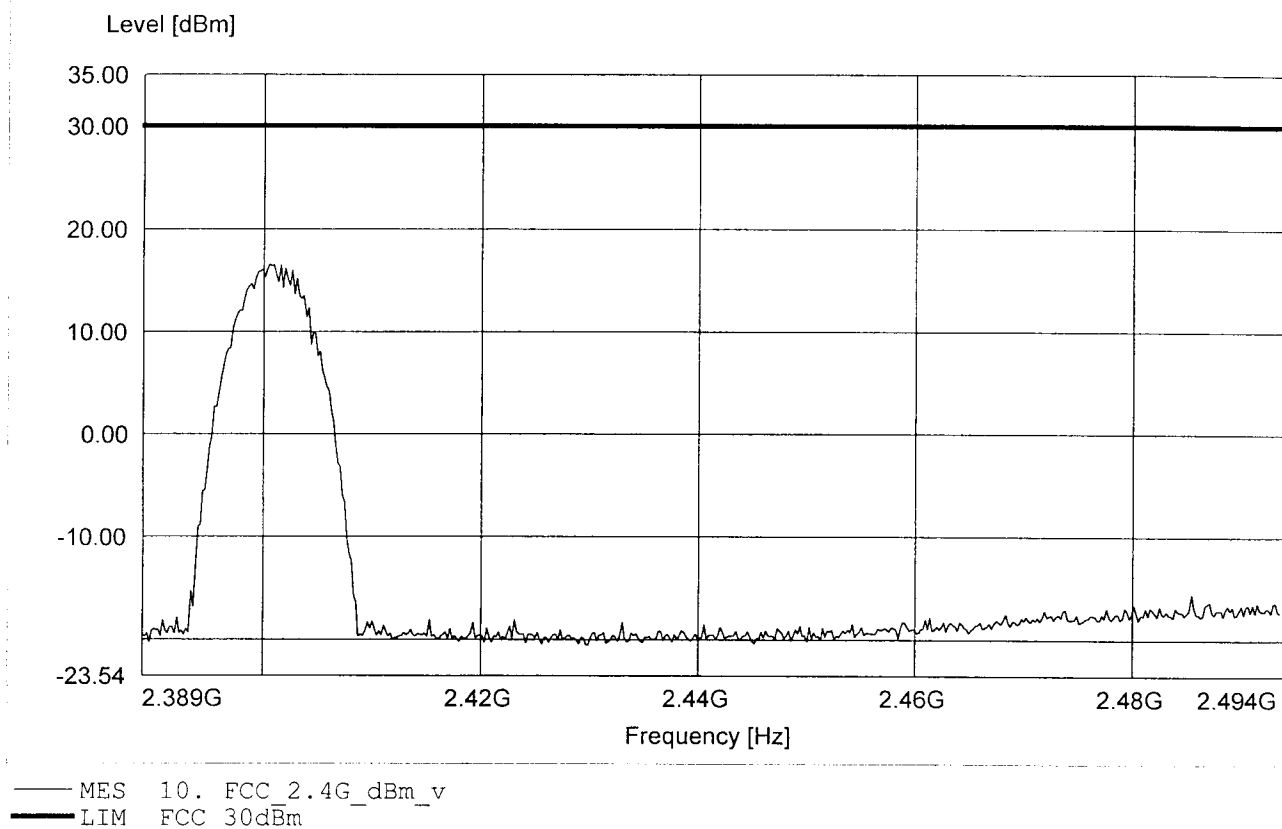

Carrier power (dBm)
FCC RULES PART 15, SUBPART C


EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC +15% (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.401GHz Pmax:23.76dBm RBW: 5 MHz

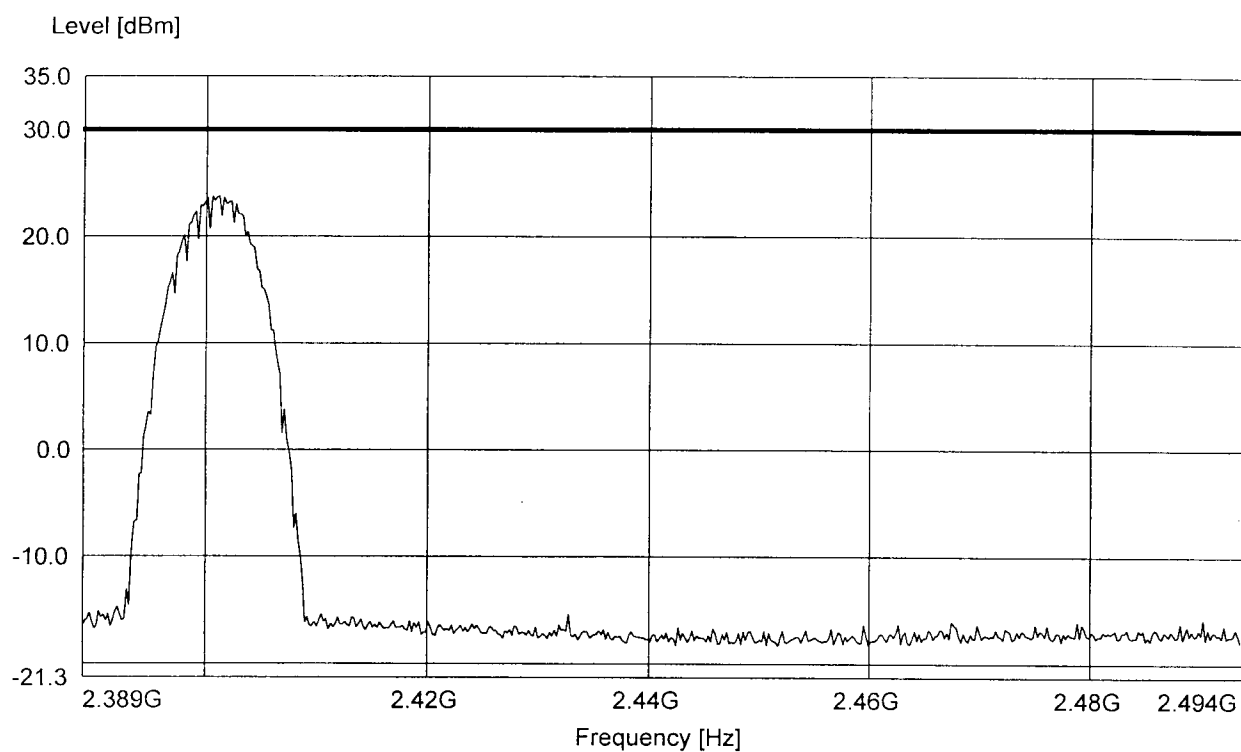

— MES 10. FCC 2.4G_dBm_h
— LIM FCC_30dBm


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.442GHz Pmax:17.85dBm RBW: 5 MHz

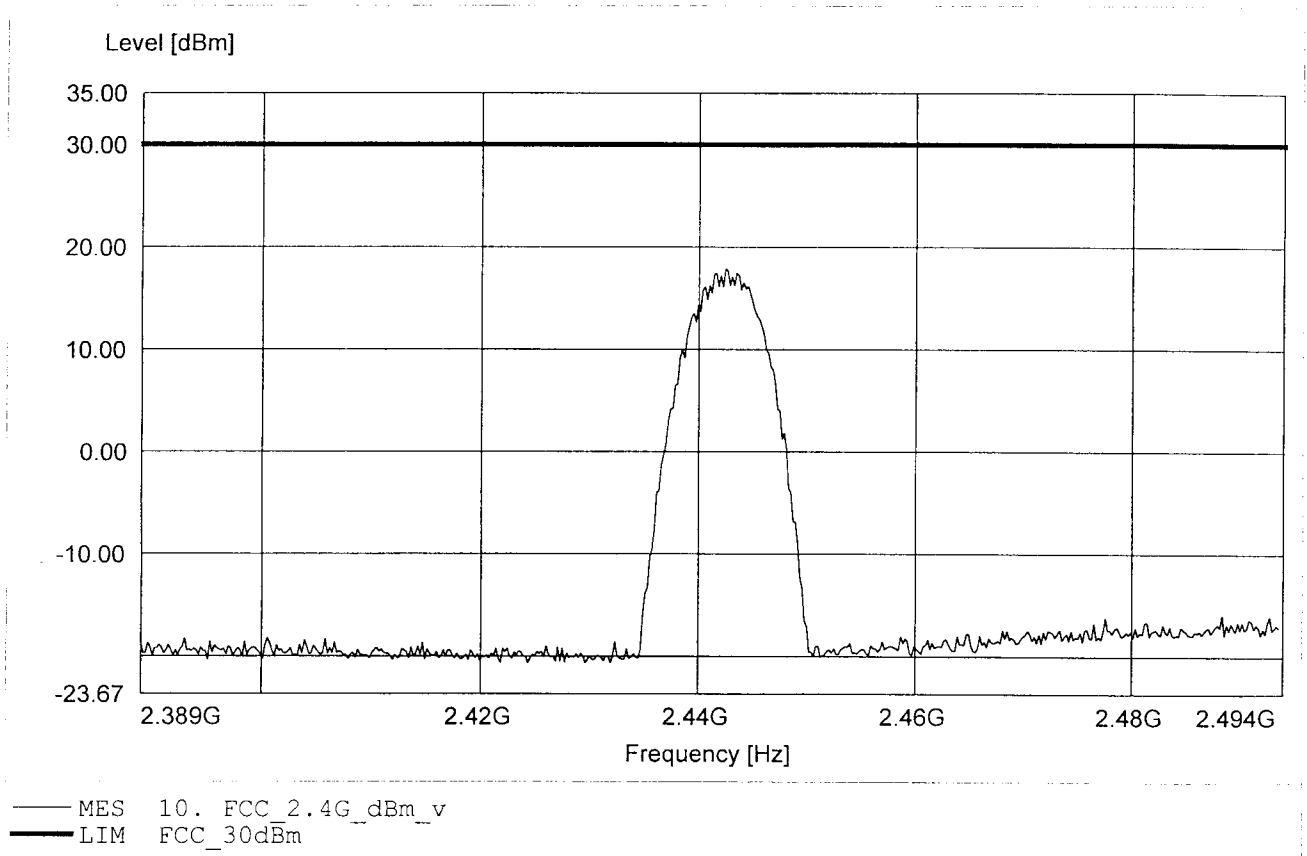


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.443GHz Pmax:22.51dBm RBW: 5 MHz

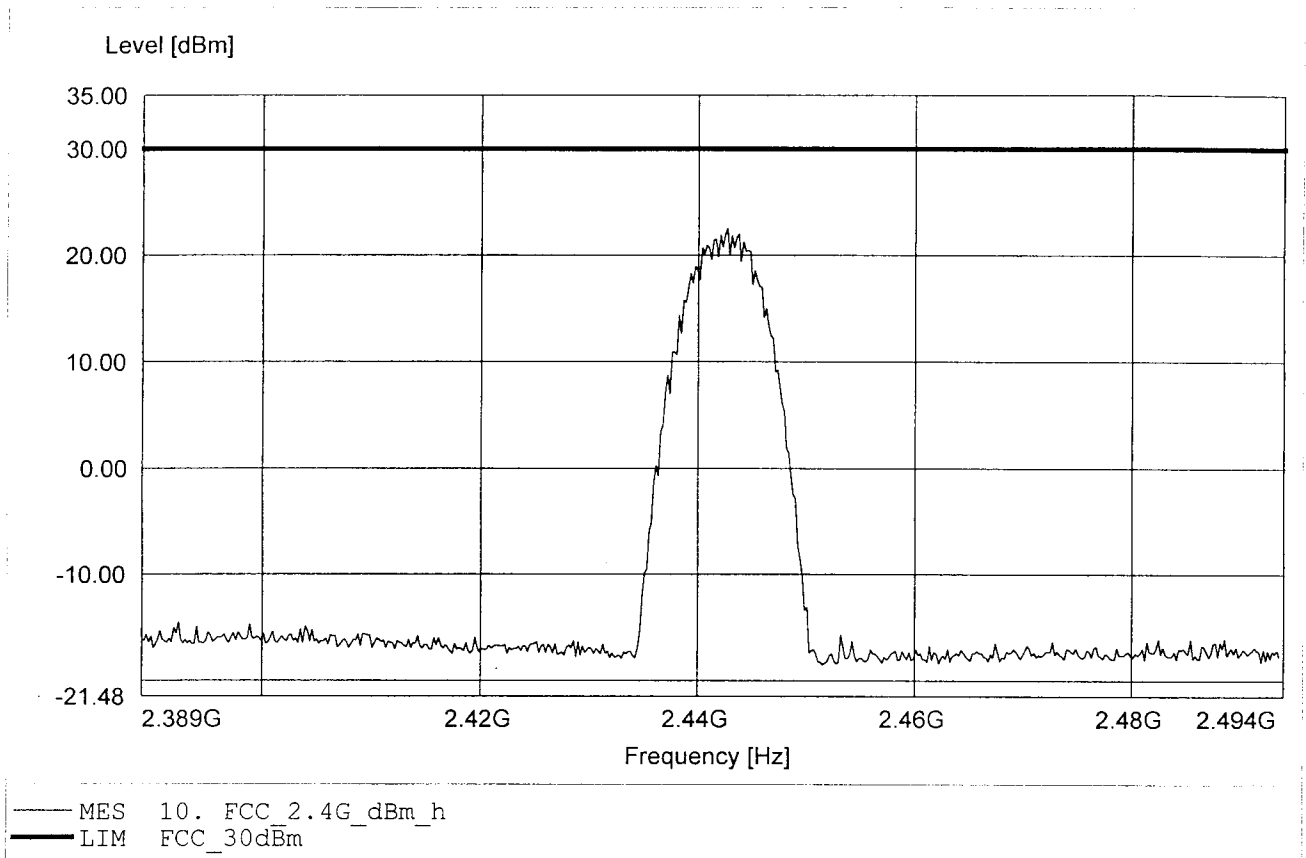


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC -15% (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.442GHz Pmax:17.66dBm RBW: 5 MHz

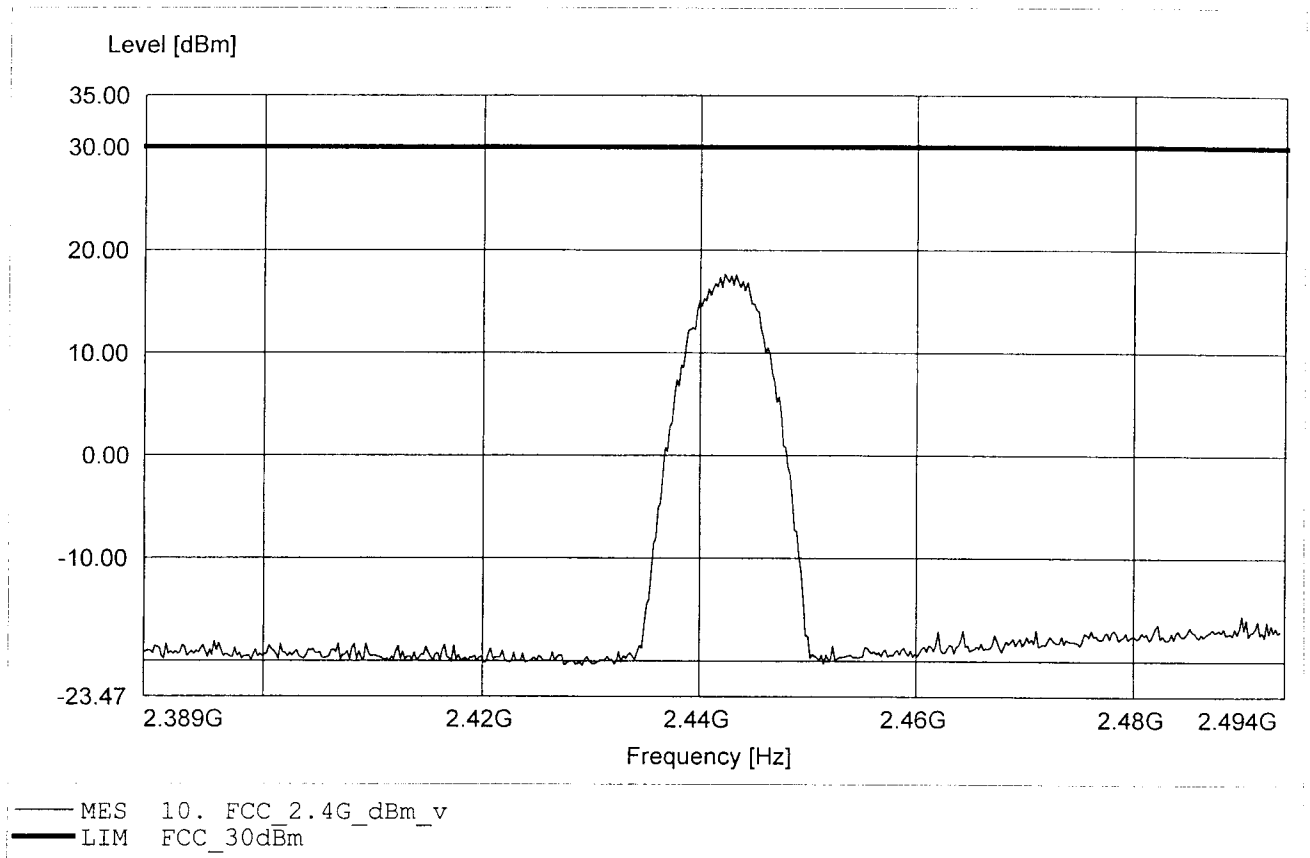


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC -15% (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.442GHz Pmax:22.36dBm RBW: 5 MHz

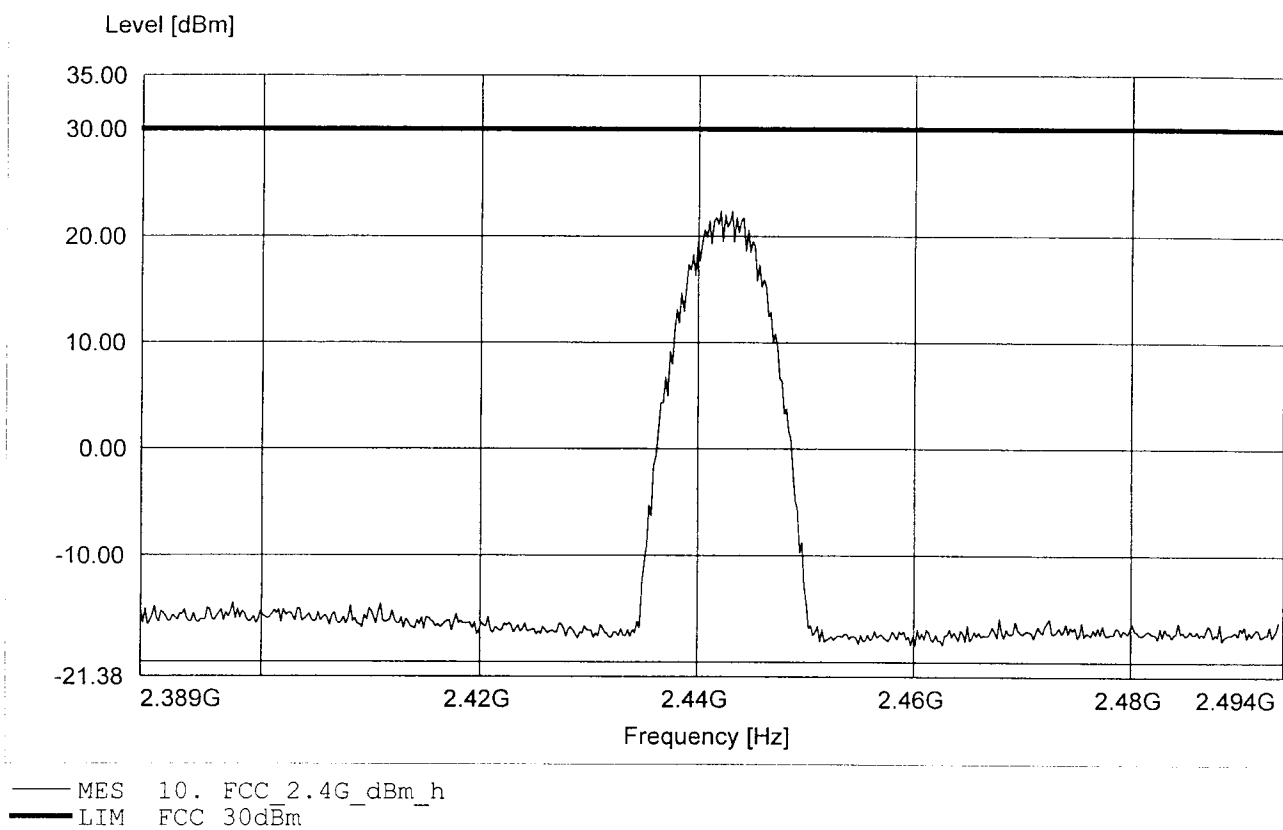


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC +15% (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.443GHz Pmax:17.67dBm RBW: 5 MHz

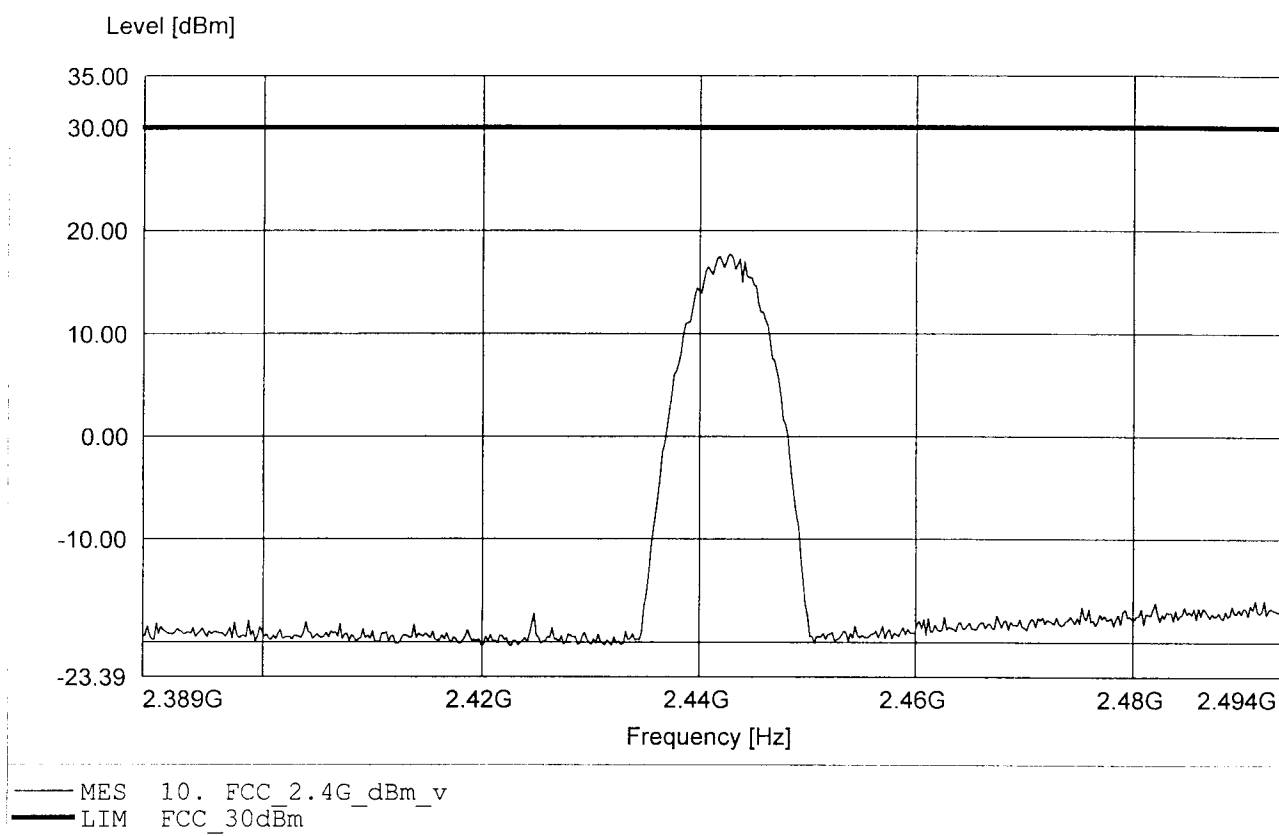


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC +15% (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.442GHz Pmax:22.43dBm RBW: 5 MHz

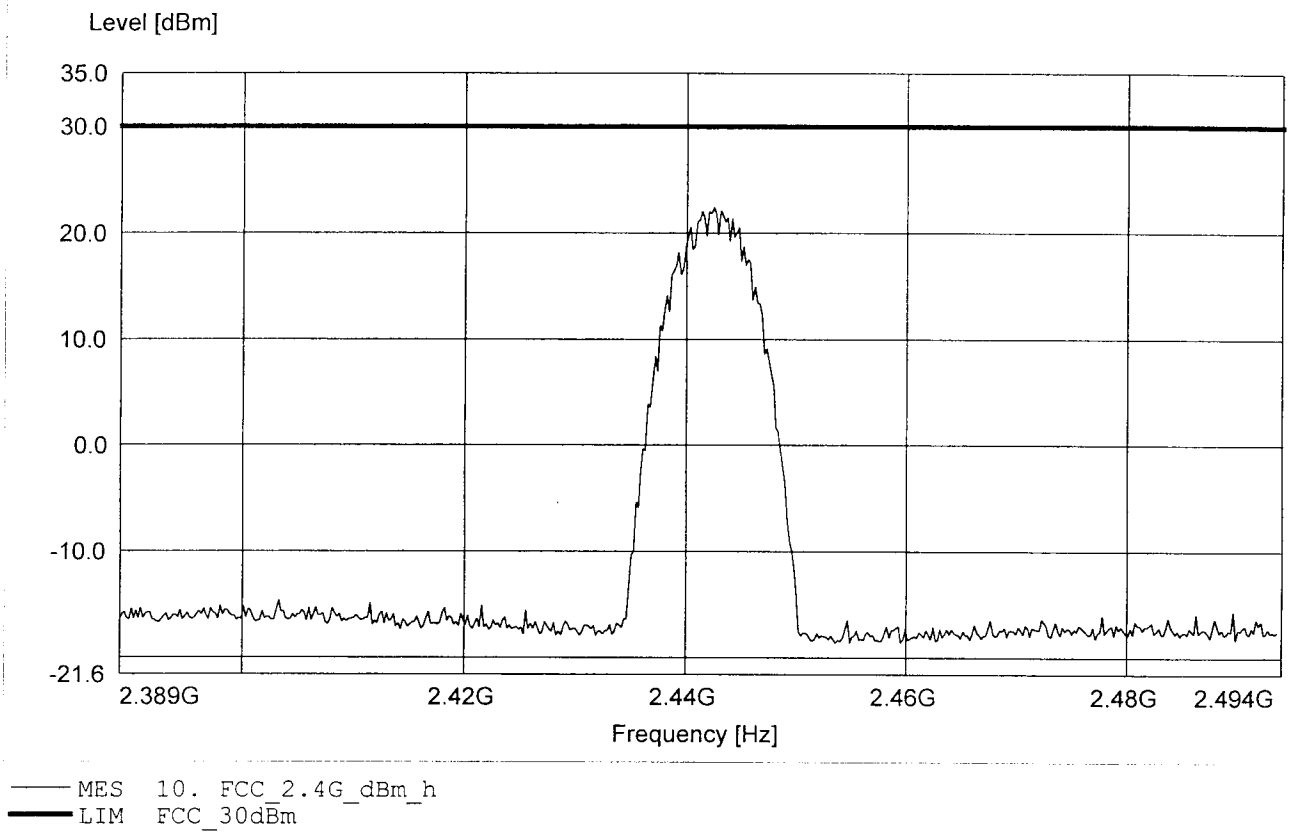


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 78
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.482GHz Pmax:23.15dBm RBW: 5 MHz

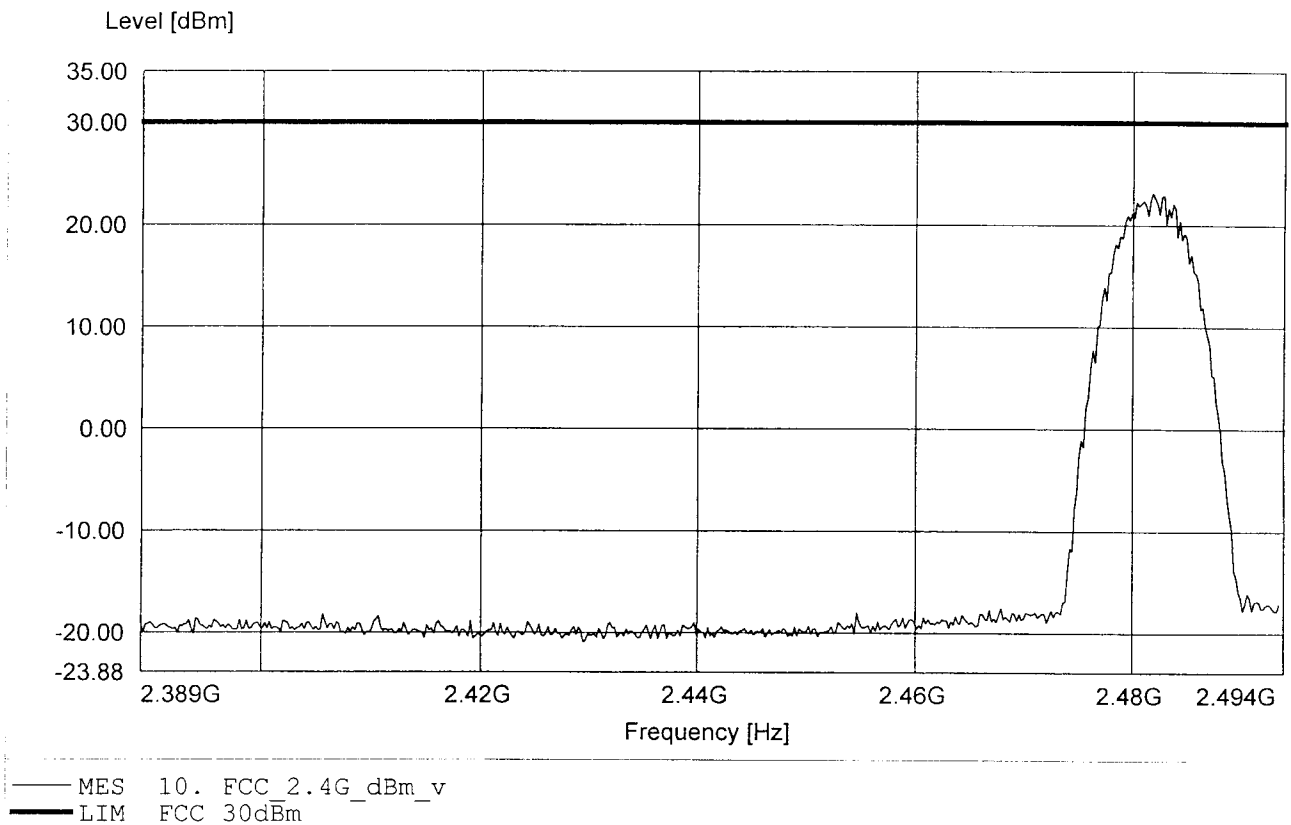


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 78
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.482GHz Pmax:23.02dBm RBW: 5 MHz

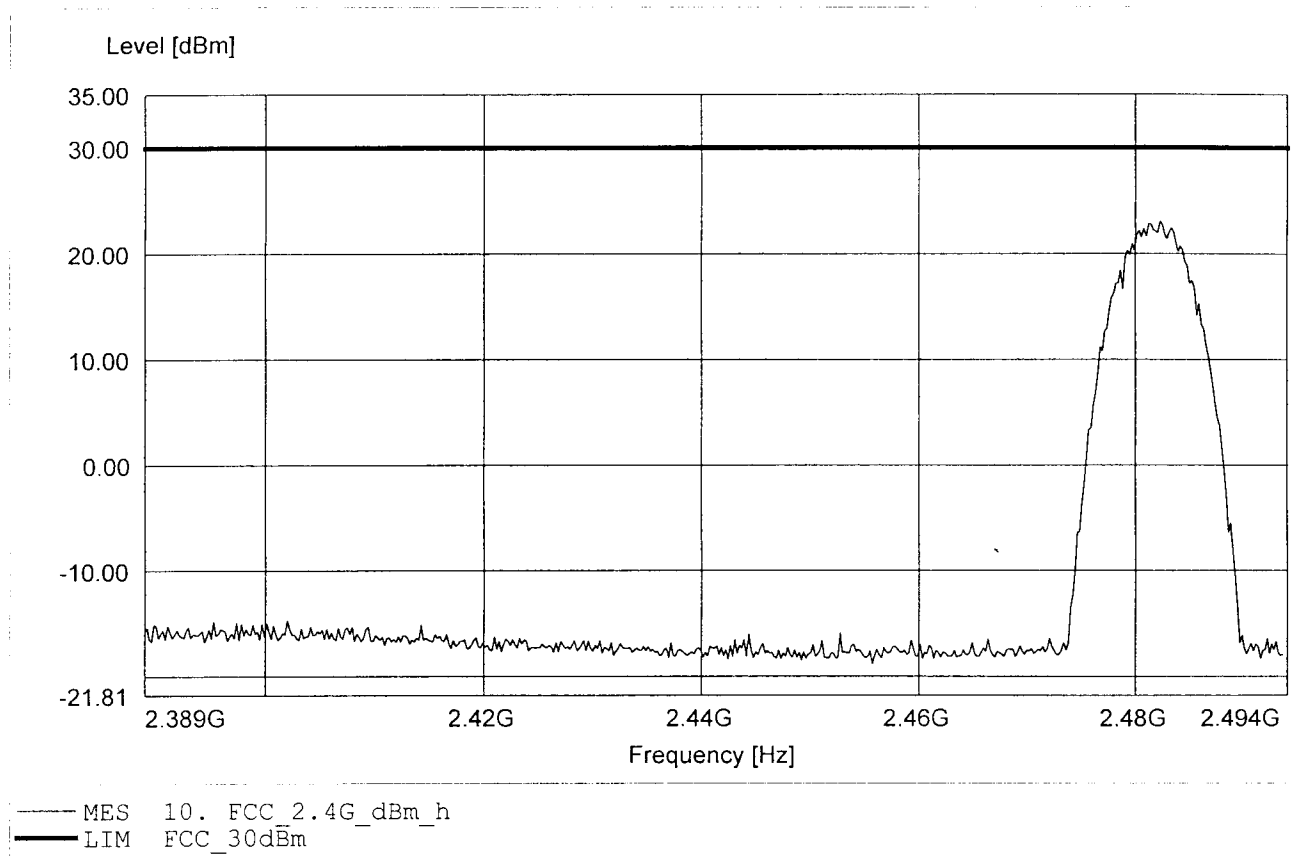


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 78
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC -15% (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.482GHz Pmax:23.15dBm RBW: 5 MHz

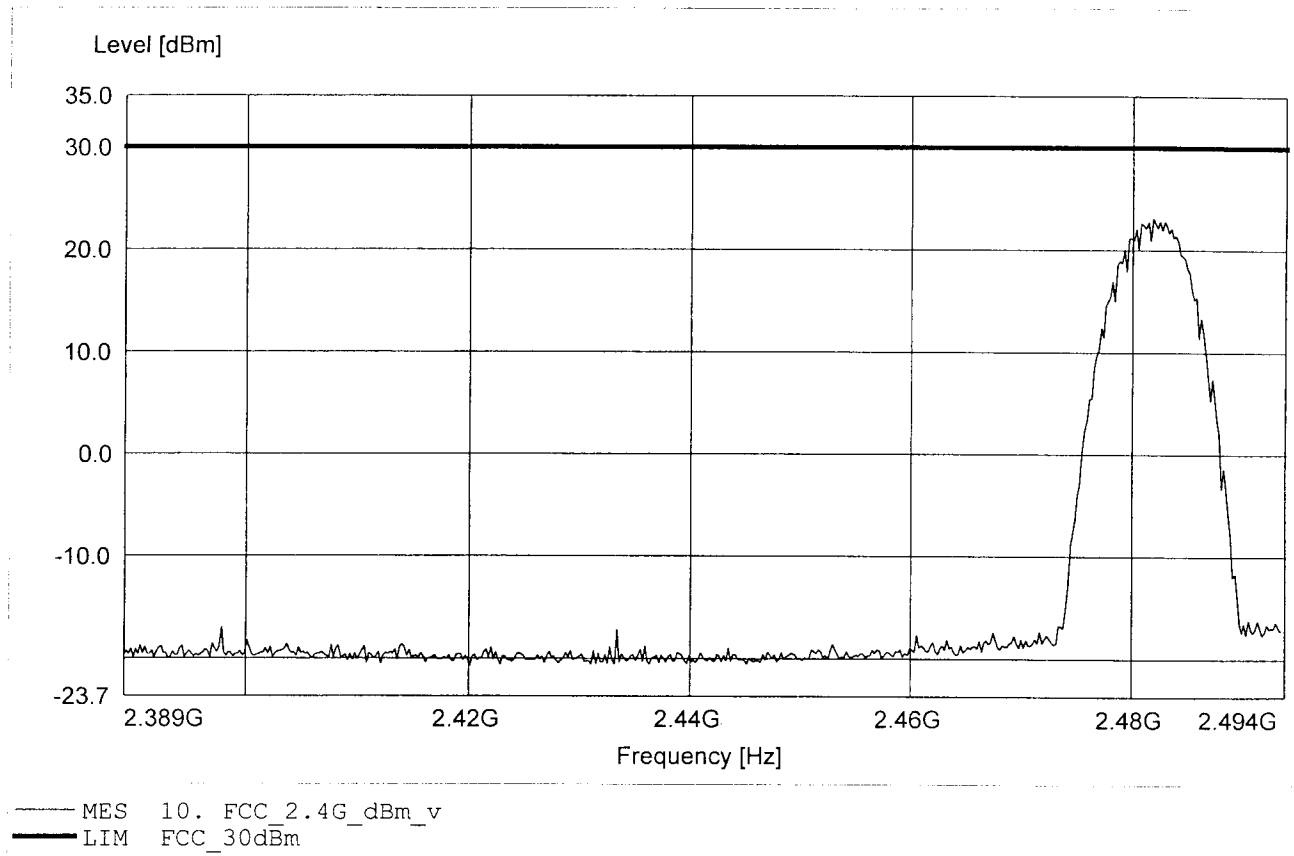


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 78
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC -15% (AC/DC adaptor), Thom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.482GHz Pmax:22.92dBm RBW: 5 MHz

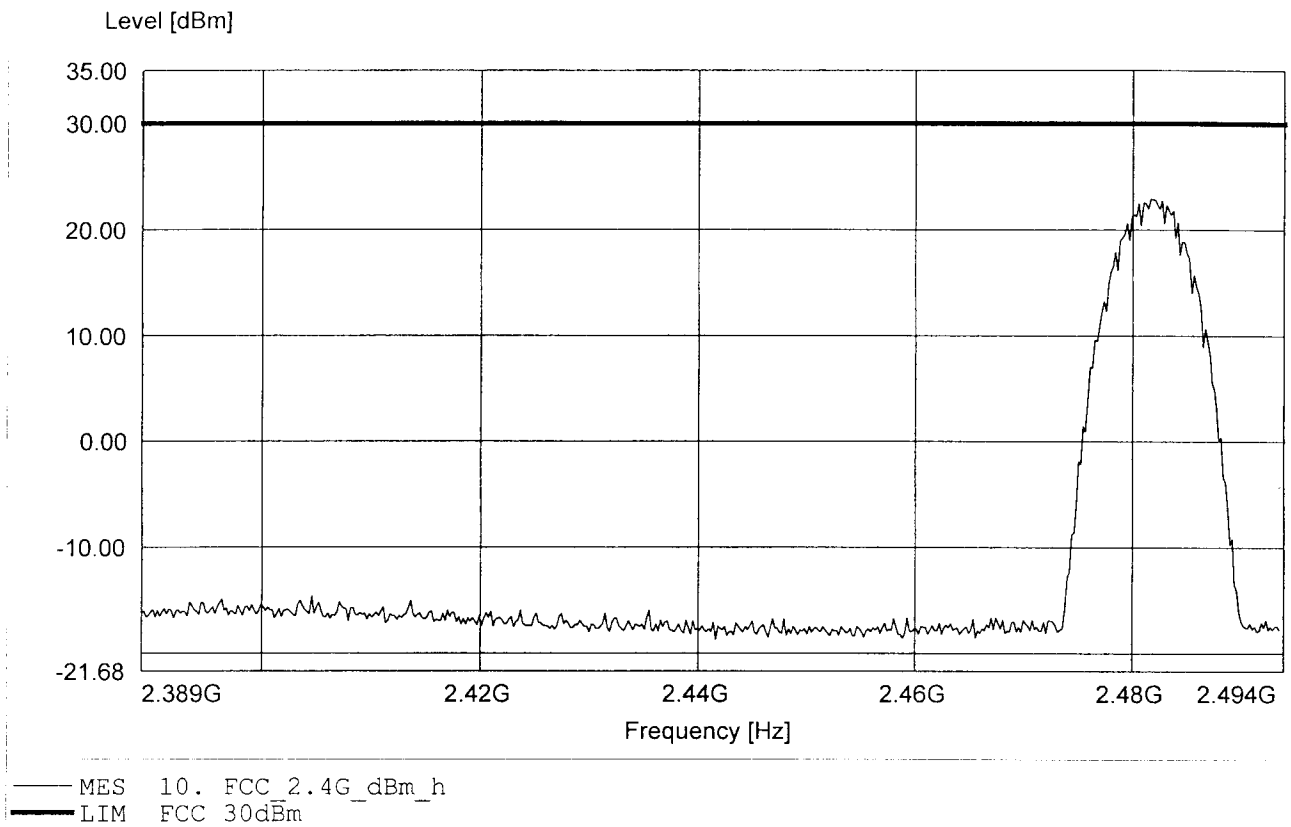


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 78
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC +15% (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.482GHz Pmax:23.01dBm RBW: 5 MHz

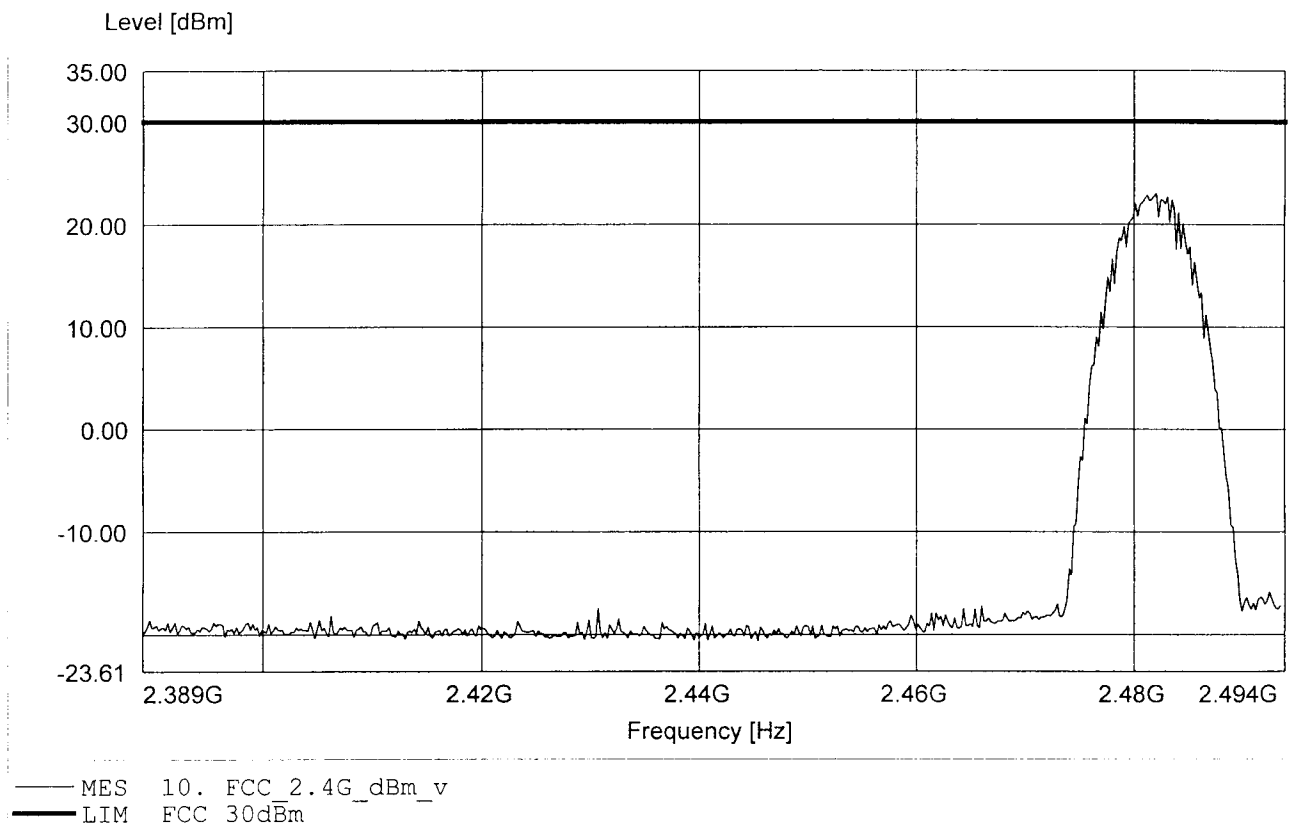


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 78
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC +15% (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.482GHz Pmax:22.91dBm RBW: 5 MHz

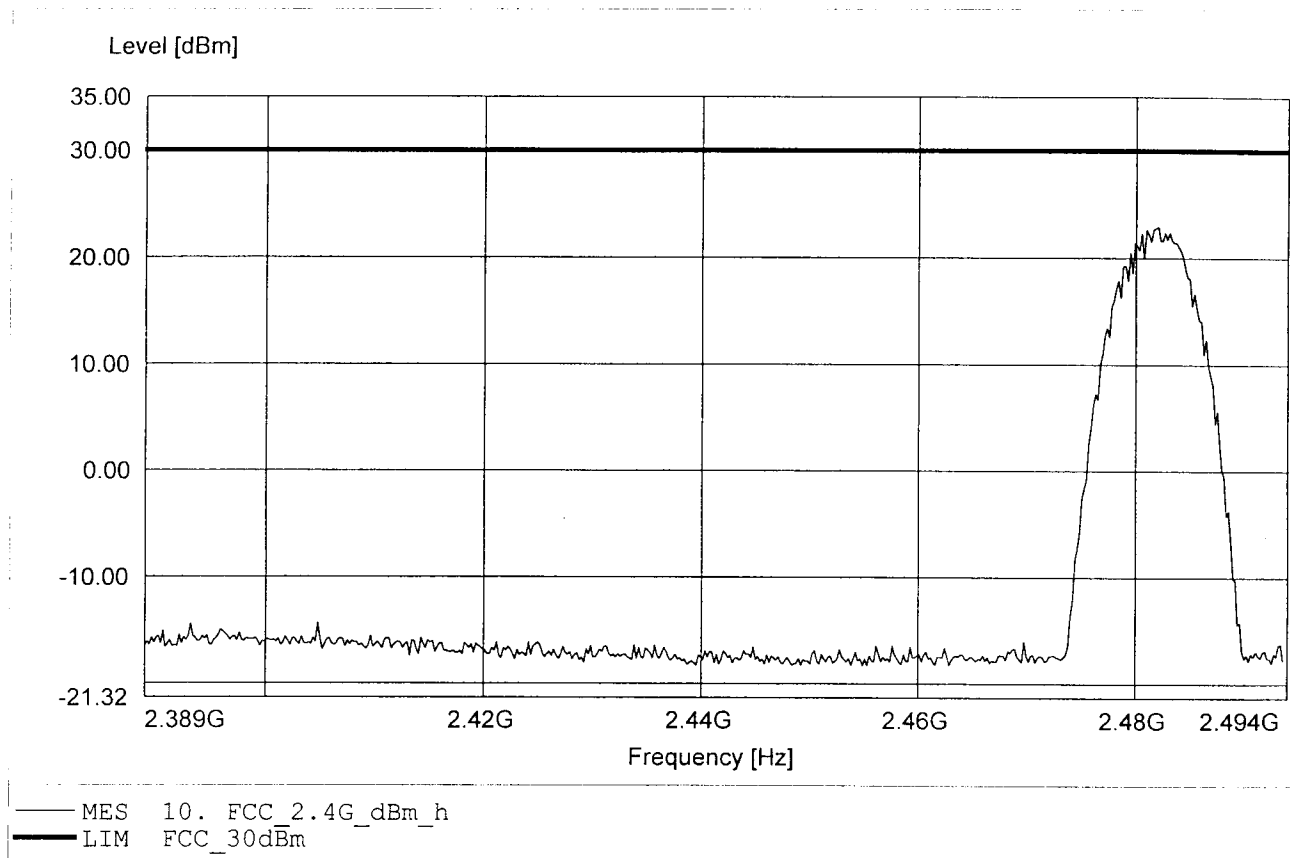


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.401GHz Pmax:14.98dBm RBW: 5 MHz

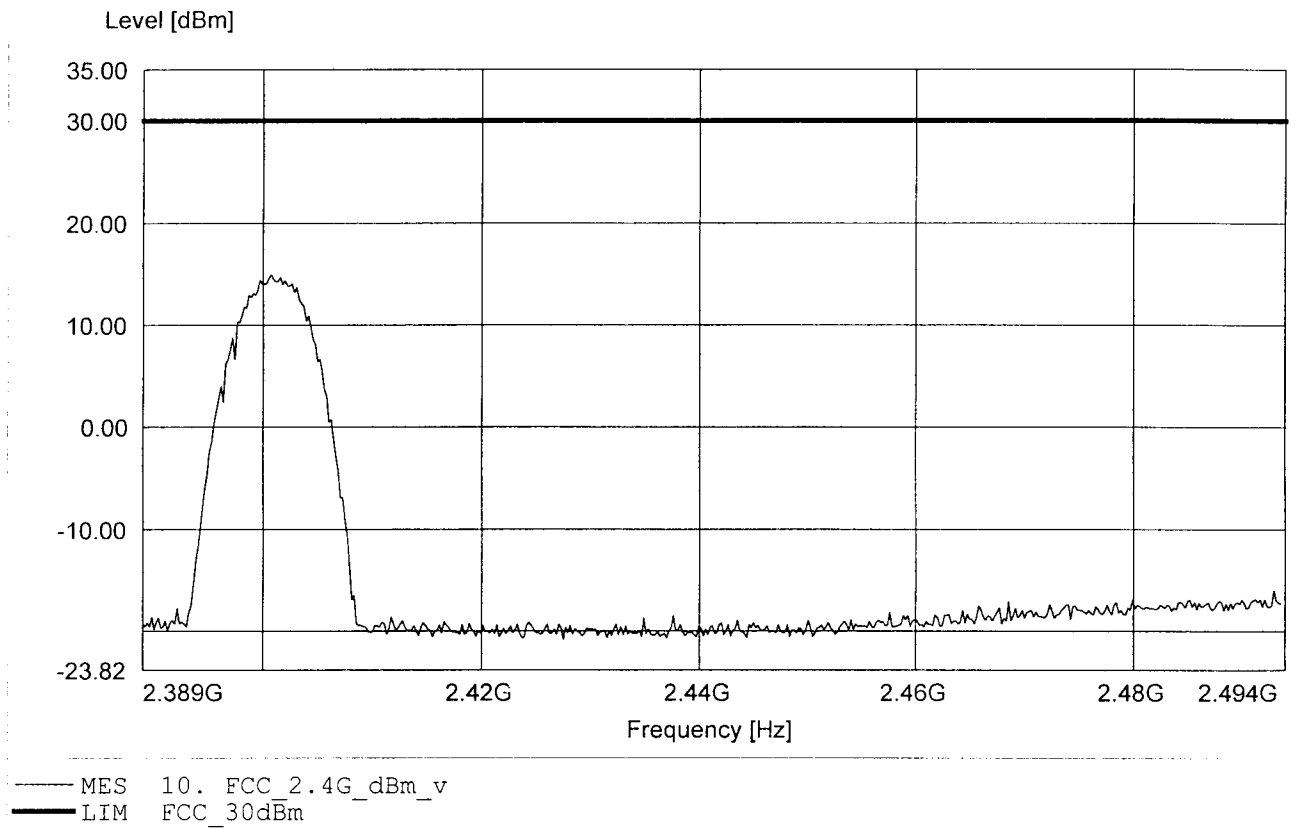


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Thom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.401GHz Pmax:17.63dBm RBW: 5 MHz

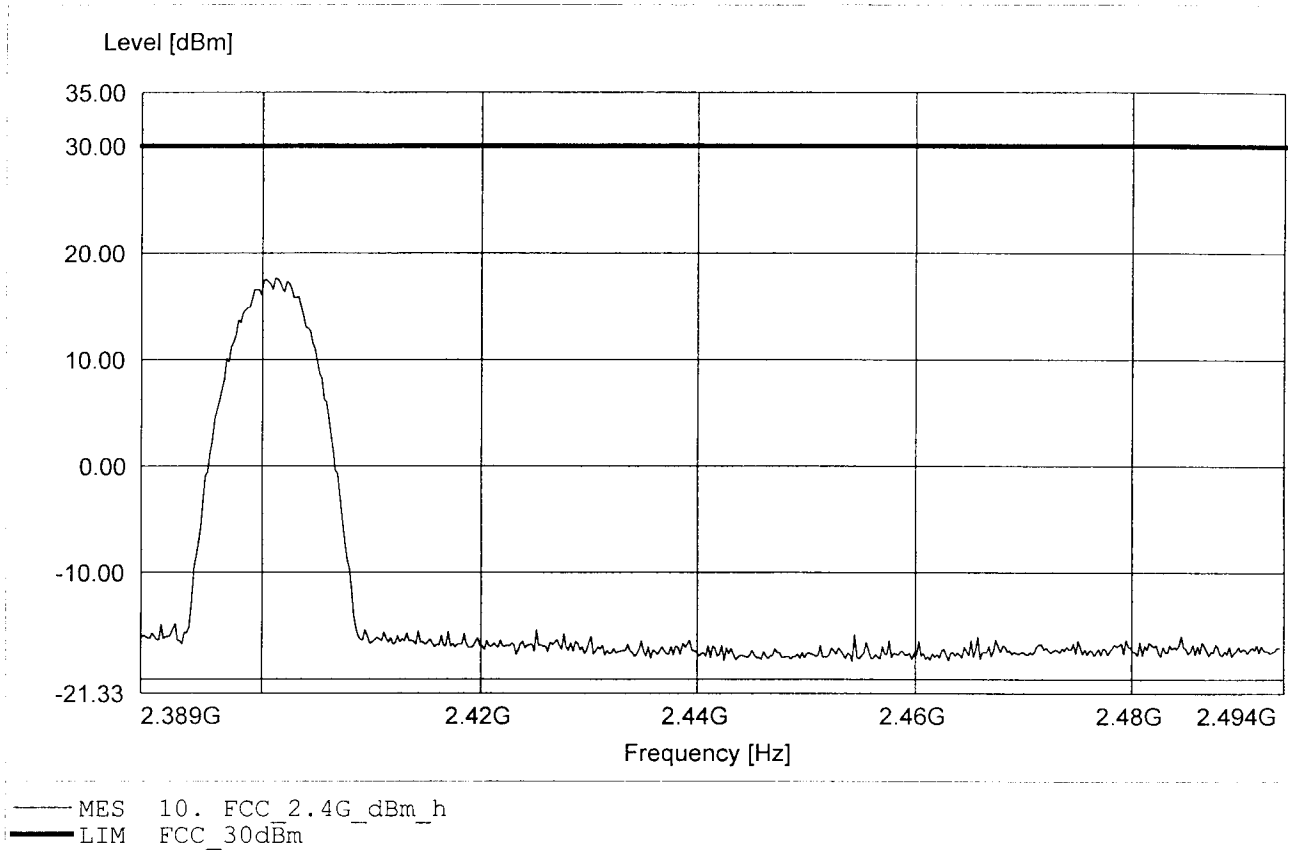


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC -15% (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.401GHz Pmax:15.21dBm RBW: 5 MHz

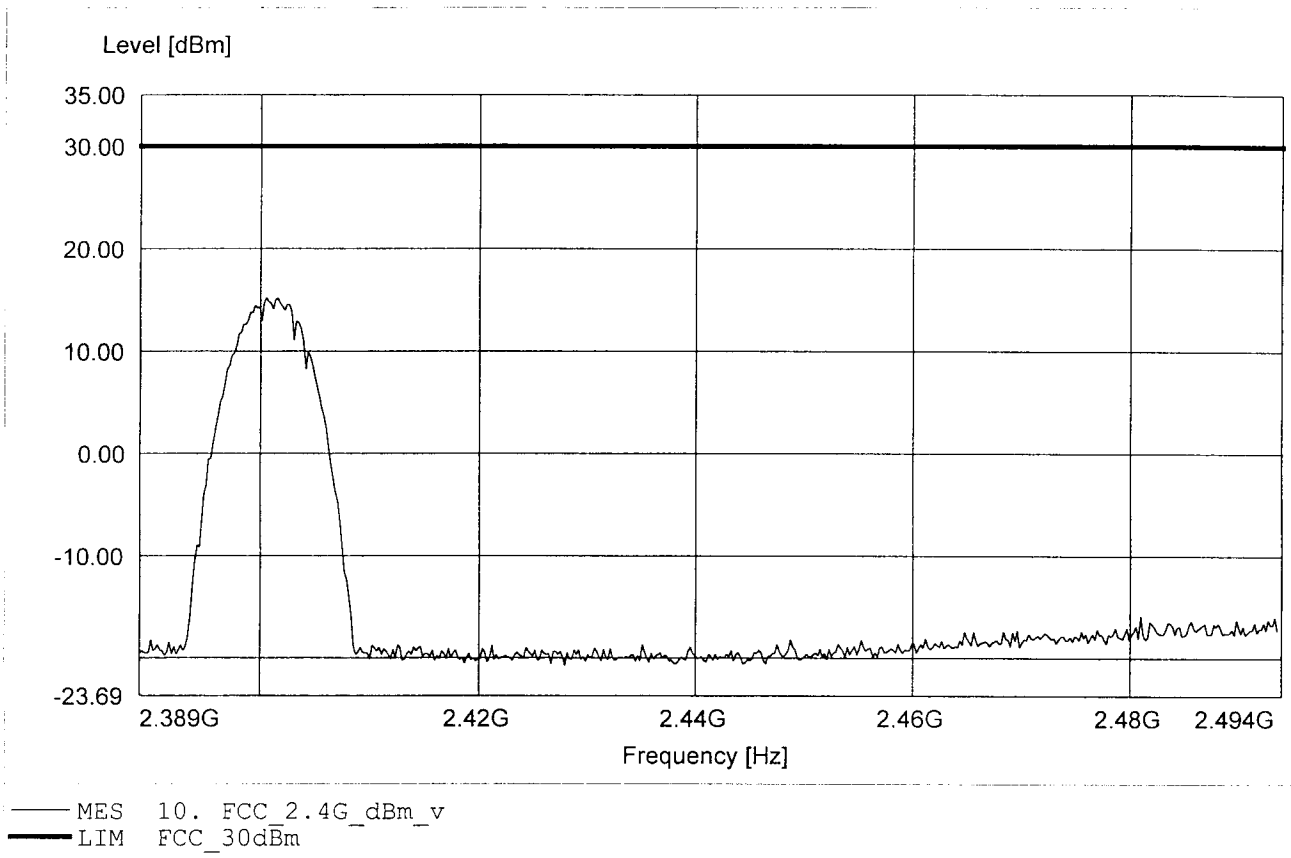


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC -15% (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.401GHz Pmax:17.59dBm RBW: 5 MHz

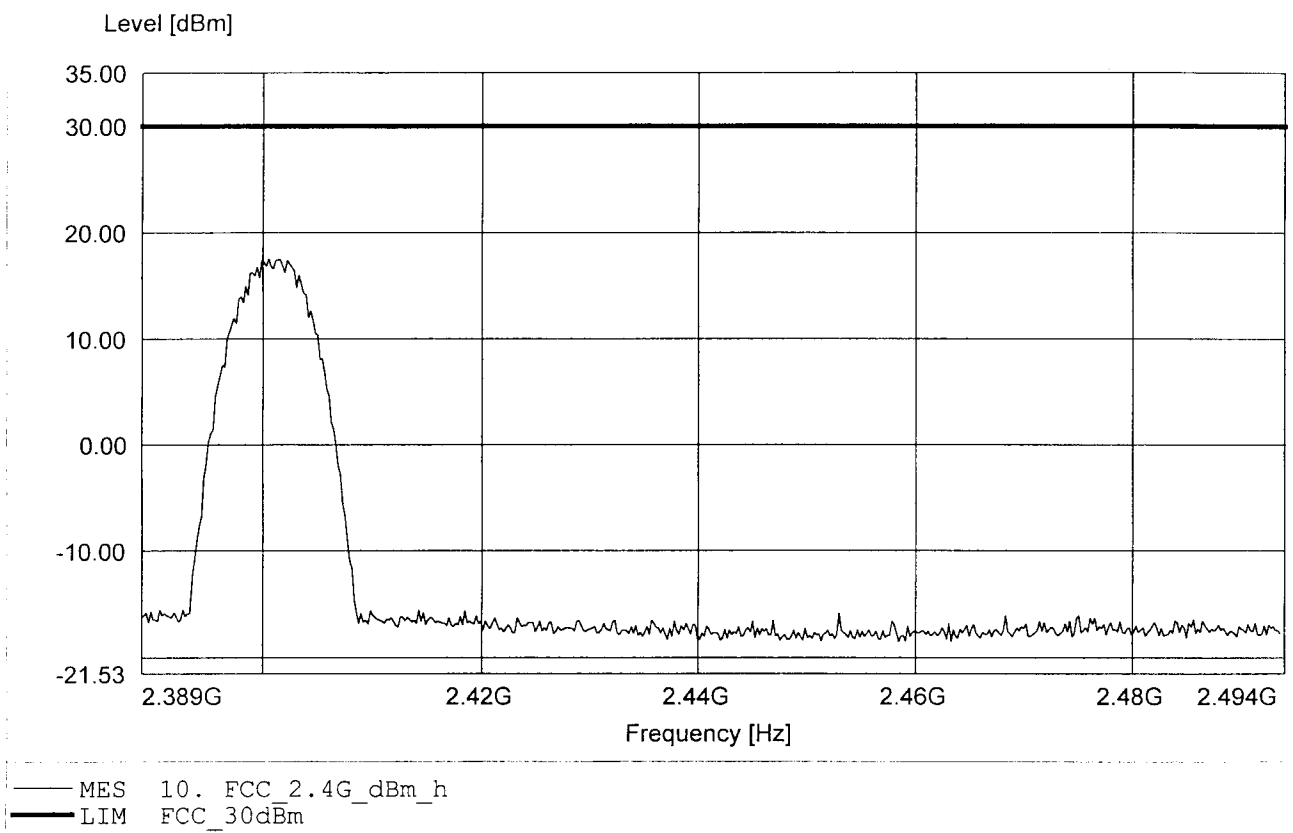


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC +15% (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.401GHz Pmax:15.21dBm RBW: 5 MHz

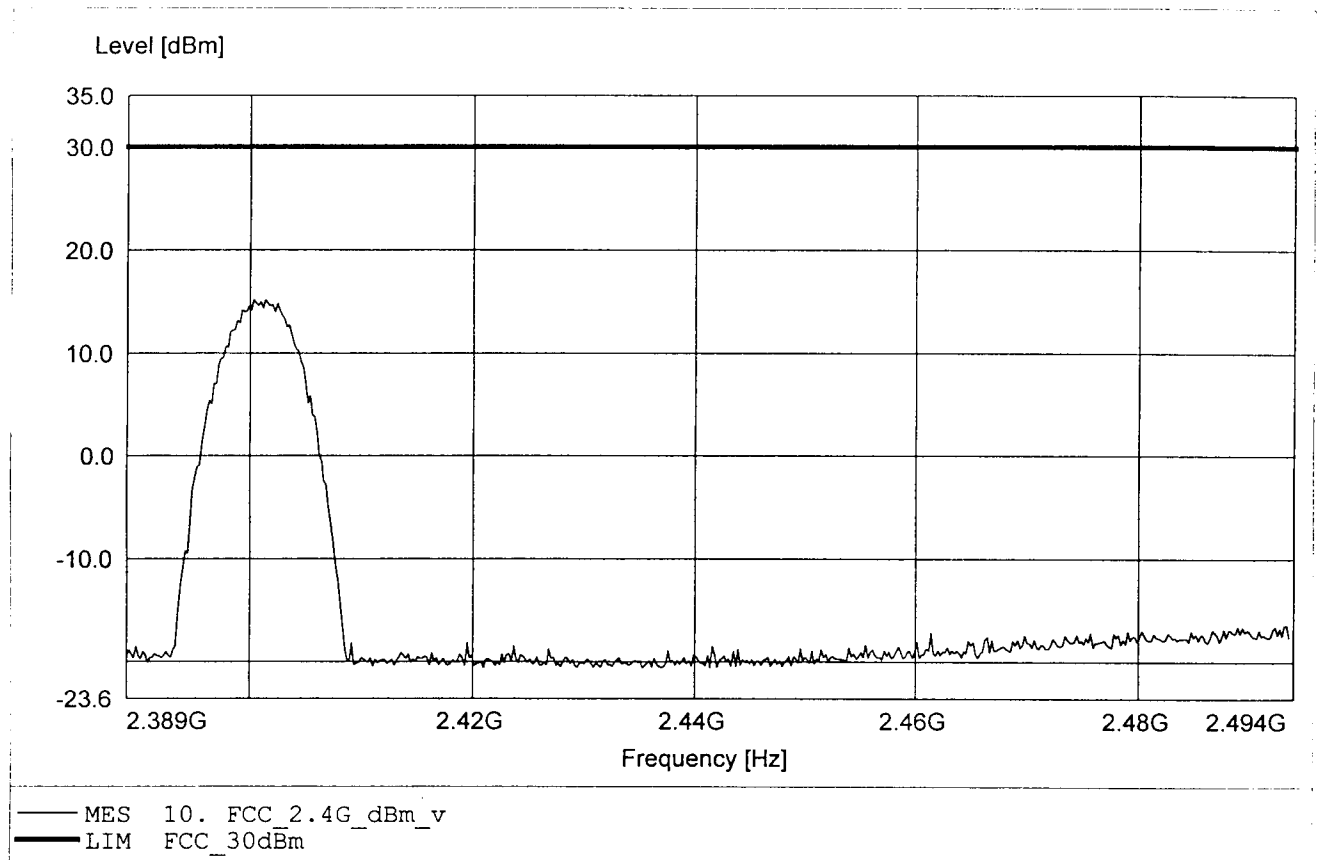


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC +15% (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.401GHz Pmax:17.87dBm RBW: 5 MHz

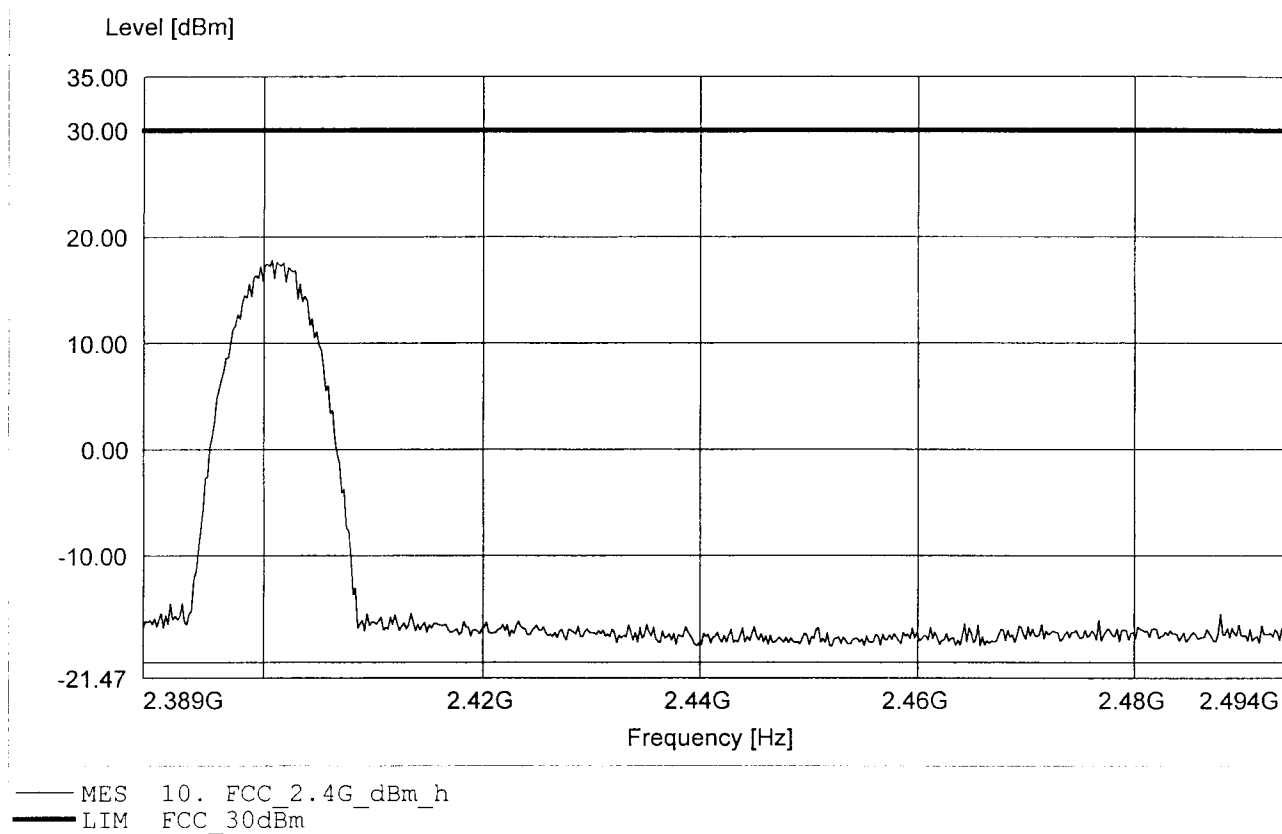

Carrier power (dBm)
FCC RULES PART 15, SUBPART C


EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.443GHz Pmax:18.41dBm RBW: 5 MHz

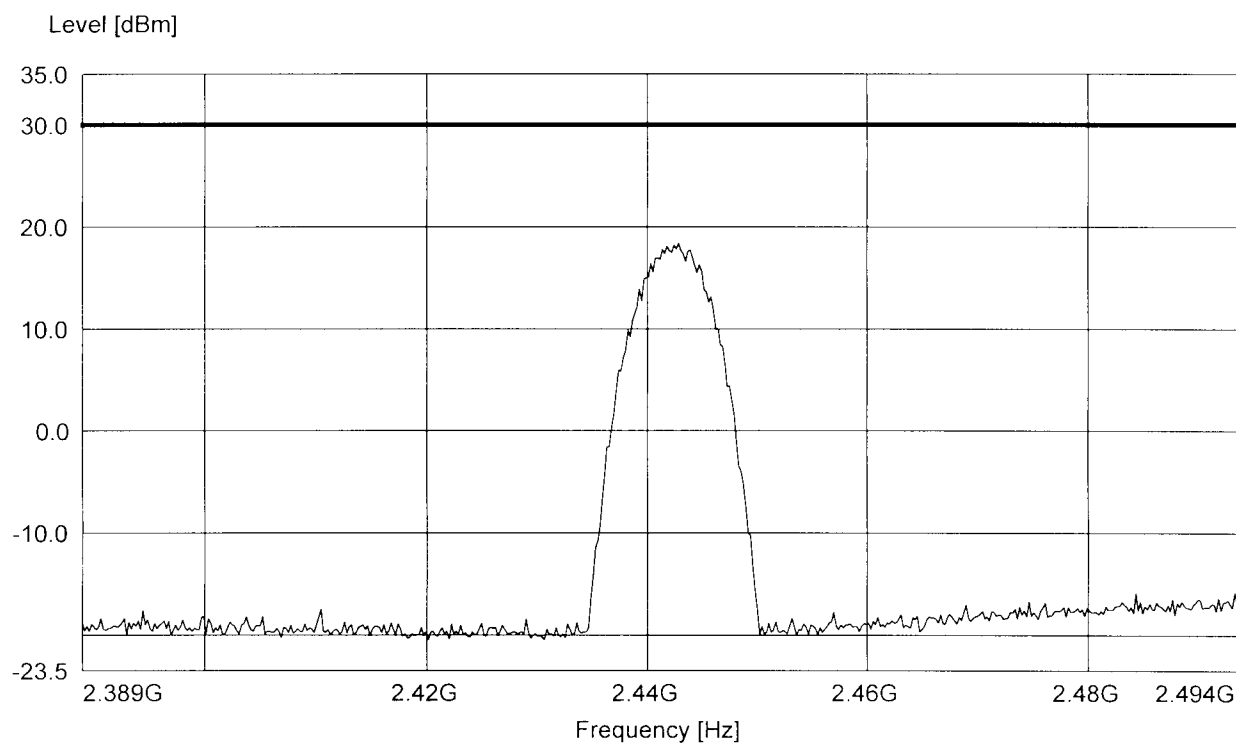

— MES 10. FCC_2.4G_dBm_v
— LIM FCC_30dBm

Carrier power (dBm)
FCC RULES PART 15, SUBPART C


EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.442GHz Pmax:20.19dBm RBW: 5 MHz

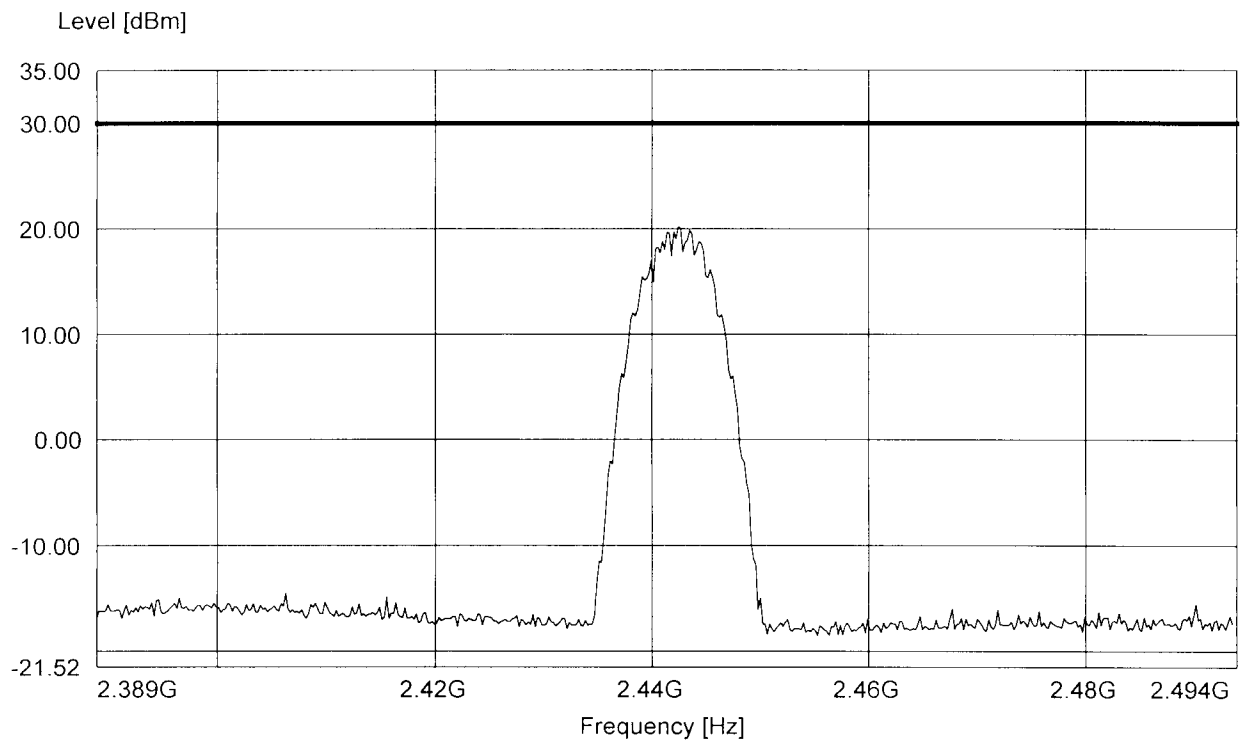

— MES 10. FCC_2.4G_dBm_h
— LIM FCC_30dBm

Carrier power (dBm)
FCC RULES PART 15, SUBPART C


EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC -15% (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.443GHz Pmax:18.47dBm RBW: 5 MHz

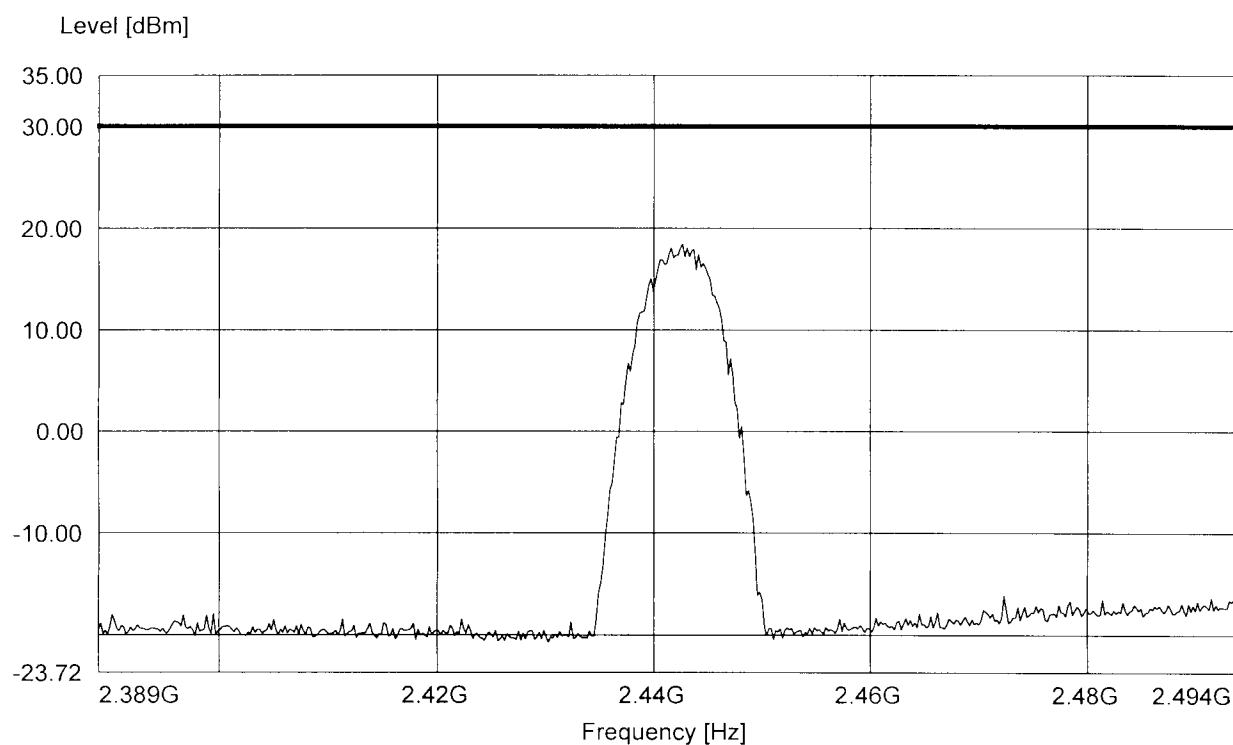

— MES 10. FCC_2.4G_dBm_v
— LIM FCC_30dBm


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC -15% (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.443GHz Pmax:20.18dBm RBW: 5 MHz

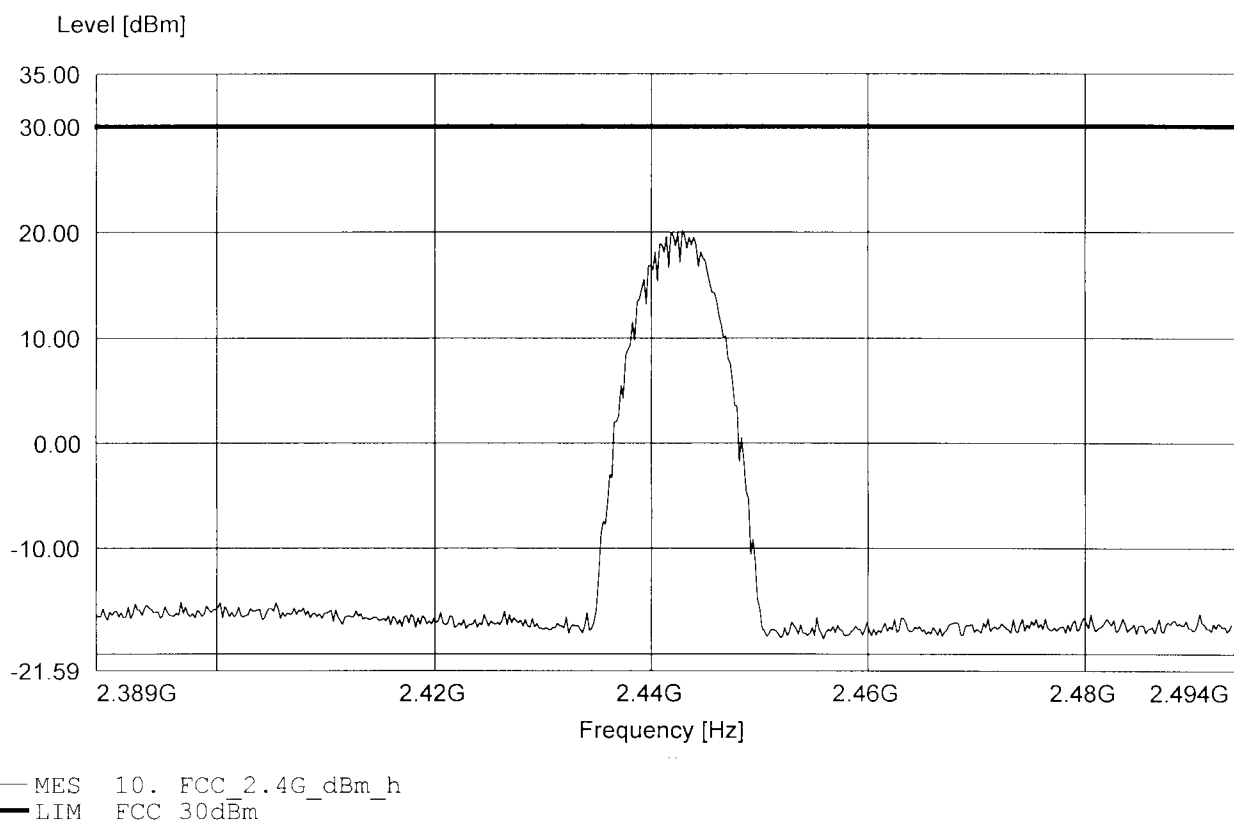


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC +15% (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.442GHz Pmax:18.34dBm RBW: 5 MHz

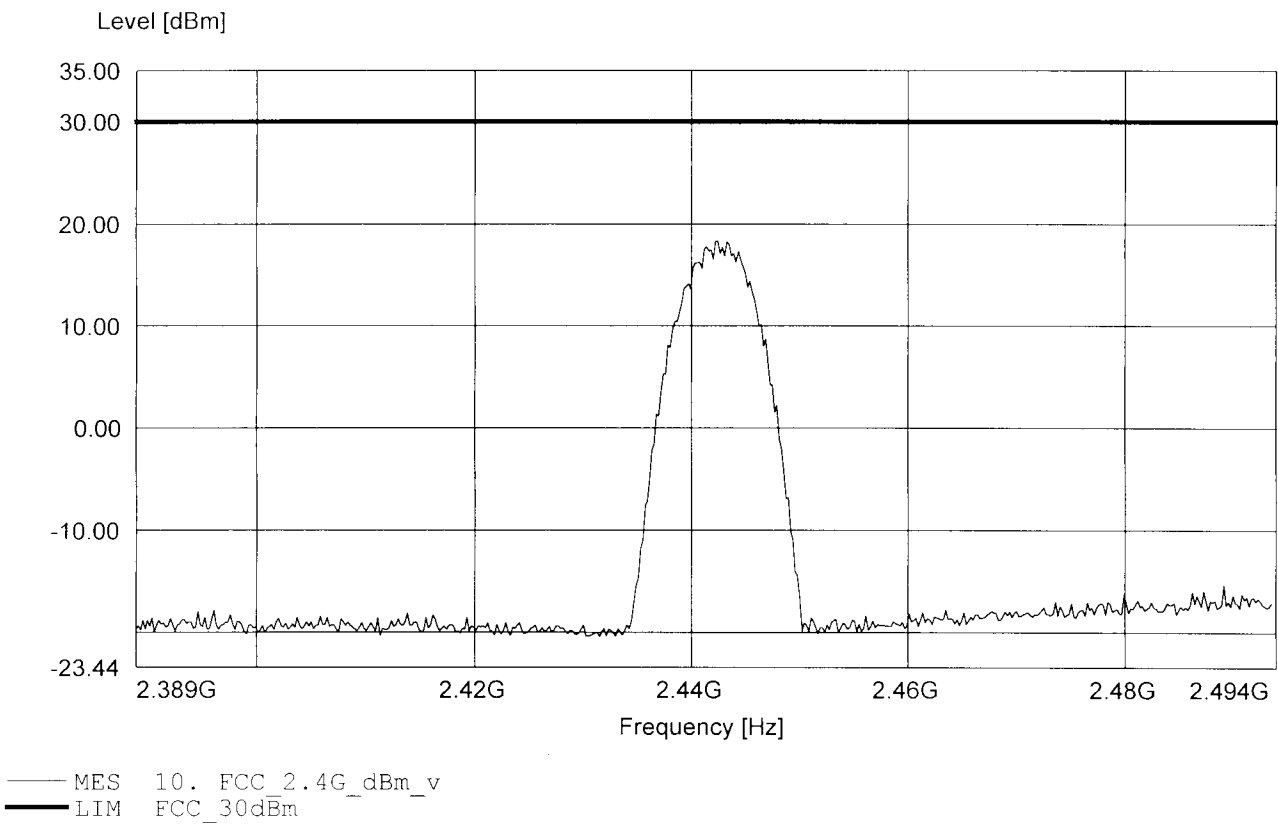

Carrier power (dBm)
FCC RULES PART 15, SUBPART C


EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC +15% (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.442GHz Pmax:20.20dBm RBW: 5 MHz

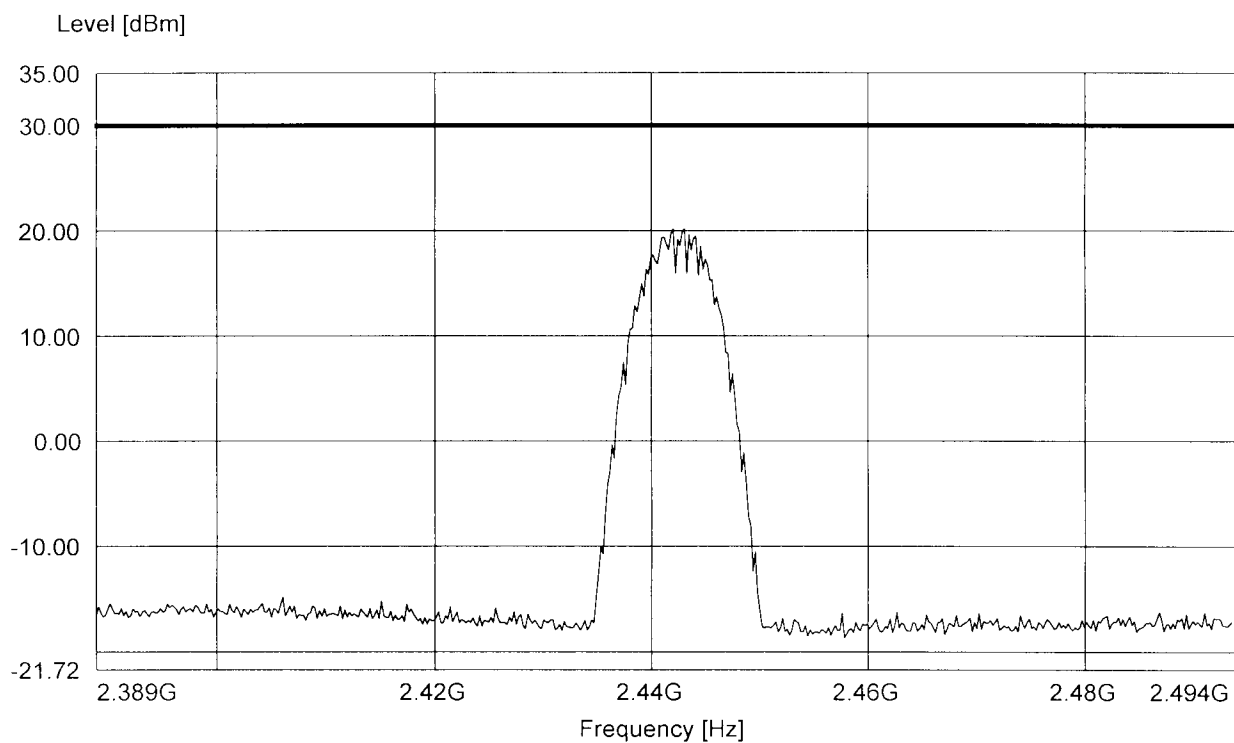

— MES 10. FCC_2.4G_dBm_h
— LIM FCC_30dBm


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 78
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.482GHz Pmax:24.73dBm RBW: 5 MHz

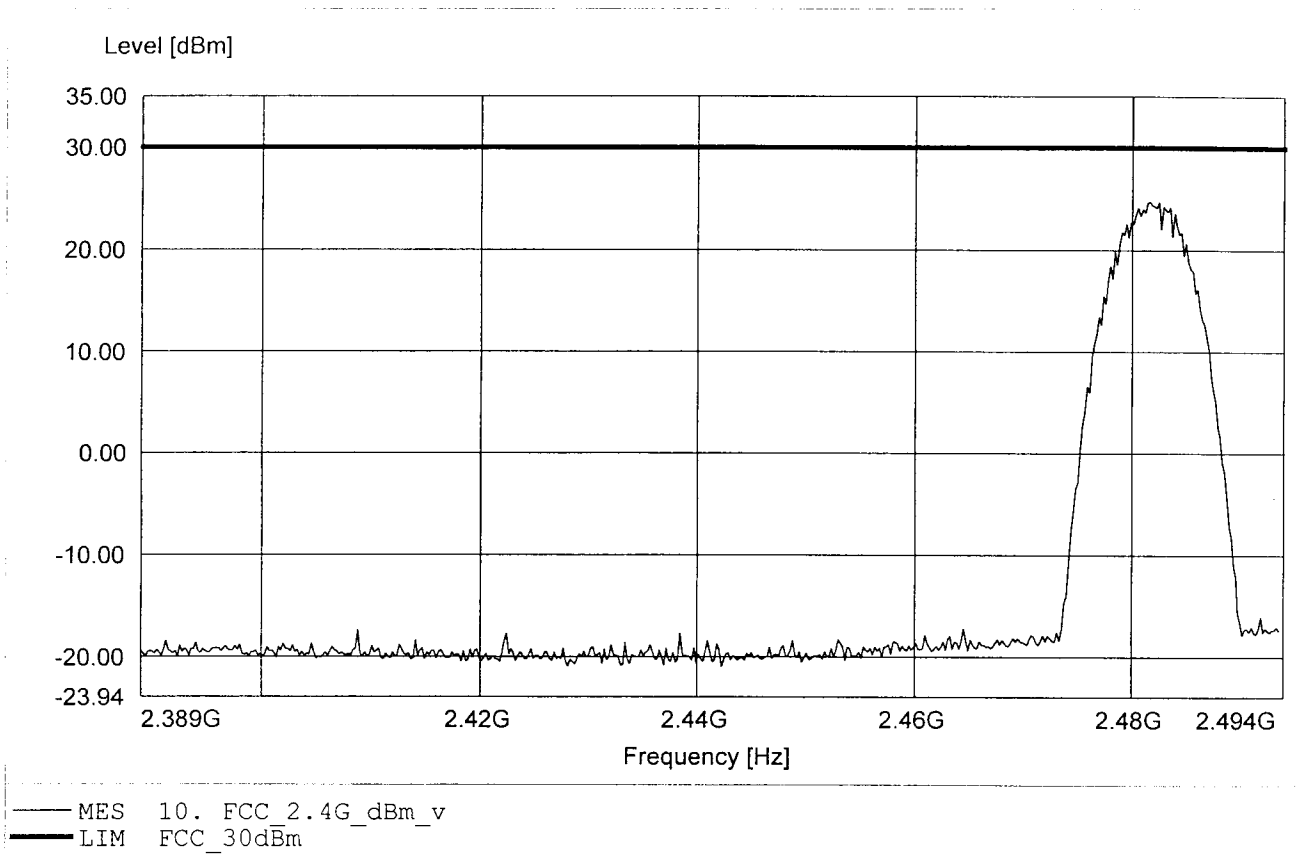


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 78
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.482GHz Pmax:23.19dBm RBW: 5 MHz

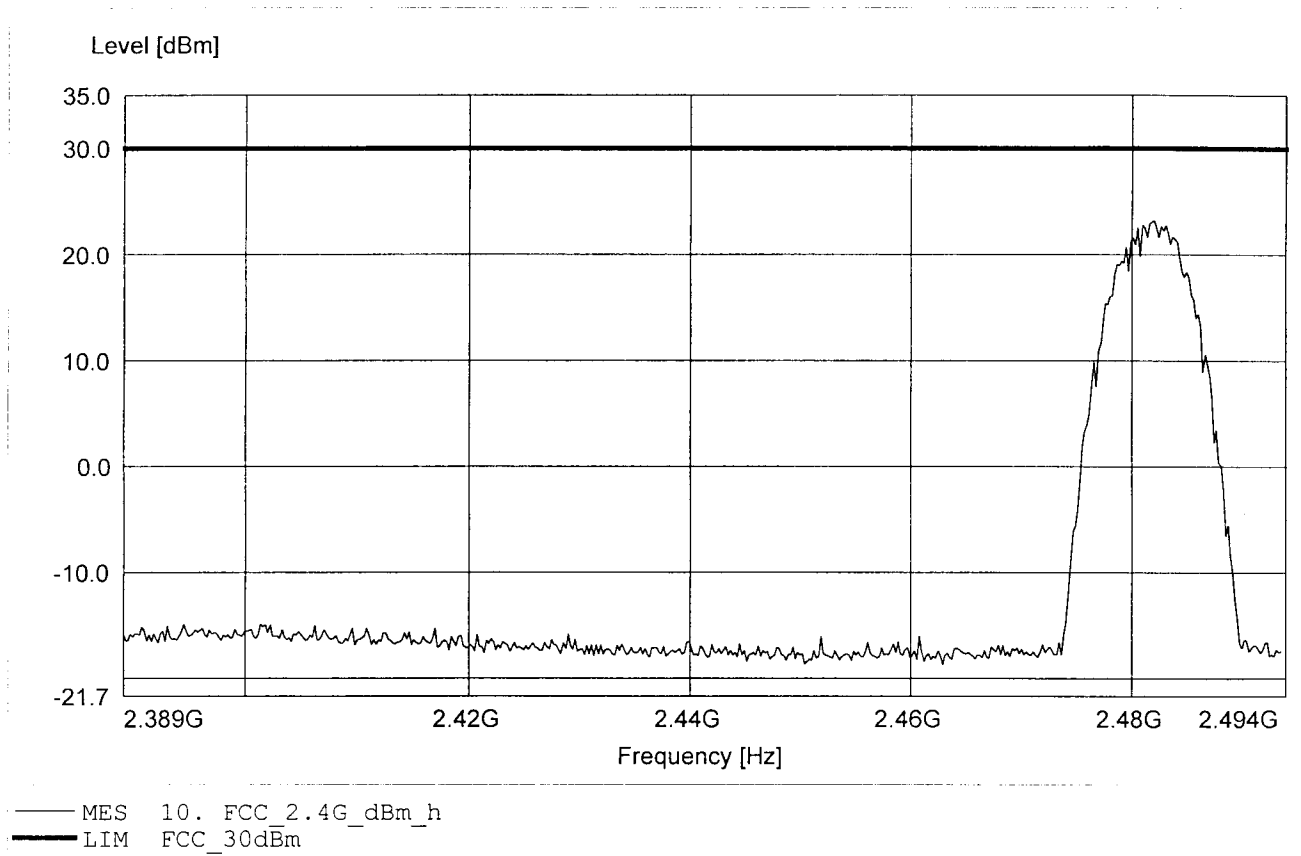


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 78
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC -15% (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.481GHz Pmax:24.85dBm RBW: 5 MHz

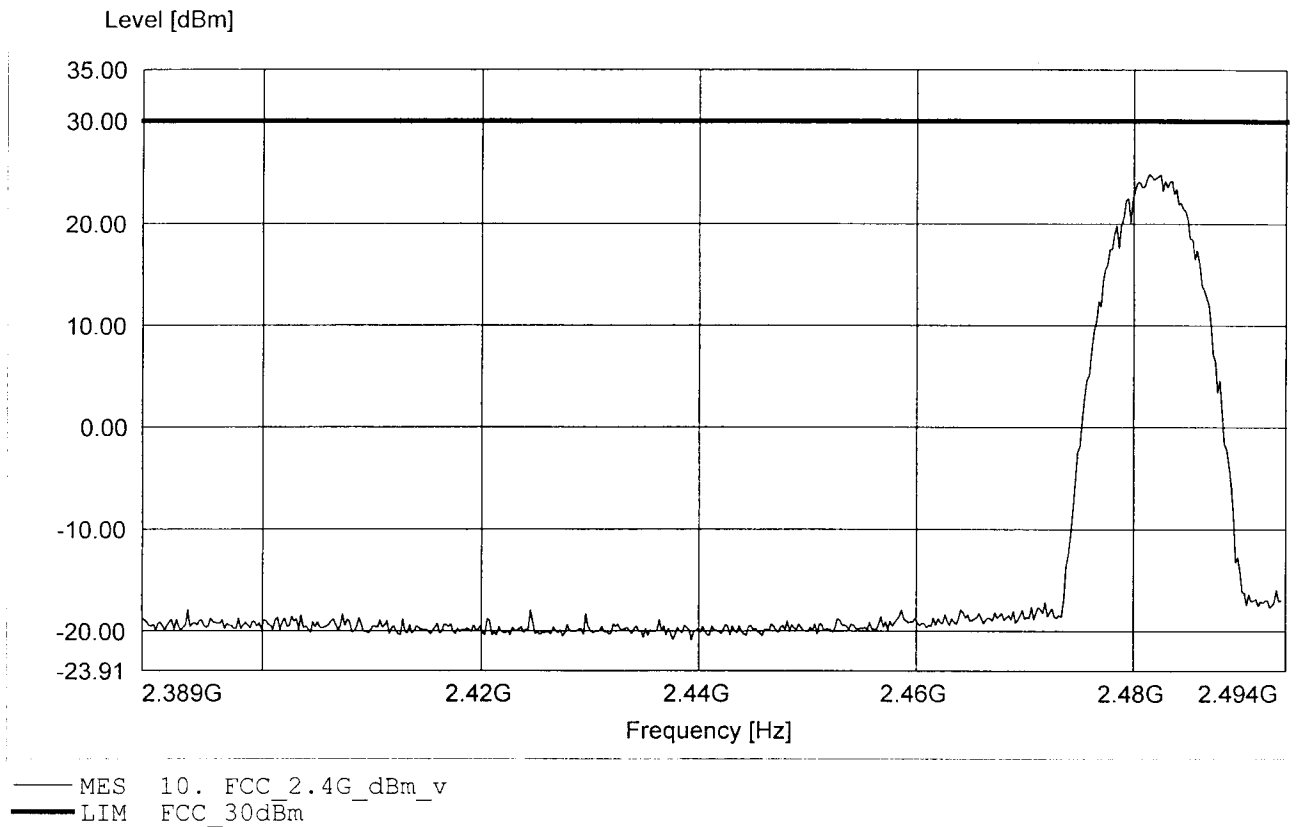


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 78
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC -15% (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.482GHz Pmax:23.26dBm RBW: 5 MHz

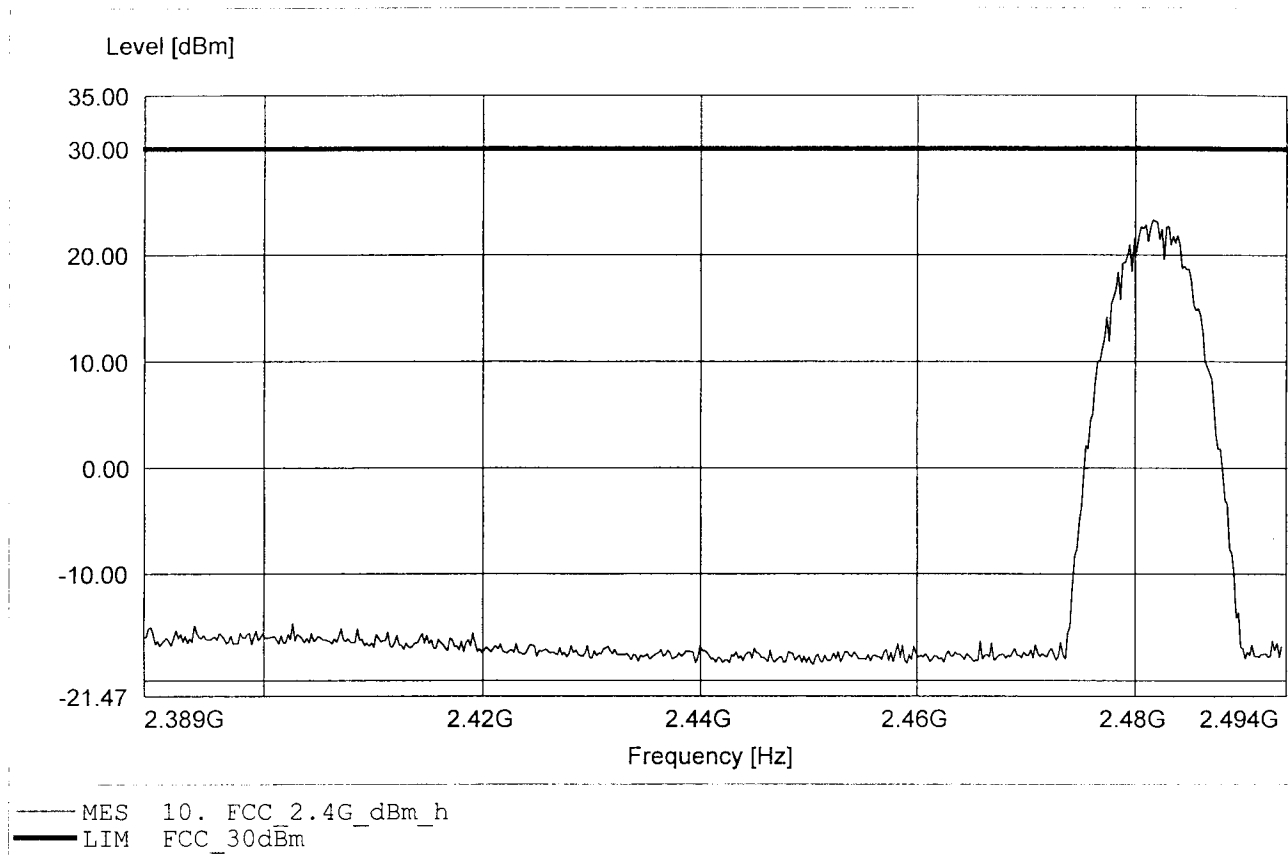


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 78
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC +15% (AC/DC adaptor), Thom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.482GHz Pmax:24.86dBm RBW: 5 MHz

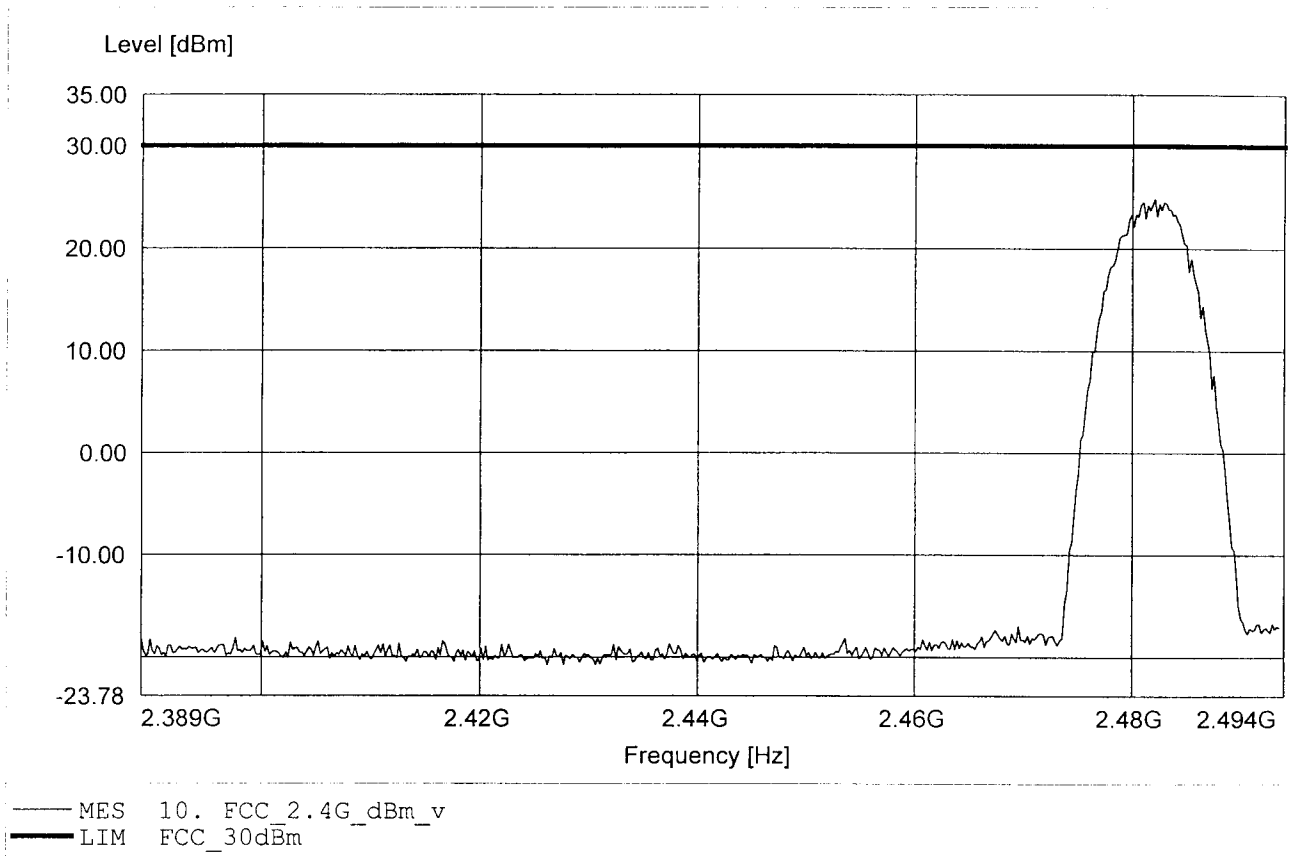

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 2 / Ch.: 78
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC +15% (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.482GHz Pmax:23.14dBm RBW: 5 MHz

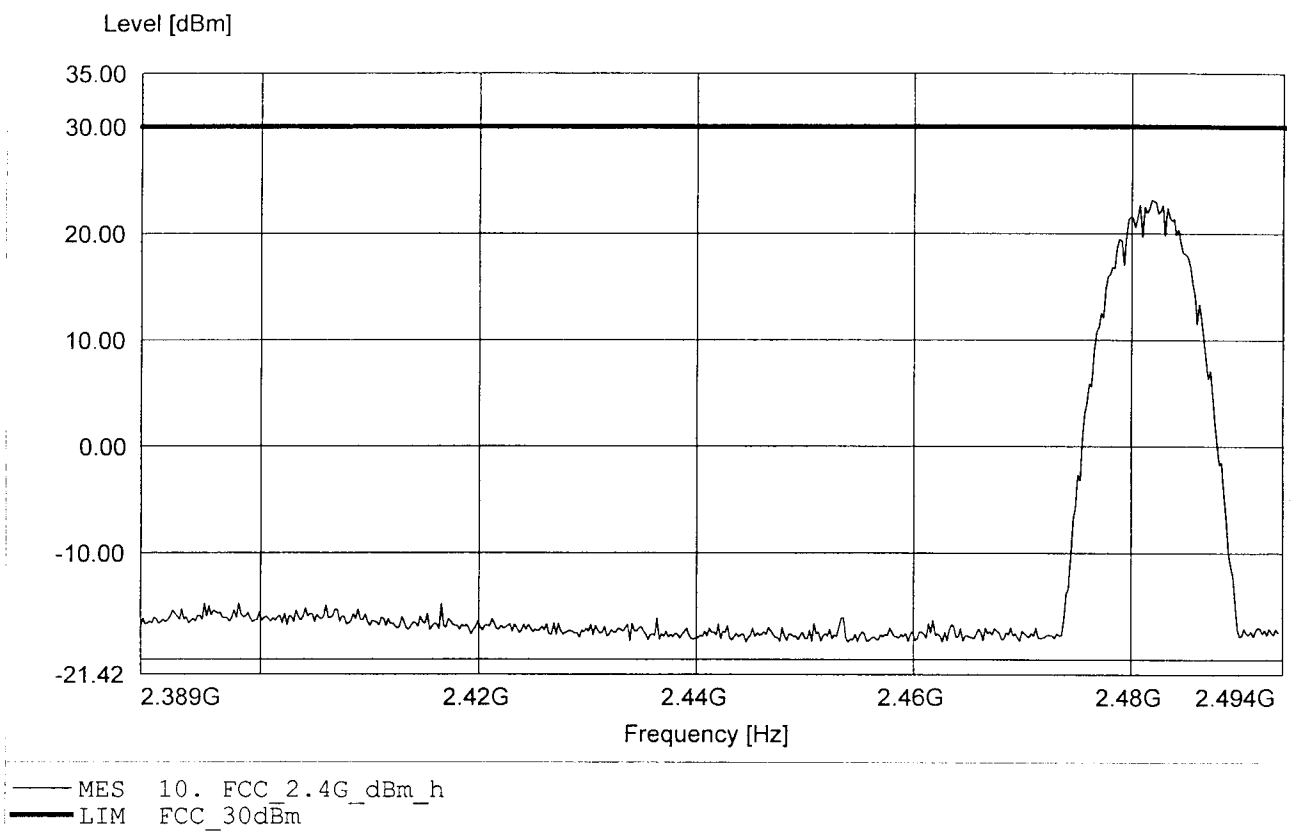


Appendix C

Spurious Emissions radiated - Transmitter operating


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:191.483MHz Emax:32.65dBμV/m RBW: 100 kHz

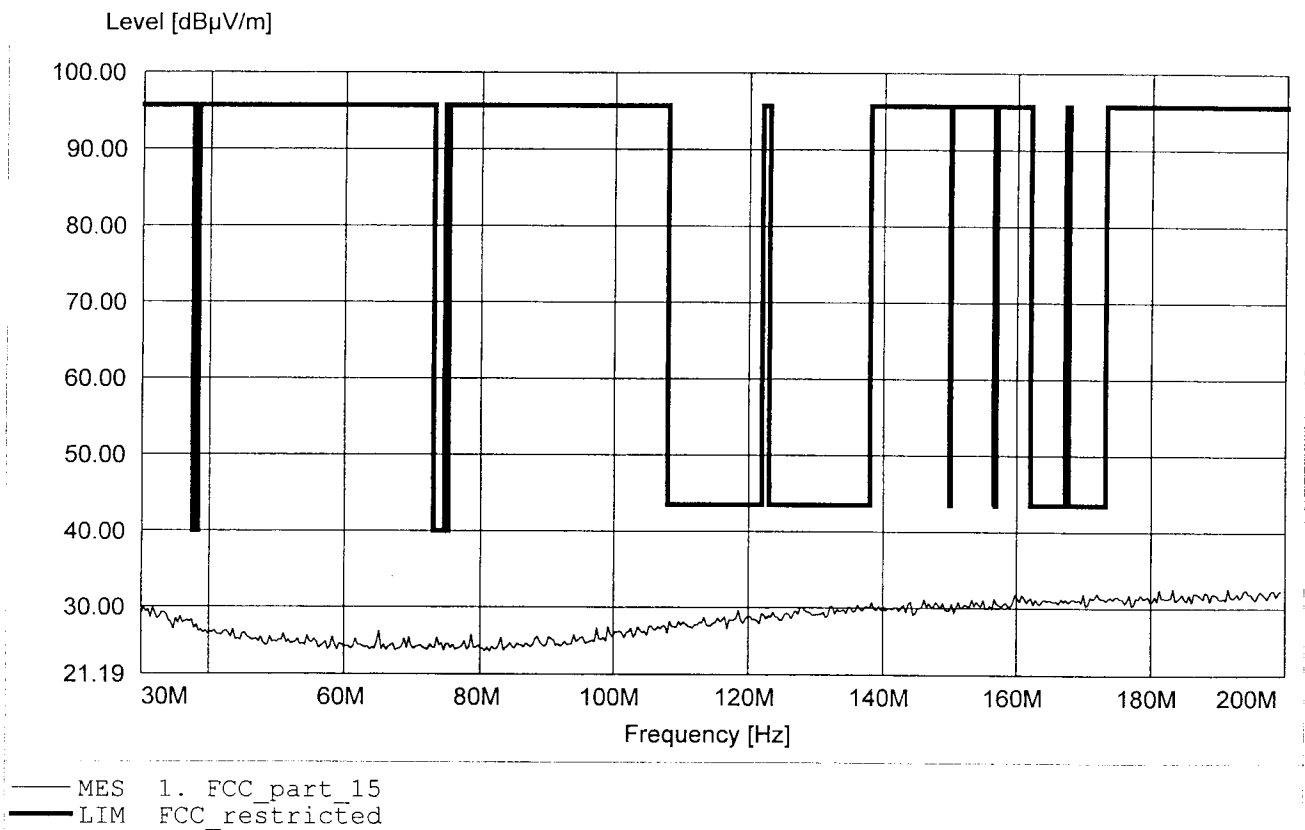


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:185.351MHz Emax:32.82dBμV/m RBW: 100 kHz

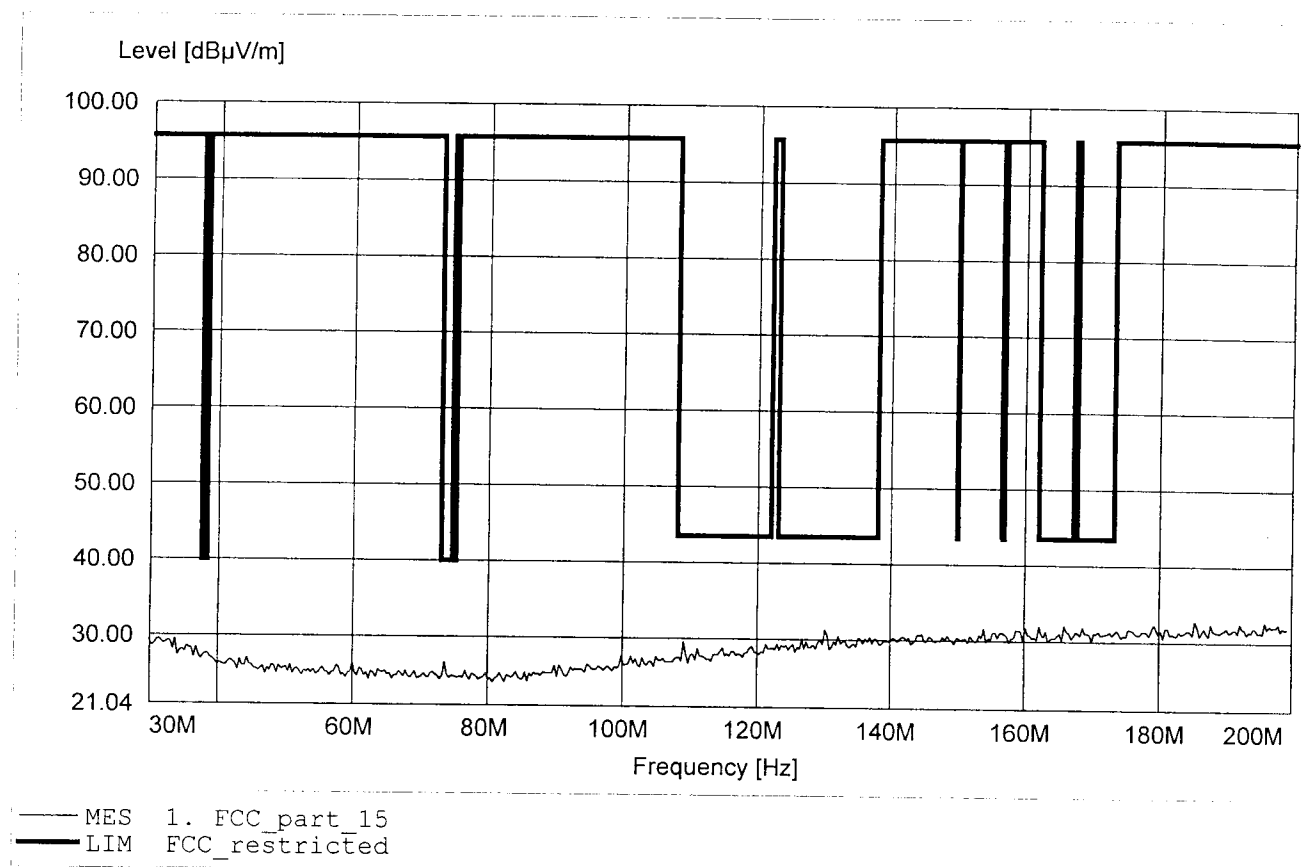


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq:688.978MHz Emax:27.14dBµV/m RBW: 100 kHz

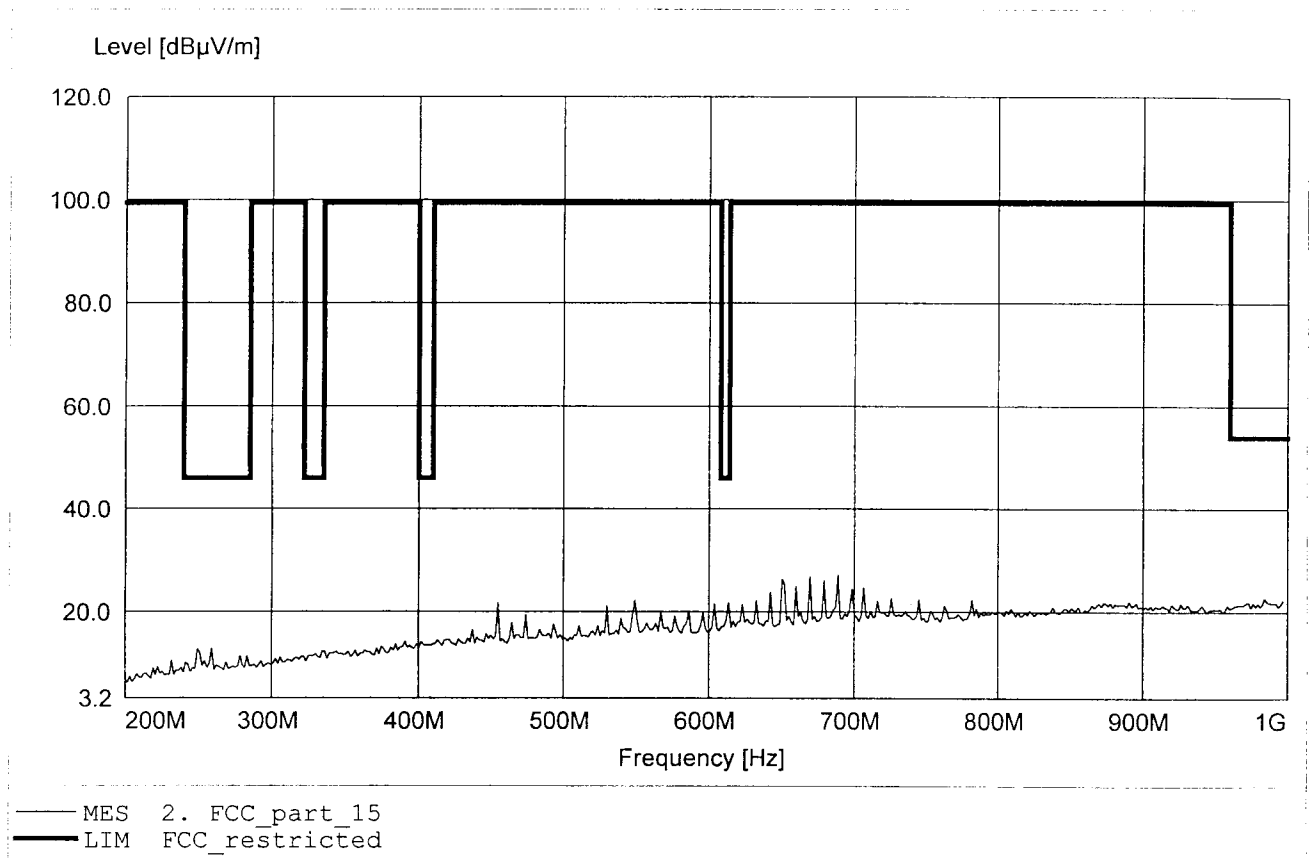


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq:669.739MHz Emax:26.83dBμV/m RBW: 100 kHz

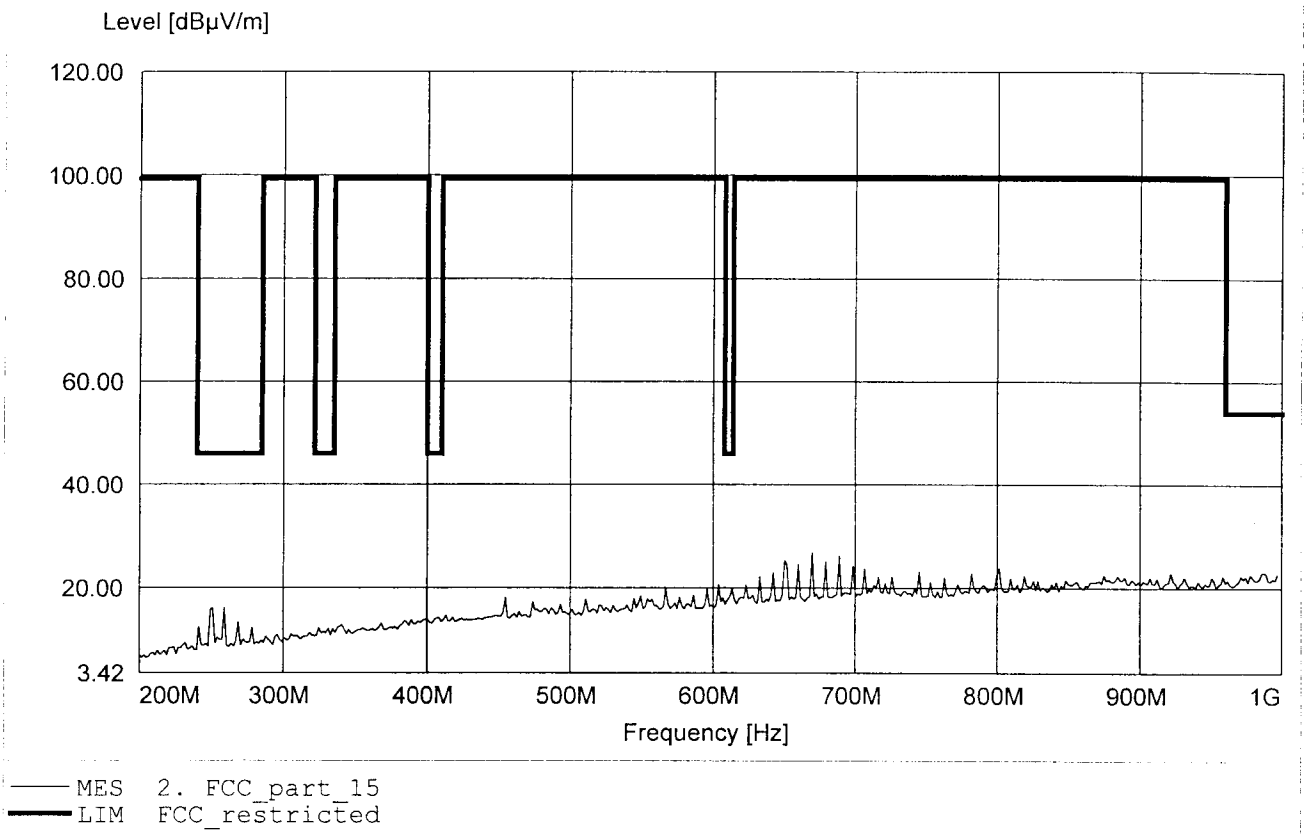


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq:2.400GHz Emax:64.84dBμV/m RBW: 1 MHz

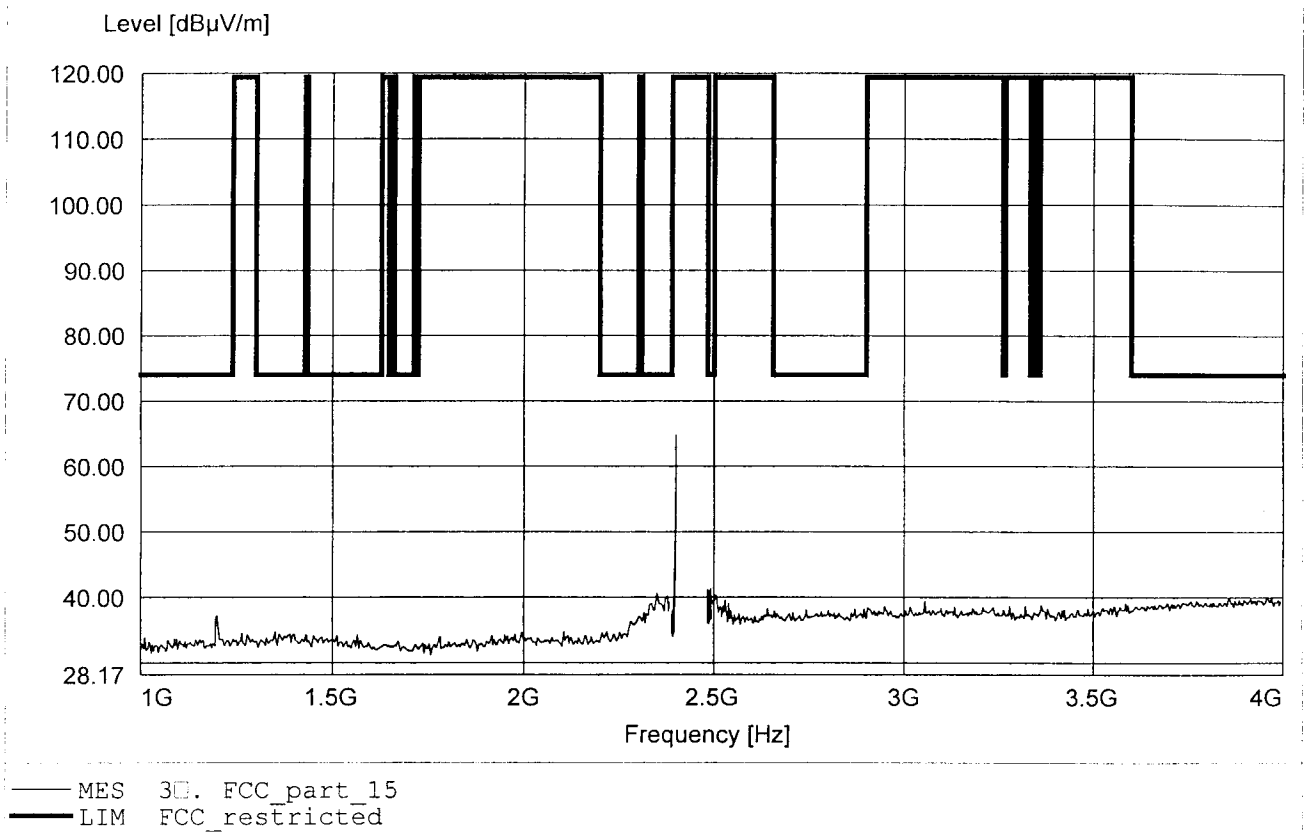


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq:2.400GHz Emax:68.41dBμV/m RBW: 1 MHz

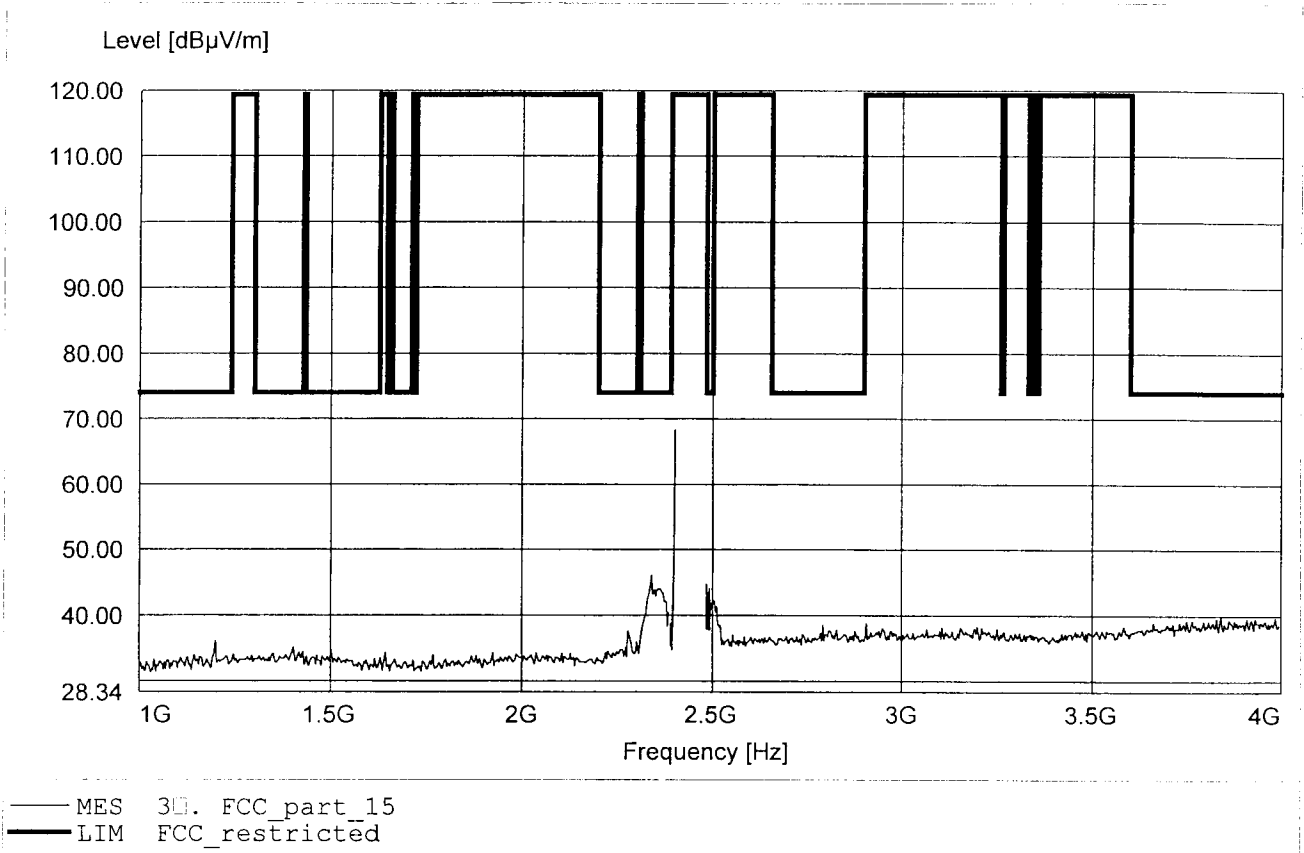


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq:4.802GHz Emax:48.14dBμV/m RBW: 1 MHz

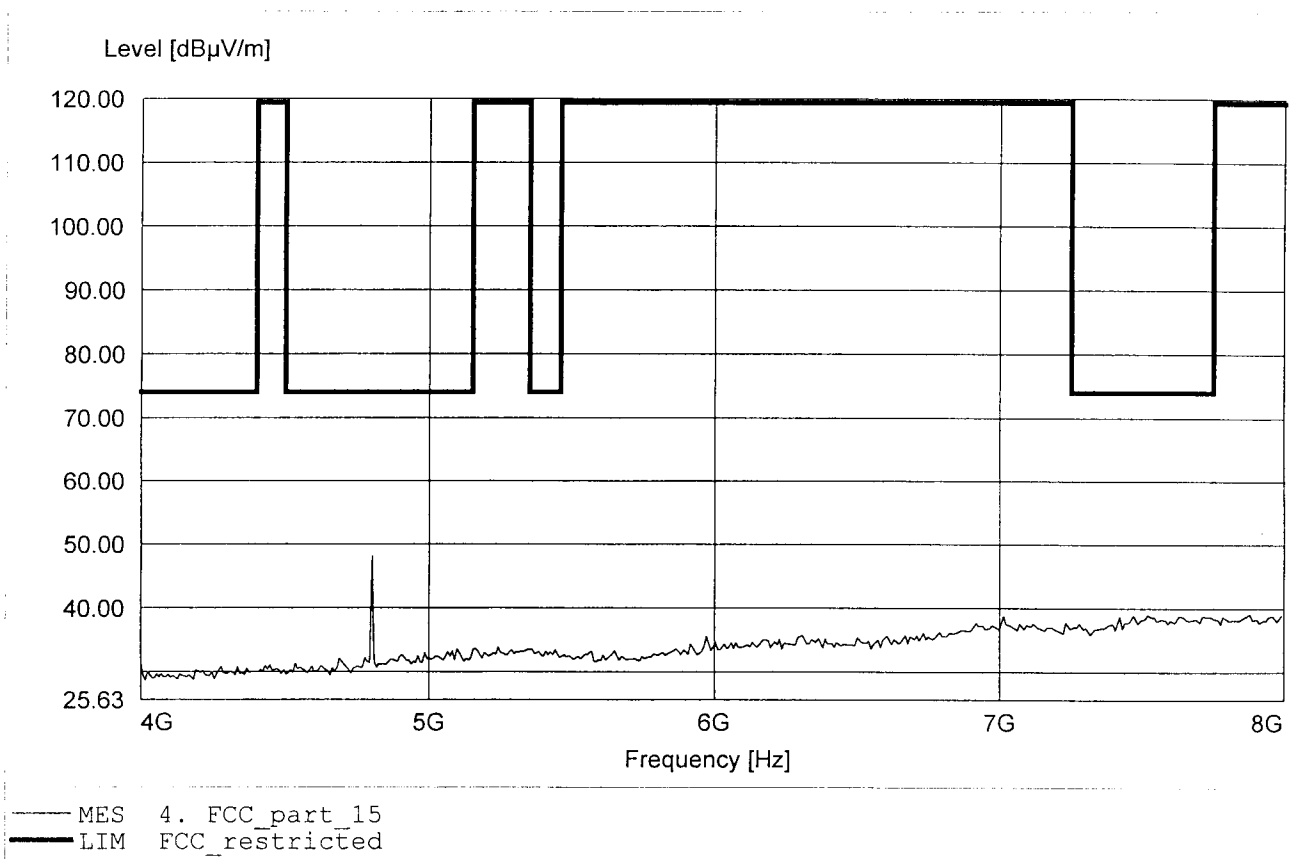


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq:7.206GHz Emax:58.18dBμV/m RBW: 1 MHz

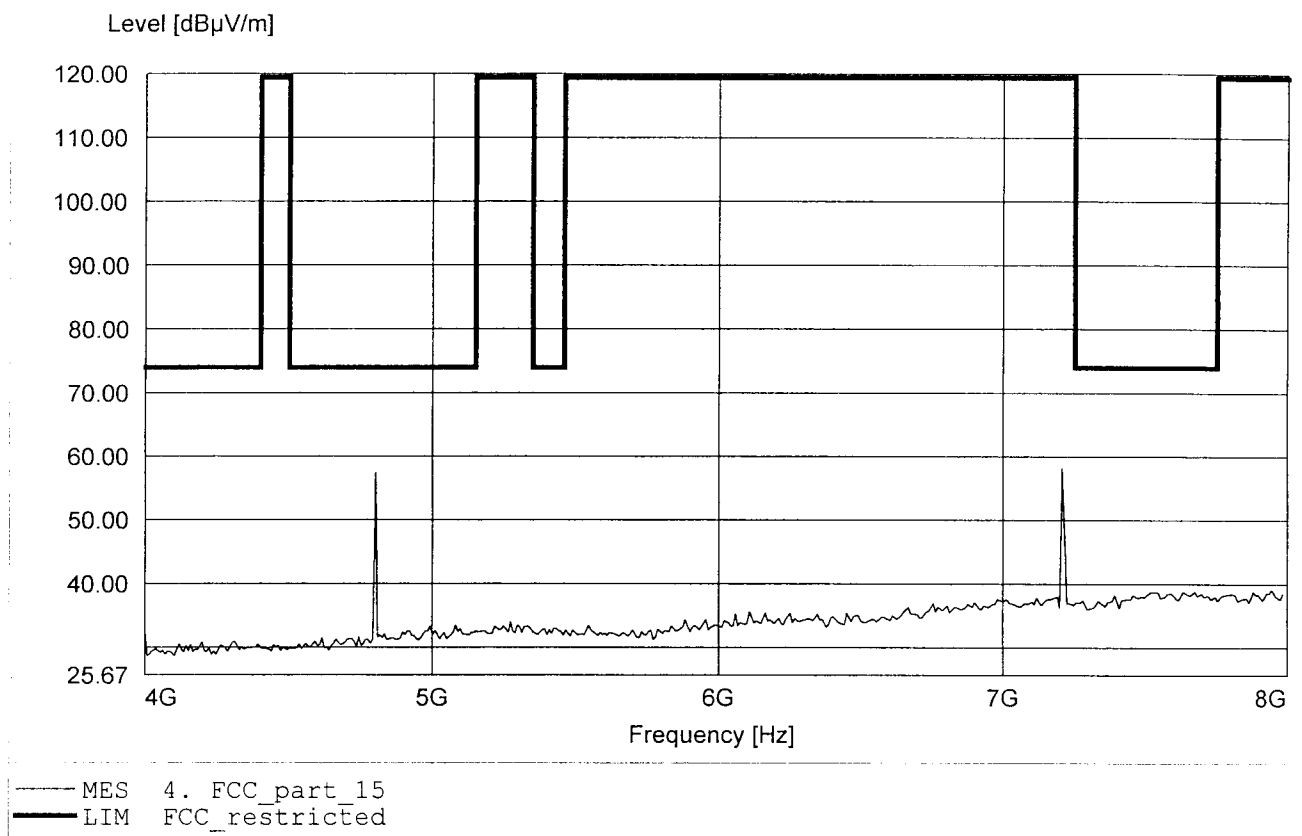


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq:9.603GHz Emax:44.73dBμV/m RBW: 1 MHz

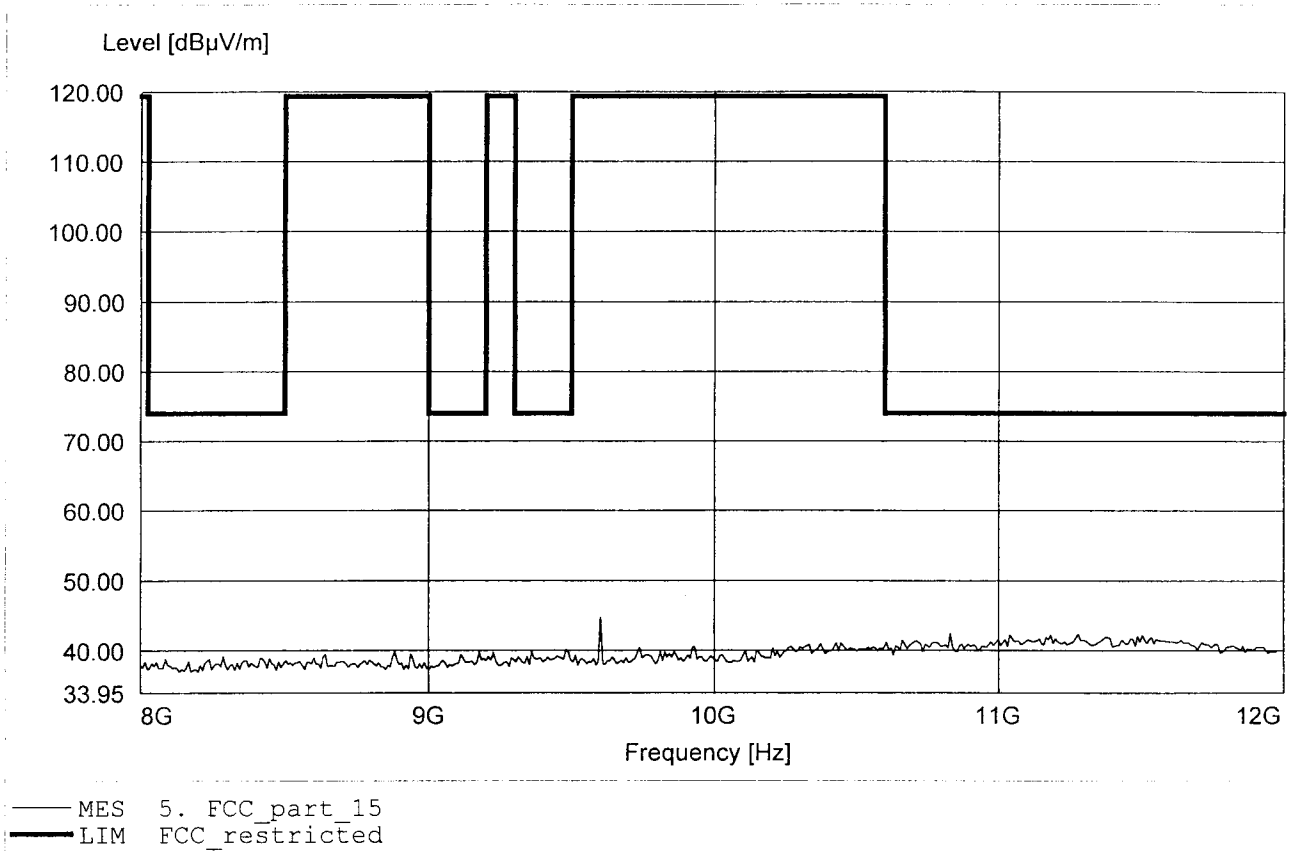


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq:11.375GHz Emax:43.14dBμV/m RBW: 1 MHz

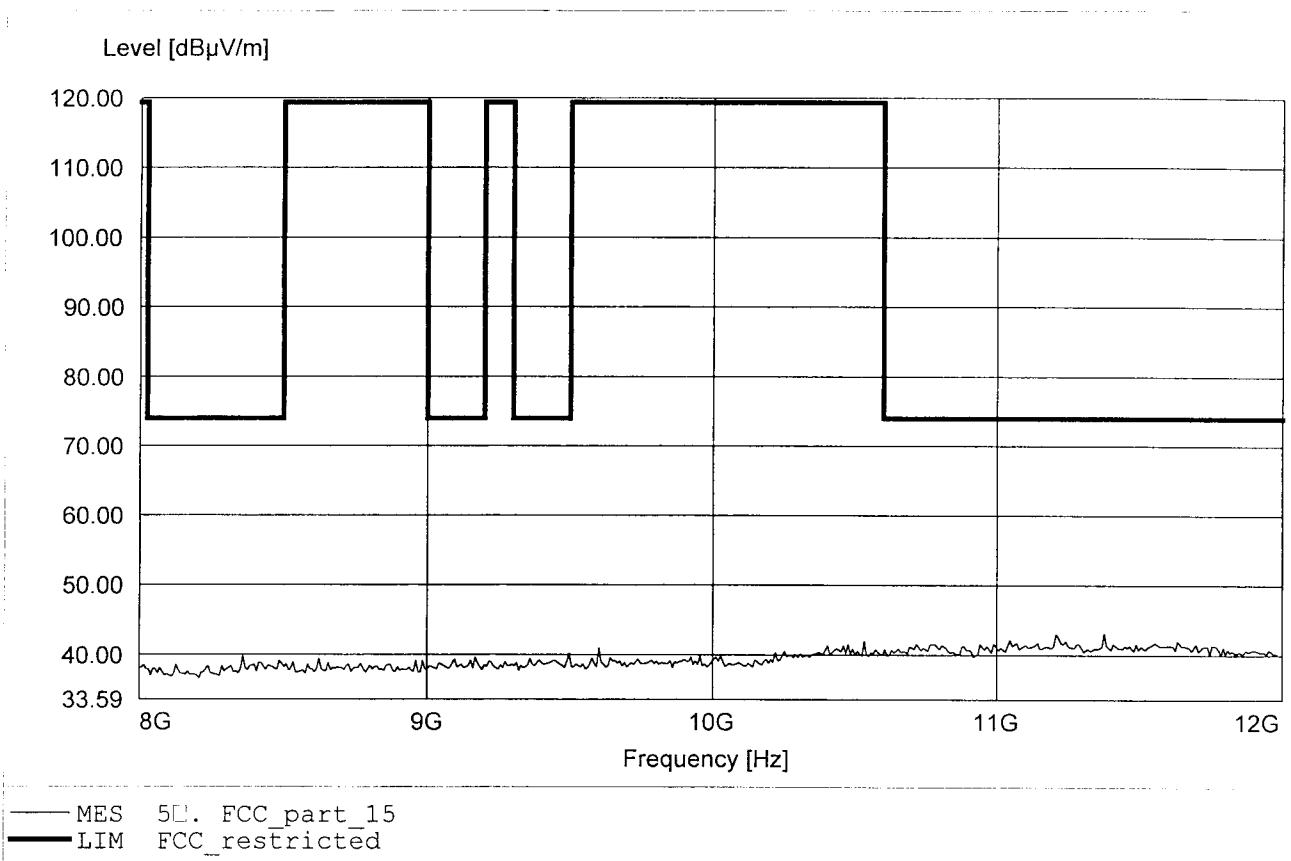


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:14.996GHz Emax:45.72dBμV/m RBW: 1 MHz

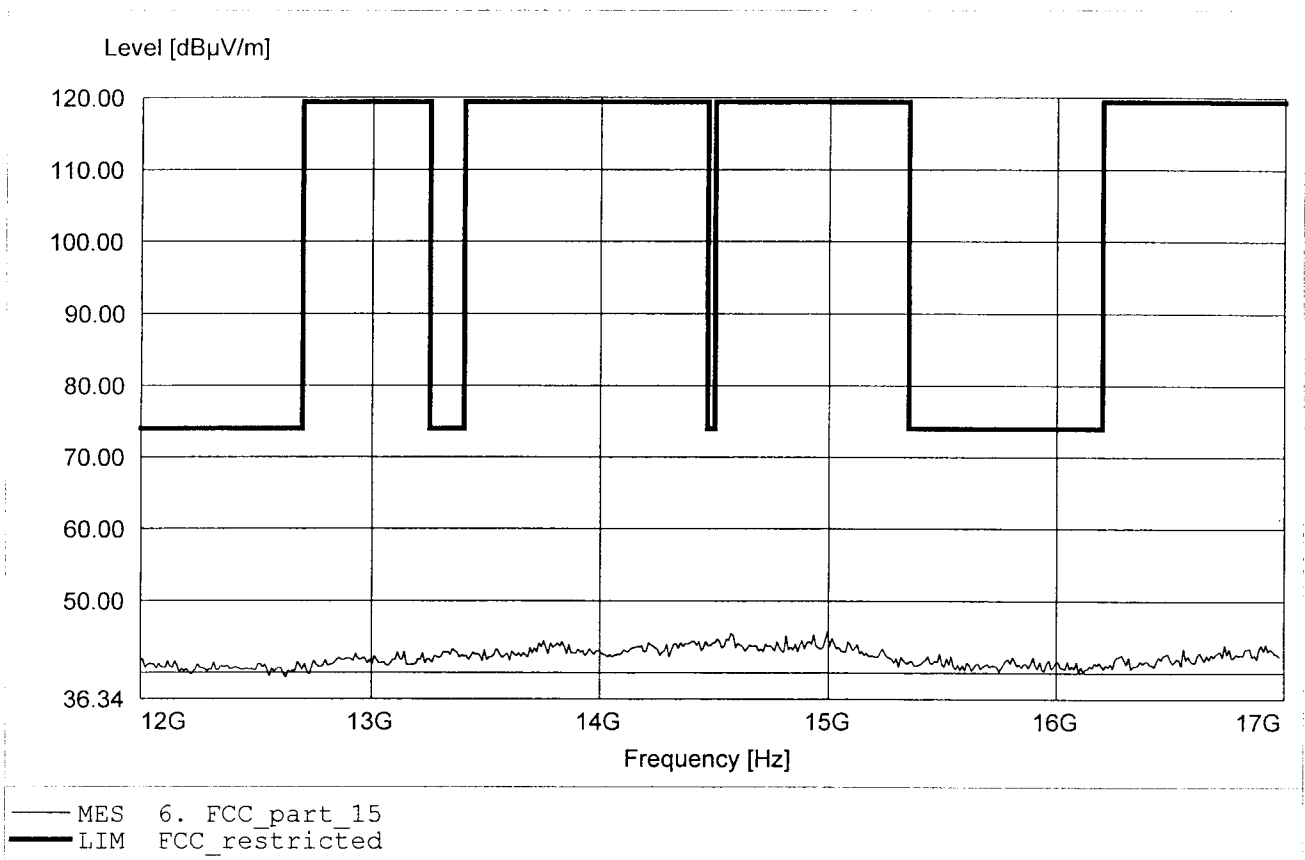


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:14.405GHz Emax:54.78dBμV/m RBW: 1 MHz

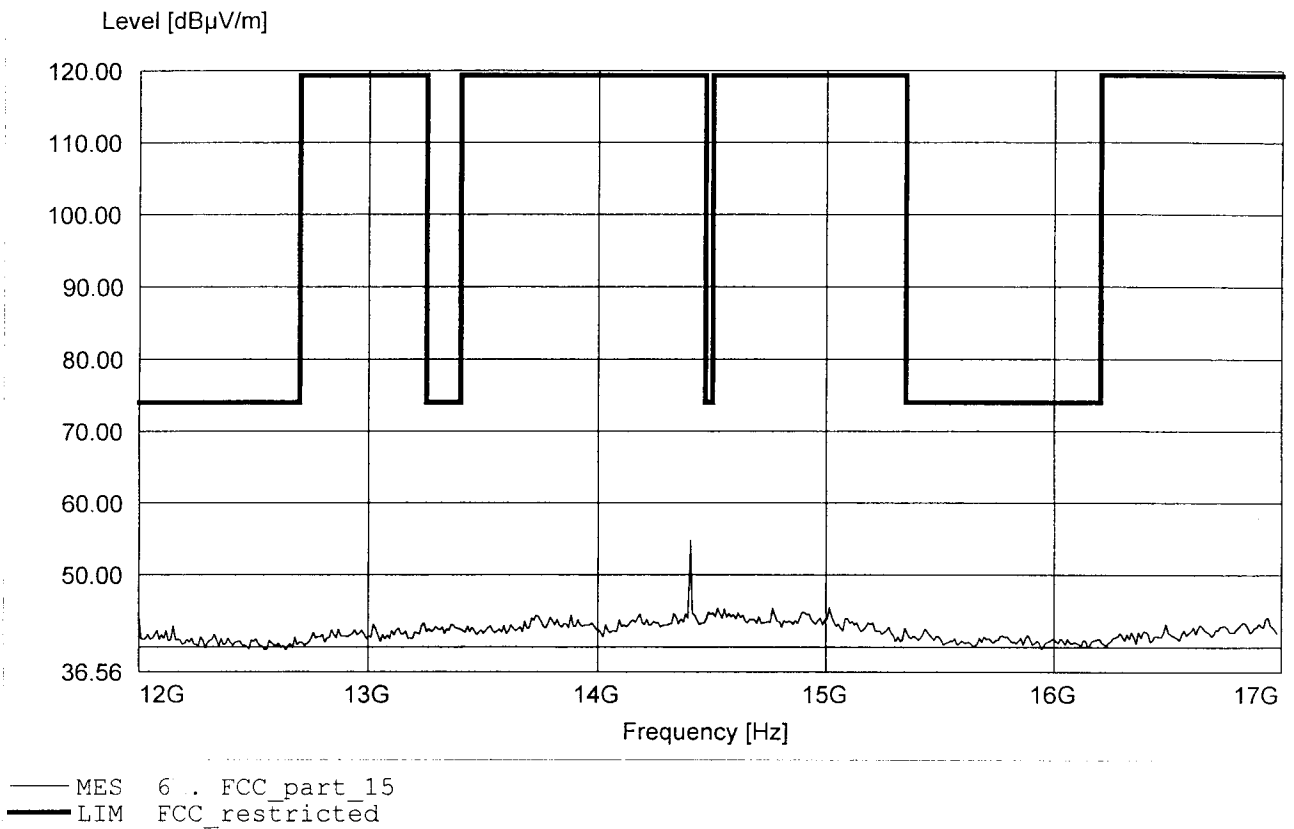


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:26.272GHz Emax:50.33dBμV/m RBW: 1 MHz

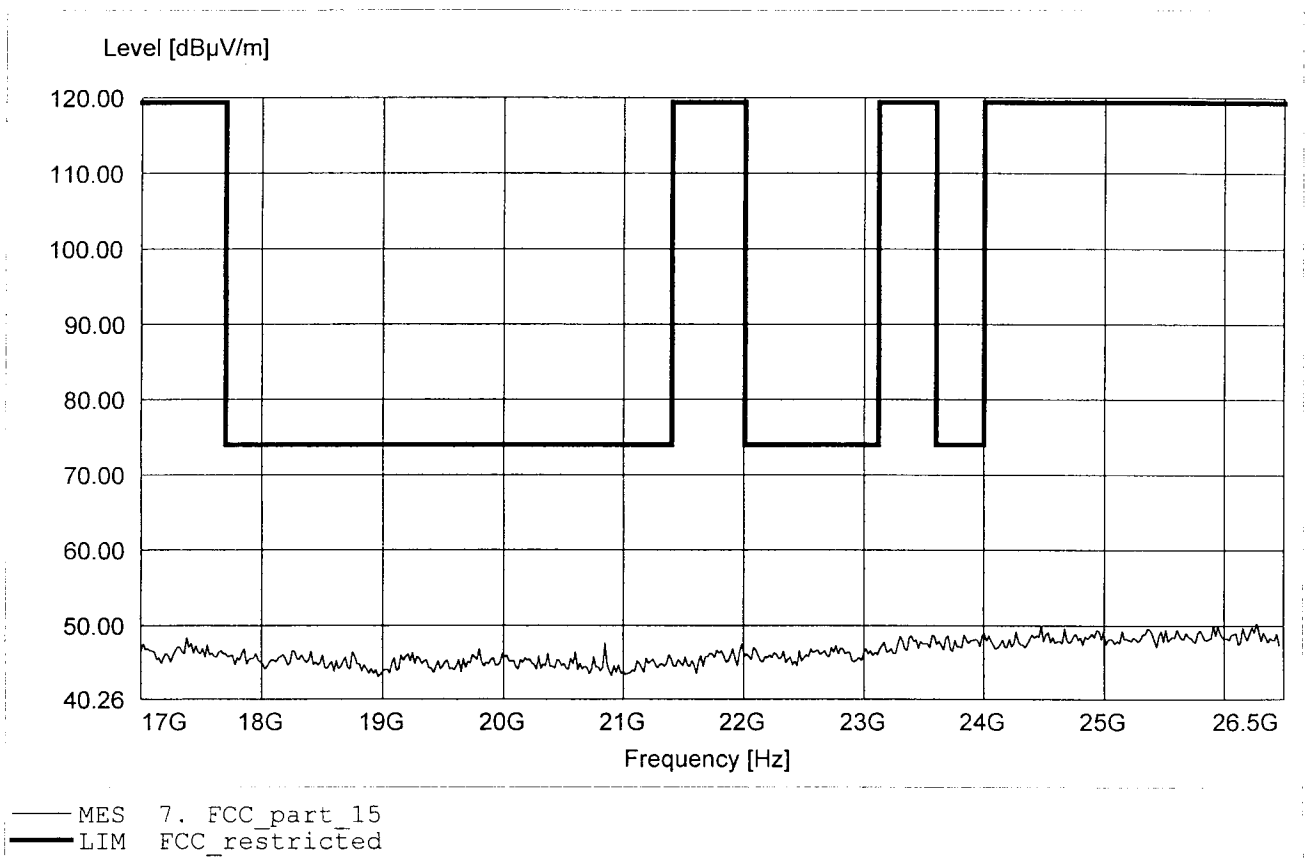


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 0
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to §15.247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:26.081GHz Emax:50.11dBμV/m RBW: 1 MHz

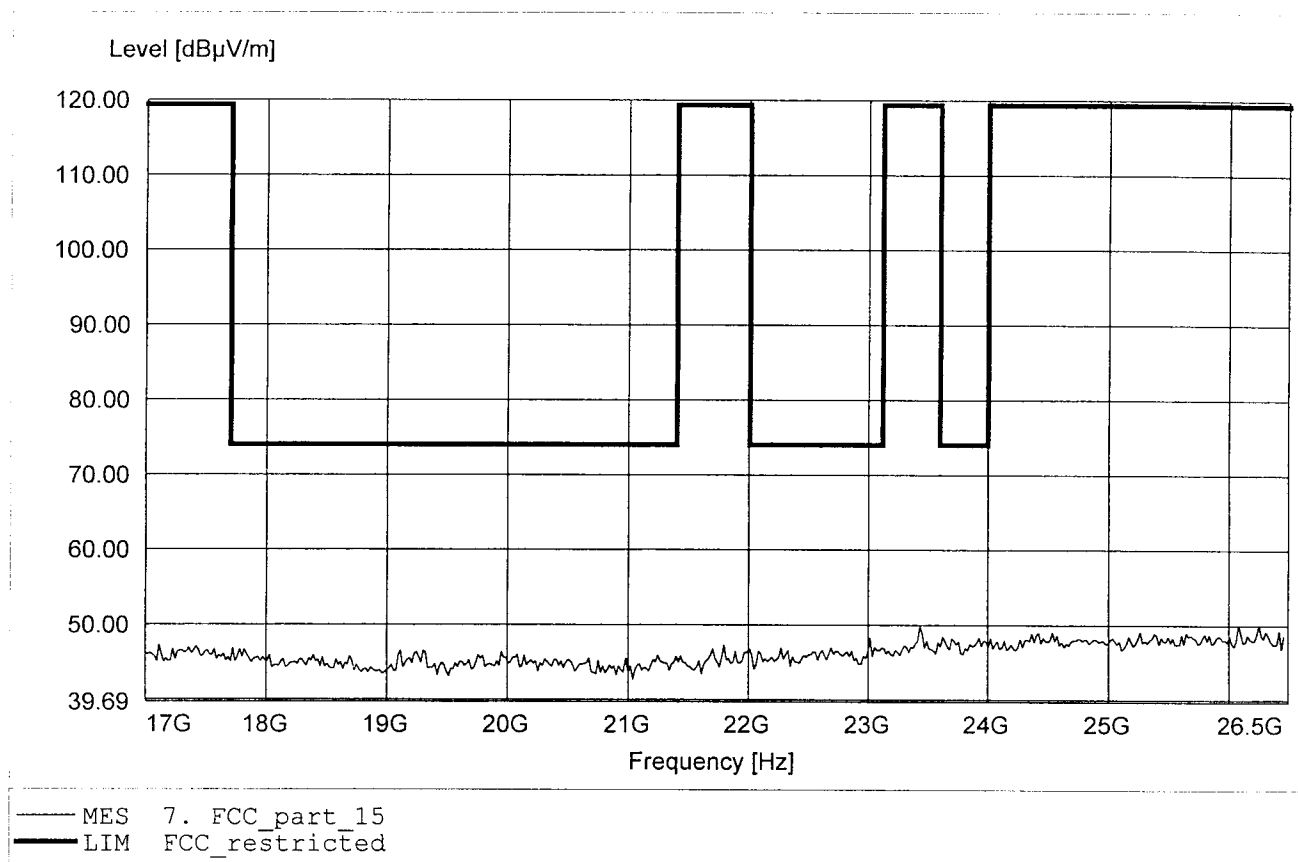


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:189.098MHz Emax:32.87dBµV/m RBW: 100 kHz

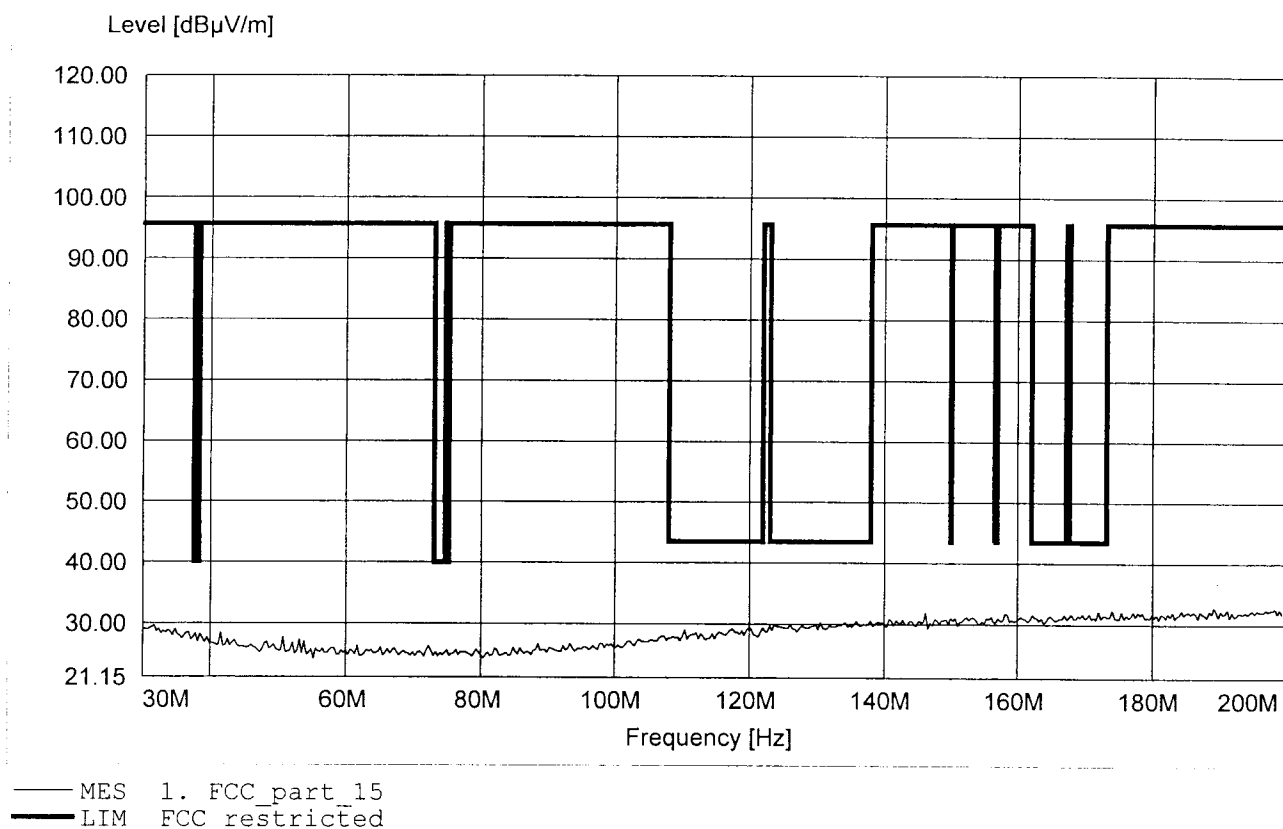


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:189.780MHz Emax:33.08dBµV/m RBW: 100 kHz

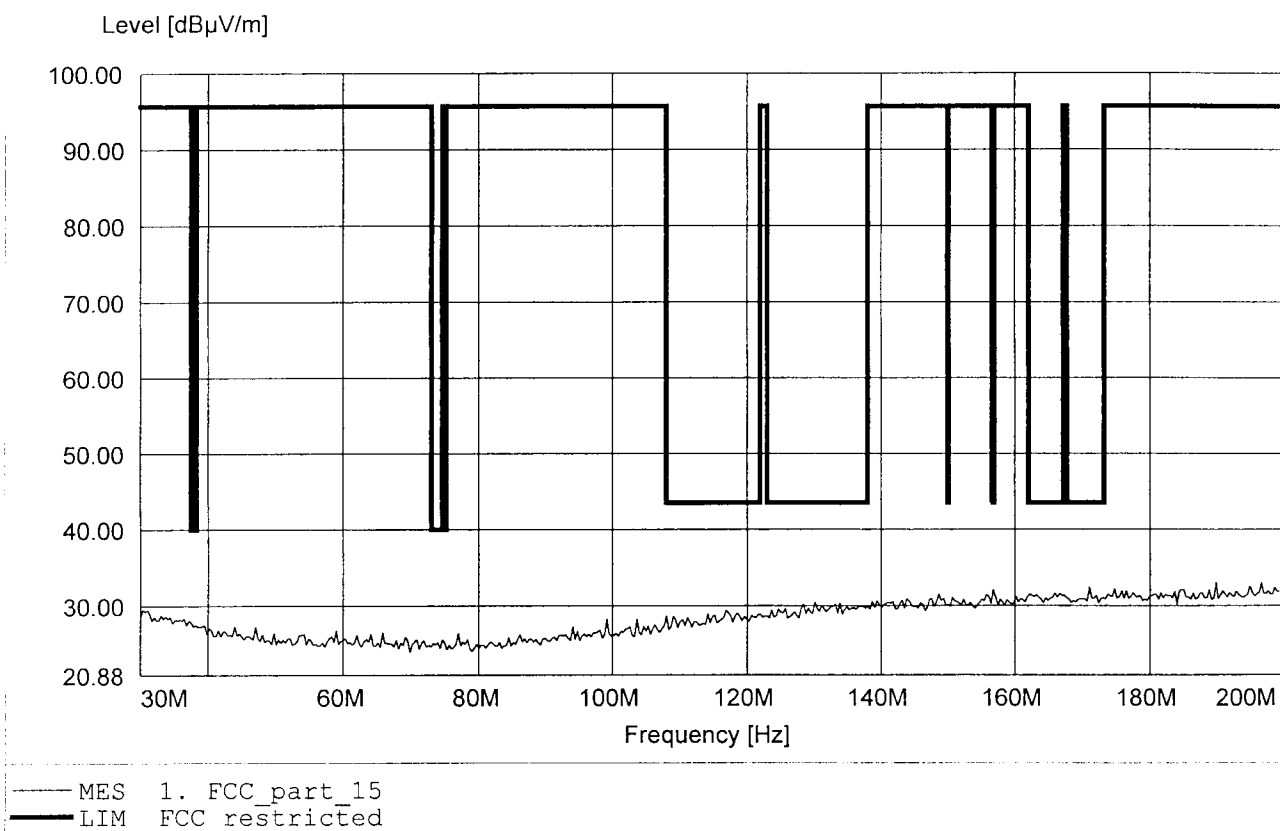


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to §15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq:688.978MHz Emax:27.31dBµV/m RBW: 100 kHz

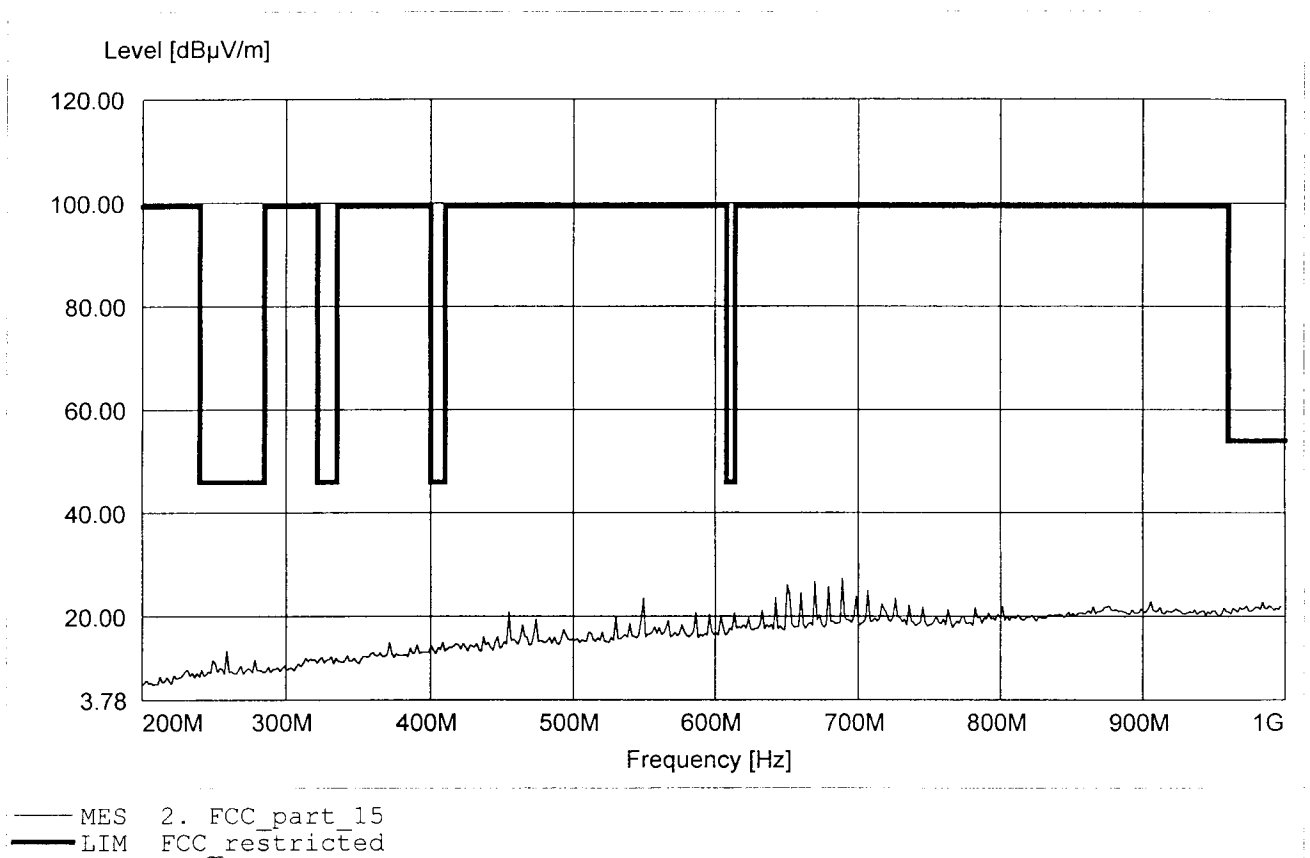


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq:669.739MHz Emax:26.61dBµV/m RBW: 100 kHz

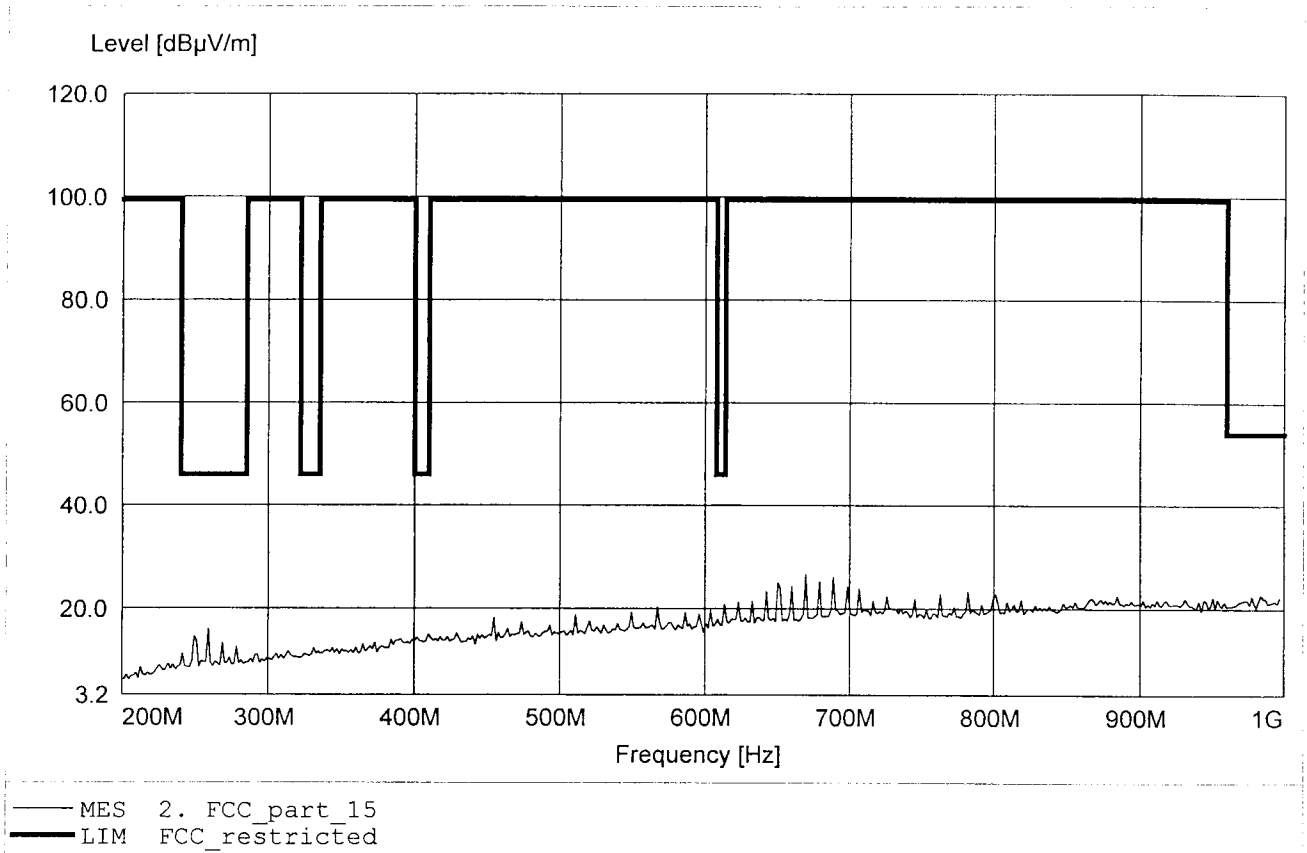


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to §15.247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq:3.849GHz Emax:39.46dBμV/m RBW: 1 MHz

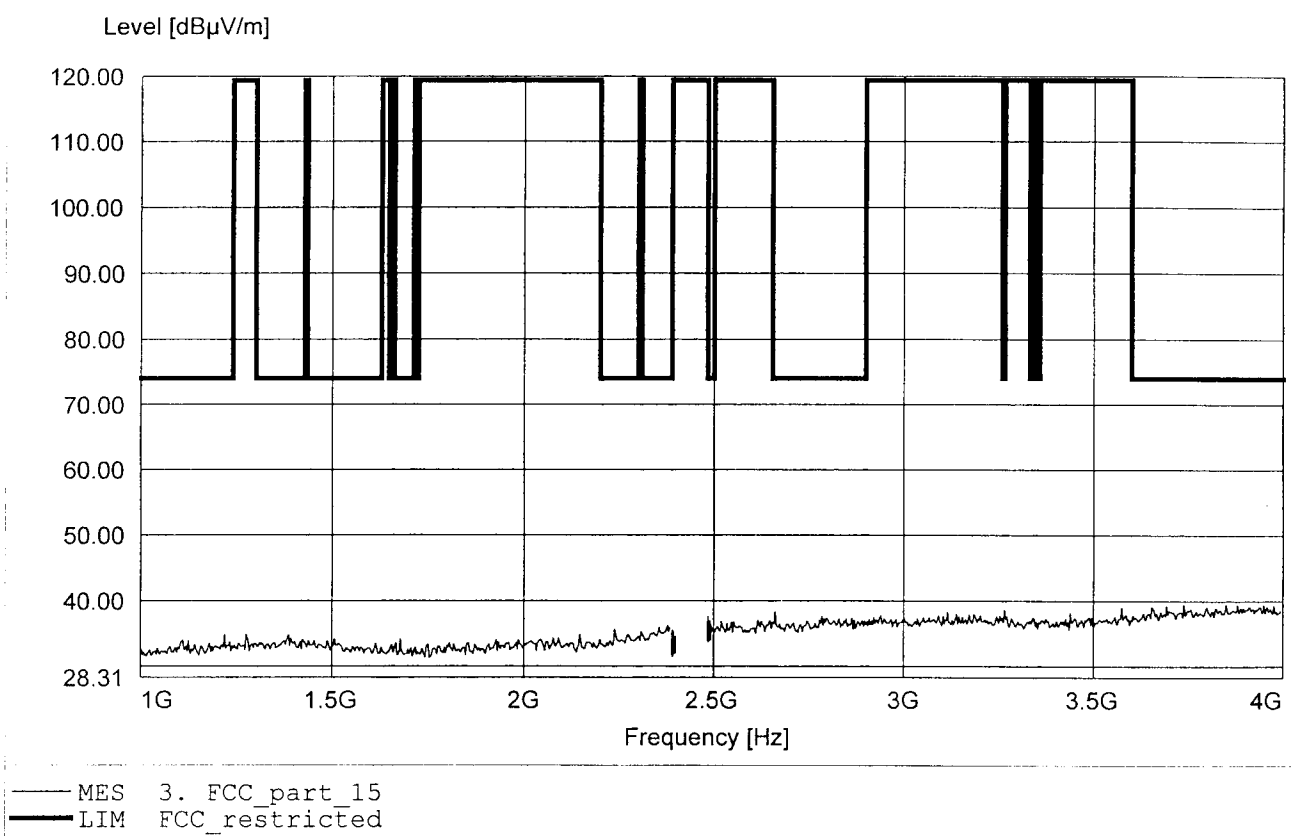


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq:2.354GHz Emax:44.98dBμV/m RBW: 1 MHz

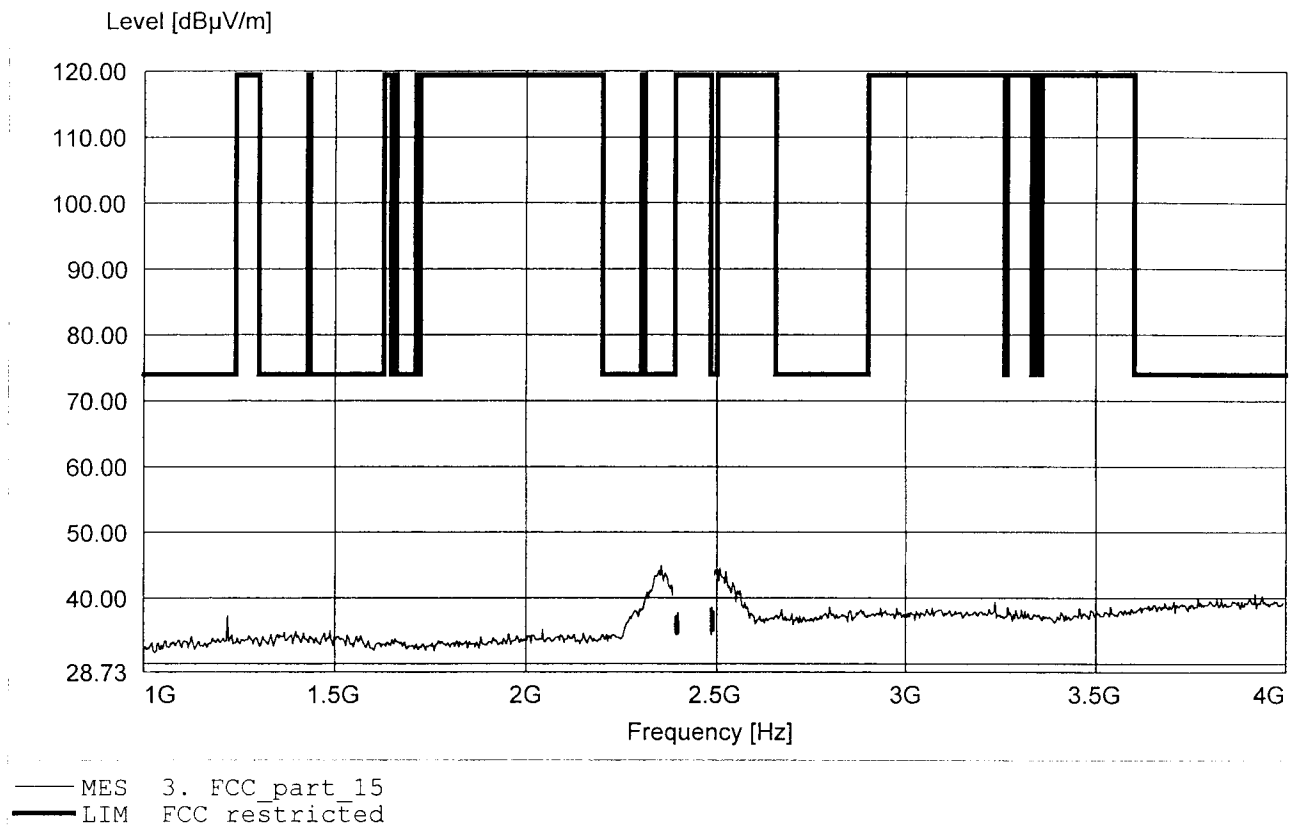


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq:4.882GHz Emax:53.08dBμV/m RBW: 1 MHz

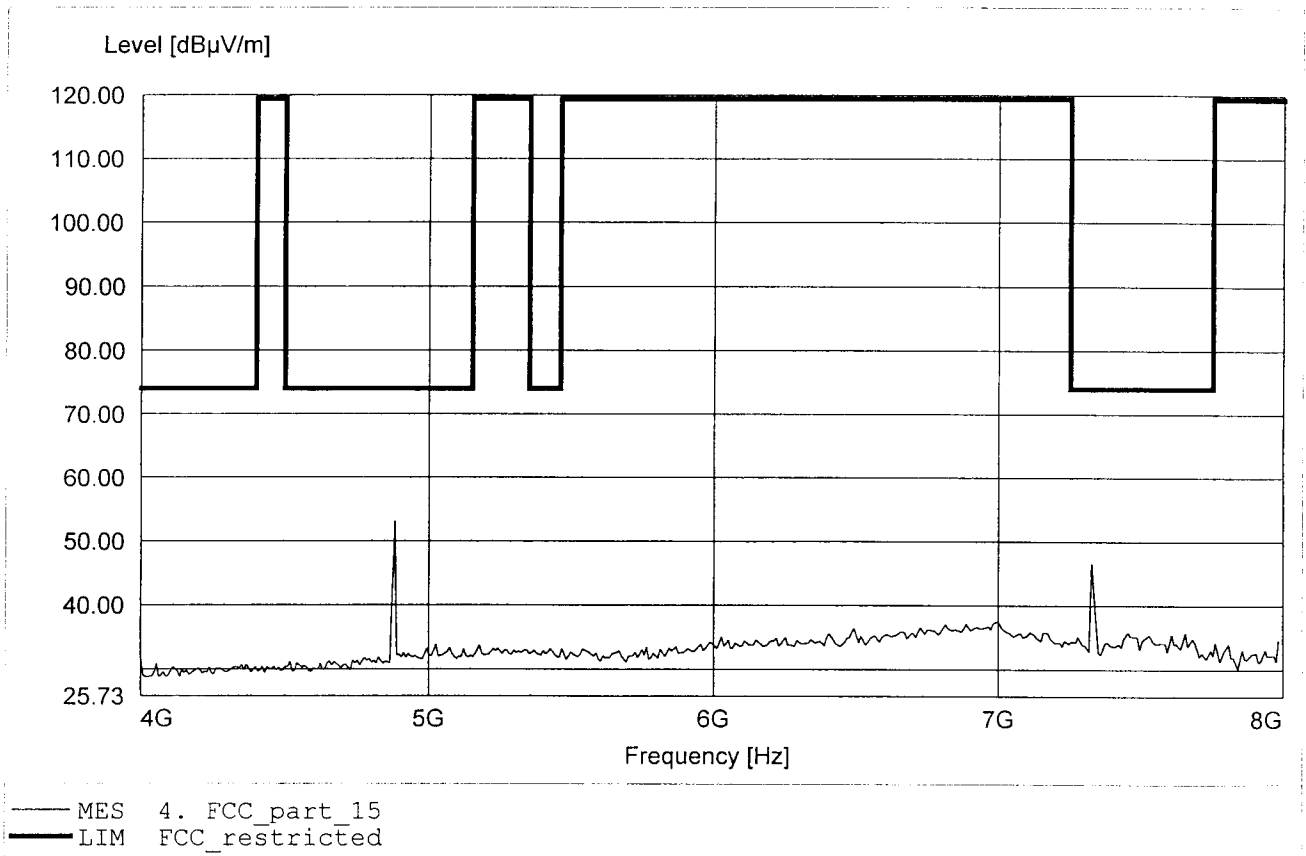


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq:4.882GHz Emax:52.65dBμV/m RBW: 1 MHz

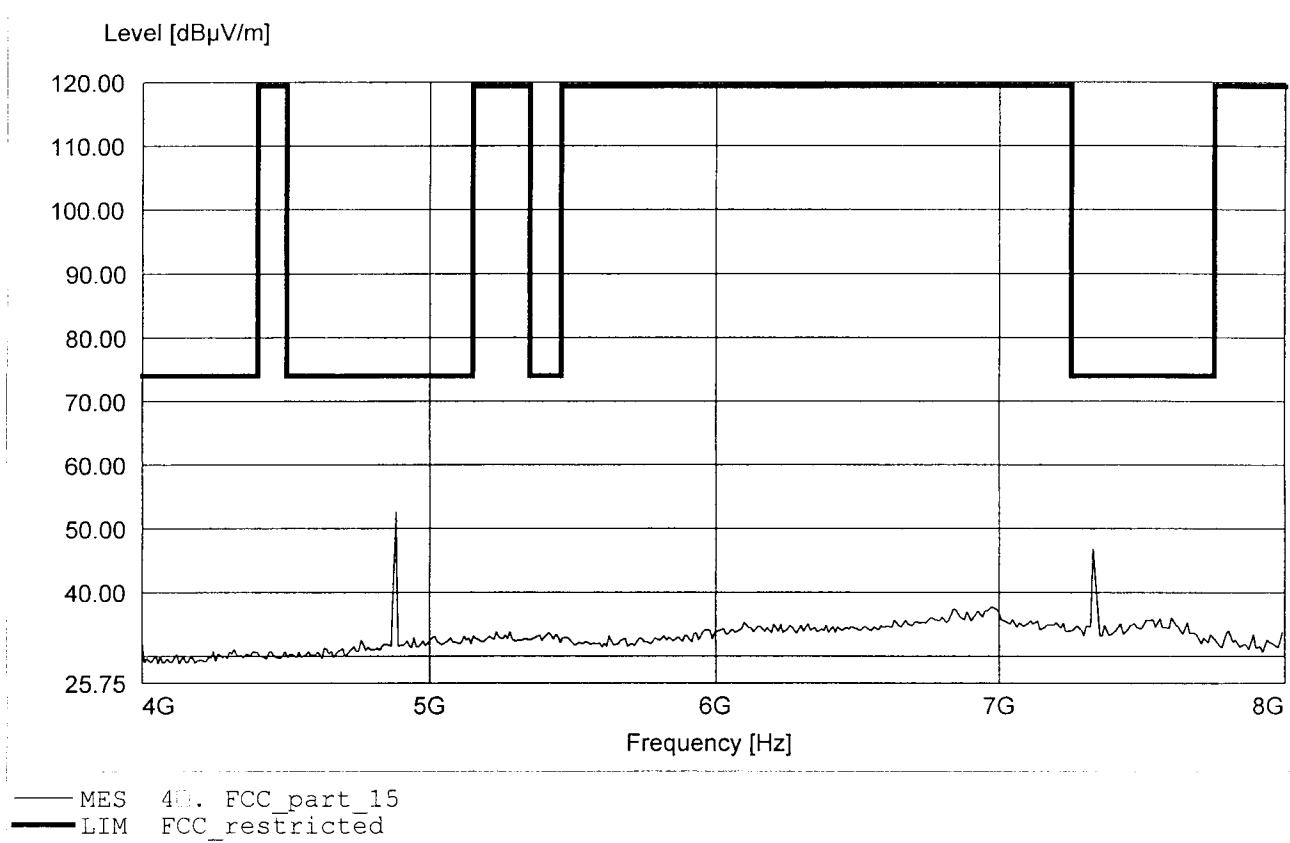


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq:10.758GHz Emax:42.81dBµV/m RBW: 1 MHz

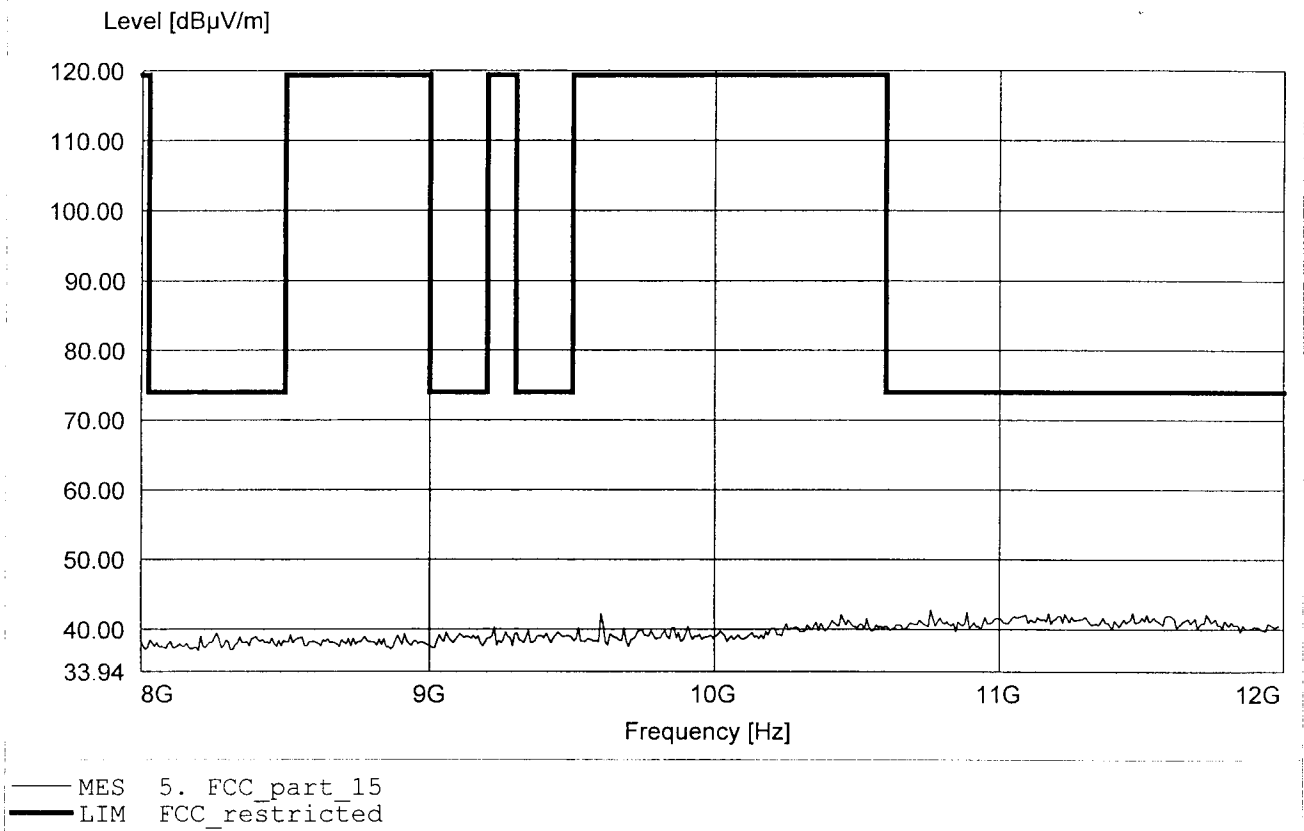


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to §15.247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq:11.230GHz Emax:42.95dBμV/m RBW: 1 MHz

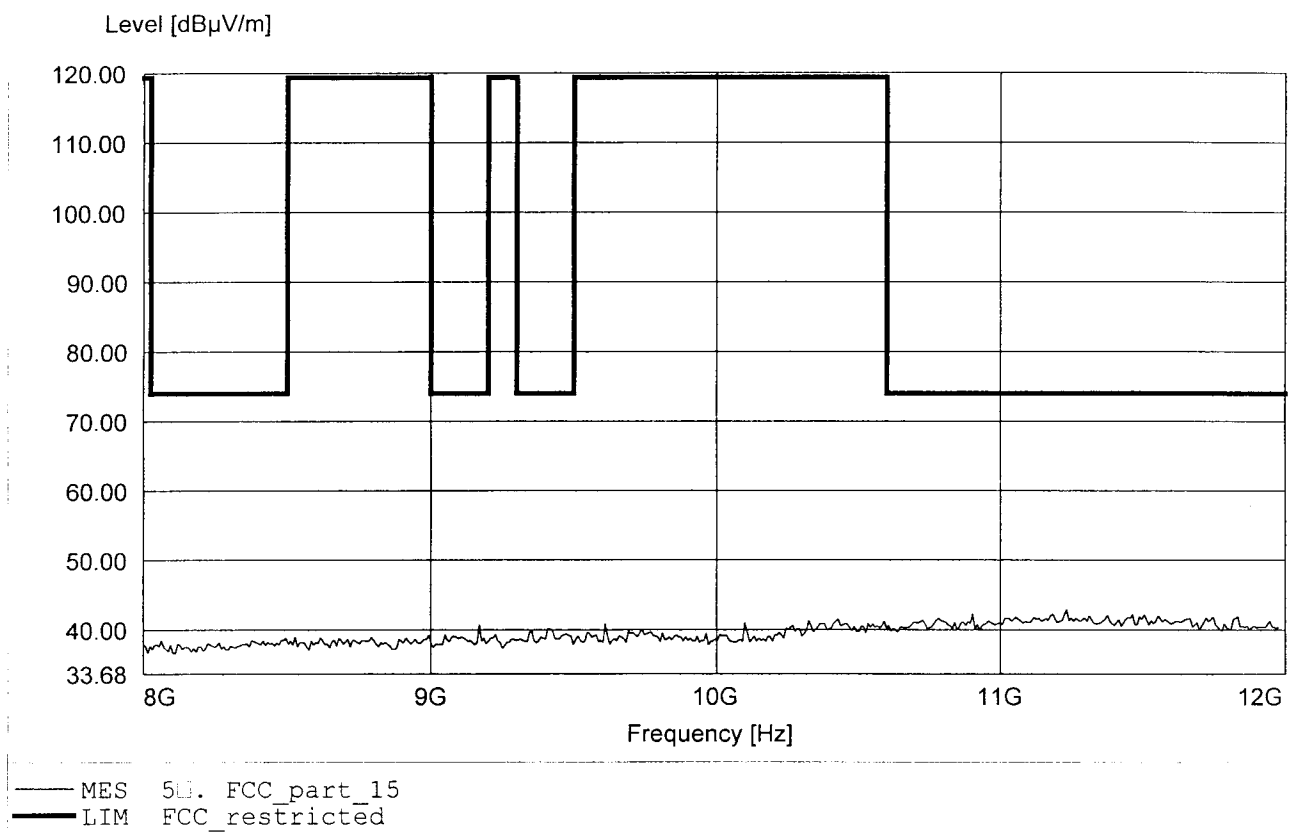


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:14.655GHz Emax:47.05dBμV/m RBW: 1 MHz

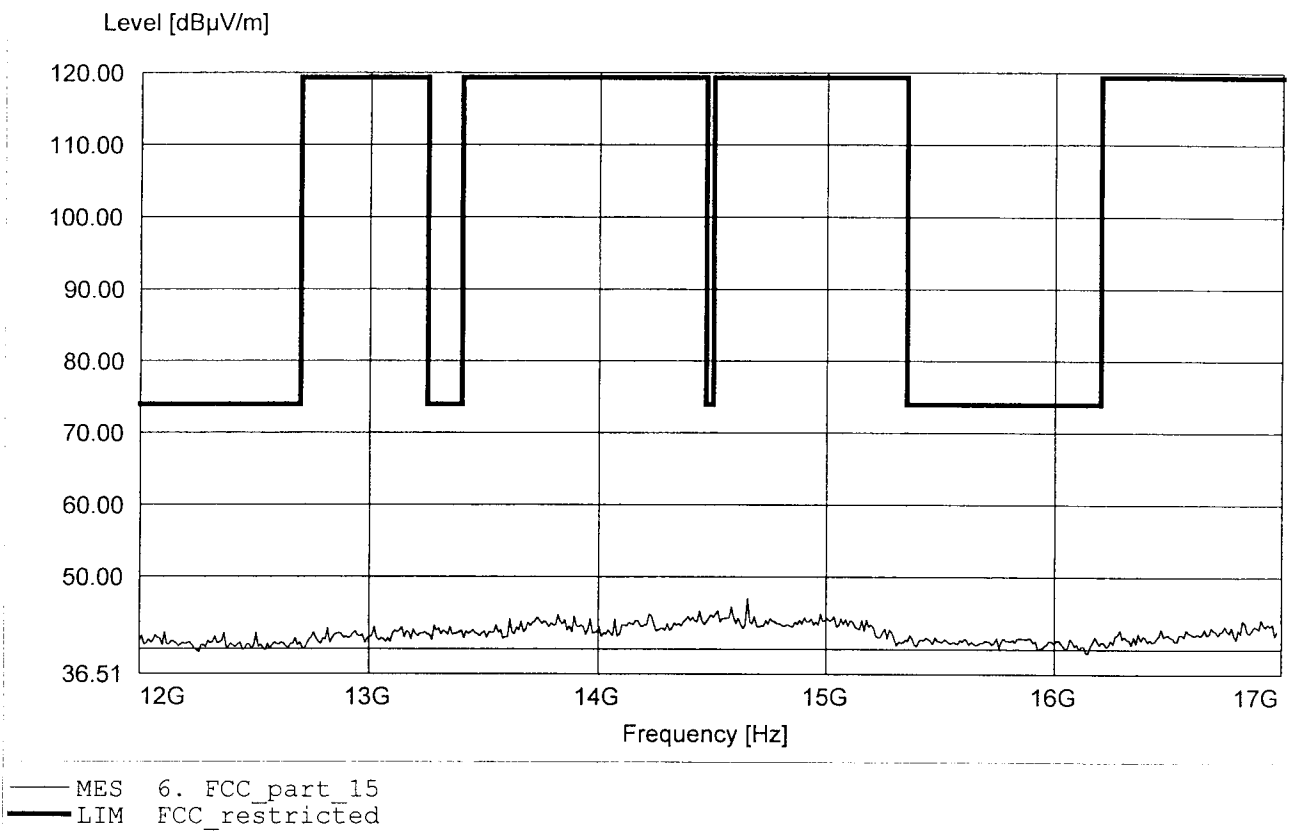

Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C


EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:14.655GHz Emax:53.11dBμV/m RBW: 1 MHz

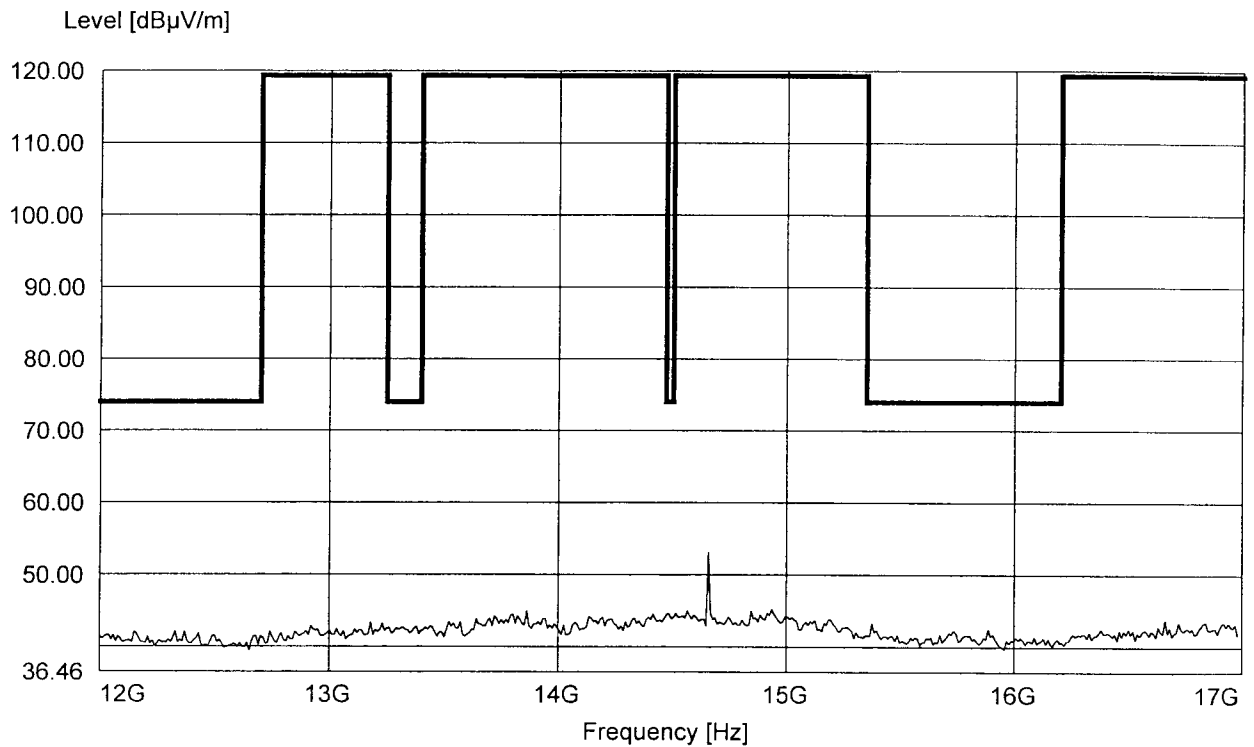

— MES 60. FCC_part_15
— LIM FCC_restricted

Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:25.929GHz Emax:50.20dBμV/m RBW: 1 MHz

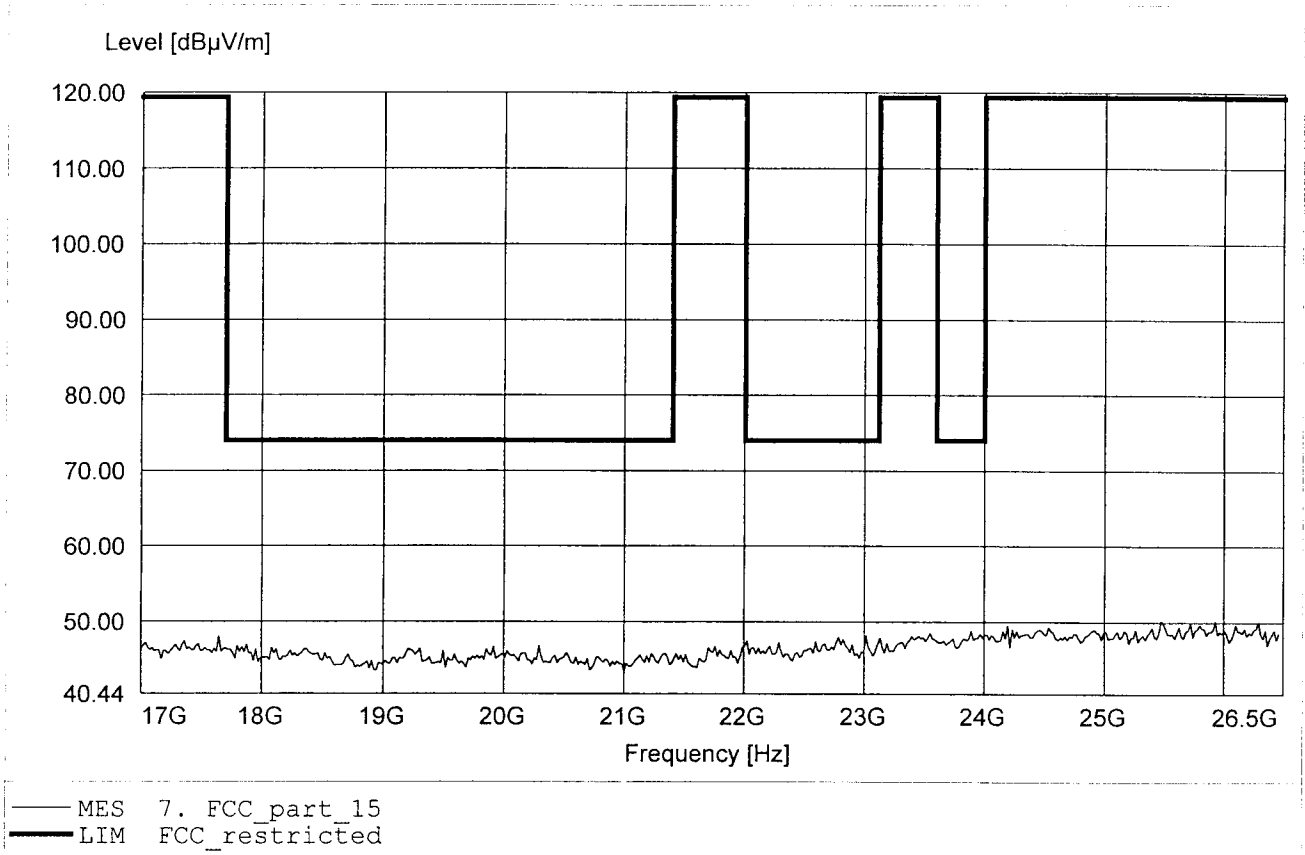

Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT : Cordless Headset / Base / Ant.: 1 / Ch.: 40
Model: Gn 9050
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC adaptor), Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247, Limit 20 dB up peak detector / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:25.339GHz Emax:50.90dBuV/m RBW: 1 MHz

