




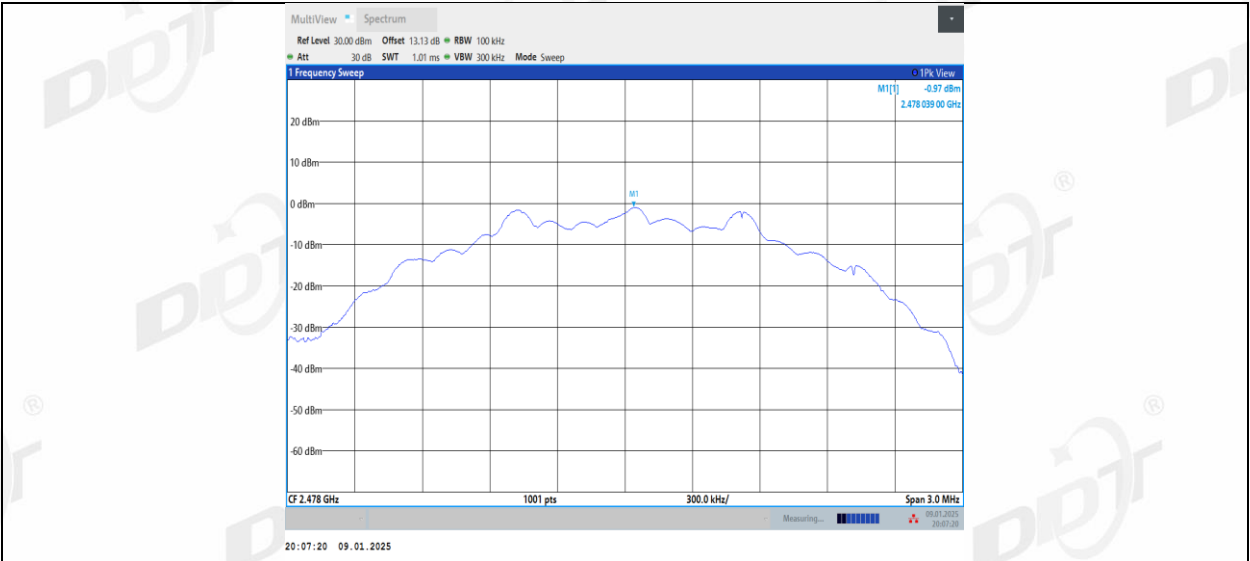


BLE_2M_Left side_2478_30~1000

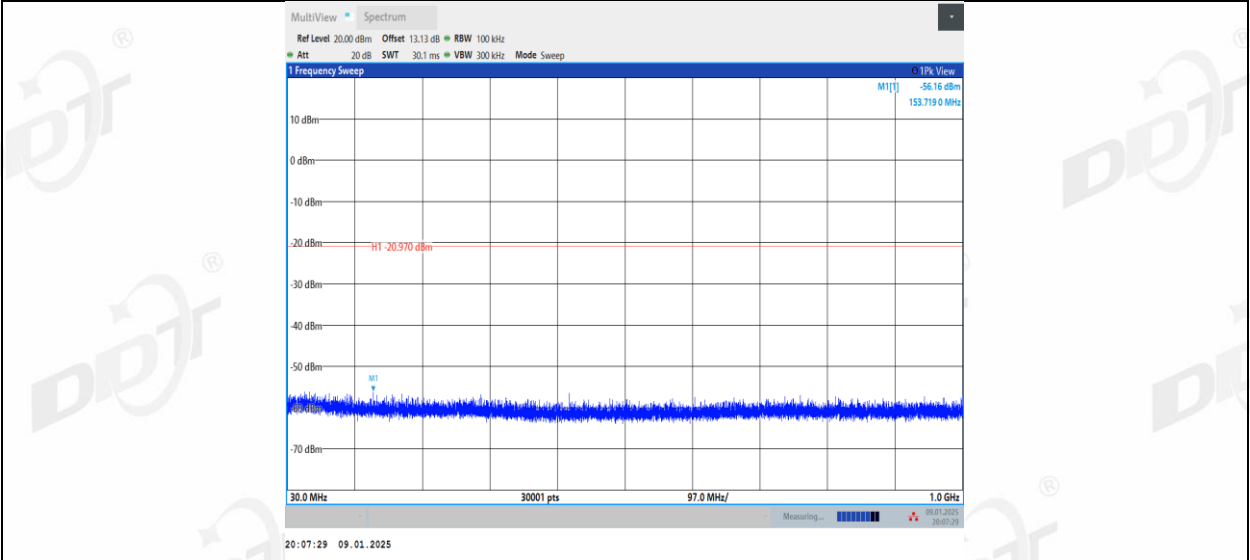


BLE_2M_Left side_2478_1000~26500

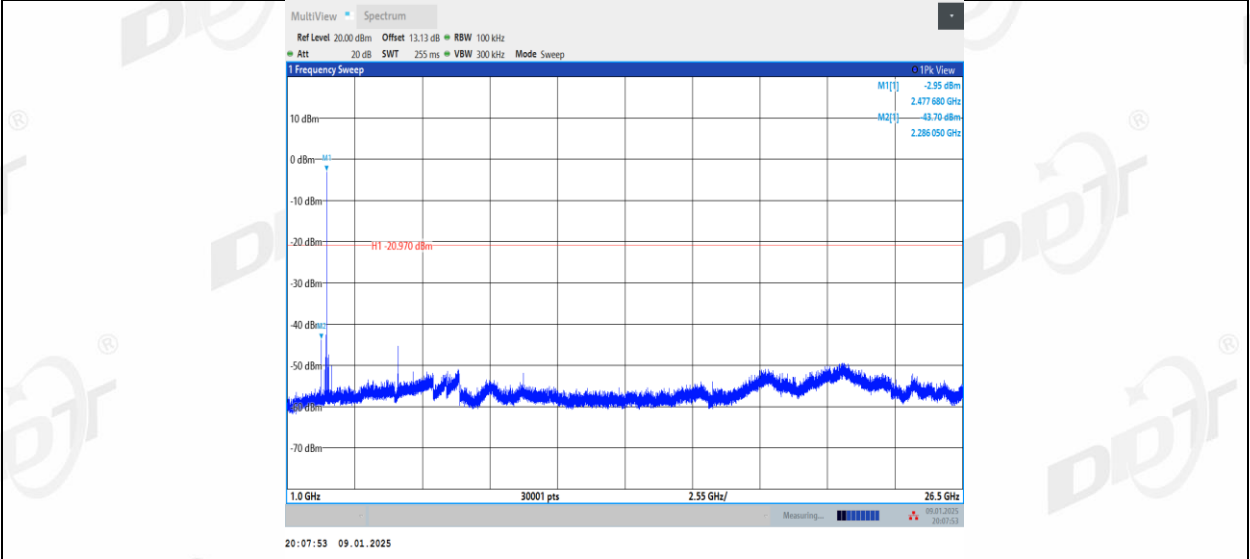


BLE_2M_Right side_2478_0~Reference

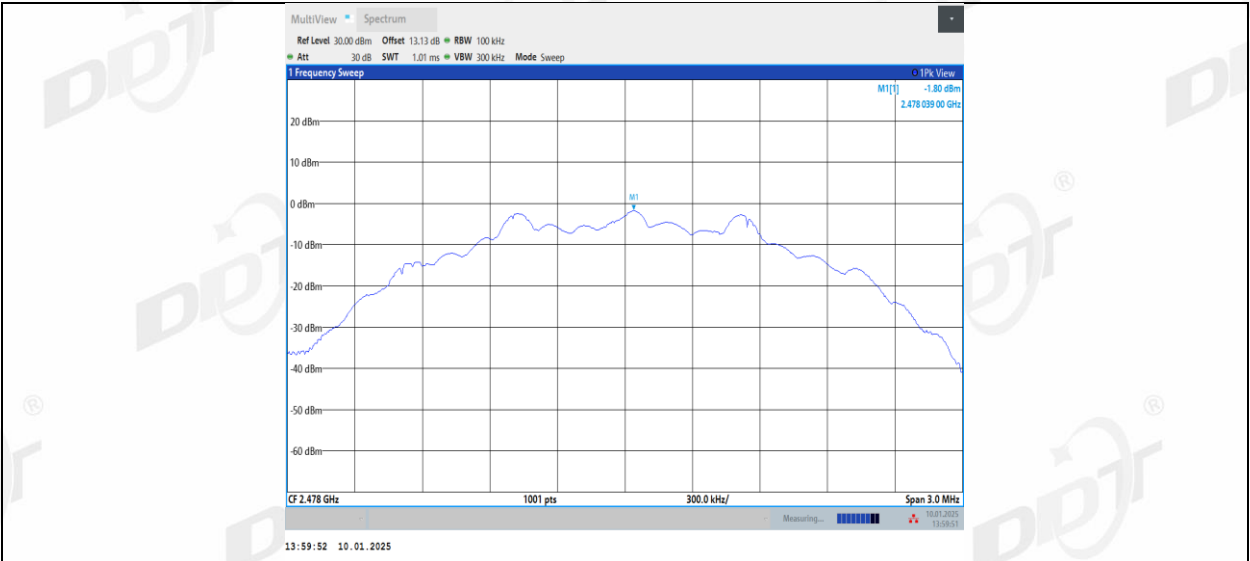

BLE_2M_Right side_2478_30~1000

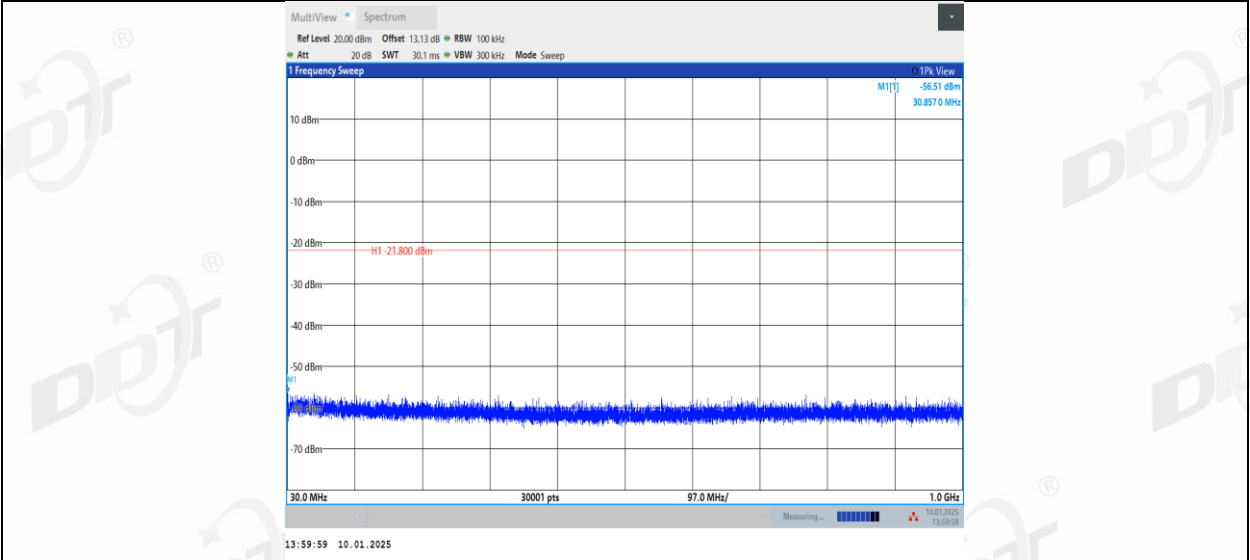


BLE_2M_Right side_2478_1000~26500

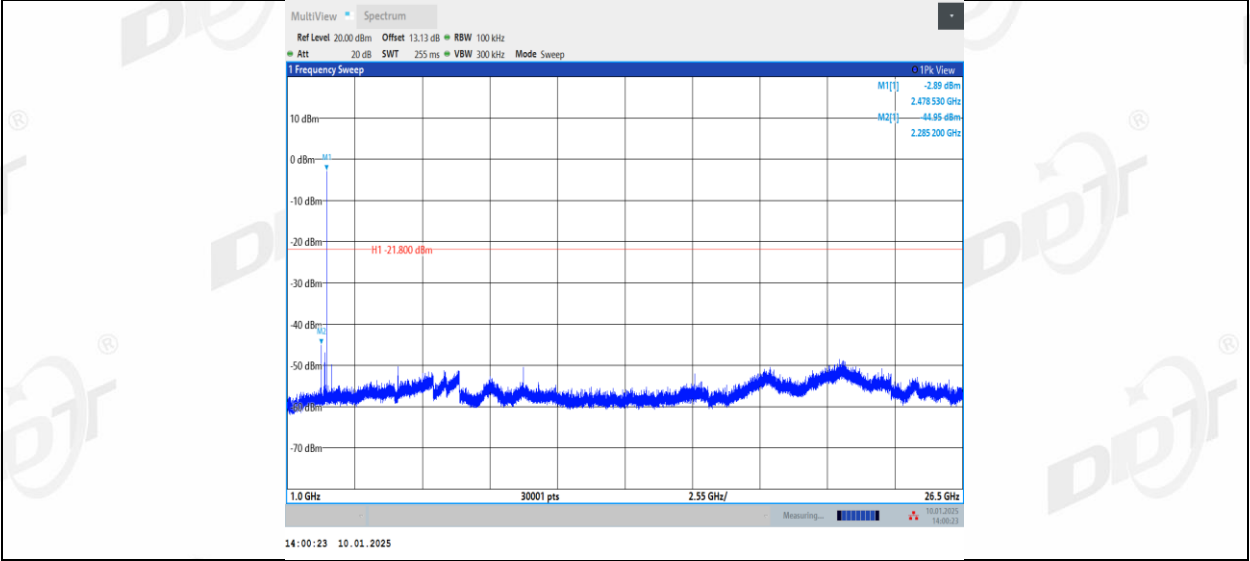

10. Duty Cycle

10.1. Block diagram of test setup

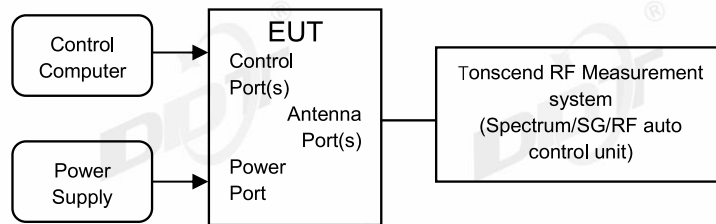

10.2. Limit

Just for Report.

10.3. Test procedure


- (1) Connected the EUT's antenna port to the Spectrum Analyzer by suitable attenuator, The cable loss and attenuator loss have been put into spectrum analyzer as amplitude offset.
set the Spectrum Analyzer as below:
 - Centre Frequency: The centre frequency of the middle hopping channel.
 - Resolution BW: 10 MHz.
 - Video BW: 10 MHz.
 - Span: Zero span.
 - Detector: Peak.
 - Trace Mode: Clear Write.
 - Sweep: Video Trigger
- (2) When the trace is complete, measure the sending time of 1 burst and the duty cycle of 1 burst cycle.
- (3) Calculate dwell time follow below formula:
Duty cycle= Pulse's on time / Burst cycle


10.4. Test result

Test Engineer:	Zoe Peng	Test Site:	RF Measurement System 4#
Ambient Condition:	21.2-22.3℃,45.9-46.8%RH	Test Date:	2025.01.09-2025.01.10
Test Power Supply:	Battery	Sample Number:	S24121821-003


Test Mode	Antenna	Frequency [MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor[dB]
BLE_1M	Left side	2402	2.14	2.50	85.60	0.68
	Right side	2402	2.14	2.50	85.60	0.68
	Left side	2440	2.14	2.50	85.60	0.68
	Right side	2440	2.14	2.50	85.60	0.68
	Left side	2480	2.14	2.50	85.60	0.68
	Right side	2480	2.14	2.50	85.60	0.68
BLE_2M	Left side	2404	1.09	2.50	43.60	3.61
	Right side	2404	1.09	2.50	43.60	3.61
	Left side	2440	1.09	2.50	43.60	3.61
	Right side	2440	1.09	2.50	43.60	3.61
	Left side	2478	1.09	2.50	43.60	3.61
	Right side	2478	1.09	2.50	43.60	3.61

10.5. Test graphs

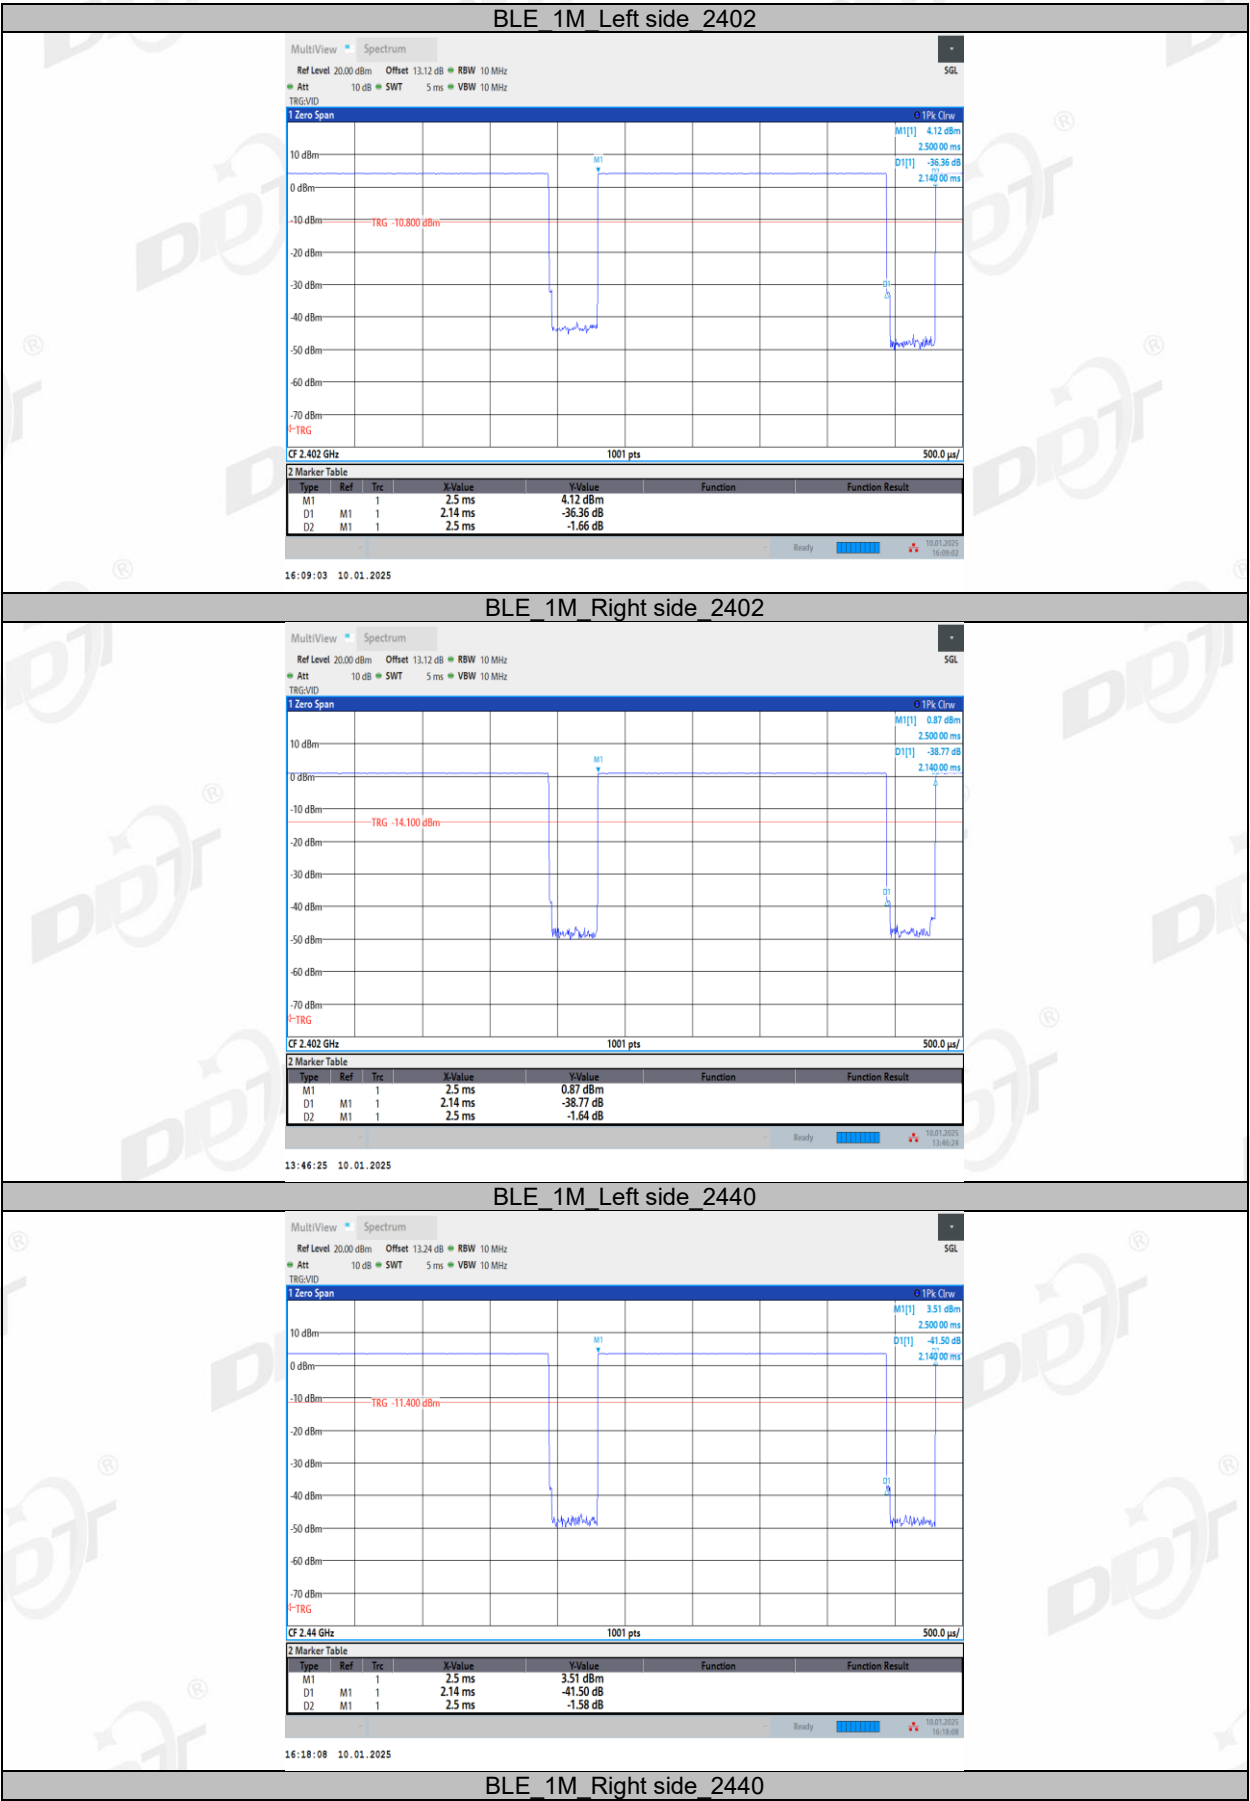


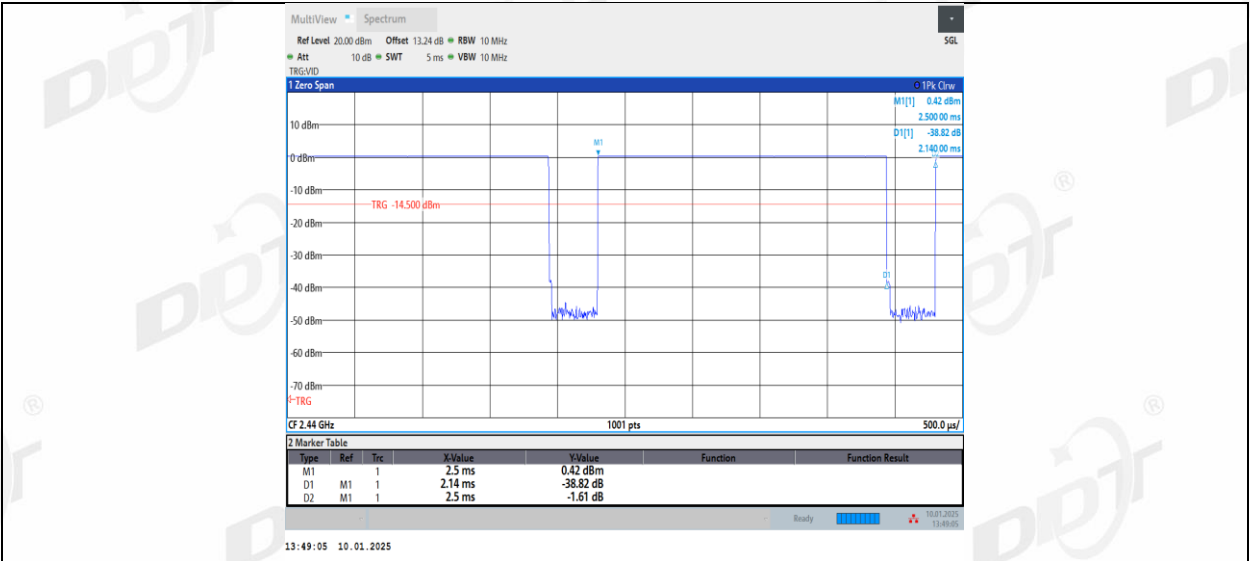


BLE_1M_Left side_2480

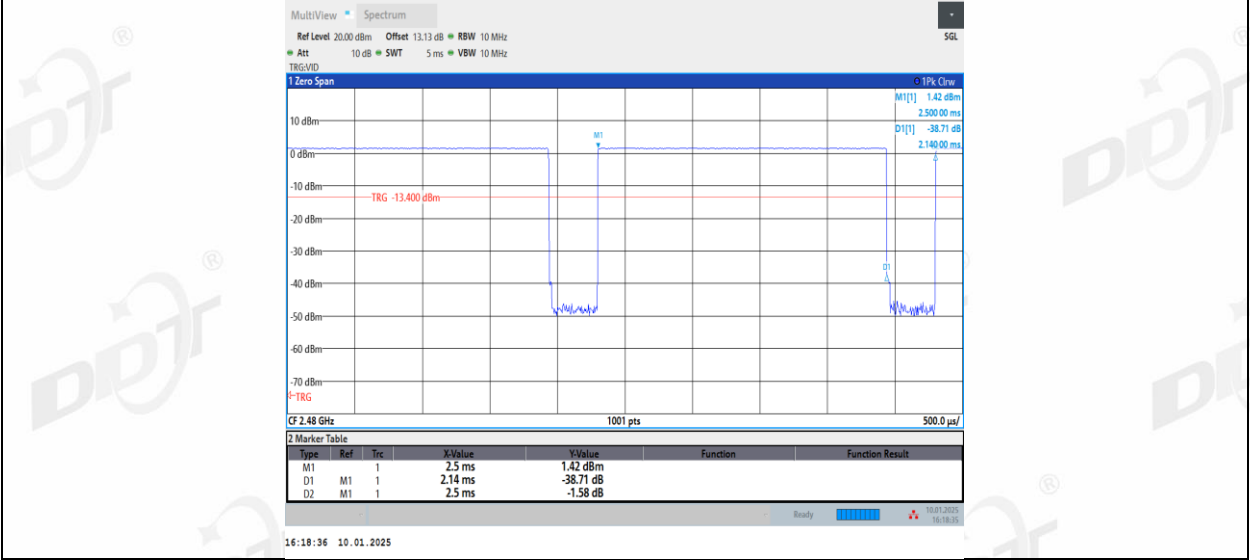


BLE_1M_Right side_2480

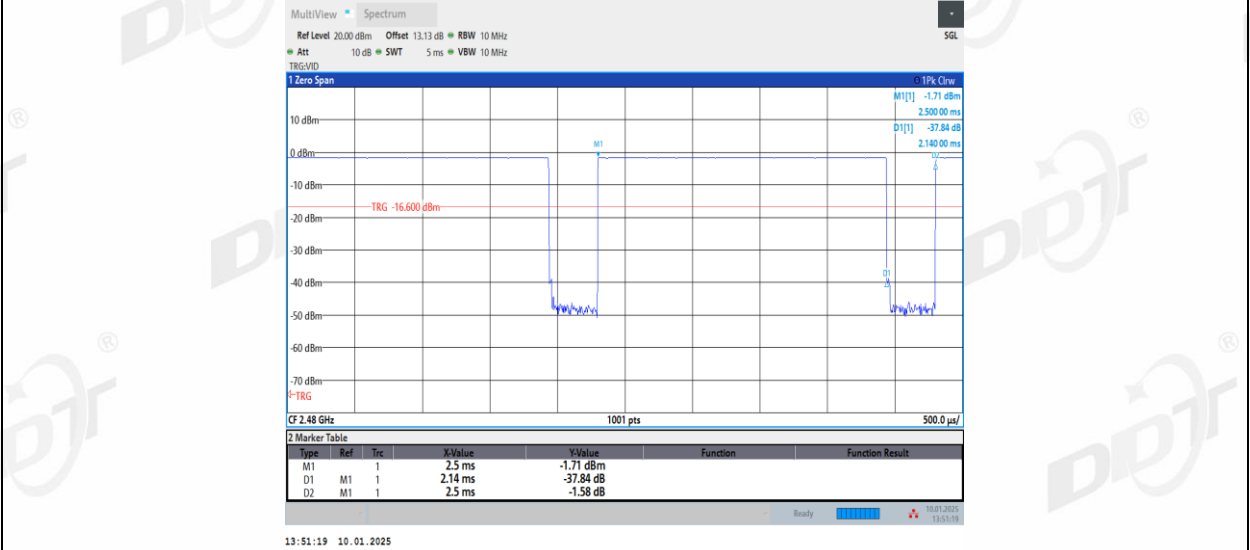


BLE_2M_Left side_2404

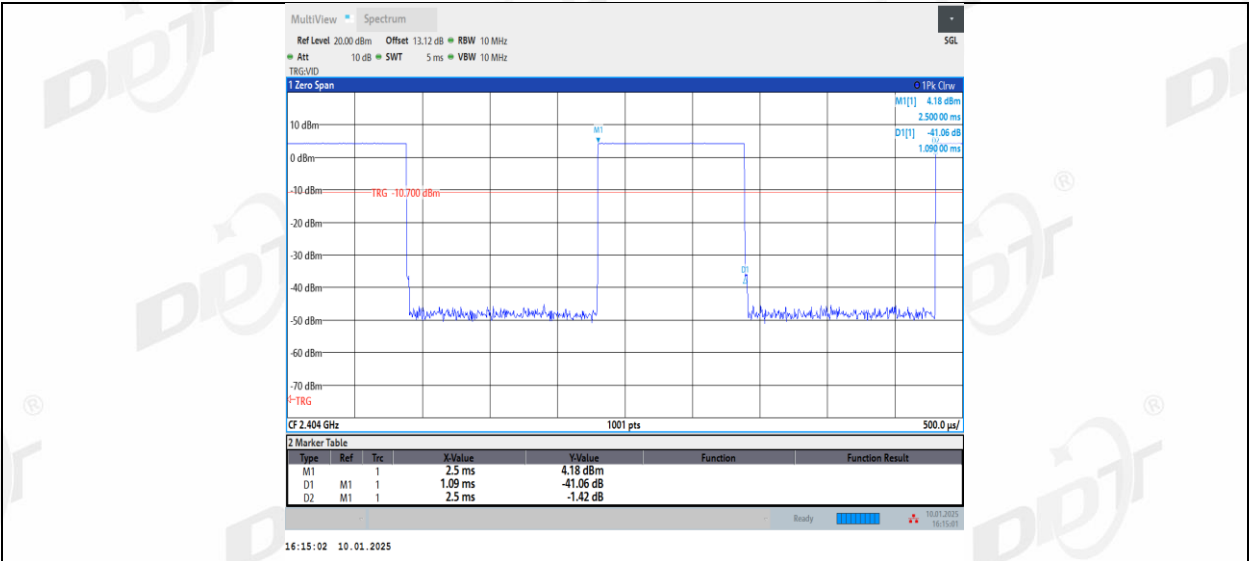


BLE_2M_Right side_2404

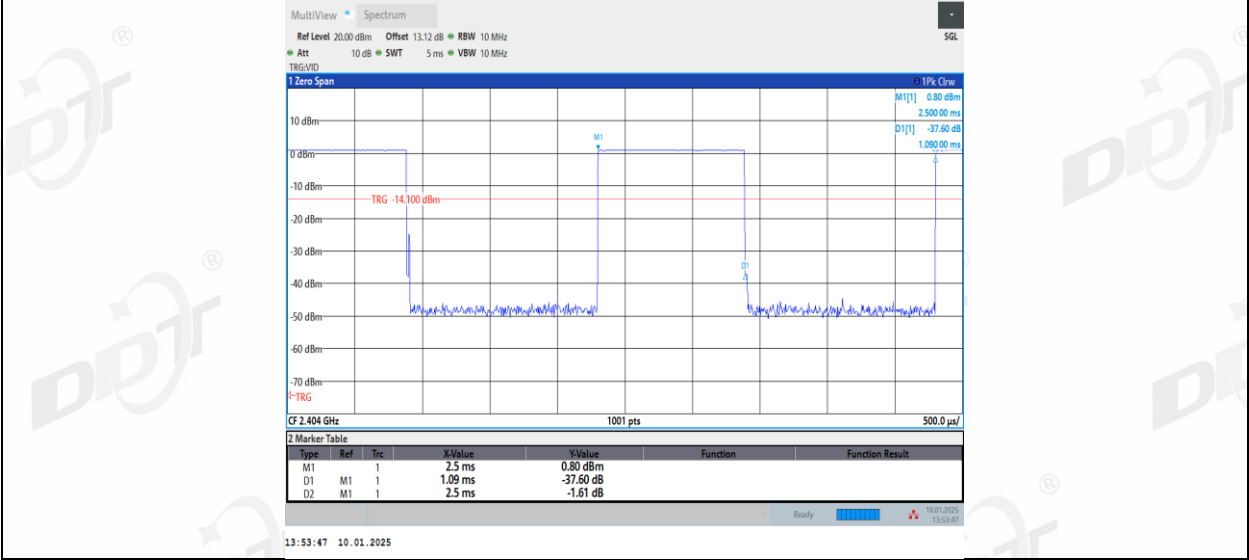


BLE_2M_Left side_2440

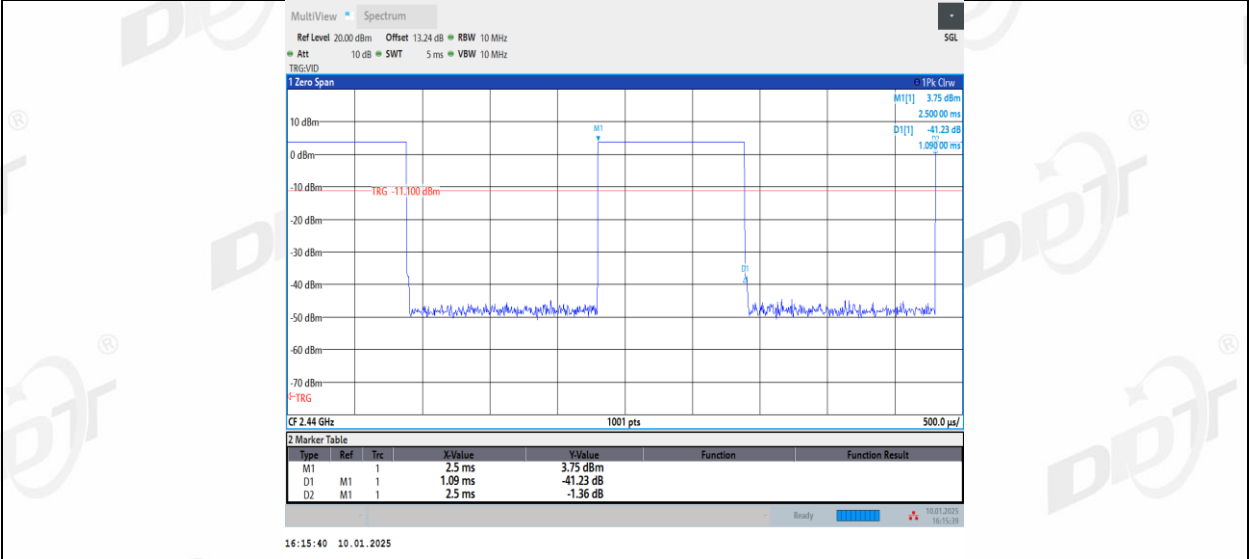


BLE_2M_Right side_2440

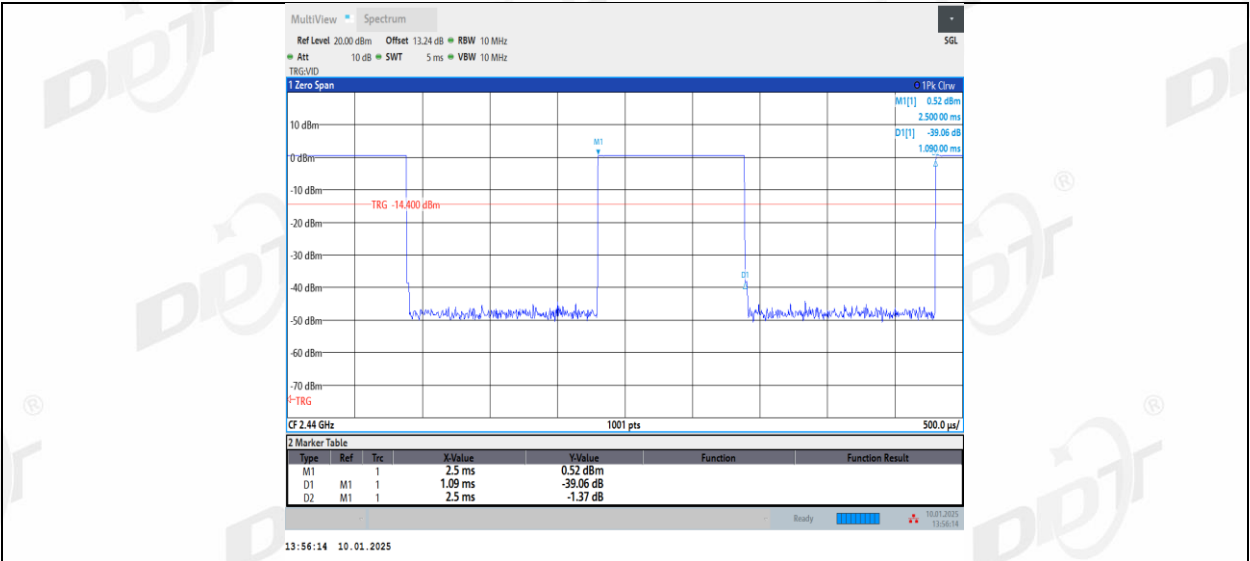

BLE_2M_Left side_2478

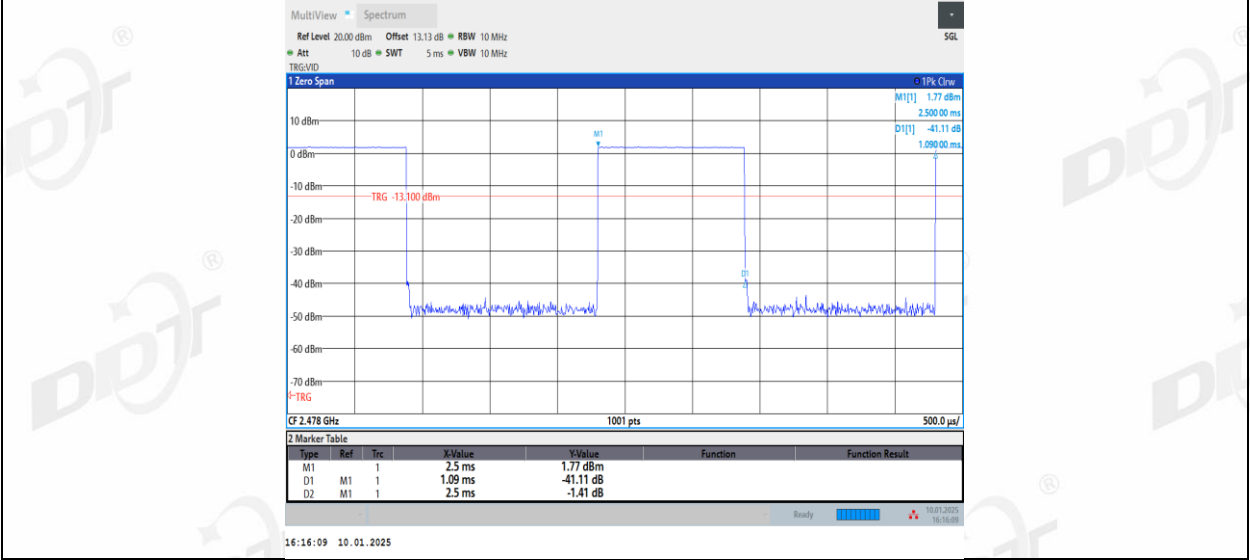

BLE_2M_Right side_2478

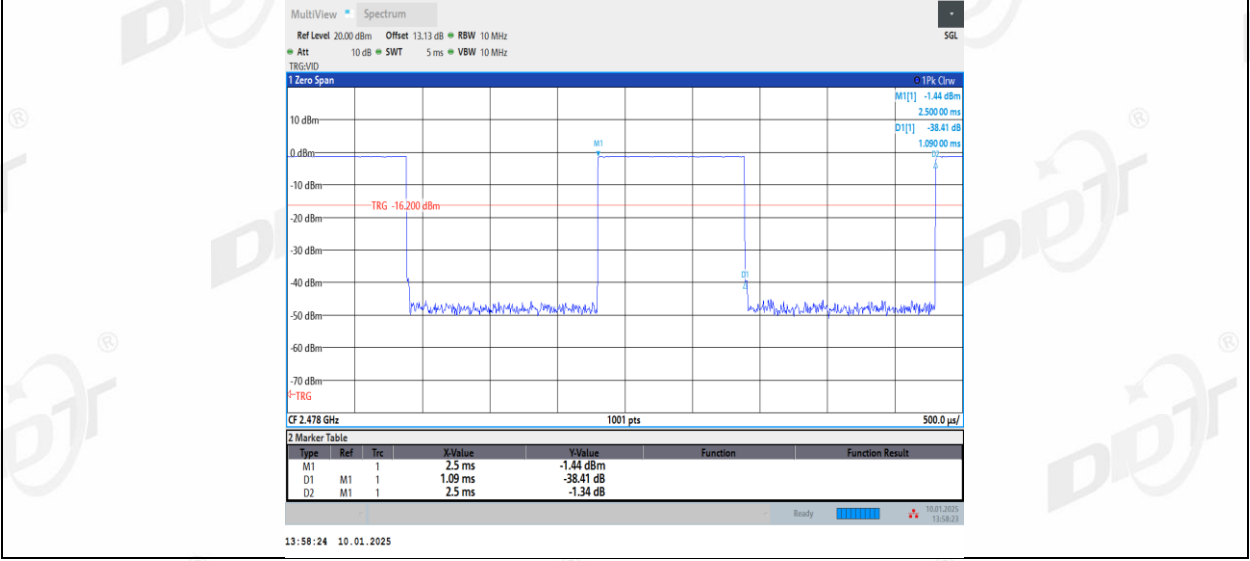

11. Antenna Requirements

11.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For intentional device, according to RSS-Gen issue 5 section 6.8.

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

11.2. Result


The antenna used for this product as Antenna information described in section 2.1 of the report, and there is no other antenna than that furnished by the responsible party shall be used with the device.


12.Radiated Emission

12.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
Active Loop Antenna	Schwarzbeck	FMZB1519	DDT-ZC00524	2025/09/11
High pass filter	Micro-Tronics	HPM50102	DDT-ZC00561	2025/04/22
Micro-Tronics filters	REBES	BRM50702	DDT-ZC03242	/
RF Cable	N/A	W24.02 HL-562	DDT-ZC04022	2025/03/31
High pass filter	Micro-Tronics	HPM50108	DDT-ZC00560	2025/04/22
PSA Series Spectrum Analyzer	Agilent	E4447A	DDT-ZC00517	2025/03/31
RF Cable	N/A	W13.02 AP1-X2	DDT-ZC04023	2025/03/31
RF cable	Zhongke Junchuang	JCT26S-NJ-NJ-1.5M	DDT-ZC02762	2025/03/31
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2025/03/31
RF cable	Yuhu Technology	JCTB810-NJ-NJ-9M	DDT-ZC02538	2025/03/31
Micro-Tronics filters	REBES	BRM50716	DDT-ZC03240	/
Hochgewinn-Hornantenne	SCHWARZBEC K	BBHA 9120 D	DDT-ZC02129	2025/09/18
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2025/04/26
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	DDT-ZC02050	2025/07/11
EMI TEST RECEIVER	R&S	ESU26	DDT-ZC01909	2025/03/31
Pre-amplifier	COM-POWER	PAM-118A	DDT-ZC01293	2025/08/25
High Pass filter	Xi'an Xingbo	XBLBQ-GTA67	DDT-ZC02179	2025/04/22
RF cable	Yuhu Technology	ZT26S-SMAJ-SMAJ-1M	DDT-ZC02037	2025/03/31

12.2. Block diagram of test setup

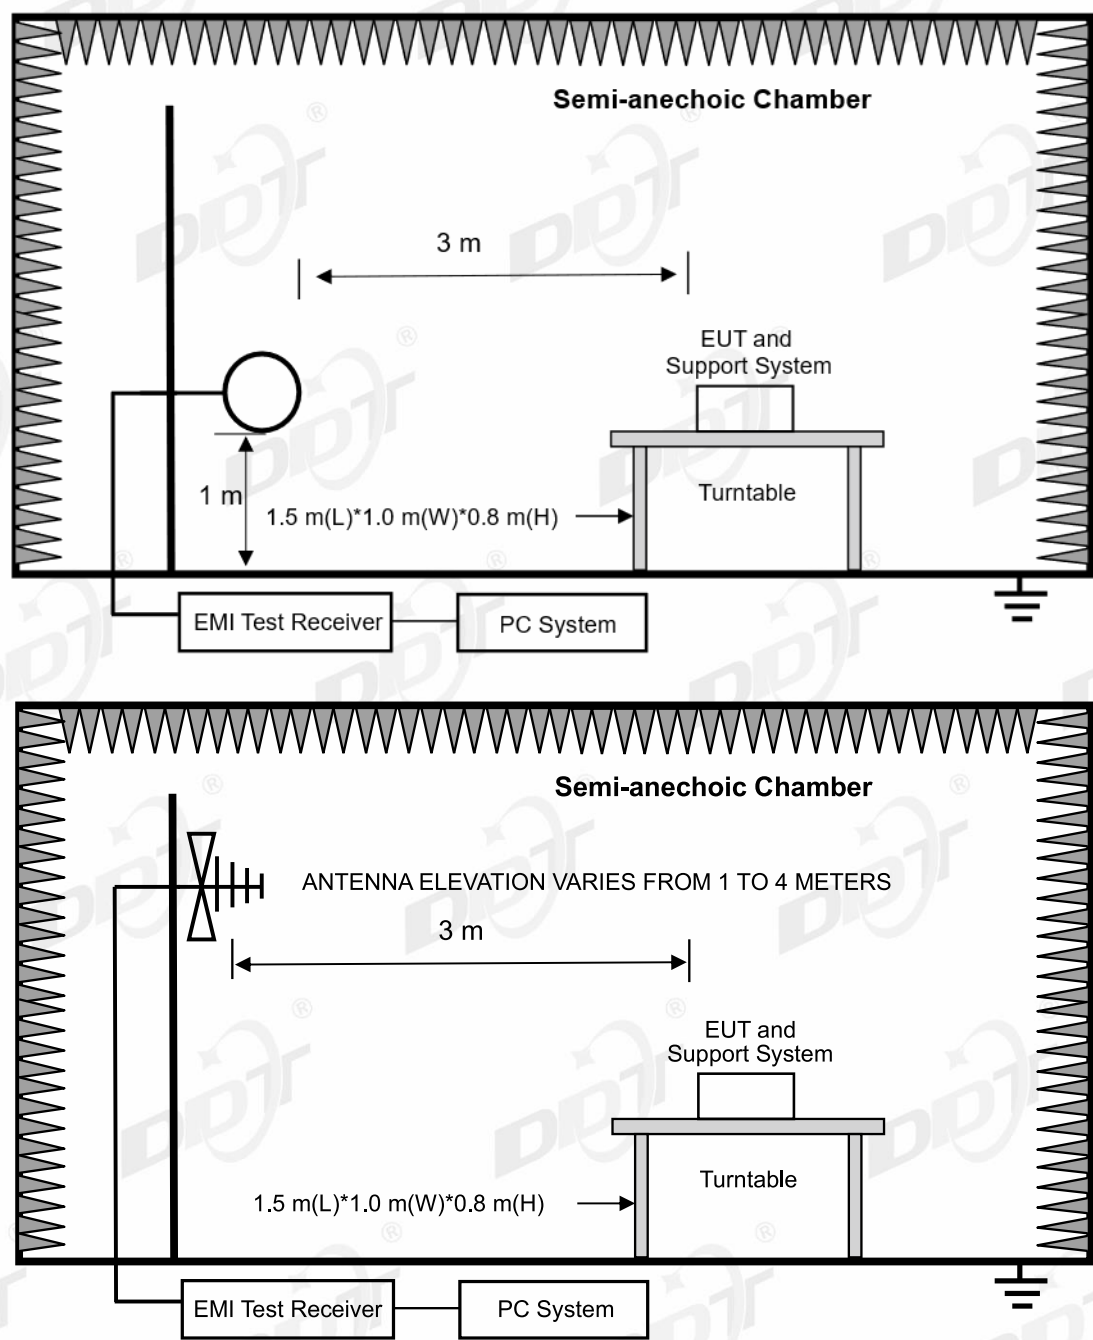

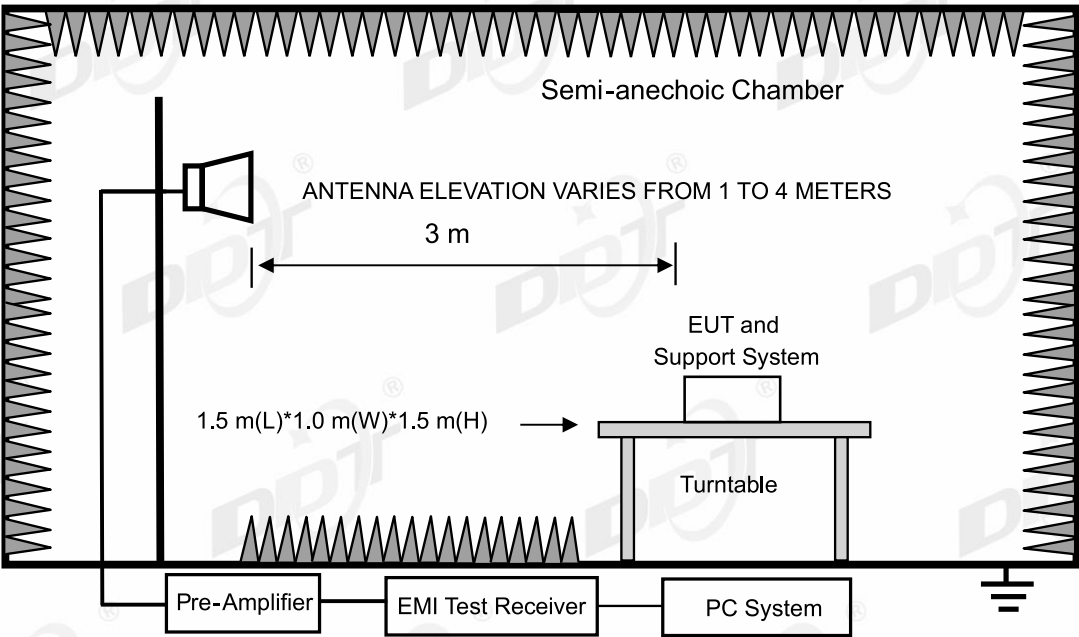

12.3. Limits

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	⁽²⁾
13.36-13.41			

1Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

2Above 38.6

RSS-Gen section 8.10 Restricted frequency bands*

MHz	MHz	MHz	GHz
0.090-0.110	12.51975-12.52025	240-285	3.5-4.4
0.495-0.505	12.57675-12.57725	322-335.4	4.5-5.15
2.1735-2.1905	13.36-13.41	399.9-410	5.35-5.46
3.020-3.026	16.42-16.423	608-614	7.25-7.75
4.125-4.128	16.69475-16.69525	960-1427	8.025-8.5
4.1772&4.17775	16.80425-16.80475	1435-1626.5	9.0-9.2
4.2072&4.20775	25.5-25.67	1645.5-1646.5	9.3-9.5
5.677-5.683	37.5-38.25	1660-1710	10.6-12.7
6.215-6.218	73-74.6	1718.8-1722.2	13.25-13.4
6.26775-6.26825	74.8-75.2	2200-2300	14.47-14.5
6.31175-6.31225	108-138	2310-2390	15.35-16.2
8.291-8.294	149.9-150.05	2483.5-2500	17.7-21.4
8.362-8.366	156.52475-156.52525	2655-2900	22.01-23.12
8.37625-8.38675	156.7-156.9	3260-3267	23.6-24.0
8.41425-8.41475	162.0125-167.17	3332-3339	31.2-31.8
12.29-12.293	167.72-173.2	3345.8-3358	36.43-36.5
			Above 38.6

* Certain frequency bands listed in table and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

(2) FCC 15.209 Limit & RSS-Gen section 8.9 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		uV/m	dBuV/m
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30~88	3	100	40.0
88~216	3	150	43.5
216~960	3	200	46.0
960~1000	3	500	54.0
Above 1000	3	74.0 dBuV/m (Peak) 54.0 dBuV/m (Average)	

Note: Limit (dBuV/m) = 20*Log (Limit (uV/m))

Note:

(1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz and above 1000 MHz,

radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30 MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3\text{m}}(\text{dBuV/m}) = \text{Limit}_{30\text{m}}(\text{dBuV/m}) + 40\text{Log}(30\text{m}/3\text{m})$$

(3) Limit for this EUT

The emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, and the emissions appearing within RSS-Gen section 8.10 Restricted frequency bands shall not exceed the limits shown in RSS-Gen section 8.9, all the other emissions shall be at least 20 dB below the fundamental emissions or comply with 15.209 limits and RSS-Gen section 8.9 limits.

12.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
NoteBook	Lenovo	i7-3520M	N/A	00426-OEM-8992662-00400

12.5. Test procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for below 1G and 150 cm above the ground plane inside a fully-anechoic chamber for above 1G.
- (2) Test antenna was located 3 m from the EUT on an adjustable mast, and the antenna used as below table.

Test frequency range	Test antenna used	Test antenna distance
9 kHz - 30 MHz	Active Loop antenna	3 m
30 MHz - 1 GHz	Trilog Broadband Antenna	3 m
1 GHz - 18 GHz	Double Ridged Horn Antenna(1 GHz-18 GHz)	3 m
18 GHz - 40 GHz	Horn Antenna(18 GHz-40 GHz)	1 m

According ANSI C63.10:2013 clause 6.4.6 and 6.5.3, for measurements below 30 MHz, Antenna was located 3 m from EUT, the loop antenna was positioned in three antenna orientations (parallel, perpendicular, and round-parallel), for each measurement antenna alignment, the EUT shall be rotated through 0° to 360° on a turntable, and the lowest height of the magnetic antenna shall be 1 m above the ground. For measurement above 30MHz, the trilob Broadband Antenna or Horn Antenna was located 3m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1 m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18 GHz to 25 GHz, so below final test was performed with frequency range from 9 kHz to 18 GHz.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to ANSI C63.10:2013 on Radiated Emission test.

(5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz, for emissions from 9 kHz - 90 kHz, 110 kHz - 490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.

(6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW.

Frequency band	RBW
9 kHz - 150 kHz	200 Hz
150 kHz - 30 MHz	9 kHz
30 MHz - 1 GHz	120 kHz

(7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; According ANSI C63.10:2013 clause 4.1.4.2.2 procedure for average measure.

(8) For portable device, X axis, Y axis, Z axis are tested, and worse setup is reported.

(9) According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz, so the final test was performed with frequency range from 30 MHz to 18 GHz and recorded in below.

(10) For 30 MHz ~ 25 GHz: (Scan with all mode, the worst case is reported)

(11) For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in worst mode.

12.6. Test result

PASS. (See below detailed test result)

12.7. Test data

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-01-14

Tested By:

Zhong Nan

EUT:

WIRELESS HEADPHONES

Model Number:

HA-A23T

Test Mode:

BLE 1M Tx mode

Power Supply:

Battery

Condition:

Temp:21.3°C;Humi:47.4%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24121821-1E\FCC BELOW1G\20250114-155035_H

Memo:

Sample Number: S24121821-004 Left side

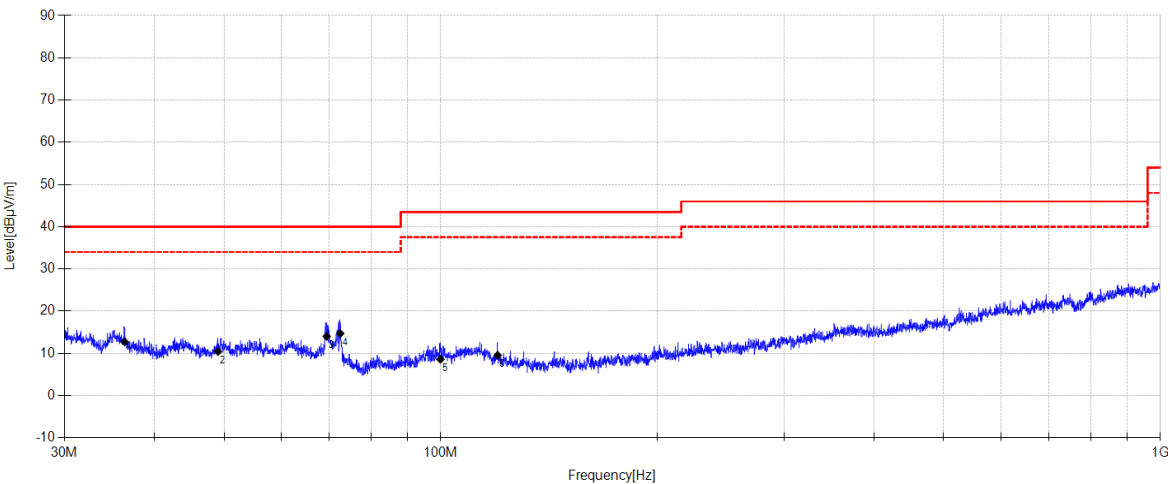


Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	36.380	28.21	11.82	3.80	12.73	40.00	27.27	QP	Horizontal
2	49.044	24.97	12.71	3.87	10.45	40.00	29.55	QP	Horizontal
3	69.443	30.92	10.19	4.02	14.03	40.00	25.97	QP	Horizontal
4	72.528	32.39	9.39	4.04	14.72	40.00	25.28	QP	Horizontal
5	99.924	23.93	11.55	4.22	8.60	43.50	34.90	QP	Horizontal
6	119.991	26.33	10.00	4.33	9.54	43.50	33.96	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-01-14 Tested By: Zhong Nan
EUT: WIRELESS HEADPHONES Model Number: HA-A23T
Test Mode: BLE 1M Tx mode Power Supply: Battery
Condition: Temp:21.3°C;Humi:47.4% Test Site: DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24121821-1E\FCC BELOW1G\20250114-155120_V
Memo: Sample Number: S24121821-004 Left side

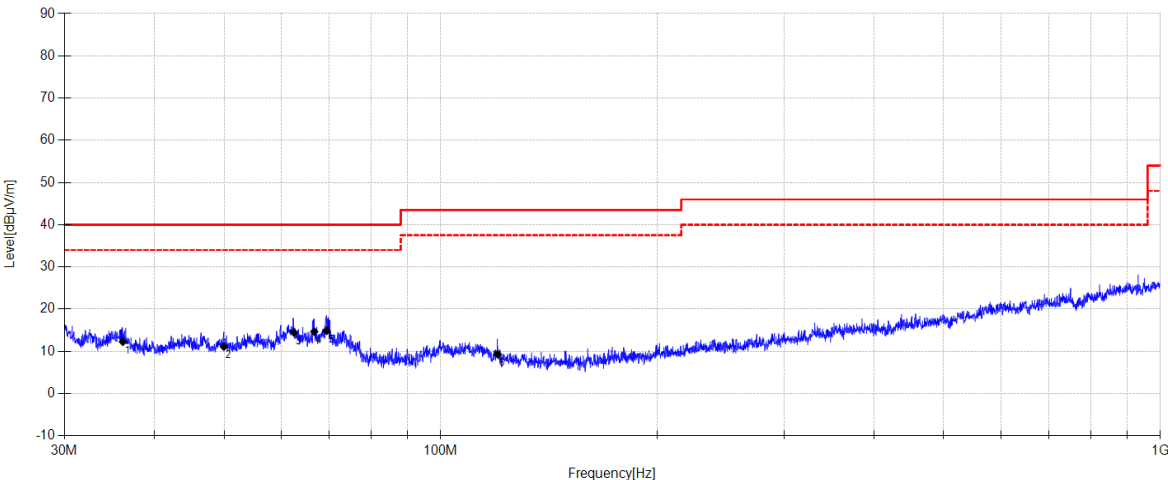


Data List									
NO.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	36.177	27.72	11.86	3.80	12.28	40.00	27.72	QP	Vertical
2	49.981	25.36	12.99	3.88	11.13	40.00	28.87	QP	Vertical
3	62.510	29.01	12.60	3.98	14.49	40.00	25.51	QP	Vertical
4	66.722	31.32	10.46	4.00	14.68	40.00	25.32	QP	Vertical
5	69.443	31.78	10.19	4.02	14.89	40.00	25.11	QP	Vertical
6	119.991	26.11	10.00	4.33	9.32	43.50	34.18	QP	Vertical

Note:
1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-01-14 **Tested By:** Zhong Nan
EUT: WIRELESS HEADPHONES **Model Number:** HA-A23T
Test Mode: BLE 2M Tx mode **Power Supply:** Battery
Condition: Temp:21.3°C;Humi:47.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24121821-1E\FCC BELOW1G\20250114-154841_H
Memo: Sample Number: S24121821-004 Left side

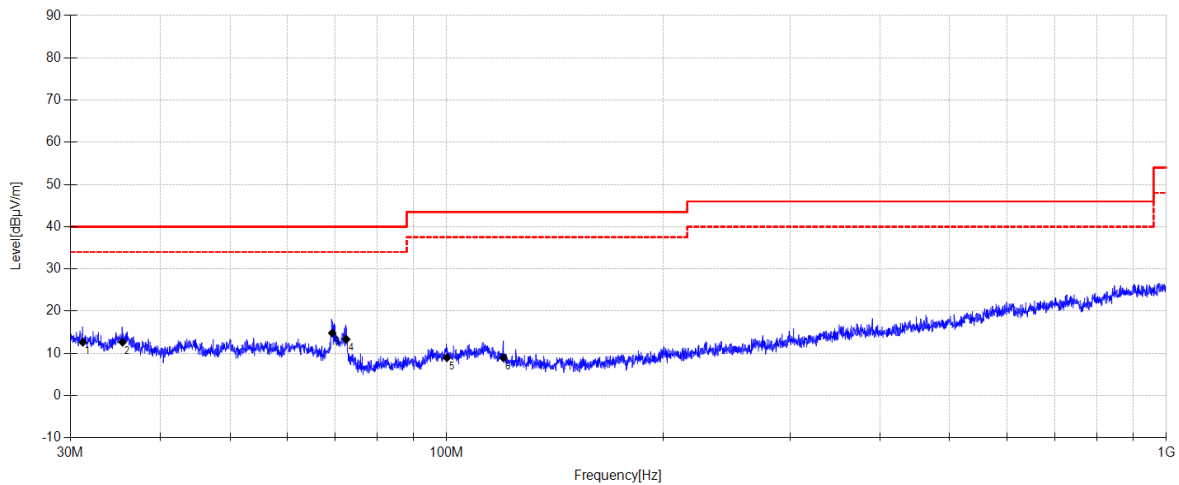


Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	31.223	29.64	10.33	3.77	12.64	40.00	27.36	QP	Horizontal
2	35.448	28.24	11.73	3.79	12.66	40.00	27.34	QP	Horizontal
3	69.345	31.61	10.26	4.02	14.79	40.00	25.21	QP	Horizontal
4	72.528	31.01	9.39	4.04	13.34	40.00	26.66	QP	Horizontal
5	100.064	24.33	11.52	4.22	8.97	43.50	34.53	QP	Horizontal
6	119.906	25.76	9.98	4.33	8.95	43.50	34.55	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-01-14 **Tested By:** Zhong Nan
EUT: WIRELESS HEADPHONES **Model Number:** HA-A23T
Test Mode: BLE 2M Tx mode **Power Supply:** Battery
Condition: Temp:21.3°C;Humi:47.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24121821-1E\FCC BELOW1G\20250114-154927_V
Memo: Sample Number: S24121821-004 Left side

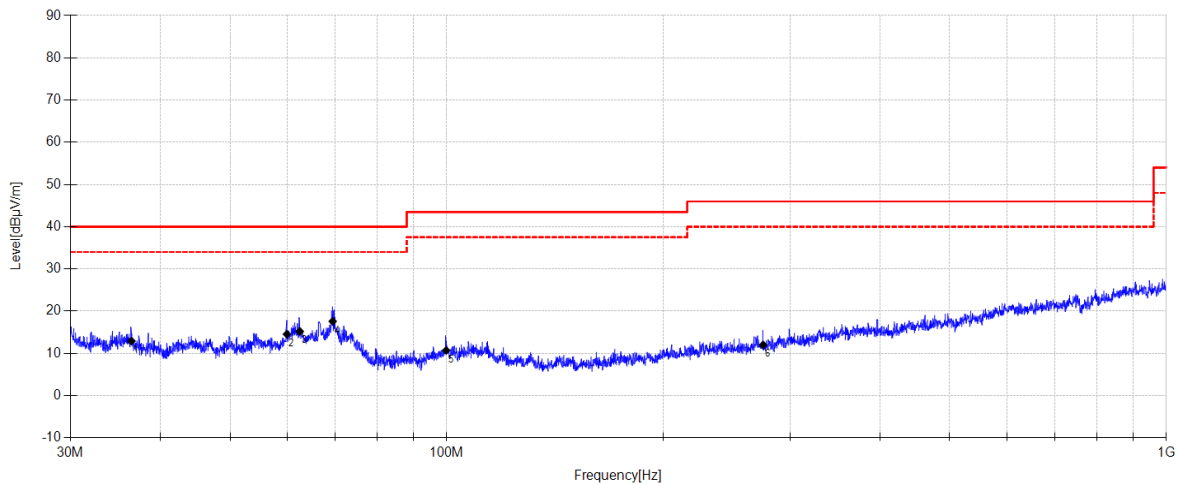


Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	36.482	28.41	11.80	3.80	12.91	40.00	27.09	QP	Vertical
2	59.977	28.89	12.79	3.96	14.54	40.00	25.46	QP	Vertical
3	62.510	29.72	12.60	3.98	15.20	40.00	24.80	QP	Vertical
4	69.443	34.48	10.19	4.02	17.59	40.00	22.41	QP	Vertical
5	99.854	26.07	11.50	4.22	10.69	43.50	32.81	QP	Vertical
6	275.228	25.74	12.50	5.11	12.00	46.00	34.00	QP	Vertical

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-01-08 **Tested By:** Zhong Nan
EUT: WIRELESS HEADPHONES **Model Number:** HA-A23T
Test Mode: BLE 1M Tx mode **Power Supply:** Battery
Condition: Temp:21.3°C;Humi:47.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24121821-1E\FCC BELOW1G\20250108-211214_H
Memo: Sample Number: S24121821-004 Right side

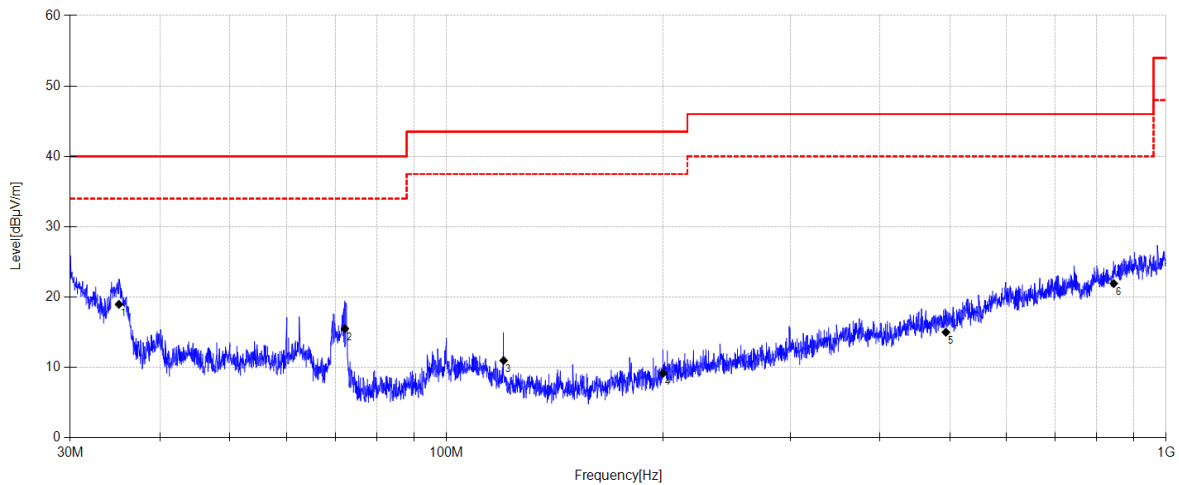


Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	35.053	34.66	11.62	3.79	18.97	40.00	21.03	QP	Horizontal
2	72.223	33.06	9.51	4.04	15.51	40.00	24.49	QP	Horizontal
3	119.991	27.77	10.00	4.33	10.98	43.50	32.52	QP	Horizontal
4	199.910	24.87	10.75	4.76	9.18	43.50	34.32	QP	Horizontal
5	493.922	24.01	16.51	5.98	15.00	46.00	31.00	QP	Horizontal
6	845.116	24.48	21.20	7.06	21.92	46.00	24.08	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-01-08 **Tested By:** Zhong Nan
EUT: WIRELESS HEADPHONES **Model Number:** HA-A23T
Test Mode: BLE 1M Tx mode **Power Supply:** Battery
Condition: Temp:21.3°C;Humi:47.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24121821-1E\FCC BELOW1G\20250108-211241_V
Memo: Sample Number: S24121821-004 Right side

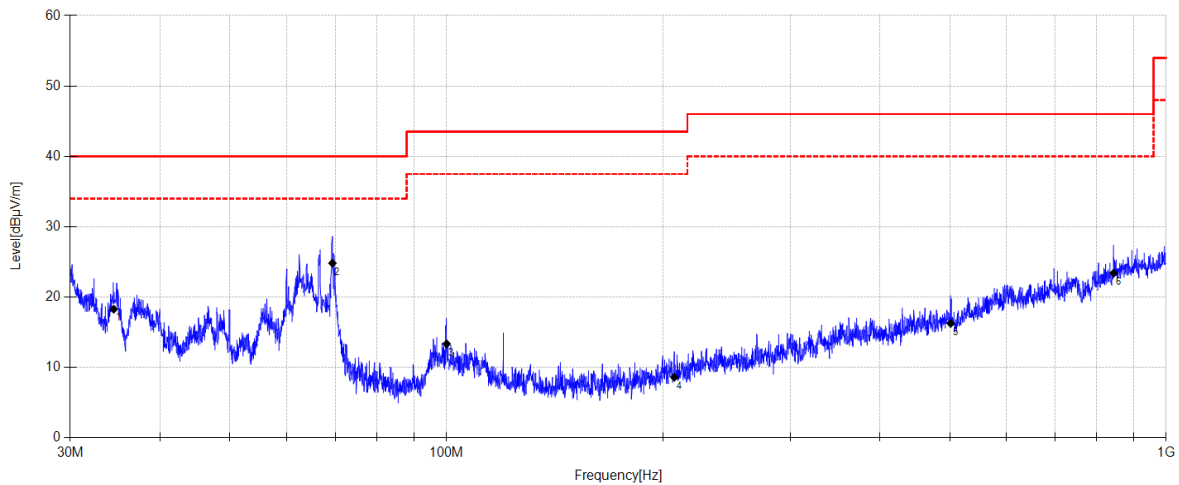


Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	34.468	34.02	11.57	3.79	18.28	40.00	21.72	QP	Vertical
2	69.394	41.68	10.22	4.02	24.82	40.00	15.18	QP	Vertical
3	99.994	28.63	11.60	4.22	13.35	43.50	30.15	QP	Vertical
4	207.188	24.46	10.56	4.79	8.60	43.50	34.90	QP	Vertical
5	501.600	24.78	16.97	6.01	16.26	46.00	29.74	QP	Vertical
6	845.116	25.96	21.20	7.06	23.40	46.00	22.60	QP	Vertical

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-01-08 **Tested By:** Zhong Nan
EUT: WIRELESS HEADPHONES **Model Number:** HA-A23T
Test Mode: BLE 2M Tx mode **Power Supply:** Battery
Condition: Temp:21.3°C;Humi:47.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24121821-1E\FCC BELOW1G\20250108-211346_H
Memo: Sample Number: S24121821-004 Right side

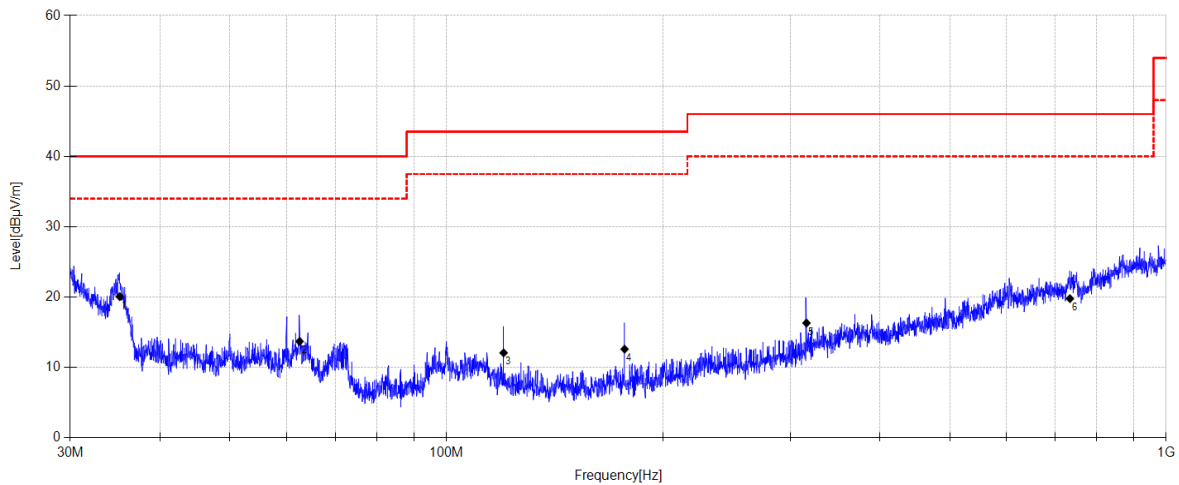


Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	35.127	35.74	11.64	3.79	20.07	40.00	19.93	QP	Horizontal
2	62.466	28.22	12.61	3.97	13.70	40.00	26.30	QP	Horizontal
3	119.991	28.86	10.00	4.33	12.07	43.50	31.43	QP	Horizontal
4	176.701	29.42	9.73	4.63	12.60	43.50	30.90	QP	Horizontal
5	316.218	28.82	13.62	5.28	16.31	46.00	29.69	QP	Horizontal
6	734.537	24.35	19.99	6.78	19.78	46.00	26.22	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-01-08 **Tested By:** Zhong Nan
EUT: WIRELESS HEADPHONES **Model Number:** HA-A23T
Test Mode: BLE 2M Tx mode **Power Supply:** Battery
Condition: Temp:21.3°C;Humi:47.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24121821-1E\FCC BELOW1G\20250108-211414_V
Memo: Sample Number: S24121821-004 Right side

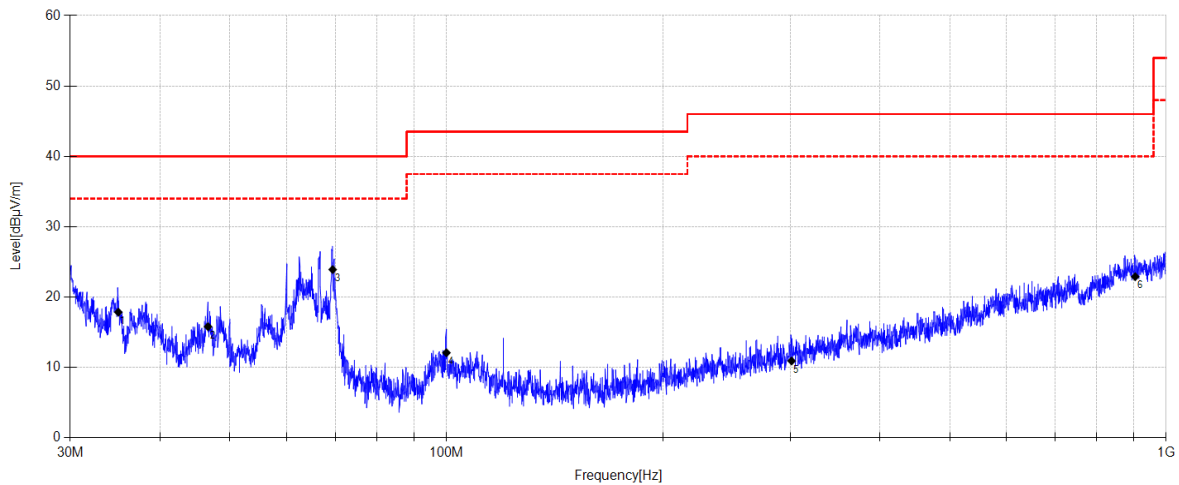

Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	34.979	33.56	11.60	3.79	17.85	40.00	22.15	QP	Vertical
2	46.597	30.32	12.72	3.86	15.80	40.00	24.20	QP	Vertical
3	69.443	40.8	10.19	4.02	23.91	40.00	16.09	QP	Vertical
4	99.924	27.42	11.55	4.22	12.09	43.50	31.41	QP	Vertical
5	301.495	23.39	13.70	5.23	10.92	46.00	35.08	QP	Vertical
6	905.230	24.35	21.88	7.21	22.90	46.00	23.10	QP	Vertical

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-12-26

Tested By:

Zhong Nan

EUT:

WIRELESS HEADPHONES

Model Number:

HA-A23T

Test Mode:

TX BLE 1M 2402MHz

Power Supply:

Battery

Condition:

Temp:21.3°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24121821-1E\FCC ABOVE1G\21

Memo:

Sample Number: S24121821-004 Left side

Test Graph

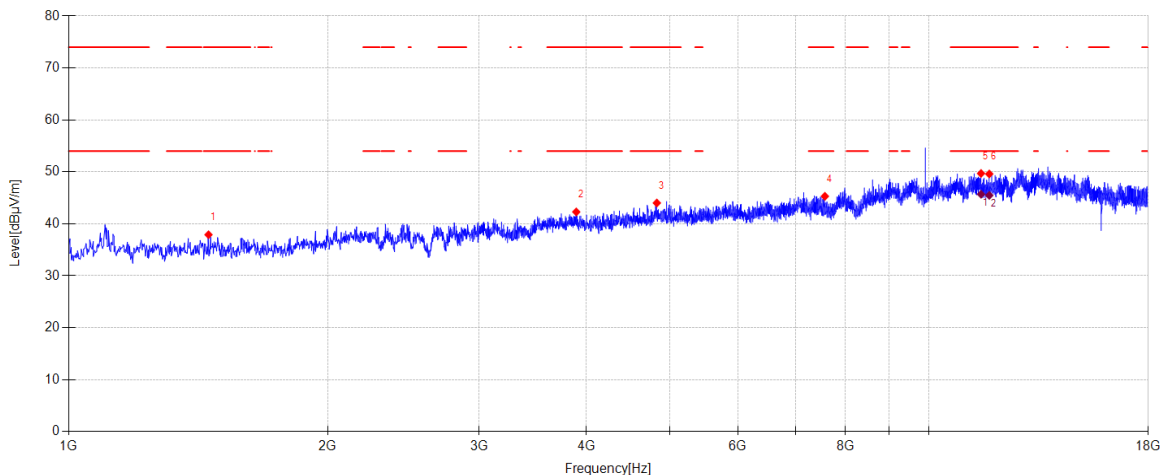

Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1453.900	46.32	25.32	3.65	-37.39	37.90	74.00	36.10	PK	Horizontal
2	3891.700	45.72	31.15	5.07	-39.65	42.29	74.00	31.71	PK	Horizontal
3	4828.400	44.83	33.24	5.55	-39.61	44.01	74.00	29.99	PK	Horizontal
4	7572.200	42.61	36.44	6.74	-40.49	45.30	74.00	28.70	PK	Horizontal
5	11502.600	41.56	39.19	8.45	-39.50	49.70	74.00	24.30	PK	Horizontal
6	11759.300	41.81	38.94	8.61	-39.76	49.60	74.00	24.40	PK	Horizontal

Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	11502.600	37.55	39.19	8.45	45.69	54.00	8.31	AV	Horizontal	
2	11759.300	37.68	38.94	8.61	45.47	54.00	8.53	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2024-12-26 Tested By: Zhong Nan

EUT: WIRELESS HEADPHONES Model Number: HA-A23T


Test Mode: TX BLE 1M 2402MHz Power Supply: Battery

Condition: Temp:21.3°C;Humi:47.4% Test Site: DDT 3# Chamber

File Path: d:\ts\2024 report data\Q24121821-1E\FCC ABOVE1G\22

Memo: Sample Number: S24121821-004 Left side

Test Graph

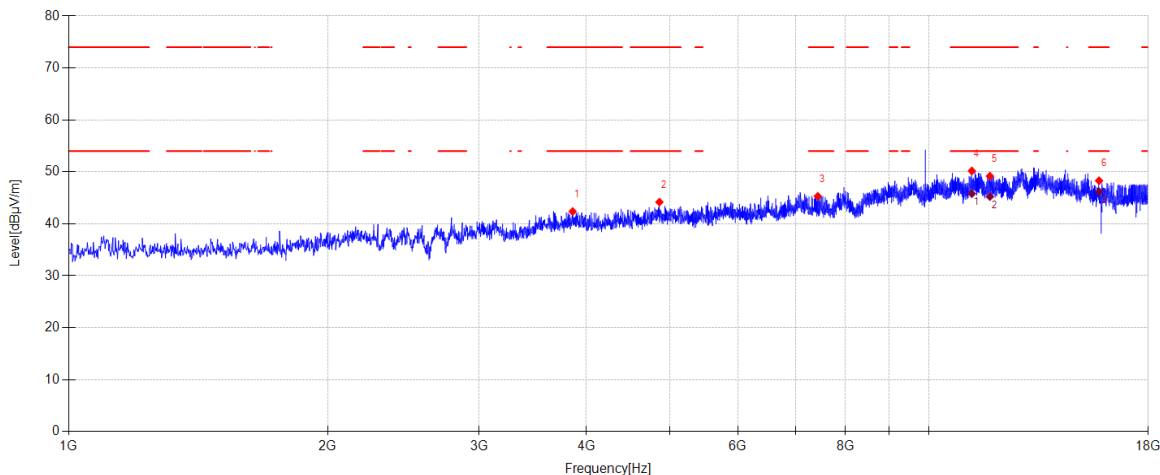

Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3854.300	46.02	30.93	5.07	-39.65	42.37	74.00	31.63	PK	Vertical
2	4862.400	44.62	33.60	5.57	-39.61	44.18	74.00	29.82	PK	Vertical
3	7429.400	42.60	36.64	6.67	-40.61	45.30	74.00	28.70	PK	Vertical
4	11223.800	41.93	39.20	8.27	-39.22	50.18	74.00	23.82	PK	Vertical
5	11779.700	41.42	38.92	8.62	-39.78	49.18	74.00	24.82	PK	Vertical
6	15776.400	39.35	38.35	10.00	-39.40	48.30	74.00	25.70	PK	Vertical

Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	11223.800	37.56	39.20	8.27	45.81	54.00	8.19	AV	Vertical
2	11779.700	37.48	38.92	8.62	45.24	54.00	8.76	AV	Vertical
3	15776.400	37.26	38.35	10.00	46.21	54.00	7.79	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2024-12-26 Tested By: Zhong Nan
EUT: WIRELESS HEADPHONES Model Number: HA-A23T
Test Mode: TX BLE 1M 2440MHz Power Supply: Battery
Condition: Temp:21.3°C;Humi:47.4% Test Site: DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24121821-1E\FCC ABOVE1G\25
Memo: Sample Number: S24121821-004 Left side

Test Graph

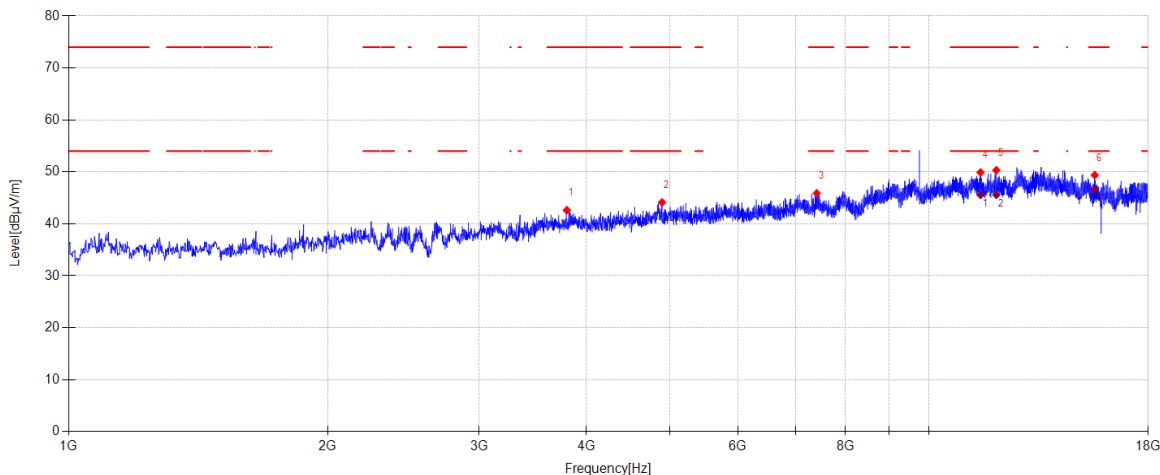

Data List										
NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	3794.800	46.49	30.68	5.08	-39.63	42.62	74.00	31.38	PK	Horizontal
2	4896.400	45.08	33.06	5.59	-39.61	44.12	74.00	29.88	PK	Horizontal
3	7409.000	43.16	36.68	6.66	-40.63	45.87	74.00	28.13	PK	Horizontal
4	11487.300	41.74	39.21	8.44	-39.49	49.90	74.00	24.10	PK	Horizontal
5	11983.700	42.39	39.15	8.75	-39.98	50.31	74.00	23.69	PK	Horizontal
6	15597.900	40.29	38.60	9.88	-39.40	49.37	74.00	24.63	PK	Horizontal


Data List										
NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity	
1	11487.300	37.41	39.21	8.44	45.57	54.00	8.43	AV	Horizontal	
2	11983.700	37.66	39.15	8.75	45.58	54.00	8.42	AV	Horizontal	
3	15597.900	37.59	38.60	9.88	46.67	54.00	7.33	AV	Horizontal	

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2024-12-26 Tested By: Zhong Nan
EUT: WIRELESS HEADPHONES Model Number: HA-A23T
Test Mode: TX BLE 1M 2440MHz Power Supply: Battery
Condition: Temp:21.3°C;Humi:47.4% Test Site: DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24121821-1E\FCC ABOVE1G\26
Memo: Sample Number: S24121821-004 Left side

Test Graph

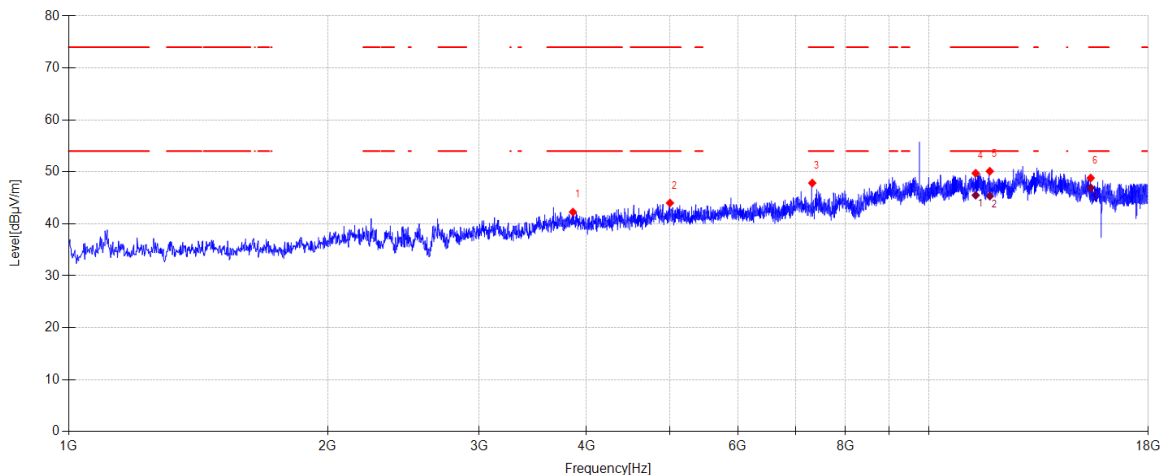

Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3857.700	45.89	30.95	5.07	-39.65	42.26	74.00	31.74	PK	Vertical
2	5001.800	44.76	33.20	5.65	-39.60	44.01	74.00	29.99	PK	Vertical
3	7320.600	45.09	36.86	6.61	-40.71	47.85	74.00	26.15	PK	Vertical
4	11339.400	41.49	39.24	8.34	-39.34	49.73	74.00	24.27	PK	Vertical
5	11776.300	42.36	38.92	8.62	-39.78	50.12	74.00	23.88	PK	Vertical
6	15429.600	39.51	38.94	9.77	-39.40	48.82	74.00	25.18	PK	Vertical


Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	11339.400	37.26	39.24	8.34	45.50	54.00	8.50	AV	Vertical	
2	11776.300	37.58	38.92	8.62	45.34	54.00	8.66	AV	Vertical	
3	15429.600	37.61	38.94	9.77	46.92	54.00	7.08	AV	Vertical	

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2024-12-26 Tested By: Zhong Nan
EUT: WIRELESS HEADPHONES Model Number: HA-A23T
Test Mode: TX BLE 1M 2480MHz Power Supply: Battery
Condition: Temp:21.3°C;Humi:47.4% Test Site: DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24121821-1E\FCC ABOVE1G\27
Memo: Sample Number: S24121821-004 Left side

Test Graph

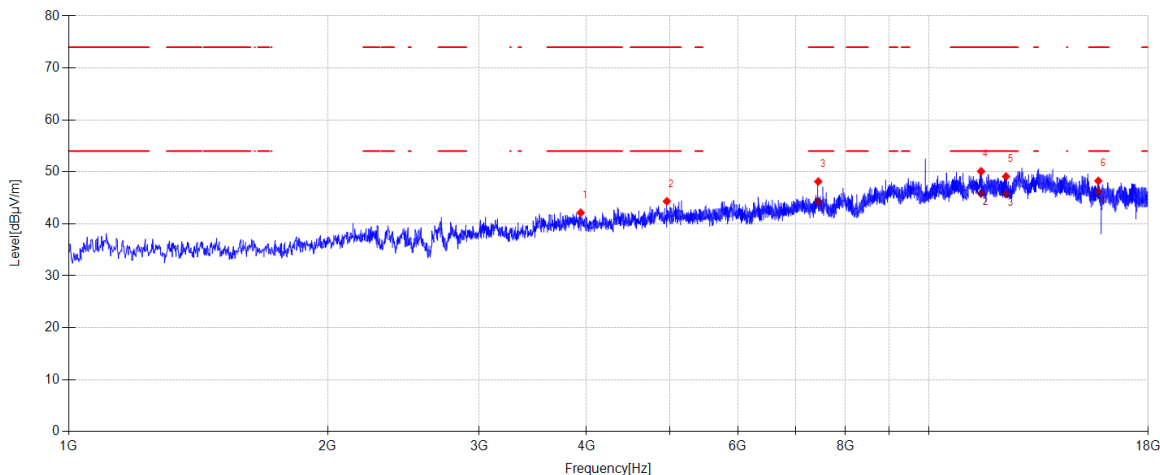

Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3937.600	45.62	31.12	5.06	-39.67	42.13	74.00	31.87	PK	Horizontal
2	4959.300	45.18	33.12	5.63	-39.60	44.33	74.00	29.67	PK	Horizontal
3	7439.600	45.44	36.62	6.67	-40.60	48.13	74.00	25.87	PK	Horizontal
4	11502.600	41.96	39.19	8.45	-39.50	50.10	74.00	23.90	PK	Horizontal
5	12298.200	40.84	39.30	8.91	-39.94	49.11	74.00	24.89	PK	Horizontal
6	15745.800	39.27	38.41	9.98	-39.40	48.26	74.00	25.74	PK	Horizontal

Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	7439.600	41.59	36.62	6.67	44.28	54.00	9.72	AV	Horizontal
2	11502.600	37.69	39.19	8.45	45.83	54.00	8.17	AV	Horizontal
3	12298.200	37.46	39.30	8.91	45.73	54.00	8.27	AV	Horizontal
4	15745.800	37.23	38.41	9.98	46.22	54.00	7.78	AV	Horizontal

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-12-26

Tested By:

Zhong Nan

EUT:

WIRELESS HEADPHONES

Model Number:

HA-A23T

Test Mode:

TX BLE 1M 2480MHz

Power Supply:

Battery

Condition:

Temp:21.3°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24121821-1E\FCC ABOVE1G\28

Memo:

Sample Number: S24121821-004 Left side

Test Graph

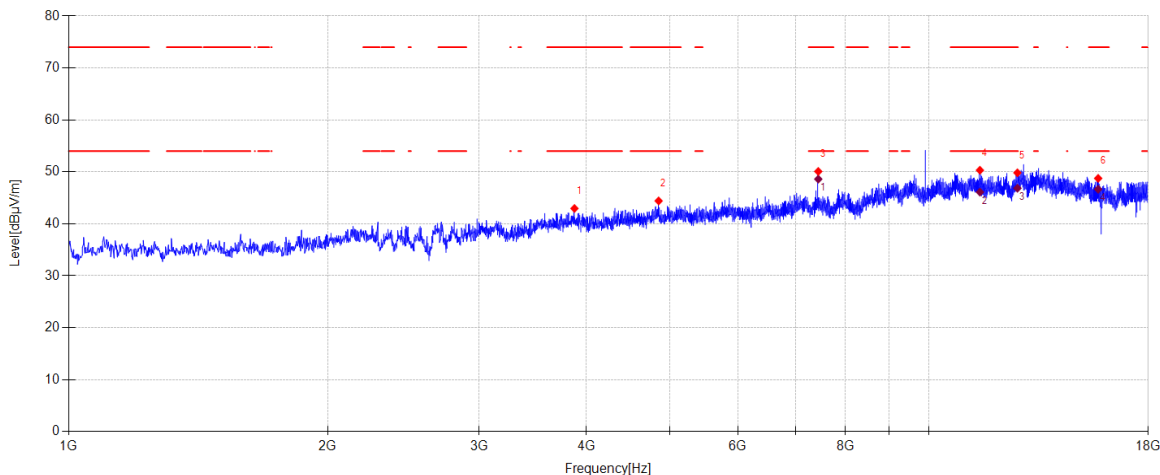

Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3873.000	46.50	31.04	5.07	-39.65	42.96	74.00	31.04	PK	Vertical
2	4852.200	44.70	33.76	5.56	-39.61	44.41	74.00	29.59	PK	Vertical
3	7439.600	47.39	36.62	6.67	-40.60	50.08	74.00	23.92	PK	Vertical
4	11468.600	42.13	39.23	8.43	-39.47	50.32	74.00	23.68	PK	Vertical
5	12679.000	41.01	39.56	9.11	-39.86	49.82	74.00	24.18	PK	Vertical
6	15740.700	39.75	38.42	9.98	-39.40	48.75	74.00	25.25	PK	Vertical

Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	7439.600	45.92	36.62	6.67	48.61	54.00	5.39	AV	Vertical
2	11468.600	37.91	39.23	8.43	46.10	54.00	7.90	AV	Vertical
3	12679.000	38.04	39.56	9.11	46.85	54.00	7.15	AV	Vertical
4	15740.700	37.66	38.42	9.98	46.66	54.00	7.34	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2024-12-26 Tested By: Zhong Nan
EUT: WIRELESS HEADPHONES Model Number: HA-A23T
Test Mode: TX BLE 2M 2404MHz Power Supply: Battery
Condition: Temp:21.3°C;Humi:47.4% Test Site: DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24121821-1E\FCC ABOVE1G\33
Memo: Sample Number: S24121821-004 Left side

Test Graph

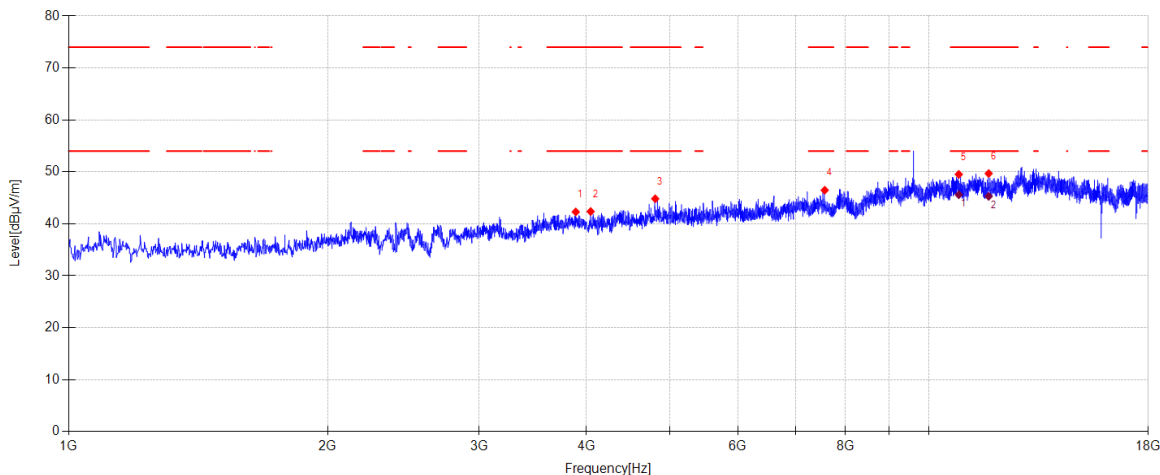

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3886.600	45.75	31.12	5.07	-39.65	42.29	74.00	31.71	PK	Horizontal
2	4044.700	45.98	30.99	5.08	-39.68	42.37	74.00	31.63	PK	Horizontal
3	4808.000	46.21	32.71	5.53	-39.62	44.83	74.00	29.17	PK	Horizontal
4	7568.800	43.78	36.44	6.74	-40.49	46.47	74.00	27.53	PK	Horizontal
5	10837.900	41.21	39.36	8.05	-39.10	49.52	74.00	24.48	PK	Horizontal
6	11740.600	41.86	38.96	8.60	-39.74	49.68	74.00	24.32	PK	Horizontal


Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	10837.900	37.29	39.36	8.05	45.60	54.00	8.40	AV	Horizontal
2	11740.600	37.47	38.96	8.60	45.29	54.00	8.71	AV	Horizontal

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2024-12-26 Tested By: Zhong Nan
EUT: WIRELESS HEADPHONES Model Number: HA-A23T
Test Mode: TX BLE 2M 2404MHz Power Supply: Battery
Condition: Temp:21.3°C;Humi:47.4% Test Site: DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24121821-1E\FCC ABOVE1G\34
Memo: Sample Number: S24121821-004 Left side

Test Graph

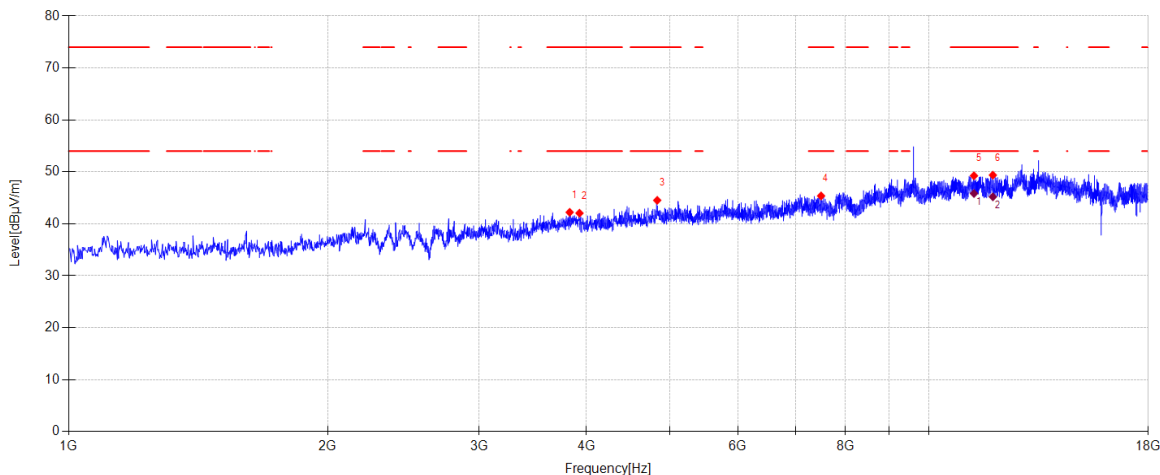

Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3823.700	45.99	30.79	5.08	-39.64	42.22	74.00	31.78	PK	Vertical
2	3925.700	45.50	31.15	5.06	-39.66	42.05	74.00	31.95	PK	Vertical
3	4833.500	45.21	33.37	5.55	-39.61	44.52	74.00	29.48	PK	Vertical
4	7495.700	42.71	36.51	6.70	-40.55	45.37	74.00	28.63	PK	Vertical
5	11286.700	41.03	39.20	8.31	-39.29	49.25	74.00	24.75	PK	Vertical
6	11873.200	41.66	38.90	8.68	-39.87	49.37	74.00	24.63	PK	Vertical


Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	11286.700	37.62	39.20	8.31	45.84	54.00	8.16	AV	Vertical	
2	11873.200	37.48	38.90	8.68	45.19	54.00	8.81	AV	Vertical	

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2024-12-26 Tested By: Zhong Nan
EUT: WIRELESS HEADPHONES Model Number: HA-A23T
Test Mode: TX BLE 2M 2440MHz Power Supply: Battery
Condition: Temp:21.3°C;Humi:47.4% Test Site: DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24121821-1E\FCC ABOVE1G\31
Memo: Sample Number: S24121821-004 Left side

Test Graph

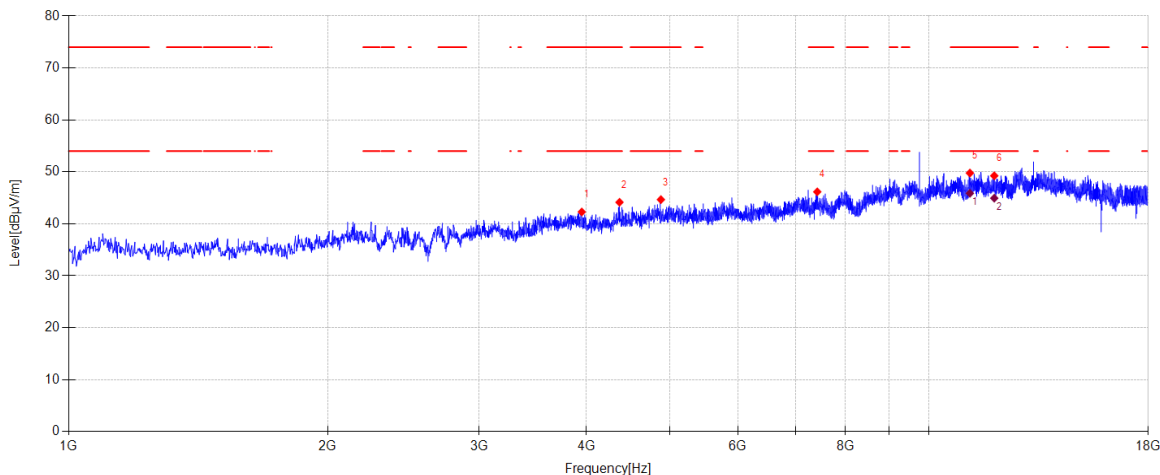

Data List										
NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	3949.500	45.80	31.10	5.06	-39.67	42.29	74.00	31.71	PK	Horizontal
2	4369.400	46.89	31.64	5.27	-39.65	44.15	74.00	29.85	PK	Horizontal
3	4881.100	45.39	33.30	5.58	-39.61	44.66	74.00	29.34	PK	Horizontal
4	7419.200	43.46	36.66	6.66	-40.62	46.16	74.00	27.84	PK	Horizontal
5	11164.300	41.46	39.24	8.23	-39.16	49.77	74.00	24.23	PK	Horizontal
6	11917.400	41.51	38.95	8.71	-39.92	49.25	74.00	24.75	PK	Horizontal


Data List										
NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity	
1	11164.300	37.56	39.24	8.23	45.87	54.00	8.13	AV	Horizontal	
2	11917.400	37.19	38.95	8.71	44.93	54.00	9.07	AV	Horizontal	

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2024-12-26 Tested By: Zhong Nan
EUT: WIRELESS HEADPHONES Model Number: HA-A23T
Test Mode: TX BLE 2M 2440MHz Power Supply: Battery
Condition: Temp:21.3°C;Humi:47.4% Test Site: DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24121821-1E\FCC ABOVE1G\32
Memo: Sample Number: S24121821-004 Left side

Test Graph

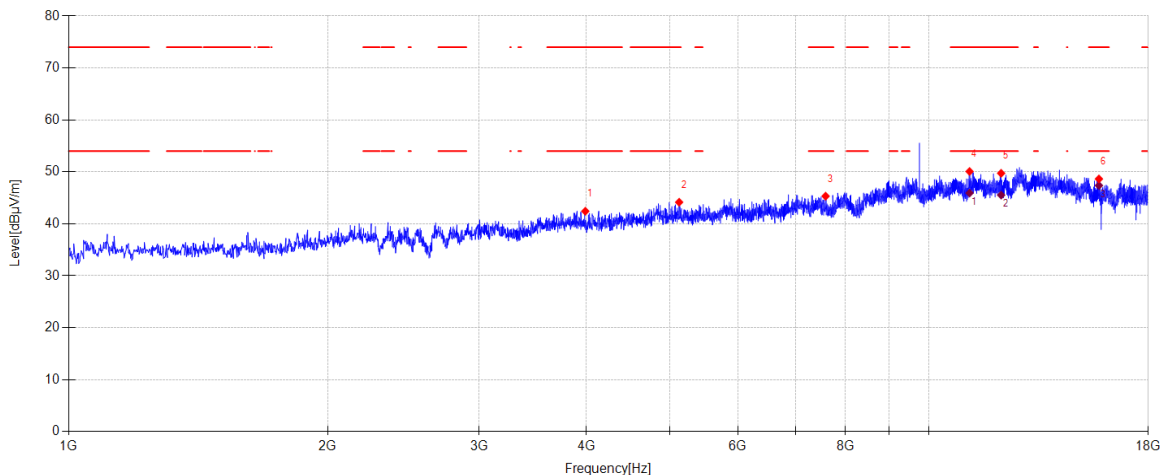

Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3986.900	46.10	30.95	5.05	-39.68	42.42	74.00	31.58	PK	Vertical
2	5125.900	44.64	33.40	5.72	-39.60	44.16	74.00	29.84	PK	Vertical
3	7587.500	42.56	36.48	6.75	-40.47	45.32	74.00	28.68	PK	Vertical
4	11154.100	41.75	39.25	8.23	-39.15	50.08	74.00	23.92	PK	Vertical
5	12138.400	41.57	39.30	8.83	-39.97	49.73	74.00	24.27	PK	Vertical
6	15771.300	39.68	38.36	10.00	-39.40	48.64	74.00	25.36	PK	Vertical

Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	11154.100	37.59	39.25	8.23	45.92	54.00	8.08	AV	Vertical
2	12138.400	37.37	39.30	8.83	45.53	54.00	8.47	AV	Vertical
3	15771.300	38.42	38.36	10.00	47.38	54.00	6.62	AV	Vertical

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-12-26

Tested By:

Zhong Nan

EUT:

WIRELESS HEADPHONES

Model Number:

HA-A23T

Test Mode:

TX BLE 2M 2478MHz

Power Supply:

Battery

Condition:

Temp:21.3°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24121821-1E\FCC ABOVE1G\29

Memo:

Sample Number: S24121821-004 Left side

Test Graph

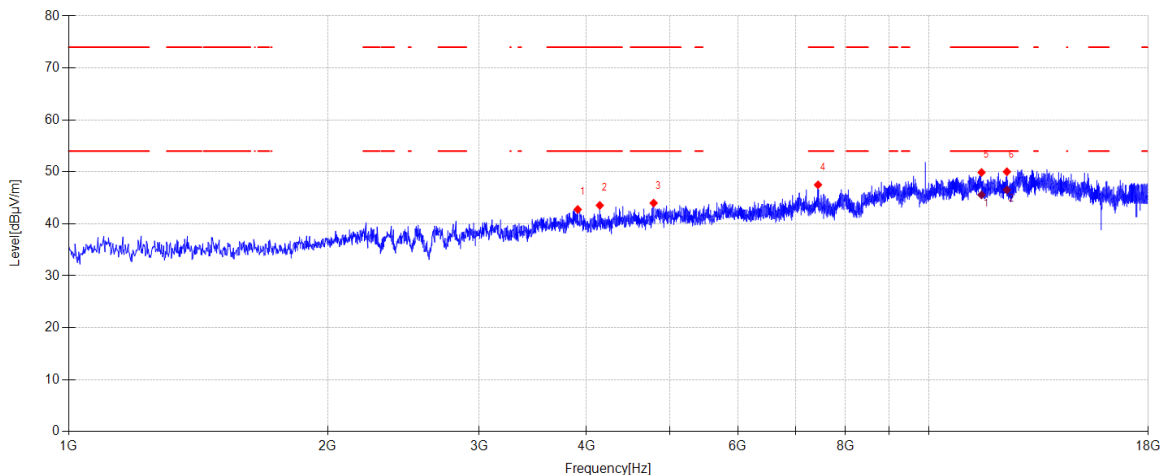

Data List										
NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	3907.000	46.17	31.19	5.07	-39.66	42.77	74.00	31.23	PK	Horizontal
2	4145.000	46.89	31.19	5.14	-39.67	43.55	74.00	30.45	PK	Horizontal
3	4787.600	45.64	32.45	5.52	-39.62	43.99	74.00	30.01	PK	Horizontal
4	7434.500	44.82	36.63	6.67	-40.61	47.51	74.00	26.49	PK	Horizontal
5	11517.900	41.80	39.16	8.46	-39.52	49.90	74.00	24.10	PK	Horizontal
6	12327.100	41.73	39.30	8.93	-39.93	50.03	74.00	23.97	PK	Horizontal

Data List									
NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	11517.900	37.48	39.16	8.46	45.58	54.00	8.42	AV	Horizontal
2	12327.100	38.22	39.30	8.93	46.52	54.00	7.48	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2024-12-26 Tested By: Zhong Nan
EUT: WIRELESS HEADPHONES Model Number: HA-A23T
Test Mode: TX BLE 2M 2478MHz Power Supply: Battery
Condition: Temp:21.3°C;Humi:47.4% Test Site: DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24121821-1E\FCC ABOVE1G\30
Memo: Sample Number: S24121821-004 Left side

Test Graph

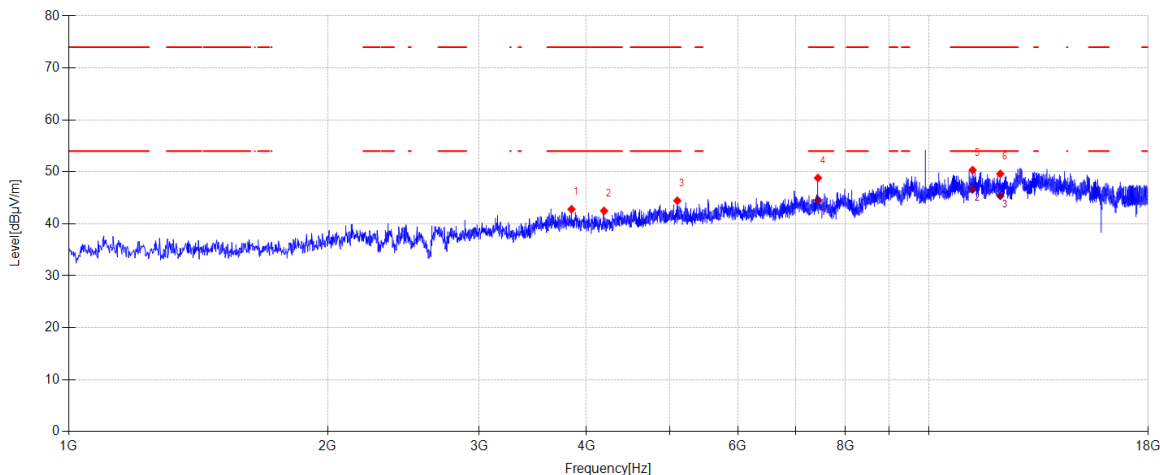

Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3842.400	46.50	30.87	5.08	-39.64	42.81	74.00	31.19	PK	Vertical
2	4192.600	45.78	31.20	5.17	-39.66	42.49	74.00	31.51	PK	Vertical
3	5100.400	44.95	33.40	5.70	-39.60	44.45	74.00	29.55	PK	Vertical
4	7434.500	46.14	36.63	6.67	-40.61	48.83	74.00	25.17	PK	Vertical
5	11245.900	42.11	39.20	8.28	-39.25	50.34	74.00	23.66	PK	Vertical
6	12111.200	41.49	39.30	8.82	-39.98	49.63	74.00	24.37	PK	Vertical

Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	7434.500	41.86	36.63	6.67	44.55	54.00	9.45	AV	Vertical	
2	11245.900	38.41	39.20	8.28	46.64	54.00	7.36	AV	Vertical	
3	12111.200	37.26	39.30	8.82	45.40	54.00	8.60	AV	Vertical	

- Note:
- 1. Level = Reading + Cable loss + Antenna Factor + AMP
 - 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 - 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-12-26

Tested By:

Zhong Nan

EUT:

WIRELESS HEADPHONES

Model Number:

HA-A23T

Test Mode:

TX BLE 1M 2402MHz

Power Supply:

Battery

Condition:

Temp:21.3°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24121821-1E\FCC ABOVE1G\58

Memo:

Sample Number: S24121821-004 Right side

Test Graph

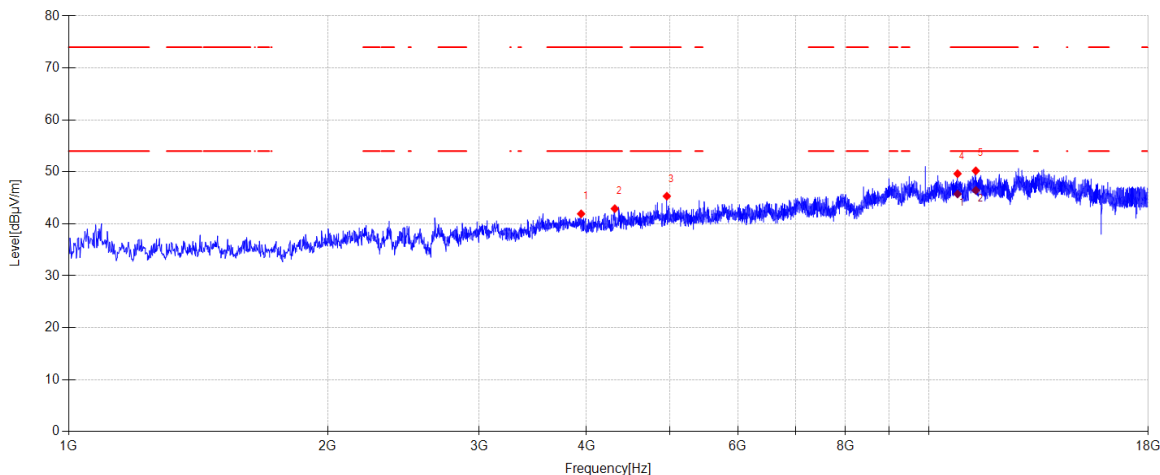

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3942.700	45.42	31.11	5.06	-39.67	41.92	74.00	32.08	PK	Horizontal
2	4315.000	45.72	31.60	5.24	-39.65	42.91	74.00	31.09	PK	Horizontal
3	4959.300	46.17	33.12	5.63	-39.60	45.32	74.00	28.68	PK	Horizontal
4	10802.200	41.33	39.40	8.03	-39.12	49.64	74.00	24.36	PK	Horizontal
5	11342.800	41.95	39.24	8.35	-39.34	50.20	74.00	23.80	PK	Horizontal

Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	10802.200	37.43	39.40	8.03	45.74	54.00	8.26	AV	Horizontal
2	11342.800	38.19	39.24	8.35	46.44	54.00	7.56	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-12-26

Tested By:

Zhong Nan

EUT:

WIRELESS HEADPHONES

Model Number:

HA-A23T

Test Mode:

TX BLE 1M 2402MHz

Power Supply:

Battery

Condition:

Temp:21.3°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24121821-1E\FCC ABOVE1G\59

Memo:

Sample Number: S24121821-004 Right side

Test Graph

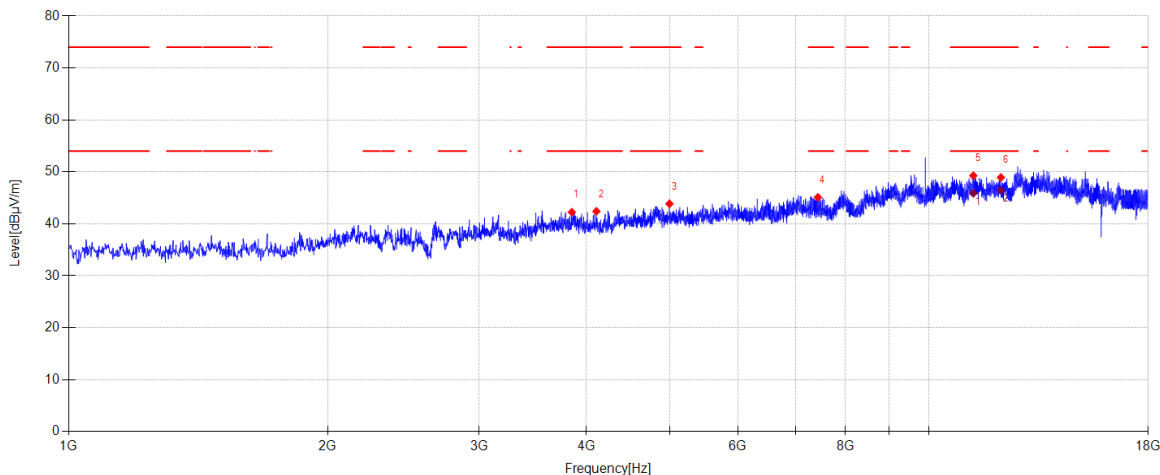

Data List										
NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	3845.800	45.93	30.88	5.08	-39.64	42.25	74.00	31.75	PK	Vertical
2	4107.600	45.84	31.12	5.11	-39.67	42.40	74.00	31.60	PK	Vertical
3	4995.000	44.62	33.19	5.65	-39.60	43.86	74.00	30.14	PK	Vertical
4	7431.100	42.40	36.64	6.67	-40.61	45.10	74.00	28.90	PK	Vertical
5	11268.000	41.04	39.20	8.30	-39.27	49.27	74.00	24.73	PK	Vertical
6	12131.600	40.76	39.30	8.83	-39.97	48.92	74.00	25.08	PK	Vertical

Data List									
NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	11268.000	37.65	39.20	8.30	45.88	54.00	8.12	AV	Vertical
2	12131.600	38.29	39.30	8.83	46.45	54.00	7.55	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-12-26

Tested By:

Zhong Nan

EUT:

WIRELESS HEADPHONES

Model Number:

HA-A23T

Test Mode:

TX BLE 1M 2440MHz

Power Supply:

Battery

Condition:

Temp:21.3°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24121821-1E\FCC ABOVE1G\60

Memo:

Sample Number: S24121821-004 Right side

Test Graph

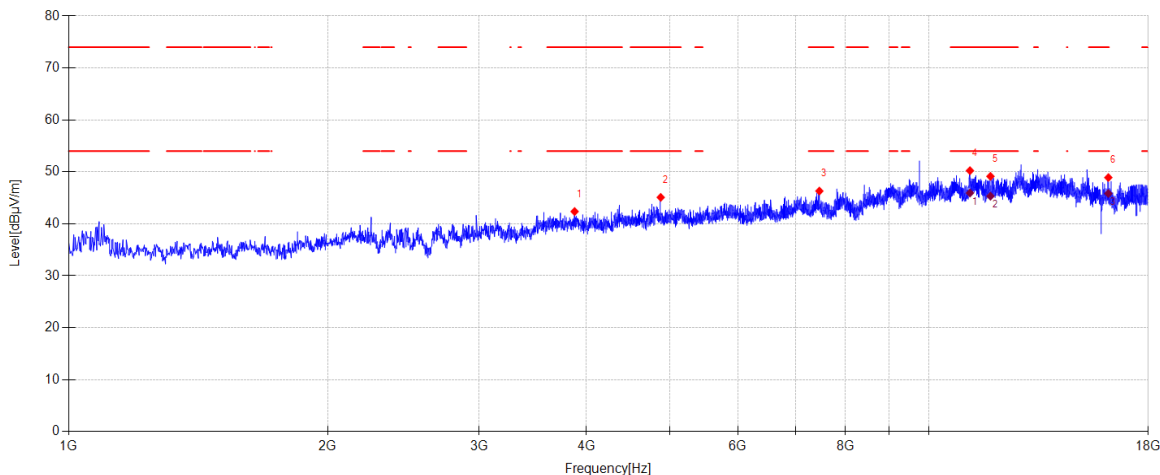

Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3874.700	45.90	31.05	5.07	-39.65	42.37	74.00	31.63	PK	Horizontal
2	4879.400	45.79	33.33	5.58	-39.61	45.09	74.00	28.91	PK	Horizontal
3	7461.700	43.63	36.58	6.68	-40.58	46.31	74.00	27.69	PK	Horizontal
4	11166.000	41.94	39.23	8.23	-39.17	50.23	74.00	23.77	PK	Horizontal
5	11796.700	41.41	38.90	8.63	-39.80	49.14	74.00	24.86	PK	Horizontal
6	16174.200	40.41	37.83	10.19	-39.52	48.91	74.00	25.09	PK	Horizontal

Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	11166.000	37.64	39.23	8.23	45.93	54.00	8.07	AV	Horizontal
2	11796.700	37.59	38.90	8.63	45.32	54.00	8.68	AV	Horizontal
3	16174.200	37.33	37.83	10.19	45.83	54.00	8.17	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-12-26

Tested By:

Zhong Nan

EUT:

WIRELESS HEADPHONES

Model Number:

HA-A23T

Test Mode:

TX BLE 1M 2440MHz

Power Supply:

Battery

Condition:

Temp:21.3°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24121821-1E\FCC ABOVE1G\61

Memo:

Sample Number: S24121821-004 Right side

Test Graph

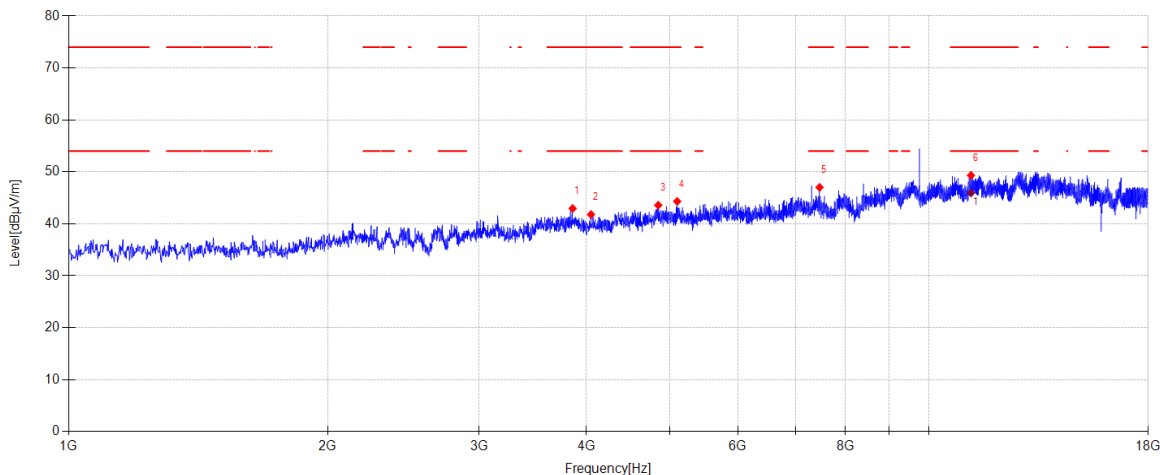

Data List										
NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	3854.300	46.60	30.93	5.07	-39.65	42.95	74.00	31.05	PK	Vertical
2	4048.100	45.39	31.00	5.08	-39.68	41.79	74.00	32.21	PK	Vertical
3	4847.100	43.91	33.72	5.56	-39.61	43.58	74.00	30.42	PK	Vertical
4	5098.700	44.82	33.40	5.70	-39.60	44.32	74.00	29.68	PK	Vertical
5	7465.100	44.33	36.57	6.69	-40.58	47.01	74.00	26.99	PK	Vertical
6	11196.600	41.07	39.20	8.25	-39.20	49.32	74.00	24.68	PK	Vertical

Data List									
NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	11196.600	37.69	39.20	8.25	45.94	54.00	8.06	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-12-26

Tested By:

Zhong Nan

EUT:

WIRELESS HEADPHONES

Model Number:

HA-A23T

Test Mode:

TX BLE 1M 2480MHz

Power Supply:

Battery

Condition:

Temp:21.3°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24121821-1E\FCC ABOVE1G\62

Memo:

Sample Number: S24121821-004 Right side

Test Graph

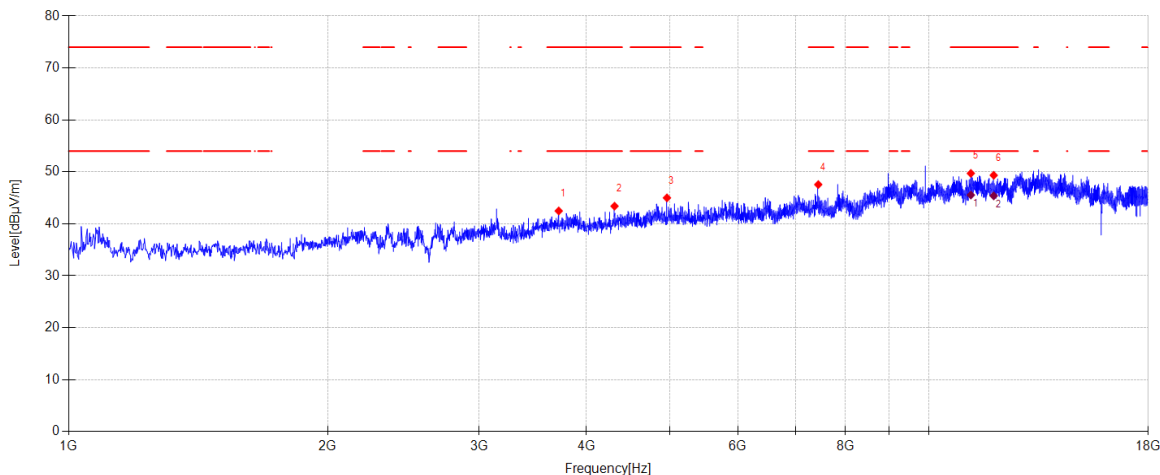

Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3713.200	46.56	30.43	5.10	-39.61	42.48	74.00	31.52	PK	Horizontal
2	4311.600	46.22	31.60	5.24	-39.66	43.40	74.00	30.60	PK	Horizontal
3	4961.000	45.85	33.12	5.63	-39.60	45.00	74.00	29.00	PK	Horizontal
4	7439.600	44.87	36.62	6.67	-40.60	47.56	74.00	26.44	PK	Horizontal
5	11193.200	41.44	39.21	8.25	-39.19	49.71	74.00	24.29	PK	Horizontal
6	11900.400	41.64	38.90	8.70	-39.90	49.34	74.00	24.66	PK	Horizontal

Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	11193.200	37.27	39.21	8.25	45.54	54.00	8.46	AV	Horizontal	
2	11900.400	37.68	38.90	8.70	45.38	54.00	8.62	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-12-26

Tested By:

Zhong Nan

EUT:

WIRELESS HEADPHONES

Model Number:

HA-A23T

Test Mode:

TX BLE 1M 2480MHz

Power Supply:

Battery

Condition:

Temp:21.3°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24121821-1E\FCC ABOVE1G\63

Memo:

Sample Number: S24121821-004 Right side

Test Graph

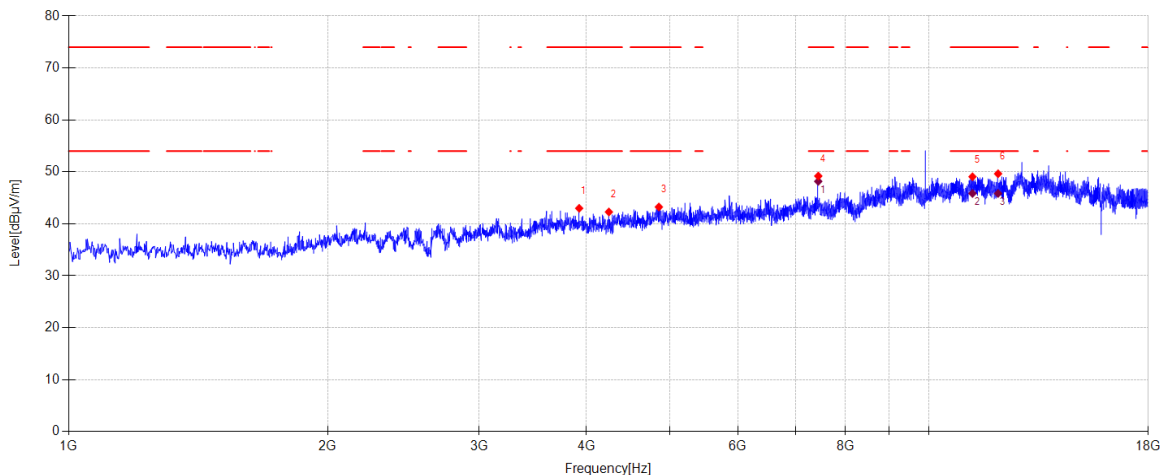

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3922.300	46.43	31.16	5.06	-39.66	42.99	74.00	31.01	PK	Vertical
2	4247.000	45.35	31.39	5.20	-39.66	42.28	74.00	31.72	PK	Vertical
3	4855.600	43.58	33.71	5.56	-39.61	43.24	74.00	30.76	PK	Vertical
4	7439.600	46.51	36.62	6.67	-40.60	49.20	74.00	24.80	PK	Vertical
5	11242.500	40.82	39.20	8.28	-39.24	49.06	74.00	24.94	PK	Vertical
6	12039.800	41.61	39.24	8.78	-39.99	49.64	74.00	24.36	PK	Vertical

Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	7439.600	45.48	36.62	6.67	48.17	54.00	5.83	AV	Vertical
2	11242.500	37.61	39.20	8.28	45.85	54.00	8.15	AV	Vertical
3	12039.800	37.81	39.24	8.78	45.84	54.00	8.16	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-12-26

Tested By:

Zhong Nan

EUT:

WIRELESS HEADPHONES

Model Number:

HA-A23T

Test Mode:

TX BLE 2M 2404MHz

Power Supply:

Battery

Condition:

Temp:21.3°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24121821-1E\FCC ABOVE1G\68

Memo:

Sample Number: S24121821-004 Right side

Test Graph

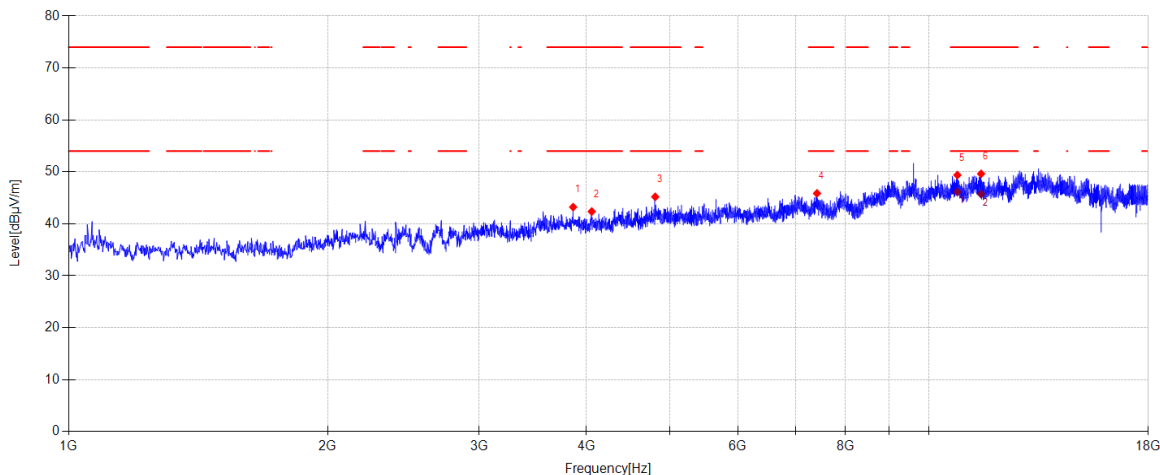

Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3859.400	46.84	30.96	5.07	-39.65	43.22	74.00	30.78	PK	Horizontal
2	4056.600	45.96	31.01	5.08	-39.68	42.37	74.00	31.63	PK	Horizontal
3	4808.000	46.57	32.71	5.53	-39.62	45.19	74.00	28.81	PK	Horizontal
4	7414.100	43.16	36.67	6.66	-40.63	45.86	74.00	28.14	PK	Horizontal
5	10797.100	41.07	39.40	8.03	-39.12	49.38	74.00	24.62	PK	Horizontal
6	11504.300	41.49	39.19	8.45	-39.50	49.63	74.00	24.37	PK	Horizontal

Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	10797.100	37.81	39.40	8.03	46.12	54.00	7.88	AV	Horizontal	
2	11504.300	37.59	39.19	8.45	45.73	54.00	8.27	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2024-12-26 Tested By: Zhong Nan
EUT: WIRELESS HEADPHONES Model Number: HA-A23T
Test Mode: TX BLE 2M 2404MHz Power Supply: Battery
Condition: Temp:21.3°C;Humi:47.4% Test Site: DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24121821-1E\FCC ABOVE1G\69
Memo: Sample Number: S24121821-004 Right side

Test Graph

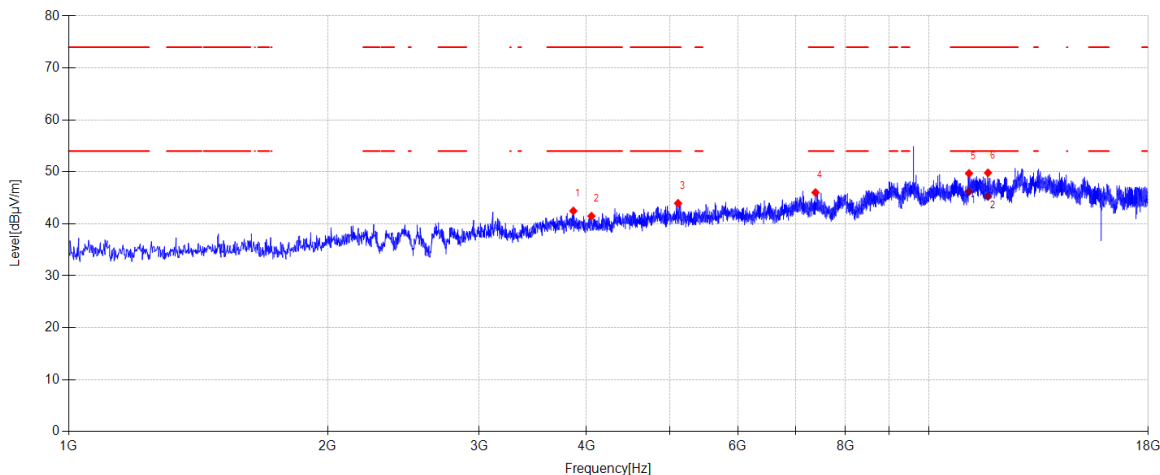

Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3861.100	46.09	30.97	5.07	-39.65	42.48	74.00	31.52	PK	Vertical
2	4053.200	45.07	31.01	5.08	-39.68	41.48	74.00	32.52	PK	Vertical
3	5110.600	44.44	33.40	5.71	-39.60	43.95	74.00	30.05	PK	Vertical
4	7385.200	43.30	36.73	6.64	-40.65	46.02	74.00	27.98	PK	Vertical
5	11138.800	41.36	39.26	8.22	-39.14	49.70	74.00	24.30	PK	Vertical
6	11718.500	41.98	38.98	8.58	-39.72	49.82	74.00	24.18	PK	Vertical


Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	11138.800	37.86	39.26	8.22	46.20	54.00	7.80	AV	Vertical	
2	11718.500	37.43	38.98	8.58	45.27	54.00	8.73	AV	Vertical	

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2024-12-26 Tested By: Zhong Nan
EUT: WIRELESS HEADPHONES Model Number: HA-A23T
Test Mode: TX BLE 2M 2440MHz Power Supply: Battery
Condition: Temp:21.3°C;Humi:47.4% Test Site: DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24121821-1E\FCC ABOVE1G\66
Memo: Sample Number: S24121821-004 Right side

Test Graph

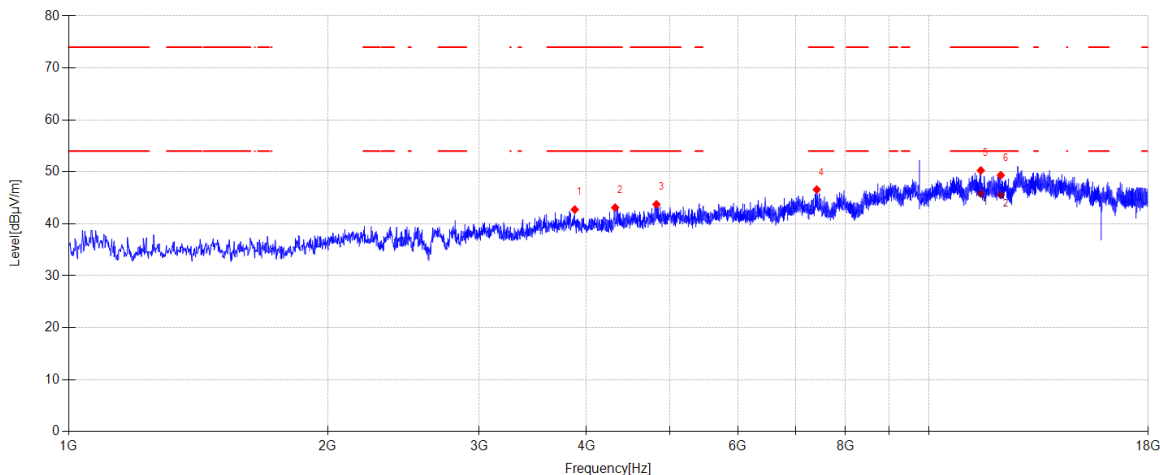

Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3876.400	46.27	31.06	5.07	-39.65	42.75	74.00	31.25	PK	Horizontal
2	4318.400	45.94	31.60	5.24	-39.65	43.13	74.00	30.87	PK	Horizontal
3	4823.300	44.71	33.11	5.54	-39.61	43.75	74.00	30.25	PK	Horizontal
4	7409.000	43.88	36.68	6.66	-40.63	46.59	74.00	27.41	PK	Horizontal
5	11495.800	42.13	39.20	8.44	-39.50	50.27	74.00	23.73	PK	Horizontal
6	12126.500	41.20	39.30	8.82	-39.97	49.35	74.00	24.65	PK	Horizontal


Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	11495.800	37.68	39.20	8.44	45.82	54.00	8.18	AV	Horizontal	
2	12126.500	37.41	39.30	8.82	45.56	54.00	8.44	AV	Horizontal	

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2024-12-26 Tested By: Zhong Nan
EUT: WIRELESS HEADPHONES Model Number: HA-A23T
Test Mode: TX BLE 2M 2440MHz Power Supply: Battery
Condition: Temp:21.3°C;Humi:47.4% Test Site: DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24121821-1E\FCC ABOVE1G\67
Memo: Sample Number: S24121821-004 Right side

Test Graph

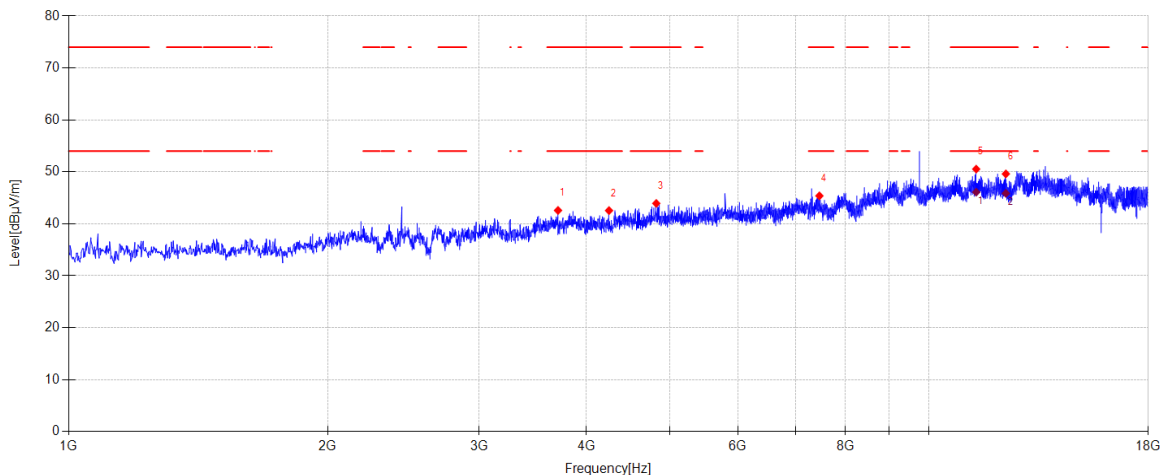

Data List										
NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	3706.400	46.68	30.41	5.10	-39.61	42.58	74.00	31.42	PK	Vertical
2	4248.700	45.62	31.39	5.20	-39.66	42.55	74.00	31.45	PK	Vertical
3	4821.600	44.94	33.06	5.54	-39.61	43.93	74.00	30.07	PK	Vertical
4	7461.700	42.70	36.58	6.68	-40.58	45.38	74.00	28.62	PK	Vertical
5	11354.700	42.29	39.25	8.35	-39.35	50.54	74.00	23.46	PK	Vertical
6	12293.100	41.34	39.30	8.91	-39.94	49.61	74.00	24.39	PK	Vertical


Data List										
NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity	
1	11354.700	37.84	39.25	8.35	46.09	54.00	7.91	AV	Vertical	
2	12293.100	37.59	39.30	8.91	45.86	54.00	8.14	AV	Vertical	

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2024-12-26 Tested By: Zhong Nan
EUT: WIRELESS HEADPHONES Model Number: HA-A23T
Test Mode: TX BLE 2M 2478MHz Power Supply: Battery
Condition: Temp:21.3°C;Humi:47.4% Test Site: DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24121821-1E\FCC ABOVE1G\64
Memo: Sample Number: S24121821-004 Right side

Test Graph

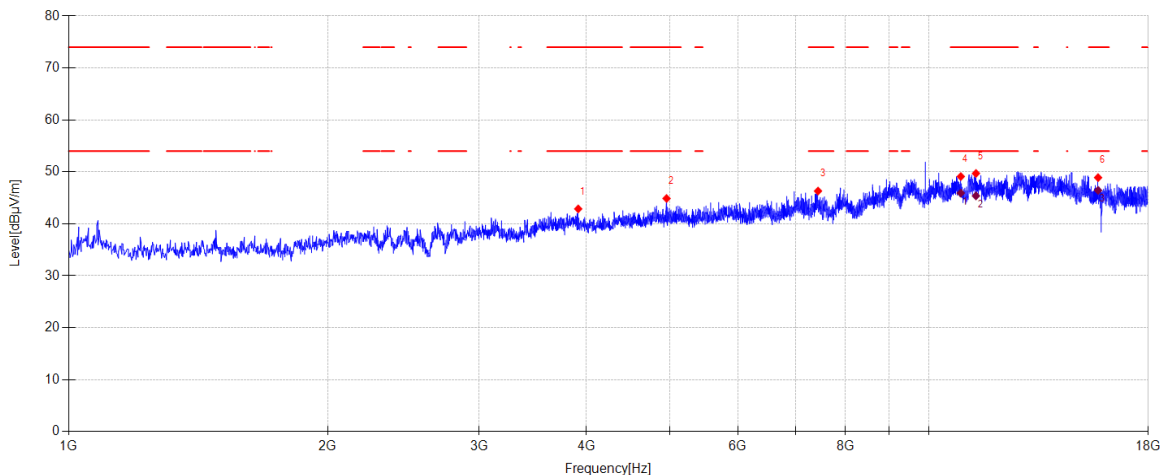

Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3912.100	46.29	31.18	5.06	-39.66	42.87	74.00	31.13	PK	Horizontal
2	4955.900	45.75	33.11	5.62	-39.60	44.88	74.00	29.12	PK	Horizontal
3	7434.500	43.62	36.63	6.67	-40.61	46.31	74.00	27.69	PK	Horizontal
4	10895.700	40.78	39.30	8.08	-39.06	49.10	74.00	24.90	PK	Horizontal
5	11347.900	41.45	39.25	8.35	-39.35	49.70	74.00	24.30	PK	Horizontal
6	15735.600	39.90	38.43	9.97	-39.40	48.90	74.00	25.10	PK	Horizontal


Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	10895.700	37.59	39.30	8.08	45.91	54.00	8.09	AV	Horizontal
2	11347.900	37.13	39.25	8.35	45.38	54.00	8.62	AV	Horizontal
3	15735.600	37.44	38.43	9.97	46.44	54.00	7.56	AV	Horizontal

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2024-12-26 Tested By: Zhong Nan
EUT: WIRELESS HEADPHONES Model Number: HA-A23T
Test Mode: TX BLE 2M 2478MHz Power Supply: Battery
Condition: Temp:21.3°C;Humi:47.4% Test Site: DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24121821-1E\FCC ABOVE1G\65
Memo: Sample Number: S24121821-004 Right side

Test Graph

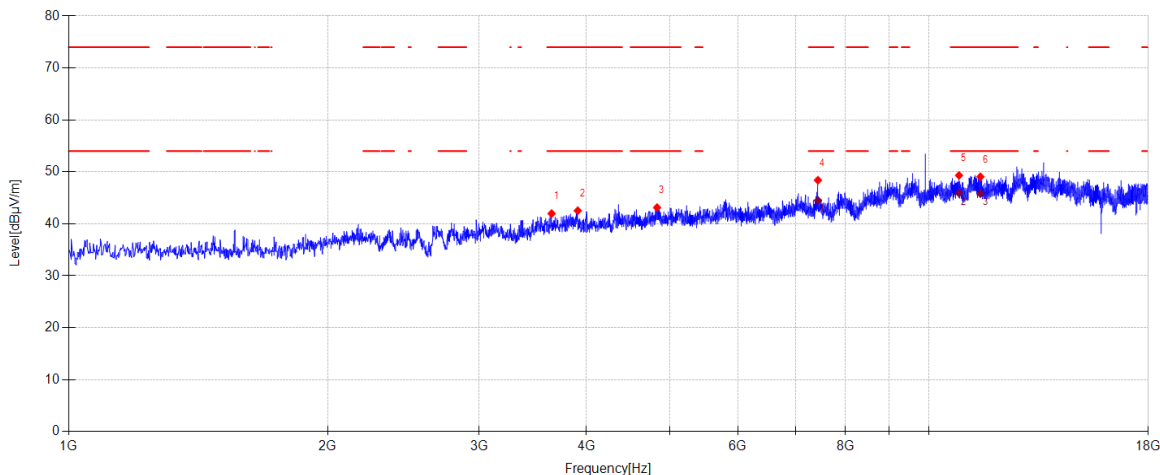

Data List										
NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	3643.500	46.28	30.17	5.11	-39.59	41.97	74.00	32.03	PK	Vertical
2	3907.000	45.93	31.19	5.07	-39.66	42.53	74.00	31.47	PK	Vertical
3	4831.800	43.86	33.33	5.55	-39.61	43.13	74.00	30.87	PK	Vertical
4	7432.800	45.70	36.63	6.67	-40.61	48.39	74.00	25.61	PK	Vertical
5	10844.700	41.00	39.36	8.05	-39.09	49.32	74.00	24.68	PK	Vertical
6	11483.900	40.89	39.22	8.43	-39.48	49.06	74.00	24.94	PK	Vertical

Data List										
NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity	
1	7432.800	41.81	36.63	6.67	44.50	54.00	9.50	AV	Vertical	
2	10844.700	37.59	39.36	8.05	45.91	54.00	8.09	AV	Vertical	
3	11483.900	37.64	39.22	8.43	45.81	54.00	8.19	AV	Vertical	


Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

13.Band Edge Compliance

13.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
Micro-Tronics filters	REBES	BRM50716	DDT-ZC03240	/
RF cable	Yuhu Technology	ZT26S-SMAJ-SMAJ-1M	DDT-ZC02037	2025/03/31
High pass filter	Micro-Tronics	HPM50102	DDT-ZC00561	2025/04/22
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2025/03/31
Pre-amplifier	COM-POWER	PAM-118A	DDT-ZC01293	2025/08/25
EMI TEST RECEIVER	R&S	ESU26	DDT-ZC01909	2025/03/31
Micro-Tronics filters	REBES	BRM50702	DDT-ZC03242	/
Hochgewinn-Hornantenne	SCHWARZBECK	BBHA 9120 D	DDT-ZC02129	2025/09/18
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	DDT-ZC02050	2025/07/11
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2025/04/26
RF Cable	N/A	W13.02 AP1-X2	DDT-ZC04023	2025/03/31
RF cable	Yuhu Technology	JCTB810-NJ-NJ-9M	DDT-ZC02538	2025/03/31
PSA Series Spectrum Analyzer	Agilent	E4447A	DDT-ZC00517	2025/03/31
High Pass filter	Xi'an Xingbo	XBLBQ-GTA67	DDT-ZC02179	2025/04/22
RF Cable	N/A	W24.02 HL-562	DDT-ZC04022	2025/03/31
High pass filter	Micro-Tronics	HPM50108	DDT-ZC00560	2025/04/22
RF cable	Zhongke Junchuang	JCT26S-NJ-NJ-1.5M	DDT-ZC02762	2025/03/31
Active Loop Antenna	Schwarzbeck	FMZB1519	DDT-ZC00524	2025/09/11

13.2. Block diagram of test setup

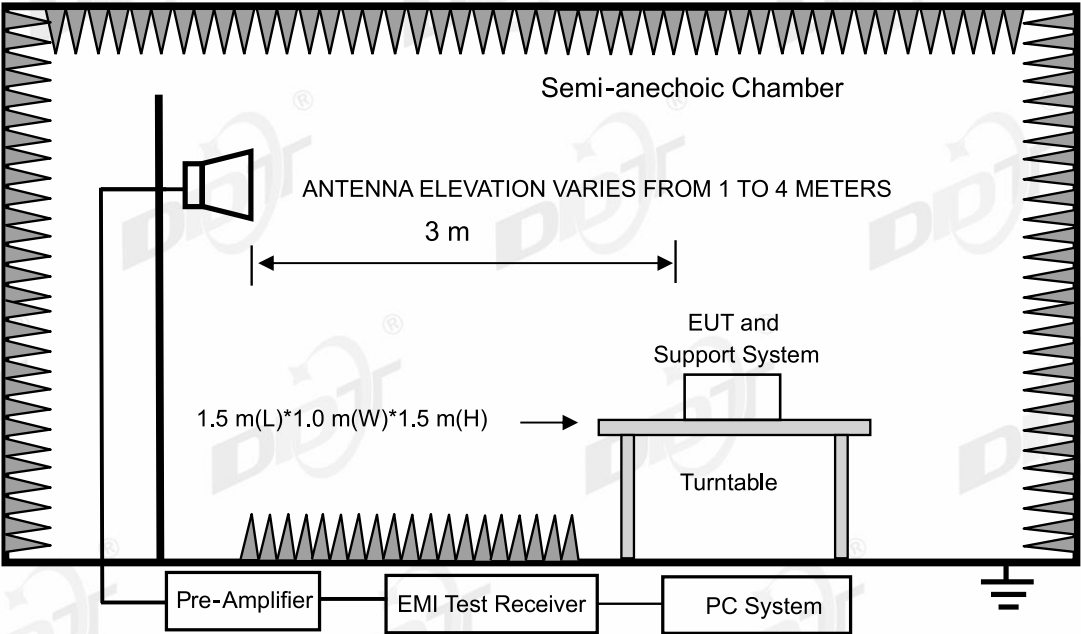

13.3. Limits

All restriction band should comply with 15.209 and RSS-Gen section 8.9 limits, other emission should be at least 20 dB below the fundamental.

13.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
NoteBook	Lenovo	i7-3520M	N/A	00426-OEM-8992662-00400

13.5. Test procedure

Same with Radiated Emission except change investigated frequency range.
Remark: All restriction band have been tested, and only the worst case is shown in report.

13.6. Test result

PASS. (See below detailed test result)

13.7. Test data

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-12-26

Tested By:

Zhong Nan

EUT:

WIRELESS HEADPHONES

Model Number:

HA-A23T

Test Mode:

TX BLE 1M 2402MHz

Power Supply:

Battery

Condition:

Temp:21.3°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24121821-1E\FCC ABOVE1G\38

Memo:

Sample Number: S24121821-004 Left side

Test Graph

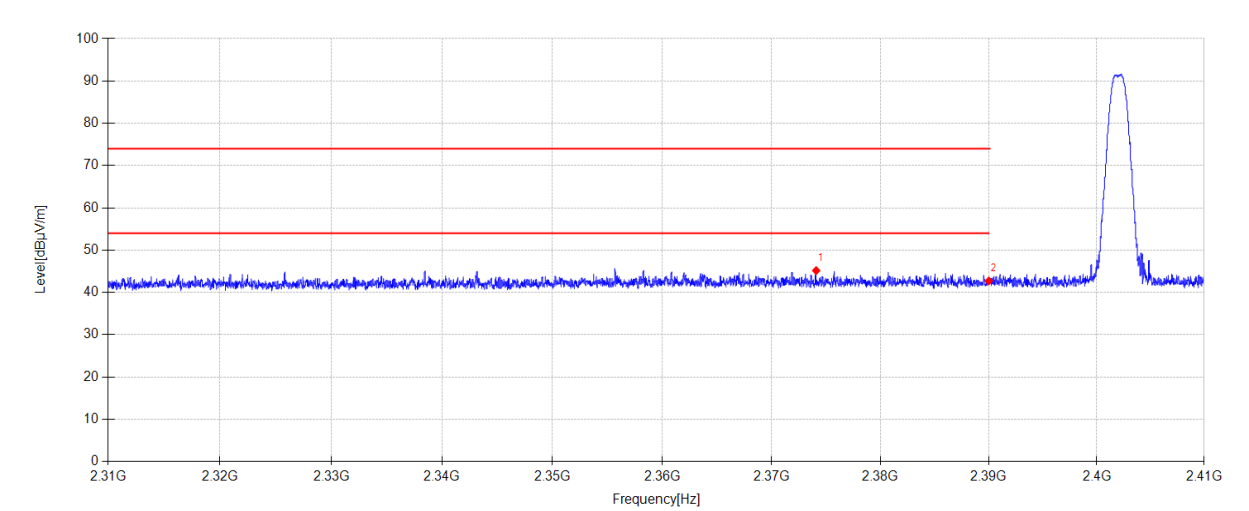

Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2374.100	14.41	27.20	3.56	0.00	45.17	74.00	28.83	PK	Horizontal
2	2390.000	11.89	27.26	3.57	0.00	42.72	74.00	31.28	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-12-26

Tested By:

Zhong Nan

EUT:

WIRELESS HEADPHONES

Model Number:

HA-A23T

Test Mode:

TX BLE 1M 2480MHz

Power Supply:

Battery

Condition:

Temp:21.3°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24121821-1E\FCC ABOVE1G\37

Memo:

Sample Number: S24121821-004 Left side

Test Graph

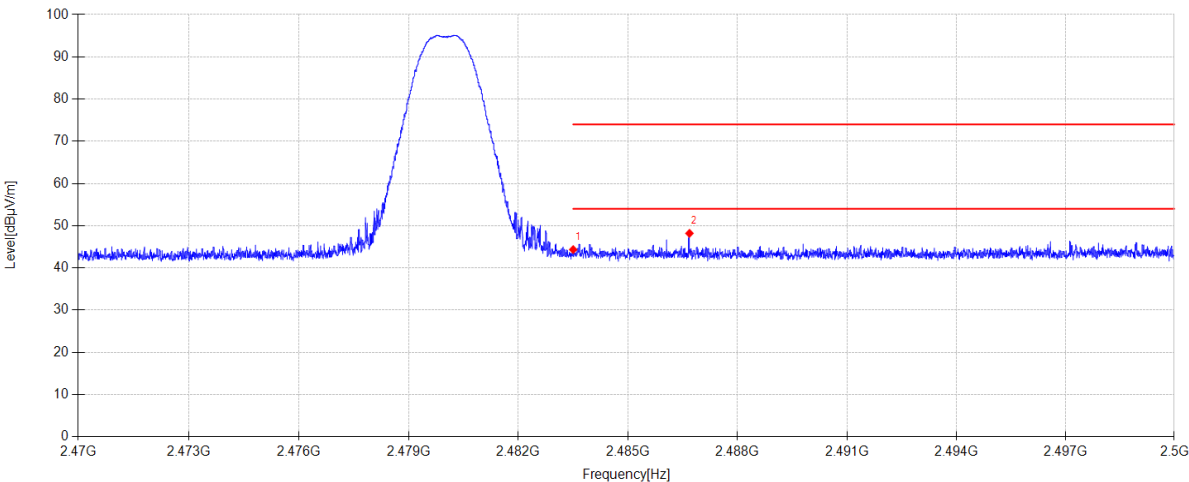

Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	13.20	27.53	3.62	0.00	44.35	74.00	29.65	PK	Horizontal
2	2486.683	17.03	27.55	3.62	0.00	48.20	74.00	25.80	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-12-26

Tested By:

Zhong Nan

EUT:

WIRELESS HEADPHONES

Model Number:

HA-A23T

Test Mode:

TX BLE 2M 2404MHz

Power Supply:

Battery

Condition:

Temp:21.3°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24121821-1E\FCC ABOVE1G\35

Memo:

Sample Number: S24121821-004 Left side

Test Graph

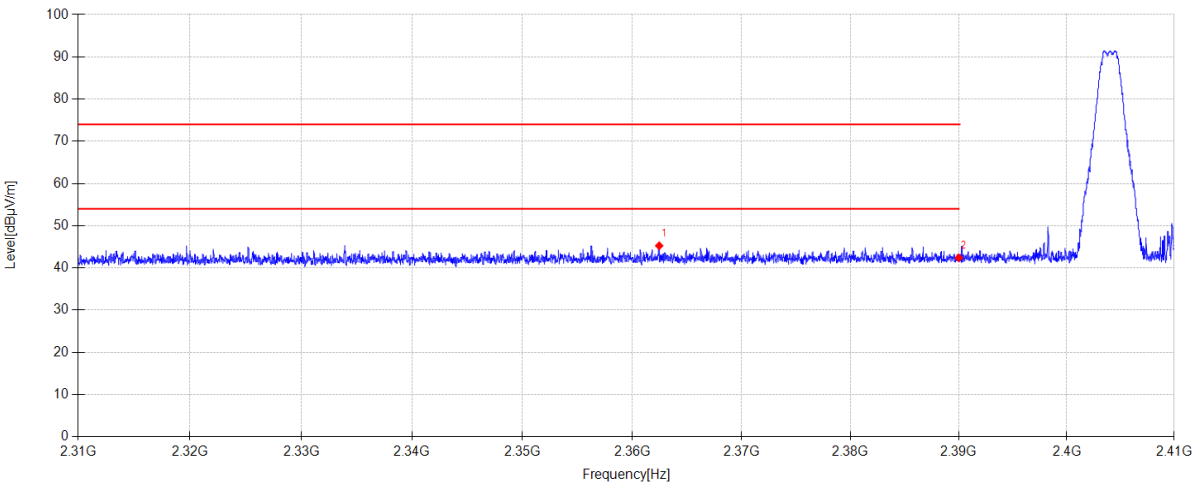

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2362.470	14.56	27.15	3.55	0.00	45.26	74.00	28.74	PK	Horizontal
2	2390.000	11.58	27.26	3.57	0.00	42.41	74.00	31.59	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-12-26

Tested By:

Zhong Nan

EUT:

WIRELESS HEADPHONES

Model Number:

HA-A23T

Test Mode:

TX BLE 2M 2478MHz

Power Supply:

Battery

Condition:

Temp:21.3°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24121821-1E\FCC ABOVE1G\36

Memo:

Sample Number: S24121821-004 Left side

Test Graph

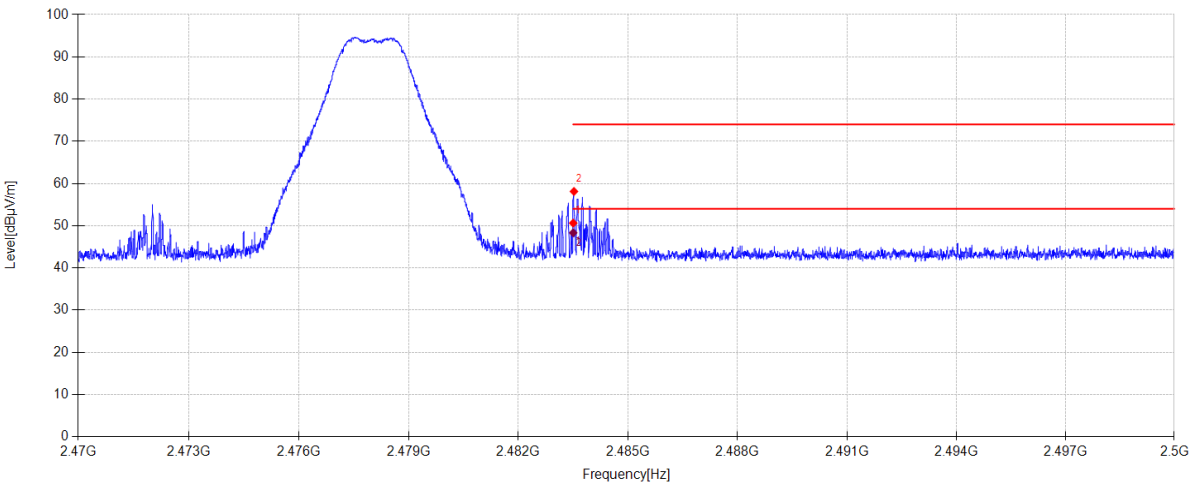

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	19.47	27.53	3.62	0.00	50.62	74.00	23.38	PK	Horizontal
2	2483.521	26.97	27.53	3.62	0.00	58.12	74.00	15.88	PK	Horizontal

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2483.500	17.16	27.53	3.62	48.31	54.00	5.69	AV	Horizontal	
2	2483.521	16.93	27.53	3.62	48.08	54.00	5.92	AV	Horizontal	

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-12-26

Tested By:

Zhong Nan

EUT:

WIRELESS HEADPHONES

Model Number:

HA-A23T

Test Mode:

TX BLE 1M 2402MHz

Power Supply:

Battery

Condition:

Temp:21.3°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24121821-1E\FCC ABOVE1G\73

Memo:

Sample Number:S24121821-003 Power Setting:10

Test Graph

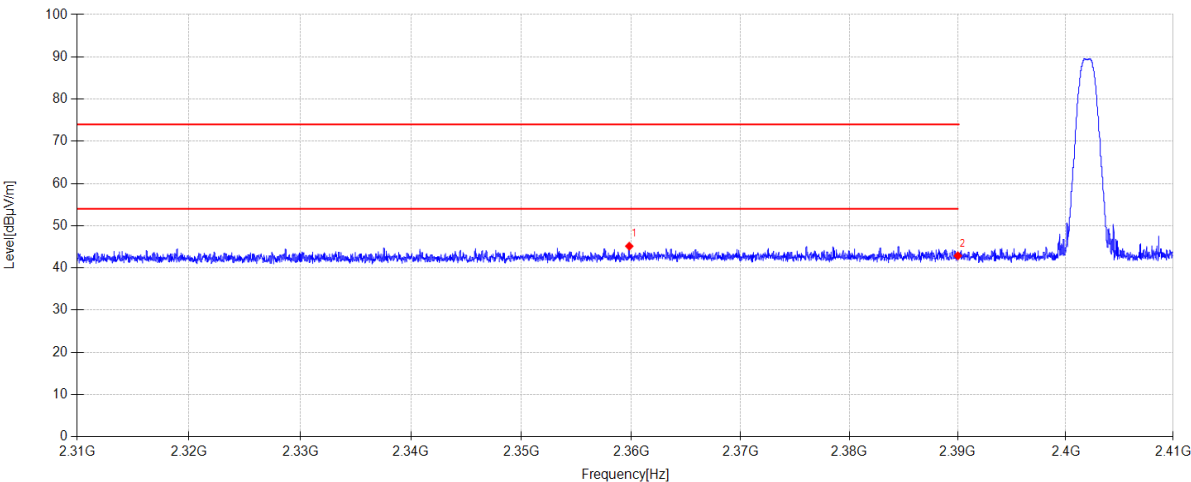

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2359.830	14.46	27.14	3.55	0.00	45.15	74.00	28.85	PK	Horizontal
2	2390.000	12.05	27.26	3.57	0.00	42.88	74.00	31.12	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-12-26

Tested By:

Zhong Nan

EUT:

WIRELESS HEADPHONES

Model Number:

HA-A23T

Test Mode:

TX BLE 1M 2480MHz

Power Supply:

Battery

Condition:

Temp:21.3°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24121821-1E\FCC ABOVE1G\72

Memo:

Sample Number: S24121821-004 Right side

Test Graph

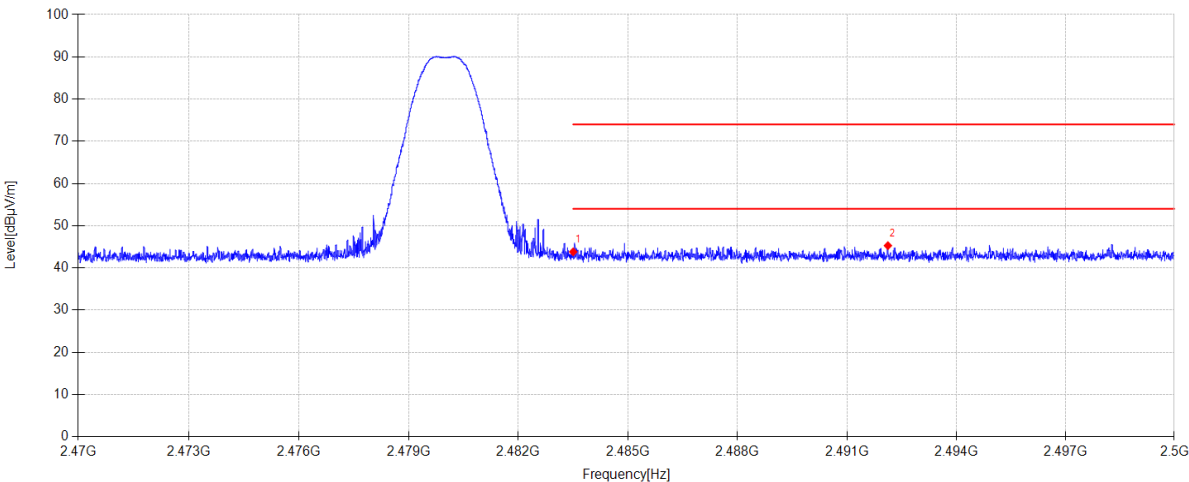

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	12.66	27.53	3.62	0.00	43.81	74.00	30.19	PK	Horizontal
2	2492.125	14.09	27.57	3.63	0.00	45.29	74.00	28.71	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-12-26

Tested By:

Zhong Nan

EUT:

WIRELESS HEADPHONES

Model Number:

HA-A23T

Test Mode:

TX BLE 2M 2404MHz

Power Supply:

Battery

Condition:

Temp:21.3°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24121821-1E\FCC ABOVE1G\70

Memo:

Sample Number: S24121821-004 Right side

Test Graph

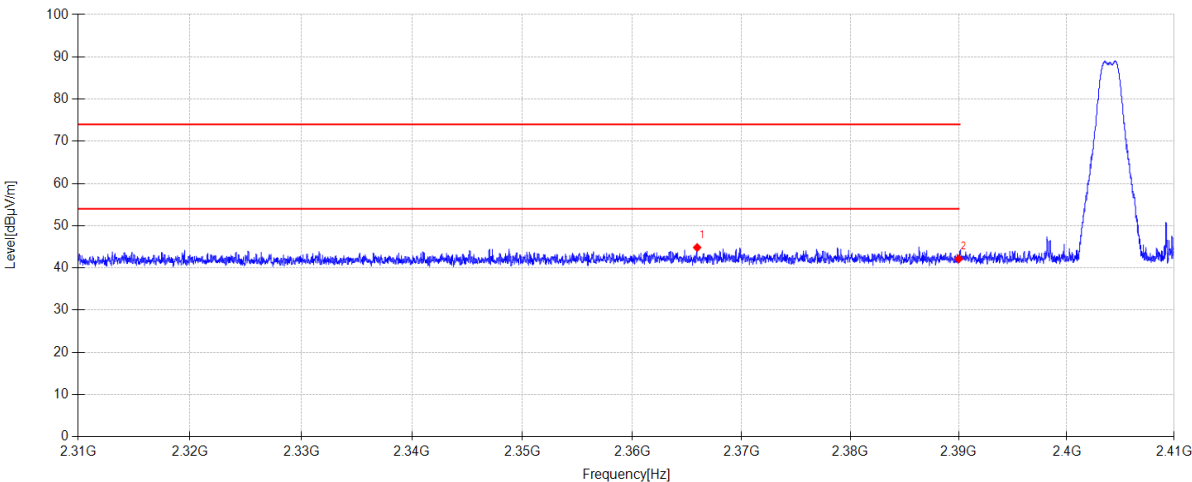

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2365.940	14.13	27.16	3.55	0.00	44.84	74.00	29.16	PK	Horizontal
2	2390.000	11.31	27.26	3.57	0.00	42.14	74.00	31.86	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2024-12-26 Tested By: Zhong Nan
EUT: WIRELESS HEADPHONES Model Number: HA-A23T
Test Mode: TX BLE 2M 2478MHz Power Supply: Battery
Condition: Temp:21.3°C;Humi:47.4% Test Site: DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24121821-1E\FCC ABOVE1G\71
Memo: Sample Number: S24121821-004 Right side

Test Graph

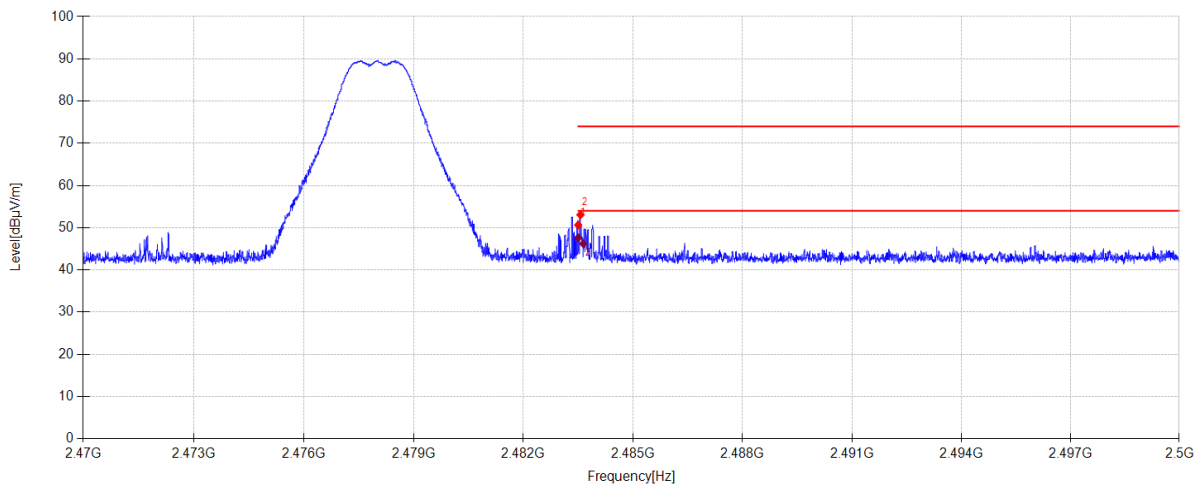

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	19.49	27.53	3.62	0.00	50.64	74.00	23.36	PK	Horizontal
2	2483.563	21.91	27.53	3.62	0.00	53.06	74.00	20.94	PK	Horizontal

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2483.500	16.48	27.53	3.62	47.63	54.00	6.37	AV	Horizontal	
2	2483.641	15.05	27.53	3.62	46.20	54.00	7.80	AV	Horizontal	


- Note:
- 1. Level = Reading + Cable loss + Antenna Factor + AMP
 - 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 - 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

14. Power Line Conducted Emissions

14.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
Conducted Radiated Software	Audix	E3	DDT-ZC00562	/
Copper shaft signal cable	H&S	RG214-5	DDT-ZC01817	2025/03/31
Two Line V-Network	R&S	ENV216	DDT-ZC02058	2025/07/08
Two Line V-Network	R&S	ENV216	DDT-ZC00586	2025/07/08
EMI Test Receiver	R&S	ESCI	DDT-ZC01972	2025/03/31
Pulse Limiter	R&S	KH43101	DDT-ZC00747	2025/04/22

14.2. Block diagram of test setup

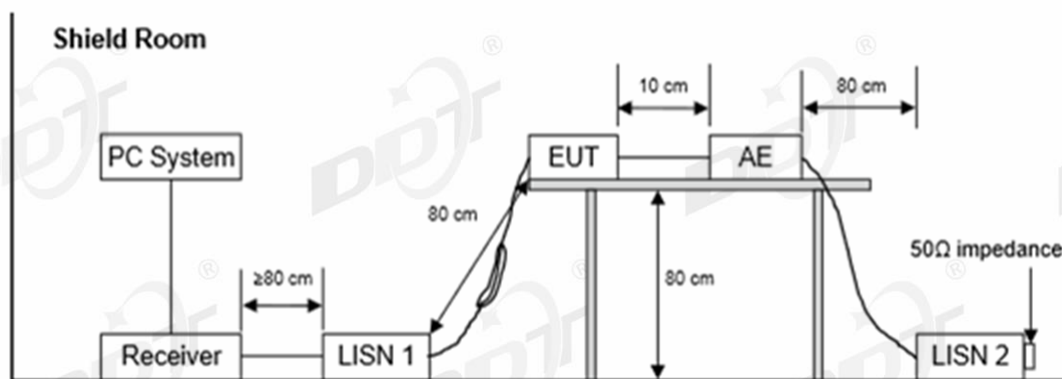

14.3. Limits

Frequency	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150 kHz~500 kHz	66 ~ 56*	56 ~ 46*
500 kHz~5 MHz	56	46
5 MHz~30 MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

14.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
Adapter	HUAWEI	HW-110600C02	Huawei SuperCharge	Input: 100-240V~50/60Hz, 1.8A, Output: 5V/2A or 10V/4A or 11V/6A MAX
Charging case	Dongguan Siyoto Electronics Co.,Ltd.	HA-A23T	N/A	CAPACITY: DC 3. 7V/400mAh 1.48Wh, INPUT: DC 5V/320 mA

14.5. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

14.6. Test result

PASS. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.

Note2: “----” means Peak detection; “-----” means Average detection.

Note3: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/50Hz, recorded the worst case.

14.7. Test data

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 5# Shield Room

Test Date : 2025-01-07

EUT : WIRELESS HEADPHONES

Power Supply : AC 120V/60Hz

Condition : Temp:24.5°C,Humi:55.5%

Memo : Sample Number: S24121821-004

D:\2024 report data\Q24121821-1E\0107 CE.EM6


Tested By : Gen Liu

Model Number : HA-A23T

Test Mode : Tx mode

LISN : 2023 ENV216 2#/LINE

Data: 6

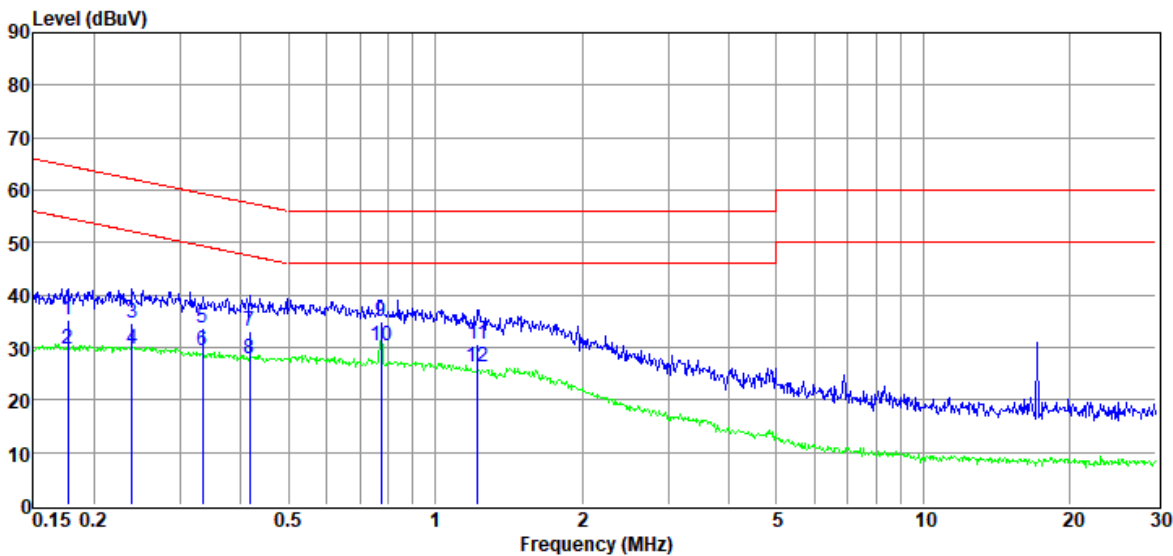

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.18	15.08	9.96	0.09	10.06	35.19	64.64	-29.45	QP	LINE
2	0.18	9.62	9.96	0.09	10.06	29.73	54.64	-24.91	Average	LINE
3	0.24	14.58	9.99	0.09	10.06	34.72	62.13	-27.41	QP	LINE
4	0.24	9.61	9.99	0.09	10.06	29.75	52.13	-22.38	Average	LINE
5	0.33	13.55	9.89	0.09	10.07	33.60	59.35	-25.75	QP	LINE
6	0.33	9.28	9.89	0.09	10.07	29.33	49.35	-20.02	Average	LINE
7	0.42	12.89	10.01	0.10	10.07	33.07	57.51	-24.44	QP	LINE
8	0.42	7.57	10.01	0.10	10.07	27.75	47.51	-19.76	Average	LINE
9	0.78	14.77	9.97	0.10	10.06	34.90	56.00	-21.10	QP	LINE
10	0.78	10.06	9.97	0.10	10.06	30.19	46.00	-15.81	Average	LINE
11	1.22	10.30	10.03	0.12	10.05	30.50	56.00	-25.50	QP	LINE
12	1.22	6.10	10.03	0.12	10.05	26.30	46.00	-19.70	Average	LINE

Note: 1. Result Level = Read Level +LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 5# Shield Room

D:\2024 report data\Q24121821-1E\0107 CE.EM6

Test Date : 2025-01-07

Tested By : Gen Liu

EUT : WIRELESS HEADPHONES

Model Number : HA-A23T

Power Supply : AC 120V/60Hz


Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55.5%

LISN : 2023 ENV216 2#/NEUTRAL

Memo : Sample Number: S24121821-004

Data: 8

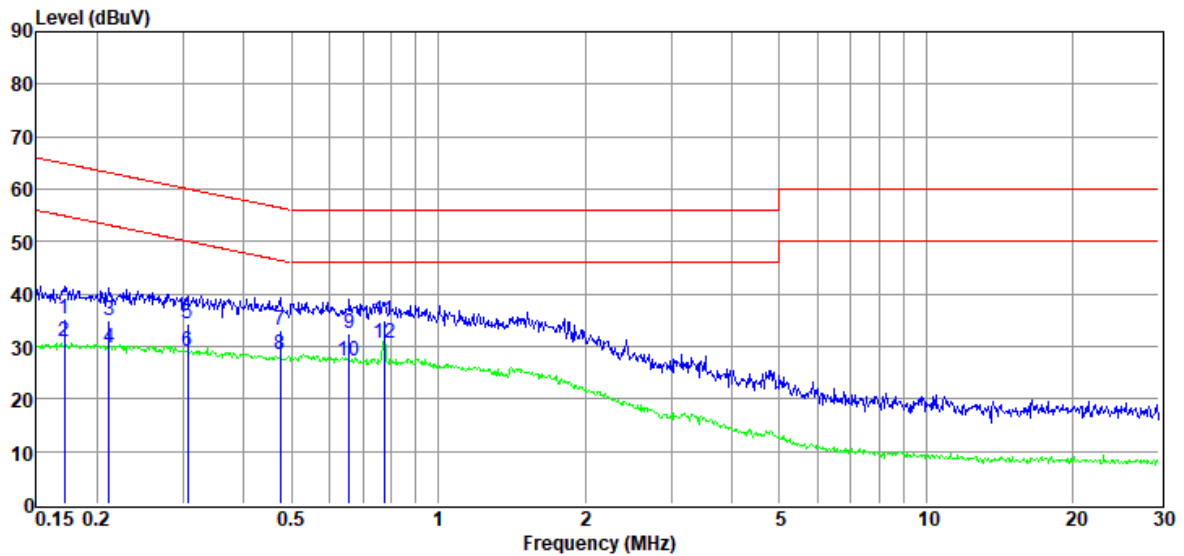

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.17	15.22	9.97	0.09	10.06	35.34	64.90	-29.56	QP	NEUTRAL
2	0.17	10.89	9.97	0.09	10.06	31.01	54.90	-23.89	Average	NEUTRAL
3	0.21	14.96	9.92	0.09	10.06	35.03	63.14	-28.11	QP	NEUTRAL
4	0.21	9.76	9.92	0.09	10.06	29.83	53.14	-23.31	Average	NEUTRAL
5	0.31	14.17	10.02	0.09	10.06	34.34	60.06	-25.72	QP	NEUTRAL
6	0.31	8.89	10.02	0.09	10.06	29.06	50.06	-21.00	Average	NEUTRAL
7	0.47	12.79	9.98	0.10	10.07	32.94	56.45	-23.51	QP	NEUTRAL
8	0.47	8.39	9.98	0.10	10.07	28.54	46.45	-17.91	Average	NEUTRAL
9	0.66	12.28	9.95	0.10	10.06	32.39	56.00	-23.61	QP	NEUTRAL
10	0.66	7.18	9.95	0.10	10.06	27.29	46.00	-18.71	Average	NEUTRAL
11	0.78	14.83	9.97	0.10	10.06	34.96	56.00	-21.04	QP	NEUTRAL
12	0.78	10.34	9.97	0.10	10.06	30.47	46.00	-15.53	Average	NEUTRAL

Note: 1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).

4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

16. Photos of the EUT

Please refer to DDT-Q24121821-2E appendix I

-----End Report-----