

Report No. QEC-2309083

October 11, 2023

Antenna Measurement Report

**JTI Chip Antenna P/N:
2450AT14A0100001T**

Prepared By: Arlan Fajardo
Applications Engineering Technician III

Approved By: Antonio Guilin
RF Applications Engineer
Johanson Technology Inc.
aguilin@johansontechnology.com
Tel: (805) 389-1166 ext.1506
www.johansontechnology.com

1. Abstract:

This measurement report includes antenna return loss, matching network, radiated efficiency, and radiation patterns for the Johanson Technology antenna P/N. 2450AT14A0100001T mounted on evaluation board. It also shows the test equipment information.

Evaluation Board and Recommended Mounting Configuration 1: 2450AT14A0100001CE1

Evaluation Board and Recommended Mounting Configuration 2: 2450AT14A0100001CE2

2. Antenna gain table summary:

A. 2450AT14A0100001CE1


Unit in dBi	XY-plane		XZ-plane		YZ-plane		Efficiency
	Peak	Avg.	Peak	Avg.	Peak	Avg.	
@2400MHz	-5.0	-8.7	-2.6	-5.9	-2.8	-6.3	24.0%
@2440MHz	-4.4	-7.6	-2.5	-5.5	-2.4	-5.8	27.0%
@2480MHz	-5.0	-7.9	-2.8	-6.2	-3.5	-6.5	24.0%

B. 2450AT14A0100001CE2

Unit in dBi	XY-plane		XZ-plane		YZ-plane		Efficiency
	Peak	Avg.	Peak	Avg.	Peak	Avg.	
@2400MHz	-1.9	-5.8	-0.8	-2.3	-0.5	-5.8	42.0%
@2440MHz	-1.4	-5.3	-0.9	-2.1	-1.0	-5.7	45.0%
@2480MHz	-1.6	-5.5	-0.9	-2.3	-1.1	-5.6	44.0%

3. EVB assembly and 3D plane definition:

2450AT14A0100001CE1




2450AT14A0100001CE2




4. Antenna matching networks:

2450AT14A0100001CE1

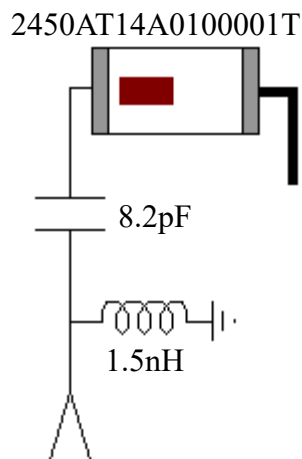

2450AT14A0100001CE2

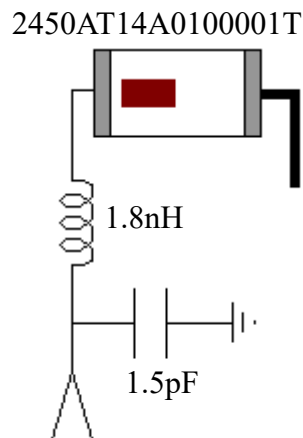

Johanson Technology Part Numbers Used* :

2450AT14A0100001CE1	8.2pF	1.5nH
	QSCF500Q8R2B1GV001T	LRC0402CS1N5GV001T
2450AT14A0100001CE2	1.8nH	1.5pF
	LRC0402CS1N8GV001T	QSCF500Q1R5B1GV001T

* It is recommended that the designer leave available slots for a "pi" (or shunt-series-shunt) network. The antenna matching network above is used when antenna is mounted on Johanson's evaluation board. The matching network values on client's PCB will be different, depending on the layout, thickness, material, etc. Go to: <https://www.johansontechnology.com/tuning> and see how to obtain the new values.

5. Equipment Information:


A. Return Loss / VSWR:

- ◆ **Instrument:** Vector Network Analyzer - Agilent E5071C
- ◆ **Calibration method:** open/short/load – Cal.Kit 85052D


B. Radiation Patterns:

- ◆ **Instrument (3D Radiation pattern):** NSI 800F-10 Far Field antenna measurement system

3D Far-Field Antenna Measurement System Wiring Schematic with NSI-Based Controller Configuration

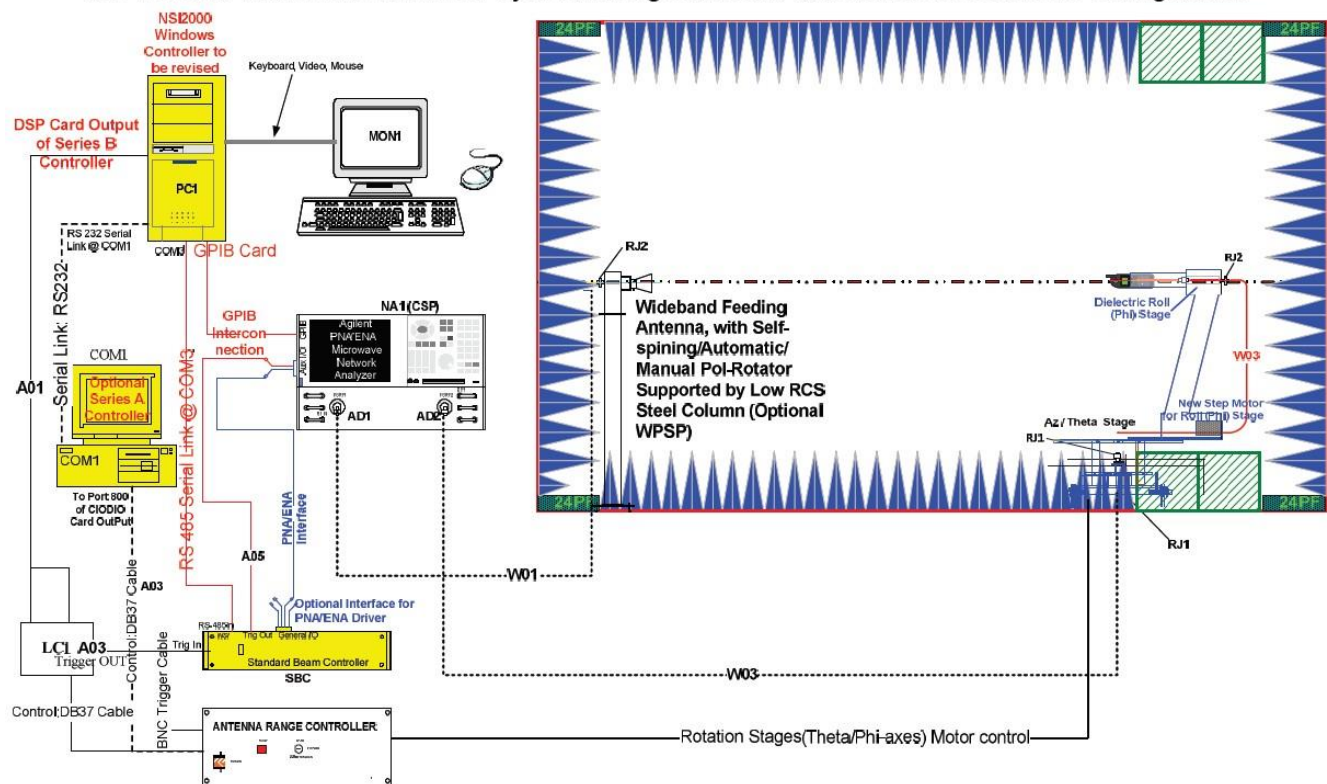

◆ **Scanning direction**

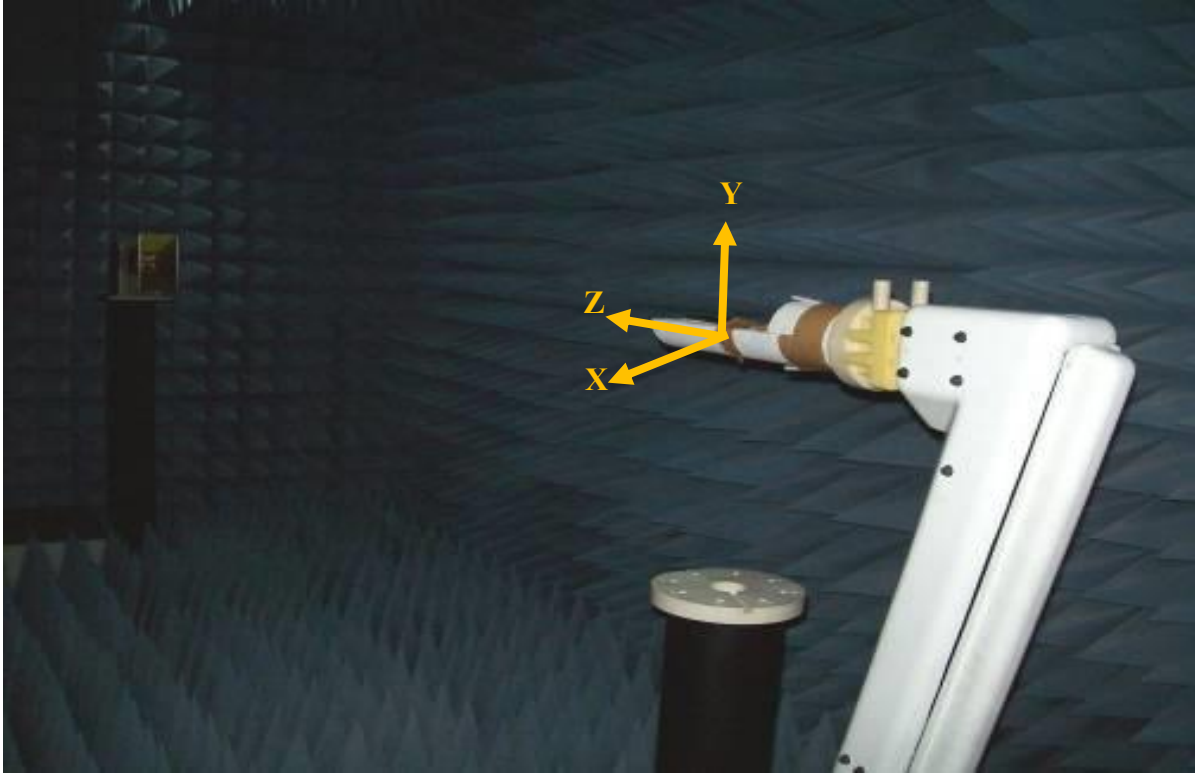


◆ **Plane definition**

XY-plane	Theta=90°
XZ-plane	Phi=0°
YZ-plane	Phi=90°


6. Measurement results:

A. Return Loss with matching circuits

2450AT14A0100001CE1

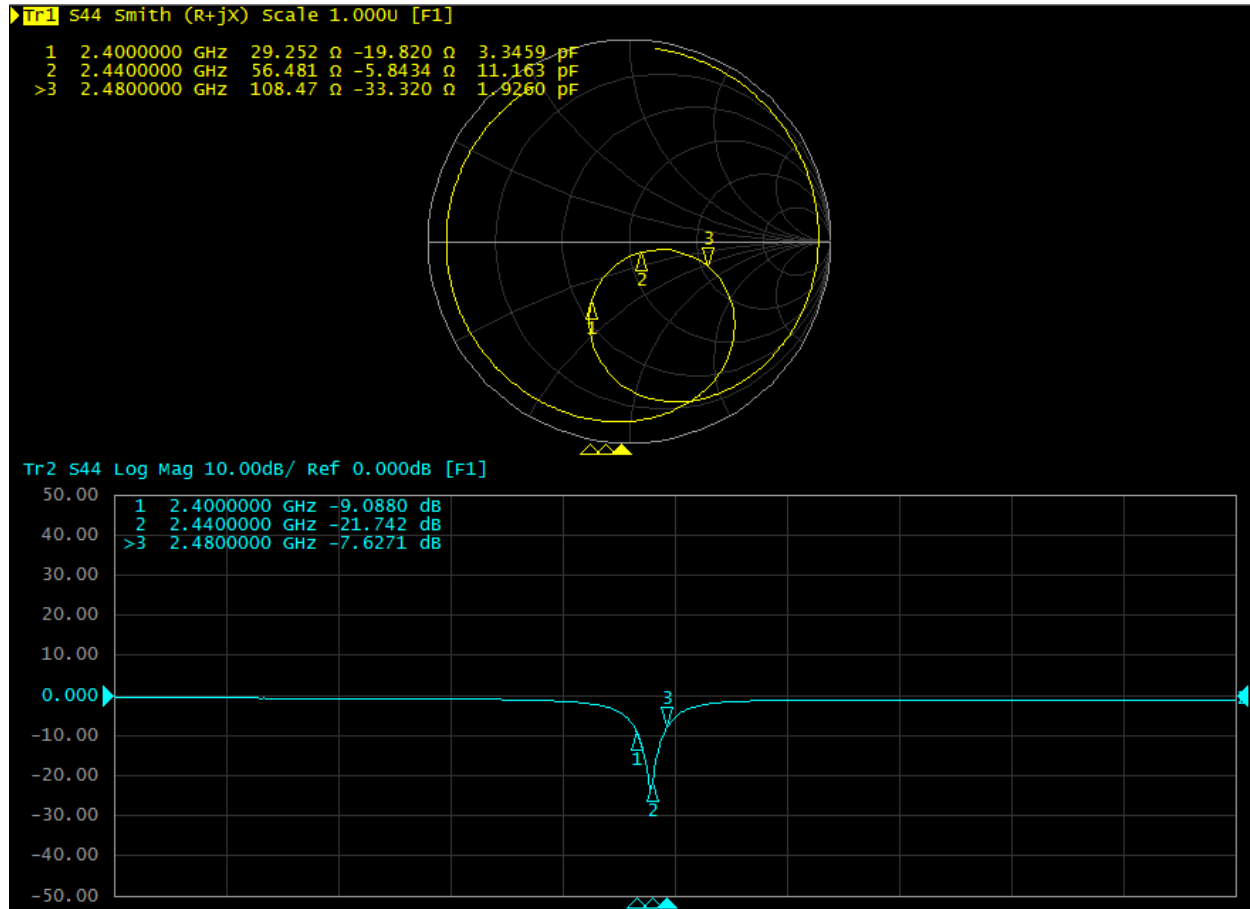


2450AT14A0100001CE2

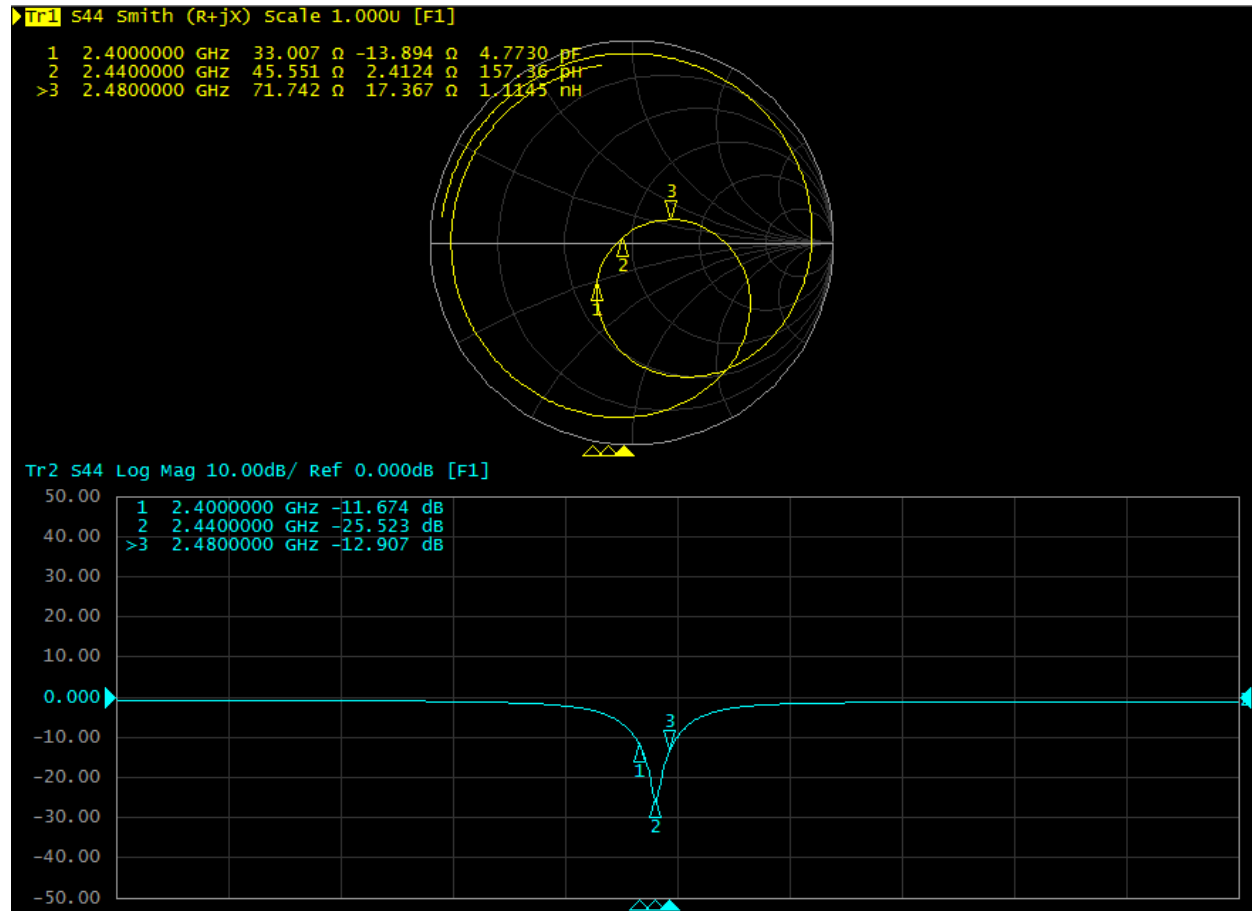


B. Measured 3D Radiation Pattern

2450AT14A0100001CE1 @2440MHz

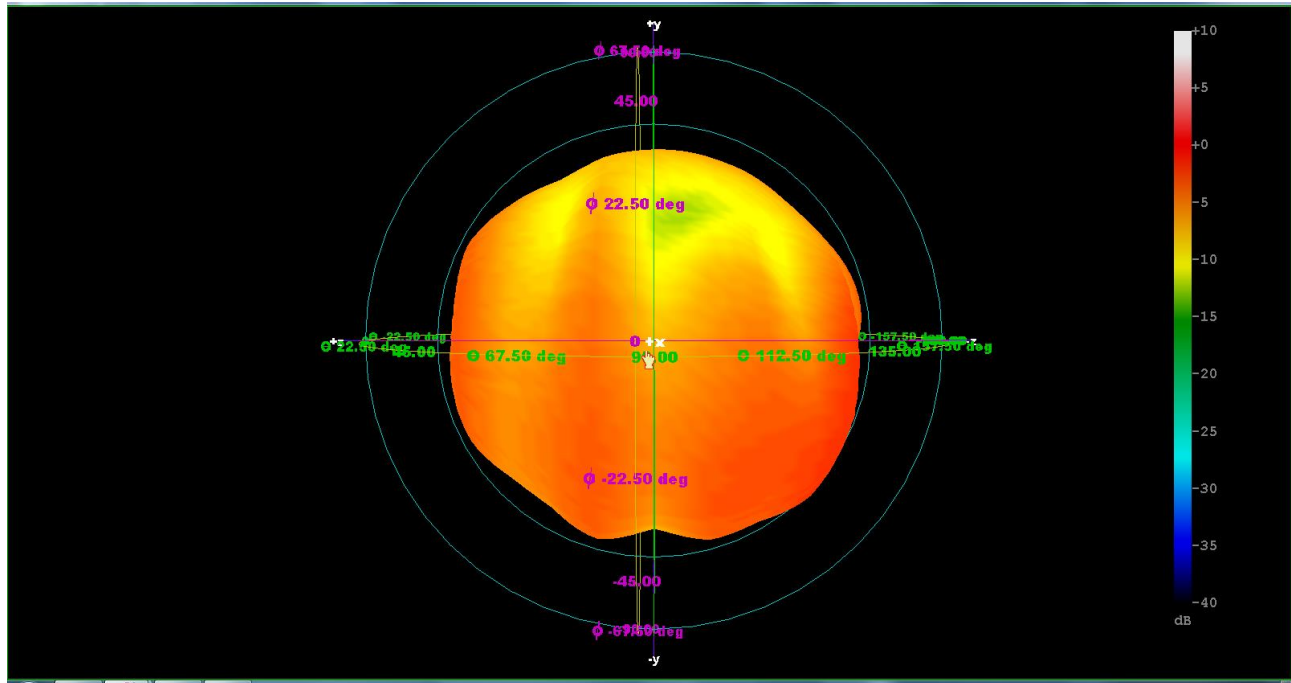

2450AT14A0100001CE2 @2440MHz

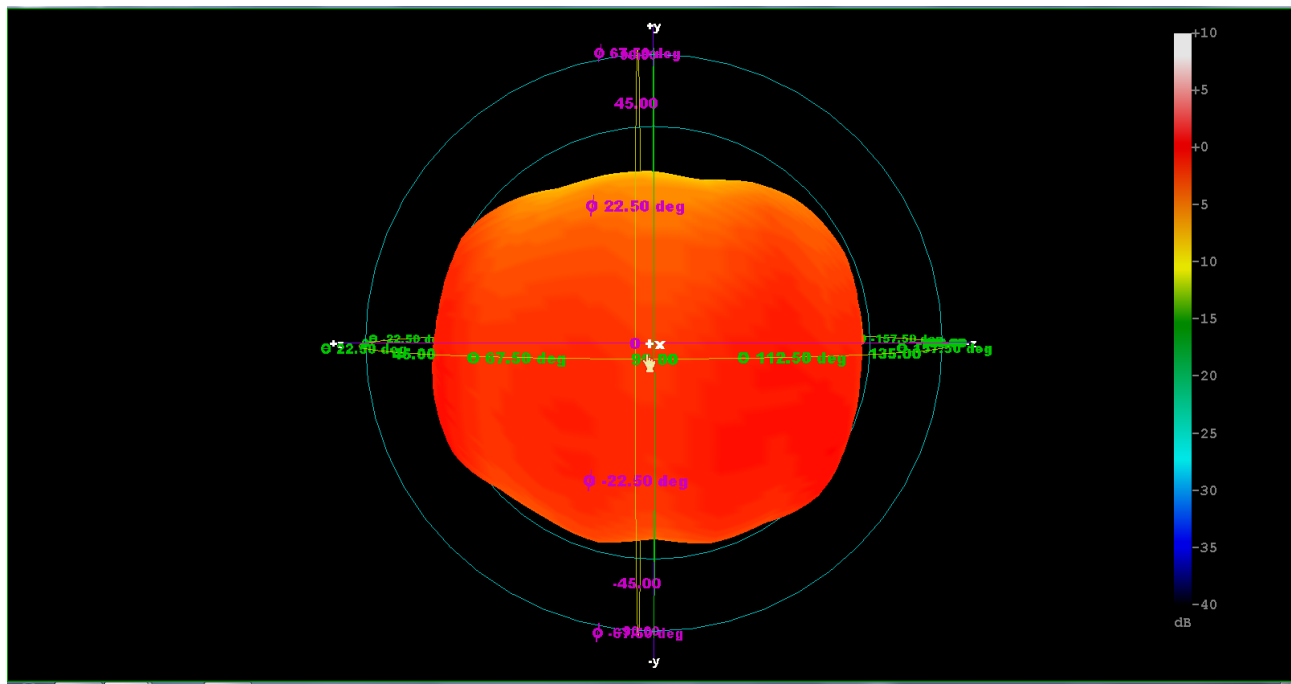


C. Measured 2-D Cut Radiation Pattern

2450AT14A0100001CE1 @2440MHz

◆ XY-plane

Far-field Power Distribution(Total) on X-Y Plane
Plot Peak Gain(Total)=-4.4 dBi Plot AvgGain(Total)=-7.6dBi @2.44000 GHz

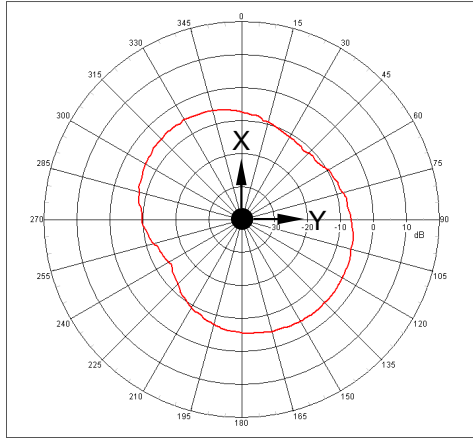


Unit : dBi

	Peak gain	Avg. gain
XY-plane	-4.4	-7.6

◆ XZ-plane


Far-field Power Distribution(Total) on X-Z Plane
Plot Peak Gain(Total)=-2.5 dBi Plot AvgGain(Total)=-5.5dBi @2.44000 GHz

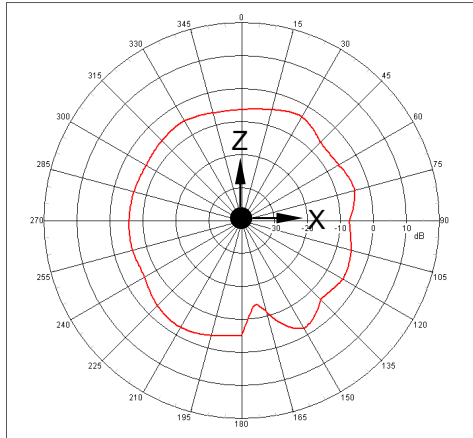

	Peak gain	Avg. gain
XZ-plane	-2.5	-5.5

◆ YZ-plane

Far-field Power Distribution(Total) on Y-Z Plane
Plot Peak Gain(Total)=-2.4 dBi Plot AvgGain(Total)=-5.8dBi @2.44000 GHz

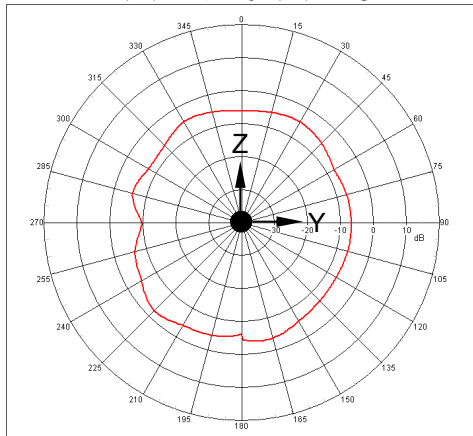


	Peak gain	Avg. gain
YZ-plane	-2.4	-5.8

2450AT14A0100001CE2 @2440MHz

◆ XY-plane

Far-field Power Distribution(Total) on X-Y Plane
Plot Peak Gain(Total)= -1.4 dBi; Plot AvgGain(Total)= -5.3dBi @2.44000 GHz

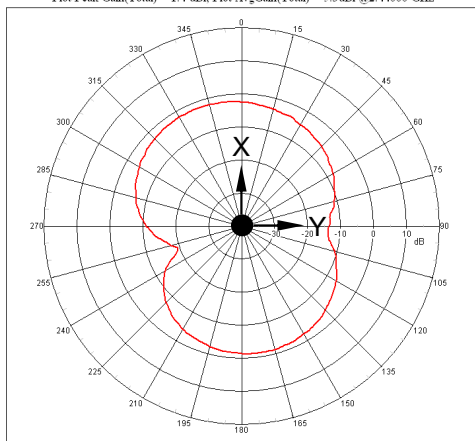


Unit : dBi

	Peak gain	Avg. gain
XY-plane	-1.4	-5.3

◆ XZ-plane


Far-field Power Distribution(Total) on X-Z Plane
Plot Peak Gain(Total)= -0.9 dBi; Plot AvgGain(Total)= -2.1dBi @2.44000 GHz

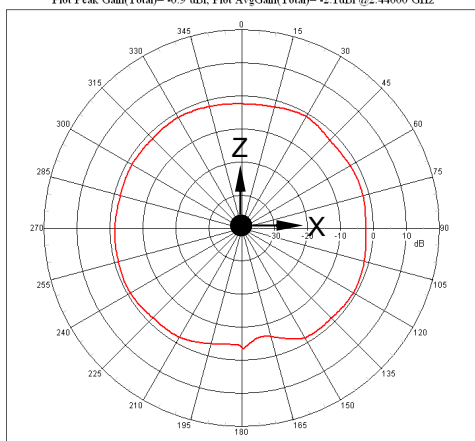

	Peak gain	Avg. gain
XZ-plane	-0.9	-2.1

◆ YZ-plane

Far-field Power Distribution(Total) on Y-Z Plane
Plot Peak Gain(Total)= -1.0 dBi; Plot AvgGain(Total)= -5.7dBi @2.44000 GHz

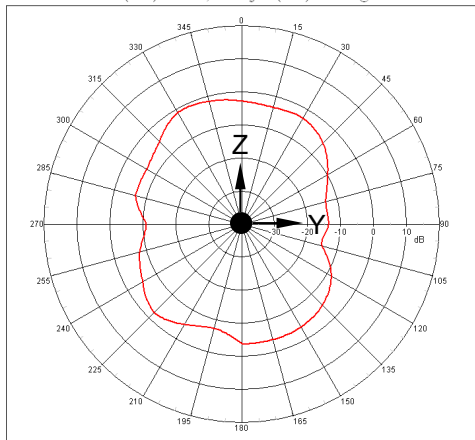

	Peak gain	Avg. gain
YZ-plane	-1.0	-5.7

7. Appendix

A. Antenna Datasheet:

<https://www.johansontechnology.com/antennas>

B. Antenna Tuning, Optimization, and Validation Services:

<https://www.johansontechnology.com/ipc-antenna-services>

C. Johanson Chip RF Inductors:

<https://www.johansontechnology.com/ceramic-inductors>

D. Johanson Chip RF Capacitors (High-Q):

<https://www.johansontechnology.com/high-q-multi-layer-capacitors>

Report No. QEC-2309083

Printed Wednesday, October 11, 2023