



FCC 47 CFR PART 15 SUBPART E

CERTIFICATION TEST REPORT

FOR

802.11a/g/n/ac 3X3 WLAN + Bluetooth PCI-E Custom Combination Card

MODEL NUMBER: BCM943602BAED

FCC ID: QDS-BRCM1088

REPORT NUMBER: 15U20284-E3, Revision A

ISSUE DATE: JUNE 16, 2015

Prepared for
BROADCOM CORPORATION
190 MATHILDA PLACE
SUNNYVALE, CA 94086, U.S.A.

Prepared by
UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

| Rev. | Issue Date | Revisions | Revised By |
|------|------------|-----------------------------|-------------|
| -- | 05/27/15 | Initial Issue | H. Mustapha |
| A | 06/16/15 | Revised sections 5.5 and 10 | F. Ibrahim |

TABLE OF CONTENTS

| | |
|--|-----------|
| 1. ATTESTATION OF TEST RESULTS | 9 |
| 2. TEST METHODOLOGY | 11 |
| 3. FACILITIES AND ACCREDITATION | 11 |
| 4. CALIBRATION AND UNCERTAINTY | 11 |
| 4.1. MEASURING INSTRUMENT CALIBRATION | 11 |
| 4.2. SAMPLE CALCULATION | 11 |
| 4.3. MEASUREMENT UNCERTAINTY..... | 12 |
| 5. EQUIPMENT UNDER TEST | 13 |
| 5.1. DESCRIPTION OF EUT | 13 |
| 5.2. MAXIMUM OUTPUT POWER..... | 13 |
| 5.3. DESCRIPTION OF AVAILABLE ANTENNAS | 17 |
| 5.4. SOFTWARE AND FIRMWARE..... | 17 |
| 5.5. WORST-CASE CONFIGURATION AND MODE..... | 18 |
| 5.6. DESCRIPTION OF TEST SETUP..... | 19 |
| 6. TEST AND MEASUREMENT EQUIPMENT | 21 |
| 7. MEASUREMENT METHODS | 22 |
| 8. ANTENNA PORT TEST RESULTS | 23 |
| 8.1. ON TIME AND DUTY CYCLE | 23 |
| 8.2. DUTY CYCLE PLOTS | 24 |
| 8.3. 802.11a LEGACY 1TX MODE IN THE 5.2 GHz BAND | 32 |
| 8.3.1. OUTPUT POWER | 32 |
| 8.4. 802.11n HT20 CDD 3Tx MODE IN THE 5.2 GHz BAND..... | 34 |
| 8.4.1. 26 dB BANDWIDTH..... | 34 |
| 8.4.2. 99% BANDWIDTH..... | 40 |
| 8.4.3. OUTPUT POWER AND PSD | 46 |
| 8.5. 802.11n HT20 STBC 3Tx MODE IN THE 5.2 GHz BAND..... | 54 |
| 8.5.1. 26 dB BANDWIDTH..... | 54 |
| 8.5.2. 99% BANDWIDTH..... | 60 |
| 8.5.3. OUTPUT POWER AND PSD | 66 |
| 8.6. 802.11n HT20 TxBF 3Tx MODE IN THE 5.2 GHz BAND..... | 73 |
| 8.6.1. OUTPUT POWER AND PSD | 73 |
| 8.7. 802.11n HT40 1Tx MODE IN THE 5.2 GHz BAND | 81 |
| 8.7.1. OUTPUT POWER | 81 |
| 8.8. 802.11n HT40 CDD 3Tx MODE IN THE 5.2 GHz BAND..... | 83 |
| 8.8.1. 26 dB BANDWIDTH..... | 83 |

| | | |
|---------|---|-----|
| 8.8.2. | 99% BANDWIDTH | 87 |
| 8.8.3. | OUTPUT POWER AND PSD | 91 |
| 8.9. | <i>802.11n HT40 TxBF 3Tx MODE IN THE 5.2 GHz BAND</i> | 97 |
| 8.9.1. | OUTPUT POWER AND PSD | 97 |
| 8.10. | <i>802.11ac VHT80 1Tx MODE IN THE 5.2 GHz BAND</i> | 103 |
| 8.10.1. | OUTPUT POWER | 103 |
| 8.11. | <i>802.11ac VHT80 CDD 3Tx MODE IN THE 5.2 GHz BAND</i> | 105 |
| 8.11.1. | 26 dB BANDWIDTH | 105 |
| 8.11.2. | 99% BANDWIDTH | 108 |
| 8.11.3. | OUTPUT POWER AND PSD | 111 |
| 8.12. | <i>802.11ac VHT80 TxBF 3Tx MODE IN THE 5.2 GHz BAND</i> | 116 |
| 8.12.1. | OUTPUT POWER AND PSD | 116 |
| 8.13. | <i>802.11a LEGACY 1TX MODE IN THE 5.3 GHz BAND</i> | 121 |
| 8.13.1. | 26 dB BANDWIDTH | 121 |
| 8.13.2. | 99% BANDWIDTH | 124 |
| 8.13.3. | OUTPUT POWER AND PSD | 127 |
| 8.14. | <i>802.11n HT20 CDD 3Tx MODE IN THE 5.3 GHz BAND</i> | 131 |
| 8.14.1. | 26 dB BANDWIDTH | 131 |
| 8.14.2. | 99% BANDWIDTH | 137 |
| 8.14.3. | OUTPUT POWER AND PSD | 143 |
| 8.15. | <i>802.11n HT20 STBC 3Tx MODE IN THE 5.3 GHz BAND</i> | 150 |
| 8.15.1. | 26 dB BANDWIDTH | 150 |
| 8.15.2. | 99% BANDWIDTH | 156 |
| 8.15.3. | OUTPUT POWER AND PSD | 162 |
| 8.16. | <i>802.11n HT20 TxBF 3Tx MODE IN THE 5.3 GHz BAND</i> | 169 |
| 8.16.1. | OUTPUT POWER AND PSD | 169 |
| 8.17. | <i>802.11n HT40 1Tx MODE IN THE 5.3 GHz BAND</i> | 176 |
| 8.17.1. | OUTPUT POWER | 176 |
| 8.18. | <i>802.11n HT40 CDD 3Tx MODE IN THE 5.3 GHz BAND</i> | 178 |
| 8.18.1. | 26 dB BANDWIDTH | 178 |
| 8.18.2. | 99% BANDWIDTH | 182 |
| 8.18.3. | OUTPUT POWER AND PSD | 186 |
| 8.19. | <i>802.11n HT40 TxBF 3Tx MODE IN THE 5.3 GHz BAND</i> | 191 |
| 8.19.1. | OUTPUT POWER AND PSD | 191 |
| 8.20. | <i>802.11ac VHT80 1Tx MODE IN THE 5.3 GHz BAND</i> | 196 |
| 8.20.1. | OUTPUT POWER | 196 |
| 8.21. | <i>802.11ac VHT80 CDD 3Tx MODE IN THE 5.3 GHz BAND</i> | 198 |
| 8.21.1. | 26 dB BANDWIDTH | 198 |
| 8.21.2. | 99% BANDWIDTH | 201 |
| 8.21.3. | OUTPUT POWER AND PSD | 204 |
| 8.22. | <i>802.11ac VHT80 TxBF 3Tx MODE IN THE 5.3 GHz BAND</i> | 209 |
| 8.22.1. | OUTPUT POWER AND PSD | 209 |
| 8.23. | <i>802.11a LEGACY MODE IN THE 5.6 GHz BAND</i> | 214 |
| 8.23.1. | 26 dB BANDWIDTH | 214 |
| 8.23.2. | 99% BANDWIDTH | 216 |

| | | |
|---------|---|------------|
| 8.23.3. | OUTPUT POWER AND PSD | 218 |
| 8.24. | <i>802.11n HT20 CDD 3Tx MODE IN THE 5.6 GHz BAND</i> | <i>222</i> |
| 8.24.1. | 26 dB BANDWIDTH | 222 |
| 8.24.2. | 99% BANDWIDTH | 229 |
| 8.24.3. | OUTPUT POWER AND PSD | 236 |
| 8.24.4. | AVERAGE OUTPUT POWER (WHOLE FUNDAMENTAL) | 251 |
| 8.25. | <i>802.11n HT20 STBC 3Tx MODE IN THE 5.6 GHz BAND</i> | <i>252</i> |
| 8.25.1. | 26 dB BANDWIDTH | 252 |
| 8.25.2. | 99% BANDWIDTH | 259 |
| 8.25.3. | OUTPUT POWER AND PSD | 266 |
| 8.25.4. | AVERAGE OUTPUT POWER (WHOLE FUNDAMENTAL) | 279 |
| 8.26. | <i>802.11n HT20 TxBF 3Tx MODE IN THE 5.6 GHz BAND</i> | <i>280</i> |
| 8.26.1. | OUTPUT POWER AND PSD | 280 |
| 8.26.2. | AVERAGE OUTPUT POWER (WHOLE FUNDAMENTAL) | 293 |
| 8.27. | <i>802.11n HT40 1Tx MODE IN THE 5.6 GHz BAND</i> | <i>294</i> |
| 8.27.1. | OUTPUT POWER | 294 |
| 8.28. | <i>802.11n HT40 CDD 3Tx MODE IN THE 5.6 GHz BAND</i> | <i>296</i> |
| 8.28.1. | 26 dB BANDWIDTH | 296 |
| 8.28.2. | 99% BANDWIDTH | 303 |
| 8.28.3. | OUTPUT POWER AND PSD | 310 |
| 8.28.4. | AVERAGE OUTPUT POWER (WHOLE FUNDAMENTAL) | 323 |
| 8.29. | <i>802.11n HT40 TxBF 3Tx MODE IN THE 5.6 GHz BAND</i> | <i>324</i> |
| 8.29.1. | OUTPUT POWER AND PSD | 324 |
| 8.29.2. | AVERAGE OUTPUT POWER (WHOLE FUNDAMENTAL) | 337 |
| 8.30. | <i>802.11ac VHT80 1Tx MODE IN THE 5.6 GHz BAND</i> | <i>338</i> |
| 8.30.1. | OUTPUT POWER | 338 |
| 8.31. | <i>802.11ac VHT80 CDD 3Tx MODE IN THE 5.6 GHz BAND</i> | <i>340</i> |
| 8.31.1. | 26 dB BANDWIDTH | 340 |
| 8.31.2. | 99% BANDWIDTH | 346 |
| 8.31.3. | OUTPUT POWER AND PSD | 352 |
| 8.31.4. | AVERAGE OUTPUT POWER (WHOLE FUNDAMENTAL) | 363 |
| 8.32. | <i>802.11ac VHT80 TxBF 3Tx MODE IN THE 5.6 GHz BAND</i> | <i>364</i> |
| 8.32.1. | OUTPUT POWER AND PSD | 364 |
| 8.32.2. | AVERAGE OUTPUT POWER (WHOLE FUNDAMENTAL) | 375 |
| 8.33. | <i>802.11a LEGACY MODE IN THE 5.8 GHz BAND</i> | <i>376</i> |
| 8.33.1. | OUTPUT POWER | 376 |
| 8.33.2. | Maximum Power Spectral Density (PSD) | 378 |
| 8.34. | <i>802.11n HT20 CDD 2Tx MODE IN THE 5.8 GHz BAND</i> | <i>380</i> |
| 8.34.1. | OUTPUT POWER | 380 |
| 8.35. | <i>802.11n HT20 CDD 3Tx MODE IN THE 5.8 GHz BAND</i> | <i>381</i> |
| 8.35.1. | 6 dB BANDWIDTH | 381 |
| 8.35.2. | 99% BANDWIDTH | 387 |
| 8.35.3. | OUTPUT POWER | 393 |
| 8.35.4. | Maximum Power Spectral Density (PSD) | 395 |
| 8.36. | <i>802.11n HT20 TxBF 3Tx MODE IN THE 5.8 GHz BAND</i> | <i>402</i> |
| 8.36.1. | OUTPUT POWER | 402 |

| | | |
|-----------|--|------------|
| 8.37. | 802.11n HT40 1Tx MODE IN THE 5.8 GHz BAND | 404 |
| 8.37.1. | OUTPUT POWER | 404 |
| 8.38. | 802.11n HT40 CDD 3Tx MODE IN THE 5.8 GHz BAND | 405 |
| 8.38.1. | 6 dB BANDWIDTH | 405 |
| 8.38.2. | 99% BANDWIDTH | 409 |
| 8.38.3. | OUTPUT POWER | 413 |
| 8.38.4. | Maximum Power Spectral Density (PSD) | 414 |
| 8.39. | 802.11n HT40 TxBF 3Tx MODE IN THE 5.8 GHz BAND | 419 |
| 8.39.1. | OUTPUT POWER | 419 |
| 8.39.2. | Maximum Power Spectral Density (PSD) | 421 |
| 8.40. | 802.11ac VHT80 1TX MODE IN THE 5.8 GHz BAND | 426 |
| 8.40.1. | OUTPUT POWER | 426 |
| 8.41. | 802.11ac VHT80 CDD 2TX MODE IN THE 5.8 GHz BAND | 427 |
| 8.41.1. | OUTPUT POWER | 427 |
| 8.42. | 802.11ac VHT80 CDD 3Tx MODE IN THE 5.8 GHz BAND | 428 |
| 8.42.1. | 6 dB BANDWIDTH | 428 |
| 8.42.2. | 99% BANDWIDTH | 431 |
| 8.42.3. | OUTPUT POWER | 434 |
| 8.43. | 802.11ac VHT80 TxBF 3Tx MODE IN THE 5.8 GHz BAND | 438 |
| 8.43.1. | OUTPUT POWER | 438 |
| 8.44. | COLOCATION | 442 |
| 9. | RADIATED TEST RESULTS | 449 |
| 9.1. | LIMITS AND PROCEDURE | 449 |
| 9.2. | TX ABOVE 1 GHz 802.11a LEGACY MODE IN THE 5.2 GHz BAND | 450 |
| 9.3. | TX ABOVE 1 GHz 802.11n HT20 CDD 3TX MODE IN THE 5.2 GHz BAND | 451 |
| 9.4. | TX ABOVE 1 GHz 802.11n HT20 TxBF 3TX MODE IN THE 5.2 GHz BAND | 458 |
| 9.5. | TX ABOVE 1 GHz 802.11n HT40 1TX MODE IN THE 5.2 GHz BAND | 461 |
| 9.6. | TX ABOVE 1 GHz 802.11n HT40 CDD 3TX MODE IN THE 5.2 GHz BAND | 463 |
| 9.7. | TX ABOVE 1 GHz 802.11n HT40 TxBF 3TX MODE IN THE 5.2 GHz BAND | 468 |
| 9.8. | TX ABOVE 1 GHz 802.11ac VHT80 1TX MODE IN THE 5.2 GHz BAND | 473 |
| 9.9. | TX ABOVE 1 GHz 802.11ac VHT80 CDD 3TX MODE IN THE 5.2 GHz BAND | 474 |
| 9.10. | TX ABOVE 1 GHz 802.11ac VHT80 TxBF 3TX MODE IN THE 5.2 GHz BAND | 477 |
| 9.11. | TX ABOVE 1 GHz 802.11a 1TX MODE IN THE 5.3 GHz BAND | 480 |
| 9.12. | TX ABOVE 1 GHz 802.11n HT20 CDD 3TX MODE IN THE 5.3 GHz BAND | 482 |
| 9.13. | TX ABOVE 1 GHz 802.11n HT20 TxBF 3TX MODE IN THE 5.3 GHz BAND | 489 |
| 9.14. | TX ABOVE 1 GHz 802.11n HT40 1TX MODE IN THE 5.3 GHz BAND | 496 |
| 9.15. | TX ABOVE 1 GHz 802.11n HT40 CDD 3TX MODE IN THE 5.3 GHz BAND | 497 |
| 9.16. | TX ABOVE 1 GHz 802.11n HT40 TxBF 3TX MODE IN THE 5.3 GHz BAND | 502 |
| 9.17. | TX ABOVE 1 GHz 802.11ac VHT80 1TX MODE IN THE 5.3 GHz BAND | 507 |

| | | |
|------------|--|------------|
| 9.18. | TX ABOVE 1 GHz 802.11ac VHT80 CDD 3TX MODE IN THE 5.3 GHz BAND | 508 |
| 9.19. | TX ABOVE 1 GHz 802.11ac VHT80 TxBF 3TX MODE IN THE 5.3 GHz BAND | 511 |
| 9.20. | TX ABOVE 1 GHz 802.11a 1TX MODE IN THE 5.6 GHz BAND | 514 |
| 9.21. | TX ABOVE 1 GHz 802.11n HT20 CDD 3TX MODE IN THE 5.6 GHz BAND | 516 |
| 9.22. | TX ABOVE 1 GHz 802.11n HT20 TxBF 3TX MODE IN THE 5.6 GHz BAND | 524 |
| 9.23. | TX ABOVE 1 GHz 802.11n HT20 3TX CDD MODE CHANNEL 144..... | 532 |
| 9.24. | TX ABOVE 1 GHz 802.11n HT20 TXBF 3TX MODE CHANNEL 144 | 534 |
| 9.25. | TX ABOVE 1 GHz 802.11n HT40 1TX MODE IN THE 5.6 GHz BAND..... | 536 |
| 9.26. | TX ABOVE 1 GHz 802.11n HT40 CDD 3TX MODE IN THE 5.6 GHz BAND | 538 |
| 9.27. | TX ABOVE 1 GHz 802.11n HT40 TxBF 3TX MODE IN THE 5.6 GHz BAND | 546 |
| 9.28. | TX ABOVE 1 GHz 802.11n HT40 3Tx CDD MODE CHANNEL 142 | 554 |
| 9.29. | TX ABOVE 1 GHz 802.11n HT40 TxBF 3Tx MODE CHANNEL 142 | 556 |
| 9.30. | TX ABOVE 1 GHz 802.11ac VHT80 1TX MODE IN THE 5.6 GHz BAND..... | 558 |
| 9.31. | TX ABOVE 1 GHz 802.11ac VHT80 CDD 3TX MODE IN THE 5.6 GHz BAND | 560 |
| 9.32. | TX ABOVE 1 GHz 802.11ac VHT80 TxBF 3TX MODE IN THE 5.6 GHz BAND | 566 |
| 9.33. | TX ABOVE 1 GHz 802.11ac VHT80 3TX CDD MODE CHANNEL 138 | 572 |
| 9.34. | TX ABOVE 1 GHz 802.11ac VHT80 TxBF 3TX MODE CHANNEL 138..... | 574 |
| 9.35. | TX ABOVE 1 GHz 802.11a 1Tx MODE IN THE 5.8 GHz BAND | 576 |
| 9.36. | TX ABOVE 1 GHz 802.11n HT20 CDD 2Tx MODE IN THE 5.8 GHz BAND..... | 578 |
| 9.37. | TX ABOVE 1 GHz 802.11n HT20 CDD 3Tx MODE IN THE 5.8 GHz BAND..... | 580 |
| 9.38. | TX ABOVE 1 GHz 802.11n HT20 TxBF 3Tx MODE IN THE 5.8 GHz BAND..... | 589 |
| 9.39. | TX ABOVE 1 GHz 802.11n HT40 1Tx MODE IN THE 5.8 GHz BAND | 597 |
| 9.40. | TX ABOVE 1 GHz 802.11n HT40 CDD 3Tx MODE IN THE 5.8 GHz BAND..... | 599 |
| 9.41. | TX ABOVE 1 GHz 802.11n HT40 TxBF 3Tx MODE IN THE 5.8 GHz BAND..... | 605 |
| 9.42. | TX ABOVE 1 GHz 802.11ac VHT80 1Tx MODE IN THE 5.8 GHz BAND | 611 |
| 9.43. | TX ABOVE 1 GHz 802.11ac HT80 CDD 2Tx MODE IN THE 5.8 GHz BAND..... | 613 |
| 9.44. | TX ABOVE 1 GHz 802.11ac VHT80 CDD 3Tx MODE IN THE 5.8 GHz BAND | 615 |
| 9.45. | TX ABOVE 1 GHz 802.11ac VHT80 TxBF 3Tx MODE IN THE 5.8 GHz BAND..... | 619 |
| 9.46. | WORST-CASE ABOVE 18GHz..... | 623 |
| 9.47. | WORST-CASE BELOW 1 GHz | 625 |
| 9.48. | AC POWER LINE CONDUCTED EMISSIONS..... | 627 |
| 10. | SETUP PHOTOS | 630 |
| 10.1. | ANTENNA PORT CONDUCTED RF MEASUREMENT SETUP | 630 |
| 10.2. | XYZ MEASUREMENT SETUP..... | 631 |
| 10.3. | RADIATED RF MEASUREMENT SETUP (BELOW 1 GHz) | 633 |

| | | |
|-------|--|------------|
| 10.4. | <i>RADIATED RF MEASUREMENT SETUP (ABOVE 1 GHz).....</i> | <i>634</i> |
| 10.5. | <i>POWERLINE CONDUCTED EMISSIONS MEASUREMENT SETUP</i> | <i>635</i> |

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: BROADCOM CORPORATION
190 MATHILDA PLACE
SUNNYVALE, CA 94086, U.S.A.

EUT DESCRIPTION: 802.11a/g/n/ac 3X3 WLAN + Bluetooth PCI-E Custom Combination Card

MODEL: BCM943602BAED

SERIAL NUMBER: Conducted: P103 S/N: 0169
Radiated: P103 S/N: 0027

DATE TESTED: MARCH 17, 2015 – MAY 22, 2015

| APPLICABLE STANDARDS | |
|--------------------------|--------------|
| STANDARD | TEST RESULTS |
| CFR 47 Part 15 Subpart E | Pass |

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:

Tested By:

Huda Mustapha

Lieu Nguyen

HUDA MUSTAPHA
PROJECT LEAD
UL Verification Services Inc.

LIEU NGUYEN
EMC ENGINEER
UL Verification Services Inc.

Frank Ibrahim

FRANK IBRAHIM
PROGRAM MANAGER
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, FCC 06-96, FCC KDB 789033 D02 v01 and ANSI C63.10-2009.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

| 47173 Benicia Street | 47266 Benicia Street |
|---|------------------------------------|
| <input checked="" type="checkbox"/> Chamber A | <input type="checkbox"/> Chamber D |
| <input type="checkbox"/> Chamber B | <input type="checkbox"/> Chamber E |
| <input type="checkbox"/> Chamber C | <input type="checkbox"/> Chamber F |
| | <input type="checkbox"/> Chamber G |
| | <input type="checkbox"/> Chamber H |

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers A through H are covered under Industry Canada company address code 2324B with site numbers 2324B -1 through 2324B-8, respectively.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned}\text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m}\end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| PARAMETER | UNCERTAINTY |
|---------------------------------------|---------------|
| Conducted Disturbance, 0.15 to 30 MHz | ± 3.52 dB |
| Radiated Disturbance, 30 to 1000 MHz | ± 4.94 dB |
| Radiated Disturbance, 1 to 6 GHz | ± 3.86 dB |
| Radiated Disturbance, 6 to 18 GHz | ± 4.23 dB |
| Radiated Disturbance, 18 to 26 GHz | ± 5.30 dB |
| Radiated Disturbance, 26 to 40 GHz | ± 5.23 dB |

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is an 802.11a/g/n/ac 3X3 WLAN + Bluetooth PCI-E Custom Combination Card.

The radio module is manufactured by Broadcom.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

5.2 GHz BAND

| Frequency Range (MHz) | Mode | Power, Chain 0 (dBm) | Power, Chain 1 (dBm) | Power, Chain 2 (dBm) | Output Power (dBm) | Output Power (mW) |
|--------------------------|---------------------|----------------------|----------------------|----------------------|--------------------|-------------------|
| 5.2 GHz band, 1TX | | | | | | |
| 5180 - 5240 | 802.11a | 19.08 | N/A | N/A | 19.08 | 80.91 |
| 5190 - 5230 | 802.11n HT40 | 19.10 | N/A | N/A | 19.10 | 81.28 |
| 5210 | 802.11ac VHT80 | 12.54 | N/A | N/A | 12.54 | 17.95 |
| 5.2 GHz band, 3TX | | | | | | |
| 5180 - 5240 | 802.11n HT20 CDD | 16.36 | 16.32 | 16.10 | 21.03 | 126.844 |
| 5180 - 5240 | 802.11n HT20 STBC | 19.10 | 18.90 | 18.97 | 23.76 | 237.794 |
| 5180 - 5240 | 802.11n HT20 TxBF | 14.05 | 14.77 | 14.62 | 19.26 | 84.375 |
| 5190 - 5230 | 802.11n HT40 CDD | 18.70 | 18.98 | 18.20 | 23.41 | 219.268 |
| 5190 - 5230 | 802.11n HT40 TxBF | 14.12 | 14.60 | 14.19 | 19.08 | 80.905 |
| 5210 | 802.11ac VHT80 CDD | 10.61 | 10.82 | 10.90 | 15.55 | 35.889 |
| 5210 | 802.11ac VHT80 TxBF | 10.74 | 10.71 | 10.31 | 15.36 | 34.374 |

5.3 GHz BAND

| Frequency Range (MHz) | Mode | Power, Chain 0 (dBm) | Power, Chain 1 (dBm) | Power, Chain 2 (dBm) | Output Power (dBm) | Output Power (mW) |
|--------------------------|---------------------|----------------------|----------------------|----------------------|--------------------|-------------------|
| 5.3 GHz band, 1TX | | | | | | |
| 5260 - 5320 | 802.11a | 18.90 | N/A | N/A | 18.90 | 77.62 |
| 5270 - 5310 | 802.11n HT40 | 14.09 | N/A | N/A | 14.09 | 25.64 |
| 5290 | 802.11ac VHT80 | 12.48 | N/A | N/A | 12.48 | 17.70 |
| 5.3 GHz band, 3TX | | | | | | |
| 5260 - 5320 | 802.11n HT20 CDD | 17.15 | 17.55 | 17.10 | 22.04 | 160.05 |
| 5260 - 5320 | 802.11n HT20 STBC | 18.45 | 18.57 | 18.65 | 23.33 | 215.21 |
| 5260 - 5320 | 802.11n HT20 TxBF | 14.00 | 14.15 | 13.90 | 18.79 | 75.67 |
| 5270 - 5310 | 802.11n HT40 CDD | 18.90 | 18.78 | 18.52 | 23.51 | 224.26 |
| 5270 - 5310 | 802.11n HT40 TxBF | 14.15 | 14.20 | 13.98 | 18.88 | 77.31 |
| 5290 | 802.11ac VHT80 CDD | 9.28 | 9.30 | 9.64 | 14.18 | 26.19 |
| 5290 | 802.11ac VHT80 TxBF | 11.55 | 11.51 | 10.84 | 16.08 | 40.58 |

5.6 GHz BAND

| Frequency Range (MHz) | Mode | Power, Chain 0 (dBm) | Power, Chain 1 (dBm) | Power, Chain 2 (dBm) | Output Power (dBm) | Output Power (mW) |
|--------------------------|---------------------|----------------------|----------------------|----------------------|--------------------|-------------------|
| 5.6 GHz band, 1TX | | | | | | |
| 5500-5700 | 802.11a | 18.52 | N/A | N/A | 18.52 | 71.12 |
| 5510-5670 | 802.11n HT40 | 17.55 | N/A | N/A | 17.55 | 56.89 |
| 5530 | 802.11ac VHT80 | 18.64 | N/A | N/A | 18.64 | 73.11 |
| 5.6 GHz band, 2TX | | | | | | |
| 5500-5700 | 802.11n HT20 CDD | 13.10 | 13.05 | 13.20 | 17.89 | 61.49 |
| 5500-5700 | 802.11n HT20 STBC | 18.40 | 18.45 | 18.40 | 23.19 | 208.35 |
| 5500-5700 | 802.11n HT20 TxBF | 13.15 | 14.00 | 13.56 | 18.36 | 68.47 |
| 5510-5670 | 802.11n HT40 CDD | 18.90 | 18.45 | 18.90 | 23.53 | 225.23 |
| 5510-5670 | 802.11n HT40 TxBF | 13.90 | 14.27 | 14.05 | 18.85 | 76.69 |
| 5530 | 802.11ac VHT80 CDD | 16.16 | 16.61 | 16.72 | 21.27 | 134.11 |
| 5530 | 802.11ac VHT80 TxBF | 13.90 | 14.05 | 14.00 | 18.75 | 75.08 |

5.8 GHz BAND

| Frequency Range (MHz) | Mode | Power, Chain 0 (dBm) | Power, Chain 1 (dBm) | Power, Chain 2 (dBm) | Output Power (dBm) | Output Power (mW) |
|--------------------------|---------------------|----------------------|----------------------|----------------------|--------------------|-------------------|
| 5.8 GHz band, 1TX | | | | | | |
| 5745-5825 | 802.11a | 18.90 | N/A | N/A | 18.90 | 77.62 |
| 5755-5795 | 802.11n HT40 | 19.31 | N/A | N/A | 19.31 | 85.31 |
| 5775 | 802.11ac VHT80 | 13.28 | N/A | N/A | 13.28 | 21.28 |
| 5.8 GHz band, 2TX | | | | | | |
| 5745-5825 | 802.11n HT20 CDD | 16.95 | 16.81 | N/A | 19.89 | 97.52 |
| 5775 | 802.11ac VHT80 CDD | 11.92 | 11.79 | N/A | 14.87 | 30.66 |
| 5.8 GHz band, 3TX | | | | | | |
| 5745-5825 | 802.11n HT20 CDD | 18.50 | 18.82 | 18.10 | 23.25 | 211.57 |
| 5745-5825 | 802.11n HT20 TxBF | 18.87 | 18.92 | 19.05 | 23.72 | 235.43 |
| 5755-5795 | 802.11n HT40 CDD | 19.41 | 18.89 | 19.09 | 23.91 | 245.84 |
| 5755-5795 | 802.11n HT40 TxBF | 19.28 | 19.26 | 18.38 | 23.76 | 237.92 |
| 5775 | 802.11ac VHT80 CDD | 10.47 | 10.98 | 10.80 | 15.53 | 35.70 |
| 5775 | 802.11ac VHT80 TxBF | 11.16 | 11.13 | 10.22 | 15.63 | 36.55 |

STRADDLE CHANNELS

| Frequency Range (MHz) | Mode | Power, Chain 0 (dBm) | Power, Chain 1 (dBm) | Power, Chain 2 (dBm) | Output Power (dBm) | Output Power (mW) |
|--|---------------------|----------------------|----------------------|----------------------|--------------------|-------------------|
| 5.6 GHz band, 3TX (Channels overlapping UNII-2C and UNII-3) | | | | | | |
| 5720 (Whole signal) | 802.11n HT20 CDD | 18.98 | 18.80 | 18.75 | 23.62 | 229.92 |
| 5720 (Whole signal) | 802.11n HT20 STBC | 18.87 | 18.90 | 19.00 | 23.69 | 234.15 |
| 5720 (Whole signal) | 802.11n HT20 TxBF | 18.98 | 18.80 | 18.75 | 23.62 | 229.92 |
| 5710 (Whole signal) | 802.11n HT40 CDD | 18.90 | 19.05 | 18.95 | 23.74 | 236.50 |
| 5710 (Whole signal) | 802.11n HT40 TxBF | 18.90 | 19.05 | 18.95 | 23.74 | 236.50 |
| 5690 (Whole signal) | 802.11ac VHT80 CDD | 18.10 | 17.96 | 17.80 | 22.73 | 187.34 |
| 5690 (Whole signal) | 802.11ac VHT80 TxBF | 18.10 | 17.96 | 17.80 | 22.73 | 187.34 |

List of test reduction (Non Beam-Forming modes)

| Antenna Port Testing | | |
|----------------------|---------------------------------|------------------------|
| Band | Mode | Covered by |
| 5 GHz bands | 802.11a Legacy 1TX | 802.11n HT20 CDD 3TX |
| 5 GHz bands | 802.11a CDD 2TX | 802.11n HT20 CDD 3TX |
| 5 GHz bands | 802.11a CDD 3TX | 802.11n HT20 CDD 3TX |
| 5 GHz bands | 802.11n HT20 CDD/SDM/STBC 2TX | 802.11n HT20 CDD 3TX |
| 5 GHz bands | 802.11n HT40 1TX | 802.11n HT40 CDD 3TX |
| 5 GHz bands | 802.11n HT40 CDD/SDM/STBC 2TX | 802.11n HT40 CDD 3TX |
| 5 GHz bands | 802.11n HT40 STBC 3TX | 802.11n HT40 CDD 3TX |
| 5 GHz bands | 802.11ac VHT80 1TX | 802.11ac VHT80 CDD 3TX |
| 5 GHz bands | 802.11ac VHT80 CDD/SDM/STBC 2TX | 802.11ac VHT80 CDD 3TX |
| 5 GHz bands | 802.11ac VHT80 STBC 3TX | 802.11ac VHT80 CDD 3TX |

| Radiated Testing | | |
|------------------|---------------------------------|------------------------------------|
| Band | Mode | Covered by |
| 5 GHz bands | 802.11a Legacy 1TX (Harmonics) | 802.11n HT20 CDD 3TX (Harmonics) |
| 5 GHz bands | 802.11a CDD 2TX | 802.11n HT20 CDD 3TX |
| 5 GHz bands | 802.11a CDD 3TX | 802.11n HT20 CDD 3TX |
| 5 GHz bands | 802.11n HT20 CDD/SDM/STBC 2TX | 802.11n HT20 CDD 3TX |
| 5 GHz bands | 802.11n HT40 1TX (Harmonics) | 802.11n HT40 CDD 3TX (Harmonics) |
| 5 GHz bands | 802.11n HT40 STBC 3TX | 802.11n HT40 CDD 3TX |
| 5 GHz bands | 802.11ac VHT80 1TX (Harmonics) | 802.11ac VHT80 CDD 3TX (Harmonics) |
| 5 GHz bands | 802.11ac VHT80 CDD/SDM/STBC 2TX | 802.11ac VHT80 CDD 3TX |
| 5 GHz bands | 802.11ac VHT80 STBC 3TX | 802.11ac VHT80 CDD 3TX |

List of test reduction (Beam-Forming modes)

| Antenna Port Testing | | |
|----------------------|-----------------------|-----------------------|
| Band | Mode | Covered by |
| 5 GHz bands | 802.11n HT40 BF 2Tx | 802.11n HT40 BF 3Tx |
| 5 GHz bands | 802.11ac VHT80 BF 2Tx | 802.11ac VHT80 BF 3Tx |

| Radiated Testing | | |
|------------------|-----------------------|-----------------------|
| Band | Mode | Covered by |
| 5 GHz bands | 802.11a BF 2TX | 802.11n HT20 BF 3Tx |
| 5 GHz bands | 802.11a BF 3TX | 802.11n HT20 BF 3Tx |
| 5 GHz bands | 802.11n HT20 BF 2Tx | 802.11n HT20 BF 3Tx |
| 5 GHz bands | 802.11n HT40 BF 2Tx | 802.11n HT40 BF 3Tx |
| 5 GHz bands | 802.11ac VHT80 BF 2Tx | 802.11ac VHT80 BF 3Tx |

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The EUT utilizes the following antenna:

| No. | Antenna Manufacturer | Antenna Type | Model | Peak gain@ 5150-5250MHz | Peak gain@ 5250-5350MHz | Peak gain@ 5470-5725MHz | Peak gain@ 5725 - 5850MHz |
|-----|----------------------|------------------------------------|----------------------|-------------------------|-------------------------|-------------------------|---------------------------|
| 1 | MagLayers | 802.11abgn WLAN, Bluetooth Antenna | PCA-4077-25GC1-A1-RT | 5.85 | 5.85 | 6.21 | 6.21 |

5.4. SOFTWARE AND FIRMWARE

The EUT driver software installed during testing was Broadcom, rev.7.35.201.0.

The test utility software used during testing was Broadcom, rev. 7.15RC163.2 (r518356 WLTEST).

5.5. WORST-CASE CONFIGURATION AND MODE

The EUT was tested as an external module installed in a test jig board connected to a host Laptop PC.

X,Y,Z investigation was performed and Y orientation was found to be worst-case, therefore, all final radiated emissions was performed using Y orientation. See setup photos section for details.

Radiated emission below 1GHz, above 18GHz, and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Worst-case chains as provided by the client were:

For SISO modes:

- 5 GHz band: chain 0 (connector J0) connected to any antenna, as all three antennas have equal antenna gain.

For 2 TX modes:

- 5 HGz band: chain 0 (connector J0) connected to any antenna and chain 1 (connector J1) connected to any antenna, as all three antennas have equal antenna gain.

Worst-case data rates as provided by the client were:

802.11b mode: 1 Mbps
802.11g mode: 6 Mbps
802.11a mode: 6 Mbps
802.11n HT20 mode: MCS0
802.11n HT40 mode: MCS0
802.11ac VHT80 mode: MCS0

For TxBF mode conducted testing, the bandwidth and duty cycle data were shared with CDD mode; the TxBF mode radiated portion has its own duty cycle.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

| Support Equipment List | | | | |
|------------------------|--------------|----------------|---------------|--------|
| Description | Manufacturer | Model | Serial Number | FCC ID |
| Laptop | Lenovo | Lenovo G560 | CBO6427681 | N/A |
| AC / DC Adapter | Lenovo | ADP-65KHB | N/A | N/A |
| Laptop | DELL | Latitude E6400 | 7WCBYH1 | N/A |
| AC / DC Adapter | DELL | DA90PM111 | N/A | N/A |


I/O CABLES

| I/O Cable List | | | | | | |
|----------------|------|----------------------|----------------|-------------|------------------|---------|
| Cable No | Port | # of identical ports | Connector Type | Cable Type | Cable Length (m) | Remarks |
| 1 | AC | 1 | US115V | Un-Shielded | 1 | |
| 2 | DC | 1 | 19.5 Vdc | Un-Shielded | 1.5 | |

TEST SETUP

The EUT is connected to a host laptop via PCIE card. Test software exercised the EUT.

SETUP DIAGRAM FOR TESTS

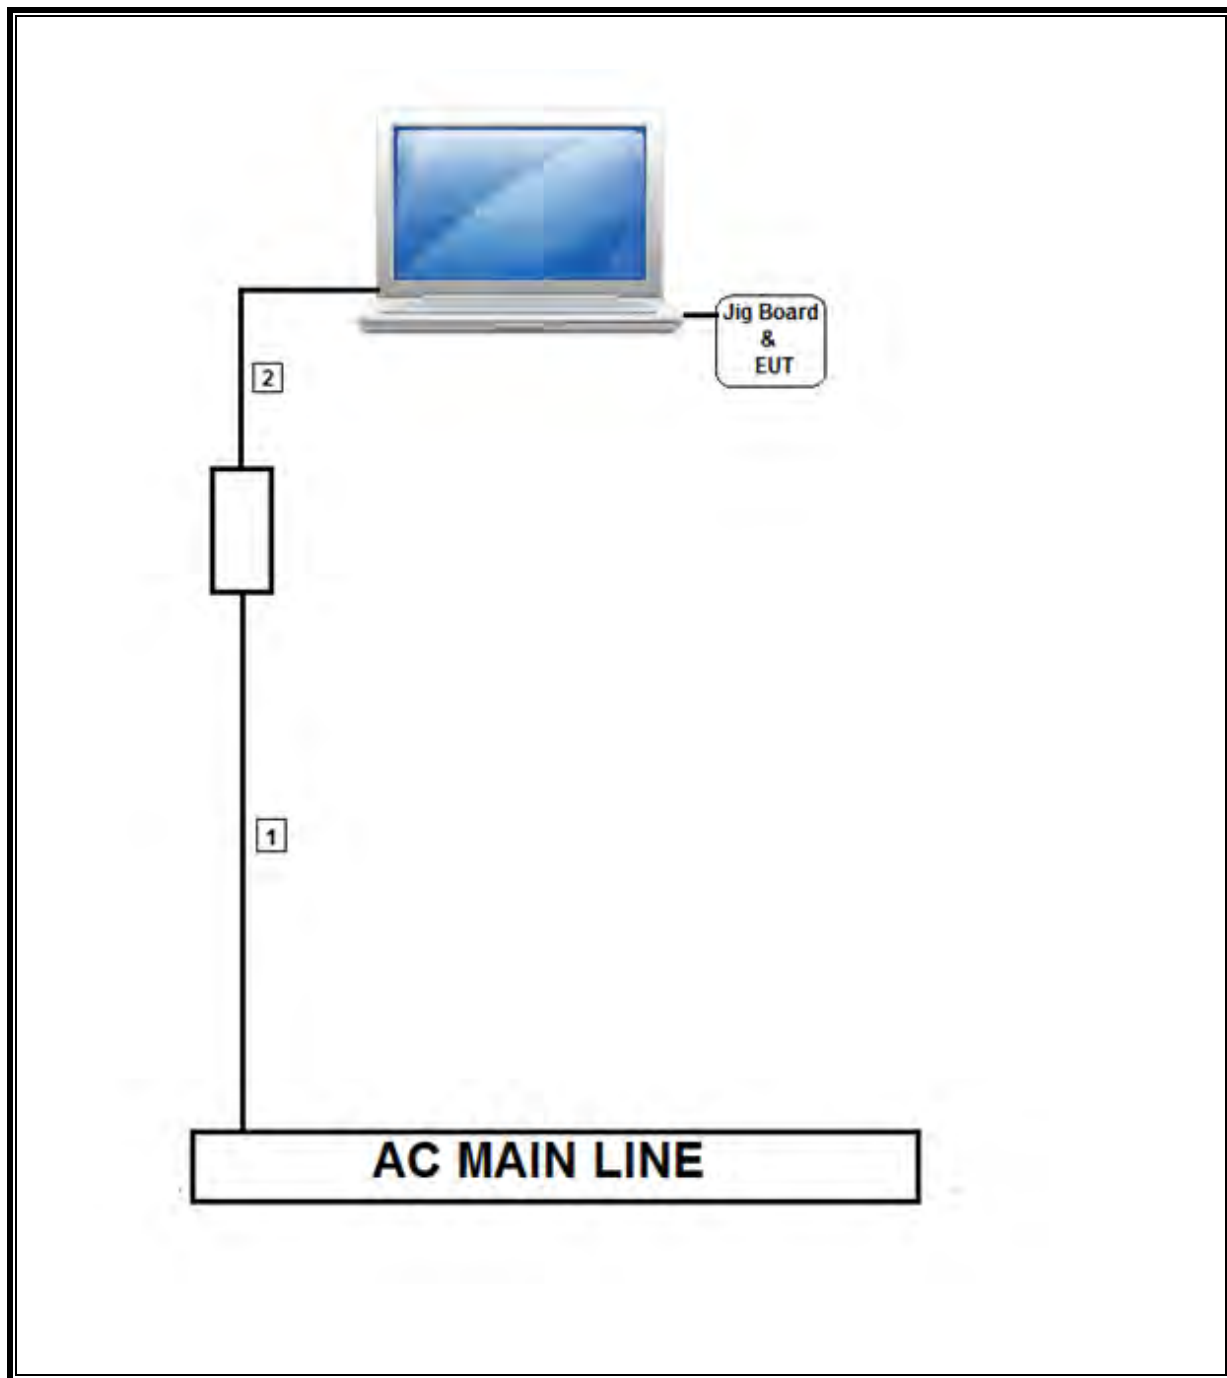

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

| Test Equipment List | | | | | |
|---------------------------------|-----------------|------------------------|------------------------|----------|----------|
| Description | Manufacturer | Model | T No. | Cal Date | Cal Due |
| Radiated Software | UL | UL EMC | Ver 9.5, July 22, 2014 | | |
| Line Conducted Software | UL | UL EMC | Ver 9.5, May 17, 2012 | | |
| Bilog Antenna 30-1000MHz | Sunol | JB1 | 136 | 09/10/14 | 09/10/15 |
| Horn Antenna 1-18GHz | ETS | 3117 | 345 | 03/03/15 | 03/03/16 |
| Horn Antenna 18-26GHz | ARA | MWH-1826 | 89 | 12/17/14 | 12/17/15 |
| Preamp 10kHz-1000MHz | Sonoma | 310 | 300 | 11/01/14 | 11/01/15 |
| Preamp 1-8GHz | Miteq | AMF-4D-01000800-30-29P | 782 | 11/18/14 | 11/18/15 |
| Preamp 1-18GHz | Miteq | AFS42-00101800-25-2-42 | 492 | 08/09/14 | 08/09/15 |
| Preamp 1-26.5GHz | Agilent | 8449B | 404 | 04/13/15 | 04/03/16 |
| Spectrum Analyzer 3kHz - 44GHz | Agilent | N9030A | 908 | 09/05/14 | 09/05/15 |
| Spectrum Analyzer 9kHz - 40GHz | HP | 8564E | 106 | 08/06/14 | 08/06/15 |
| Coaxial Switchbox | Agilent | SP6T | 927 | 09/15/14 | 09/15/15 |
| 3GHz HPF | Micro-Tronics | HPM17543 | 486 | 11/18/14 | 11/18/15 |
| EMI Test Receiver | Rohde & Schwarz | ECSI 7 | 212 | 08/14/14 | 08/14/15 |
| Spectrum Analyzer 3Hz to 44GHz | Agilent | E4440A | 123 | 10/28/14 | 10/28/15 |
| Power Meter | Agilent | N1911A | 377 | 06/30/14 | 06/30/15 |
| Power Sensor | Agilent | E9327A | 117 | 03/09/15 | 03/09/16 |
| Antenna, Horn 26.5 to 40GHz | ARA | MWH-2640/B | C00891 | 11/14/14 | 11/14/15 |
| Amplifier, 26 - 40GHz | Miteq | NSP4000-SP2 | 88 | 9/3/2014 | 9/3/2015 |
| EMI Test Receiver, 9KHz to 7GHz | Rohde & Schwarz | ESCI 7 | 284 | 09/16/14 | 09/16/15 |
| LISN for Conducted Emission | FCC | 50/250-25-2 | 24 | 01/16/15 | 01/16/16 |

7. MEASUREMENT METHODS

On Time and Duty Cycle: KDB 789033 D02 v01, Section B.

26 dB Emission BW: KDB 789033 D02 v01, Section C.

99% Occupied BW: KDB 789033 D02 v01, Section D.

Conducted Output Power: KDB 789033 D02 v01, Section E.3.b (Method PM-G), and KDB 662911 D01 v02r01.

Power Spectral Density: KDB 789033 D02 v01, Section F, and KDB 662911 D01 v02r01.

Unwanted emissions in restricted bands: KDB 789033 D02 v01, Sections G.2, G.3, G.4, G.5, and G.6.

Unwanted emissions in non-restricted bands: KDB 789033 D02 v01, Sections G.2, G.3, G.4, and G.5.

AC Power Line Conducted Emissions: ANSI C63.10-2009, Section 6.2.

8. ANTENNA PORT TEST RESULTS

8.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.



ON TIME AND DUTY CYCLE RESULTS



| Mode | ON Time B (msec) | Period (msec) | Duty Cycle x (linear) | Duty Cycle (%) | Duty Cycle Correction Factor (dB) | 1/B Minimum VBW (kHz) |
|------------------------|------------------------|------------------|-----------------------------|----------------------|---|-----------------------------|
| 5GHz Band | | | | | | |
| 802.11a 1TX | 2.061 | 2.084 | 0.989 | 98.90% | 0.00 | 0.010 |
| 802.11n HT20 CDD 3TX | 1.917 | 1.938 | 0.989 | 98.92% | 0.00 | 0.010 |
| 802.11n HT20 STBC 3TX | 1.926 | 1.946 | 0.990 | 98.97% | 0.00 | 0.010 |
| 802.11n HT20 BF 3TX | 24.000 | 27.880 | 0.861 | 86.08% | 0.65 | 0.042 |
| 802.11n HT40 CDD 3TX | 0.9440 | 0.9640 | 0.979 | 97.93% | 0.09 | 1.059 |
| 802.11n HT40 BF 3TX | 5.660 | 6.840 | 0.827 | 82.75% | 0.82 | 0.177 |
| 802.11ac VHT80 CDD 3TX | 0.4590 | 0.4780 | 0.960 | 96.03% | 0.18 | 2.179 |
| 802.11ac VHT80 BF 3TX | 2.7500 | 3.7500 | 0.733 | 73.33% | 1.35 | 0.364 |



Note: CDD mode was also used for conducted BF testing. DCCF for BF was only used for radiated testing.



8.2. DUTY CYCLE PLOTS



5 GHz BANDS

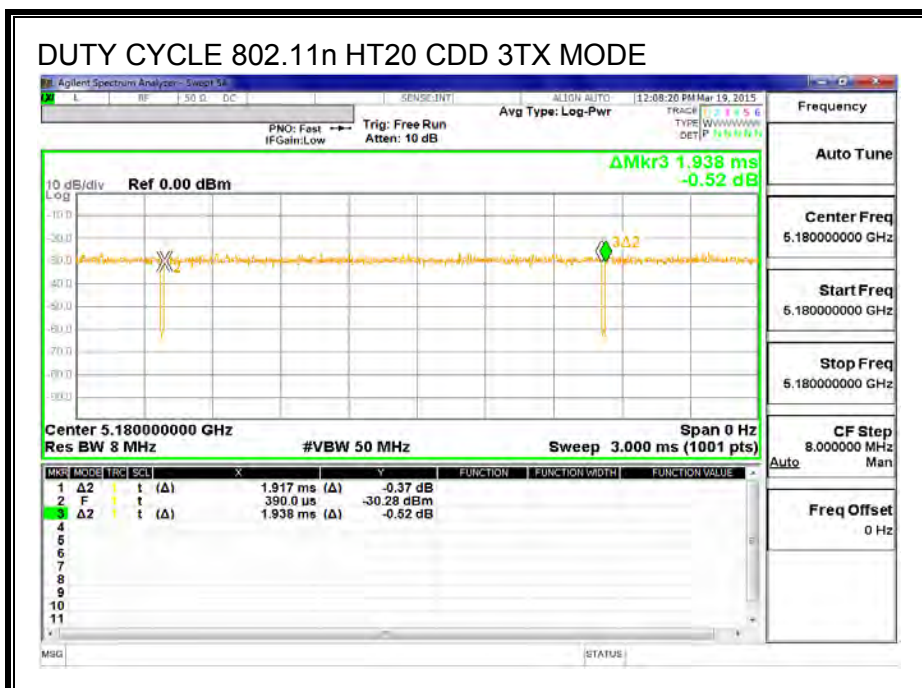
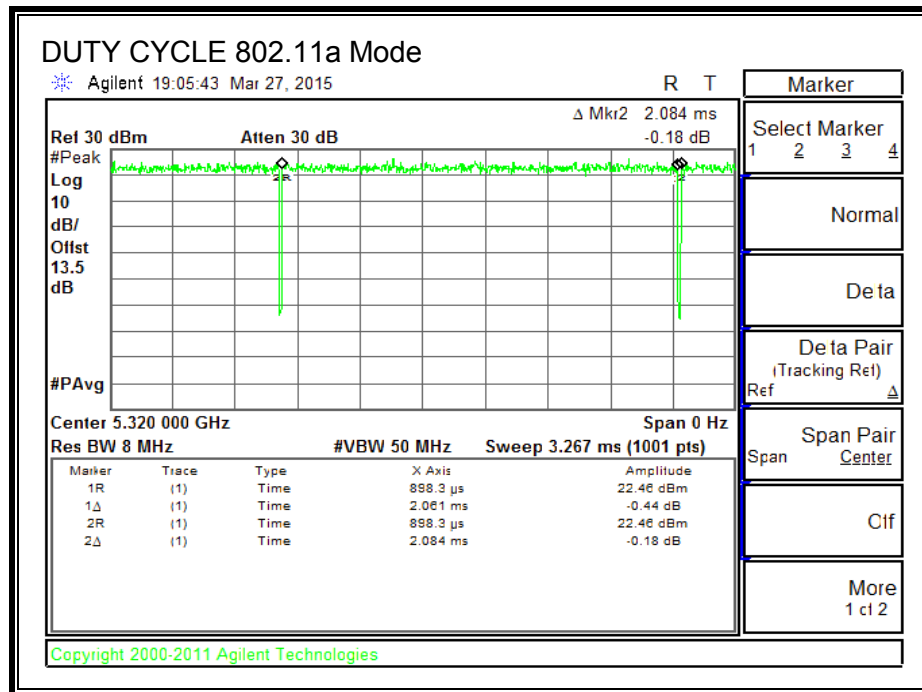


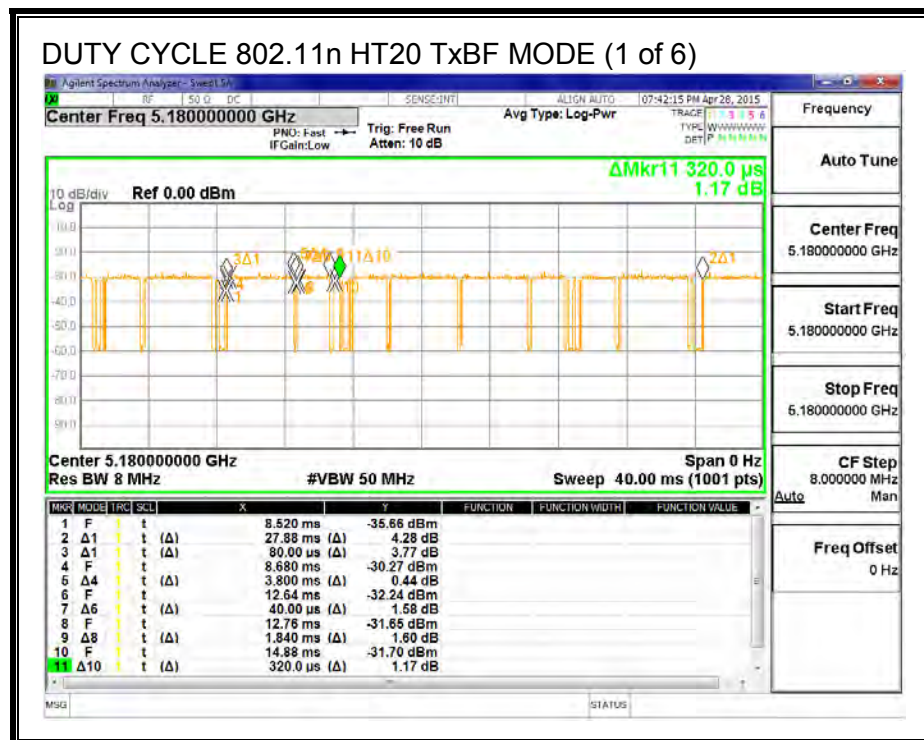
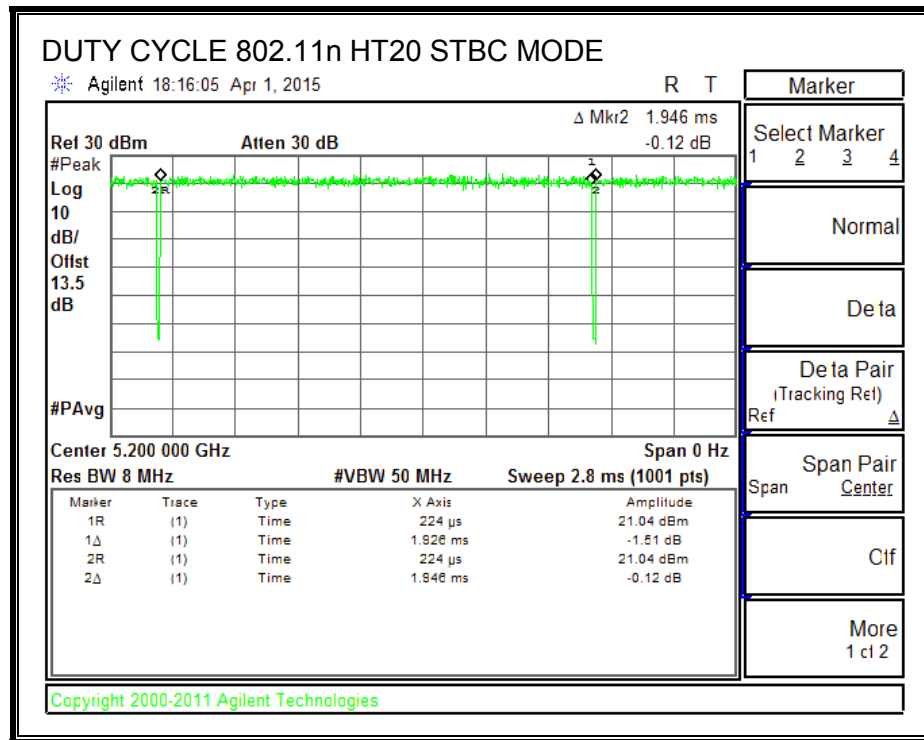


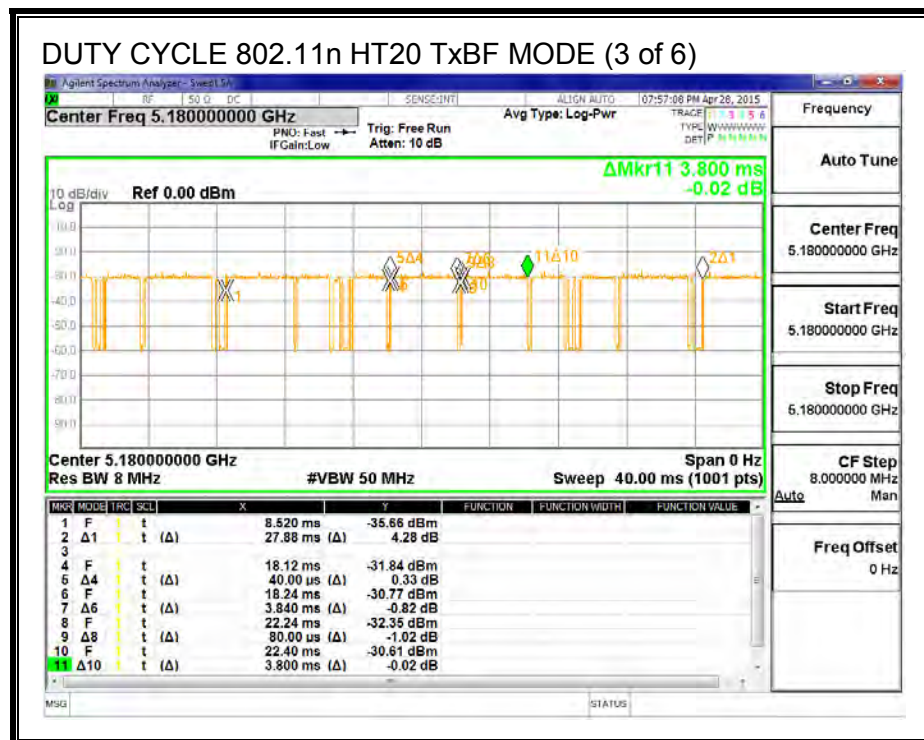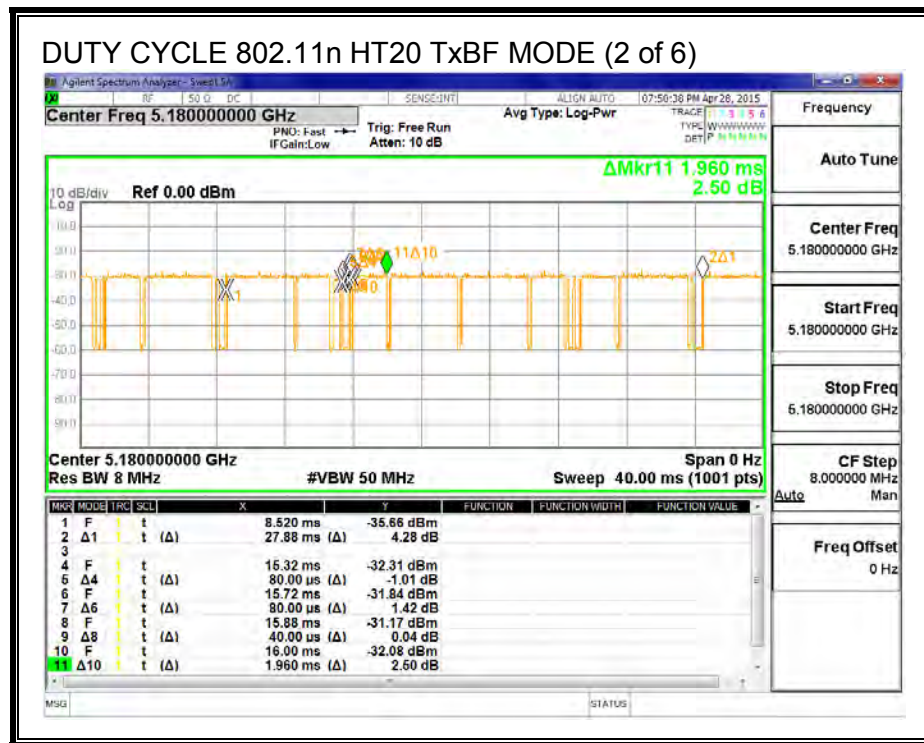


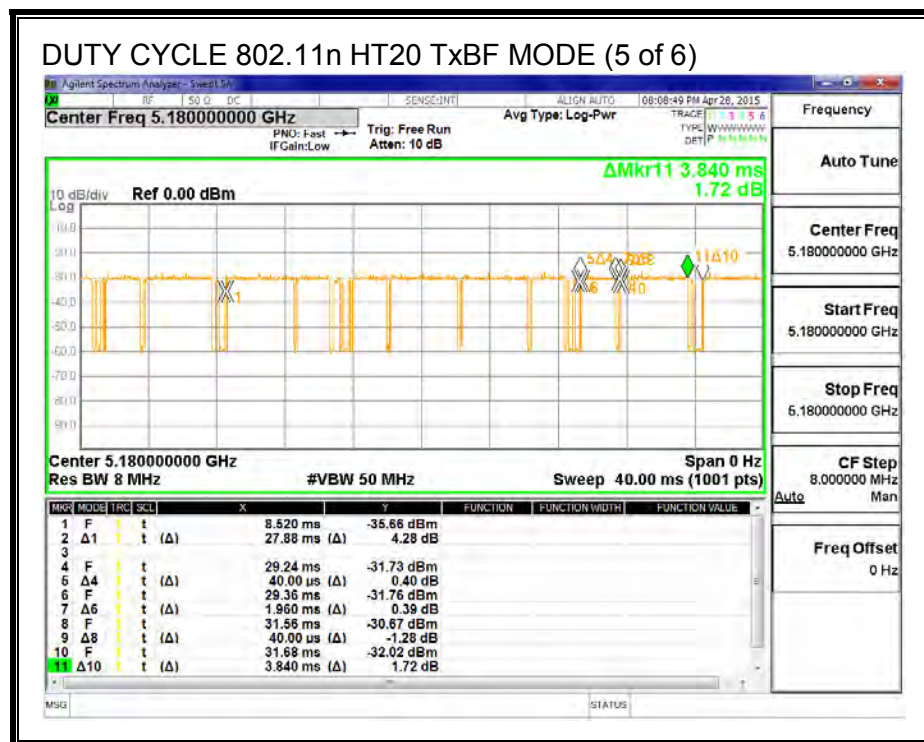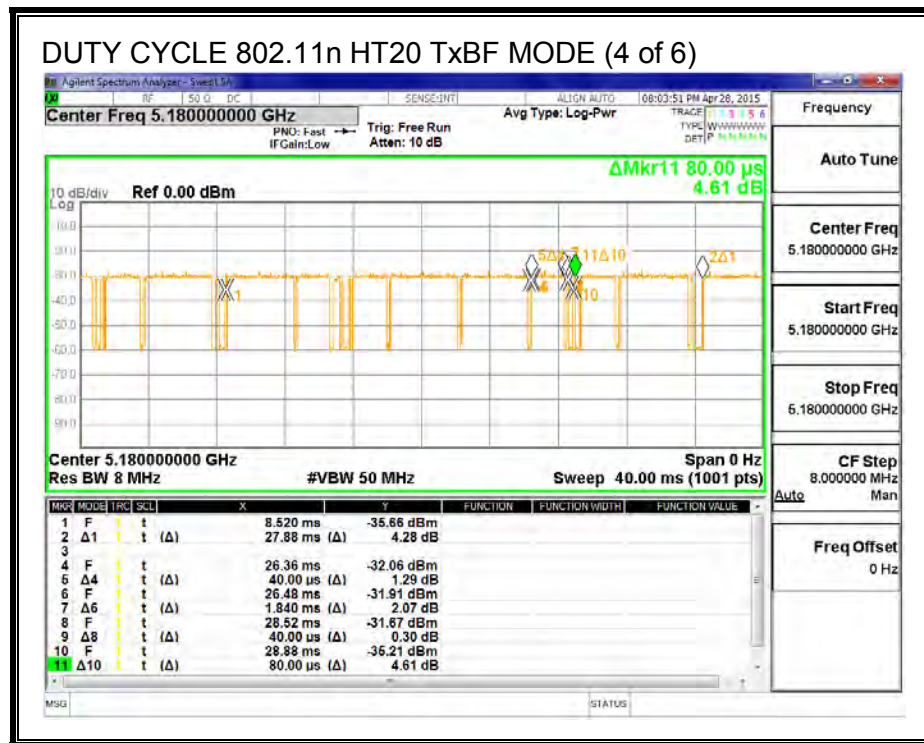

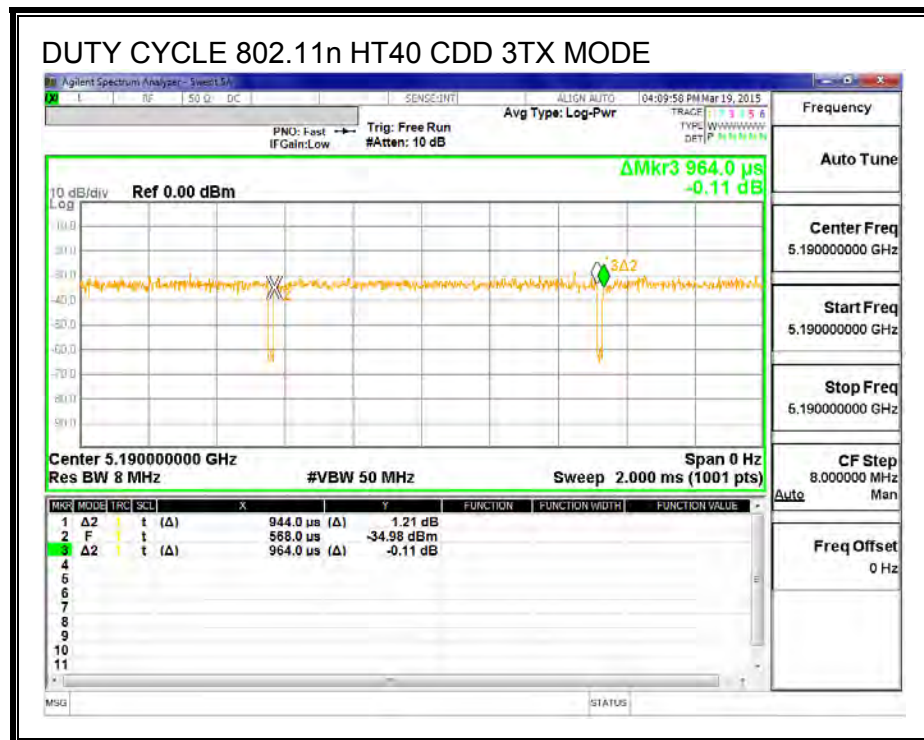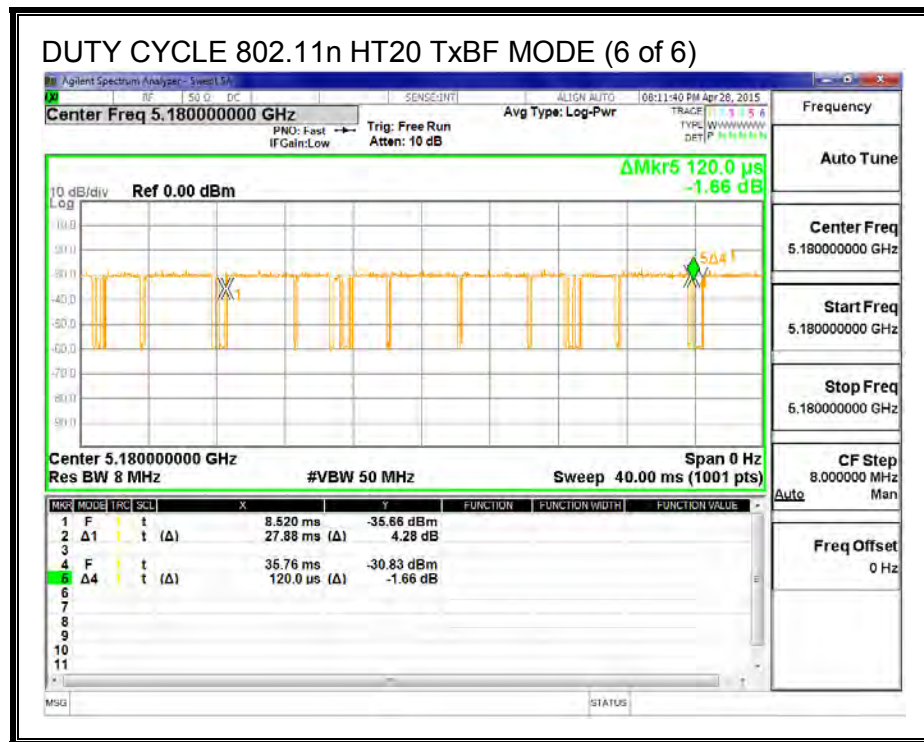

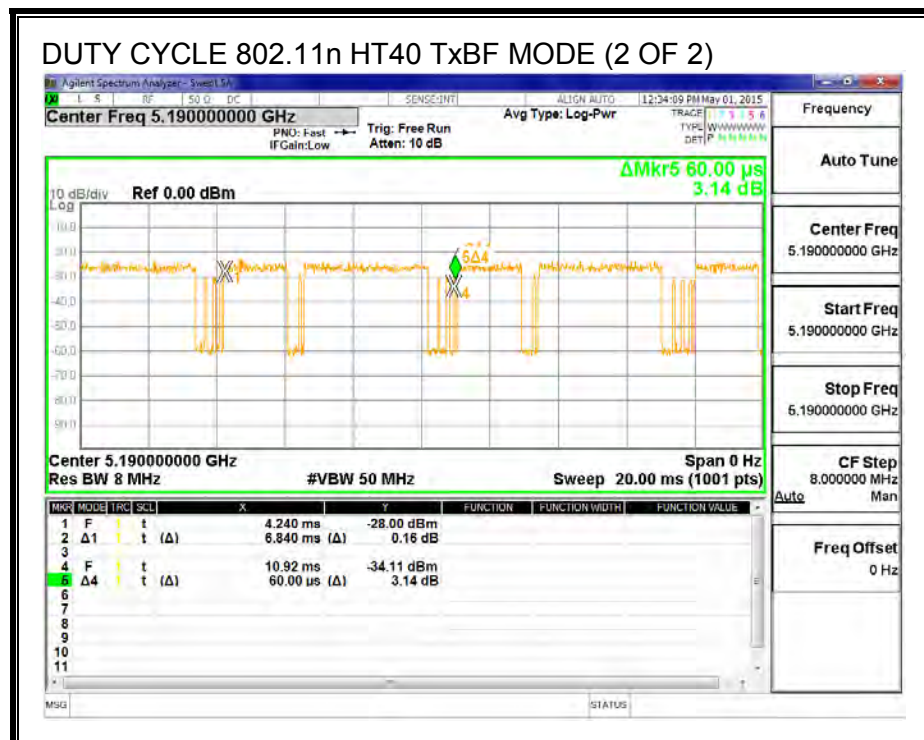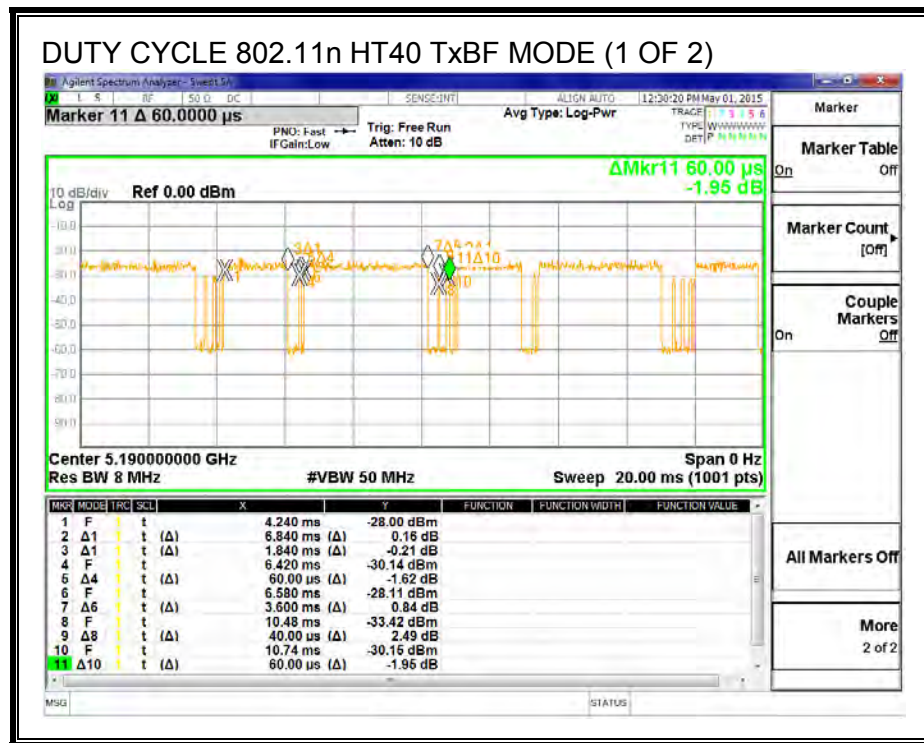

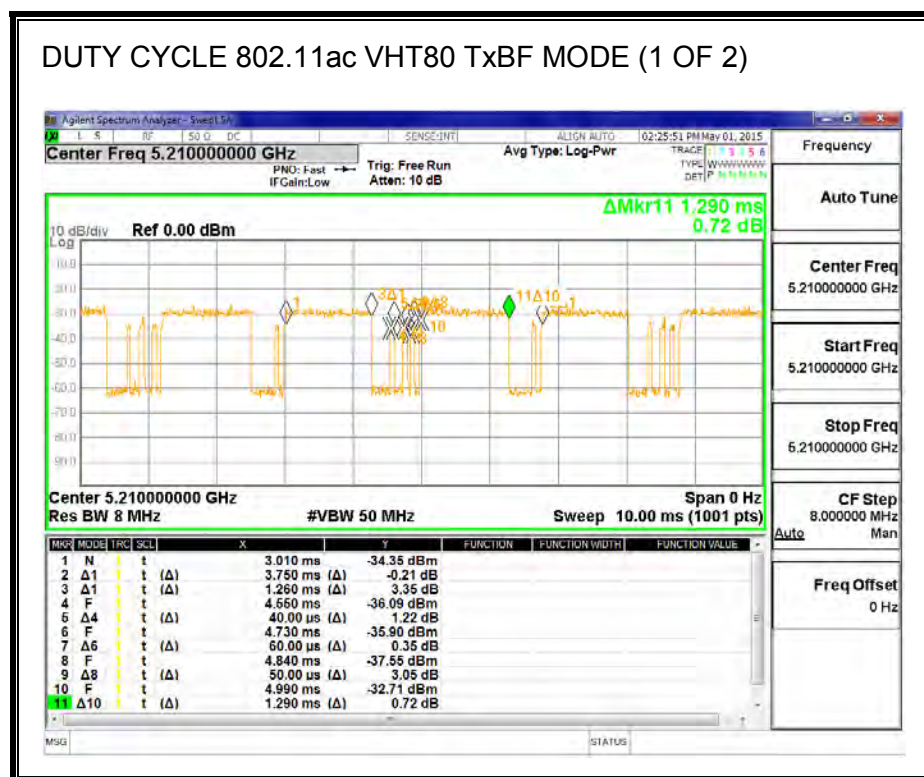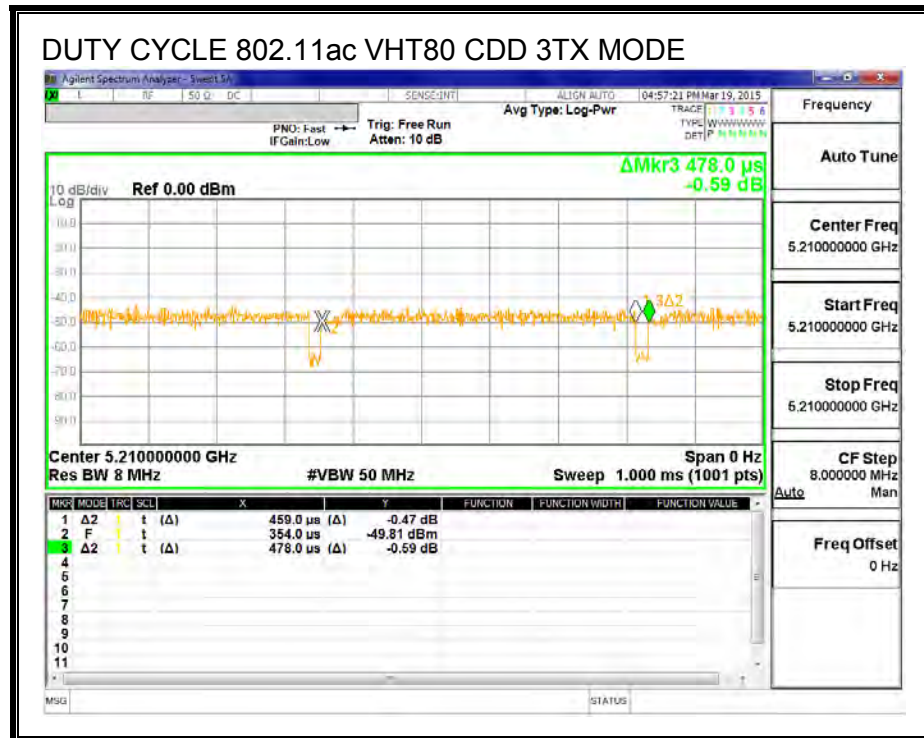

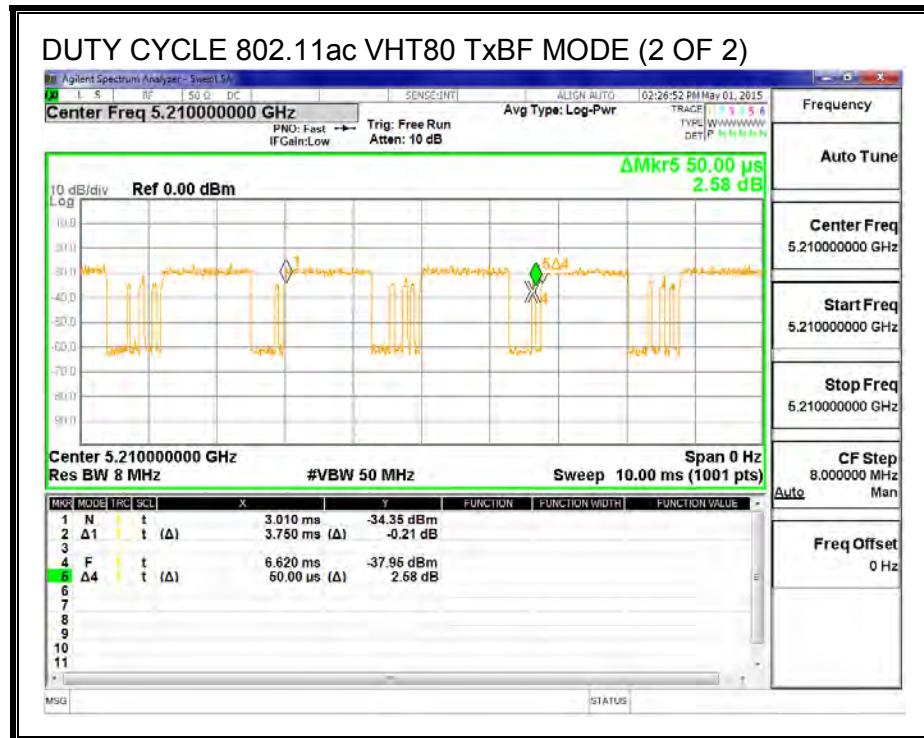

8.3. 802.11a LEGACY 1TX MODE IN THE 5.2 GHz BAND

8.3.1. OUTPUT POWER

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

This is SISO mode, AG is the highest (worst-case) = 5.85 dBi

RESULTS

Antenna Gain and Limits

| Channel | Frequency (MHz) | Directional Gain for Power (dBi) | Power Limit (dBm) |
|---------|--------------------|---|-------------------------|
| Low | 5180 | 5.85 | 24.00 |

Output Power Results

| Channel | Frequency (MHz) | Chain 0 Meas Power (dBm) | Total Corr'd Power (dBm) | Power Limit (dBm) | Power Margin (dB) |
|---------|--------------------|-----------------------------------|-----------------------------------|-------------------------|-------------------------|
| Low | 5180 | 19.08 | 19.08 | 24.00 | -4.92 |

Note: the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.

8.4. 802.11n HT20 CDD 3Tx MODE IN THE 5.2 GHz BAND

8.4.1. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS


| Channel | Frequency (MHz) | 26 dB BW Chain 0 (MHz) | 26 dB BW Chain 1 (MHz) | 26 dB BW Chain 2 (MHz) |
|---------|--------------------|------------------------------|------------------------------|------------------------------|
| Low | 5180 | 39.25 | 40.55 | 42.85 |
| Mid | 5200 | 42.20 | 41.10 | 41.30 |
| High | 5240 | 41.60 | 41.60 | 42.35 |



26 dB BANDWIDTH, Chain 0

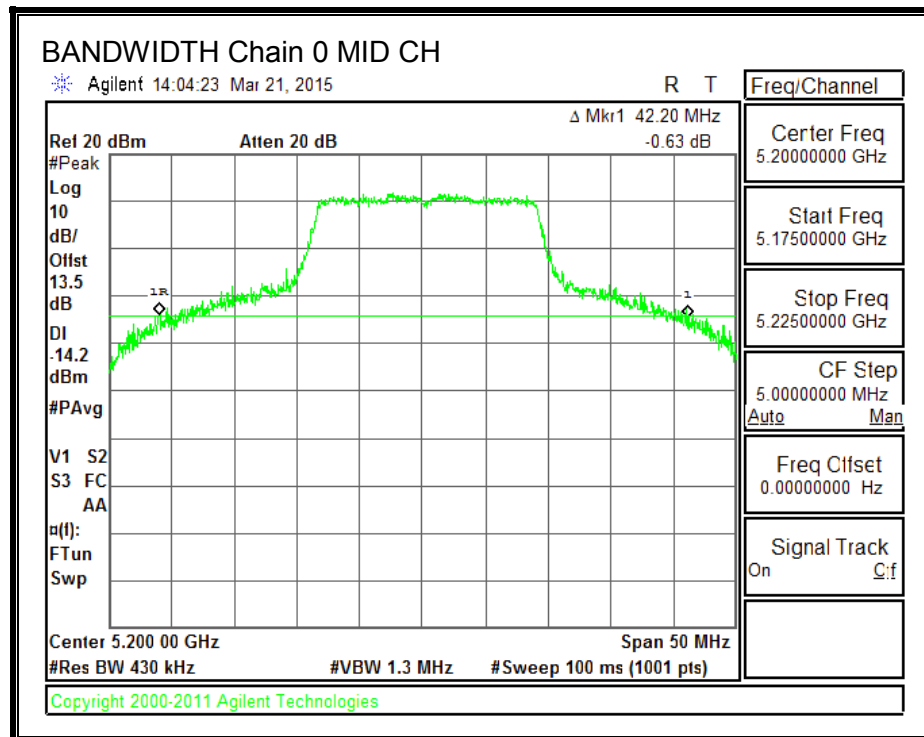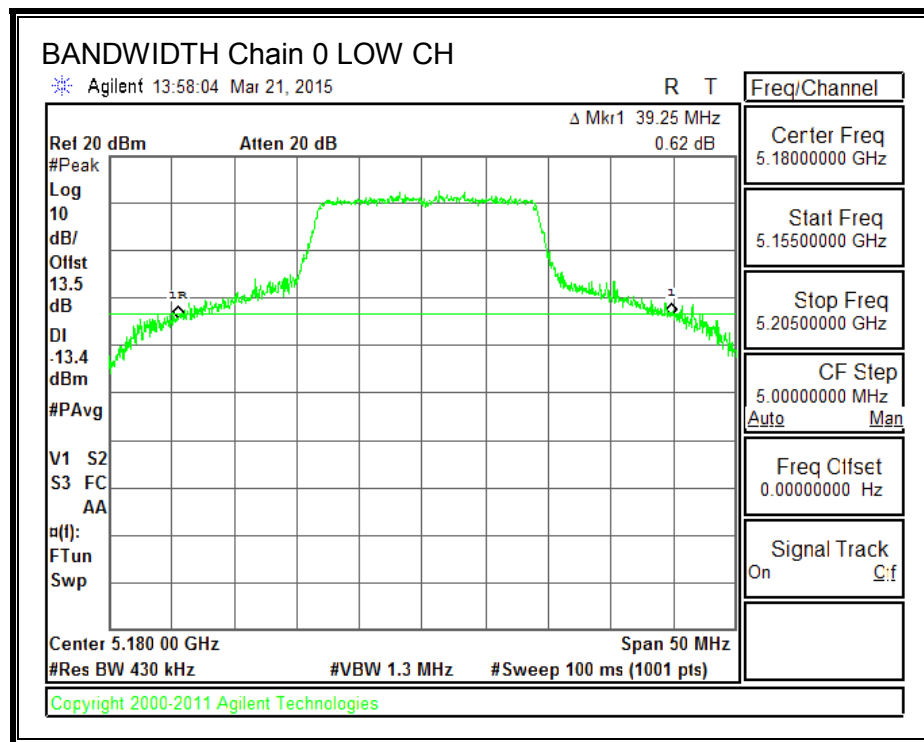


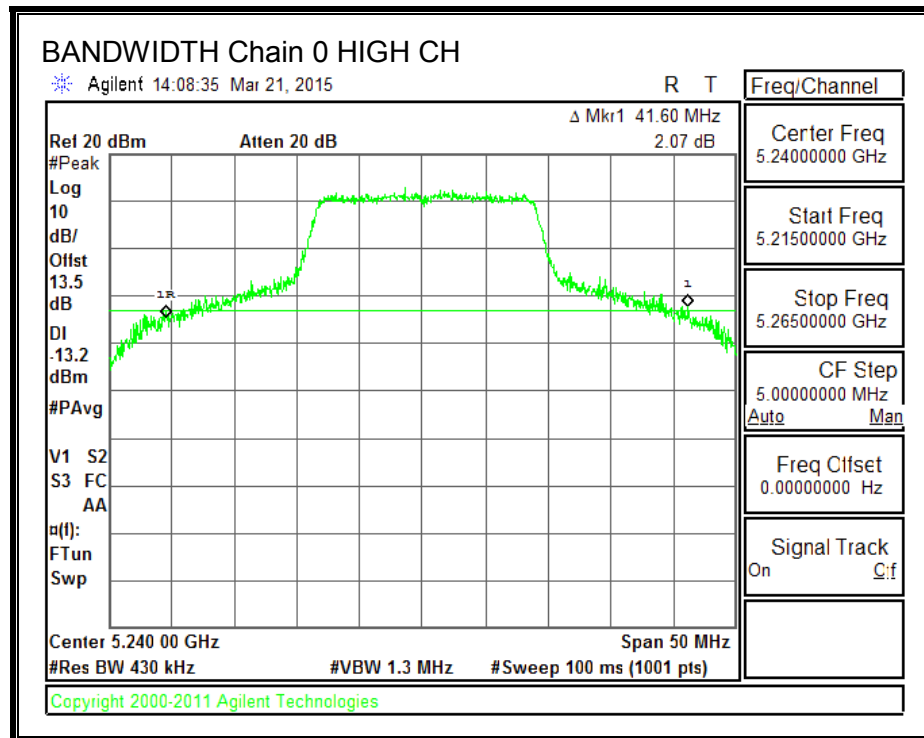



26 dB BANDWIDTH, Chain 1

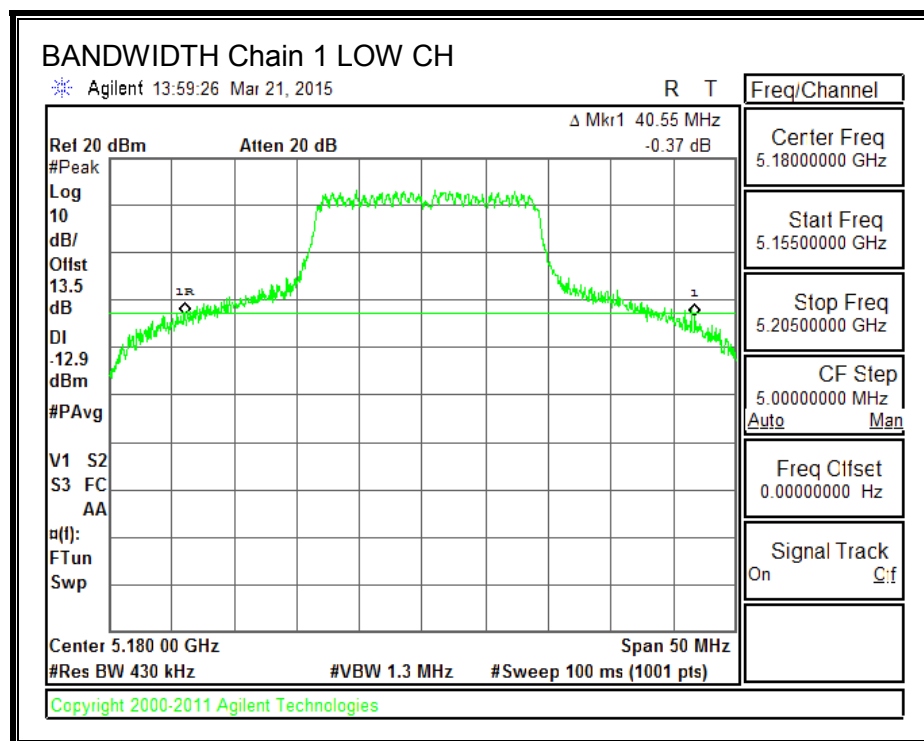

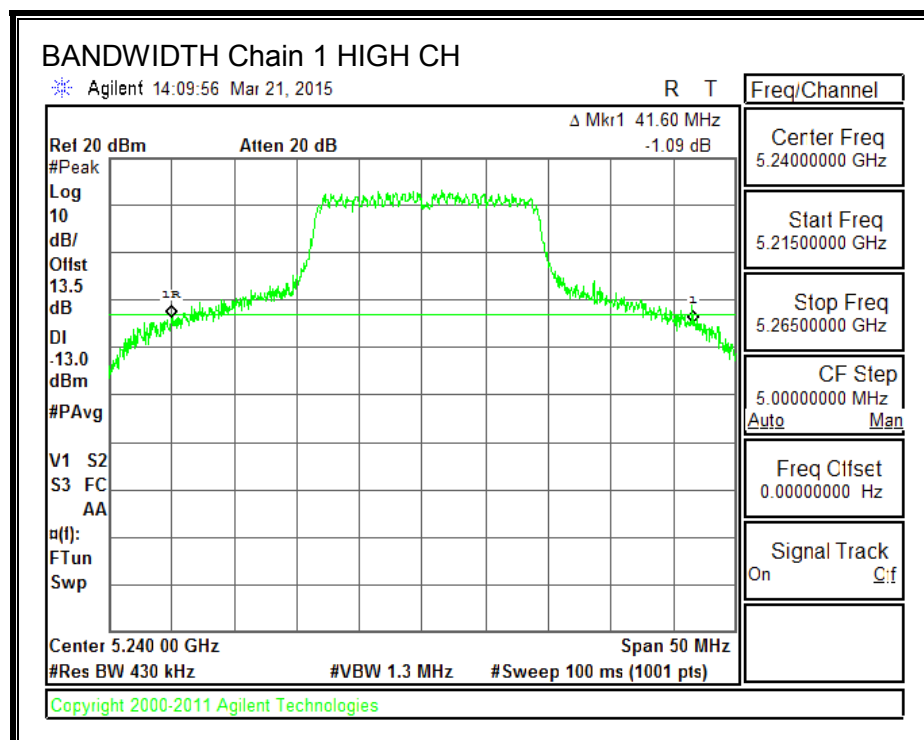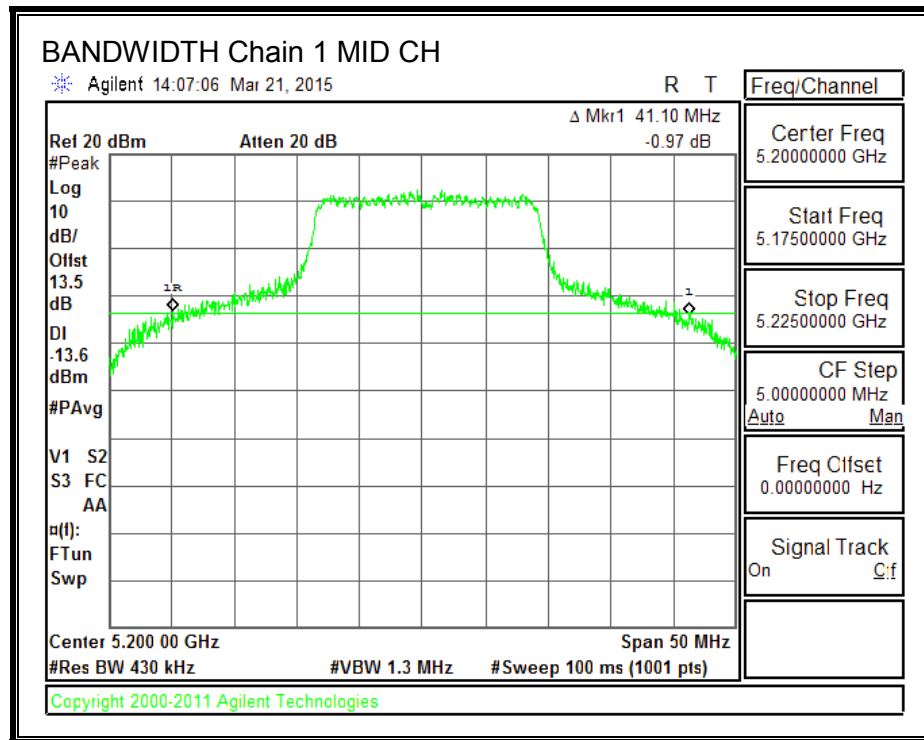

26 dB BANDWIDTH, Chain 2

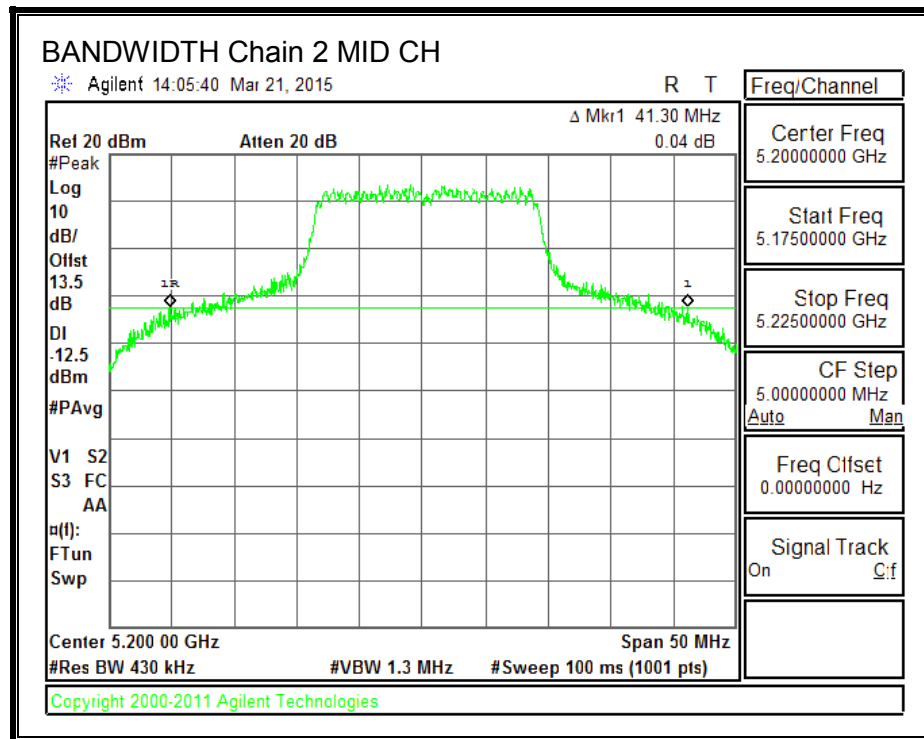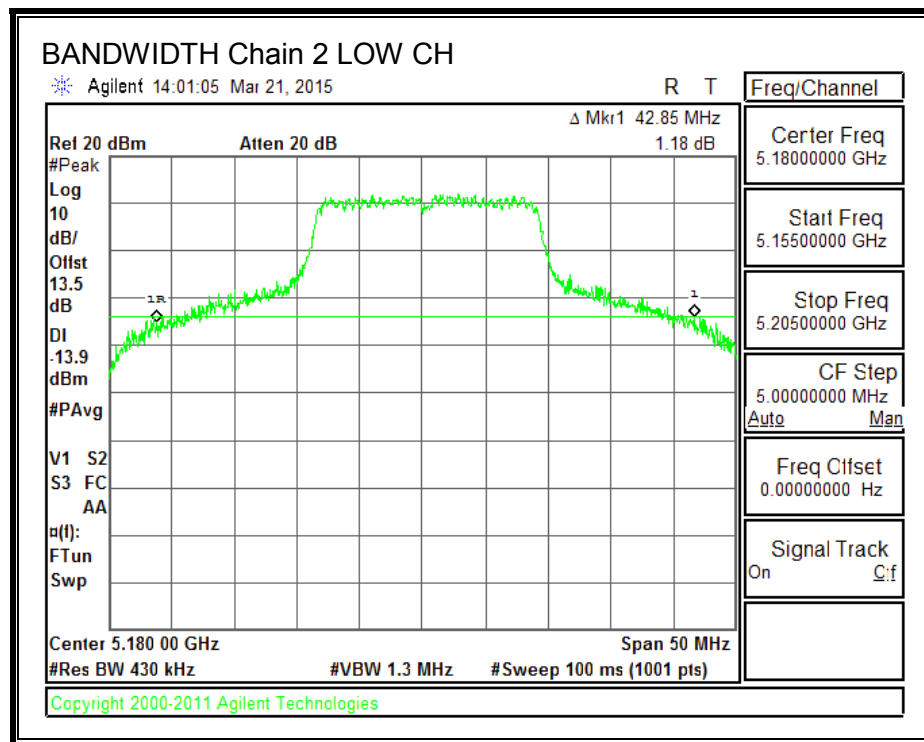

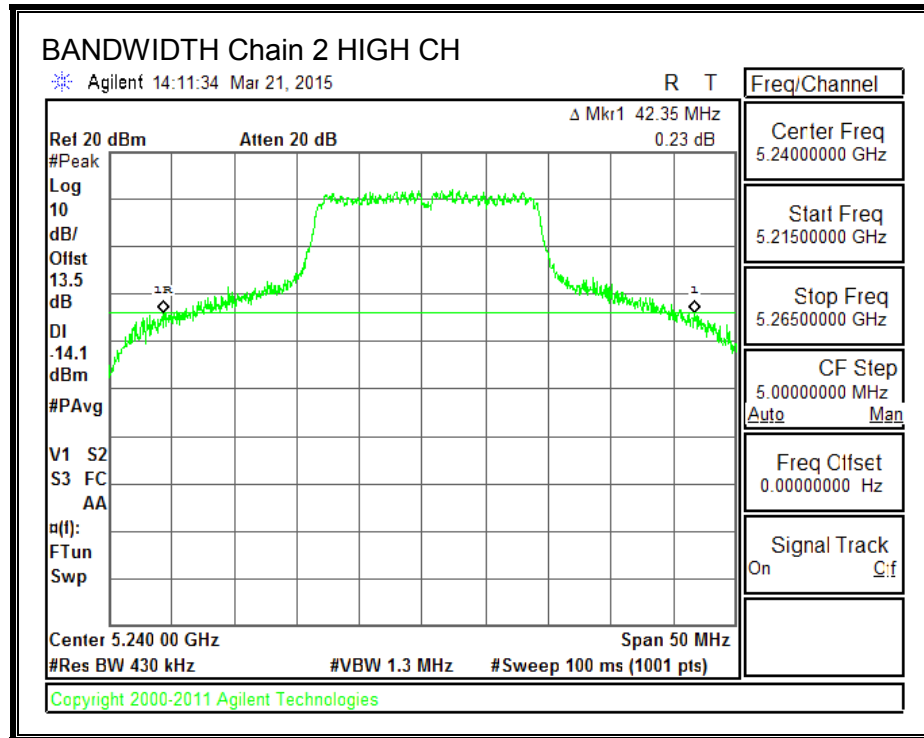

8.4.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS


| Channel | Frequency (MHz) | 99% BW Chain 0 (MHz) | 99% BW Chain 1 (MHz) | 99% BW Chain 2 (MHz) |
|---------|--------------------|----------------------------|----------------------------|----------------------------|
| Low | 5180 | 17.8410 | 17.8151 | 17.9016 |
| Mid | 5200 | 17.8652 | 17.8372 | 17.9418 |
| High | 5240 | 17.8346 | 17.8706 | 17.9110 |



99% BANDWIDTH, Chain 0

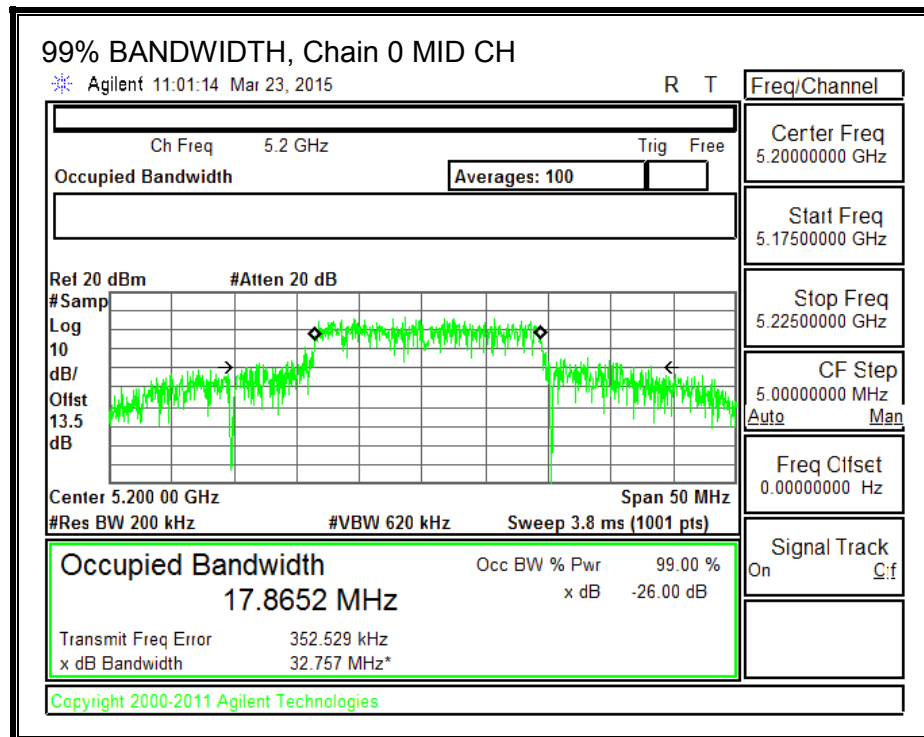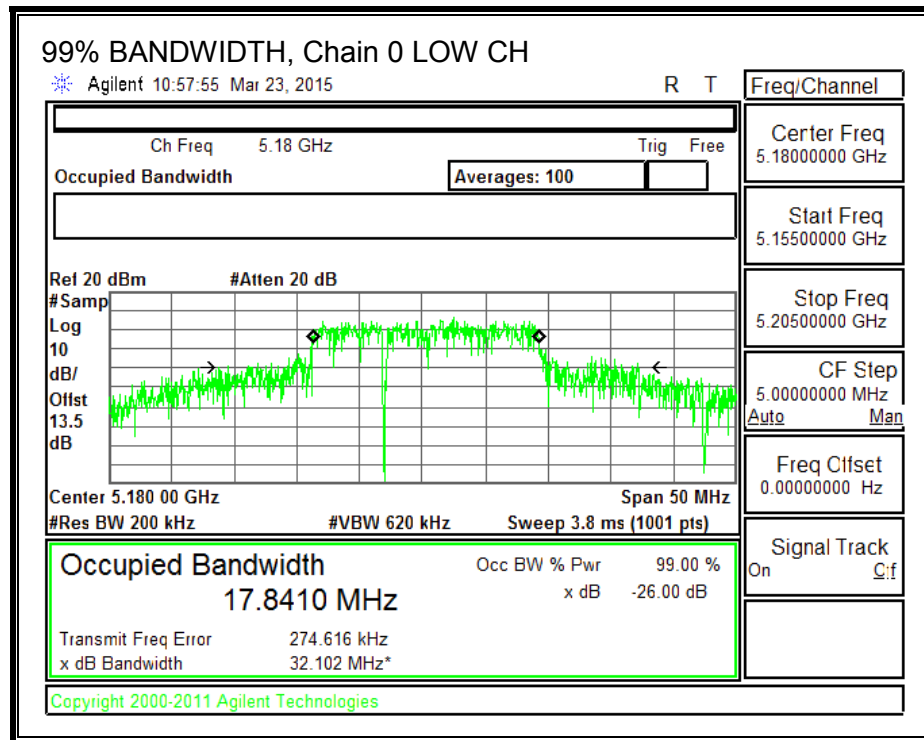


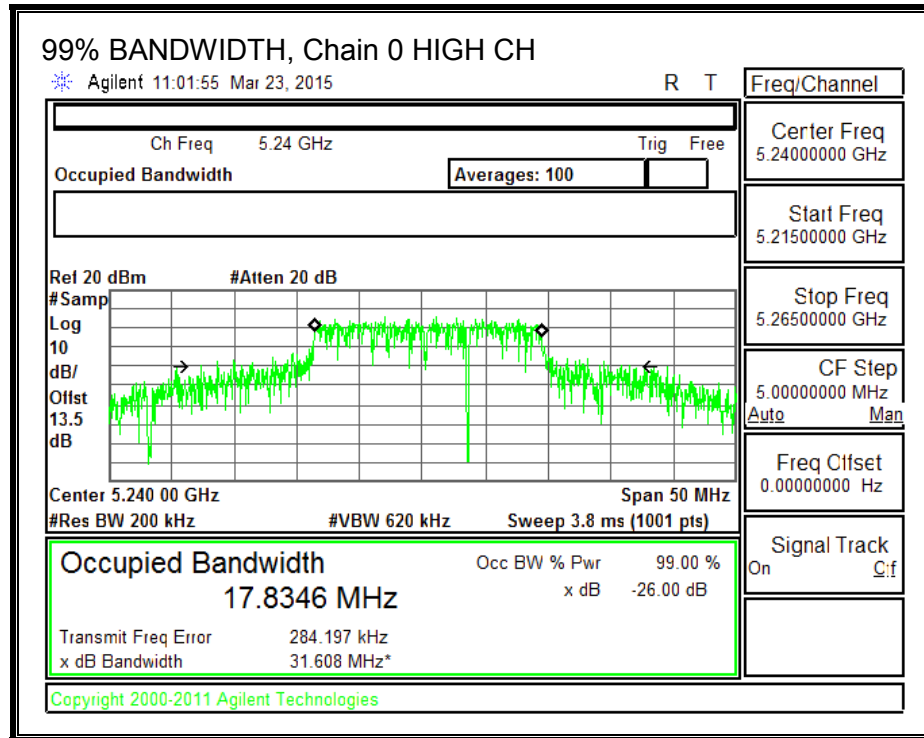



99% BANDWIDTH, Chain 1

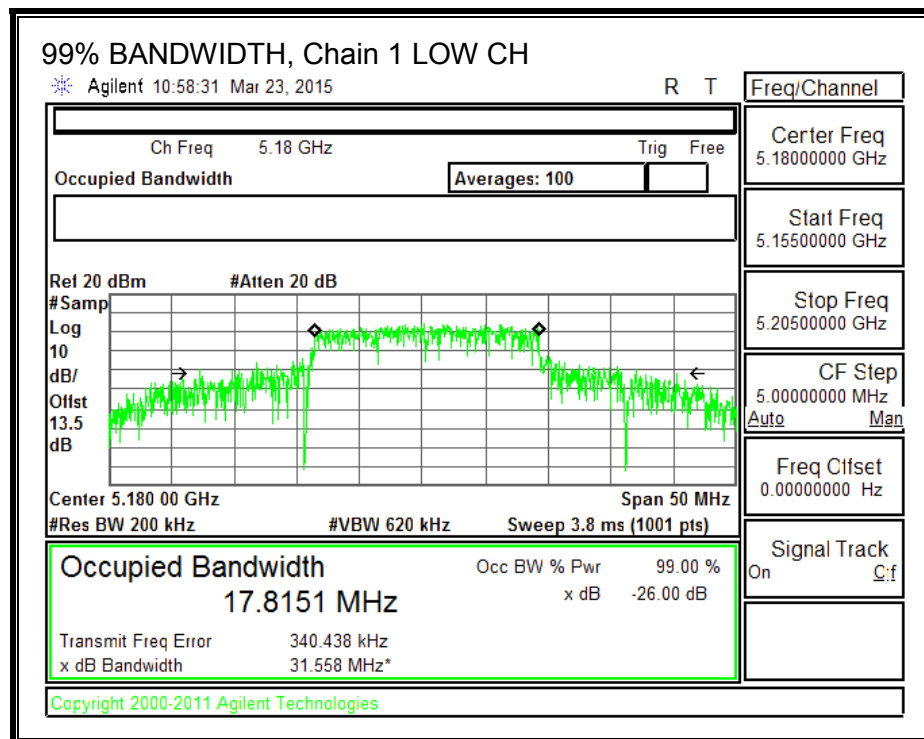

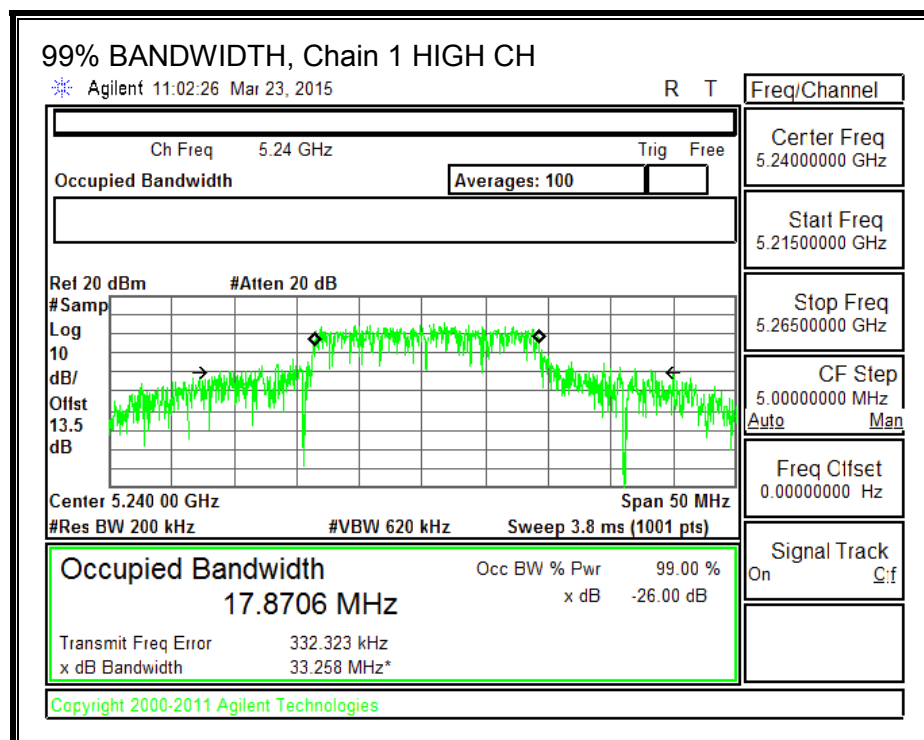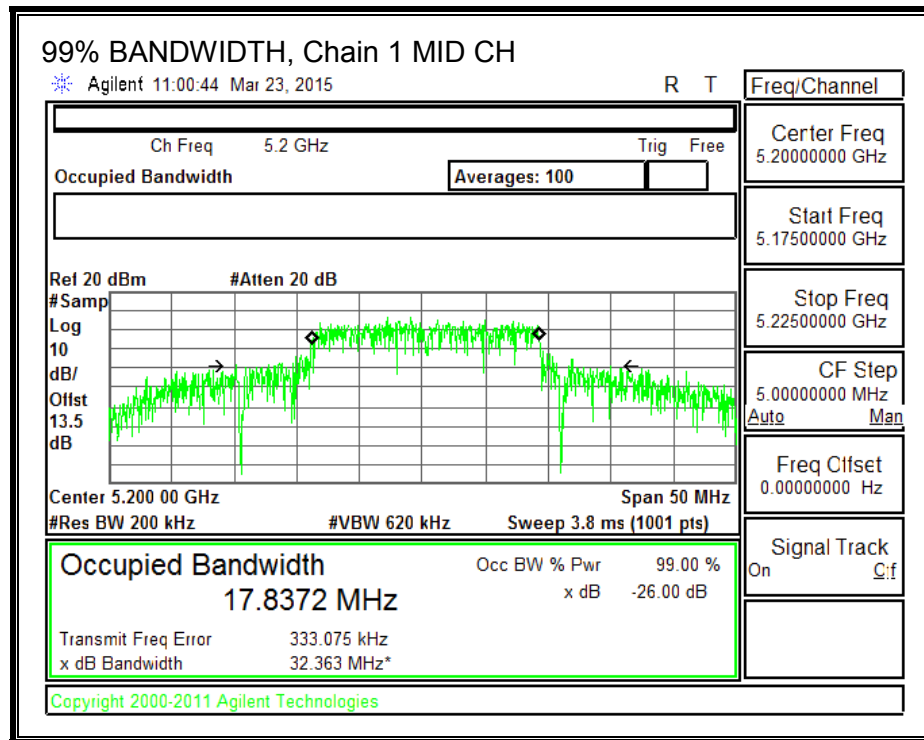

99% BANDWIDTH, Chain 2

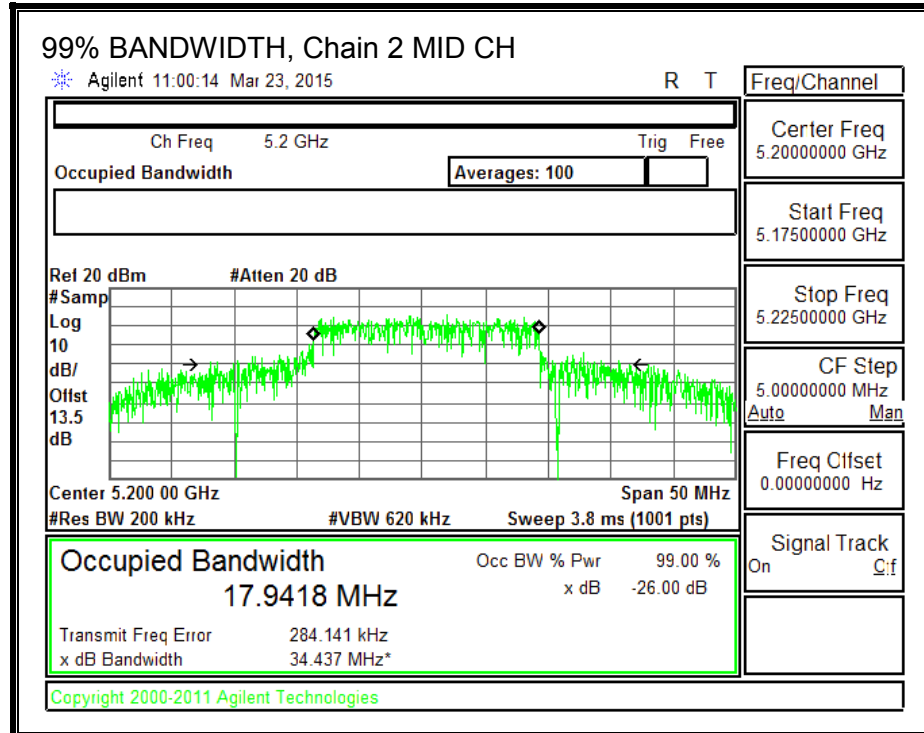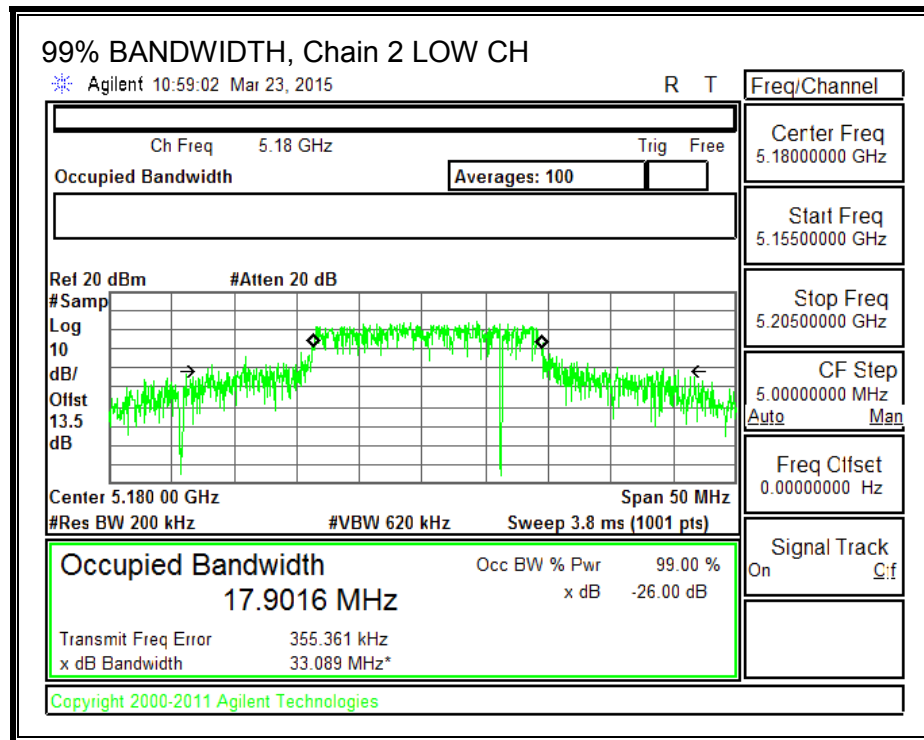

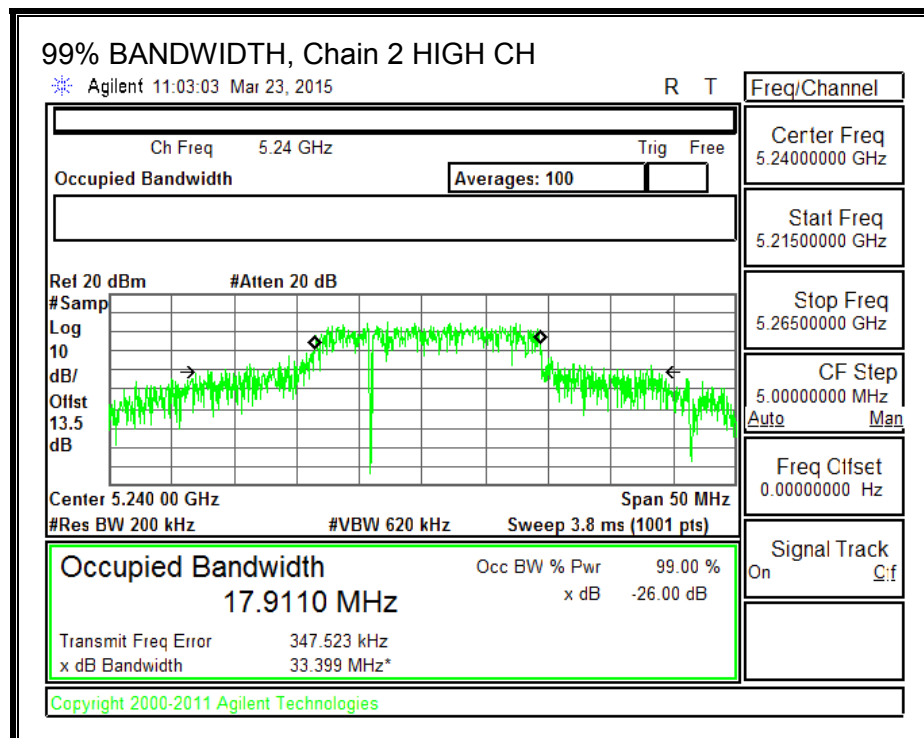

8.4.3. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

For power the TX chains are uncorrelated and the antenna gain is the same for each chain. The directional gain is equal to the antenna gain, 5.85 dBi.

For PSD the TX chains are correlated and the antenna gain is the same for each chain. The directional gain is:

| Antenna Gain (dBi) | 10 * Log (3 chains) (dB) | Correlated Chains Directional Gain (dBi) |
|--------------------------|-----------------------------|--|
| 5.85 | 4.77 | 10.62 |

RESULTS

Antenna Gain and Limits

| Channel | Frequency (MHz) | Directional Gain for Power (dBi) | Directional Gain for PSD (dBi) | Power Limit (dBm) | PSD Limit (dBm) |
|---------|--------------------|---|---|-------------------------|-----------------------|
| Low | 5180 | 5.85 | 10.62 | 24.00 | 6.38 |
| Mid | 5200 | 5.85 | 10.62 | 24.00 | 6.38 |
| High | 5240 | 5.85 | 10.62 | 24.00 | 6.38 |

| | | |
|--------------------|------|---------------------------------|
| Duty Cycle CF (dB) | 0.00 | Included in Calculations of PSD |
|--------------------|------|---------------------------------|


Output Power Results

| Channel | Frequency (MHz) | Chain 0 Meas Power (dBm) | Chain 1 Meas Power (dBm) | Chain 2 Meas Power (dBm) | Total Corr'd Power (dBm) | Power Limit (dBm) | Power Margin (dB) |
|---------|--------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-------------------------|-------------------------|
| Low | 5180 | 16.25 | 16.35 | 16.15 | 21.02 | 24.00 | -2.98 |
| Mid | 5200 | 16.36 | 16.32 | 16.10 | 21.03 | 24.00 | -2.97 |
| High | 5240 | 16.02 | 16.17 | 15.90 | 20.80 | 24.00 | -3.20 |

PSD Results

| Channel | Frequency (MHz) | Chain 0 Meas PSD (dBm) | Chain 1 Meas PSD (dBm) | Chain 2 Meas PSD (dBm) | Total Corr'd PSD (dBm) | PSD Limit (dBm) | PSD Margin (dB) |
|---------|--------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|-----------------------|-----------------------|
| Low | 5180 | 1.49 | 1.96 | 1.17 | 6.32 | 6.38 | -0.06 |
| Mid | 5200 | 1.56 | 1.96 | 1.15 | 6.34 | 6.38 | -0.04 |
| High | 5240 | 1.12 | 1.73 | 0.73 | 5.98 | 6.38 | -0.40 |


Note: the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.

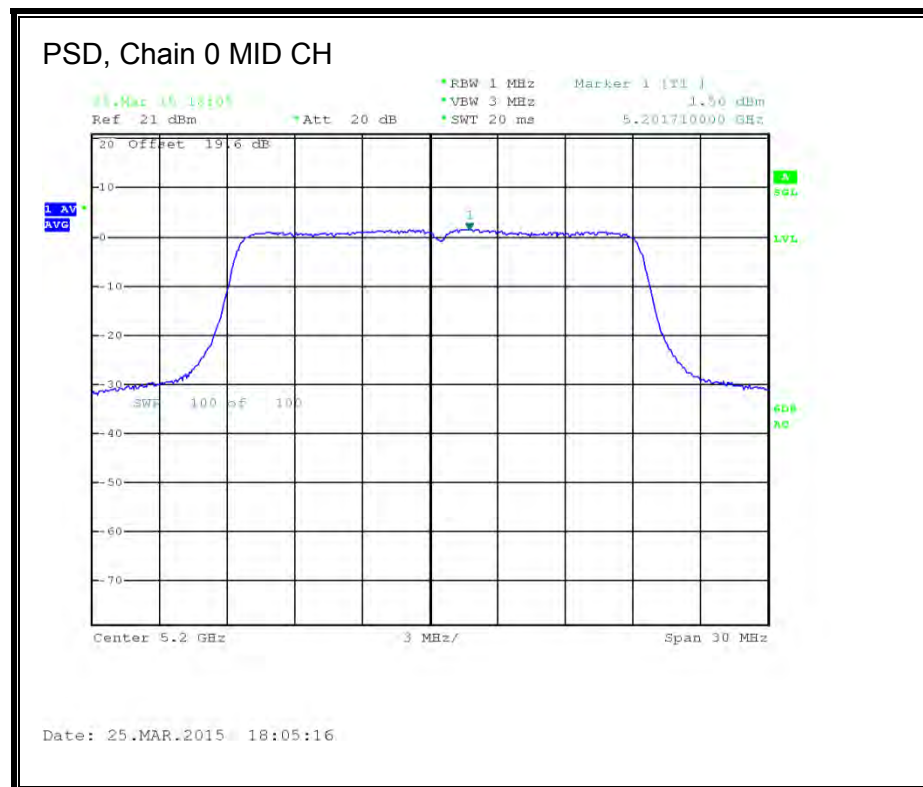



PSD, Chain 1



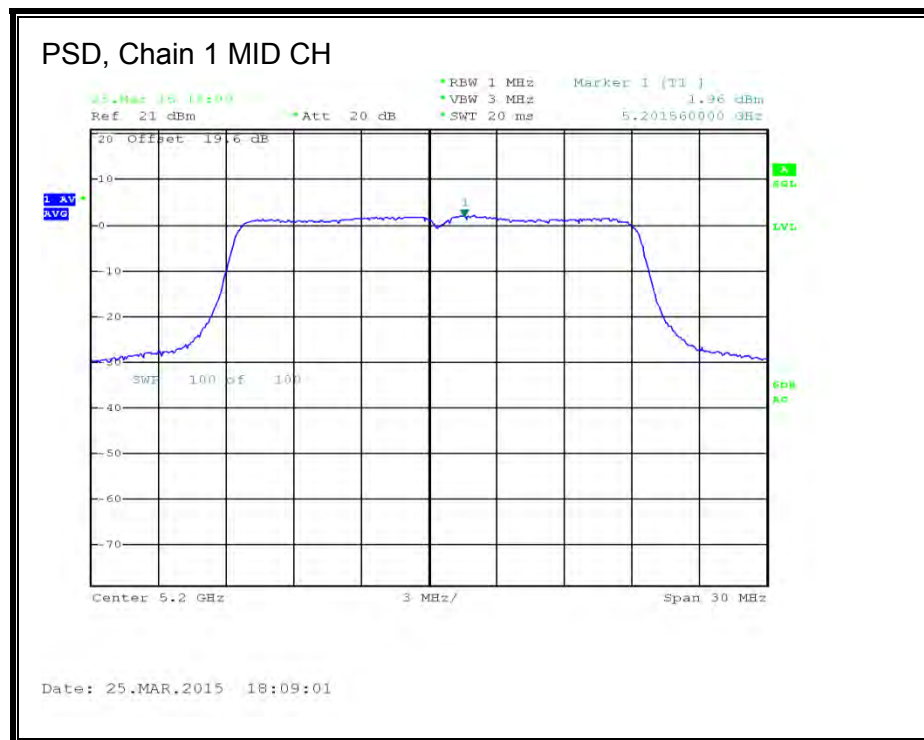

PSD, Chain 2





8.5. 802.11n HT20 STBC 3Tx MODE IN THE 5.2 GHz BAND

8.5.1. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS


| Channel | Frequency (MHz) | 26 dB BW Chain 0 (MHz) | 26 dB BW Chain 1 (MHz) | 26 dB BW Chain 2 (MHz) |
|---------|--------------------|------------------------------|------------------------------|------------------------------|
| Low | 5180 | 41.95 | 38.05 | 38.65 |
| Mid | 5200 | 41.85 | 39.55 | 43.55 |
| High | 5240 | 41.90 | 39.75 | 38.25 |



26 dB BANDWIDTH, Chain 0

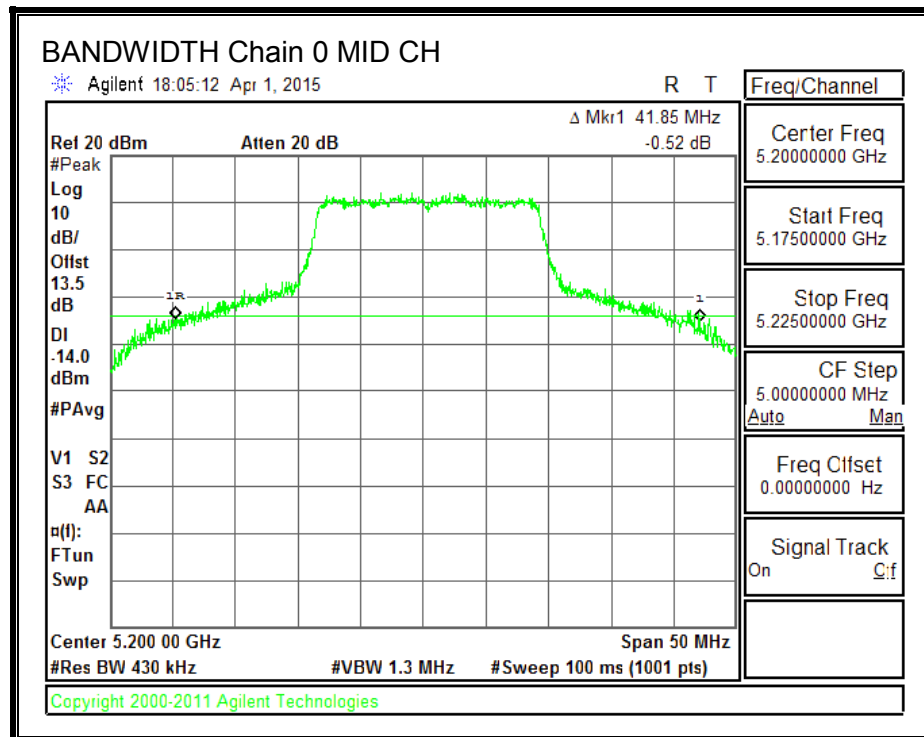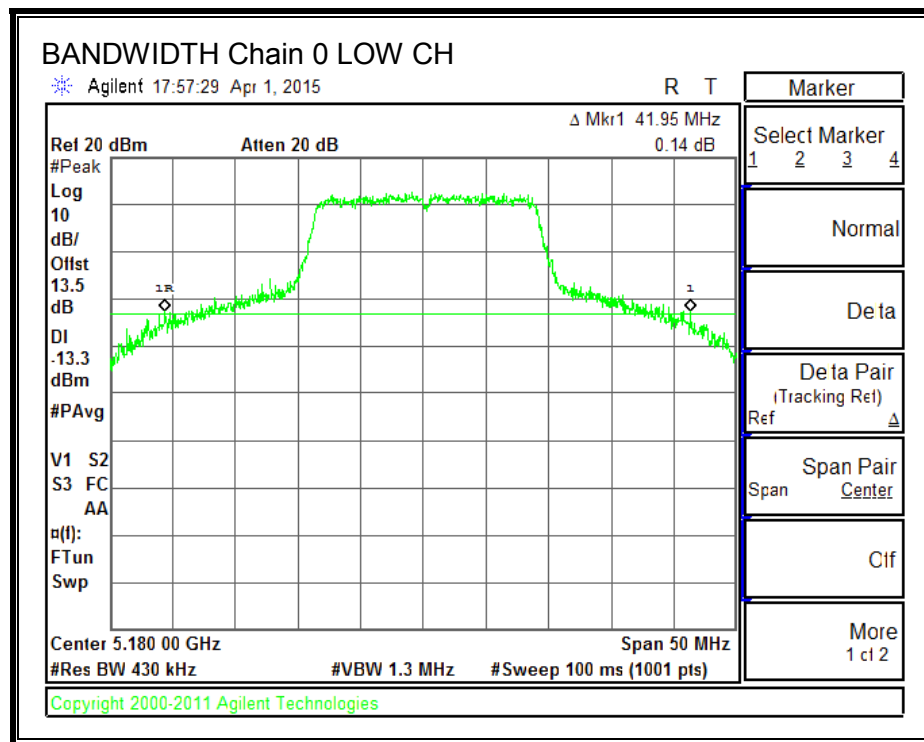


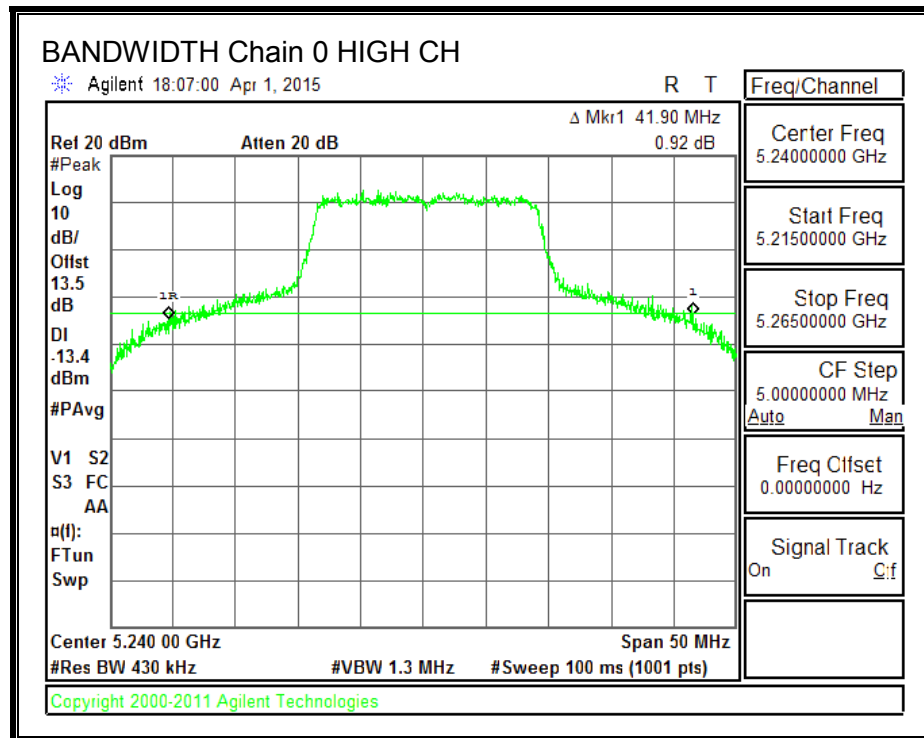



26 dB BANDWIDTH, Chain 1

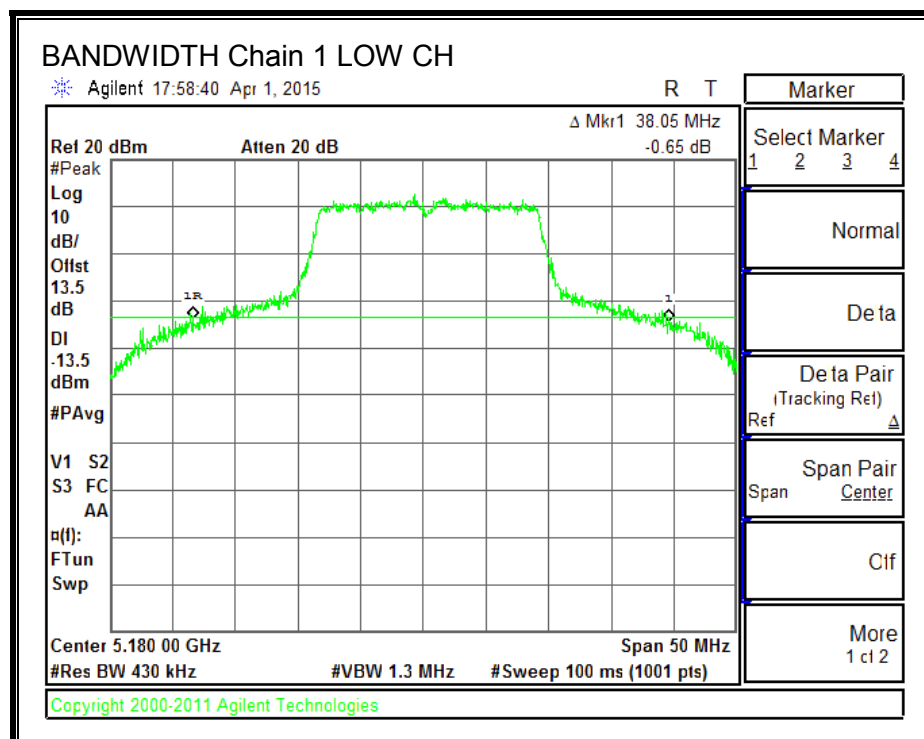

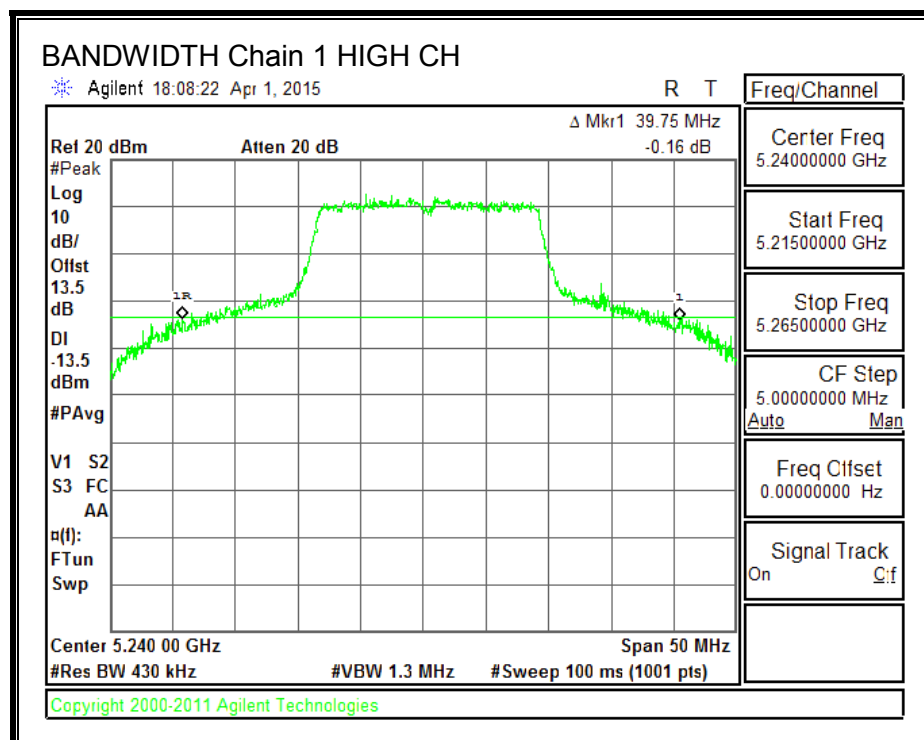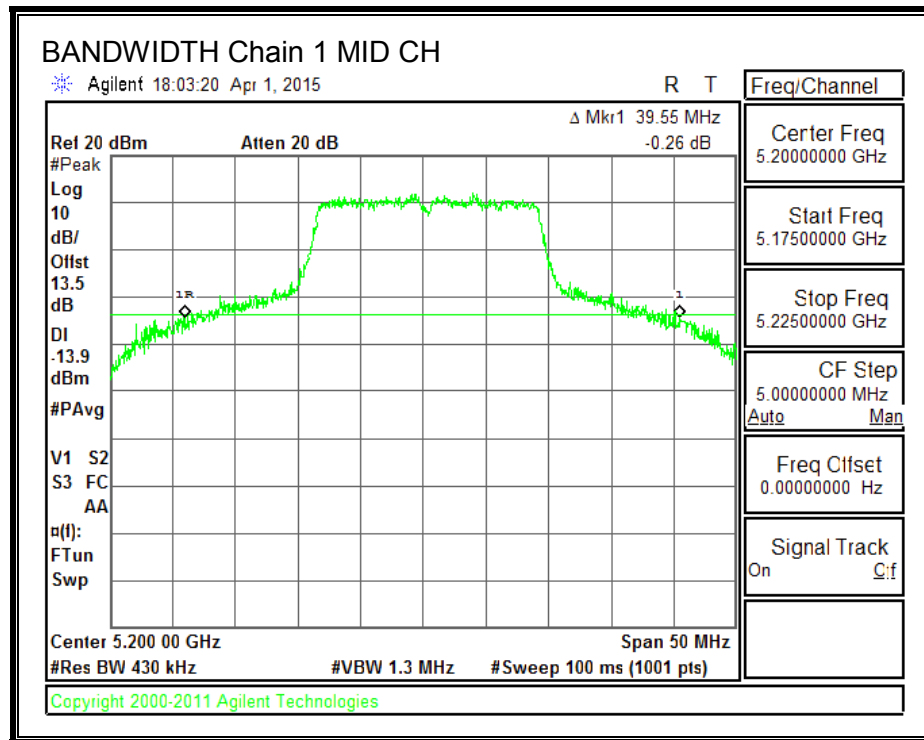

26 dB BANDWIDTH, Chain 2

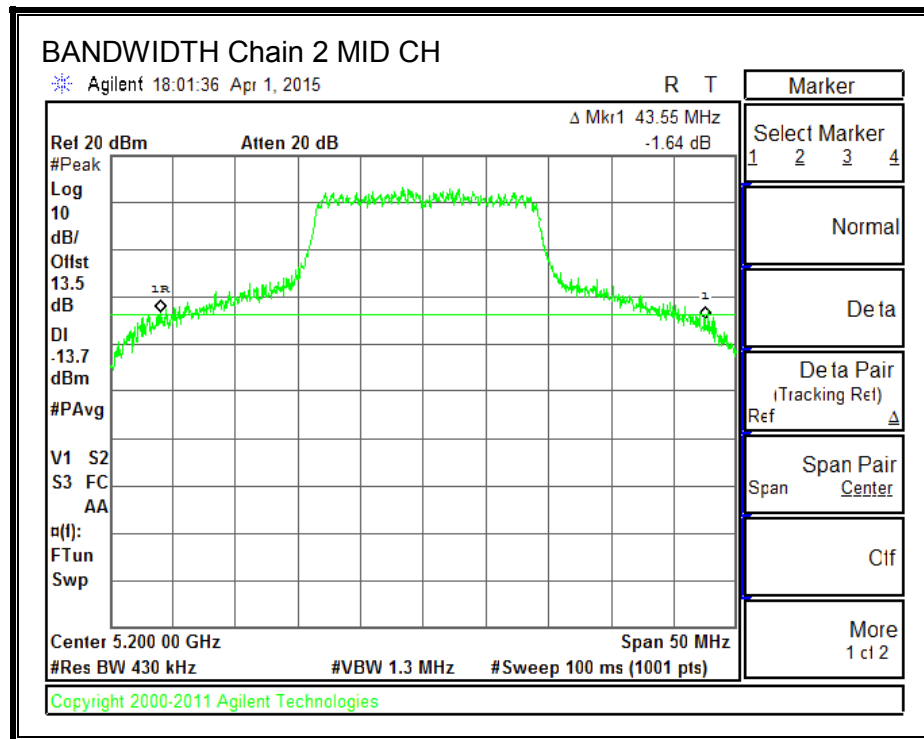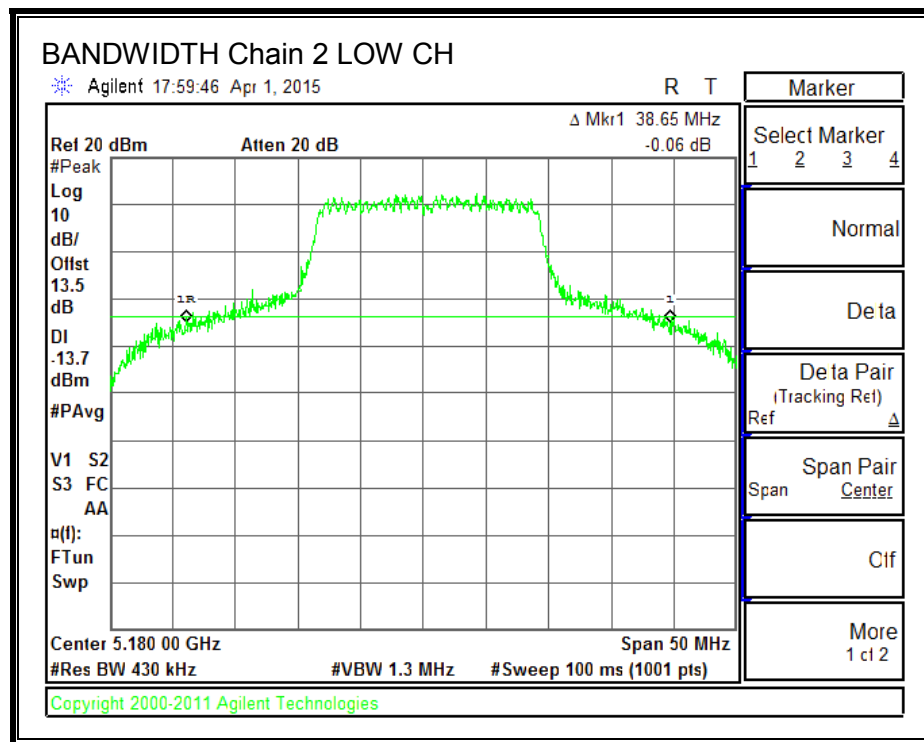

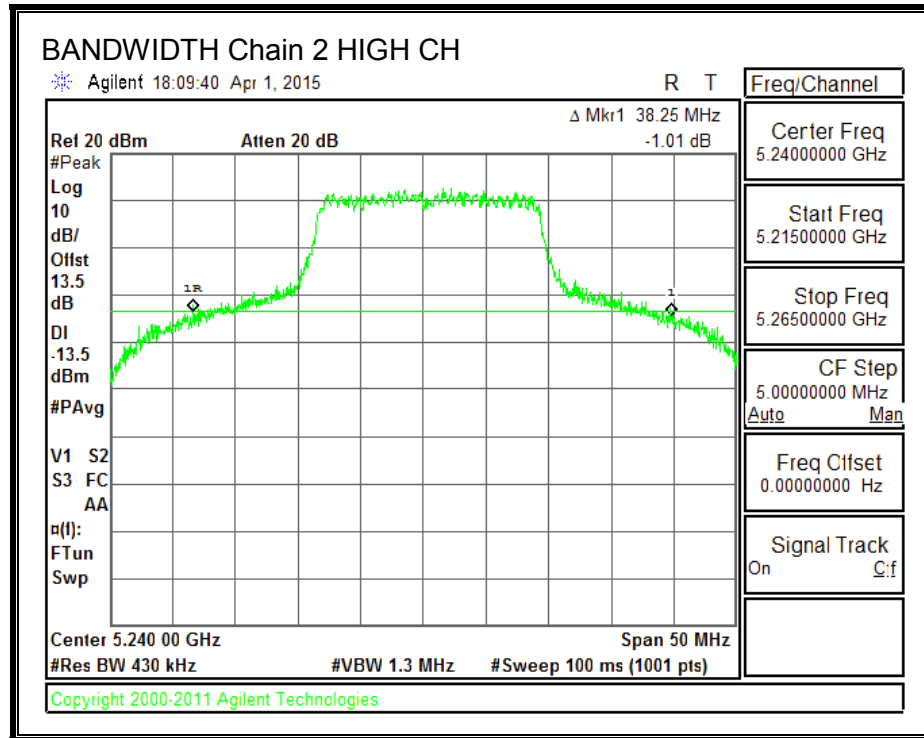

8.5.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS


| Channel | Frequency (MHz) | 99% BW Chain 0 (MHz) | 99% BW Chain 1 (MHz) | 99% BW Chain 2 (MHz) |
|---------|--------------------|----------------------------|----------------------------|----------------------------|
| Low | 5180 | 17.8116 | 17.7741 | 17.8804 |
| Mid | 5200 | 17.8354 | 17.8121 | 17.7960 |
| High | 5240 | 17.8284 | 17.8158 | 17.7823 |



99% BANDWIDTH, Chain 0

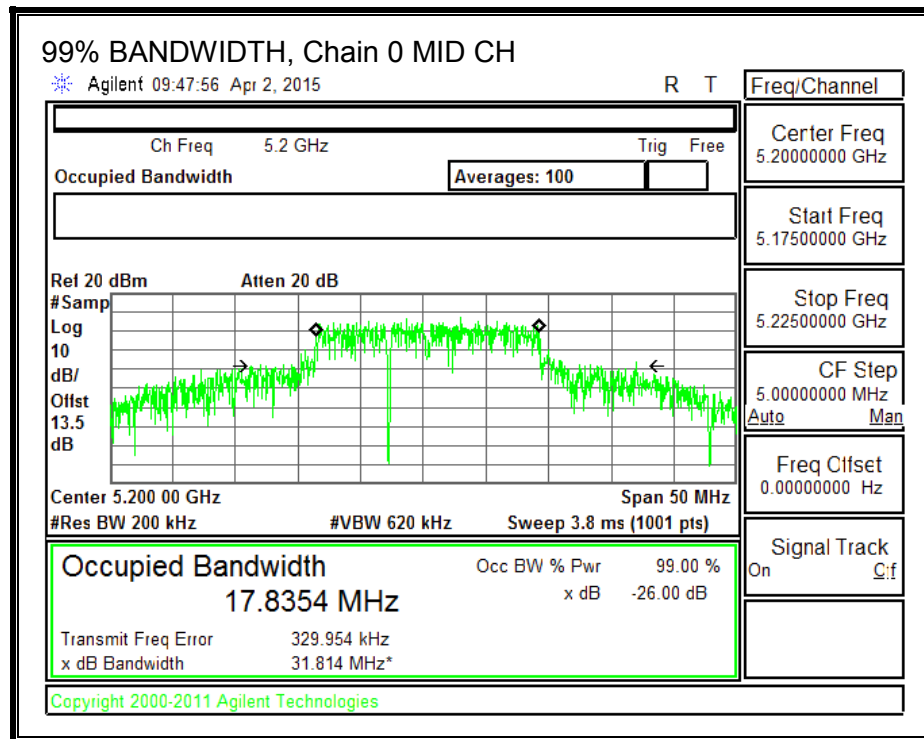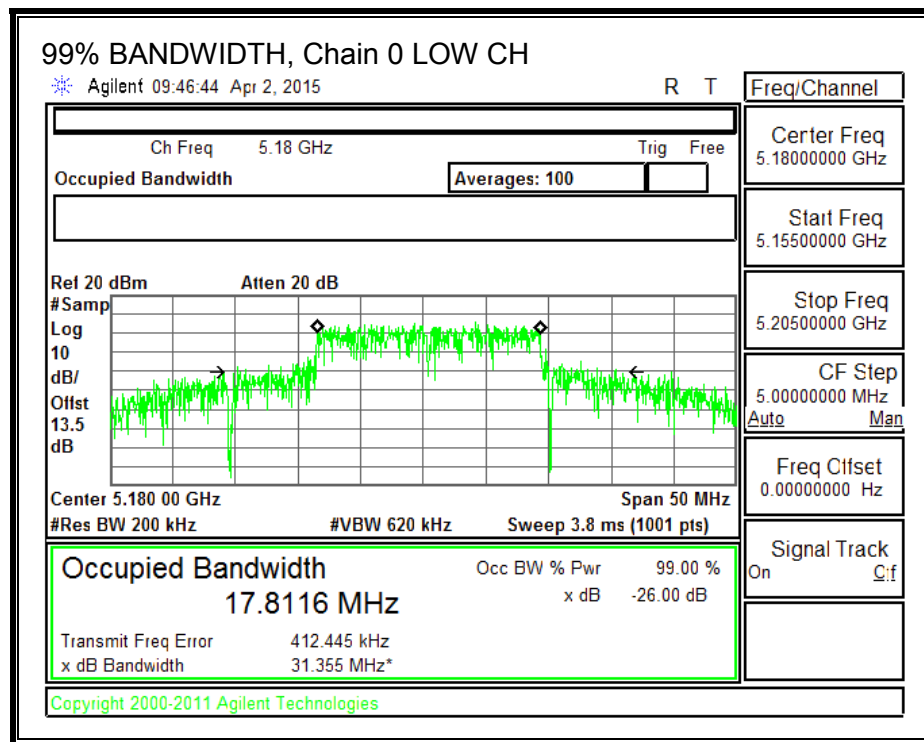


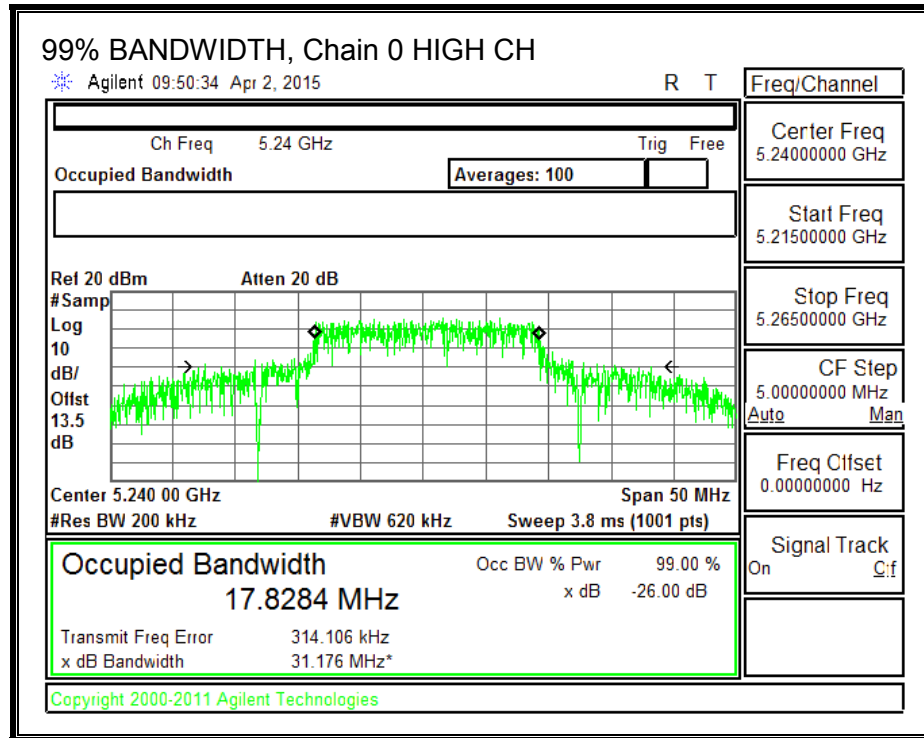



99% BANDWIDTH, Chain 1

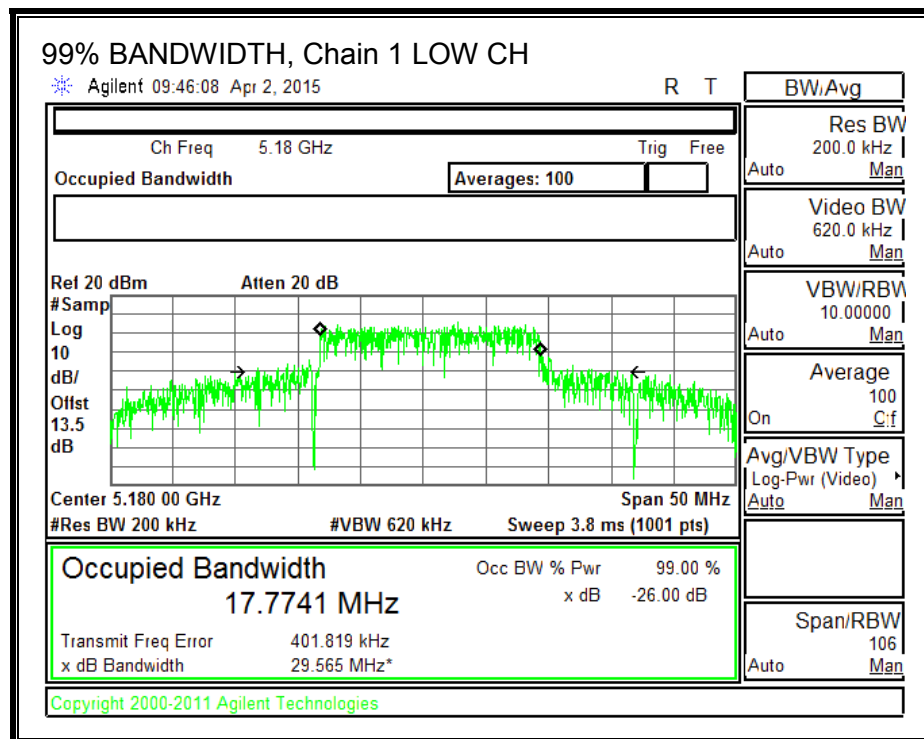

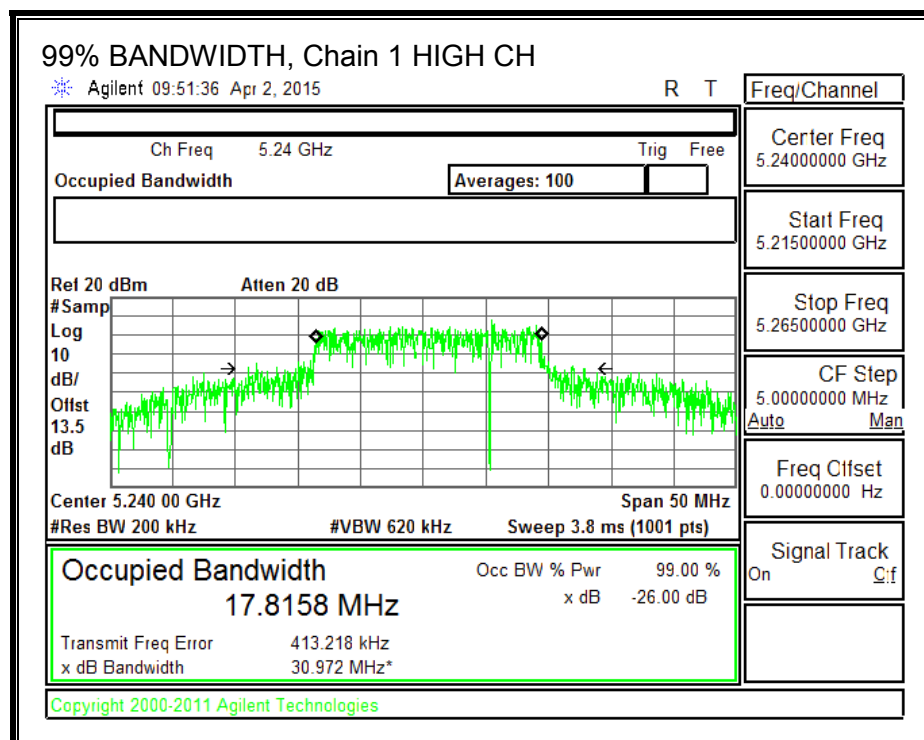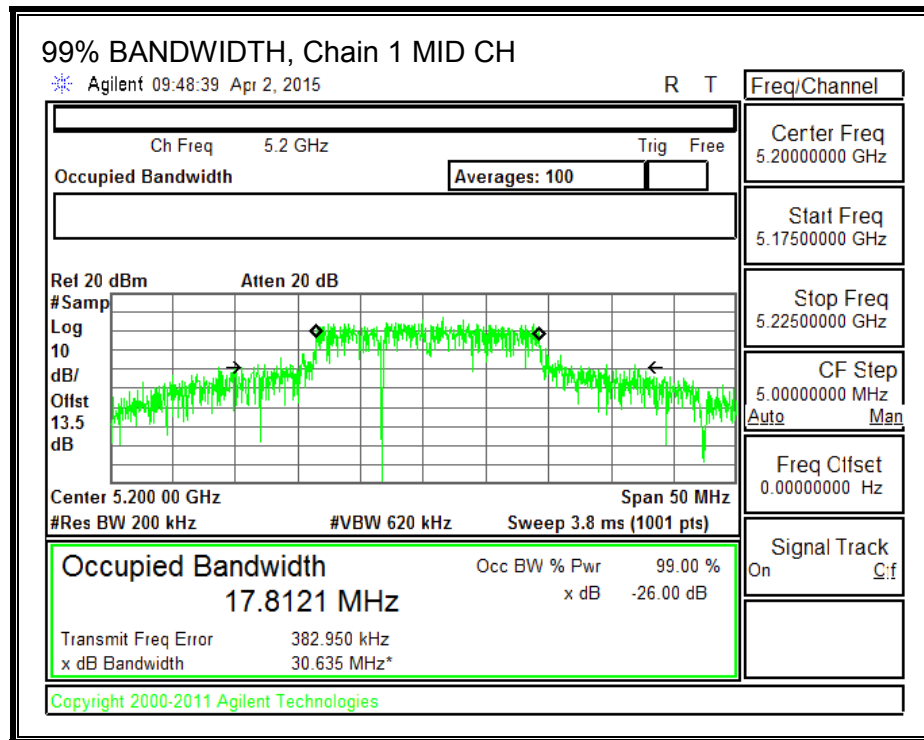

99% BANDWIDTH, Chain 2

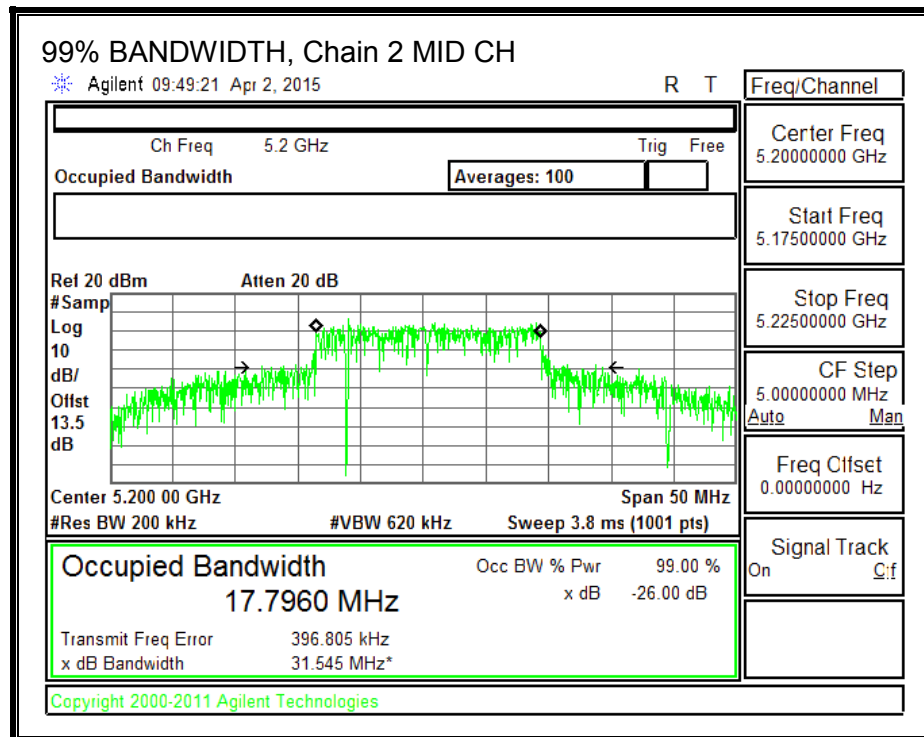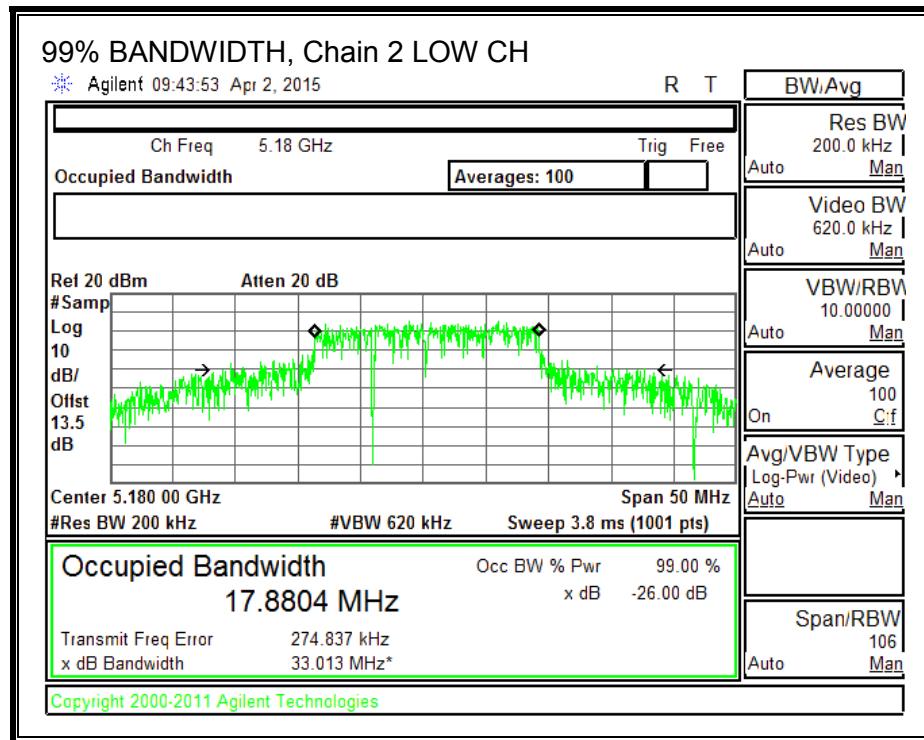

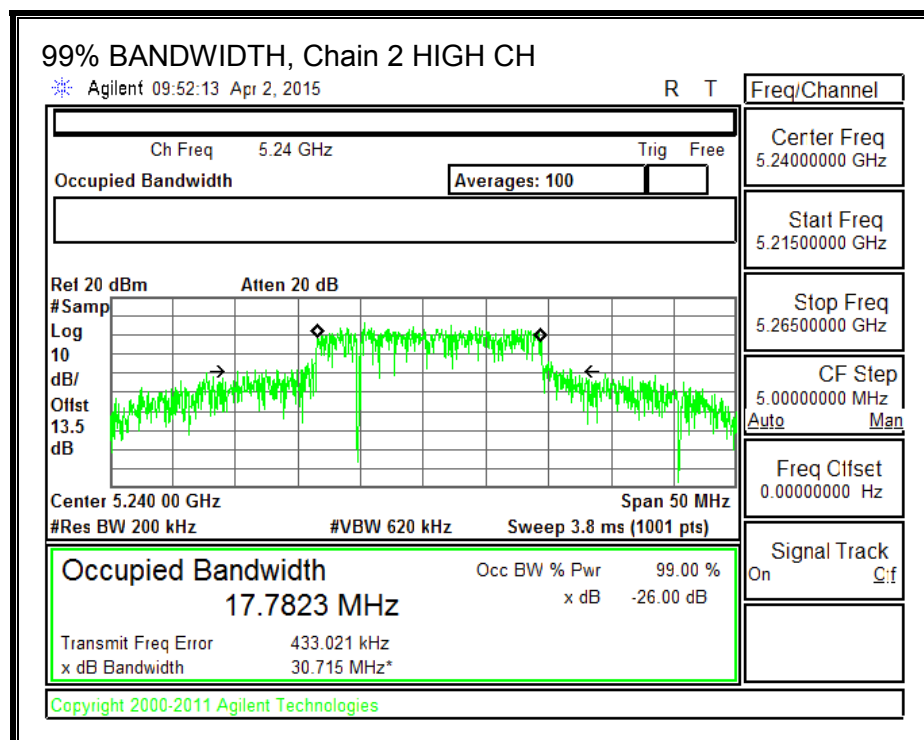

8.5.3. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

For power and PSD the TX chains are uncorrelated and the antenna gain is the same for each chain. The directional gain is equal to the antenna gain, 5.85 dBi.

RESULTS

Antenna Gain and Limits

| Channel | Frequency (MHz) | Directional Gain for Power (dBi) | Directional Gain for PSD (dBi) | Power Limit (dBm) | PSD Limit (dBm) |
|---------|--------------------|---|---|-------------------------|-----------------------|
| Low | 5180 | 5.85 | 5.85 | 24.00 | 11.00 |
| Mid | 5200 | 5.85 | 5.85 | 24.00 | 11.00 |
| High | 5240 | 5.85 | 5.85 | 24.00 | 11.00 |

| | | |
|--------------------|------|---------------------------------|
| Duty Cycle CF (dB) | 0.00 | Included in Calculations of PSD |
|--------------------|------|---------------------------------|

Output Power Results



| Channel | Frequency (MHz) | Chain 0 Meas Power (dBm) | Chain 1 Meas Power (dBm) | Chain 2 Meas Power (dBm) | Total Corr'd Power (dBm) | Power Limit (dBm) | Power Margin (dB) |
|---------|--------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-------------------------|-------------------------|
| Low | 5180 | 17.70 | 18.24 | 17.69 | 22.66 | 24.00 | -1.34 |
| Mid | 5200 | 19.10 | 18.90 | 18.97 | 23.76 | 24.00 | -0.24 |
| High | 5240 | 18.90 | 18.88 | 18.92 | 23.67 | 24.00 | -0.33 |


PSD Results

| Channel | Frequency (MHz) | Chain 0 Meas PSD (dBm) | Chain 1 Meas PSD (dBm) | Chain 2 Meas PSD (dBm) | Total Corr'd PSD (dBm) | PSD Limit (dBm) | PSD Margin (dB) |
|---------|--------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|-----------------------|-----------------------|
| Low | 5180 | 3.12 | 2.76 | 3.52 | 7.92 | 11.00 | -3.08 |
| Mid | 5200 | 3.77 | 3.20 | 3.49 | 8.26 | 11.00 | -2.74 |
| High | 5240 | 3.37 | 2.37 | 2.67 | 7.60 | 11.00 | -3.40 |

Note: the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.


PSD, Chain 0

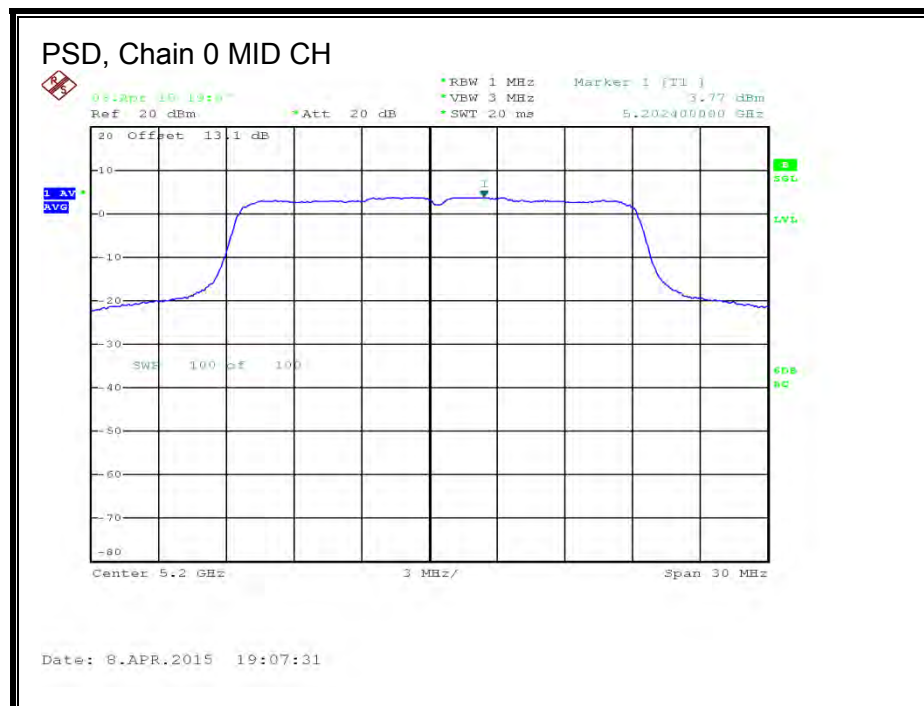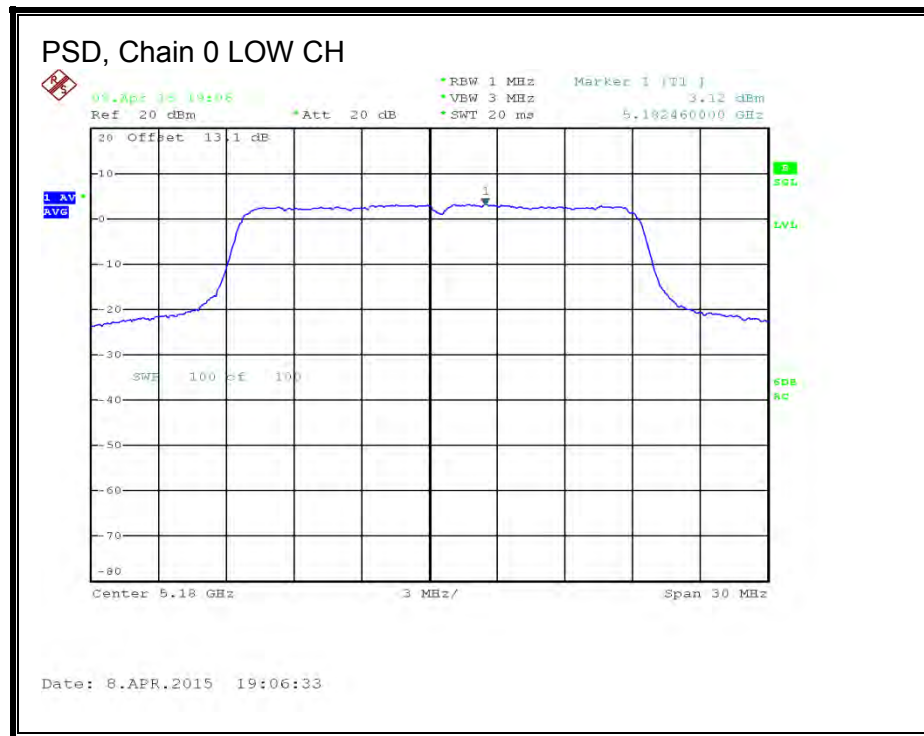

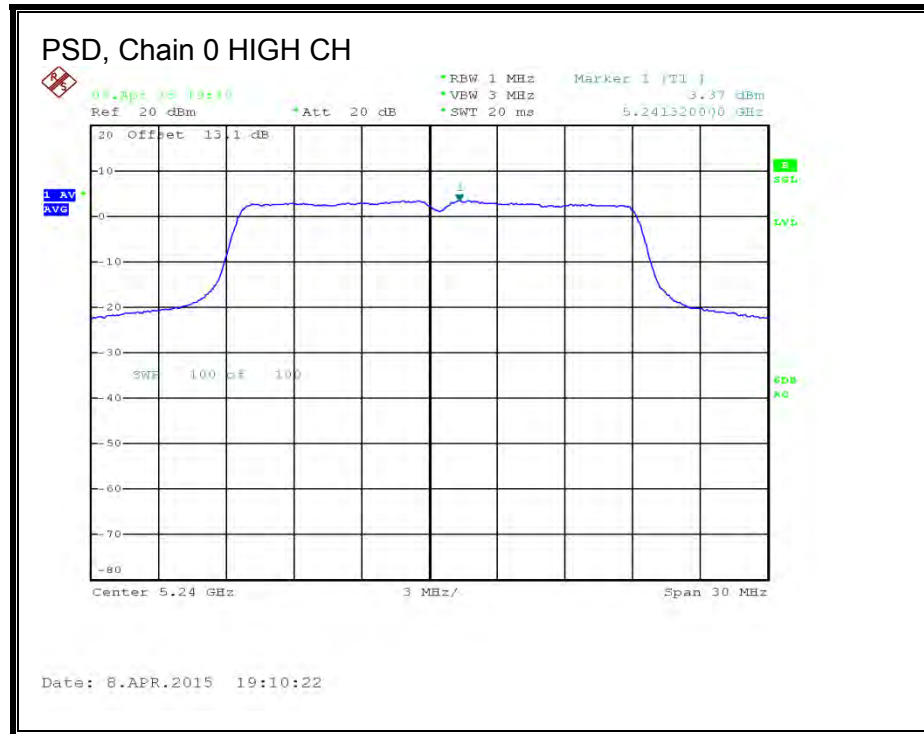


PSD, Chain 1



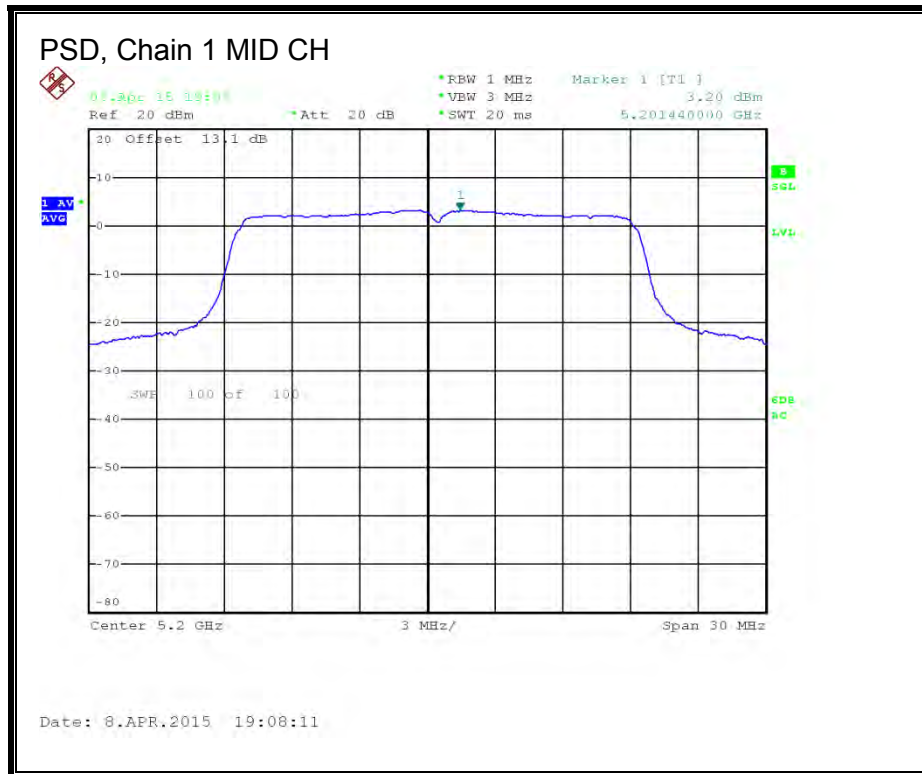

PSD, Chain 2

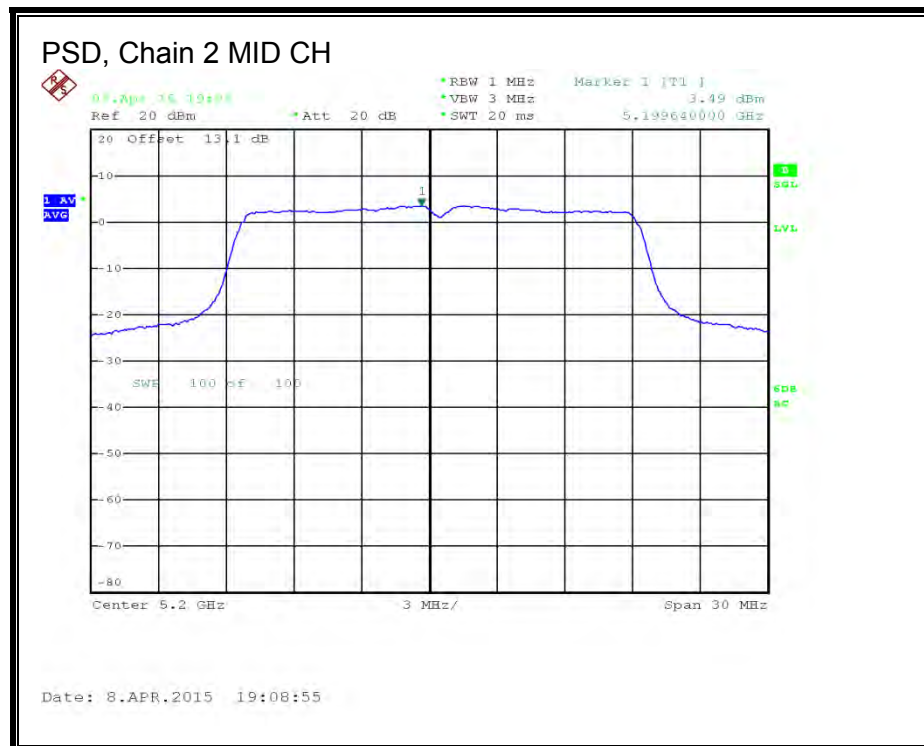



8.6. 802.11n HT20 TxBF 3Tx MODE IN THE 5.2 GHz BAND

8.6.1. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

For power and PSD, the TX chains are correlated and the antenna gain is the same for each chain. The directional gain is:

| Antenna Gain (dBi) | 10 * Log (3 chains) (dB) | Correlated Chains Directional Gain (dBi) |
|-----------------------------------|-------------------------------------|---|
| 5.85 | 4.77 | 10.62 |

RESULTS

Antenna Gain and Limits

| Channel | Frequency (MHz) | Directional Gain for Power (dBi) | Directional Gain for PSD (dBi) | Power Limit (dBm) | PSD Limit (dBm) |
|---------|--------------------|---|---|-------------------------|-----------------------|
| Low | 5180 | 10.62 | 10.62 | 19.38 | 6.38 |
| Mid | 5200 | 10.62 | 10.62 | 19.38 | 6.38 |
| High | 5240 | 10.62 | 10.62 | 19.38 | 6.38 |

| | | |
|--------------------|------|---------------------------------|
| Duty Cycle CF (dB) | 0.00 | Included in Calculations of PSD |
|--------------------|------|---------------------------------|

Output Power Results



| Channel | Frequency (MHz) | Chain 0 Meas Power (dBm) | Chain 1 Meas Power (dBm) | Chain 2 Meas Power (dBm) | Total Corr'd Power (dBm) | Power Limit (dBm) | Power Margin (dB) |
|---------|--------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-------------------------|-------------------------|
| Low | 5180 | 13.97 | 14.56 | 14.35 | 19.07 | 19.38 | -0.31 |
| Mid | 5200 | 14.05 | 14.77 | 14.62 | 19.26 | 19.38 | -0.12 |
| High | 5240 | 13.95 | 14.71 | 14.58 | 19.20 | 19.38 | -0.18 |

PSD Results

| Channel | Frequency (MHz) | Chain 0 Meas PSD (dBm) | Chain 1 Meas PSD (dBm) | Chain 2 Meas PSD (dBm) | Total Corr'd PSD (dBm) | PSD Limit (dBm) | PSD Margin (dB) |
|---------|--------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|-----------------------|-----------------------|
| Low | 5180 | -0.66 | 0.27 | -0.17 | 4.60 | 6.38 | -1.78 |
| Mid | 5200 | -0.31 | 0.59 | 0.34 | 4.99 | 6.38 | -1.39 |
| High | 5240 | -0.84 | 0.16 | -0.08 | 4.54 | 6.38 | -1.84 |

Note: the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.


PSD, Chain 0

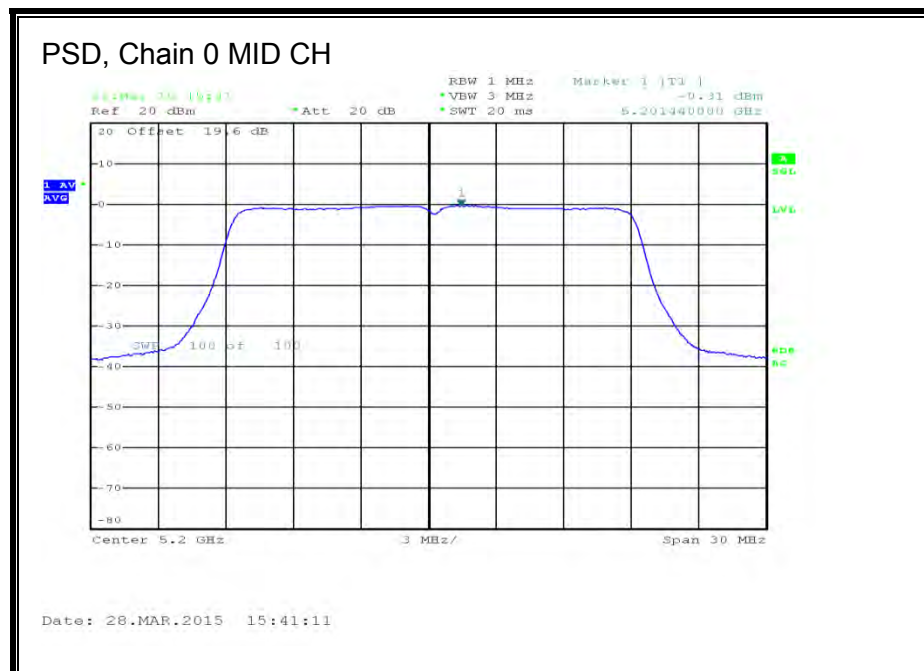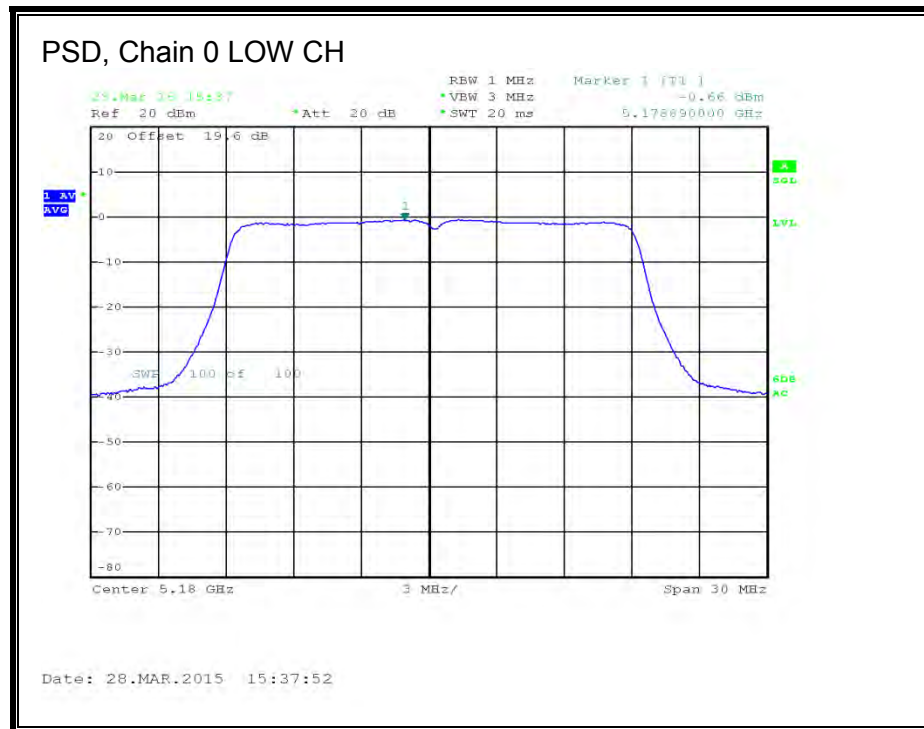





PSD, Chain 1



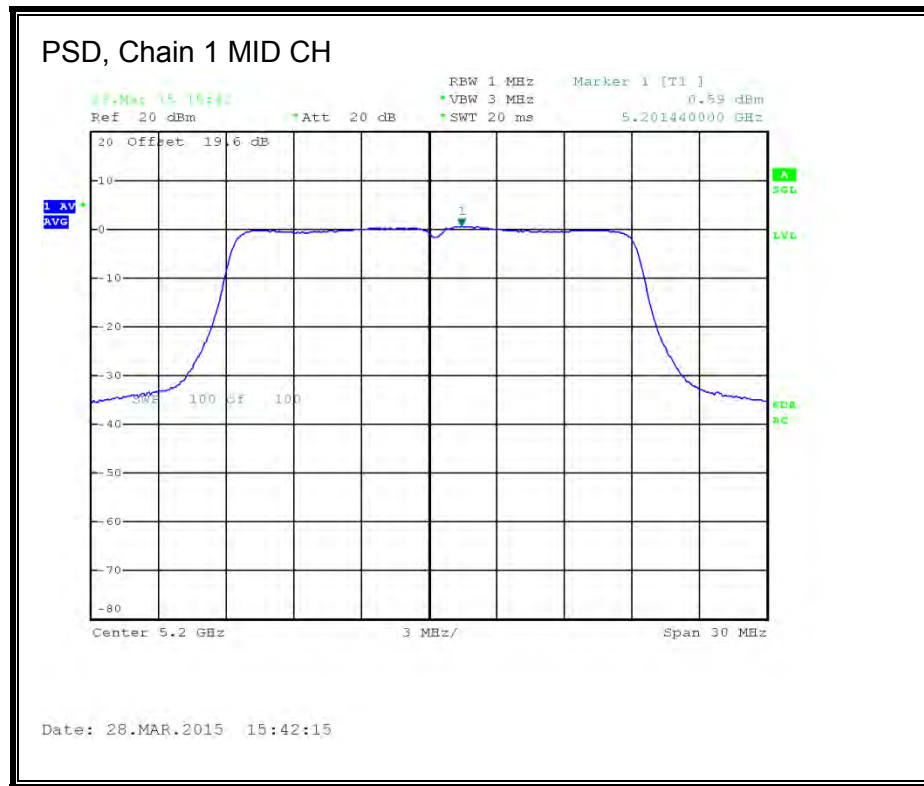

PSD, Chain 2

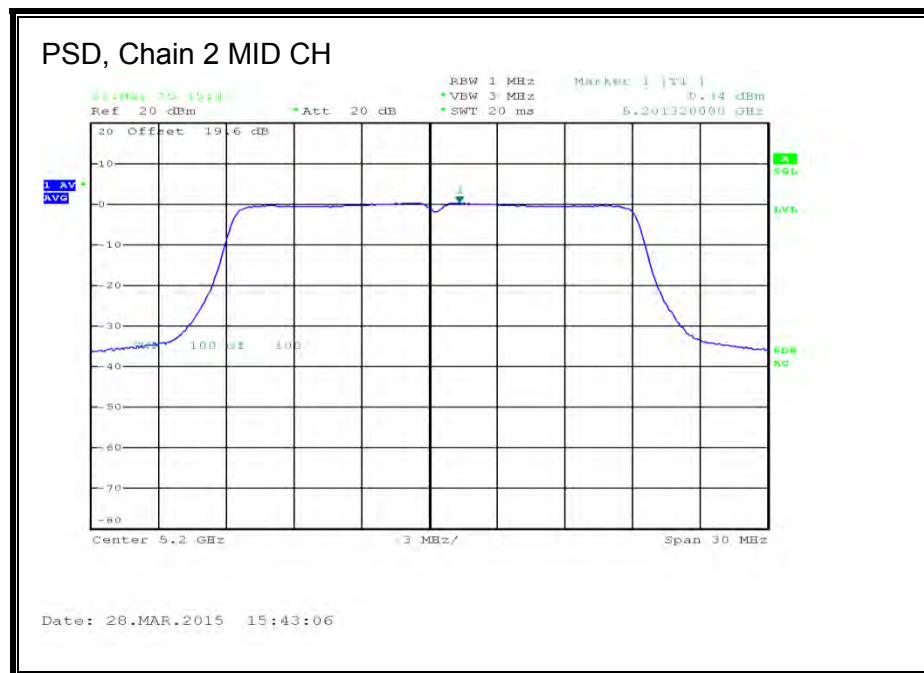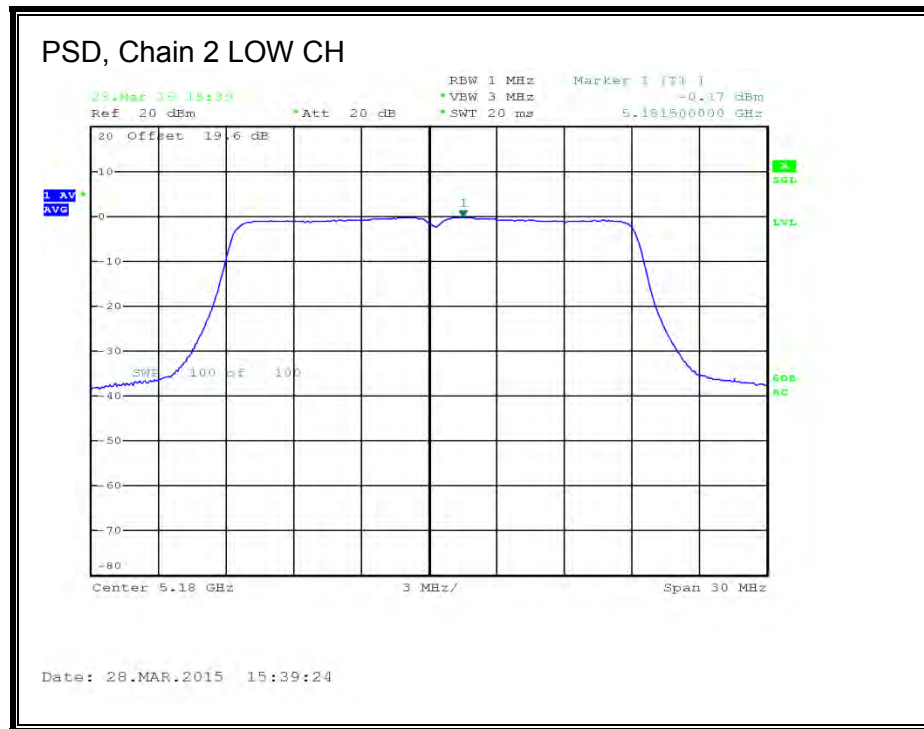



8.7. 802.11n HT40 1Tx MODE IN THE 5.2 GHz BAND

8.7.1. OUTPUT POWER

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

This is SISO mode, AG is the highest (worst-case) = 5.85 dBi

RESULTS

Antenna Gain and Limits

| Channel | Frequency (MHz) | Directional Gain for Power (dBi) | Power Limit (dBm) |
|---------|--------------------|---|-------------------------|
| Low | 5190 | 5.85 | 24.00 |
| High | 5230 | 5.85 | 24.00 |

Output Power Results

| Channel | Frequency (MHz) | Chain 0 Meas Power (dBm) | Total Corr'd Power (dBm) | Power Limit (dBm) | Power Margin (dB) |
|---------|--------------------|-----------------------------------|-----------------------------------|-------------------------|-------------------------|
| Low | 5190 | 13.12 | 13.12 | 24.00 | -10.88 |
| High | 5230 | 19.10 | 19.10 | 24.00 | -4.90 |

Note: the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.

8.8. 802.11n HT40 CDD 3Tx MODE IN THE 5.2 GHz BAND

8.8.1. 26 dB BANDWIDTH



LIMITS

None; for reporting purposes only.



RESULTS

| Channel | Frequency (MHz) | 26 dB BW Chain 0 (MHz) | 26 dB BW Chain 1 (MHz) | 26 dB BW Chain 2 (MHz) |
|---------|--------------------|------------------------------|------------------------------|------------------------------|
| Low | 5190 | 91.08 | 86.88 | 86.76 |
| High | 5230 | 85.08 | 81.84 | 89.04 |



26 dB BANDWIDTH, Chain 0

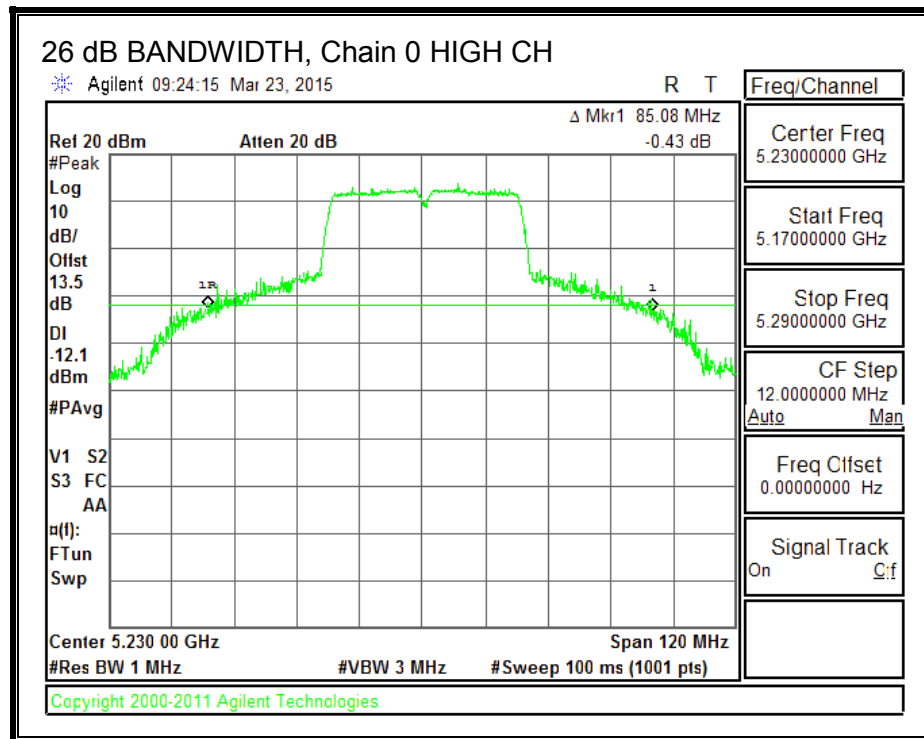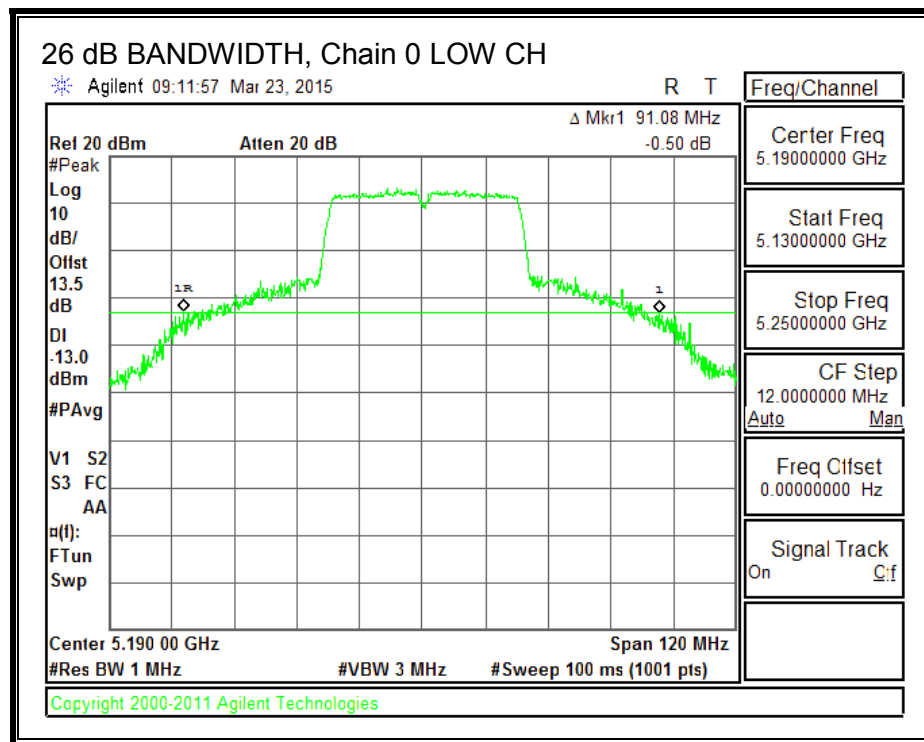

26 dB BANDWIDTH, Chain 1

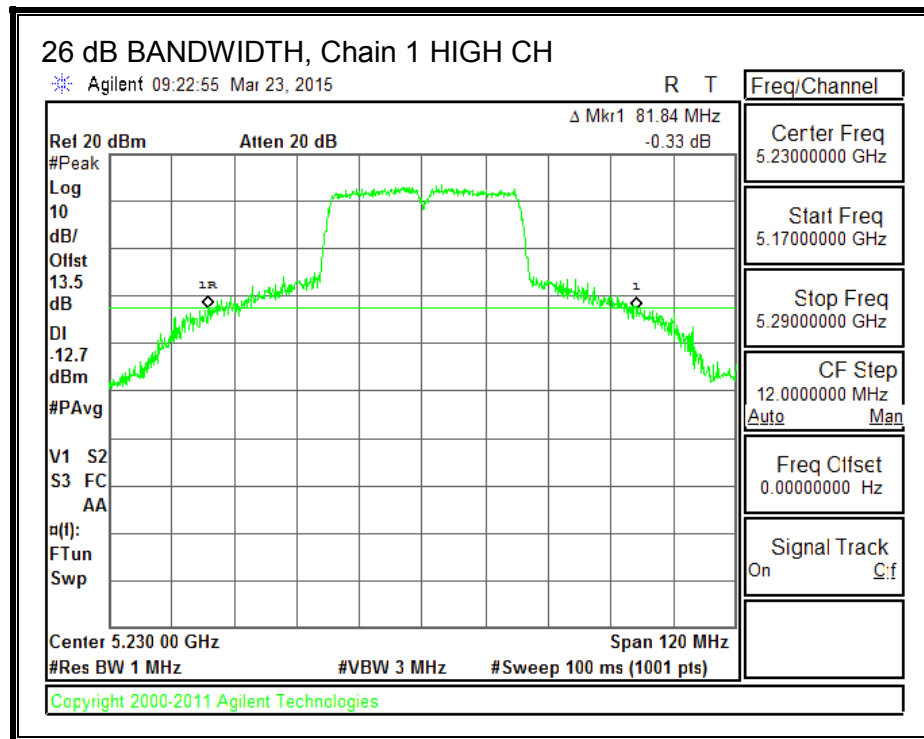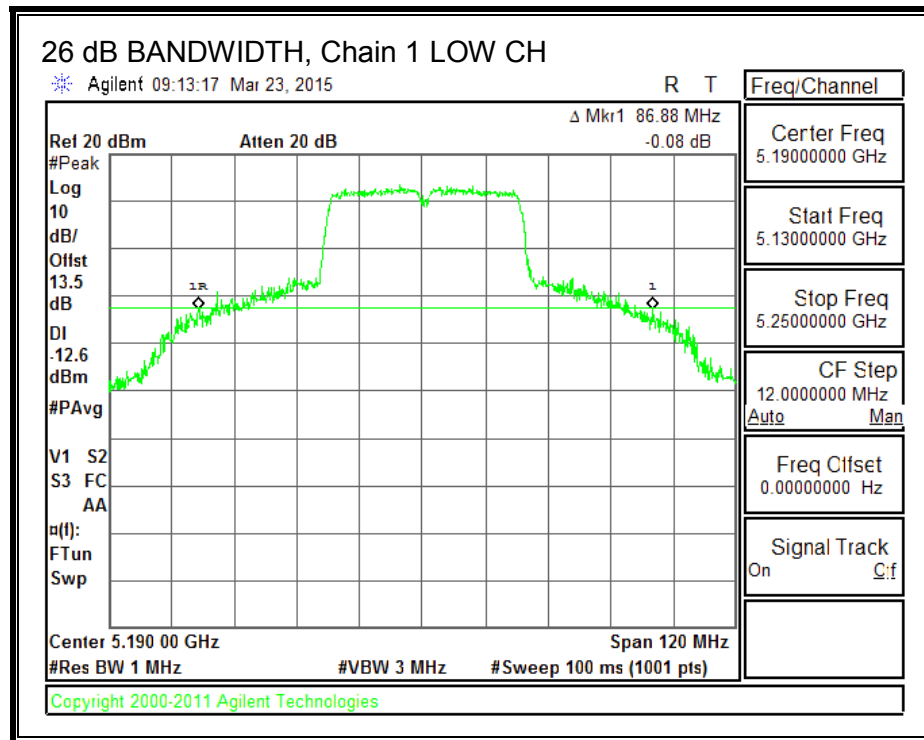

26 dB BANDWIDTH, Chain 2

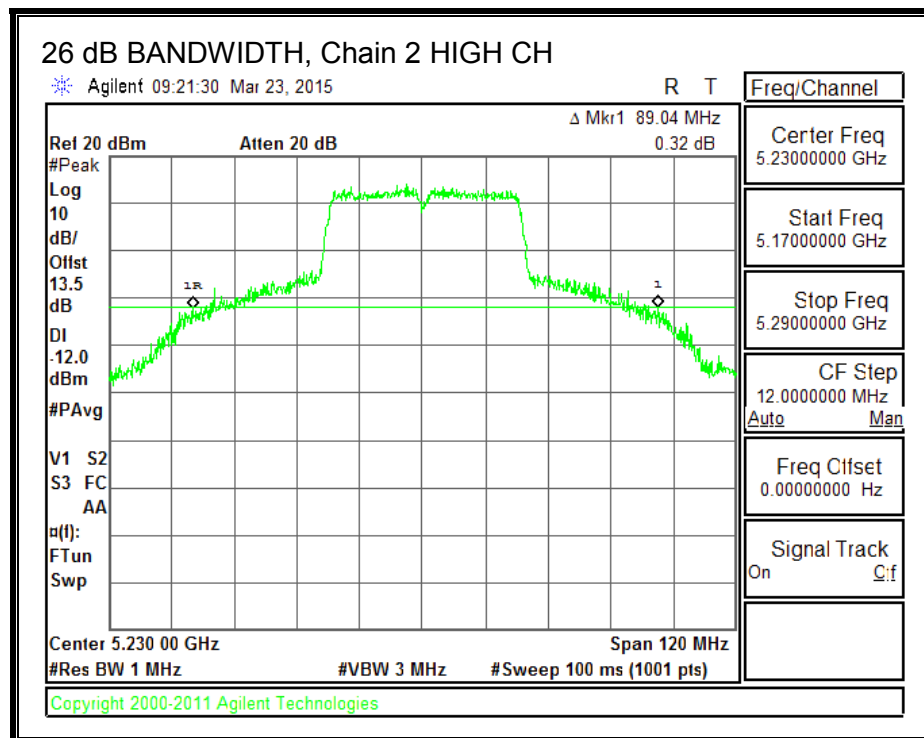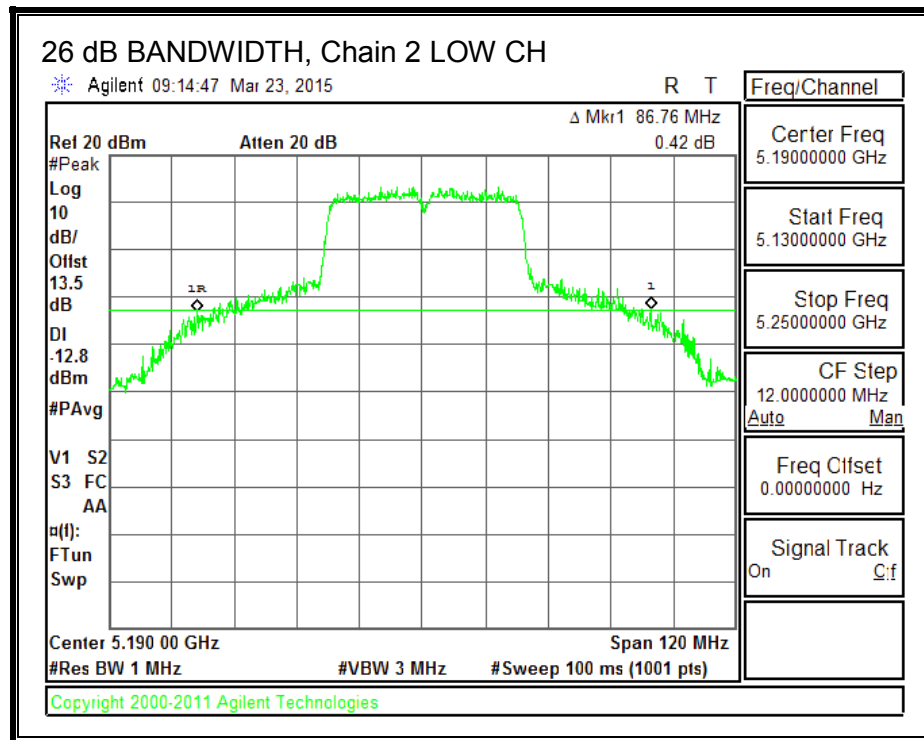

8.8.2. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.



RESULTS

| Channel | Frequency (MHz) | 99% BW Chain 0 (MHz) | 99% BW Chain 1 (MHz) | 99% BW Chain 2 (MHz) |
|---------|--------------------|----------------------------|----------------------------|----------------------------|
| Low | 5190 | 36.7065 | 36.6264 | 36.6702 |
| High | 5230 | 36.7522 | 36.6768 | 36.7718 |



99% BANDWIDTH, Chain 0

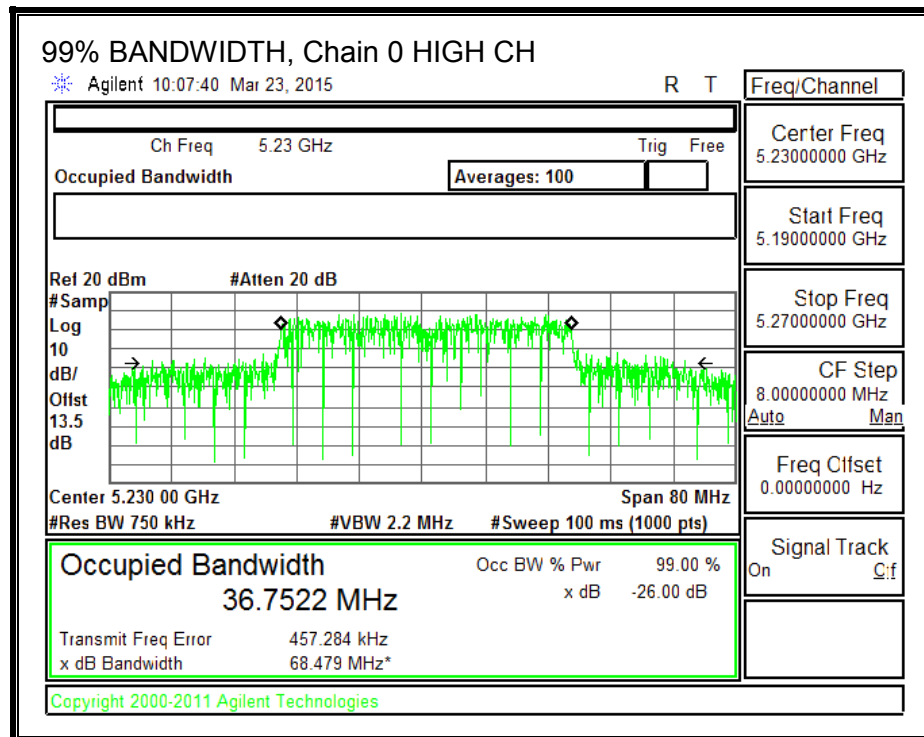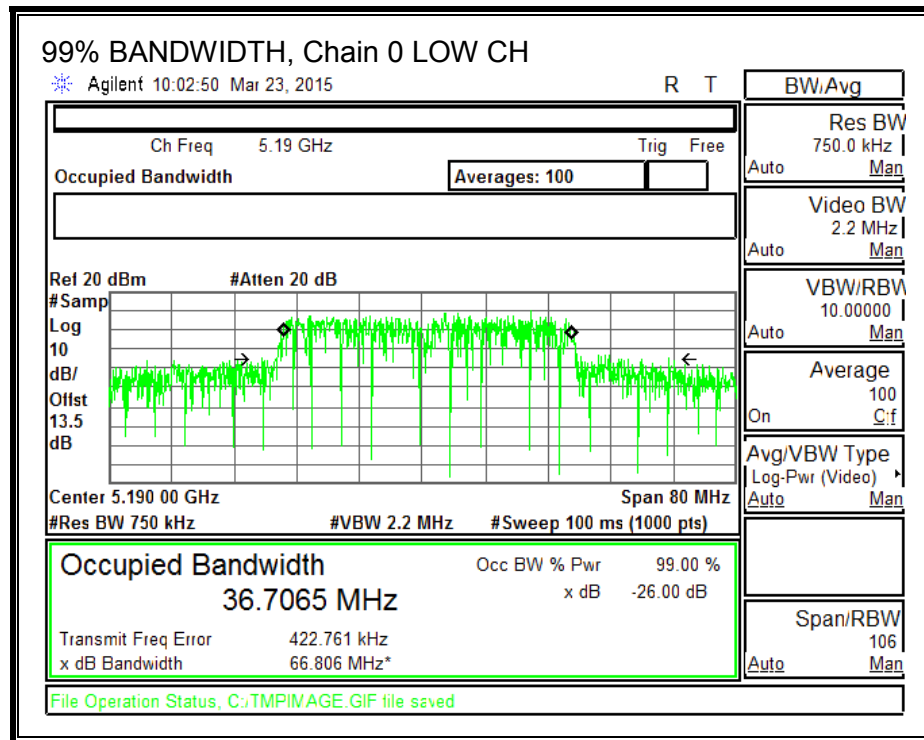

99% BANDWIDTH, Chain 1

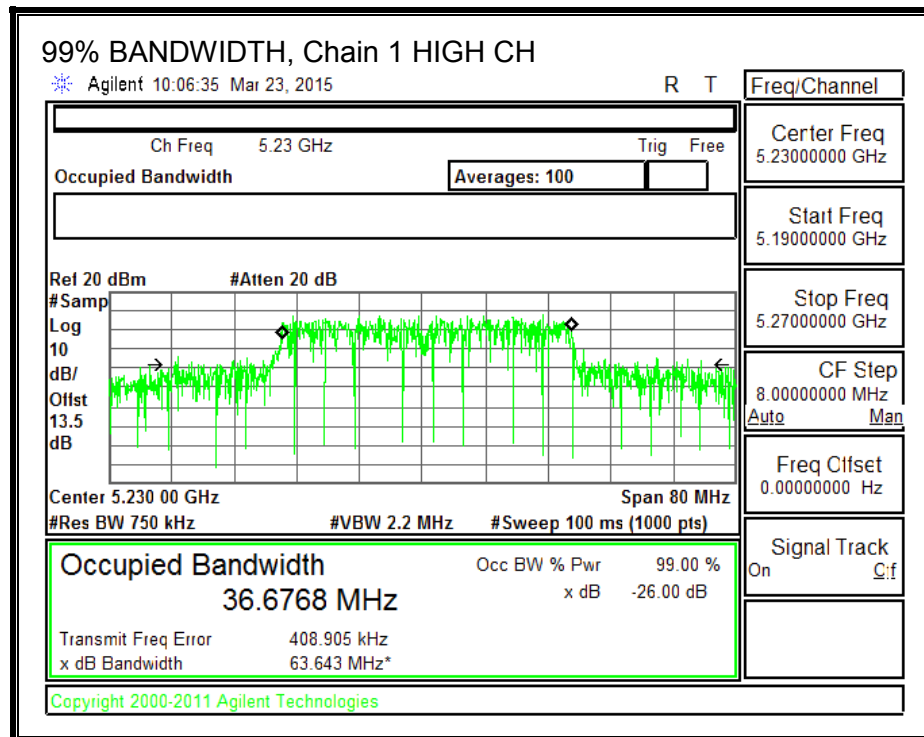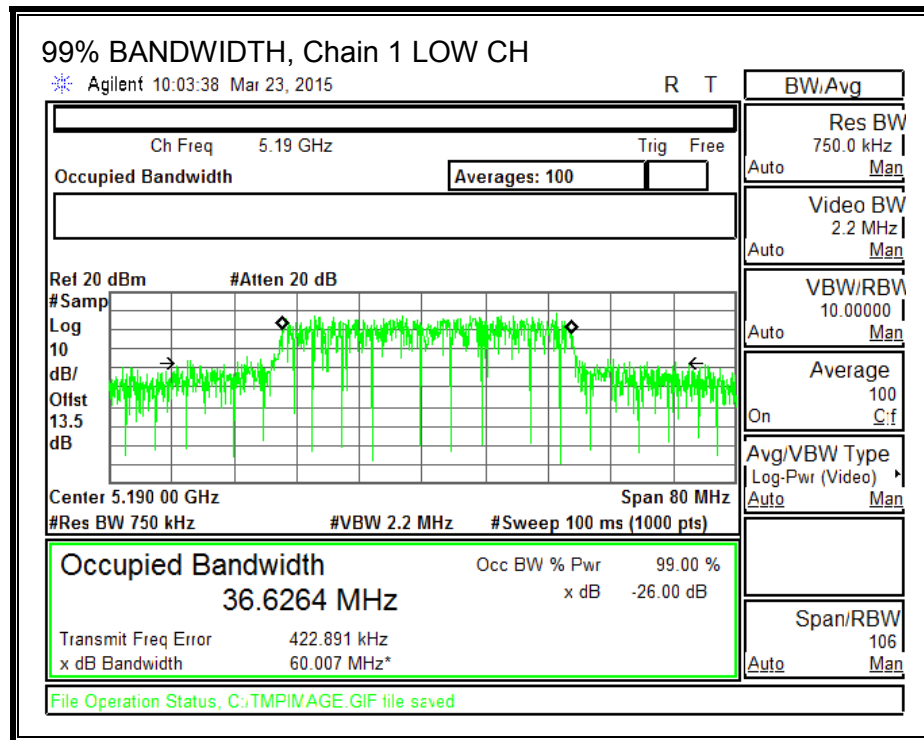

99% BANDWIDTH, Chain 2

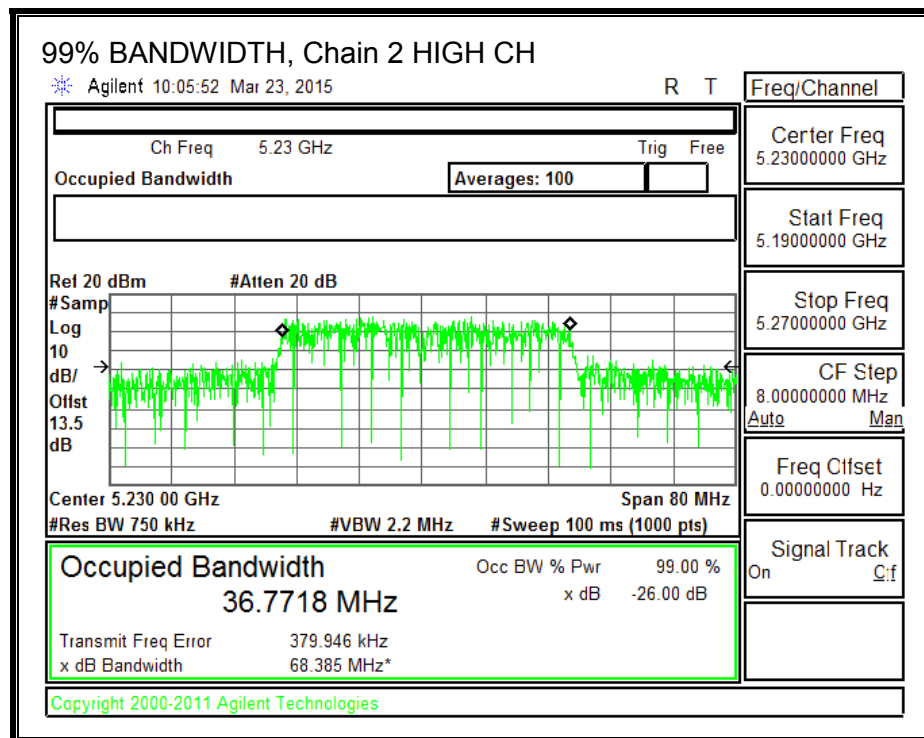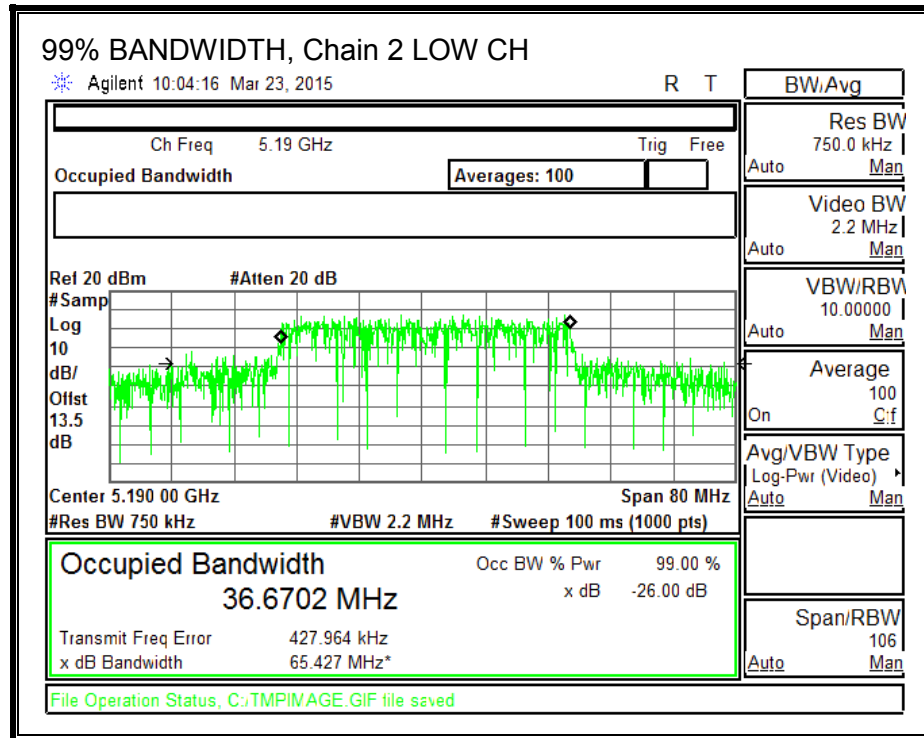

8.8.3. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

For power the TX chains are uncorrelated and the antenna gain is the same for each chain. The directional gain is equal to the antenna gain, 5.85 dBi.

For PSD the TX chains are correlated and the antenna gain is the same for each chain. The directional gain is:

| Antenna Gain (dBi) | 10 * Log (3 chains) (dB) | Correlated Chains Directional Gain (dBi) |
|--------------------------|-----------------------------|--|
| 5.85 | 4.77 | 10.62 |

RESULTS

Antenna Gain and Limits

| Channel | Frequency (MHz) | Directional Gain for Power (dBi) | Directional Gain for PSD (dBi) | Power Limit (dBm) | PSD Limit (dBm) |
|---------|--------------------|---|---|-------------------------|-----------------------|
| Low | 5190 | 5.85 | 10.62 | 24.00 | 6.38 |
| High | 5230 | 5.85 | 10.62 | 24.00 | 6.38 |

| | | |
|--------------------|------|---------------------------------|
| Duty Cycle CF (dB) | 0.09 | Included in Calculations of PSD |
|--------------------|------|---------------------------------|

Output Power Results


| Channel | Frequency (MHz) | Chain 0 Meas Power (dBm) | Chain 1 Meas Power (dBm) | Chain 2 Meas Power (dBm) | Total Corr'd Power (dBm) | Power Limit (dBm) | Power Margin (dB) |
|---------|--------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-------------------------|-------------------------|
| Low | 5190 | 11.70 | 11.90 | 11.85 | 16.59 | 24.00 | -7.41 |
| High | 5230 | 18.70 | 18.98 | 18.20 | 23.41 | 24.00 | -0.59 |

PSD Results



| Channel | Frequency (MHz) | Chain 0 Meas PSD (dBm) | Chain 1 Meas PSD (dBm) | Chain 2 Meas PSD (dBm) | Total Corr'd PSD (dBm) | PSD Limit (dBm) | PSD Margin (dB) |
|---------|--------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|-----------------------|-----------------------|
| Low | 5190 | 1.50 | 0.54 | 0.18 | 5.64 | 6.38 | -0.74 |
| High | 5230 | 1.25 | 0.63 | 0.11 | 5.55 | 6.38 | -0.83 |

Note: the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.



PSD, Chain 0

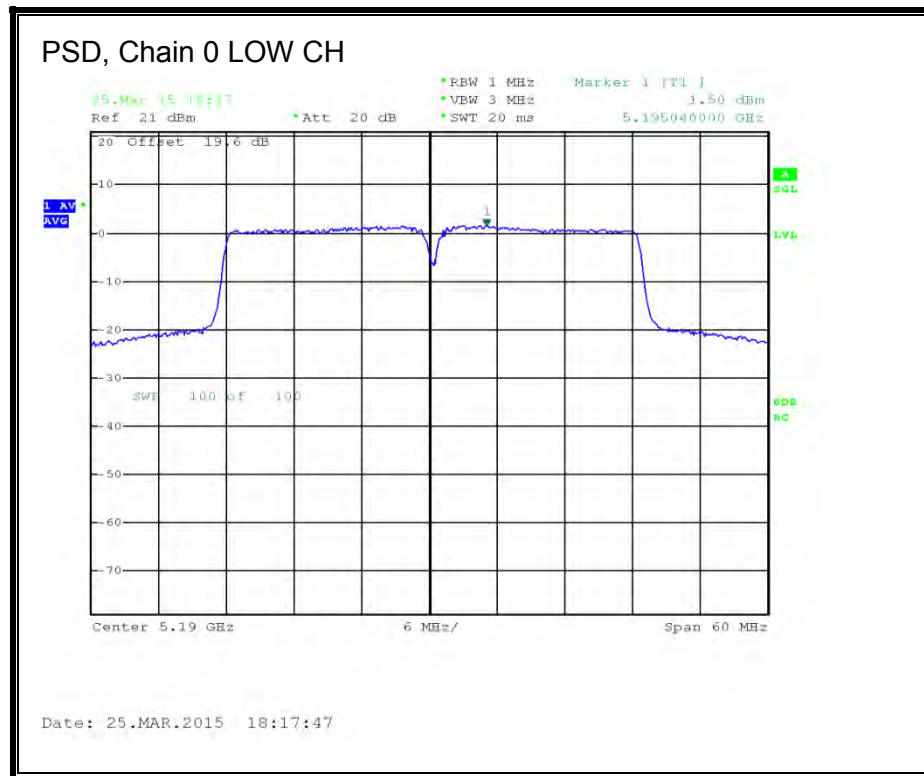

PSD, Chain 1

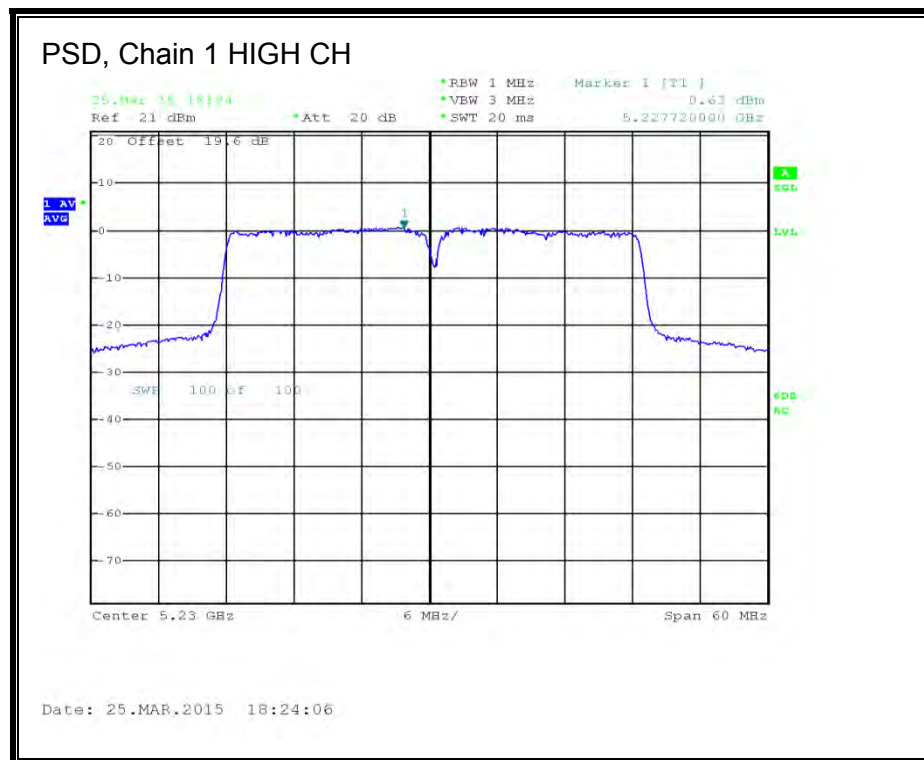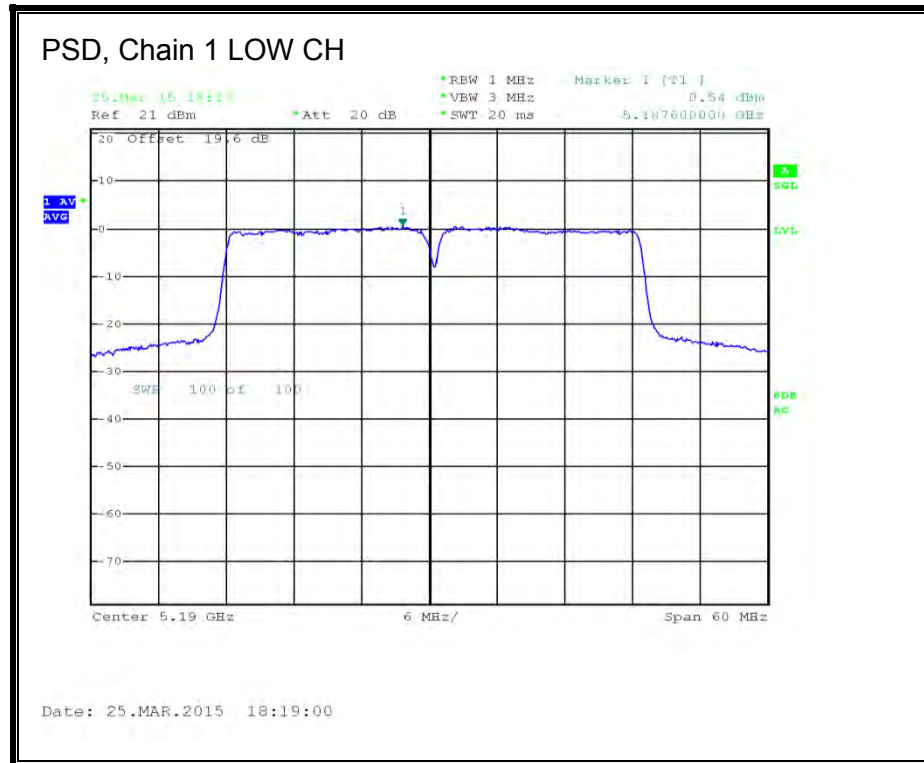

PSD, Chain 2

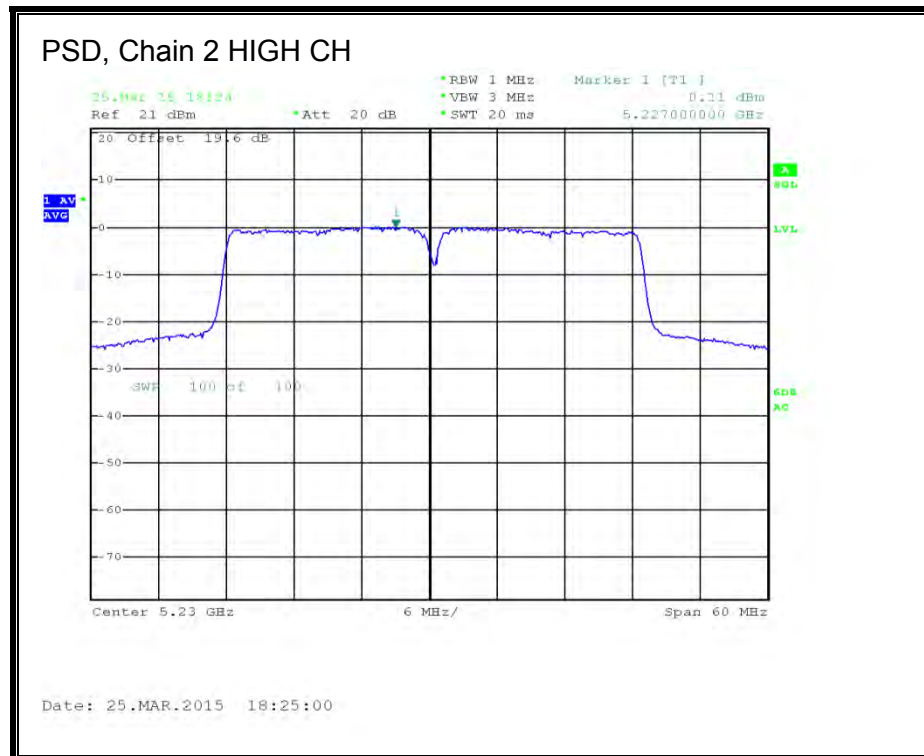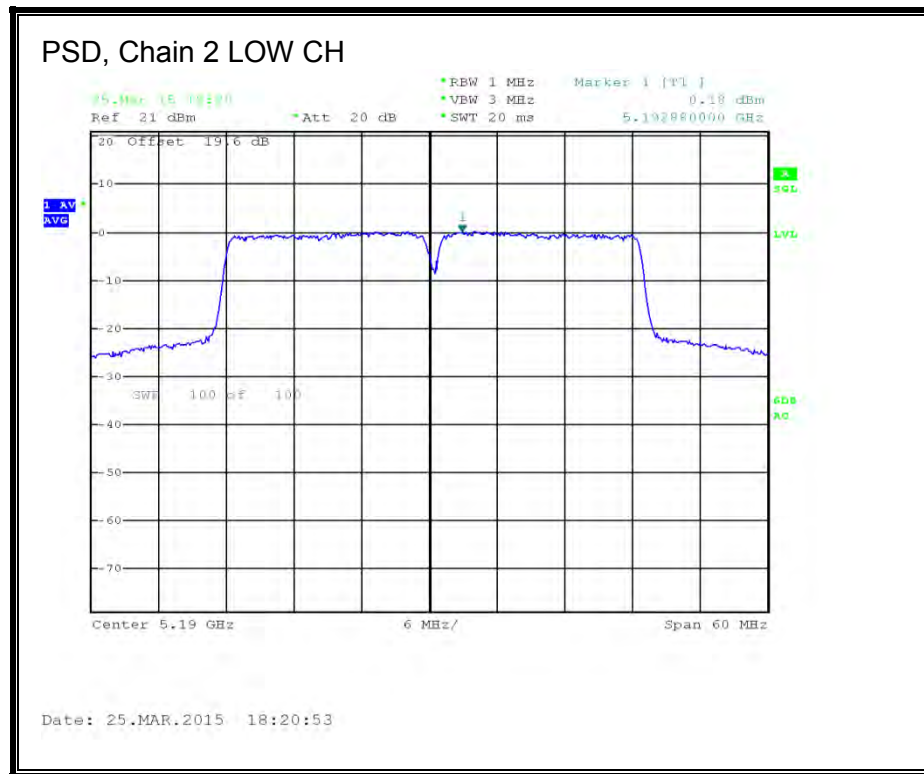

8.9. 802.11n HT40 TxBF 3Tx MODE IN THE 5.2 GHz BAND

8.9.1. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

For power and PSD the TX chains are correlated and the antenna gain is the same for each chain. The directional gain is:

| Antenna Gain (dBi) | 10 * Log (3 chains) (dB) | Correlated Chains Directional Gain (dBi) |
|-----------------------------------|-------------------------------------|---|
| 5.85 | 4.77 | 10.62 |

RESULTS

Antenna Gain and Limits

| Channel | Frequency (MHz) | Directional Gain for Power (dBi) | Directional Gain for PSD (dBi) | Power Limit (dBm) | PSD Limit (dBm) |
|---------|--------------------|---|---|-------------------------|-----------------------|
| Low | 5190 | 10.62 | 10.62 | 19.38 | 6.38 |
| High | 5230 | 10.62 | 10.62 | 19.38 | 6.38 |

| | | |
|--------------------|------|---------------------------------|
| Duty Cycle CF (dB) | 0.09 | Included in Calculations of PSD |
|--------------------|------|---------------------------------|

Output Power Results


| Channel | Frequency (MHz) | Chain 0 Meas Power (dBm) | Chain 1 Meas Power (dBm) | Chain 2 Meas Power (dBm) | Total Corr'd Power (dBm) | Power Limit (dBm) | Power Margin (dB) |
|---------|--------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-------------------------|-------------------------|
| Low | 5190 | 11.80 | 12.00 | 11.90 | 16.67 | 19.38 | -2.71 |
| High | 5230 | 14.12 | 14.60 | 14.19 | 19.08 | 19.38 | -0.30 |

PSD Results

| Channel | Frequency (MHz) | Chain 0 Meas PSD (dBm) | Chain 1 Meas PSD (dBm) | Chain 2 Meas PSD (dBm) | Total Corr'd PSD (dBm) | PSD Limit (dBm) | PSD Margin (dB) |
|---------|--------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|-----------------------|-----------------------|
| Low | 5190 | -3.47 | -3.00 | -3.25 | 1.63 | 6.38 | -4.75 |
| High | 5230 | -3.66 | -3.23 | -3.76 | 1.32 | 6.38 | -5.06 |

Note: the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.

PSD, Chain 0

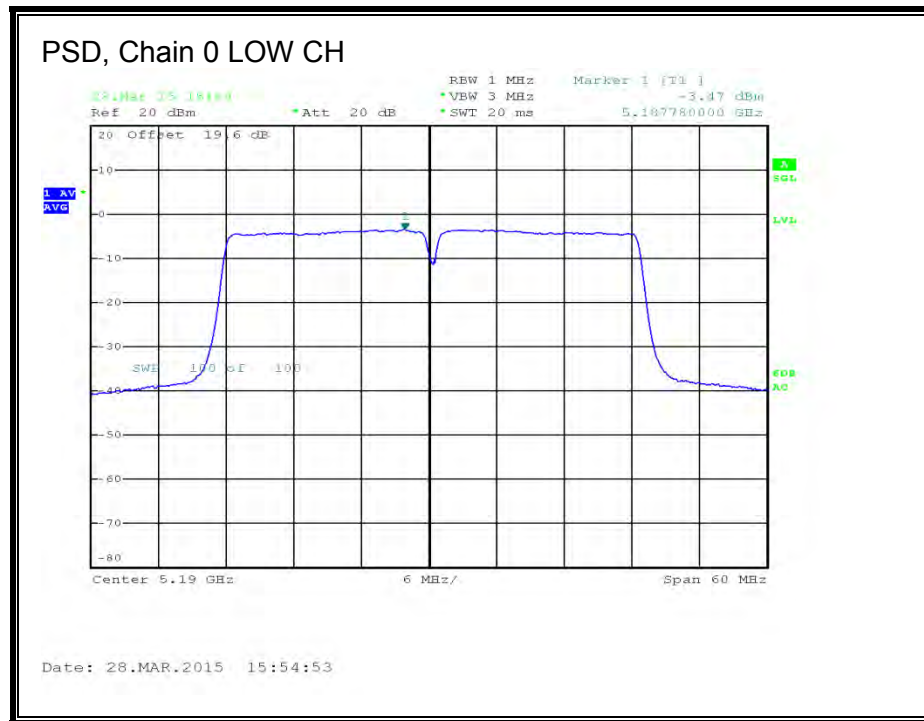

PSD, Chain 1



PSD, Chain 2



8.10. 802.11ac VHT80 1Tx MODE IN THE 5.2 GHz BAND

8.10.1. OUTPUT POWER

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

This is SISO mode, AG is the highest (worst-case) = 5.85 dBi

RESULTS

Antenna Gain and Limits

| Channel | Frequency (MHz) | Directional Gain for Power (dBi) | Power Limit (dBm) |
|---------|--------------------|---|-------------------------|
| Mid | 5210 | 5.85 | 24.00 |

Output Power Results

| Channel | Frequency (MHz) | Chain 0 Meas Power (dBm) | Total Corr'd Power (dBm) | Power Limit (dBm) | Power Margin (dB) |
|---------|--------------------|-----------------------------------|-----------------------------------|-------------------------|-------------------------|
| Mid | 5210 | 12.54 | 12.54 | 24.00 | -11.46 |

Note: the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.

8.11. 802.11ac VHT80 CDD 3Tx MODE IN THE 5.2 GHz BAND

8.11.1. 26 dB BANDWIDTH


LIMITS

None; for reporting purposes only.


RESULTS

| Channel | Frequency (MHz) | 26 dB BW Chain 0 (MHz) | 26 dB BW Chain 1 (MHz) | 26 dB BW Chain 2 (MHz) |
|---------|--------------------|------------------------------|------------------------------|------------------------------|
| Mid | 5210 | 149.75 | 151.25 | 147.25 |


26 dB BANDWIDTH, Chain 0

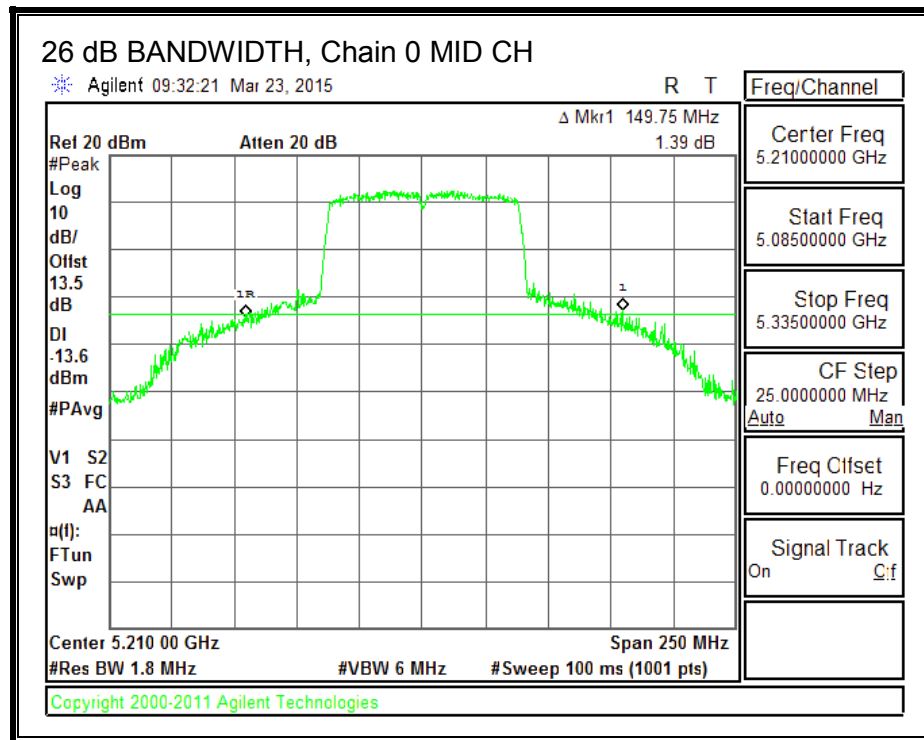

26 dB BANDWIDTH, Chain 1

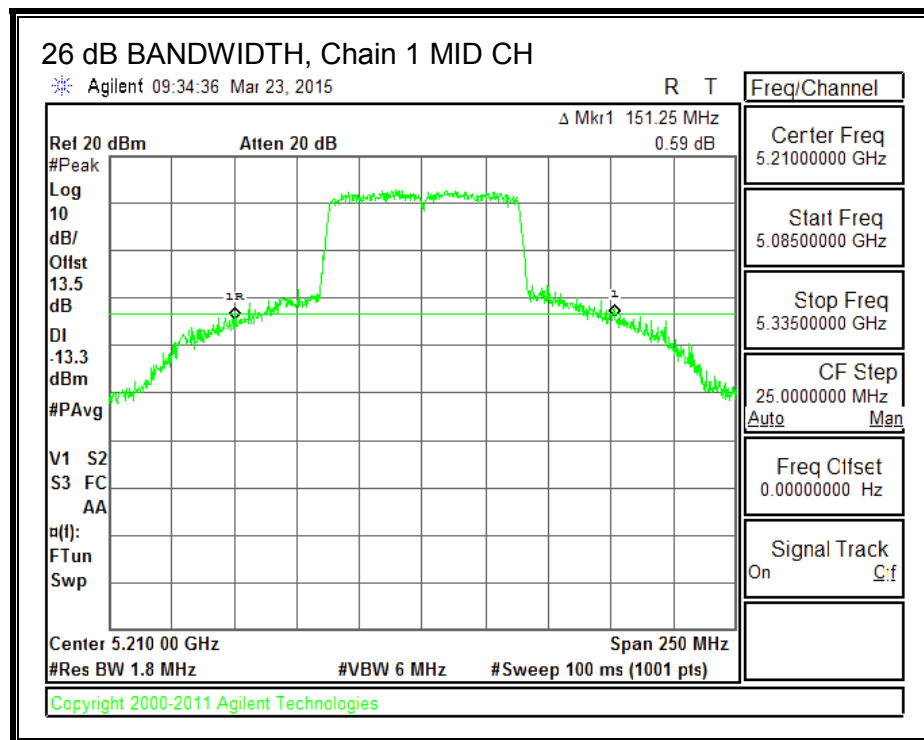

26 dB BANDWIDTH, Chain 2

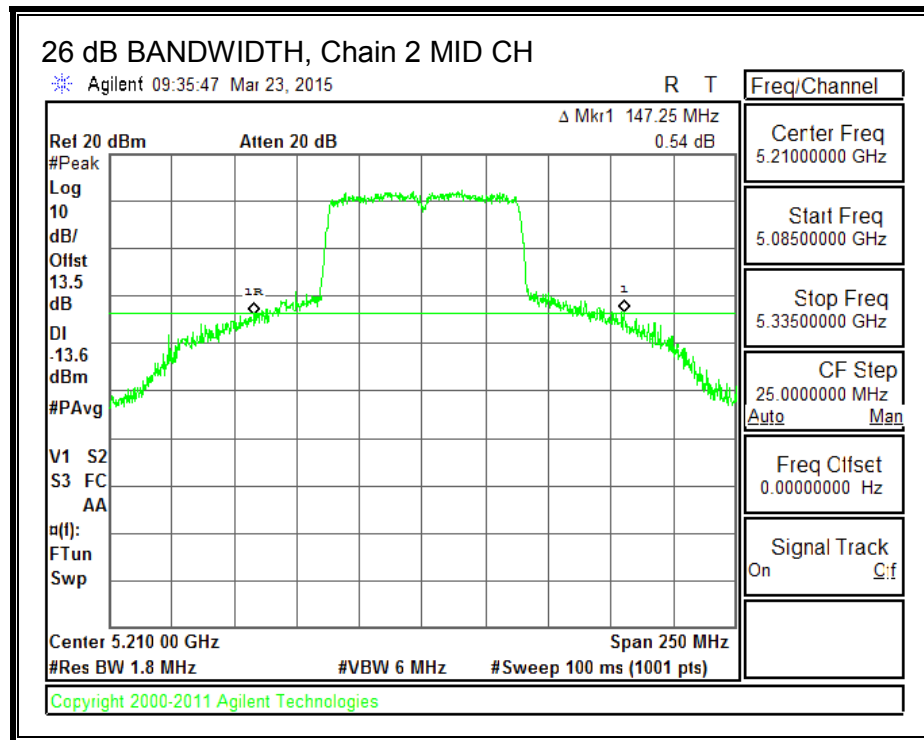

8.11.2. 99% BANDWIDTH


LIMITS

None; for reporting purposes only.


RESULTS

| Channel | Frequency (MHz) | 99% BW Chain 0 (MHz) | 99% BW Chain 1 (MHz) | 99% BW Chain 2 (MHz) |
|---------|--------------------|----------------------------|----------------------------|----------------------------|
| Mid | 5210 | 75.9204 | 75.8123 | 75.8013 |


99% BANDWIDTH, Chain 0

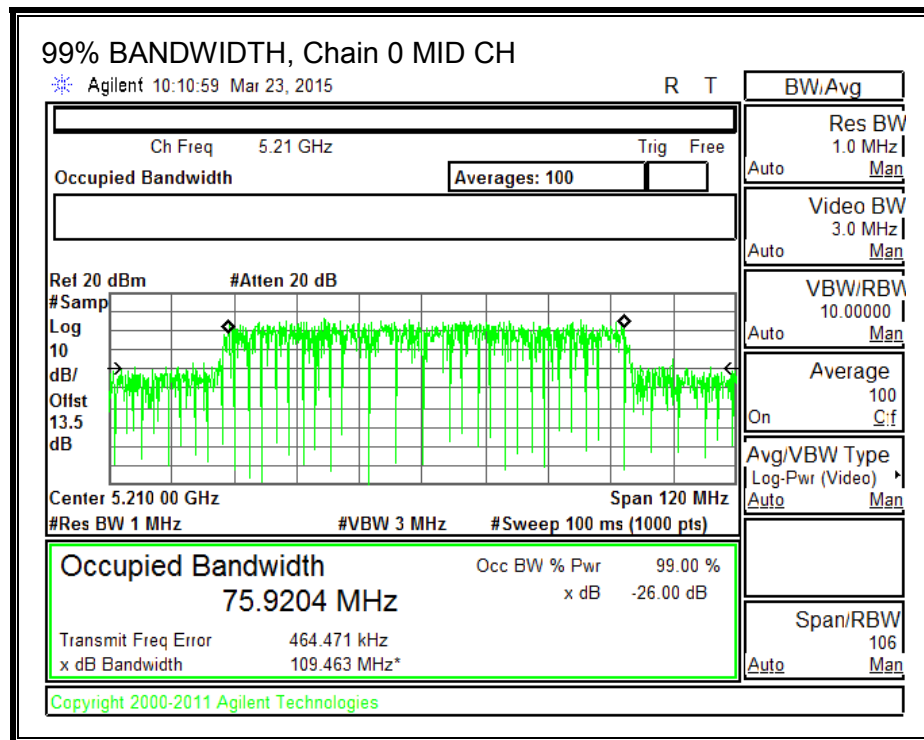

99% BANDWIDTH, Chain 1

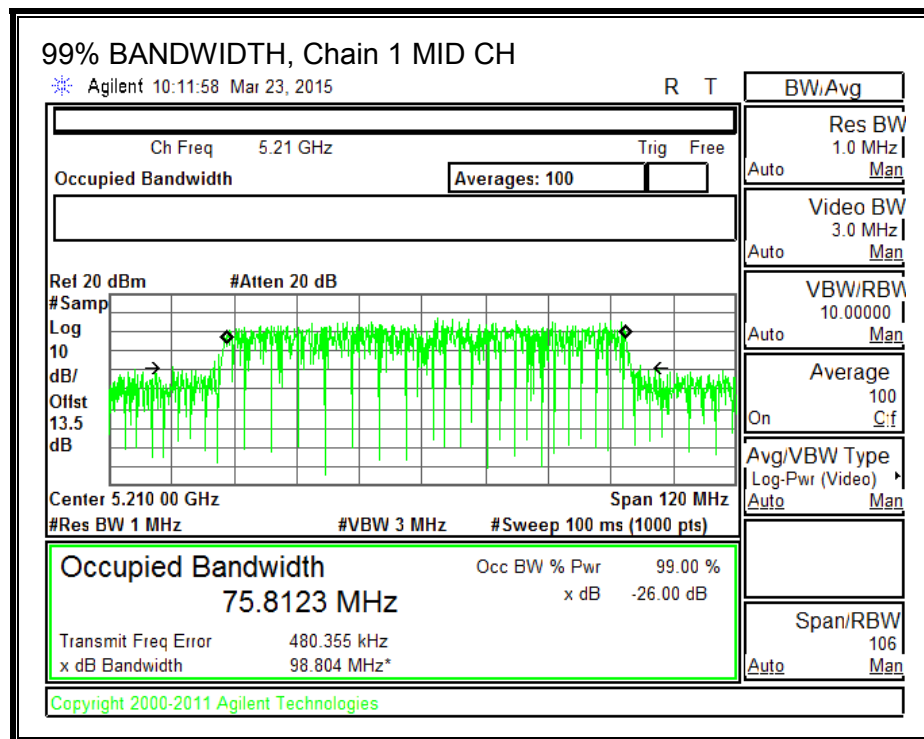

99% BANDWIDTH, Chain 2

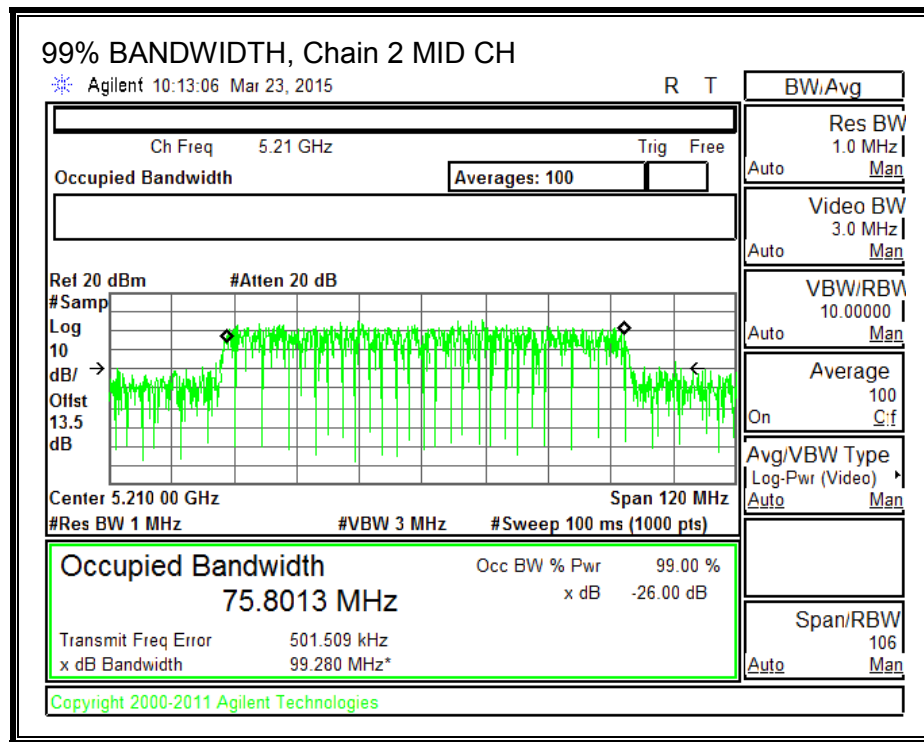

8.11.3. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

For power, the TX chains are uncorrelated and the antenna gain is the same for each chain. The directional gain is equal to the antenna gain, 5.85 dBi.

For PSD, the TX chains are correlated and the antenna gain is the same for each chain. The directional gain is:

| Antenna Gain (dBi) | 10 * Log (3 chains) (dB) | Correlated Chains Directional Gain (dBi) |
|--------------------|--------------------------|--|
| 5.85 | 4.77 | 10.62 |

RESULTS

Antenna Gain and Limits

| Channel | Frequency (MHz) | Directional Gain for Power (dBi) | Directional Gain for PSD (dBi) | Power Limit (dBi) | PSD Limit (dBi) |
|---------|--------------------|---|---|-------------------------|-----------------------|
| Mid | 5210 | 5.85 | 10.62 | 24.00 | 6.38 |

| | | |
|--------------------|------|---------------------------------|
| Duty Cycle CF (dB) | 0.18 | Included in Calculations of PSD |
|--------------------|------|---------------------------------|

Output Power Results


| Channel | Frequency (MHz) | Chain 0 Meas Power (dBm) | Chain 1 Meas Power (dBm) | Chain 2 Meas Power (dBm) | Total Corr'd Power (dBm) | Power Limit (dBm) | Power Margin (dB) |
|---------|--------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-------------------------|-------------------------|
| Mid | 5210 | 10.61 | 10.82 | 10.90 | 15.55 | 24.00 | -8.45 |

PSD Results


| Channel | Frequency (MHz) | Chain 0 Meas PSD (dBm) | Chain 1 Meas PSD (dBm) | Chain 2 Meas PSD (dBm) | Total Corr'd PSD (dBm) | PSD Limit (dBm) | PSD Margin (dB) |
|---------|--------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|-----------------------|-----------------------|
| Mid | 5210 | -2.27 | -3.02 | -4.11 | 1.88 | 6.38 | -4.50 |

Note: the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.

PSD, Chain 0

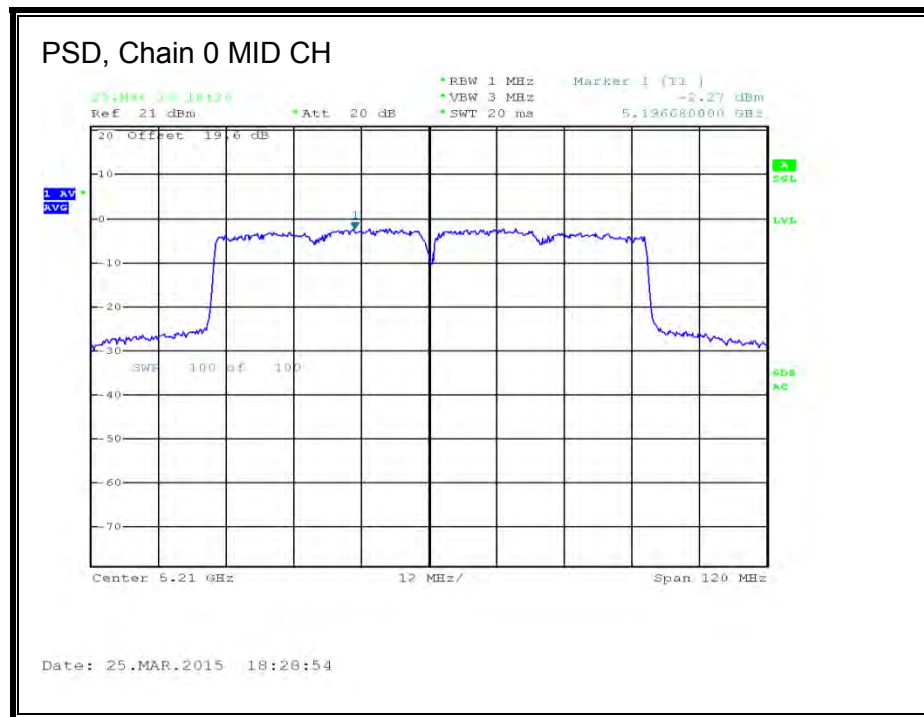

PSD, Chain 1

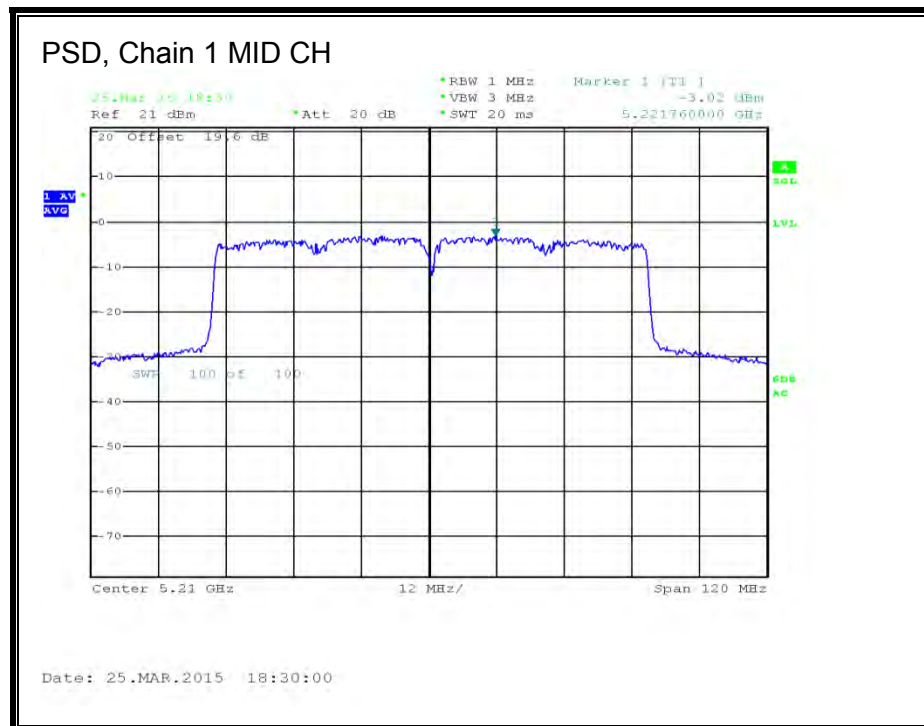

PSD, Chain 2 MID CH

25.Mar 15 18:31

Ref 21 dBm Att 20 dB RBW 1 MHz VEW 3 MHz SWT 20 ms Marker 1 [TL] -4.11 dBm 5.222720000 GHz

1 AV
AVG

20 Offset 19.6 dB

SWF 100 dB 100

Center 5.21 GHz 12 MHz/ Span 120 MHz

SGL
LVL
SDB
AC

Date: 25.MAR.2015 18:31:13

8.12. 802.11ac VHT80 TxBF 3Tx MODE IN THE 5.2 GHz BAND

8.12.1. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

For power and PSD, the TX chains are correlated and the antenna gain is the same for each chain. The directional gain is:

| Antenna Gain (dBi) | 10 * Log (3 chains) (dB) | Correlated Chains Directional Gain (dBi) |
|-----------------------------------|-------------------------------------|---|
| 5.85 | 4.77 | 10.62 |

RESULTS

Antenna Gain and Limits

| Channel | Frequency (MHz) | Directional Gain for Power (dBi) | Directional Gain for PSD (dBi) | Power Limit (dBi) | PSD Limit (dBi) |
|---------|--------------------|---|---|-------------------------|-----------------------|
| Mid | 5210 | 10.62 | 10.62 | 19.38 | 6.38 |

| | | |
|--------------------|------|---------------------------------|
| Duty Cycle CF (dB) | 0.18 | Included in Calculations of PSD |
|--------------------|------|---------------------------------|

Output Power Results


| Channel | Frequency (MHz) | Chain 0 Meas Power (dBm) | Chain 1 Meas Power (dBm) | Chain 2 Meas Power (dBm) | Total Corr'd Power (dBm) | Power Limit (dBm) | Power Margin (dB) |
|---------|--------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-------------------------|-------------------------|
| Mid | 5210 | 10.74 | 10.71 | 10.31 | 15.36 | 19.38 | -4.02 |

PSD Results


| Channel | Frequency (MHz) | Chain 0 Meas PSD (dBm) | Chain 1 Meas PSD (dBm) | Chain 2 Meas PSD (dBm) | Total Corr'd PSD (dBm) | PSD Limit (dBm) | PSD Margin (dB) |
|---------|--------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|-----------------------|-----------------------|
| Mid | 5210 | -6.98 | -6.82 | -6.10 | -1.66 | 6.38 | -8.04 |

Note: the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.

PSD, Chain 0

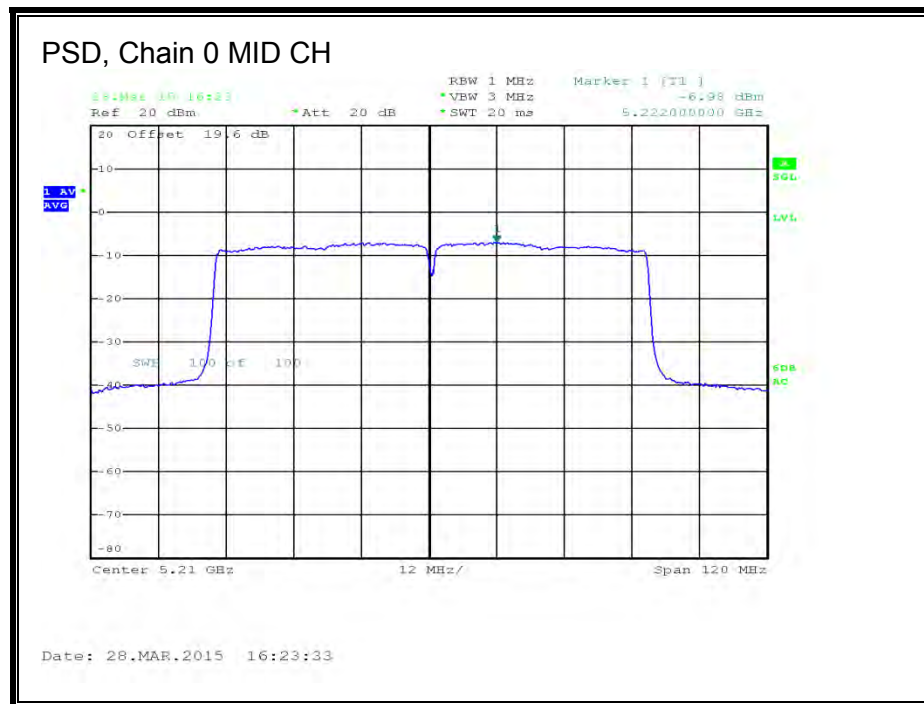

PSD, Chain 1

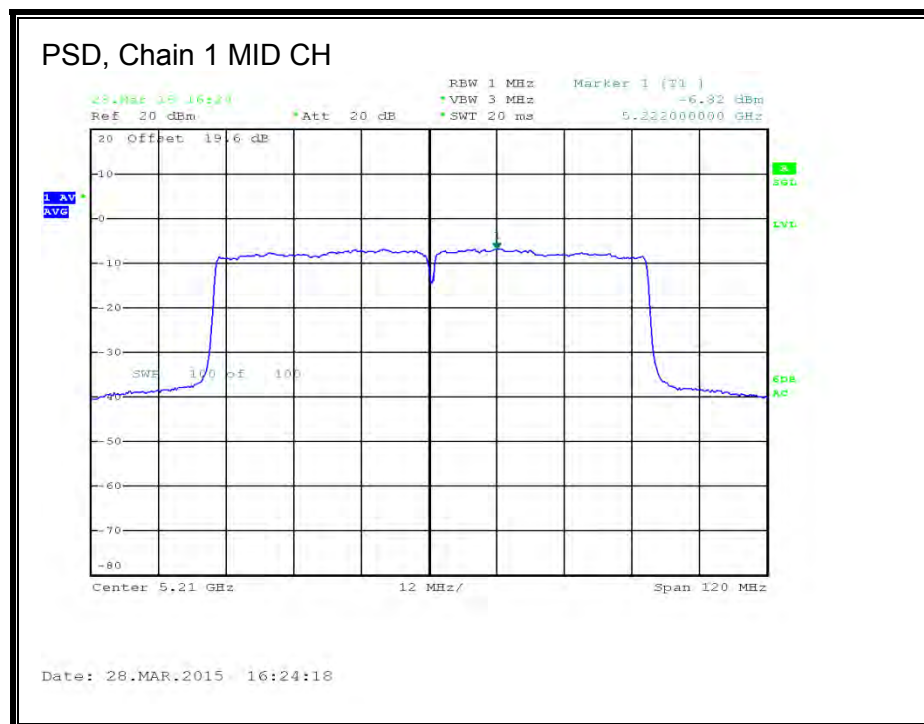

PSD, Chain 2 MID CH

28 Mar 16 16:25 RBW 1 MHz Marker 1 [T1]
Ref 20 dBm Att 20 dB VEW 3 MHz -6.10 dBm
SWT 20 ms 5.10932000 GHz

20 Offset 19.6 dB
-10
0
-10
-20
-30
-40
-50
-60
-70
-80

SWT 100 100

Center 5.21 GHz 12 MHz/ Span 120 MHz

1 AV
AVG

1
T1

SGL
LVL
6dB
AC

8.13. 802.11a LEGACY 1TX MODE IN THE 5.3 GHz BAND

8.13.1. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) |
|---------|--------------------|--------------------------|
| Low | 5260 | 33.10 |
| Mid | 5300 | 31.65 |
| High | 5320 | 30.35 |

26 dB BANDWIDTH

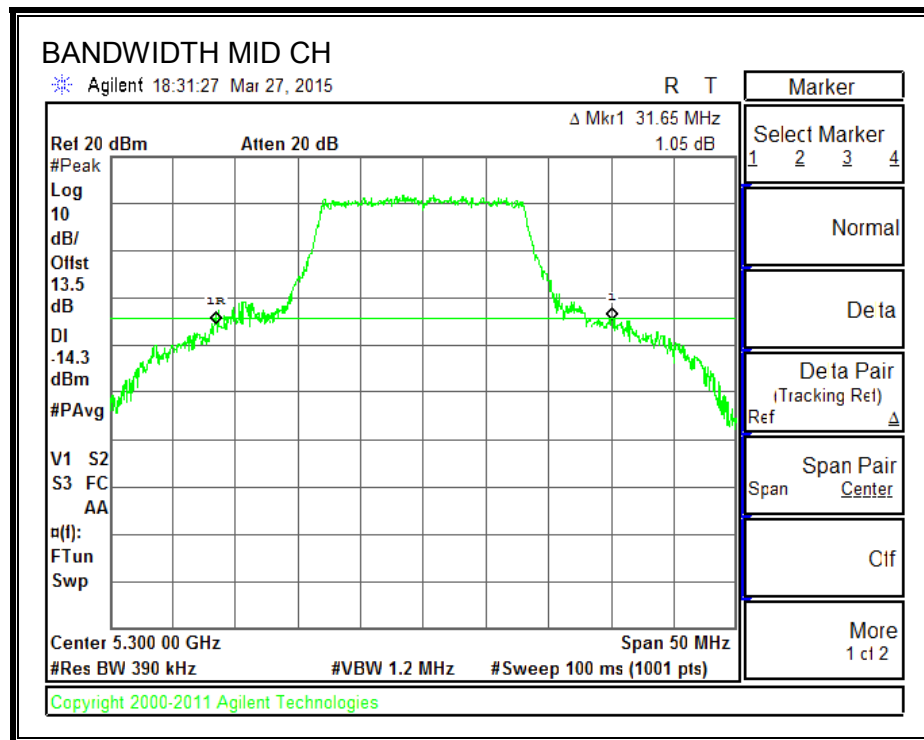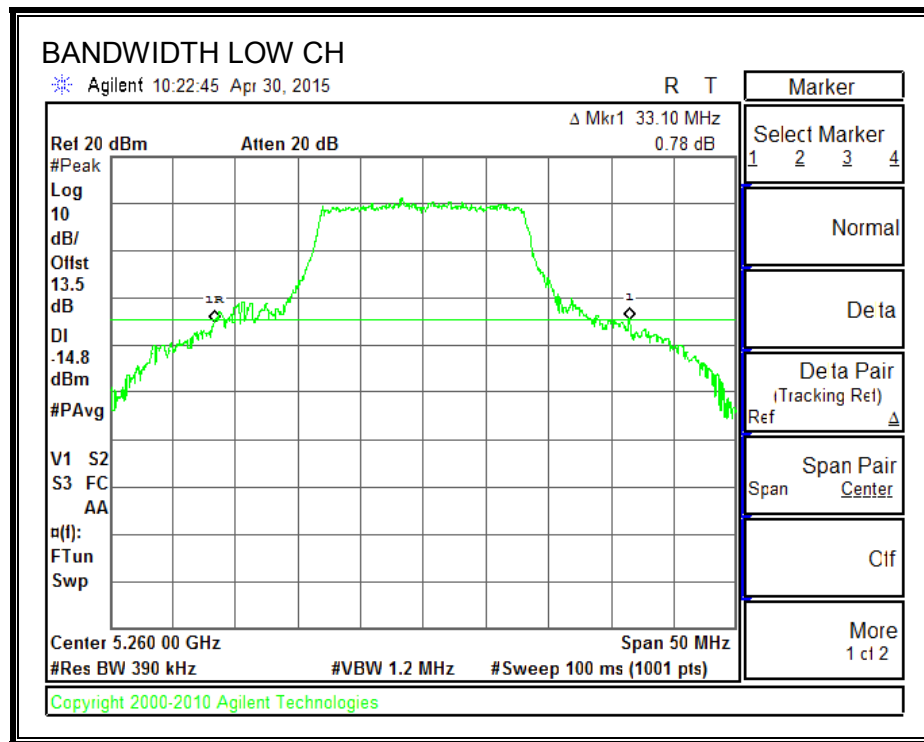

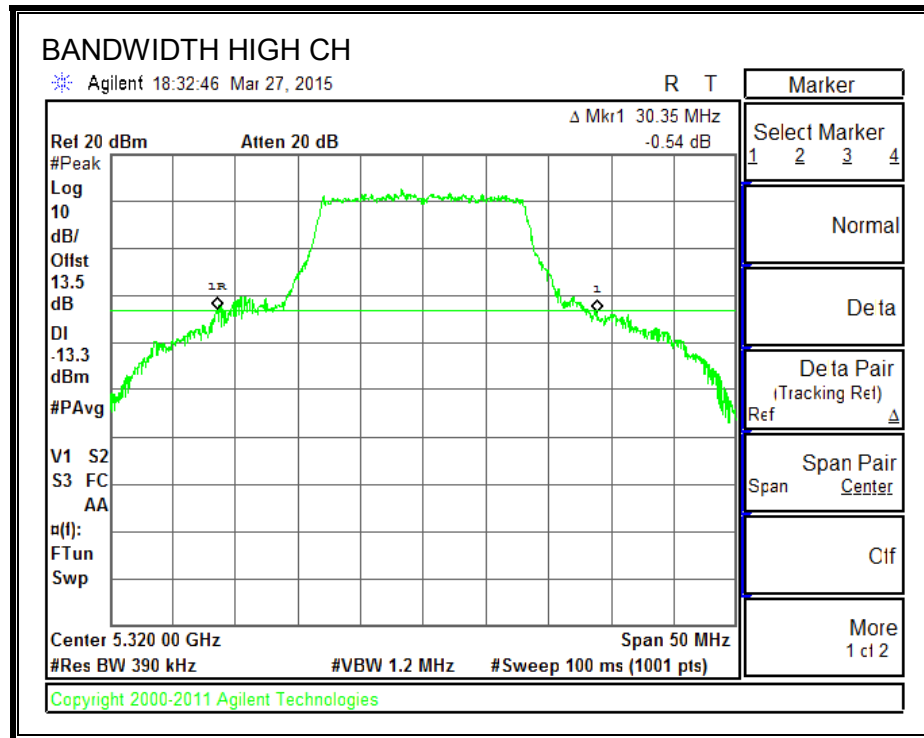

8.13.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

| Channel | Frequency (MHz) | 99% BW Chain 2 (MHz) |
|---------|--------------------|----------------------------|
| Low | 5260 | 16.5189 |
| Mid | 5300 | 16.5015 |
| High | 5320 | 16.5144 |

99% BANDWIDTH

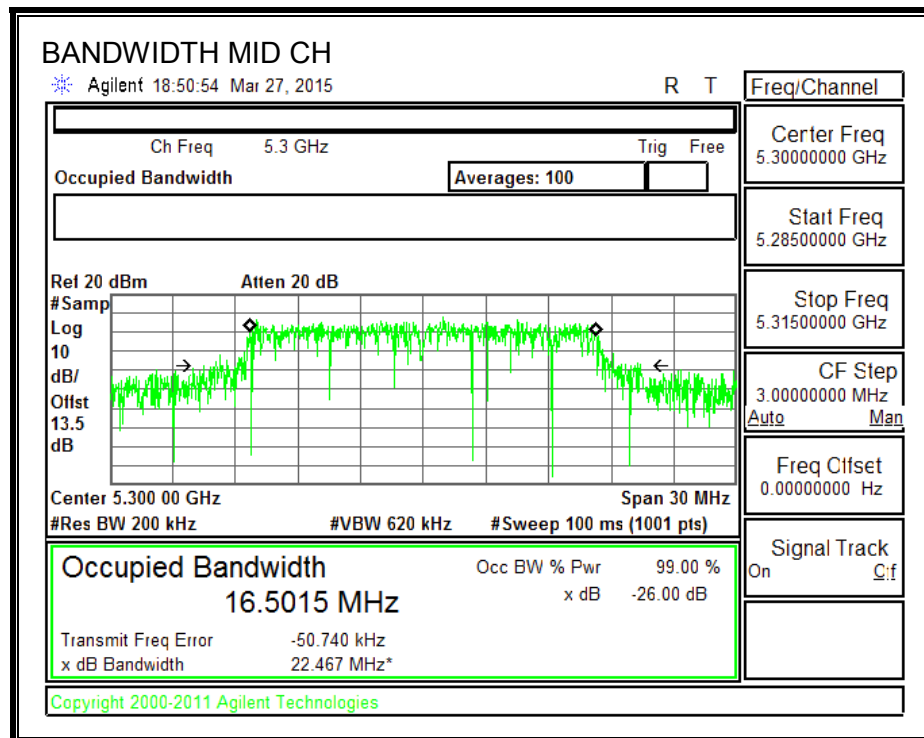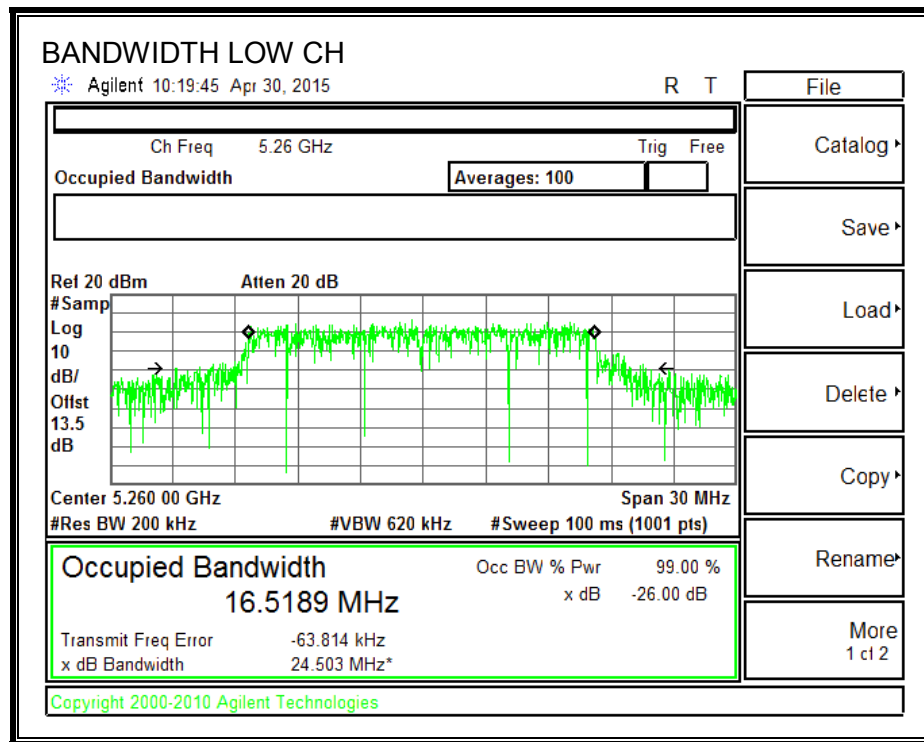

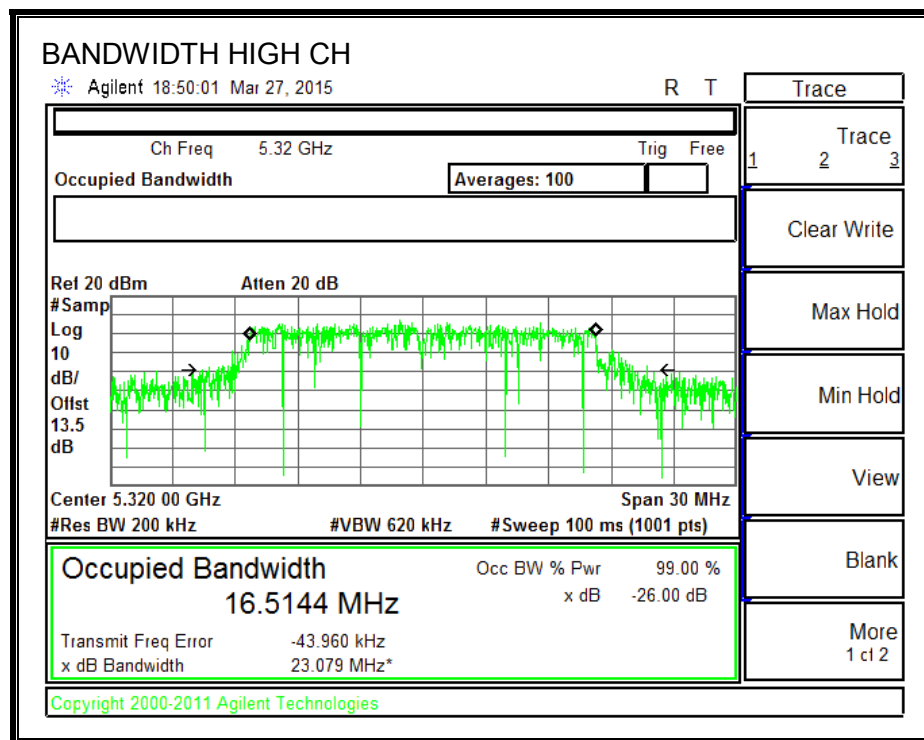

8.13.3. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

This is SISO mode, AG is the highest (worst-case) = 5.85 dBi.

RESULTS

Bandwidth, Antenna Gain, and Limits

| Channel | Frequency (MHz) | Min 26 dB BW (MHz) | Directional Gain (dBi) | Power Limit (dBm) | PSD Limit (dBm) |
|---------|--------------------|-----------------------------|------------------------------|-------------------------|-----------------------|
| Low | 5260 | 33.10 | 5.85 | 24.00 | 11.00 |
| Mid | 5300 | 31.65 | 5.85 | 24.00 | 11.00 |
| High | 5320 | 30.35 | 5.85 | 24.00 | 11.00 |

| | | |
|--------------------|------|---------------------------------|
| Duty Cycle CF (dB) | 0.00 | Included in Calculations of PSD |
|--------------------|------|---------------------------------|



Output Power Results


| Channel | Frequency (MHz) | Chain 0 Meas Power (dBm) | Total Corr'd Power (dBm) | Power Limit (dBm) | Power Margin (dB) |
|---------|--------------------|-----------------------------------|-----------------------------------|-------------------------|-------------------------|
| Low | 5260 | 18.90 | 18.90 | 24.00 | -5.10 |
| Mid | 5300 | 18.80 | 18.80 | 24.00 | -5.20 |
| High | 5320 | 18.87 | 18.87 | 24.00 | -5.13 |

PSD Results

| Channel | Frequency (MHz) | Chain 0 Meas PSD (dBm) | Total Corr'd PSD (dBm) | PSD Limit (dBm) | PSD Margin (dB) |
|---------|--------------------|---------------------------------|---------------------------------|-----------------------|-----------------------|
| Low | 5260 | 5.70 | 5.70 | 11.00 | -5.30 |
| Mid | 5300 | 5.20 | 5.20 | 11.00 | -5.80 |
| High | 5320 | 6.62 | 6.62 | 11.00 | -4.38 |

PSD, Chain 0

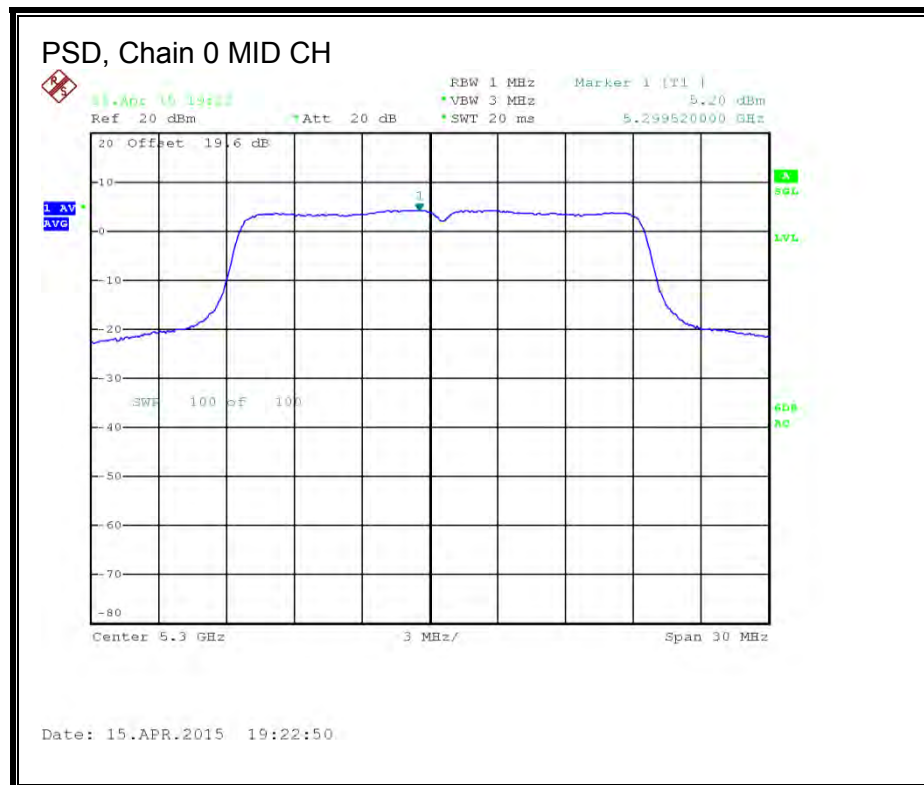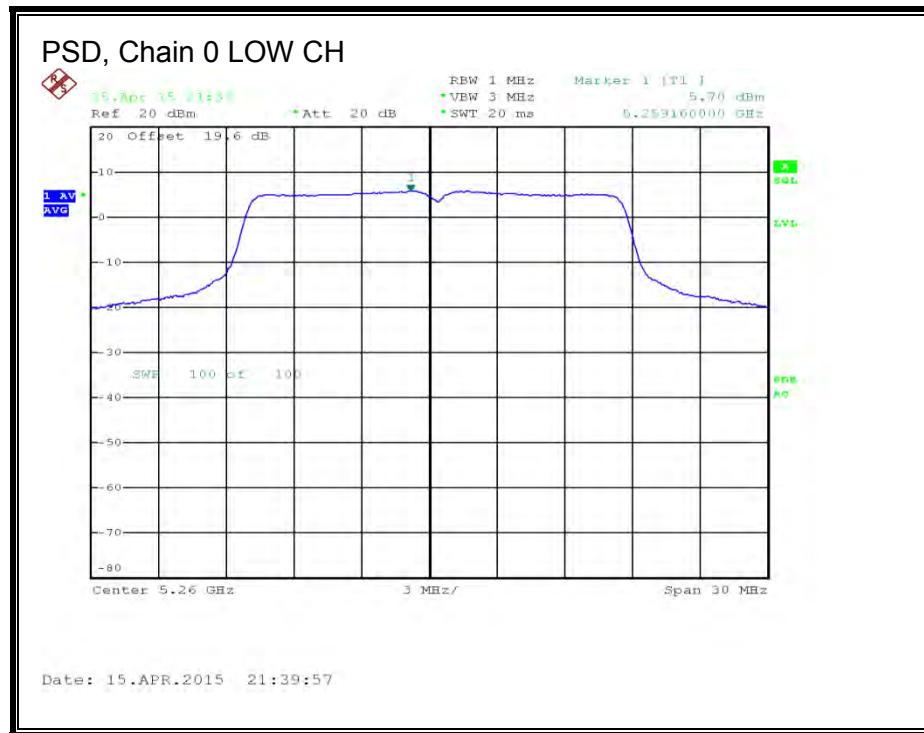

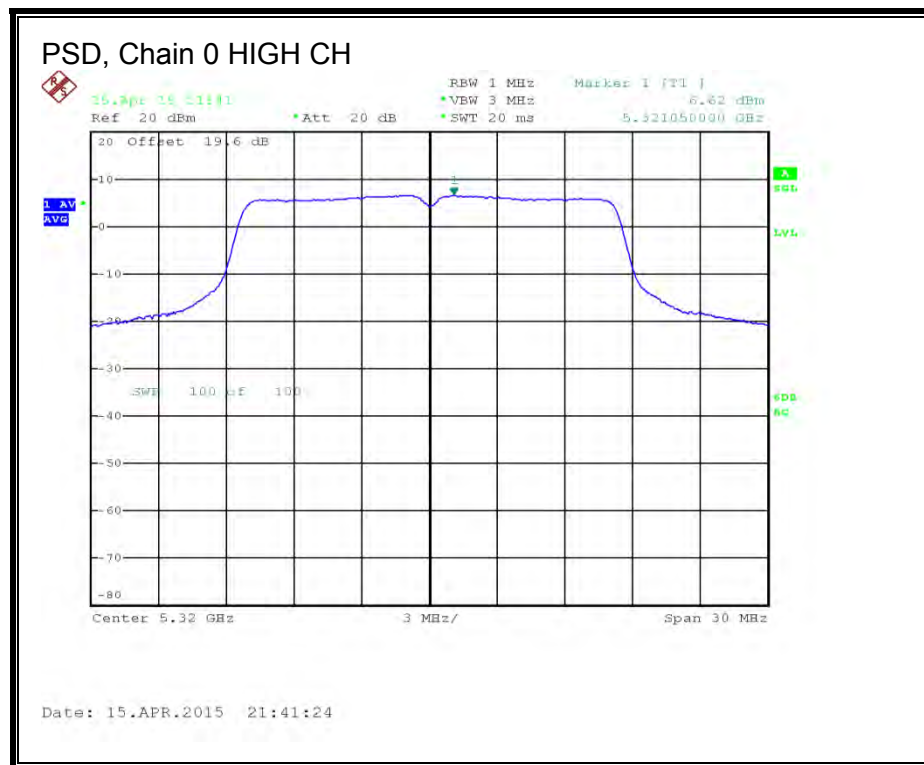

8.14. 802.11n HT20 CDD 3Tx MODE IN THE 5.3 GHz BAND

8.14.1. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS


| Channel | Frequency (MHz) | 26 dB BW Chain 0 (MHz) | 26 dB BW Chain 1 (MHz) | 26 dB BW Chain 2 (MHz) |
|---------|--------------------|------------------------------|------------------------------|------------------------------|
| Low | 5260 | 43.14 | 40.50 | 41.64 |
| Mid | 5300 | 42.78 | 41.94 | 41.94 |
| High | 5320 | 41.10 | 42.36 | 42.96 |



26 dB BANDWIDTH, Chain 0

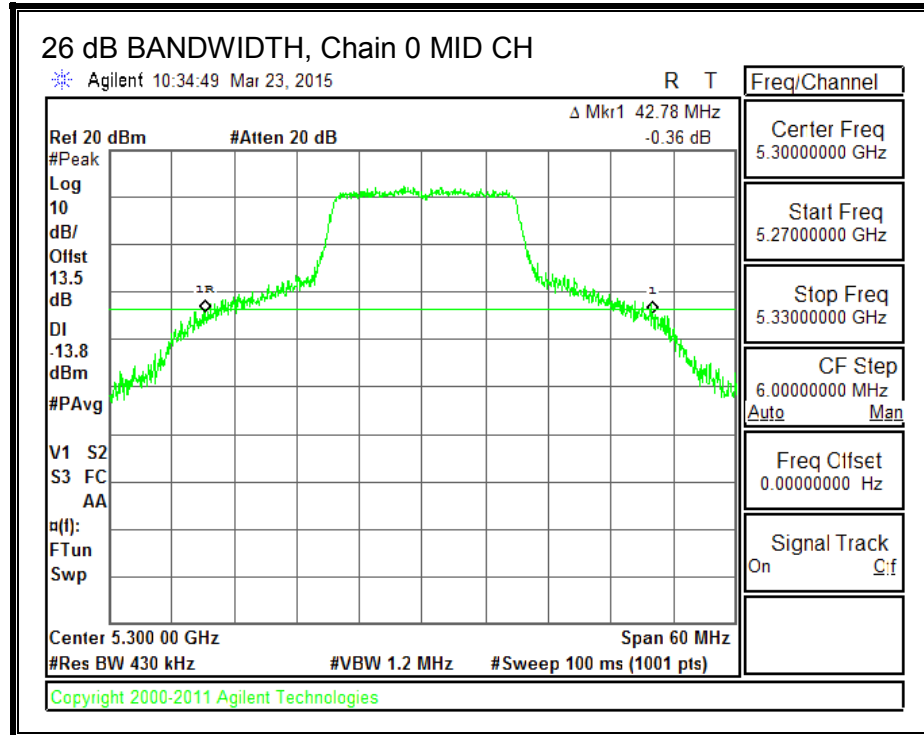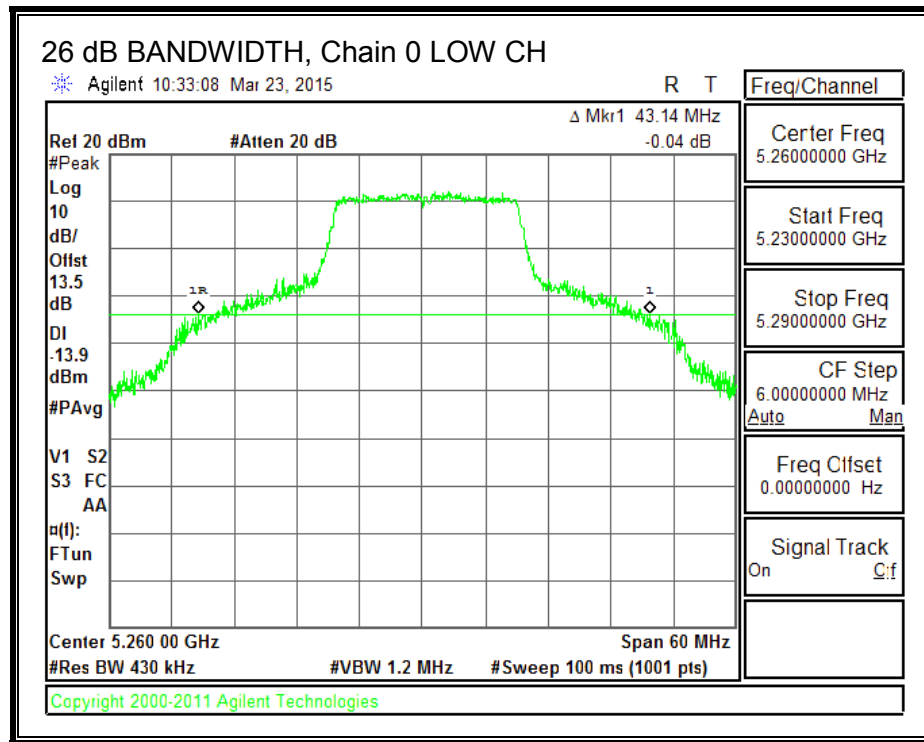


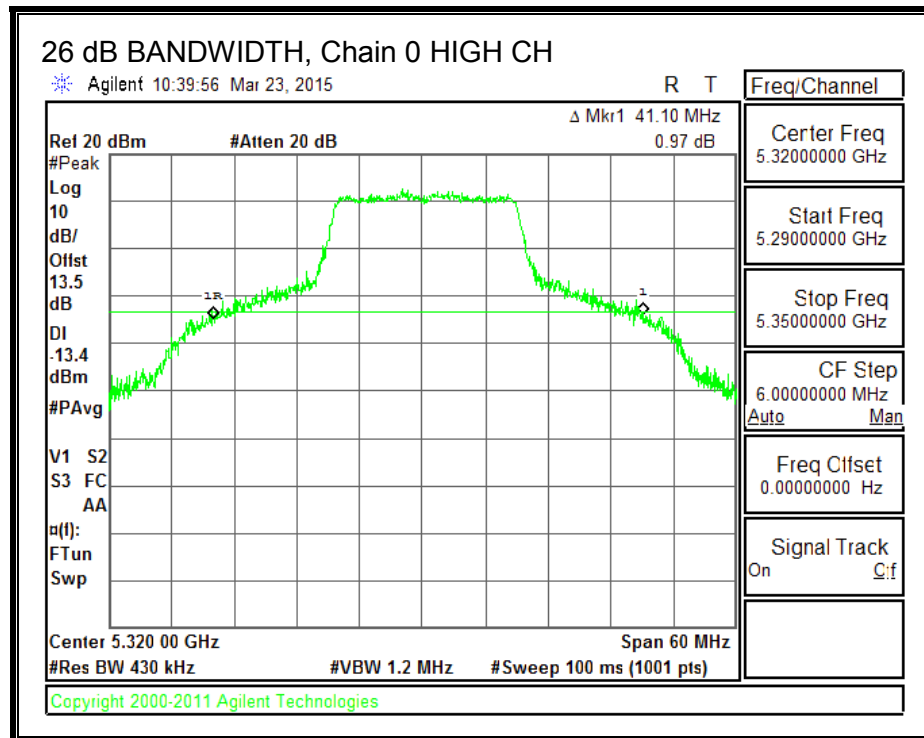



26 dB BANDWIDTH, Chain 1

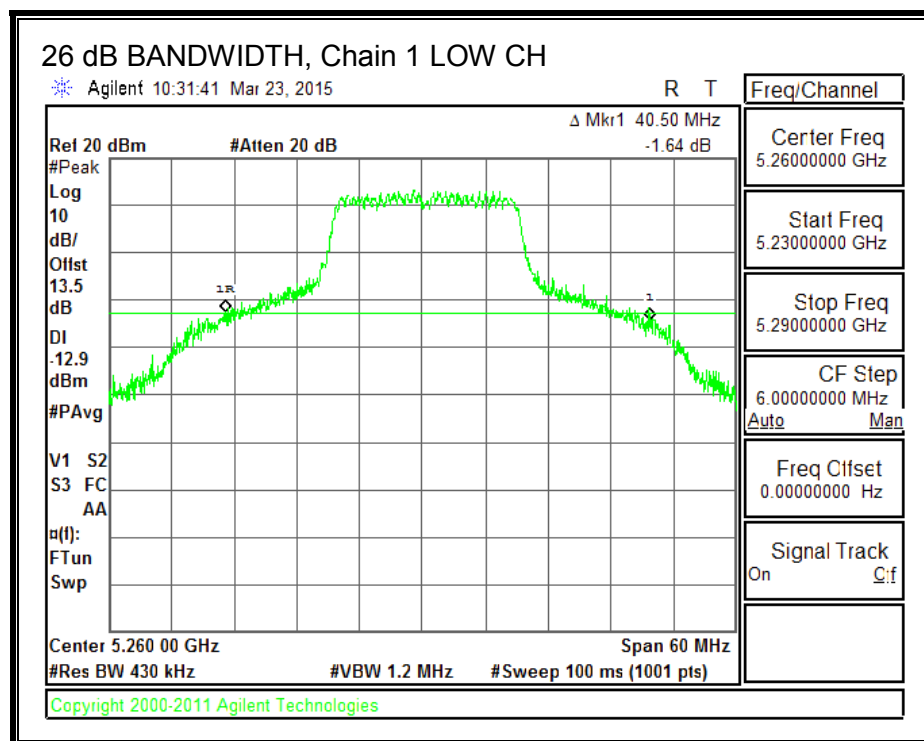

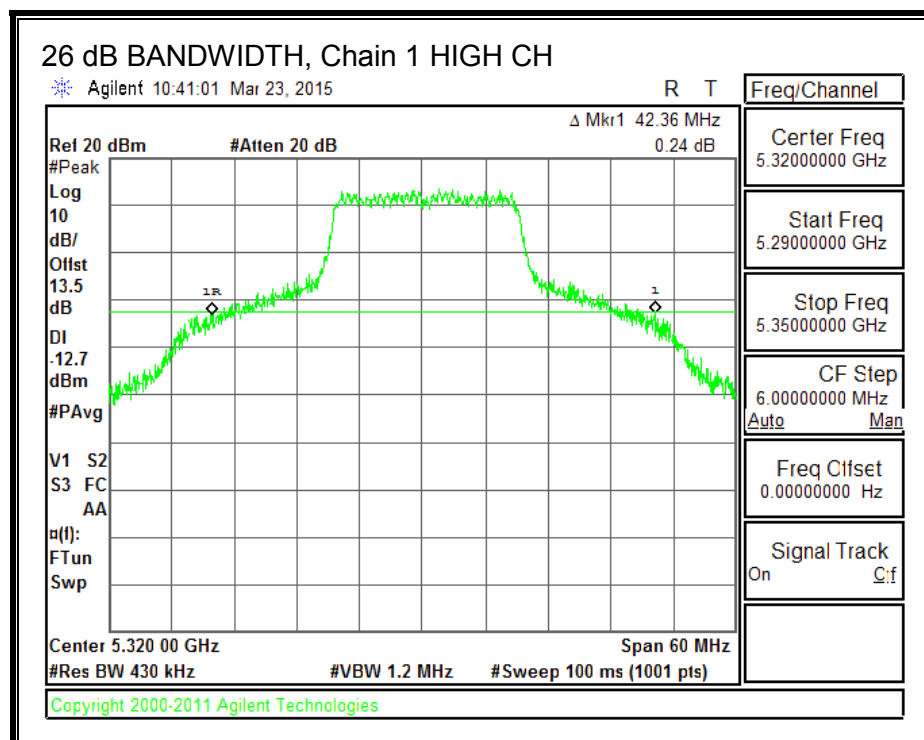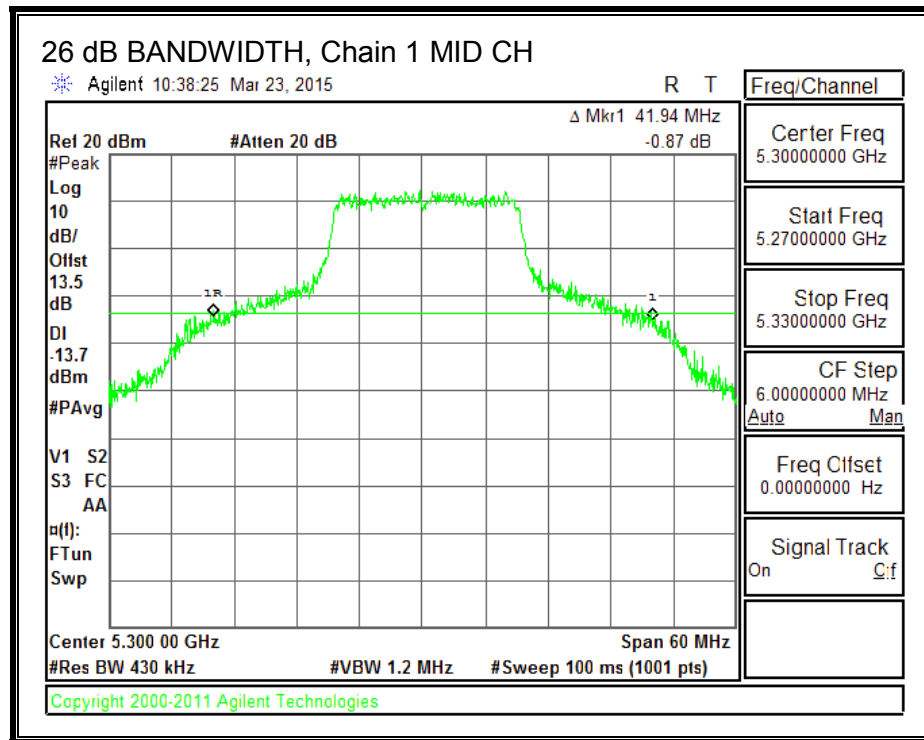

26 dB BANDWIDTH, Chain 2

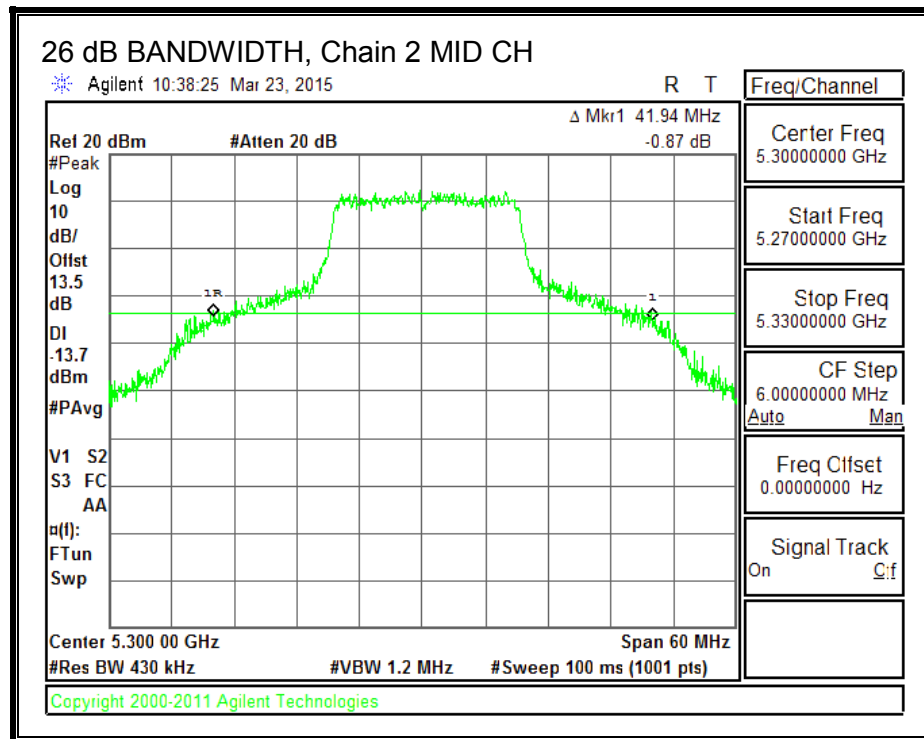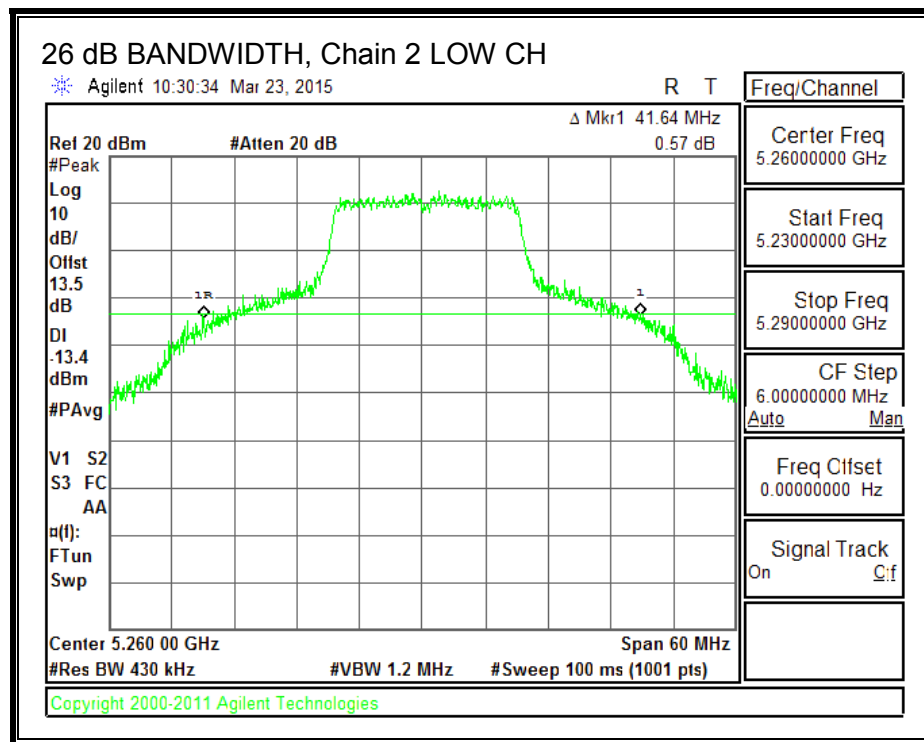

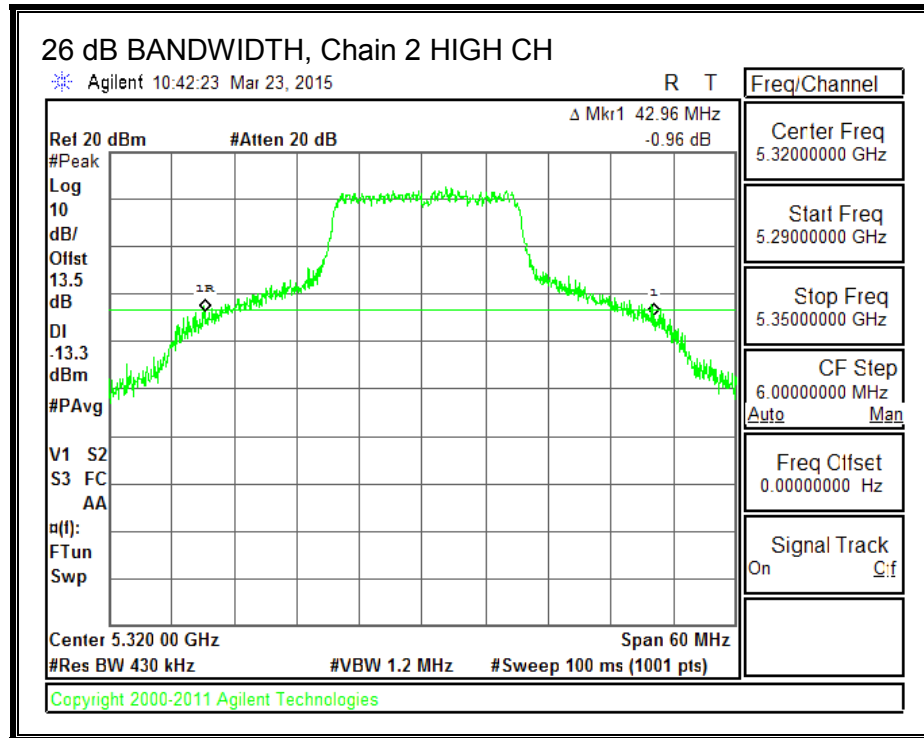

8.14.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS


| Channel | Frequency (MHz) | 99% BW Chain 0 (MHz) | 99% BW Chain 1 (MHz) | 99% BW Chain 2 (MHz) |
|---------|--------------------|----------------------------|----------------------------|----------------------------|
| Low | 5260 | 17.8547 | 17.8255 | 17.8818 |
| Mid | 5300 | 17.8550 | 17.8547 | 17.8935 |
| High | 5320 | 17.9505 | 17.9169 | 17.8791 |



99% BANDWIDTH, Chain 0

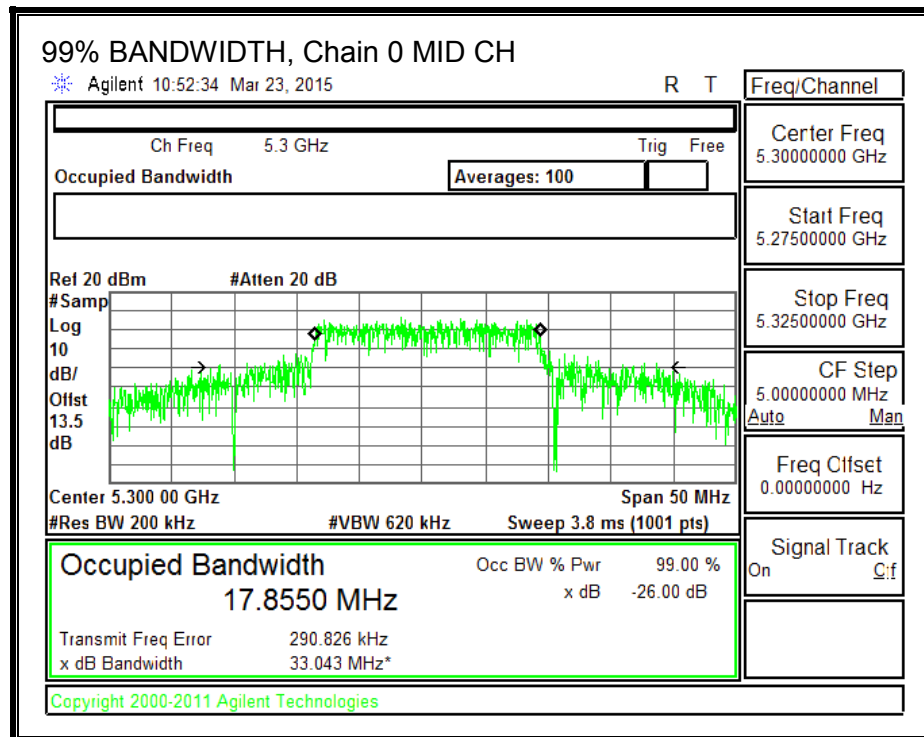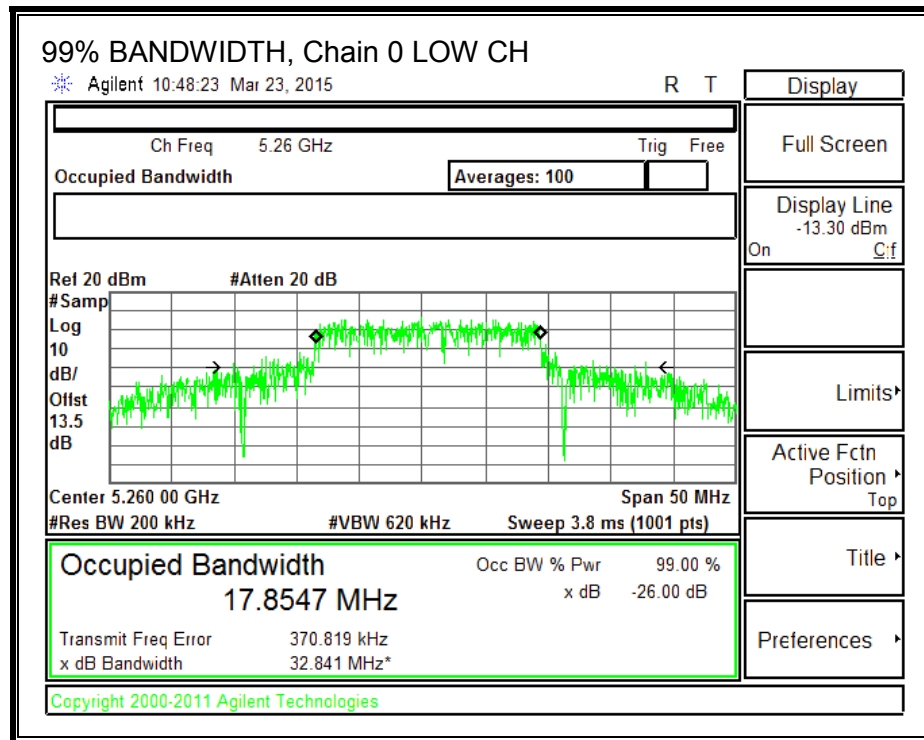


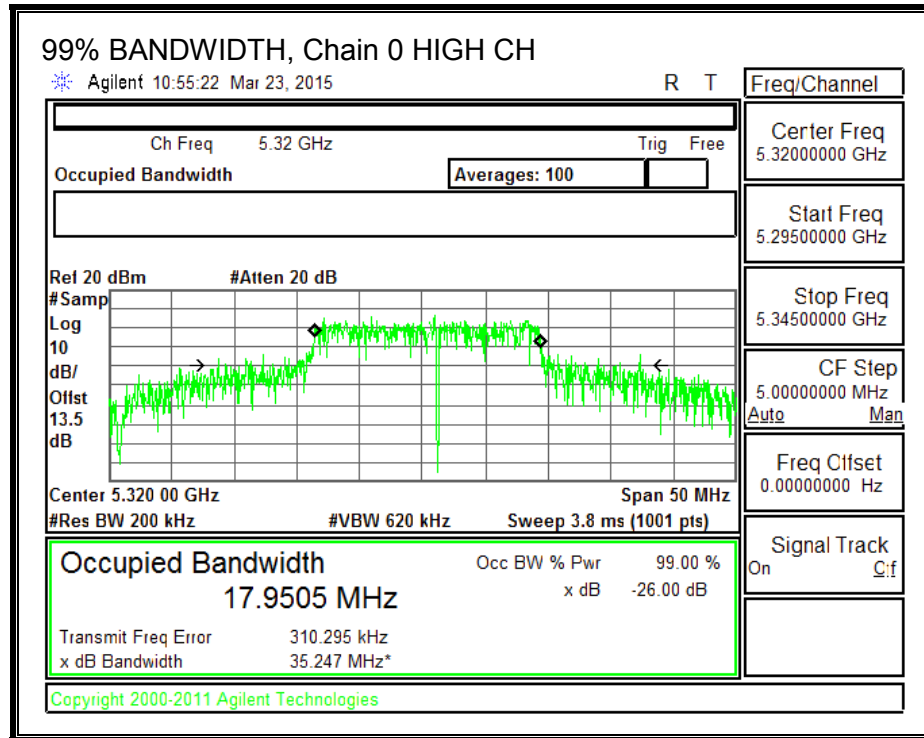



99% BANDWIDTH, Chain 1

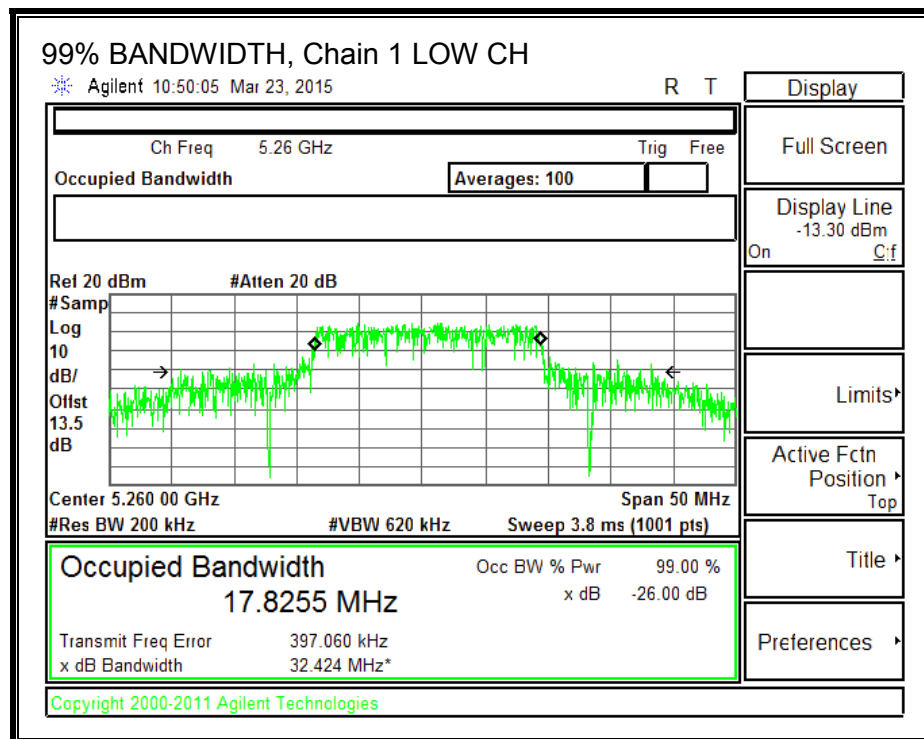

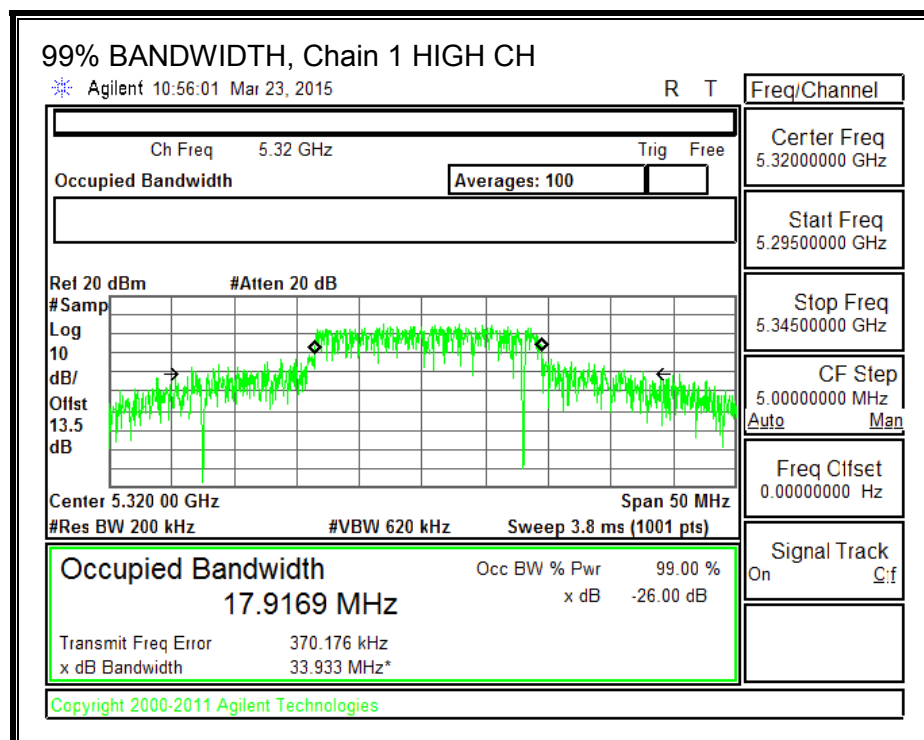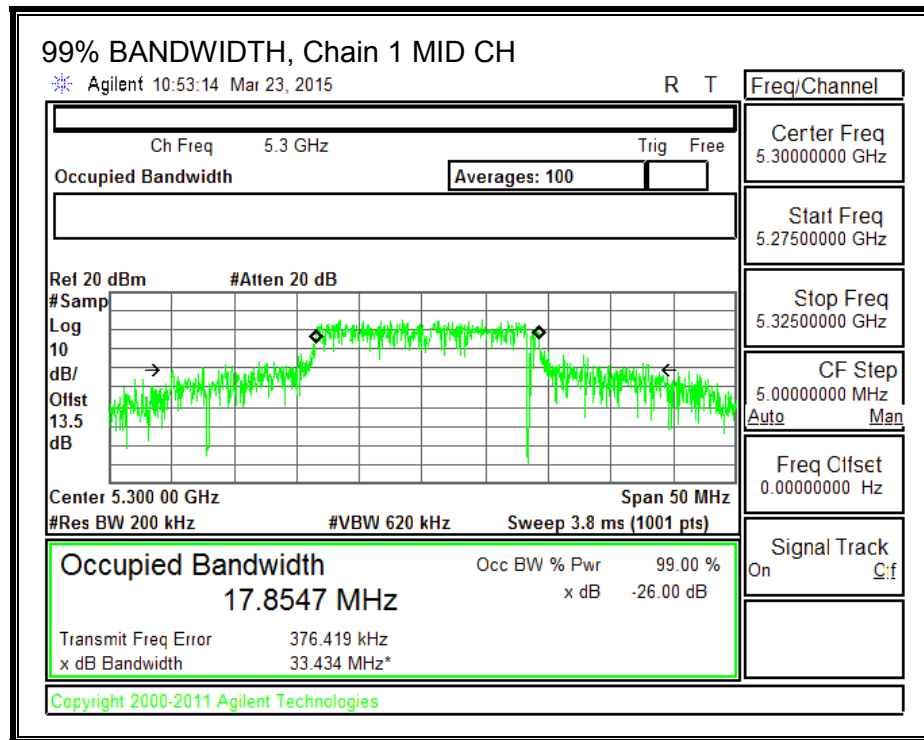

99% BANDWIDTH, Chain 2

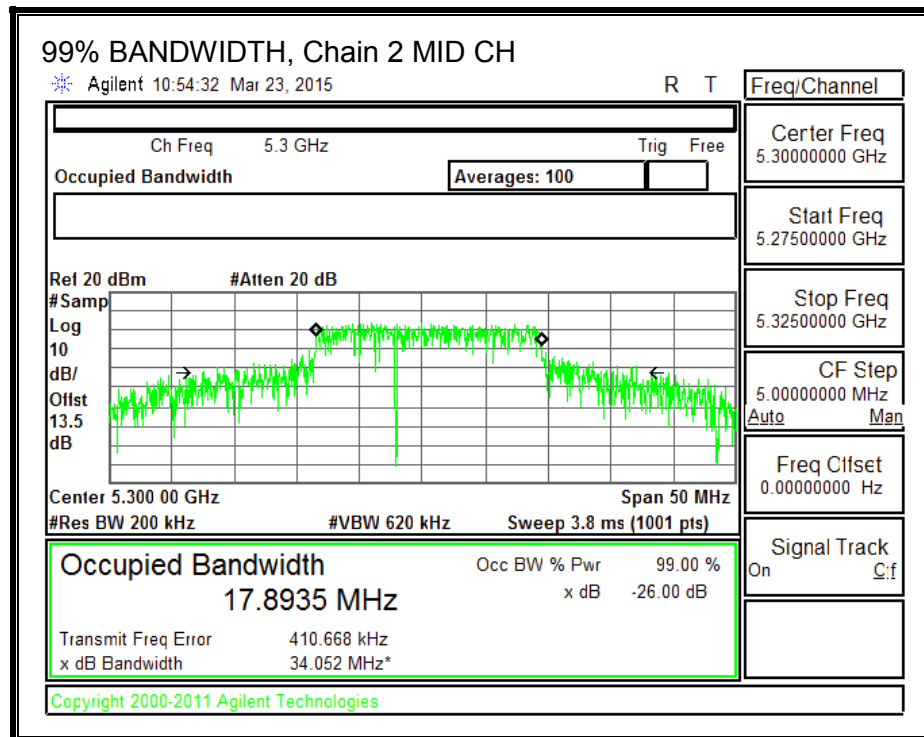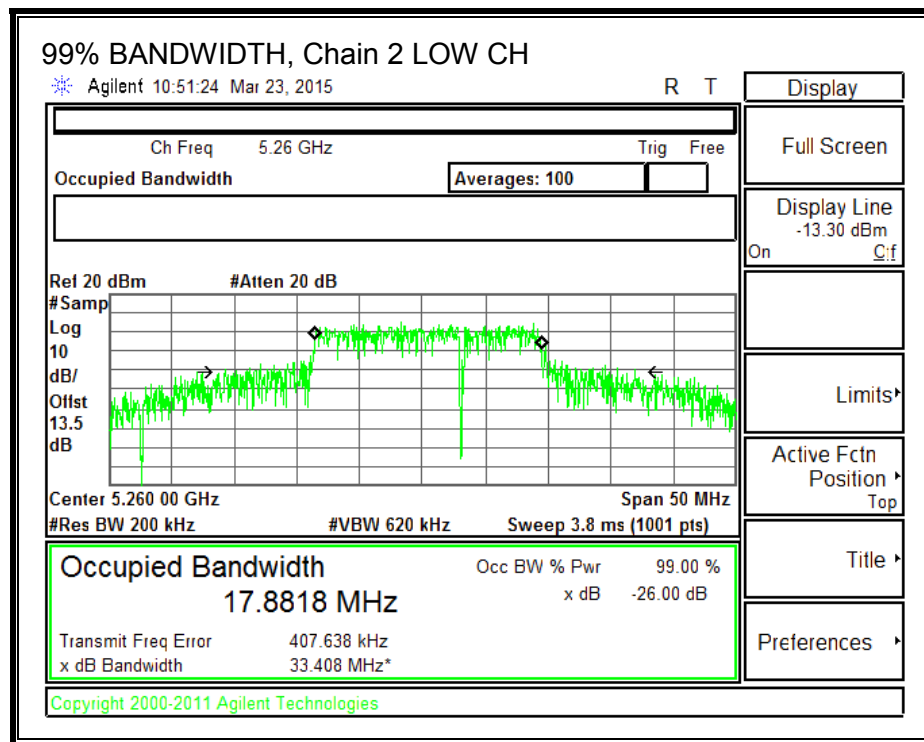

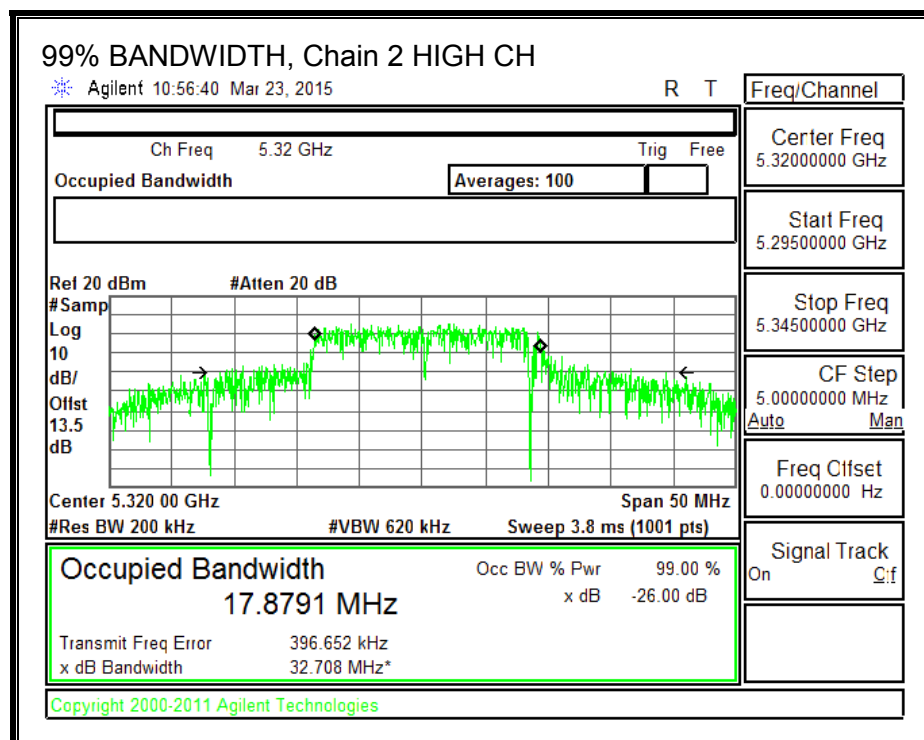

8.14.3. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

For power, the TX chains are uncorrelated and the antenna gain is the same for each chain. The directional gain is equal to the antenna gain, 5.85 dBi.

For PSD, The TX chains are correlated and the antenna gain is the same for each chain. The directional gain is:

| Antenna Gain (dBi) | 10 * Log (3 chains) (dB) | Correlated Chains Directional Gain (dBi) |
|--------------------------|-----------------------------|--|
| 5.85 | 4.77 | 10.62 |

RESULTS

Bandwidth, Antenna Gain, and Limits

| Channel | Frequency (MHz) | Min 26 dB BW (MHz) | Directional Gain for Power (dBi) | Directional Gain for PSD (dBi) | Power Limit (dBm) | PSD Limit (dBm) |
|---------|--------------------|-----------------------------|---|---|-------------------------|-----------------------|
| Low | 5260 | 40.50 | 5.85 | 10.62 | 24.00 | 6.38 |
| Mid | 5300 | 41.94 | 5.85 | 10.62 | 24.00 | 6.38 |
| High | 5320 | 41.10 | 5.85 | 10.62 | 24.00 | 6.38 |

| | | |
|--------------------|------|--|
| Duty Cycle CF (dB) | 0.00 | Included in Calculations of Corr'd PSD |
|--------------------|------|--|



Output Power Results

| Channel | Frequency (MHz) | Chain 0 Meas Power (dBm) | Chain 1 Meas Power (dBm) | Chain 2 Meas Power (dBm) | Total Corr'd Power (dBm) | Power Limit (dBm) | Power Margin (dB) |
|---------|--------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-------------------------|-------------------------|
| Low | 5260 | 16.98 | 17.44 | 16.95 | 21.90 | 24.00 | -2.10 |
| Mid | 5300 | 17.25 | 17.50 | 16.98 | 22.02 | 24.00 | -1.98 |
| High | 5320 | 17.15 | 17.55 | 17.10 | 22.04 | 24.00 | -1.96 |

PPSD Results


| Channel | Frequency (MHz) | Chain 0 Meas PSD (dBm) | Chain 1 Meas PSD (dBm) | Chain 2 Meas PSD (dBm) | Total Corr'd PSD (dBm) | PSD Limit (dBm) | PSD Margin (dB) |
|---------|--------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|-----------------------|-----------------------|
| Low | 5260 | 1.21 | 1.88 | 1.15 | 6.20 | 6.38 | -0.18 |
| Mid | 5300 | 1.47 | 1.96 | 0.91 | 6.24 | 6.38 | -0.14 |
| High | 5320 | 1.32 | 1.90 | 0.91 | 6.17 | 6.38 | -0.21 |



Note: the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.

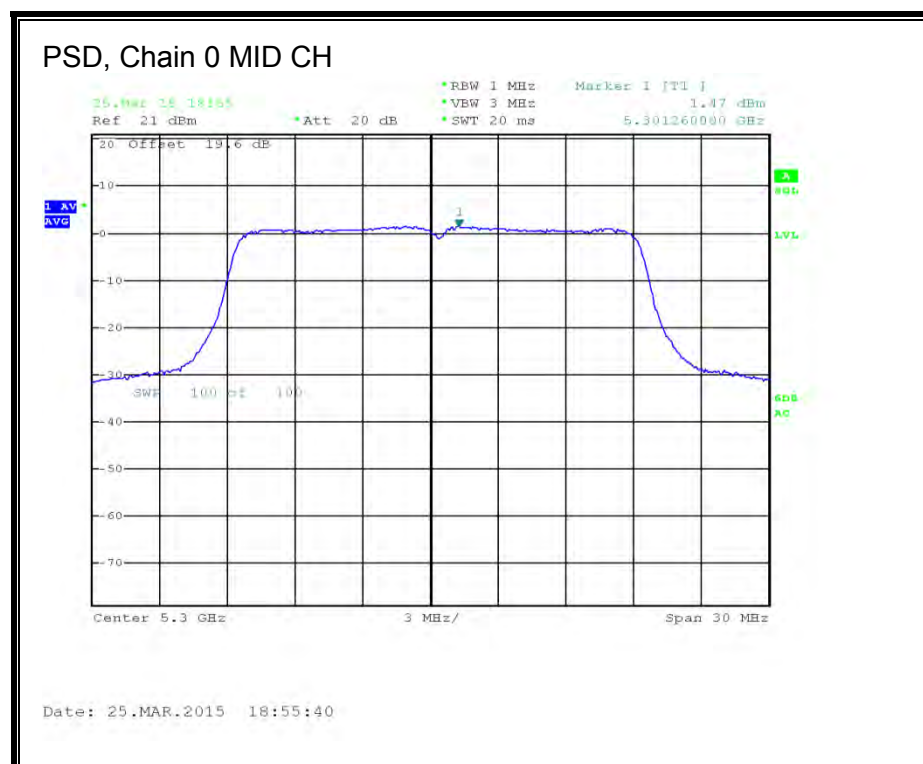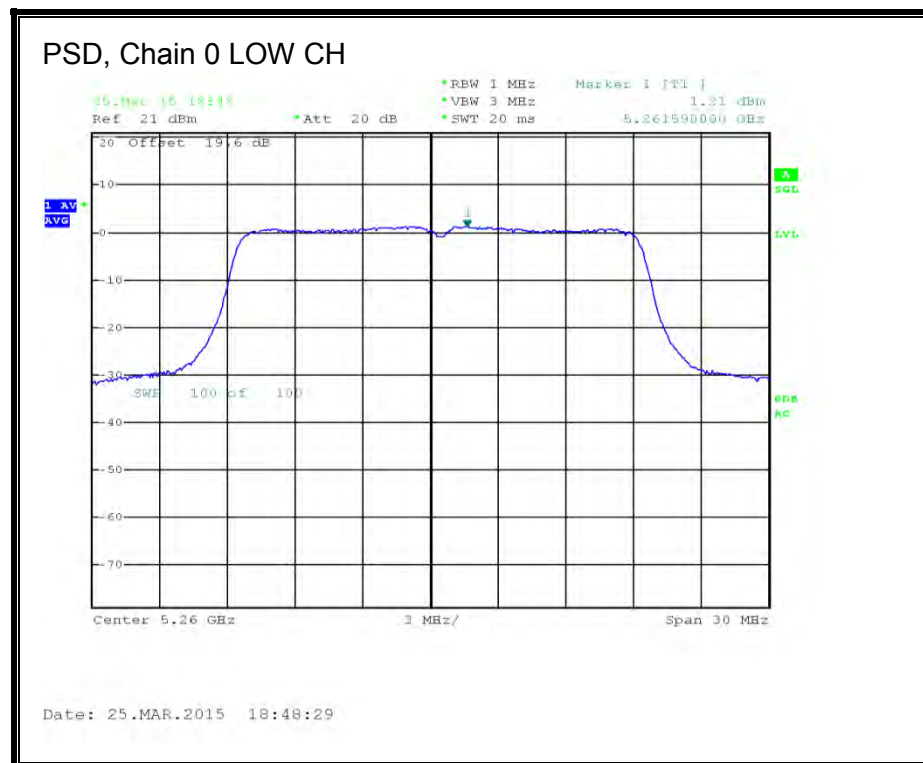





PSD, Chain 1

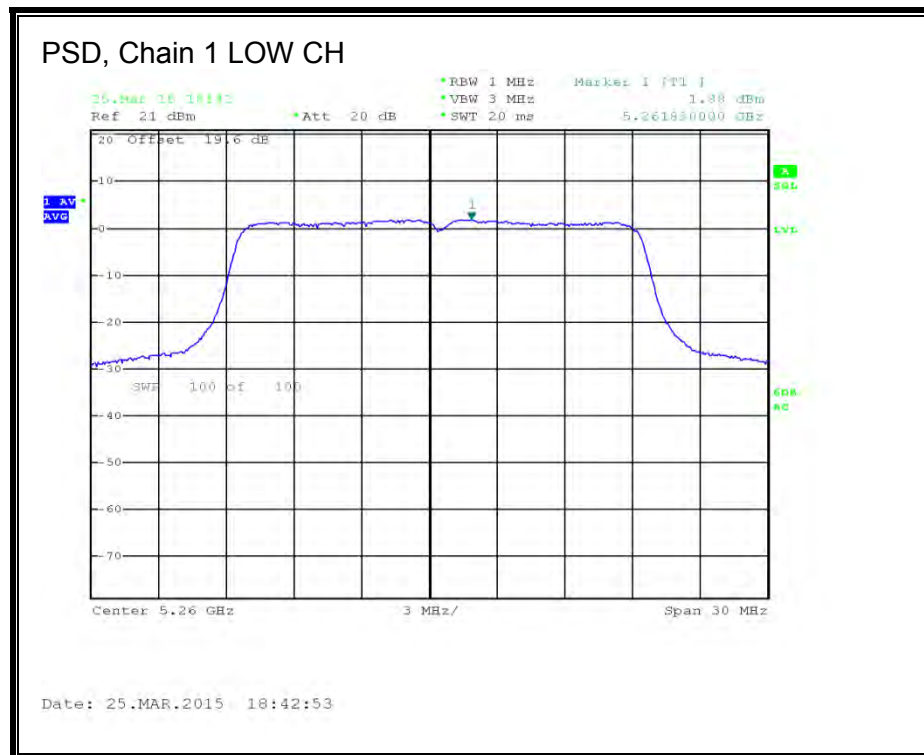

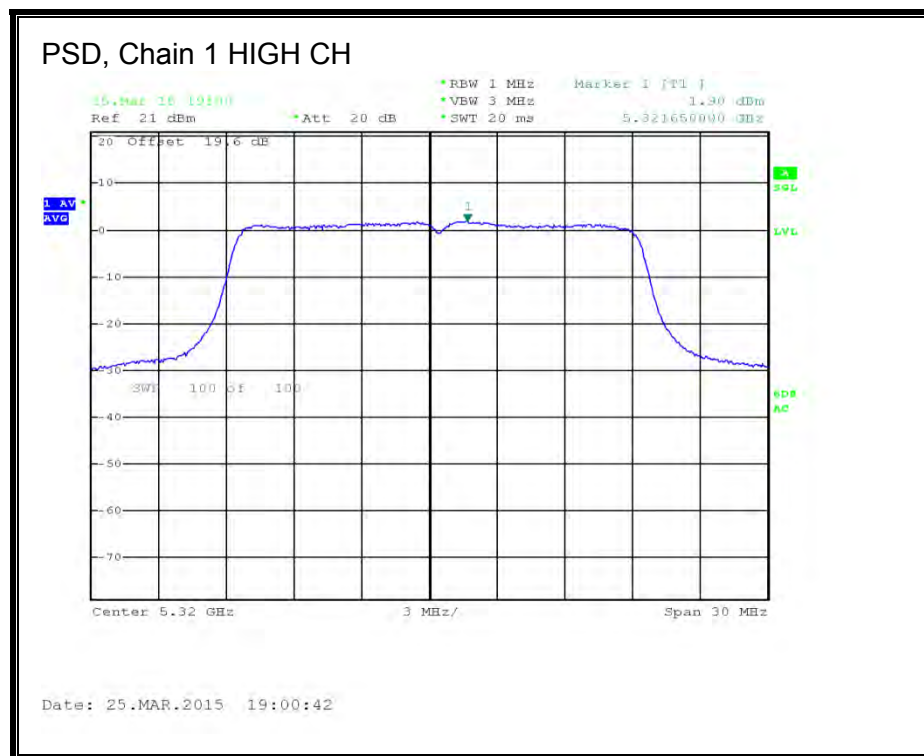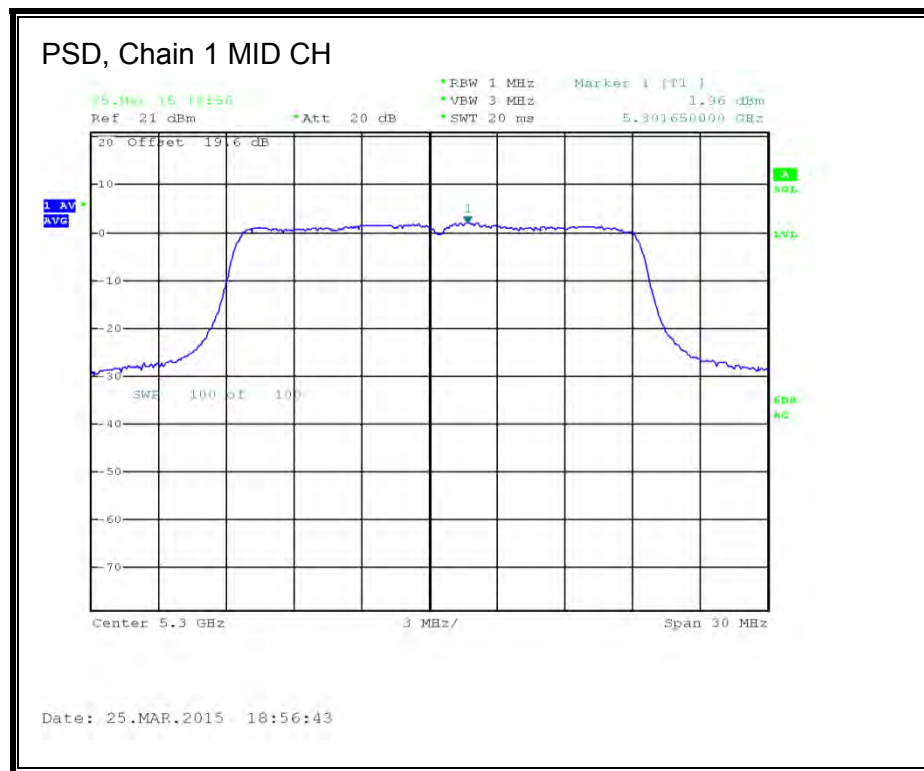

PSD, Chain 2

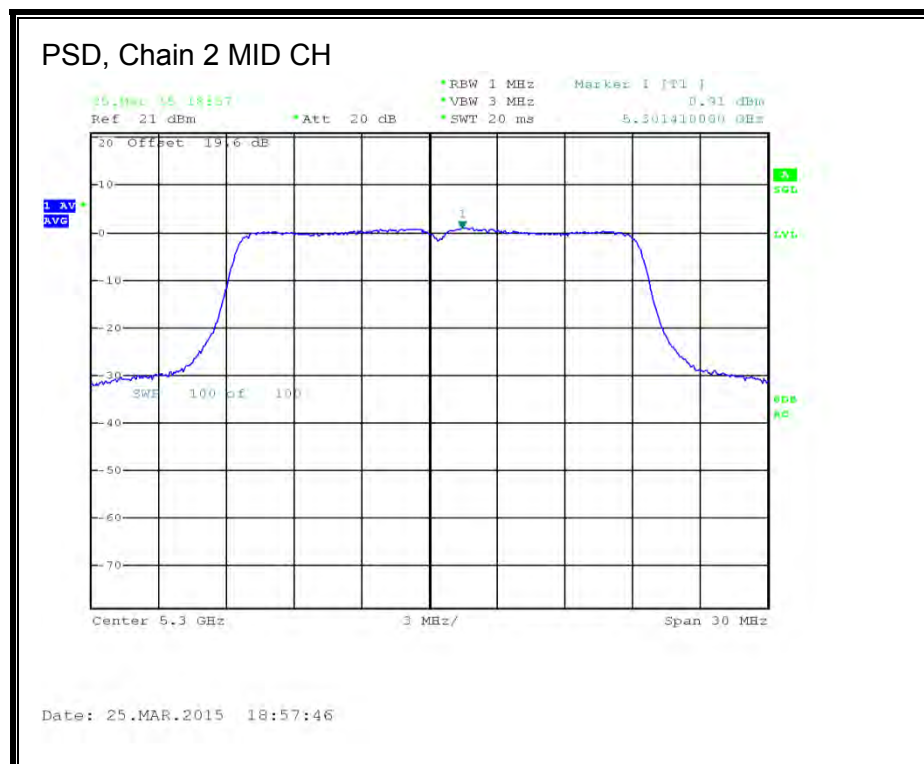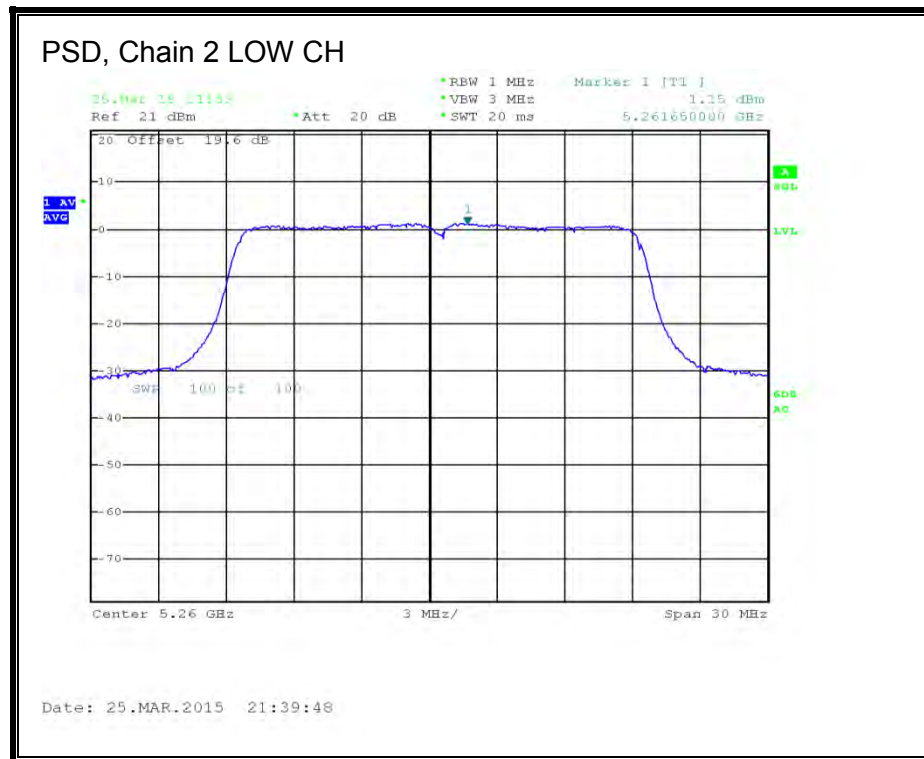



8.15. 802.11n HT20 STBC 3Tx MODE IN THE 5.3 GHz BAND

8.15.1. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS


| Channel | Frequency (MHz) | 26 dB BW Chain 0 (MHz) | 26 dB BW Chain 1 (MHz) | 26 dB BW Chain 2 (MHz) |
|---------|--------------------|------------------------------|------------------------------|------------------------------|
| Low | 5260 | 43.00 | 40.65 | 40.10 |
| Mid | 5300 | 42.90 | 38.35 | 41.45 |
| High | 5320 | 41.75 | 39.10 | 41.30 |



26 dB BANDWIDTH, Chain 0

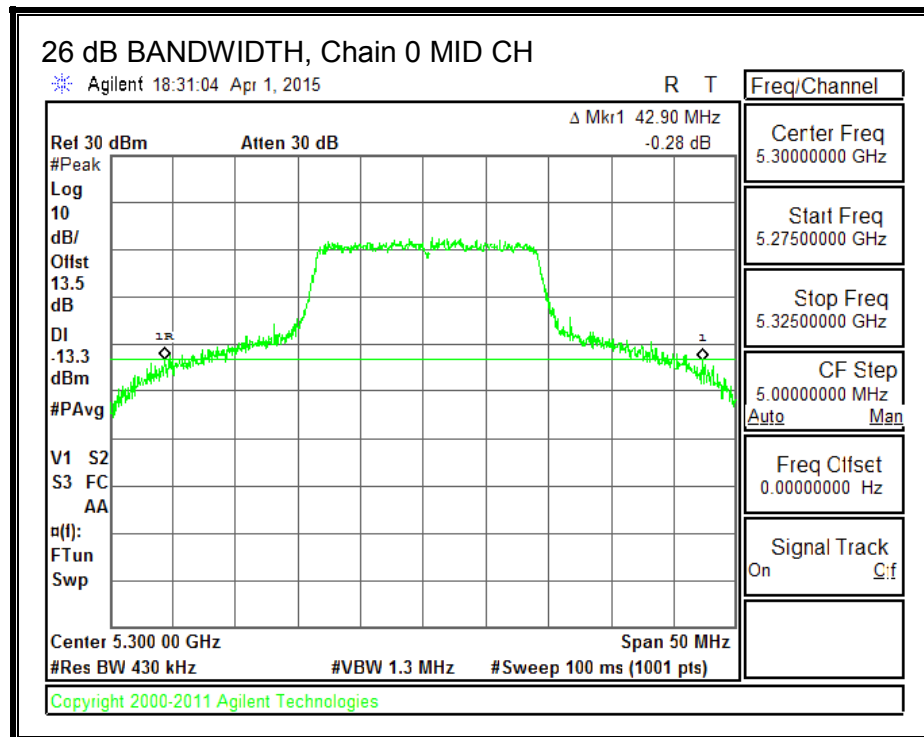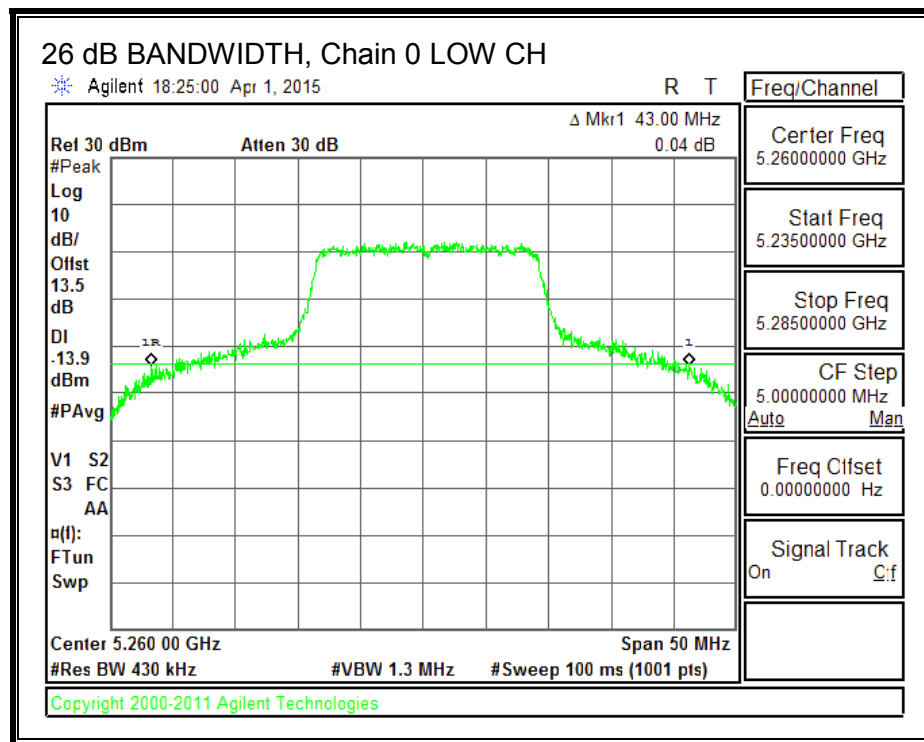


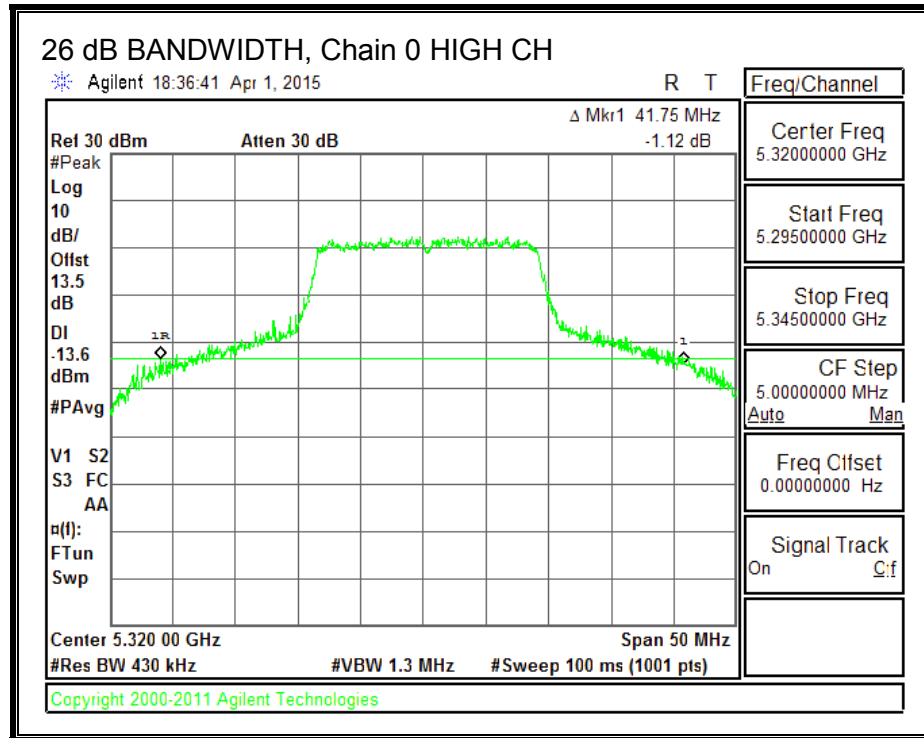



26 dB BANDWIDTH, Chain 1

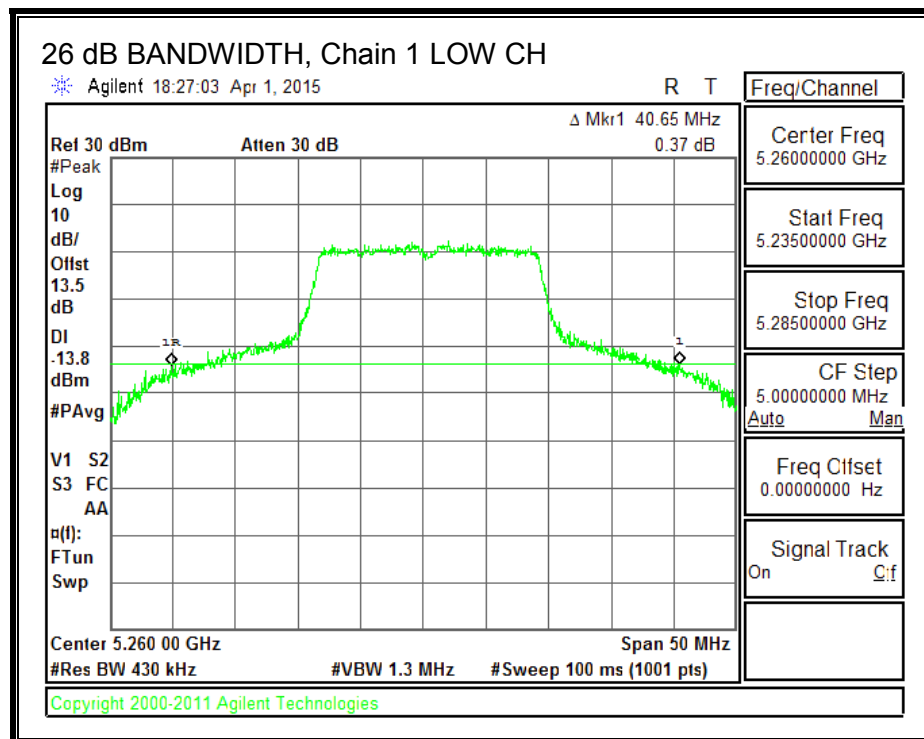

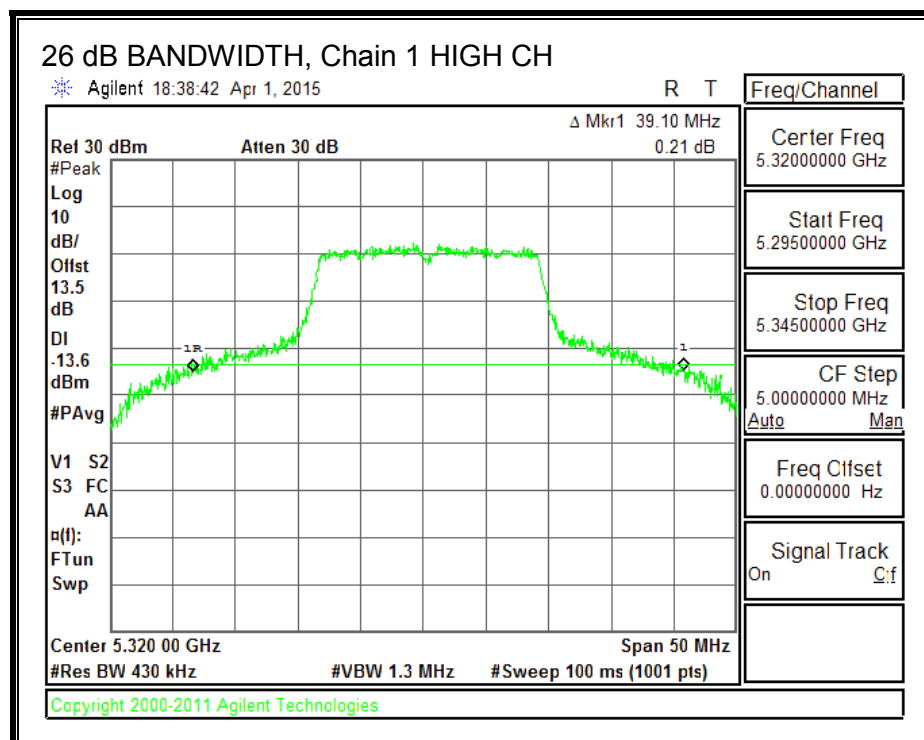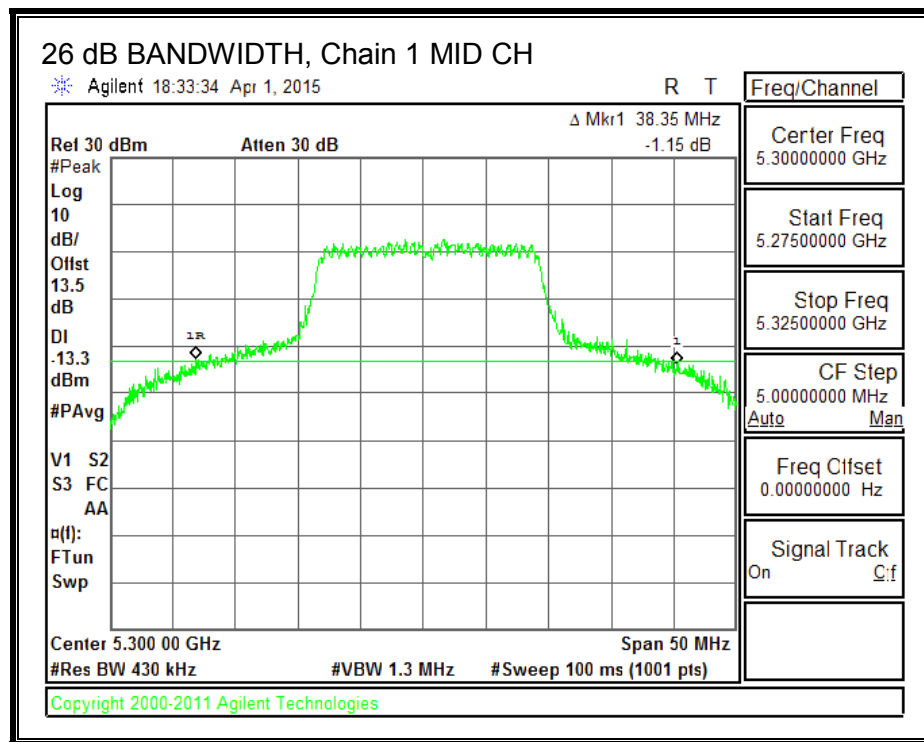

26 dB BANDWIDTH, Chain 2

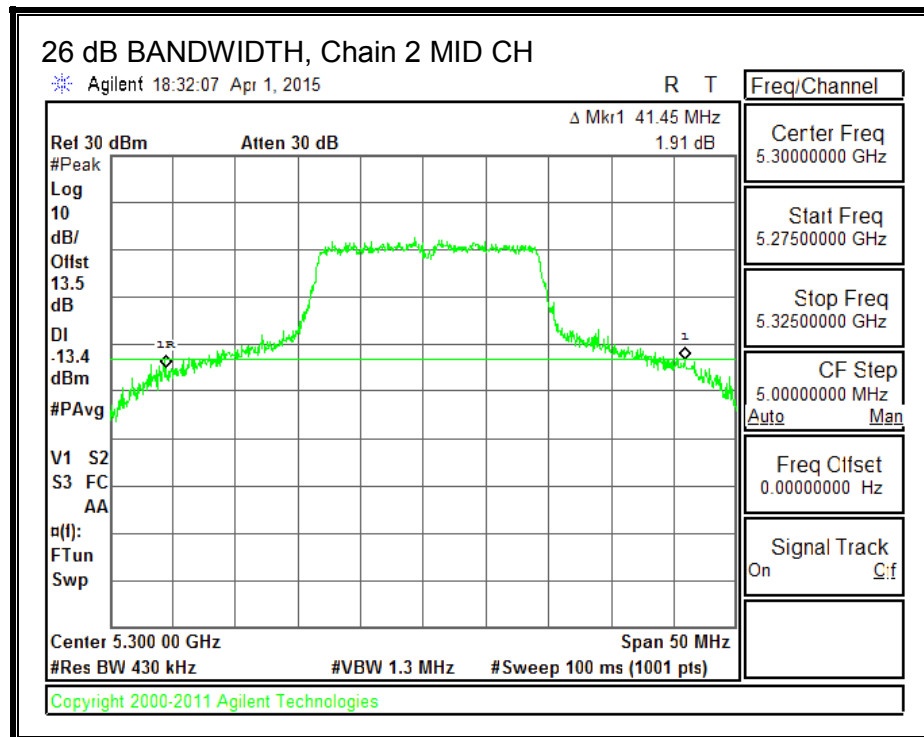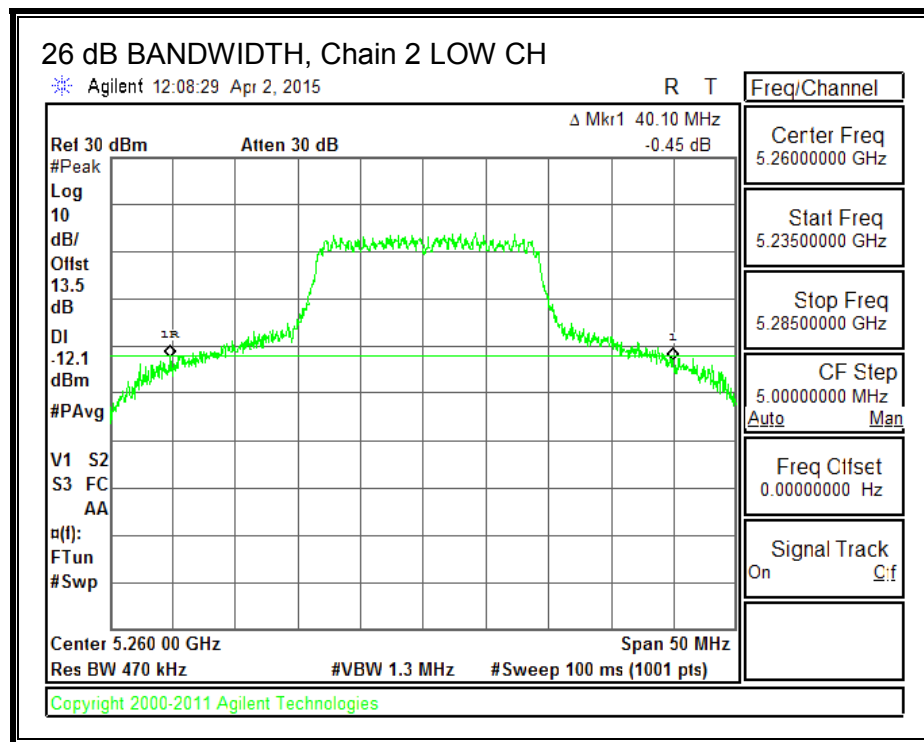

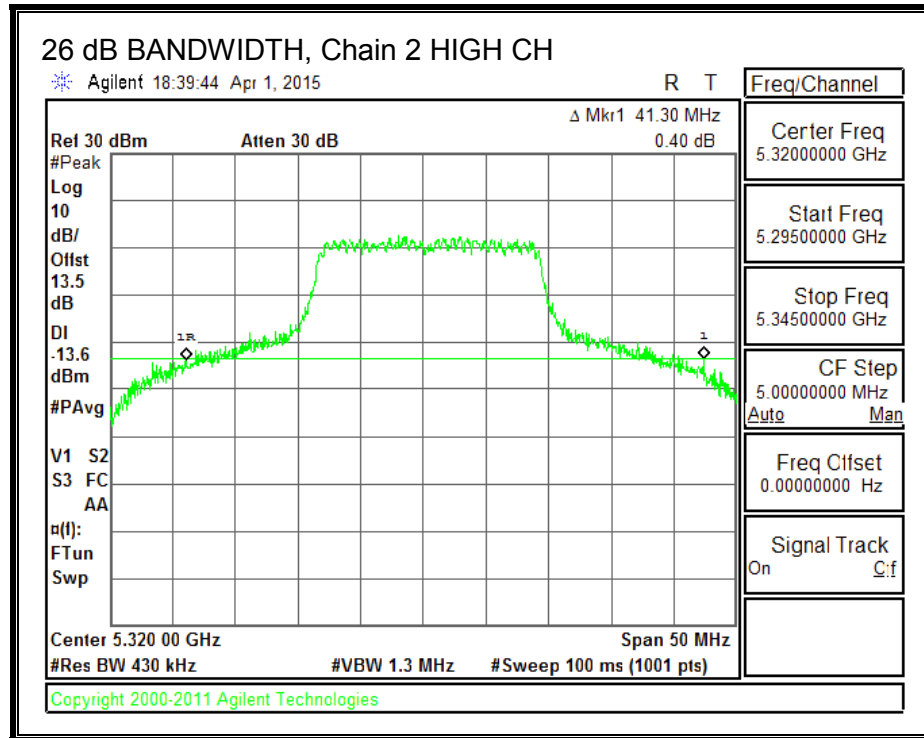

8.15.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS


| Channel | Frequency (MHz) | 99% BW | 99% BW | 99% BW |
|---------|--------------------|------------------|------------------|------------------|
| | | Chain 0 (MHz) | Chain 1 (MHz) | Chain 2 (MHz) |
| Low | 5260 | 17.8204 | 17.8204 | 17.8094 |
| Mid | 5300 | 17.8321 | 17.8238 | 17.8062 |
| High | 5320 | 17.8753 | 17.8632 | 17.9112 |



99% BANDWIDTH, Chain 0

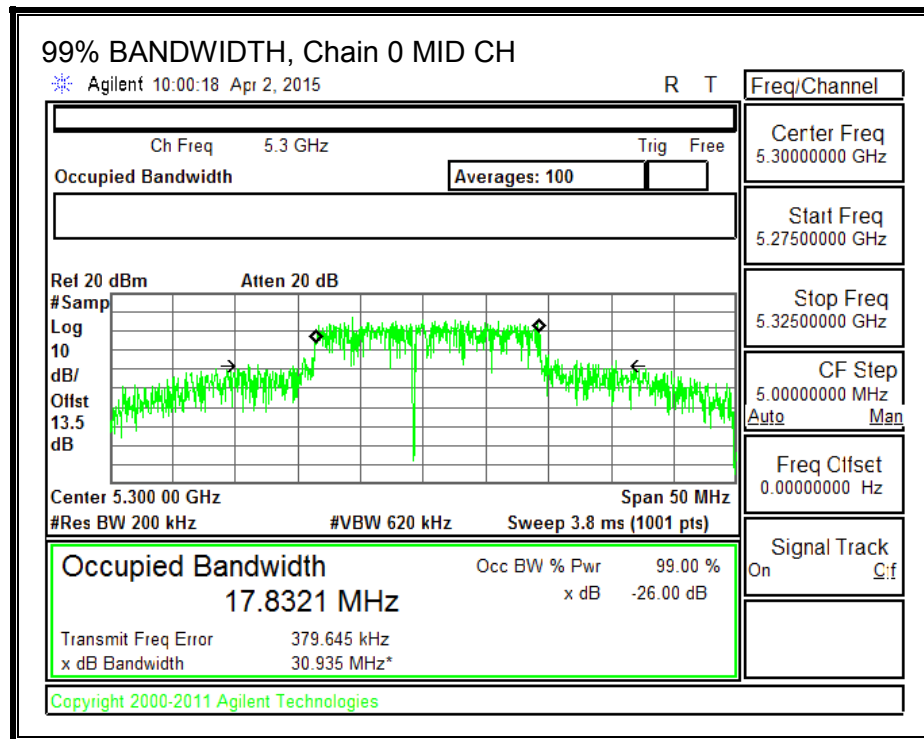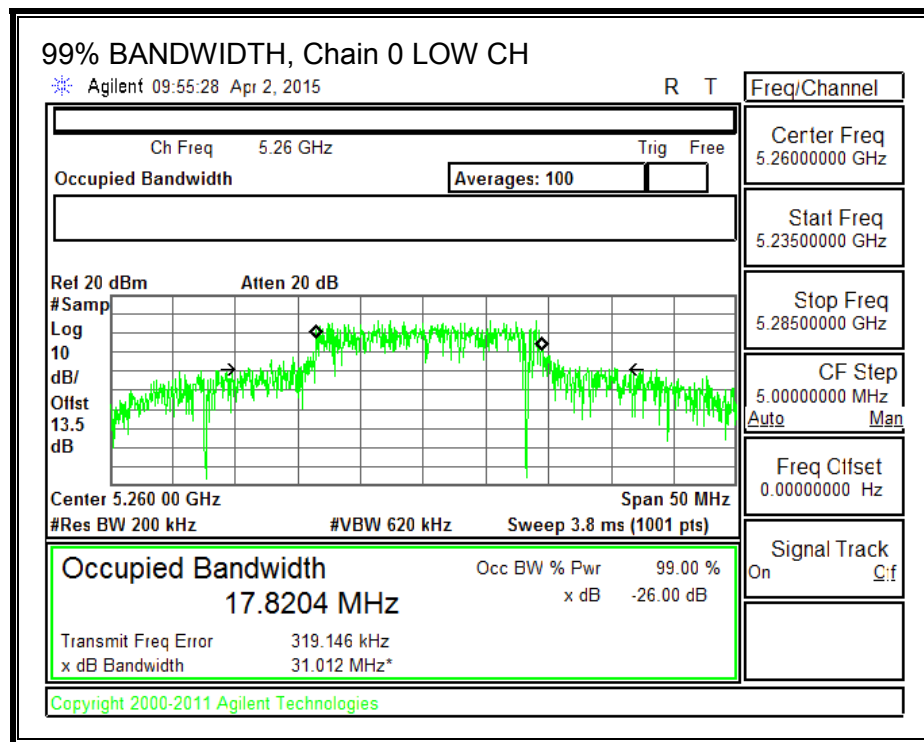


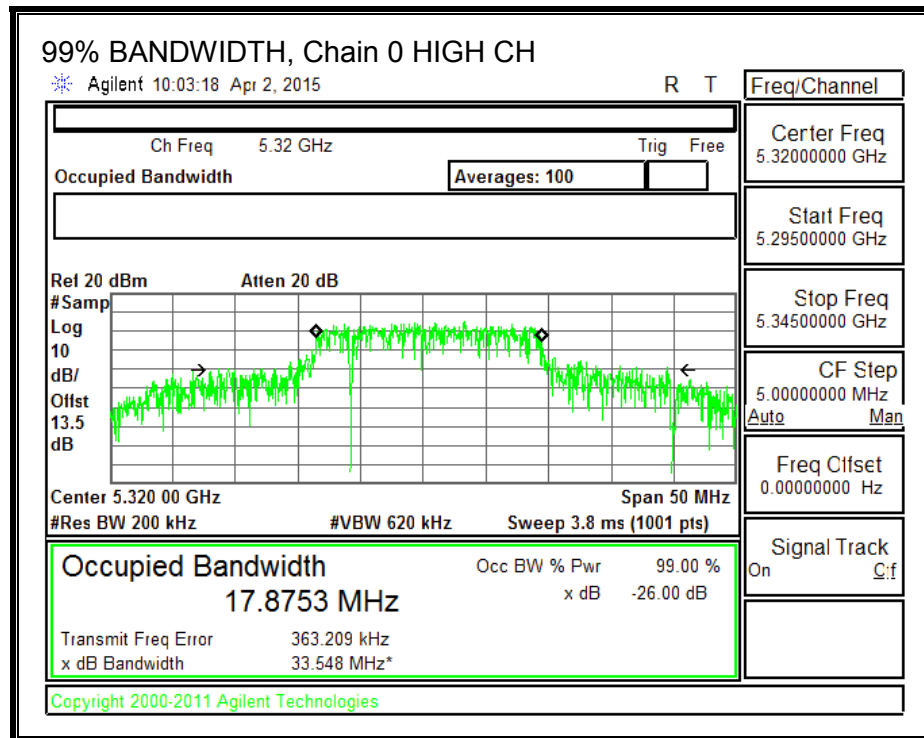



99% BANDWIDTH, Chain 1

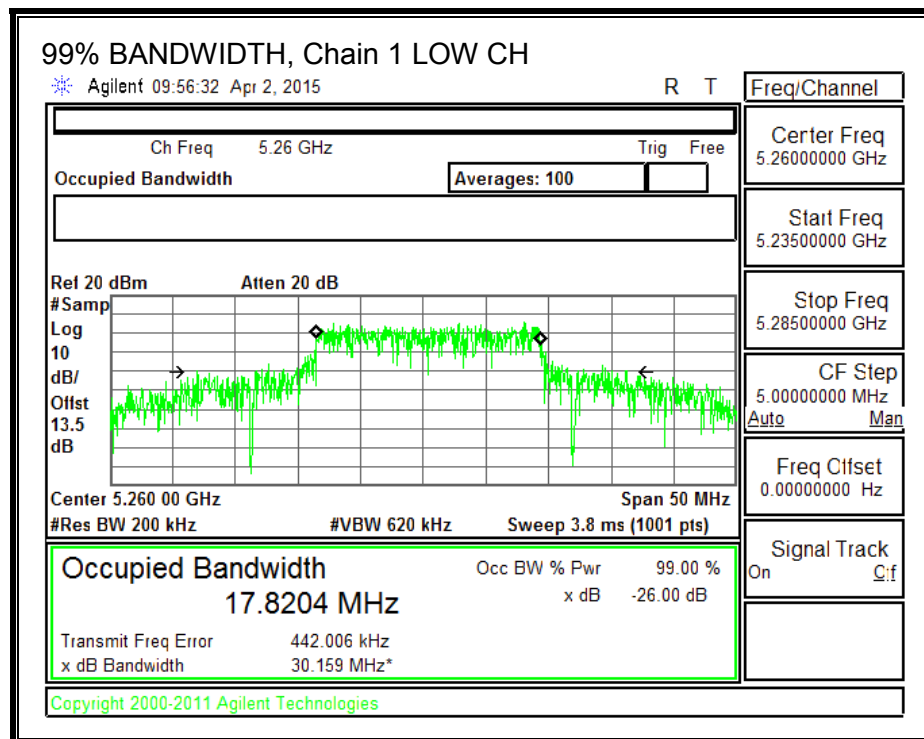

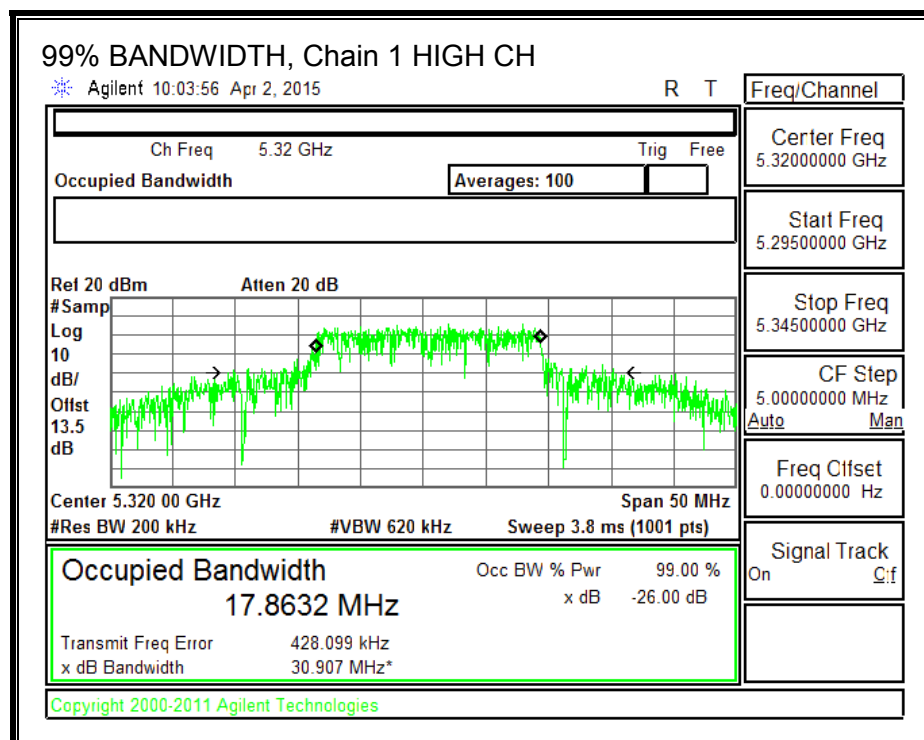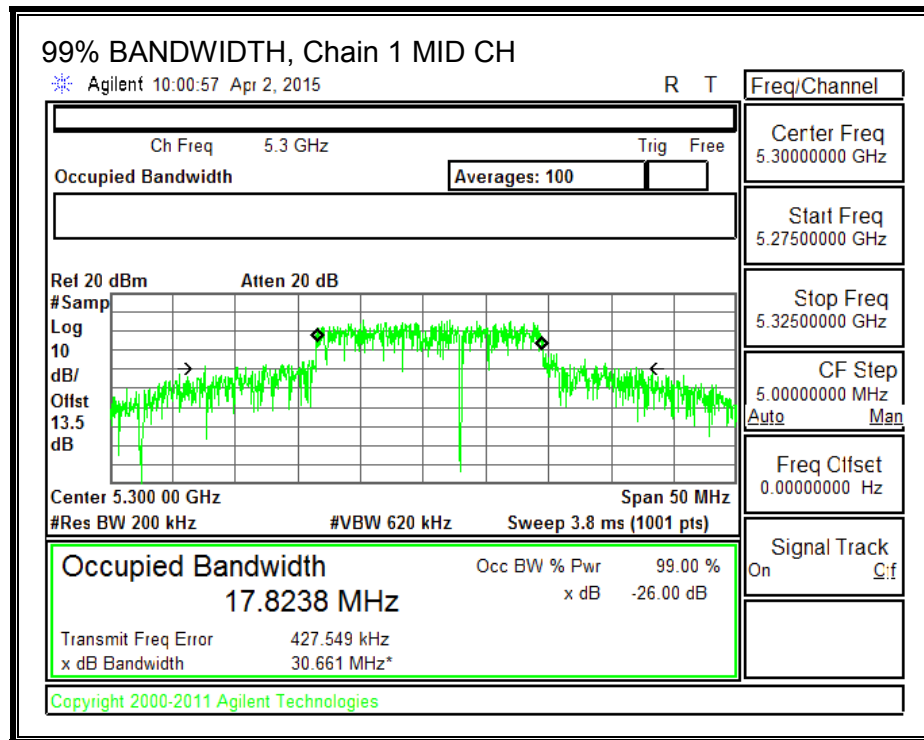

99% BANDWIDTH, Chain 2

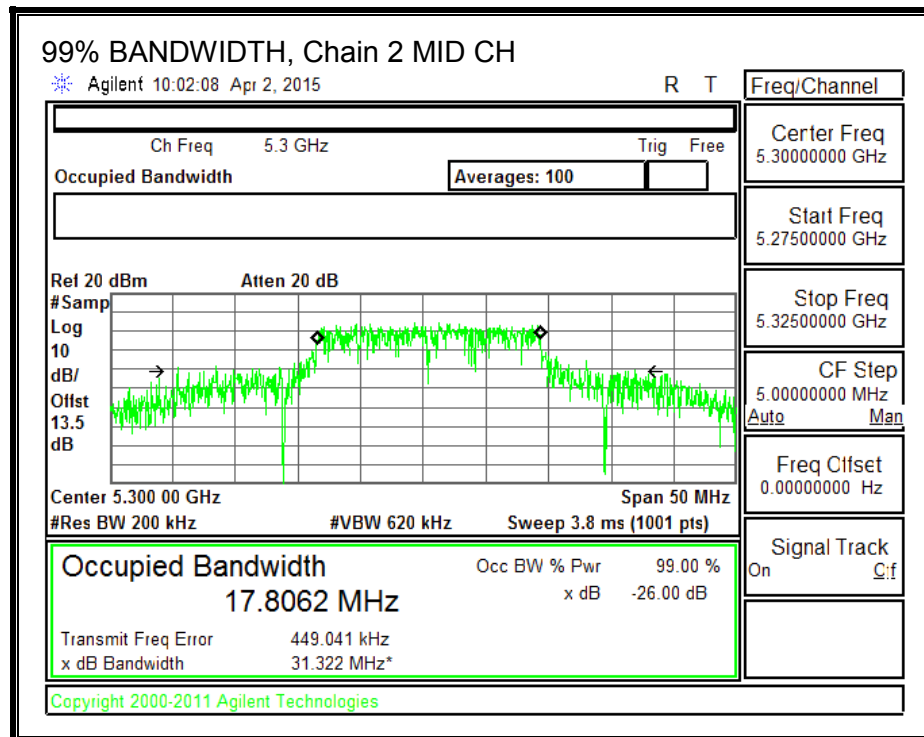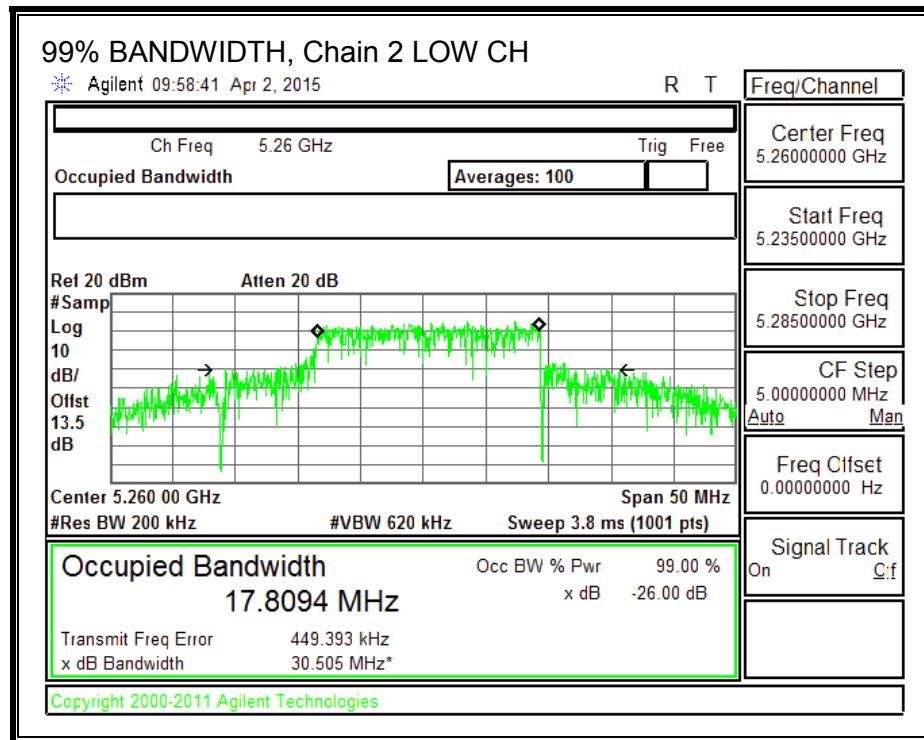

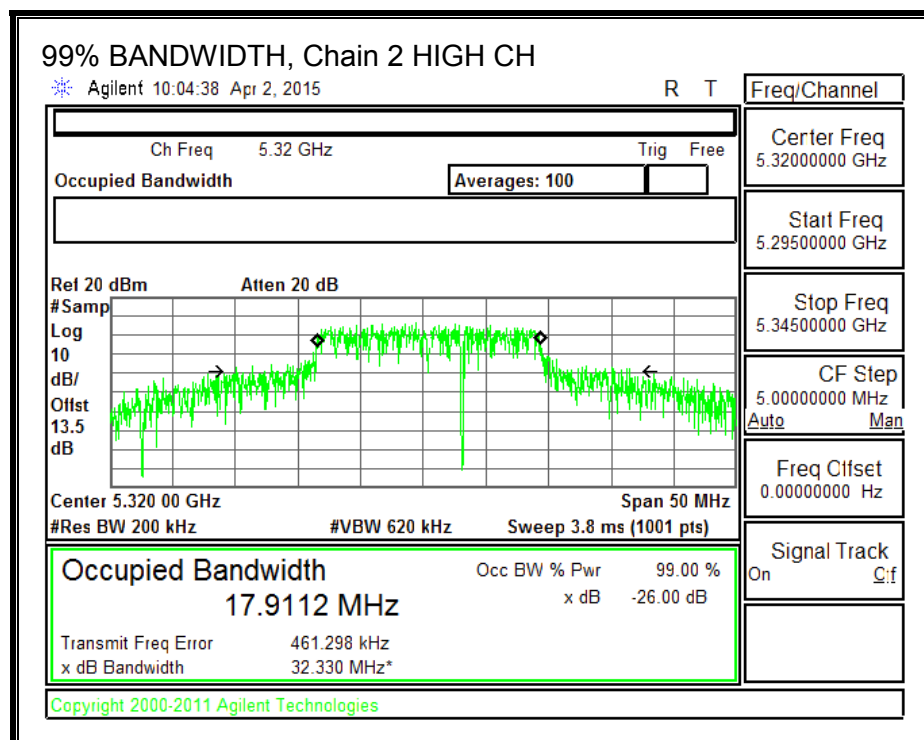

8.15.3. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

For power and PSD, the TX chains are uncorrelated and the antenna gain is the same for each chain. The directional gain is equal to the antenna gain, 5.85 dBi.

RESULTS

Bandwidth, Antenna Gain, and Limits

| Channel | Frequency (MHz) | Min 26 dB BW (MHz) | Directional Gain for Power (dBi) | Directional Gain for PSD (dBi) | Power Limit (dBm) | PSD Limit (dBm) |
|---------|--------------------|-----------------------------|---|---|-------------------------|-----------------------|
| Low | 5260 | 40.10 | 5.85 | 5.85 | 24.00 | 11.00 |
| Mid | 5300 | 38.35 | 5.85 | 5.85 | 24.00 | 11.00 |
| High | 5320 | 39.10 | 5.85 | 5.85 | 24.00 | 11.00 |

| | | |
|--------------------|------|--|
| Duty Cycle CF (dB) | 0.00 | Included in Calculations of Corr'd PSD |
|--------------------|------|--|

Output Power Results



| Channel | Frequency (MHz) | Chain 0 Meas Power (dBm) | Chain 1 Meas Power (dBm) | Chain 2 Meas Power (dBm) | Total Corr'd Power (dBm) | Power Limit (dBm) | Power Margin (dB) |
|---------|--------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-------------------------|-------------------------|
| Low | 5260 | 18.30 | 18.40 | 18.45 | 23.15 | 24.00 | -0.85 |
| Mid | 5300 | 18.45 | 18.57 | 18.65 | 23.33 | 24.00 | -0.67 |
| High | 5320 | 17.48 | 17.63 | 17.65 | 22.36 | 24.00 | -1.64 |


PPSD Results

| Channel | Frequency (MHz) | Chain 0 Meas PSD (dBm) | Chain 1 Meas PSD (dBm) | Chain 2 Meas PSD (dBm) | Total Corr'd PSD (dBm) | PSD Limit (dBm) | PSD Margin (dB) |
|---------|--------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|-----------------------|-----------------------|
| Low | 5260 | 3.14 | 3.51 | 3.52 | 8.16 | 11.00 | -2.84 |
| Mid | 5300 | 3.25 | 3.73 | 3.56 | 8.29 | 11.00 | -2.71 |
| High | 5320 | 3.14 | 3.64 | 3.58 | 8.23 | 11.00 | -2.77 |

Note: the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.



PSD, Chain 0

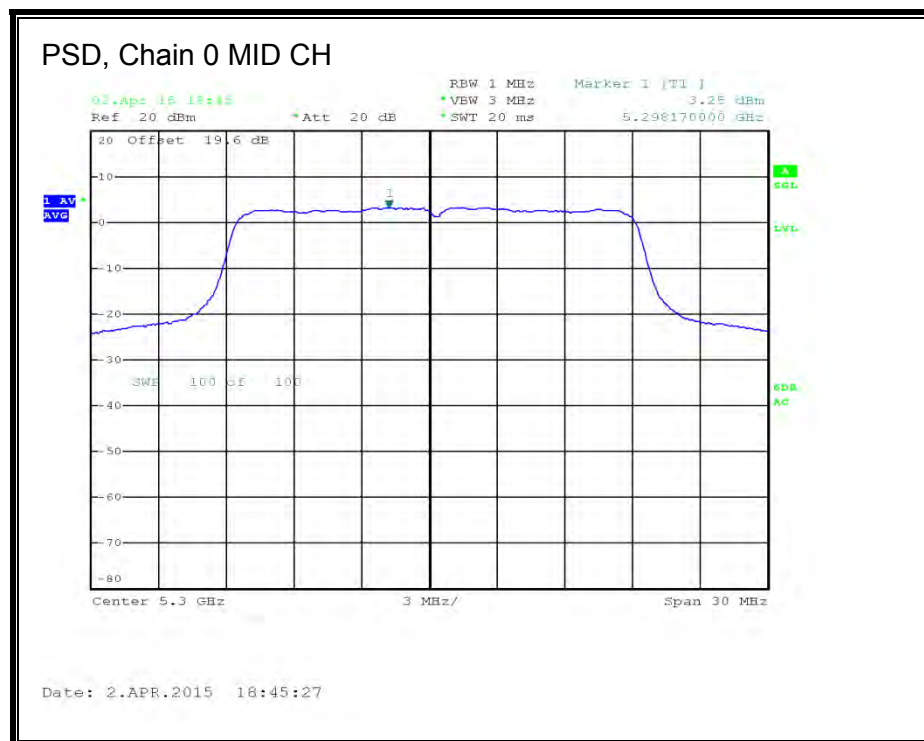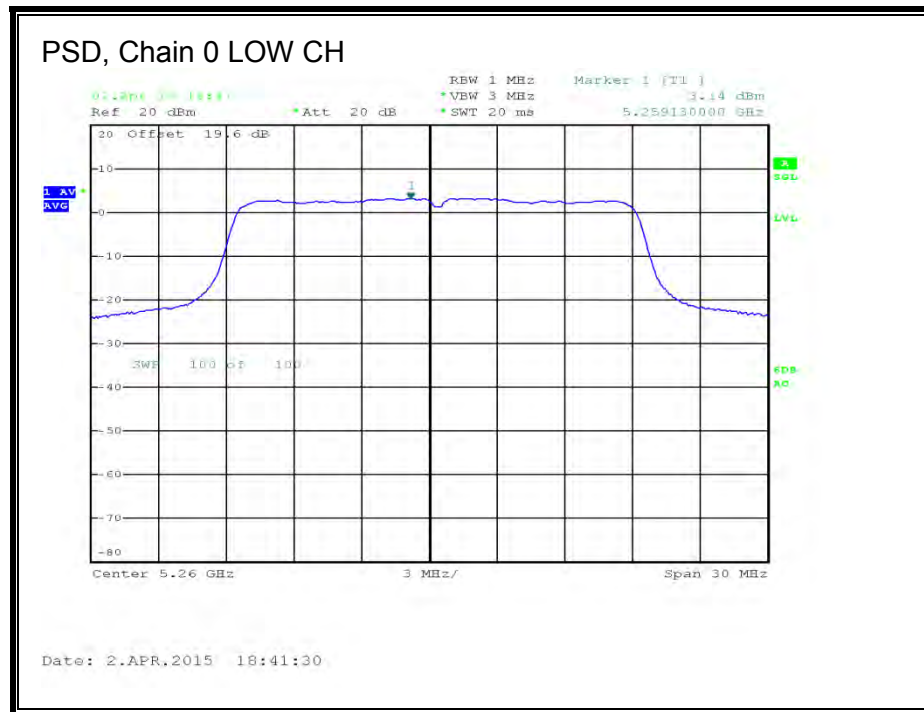


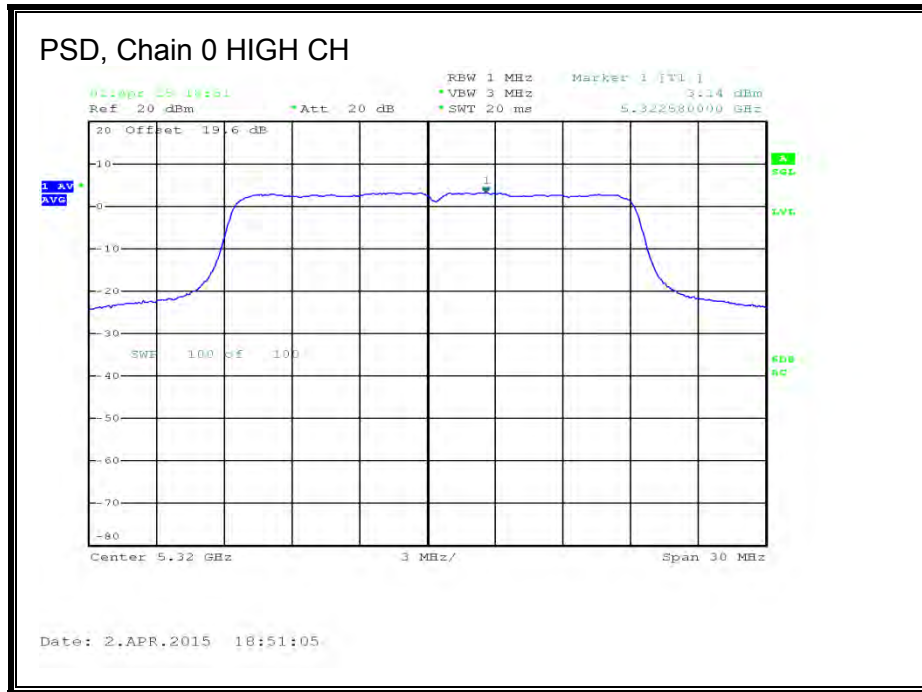



PSD, Chain 1



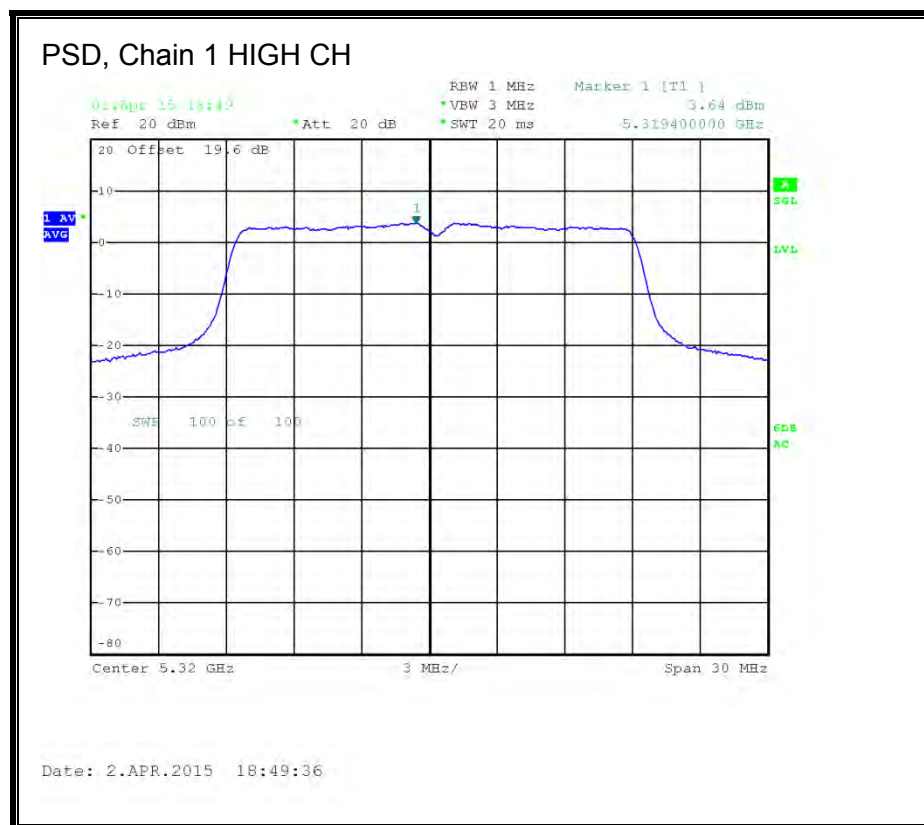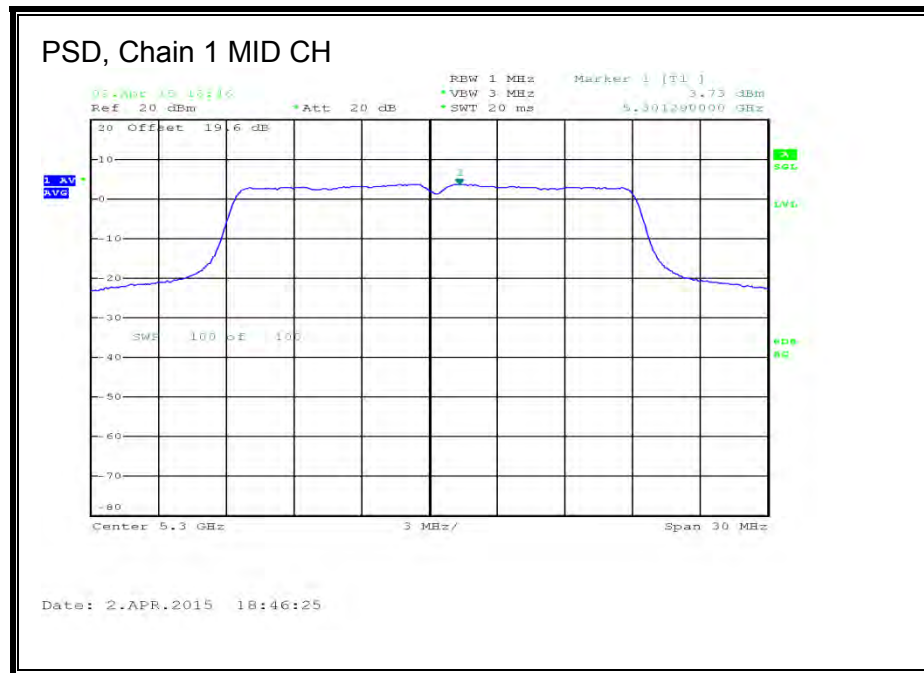

PSD, Chain 2

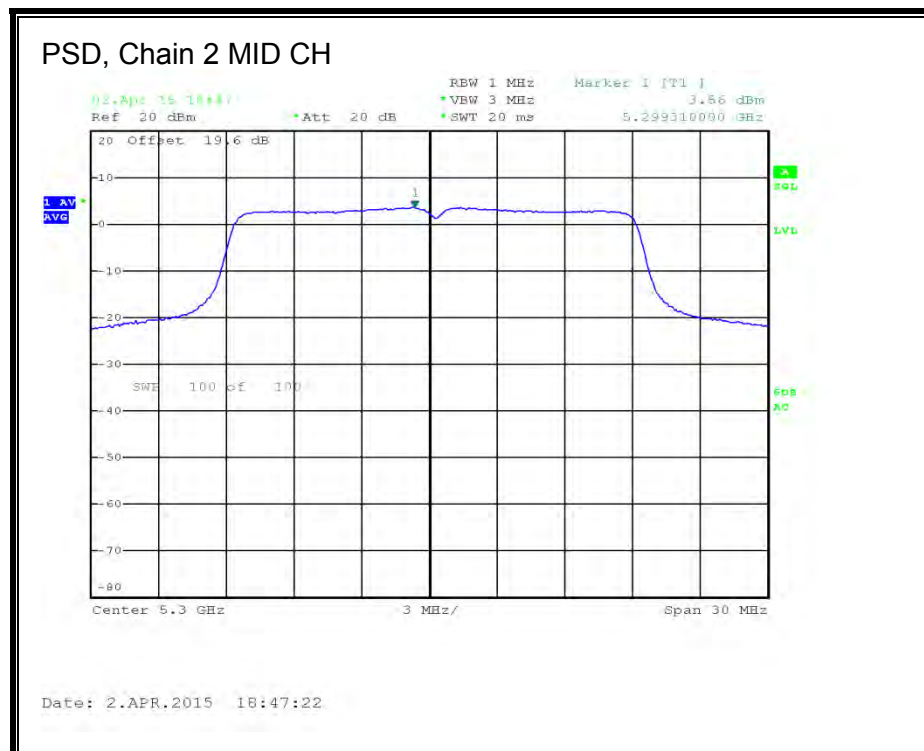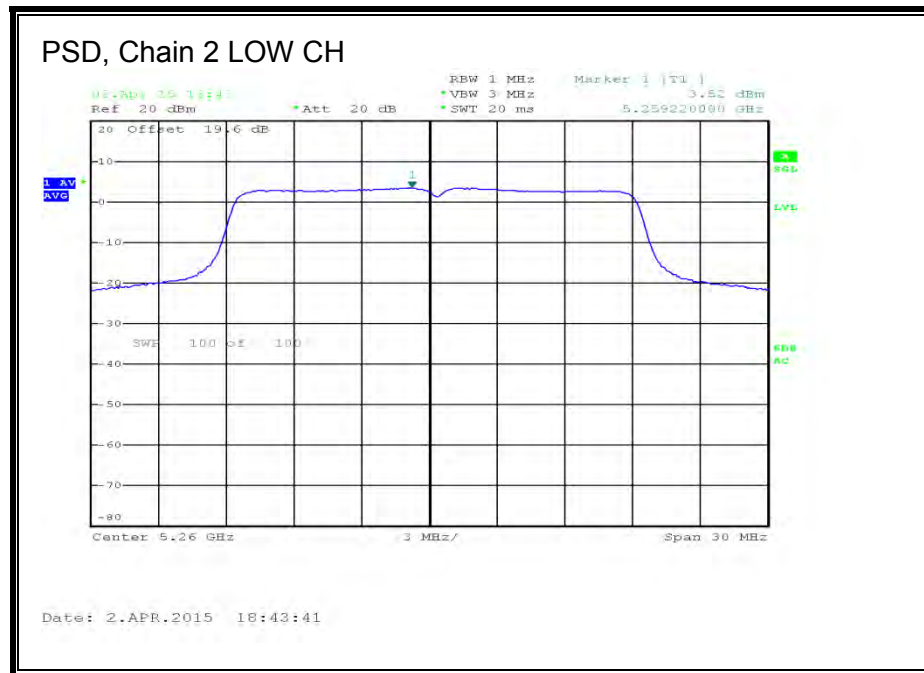

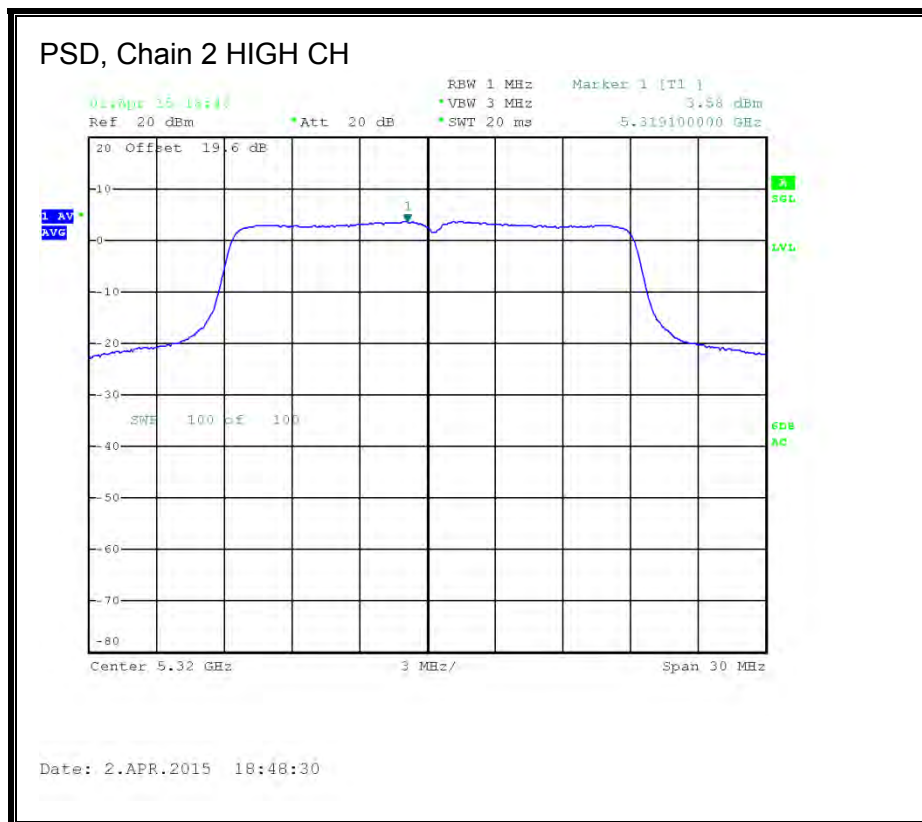

8.16. 802.11n HT20 TxBF 3Tx MODE IN THE 5.3 GHz BAND

8.16.1. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

For power and PSD, The TX chains are correlated and the antenna gain is the same for each chain. The directional gain is:

| Antenna Gain (dBi) | 10 * Log (3 chains) (dB) | Correlated Chains Directional Gain (dBi) |
|-----------------------------------|-------------------------------------|---|
| 5.85 | 4.77 | 10.62 |

RESULTS

Bandwidth, Antenna Gain, and Limits

| Channel | Frequency (MHz) | Min 26 dB BW (MHz) | Directional Gain for Power (dBi) | Directional Gain for PSD (dBi) | Power Limit (dBm) | PSD Limit (dBm) |
|---------|--------------------|-----------------------------|---|---|-------------------------|-----------------------|
| Low | 5260 | 40.50 | 10.62 | 10.62 | 19.38 | 6.38 |
| Mid | 5300 | 41.94 | 10.62 | 10.62 | 19.38 | 6.38 |
| High | 5320 | 41.10 | 10.62 | 10.62 | 19.38 | 6.38 |

| | | |
|--------------------|------|--|
| Duty Cycle CF (dB) | 0.00 | Included in Calculations of Corr'd PSD |
|--------------------|------|--|

Output Power Results


| Channel | Frequency (MHz) | Chain 0 Meas Power (dBm) | Chain 1 Meas Power (dBm) | Chain 2 Meas Power (dBm) | Total Corr'd Power (dBm) | Power Limit (dBm) | Power Margin (dB) |
|---------|--------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-------------------------|-------------------------|
| Low | 5260 | 14.00 | 14.15 | 13.90 | 18.79 | 19.38 | -0.59 |
| Mid | 5300 | 14.10 | 13.90 | 13.95 | 18.76 | 19.38 | -0.62 |
| High | 5320 | 13.98 | 14.00 | 13.90 | 18.73 | 19.38 | -0.65 |


PPSD Results

| Channel | Frequency (MHz) | Chain 0 Meas PSD (dBm) | Chain 1 Meas PSD (dBm) | Chain 2 Meas PSD (dBm) | Total Corr'd PSD (dBm) | PSD Limit (dBm) | PSD Margin (dB) |
|---------|--------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|-----------------------|-----------------------|
| Low | 5260 | -0.39 | -0.41 | -0.84 | 4.23 | 6.38 | -2.15 |
| Mid | 5300 | -0.49 | -0.73 | -1.10 | 4.01 | 6.38 | -2.37 |
| High | 5320 | -0.33 | -0.47 | -0.94 | 4.20 | 6.38 | -2.18 |

Note: the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.


PSD, Chain 0

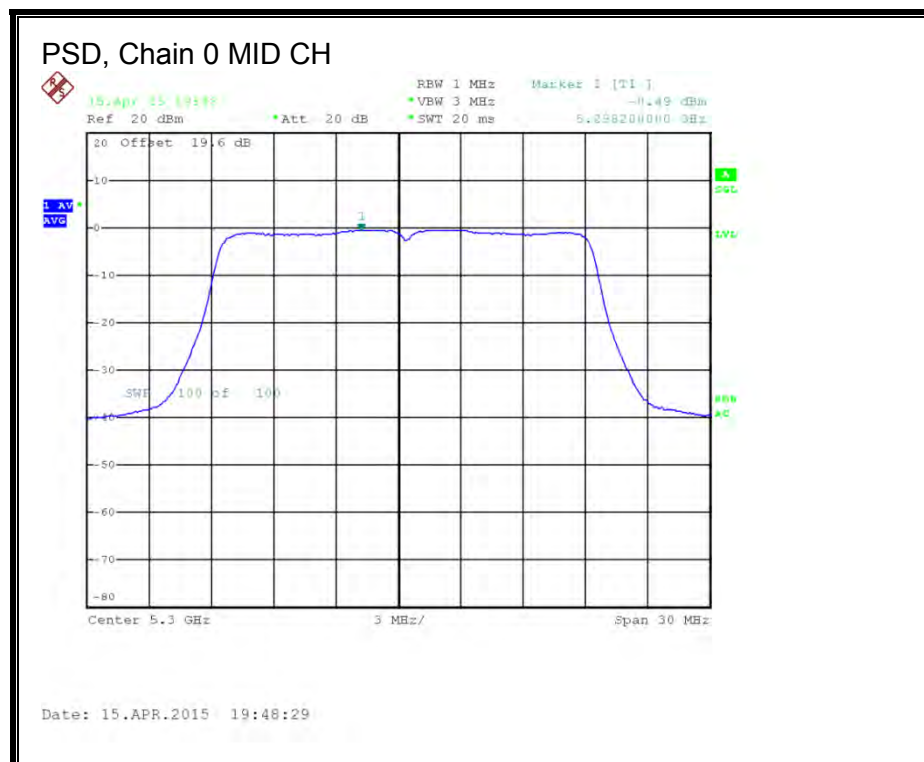

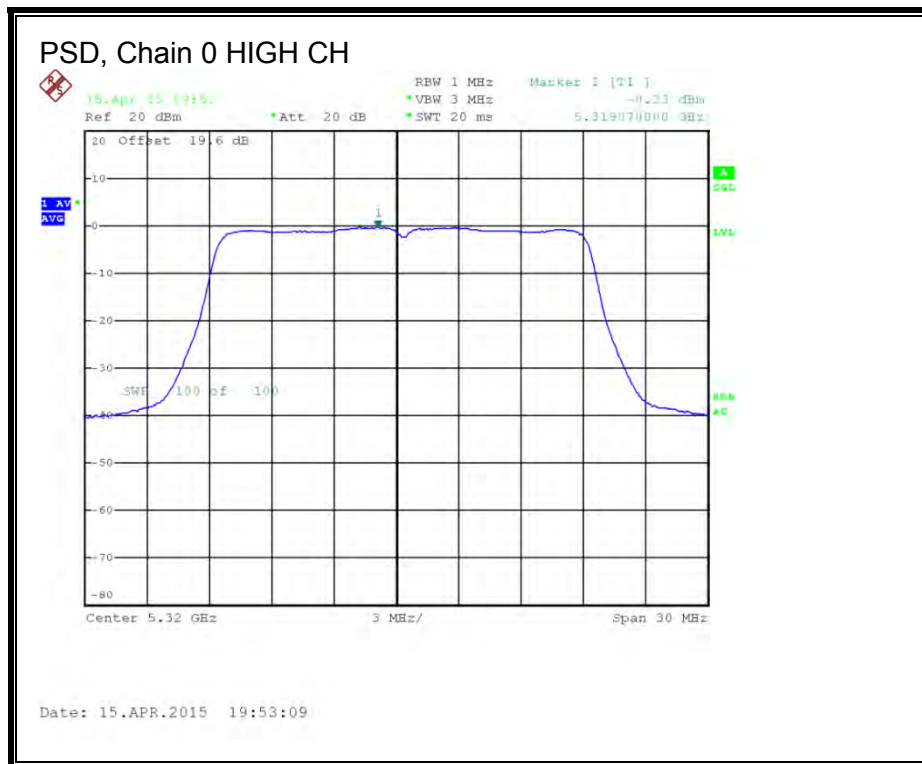


PSD, Chain 1



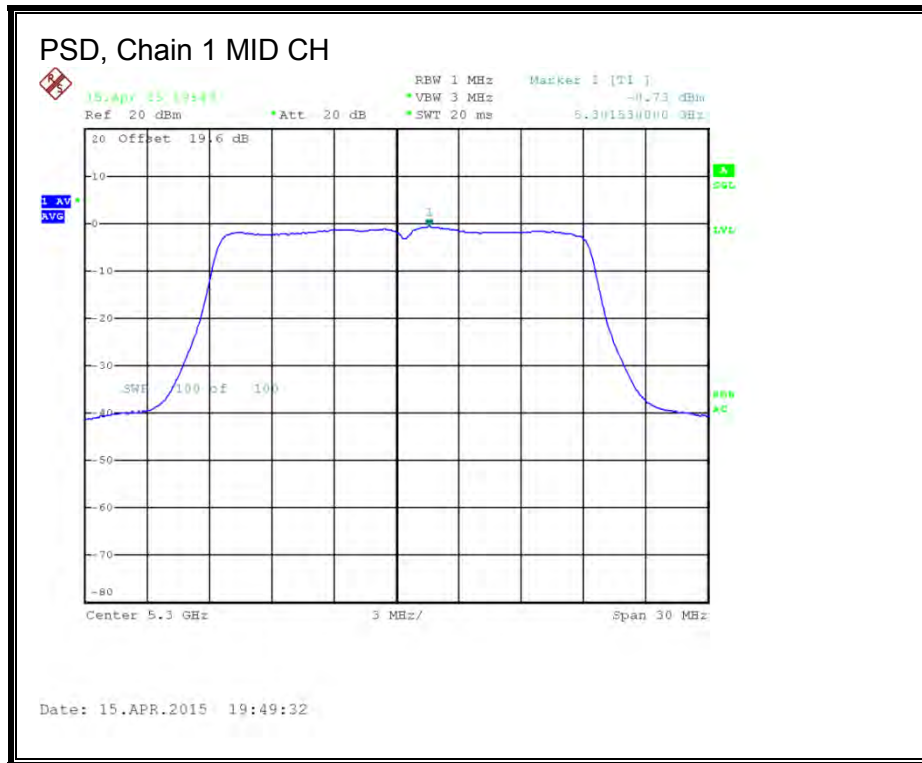

PSD, Chain 2

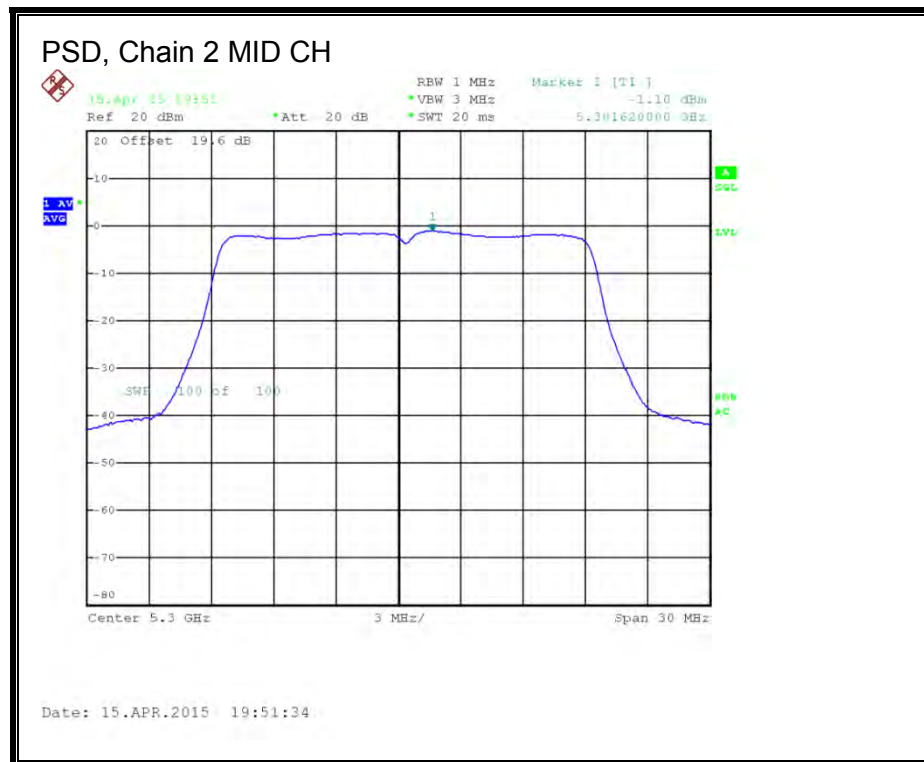



8.17. 802.11n HT40 1Tx MODE IN THE 5.3 GHz BAND

8.17.1. OUTPUT POWER

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

This is SISO mode, AG is the highest (worst-case) = 5.85 dBi.

RESULTS

Bandwidth, Antenna Gain, and Limits

| Channel | Frequency (MHz) | Min 26 dB BW (MHz) | Directional Gain (dBi) | Power Limit (dBm) | PSD Limit (dBm) |
|---------|--------------------|-----------------------------|------------------------------|-------------------------|-----------------------|
| High | 5310 | 96.36 | 5.85 | 24.00 | 11.00 |

Output Power Results

| Channel | Frequency (MHz) | Chain 0 Meas Power (dBm) | Total Corr'd Power (dBm) | Power Limit (dBm) | Power Margin (dB) |
|---------|--------------------|-----------------------------------|-----------------------------------|-------------------------|-------------------------|
| High | 5310 | 14.09 | 14.09 | 24.00 | -9.91 |

Note: for Chain 0, 26dB & 99% data & plots, see section 11n HT40 CDD 3TX MODE IN THE 5.3 GHz BAND

Note: the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.

8.18. 802.11n HT40 CDD 3Tx MODE IN THE 5.3 GHz BAND

8.18.1. 26 dB BANDWIDTH



LIMITS

None; for reporting purposes only.



RESULTS

| Channel | Frequency (MHz) | 26 dB BW Chain 0 (MHz) | 26 dB BW Chain 1 (MHz) | 26 dB BW Chain 2 (MHz) |
|---------|--------------------|------------------------------|------------------------------|------------------------------|
| Low | 5270 | 94.68 | 85.92 | 84.84 |
| High | 5310 | 96.36 | 86.76 | 84.60 |



26 dB BANDWIDTH, Chain 0

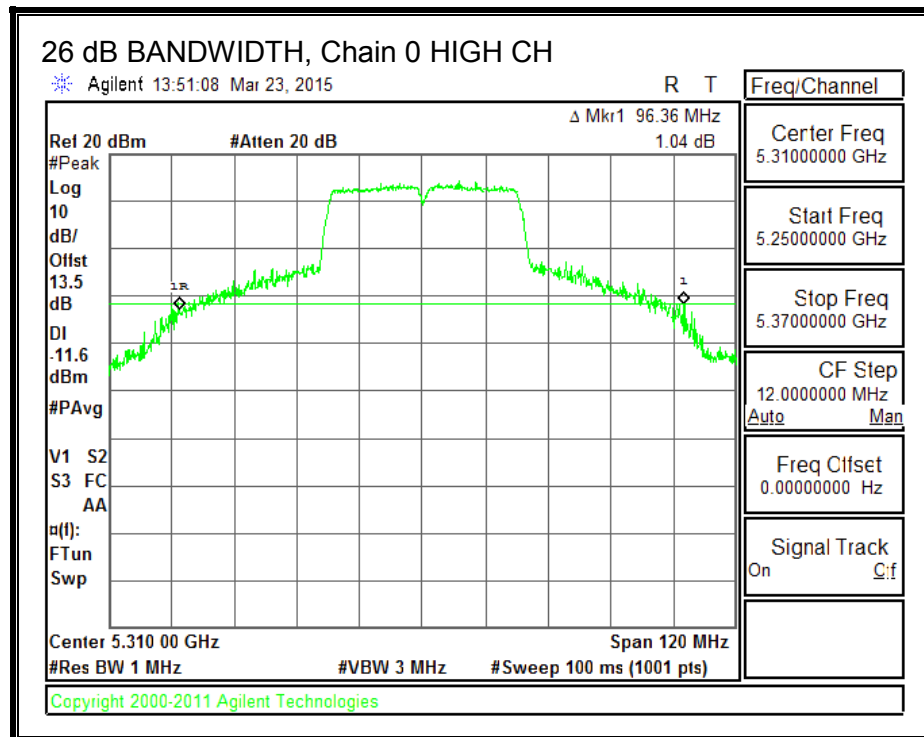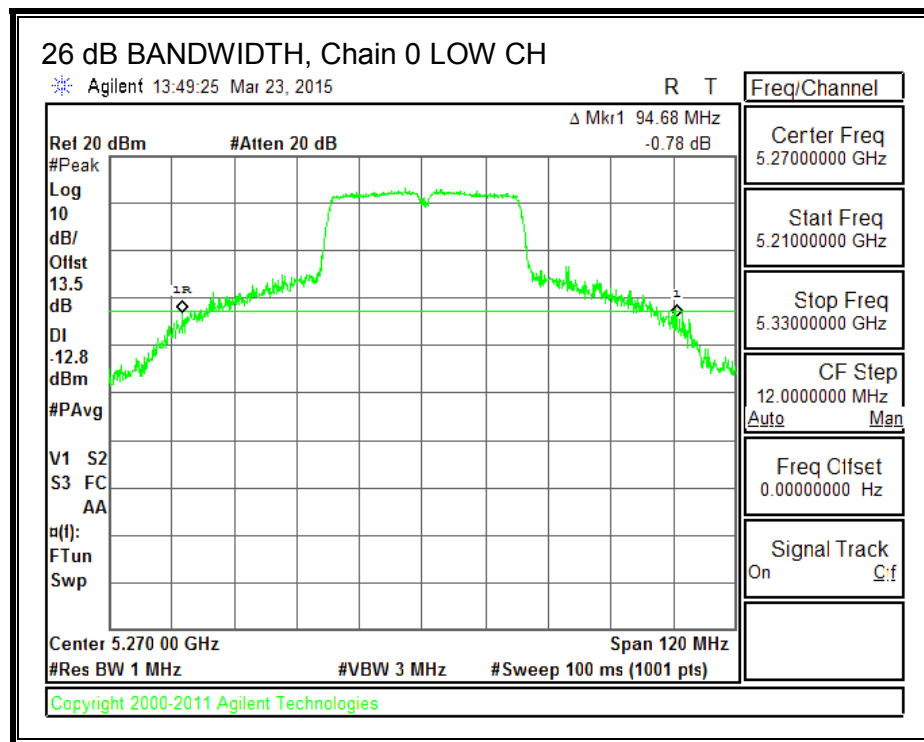

26 dB BANDWIDTH, Chain 1

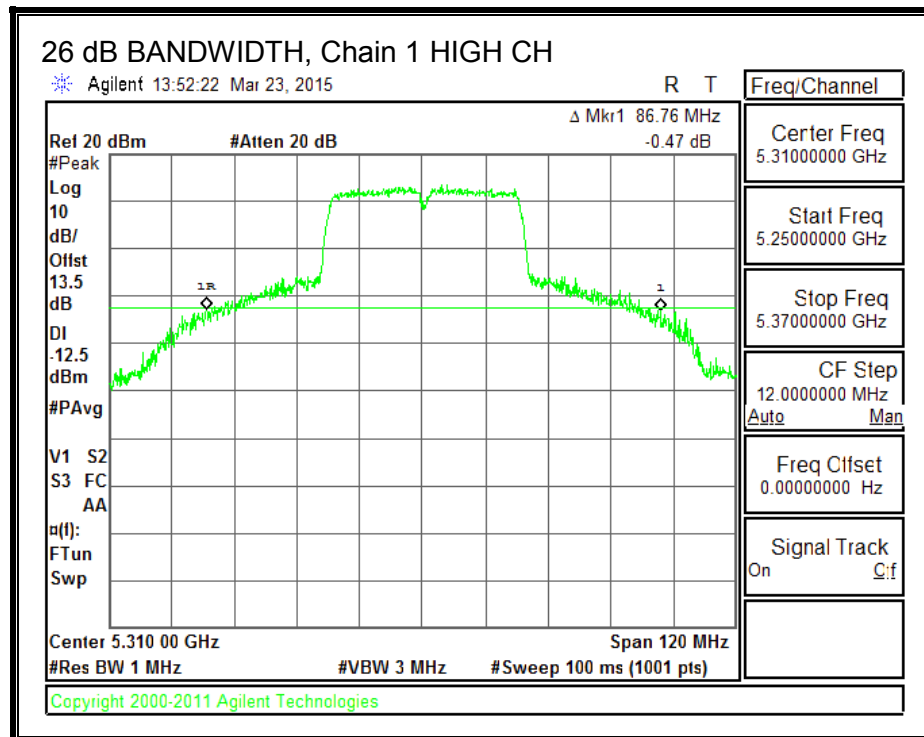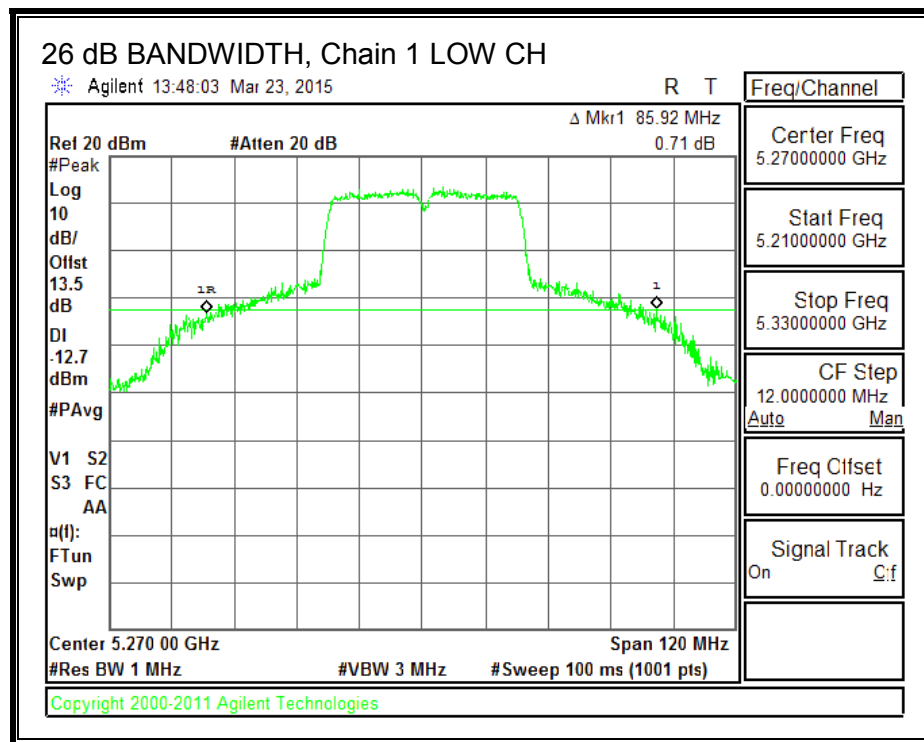

26 dB BANDWIDTH, Chain 2

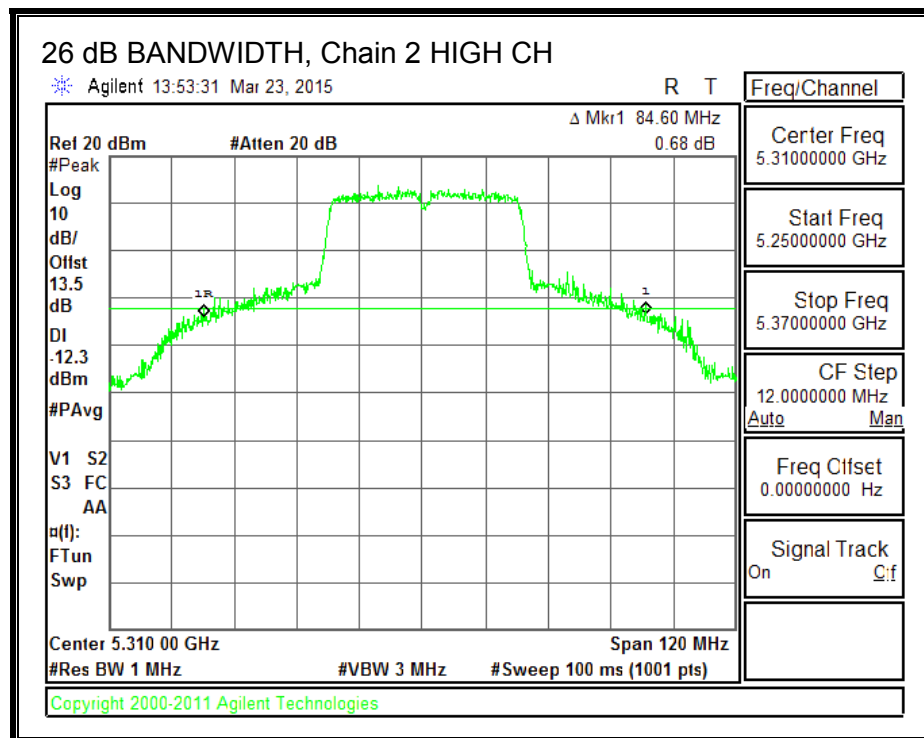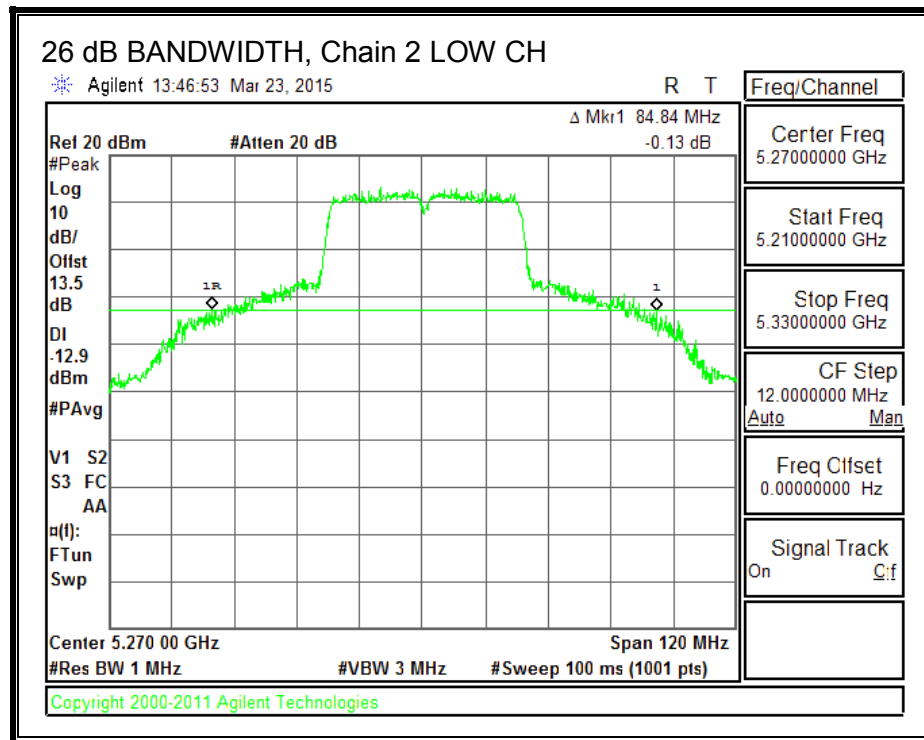

8.18.2. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.



RESULTS

| Channel | Frequency (MHz) | 99% BW Chain 0 (MHz) | 99% BW Chain 1 (MHz) | 99% BW Chain 2 (MHz) |
|---------|--------------------|----------------------------|----------------------------|----------------------------|
| Low | 5270 | 36.7723 | 36.6748 | 36.7241 |
| High | 5310 | 36.9200 | 36.6773 | 36.6473 |



99% BANDWIDTH, Chain 0

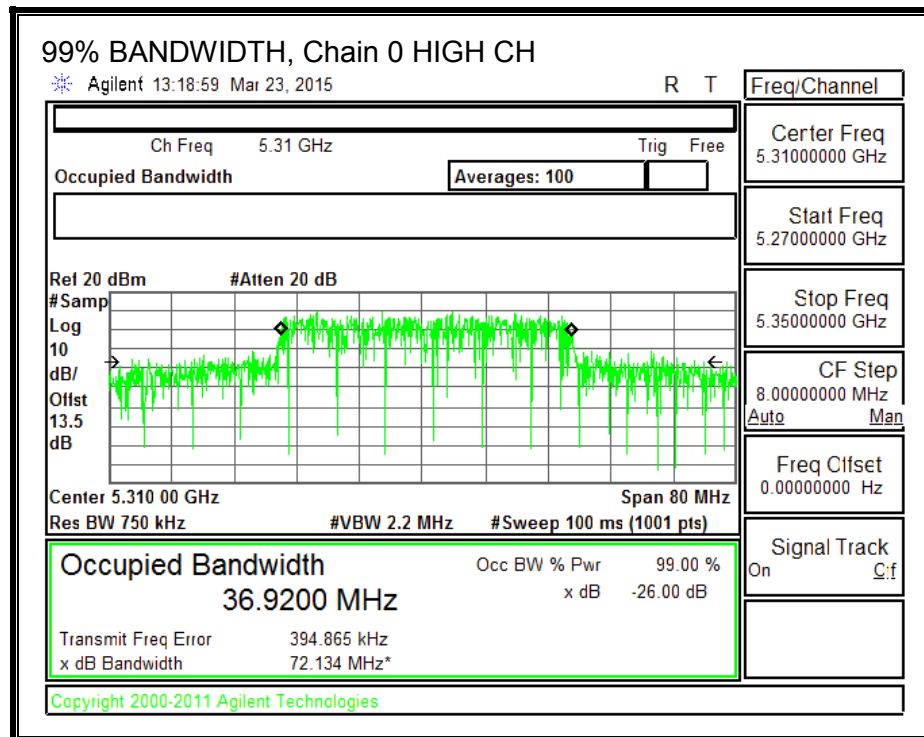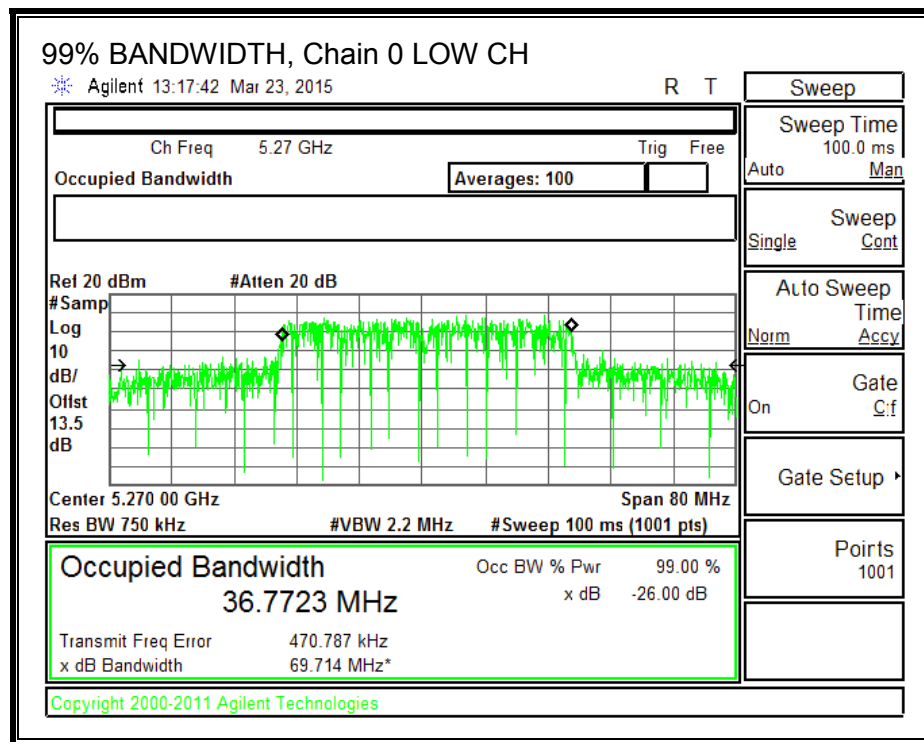

99% BANDWIDTH, Chain 1

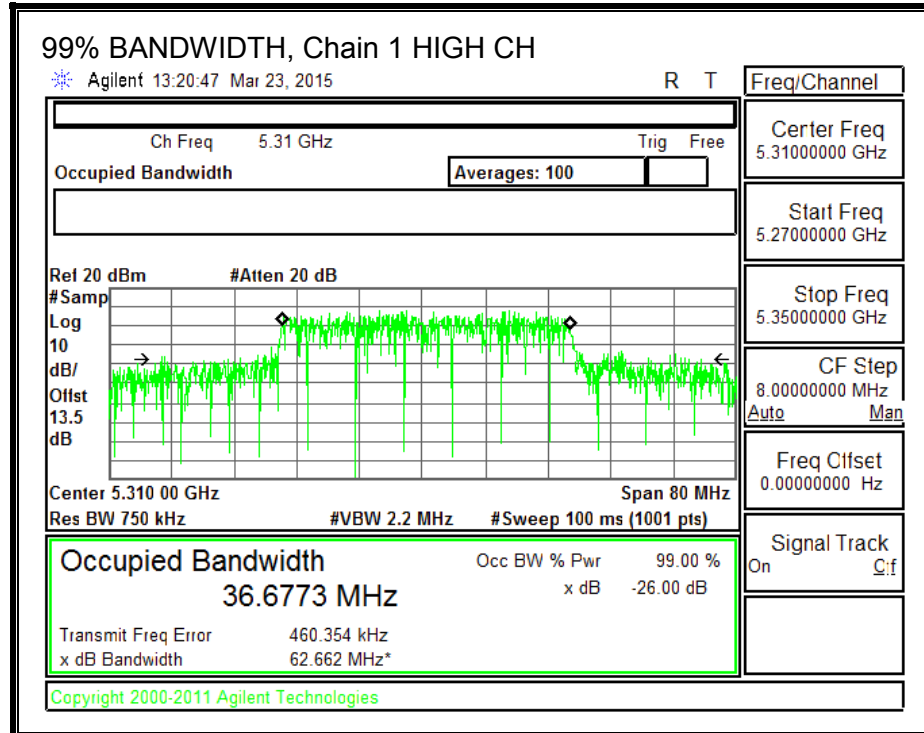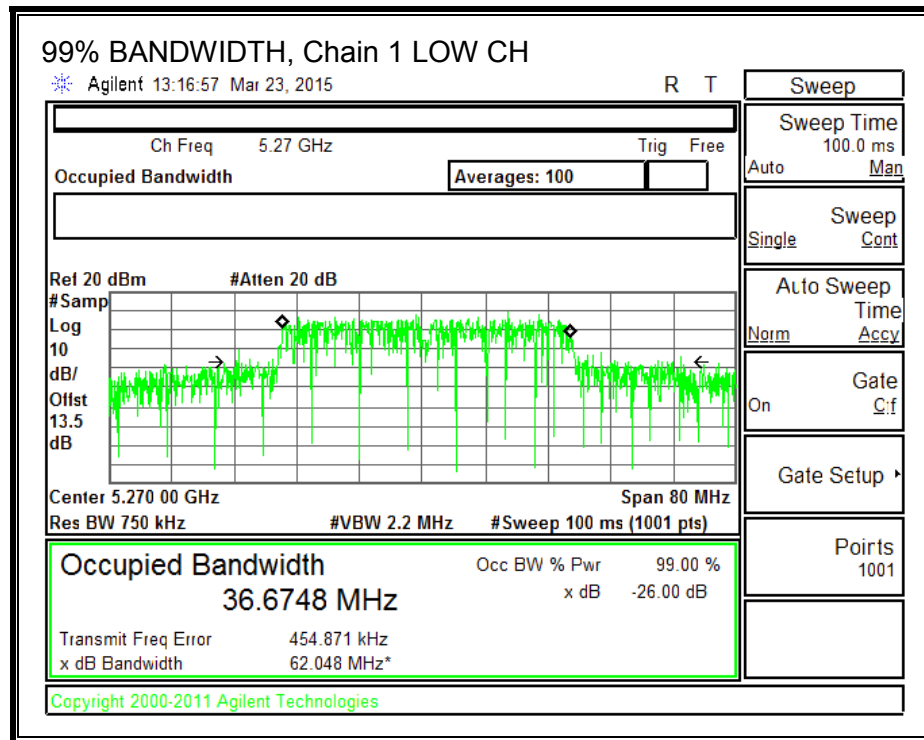

99% BANDWIDTH, Chain 2

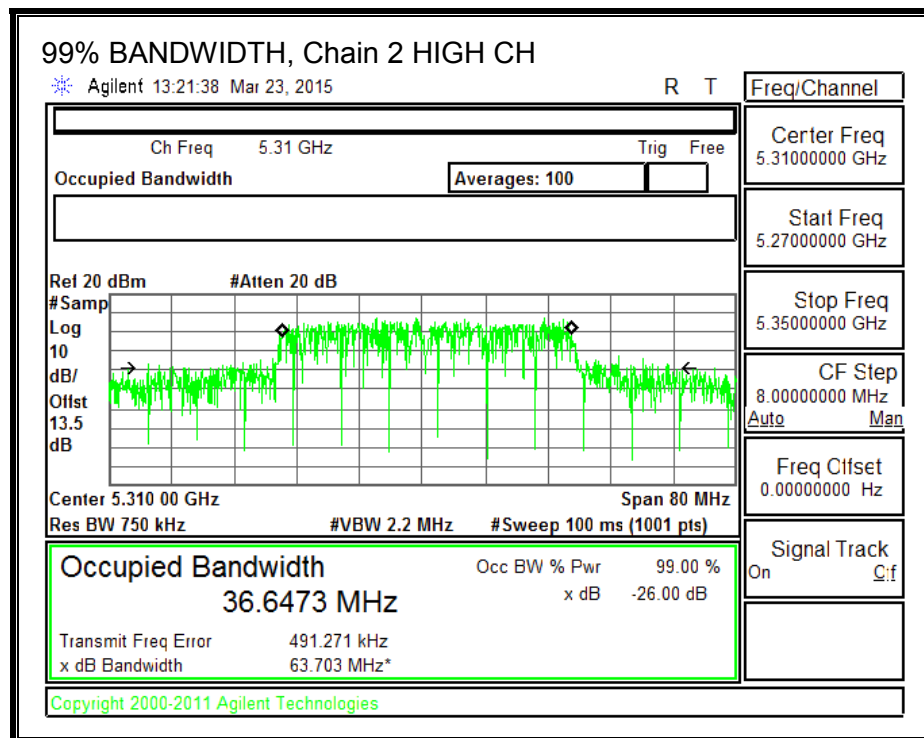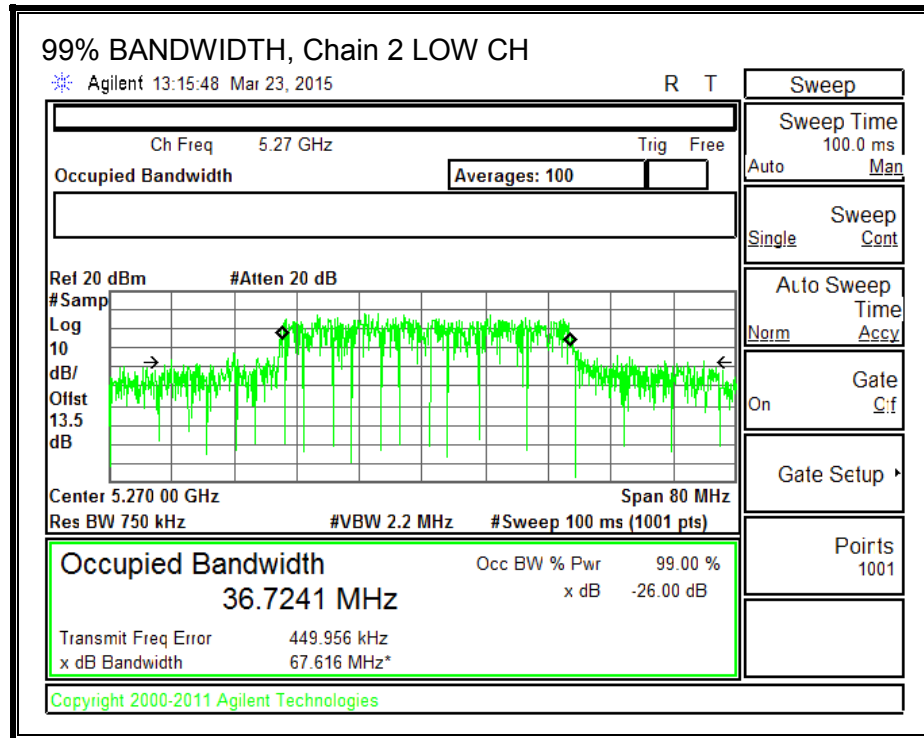

8.18.3. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

For power, the TX chains are uncorrelated and the antenna gain is the same for each chain. The directional gain is equal to the antenna gain, 5.85 dBi.

For PSD, the TX chains are correlated and the antenna gain is the same for each chain. The directional gain is:

| Antenna Gain (dBi) | 10 * Log (3 chains) (dB) | Correlated Chains Directional Gain (dBi) |
|--------------------------|-----------------------------|--|
| 5.85 | 4.77 | 10.62 |

RESULTS

Bandwidth, Antenna Gain, and Limits

| Channel | Frequency (MHz) | Min 26 dB BW (MHz) | Directional Gain for Power (dBi) | Directional Gain for PSD (dBi) | Power Limit (dBm) | PSD Limit (dBm) |
|---------|--------------------|-----------------------------|---|---|-------------------------|-----------------------|
| Low | 5270 | 84.84 | 5.85 | 10.62 | 24.00 | 6.38 |
| High | 5310 | 84.60 | 5.85 | 10.62 | 24.00 | 6.38 |

| | | |
|--------------------|------|--|
| Duty Cycle CF (dB) | 0.09 | Included in Calculations of Corr'd PSD |
|--------------------|------|--|

Output Power Results


| Channel | Frequency (MHz) | Chain 0 Meas Power (dBm) | Chain 1 Meas Power (dBm) | Chain 2 Meas Power (dBm) | Total Corr'd Power (dBm) | Power Limit (dBm) | Power Margin (dB) |
|---------|--------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-------------------------|-------------------------|
| Low | 5270 | 18.90 | 18.78 | 18.52 | 23.51 | 24.00 | -0.49 |
| High | 5310 | 10.52 | 11.03 | 10.87 | 15.58 | 24.00 | -8.42 |

PSD Results


| Channel | Frequency (MHz) | Chain 0 Meas PSD (dBm) | Chain 1 Meas PSD (dBm) | Chain 2 Meas PSD (dBm) | Total Corr'd PSD (dBm) | PSD Limit (dBm) | PSD Margin (dB) |
|---------|--------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|-----------------------|-----------------------|
| Low | 5270 | 0.51 | 0.01 | -0.46 | 4.90 | 6.38 | -1.48 |
| High | 5310 | 0.89 | 0.13 | -0.32 | 5.12 | 6.38 | -1.26 |

Note: the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.


PSD, Chain 0

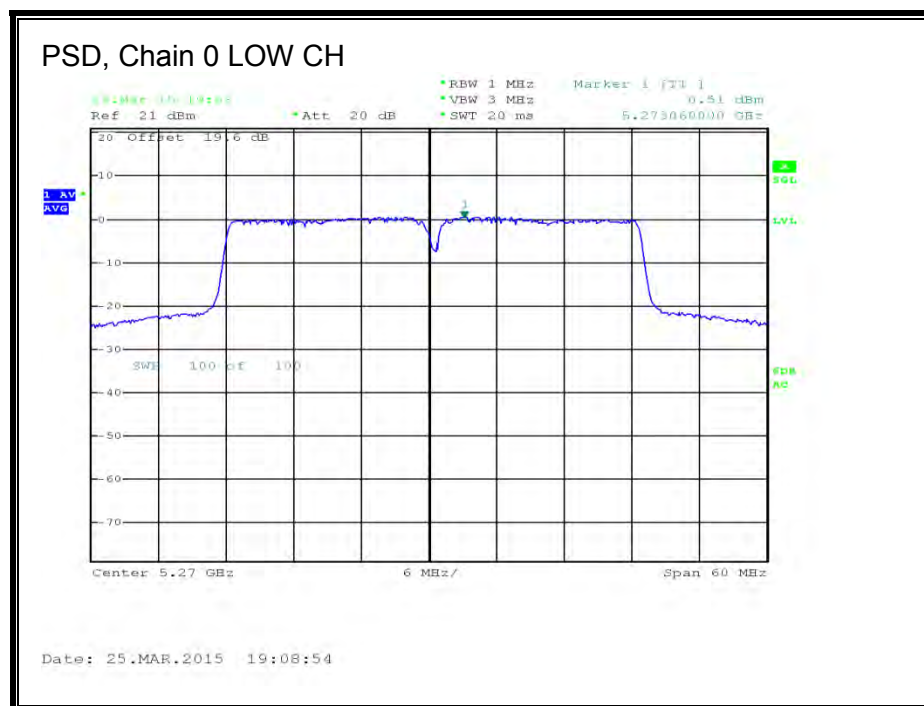

PSD, Chain 1

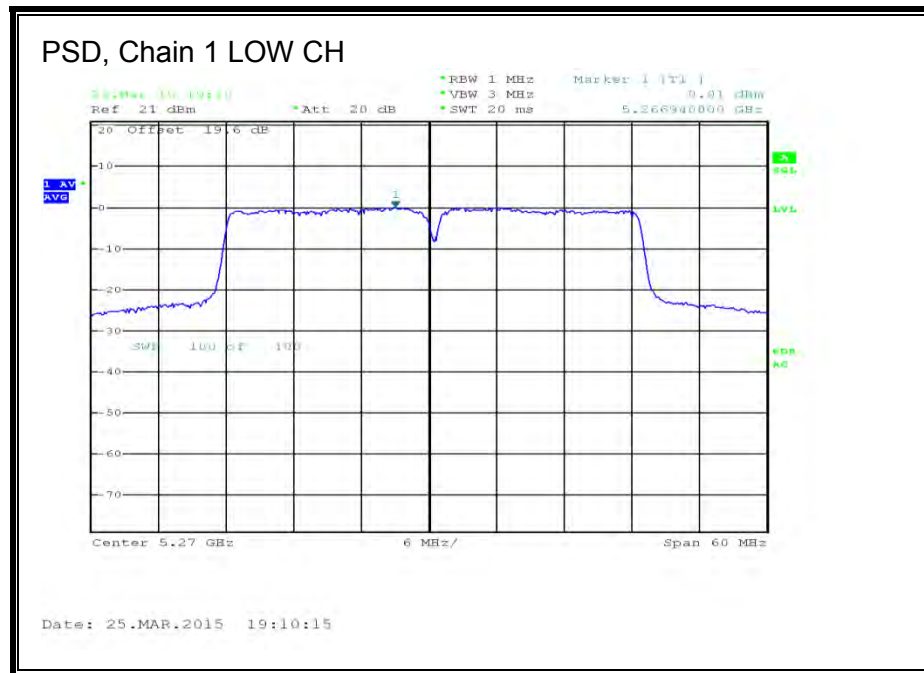

PSD, Chain 2

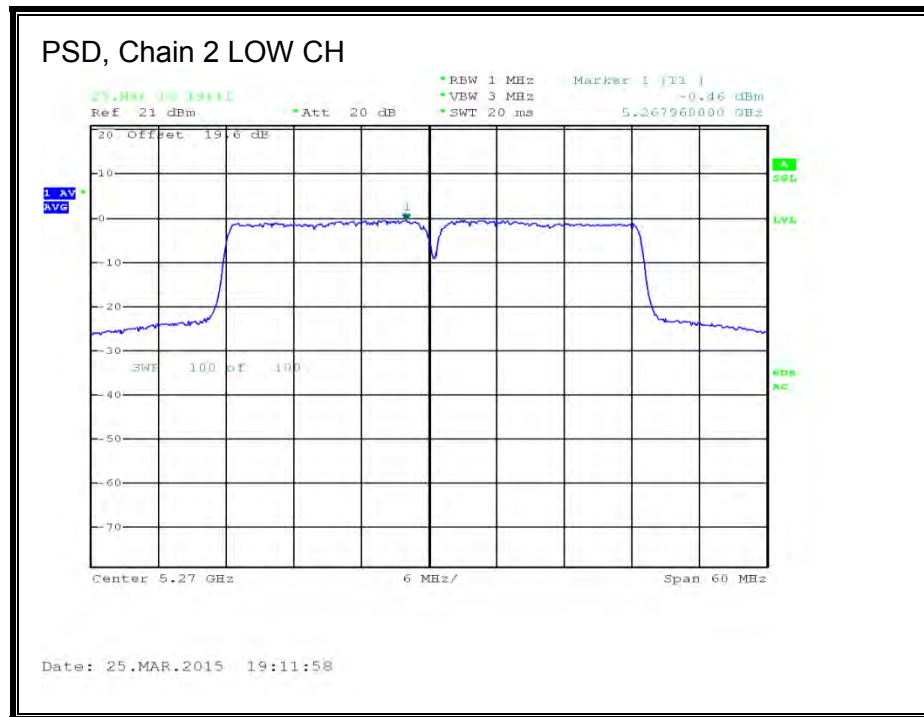

8.19. 802.11n HT40 TxBF 3Tx MODE IN THE 5.3 GHz BAND

8.19.1. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

For power and PSD, the TX chains are correlated and the antenna gain is the same for each chain. The directional gain is:

| Antenna Gain (dBi) | 10 * Log (3 chains) (dB) | Correlated Chains Directional Gain (dBi) |
|-----------------------------------|-------------------------------------|---|
| 5.85 | 4.77 | 10.62 |

RESULTS

Bandwidth, Antenna Gain, and Limits

| Channel | Frequency (MHz) | Min 26 dB BW (MHz) | Directional Gain for Power (dBi) | Directional Gain for PSD (dBi) | Power Limit (dBm) | PSD Limit (dBm) |
|---------|--------------------|-----------------------------|---|---|-------------------------|-----------------------|
| Low | 5270 | 84.84 | 10.62 | 10.62 | 19.38 | 6.38 |
| High | 5310 | 84.60 | 10.62 | 10.62 | 19.38 | 6.38 |

| | | |
|--------------------|------|--|
| Duty Cycle CF (dB) | 0.09 | Included in Calculations of Corr'd PSD |
|--------------------|------|--|

Output Power Results

| Channel | Frequency (MHz) | Chain 0 Meas Power (dBm) | Chain 1 Meas Power (dBm) | Chain 2 Meas Power (dBm) | Total Corr'd Power (dBm) | Power Limit (dBm) | Power Margin (dB) |
|---------|--------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-------------------------|-------------------------|
| Low | 5270 | 14.15 | 14.20 | 13.98 | 18.88 | 19.38 | -0.50 |
| High | 5310 | 10.37 | 10.25 | 9.75 | 14.90 | 19.38 | -4.48 |


PSD Results

| Channel | Frequency (MHz) | Chain 0 Meas PSD (dBm) | Chain 1 Meas PSD (dBm) | Chain 2 Meas PSD (dBm) | Total Corr'd PSD (dBm) | PSD Limit (dBm) | PSD Margin (dB) |
|---------|--------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|-----------------------|-----------------------|
| Low | 5270 | -3.05 | -2.76 | -3.03 | 1.92 | 6.38 | -4.46 |
| High | 5310 | -2.79 | -2.61 | -2.81 | 2.13 | 6.38 | -4.25 |


Note: for Chains 0, 1 and 2, 26dB and 99% data and plots, see section 11n HT40 CDD 3TX MODE IN THE 5.3 GHz BAND

Note: the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.



PSD, Chain 0

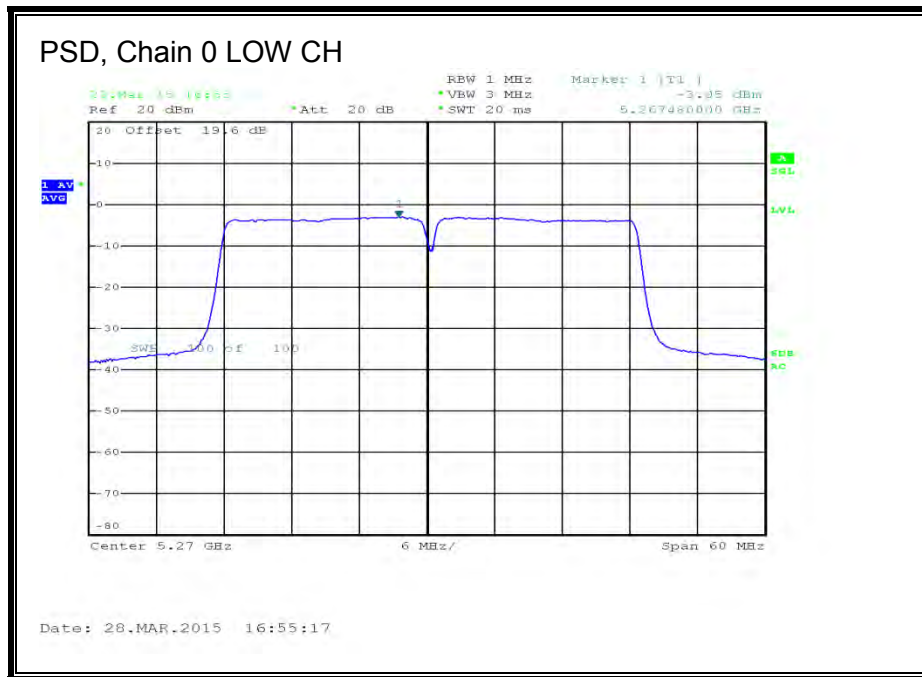

PSD, Chain 1

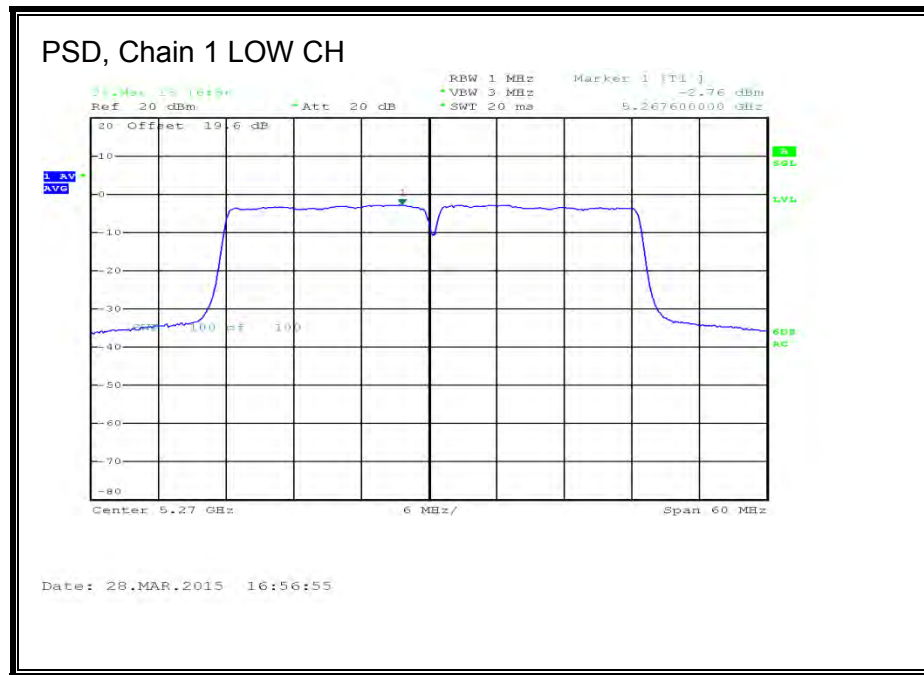

PSD, Chain 2

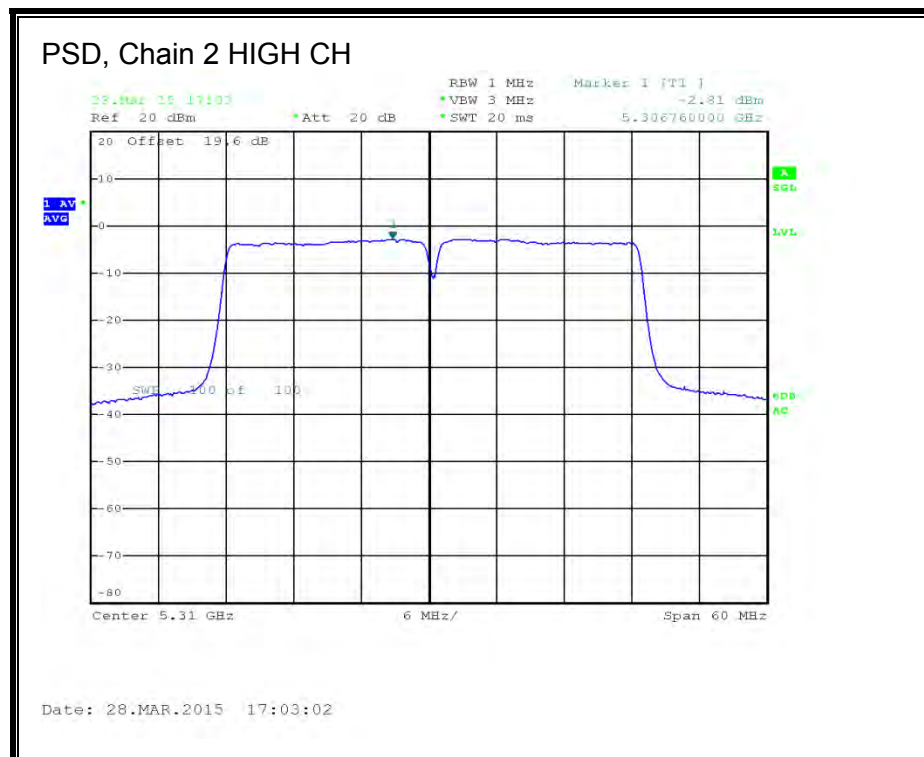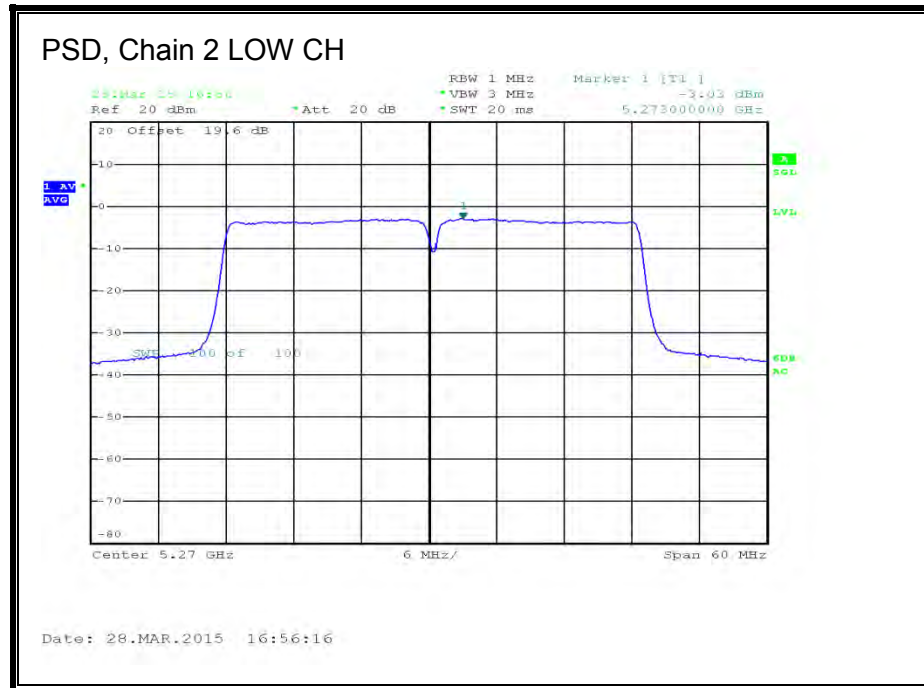

8.20. 802.11ac VHT80 1Tx MODE IN THE 5.3 GHz BAND

8.20.1. OUTPUT POWER

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

This is SISO mode, AG is the highest (worst-case) = 5.85 dBi.

RESULTS

Bandwidth, Antenna Gain, and Limits

| Channel | Frequency (MHz) | Min 26 dB BW (MHz) | Directional Gain (dBi) | Power Limit (dBm) |
|---------|--------------------|-----------------------------|------------------------------|-------------------------|
| Mid | 5290 | 177.25 | 5.85 | 24.00 |

Output Power Results

| Channel | Frequency (MHz) | Chain 0 Meas Power (dBm) | Total Corr'd Power (dBm) | Power Limit (dBm) | Power Margin (dB) |
|---------|--------------------|-----------------------------------|-----------------------------------|-------------------------|-------------------------|
| Mid | 5290 | 12.48 | 12.48 | 24.00 | -11.52 |

Note: for Chain 0, 26dB & 99% data & plots, see section 11ac VHT80 CDD 3TX MODE IN THE 5.3 GHz BAND

Note: the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.

8.21. 802.11ac VHT80 CDD 3Tx MODE IN THE 5.3 GHz BAND

8.21.1. 26 dB BANDWIDTH


LIMITS

None; for reporting purposes only.


RESULTS

| Channel | Frequency (MHz) | 26 dB BW Chain 0 (MHz) | 26 dB BW Chain 1 (MHz) | 26 dB BW Chain 2 (MHz) |
|---------|--------------------|------------------------------|------------------------------|------------------------------|
| Mid | 5290 | 177.25 | 159.25 | 158.50 |


26 dB BANDWIDTH, Chain 0

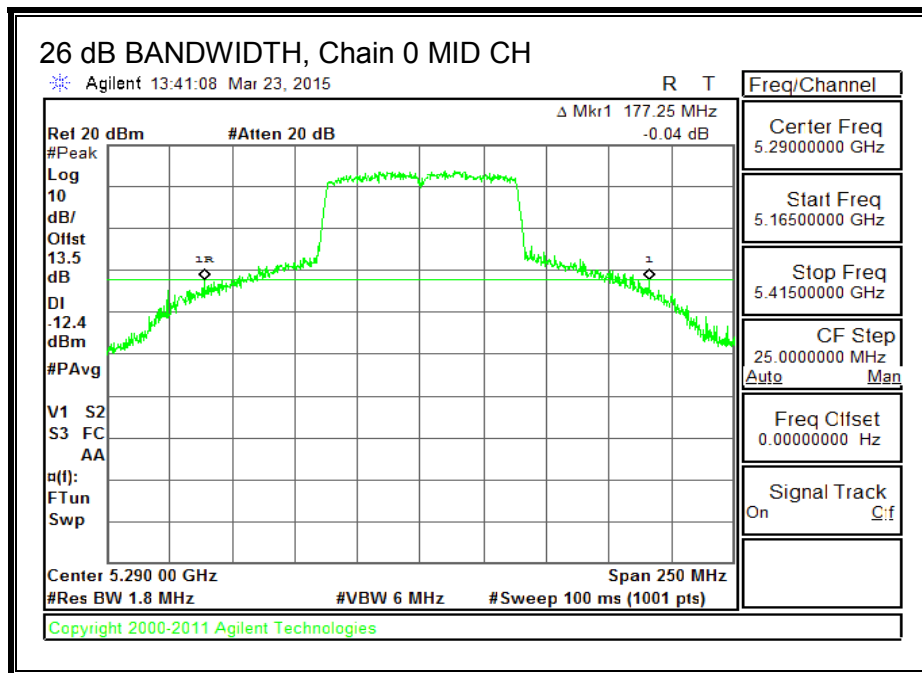

26 dB BANDWIDTH, Chain 1

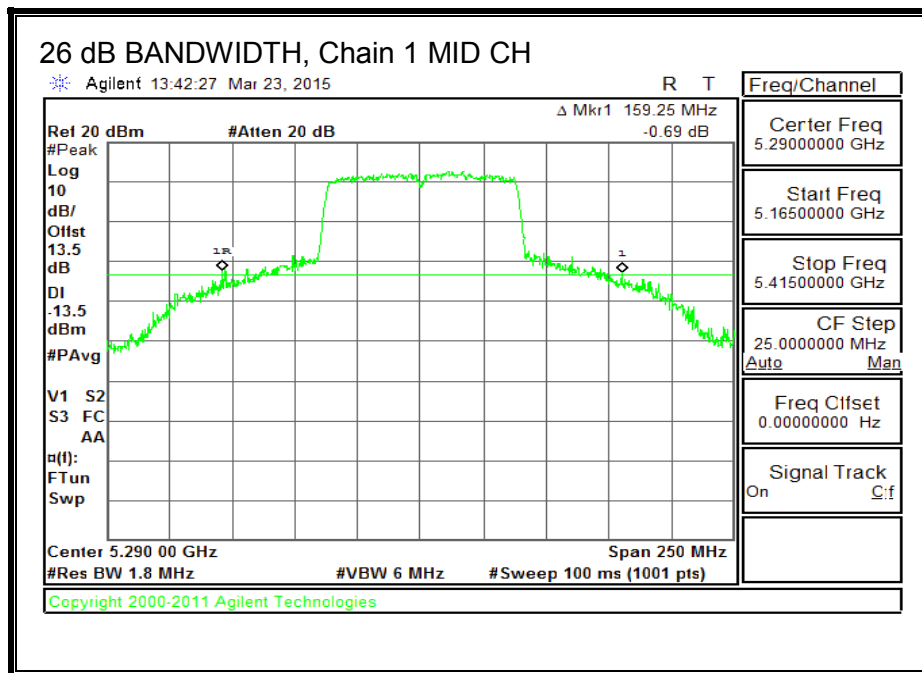

26 dB BANDWIDTH, Chain 2

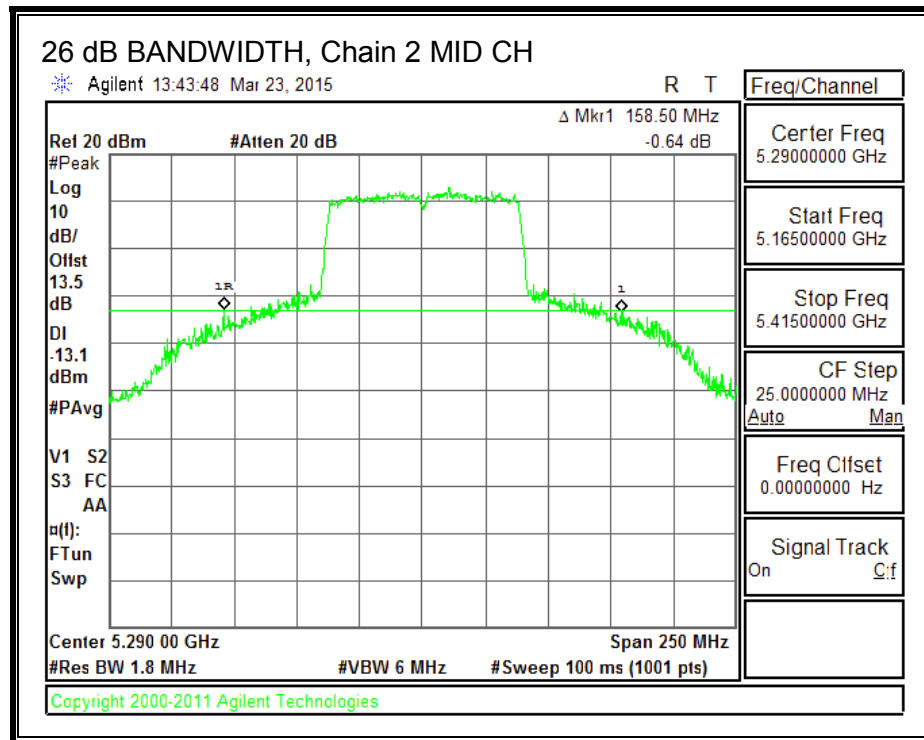

8.21.2. 99% BANDWIDTH


LIMITS

None; for reporting purposes only.


RESULTS

| Channel | Frequency (MHz) | 99% BW Chain 0 (MHz) | 99% BW Chain 1 (MHz) | 99% BW Chain 2 (MHz) |
|---------|--------------------|----------------------------|----------------------------|----------------------------|
| Mid | 5290 | 76.0236 | 75.9002 | 75.9504 |


99% BANDWIDTH, Chain 0

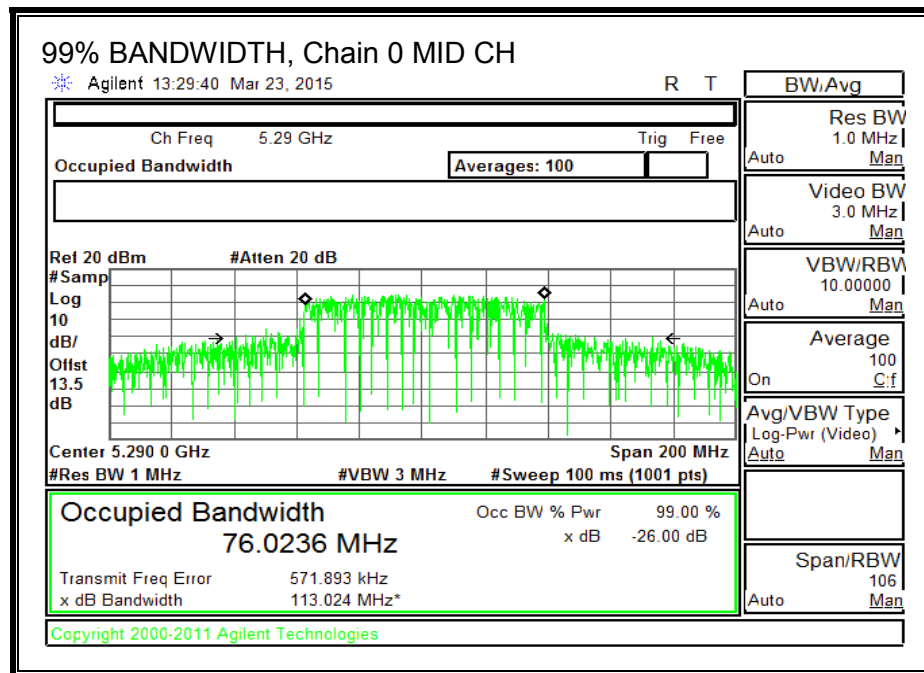

99% BANDWIDTH, Chain 1

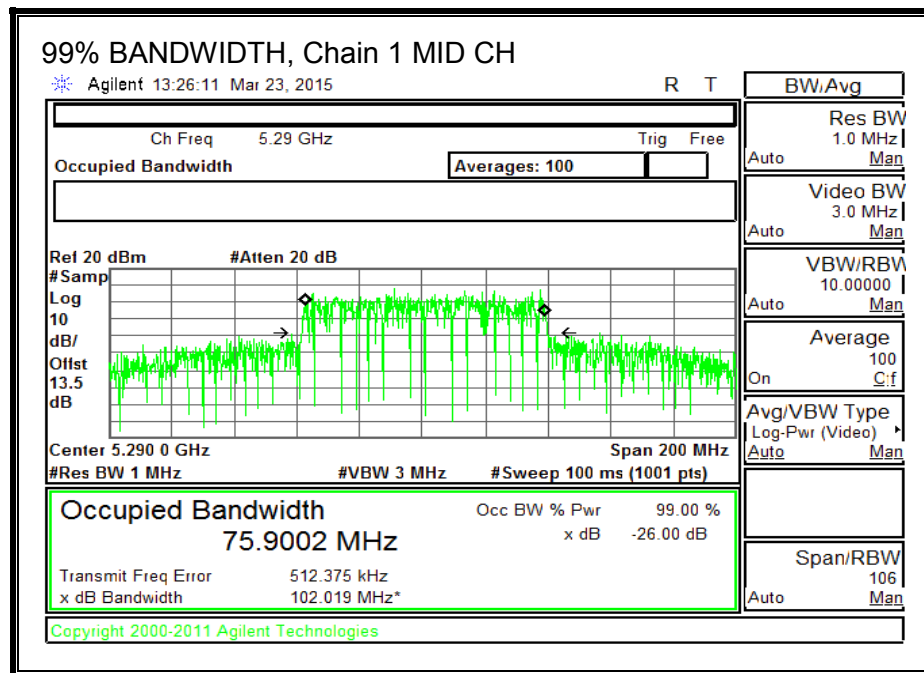

99% BANDWIDTH, Chain 2

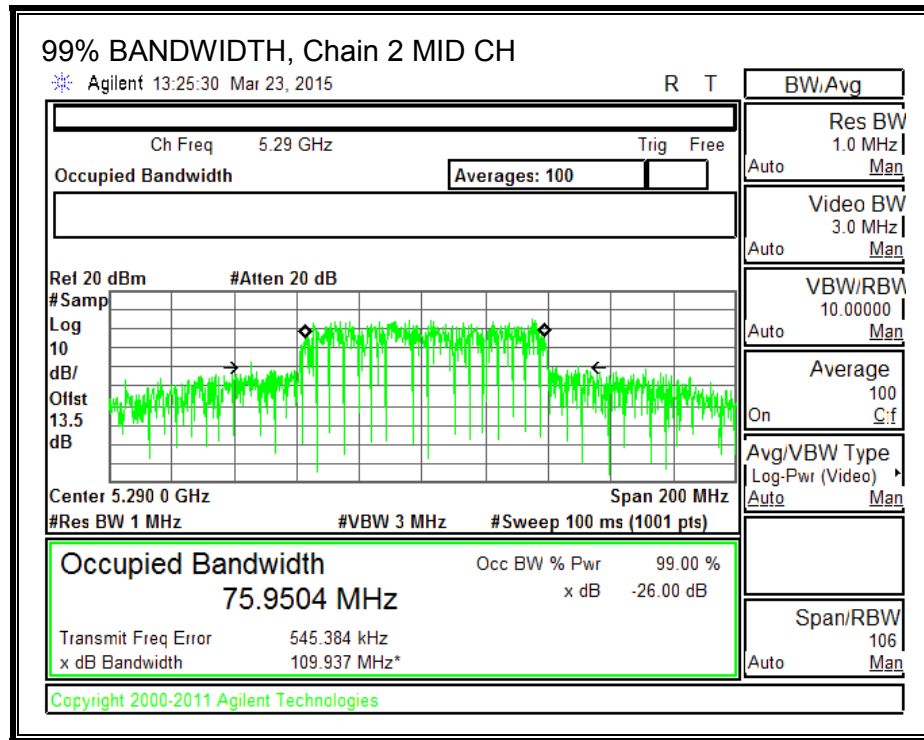

8.21.3. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

For power, the TX chains are uncorrelated and the antenna gain is the same for each chain. The directional gain is equal to the antenna gain, 5.85 dBi.

For PSD, The TX chains are correlated and the antenna gain is the same for each chain. The directional gain is:

| Antenna Gain (dBi) | 10 * Log (3 chains) (dB) | Correlated Chains Directional Gain (dBi) |
|--------------------------|-----------------------------|--|
| 5.85 | 4.77 | 10.62 |

RESULTS

Bandwidth, Antenna Gain, and Limits

| Channel | Frequency (MHz) | Min 26 dB BW (MHz) | Directional Gain for Power (dBi) | Directional Gain for PSD (dBi) | Power Limit (dBm) | PSD Limit (dBm) |
|---------|--------------------|-----------------------------|---|---|-------------------------|-----------------------|
| Mid | 5290 | 158.50 | 5.85 | 10.62 | 24.00 | 6.38 |

| | | |
|--------------------|------|--|
| Duty Cycle CF (dB) | 0.18 | Included in Calculations of Corr'd PSD |
|--------------------|------|--|

Output Power Results


| Channel | Frequency (MHz) | Chain 0 Meas Power (dBm) | Chain 1 Meas Power (dBm) | Chain 2 Meas Power (dBm) | Total Corr'd Power (dBm) | Power Limit (dBm) | Power Margin (dB) |
|---------|--------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-------------------------|-------------------------|
| Mid | 5290 | 9.28 | 9.30 | 9.64 | 14.18 | 24.00 | -9.82 |

PSD Results


| Channel | Frequency (MHz) | Chain 0 Meas PSD (dBm) | Chain 1 Meas PSD (dBm) | Chain 2 Meas PSD (dBm) | Total Corr'd PSD (dBm) | PSD Limit (dBm) | PSD Margin (dB) |
|---------|--------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|-----------------------|-----------------------|
| Mid | 5290 | -4.17 | -3.90 | -4.34 | 0.82 | 6.38 | -5.56 |

Note: the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.


PSD, Chain 0

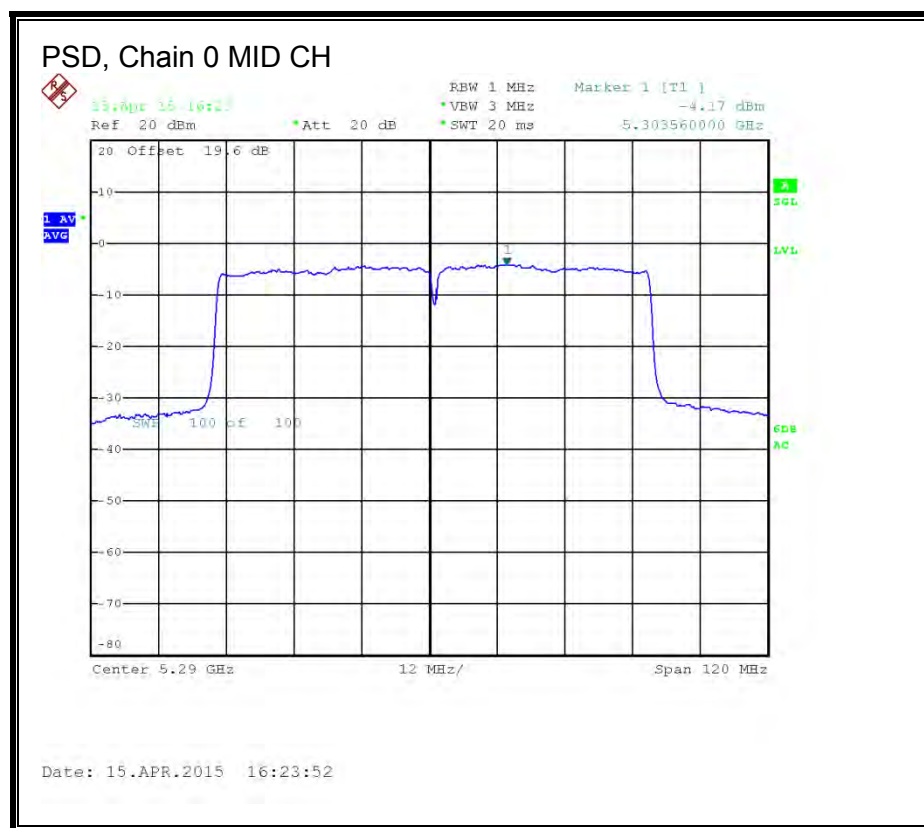

PSD, Chain 1

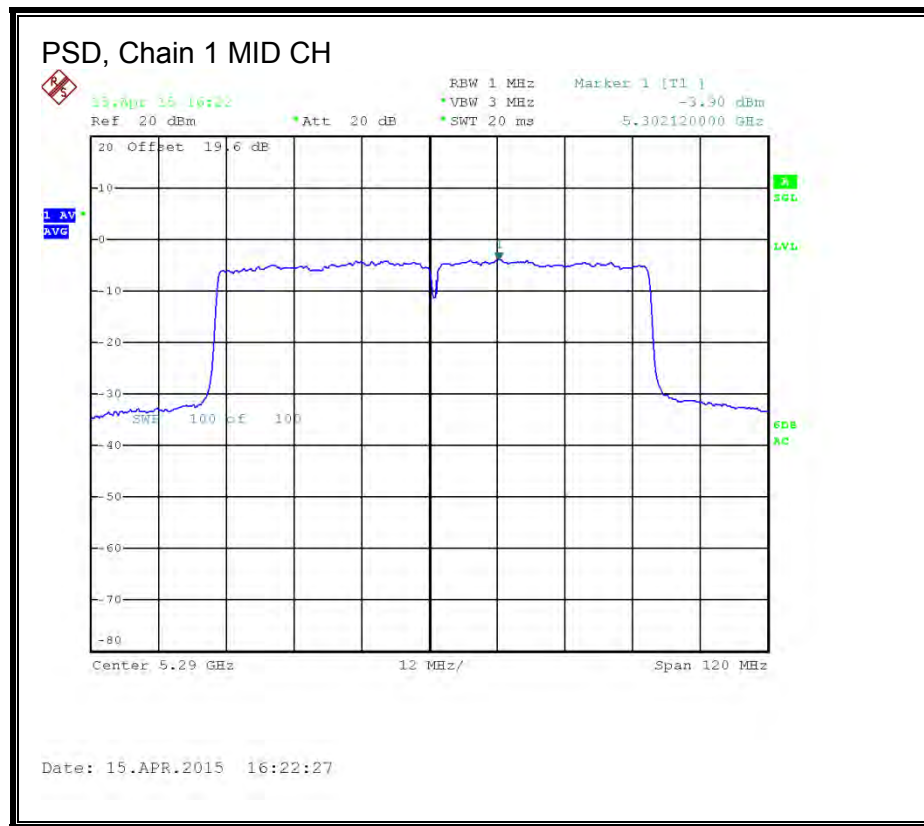

PSD, Chain 2

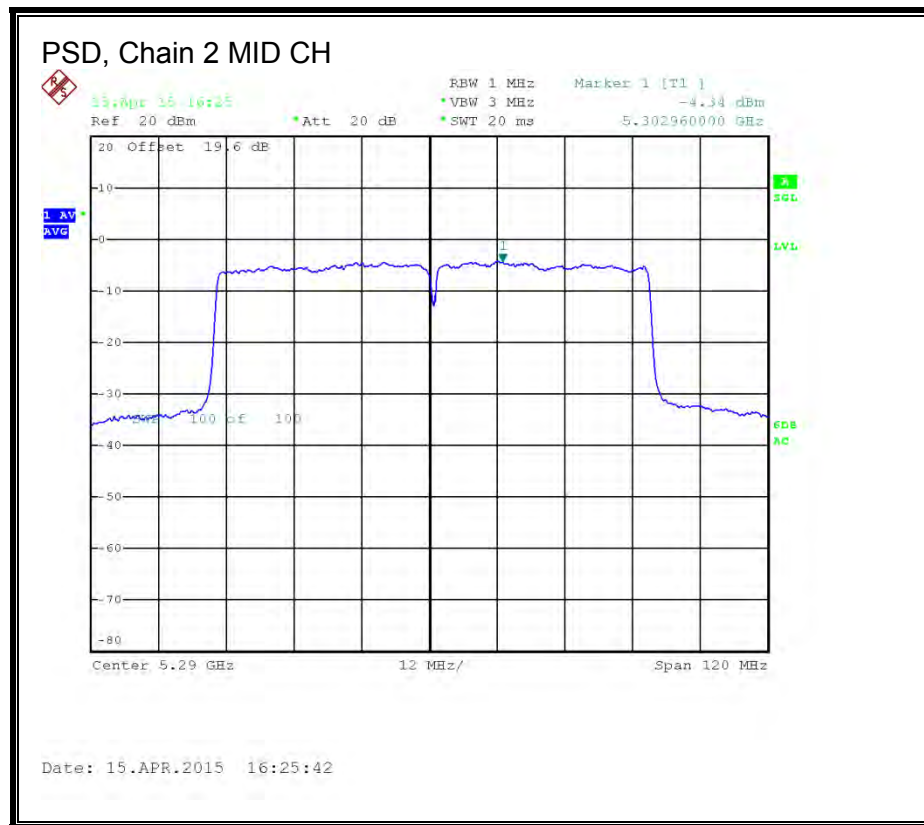

8.22. 802.11ac VHT80 TxBF 3Tx MODE IN THE 5.3 GHz BAND

8.22.1. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

For power and PSD, the TX chains are correlated and the antenna gain is the same for each chain. The directional gain is:

| Antenna Gain (dBi) | 10 * Log (3 chains) (dB) | Correlated Chains Directional Gain (dBi) |
|-----------------------------------|-------------------------------------|---|
| 5.85 | 4.77 | 10.62 |

RESULTS

Bandwidth, Antenna Gain, and Limits

| Channel | Frequency (MHz) | Min 26 dB BW (MHz) | Directional Gain for Power (dBi) | Directional Gain for PSD (dBi) | Power Limit (dBm) | PSD Limit (dBm) |
|---------|--------------------|-----------------------------|---|---|-------------------------|-----------------------|
| Mid | 5290 | 158.50 | 10.62 | 10.62 | 19.38 | 6.38 |

| | | |
|--------------------|------|--|
| Duty Cycle CF (dB) | 0.18 | Included in Calculations of Corr'd PSD |
|--------------------|------|--|

Output Power Results

| Channel | Frequency (MHz) | Chain 0 Meas Power (dBm) | Chain 1 Meas Power (dBm) | Chain 2 Meas Power (dBm) | Total Corr'd Power (dBm) | Power Limit (dBm) | Power Margin (dB) |
|---------|--------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-------------------------|-------------------------|
| Mid | 5290 | 11.55 | 11.51 | 10.84 | 16.08 | 19.38 | -3.30 |


PSD Results

| Channel | Frequency (MHz) | Chain 0 Meas PSD (dBm) | Chain 1 Meas PSD (dBm) | Chain 2 Meas PSD (dBm) | Total Corr'd PSD (dBm) | PSD Limit (dBm) | PSD Margin (dB) |
|---------|--------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|-----------------------|-----------------------|
| Mid | 5290 | -6.69 | -6.08 | -6.34 | -1.41 | 6.38 | -7.79 |


Note: for Chains 0, 1 and 2, 26dB & 99% data & plots, see section 11ac VHT80 CDD 3TX MODE IN THE 5.3 GHz BAND

Note: the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.


PSD, Chain 0

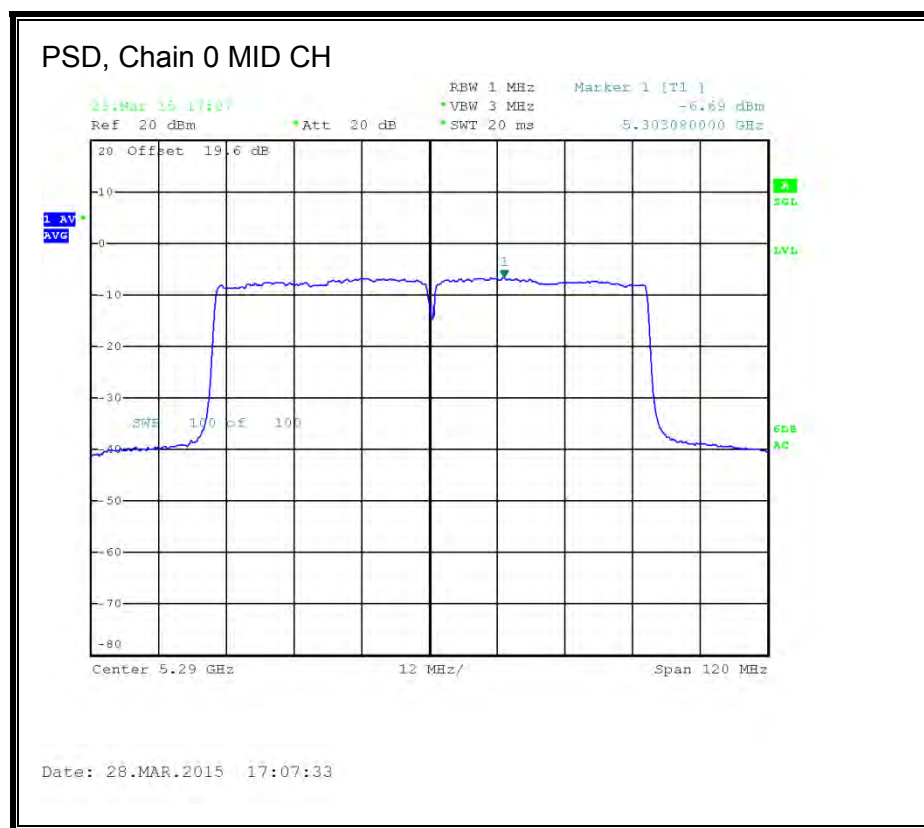

PSD, Chain 1

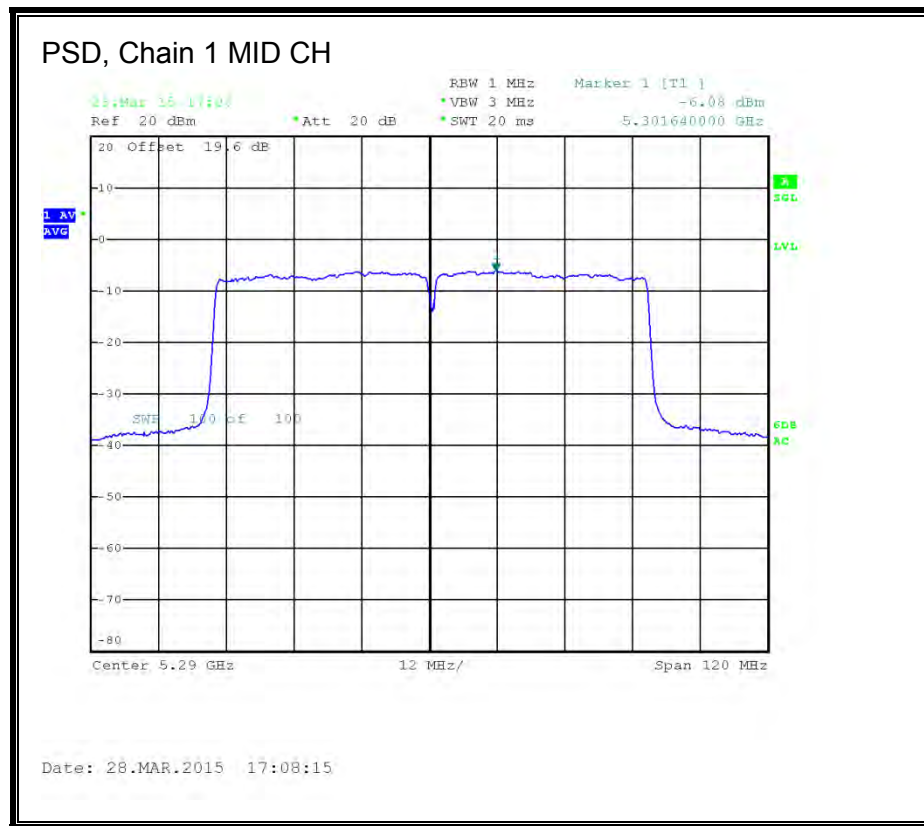

PSD, Chain 2

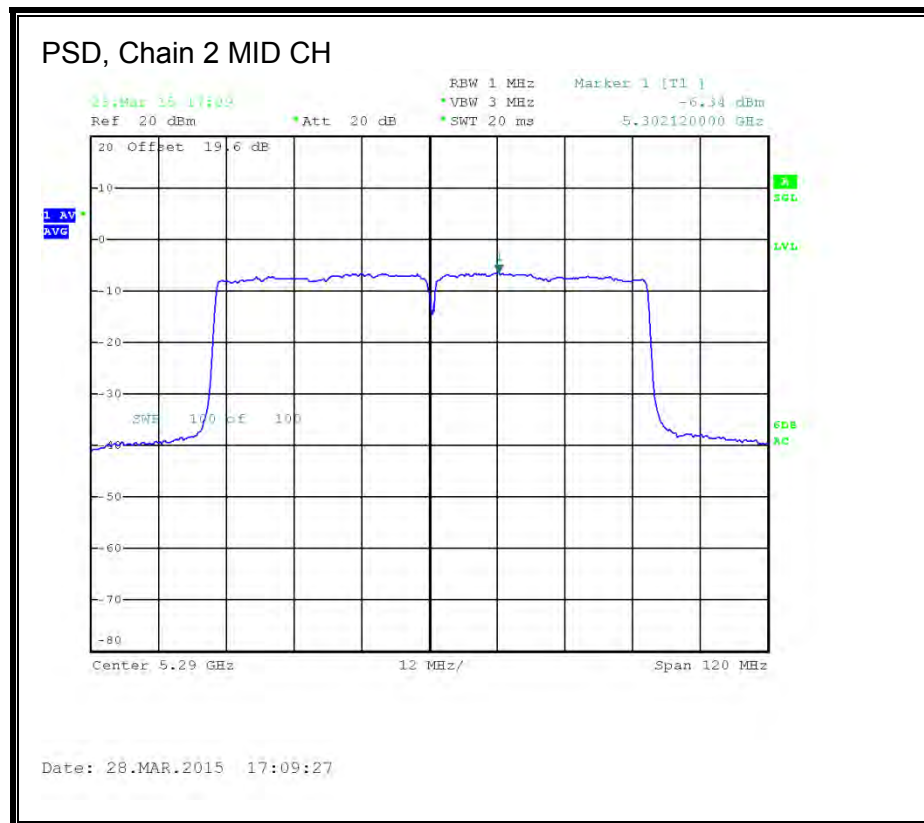

8.23. 802.11a LEGACY MODE IN THE 5.6 GHz BAND

8.23.1. 26 dB BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) |
|---------|--------------------|--------------------------|
| Low | 5500 | 33.00 |
| High | 5700 | 33.05 |

26 dB BANDWIDTH

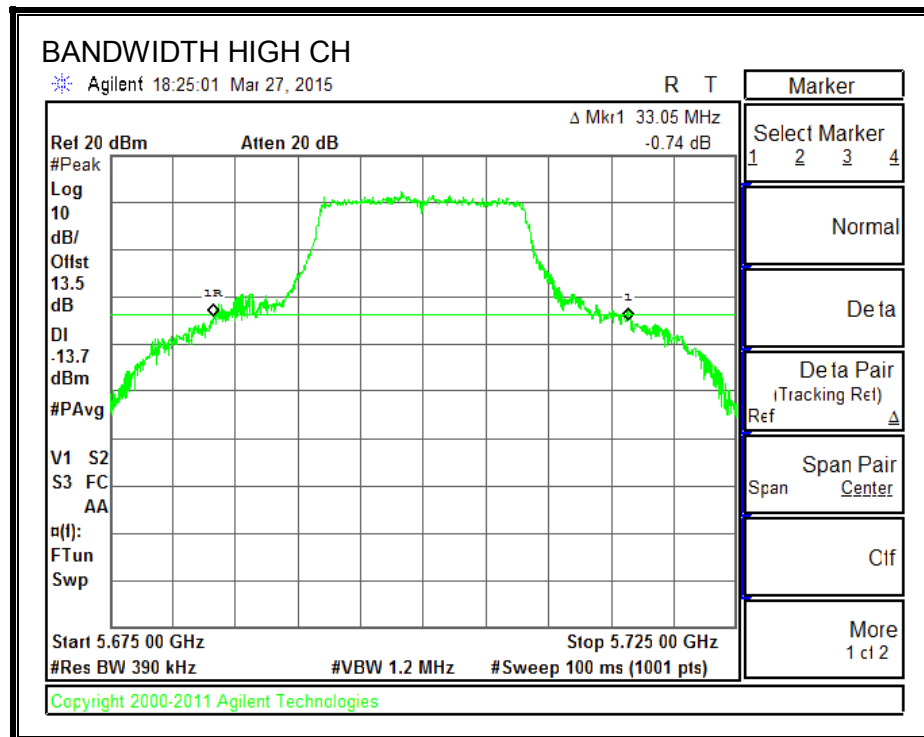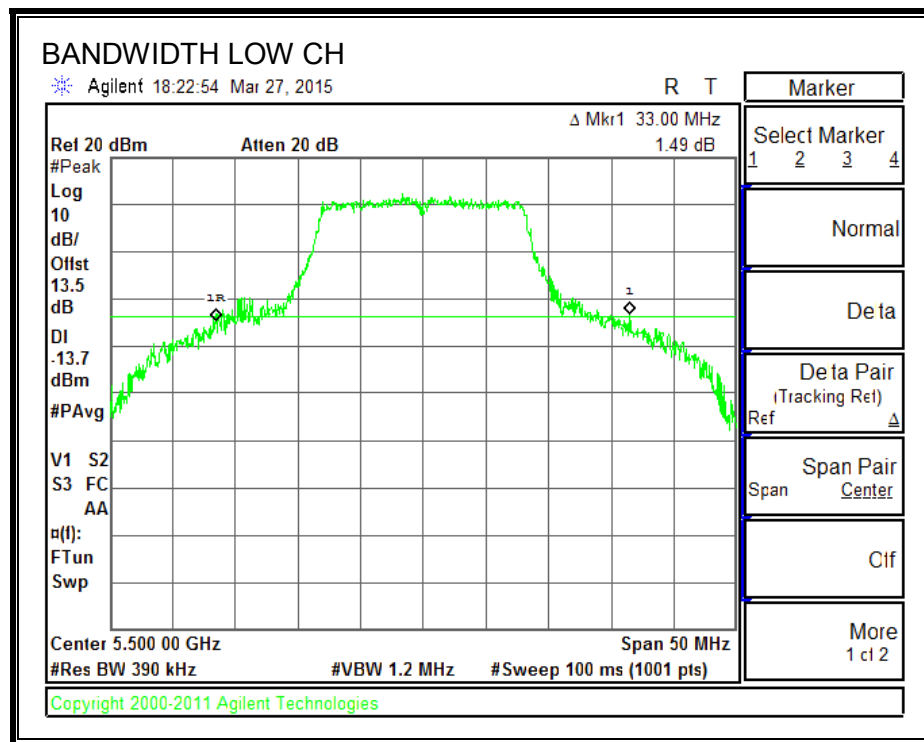

8.23.2. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

| Channel | Frequency (MHz) | 99% Bandwidth (MHz) |
|---------|--------------------|------------------------|
| Low | 5500 | 16.5255 |
| High | 5700 | 16.5234 |

99% BANDWIDTH

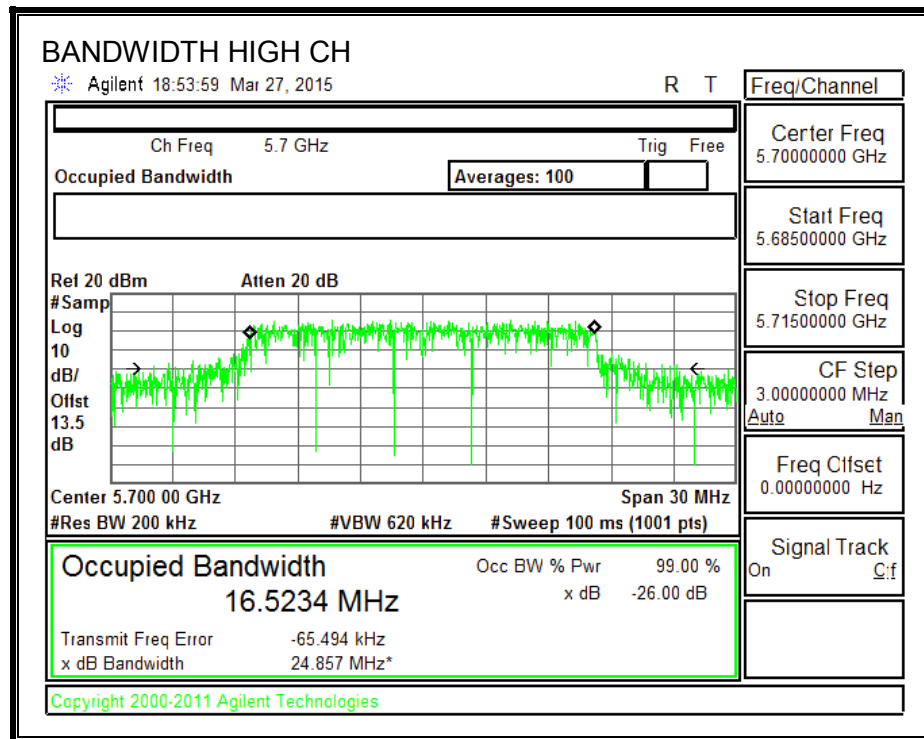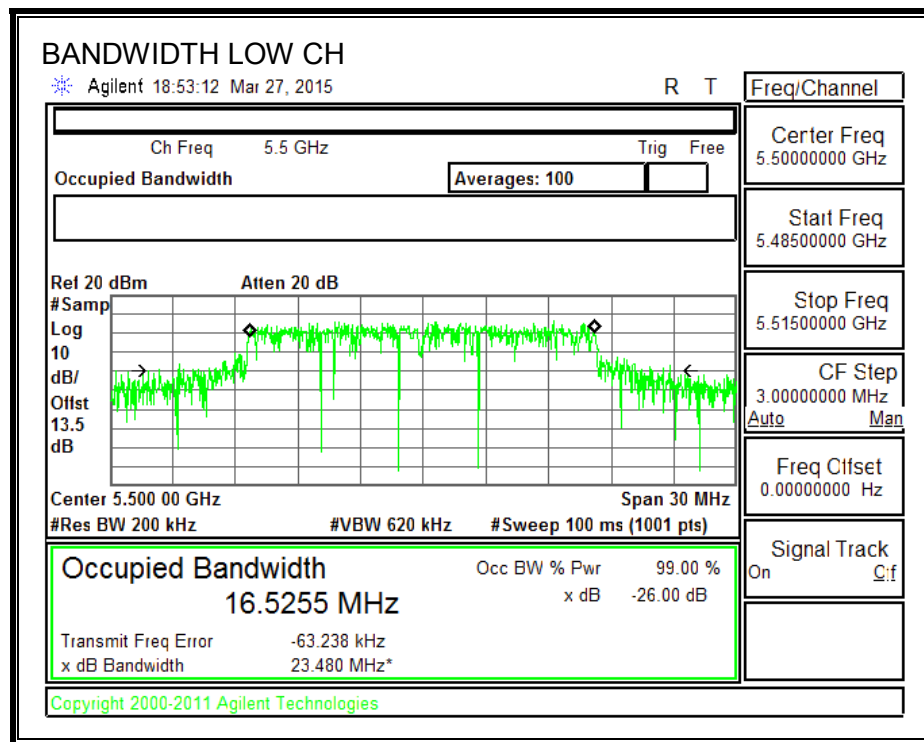

8.23.3. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.47–5.725 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

This is SISO mode, AG is the highest (worst-case) = 6.21 dBi

RESULTS

Bandwidth, Antenna Gain, and Limits

| Channel | Frequency (MHz) | Min 26 dB BW (MHz) | Directional Gain (dBi) | Power Limit (dBm) | PSD Limit (dBm) |
|---------|--------------------|-----------------------------|------------------------------|-------------------------|-----------------------|
| Low | 5500 | 33.00 | 6.21 | 23.79 | 10.79 |
| High | 5700 | 33.50 | 6.21 | 23.79 | 10.79 |

| | | |
|--------------------|------|--|
| Duty Cycle CF (dB) | 0.00 | Included in Calculations of Corr'd PSD |
|--------------------|------|--|


Output Power Results

| Channel | Frequency (MHz) | Chain 0 Meas Power (dBm) | Total Corr'd Power (dBm) | Power Limit (dBm) | Power Margin (dB) |
|---------|--------------------|-----------------------------------|-----------------------------------|-------------------------|-------------------------|
| Low | 5500 | 18.34 | 18.34 | 23.79 | -5.45 |
| High | 5700 | 18.52 | 18.52 | 23.79 | -5.27 |

PSD Results

| Channel | Frequency (MHz) | Chain 0 Meas PSD (dBm) | Total Corr'd PSD (dBm) | PSD Limit (dBm) | PSD Margin (dB) |
|---------|--------------------|---------------------------------|---------------------------------|-----------------------|-----------------------|
| Low | 5500 | 4.13 | 4.13 | 10.79 | -6.66 |
| High | 5700 | 3.16 | 3.16 | 10.79 | -7.63 |

PSD, Chain 0

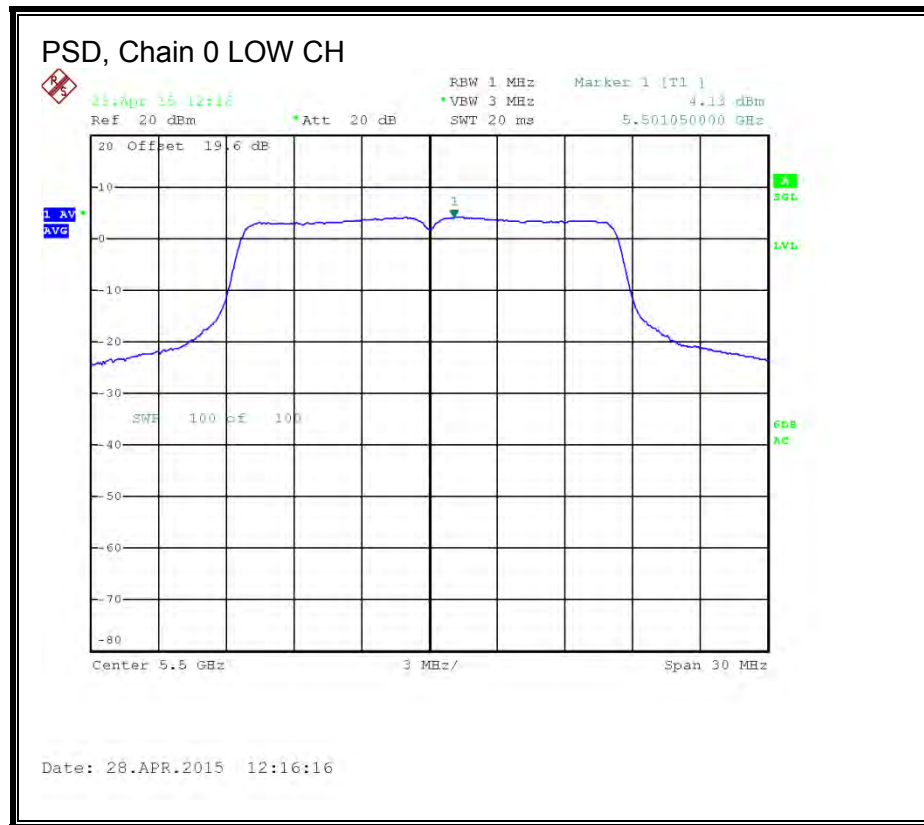



8.24. 802.11n HT20 CDD 3Tx MODE IN THE 5.6 GHz BAND

8.24.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

| Channel | Frequency (MHz) | 26 dB BW Chain 0 (MHz) | 26 dB BW Chain 1 (MHz) | 26 dB BW Chain 2 (MHz) |
|---------|--------------------|------------------------------|------------------------------|------------------------------|
| Low | 5500 | 44.76 | 42.84 | 46.32 |
| Mid | 5580 | 45.84 | 45.00 | 45.00 |
| High | 5700 | 45.60 | 44.22 | 46.26 |
| 144 | 5720 | 42.12 | 35.34 | 41.34 |