

Qaekie


User Manual

V5.3 Open Ear Wearable Stereo Headphones
(OWS Headphones)
Model No.: T22 OWS



Email: support@qaekie.com
Website: www.qaekie.com

Product Images

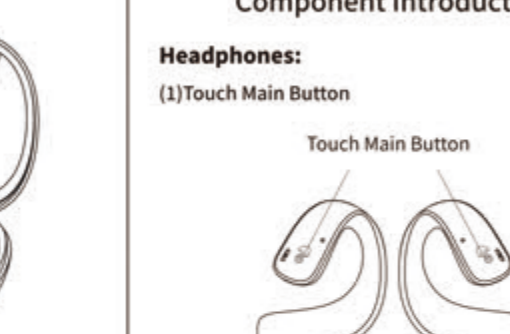


Thank you for purchasing our open ear wearable stereo headphones, which use open ear design to fit your ear and make it more comfortable when wearing. Please kindly read the user manual carefully before using it.

Product Overview

Component Introduction

Headphones:

(1)Touch Main Button

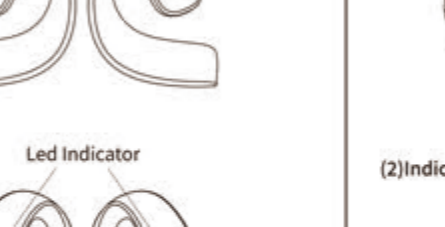

(2)Left Side/ Right Side




01

Product Overview


Component Introduction



(4)Led Indicator

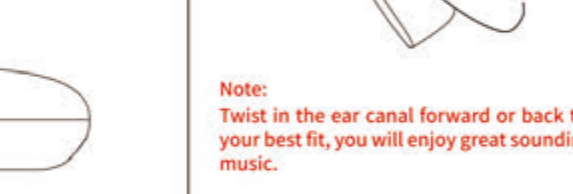

(5)Speaker

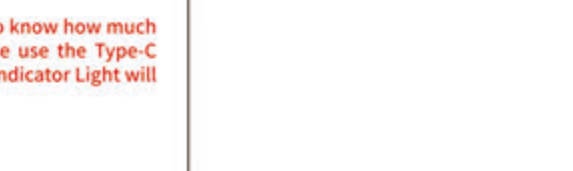


02

Product Overview

Charging box:

(1)Type-C Charging Port

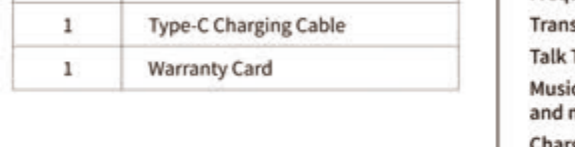

(2)Indicator Light




Note:
when the charging box is asleep, to know how much battery capacity it remains, please use the Type-C charging cable to charge, and the Indicator Light will be on and it will show you.

03

Product Overview

Perfect Fit:

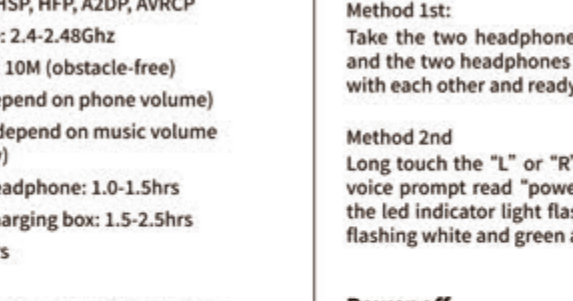

Note:
Twist in the ear canal forward or back to lock in for your best fit, you will enjoy great sounding deep bass music.

04

Package includes

1	OWS Headphones
1	User Manual
1	Type-C Charging Cable
1	Warranty Card

Wireless Version: V5.3 + EDR
Supported Profiles: HSP, HFP, A2DP, AVRCP
Frequency Response: 2.4-2.48Ghz
Transmission Range: 10M (obstacle-free)
Talk Time: 7-9hrs (depend on phone volume)
Music Time: 6-8hrs (depend on music volume and music frequency)
Charging Time for headphone: 1.0-1.5hrs
Charging Time for charging box: 1.5-2.5hrs
Standby Time: 150hrs

Charging box battery Capacity: 500mAh(charge the 2 earbuds for 2-3 times)
Rated Input: 5V/0.5A
Charging Voltage: DC 5V
Impedance: 32Ω±15%
Waterproof: IPX5 (no swimming)
Charging Port: Type-C Port
Net body weight: 84.7g
Phone Call: Supported
Multi-point Function: Not Supported

Charging box battery Capacity: 500mAh(charge the 2 earbuds for 2-3 times)
Rated Input: 5V/0.5A
Charging Voltage: DC 5V
Impedance: 32Ω±15%
Waterproof: IPX5 (no swimming)
Charging Port: Type-C Port
Net body weight: 84.7g
Phone Call: Supported
Multi-point Function: Not Supported

Charging box battery Capacity: 500mAh(charge the 2 earbuds for 2-3 times)
Rated Input: 5V/0.5A
Charging Voltage: DC 5V
Impedance: 32Ω±15%
Waterproof: IPX5 (no swimming)
Charging Port: Type-C Port
Net body weight: 84.7g
Phone Call: Supported
Multi-point Function: Not Supported

Charging box battery Capacity: 500mAh(charge the 2 earbuds for 2-3 times)
Rated Input: 5V/0.5A
Charging Voltage: DC 5V
Impedance: 32Ω±15%
Waterproof: IPX5 (no swimming)
Charging Port: Type-C Port
Net body weight: 84.7g
Phone Call: Supported
Multi-point Function: Not Supported

Charging box battery Capacity: 500mAh(charge the 2 earbuds for 2-3 times)
Rated Input: 5V/0.5A
Charging Voltage: DC 5V
Impedance: 32Ω±15%
Waterproof: IPX5 (no swimming)
Charging Port: Type-C Port
Net body weight: 84.7g
Phone Call: Supported
Multi-point Function: Not Supported

05

Specifications

Wireless Version: V5.3 + EDR
Supported Profiles: HSP, HFP, A2DP, AVRCP
Frequency Response: 2.4-2.48Ghz
Transmission Range: 10M (obstacle-free)
Talk Time: 7-9hrs (depend on phone volume)
Music Time: 6-8hrs (depend on music volume and music frequency)
Charging Time for headphone: 1.0-1.5hrs
Charging Time for charging box: 1.5-2.5hrs
Standby Time: 150hrs

Charging box battery Capacity: 500mAh(charge the 2 earbuds for 2-3 times)
Rated Input: 5V/0.5A
Charging Voltage: DC 5V
Impedance: 32Ω±15%
Waterproof: IPX5 (no swimming)
Charging Port: Type-C Port
Net body weight: 84.7g
Phone Call: Supported
Multi-point Function: Not Supported

Charging box battery Capacity: 500mAh(charge the 2 earbuds for 2-3 times)
Rated Input: 5V/0.5A
Charging Voltage: DC 5V
Impedance: 32Ω±15%
Waterproof: IPX5 (no swimming)
Charging Port: Type-C Port
Net body weight: 84.7g
Phone Call: Supported
Multi-point Function: Not Supported

Charging box battery Capacity: 500mAh(charge the 2 earbuds for 2-3 times)
Rated Input: 5V/0.5A
Charging Voltage: DC 5V
Impedance: 32Ω±15%
Waterproof: IPX5 (no swimming)
Charging Port: Type-C Port
Net body weight: 84.7g
Phone Call: Supported
Multi-point Function: Not Supported

Charging box battery Capacity: 500mAh(charge the 2 earbuds for 2-3 times)
Rated Input: 5V/0.5A
Charging Voltage: DC 5V
Impedance: 32Ω±15%
Waterproof: IPX5 (no swimming)
Charging Port: Type-C Port
Net body weight: 84.7g
Phone Call: Supported
Multi-point Function: Not Supported

Charging box battery Capacity: 500mAh(charge the 2 earbuds for 2-3 times)
Rated Input: 5V/0.5A
Charging Voltage: DC 5V
Impedance: 32Ω±15%
Waterproof: IPX5 (no swimming)
Charging Port: Type-C Port
Net body weight: 84.7g
Phone Call: Supported
Multi-point Function: Not Supported

Charging box battery Capacity: 500mAh(charge the 2 earbuds for 2-3 times)
Rated Input: 5V/0.5A
Charging Voltage: DC 5V
Impedance: 32Ω±15%
Waterproof: IPX5 (no swimming)
Charging Port: Type-C Port
Net body weight: 84.7g
Phone Call: Supported
Multi-point Function: Not Supported

06

Function and Operation

Power On

Method 1st:

Take the two headphones out of the charging box and the two headphones will automatically connect with each other and ready to pair.

Method 2nd

Long touch the "L" or "R" button for 3 seconds, the voice prompt read "power on", and simultaneously the led indicator light flash white first and turn into flashing white and green alternately.

Power off

Method 1st:

Put the two headphones into the charging box and the two headphones will shut down automatically.

Method 2nd:

Long touch the "L" or "R" button for 5 seconds, the voice prompt read "power off".

Method 3th:

Turn off the Bluetooth of the mobile phone for five minutes, and the two headphones will automatically turn off.

07

Function and Operation

Answer/Hang up/ Reject call

Answer call: Touch the "L" or "R" button one time when an incoming call ringing
Hang up call: Long touch the "L" or "R" button for 2 seconds when doing phone call
Reject an incoming call: Long touch the "L" or "R" button for 2 seconds

Music Play/Pause

Music Pause: Touch the "L" or "R" button twice when music is playing
Music Play: Touch the "L" or "R" button twice when music pause

Volume Up/Down-Last/Next Song

Volume Up: Touch "R" button one time to increase the volume, and when volume is Maximum, it read "Maximum"
Volume Down: Touch "L" button one time to decrease the volume, and no sound when volume is Minimum
Next Music: Long touch the "R" button for 2 seconds when music is playing
Previous Music: Long touch the "L" button for 2 seconds when music is playing

Activate Siri or Deactivate Siri

Activate iPhone Siri or Android Voice Assistant: Touch "L" button three times;
Last Number Redial: Touch "R" button three times

Re-charge the charging case

When the charging case is low in voltage, please recharge. To do this, simply insert the supplied Type-C charging cable into the Type-C charging port on the right of the case, and connect the other end into a USB main power source. Allow 1.5-2.5 hours for the case to recharge. The LED indicators will flash ORANGE and keep running and will be solid Orange after fully charged.

Contact Pin for Charging

Please make sure the battery of headphones is full before using the headphones in the first time. Put both headphones into the charging case. The indicator light will be solid green while charging and the indicator light will be off after fully charged.

Note:
when charging the headphones, you need to put the headphones at the right position inside the charging case. Press and move the headphones at the right position if necessary until green light is on.

08

Function and Operation

Power On

Method 1st:

Take the two headphones out of the charging box and the two headphones will automatically connect with each other and ready to pair.

Method 2nd

Long touch the "L" or "R" button for 3 seconds, the voice prompt read "power on", and simultaneously the led indicator light flash white first and one headphone quickly turn into flashing white and green alternately, as well as the other headphone led indicator light is off.

Method 3th:

Turn off the Bluetooth of the mobile phone for five minutes, and the two headphones will automatically turn off.

Method 4th:

Long touch the "L" or "R" button for 5 seconds, the voice prompt read "power off".

Method 5th:

Long touch the "L" or "R" button for 5 seconds, the voice prompt read "power off".

09

Function and Operation

Answer/Hang up/ Reject call

Answer call: Touch the "L" or "R" button one time when an incoming call ringing
Hang up call: Long touch the "L" or "R" button for 2 seconds when doing phone call
Reject an incoming call: Long touch the "L" or "R" button for 2 seconds

Music Play/Pause

Music Pause: Touch the "L" or "R" button twice when music is playing
Music Play: Touch the "L" or "R" button twice when music pause

Volume Up/Down-Last/Next Song

Volume Up: Touch "R" button one time to increase the volume, and when volume is Maximum, it read "Maximum"
Volume Down: Touch "L" button one time to decrease the volume, and no sound when volume is Minimum
Next Music: Long touch the "R" button for 2 seconds when music is playing
Previous Music: Long touch the "L" button for 2 seconds when music is playing

Activate Siri or Deactivate Siri

Activate iPhone Siri or Android Voice Assistant: Touch "L" button three times;
Last Number Redial: Touch "R" button three times

Re-charge the charging case

When the charging case is low in voltage, please recharge. To do this, simply insert the supplied Type-C charging cable into the Type-C charging port on the right of the case, and connect the other end into a USB main power source. Allow 1.5-2.5 hours for the case to recharge. The LED indicators will flash ORANGE and keep running and will be solid Orange after fully charged.

Contact Pin for Charging

Please make sure the battery of headphones is full before using the headphones in the first time. Put both headphones into the charging case. The indicator light will be solid green while charging and the indicator light will be off after fully charged.

Note:
when charging the headphones, you need to put the headphones at the right position inside the charging case. Press and move the headphones at the right position if necessary until green light is on.

10

Charging the headphone

Change Mono Mode into Stereo Mode

Take one headphone out of the charging box, pair it with your mobile phone, it is in mono mode now. Take out another one, it will power on automatically and connect with previous one. Now it is in stereo mode. Simple and easy!

Re-charge the charging case

When the charging case is low in voltage, please recharge. To do this, simply insert the supplied Type-C charging cable into the Type-C charging port on the right of the case, and connect the other end into a USB main power source. Allow 1.5-2.5 hours for the case to recharge. The LED indicators will flash ORANGE and keep running and will be solid Orange after fully charged.

Contact Pin for Charging

Please make sure the battery of headphones is full before using the headphones in the first time. Put both headphones into the charging case. The indicator light will be solid green while charging and the indicator light will be off after fully charged.

Re-charge the charging case

When the charging case is low in voltage, please recharge. To do this, simply insert the supplied Type-C charging cable into the Type-C charging port on the right of the case, and connect the other end into a USB main power source. Allow 1.5-2.5 hours for the case to recharge. The LED indicators will flash ORANGE and keep running and will be solid Orange after fully charged.

Contact Pin for Charging

Please make sure the battery of headphones is full before using the headphones in the first time. Put both headphones into the charging case. The indicator light will be solid green while charging and the indicator light will be off after fully charged.

Re-charge the charging case

When the charging case is low in voltage, please recharge. To do this, simply insert the supplied Type-C charging cable into the Type-C charging port on the right of the case, and connect the other end into a USB main power source. Allow 1.5-2.5 hours for the case to recharge. The LED indicators will flash ORANGE and keep running and will be solid Orange after fully charged.

Note:
when charging the headphones, you need to put the headphones at the right position inside the charging case. Press and move the headphones at the right position if necessary until green light is on.

11

Charging the headphone

Change Mono Mode into Stereo Mode

Take one headphone out of the charging box, pair it with your mobile phone, it is in mono mode now. Take out another one, it will power on automatically and connect with previous one. Now it is in stereo mode. Simple and easy!

Re-charge the charging case

When the charging case is low in voltage, please recharge. To do this, simply insert the supplied Type-C charging cable into the Type-C charging port on the right of the case, and connect the other end into a USB main power source. Allow 1.5-2.5 hours for the case to recharge. The LED indicators will flash ORANGE and keep running and will be solid Orange after fully charged.

Contact Pin for Charging

Please make sure the battery of headphones is full before using the headphones in the first time. Put both headphones into the charging case. The indicator light will be solid green while charging and the indicator light will be off after fully charged.

Re-charge the charging case

When the charging case is low in voltage, please recharge. To do this, simply insert the supplied Type-C charging cable into the Type-C charging port on the right of the case, and connect the other end into a USB main power source. Allow 1.5-2.5 hours for the case to recharge. The LED indicators will flash ORANGE and keep running and will be solid Orange after fully charged.

Contact Pin for Charging

Please make sure the battery of headphones is full before using the headphones in the first time. Put both headphones into the charging case. The indicator light will be solid green while charging and the indicator light will be off after fully charged.

Re-charge the charging case

When the charging case is low in voltage, please recharge. To do this, simply insert the supplied Type-C charging cable into the Type-C charging port on the right of the case, and connect the other end into a USB main power source. Allow 1.5-2.5 hours for the case to recharge. The LED indicators will flash ORANGE and keep running and will be solid Orange after fully charged.

Note:
when charging the headphones, you need to put the headphones at the right position inside the charging case. Press and move the headphones at the right position if necessary until green light is on.

12

Charging the headphone

Change Mono Mode into Stereo Mode

Take one headphone out of the charging box, pair it with your mobile phone, it is in mono mode now. Take out another one, it will power on automatically and connect with previous one. Now it is in stereo mode. Simple and easy!

Re-charge the charging case

When the charging case is low in voltage, please recharge. To do this, simply insert the supplied Type-C charging cable into the Type-C charging port on the right of the case, and connect the other end into a USB main power source. Allow 1.5-2.5 hours for the case to recharge. The LED indicators will flash ORANGE and keep running and will be solid Orange after fully charged.

Contact Pin for Charging

Please make sure the battery of headphones is full before using the headphones in the first time. Put both headphones into the charging case. The indicator light will be solid green while charging and the indicator light will be off after fully charged.

Re-charge the charging case

When the charging case is low in voltage, please recharge. To do this, simply insert the supplied Type-C charging cable into the Type-C charging port on the right of the case, and connect the other end into a USB main power source. Allow 1.5-2.5 hours for the case to recharge. The LED indicators will flash ORANGE and keep running and will be solid Orange after fully charged.

Contact Pin for Charging

Please make sure the battery of headphones is full before using the headphones in the first time. Put both headphones into the charging case. The indicator light will be solid green while charging and the indicator light will be off after fully charged.

Re-charge the charging case

When the charging case is low in voltage, please recharge. To do this, simply insert the supplied Type-C charging cable into the Type-C charging port on the right of the case, and connect the other end into a USB main power source. Allow 1.5-2.5 hours for the case to recharge. The LED indicators will flash ORANGE and keep running and will be solid Orange after fully charged.

Note:
when charging the headphones, you need to put the headphones at the right position inside the charging case. Press and move the headphones at the right position if necessary until green light is on.

13

Pairing with Mobile Phone

Power On

Method 1st:

Take the two headphones out of the charging box and the two headphones will automatically connect with each other and ready to pair.

Method 2nd

Long touch the "L" or "R" button for 3 seconds, the voice prompt read "power on", and simultaneously the led indicator light flash white first and one headphone quickly turn into flashing white and green alternately, as well as the other headphone led indicator light is off.

Method 3th:

Turn off the Bluetooth of the mobile phone for five minutes, and the two headphones will automatically turn off.

Method 4th:

Long touch the "L" or "R" button for 5 seconds, the voice prompt read "power off".

Method 5th:

Long touch the "L" or "R" button for 5 seconds, the voice prompt read "power off".

14

Pairing with Mobile Phone

Power On

Method 1st:

Take the two headphones out of the charging box and the two headphones will automatically connect with each other and ready to pair.

Method 2nd

Long touch the "L" or "R" button for 3 seconds, the voice prompt read "power on", and simultaneously the led indicator light flash white first and one headphone quickly turn into flashing white and green alternately, as well as the other headphone led indicator light is off.

Method 3th:

Turn off the Bluetooth of the mobile phone for five minutes, and the two headphones will automatically turn off.

Method 4th:

Long touch the "L" or "R" button for 5 seconds, the voice prompt read "power off".

Method 5th:

Long touch the "L" or "R" button for 5 seconds, the voice prompt read "power off".

15

Indicator

Charging box Indicator Status

Charging: Orange Indicator light will keep running.
Charging completed: Indicator light will be solid on orange

Headphone Indicator Status

Headphone not paired: Indicator light flash white and green alternately on one headphones
Headphone ready to pair: White and green light flash alternately on one side
Successful pairing with mobile phone: Indicator light will be off
Power on: White and green light flash alternately
Power off: Green light flash 3 times
Music play/pause: Indicator light will be off
Charging the headphone: Indicator light will be green
Charging completed: Indicator light will be off

Voice Prompt

Power on: Long touch the "L" or "R" button for 3 seconds
Pairing: When two headphone is ready to pair with mobile phone
Connected: When connected with mobile phone successfully
Disconnected: When disconnect from the mobile phone
0,1,2,3,4,5,6,7,8,9: When an incoming call
Volume Maximum: Volume up to the max level
Volume Minimum (no sound): Volume down to the min level
Battery Low: When battery is run out, the headphone will read
Power Off: Long touch the "L" or "R" button for 5 seconds

Attentions

1.If the size of headphone is not suitable for your ear, please adjust the headphone to the suitable position to match your ear or contact us for solution.
2.Before charging, please check the charger suitable for headphone.
3.Please use original charger, if you use other charger for charging, maybe you will damage headphone. That is DANGEROUS and You have violate the local regulation.
4.OWS headphones battery is Li-ion battery inside. Don't take it out. Protect the goods against spoilage.
5.Keep your headphone off when you don't use it and put the headphone into the charging box to prevent loss and charge the headphone in time. If you do not use it for a long time, charge it before use again.
6.Don't throw it into fire.
7.The headphone can not swim under the water, and it is sweat proof standard.
8.Do not approach hard and sharp objects, which may damage the product.
9.Please store in a cool and dry place.
10.Do not disassemble or modify the device and its accessories without authorization, otherwise the device and accessories will not be covered by the company's warranty.

Correct disposal of this product

Warning (Waste Electrical & Electronic Equipment)
This marking shown on the product or its literature, indicates that it should not be disposed with other household wastes at the end of its working life. To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate this from other types of wastes and recycle it responsibly to promote the sustainable reuse of material resources. Household user should contact either the retailer where they purchased this product or their local government office for details of where and how they can take this item for environmentally safe recycling. Business users should contact their supplier and check the terms and conditions of the purchase contract. This product should not be mixed with other commercial wastes for disposal.

Warning

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation