


11G_Ant1_2412_30~1000




11G_Ant1_2412_1000~26500

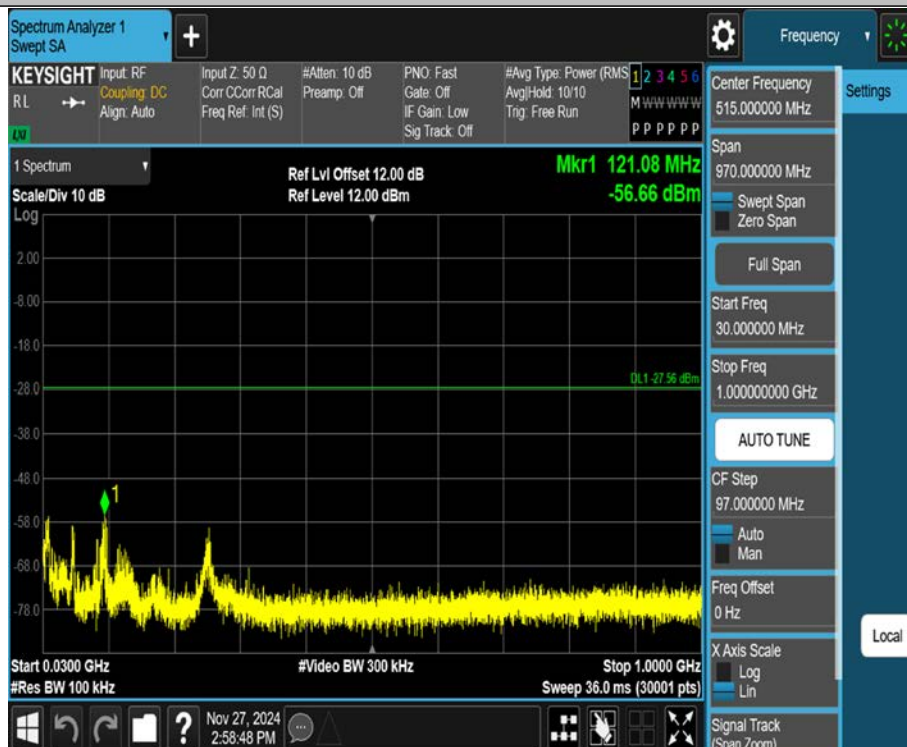

11G_Ant1_2437_0~Reference




11G_Ant1_2437_30~1000

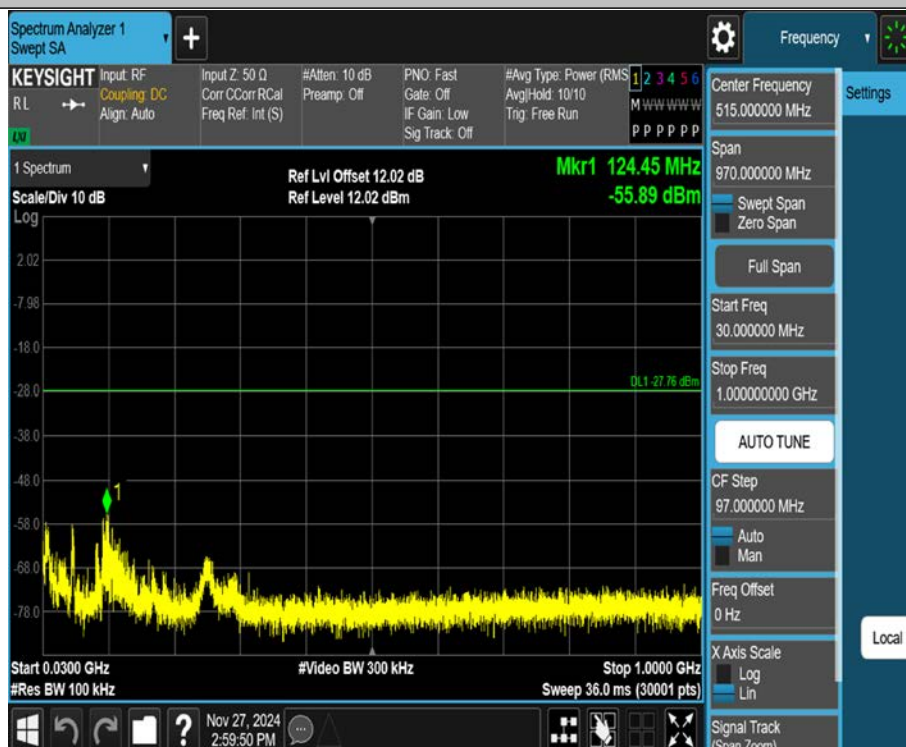


11G_Ant1_2437_1000~26500



11G_Ant1_2462_0~Reference

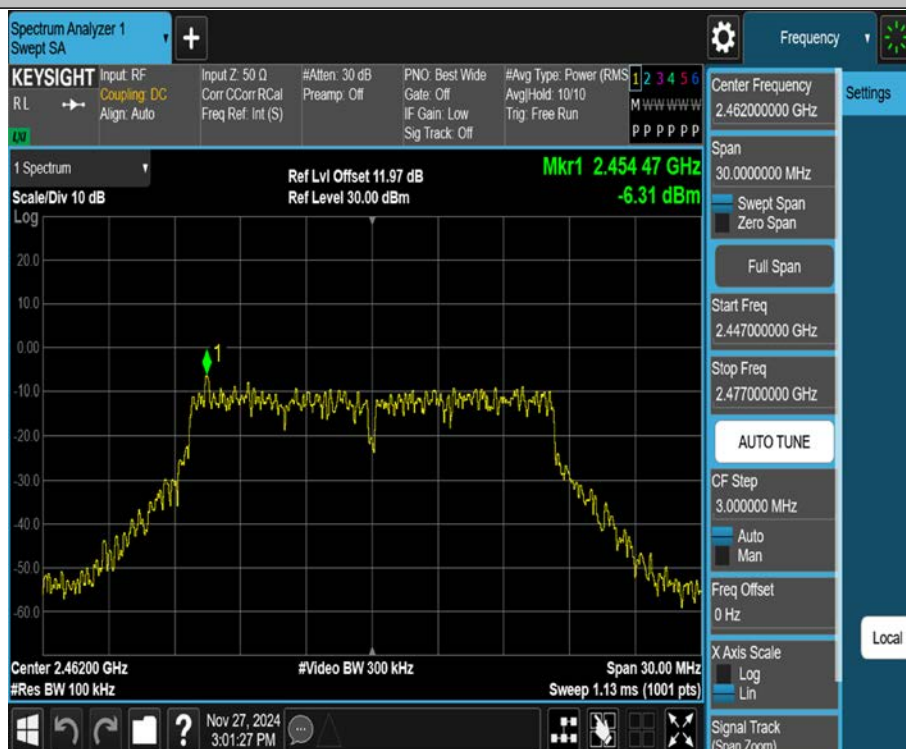


11G_Ant1_2462_30~1000

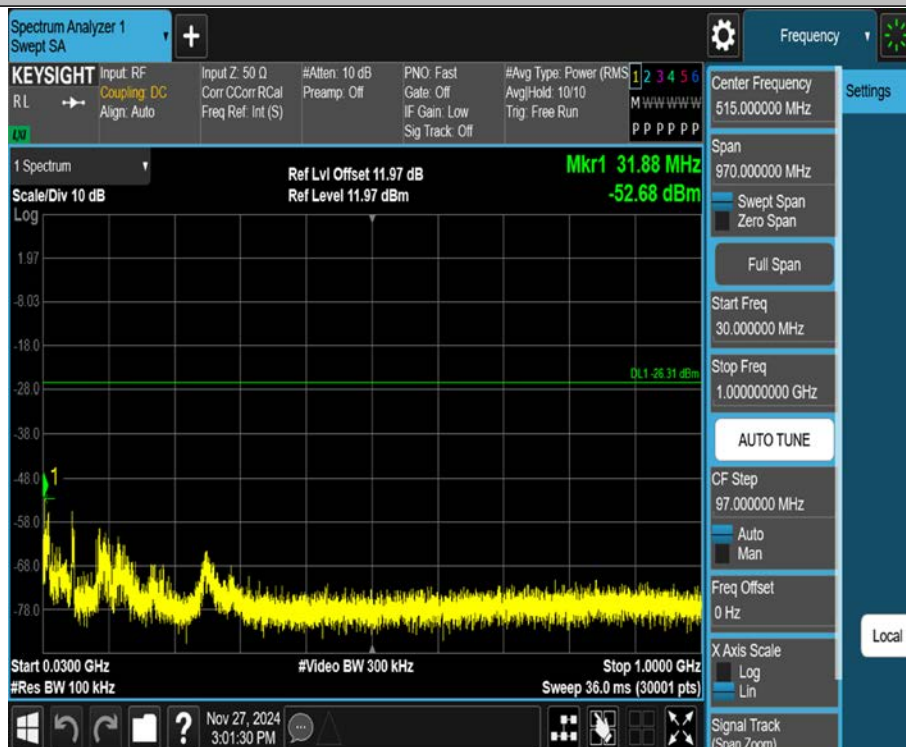


11G_Ant1_2462_1000~26500



11N20SISO_Ant1_2412_0~Reference

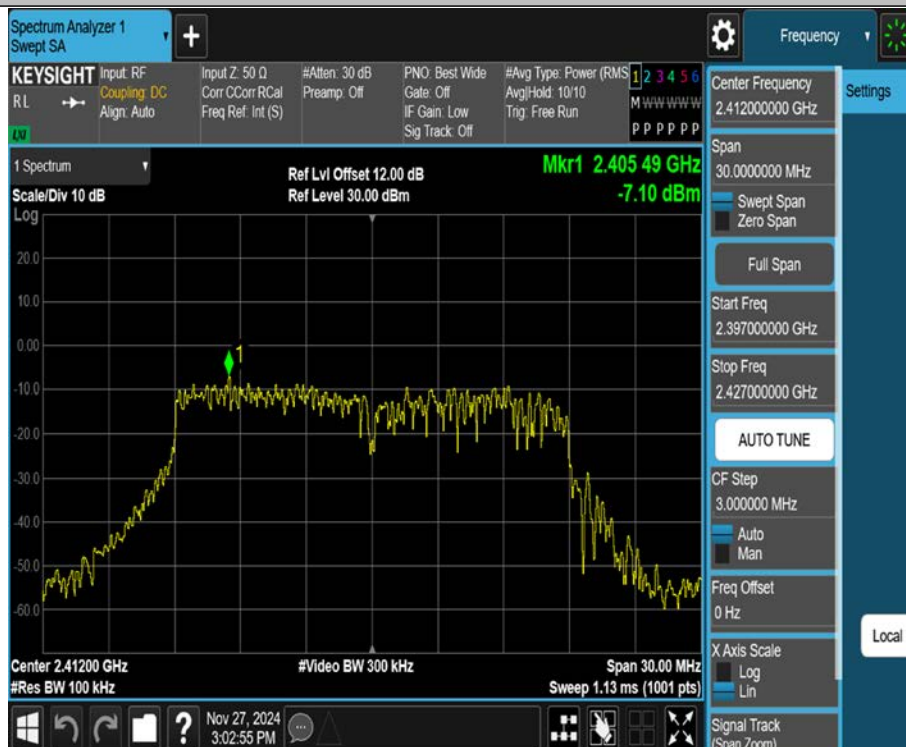


11N20SISO_Ant1_2412_30~1000

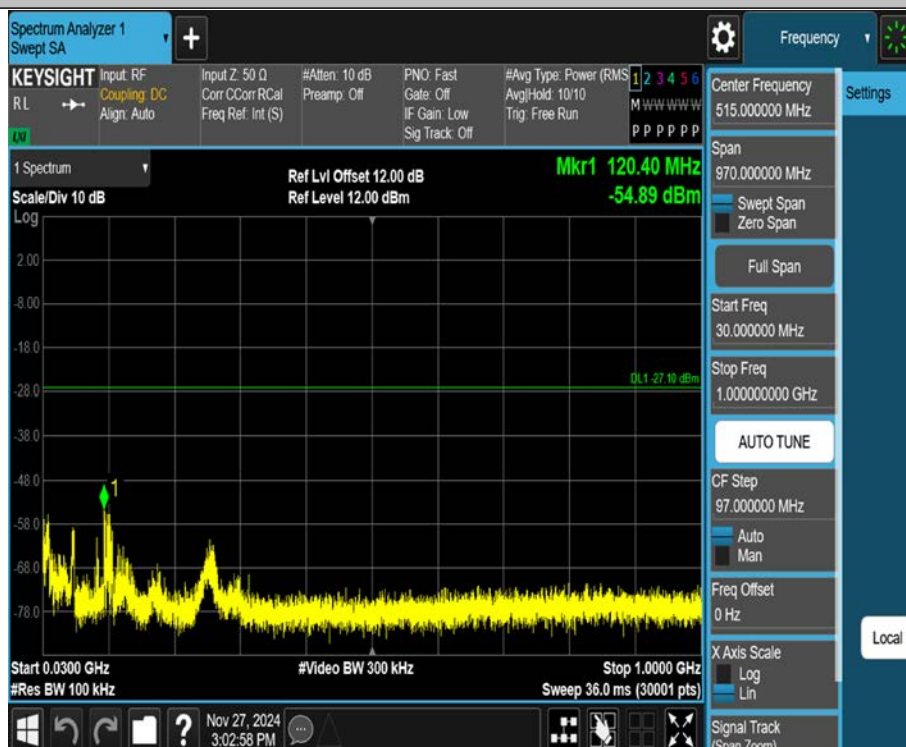


11N20SISO_Ant1_2412_1000~26500



11N20SISO_Ant1_2437_0~Reference

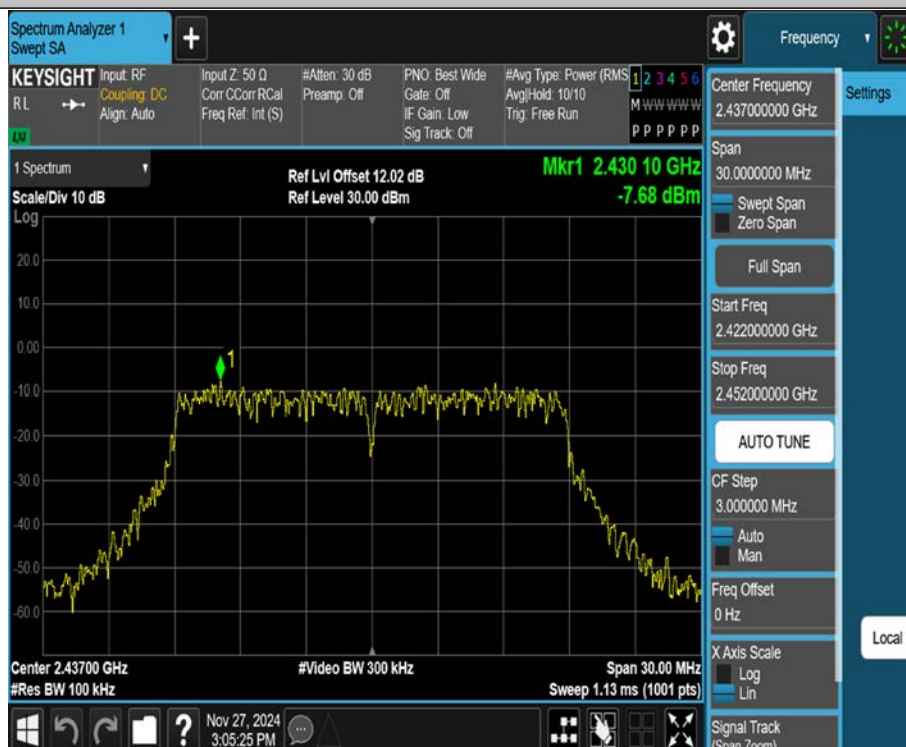

11N20SISO_Ant1_2437_30~1000

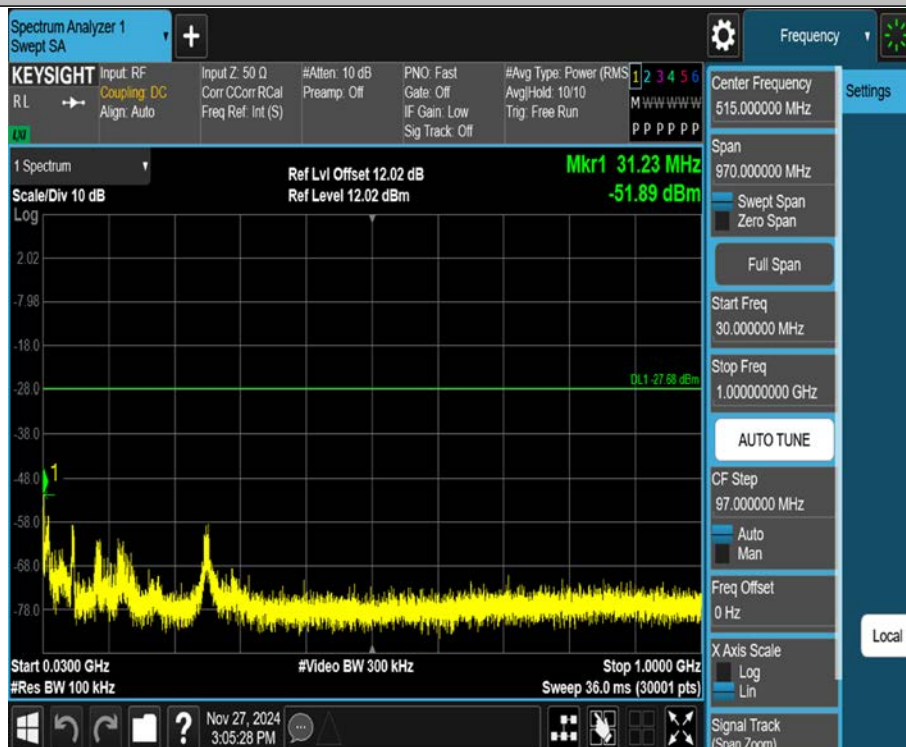


11N20SISO_Ant1_2437_1000~26500



11N20SISO_Ant1_2462_0~Reference




11N20SISO_Ant1_2462_30~1000

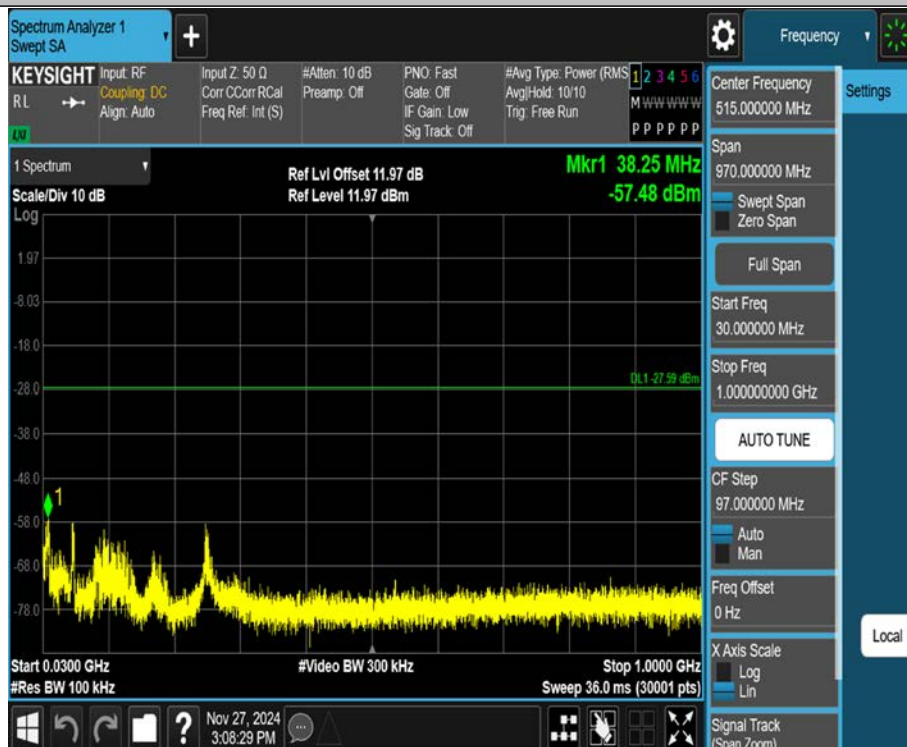


11N20SISO_Ant1_2462_1000~26500



11N40SISO_Ant1_2422_0~Reference

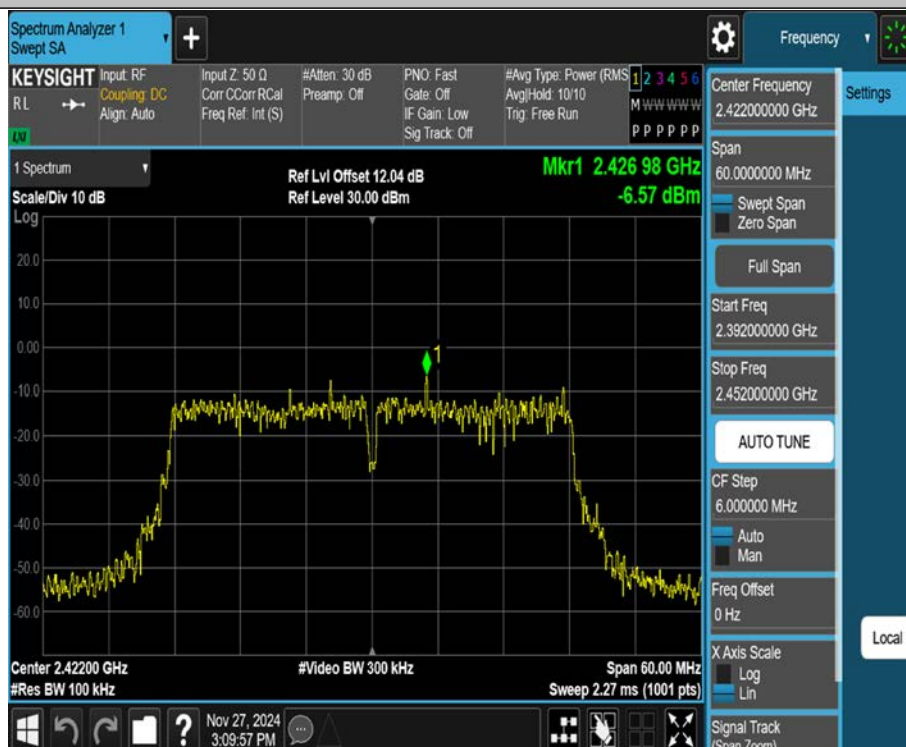

11N40SISO_Ant1_2422_30~1000

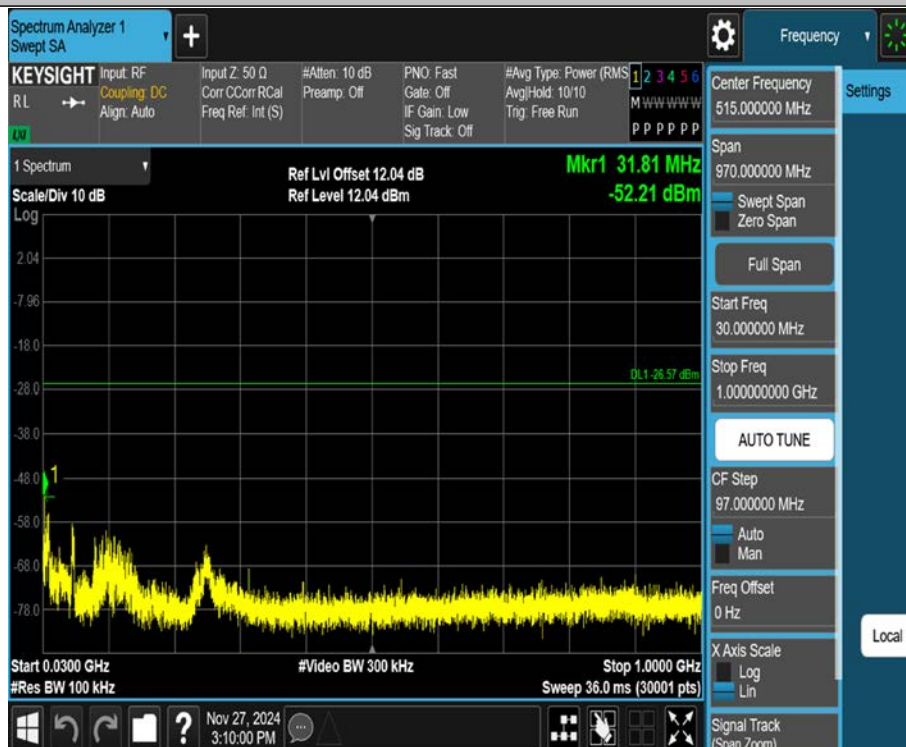


11N40SISO_Ant1_2422_1000~26500



11N40ISO_Ant1_2437_0~Reference




11N40ISO_Ant1_2437_30~1000

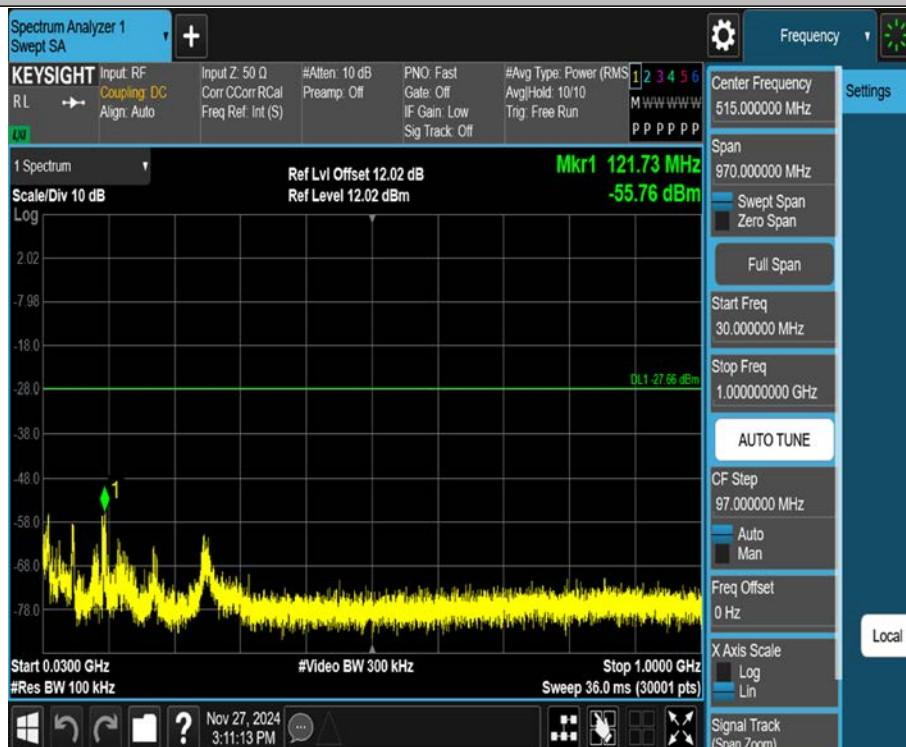


11N40SISO_Ant1_2437_1000~26500



11N40SISO_Ant1_2452_0~Reference

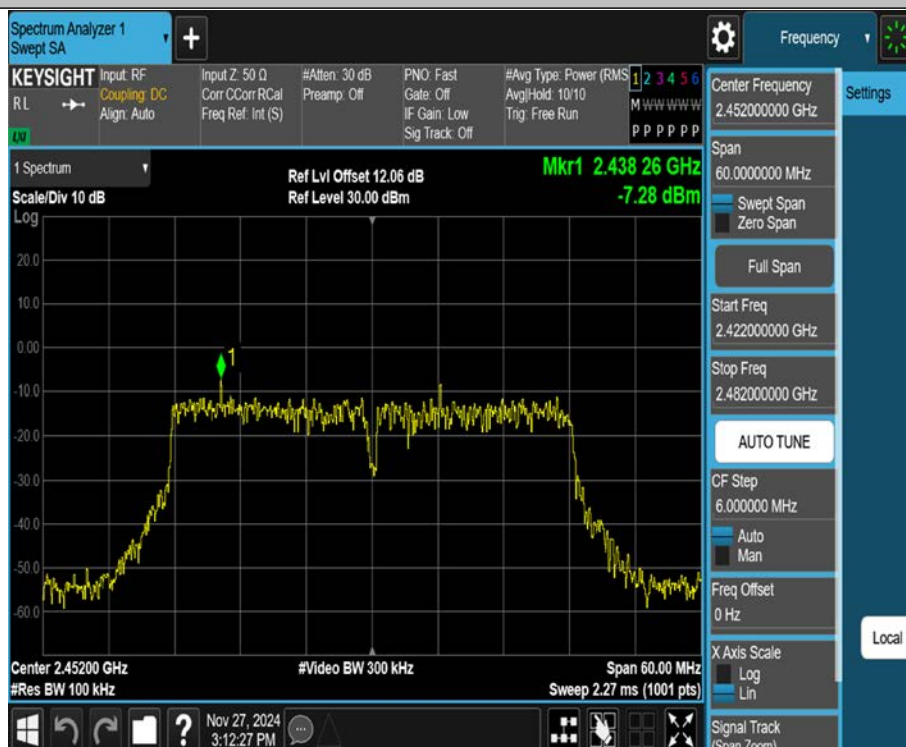

11N40SISO_Ant1_2452_30~1000

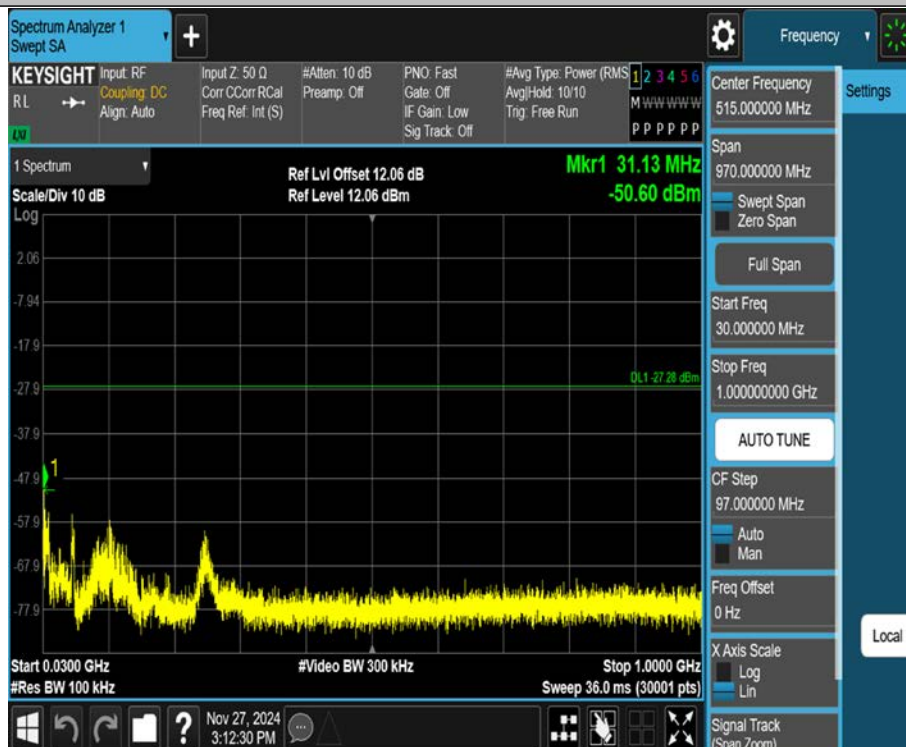


11N40SISO_Ant1_2452_1000~26500



11AC20SISO_Ant1_2412_0~Reference




11AC20SISO_Ant1_2412_30~1000

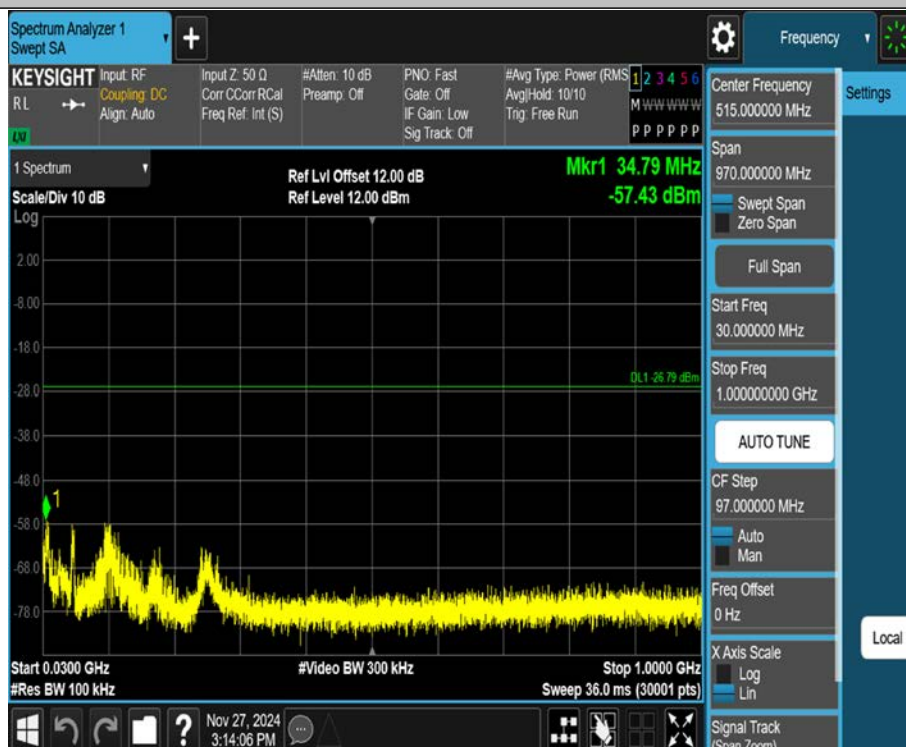


11AC20SISO_Ant1_2412_1000~26500



11AC20SISO_Ant1_2437_0~Reference

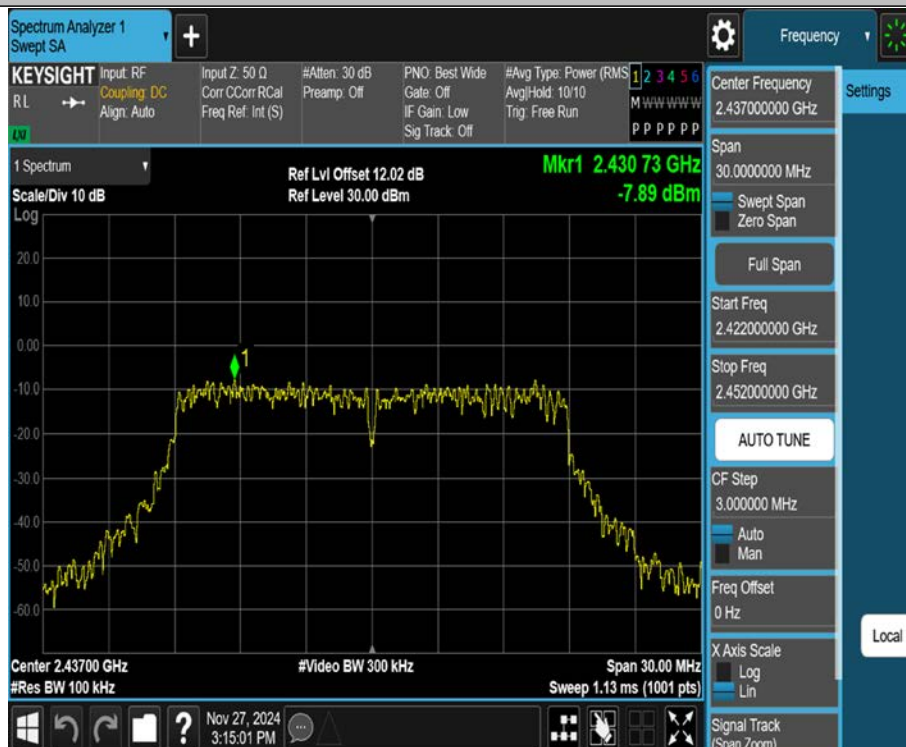


11AC20SISO_Ant1_2437_30~1000

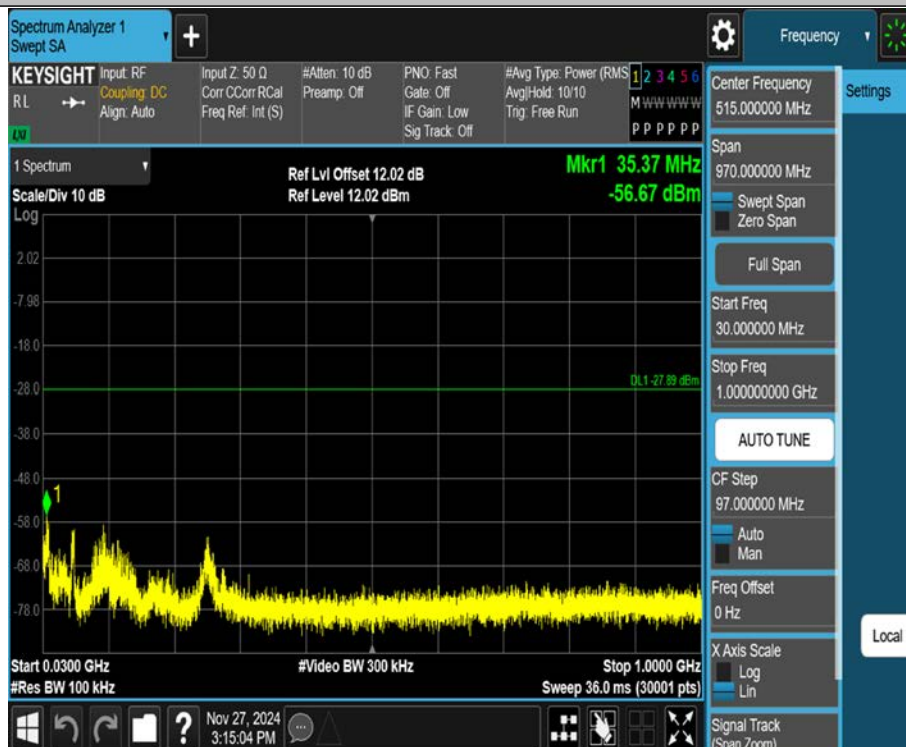


11AC20SISO_Ant1_2437_1000~26500



11AC20SISO_Ant1_2462_0~Reference

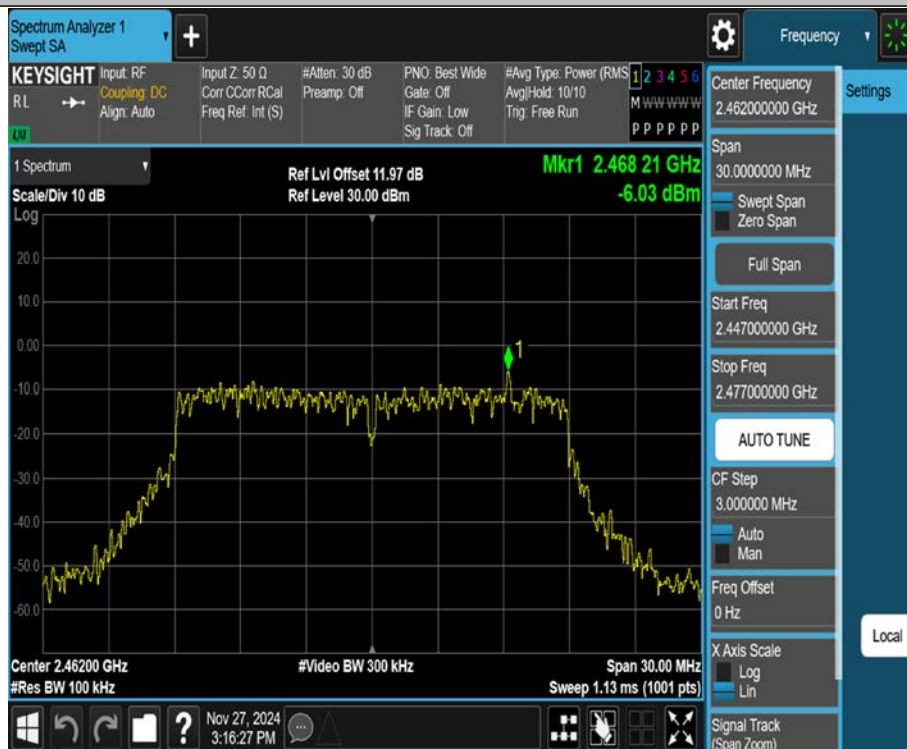

11AC20SISO_Ant1_2462_30~1000

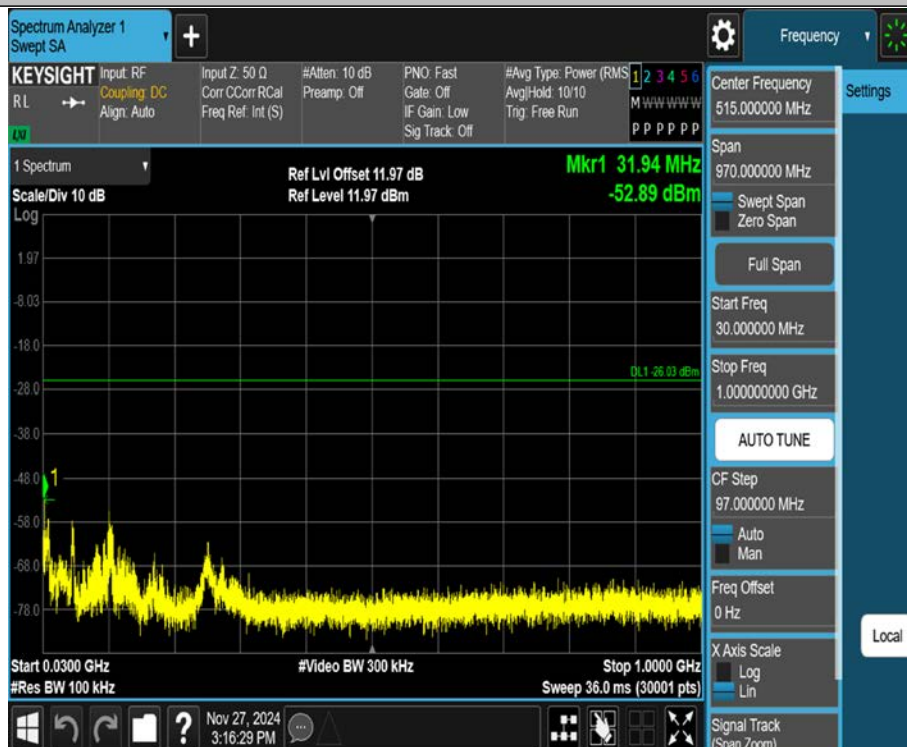

11AC20SISO_Ant1_2462_1000~26500



11B_Ant1_Low_2412



11B_Ant1_High_2462




11G_Ant1_Low_2412



11G_Ant1_High_2462



11N20ISO_Ant1_Low_2412

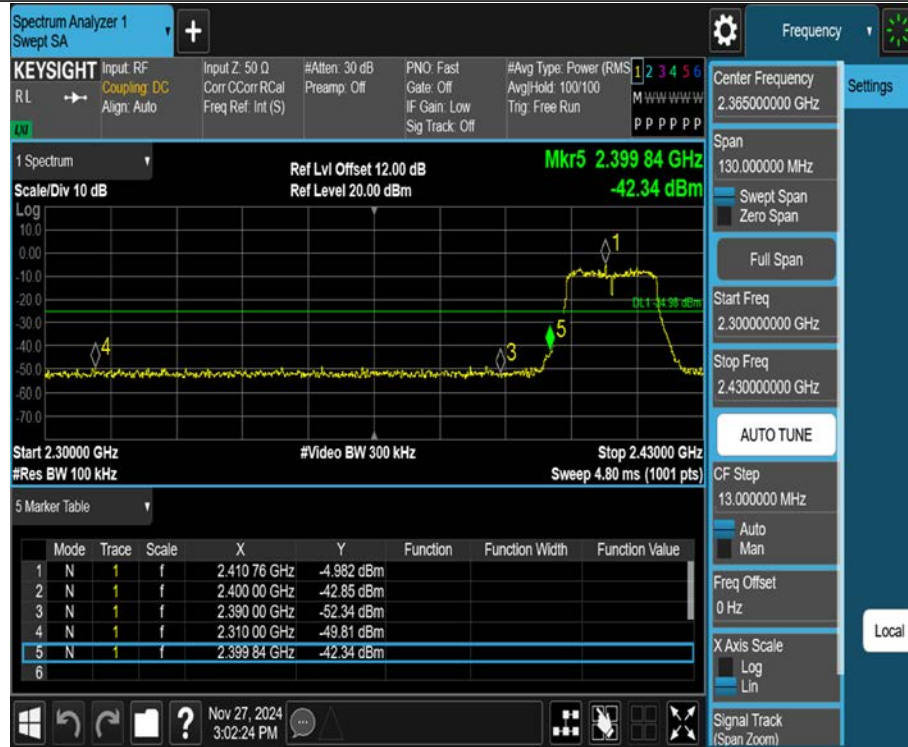

11N20ISO_Ant1_High_2462



11N40ISO_Ant1_Low_2422



11N40ISO_Ant1_High_2452



3.4 6dB Bandwidth

3.4.1 Limit

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz

3.4.2 Test Procedure

Test Method	
☒ Conducted Measurement	☐ Radiated Measurement
Test Channels	
☒ Lowest, Middle and Highest Channel	☐ Lowest and Highest Channel
Environmental conditions	
☒ Normal	☐ Normal and Extreme
Note: ☒ : Test ☐ : No Test	

a) The EUT was connected to the tonscend test system, and the spectrum analyser is set as follow:


Centre Frequency	The centre frequency of the channel under test
RBW	100kHz
VBW	300kHz
Frequency span	2x Nominal Channel Bandwidth
Detector Mode	Peak
Trace Mode	Max Hold
Sweep Time	Auto Couple

b) Wait for the trace to stabilize then find the peak value of the trace and place the analyser marker on this peak.

c) Use the -6dB bandwidth function of the spectrum analyser to measure the 6dB Bandwidth of the EUT. This value shall be recorded.

d) Make sure that the power envelope is sufficiently above the noise floor of the analyser to avoid the noise signals left and right from the power envelope being taken into account by this measurement.

3.4.3 Test Setup

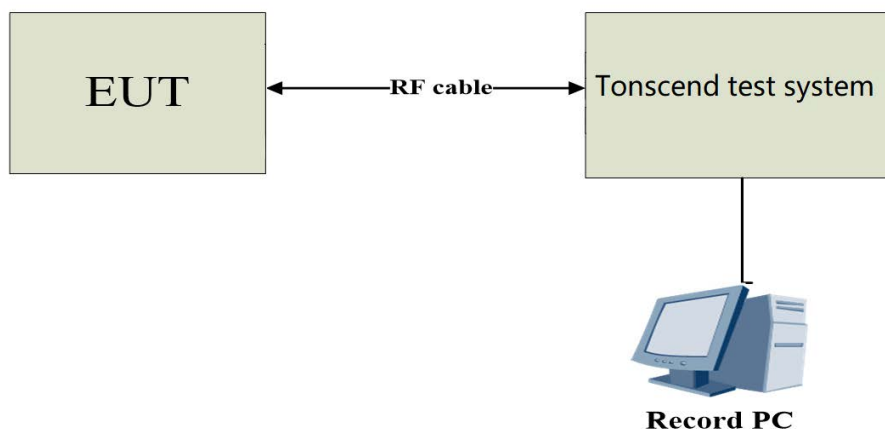

3.4.4 Test Result

DTS Bandwidth

Test Mode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	11.080	2405.960	2417.040	0.5	PASS
		2437	10.040	2431.960	2442.000	0.5	PASS
		2462	10.080	2456.960	2467.040	0.5	PASS
11G	Ant1	2412	16.360	2403.800	2420.160	0.5	PASS
		2437	16.320	2428.840	2445.160	0.5	PASS
		2462	16.320	2453.840	2470.160	0.5	PASS
11N20SISO	Ant1	2412	17.560	2403.200	2420.760	0.5	PASS
		2437	17.600	2428.200	2445.800	0.5	PASS
		2462	16.920	2453.600	2470.520	0.5	PASS
11N40SISO	Ant1	2422	35.040	2404.480	2439.520	0.5	PASS
		2437	36.080	2418.840	2454.920	0.5	PASS
		2452	35.360	2434.400	2469.760	0.5	PASS



11B_Ant1_2462



11G_Ant1_2412

