

APPENDIX I: LTE DOWNLINK ONLY CARRIER AGGREGATION TEST REDUCTION METHODOLOGY

SAR test exclusion for LTE downlink Carrier Aggregation is determined by power measurements according to the number of component carriers (CCs) supported by the product implementation. Per April 2018 TCBC Workshop Notes, the following test reduction methodology was applied to determine the combinations required for conducted power measurements.

LTE DLCA Test Reduction Methodology:

- The supported combinations were arranged by the number of component carriers in columns.
- Any limitations on the PCC or SCC for each combination were identified alongside the combination (e.g. CA_2A-2A-4A-12A, but B12 can only be configured as a SCC).
- Power measurements were performed for "supersets" (LTE CA combinations with multiple components carriers) and any "subsets" (LTE CA combinations with fewer component carriers) that were not completely covered by the supersets.
- Only subsets that have the exact same components as a superset were excluded for measurement.
- When there were certain restrictions on component carriers that existed in the superset that were not applied for the subset, the subset configuration was additionally evaluated.
- Both inter-band and intra-band downlink carrier aggregation scenarios were considered.
- Downlink CA combinations for SISO and 4x4 Downlink MIMO operations were measured independently, per May 2017 TCBC Workshop notes.

Table I-1 – Example of Exclusion Table for SISO Configurations

Index	BCC	Supported Channel Bandwidth (MHz)				Restriction	Completely Covered by Measurement Superset
		CC1	CC2	CC3	CC4		
20249	CA_2A-2A	5, 10, 15, 20	5, 10, 15, 20				Yes
20250	CA_2A-2A	5, 10, 15, 20	5, 10, 15, 20				Yes
20251	CA_2A-2A	5, 10, 15, 20	5, 10, 15, 20				Yes
20252	CA_2A-2A	5, 10, 15, 20	5, 10, 15, 20				Yes
20253	CA_2A-2A	5, 10, 15, 20	5, 10, 15, 20				Yes
20254	CA_2A-2A	5, 10, 15, 20	5, 10, 15, 20				Yes
20255	CA_2A-2A	5, 10, 15, 20	5, 10, 15, 20				Yes
20256	CA_2A-2A	5, 10, 15, 20	5, 10, 15, 20				Yes
20257	CA_2A-2A	5, 10, 15, 20	5, 10, 15, 20				Yes
20258	CA_2A-2A	5, 10, 15, 20	5, 10, 15, 20				Yes
20259	CA_2A-2A	5, 10, 15, 20	5, 10, 15, 20				Yes
20260	CA_2A-2A	5, 10, 15, 20	5, 10, 15, 20				Yes
20261	CA_2A-2A	5, 10, 15, 20	5, 10, 15, 20				Yes
20262	CA_2A-2A	5, 10, 15, 20	5, 10, 15, 20				Yes
20263	CA_2A-2A	5, 10, 15, 20	5, 10, 15, 20				Yes
20264	CA_2A-2A	5, 10, 15, 20	5, 10, 15, 20				Yes
20265	CA_2A-2A	5, 10, 15, 20	5, 10, 15, 20				Yes
20266	CA_2A-2A	5, 10, 15, 20	5, 10, 15, 20				Yes
20267	CA_2A-2A	5, 10, 15, 20	5, 10, 15, 20				Yes
20268	CA_2A-2A	5, 10, 15, 20	5, 10, 15, 20				Yes
20269	CA_2A-2A	5, 10, 15, 20	5, 10, 15, 20				Yes
20270	CA_2A-2A	5, 10, 15, 20	5, 10, 15, 20				Yes
20271	CA_2A-2A	5, 10, 15, 20	5, 10, 15, 20				Yes
20272	CA_2A-2A	5, 10, 15, 20	5, 10, 15, 20				Yes
20273	CA_2A-2A	5, 10, 15, 20	5, 10, 15, 20				Yes
20274	CA_2A-2A	5, 10, 15, 20	5, 10, 15, 20				Yes
20275	CA_2A-2A	5, 10, 15, 20	5, 10, 15, 20				Yes
20276	CA_2A-2A	5, 10, 15, 20	5, 10, 15, 20				Yes
20277	CA_2A-2A	5, 10, 15, 20	5, 10, 15, 20				Yes
20278	CA_2A-2A	5, 10, 15, 20	5, 10, 15, 20				Yes
20279	CA_2A-2A	5, 10, 15, 20	5, 10, 15, 20				Yes
20280	CA_2A-2A	5, 10, 15, 20	5, 10, 15, 20				Yes
20281	CA_2A-2A	5, 10, 15, 20	5, 10, 15, 20				Yes
20282	CA_2A-2A	5, 10, 15, 20	5, 10, 15, 20				Yes
20283	CA_2A-2A	5, 10, 15, 20	5, 10, 15, 20				Yes
20284	CA_2A-2A	5, 10, 15, 20	5, 10, 15, 20				Yes
20285	CA_2A-2A	5, 10, 15, 20	5, 10, 15, 20				Yes
20286	CA_2A-2A	5, 10, 15, 20	5, 10, 15, 20				Yes
20287	CA_2A-2A	5, 10, 15, 20	5, 10, 15, 20				Yes
20288	CA_2A-2A	5, 10, 15, 20	5, 10, 15, 20				Yes
20289	CA_2A-2A	5, 10, 15, 20	5, 10, 15, 20				Yes
20290	CA_2A-2A	5, 10, 15, 20	5, 10, 15, 20				Yes
20291	CA_2A-2A	5, 10, 15, 20	5, 10, 15, 20				Yes
20292	CA_2A-2A	5, 10, 15, 20	5, 10, 15, 20				Yes
20293	CA_2A-2A	5, 10, 15, 20	5, 10, 15, 20				Yes
20294	CA_2A-2A	5, 10, 15, 20	5, 10, 15, 20				Yes
20295	CA_2A-2A	5, 10, 15, 20	5, 10, 15, 20				Yes
20296	CA_2A-2A	5, 10, 15, 20	5, 10, 15, 20				Yes
20297	CA_2A-2A	5, 10, 15, 20	5, 10, 15, 20				Yes
20298	CA_2A-2A	5, 10, 15, 20	5, 10, 15, 20				Yes
20299	CA_2A-2A	5, 10, 15, 20	5, 10, 15, 20				Yes

Table I-2 – Example of Exclusion Table for 4x4 Downlink MIMO Configurations

Index	2CC	Supported Channel Bandwidth (MHz)				Restriction	Completely Covered by Measurement Superset	Index	3CC	Supported Channel Bandwidth (MHz)				Restriction	Completely Covered by Measurement Superset	Index	4CC	Supported Channel Bandwidth (MHz)				Restriction	Completely Covered by Measurement Superset
		CC1	CC2	CC3	CC4					CC1	CC2	CC3	CC4					CC1	CC2	CC3	CC4		
2CC#M0	CA_1A-1A	5, 10, 15, 20	5, 10, 15, 20				2CC#M0	CA_1A-2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		No	2CC#M1	CA_1A-2A-6A	5, 10, 15, 20	5, 10	5, 10, 15, 20	5, 10, 15, 20		No		
2CC#M1	CA_1A-2A	5, 10, 15, 20	5, 10, 15, 20				2CC#M2	CA_1A-2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		No	2CC#M2	CA_2A-9A-16A	5, 10, 15, 20	5, 10	5, 10, 15, 20	5, 10, 15, 20		No		
2CC#M2	CA_1A-2A	5, 10, 15, 20	5, 10, 15, 20				2CC#M3	CA_2A-2A-12A	5, 10, 15, 20	5, 10, 15, 20	5, 10		No	2CC#M3	CA_1A-2A-6A	5, 10, 15, 20	5, 10	5, 10, 15, 20	5, 10, 15		No		
2CC#M3	CA_1A-2A	5, 10, 15, 20	5, 10, 15, 20				2CC#M4	CA_1A-2A-13A	5, 10, 15, 20	5, 10, 15, 10			No	2CC#M4	CA_2A-5A-16A	5, 10, 15, 20	5, 10	5, 10, 15, 20	5, 10, 15		No		
2CC#M4	CA_1A-2A-1A	5, 10, 15, 20	5, 10, 15, 20				2CC#M5	CA_1A-2A-9A	5, 10, 15, 20	5, 10, 15, 20			No	2CC#M5	CA_1A-2A-6A	5, 10, 15, 20	5, 10	5, 10, 15, 20	5, 10, 15, 20		No		
2CC#M5	CA_2A-5A	5, 10, 15, 20	5, 10				2CC#M6	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		No	2CC#M6	CA_2A-5A-6A	5, 10, 15, 20	5, 10	5, 10, 15, 20	5, 10, 15, 20		No		
2CC#M6	CA_1A-2A-1A	5, 10, 15, 20	5, 10				2CC#M7	CA_2A-16A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		No										
2CC#M7	CA_2A-13A	5, 10, 15, 20	10				2CC#M8	CA_2A-16A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		No										
2CC#M8	CA_2A-13A	5, 10	5, 10				2CC#M9	CA_2A-2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		No										
2CC#M10	CA_2A-29A	5, 10, 15, 20	5, 10			B29 SEC Only	2CC#M12	CA_2A-2A-16A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		No										
2CC#M11	CA_2A-7A	5, 10, 15, 20	5, 10				2CC#M13	CA_1A-2A-71A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		No										
2CC#M12	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20				2CC#M14	CA_1A-2A-71A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		No										
2CC#M13	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20				2CC#M15	CA_2A-4A-29A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		B29 SEC Only										
2CC#M14	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20				2CC#M16	CA_2A-4A-71A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		No										
2CC#M15	CA_2A-16A	5, 10, 15, 20	5, 10, 15, 20				2CC#M17	CA_2A-15A	5, 10, 15, 20	5, 10	5, 10		2CC#M18	CA_2A-15A	5, 10, 15, 20	5, 10					2CC#M18		
2CC#M16	CA_2A-71A	5, 10, 15, 20	5, 10, 15, 20				2CC#M18	CA_2A-5A-6A	5, 10, 15, 20	5, 10	5, 10, 15, 20		No										
2CC#M17	CA_2A-16A	5, 10	5, 10, 15, 20				2CC#M19	CA_2A-12A-16A	5, 10, 15, 20	5, 10	5, 10, 15, 20		No										
2CC#M18	CA_1A-16A	5, 10	5, 10, 15, 20				2CC#M20	CA_2A-13A-6A	5, 10, 15, 20	5, 10	5, 10, 15, 20		No										
2CC#M19	CA_30A-16A	5, 10	5, 10, 15, 20				2CC#M21	CA_2A-13A-6A	5, 10, 15, 20	5, 10	5, 10, 15, 20		No										
2CC#M20	CA_16A	5, 10, 15, 20	5, 10, 15, 20				2CC#M22	CA_2A-9A-9A-16A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		No										
2CC#M21	CA_16A	5, 10, 15, 20	5, 10, 15, 20				2CC#M23	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M24	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M24			
2CC#M22	CA_16A	5, 10, 15, 20	5, 10, 15, 20				2CC#M24	CA_2A-16A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M25	CA_2A-16A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M25			
2CC#M23	CA_16A	5, 10, 15, 20	5, 10, 15, 20				2CC#M25	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M26	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M26			
							2CC#M26	CA_2A-16A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M27	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M27			
							2CC#M27	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M28	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M28			
							2CC#M28	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M29	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M29			
							2CC#M29	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M30	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M30			
							2CC#M30	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M31	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M31			
							2CC#M31	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M32	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M32			
							2CC#M32	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M33	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M33			
							2CC#M33	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M34	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M34			
							2CC#M34	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M35	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M35			
							2CC#M35	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M36	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M36			
							2CC#M36	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M37	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M37			
							2CC#M37	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M38	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M38			
							2CC#M38	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M39	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M39			
							2CC#M39	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M40	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M40			
							2CC#M40	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M41	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M41			
							2CC#M41	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M42	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M42			
							2CC#M42	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M43	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M43			
							2CC#M43	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M44	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M44			
							2CC#M44	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M45	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M45			
							2CC#M45	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M46	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M46			
							2CC#M46	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M47	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M47			
							2CC#M47	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M48	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M48			
							2CC#M48	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M49	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M49			
							2CC#M49	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M50	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M50			
							2CC#M50	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M51	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M51			
							2CC#M51	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M52	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M52			
							2CC#M52	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M53	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M53			
							2CC#M53	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M54	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M54			
							2CC#M54	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M55	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M55			
							2CC#M55	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M56	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M56			
							2CC#M56	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M57	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M57			
							2CC#M57	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2CC#M58	CA_2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20		2			

only) active are made in accordance to KDB Publication 941225 D05Av01r02. The RRC connection is only handled by one cell, the primary component carrier (PCC) for downlink and uplink communications. After making a data connection to the PCC, the UE device adds secondary component carrier(s) (SCC) on the downlink only. All uplink communications and acknowledgements remain identical to specifications when downlink carrier aggregation is inactive on the PCC. Additional conducted output powers are measured with the downlink carrier aggregation active for the configuration with highest measured maximum conducted power with downlink carrier aggregation inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band.

Per FCC KDB Publication 941225 D05Av01r02, no SAR measurements are required for carrier aggregation configurations when the maximum average output power with downlink only carrier aggregation active is not more than 0.25 dB higher than the average output power with downlink only carrier aggregation inactive. All bands required for SAR testing per FCC KDB procedures were considered. Based on the measured maximum powers below, no additional SAR tests were required for DLCA SAR configurations.

General PCC and SCC configuration selection procedure

- PCC uplink channel, channel bandwidth, modulation and RB configurations were selected based on section C)3)b)ii) of KDB 941225 D05 V01r02. All LTE bandwidth conducted powers needed for PCC uplink configuration selection can be found in the RF Conducted Powers Section and LTE/NR Lower Bandwidth RF Conducted Power Appendix. The downlink PCC channel was paired with the selected PCC uplink channel according to normal configurations without carrier aggregation.
- To maximize aggregated bandwidth, highest channel bandwidth available for that CA combination was selected for SCC. For inter-band CA, the SCC downlink channels were selected near the middle of their transmission bands. For contiguous intra-band CA, the downlink channel spacing between the component carriers was set to multiple of 300 kHz less than the nominal channel spacing defined in section 5.4.1A of 3GPP TS 36.521. For non-contiguous intra-band CA, the downlink channel spacing between the component carriers was set to be larger than the nominal channel spacing and provided maximum separation between the component carriers.
- All selected PCC and SCC(s) remained fully within the uplink/downlink transmission band of the respective component carrier.




Figure I-1
DL CA Power Measurement Setup

FCC ID: A3LSMA156E	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Portable Handset		APPENDIX I: Page 2 of 5

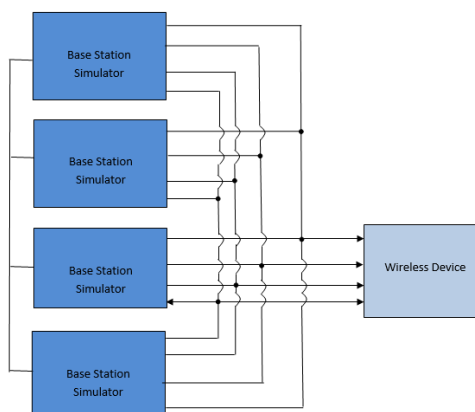


Figure I-2
DL CA with DL 4x4 MIMO Power Measurement Setup

I.2 Downlink Carrier Aggregation RF Conducted Powers

I.2.1 LTE Band 12 as PCC

Table I-3
Maximum Output Powers

Maximum Output Powers															
Combination	PCC									SCC				Power	
	PCC Band	PCC BW [MHz]	PCC (UL) Channel	PCC (UL) Freq. [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	PCC (DL) Ch.	PCC (DL) Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC (DL) Ch.	SCC (DL) Freq. [MHz]	LTE Tx.Power with DL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_2A-12A (1)	LTE B12	5	23155	713.5	QPSK	1	24	5155	743.5	LTE B2	20	900	1960	23.87	23.96
CA_4A-12A (1)	LTE B12	5	23155	713.5	QPSK	1	24	5155	743.5	LTE B4	20	2175	2132.5	23.86	23.96
CA_4A-12A (2)	LTE B12	5	23155	713.5	QPSK	1	24	5155	743.5	LTE B4	20	2175	2132.5	23.86	23.96
CA_12A-66A (1)	LTE B12	5	23155	713.5	QPSK	1	24	5155	743.5	LTE B66	20	66786	2145	23.90	23.96
CA_12A-66A (2)	LTE B12	5	23155	713.5	QPSK	1	24	5155	743.5	LTE B66	20	66786	2145	23.90	23.96

I.2.2 LTE Band 26 as PCC

Table I-4
Maximum Output Powers

Maximum Output Powers															
Combination	PCC								SCC				Power		
	PCC Band	PCC BW [MHz]	PCC (UL) Channel	PCC (UL) Freq. [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	PCC (DL) Ch.	PCC (DL) Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC (DL) Ch.	SCC (DL) Freq. [MHz]	LTE Tx.Power with DL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_26A-41A	LTE B26	15	26865	831.5	QPSK	1	36	8865	876.5	LTE B41	20	40620	2593	23.82	23.81

I.2.3 LTE Band 66 as PCC

Table I-5
Maximum Output Powers

	PCC									SCC				Power	
Combination	PCC Band	PCC BW [MHz]	PCC (UL) Channel	PCC (UL) Freq. [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	PCC (DL) Ch.	PCC (DL) Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC (DL) Ch.	SCC (DL) Freq. [MHz]	LTE Tx.Power with DL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_2A-66A	LTE B66	15	132047	1717.5	QPSK	1	74	66511	2117.5	LTE B2	20	900	1960	23.80	23.77
CA_12A-66A (1)	LTE B66	15	132047	1717.5	QPSK	1	74	66511	2117.5	LTE B12	10	5095	737.5	23.70	23.77
CA_12A-66A (2)	LTE B66	15	132047	1717.5	QPSK	1	74	66511	2117.5	LTE B12	10	5095	737.5	23.70	23.77
CA_66A-66A	LTE B66	15	132047	1717.5	QPSK	1	74	66511	2117.5	LTE B66	20	67236	2190	23.76	23.77
CA_66B	LTE B66	15	132047	1717.5	QPSK	1	74	66511	2117.5	LTE B66	5	66604	2126.8	23.79	23.77
CA_66C	LTE B66	15	132047	1717.5	QPSK	1	74	66511	2117.5	LTE B66	20	66682	2134.6	23.78	23.77

FCC ID: A3LSMA156E	SAR EVALUATION REPORT	Approved by:
DUT Type: Portable Handset		Technical Manager
APPENDIX I: Page 3 of 5		

I.2.4 LTE Band 2 as PCC

Table I-6
Maximum Output Powers

Combination	PCC									SCC				Power	
	PCC Band	PCC BW [MHz]	PCC (UL) Channel	PCC (UL) Freq. [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	PCC (DL) Ch.	PCC (DL) Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC (DL) Ch.	SCC (DL) Freq. [MHz]	LTE Tx.Power with DL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_2A-2A	LTE B2	20	18700	1860	QPSK	1	50	700	1940	LTE B2	20	1100	1980	22.99	23.00
CA_2A-4A	LTE B2	20	18700	1860	QPSK	1	50	700	1940	LTE B4	20	2175	2132.5	22.98	23.00
CA_2A-4A (1)	LTE B2	10	18900	1880	QPSK	1	25	900	1960	LTE B4	10	2175	2132.5	22.97	22.96
CA_2A-4A (2)	LTE B2	20	18700	1860	QPSK	1	50	700	1940	LTE B4	20	2175	2132.5	22.98	23.00
CA_2A-5A	LTE B2	20	18700	1860	QPSK	1	50	700	1940	LTE B5	10	2525	881.5	23.00	23.00
CA_2A-5A (1)	LTE B2	10	18900	1880	QPSK	1	25	900	1960	LTE B5	10	2525	881.5	22.98	22.96
CA_2A-12A	LTE B2	20	18700	1860	QPSK	1	50	700	1940	LTE B12	10	5095	737.5	23.02	23.00
CA_2A-12A (1)	LTE B2	20	18700	1860	QPSK	1	50	700	1940	LTE B12	10	5095	737.5	23.02	23.00
CA_2A-12A (2)	LTE B2	10	18900	1880	QPSK	1	25	900	1960	LTE B12	10	5095	737.5	22.97	22.96
CA_2A-13A	LTE B2	20	18700	1860	QPSK	1	50	700	1940	LTE B13	10	5230	751	22.96	23.00
CA_2A-13A (1)	LTE B2	10	18900	1880	QPSK	1	25	900	1960	LTE B13	10	5230	751	22.99	22.96
CA_2A-13A (2)	LTE B2	20	18700	1860	QPSK	1	50	700	1940	LTE B13	10	5230	751	22.96	23.00
CA_2A-17A	LTE B2	10	18900	1880	QPSK	1	25	900	1960	LTE B17	10	5790	740	22.98	22.96
CA_2A-66A	LTE B2	20	18700	1860	QPSK	1	50	700	1940	LTE B66	20	66786	2145	22.99	23.00
CA_2A-66A (1)	LTE B2	10	18900	1880	QPSK	1	25	900	1960	LTE B66	10	66786	2145	22.96	22.96
CA_2A-66A (2)	LTE B2	20	18700	1860	QPSK	1	50	700	1940	LTE B66	20	66786	2145	22.99	23.00

I.2.5 LTE Band 41 as PCC

Table I-7
Maximum Output Powers

Combination	PCC									SCC				Power	
	PCC Band	PCC BW [MHz]	PCC (UL) Channel	PCC (UL) Freq. [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	PCC (DL) Ch.	PCC (DL) Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC (DL) Ch.	SCC (DL) Freq. [MHz]	LTE Tx.Power with DL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_41A-41A (1)	LTE B41	20	40620	2593	QPSK	1	0	40620	2593	LTE B41	20	41490	2680	22.51	22.53
CA_41C (1)	LTE B41	20	40620	2593	QPSK	1	0	40620	2593	LTE B41	20	40818	2612.8	22.52	22.53

FCC ID: A3LSMA156E	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Portable Handset		APPENDIX I: Page 4 of 5

I.3 DL CA with DL 4x4 MIMO RF Conduction Powers

This device supports downlink 4x4 MIMO operations for some LTE bands. Uplink transmission is limited to a single output stream. When carrier aggregation was applicable, the general test selection and setup procedures described in Section I.1 were applied.

Per May 2017 TCB Workshop Notes, SAR for 4x4 DL MIMO was not needed since the maximum average output power in 4x4 DL MIMO mode was not more than 0.25 dB higher than the maximum output power with 4x4 DL MIMO inactive. Additionally, SAR for 4x4 MIMO Downlink Carrier Aggregation was not needed since the maximum average output power in 4x4 MIMO Downlink Carrier Aggregation mode was not more than 0.25 dB higher than the maximum output power with 4x4 MIMO Downlink and downlink carrier aggregation inactive.

I.3.1 LTE 4x4 MIMO DL Standalone Powers

Table I-8
Maximum Output Powers

LTE Band	Bandwidth [MHz]	Channel	Frequency [MHz]	Modulation	RB Size	RB Offset	4x4 DL MIMO Tx. Power [dBm]	Single Antenna Tx. Power [dBm]	Target Power [dBm]
41	20	40620	2593	QPSK	1	0	22.54	22.53	23.0

FCC ID: A3LSMA156E	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Portable Handset		APPENDIX I: Page 5 of 5