

FCC Radio Test Report

FCC ID: QYLWCN3980B41

Report No. : BTL-FCCP-11-2202T096
Equipment : Body Worn Camera
Model Name : BC-4K
Brand Name : Getac
Applicant : Getac Technology Corporation
Address : 5F., Building A, No.209, Sec.1, Nangang., Rd., Nangang Dist., Taipei City 11568, Taiwan, R.O.C.


Radio Function : RLAN 5 GHz (U-NII 2A, U-NII 2C)

FCC Rule Part(s) : FCC CFR Title 47, Part 15, Subpart E (15.407) / FCC 06-96
Measurement Procedure(s) : FCC KDB 789033 D02 General U-NII Test Procedures New Rules v02r01
FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02
FCC KDB 905462 D03 UNII Clients Without Radar Detection New Rules v01r02


Date of Receipt : 2022/3/23
Date of Test : 2022/3/23 ~ 2022/9/5
Issued Date : 2022/10/7

The above equipment has been tested and found in compliance with the requirement of the above standards by BTL Inc.

Prepared by

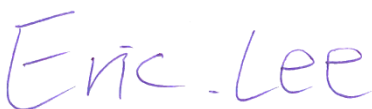
Eric Lee, Engineer

Approved by


Jerry Chuang, Supervisor

**BTL Inc.**

No.18, Ln. 171, Sec. 2, Jiuzong Rd., Neihu Dist., Taipei City 114, Taiwan

Tel: +886-2-2657-3299

Fax: +886-2-2657-3331

Web: www.newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

CONTENTS

| | |
|--|----|
| REVISION HISTORY | 4 |
| 1 SUMMARY OF TEST RESULTS | 5 |
| 1.1 TEST FACILITY | 5 |
| 1.2 TEST ENVIRONMENT CONDITIONS | 5 |
| 2 EUT INFORMATION | 6 |
| 2.1 EUT SPECIFICATION TABLE | 6 |
| 2.2 EIRP POWER | 8 |
| 3 U-NII DFS RULE REQUIREMENTS | 9 |
| 3.1 WORKING MODES AND REQUIRED TEST ITEMS | 9 |
| 3.2 TEST LIMITS AND RADAR SIGNAL PARAMETERS | 10 |
| 4 DYNAMIC FREQUENCY SELECTION (DFS) TEST | 13 |
| 4.1 DFS MEASUREMENT SYSTEM | 13 |
| 4.2 CALIBRATION OF DFS DETECTION THRESHOLD LEVEL | 16 |
| 4.3 DEVIATION FROM TEST STANDARD | 16 |
| 5 LIST OF MEASURING EQUIPMENTS | 17 |
| 6 EUT TEST PHOTO | 18 |
| 7 EUT PHOTOS | 18 |
| 8 TEST RESULTS | 19 |
| 8.1 SUMMARY OF TEST RESULT | 19 |
| 8.2 TEST MODE: DEVICE OPERATING IN MASTER MODE. | 19 |
| 8.3 DFS DETECTION THRESHOLD | 20 |
| 8.4 CHANNEL CLOSING TRANSMISSION AND CHANNEL MOVE TIME WLAN TRAFFIC | 22 |
| 8.5 NON- OCCUPANCY PERIOD | 26 |

REVISION HISTORY

| Report No. | Version | Description | Issued Date | Note |
|----------------------|---------|---|-------------|---------|
| BTL-FCCP-11-2202T096 | R00 | Original Report. | 2022/10/3 | Invalid |
| BTL-FCCP-11-2202T096 | R01 | Revised report to address TCB's comments. | 2022/10/7 | Valid |

1 SUMMARY OF TEST RESULTS

Test procedures according to the technical standards.

| Standard(s) Section | Description | Test Result | Judgement | Remark |
|---------------------|-----------------------------------|-------------|-----------|--------|
| 15.407(h) | Dynamic Frequency Selection (DFS) | ----- | Pass | ----- |

NOTE:

(1) The report format version is TP.1.1.1.

1.1 TEST FACILITY

The test facilities used to collect the test data in this report:

No. 68-1, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

The test sites and facilities are covered under FCC RN: 674415 and DN: TW0659.

- ☐ C05
 ☐ CB08
 ☐ CB11
 ☐ CB15
 ☐ CB16
☒ SR05

1.2 TEST ENVIRONMENT CONDITIONS

| Test Item | Environment Condition | Test Voltage | Tested by |
|-----------------------------------|-----------------------|--------------|-----------|
| Dynamic Frequency Selection (DFS) | 23.8 °C, 50 % | AC 120V | Jay Tien |

2 EUT INFORMATION

2.1 EUT SPECIFICATION TABLE

| | | | |
|---------------------|---|-----------------------------------|-------------------|
| Equipment | Body Worn Camera | | |
| Model Name | BC-4K | | |
| Brand Name | Getac | | |
| Model Difference | N/A | | |
| Power Source | (1) From host system or power adapter. (2) Battery supplied. | | |
| Power Rating | (1) | | |
| | BC-4K | Cable type | Input Voltage |
| | Pogo pins | Magnetic USB type A to pogo Cable | 5V /1.5A |
| | USB type C | Type C To C cable | 5V/3A and 9V/2.2A |
| | (2) Getac / BP1S1P5000P: Rated Voltage: 3.63 Vdc Rated capacity: 4750 mAh, 17.24 Wh Typical capacity: 5000 mAh, 18.15 Wh | | |
| Products Covered | 1 * Adjustable Pocket Mount 1 * Clip Mount 1 * Magnetic Mount 1 * Molle Mount 1 * Dual Magnetic Mount | | |
| Operational Mode | <input type="checkbox"/> Master <input type="checkbox"/> Slave with radar detection <input checked="" type="checkbox"/> Slave without radar detection | | |
| Operation Band | UNII-2A: 5250 MHz to 5350 MHz UNII-2C: 5470 MHz to 5725 MHz | | |
| Operating Frequency | UNII-2A: 5260 MHz to 5320 MHz UNII-2C: 5500 MHz to 5700 MHz | | |
| Modulation | OFDM | | |
| Test Model | BC-4K | | |
| Sample Status | Engineering Sample | | |
| EUT Modification(s) | N/A | | |

NOTE:

(1) The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

(2) Channel List:

| IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20) | | IEEE 802.11n (HT40) IEEE 802.11ac (VHT40) | | IEEE 802.11ac (VHT80) | |
|--|-----------------|--|-----------------|-----------------------|-----------------|
| UNII-2A | | UNII-2A | | UNII-2A | |
| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 52 | 5260 | 54 | 5270 | 58 | 5290 |
| 56 | 5280 | 62 | 5310 | | |
| 60 | 5300 | | | | |
| 64 | 5320 | | | | |

| IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20) | | IEEE 802.11n (HT40) IEEE 802.11ac (VHT40) | | IEEE 802.11ac (VHT80) | |
|--|-----------------|--|-----------------|-----------------------|-----------------|
| UNII-2C | | UNII-2C | | UNII-2C | |
| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 100 | 5500 | 102 | 5510 | 106 | 5530 |
| 104 | 5520 | 110 | 5550 | 122 | 5610 |
| 108 | 5540 | 118 | 5590 | | |
| 112 | 5560 | 126 | 5630 | | |
| 116 | 5580 | 134 | 5670 | | |
| 120 | 5600 | | | | |
| 124 | 5620 | | | | |
| 128 | 5640 | | | | |
| 132 | 5660 | | | | |
| 136 | 5680 | | | | |
| 140 | 5700 | | | | |

(3) Table for Filed Antenna:

| Ant. | Brand Name | Model Name | Type | Connector | Frequency (MHz) | Gain (dBi) |
|------|------------|------------|------|-----------|-----------------|------------|
| - | Getac | BC-4K | IFA | N/A | 2400-2500 | 2.02 |
| | | | | | 5150-5250 | 2.65 |
| | | | | | 5250-5350 | 3.39 |
| | | | | | 5470-5725 | 3.87 |
| | | | | | 5725-5850 | 2.39 |

(4) The above Antenna information are derived from the antenna data sheet provided by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

2.2 EIRP POWER

| | |
|-----------|---------|
| Test Mode | UNII-2A |
|-----------|---------|

| Frequency (MHz) | Maximum Conducted Power (dBm) | Antenna Gain (dBi) | Maximum EIRP Power (dBm) | Maximum EIRP Power (mW) | Remark |
|-----------------|-------------------------------|--------------------|--------------------------|-------------------------|----------|
| 5250 to 5350 | 18.47 | 3.39 | 21.86 | 153.46 | NOTE (1) |

| | |
|-----------|---------|
| Test Mode | UNII-2C |
|-----------|---------|

| Frequency (MHz) | Maximum Conducted Power (dBm) | Antenna Gain (dBi) | Maximum EIRP Power (dBm) | Maximum EIRP Power (mW) | Remark |
|-----------------|-------------------------------|--------------------|--------------------------|-------------------------|----------|
| 5470 to 5725 | 18.46 | 3.87 | 22.33 | 171.00 | NOTE (1) |

NOTE:

- (1) $\text{EIRP Power (dBm)} = \text{Conducted Power (dBm)} + \text{Antenna Gain (dBi)}$.
 $\text{Power (mW)} = 1 \text{ mW} * 10^{(\text{dBm} / 10)}$.

3 U-NII DFS RULE REQUIREMENTS

3.1 WORKING MODES AND REQUIRED TEST ITEMS

The manufacturer shall state whether the UUT is capable of operating as a Master and/or a Client. If the UUT is capable of operating in more than one operating mode then each operating mode shall be tested separately. See tables below for the applicability of DFS requirements for each of the operational modes.

Applicability of DFS requirements prior to use a channel

| Requirement | Operational Mode | | |
|---------------------------------|------------------|--------------------------------|-----------------------------|
| | Master | Client without radar detection | Client with radar detection |
| Non-Occupancy Period | √ | √ | √ |
| DFS Detection Threshold | √ | Not required | √ |
| Channel Availability Check Time | √ | Not required | Not required |
| U-NII Detection Bandwidth | √ | Not required | √ |

Applicability of DFS requirements during normal operation

| Requirement | Operational Mode | | |
|-----------------------------------|------------------|--------------------------------|-----------------------------|
| | Master | Client without radar detection | Client with radar detection |
| DFS Detection Threshold | √ | Not required | √ |
| Channel Closing Transmission Time | √ | √ | √ |
| Channel Move Time | √ | √ | √ |
| U-NII Detection Bandwidth | √ | Not required | √ |

| Additional requirements for devices with multiple bandwidth modes | Master Device or Client with Radar Detection | Client Without Radar Detection |
|---|--|--|
| U-NII Detection Bandwidth and Statistical Performance Check | All BW modes must be tested | Not required |
| Channel Move Time and Channel Closing Transmission Time | Test using widest BW mode available | Test using the widest BW mode available for the link |
| All other tests | Any single BW mode | Not required |

Note: Frequencies selected for statistical performance check should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

3.2 TEST LIMITS AND RADAR SIGNAL PARAMETERS

DETECTION THRESHOLD VALUES

DFS Detection Thresholds for Master Devices and Client Devices with Radar Detection.

| Maximum Transmit Power | Value (See Notes 1, 2 and 3) |
|---|---------------------------------|
| e.i.r.p. \geq 200 milliwatt | -64 dBm |
| e.i.r.p. $<$ 200 milliwatt and power spectral density $<$ 10 dBm/MHz | -62 dBm |
| e.i.r.p. $<$ 200 milliwatt that do not meet the power spectral density requirement | -64 dBm |

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.

TEST LIMIT

DFS Response Requirement Values

| Parameter | Value |
|-----------------------------------|---|
| Non-occupancy period | Minimum 30 minutes |
| Channel Availability Check Time | 60 seconds |
| Channel Move Time | 10 seconds. See Note 1. |
| Channel Closing Transmission Time | 200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2. |
| U-NII Detection Bandwidth | Minimum 100% of the UNII 99% transmission power bandwidth. See Note 3. |

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

PARAMETERS OF DFS TEST SIGNALS

Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

Short Pulse Radar Test Waveforms.

| Radar Type | Pulse Width (μsec) | PRI (μsec) | Number of Pulses | Minimum Percentage of Successful Detection | Minimum Number of Trials |
|---|--------------------|---|--|--|--------------------------|
| 0 | 1 | 1428 | 18 | See Note 1 | See Note 1 |
| 1 | 1 | Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a | Roundup $\left\{ \left(\frac{1}{360} \right) \cdot \left(\frac{19 \cdot 10^6}{PRI_{\mu sec}} \right) \right\}$ | 60% | 30 |
| | | Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A | | | |
| 2 | 1-5 | 150-230 | 23-29 | 60% | 30 |
| 3 | 6-10 | 200-500 | 16-18 | 60% | 30 |
| 4 | 11-20 | 200-500 | 12-16 | 60% | 30 |
| Aggregate (Radar Types 1-4) | | | | 80% | 120 |
| Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests. | | | | | |

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B.

Long Pulse Radar Test Waveform

| Radar Type | Pulse Width (μsec) | Chirp Width (MHz) | PRI (μsec) | Number of Pulses per Burst | Number of Bursts | Minimum Percentage of Successful Detection | Minimum Number of Trials |
|------------|--------------------|-------------------|------------|----------------------------|------------------|--|--------------------------|
| 5 | 50-100 | 5-20 | 1000-2000 | 1-3 | 8-20 | 80% | 30 |

The parameters for this waveform are randomly chosen (The center frequency for each of the 30 trials of the Bin 5 radar shall be randomly selected within 80% of the Occupied Bandwidth.) Thirty unique waveforms are required for the Long Pulse Radar Type waveforms. If more than 30 waveforms are used for the Long Pulse Radar Type waveforms, then each additional waveform must also be unique and not repeated from the previous waveforms.

Frequency Hopping Radar Test Waveform

| Radar Type | Pulse Width (μsec) | Chirp Width (MHz) | PRI (μsec) | Number of Pulses per Burst | Number of Bursts | Minimum Percentage of Successful Detection | Minimum Number of Trials |
|------------|--------------------|-------------------|------------|----------------------------|------------------|--|--------------------------|
| 6 | 1 | 333 | 9 | 0.333 | 300 | 70% | 30 |


4 DYNAMIC FREQUENCY SELECTION (DFS) TEST

4.1 DFS MEASUREMENT SYSTEM

Test Precedure


1. Master device and client device are set up by conduction method as the following configuration.
2. The client device is connected to notebook and to access a IP address on wireless connection with the master device.
3. Then the master device is connected to another notebook to access a IP address.
4. Finally, let the two IP addresses run traffic with each other through the Run flow software "Lan test" to reach each 17% channel loading as below

Setup

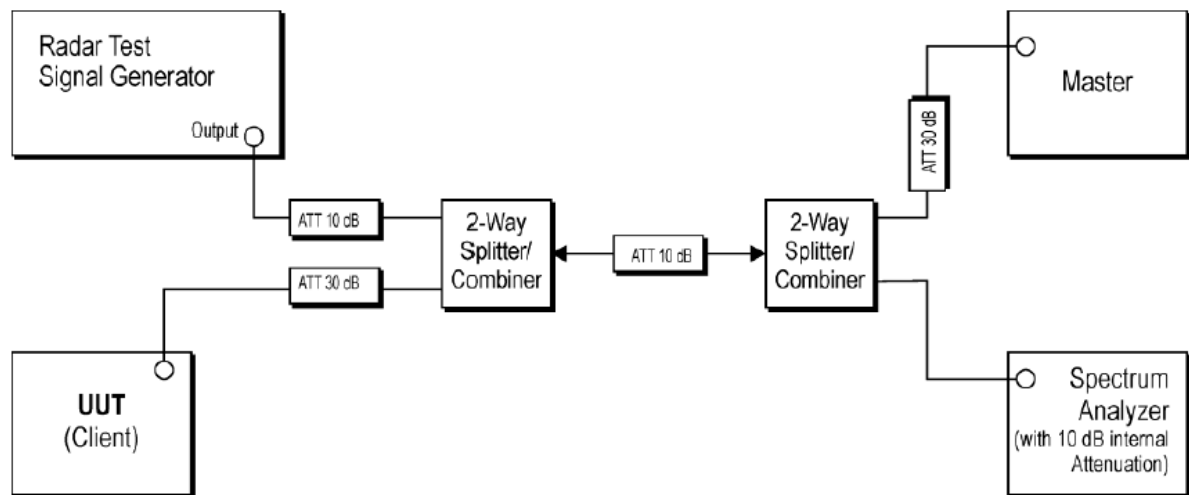

Radar Test Waveforms are injected into the Master.

Channel Loading

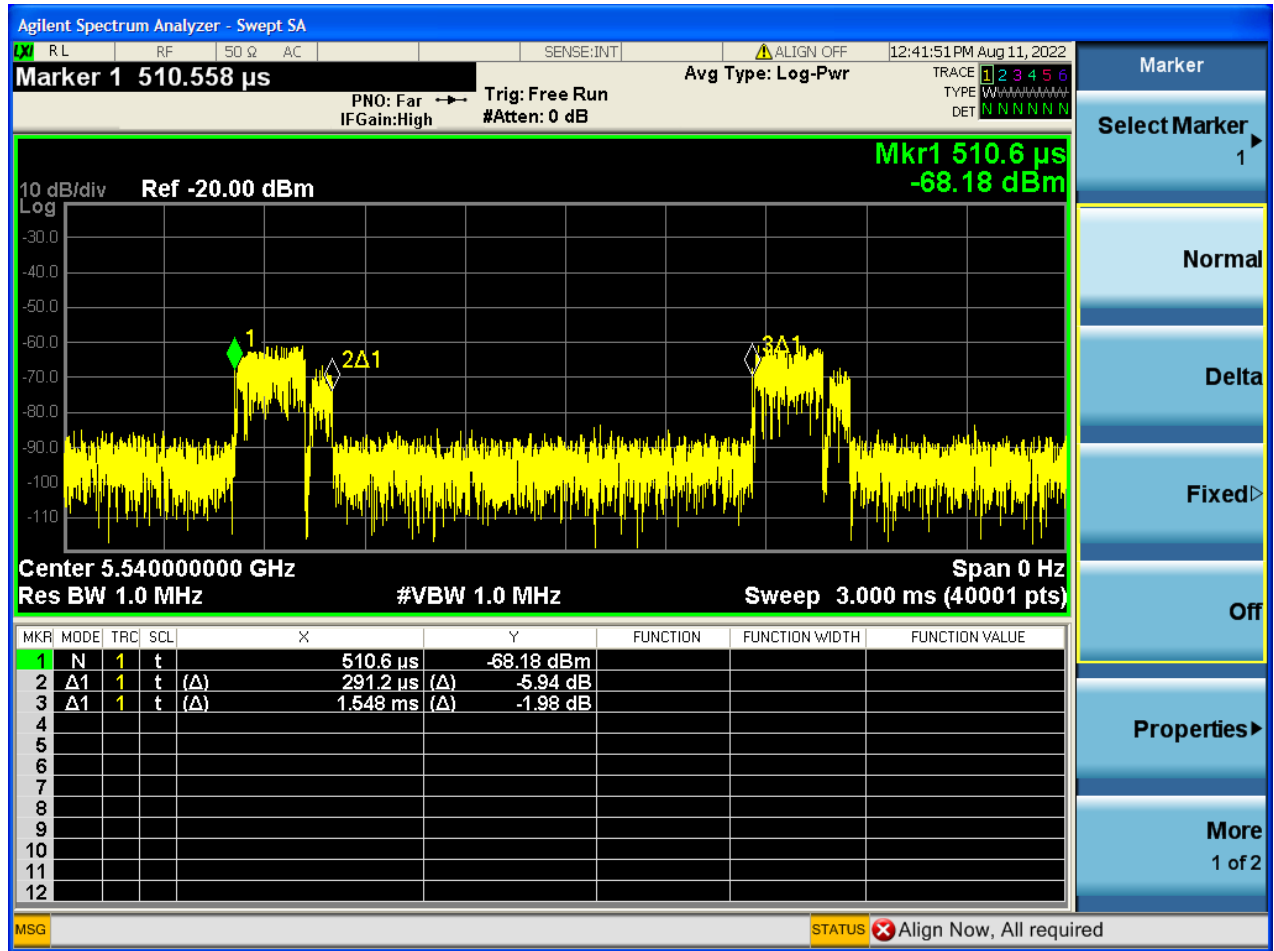

| Test Band | ON (ms) | Numbers (ON) | On Time (ms) | Period (ON+OFF) (ms) | Channel Loading Ratio (%) | Required Ratio (%) |
|------------------------|---------|--------------|--------------|----------------------|---------------------------|--------------------|
| 5.470 GHz to 5.725 GHz | 0.2912 | 1 | 0.2912 | 1.548 | 18.81% | $\geq 17\%$ |

The hopping type 6 pulse parameters are fixed while the hopping sequence is based on the August 2005 NTIA Hopping Frequency List. The initial starting point randomized at run-time and each subsequent starting point is incremented by 475. Each frequency in the 100-length segment is compared to the boundaries of the EUT Detection Bandwidth and the software creates a hopping burst pattern in accordance with Section 7.4.1.3 Method #2 Simulated frequency Hopping Radar Waveform Generating Subsystem of FCC 06-96. The frequency of the signal generator is incremented in 1 MHz steps from FL to FH for each successive trial. This incremental sequence is repeated as required to generate a minimum of 30 total trials and to maintain a uniform frequency distribution over the entire Detection Bandwidth.

The signal monitoring equipment consists of a spectrum analyzer set to display 8001 bins on the horizontal axis. The time-domain resolution is 2 msec / bin with a 16 second sweep time, meeting the 10 second short pulse reporting criteria. The aggregate ON time is calculated by multiplying the number of bins above a threshold during a particular observation period by the dwell time per bin, with the analyzer set to peak detection and max hold.

Should multiple RF ports be utilized for the Master and/or Slave devices (for example, for diversity or MIMO implementations), additional combiner/dividers are inserted between the Master Combiner/Divider and the pad connected to the Master Device (and/or between the Slave Combiner/Divider and the pad connected to the Slave Device). Additional pads are utilized such that there is one pad at each RF port on each EUT.


4.2 CALIBRATION OF DFS DETECTION THRESHOLD LEVEL

A 50 ohm load is connected in place of the spectrum analyzer, and the spectrum analyzer is connected in place of the master device and the signal generator is set to CW mode. The amplitude of the signal generator is adjusted to yield a level of -62 dBm as measured on the spectrum analyzer.

Without changing any of the instrument settings, the spectrum analyzer is reconnected to the Common port of the Spectrum Analyzer Combiner/Divider. Measure the amplitude and calculate the difference from -62 dBm. Adjust the Reference Level Offset of the spectrum analyzer to this difference.

The spectrum analyzer displays the level of the signal generator as received at the antenna ports of the Master Device. The interference detection threshold may be varied from the calibrated value of -62 dBm and the spectrum analyzer will still indicate the level as received by the Master Device.

Set the signal generator to produce a radar waveform, trigger a burst manually and measure the level on the spectrum analyzer. Readjust the amplitude of the signal generator as required so that the peak level of the waveform is at a displayed level equal to the required or desired interference detection threshold. Separate signal generator amplitude settings are determined as required for each radar type.

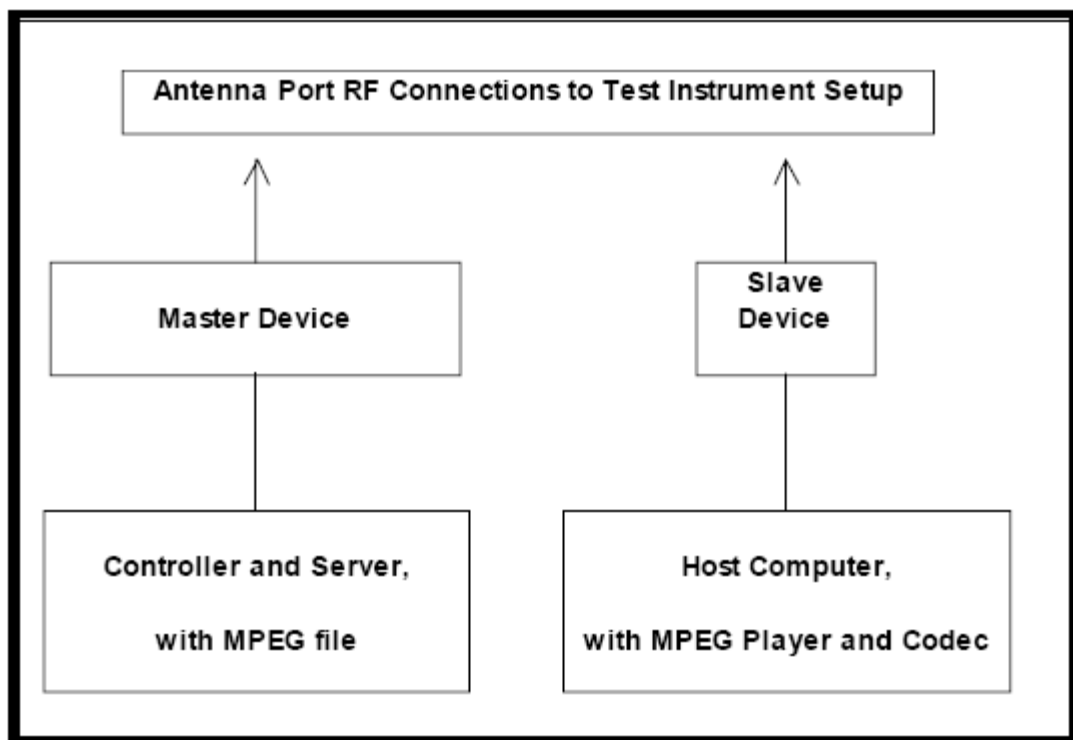

4.3 DEVIATION FROM TEST STANDARD

No deviation.

5 LIST OF MEASURING EQUIPMENTS

| Dynamic Frequency Selection (DFS) | | | | | | |
|-----------------------------------|-----------------------------|---------------|--------------|------------|-----------------|------------------|
| Item | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated Date | Calibrated Until |
| 1 | Spectrum Analyzer | Keysight | N9010A | MY54200240 | 2022/6/9 | 2023/6/8 |
| 2 | MXG Vector Signal Generator | Agilent | N5182B | MY51350711 | 2022/4/14 | 2023/4/13 |
| 3 | 10dB Attenuators | Mini-Circuits | VAT-10+ | N/A | 2022/5/12 | 2023/5/11 |
| 4 | 20dB Attenuators | Mini-Circuits | VAT-20+ | N/A | 2022/5/12 | 2023/5/11 |
| 5 | 30dB Attenuators | Mini-Circuits | VAT-30+ | N/A | 2022/5/12 | 2023/5/11 |
| 6 | POWER SPLITTER | Mini-Circuits | ZFRSC-183-S+ | N/A | 2022/5/12 | 2023/5/11 |
| 7 | POWER SPLITTER | Mini-Circuits | ZFRSC-123-S+ | N/A | 2022/5/12 | 2023/5/11 |

| Master Device | | | | | | |
|---------------|-------------------|--------------|----------|-----------|-------------|------|
| Item | Kind of Equipment | Manufacturer | Type No. | FCC ID | IC | Note |
| 1 | AP | Check Point | L-71W | YHI-NW121 | 9715A-NW121 | - |

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.
All calibration period of equipment list is one year.

6 EUT TEST PHOTO

Please refer to document Appendix No.: TP-2202T096-FCCP-1 (APPENDIX-TEST PHOTOS).

7 EUT PHOTOS

Please refer to document Appendix No.: EP-2202T096-3 (APPENDIX-EUT PHOTOS).

8 TEST RESULTS

8.1 SUMMARY OF TEST RESULT

| Clause | Test Parameter | Test Bandwidth / Channel | Remarks | Pass/Fail |
|--------|-----------------------------------|--------------------------|----------------|-----------|
| 15.407 | DFS Detection Threshold | 20MHz / 5540 MHz | Applicable | Pass |
| | | 40MHz / 5550 MHz | | |
| | | 80MHz / 5530 MHz | | |
| 15.407 | Channel Availability Check Time | - | Not Applicable | N/A |
| 15.407 | Channel Move Time | 20MHz / 5540 MHz | Applicable | Pass |
| | | 40MHz / 5550 MHz | | |
| | | 80MHz / 5530 MHz | | |
| 15.407 | Channel Closing Transmission Time | 20MHz / 5540 MHz | Applicable | Pass |
| | | 40MHz / 5550 MHz | | |
| | | 80MHz / 5530 MHz | | |
| 15.407 | Non- Occupancy Period | 20MHz / 5540 MHz | Applicable | Pass |
| | | 40MHz / 5550 MHz | | |
| | | 80MHz / 5530 MHz | | |
| 15.407 | Uniform Spreading | - | Not Applicable | N/A |
| 15.407 | U-NII Detection Bandwidth | - | Not Applicable | N/A |

NOTE:


1. The report format version is TP.1.1.1.

8.2 TEST MODE: DEVICE OPERATING IN MASTER MODE.


The EUT is slave equipment, it need a master device when testing.
Client with injection at the Master. (Radar Test Waveforms are injected into the Master)

8.3 DFS DETECTION THRESHOLD


Test Bandwidth / Channel : 20MHz / 5540 MHz

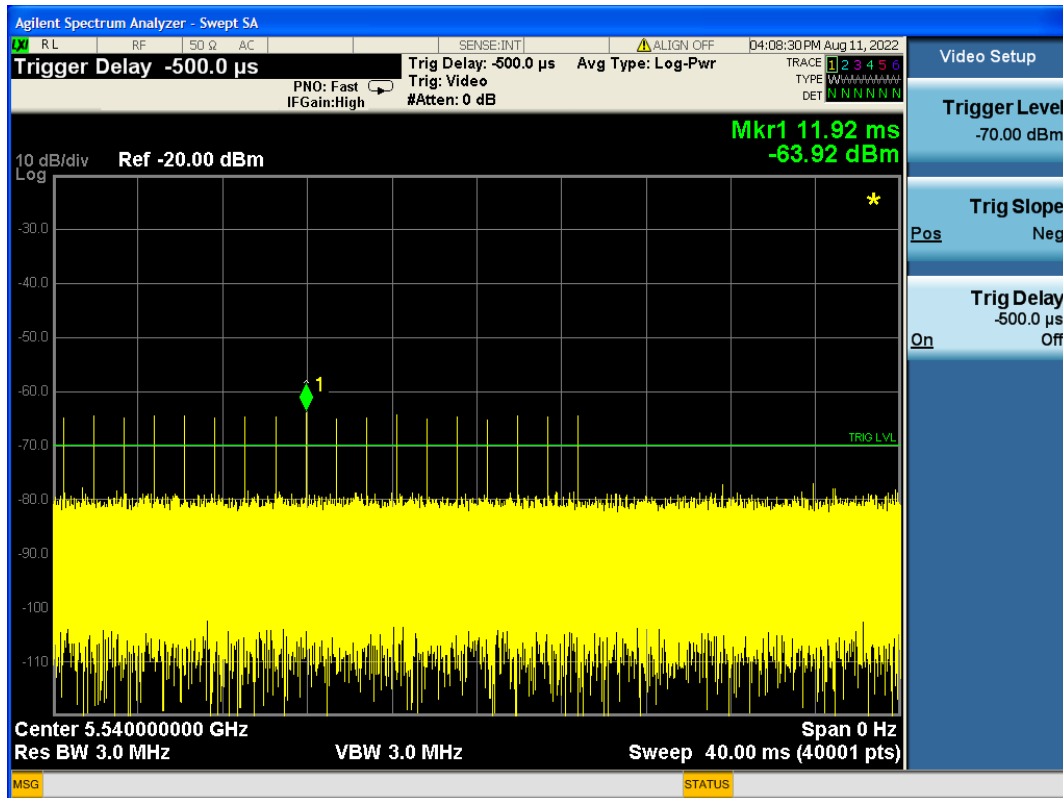

Test Bandwidth / Channel : 40MHz / 5550 MHz

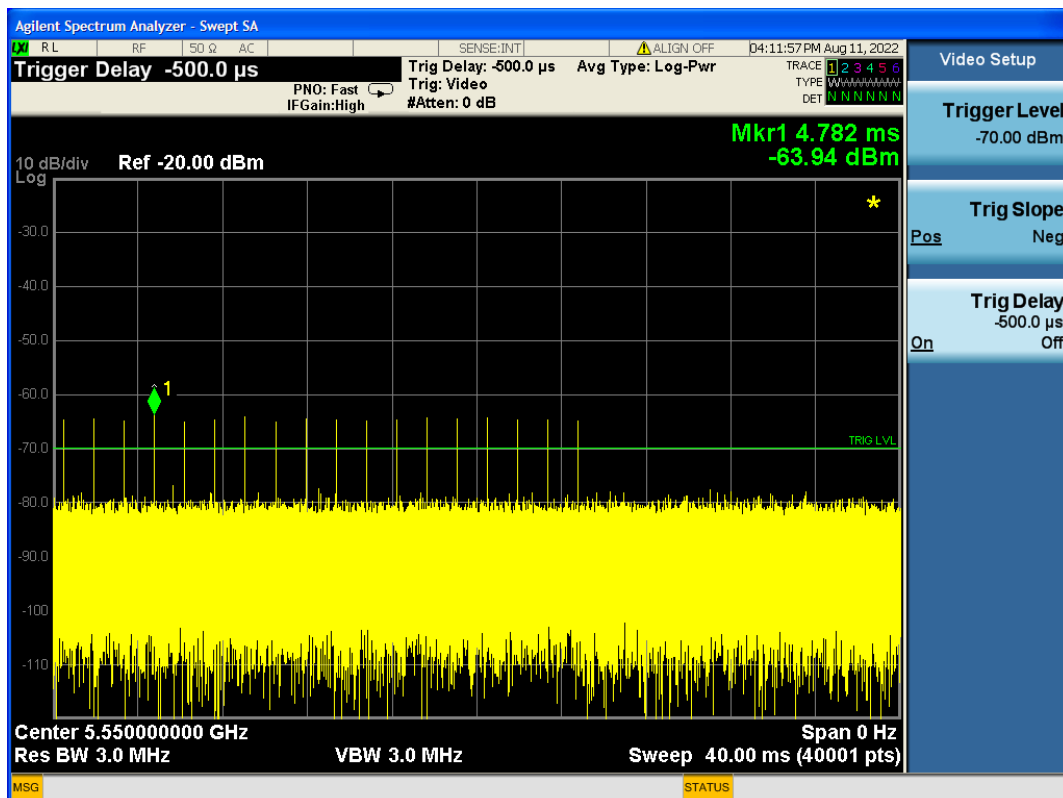


Test Bandwidth / Channel : 80MHz / 5530 MHz

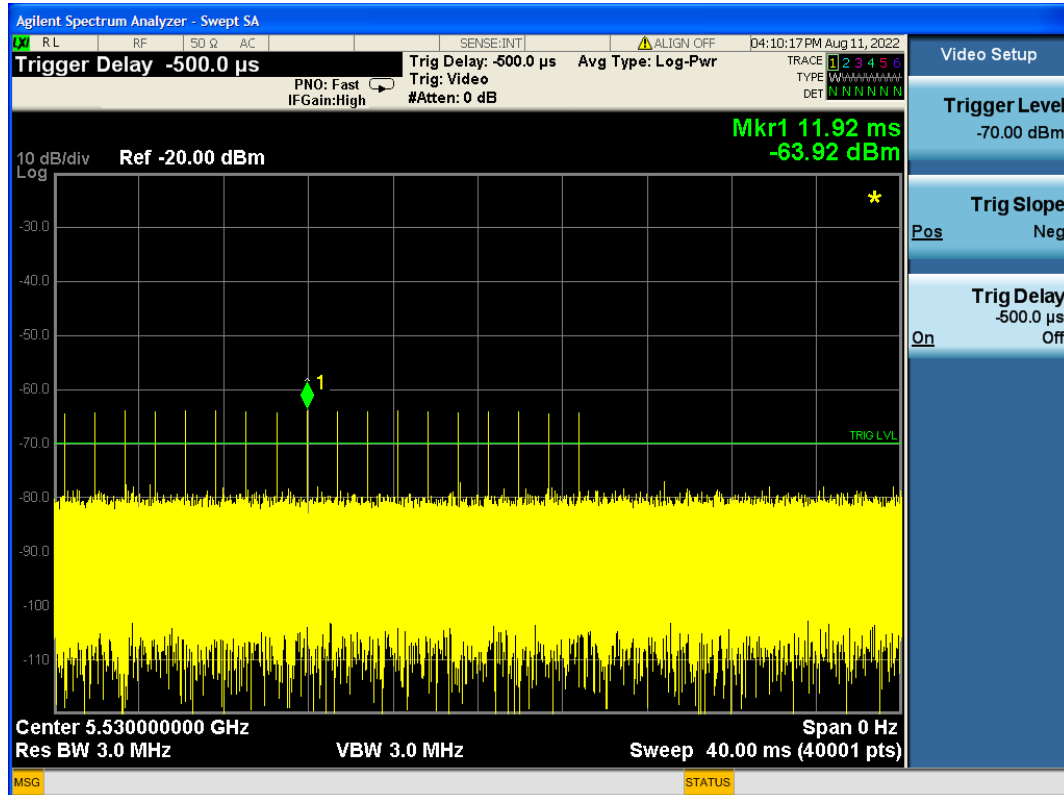

8.4 CHANNEL CLOSING TRANSMISSION AND CHANNEL MOVE TIME WLAN TRAFFIC

Test Bandwidth : 20MHz

Radar signal 0

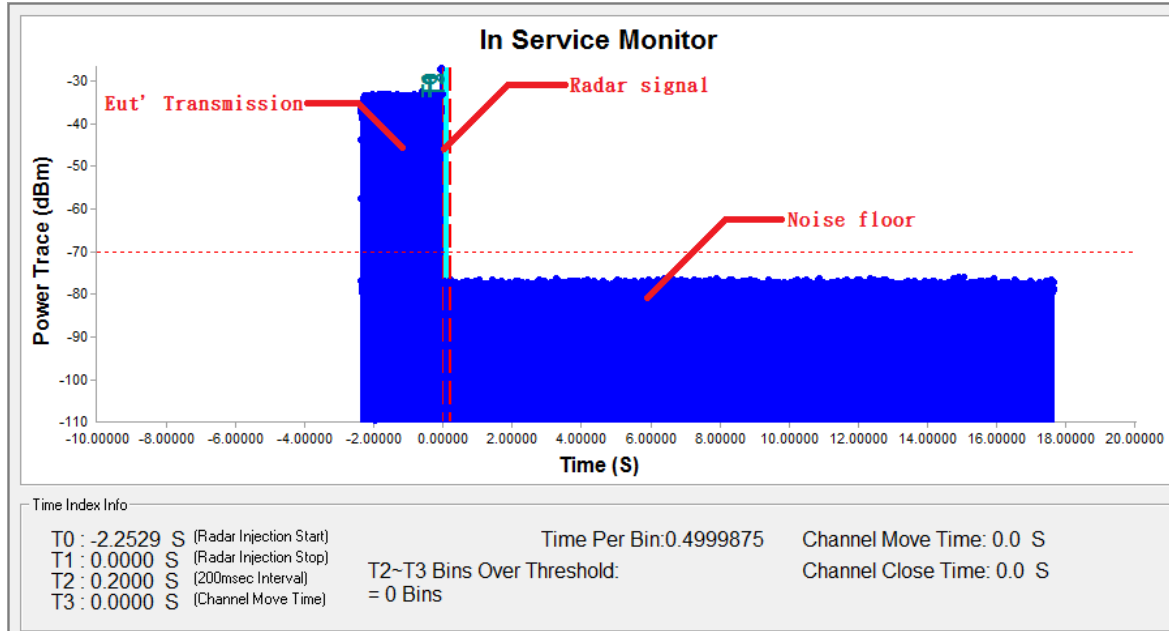

Note: T0 denotes the Radar Injection Start.

T1 denotes the start of Channel Move Time upon the end of the last Radar burst.

T2 denotes the data transmission time of 200ms from T1.


T3 denotes the end of Channel Move Time.




Note: An expanded plot for the device vacates the channel in the required 500ms

Test Bandwidth : 40MHz

Radar signal 0

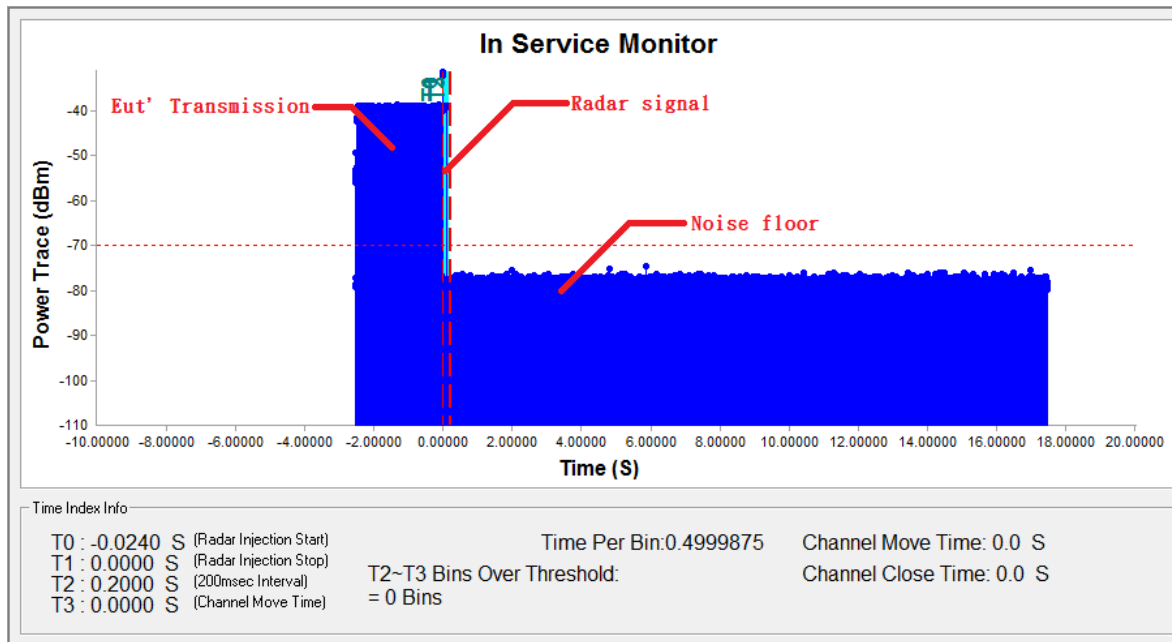


Note: T0 denotes the Radar Injection Start.
T1 denotes the start of Channel Move Time upon the end of the last Radar burst.
T2 denotes the data transmission time of 200ms from T1.
T3 denotes the end of Channel Move Time.

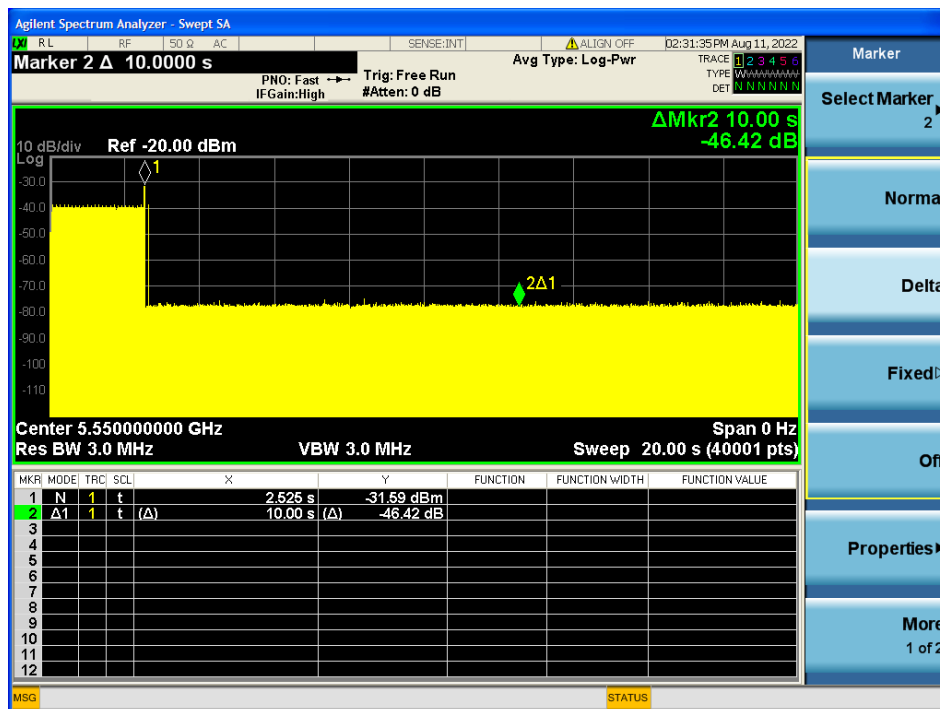


Note: An expanded plot for the device vacates the channel in the required 500ms

Test Bandwidth : 80MHz

Radar signal 0

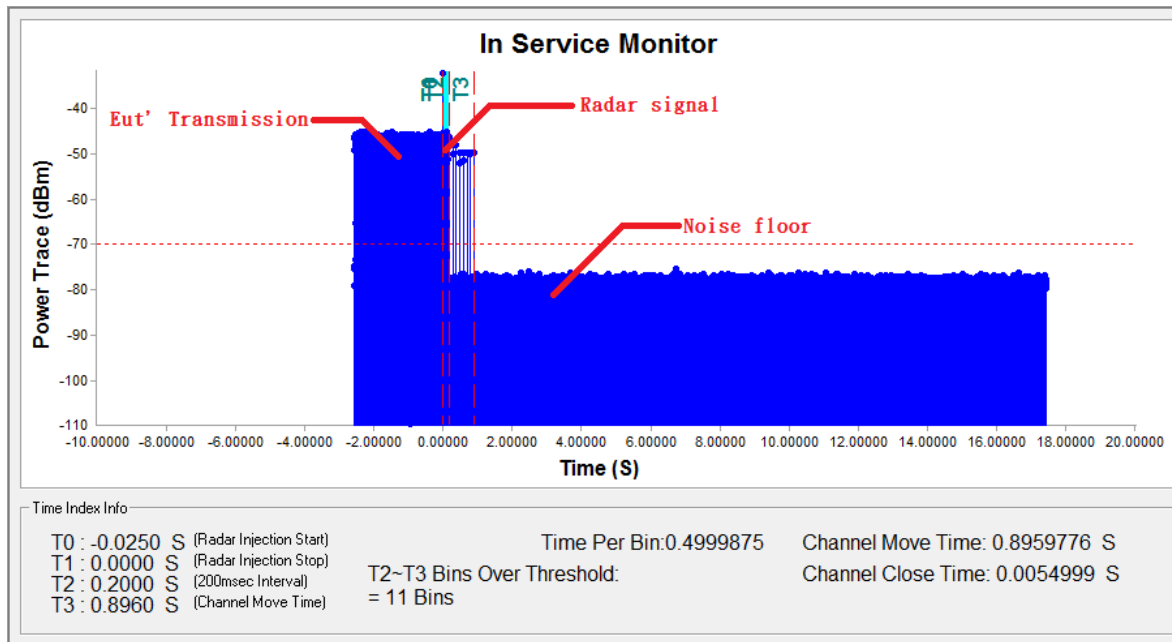

Note: T0 denotes the Radar Injection Start.
T1 denotes the start of Channel Move Time upon the end of the last Radar burst.
T2 denotes the data transmission time of 200ms from T1.
T3 denotes the end of Channel Move Time.

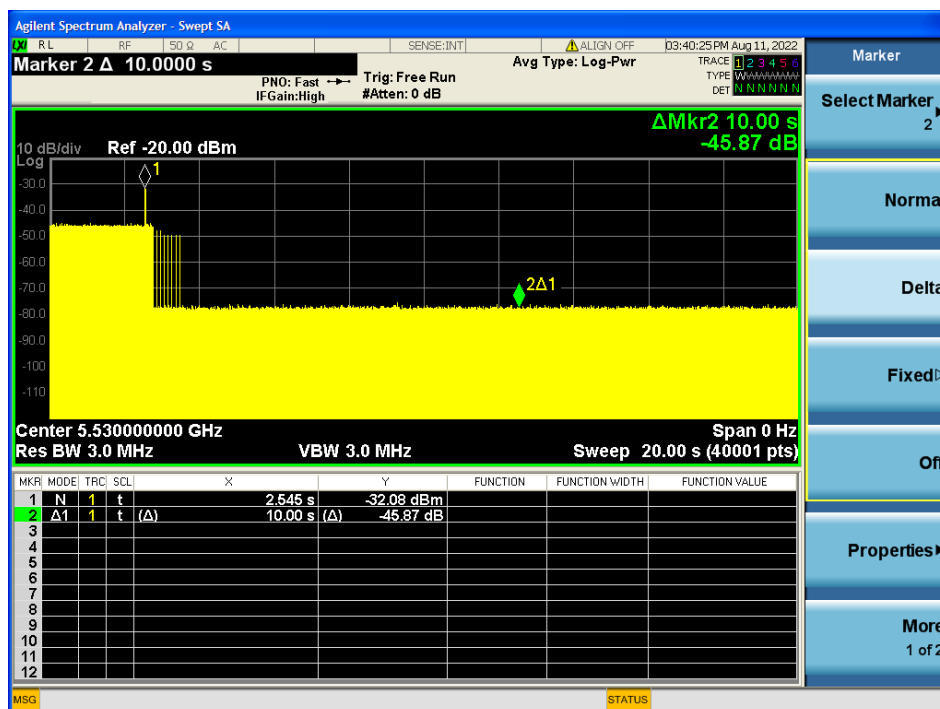

Note: An expanded plot for the device vacates the channel in the required 500ms

| Bandwidth | 20 MHz | |
|--------------------|-------------------|--|
| Item | Measured Value(s) | Limit(s) |
| Channel Move Time | 0.0 | 10 |
| Channel Close Time | 0.0 | 200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period |

| Bandwidth | 40 MHz | |
|--------------------|-------------------|--|
| Item | Measured Value(s) | Limit(s) |
| Channel Move Time | 0.0 | 10 |
| Channel Close Time | 0.0 | 200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period |


| Bandwidth | 80 MHz | |
|--------------------|-------------------|--|
| Item | Measured Value(s) | Limit(s) |
| Channel Move Time | 0.8959776 | 10 |
| Channel Close Time | 0.0054999 | 200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period |

8.5 NON- OCCUPANCY PERIOD


Test Bandwidth / Channel : 20MHz / 5540 MHz



Test Bandwidth / Channel : 40MHz / 5550 MHz

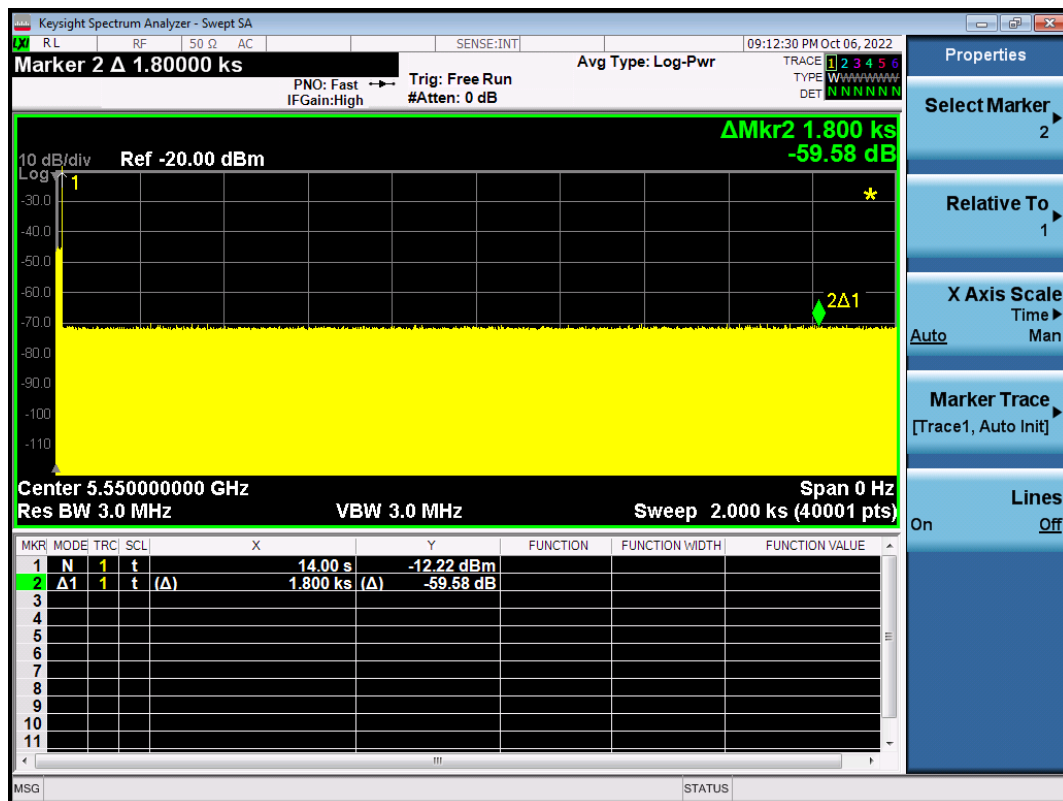

Test Bandwidth / Channel : 80MHz / 5530 MHz

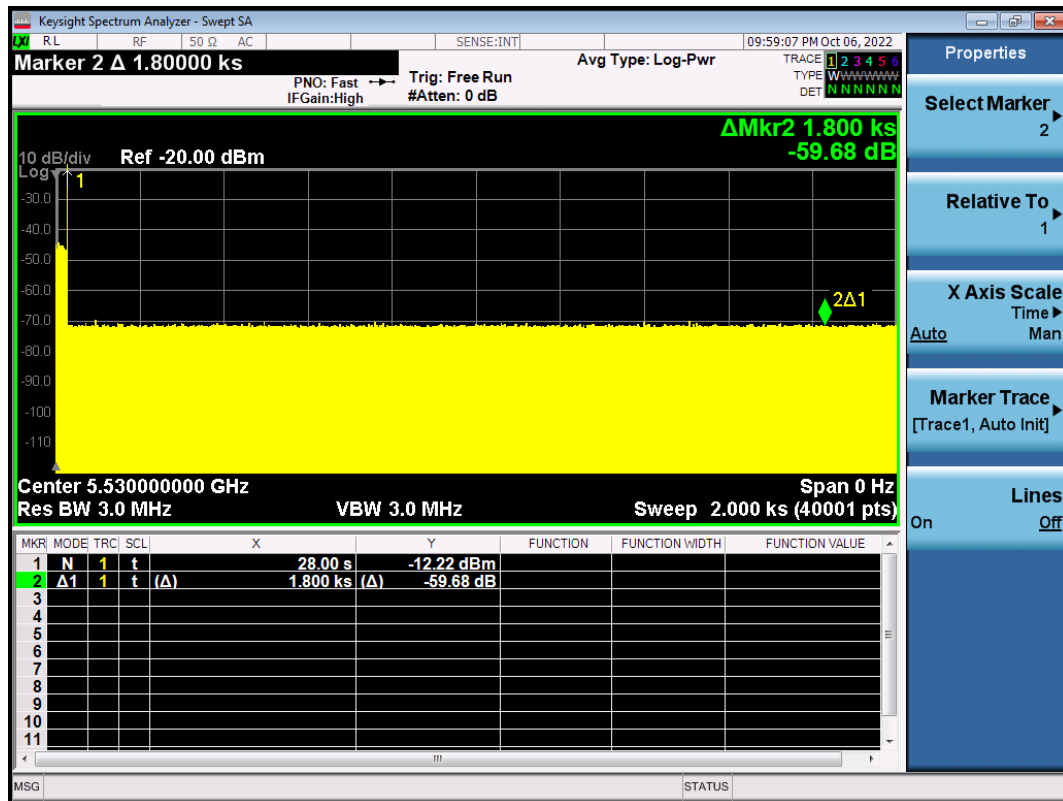

End of Test Report