

**- Part 15.205(a): Restricted band of operation**

MHz	MHz	MHz	MHz	GHz	GHz
0.009 ~ 0.110	8.414 25 ~ 8.414 75	108 ~ 121.94	1 300 ~ 1 427	4.5 ~ 5.15	14.47 ~ 14.5
0.495 ~ 0.505	12.29 ~ 12.293	123 ~ 138	1 435 ~ 1 626.5	5.35 ~ 5.46	15.35 ~ 16.2
2.173 5 ~ 2.190 5	12.519 75 ~ 12.520 25	149.9 ~ 150.05	1 645.5 ~ 1 646.5	7.25 ~ 7.75	17.7 ~ 21.4
4.125 ~ 4.128	12.576 75 ~ 12.577 25	156.524 75 ~ 156.525 25	1 660 ~ 1 710	8.025 ~ 8.5	22.01 ~ 23.12
4.177 25 ~ 4.177 75	13.36 ~ 13.41	156.7 ~ 156.9	1 718.8 ~ 1 722.2	9.0 ~ 9.2	23.6 ~ 24.0
4.207 25 ~ 4.207 75	16.42 ~ 16.423	162.012 5 ~ 167.17	2 200 ~ 2 300	9.3 ~ 9.5	31.2 ~ 31.8
6.215 ~ 6.218	16.694 75 ~ 16.695 25	167.72 ~ 173.2	2 310 ~ 2 390	10.6 ~ 12.7	36.43 ~ 36.5
6.267 75 ~ 6.268 25	16.804 25 ~ 16.804 75	240 ~ 285	2 483.5 ~ 2 500	13.25 ~ 13.4	Above 38.6
6.311 75 ~ 6.312 25	25.5 ~ 25.67	322 ~ 335.4	2 655 ~ 2 900		
8.291 ~ 8.294	37.5 ~ 38.25	399.90 ~ 410	3 260 ~ 3 267		
8.362 ~ 8.366	73 ~ 74.6	608 ~ 614	3 332 ~ 3 339		
8.376 25 ~ 8.386 75	74.8 ~ 75.2	960 ~ 1240	3 345.8 ~ 3 358		
			3 600 ~ 4 400		

**- RSS-GEN[8.10]: Restricted frequency bands**

MHz	MHz	MHz	MHz	MHz	GHz
0.090 ~ 0.110	8.362 ~ 8.366	73 ~ 74.6	608 ~ 614	3 345.8 ~ 3 358	9.0 ~ 9.2
0.495 ~ 0.505	8.376 25 ~ 8.386 75	74.8 ~ 75.2	960 ~ 1 427	3 500 ~ 4 400	9.3 ~ 9.5
2.173 5 ~ 2.190 5	8.414 25 ~ 8.414 75	108 ~ 138	1 435 ~ 1 626.5	4 500 ~ 5 150	10.6 ~ 12.7
3.020 ~ 3.026	12.29 ~ 12.293	149.9 ~ 150.05	1 645.5 ~ 1 646.5	5 350 ~ 5 460	13.25 ~ 13.4
4.125 ~ 4.128	12.519 75 ~ 12.520 25	156.524 75 ~	1 660 ~ 1 710	7 250 ~ 7 750	14.47 ~ 14.5
4.177 25 ~ 4.177 75	12.576 75 ~ 12.577 25	156.525 25	1 718.8 ~ 1 722.2	8 025 ~ 8 500	15.35 ~ 16.2
4.207 25 ~ 4.207 75	13.36 ~ 13.41	156.7 ~ 156.9	2 200 ~ 2 300		17.7 ~ 21.4
5.677 ~ 5.683	16.42 ~ 16.423	162.01 25 ~ 167.17	2 310 ~ 2 390		22.01 ~ 23.12
6.215 ~ 6.218	16.694 75 ~ 16.695 25	167.72 ~ 173.2	2 483.5 ~ 2 500		23.6 ~ 24.0
6.267 75 ~ 6.268 25	16.804 25 ~ 16.804 75	240 ~ 285	2 655 ~ 2 900		31.2 ~ 31.8
6.311 75 ~ 6.312 25	25.5 ~ 25.67	322 ~ 335.4	3 260 ~ 3 267		36.43 ~ 36.5
8.291 ~ 8.294	37.5 ~ 38.25	399.90 ~ 410	3 332 ~ 3 339		Above 38.6

## 9.3. Test Procedures

### 9.3.1. Test Procedures for Radiated Spurious Emissions

1. The EUT is placed on a non-conductive table. For emission measurements at or below 1 GHz, the table height is 80 cm. For emission measurements above 1 GHz, the table height is 1.5 m.  
The table was rotated 360 degrees to determine the position of the highest radiation.
2. During performing radiated emission below 1 GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 1 or 3 meter away from the interference-receiving antenna.
3. For measurements above 1 GHz absorbers are placed on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1 GHz, the absorbers are removed.
4. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
5. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
6. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
7. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

#### Measurement Instrument Setting

- Frequencies less than or equal to 1 000 MHz  
The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
- Frequencies above 1 000 MHz  
The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1 GHz.  
The result of Average measurement is calculated using PK result and duty correction factor.

### 9.3.2. Test Procedures for Conducted Spurious Emissions

1. The transmitter output was connected to the spectrum analyzer.
2. The **reference level** of the fundamental frequency was measured with the spectrum analyzer using RBW = 100 kHz, VBW = 300 kHz.
3. The conducted spurious emission was tested each ranges were set as below.

**Frequency range : 9 kHz ~ 30 MHz**

RBW = 100 kHz, VBW = 300 kHz, SWEEP TIME = AUTO, DETECTOR = PEAK, TRACE = MAX HOLD, SWEEP POINT : 40 001

**Frequency range : 30 MHz ~ 10 GHz, 10 GHz ~ 25 GHz**

RBW = 1 MHz, VBW = 3 MHz, SWEEP TIME = AUTO, DETECTOR = PEAK, TRACE = MAX HOLD, SWEEP POINT : 40 001

**LIMIT LINE = 20 dB below of the reference level of above measurement procedure Step 2. (RBW = 100 kHz, VBW = 300 kHz)**

If the emission level with above setting was close to the limit (ie, less than 3 dB margin) then zoom scan is required using RBW = 100 kHz, VBW = 300 kHz, SPAN = 100 MHz and BINS = 2 001 to get accurate emission level within 100 kHz BW.

Also the path loss for conducted measurement setup was used as described on the Appendix I of this test report.

## 9.4. Test Results

### 9.4.1. Radiated Emissions

#### ▪ Test Notes.

- The radiated emissions were investigated 9 kHz to 25 GHz. And no other spurious and harmonic emissions were found below listed frequencies.
- Information of Distance Correction Factor  
For finding emissions, measurements may be performed at a distance closer than that specified in the regulations.  
In this case, the distance correction factor is applied to the result.  
- Calculation of distance factor  
At frequencies below 30 MHz =  $40 \log(\text{tested distance} / \text{specified distance})$   
At frequencies at or above 30 MHz =  $20 \log(\text{tested distance} / \text{specified distance})$   
When distance factor is "N/A", the measurements were performed at the specified distance and distance factor is not applied.
- DCCF Calculation. (DCCF = Duty Cycle Correction Factor)  
- Time to cycle through all channels =  $\Delta t = T [\text{ms}] \times 20$  minimum hopping channels, where T = pulse width = **2.88 ms**  
-  $100 \text{ ms} / \Delta t [\text{ms}] = H \rightarrow$  Round up to next highest integer, to account for worst case,  $H' = 100 / (2.88 \times 20) = 1.74 \approx 2$   
- The Worst Case Dwell Time =  $T [\text{ms}] \times H' = 2.88 \text{ ms} \times 2 = 5.76 \text{ ms}$   
-  $\text{DCCF} = 20 \log(\text{The Worst Case Dwell Time} / 100 \text{ ms}) \text{ dB} = 20 \log(5.76 / 100) = -24.79 \text{ dB}$
- Sample Calculation.  
 $\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{TF} + \text{DCCF} + \text{DCF} \quad / \quad \text{TF} = \text{AF} + \text{CL} + \text{HL} + \text{AL} - \text{AG}$   
Where, TF = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain, HL = High pass filter Loss, AL = Attenuator Loss, DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

#### 9 kHz ~ 25 GHz Data (Modulation : GFSK)

##### ▪ Lowest Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	TF (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2 387.98	H	Y	PK	49.69	4.46	N/A	N/A	54.15	74.00	19.85
2 387.98	H	Y	AV	49.69	4.46	-24.79	N/A	29.36	54.00	24.64
4 804.08	V	Z	PK	50.13	2.40	N/A	N/A	52.53	74.00	21.47
4 804.08	V	Z	AV	50.13	2.40	-24.79	N/A	27.74	54.00	26.26

##### ▪ Middle Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	TF (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4 881.93	V	Z	PK	50.33	2.38	N/A	N/A	52.71	74.00	21.29
4 881.93	V	Z	AV	50.33	2.38	-24.79	N/A	27.92	54.00	26.08

##### ▪ Highest Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	TF (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2 484.16	H	Y	PK	53.53	5.41	N/A	N/A	58.94	74.00	15.06
2 484.16	H	Y	AV	53.53	5.41	-24.79	N/A	34.15	54.00	19.85
4 959.56	V	Z	PK	50.46	2.45	N/A	N/A	52.91	74.00	21.09
4 959.56	V	Z	AV	50.46	2.45	-24.79	N/A	28.12	54.00	25.88

### 9 kHz ~ 25 GHz Data (Modulation : $\pi/4$ DQPSK)

#### ▪ Lowest Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	TF (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2 388.90	H	Y	PK	50.54	4.46	N/A	N/A	55.00	74.00	19.00
2 388.90	H	Y	AV	50.54	4.46	-24.79	N/A	30.21	54.00	23.79
4 804.44	V	Z	PK	48.99	2.40	N/A	N/A	51.39	74.00	22.61
4 804.44	V	Z	AV	48.99	2.40	-24.79	N/A	26.60	54.00	27.40

#### ▪ Middle Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	TF (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4 881.65	V	Z	PK	50.66	2.37	N/A	N/A	53.03	74.00	20.97
4 881.65	V	Z	AV	50.66	2.37	-24.79	N/A	28.24	54.00	25.76

#### ▪ Highest Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	TF (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2 484.12	H	Y	PK	52.58	5.40	N/A	N/A	57.98	74.00	16.02
2 484.12	H	Y	AV	52.58	5.40	-24.79	N/A	33.19	54.00	20.81
4 959.80	V	Z	PK	50.00	2.45	N/A	N/A	52.45	74.00	21.55
4 959.80	V	Z	AV	50.00	2.45	-24.79	N/A	27.66	54.00	26.34

## 9 kHz ~ 25 GHz Data (Modulation : 8DPSK)

### ▪ Lowest Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	TF (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2 389.71	H	Y	PK	48.88	4.46	N/A	N/A	53.34	74.00	20.66
2 389.71	H	Y	AV	48.88	4.46	-24.79	N/A	28.55	54.00	25.45
4 804.24	V	Z	PK	50.34	2.40	N/A	N/A	52.74	74.00	21.26
4 804.24	V	Z	AV	50.34	2.40	-24.79	N/A	27.95	54.00	26.05

### ▪ Middle Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	TF (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4 881.84	V	Z	PK	49.88	2.38	N/A	N/A	52.26	74.00	21.74
4 881.84	V	Z	AV	49.88	2.38	-24.79	N/A	27.47	54.00	26.53


### ▪ Highest Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	TF (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2 484.66	H	Y	PK	50.89	5.41	N/A	N/A	56.30	74.00	17.70
2 484.66	H	Y	AV	50.89	5.41	-24.79	N/A	31.51	54.00	22.49
4 960.30	V	Z	PK	49.86	2.45	N/A	N/A	52.31	74.00	21.69
4 960.30	V	Z	AV	49.86	2.45	-24.79	N/A	27.52	54.00	26.48

## 9.4.2. Conducted Spurious Emissions


### Low Band-edge

### *Lowest Channel & Modulation : GFSK*

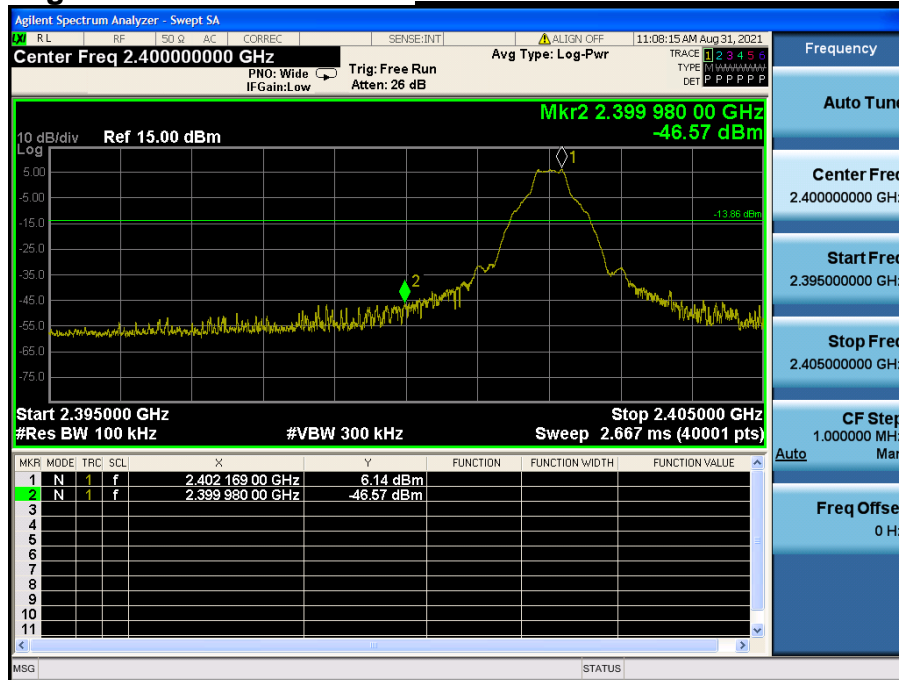



### Low Band-edge

### *Hopping mode & Modulation : GFSK*

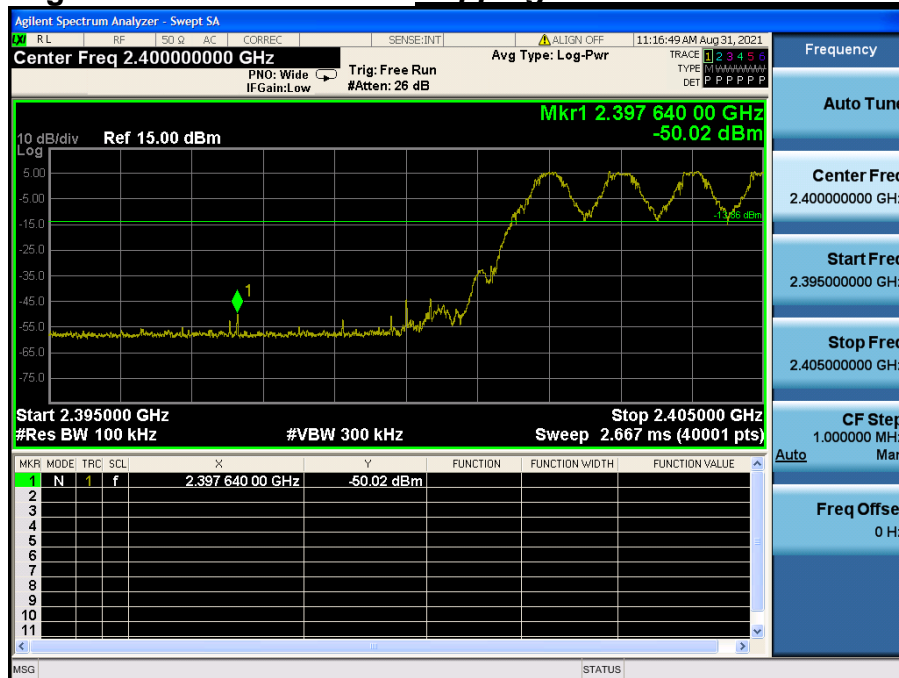

## Conducted Spurious Emissions


## Lowest Channel & Modulation : GFSK

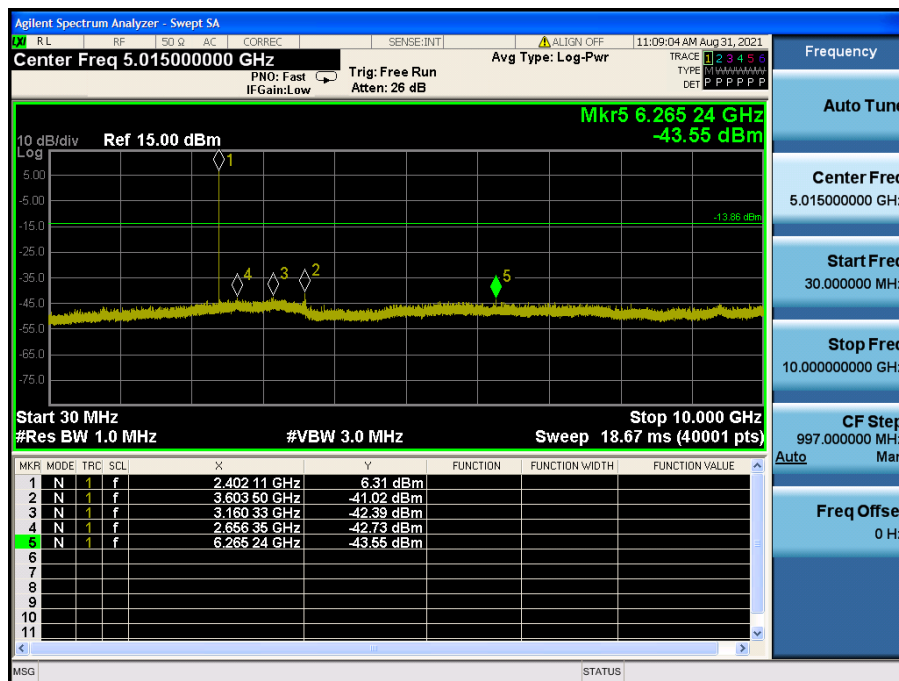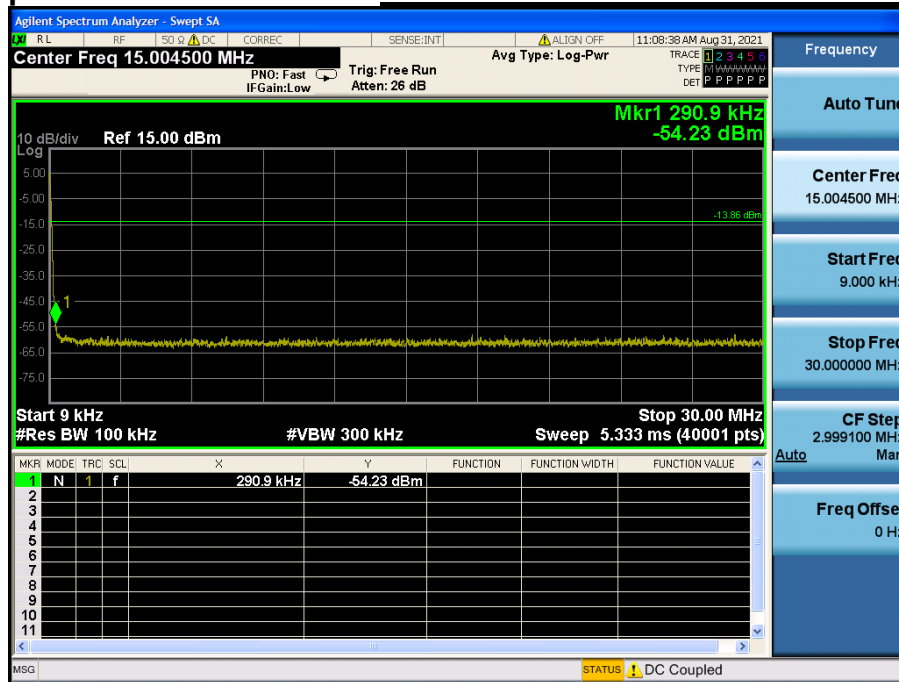




## Conducted Spurious Emissions

## Lowest Channel & Modulation : GFSK

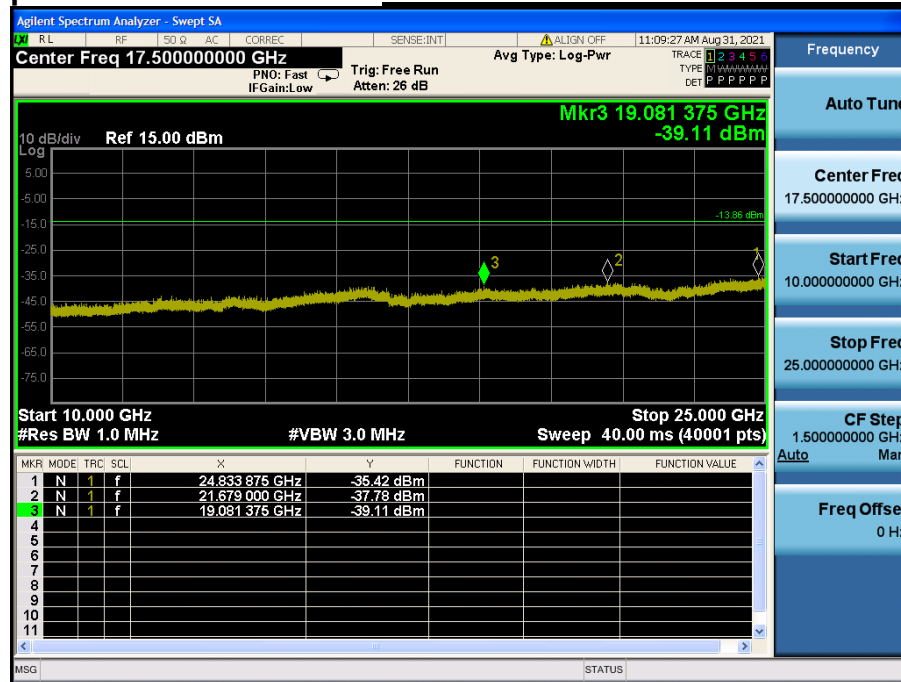


## Reference for limit

## Middle Channel & Modulation : GFSK

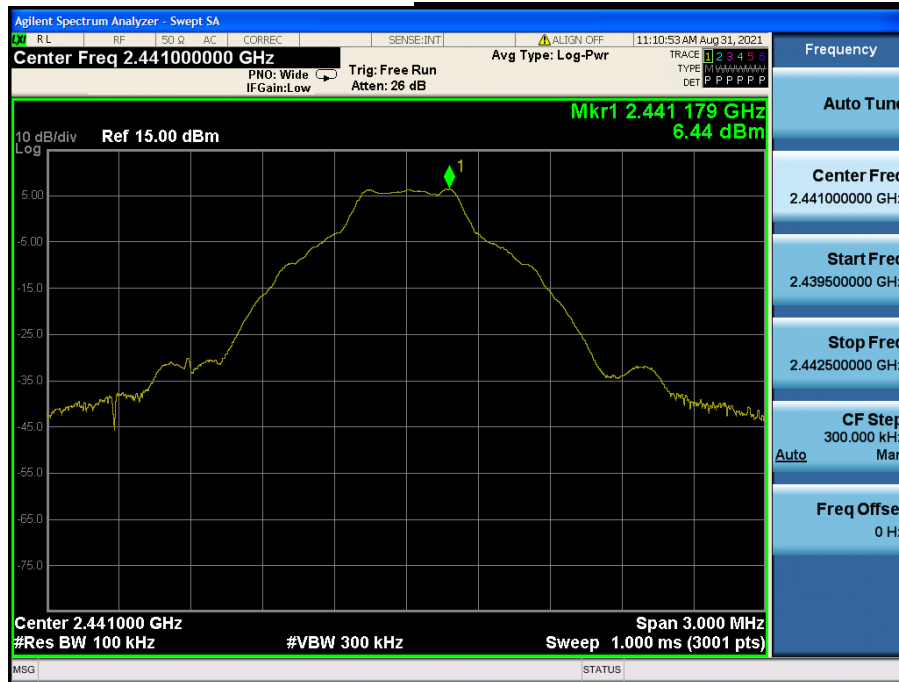



## Conducted Spurious Emissions

## Middle Channel & Modulation : GFSK

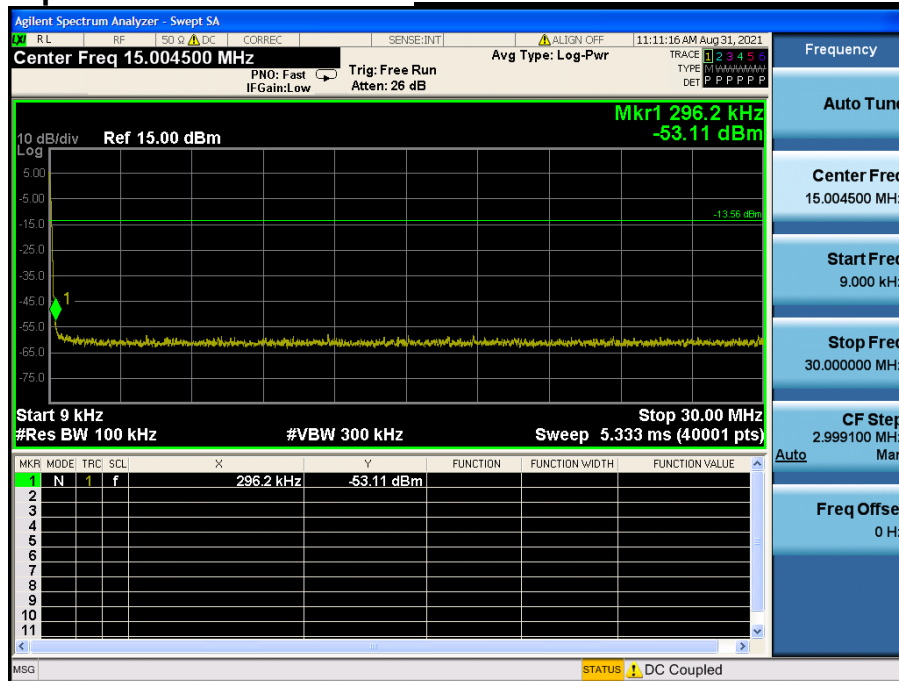


## Conducted Spurious Emissions

## Middle Channel & Modulation : GFSK

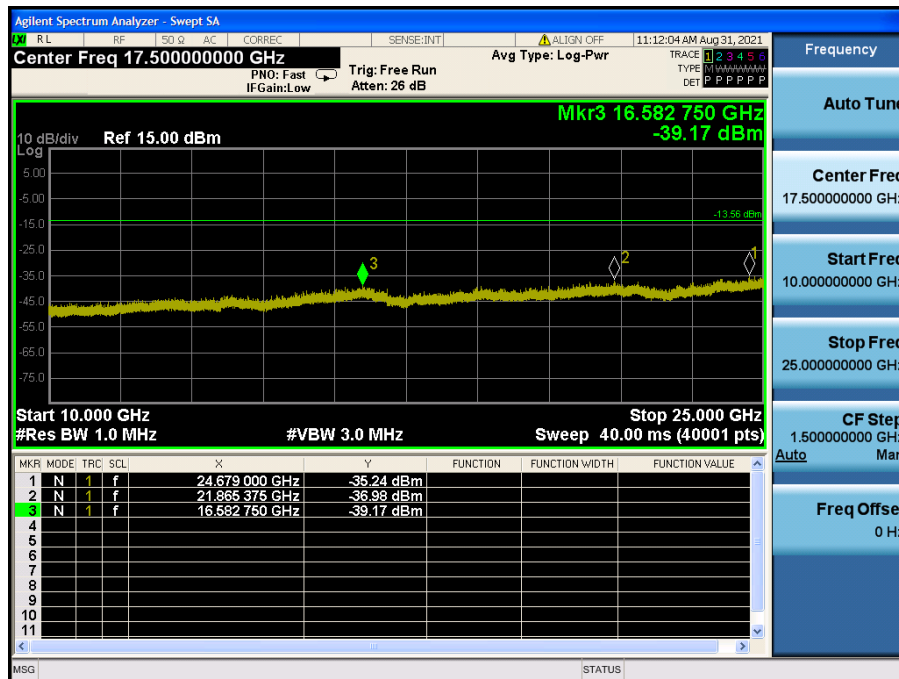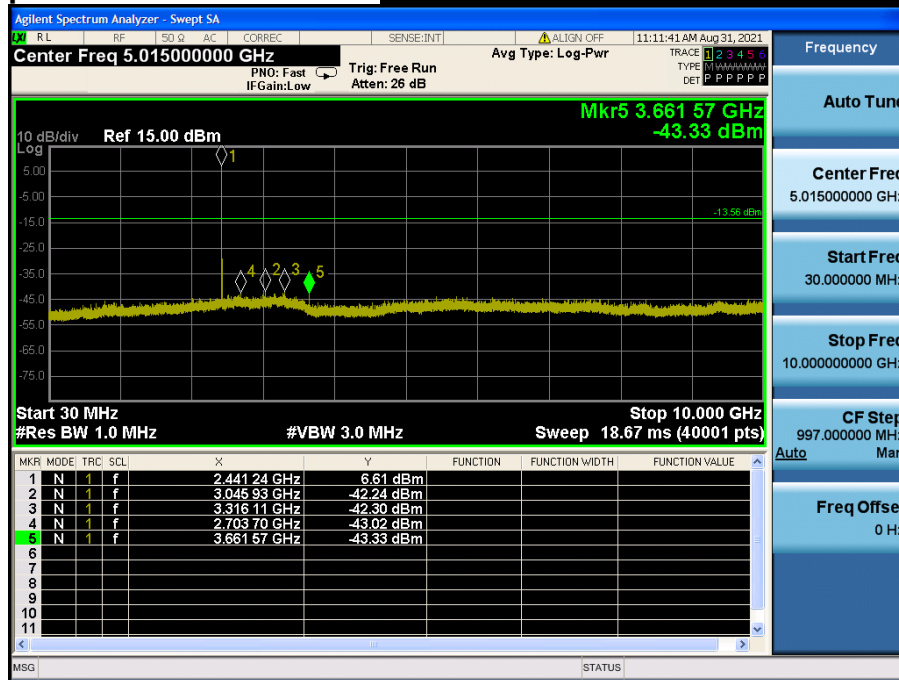


## High Band-edge

## Highest Channel & Modulation : GFSK


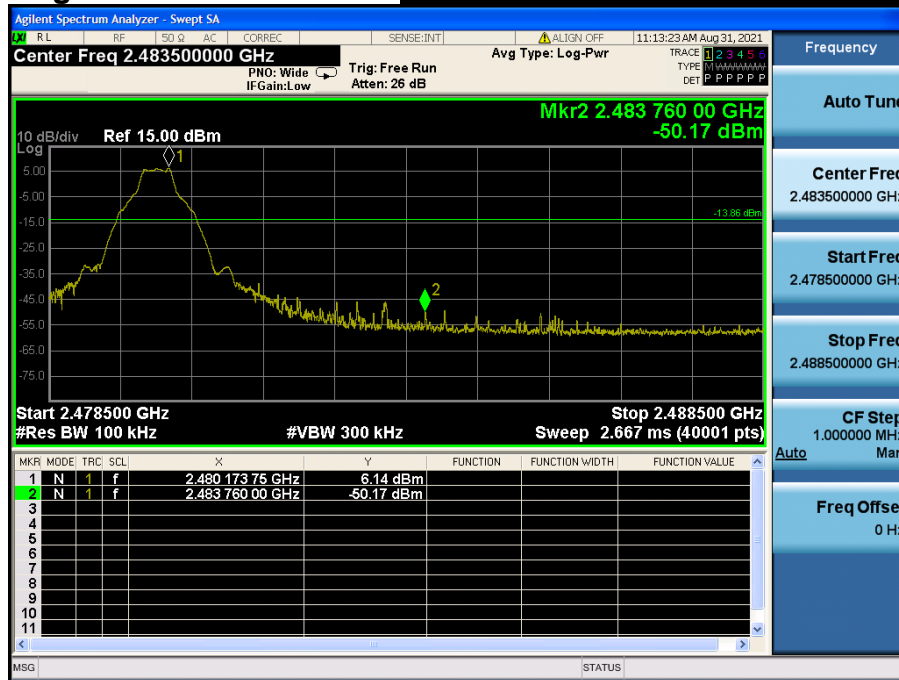


## High Band-edge


## Hopping mode & Modulation : GFSK

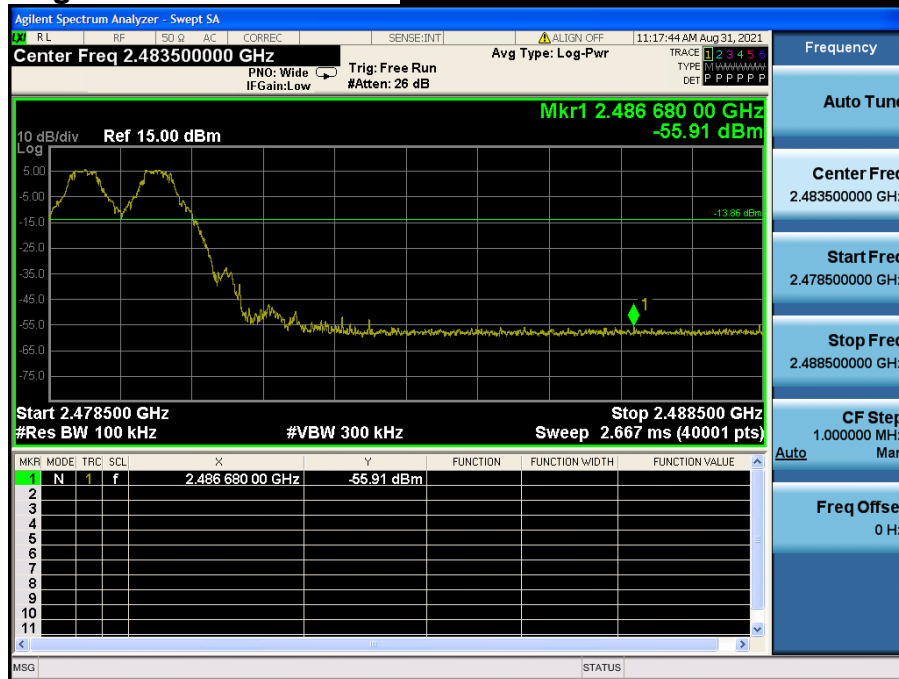


# Conducted Spurious Emissions *Highest Channel & Modulation : GFSK*

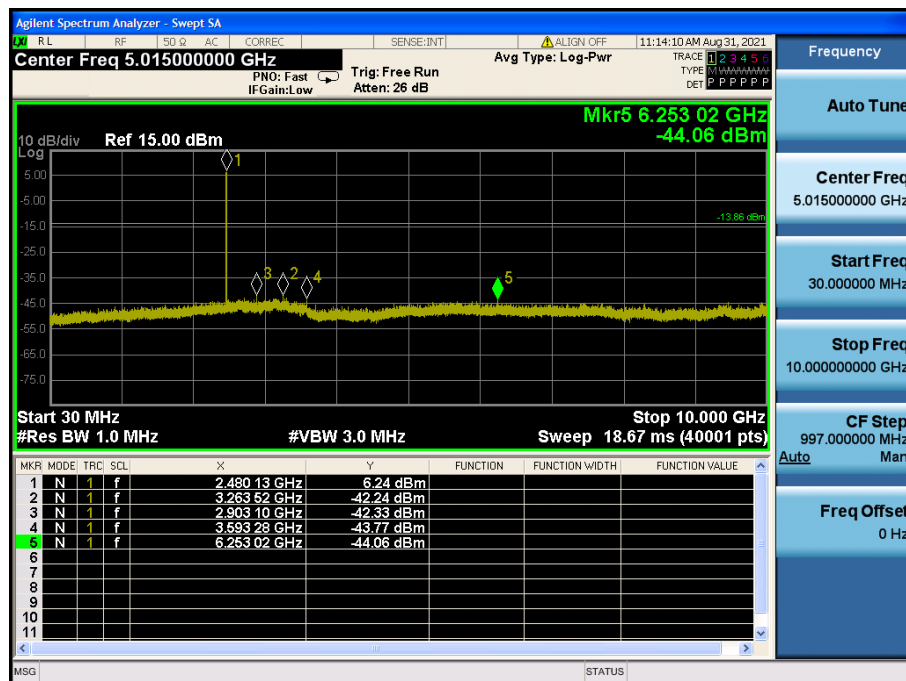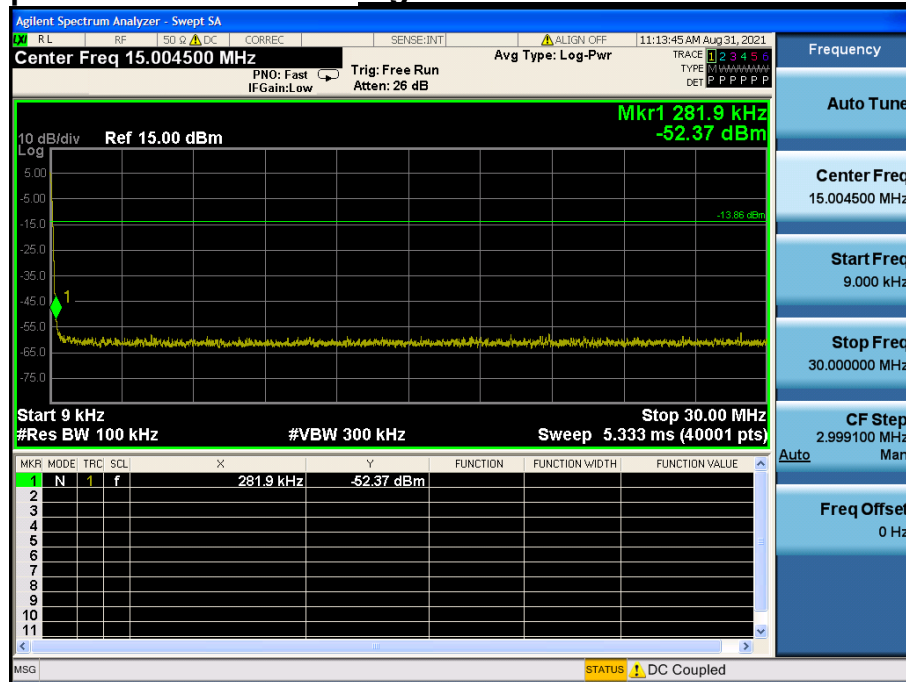


## Conducted Spurious Emissions *Highest Channel & Modulation : GFSK*

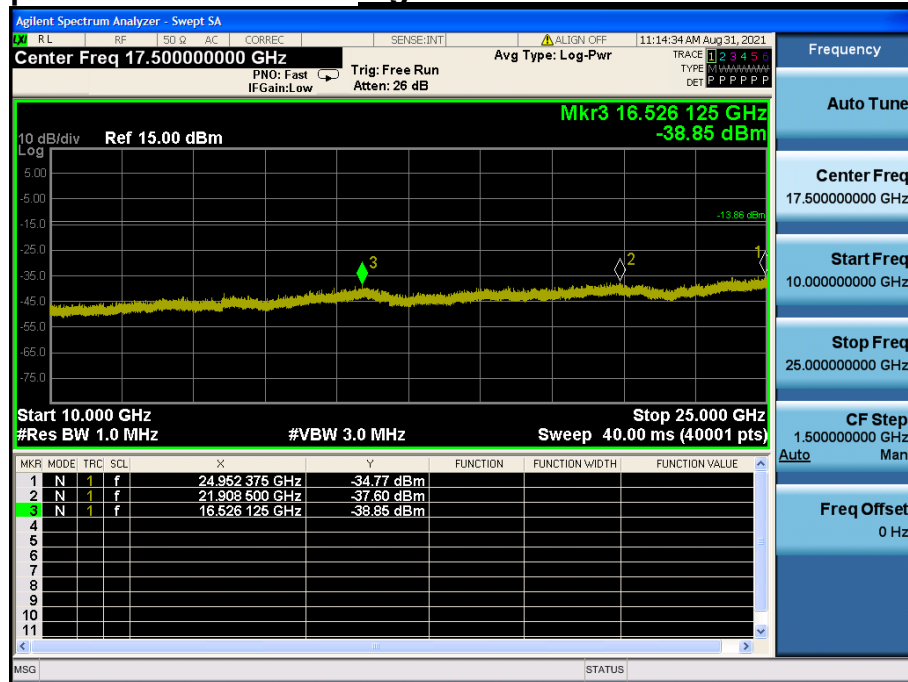



## Low Band-edge

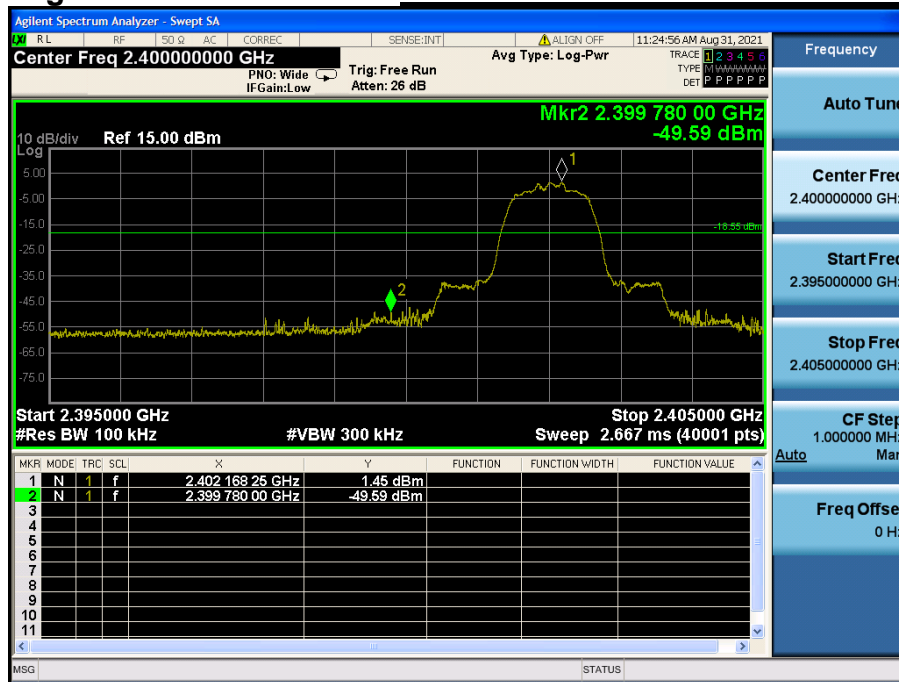Lowest Channel & Modulation :  $\pi/4$ DQPSK

## Low Band-edge

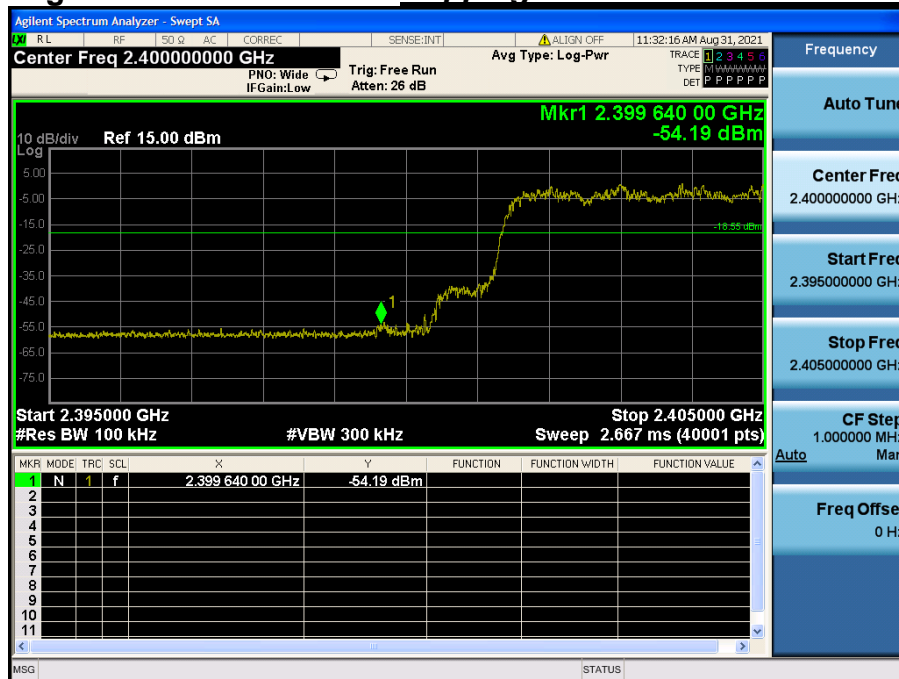
Hopping mode & Modulation :  $\pi/4$ DQPSK

# Conducted Spurious Emissions Lowest Channel & Modulation : $\pi/4$ DQPSK

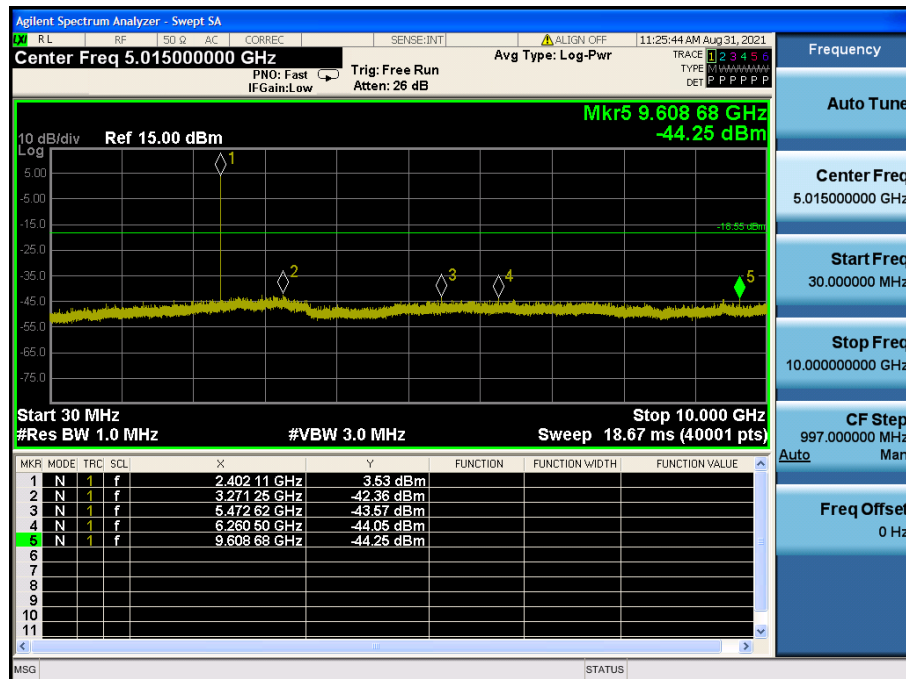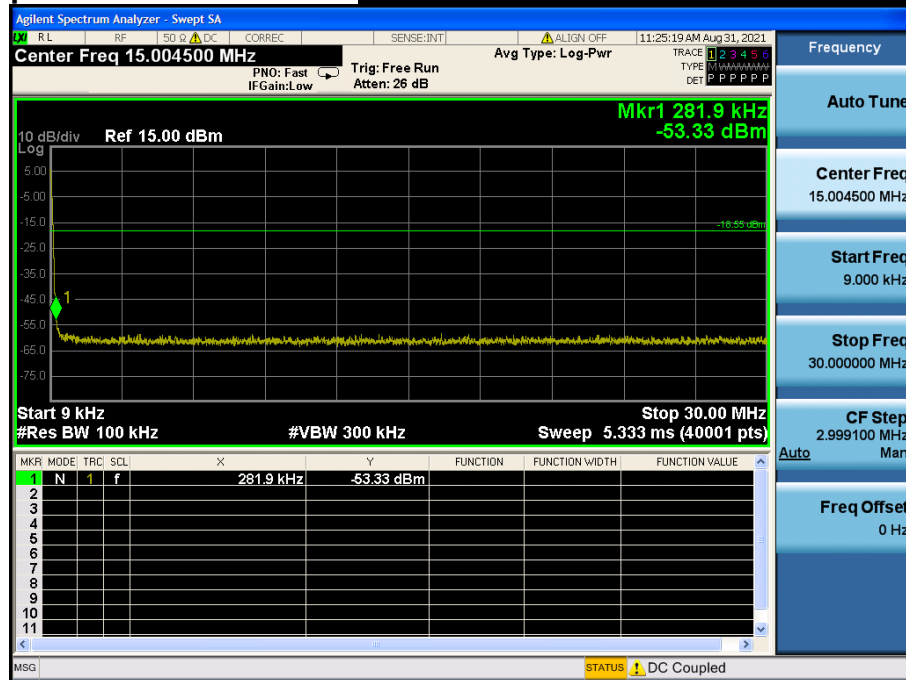




Conducted Spurious Emissions Lowest Channel & Modulation :  $\pi/4$ DQPSK

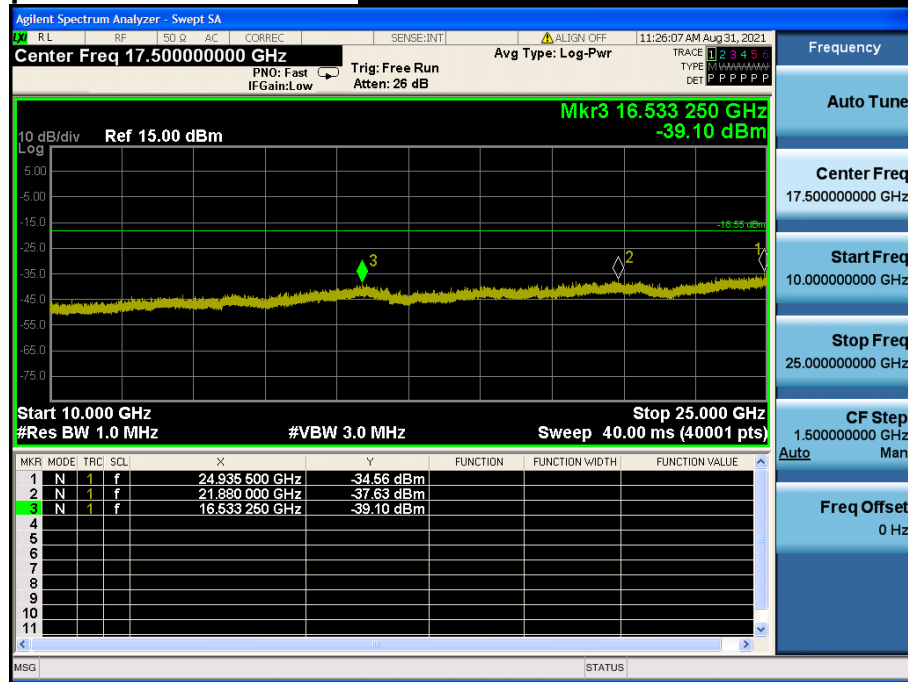


Reference for limit

**Middle Channel & Modulation :  $\pi/4$ DQPSK**

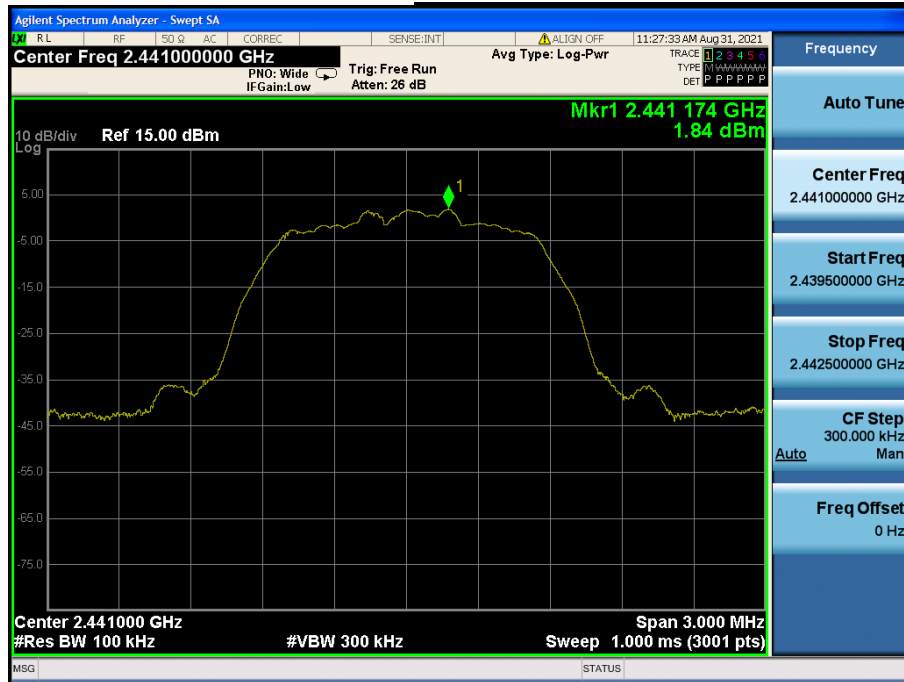



Conducted Spurious Emissions

**Middle Channel & Modulation :  $\pi/4$ DQPSK**

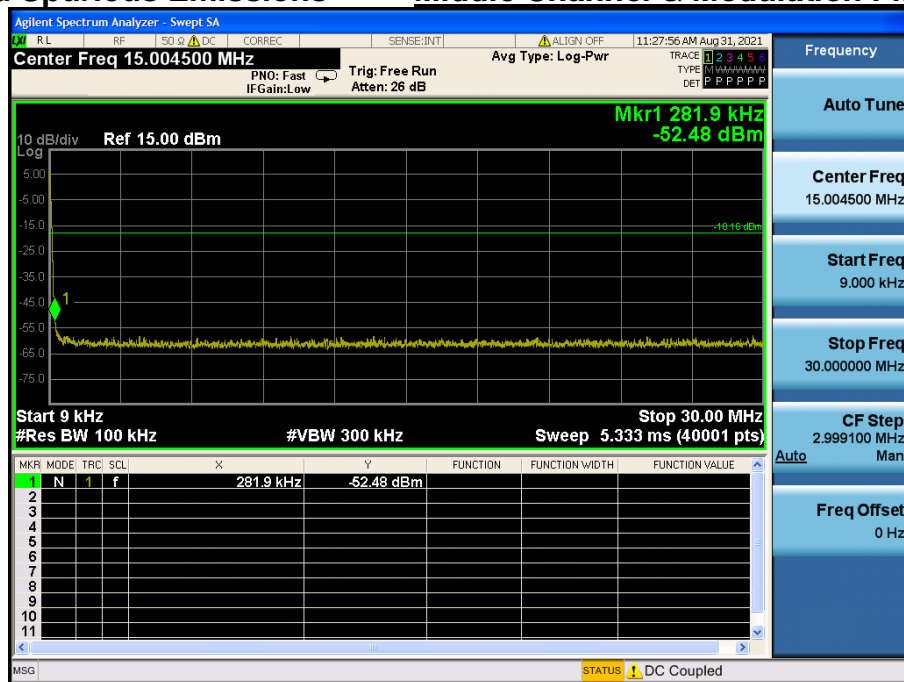


## Conducted Spurious Emissions

## Middle Channel & Modulation : $\pi/4$ DQPSK

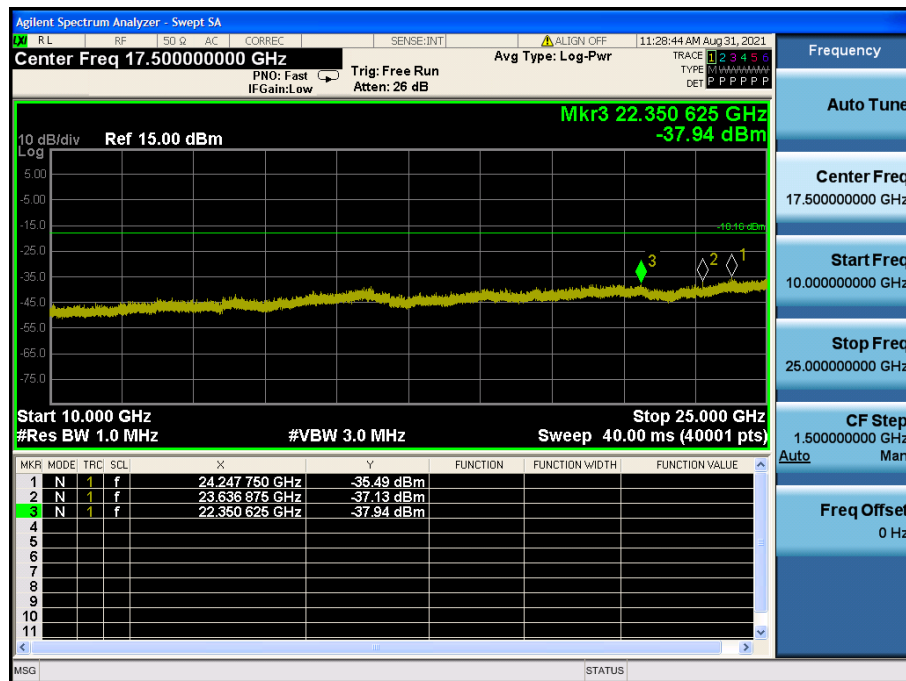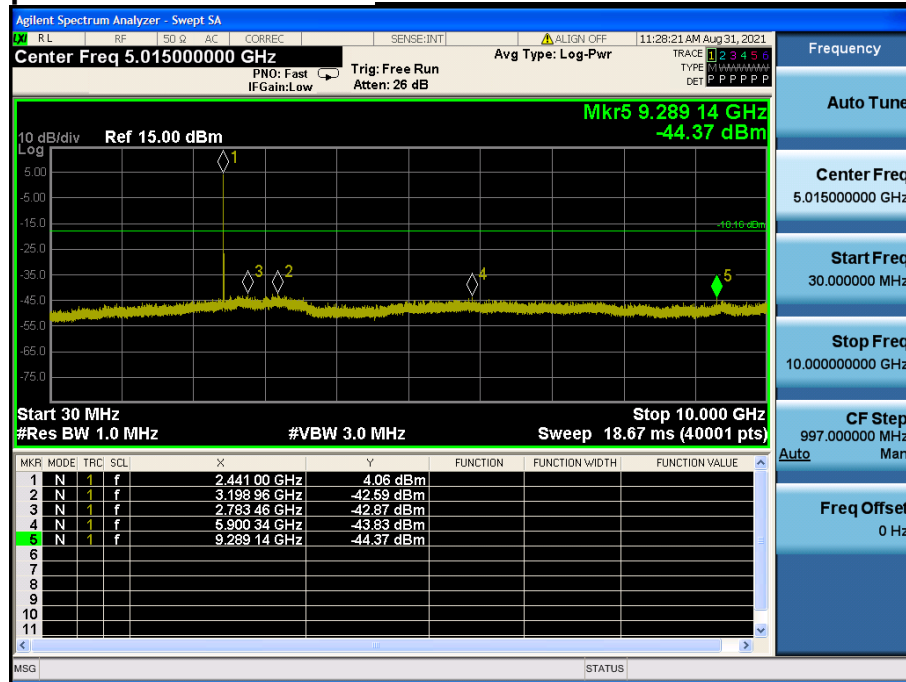


## High Band-edge

## Highest Channel & Modulation : $\pi/4$ DQPSK

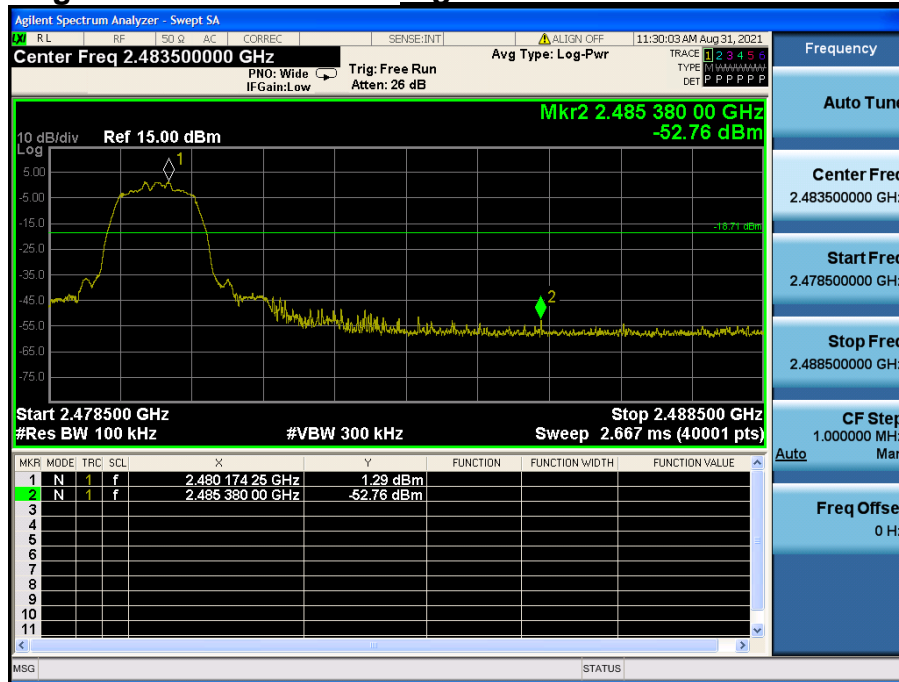



## High Band-edge

## Hopping mode & Modulation : $\pi/4$ DQPSK

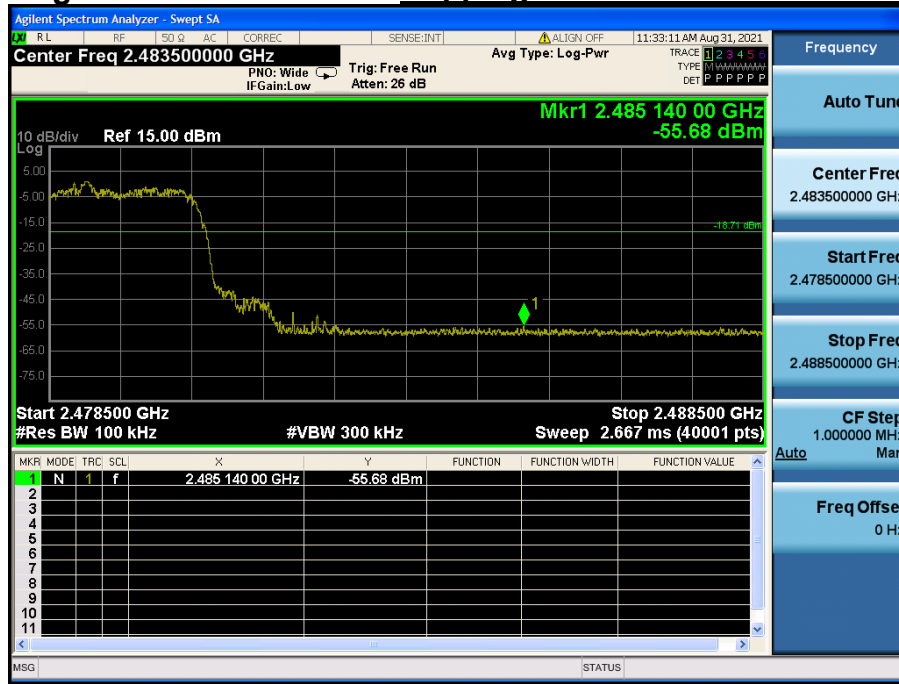


## Conducted Spurious Emissions

## Highest Channel & Modulation : $\pi/4$ DQPSK

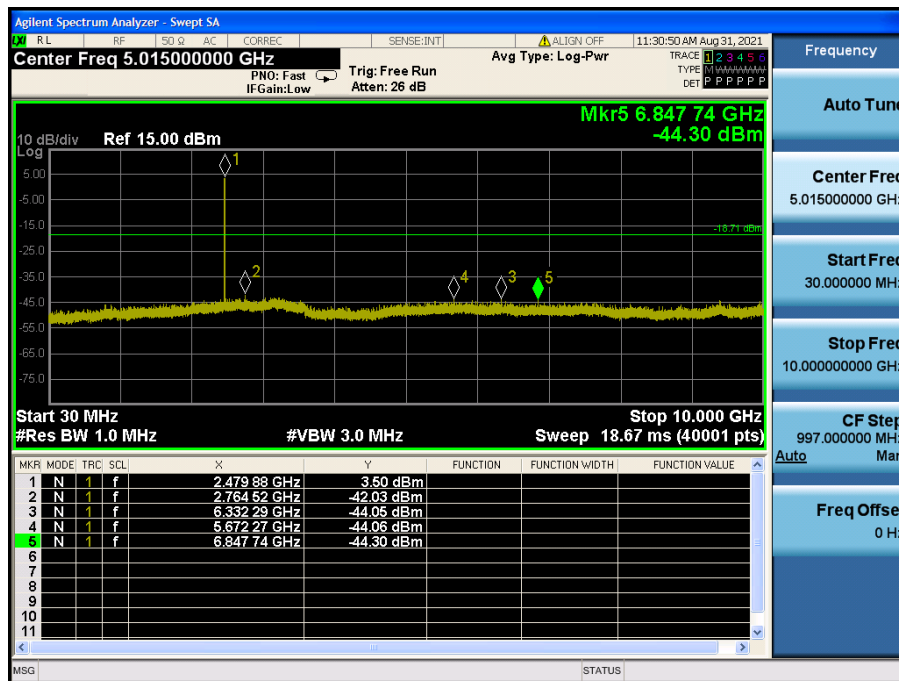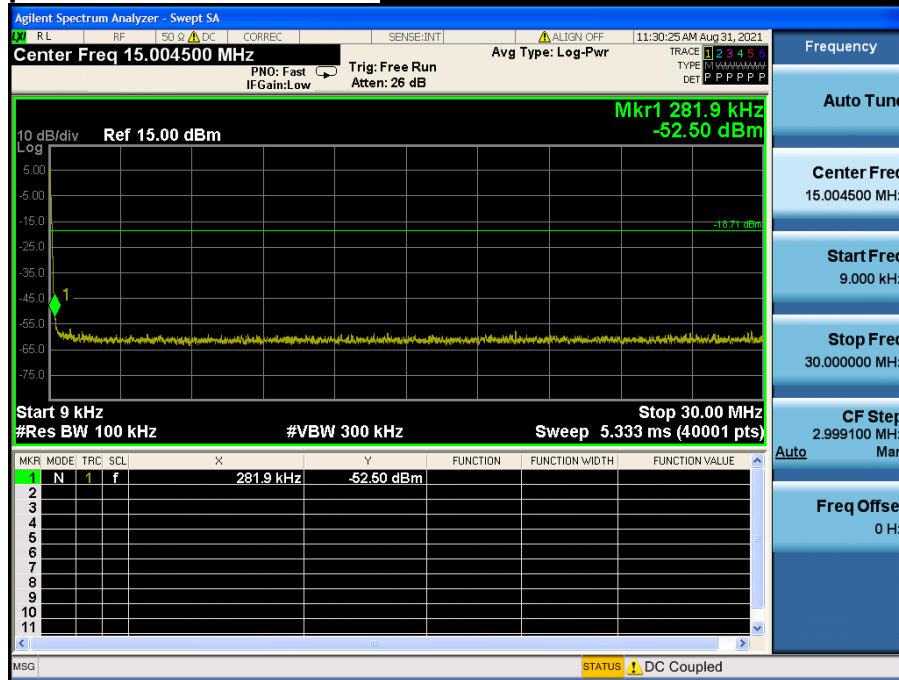


# Conducted Spurious Emissions

## Highest Channel & Modulation : $\pi/4$ DQPSK

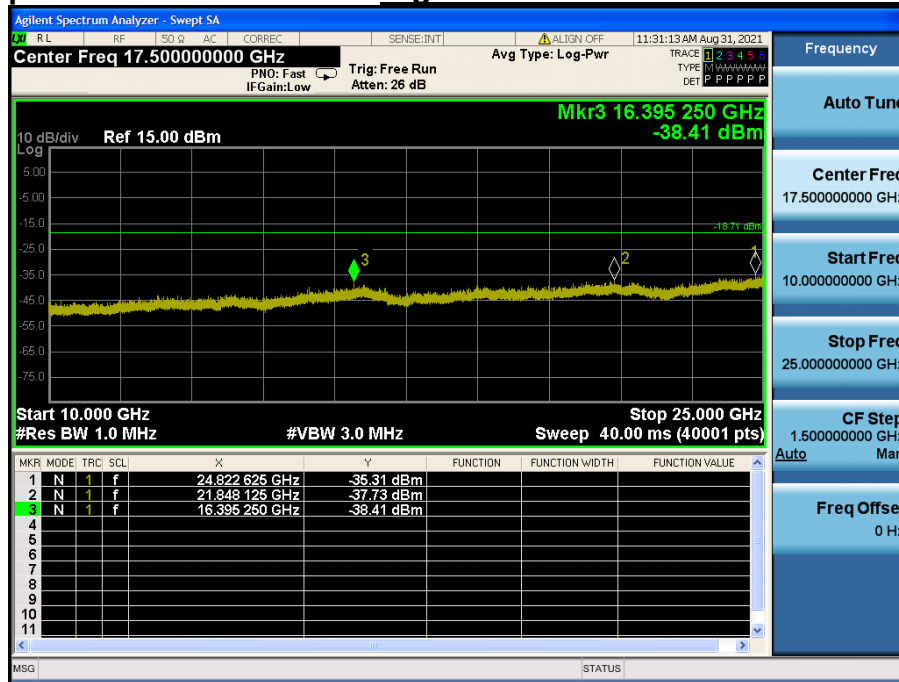


Low Band-edge

***Lowest Channel & Modulation : 8DPSK***

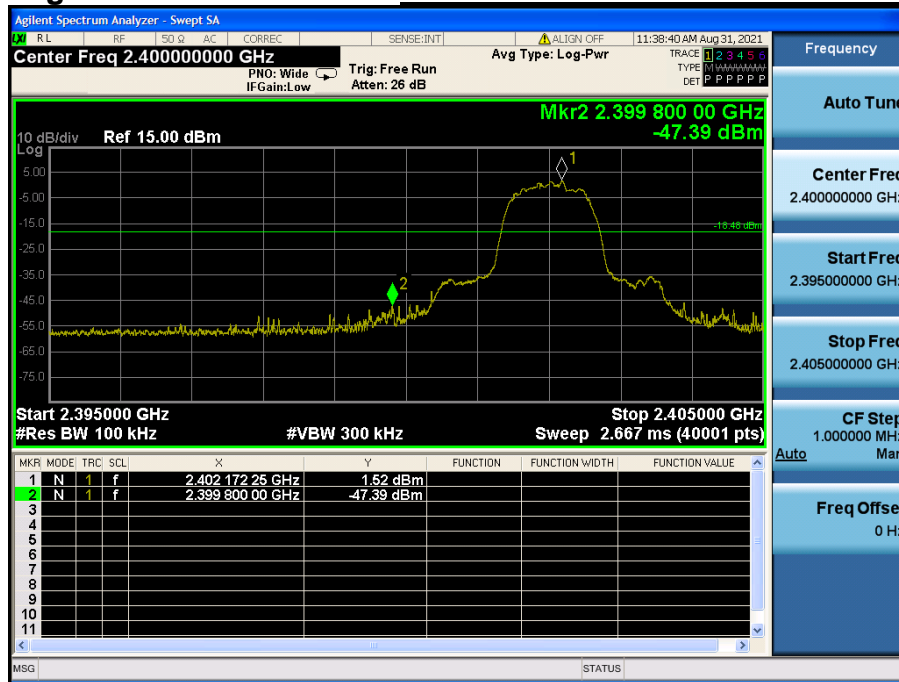



Low Band-edge

***Hopping mode & Modulation : 8DPSK***

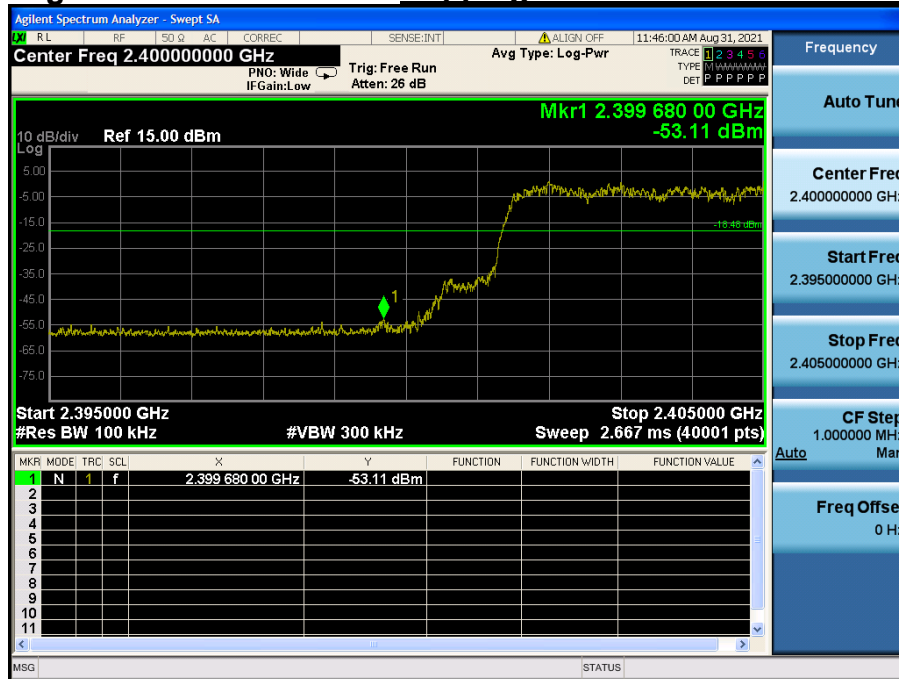

## Conducted Spurious Emissions

## Lowest Channel & Modulation : 8DPSK

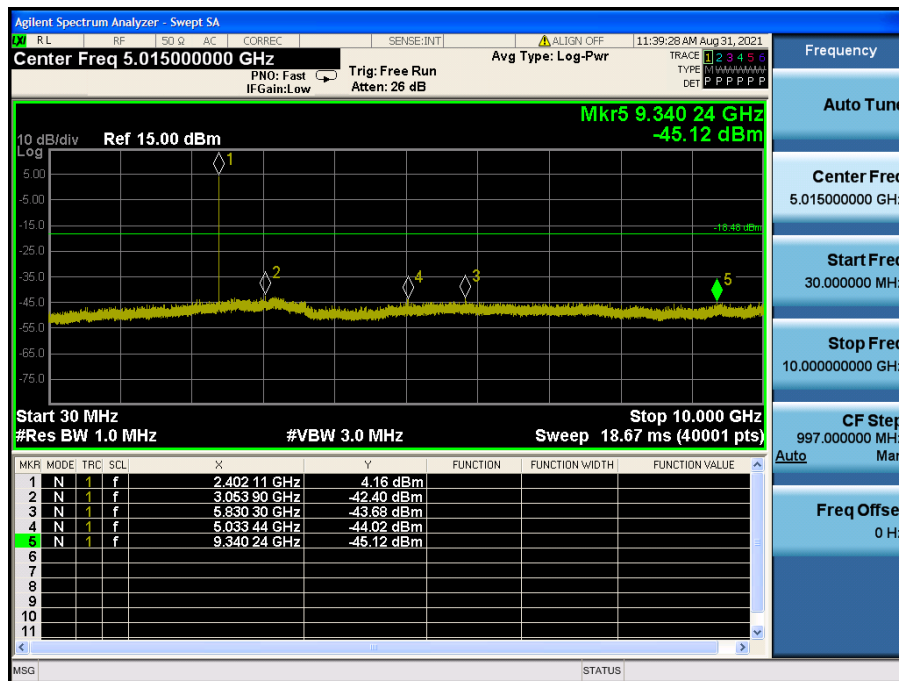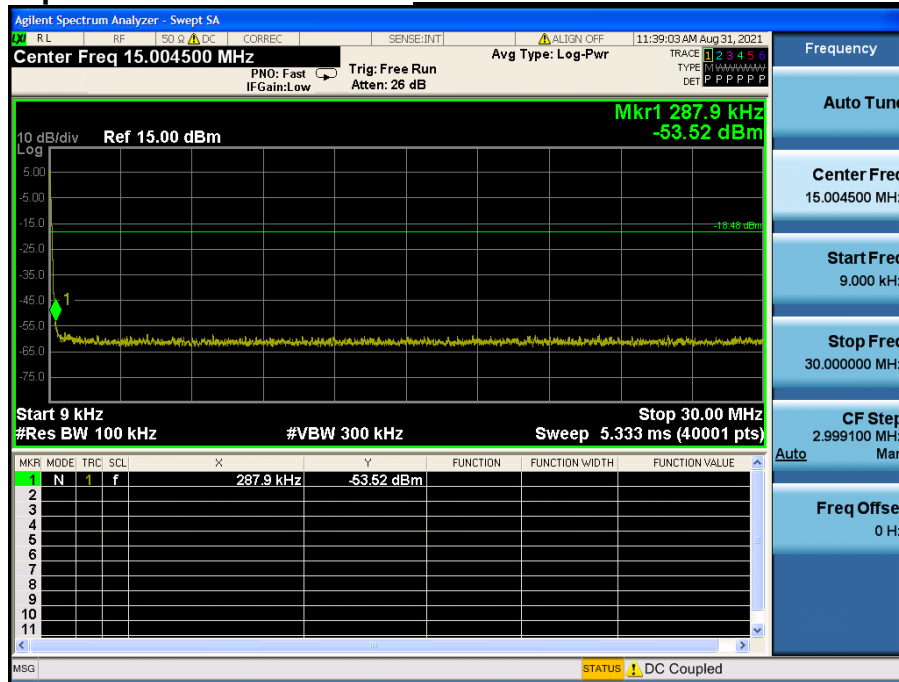




## Conducted Spurious Emissions

## Lowest Channel & Modulation : 8DPSK




## Reference for limit

## Middle Channel & Modulation : 8DPSK

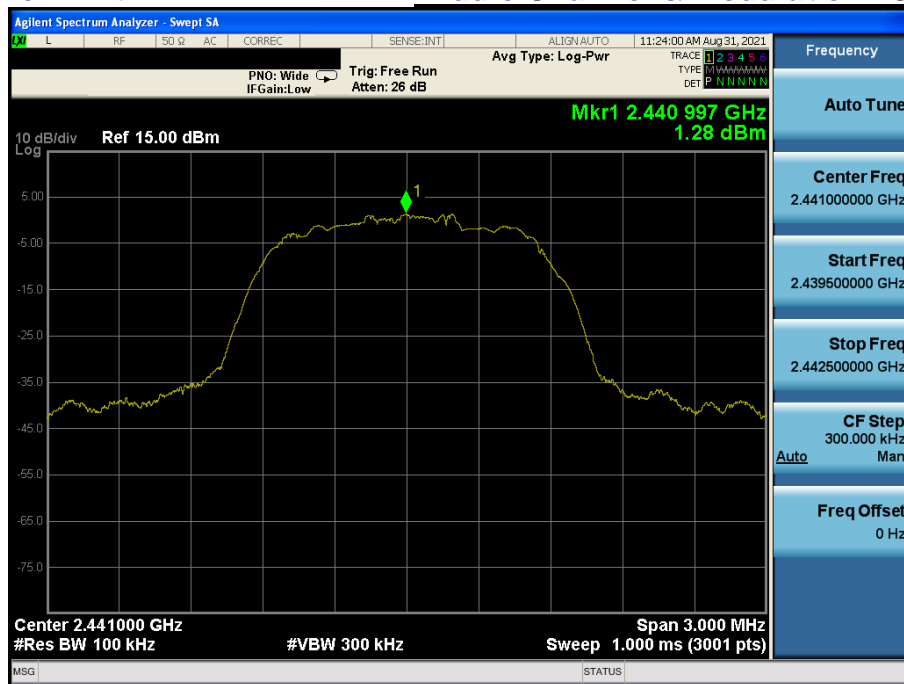



## Conducted Spurious Emissions

## Middle Channel & Modulation : 8DPSK

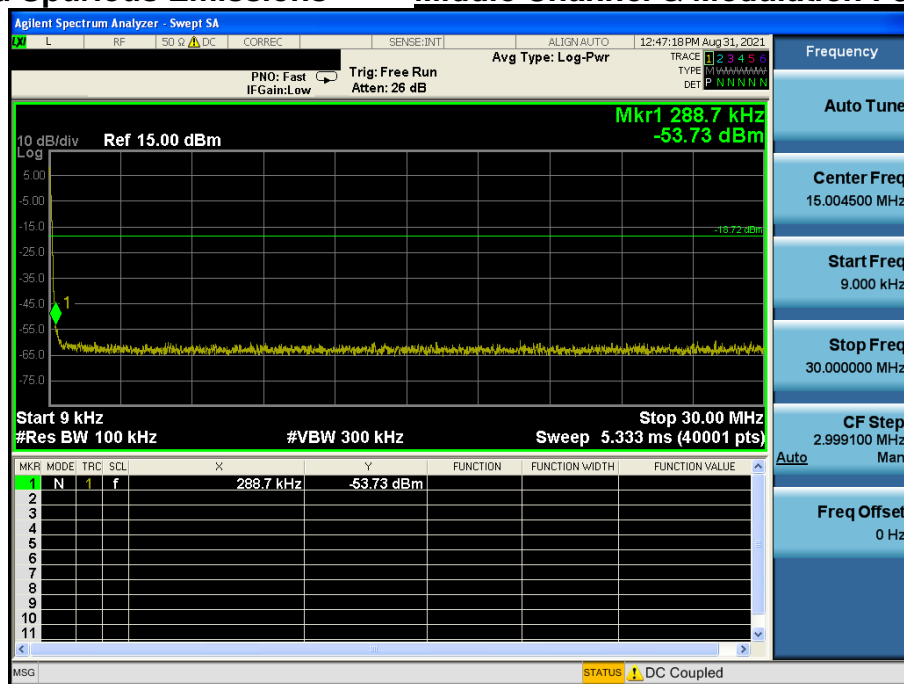


# Conducted Spurious Emissions

## Middle Channel & Modulation : 8DPSK

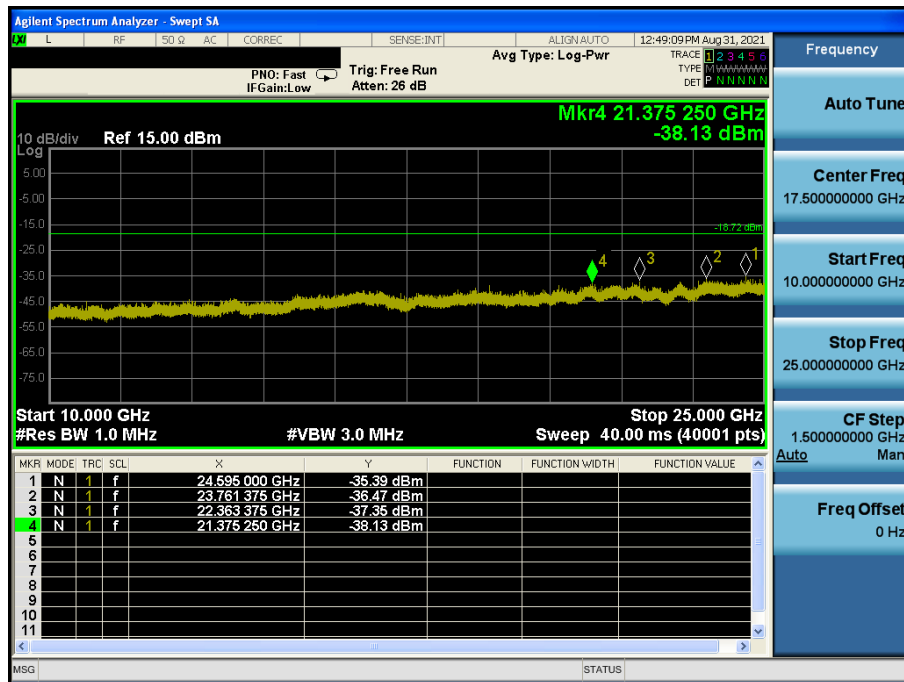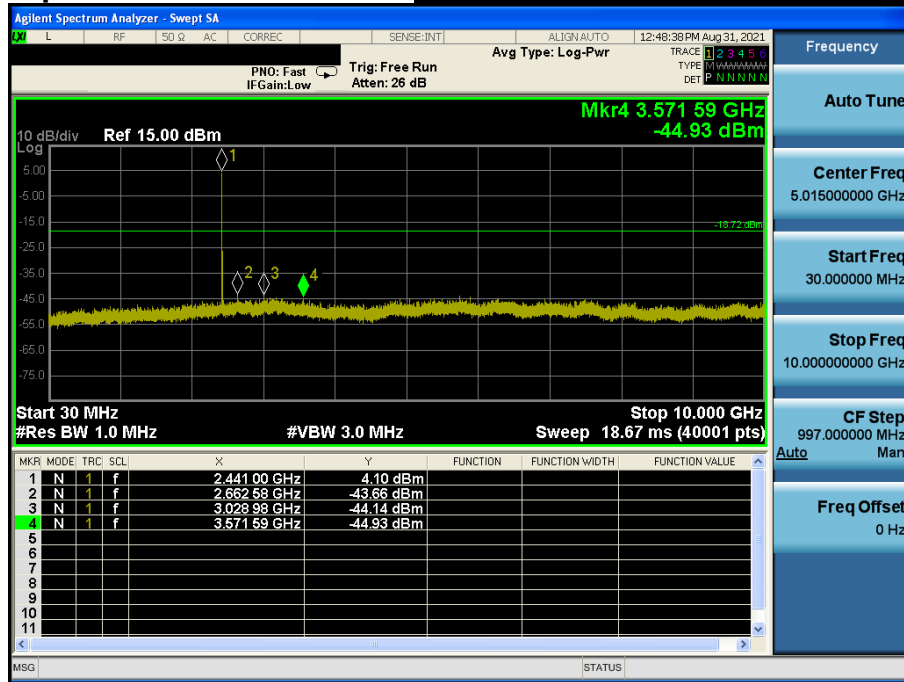


## High Band-edge

## Highest Channel & Modulation : 8DPSK

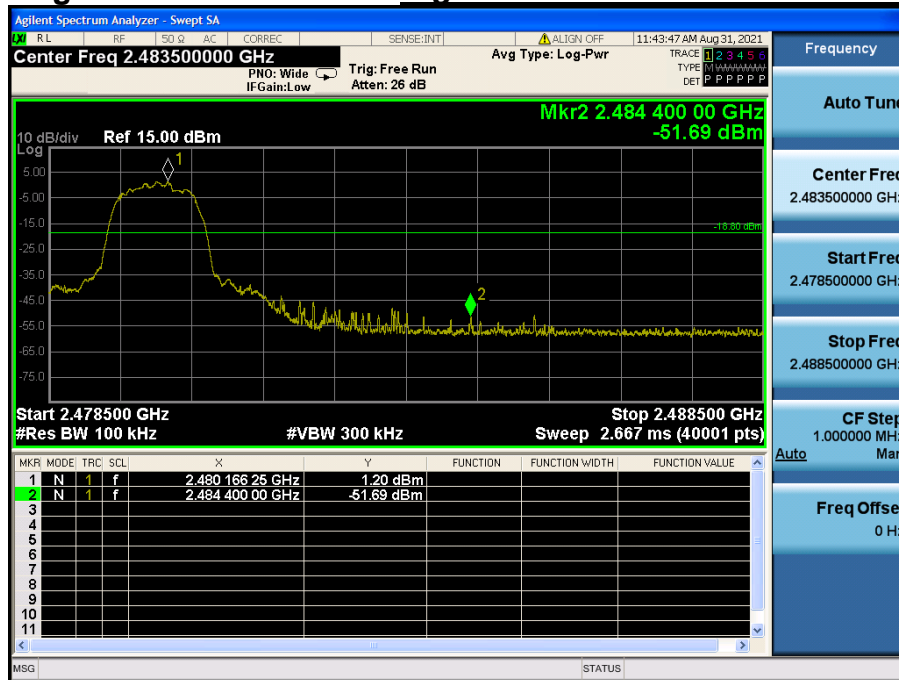



## High Band-edge

## Hopping mode & Modulation : 8DPSK

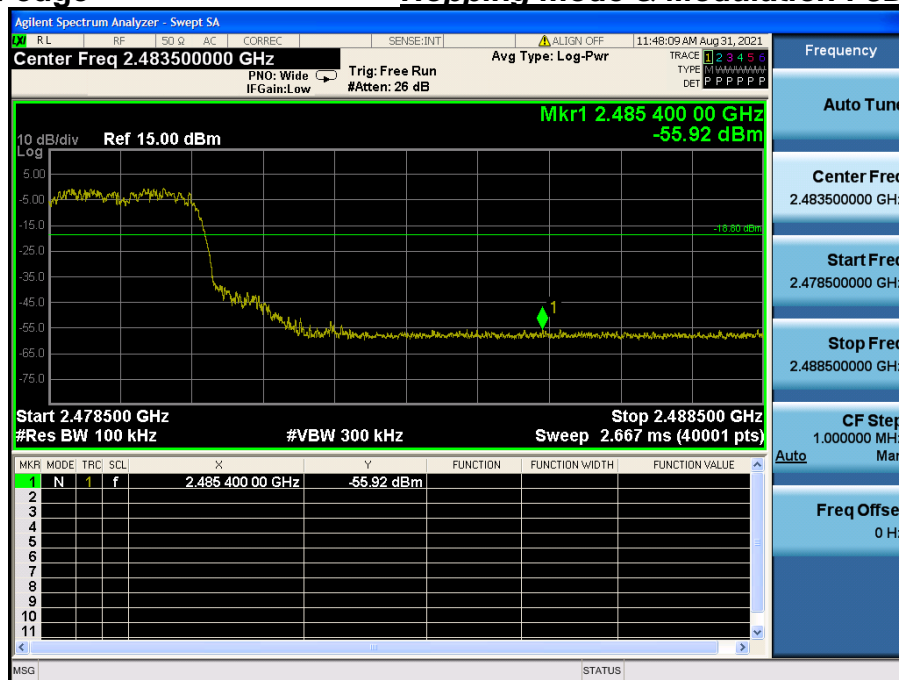

# Conducted Spurious Emissions

## Highest Channel & Modulation : 8DPSK

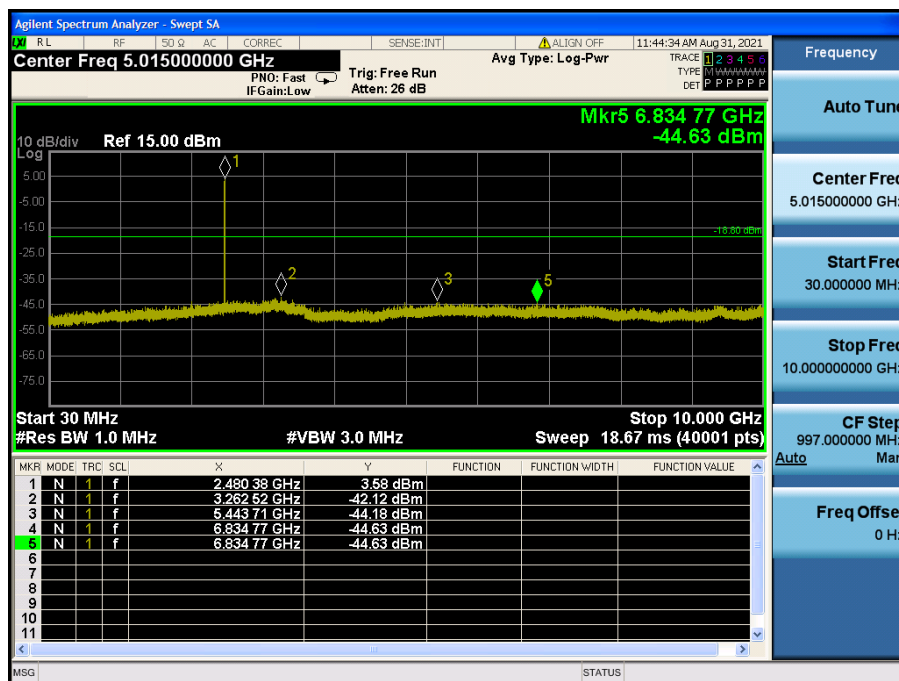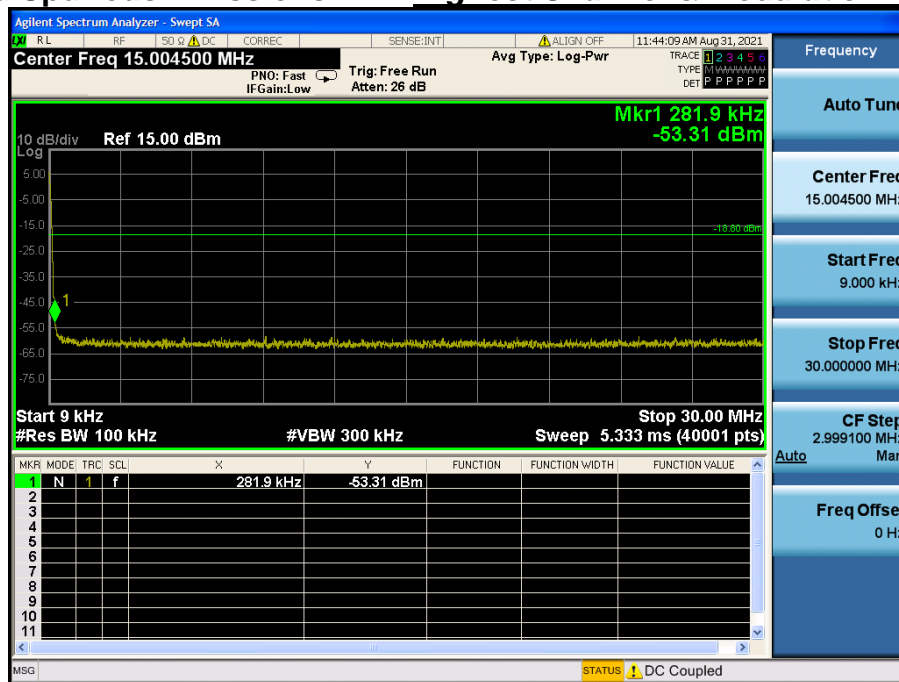

## Conducted Spurious Emissions

## Highest Channel & Modulation : 8DPSK

