

RF Test Data for 5G WiFi

(Conducted Measurements)

General Description of EUT	
Product Name:	Tablet PC
Test Model:	Tablet Lite 3.0
Sample ID:	RW-C-202209-0163-1-1#&RW-C-202209-0163-1-2#
Environmental Conditions	
Temperature:	25°C
Relative Humidity:	55%
Test Voltage:	DC 3.8V
Test Engineer:	Zhu Dian Yuan
Note: For a more detailed features description, please refer to the report TBR-C-202209-0163-23	

Contents

1. Duty Cycle.....	3
2. Maximum Conducted Output Power	11
3. Occupied Channel Bandwidth&26 Bandwidth.....	12
4. Maximum Power Spectral Density Level.....	20
5. Band Edge	28
6. Frequency Stability	35
7. Conducted RF Spurious Emission.....	43
8. Restrict Band.....	54

1. Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5180	Ant1	96.3	0.16	0.77
NVNT	a	5200	Ant1	96.3	0.16	0.77
NVNT	a	5240	Ant1	96.53	0.15	0.72
NVNT	ac(VHT20)	5180	Ant1	97.04	0.13	0.76
NVNT	ac(VHT20)	5200	Ant1	96.32	0.16	0.76
NVNT	ac(VHT20)	5240	Ant1	97.04	0.13	0.76
NVNT	ac(VHT40)	5190	Ant1	94.2	0.26	1.54
NVNT	ac(VHT40)	5230	Ant1	92.86	0.32	1.54
NVNT	ac(VHT80)	5210	Ant1	89.19	0.5	3.03
NVNT	n(HT20)	5180	Ant1	97.01	0.13	0.77
NVNT	n(HT20)	5200	Ant1	96.3	0.16	0.77
NVNT	n(HT20)	5240	Ant1	97.01	0.13	0.77
NVNT	n(HT40)	5190	Ant1	94.12	0.26	1.56
NVNT	n(HT40)	5230	Ant1	94.12	0.26	1.56

Note: Duty Cycle(%)=ON(ms)/(ON(ms)+OFF(ms))

ON(ms)=Maker3-Maker2


(ON(ms)+OFF(ms))=Maker3-Maker1

Test Graphs


Duty Cycle NVNT a 5180MHz Ant1




Duty Cycle NVNT a 5200MHz Ant1

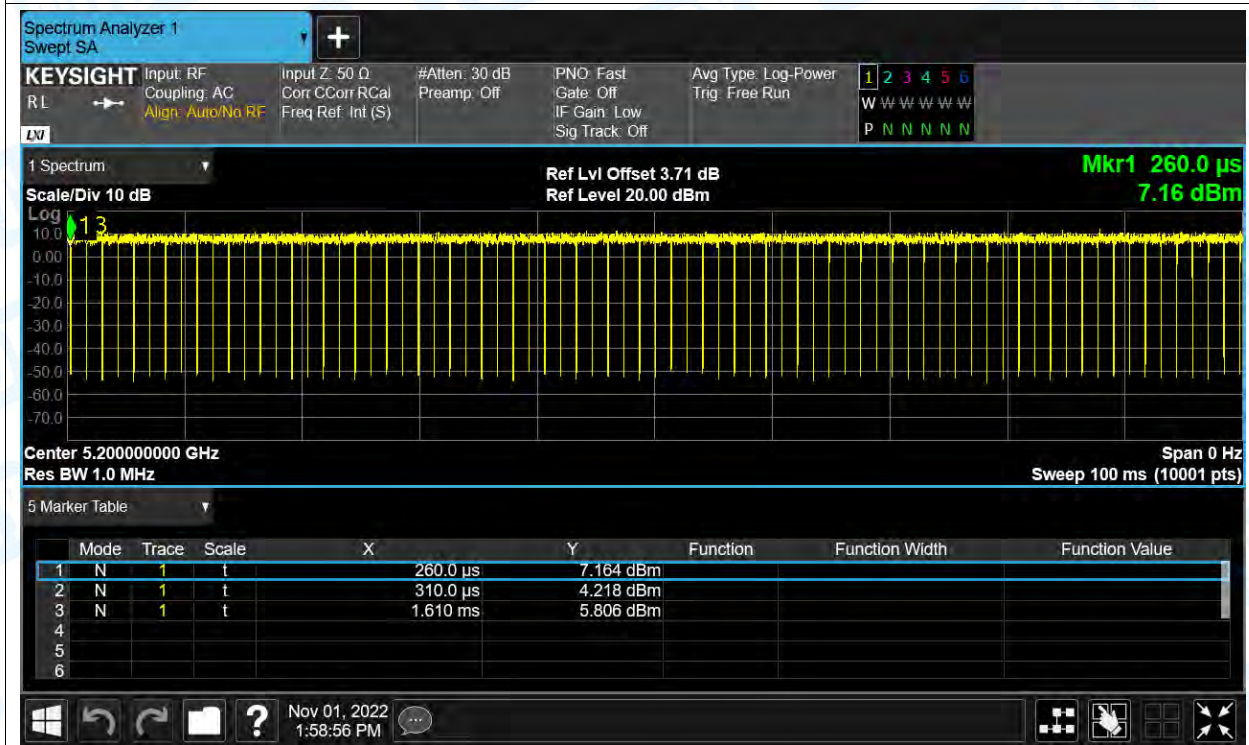


Duty Cycle NVNT a 5240MHz Ant1

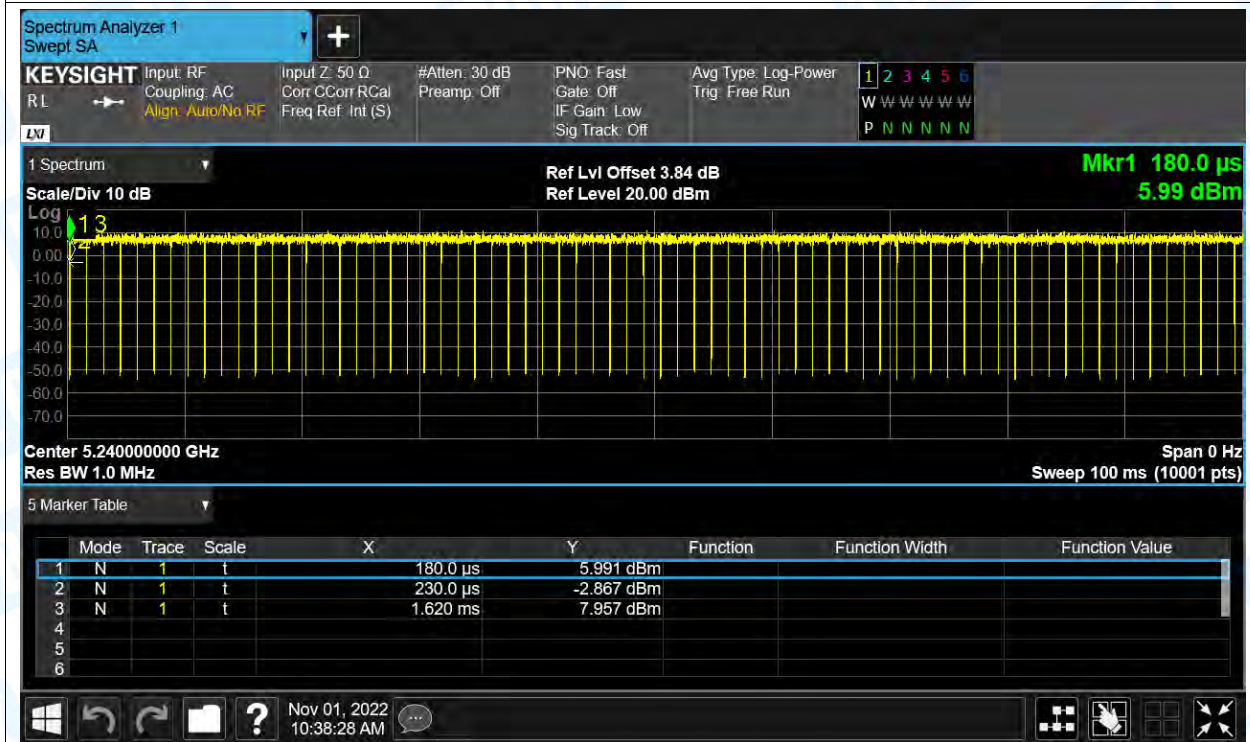


Duty Cycle NVNT ac(VHT20) 5180MHz Ant1


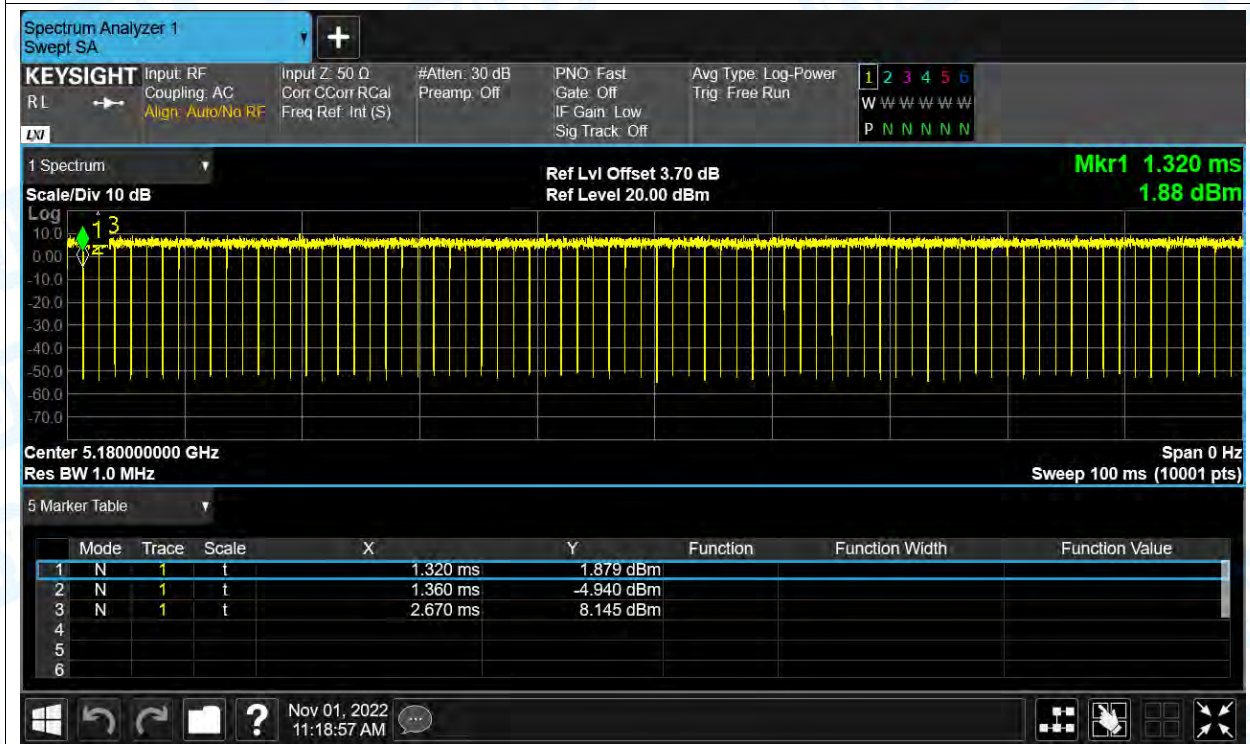




Duty Cycle NVNT ac(VHT20) 5200MHz Ant1

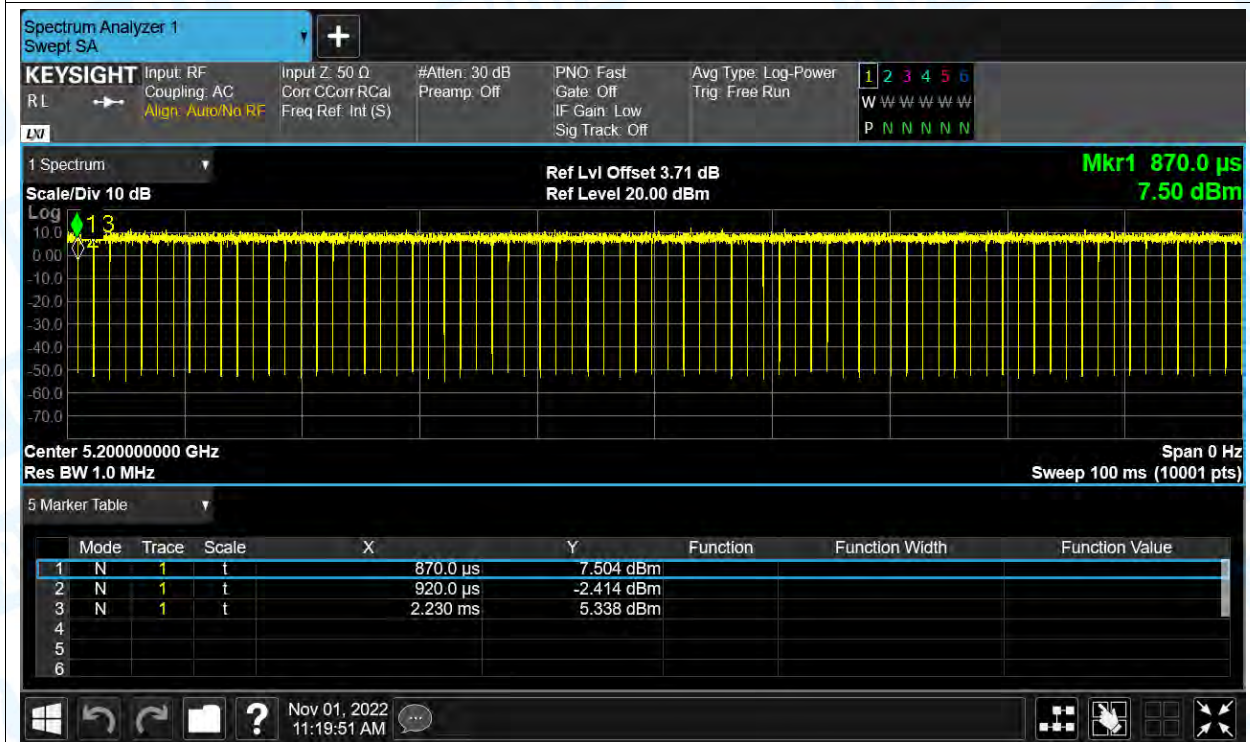


Duty Cycle NVNT ac(VHT20) 5240MHz Ant1

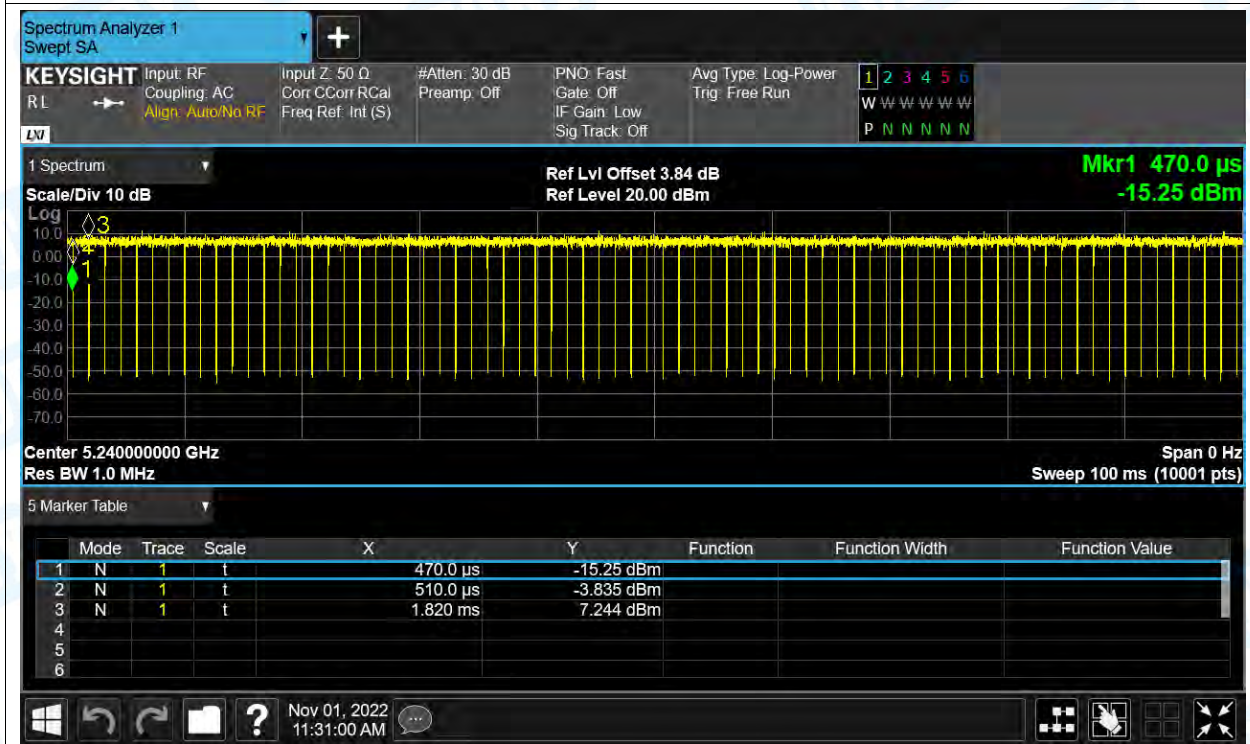

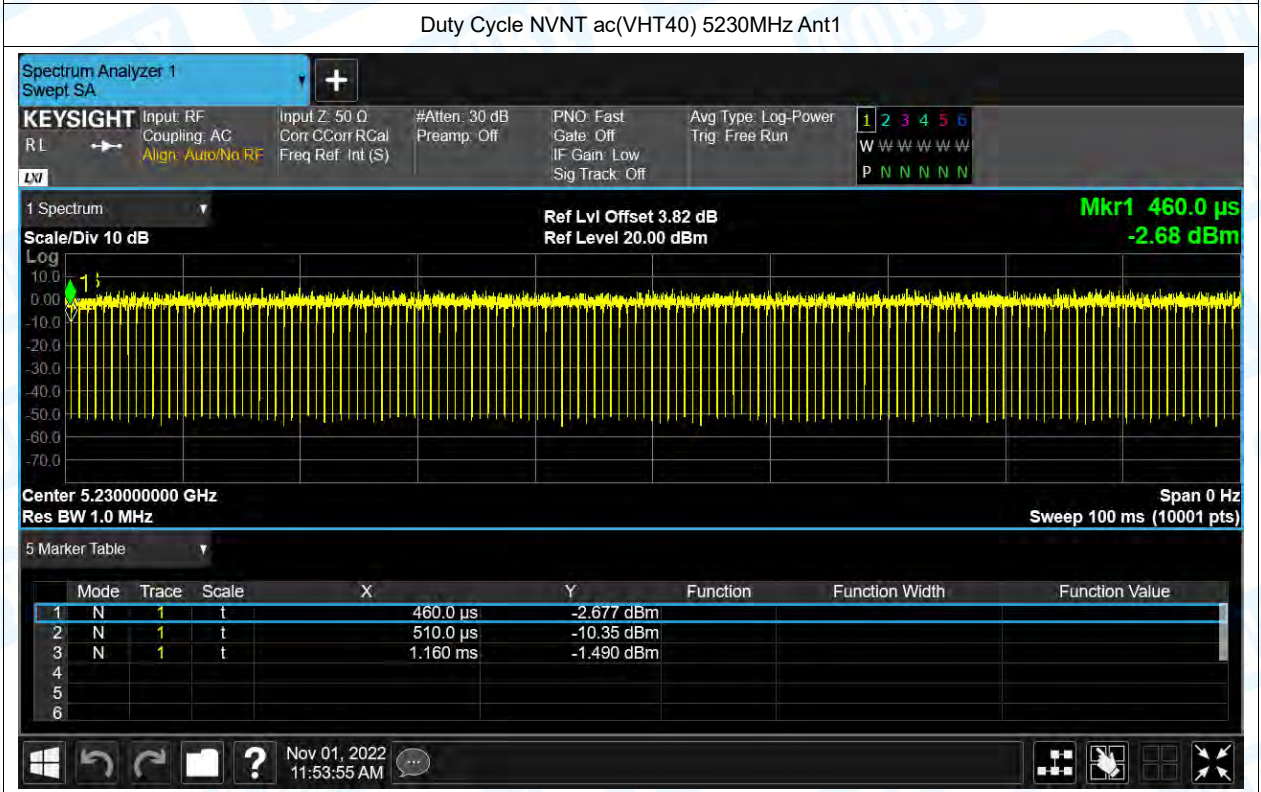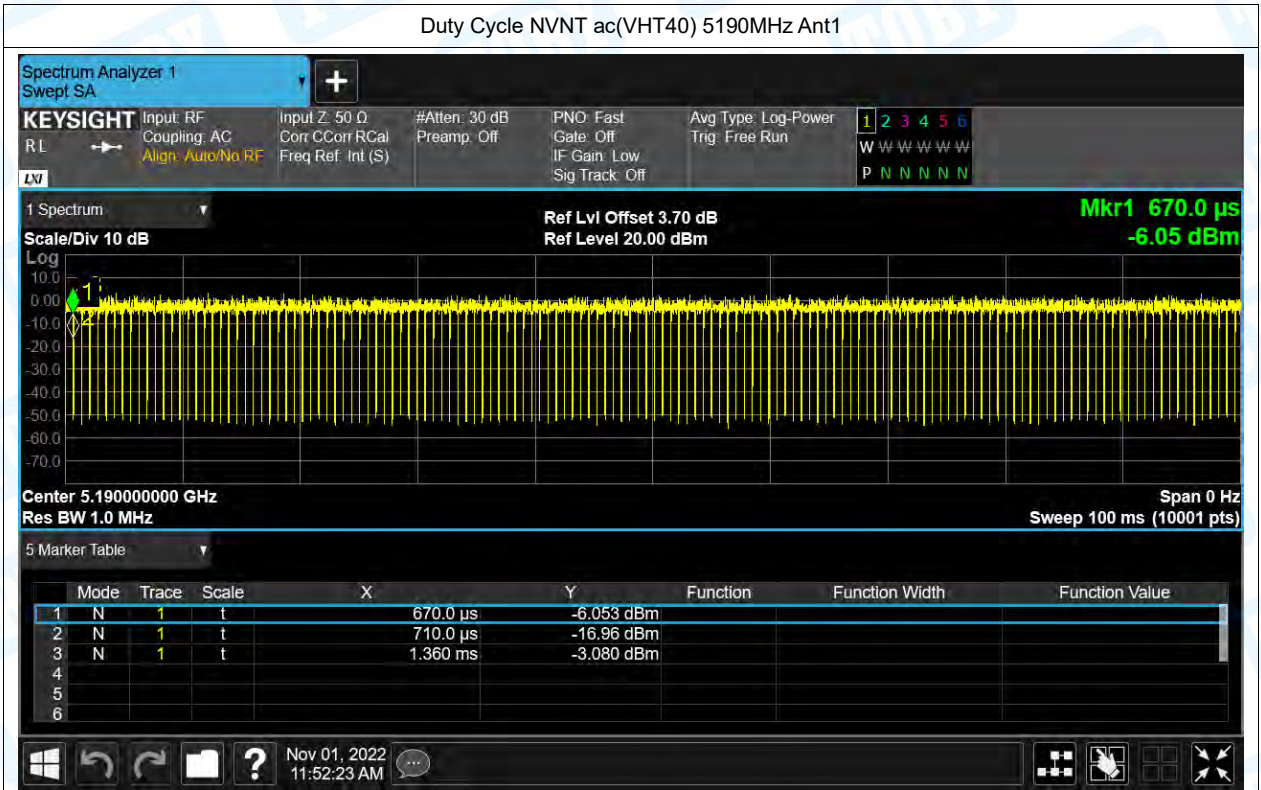


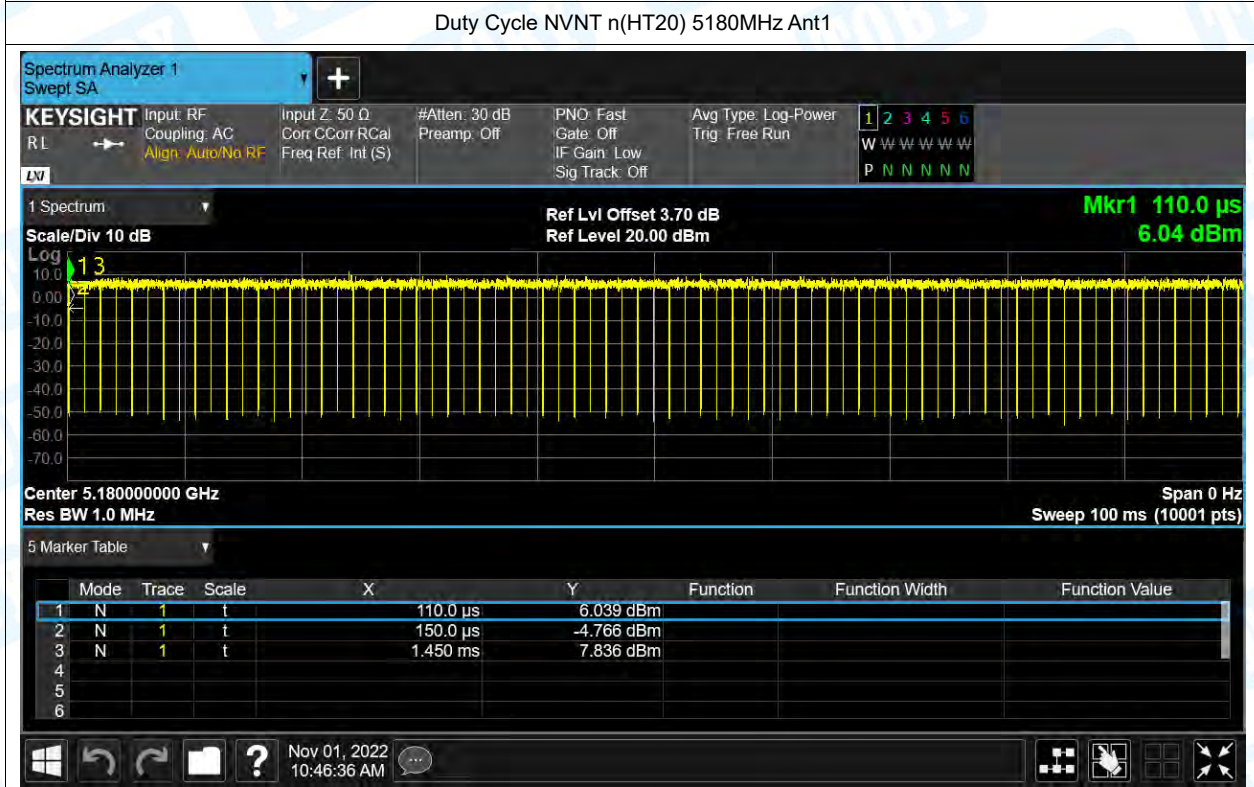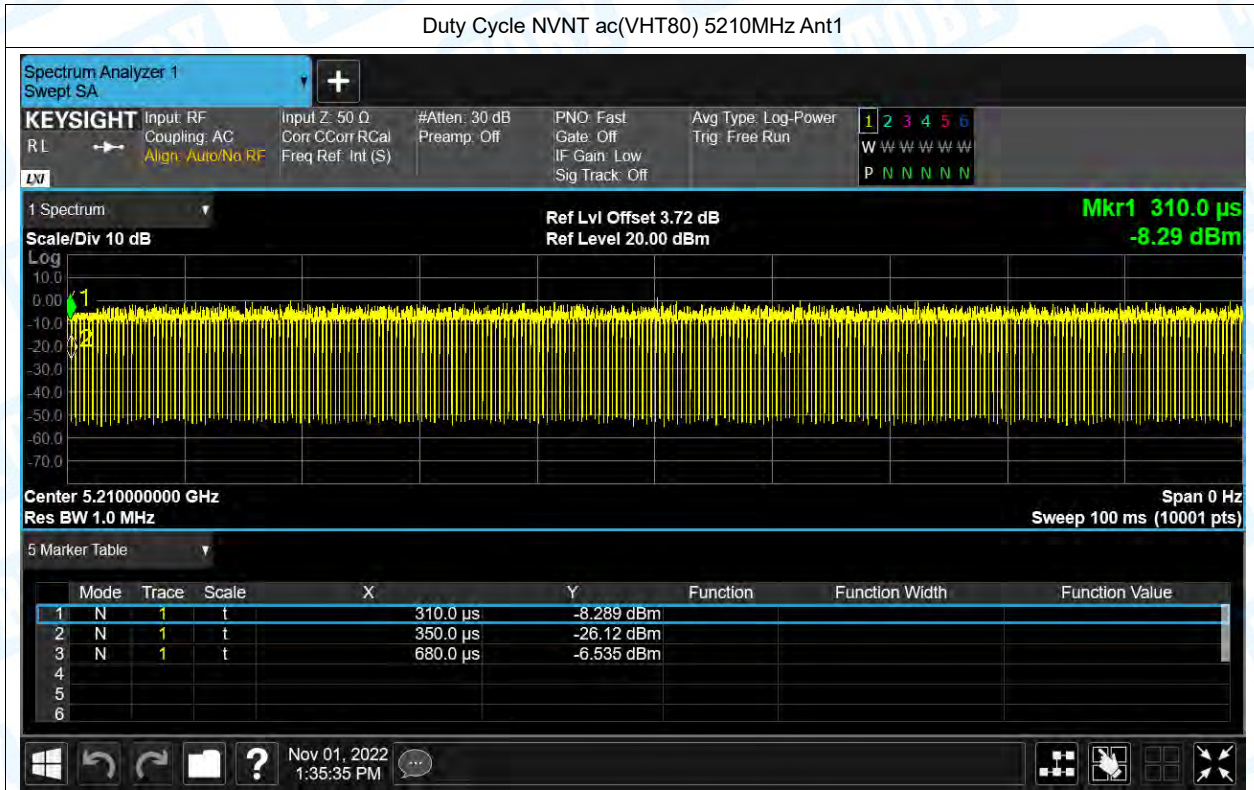


Duty Cycle NVNT n(HT20) 5200MHz Ant1

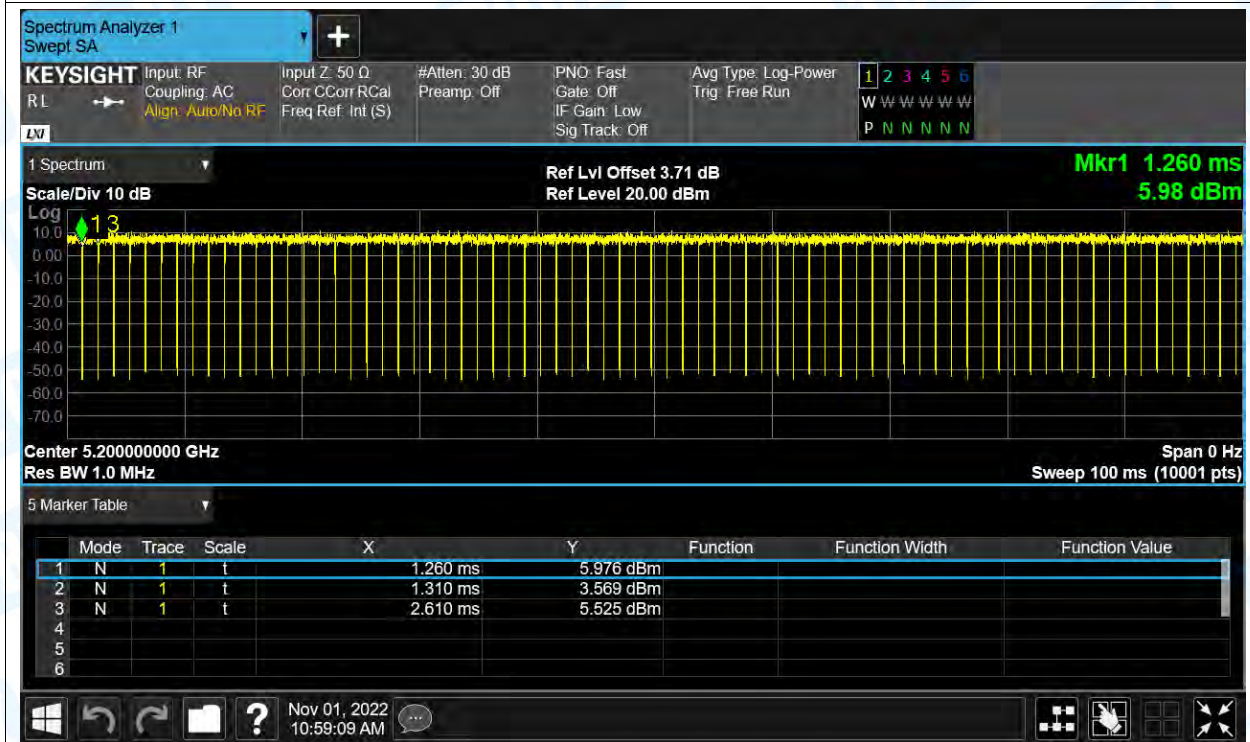


Duty Cycle NVNT n(HT20) 5240MHz Ant1

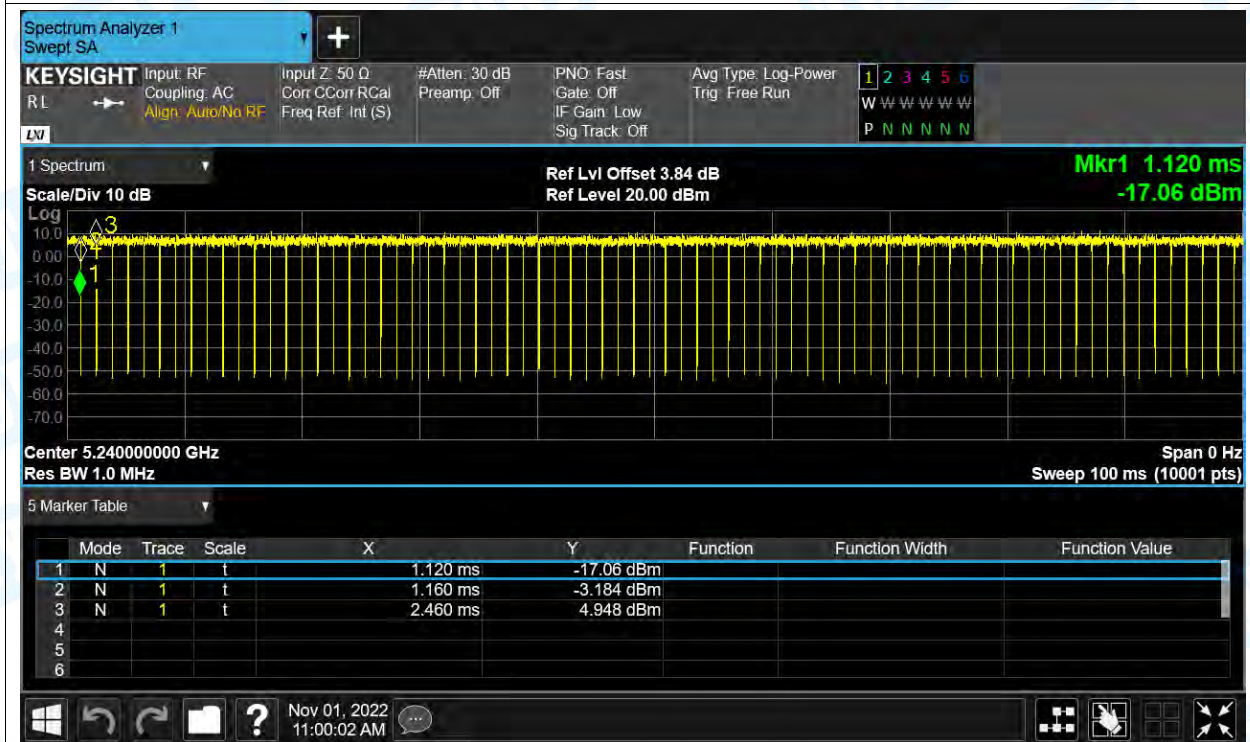

Duty Cycle NVNT n(HT40) 5190MHz Ant1

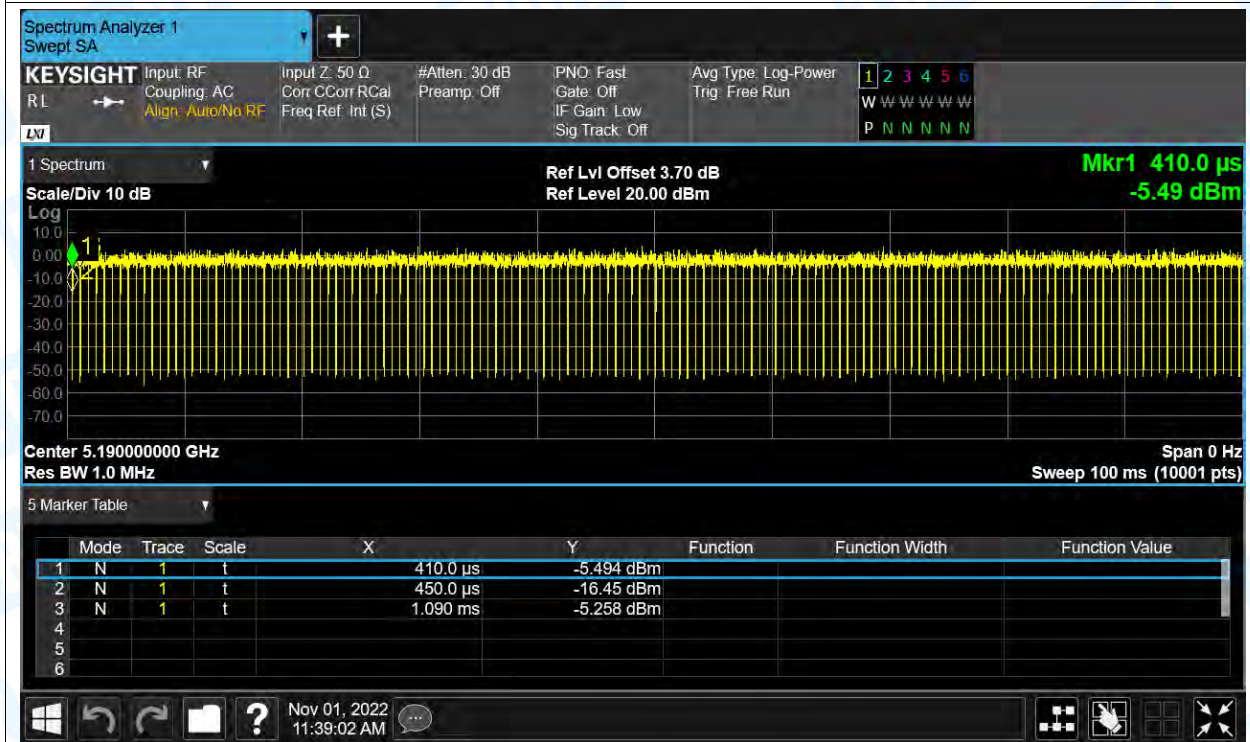

Duty Cycle NVNT n(HT40) 5230MHz Ant1

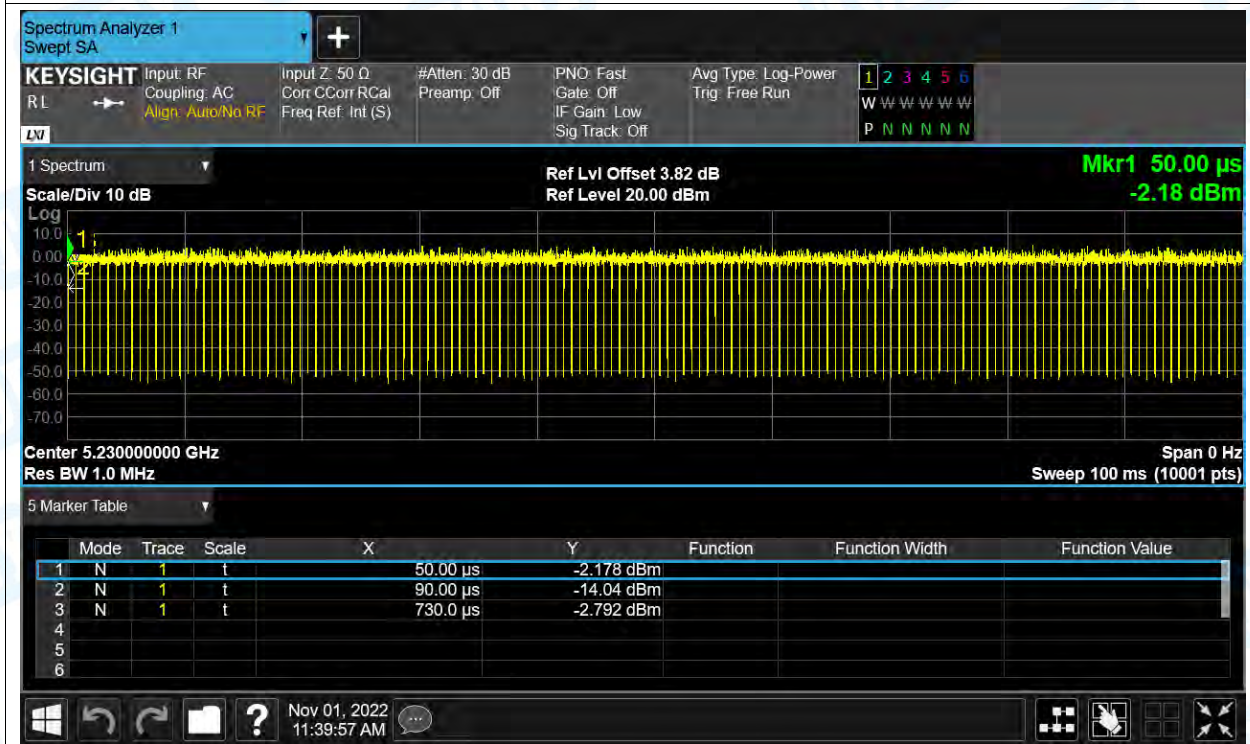

2. Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	12.94	24	Pass
NVNT	a	5200	Ant1	14.26	24	Pass
NVNT	a	5240	Ant1	13.51	24	Pass
NVNT	ac(VHT20)	5180	Ant1	12.21	24	Pass
NVNT	ac(VHT20)	5200	Ant1	13.85	24	Pass
NVNT	ac(VHT20)	5240	Ant1	12.96	24	Pass
NVNT	ac(VHT40)	5190	Ant1	9.88	24	Pass
NVNT	ac(VHT40)	5230	Ant1	11.81	24	Pass
NVNT	ac(VHT80)	5210	Ant1	9.12	24	Pass
NVNT	n(HT20)	5180	Ant1	12.05	24	Pass
NVNT	n(HT20)	5200	Ant1	13.41	24	Pass
NVNT	n(HT20)	5240	Ant1	13.29	24	Pass
NVNT	n(HT40)	5190	Ant1	10.25	24	Pass
NVNT	n(HT40)	5230	Ant1	11.85	24	Pass

3. Occupied Channel Bandwidth&26 Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	-26dB BW (MHz)
NVNT	a	5180	Ant1	16.491	20.37
NVNT	a	5200	Ant1	17.779	28.57
NVNT	a	5240	Ant1	16.758	28.97
NVNT	ac(VHT20)	5180	Ant1	17.543	19.94
NVNT	ac(VHT20)	5200	Ant1	17.512	19.87
NVNT	ac(VHT20)	5240	Ant1	17.535	20.10
NVNT	ac(VHT40)	5190	Ant1	35.969	40.39
NVNT	ac(VHT40)	5230	Ant1	36.029	40.25
NVNT	ac(VHT80)	5210	Ant1	75.233	80.53
NVNT	n(HT20)	5180	Ant1	17.577	20.32
NVNT	n(HT20)	5200	Ant1	17.527	19.96
NVNT	n(HT20)	5240	Ant1	17.61	21.87
NVNT	n(HT40)	5190	Ant1	35.953	40.07
NVNT	n(HT40)	5230	Ant1	35.989	40.56

Test Graphs

OBW NVNT a 5180MHz Ant1



OBW NVNT a 5200MHz Ant1



OBW NVNT a 5240MHz Ant1



OBW NVNT ac(VHT20) 5180MHz Ant1



OBW NVNT ac(VHT20) 5200MHz Ant1



OBW NVNT ac(VHT20) 5240MHz Ant1



OBW NVNT ac(VHT40) 5190MHz Ant1



OBW NVNT ac(VHT40) 5230MHz Ant1




OBW NVNT ac(VHT80) 5210MHz Ant1



OBW NVNT n(HT20) 5180MHz Ant1



OBW NVNT n(HT20) 5200MHz Ant1

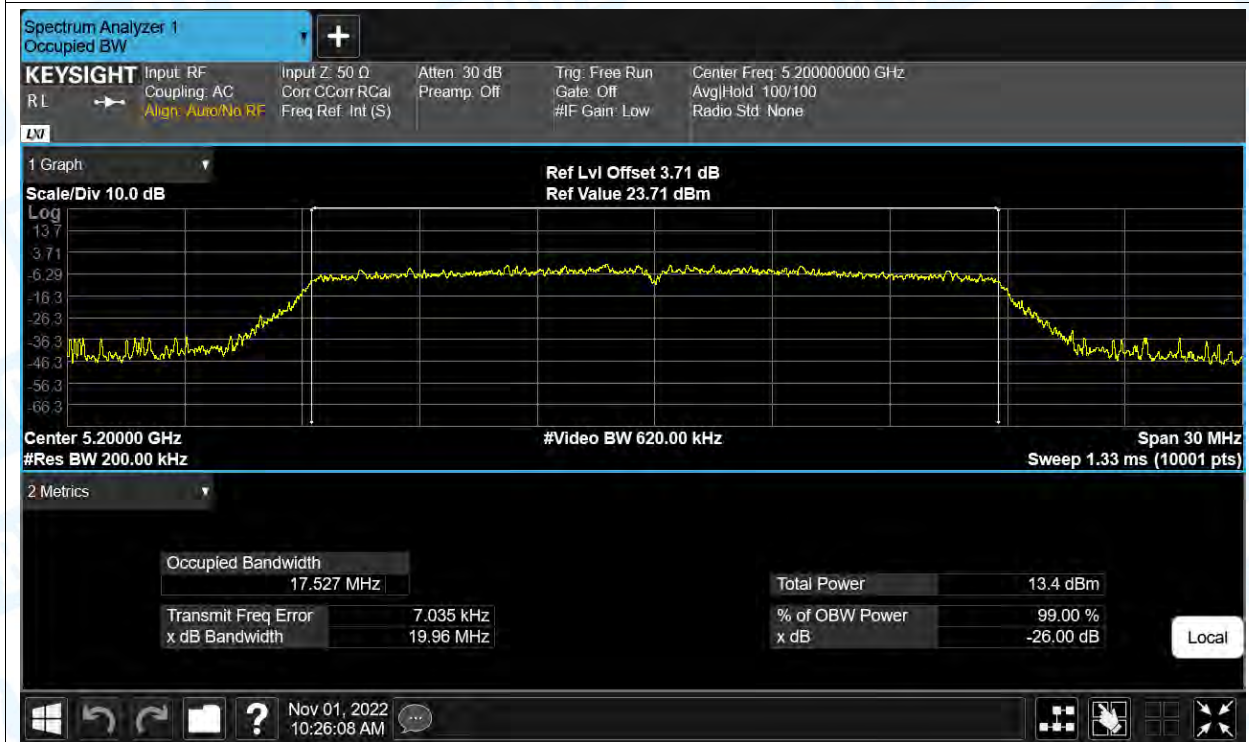

OBW NVNT n(HT20) 5240MHz Ant1



OBW NVNT n(HT40) 5190MHz Ant1



OBW NVNT n(HT40) 5230MHz Ant1



4. Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5180	Ant1	2.779	11	Pass
NVNT	a	5200	Ant1	4.39	11	Pass
NVNT	a	5240	Ant1	4.368	11	Pass
NVNT	ac(VHT20)	5180	Ant1	0.396	11	Pass
NVNT	ac(VHT20)	5200	Ant1	-0.583	11	Pass
NVNT	ac(VHT20)	5240	Ant1	0.518	11	Pass
NVNT	ac(VHT40)	5190	Ant1	-3.26	11	Pass
NVNT	ac(VHT40)	5230	Ant1	-3.774	11	Pass
NVNT	ac(VHT80)	5210	Ant1	-6.645	11	Pass
NVNT	n(HT20)	5180	Ant1	1.014	11	Pass
NVNT	n(HT20)	5200	Ant1	-1.868	11	Pass
NVNT	n(HT20)	5240	Ant1	1.745	11	Pass
NVNT	n(HT40)	5190	Ant1	-3.643	11	Pass
NVNT	n(HT40)	5230	Ant1	-3.54	11	Pass

Test Graphs

PSD NVNT a 5180MHz Ant1



PSD NVNT a 5200MHz Ant1





PSD NVNT a 5240MHz Ant1



PSD NVNT ac(VHT20) 5180MHz Ant1



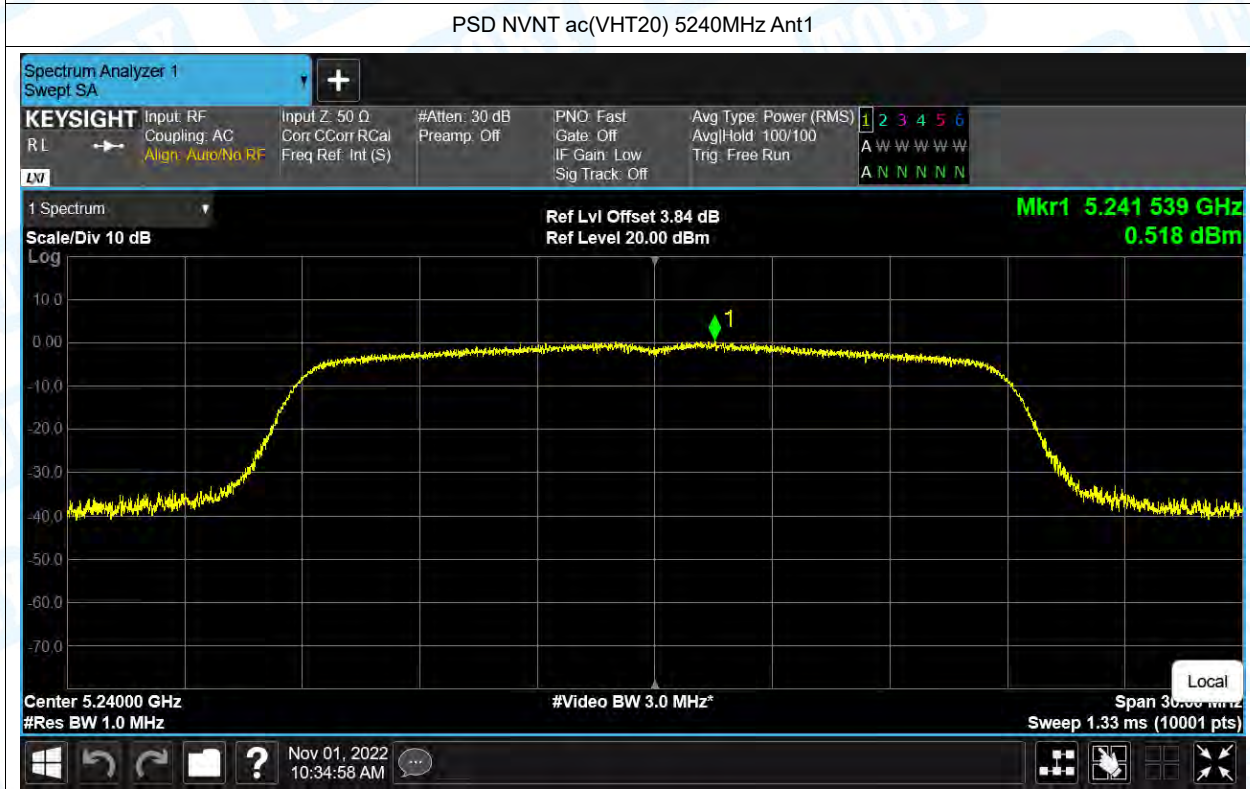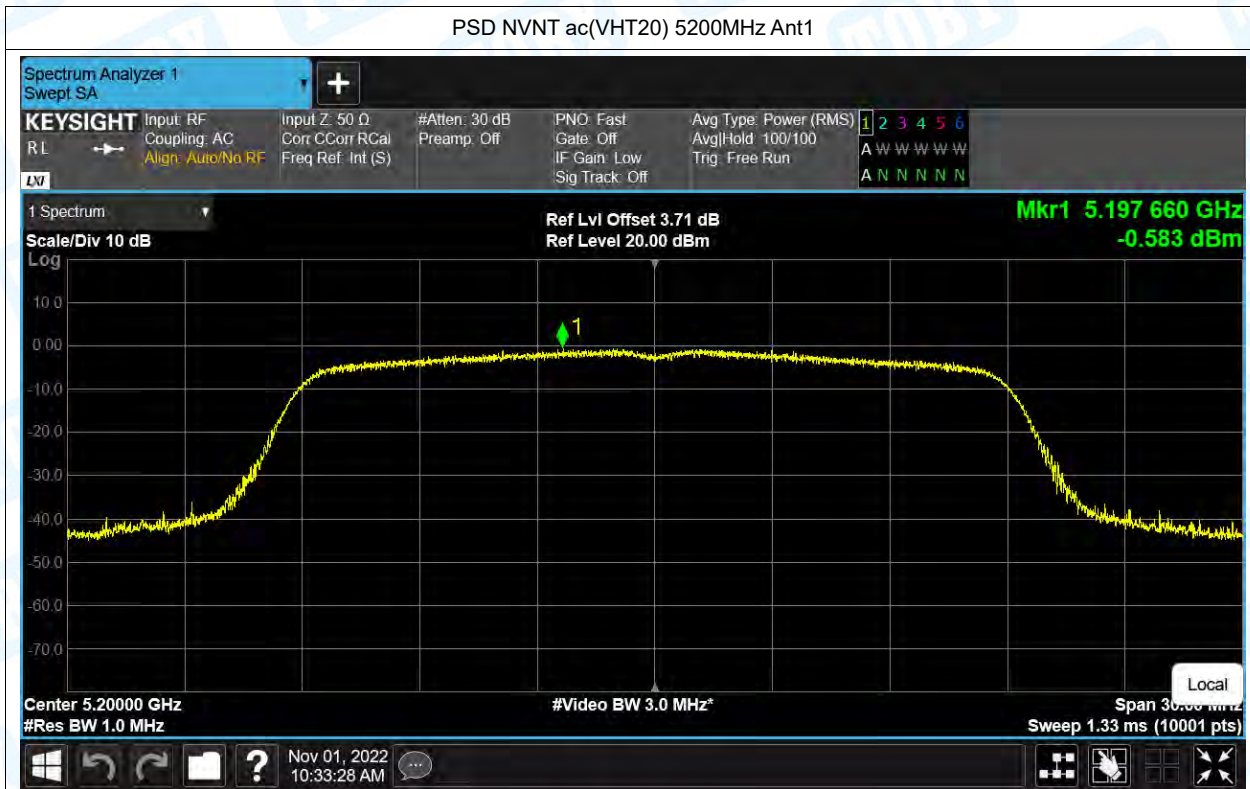


PSD NVNT ac(VHT40) 5190MHz Ant1



PSD NVNT ac(VHT40) 5230MHz Ant1



PSD NVNT ac(VHT80) 5210MHz Ant1

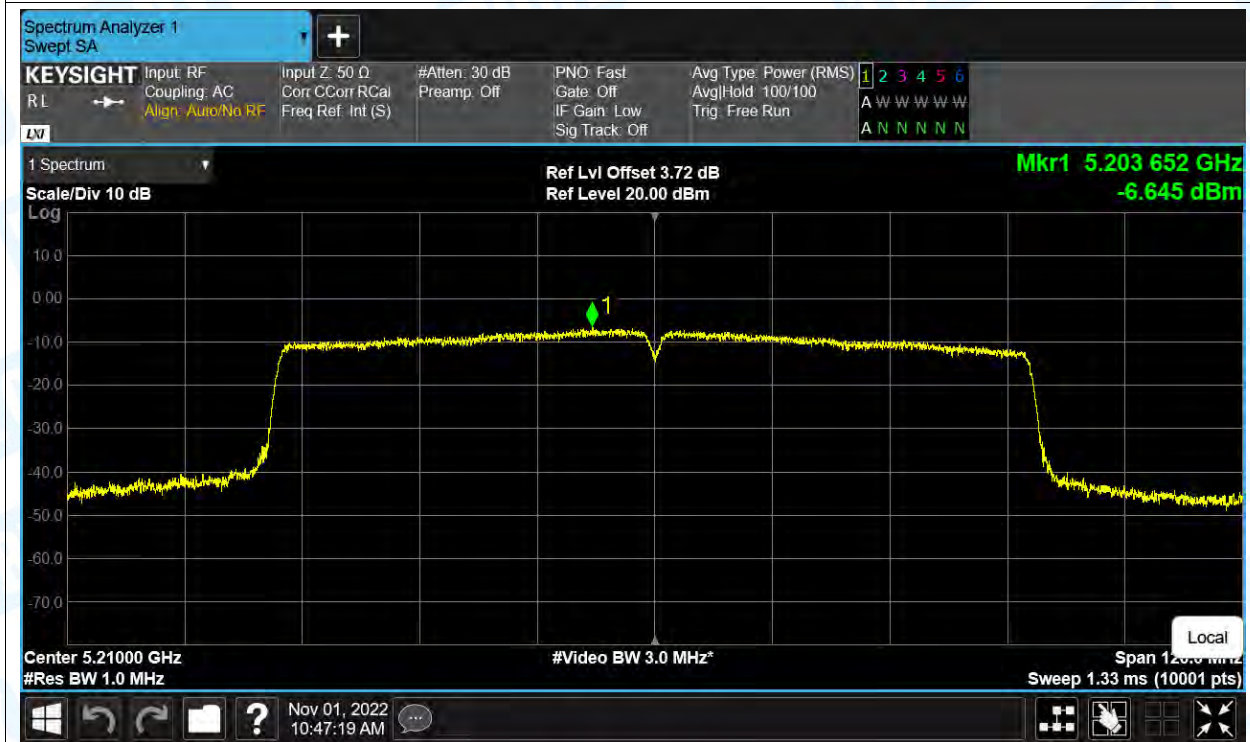

PSD NVNT n(HT20) 5180MHz Ant1



PSD NVNT n(HT20) 5200MHz Ant1



PSD NVNT n(HT20) 5240MHz Ant1



PSD NVNT n(HT40) 5190MHz Ant1



PSD NVNT n(HT40) 5230MHz Ant1



5. Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	a	5180	Ant1	-32.37	-27	Pass
NVNT	a	5240	Ant1	-47.69	-27	Pass
NVNT	ac(VHT20)	5180	Ant1	-29.9	-27	Pass
NVNT	ac(VHT20)	5240	Ant1	-48.2	-27	Pass
NVNT	ac(VHT40)	5190	Ant1	-29.67	-27	Pass
NVNT	ac(VHT40)	5230	Ant1	-48.83	-27	Pass
NVNT	ac(VHT80)	5210	Ant1	-32.29	-27	Pass
NVNT	n(HT20)	5180	Ant1	-30.76	-27	Pass
NVNT	n(HT20)	5240	Ant1	-48.51	-27	Pass
NVNT	n(HT40)	5190	Ant1	-31.55	-27	Pass
NVNT	n(HT40)	5230	Ant1	-48.25	-27	Pass

Test Graphs


Band Edge NVNT a 5180MHz Low Ant1



Band Edge NVNT a 5240MHz High Ant1



Band Edge NVNT ac(VHT20) 5180MHz Low Ant1

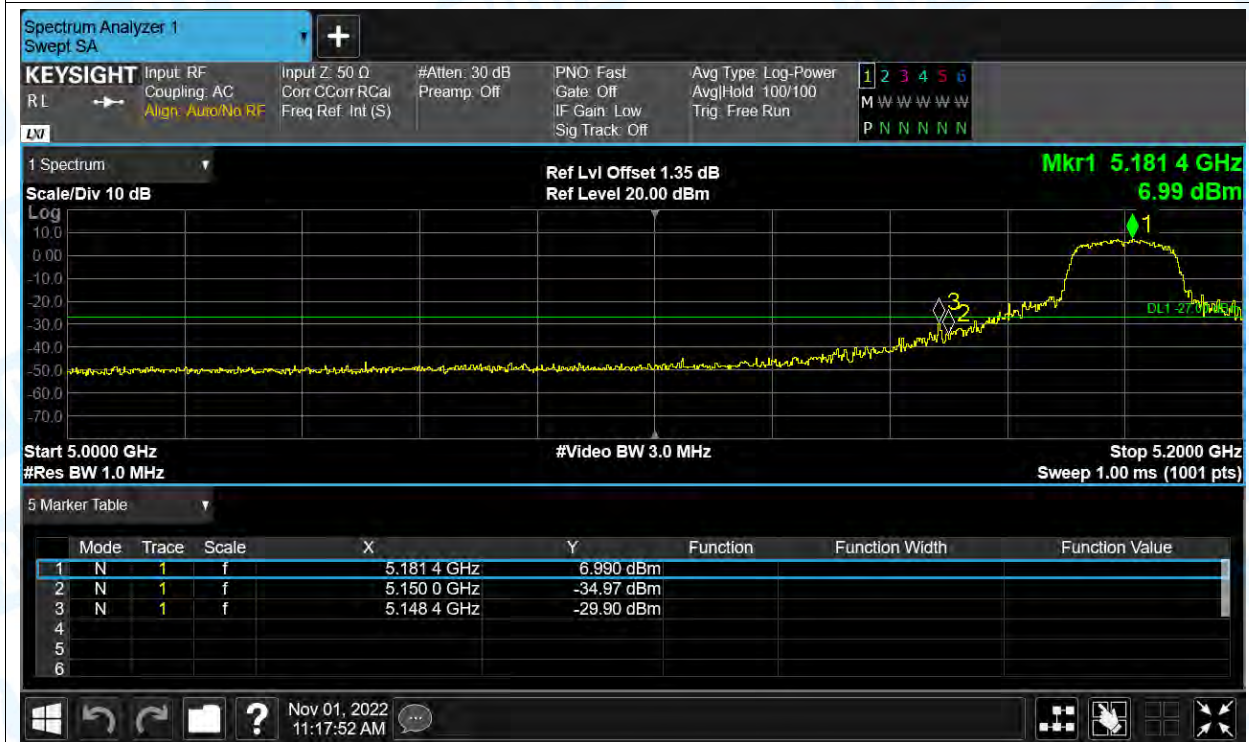

Band Edge NVNT ac(VHT20) 5240MHz High Ant1



Band Edge NVNT ac(VHT40) 5190MHz Low Ant1



Band Edge NVNT ac(VHT40) 5230MHz High Ant1



Band Edge NVNT ac(VHT80) 5210MHz Low Ant1




Band Edge NVNT n(HT20) 5180MHz Low Ant1



Band Edge NVNT n(HT20) 5240MHz High Ant1



Band Edge NVNT n(HT40) 5190MHz Low Ant1

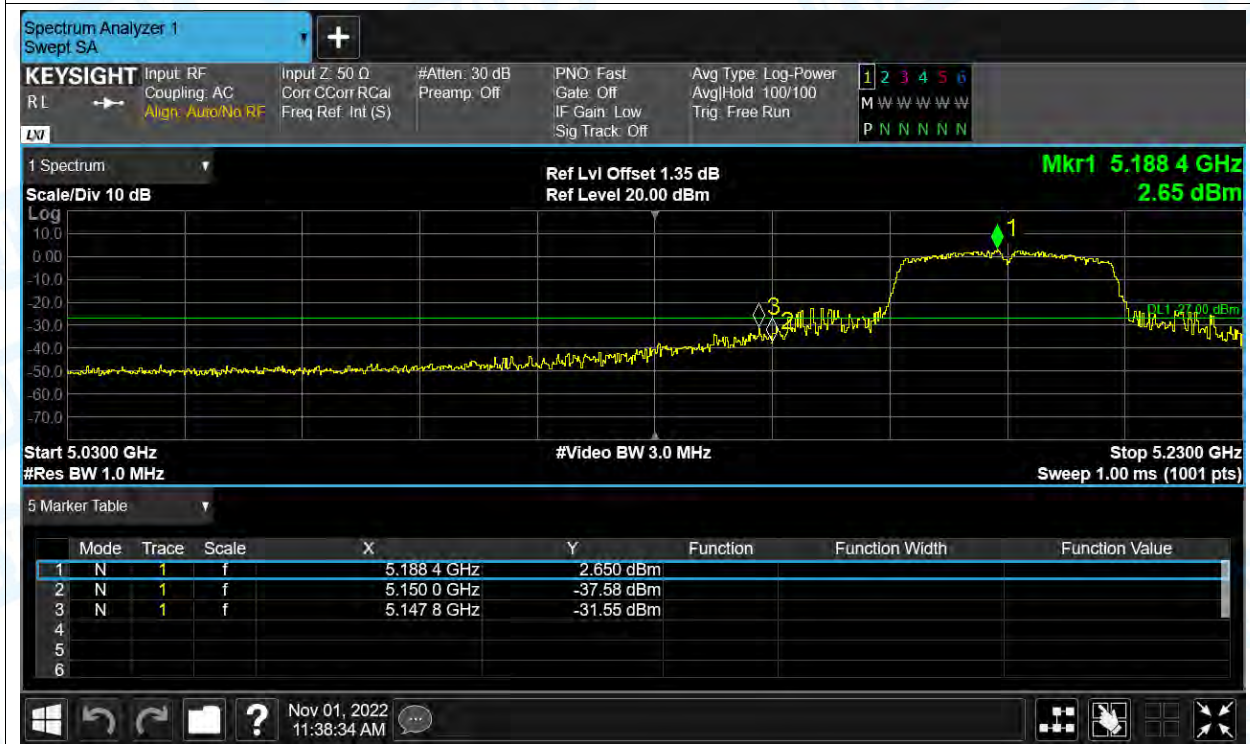



6. Frequency Stability


Condition	Mode	Frequency (MHz)	Antenna	Measured Frequency (MHz)	Deviation (ppm)	Limit (ppm)	Verdict
NVNT	a	5180	Ant1	5180	0	25	Pass
NVNT	a	5200	Ant1	5200	0	25	Pass
NVNT	a	5240	Ant1	5240	0	25	Pass
NVNT	ac(VHT20)	5180	Ant1	5180	0	25	Pass
NVNT	ac(VHT20)	5200	Ant1	5200	0	25	Pass
NVNT	ac(VHT20)	5240	Ant1	5240.02	3.82	25	Pass
NVNT	ac(VHT40)	5190	Ant1	5190	0	25	Pass
NVNT	ac(VHT40)	5230	Ant1	5230	0	25	Pass
NVNT	ac(VHT80)	5210	Ant1	5210	0	25	Pass
NVNT	n(HT20)	5180	Ant1	5180	0	25	Pass
NVNT	n(HT20)	5200	Ant1	5200	0	25	Pass
NVNT	n(HT20)	5240	Ant1	5240.02	3.82	25	Pass
NVNT	n(HT40)	5190	Ant1	5189.96	-7.71	25	Pass
NVNT	n(HT40)	5230	Ant1	5230	0	25	Pass

Test Graphs

Freq. Stability NVNT a 5180MHz Ant1



Freq. Stability NVNT a 5200MHz Ant1

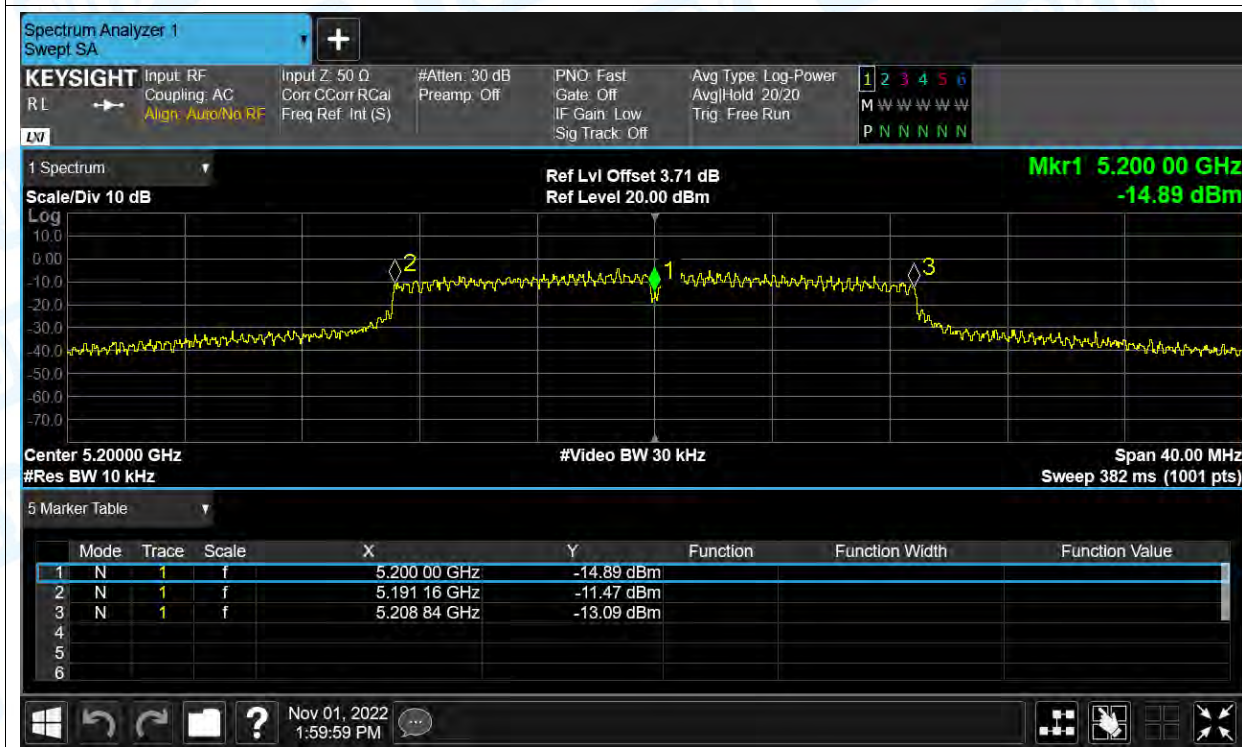

Freq. Stability NVNT a 5240MHz Ant1



Freq. Stability NVNT ac(VHT20) 5180MHz Ant1



Freq. Stability NVNT ac(VHT20) 5200MHz Ant1



Freq. Stability NVNT ac(VHT20) 5240MHz Ant1



Freq. Stability NVNT ac(VHT40) 5190MHz Ant1



Freq. Stability NVNT ac(VHT40) 5230MHz Ant1




Freq. Stability NVNT ac(VHT80) 5210MHz Ant1



Freq. Stability NVNT n(HT20) 5180MHz Ant1



Freq. Stability NVNT n(HT20) 5200MHz Ant1

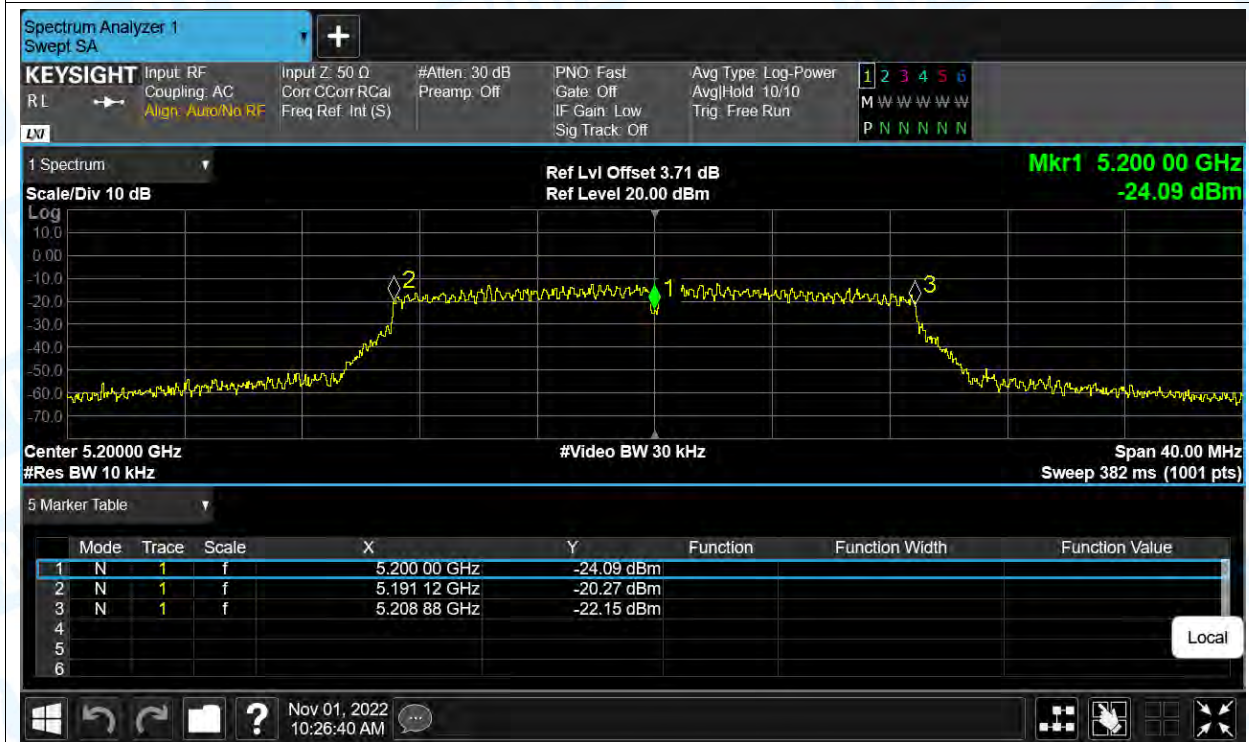

Freq. Stability NVNT n(HT20) 5240MHz Ant1



Freq. Stability NVNT n(HT40) 5190MHz Ant1





Freq. Stability NVNT n(HT40) 5230MHz Ant1




7. Conducted RF Spurious Emission

TestMode	Antenna	Channel	FreqRange [MHz]	Max. Fre [MHz]	Max. Level [dBm]	Limit [dBm]	Verdict
11A	Ant1	5180	30~1000	969.69	-44.97	≤-27	PASS
			1000~40000	5076.8	-38.76	≤-27	PASS
		5200	30~1000	992.94	-44.91	≤-27	PASS
			1000~40000	5115.8	-38.72	≤-27	PASS
		5240	30~1000	710.58	-51.06	≤-27	PASS
			1000~40000	5149.6	-38.77	≤-27	PASS
11N20SISO	Ant1	5180	30~1000	970.76	-46.27	≤-27	PASS
			1000~40000	5093.7	-39.76	≤-27	PASS
		5200	30~1000	999.69	-46.83	≤-27	PASS
			1000~40000	5115.8	-38.84	≤-27	PASS
		5240	30~1000	960.02	-51.05	≤-27	PASS
			1000~40000	5127.5	-37.67	≤-27	PASS
11N40SISO	Ant1	5190	30~1000	978.1	-48.41	≤-27	PASS
			1000~40000	5049.5	-41.24	≤-27	PASS
		5230	30~1000	889.38	-52.5	≤-27	PASS
			1000~40000	5074.2	-38.81	≤-27	PASS
11AC20SISO	Ant1	5180	30~1000	970.82	-44.08	≤-27	PASS
			1000~40000	5037.8	-40.7	≤-27	PASS
		5200	30~1000	998.69	-44.48	≤-27	PASS
			1000~40000	5115.8	-39.76	≤-27	PASS
		5240	30~1000	510.57	-52.56	≤-27	PASS
			1000~40000	5111.9	-38.62	≤-27	PASS
11AC40SISO	Ant1	5190	30~1000	976.87	-48.92	≤-27	PASS
			1000~40000	5018.3	-40.49	≤-27	PASS
		5230	30~1000	990.38	-52.33	≤-27	PASS
			1000~40000	5063.8	-40.21	≤-27	PASS
11AC80SISO	Ant1	5210	30~1000	607.92	-52.26	≤-27	PASS
			1000~40000	39274.6	-42.39	≤-27	PASS

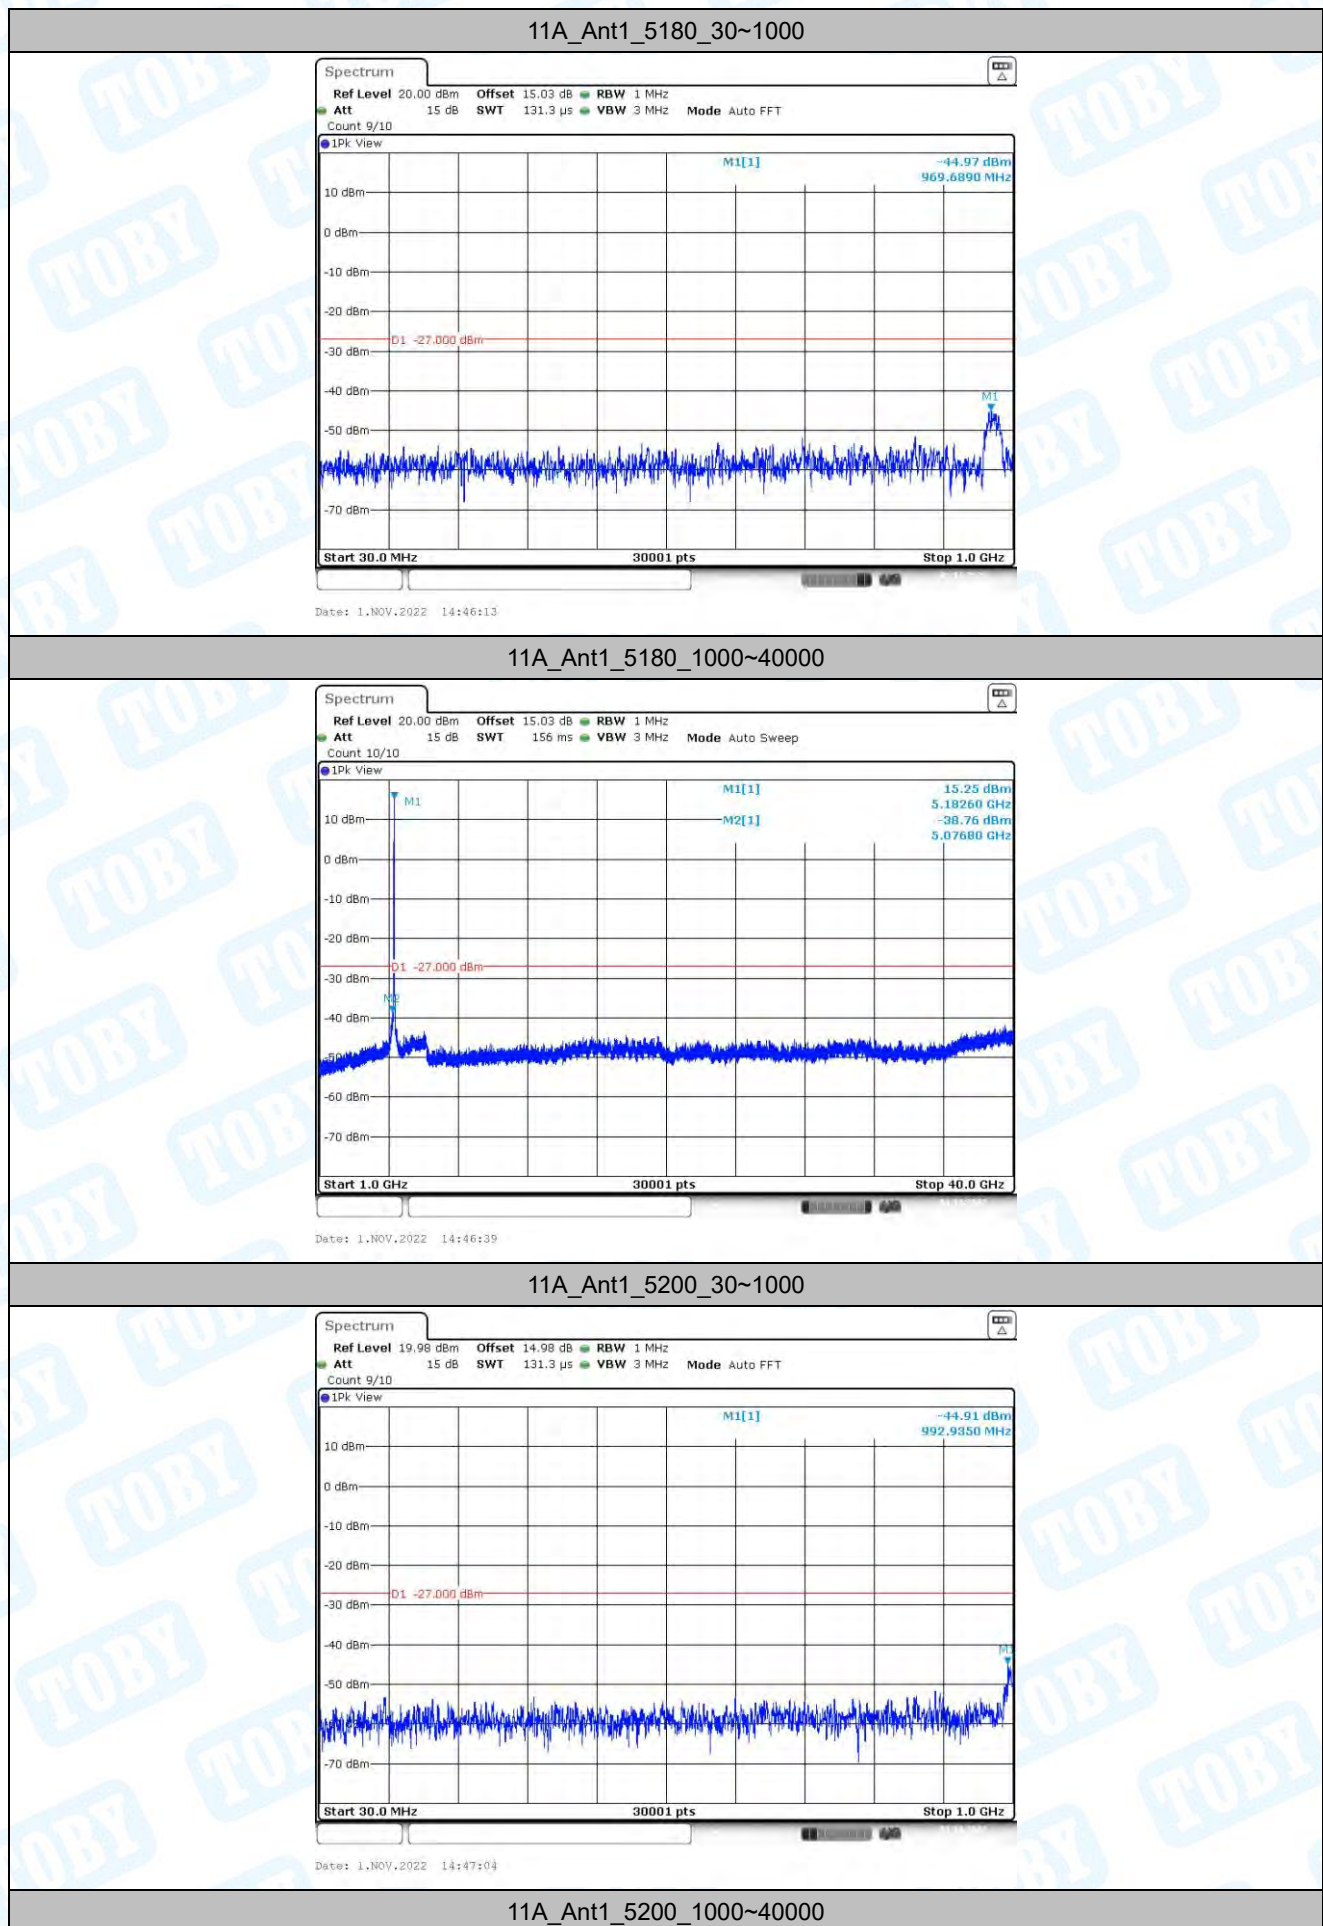


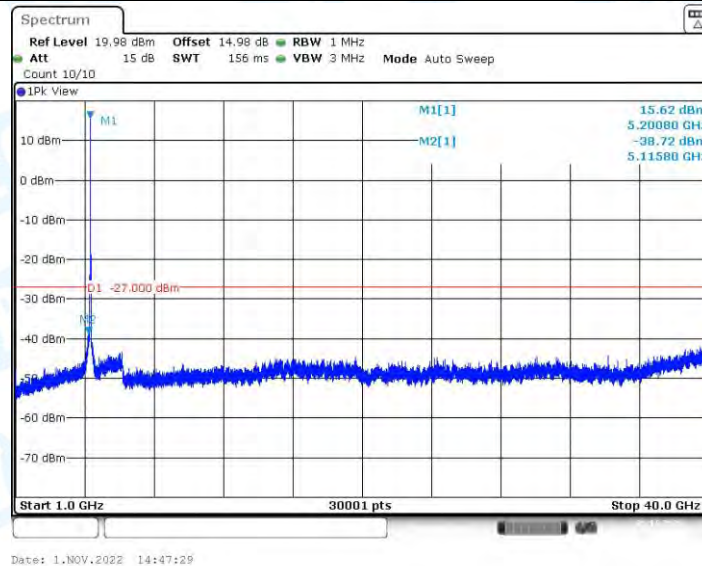


11A_Ant1_5240_30~1000

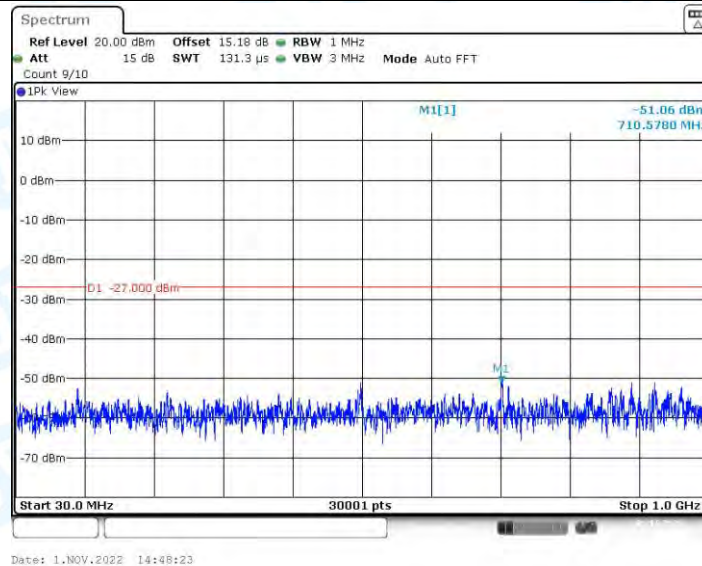


11A_Ant1_5240_1000~40000

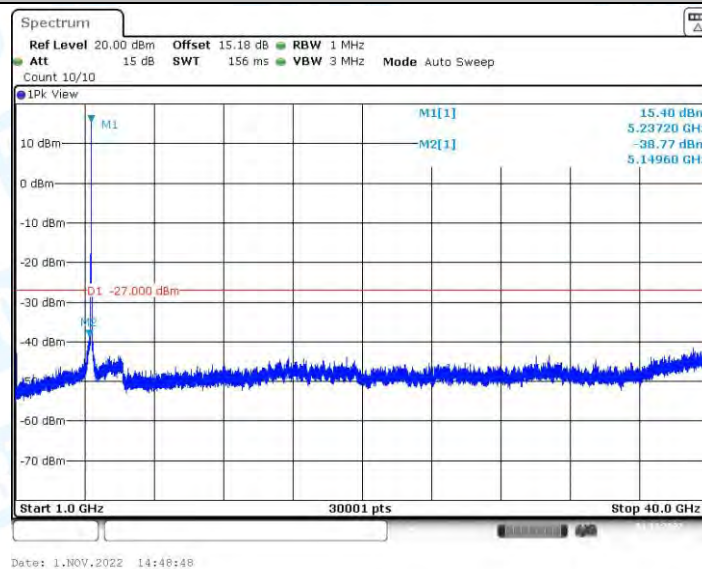


11N20SISO_Ant1_5180_30~1000

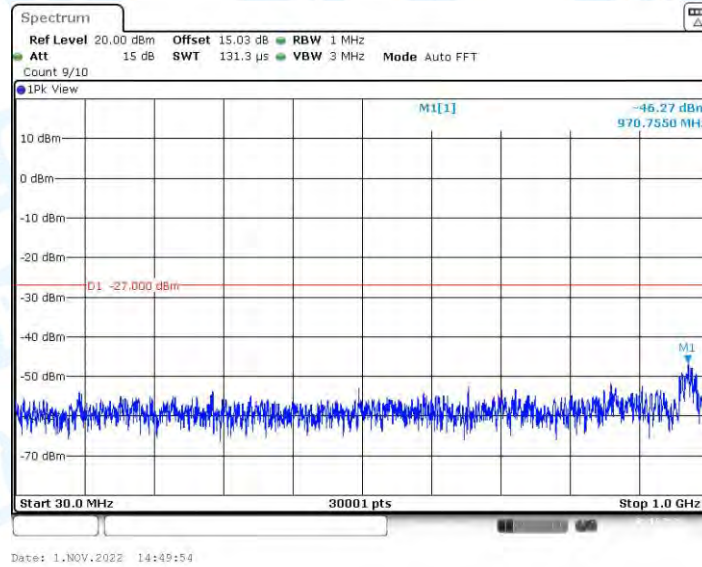


11N20SISO_Ant1_5180_1000~40000

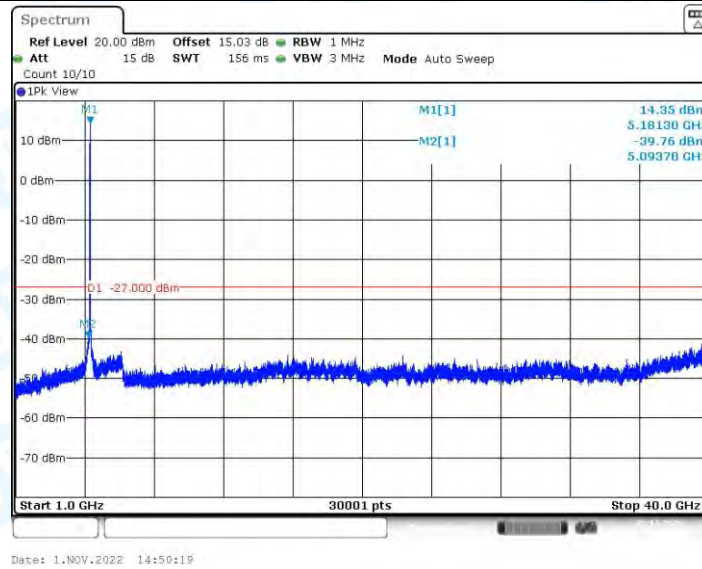


11N20SISO_Ant1_5200_30~1000

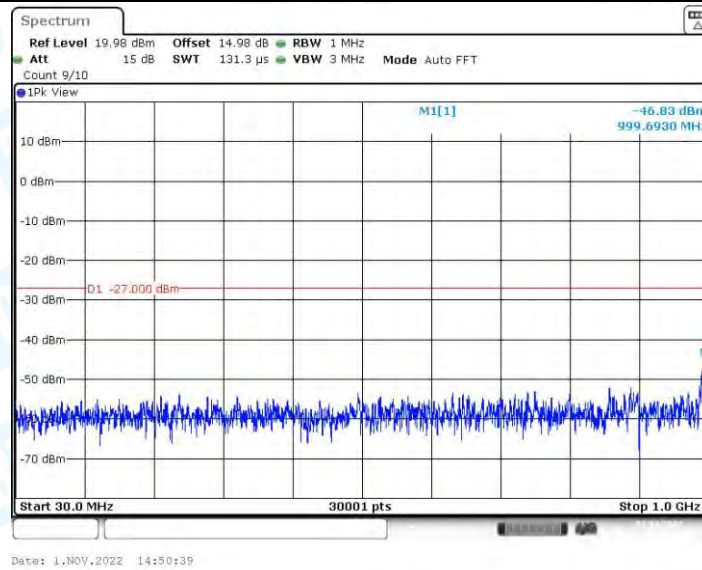


11N20SISO_Ant1_5200_1000~40000

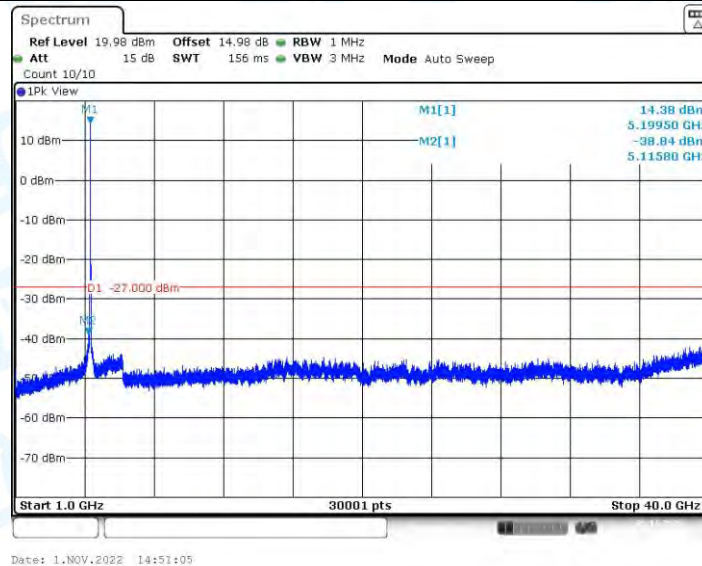


11N20SISO_Ant1_5240_30~1000

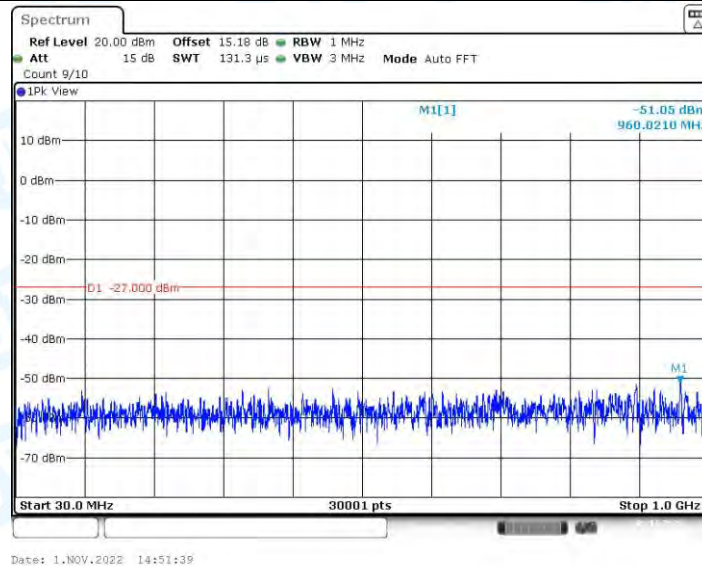


11N20SISO_Ant1_5240_1000~40000

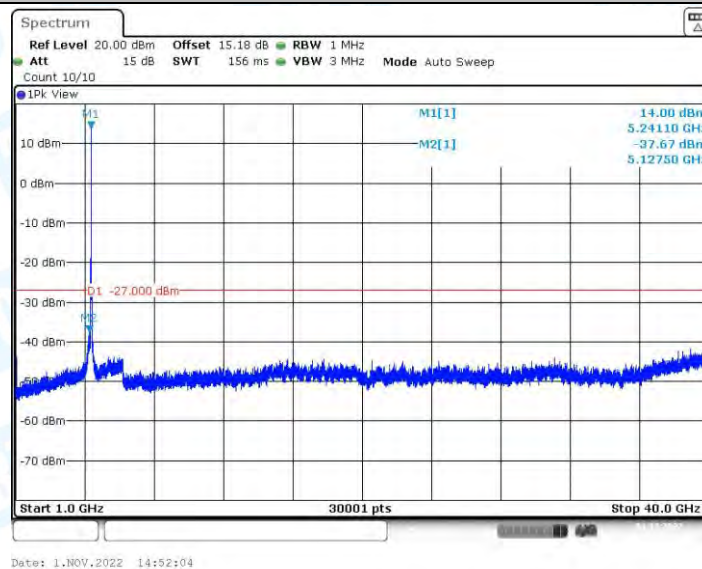


11N40SISO_Ant1_5190_30~1000

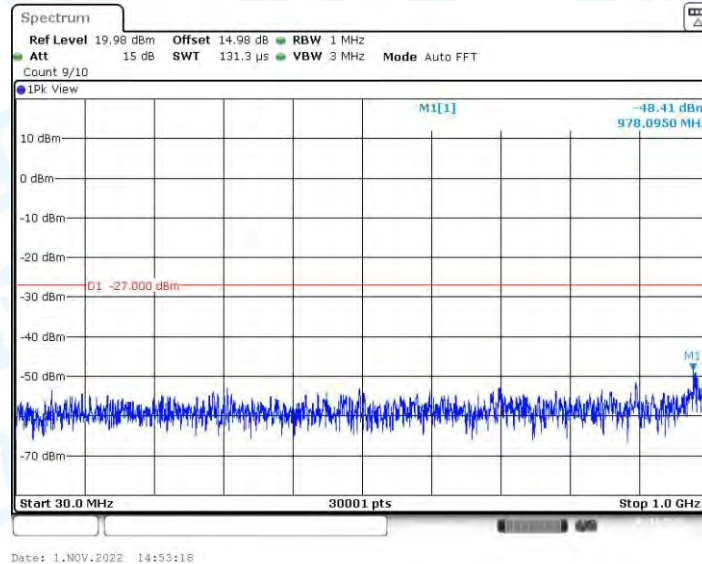


11N40SISO_Ant1_5190_1000~40000

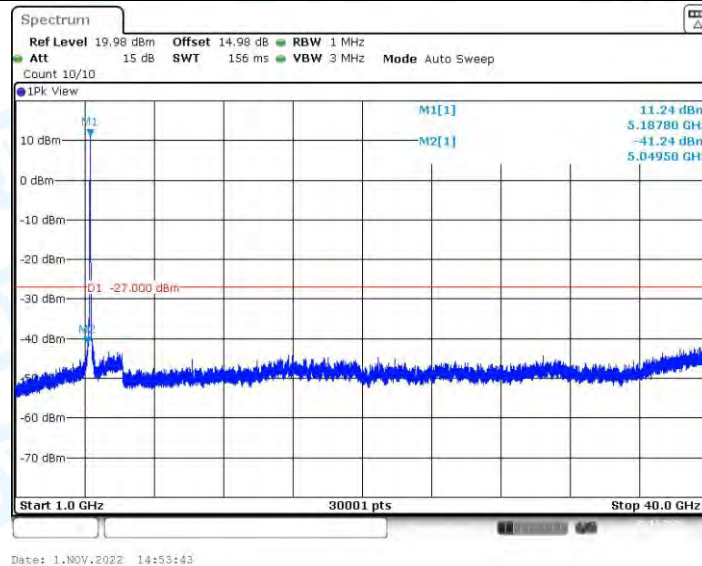


11N40SISO_Ant1_5230_30~1000

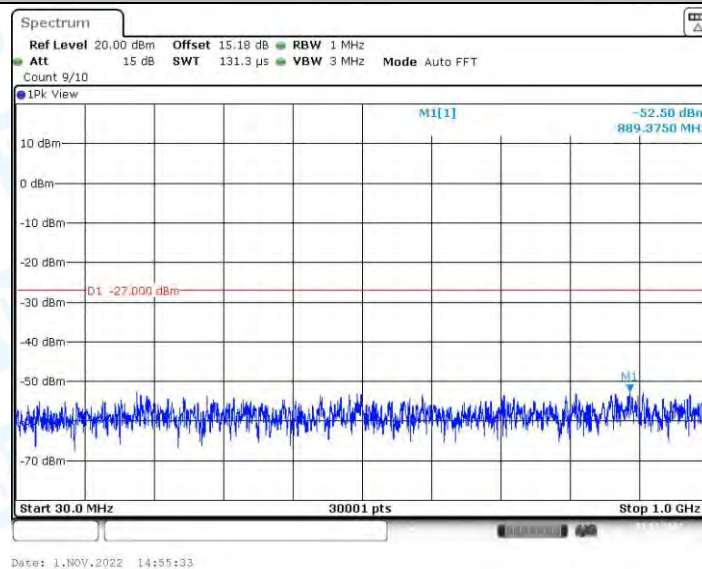


11N40SISO_Ant1_5230_1000~40000

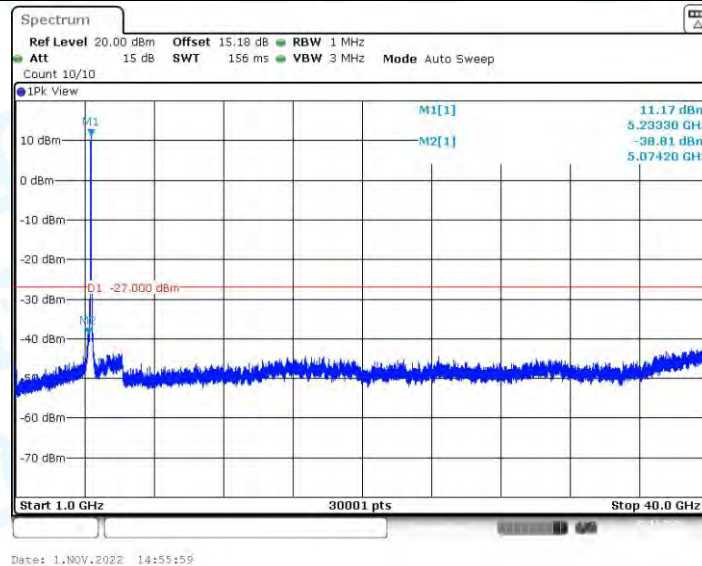


11AC20SISO_Ant1_5180_30~1000

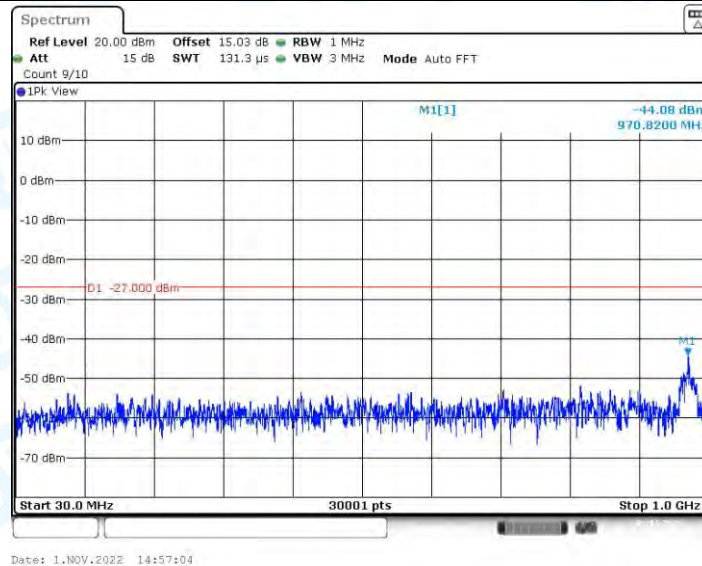


11AC20SISO_Ant1_5180_1000~40000

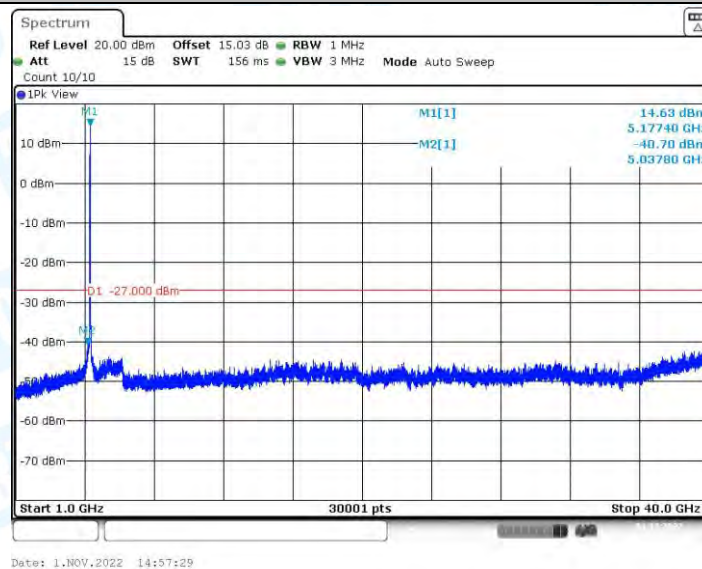


11AC20SISO_Ant1_5200_30~1000

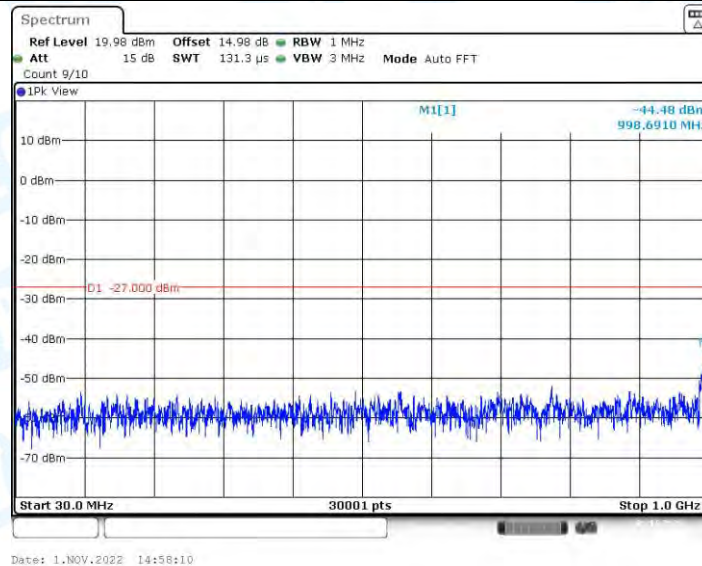


11AC20SISO_Ant1_5200_1000~40000

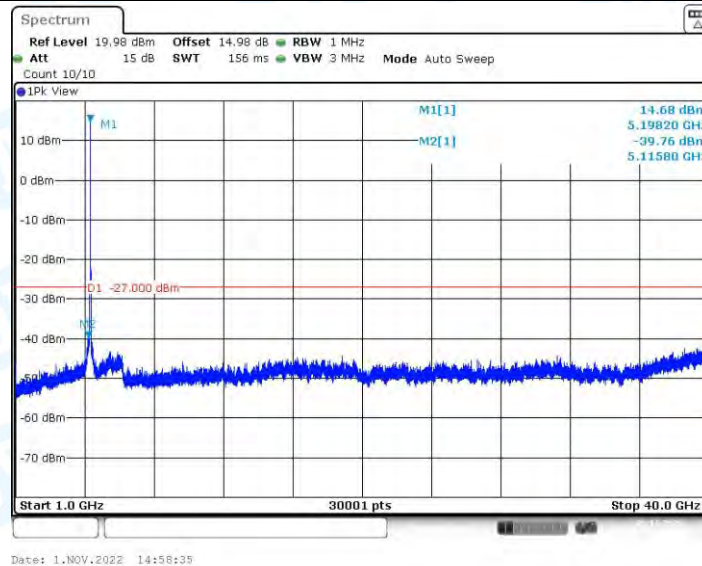


11AC20SISO_Ant1_5240_30~1000

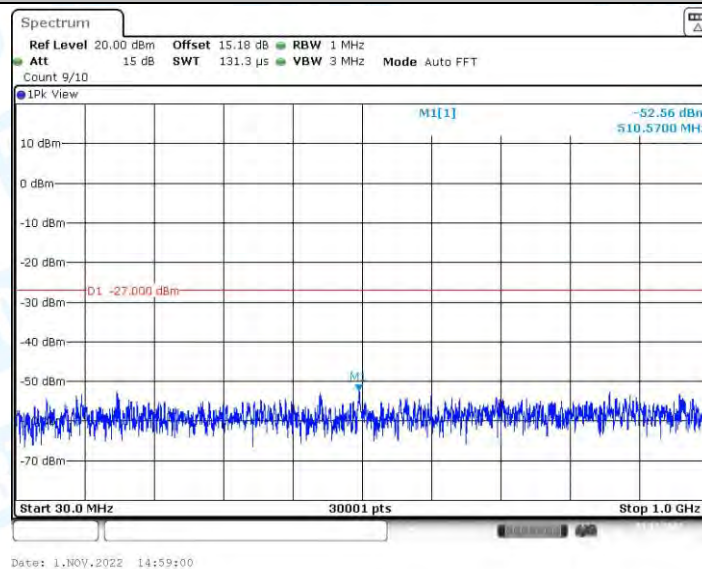


11AC20SISO_Ant1_5240_1000~40000

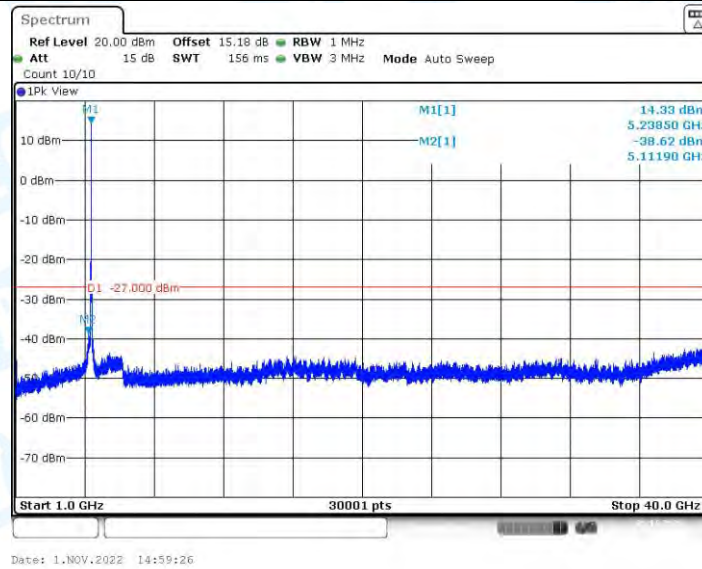


11AC40SISO_Ant1_5190_30~1000

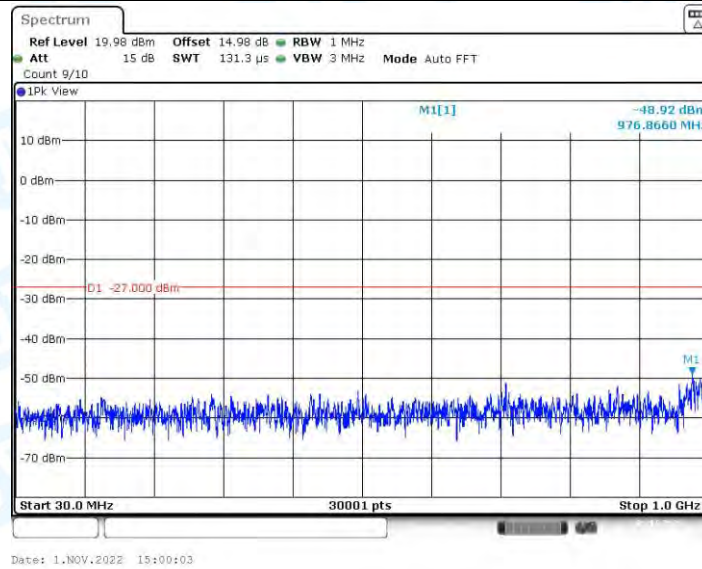


11AC40SISO_Ant1_5190_1000~40000

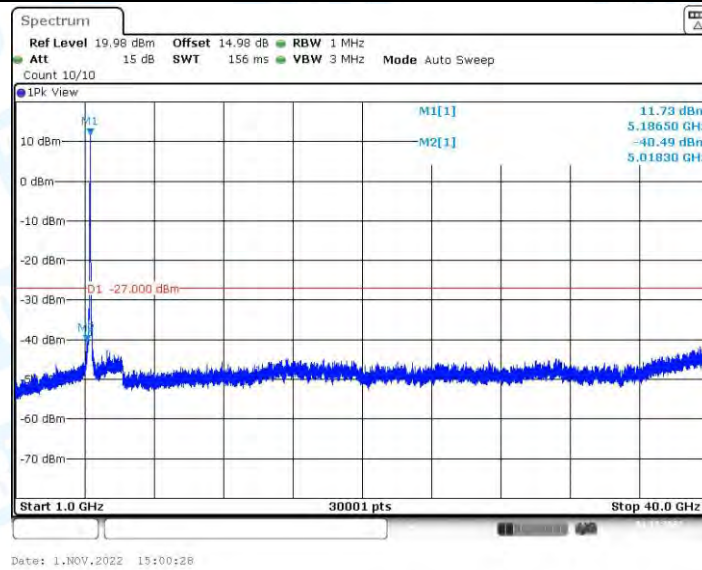


11AC40SISO_Ant1_5230_30~1000

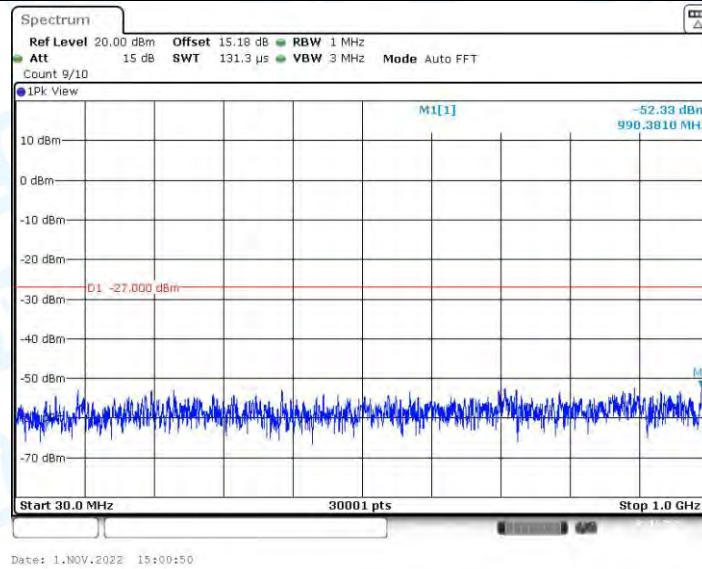


11AC40SISO_Ant1_5230_1000~40000

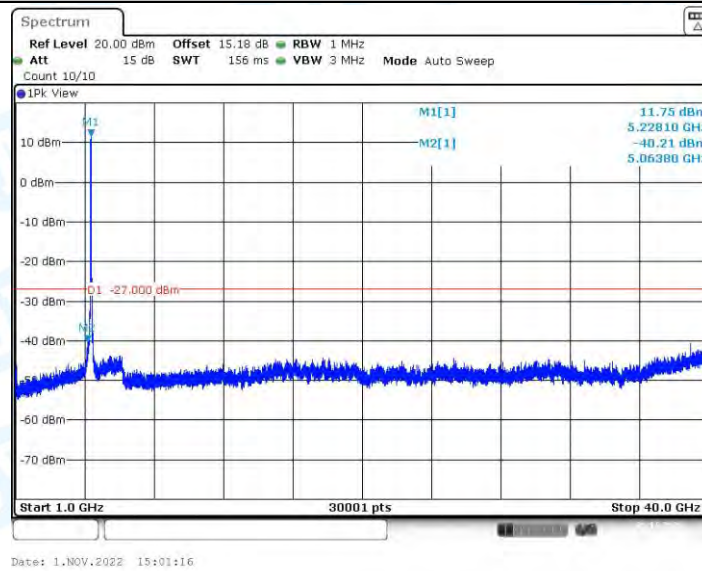

11AC80SISO_Ant1_5210_30~1000

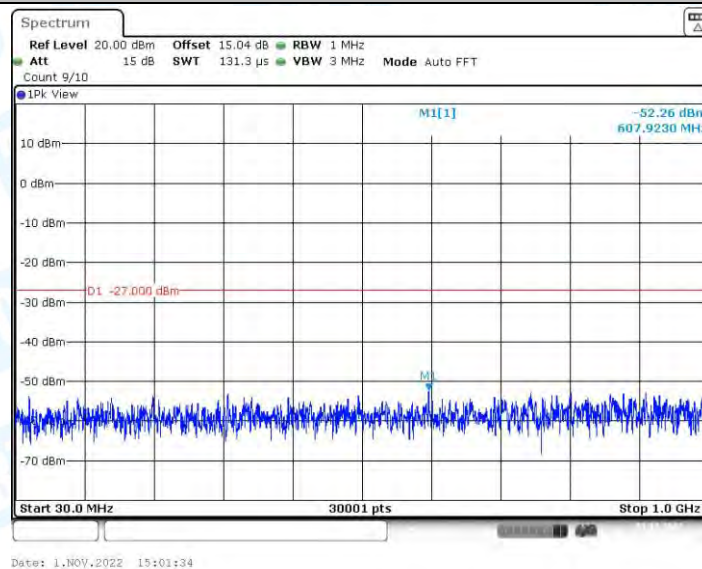

11AC80SISO_Ant1_5210_1000~40000

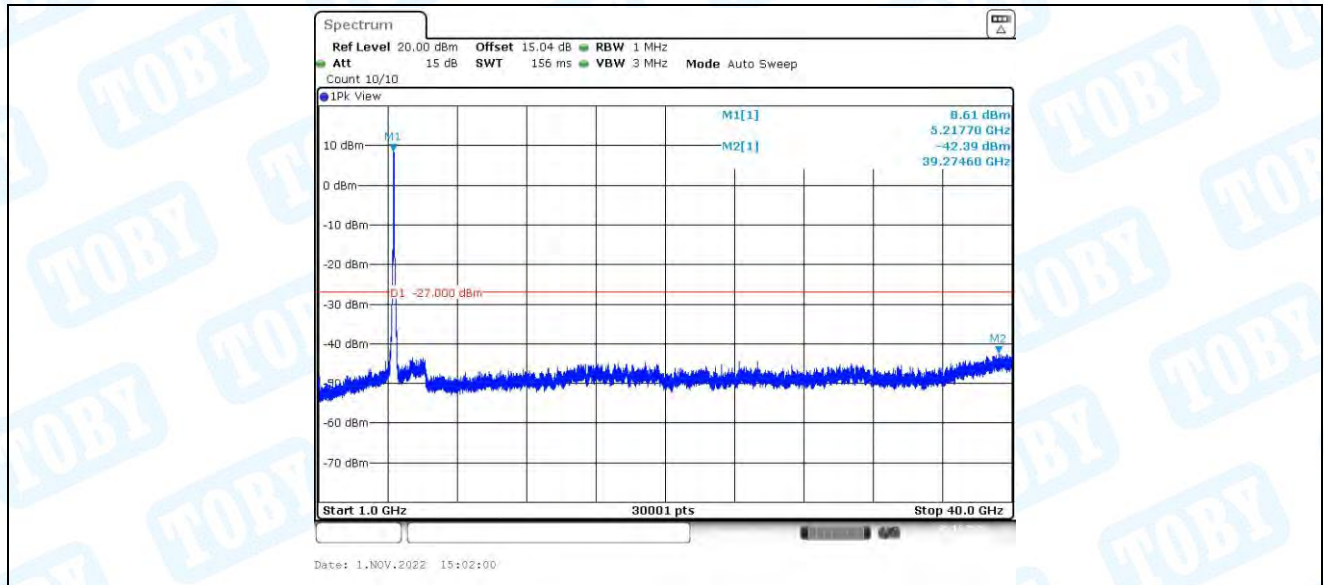


8. Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	a	5180	Ant1	4500	-48.64	2	48.59	Peak	68.2	Pass
NVNT	a	5180	Ant1	4500	-57.39	2	39.84	Average	54	Pass
NVNT	a	5180	Ant1	5144	-29.44	2	67.79	Peak	68.2	Pass
NVNT	a	5180	Ant1	5149.6	-45.04	2	52.19	Average	54	Pass
NVNT	a	5180	Ant1	5150	-30.81	2	66.42	Peak	68.2	Pass
NVNT	a	5180	Ant1	5150	-44.41	2	52.82	Average	54	Pass
NVNT	a	5240	Ant1	5350	-47.16	2	50.07	Peak	68.2	Pass
NVNT	a	5240	Ant1	5350	-56.14	2	41.09	Average	54	Pass
NVNT	a	5240	Ant1	5366.64	-43.95	2	53.28	Peak	68.2	Pass
NVNT	a	5240	Ant1	5351.28	-56.02	2	41.21	Average	54	Pass
NVNT	a	5240	Ant1	5460	-45.83	2	51.4	Peak	68.2	Pass
NVNT	a	5240	Ant1	5460	-56.67	2	40.56	Average	54	Pass
NVNT	ac(VHT20)	5180	Ant1	4500	-47.97	2	49.26	Peak	68.2	Pass
NVNT	ac(VHT20)	5180	Ant1	4500	-57.42	2	39.81	Average	54	Pass
NVNT	ac(VHT20)	5180	Ant1	5148.9	-30.3	2	66.93	Peak	68.2	Pass
NVNT	ac(VHT20)	5180	Ant1	5149.6	-45.74	2	51.49	Average	54	Pass
NVNT	ac(VHT20)	5180	Ant1	5150	-31.44	2	65.79	Peak	68.2	Pass
NVNT	ac(VHT20)	5180	Ant1	5150	-45.75	2	51.48	Average	54	Pass
NVNT	ac(VHT20)	5240	Ant1	5350	-46.27	2	50.96	Peak	68.2	Pass
NVNT	ac(VHT20)	5240	Ant1	5350	-56.16	2	41.07	Average	54	Pass
NVNT	ac(VHT20)	5240	Ant1	5421.6	-44.56	2	52.67	Peak	68.2	Pass
NVNT	ac(VHT20)	5240	Ant1	5355.12	-56.08	2	41.15	Average	54	Pass
NVNT	ac(VHT20)	5240	Ant1	5460	-46.78	2	50.45	Peak	68.2	Pass
NVNT	ac(VHT20)	5240	Ant1	5460	-56.67	2	40.56	Average	54	Pass
NVNT	ac(VHT40)	5190	Ant1	4500	-47.01	2	50.22	Peak	68.2	Pass
NVNT	ac(VHT40)	5190	Ant1	4500	-57.17	2	40.06	Average	54	Pass
NVNT	ac(VHT40)	5190	Ant1	5146.05	-32.27	2	64.96	Peak	68.2	Pass
NVNT	ac(VHT40)	5190	Ant1	5149.7	-47.65	2	49.58	Average	54	Pass
NVNT	ac(VHT40)	5190	Ant1	5150	-31.56	2	65.67	Peak	68.2	Pass
NVNT	ac(VHT40)	5190	Ant1	5150	-47.21	2	50.02	Average	54	Pass
NVNT	ac(VHT40)	5230	Ant1	5350	-46.54	2	50.69	Peak	68.2	Pass
NVNT	ac(VHT40)	5230	Ant1	5350	-55.62	2	41.61	Average	54	Pass
NVNT	ac(VHT40)	5230	Ant1	5378.73	-44.52	2	52.71	Peak	68.2	Pass
NVNT	ac(VHT40)	5230	Ant1	5351.73	-55.47	2	41.76	Average	54	Pass
NVNT	ac(VHT40)	5230	Ant1	5460	-46.59	2	50.64	Peak	68.2	Pass
NVNT	ac(VHT40)	5230	Ant1	5460	-56.6	2	40.63	Average	54	Pass
NVNT	ac(VHT80)	5210	Ant1	4497	-48.07	2	49.16	Peak	68.2	Pass
NVNT	ac(VHT80)	5210	Ant1	4497	-56.91	2	40.32	Average	54	Pass
NVNT	ac(VHT80)	5210	Ant1	5136.951	-29.76	2	67.47	Peak	68.2	Pass
NVNT	ac(VHT80)	5210	Ant1	5149.639	-44.52	2	52.71	Average	54	Pass
NVNT	ac(VHT80)	5210	Ant1	5150	-35.22	2	62.01	Peak	68.2	Pass
NVNT	ac(VHT80)	5210	Ant1	5150	-44.55	2	52.68	Average	54	Pass
NVNT	n(HT20)	5180	Ant1	4500	-47.5	2	49.73	Peak	68.2	Pass

NVNT	n(HT20)	5180	Ant1	4500	-57.37	2	39.86	Average	54	Pass
NVNT	n(HT20)	5180	Ant1	5149.6	-29.42	2	67.81	Peak	68.2	Pass
NVNT	n(HT20)	5180	Ant1	5149.6	-44.99	2	52.24	Average	54	Pass
NVNT	n(HT20)	5180	Ant1	5150	-32.54	2	64.69	Peak	68.2	Pass
NVNT	n(HT20)	5180	Ant1	5150	-44.71	2	52.52	Average	54	Pass
NVNT	n(HT20)	5240	Ant1	5350	-44.92	2	52.31	Peak	68.2	Pass
NVNT	n(HT20)	5240	Ant1	5350	-56.3	2	40.93	Average	54	Pass
NVNT	n(HT20)	5240	Ant1	5361.36	-44.25	2	52.98	Peak	68.2	Pass
NVNT	n(HT20)	5240	Ant1	5408.88	-55.91	2	41.32	Average	54	Pass
NVNT	n(HT20)	5240	Ant1	5460	-48.61	2	48.62	Peak	68.2	Pass
NVNT	n(HT20)	5240	Ant1	5460	-56.62	2	40.61	Average	54	Pass
NVNT	n(HT40)	5190	Ant1	4500	-48.59	2	48.64	Peak	68.2	Pass
NVNT	n(HT40)	5190	Ant1	4500	-57.27	2	39.96	Average	54	Pass
NVNT	n(HT40)	5190	Ant1	5149.7	-29.69	2	67.54	Peak	68.2	Pass
NVNT	n(HT40)	5190	Ant1	5149.7	-46.22	2	51.01	Average	54	Pass
NVNT	n(HT40)	5190	Ant1	5150	-31.21	2	66.02	Peak	68.2	Pass
NVNT	n(HT40)	5190	Ant1	5150	-45.48	2	51.75	Average	54	Pass
NVNT	n(HT40)	5230	Ant1	5350	-46.59	2	50.64	Peak	68.2	Pass
NVNT	n(HT40)	5230	Ant1	5350	-55.38	2	41.85	Average	54	Pass
NVNT	n(HT40)	5230	Ant1	5387.37	-43.47	2	53.76	Peak	68.2	Pass
NVNT	n(HT40)	5230	Ant1	5350.38	-55.22	2	42.01	Average	54	Pass
NVNT	n(HT40)	5230	Ant1	5460	-45.57	2	51.66	Peak	68.2	Pass
NVNT	n(HT40)	5230	Ant1	5460	-56.39	2	40.84	Average	54	Pass

Test Graphs

Restrict Band NVNT a 5180MHz Ant1 Peak

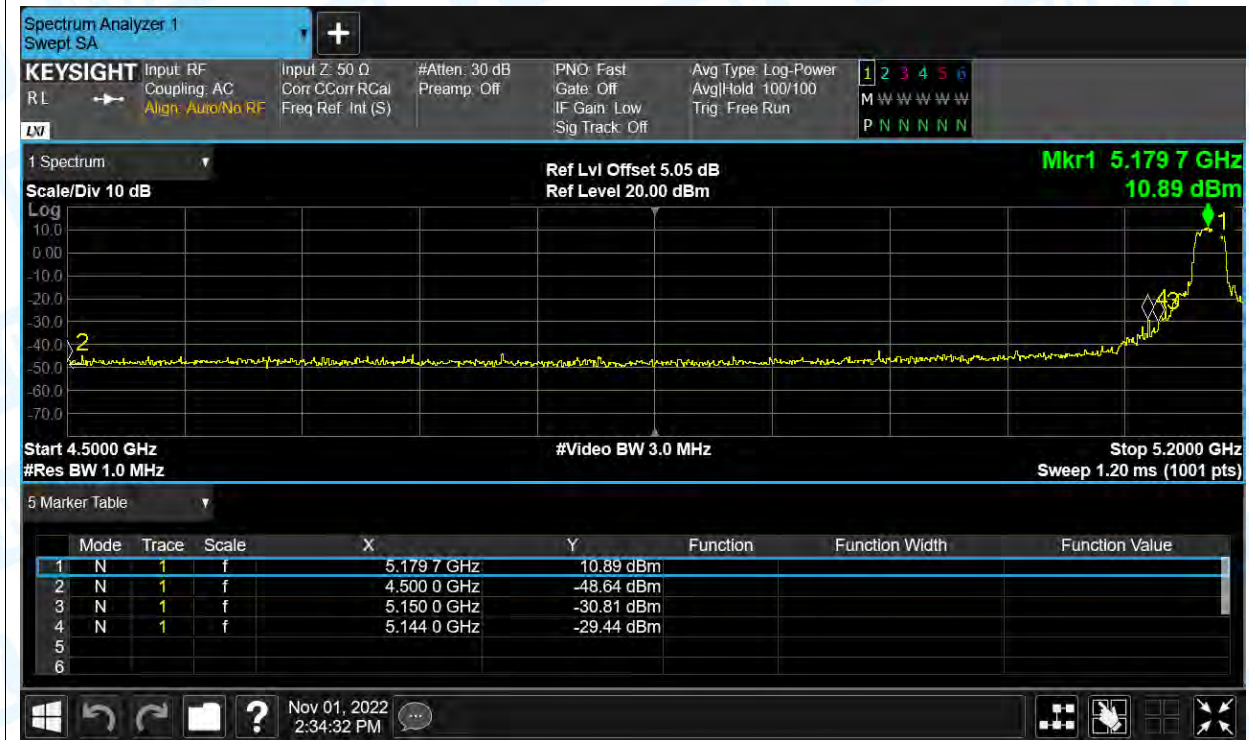

Restrict Band NVNT a 5180MHz Ant1 Average




Restrict Band NVNT a 5240MHz Ant1 Peak




Restrict Band NVNT a 5240MHz Ant1 Average




Restrict Band NVNT ac(VHT20) 5180MHz Ant1 Peak

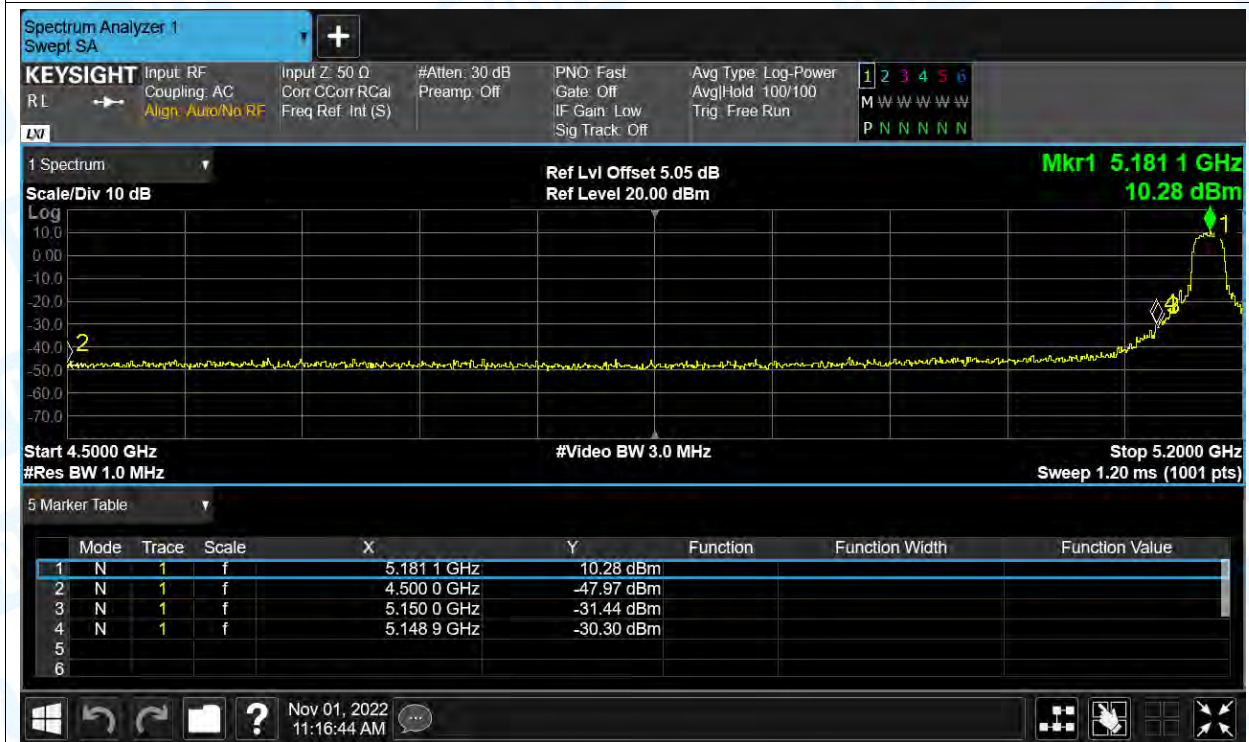

Restrict Band NVNT ac(VHT20) 5180MHz Ant1 Average

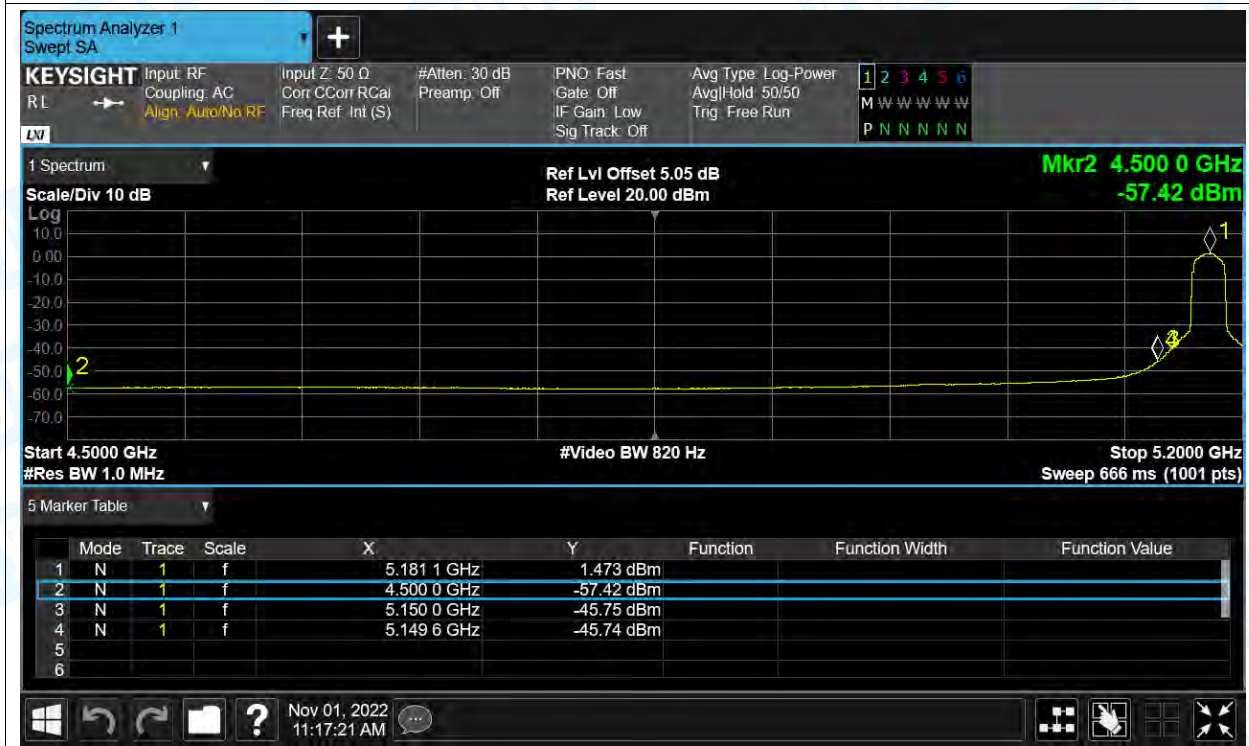


Restrict Band NVNT ac(VHT20) 5240MHz Ant1 Peak

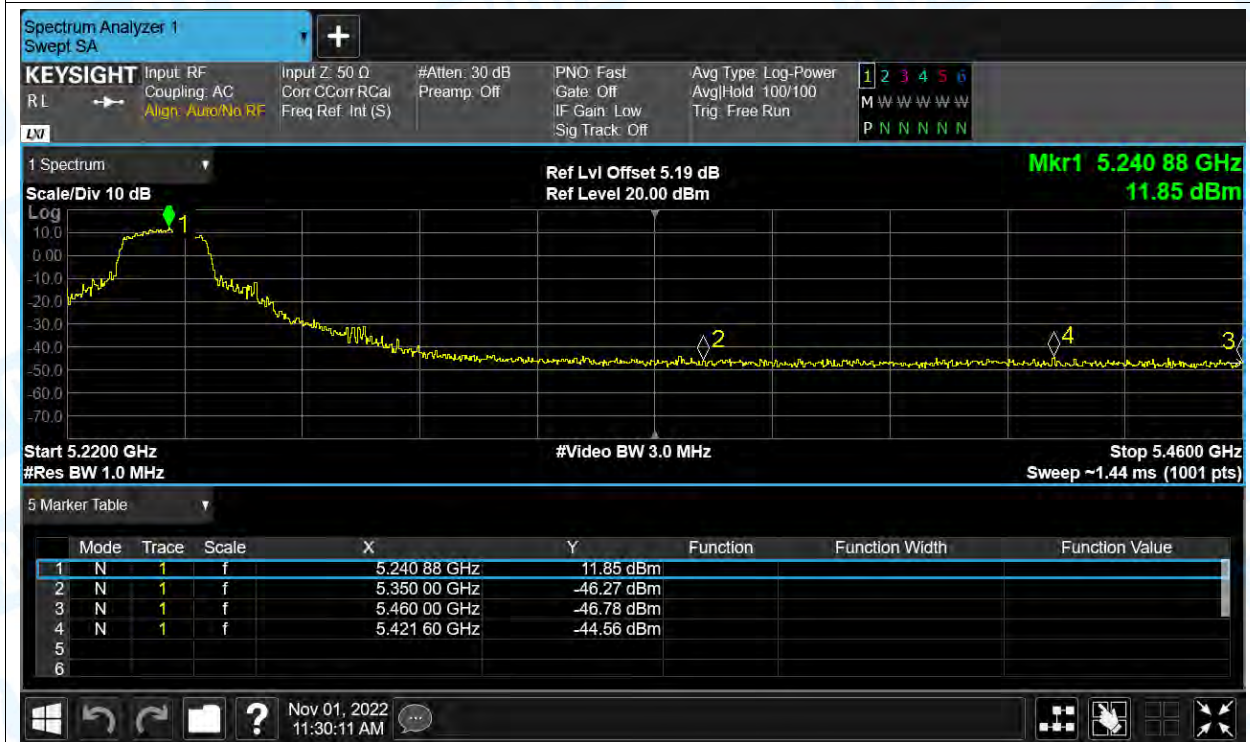


Restrict Band NVNT ac(VHT20) 5240MHz Ant1 Average




Restrict Band NVNT ac(VHT40) 5190MHz Ant1 Peak

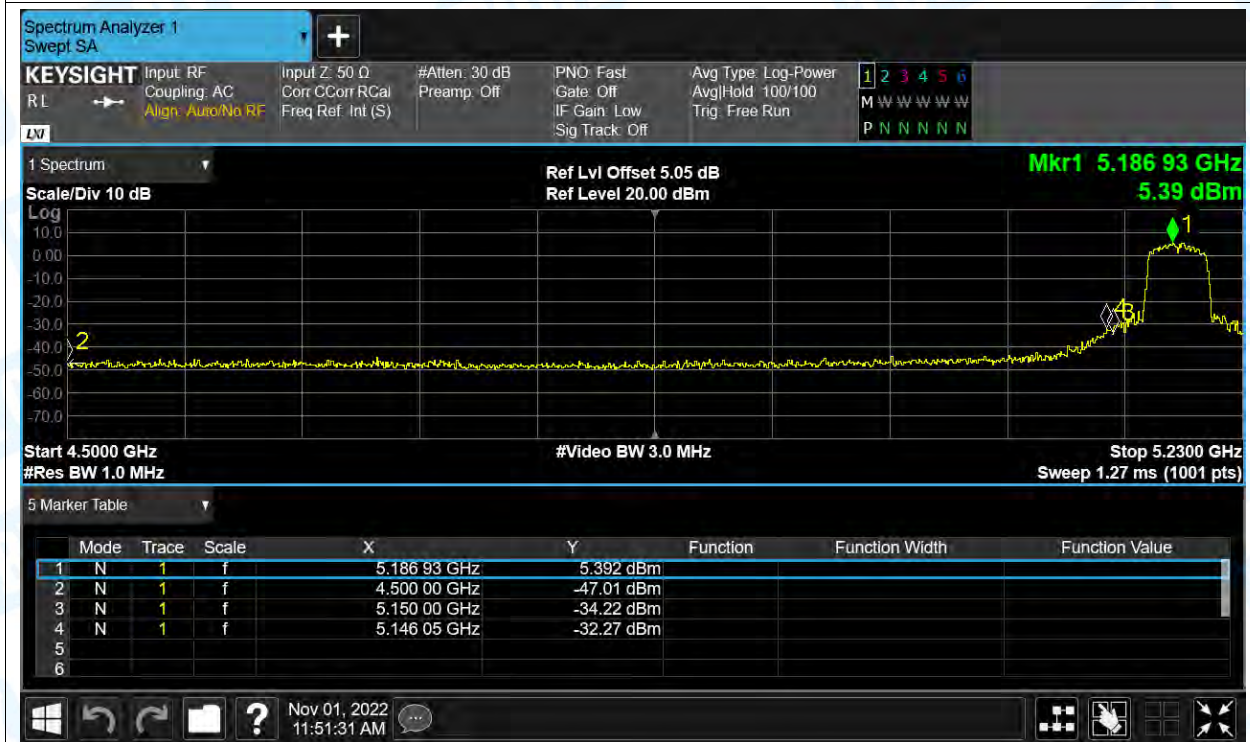

Restrict Band NVNT ac(VHT40) 5190MHz Ant1 Average

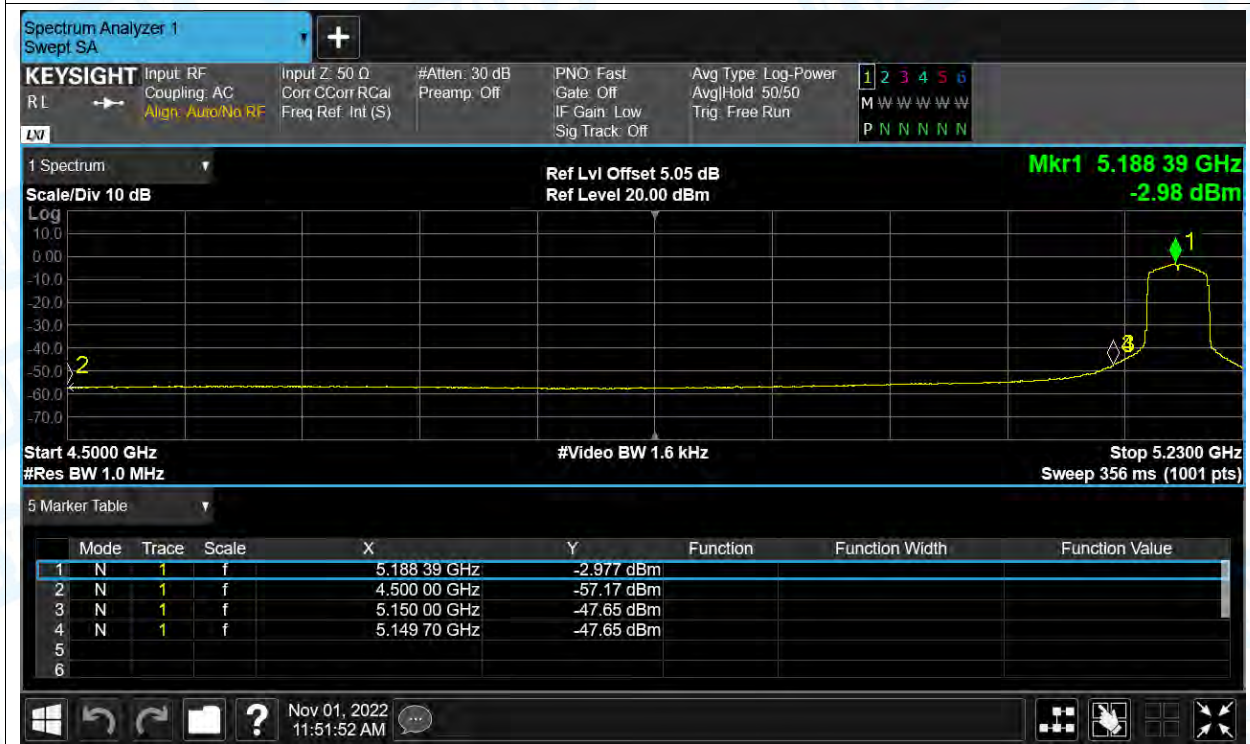


Restrict Band NVNT ac(VHT40) 5230MHz Ant1 Peak

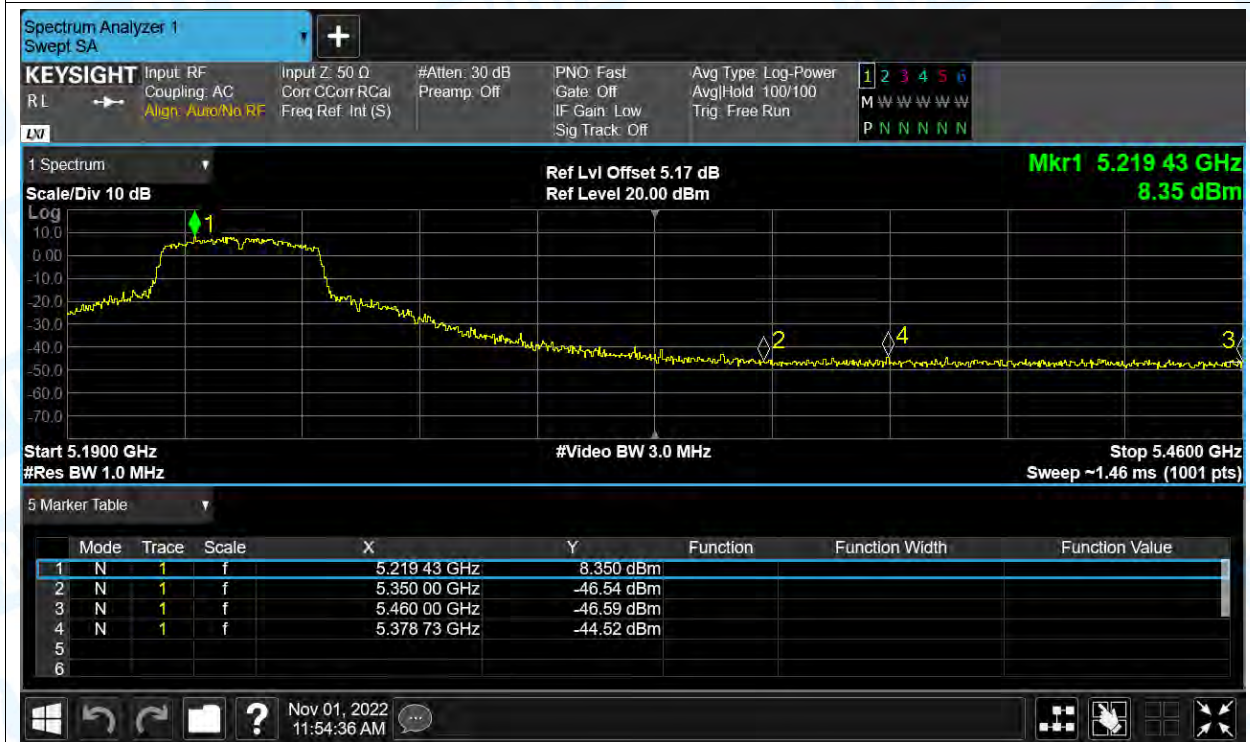


Restrict Band NVNT ac(VHT40) 5230MHz Ant1 Average




Restrict Band NVNT ac(VHT80) 5210MHz Ant1 Peak

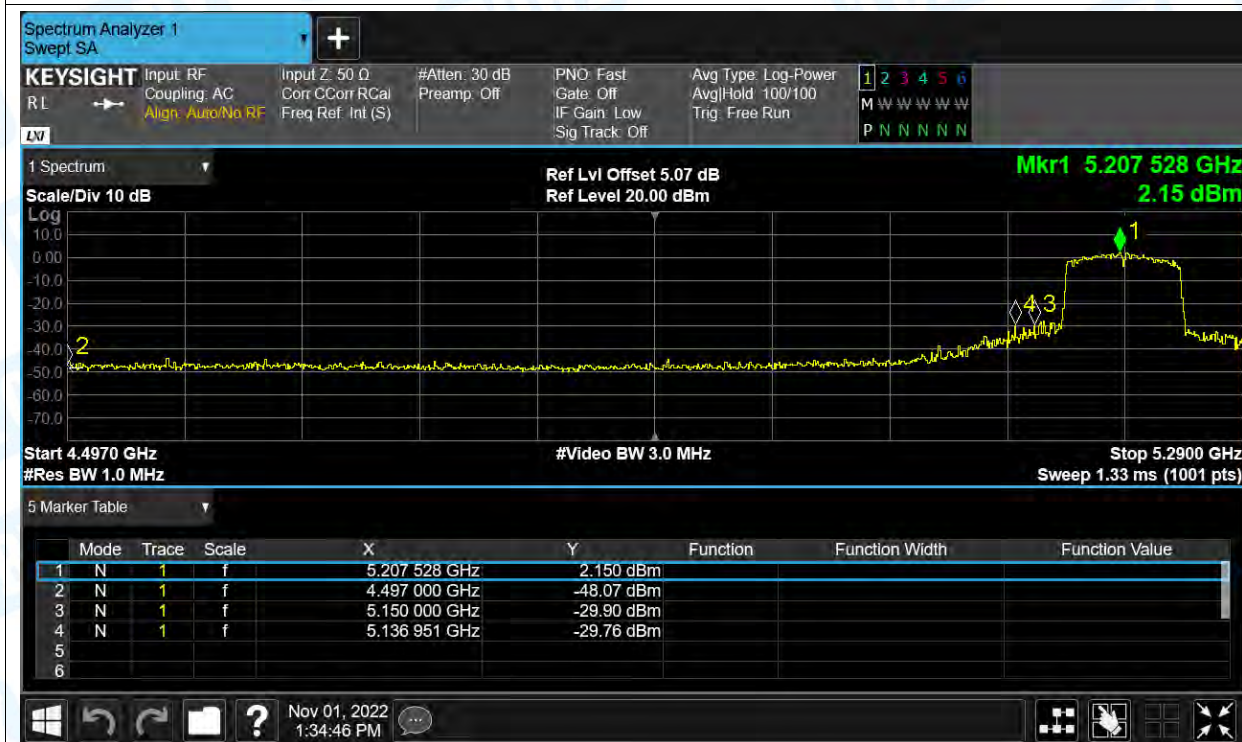

Restrict Band NVNT ac(VHT80) 5210MHz Ant1 Average

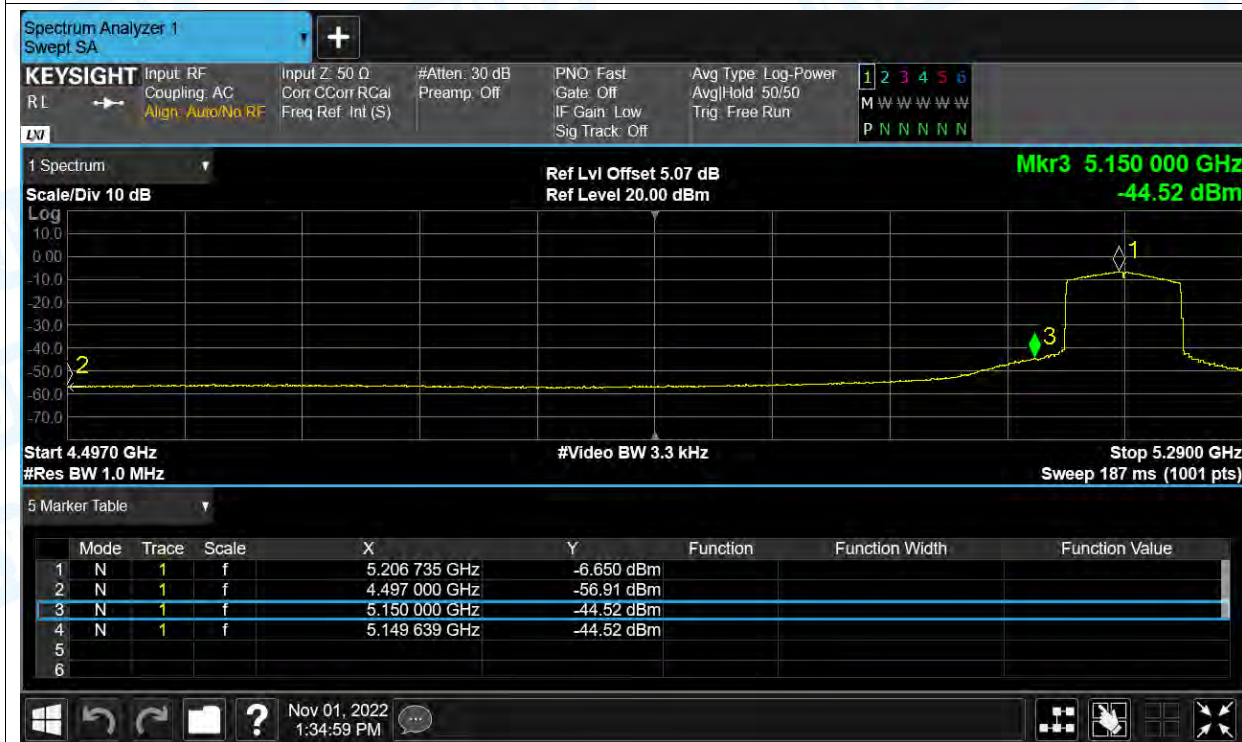

Restrict Band NVNT n(HT20) 5180MHz Ant1 Peak

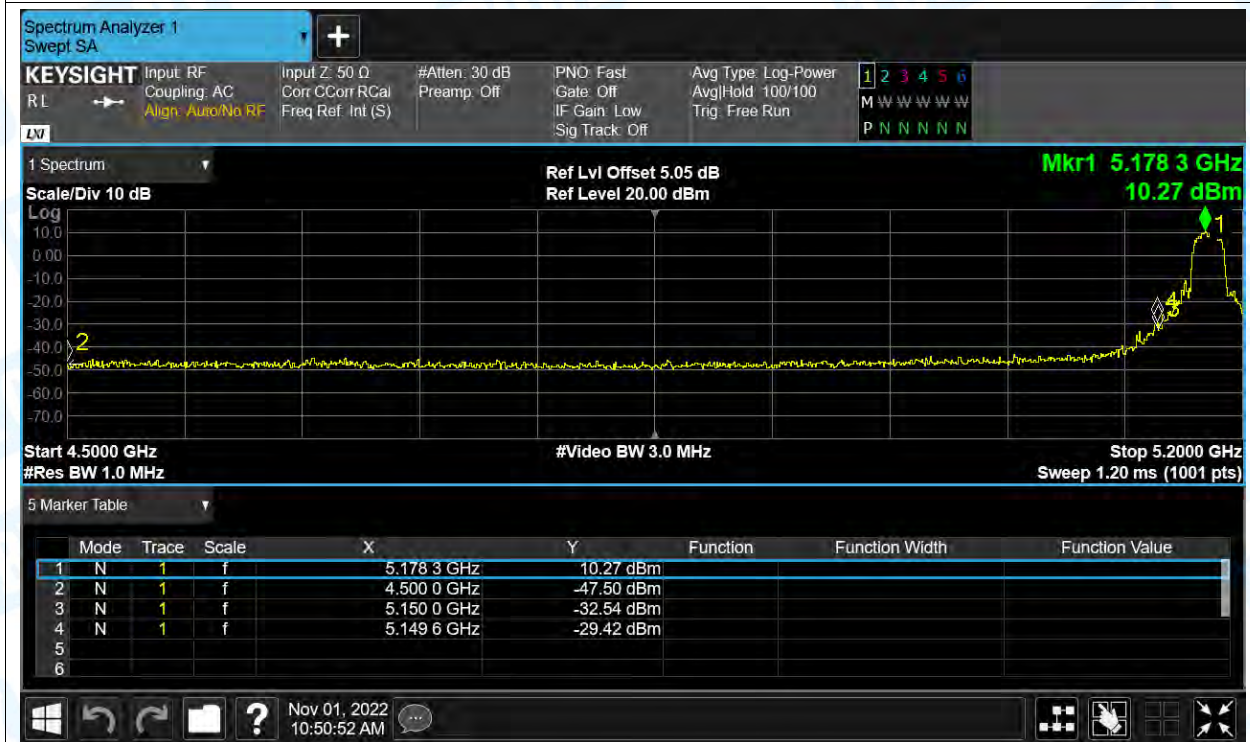

Restrict Band NVNT n(HT20) 5180MHz Ant1 Average




Restrict Band NVNT n(HT20) 5240MHz Ant1 Peak



Restrict Band NVNT n(HT20) 5240MHz Ant1 Average




Restrict Band NVNT n(HT40) 5190MHz Ant1 Peak

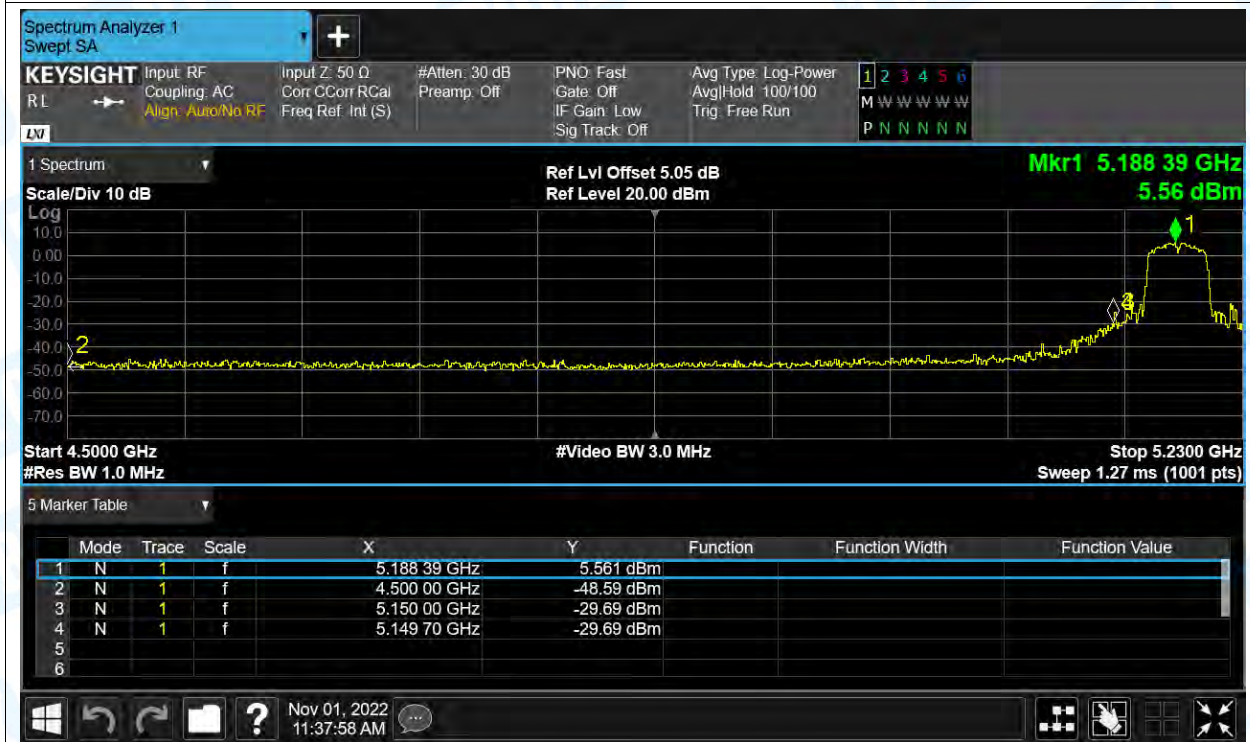


Restrict Band NVNT n(HT40) 5190MHz Ant1 Average



Restrict Band NVNT n(HT40) 5230MHz Ant1 Peak

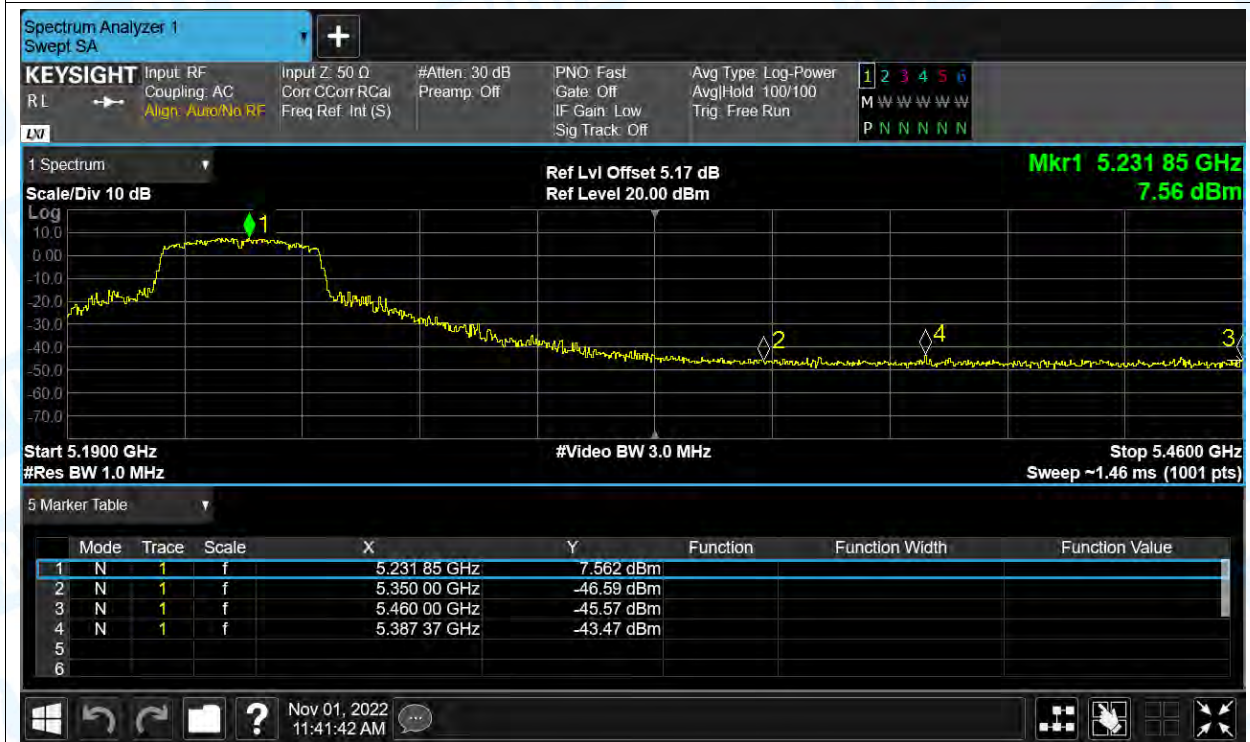

Restrict Band NVNT n(HT40) 5230MHz Ant1 Average

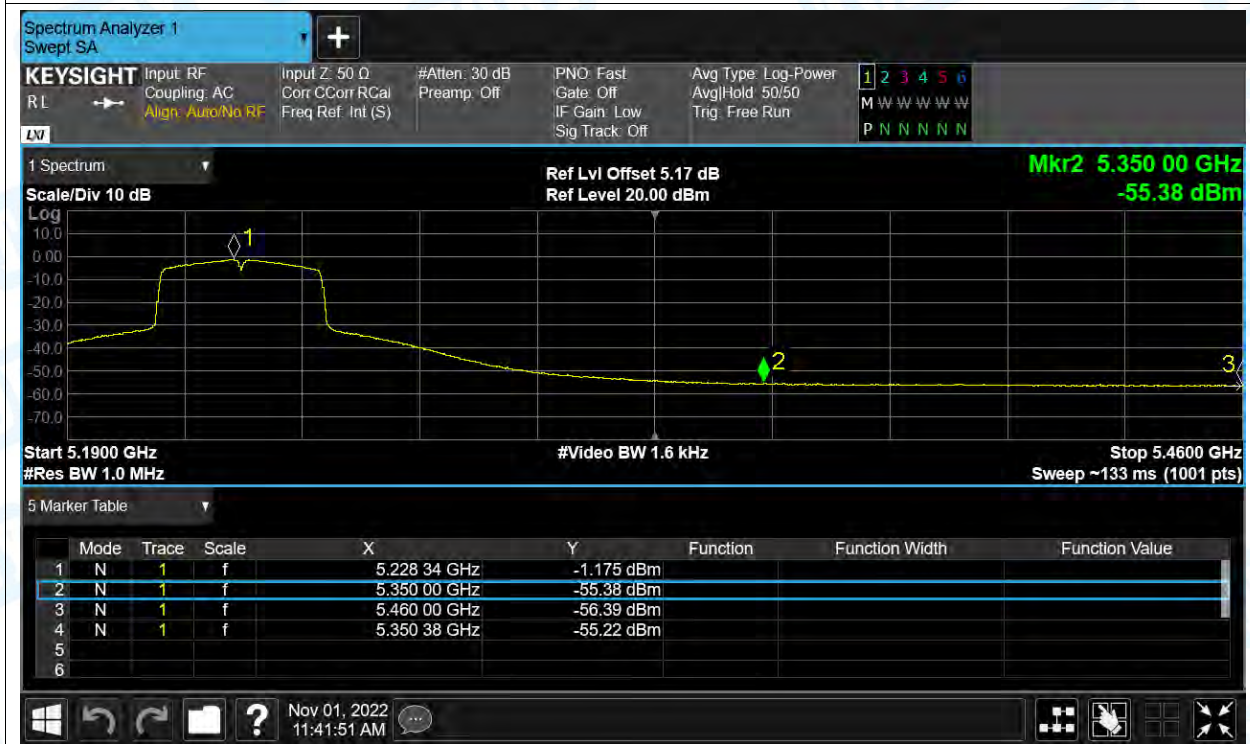

-----END OF THE REPORT-----