



Appendix D

RF Test Data for 5.2GWIFI (Conducted Measurement)

Product Name: Smart display

Test Model: SD3202

Environmental Conditions

Temperature:	23.1° C
Relative Humidity:	52.3%
ATM Pressure:	100.0 kPa
Test Engineer:	Jay Luo
Supervised by:	Nick Peng



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,
Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



D.1 -26dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant1	21.762	---	Pass
NVNT	a	5200	Ant1	24.829	---	Pass
NVNT	a	5240	Ant1	22.321	---	Pass
NVNT	n20	5180	Ant1	26.177	---	Pass
NVNT	n20	5200	Ant1	23.757	---	Pass
NVNT	n20	5240	Ant1	25.467	---	Pass
NVNT	n40	5190	Ant1	42.413	---	Pass
NVNT	n40	5230	Ant1	40.45	---	Pass
NVNT	ac20	5180	Ant1	28.728	---	Pass
NVNT	ac20	5200	Ant1	23.985	---	Pass
NVNT	ac20	5240	Ant1	26.487	---	Pass
NVNT	ac40	5190	Ant1	44.769	---	Pass
NVNT	ac40	5230	Ant1	43.917	---	Pass
NVNT	ac80	5210	Ant1	81.406	---	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,
Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

-26dB Bandwidth NVNT a 5180MHz Ant1

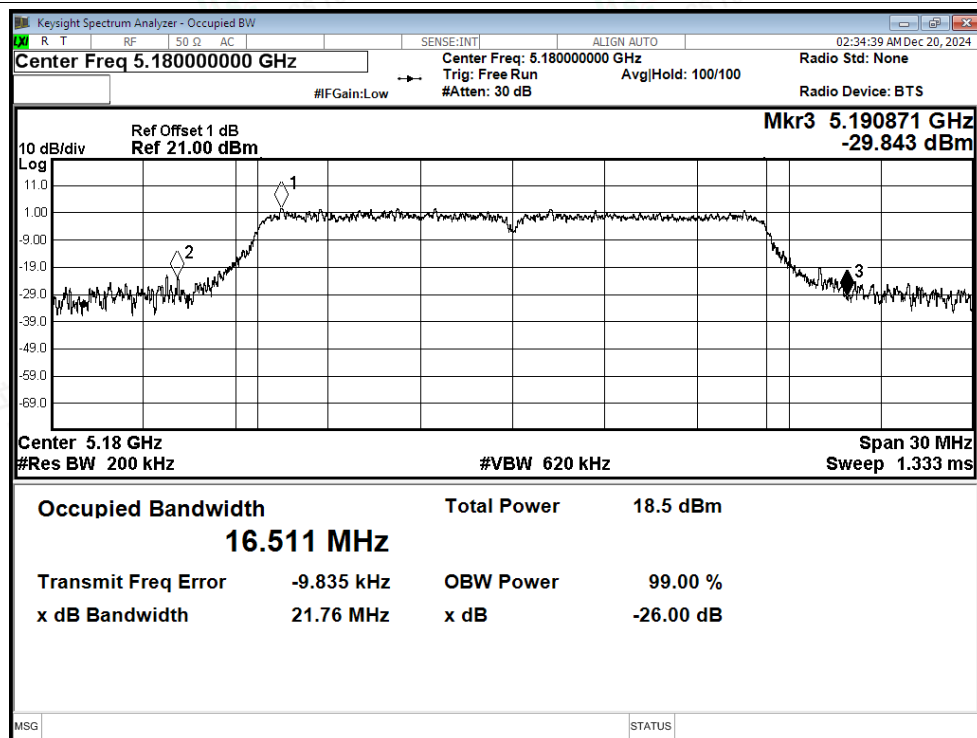


-26dB Bandwidth NVNT a 5200MHz Ant1

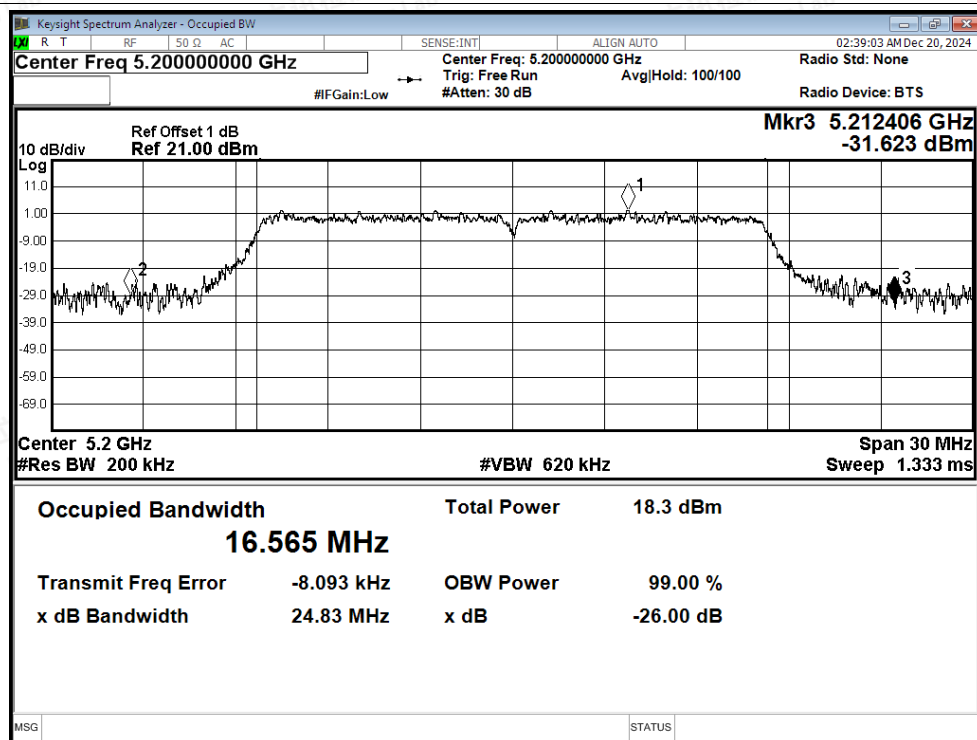








-26dB Bandwidth NVNT a 5240MHz Ant1


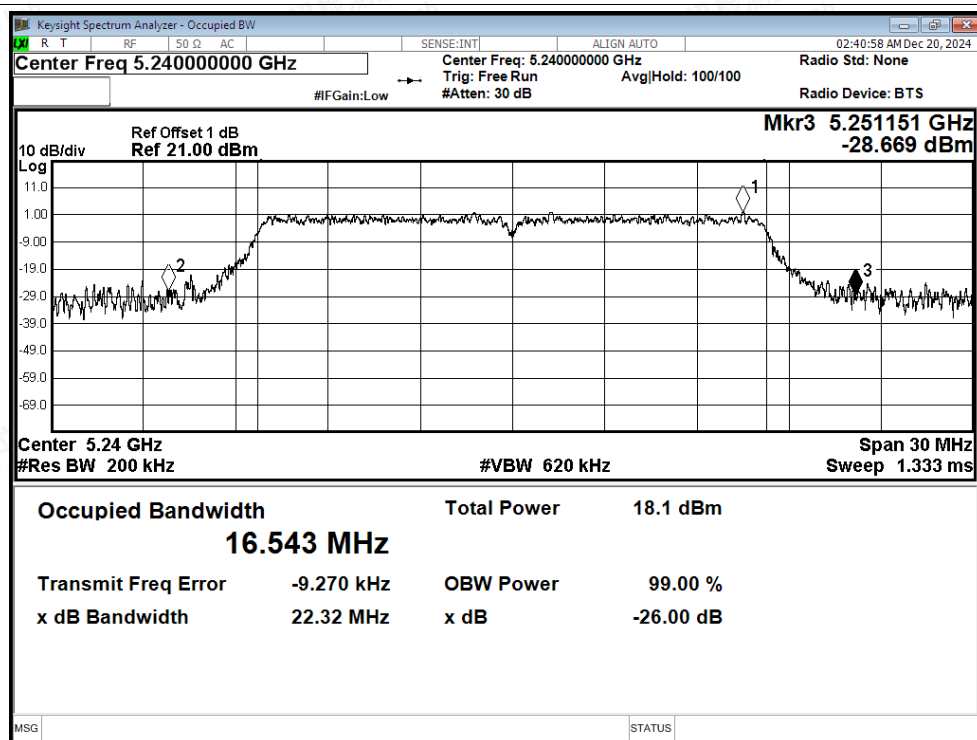




-26dB Bandwidth NVNT n20 5180MHz Ant1


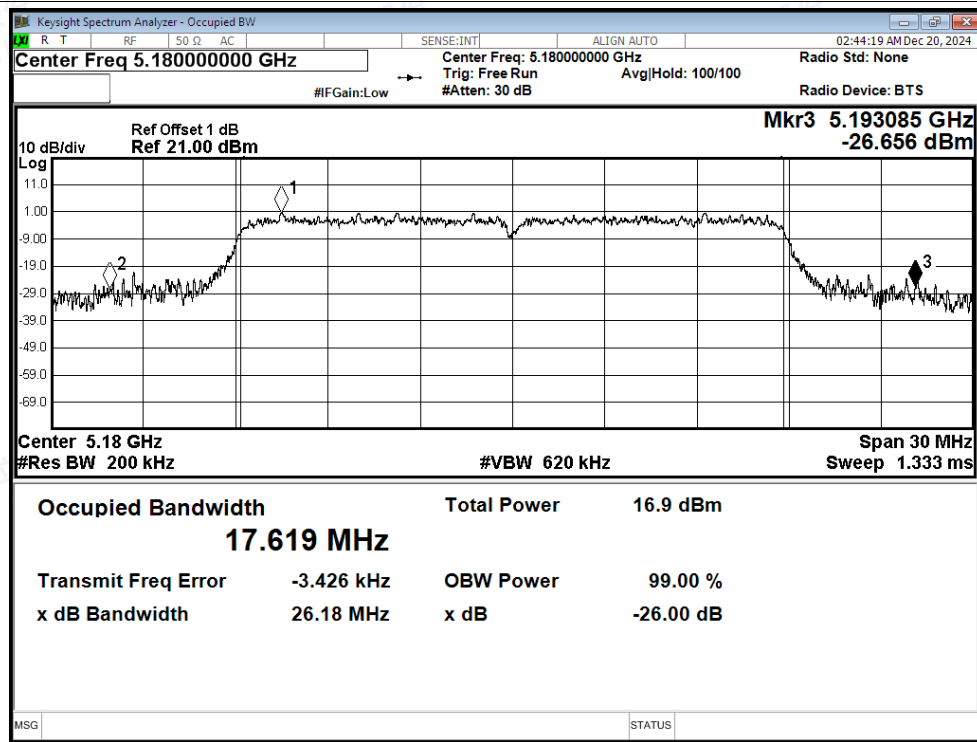


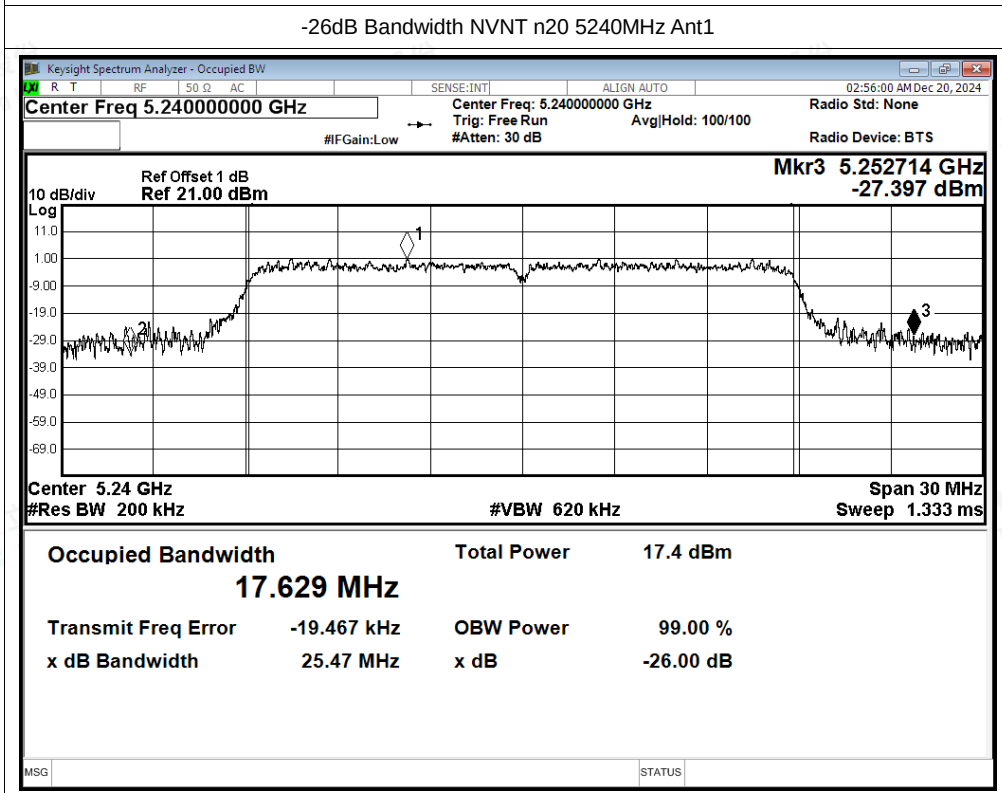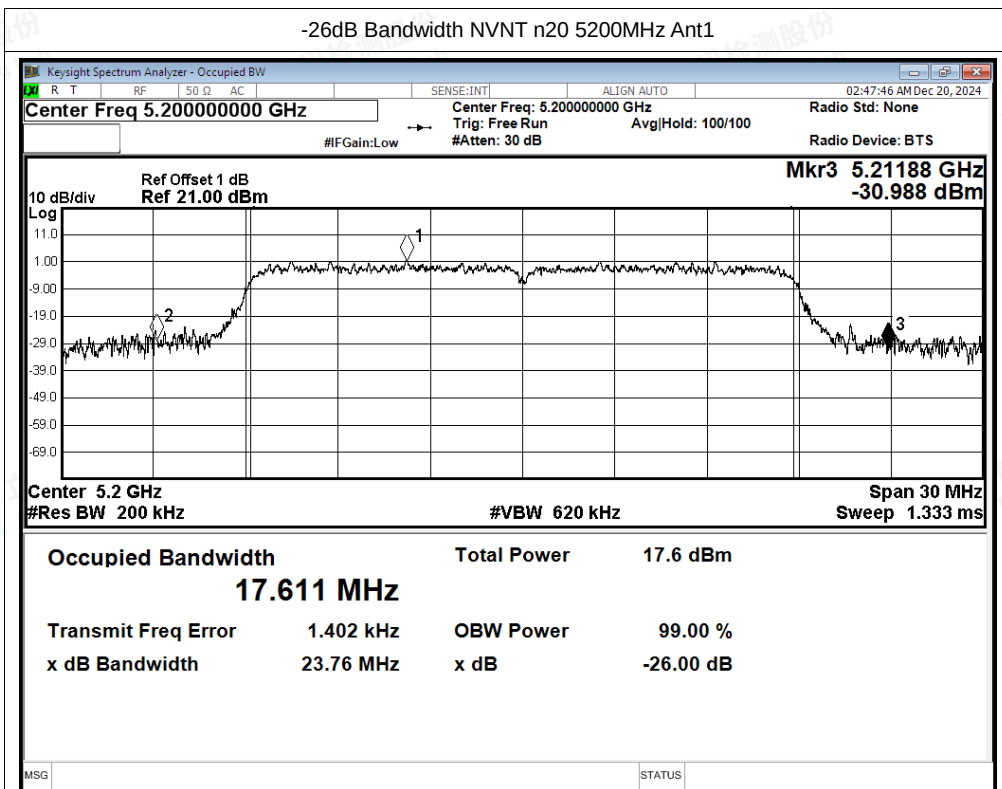

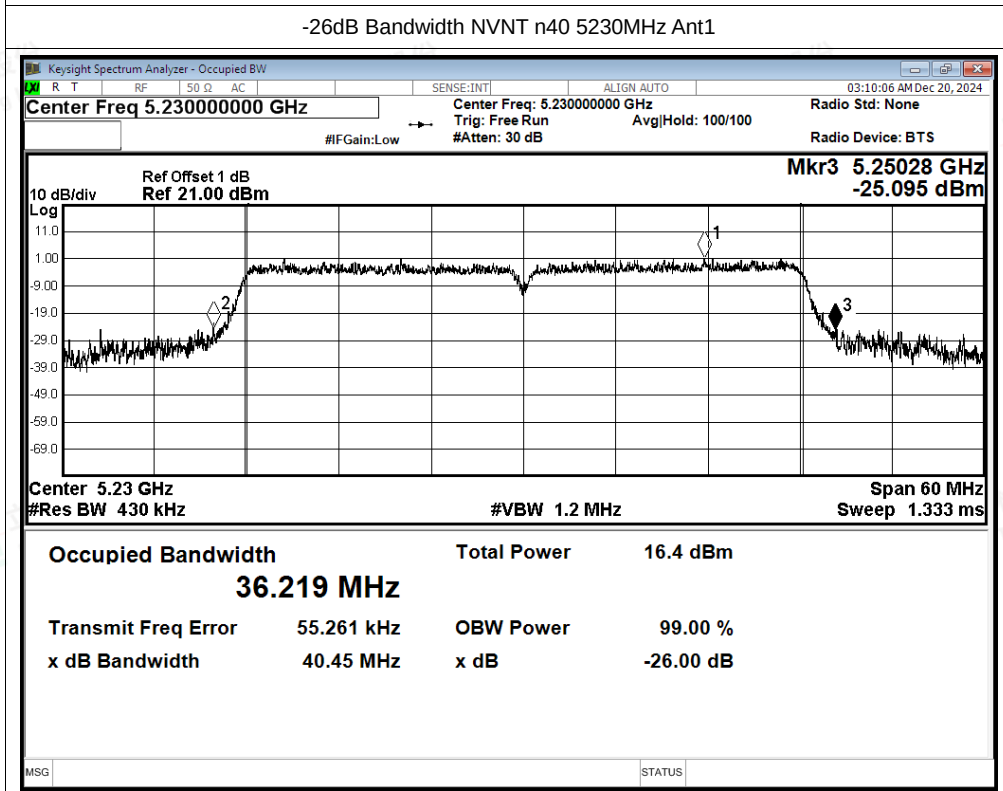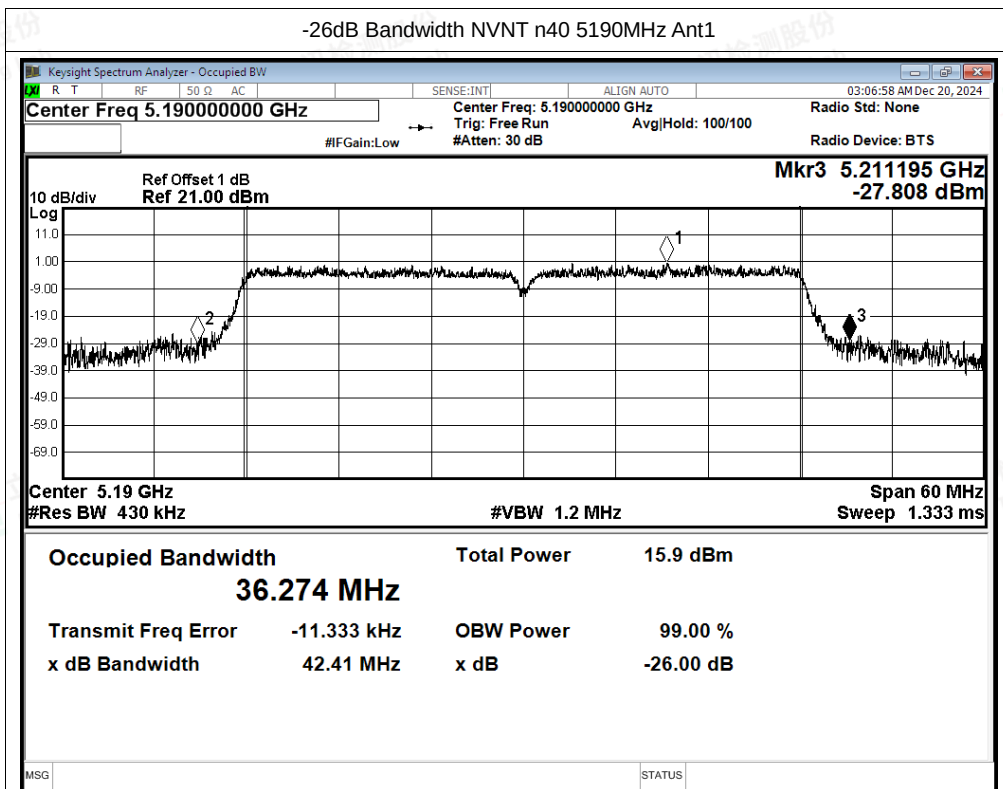

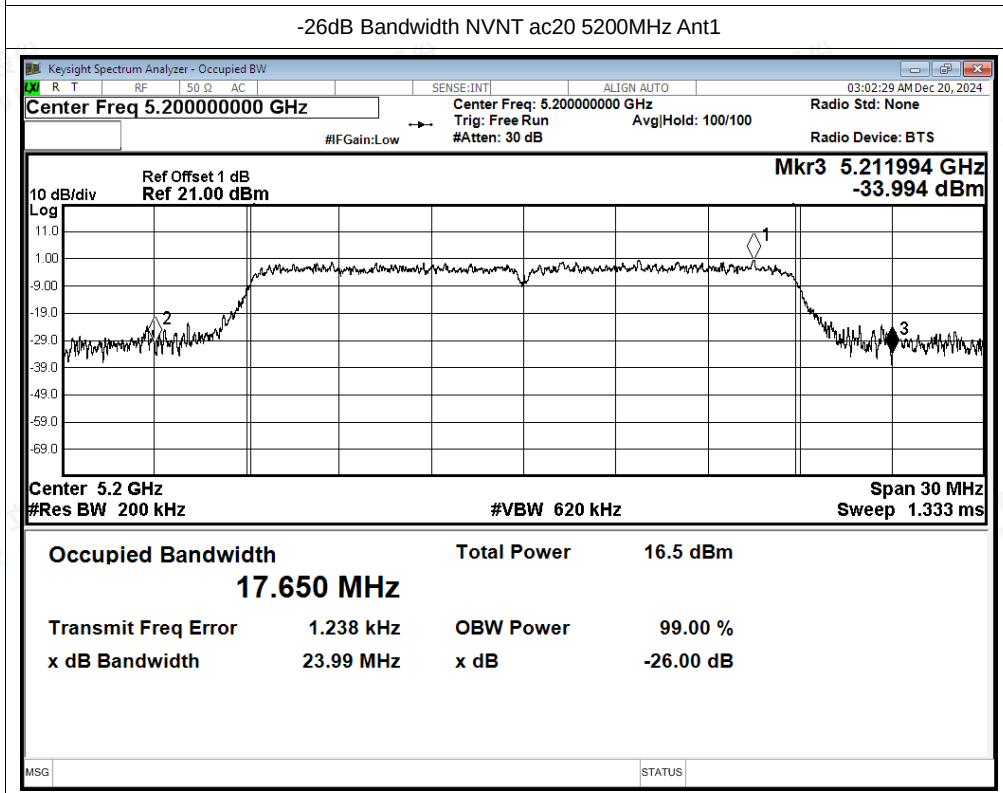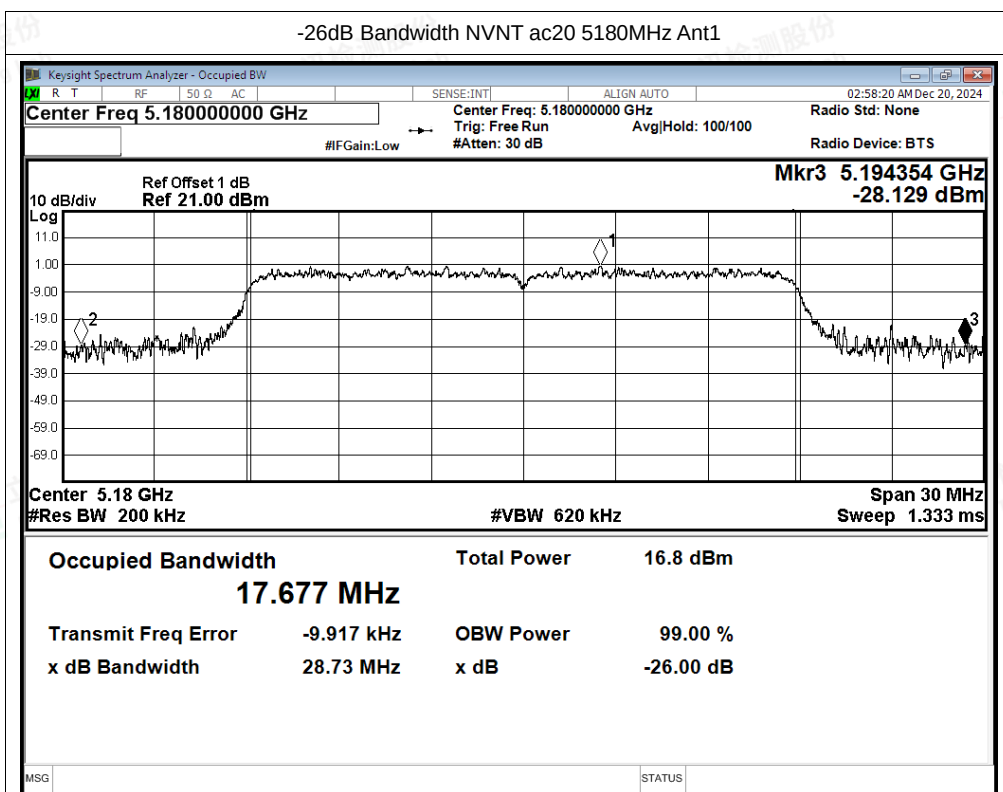

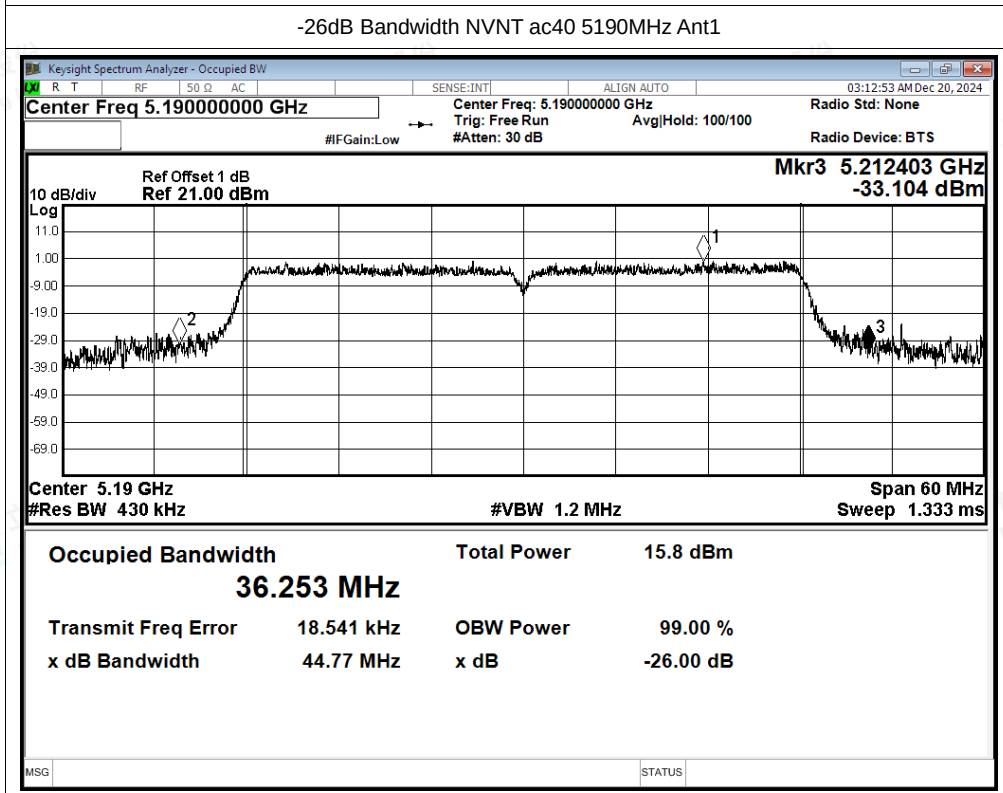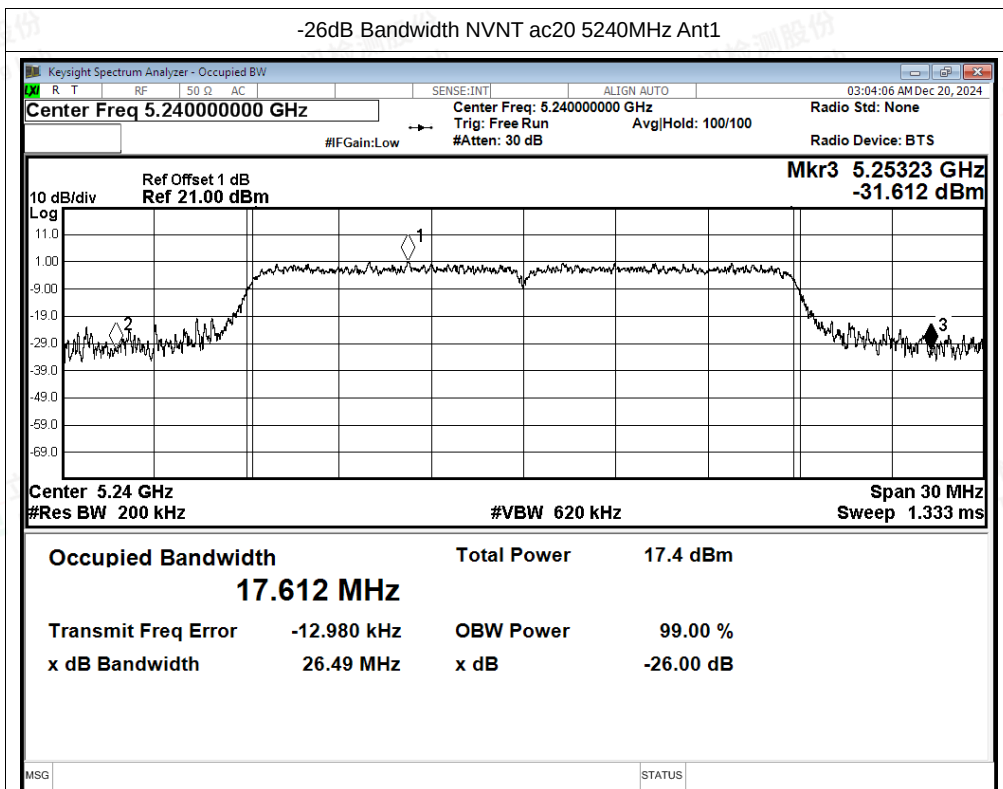

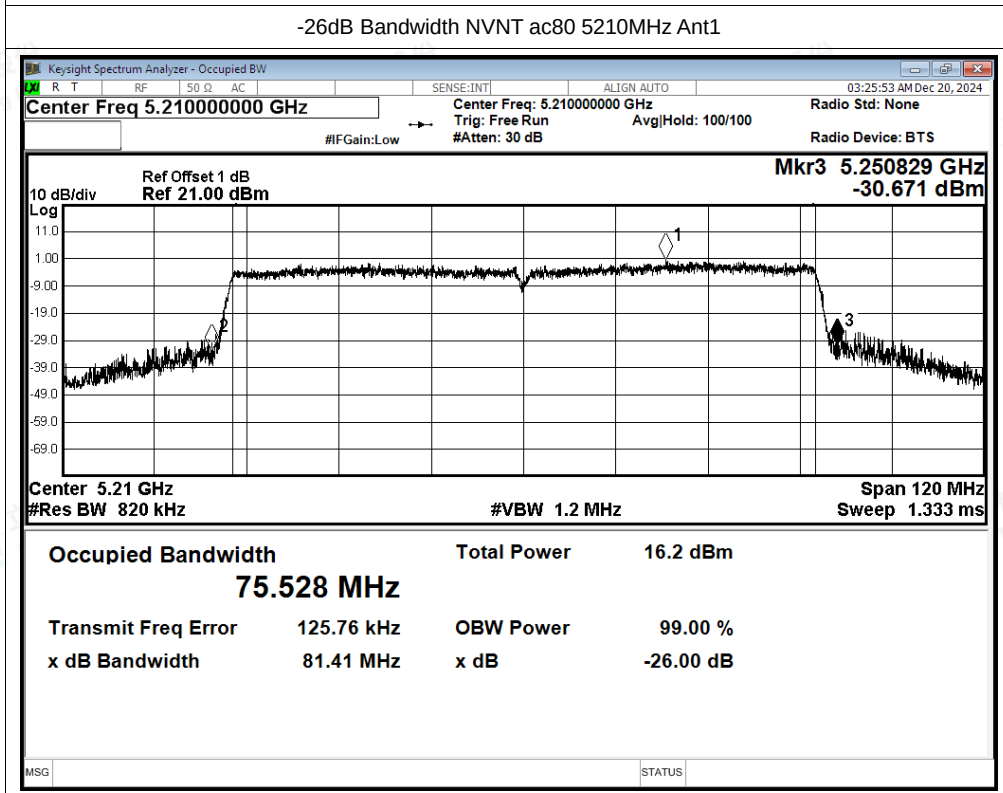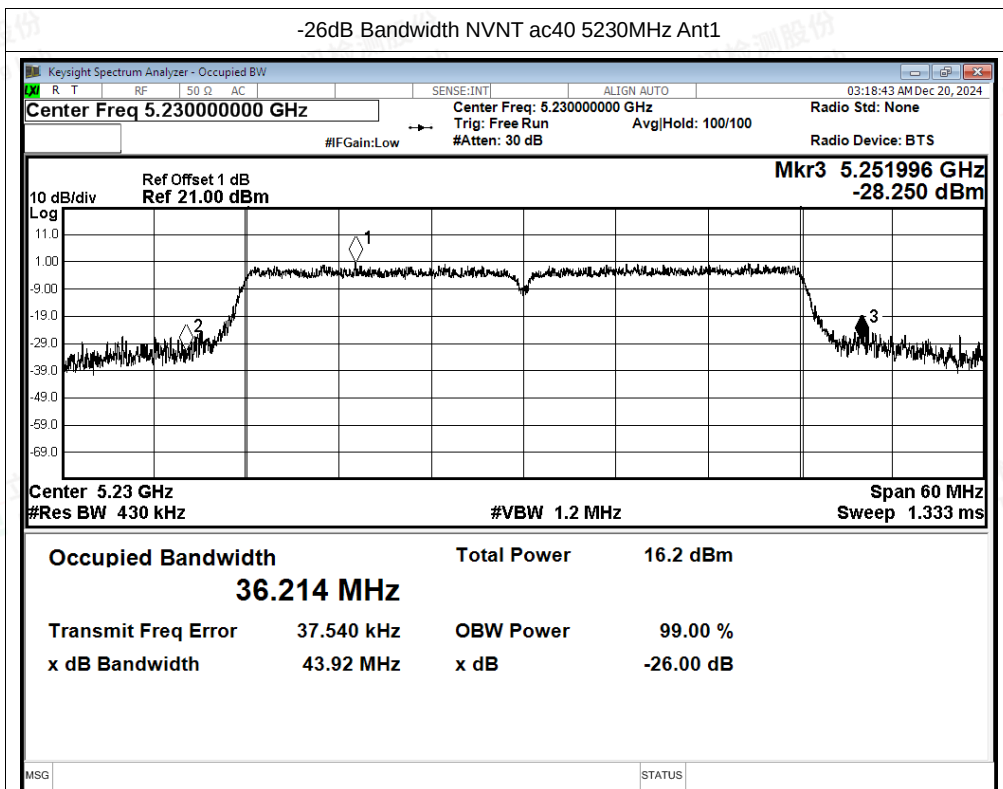



D.2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	12.75	0.24	12.99	24	Pass
NVNT	a	5200	Ant1	12.46	0.24	12.7	24	Pass
NVNT	a	5240	Ant1	12.41	0.24	12.65	24	Pass
NVNT	n20	5180	Ant1	11.21	0.28	11.49	24	Pass
NVNT	n20	5200	Ant1	11.78	0.28	12.06	24	Pass
NVNT	n20	5240	Ant1	11.7	0.28	11.98	24	Pass
NVNT	n40	5190	Ant1	10.26	0.12	10.38	24	Pass
NVNT	n40	5230	Ant1	10.68	0.12	10.8	24	Pass
NVNT	ac20	5180	Ant1	11.18	0.28	11.46	24	Pass
NVNT	ac20	5200	Ant1	10.81	0.28	11.09	24	Pass
NVNT	ac20	5240	Ant1	11.72	0.28	12	24	Pass
NVNT	ac40	5190	Ant1	10.06	0.12	10.18	24	Pass
NVNT	ac40	5230	Ant1	10.56	0.12	10.68	24	Pass
NVNT	ac80	5210	Ant1	9.87	0.25	10.12	24	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,
Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



D.3 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/MHz)	Duty Factor (dB)	Total PSD (dBm/MHz)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	-1.94	0.24	-1.7	11	Pass
NVNT	a	5200	Ant1	-1.97	0.24	-1.73	11	Pass
NVNT	a	5240	Ant1	-2.19	0.24	-1.95	11	Pass
NVNT	n20	5180	Ant1	-3.79	0.28	-3.51	11	Pass
NVNT	n20	5200	Ant1	-3.28	0.28	-3	11	Pass
NVNT	n20	5240	Ant1	-3.32	0.28	-3.04	11	Pass
NVNT	n40	5190	Ant1	-7.1	0.12	-6.98	11	Pass
NVNT	n40	5230	Ant1	-5.39	0.12	-5.27	11	Pass
NVNT	ac20	5180	Ant1	-4.17	0.28	-3.89	11	Pass
NVNT	ac20	5200	Ant1	-3.85	0.28	-3.57	11	Pass
NVNT	ac20	5240	Ant1	-4.14	0.28	-3.86	11	Pass
NVNT	ac40	5190	Ant1	-6.89	0.12	-6.77	11	Pass
NVNT	ac40	5230	Ant1	-5.8	0.12	-5.68	11	Pass
NVNT	ac80	5210	Ant1	-11.1	0.25	-10.85	11	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,
Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity






Test Graphs



PSD NVNT a 5180MHz Ant1


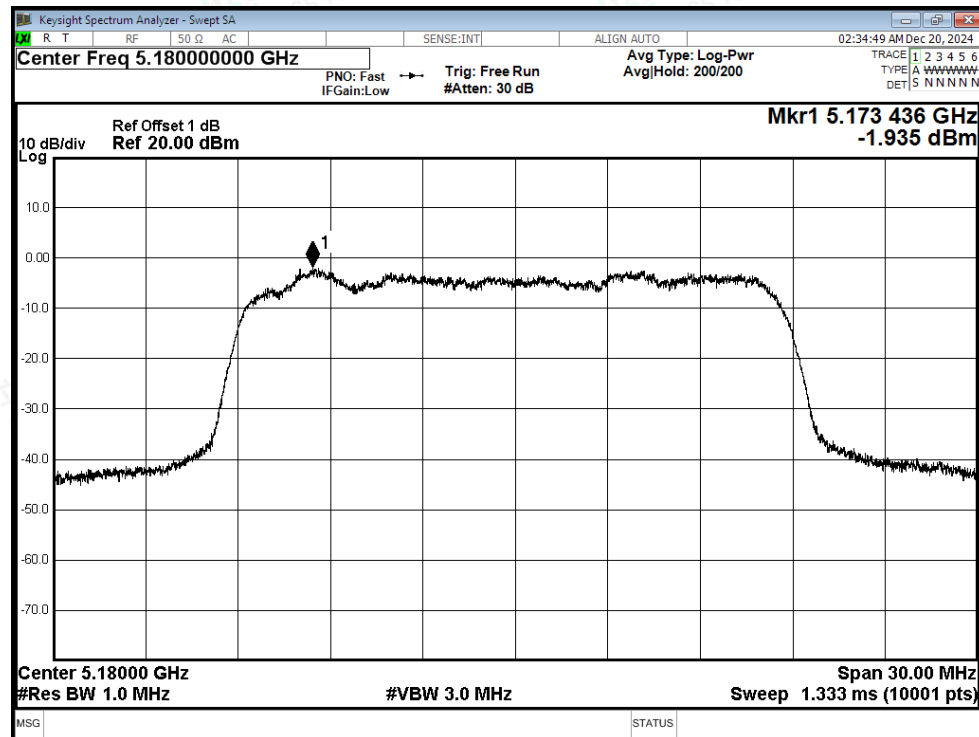




PSD NVNT a 5200MHz Ant1


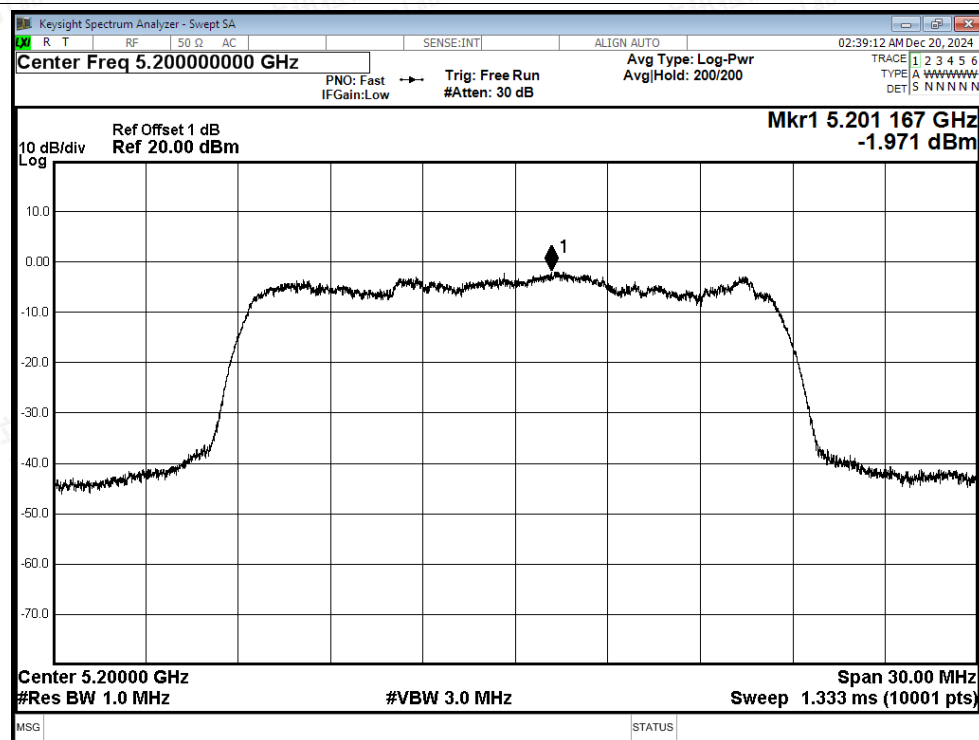


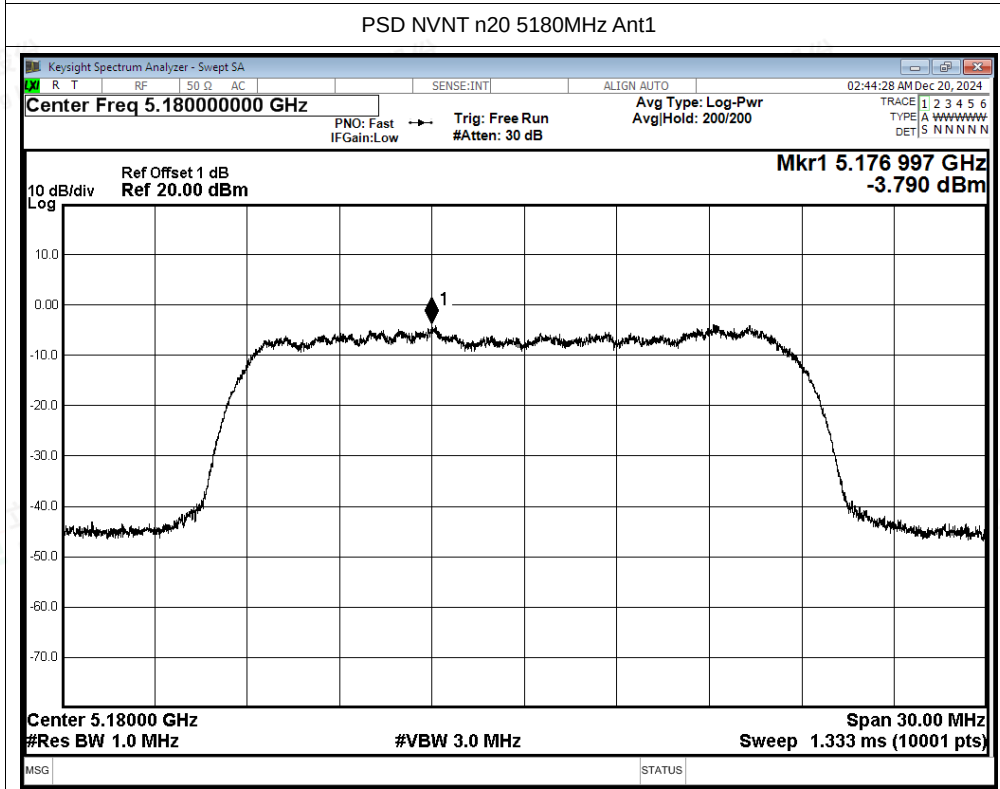
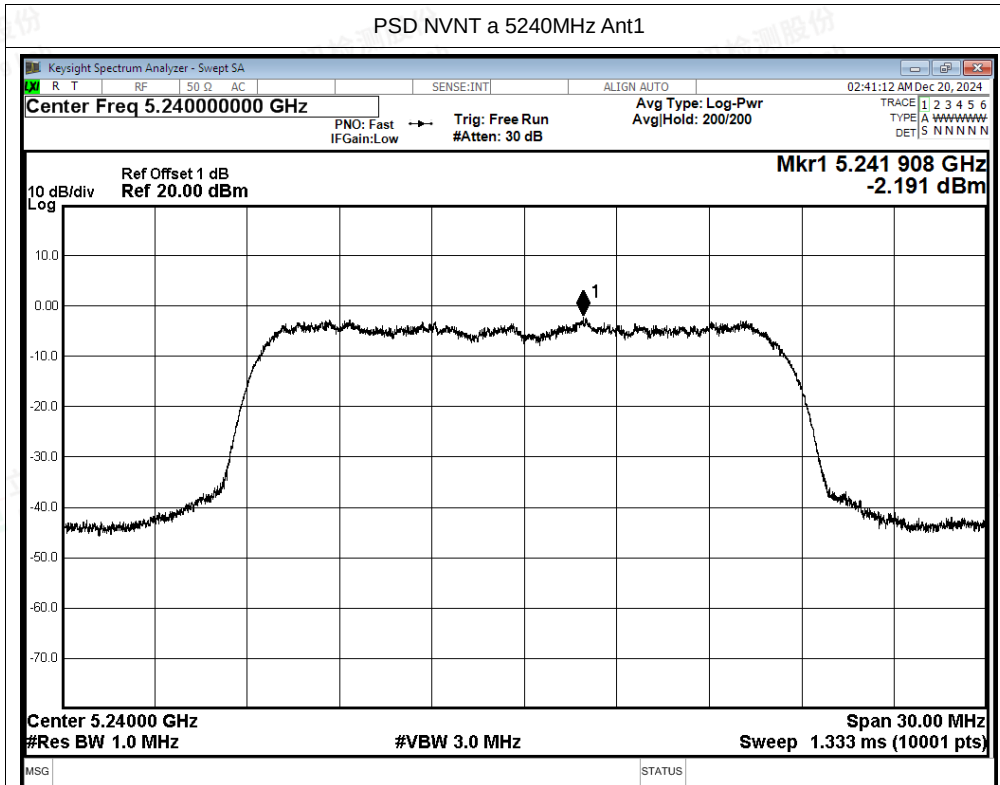


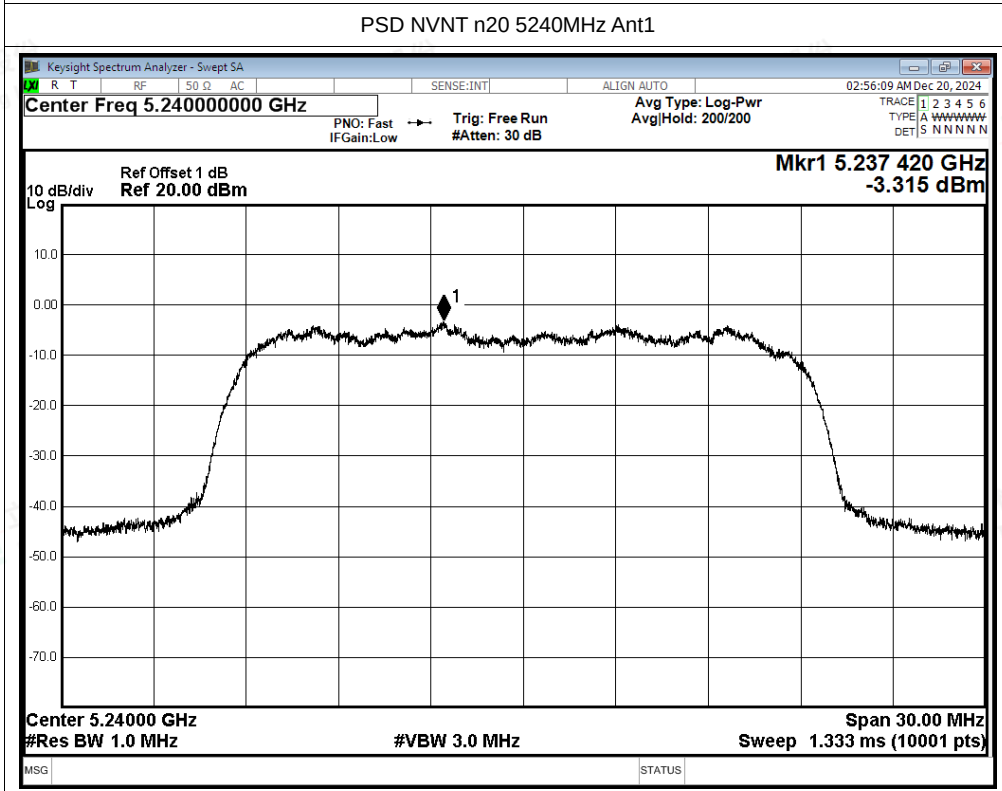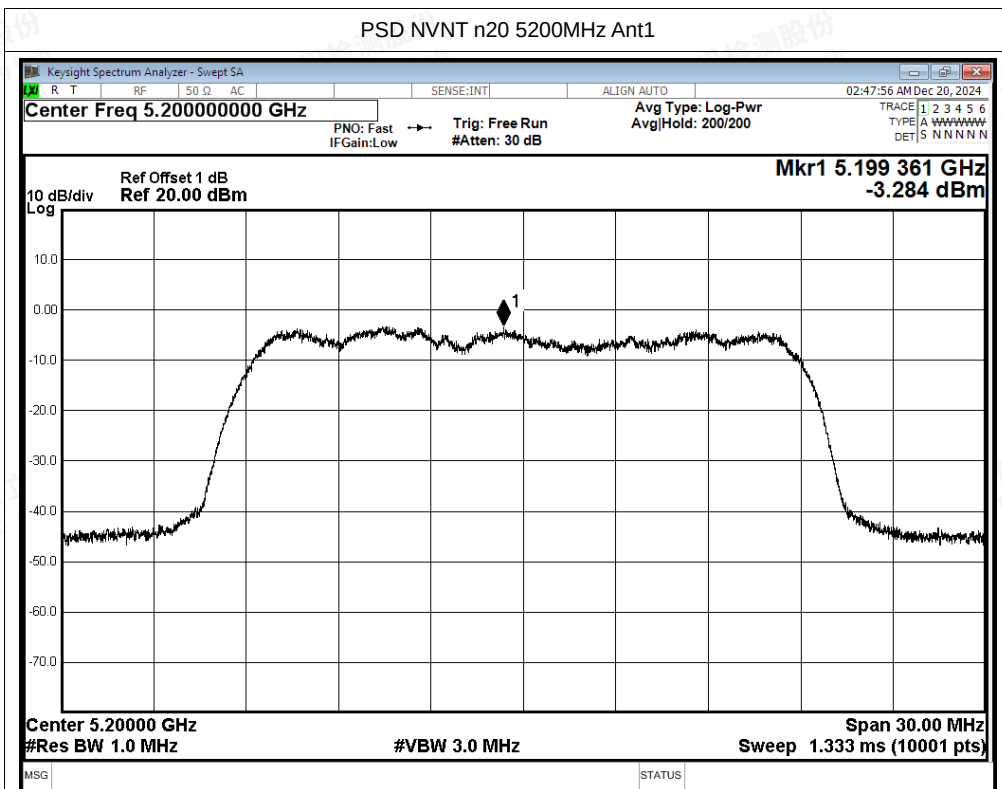

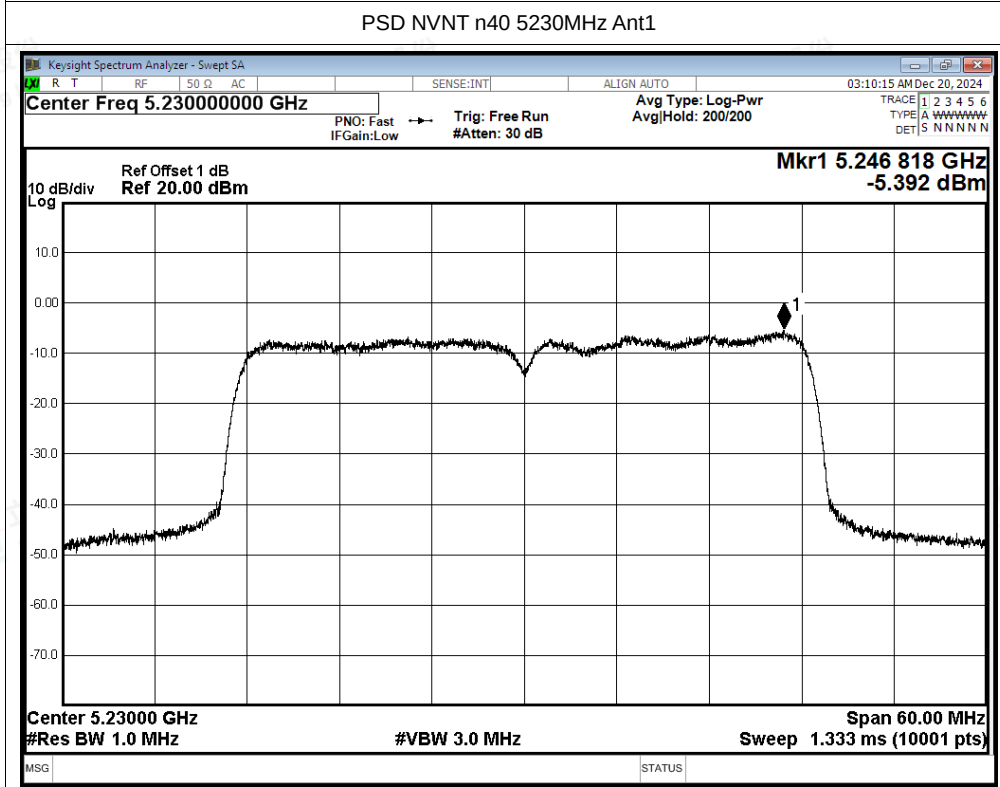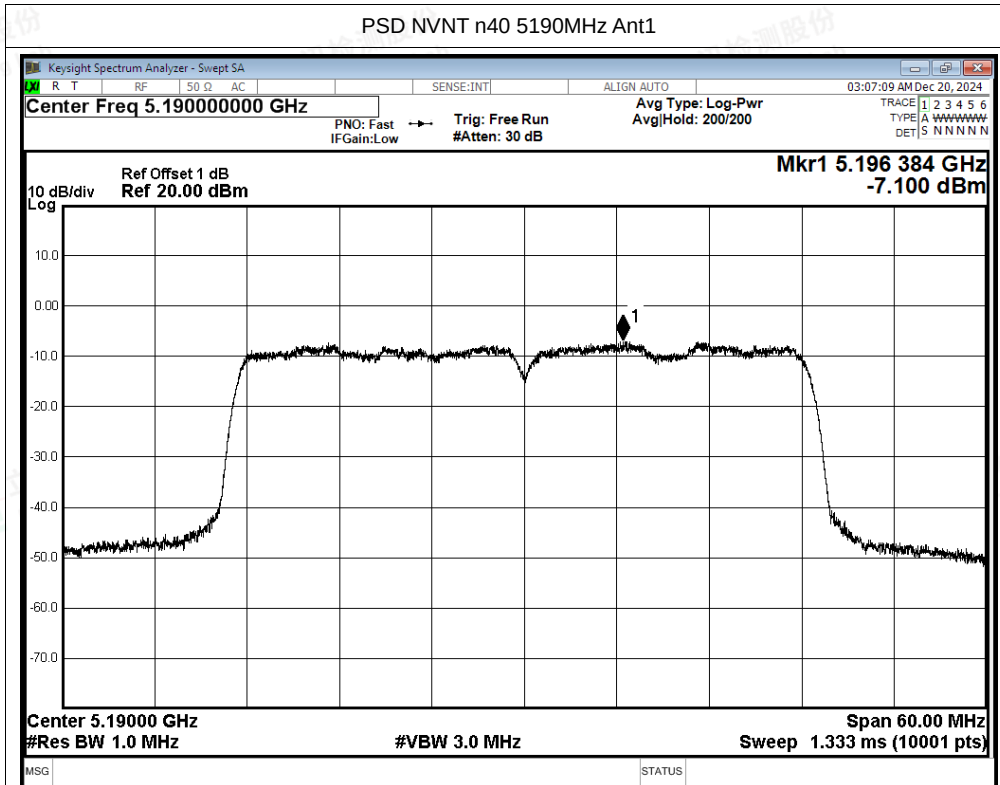

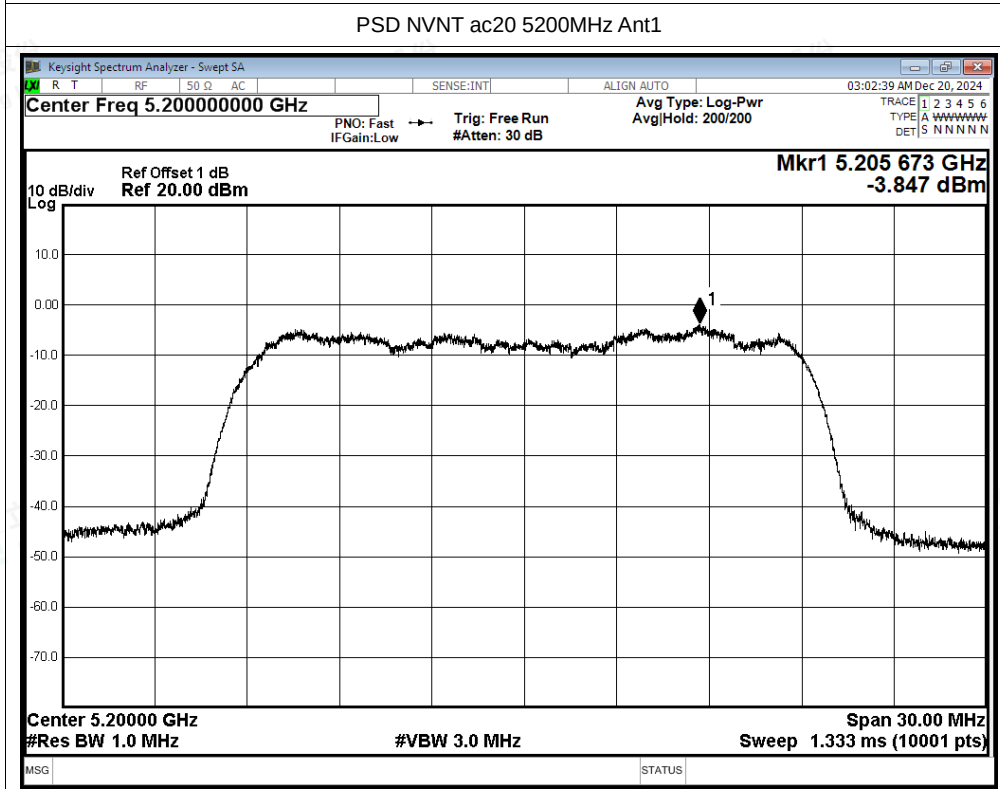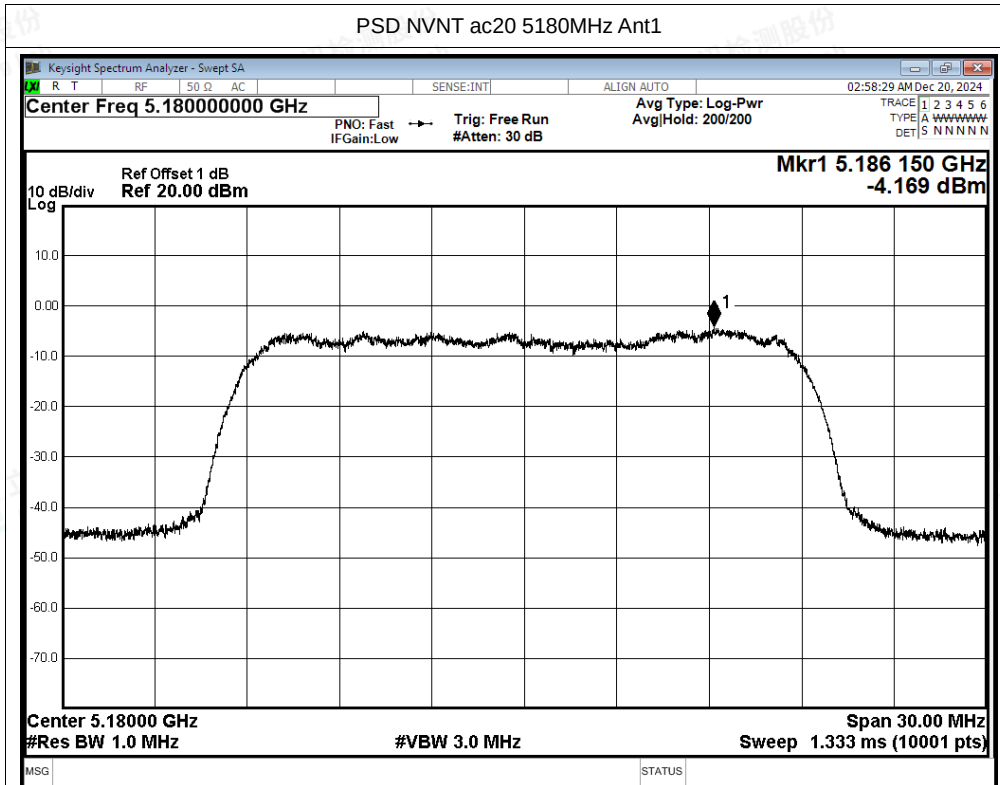

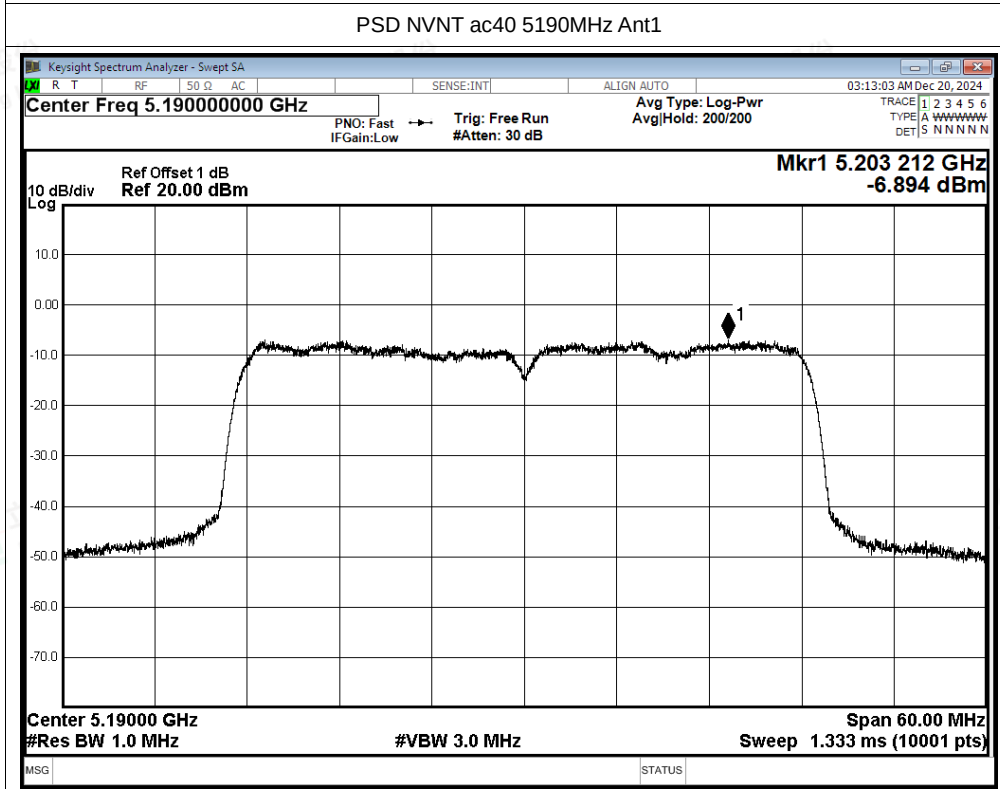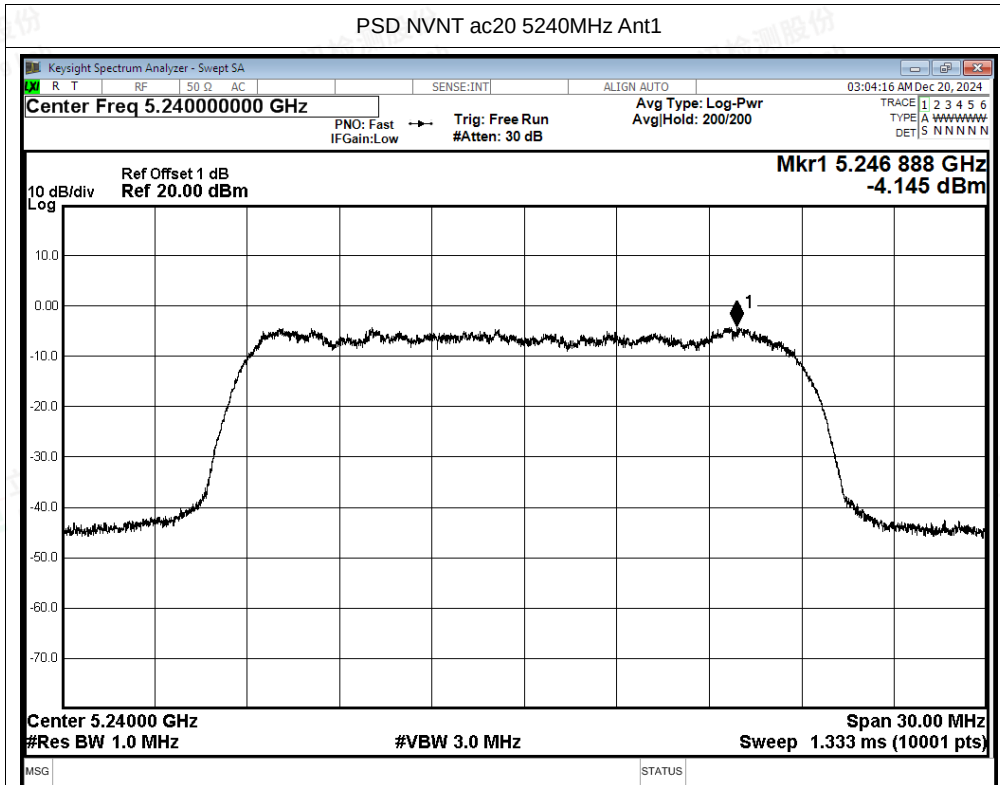

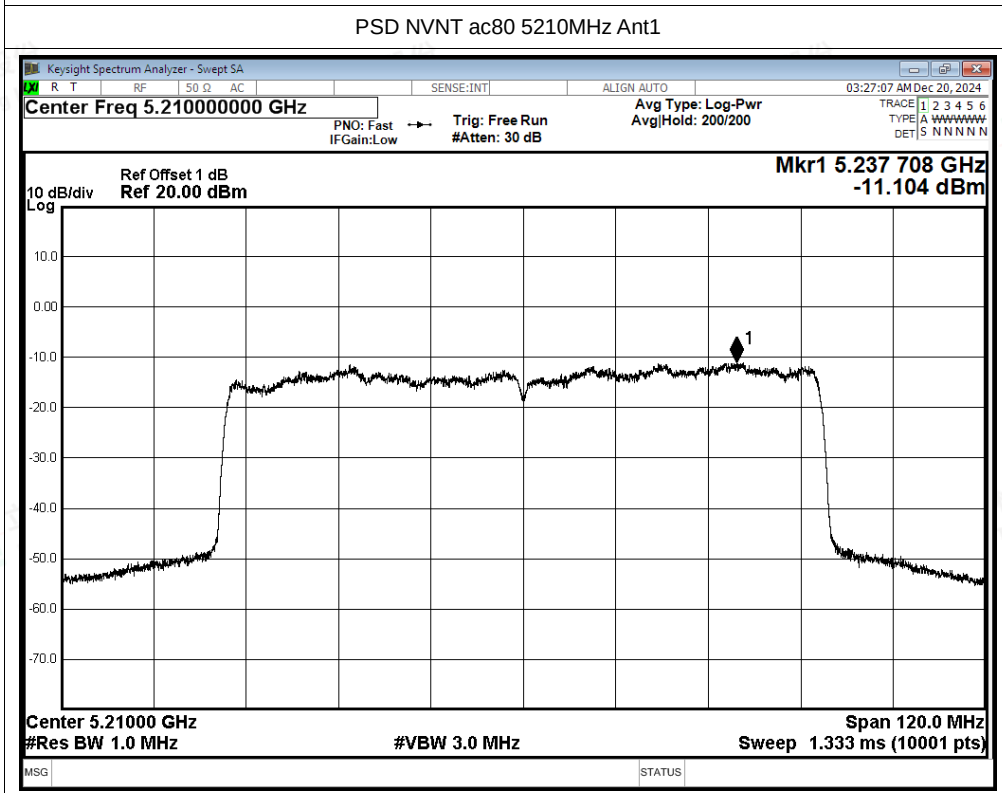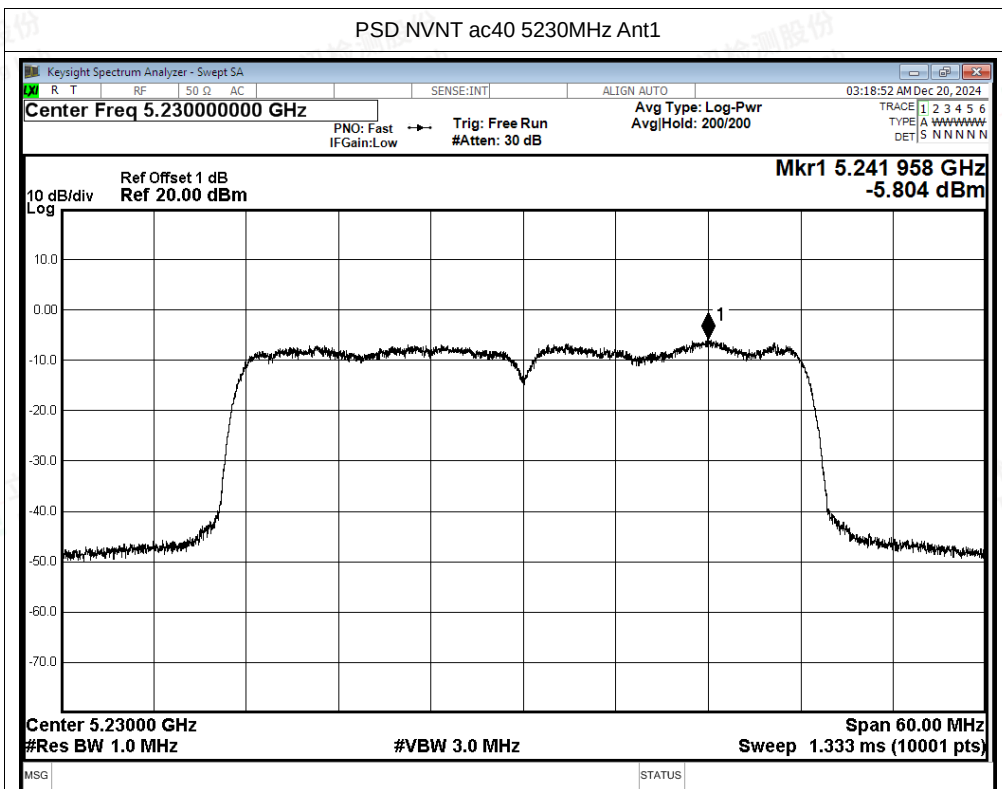



D.4 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	a	5180	Ant1	4500	-50.24	2.87	-	47.86	Peak	68.2	Pass
NVNT	a	5180	Ant1	4500	-61.51	2.87	0.24	36.83	Average	54	Pass
NVNT	a	5180	Ant1	5148.2	-37.94	2.87	-	60.16	Peak	68.2	Pass
NVNT	a	5180	Ant1	5149.6	-52.05	2.87	0.24	46.29	Average	54	Pass
NVNT	a	5180	Ant1	5150	-38.76	2.87	-	59.34	Peak	68.2	Pass
NVNT	a	5180	Ant1	5150	-51.96	2.87	0.24	46.38	Average	54	Pass
NVNT	a	5240	Ant1	5350	-50.57	2.87	-	47.53	Peak	68.2	Pass
NVNT	a	5240	Ant1	5350	-59.05	2.87	0.24	39.29	Average	54	Pass
NVNT	a	5240	Ant1	5364.72	-48.72	2.87	-	49.38	Peak	68.2	Pass
NVNT	a	5240	Ant1	5350.32	-58.92	2.87	0.24	39.42	Average	54	Pass
NVNT	a	5240	Ant1	5460	-53.13	2.87	-	44.97	Peak	68.2	Pass
NVNT	a	5240	Ant1	5460	-61.19	2.87	0.24	37.15	Average	54	Pass
NVNT	n20	5180	Ant1	4500	-51.79	2.87	-	46.31	Peak	68.2	Pass
NVNT	n20	5180	Ant1	4500	-61.31	2.87	0.28	37.07	Average	54	Pass
NVNT	n20	5180	Ant1	5148.9	-36.56	2.87	-	61.54	Peak	68.2	Pass
NVNT	n20	5180	Ant1	5149.6	-52.64	2.87	0.28	45.74	Average	54	Pass
NVNT	n20	5180	Ant1	5150	-38.76	2.87	-	59.34	Peak	68.2	Pass
NVNT	n20	5180	Ant1	5150	-52.02	2.87	0.28	46.36	Average	54	Pass
NVNT	n20	5240	Ant1	5350	-50.06	2.87	-	48.04	Peak	68.2	Pass
NVNT	n20	5240	Ant1	5350	-59.35	2.87	0.28	39.03	Average	54	Pass
NVNT	n20	5240	Ant1	5443.44	-48.49	2.87	-	49.61	Peak	68.2	Pass
NVNT	n20	5240	Ant1	5351.76	-59.06	2.87	0.28	39.32	Average	54	Pass
NVNT	n20	5240	Ant1	5460	-52.12	2.87	-	45.98	Peak	68.2	Pass
NVNT	n20	5240	Ant1	5460	-61.15	2.87	0.28	37.23	Average	54	Pass
NVNT	n40	5190	Ant1	4500	-51.03	2.87	-	47.07	Peak	68.2	Pass
NVNT	n40	5190	Ant1	4500	-61.64	2.87	0.12	36.58	Average	54	Pass
NVNT	n40	5190	Ant1	5149.7	-37.46	2.87	-	60.64	Peak	68.2	Pass
NVNT	n40	5190	Ant1	5149.7	-51.05	2.87	0.12	47.17	Average	54	Pass
NVNT	n40	5190	Ant1	5150	-37.46	2.87	-	60.64	Peak	68.2	Pass
NVNT	n40	5190	Ant1	5150	-51.05	2.87	0.12	47.17	Average	54	Pass
NVNT	n40	5230	Ant1	5350	-48.87	2.87	-	49.23	Peak	68.2	Pass
NVNT	n40	5230	Ant1	5350	-59.92	2.87	0.12	38.30	Average	54	Pass
NVNT	n40	5230	Ant1	5383.05	-48.49	2.87	-	49.61	Peak	68.2	Pass
NVNT	n40	5230	Ant1	5351.46	-59.84	2.87	0.12	38.38	Average	54	Pass
NVNT	n40	5230	Ant1	5460	-52.25	2.87	-	45.85	Peak	68.2	Pass
NVNT	n40	5230	Ant1	5460	-61.26	2.87	0.12	36.96	Average	54	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,
Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




NVNT	ac20	5180	Ant1	4500	-52.94	2.87	-	45.16	Peak	68.2	Pass
NVNT	ac20	5180	Ant1	4500	-61.48	2.87	0.28	36.90	Average	54	Pass
NVNT	ac20	5180	Ant1	5148.9	-37.39	2.87	-	60.71	Peak	68.2	Pass
NVNT	ac20	5180	Ant1	5149.6	-53.41	2.87	0.28	44.97	Average	54	Pass
NVNT	ac20	5180	Ant1	5150	-38.09	2.87	-	60.01	Peak	68.2	Pass
NVNT	ac20	5180	Ant1	5150	-52.85	2.87	0.28	45.53	Average	54	Pass
NVNT	ac20	5240	Ant1	5350	-50.34	2.87	-	47.76	Peak	68.2	Pass
NVNT	ac20	5240	Ant1	5350	-59.22	2.87	0.28	39.16	Average	54	Pass
NVNT	ac20	5240	Ant1	5351.28	-46.77	2.87	-	51.33	Peak	68.2	Pass
NVNT	ac20	5240	Ant1	5351.52	-59.07	2.87	0.28	39.31	Average	54	Pass
NVNT	ac20	5240	Ant1	5460	-51.55	2.87	-	46.55	Peak	68.2	Pass
NVNT	ac20	5240	Ant1	5460	-61.15	2.87	0.28	37.23	Average	54	Pass
NVNT	ac40	5190	Ant1	4500	-51.73	2.87	-	46.37	Peak	68.2	Pass
NVNT	ac40	5190	Ant1	4500	-61.75	2.87	0.12	36.47	Average	54	Pass
NVNT	ac40	5190	Ant1	5148.97	-38.44	2.87	-	59.66	Peak	68.2	Pass
NVNT	ac40	5190	Ant1	5149.7	-54.98	2.87	0.12	43.24	Average	54	Pass
NVNT	ac40	5190	Ant1	5150	-41.16	2.87	-	56.94	Peak	68.2	Pass
NVNT	ac40	5190	Ant1	5150	-54.98	2.87	0.12	43.24	Average	54	Pass
NVNT	ac40	5230	Ant1	5350	-50.45	2.87	-	47.65	Peak	68.2	Pass
NVNT	ac40	5230	Ant1	5350	-59.89	2.87	0.12	38.33	Average	54	Pass
NVNT	ac40	5230	Ant1	5377.38	-48.39	2.87	-	49.71	Peak	68.2	Pass
NVNT	ac40	5230	Ant1	5350.38	-59.79	2.87	0.12	38.43	Average	54	Pass
NVNT	ac40	5230	Ant1	5460	-51.53	2.87	-	46.57	Peak	68.2	Pass
NVNT	ac40	5230	Ant1	5460	-61.44	2.87	0.12	36.78	Average	54	Pass
NVNT	ac80	5210	Ant1	5350	-49.03	2.87	-	49.07	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	5350	-58.83	2.87	0.25	39.52	Average	54	Pass
NVNT	ac80	5210	Ant1	5369.91	-46.82	2.87	-	51.28	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	5352.09	-58.78	2.87	0.25	39.57	Average	54	Pass
NVNT	ac80	5210	Ant1	5460	-50.06	2.87	-	48.04	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	5460	-60.4	2.87	0.25	37.95	Average	54	Pass
NVNT	ac80	5210	Ant1	4500	-51.73	2.87	-	46.37	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	4500	-61.4	2.87	0.25	36.95	Average	54	Pass
NVNT	ac80	5210	Ant1	5140.69	-42.66	2.87	-	55.44	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	5148.59	-52.45	2.87	0.25	45.90	Average	54	Pass
NVNT	ac80	5210	Ant1	5150	-40.77	2.87	-	57.33	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	5150	-52.23	2.87	0.25	46.12	Average	54	Pass






Test Graphs

Restrict Band NVNT a 5180MHz Ant1 Peak

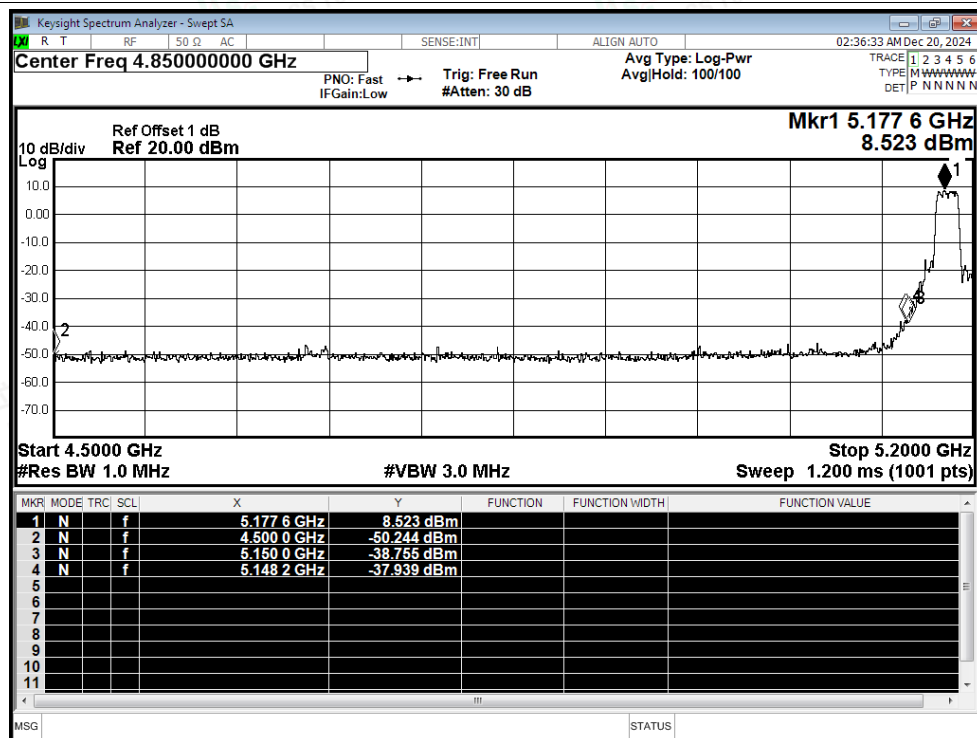


Restrict Band NVNT a 5180MHz Ant1 Average

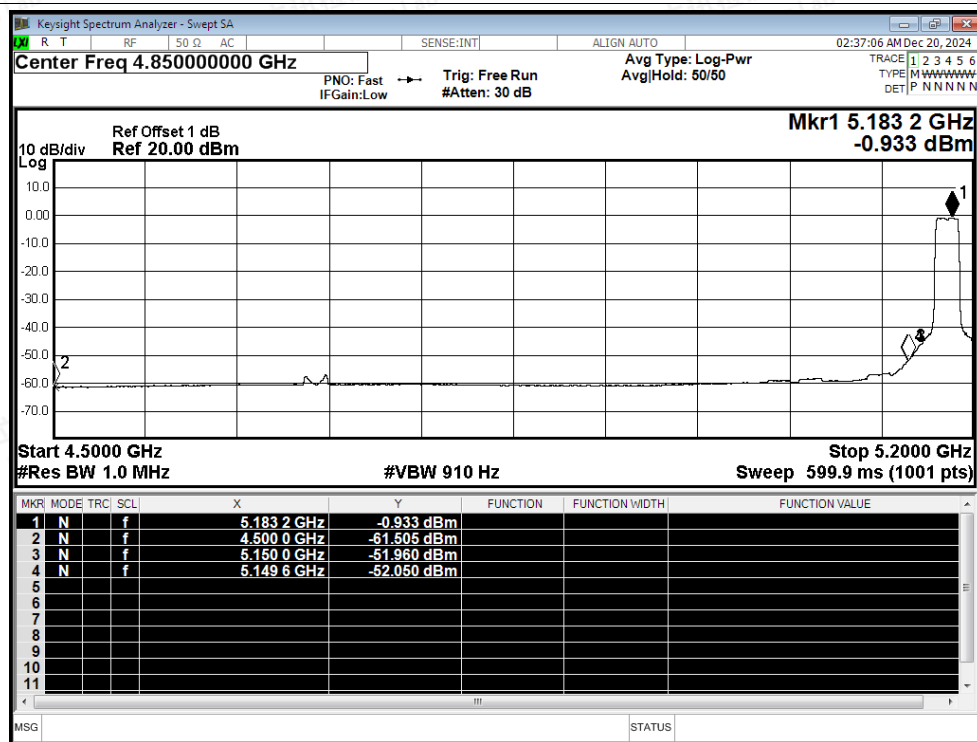






Restrict Band NVNT a 5240MHz Ant1 Peak

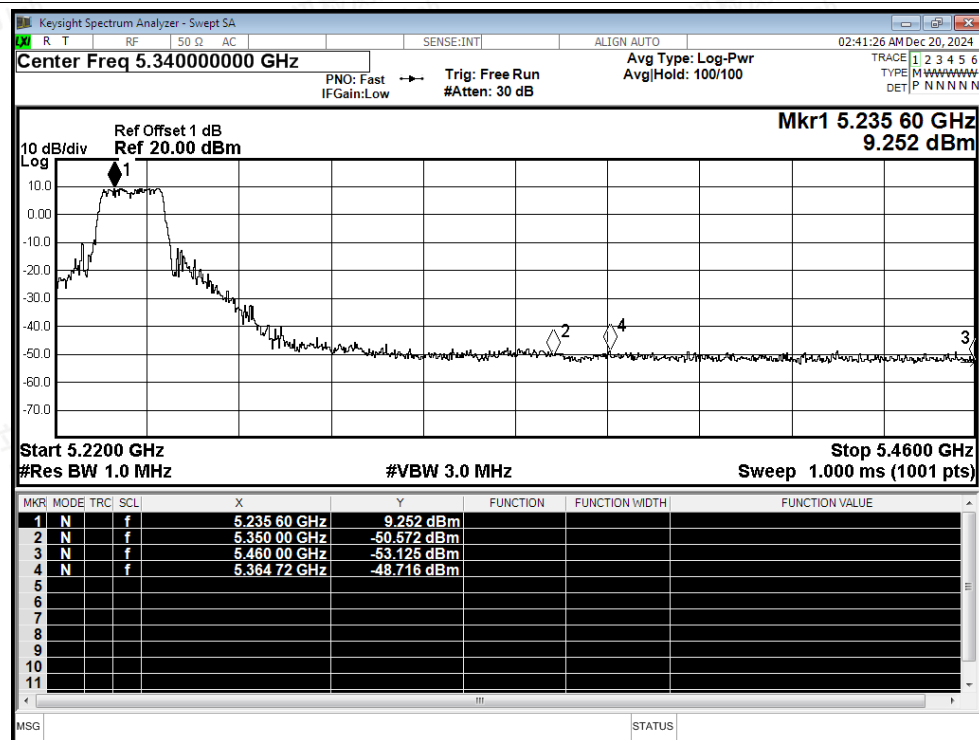


Restrict Band NVNT a 5240MHz Ant1 Average

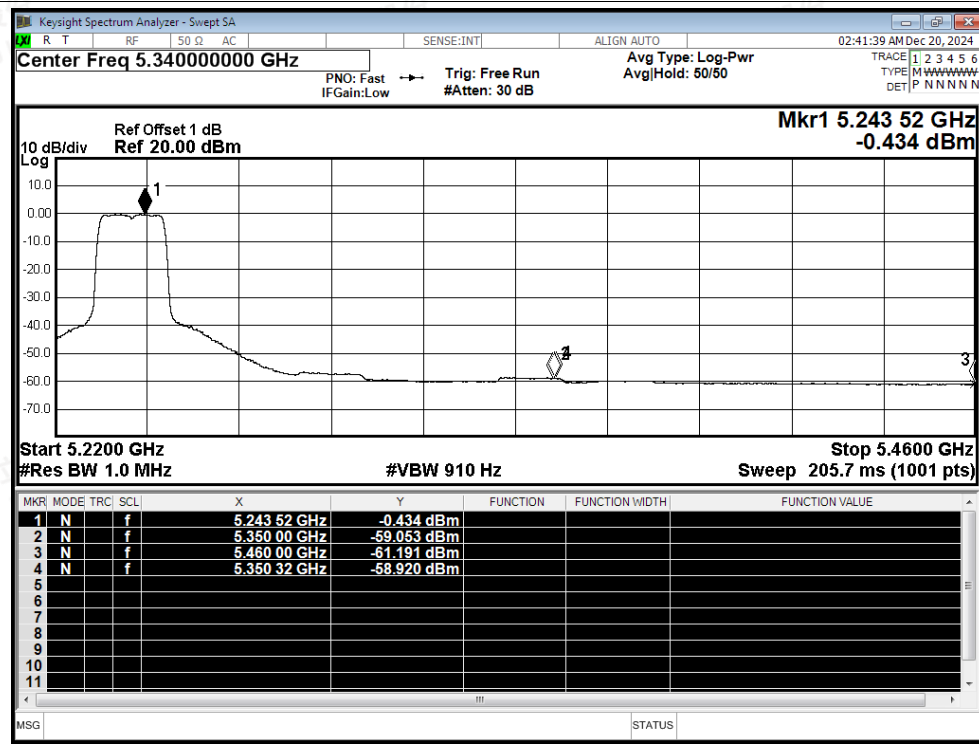

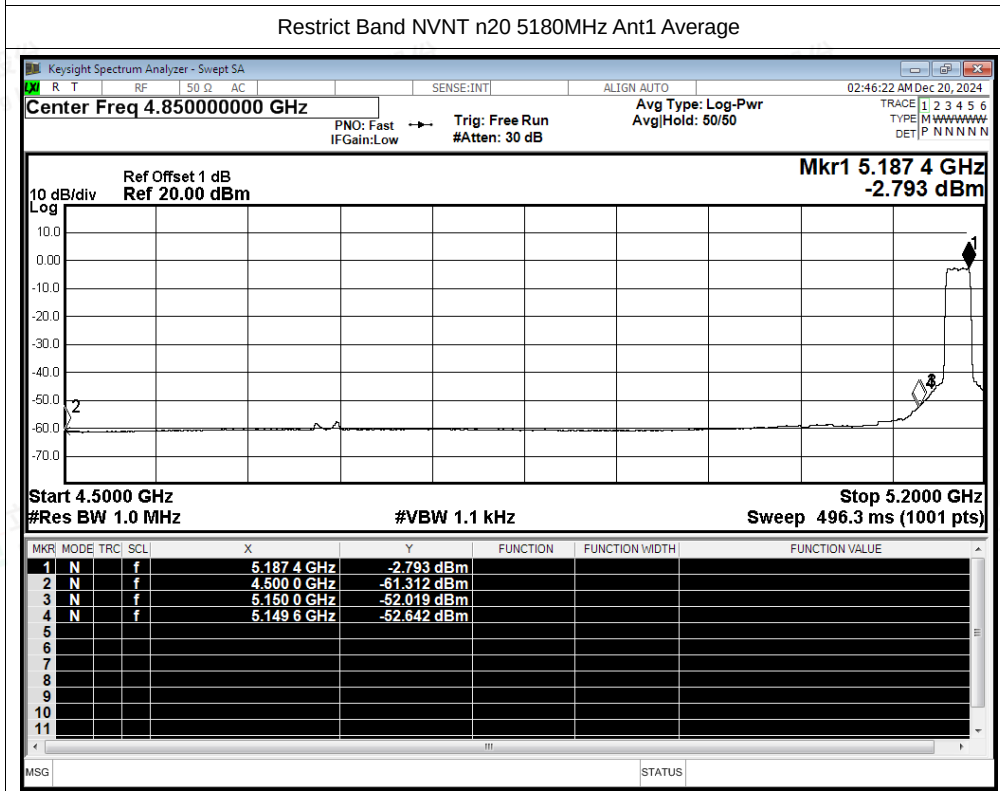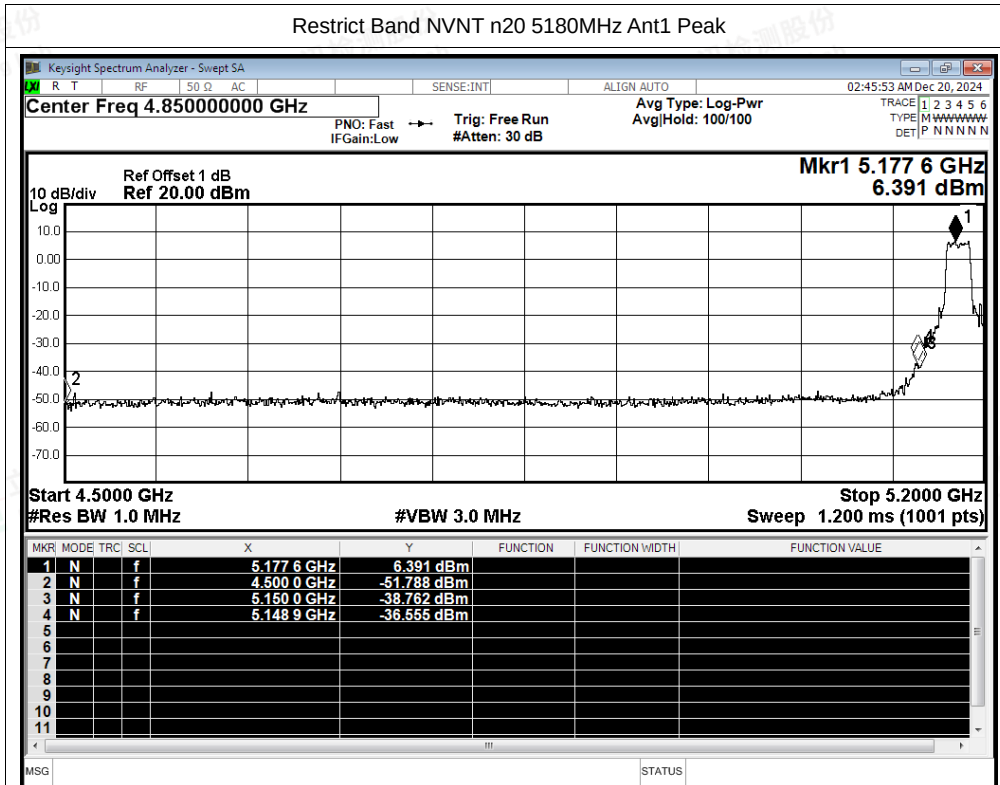








Restrict Band NVNT n20 5240MHz Ant1 Peak


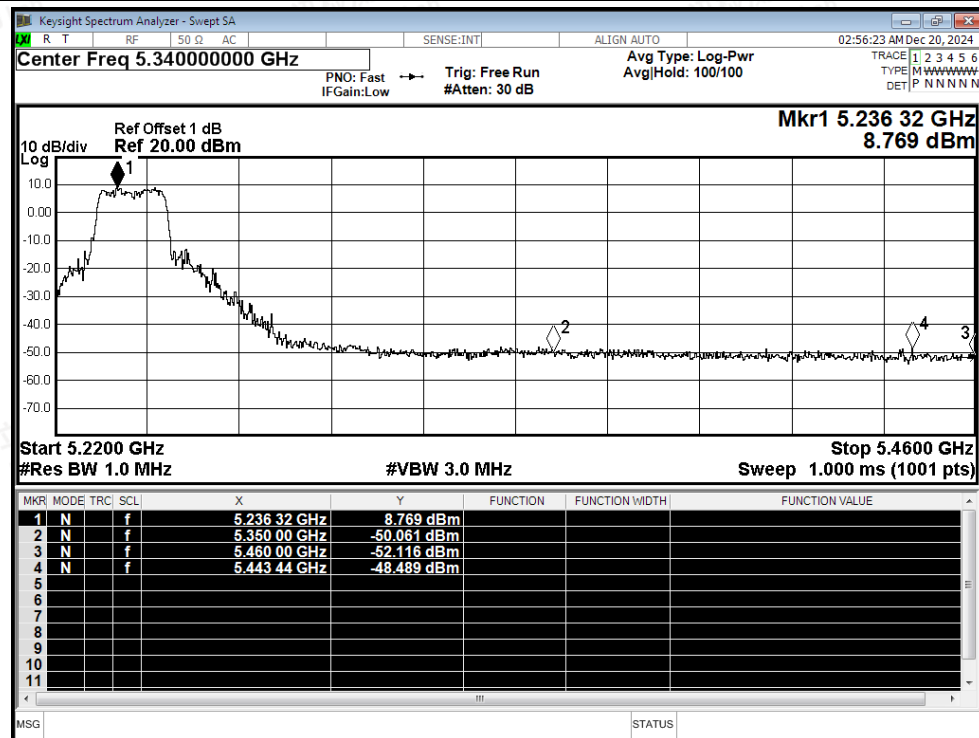


Restrict Band NVNT n20 5240MHz Ant1 Average

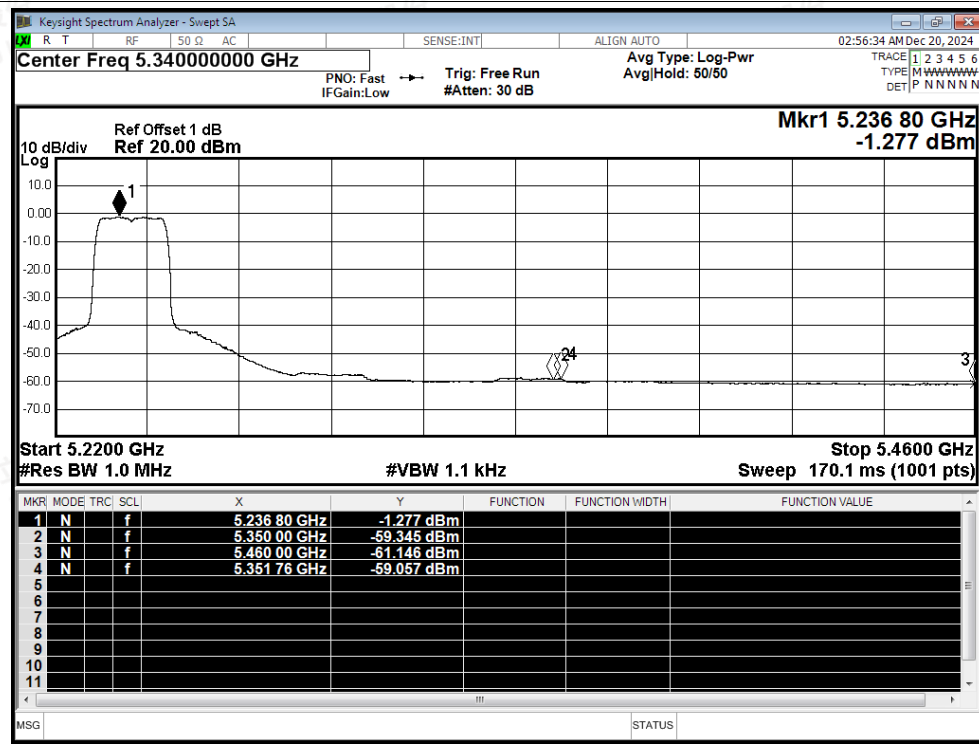

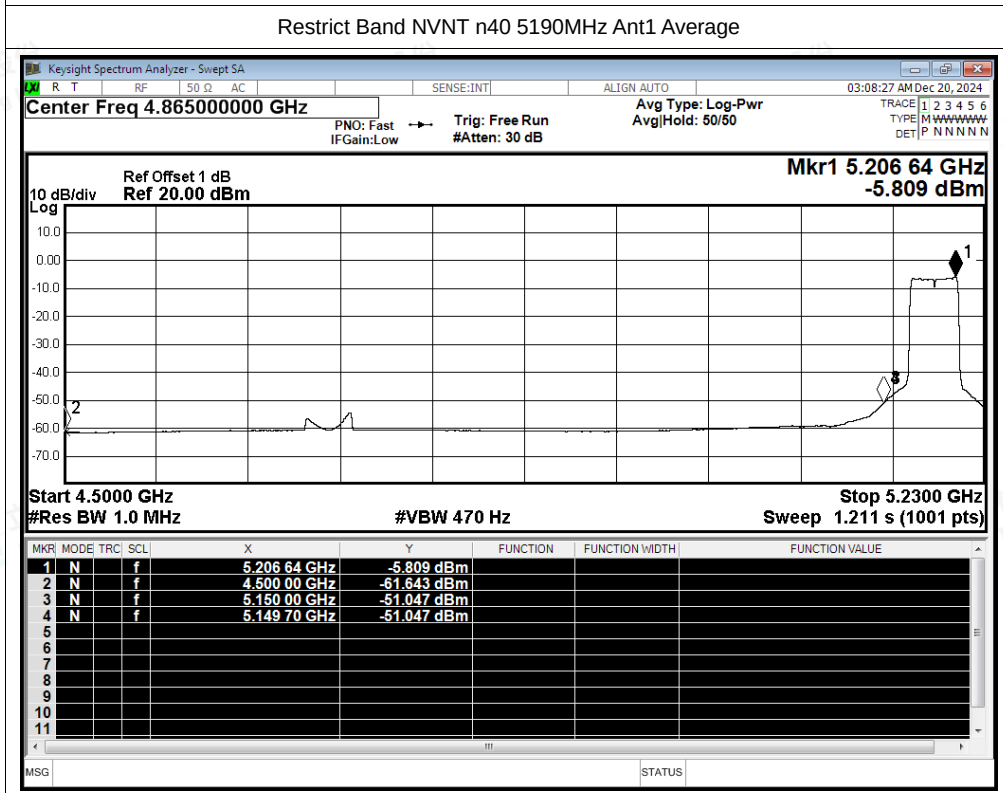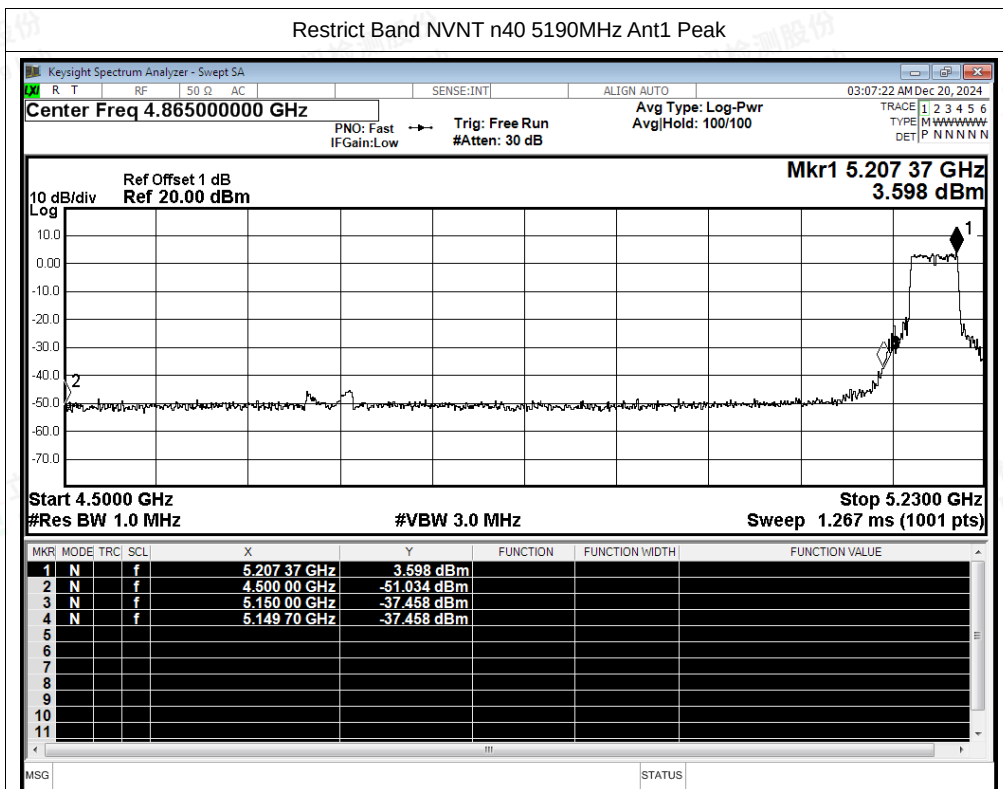


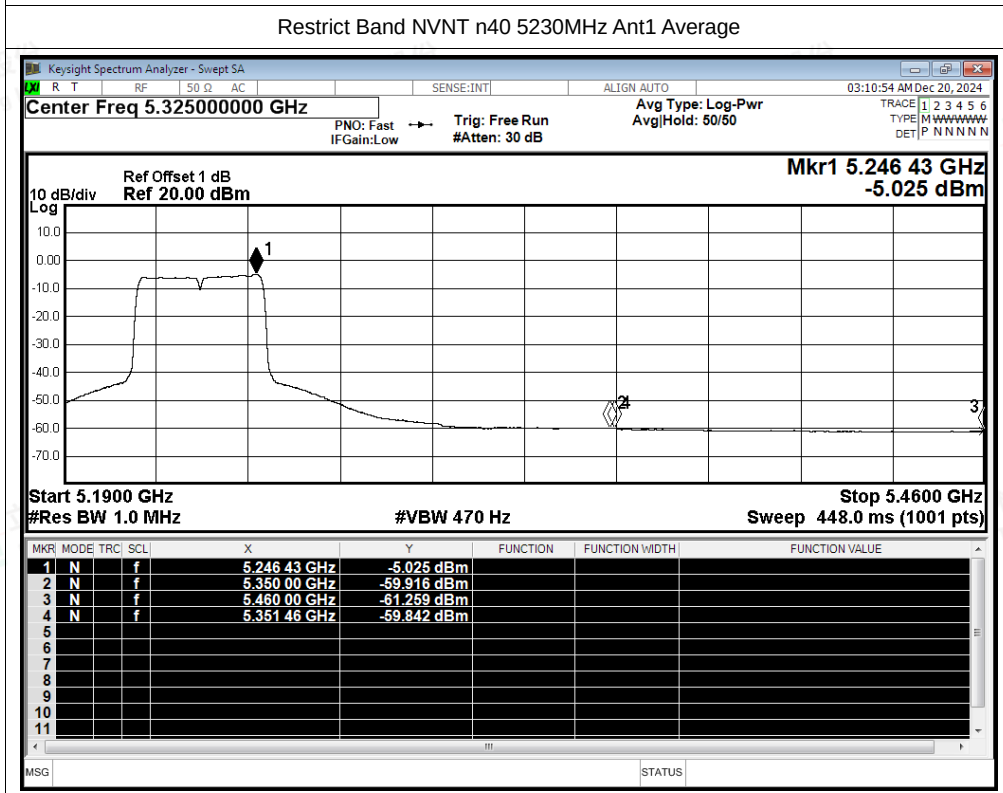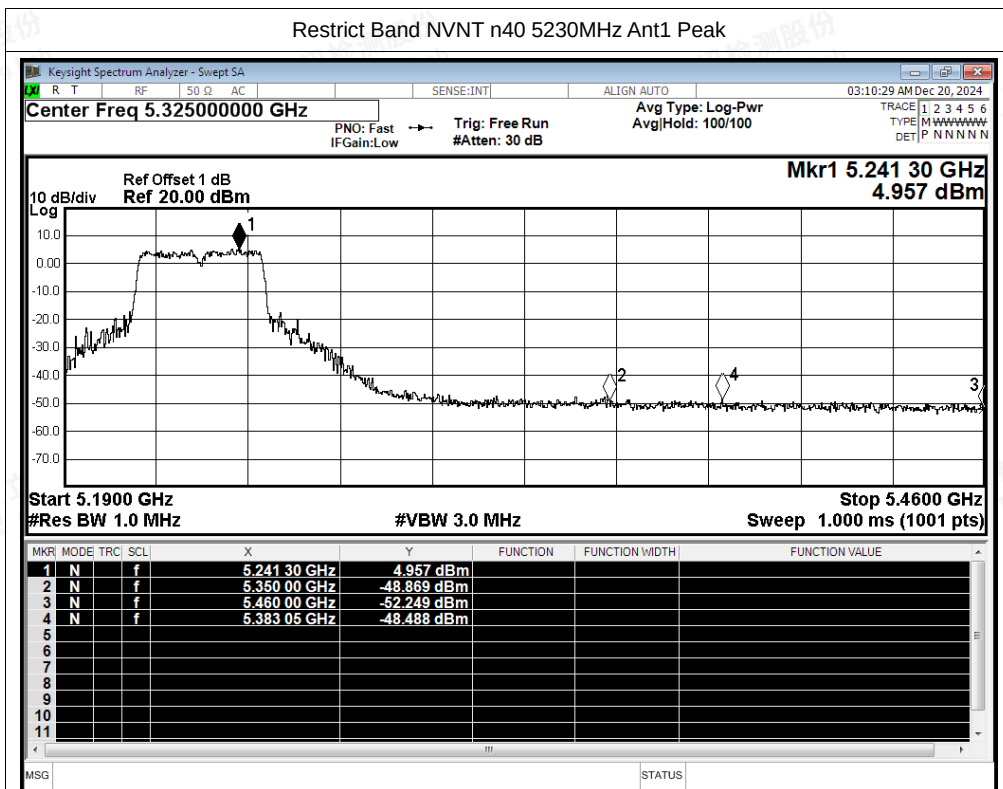

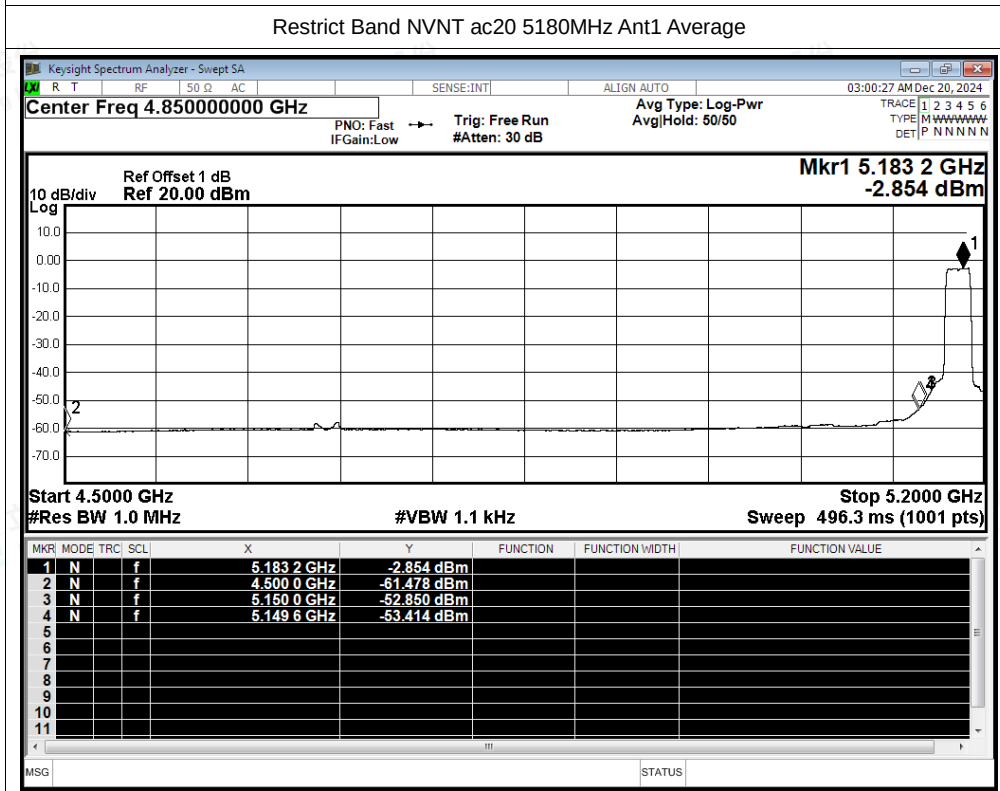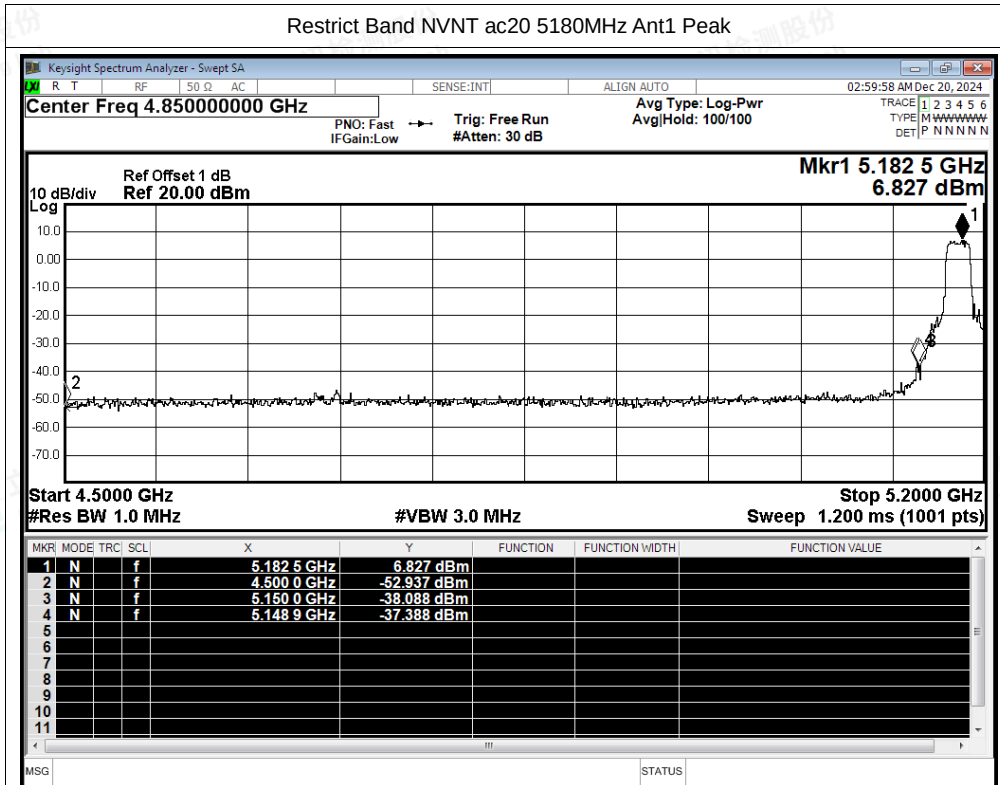




Restrict Band NVNT ac20 5240MHz Ant1 Peak

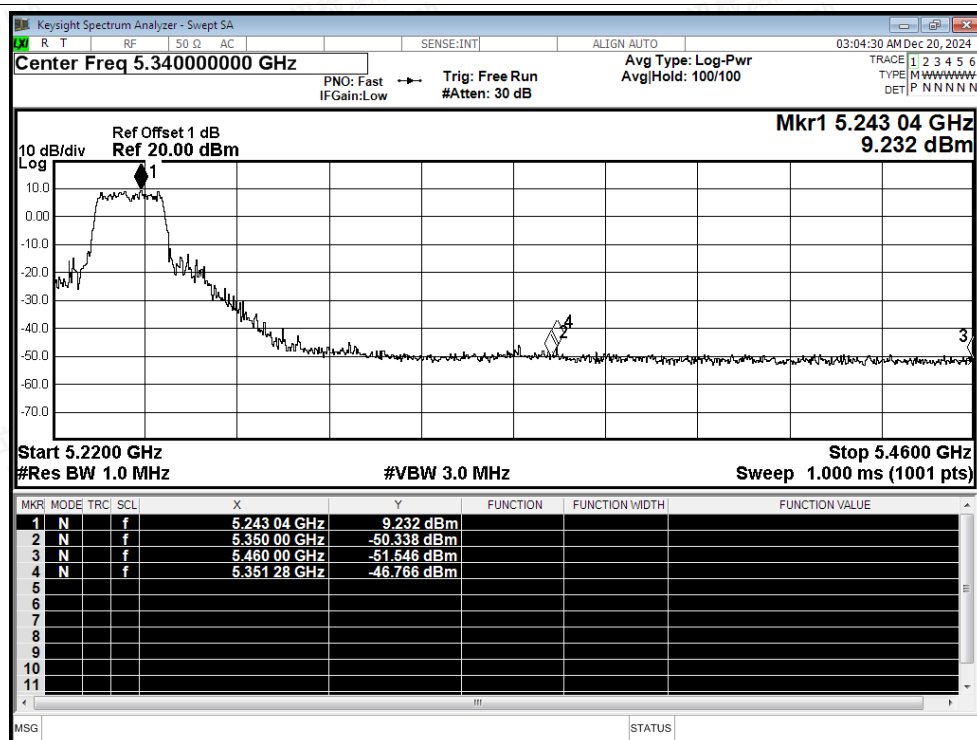


Restrict Band NVNT ac20 5240MHz Ant1 Average

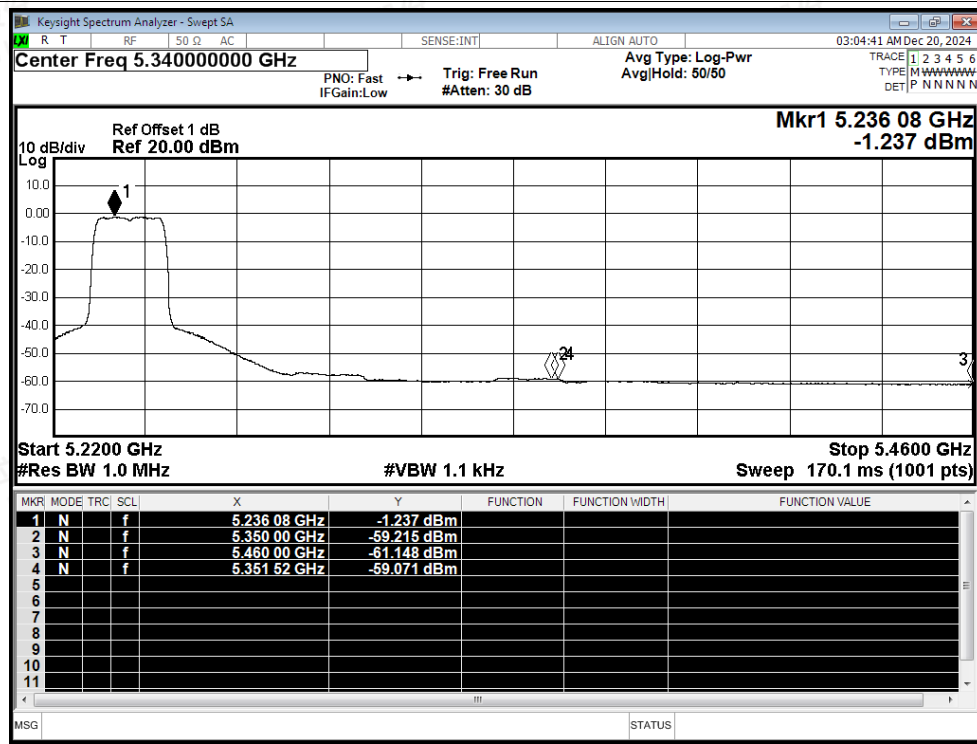




Restrict Band NVNT ac40 5190MHz Ant1 Peak

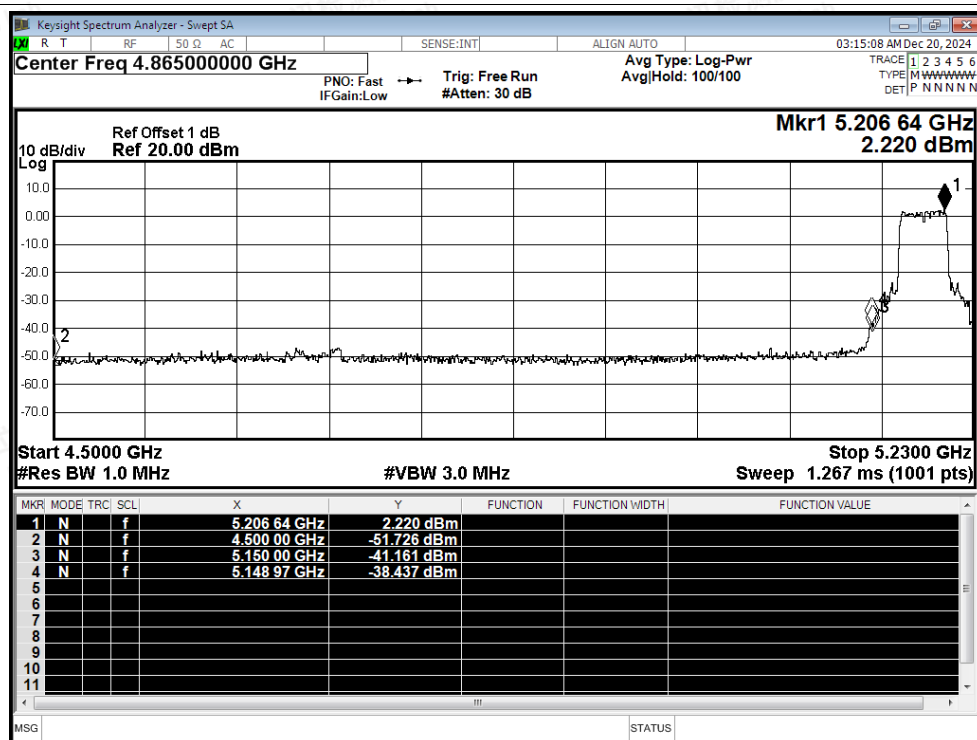


Restrict Band NVNT ac40 5190MHz Ant1 Average

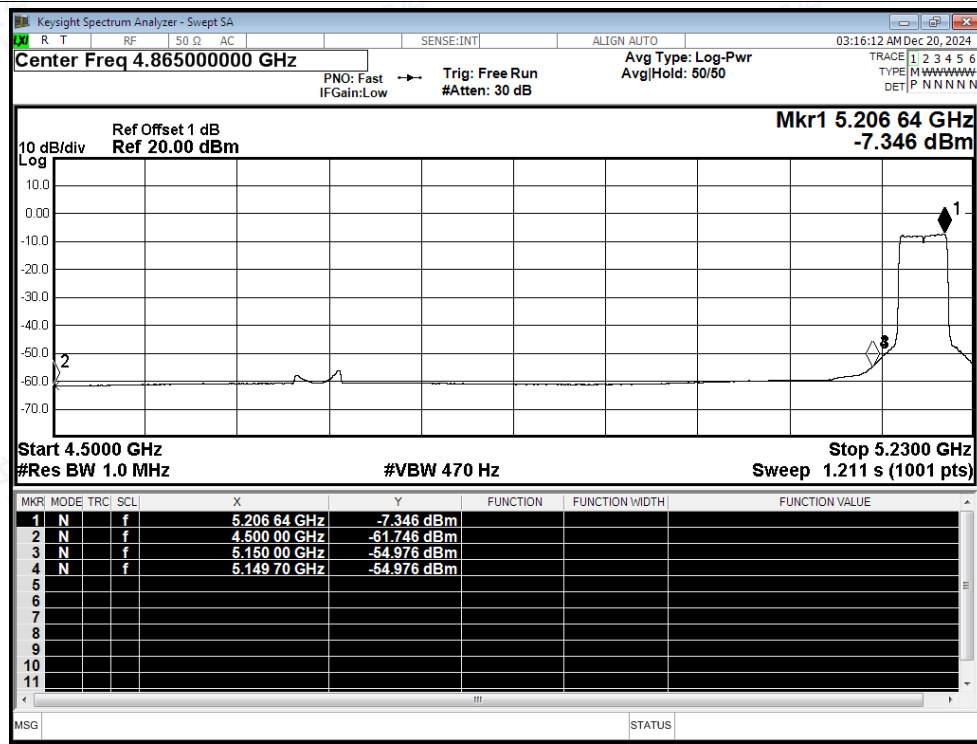




Restrict Band NVNT ac40 5230MHz Ant1 Peak

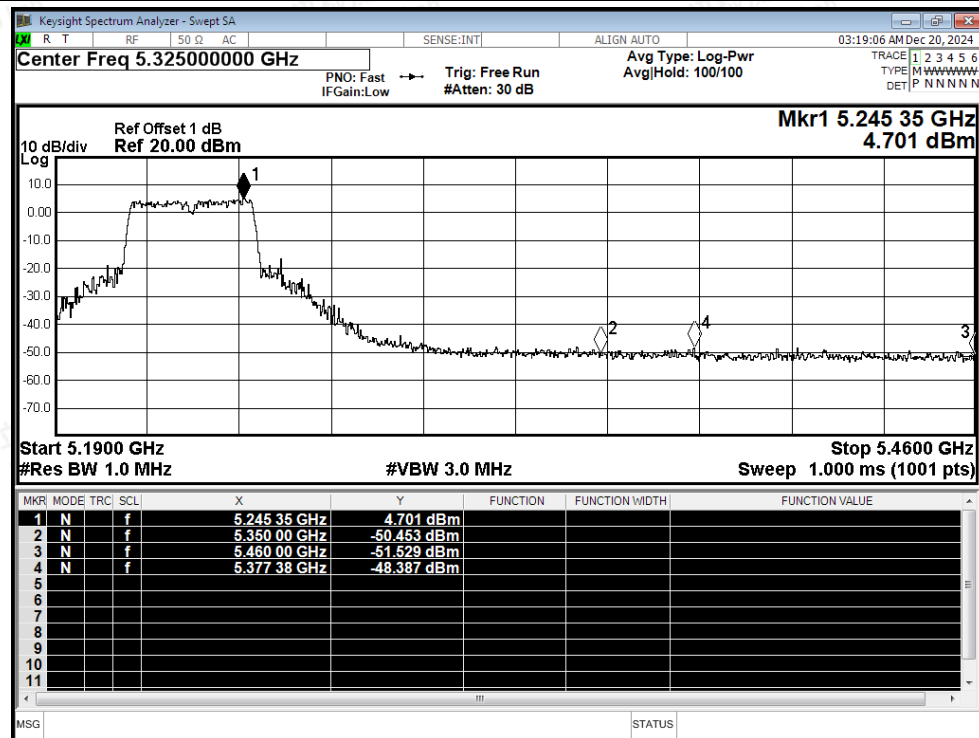


Restrict Band NVNT ac40 5230MHz Ant1 Average

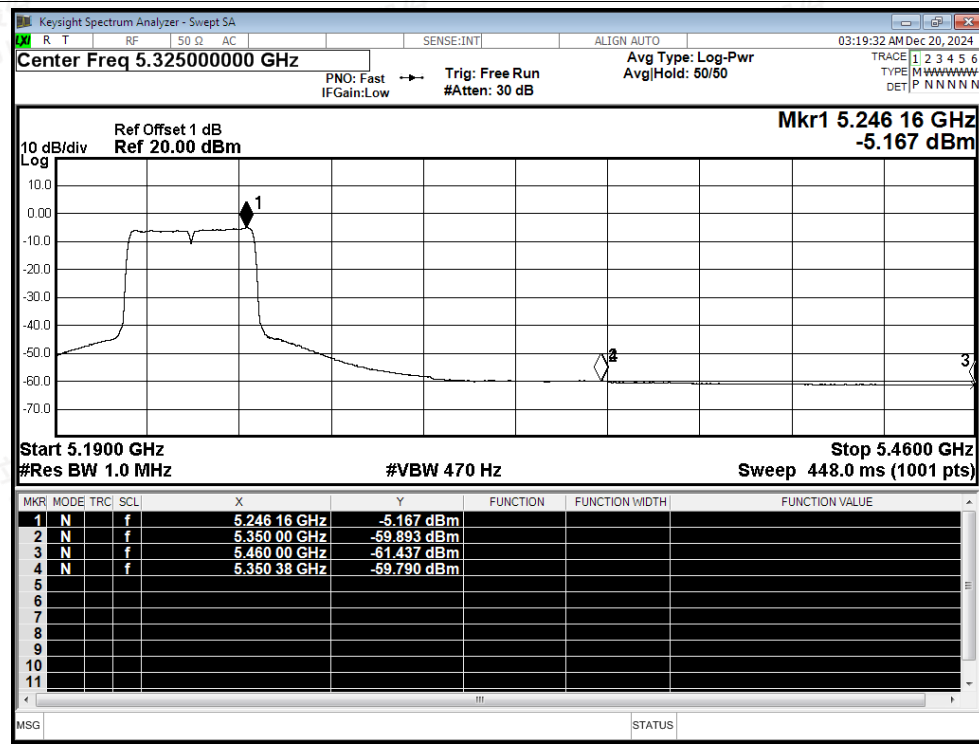




Restrict Band NVNT ac80 5210MHz Ant1 Peak

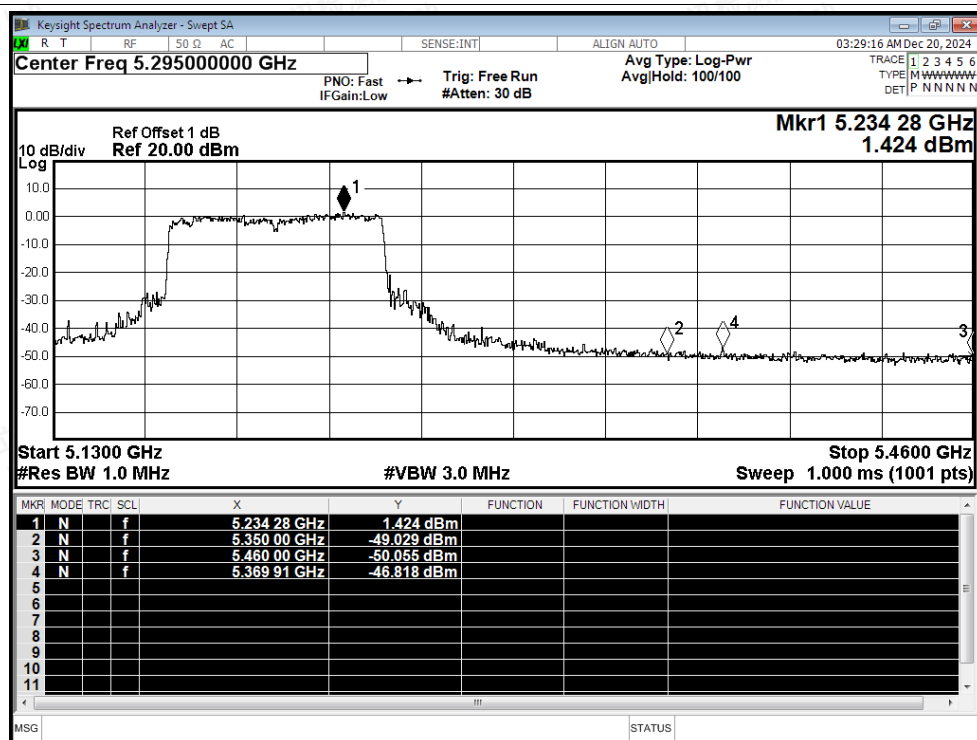


Restrict Band NVNT ac80 5210MHz Ant1 Average

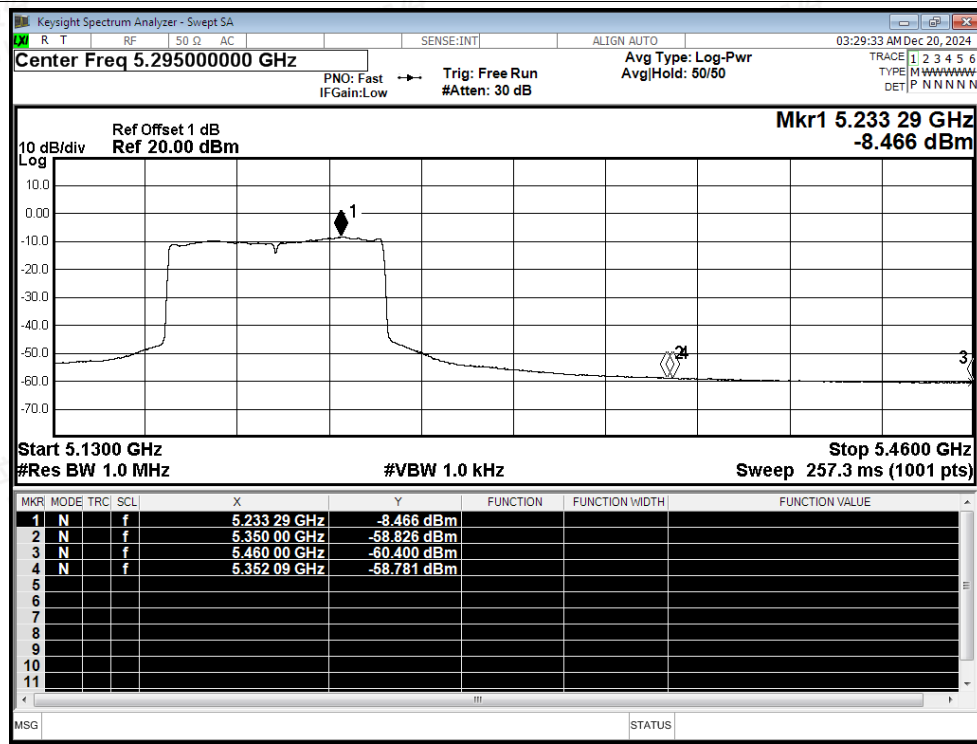




Restrict Band NVNT ac80 5210MHz Ant1 Peak

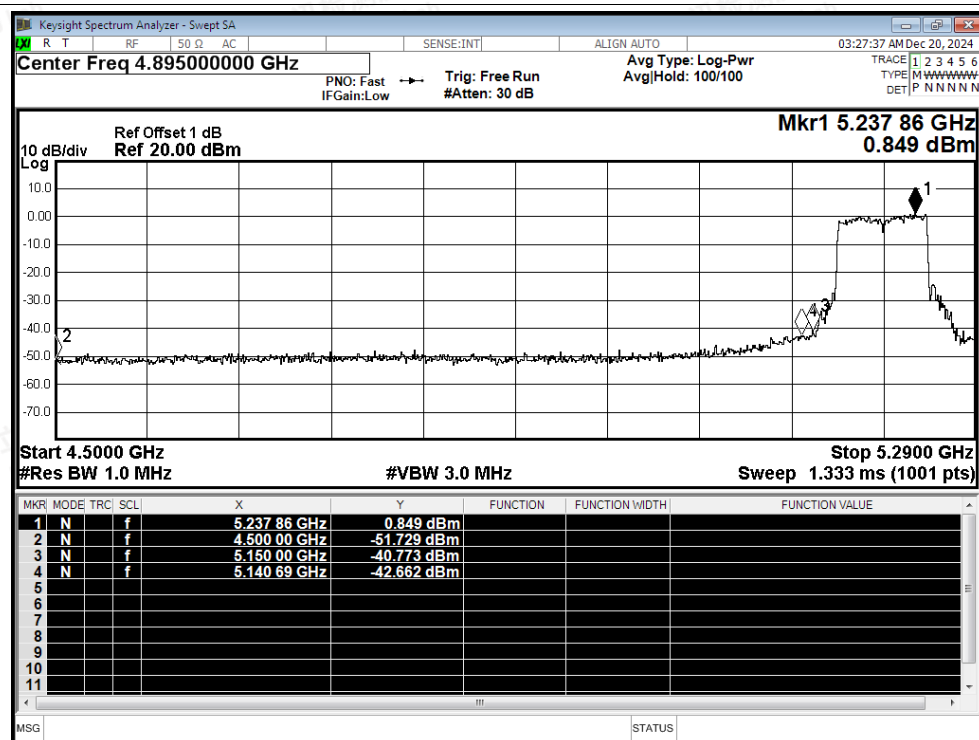

Restrict Band NVNT ac80 5210MHz Ant1 Average

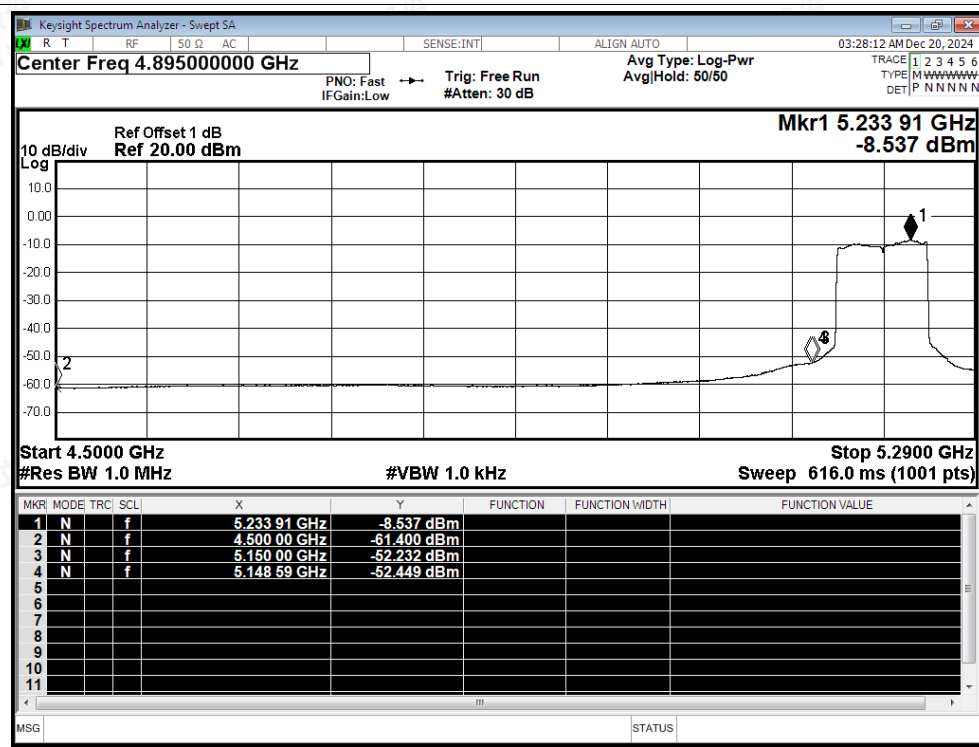



D.5 Frequency Stability

Condition	Mode	Frequency (MHz)	Antenna	Measured Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
NVNT	ac20	5180	Ant1	5179.98	-20000	-3.86	25	Pass
NVNT	ac20	5200	Ant1	5199.98	-20000	-3.85	25	Pass
NVNT	ac20	5240	Ant1	5239.98	-20000	-3.82	25	Pass
NVNT	ac40	5190	Ant1	5190	0	0	25	Pass
NVNT	ac40	5230	Ant1	5230	0	0	25	Pass
NVNT	ac80	5210	Ant1	5210	0	0	25	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,
Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs



Freq. Stability NVNT ac20 5180MHz Ant1

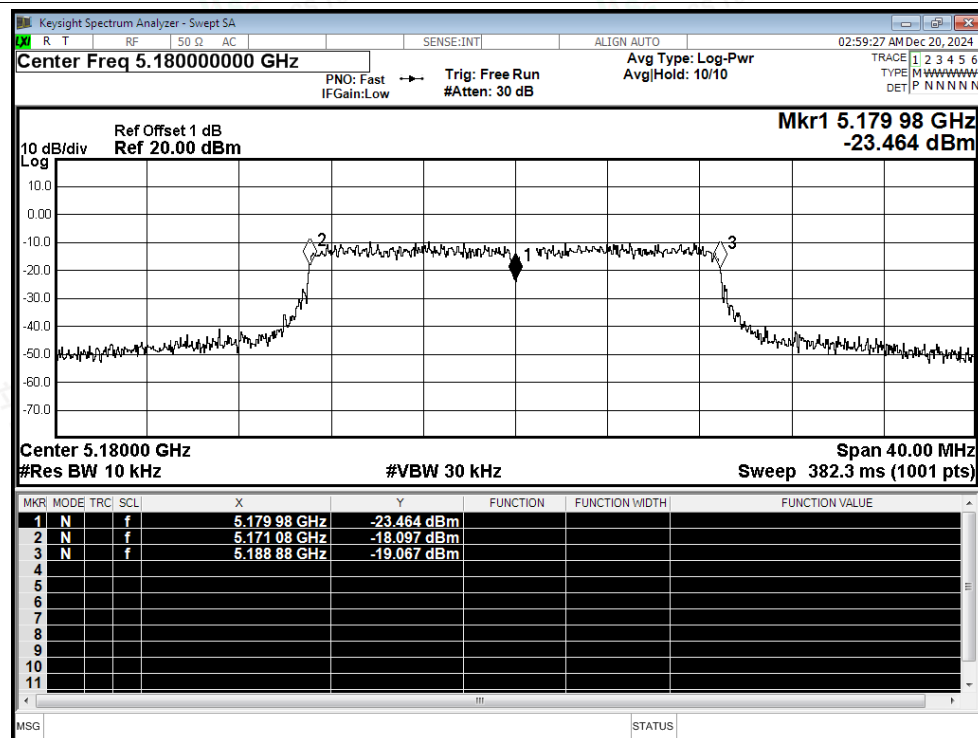


Freq. Stability NVNT ac20 5200MHz Ant1

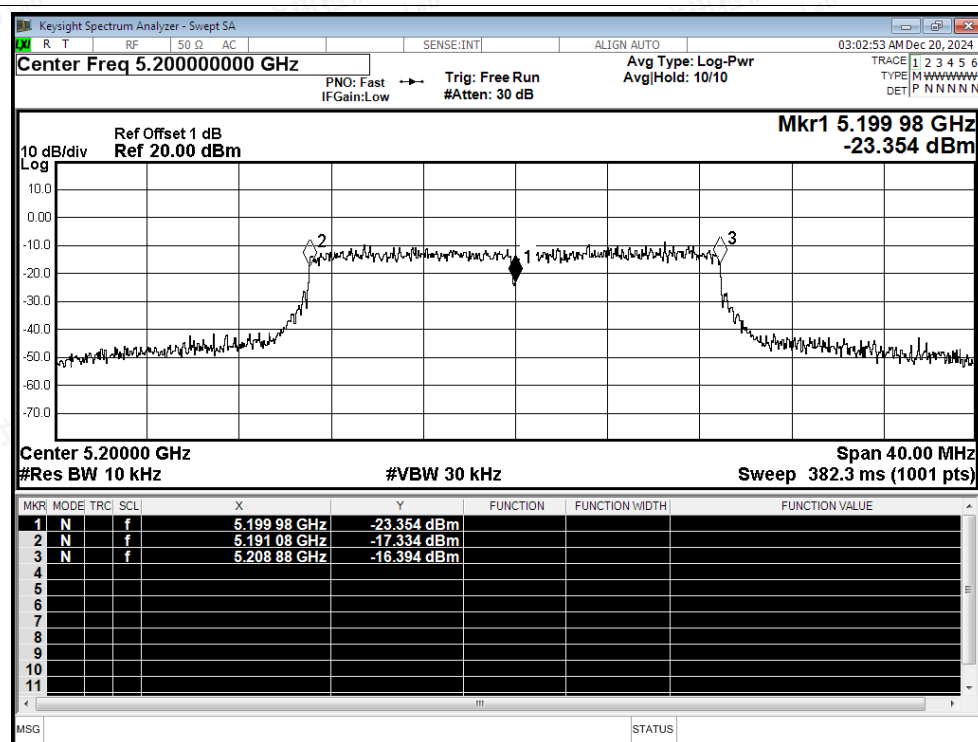


Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,
Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity

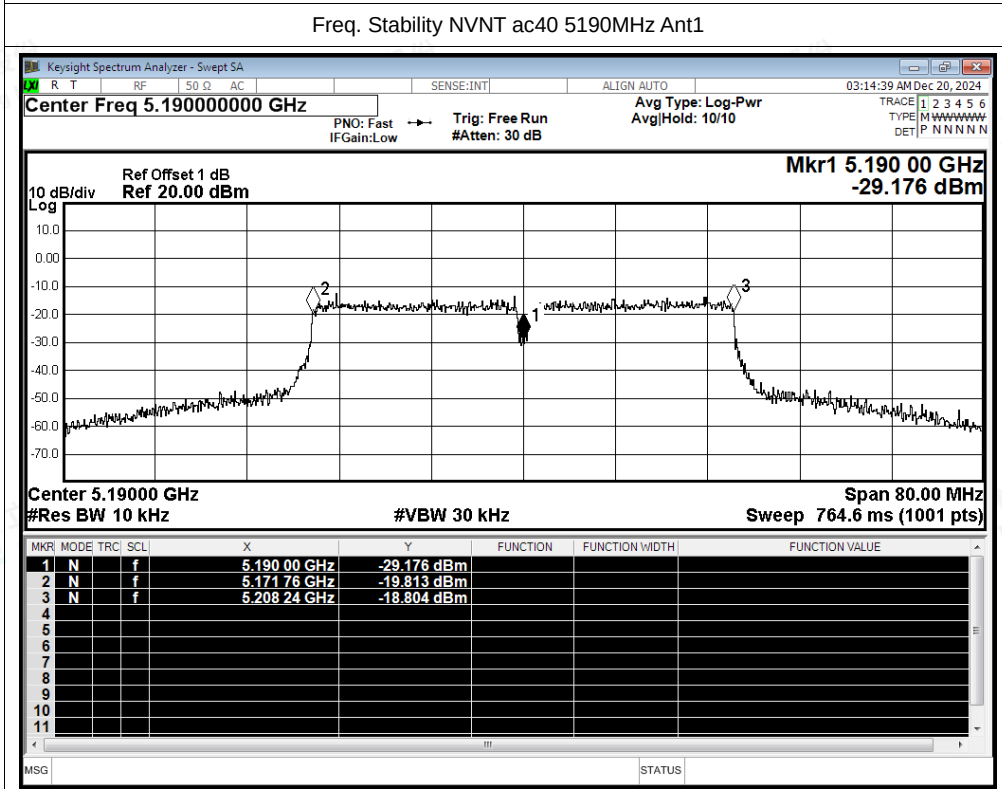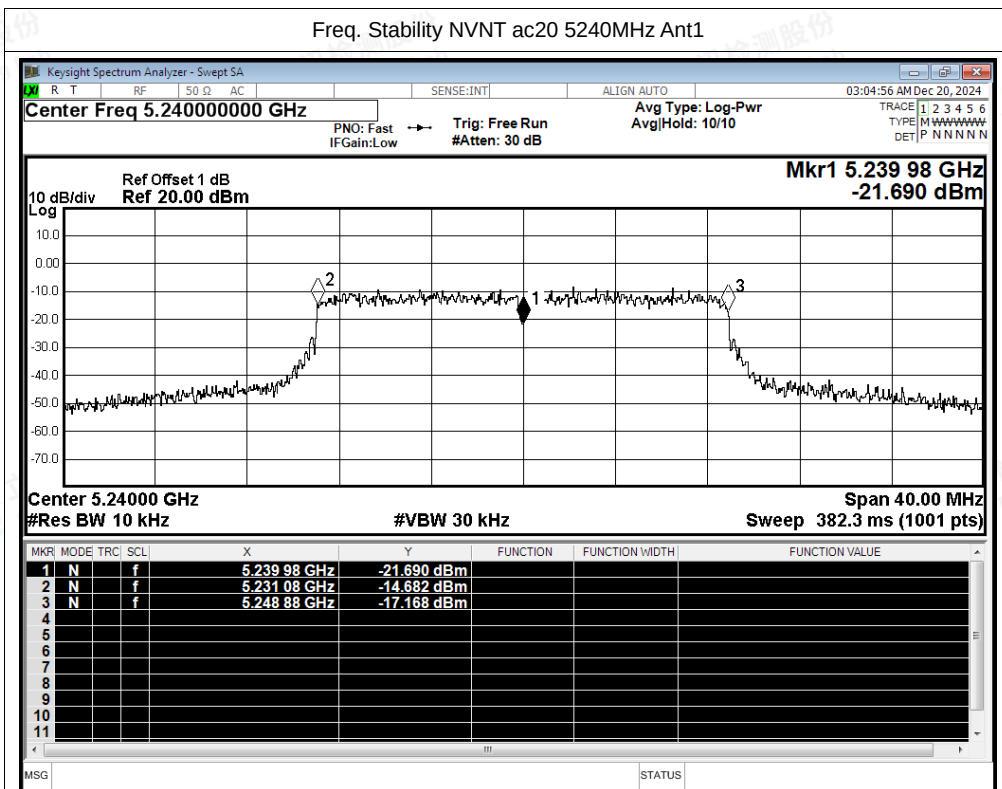

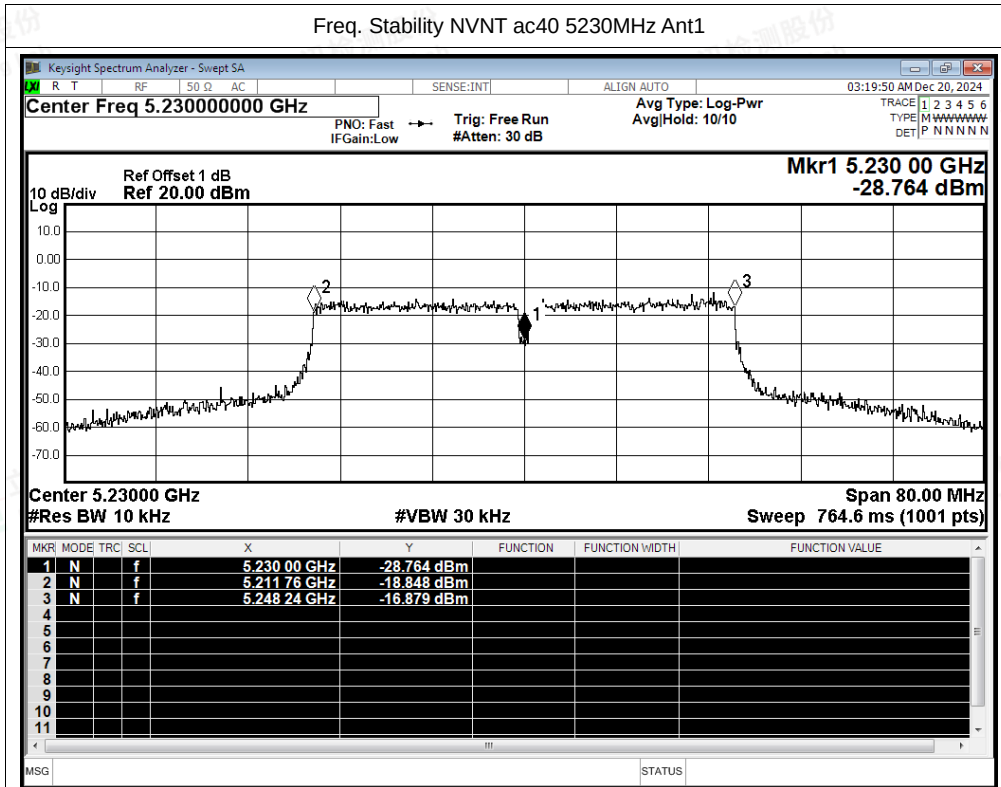

Freq. Stability NVNT ac80 5210MHz Ant1

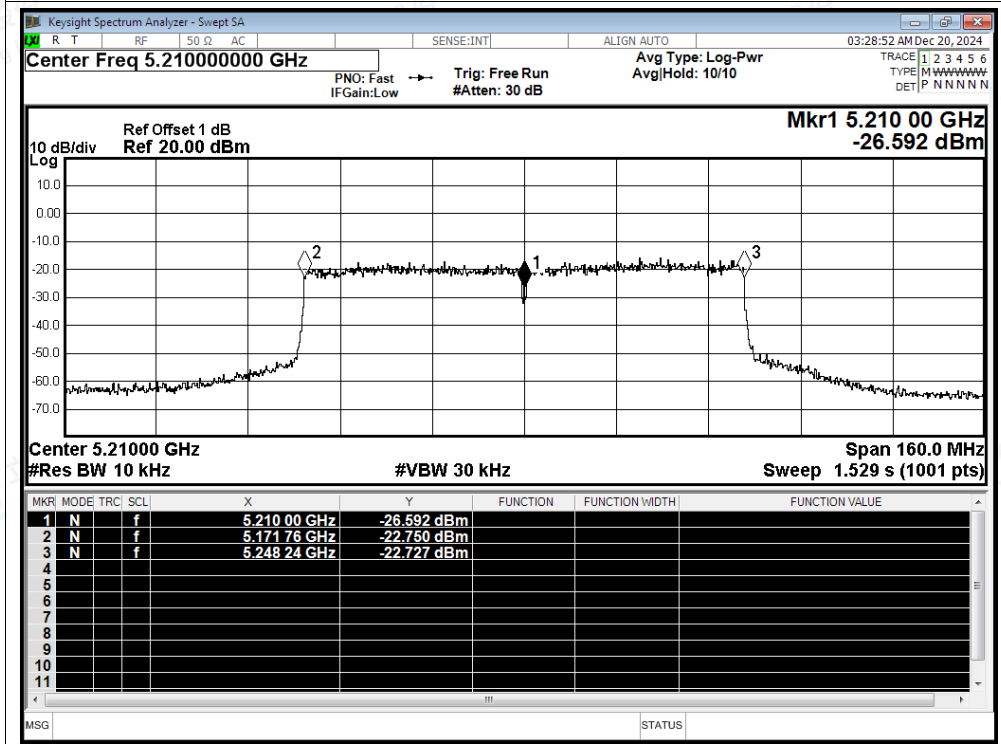



D.6 Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5180	Ant1	94.56	0.24	0.91
NVNT	a	5200	Ant1	94.56	0.24	0.91
NVNT	a	5240	Ant1	94.65	0.24	0.91
NVNT	n20	5180	Ant1	93.77	0.28	1.07
NVNT	n20	5200	Ant1	93.77	0.28	1.07
NVNT	n20	5240	Ant1	93.77	0.28	1.07
NVNT	n40	5190	Ant1	97.18	0.12	0.46
NVNT	n40	5230	Ant1	97.23	0.12	0.46
NVNT	ac20	5180	Ant1	93.83	0.28	1.06
NVNT	ac20	5200	Ant1	93.72	0.28	1.06
NVNT	ac20	5240	Ant1	93.72	0.28	1.06
NVNT	ac40	5190	Ant1	97.19	0.12	0.46
NVNT	ac40	5230	Ant1	97.19	0.12	0.46
NVNT	ac80	5210	Ant1	94.32	0.25	0.97




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,
Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Duty Cycle NVNT a 5180MHz Ant1

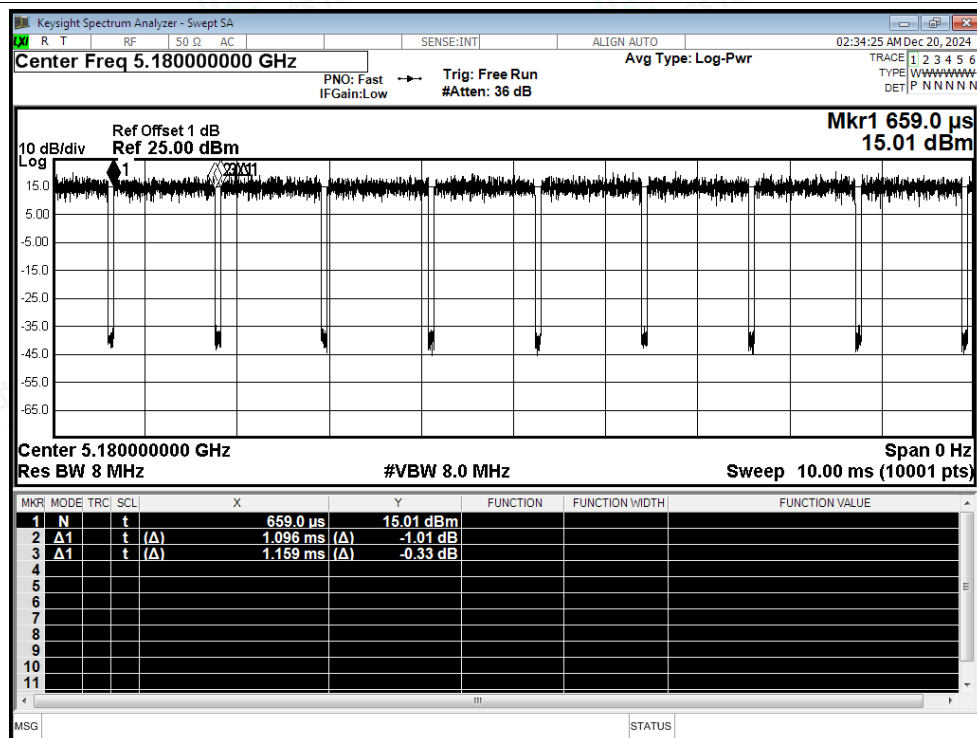


Duty Cycle NVNT a 5200MHz Ant1

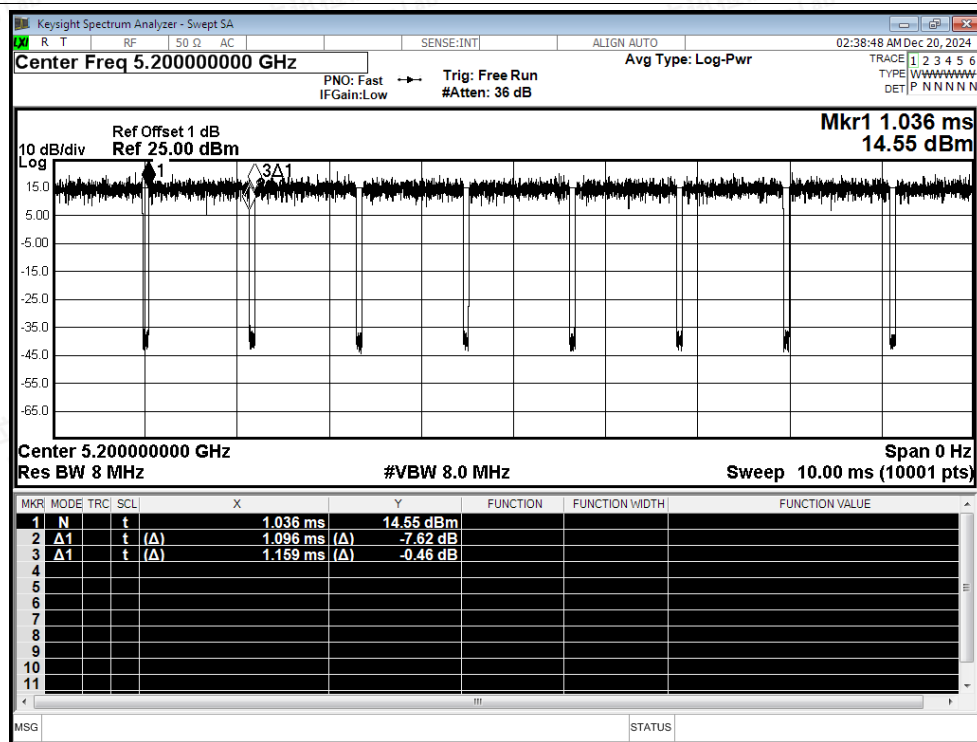



Duty Cycle NVNT a 5240MHz Ant1

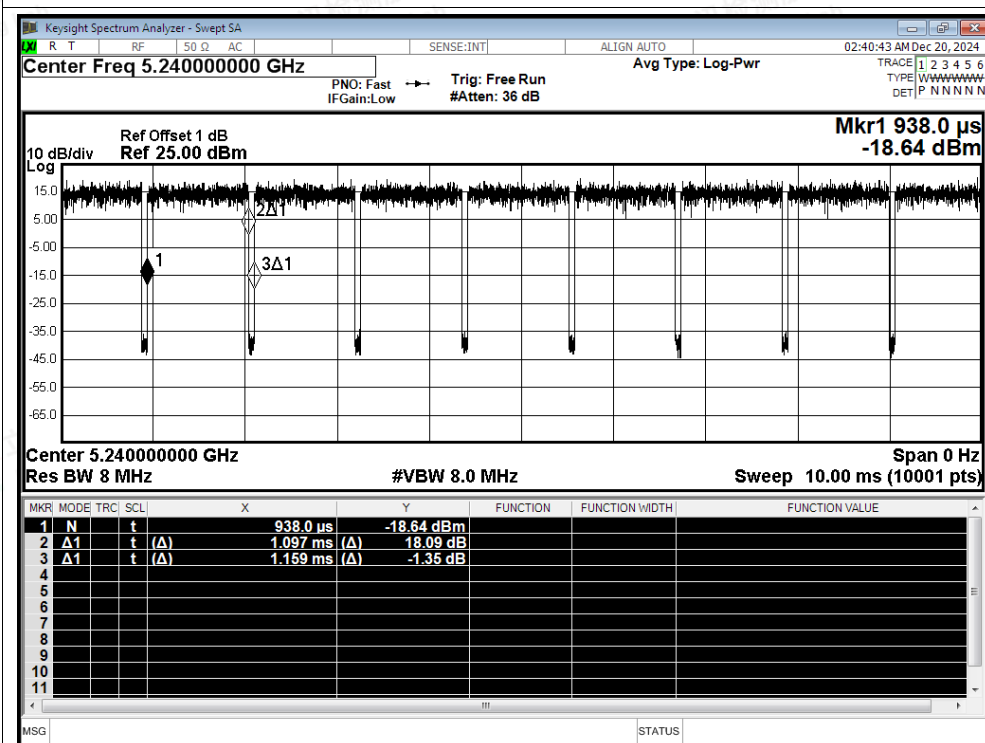

Duty Cycle NVNT n20 5180MHz Ant1

