


ENGINEERING TEST REPORT



UHF FM Repeater
Model No.: IC-FR6200H
FCC ID: AFJ370602

Applicant:

ICOM Incorporated
1-1-32, Kamiminami, Hirano-ku
Osaka, Japan, 547-0003

Tested in Accordance With

Federal Communications Commission (FCC)
47 CFR, Parts 2, 22, 74, 80 and 90 (Subpart I)

UltraTech's File No.: 15ICOM396_FCC90

This Test report is Issued under the Authority of
Tri M. Luu, BASc,
Vice President of Engineering
UltraTech Group of Labs

Date: January 27, 2015

Report Prepared by: Dharmajit Solanki

Tested by: Wei Wu

Issued Date: January 27, 2015

Test Dates: Dec.27, 2014 - Jan.07, 2015

- *The results in this Test Report apply only to the sample(s) tested, and the sample tested is randomly selected.*
- *This report must not be used by the client to claim product endorsement by NVLAP or any agency of the US Government.*

UltraTech

3000 Bristol Circle, Oakville, Ontario, Canada, L6H 6G4
Tel.: (905) 829-1570 Fax.: (905) 829-8050
Website: www.ultratech-labs.com, Email: vic@ultratech-labs.com, Email: tri@ultratech-labs.com



91038



1309



46390-2049



NVLAP LAB
CODE 200093-0



SL2-IN-E-
1119R



CA2049



TL363_B



TPTDP
DA1300

TABLE OF CONTENTS

EXHIBIT 1. INTRODUCTION	1
1.1. SCOPE.....	1
1.2. RELATED SUBMITTAL(S)/GRANT(S).....	1
1.3. NORMATIVE REFERENCES	1
EXHIBIT 2. PERFORMANCE ASSESSMENT.....	2
2.1. CLIENT INFORMATION	2
2.2. EQUIPMENT UNDER TEST (EUT) INFORMATION	2
2.3. EUT'S TECHNICAL SPECIFICATIONS.....	3
2.4. LIST OF EUT'S PORTS	4
2.5. ANCILLARY EQUIPMENT	4
2.6. GENERAL TEST SETUP	4
EXHIBIT 3. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS.....	5
3.1. CLIMATE TEST CONDITIONS.....	5
3.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TEST SIGNALS	5
EXHIBIT 4. SUMMARY OF TEST RESULTS	6
4.1. LOCATION OF TESTS	6
4.2. APPLICABILITY & SUMMARY OF EMISSION TEST RESULTS.....	6
4.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES	6
EXHIBIT 5. MEASUREMENTS, EXAMINATIONS & TEST DATA FOR EMC EMISSIONS	7
5.1. TEST PROCEDURES.....	7
5.2. MEASUREMENT UNCERTAINTIES.....	7
5.3. MEASUREMENT EQUIPMENT USED.....	7
5.4. ESSENTIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER	7
5.5. RF POWER OUTPUT [§§ 2.1046, 22.565, 74.461, 80.215 & 90.205].....	8
5.6. AUDIO FREQUENCY RESPONSE [§ 2.1047(A), 80.213(E) & 90.242(B)(8)]	9
5.7. MODULATION LIMITING [§§ 2.1047 (B), 74.463, 80.213 & 90.210].....	14
5.8. OCCUPIED BANDWIDTH & EMISSION MASK [§§ 2.1049, 74.462, 80.211(F), 90.209 & 90.210].....	19
5.9. TRANSMITTER ANTENNA POWER SPURIOUS/HARMONIC CONDUCTED EMISSIONS [§ 2.1051, 2.1057, 22.359, 80.211(F)(3) & 90.210].....	69
5.10. TRANSMITTER SPURIOUS/HARMONIC RADIATED EMISSIONS [§§ 2.1053, 2.1057, 22.359, 80.211(F)(3) & 90.210].....	82
5.11. FREQUENCY STABILITY [§§ 2.1055, 22.355, 74.464, 80.209 & 90.213].....	85
5.12. TRANSIENT FREQUENCY BEHAVIOR [§ 90.214 & 74.462(C)]	87
5.13. RF EXPOSURE REQUIREMENTS [§§ 1.1310 & 2.1091].....	95
EXHIBIT 6. TEST EQUIPMENT LIST.....	97
EXHIBIT 7. MEASUREMENT UNCERTAINTY	98
7.1. RADIATED EMISSION MEASUREMENT UNCERTAINTY	98
EXHIBIT 8. MEASUREMENT METHODS	99
8.1. CONDUCTED POWER MEASUREMENTS	99
8.2. RADIATED POWER MEASUREMENTS (ERP & EIRP) USING SUBSTITUTION METHOD	100
8.3. FREQUENCY STABILITY	103
8.4. EMISSION MASK	104
8.5. SPURIOUS EMISSIONS (CONDUCTED)	104

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 15ICOM396_FCC90

January 27, 2015

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

8.6. TRANSIENT FREQUENCY BEHAVIOR..... 105

EXHIBIT 1. INTRODUCTION

1.1. SCOPE

Reference:	FCC Parts 2, 22, 74, 80 and 90 (Subpart I)
Title:	Code of Federal Regulations (CFR), Title 47 Telecommunication – Parts 2, 22, 74, 80 and 90 (Subpart I)
Purpose of Test:	To obtain FCC Certification Authorization for Radio operating in the Frequency Band 450-512 MHz (25 kHz, 12.5 kHz and 6.25 kHz Channel Spacing).
Test Procedures:	Both conducted and radiated emissions measurements were conducted in accordance with TIA/EIA Standard TIA/EIA-603-D – Land Mobile FM or PM Communications Equipment Measurement and performance Standards.

1.2. RELATED SUBMITTAL(S)/GRANT(S)

None

1.3. NORMATIVE REFERENCES

Publication	Year	Title
FCC CFR Parts 0-19, 80-End	2014	Code of Federal Regulations – Telecommunication
ANSI C63.4	2009	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
TIA/EIA 603, Edition D	2010	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards

EXHIBIT 2. PERFORMANCE ASSESSMENT

2.1. CLIENT INFORMATION

APPLICANT	
Name:	Icom Incorporated
Address:	1-1-32, Kamiminami Hirano-ku, Osaka Japan, 547-0003
Contact Person:	Mr. Hideji Fujishima Phone #: +81 6 6793 5302 Fax #: +81 6 6793 0013 Email Address: world_support@icom.co.jp

MANUFACTURER	
Name:	Icom Incorporated
Address:	1-1-32, Kamiminami Hirano-ku, Osaka Japan, 547-0003
Contact Person:	Mr. Hideji Fujishima Phone #: +81 6 6793 5302 Fax #: +81 6 6793 0013 Email Address: world_support@icom.co.jp

2.2. EQUIPMENT UNDER TEST (EUT) INFORMATION

The applicant has supplied the following information (with the exception of the Date of Receipt).

Brand Name:	ICOM Incorporated
Product Name:	UHF FM Repeater
Model Name or Number:	IC-FR6200H
Serial Number:	1100201
Type of Equipment:	Licensed Non-Broadcast Station Transmitter
Power Supply Requirement:	13.6 VDC nominal
Transmitting/Receiving Antenna Type:	Non-integral
Primary User Functions of EUT:	2-Way Wireless Voice & Data Communication Repeater in UHF band

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 15ICOM396_FCC90
January 27, 2015

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

2.3. EUT'S TECHNICAL SPECIFICATIONS

TRANSMITTER	
Equipment Type:	Fixed or Mobile
Intended Operating Environment:	Restricted to Occupational Use only
Power Supply Requirement:	13.6 VDC Nominal
RF Output Power Rating:	50 Watt (High) / 5 Watt (Low)
Operating Frequency Range:	450-512 MHz
RF Output Impedance:	50 Ω
Channel Spacing:	25 kHz, 12.5 kHz, 6.25 kHz
Occupied Bandwidth (99%):	12.54 kHz (for 25 kHz Analog) 6.84 kHz (for 12.5 kHz Analog) 3.76 kHz (for 6.25 kHz Digital) 2.24 kHz (for 6.25 kHz Analog Tone Station ID only)
Emission Designation*:	16K0F3E**, 11K0F3E, 11K0F7E, 11K0F7D, 11K0F7W, 4K00F1E, 4K00F1D, 4K00F3E(Transmit Station ID)
Antenna Connector Type:	N
<p>* For an average case of commercial telephony, the Necessary Bandwidth is calculated as follows:</p> <p><u>For FM Voice Modulation:</u></p> <p>Channel Spacing = 25 KHz, D = 5 KHz max, K = 1, M = 3 KHz $B_n = 2M + 2DK = 2(3) + 2(5)(1) = \mathbf{16\ KHz}$ Emission designation: 16K0F3E</p> <p>Channel Spacing = 12.5 KHz, D = 2.5 KHz max, K = 1, M = 3 KHz $B_n = 2M + 2DK = 2(3) + 2(2.5)(1) = \mathbf{11\ KHz}$ Emission designation: 11K0F3E</p> <p>**Note: The emission designation 16K0F3E with 25 KHz Channel bandwidth is only applied to the device operated in FCC Rules Part 22, 74 & 80 frequencies. The operation of 16K0F3E emission will be disabled in the firmware by the manufacturer for device that operates in FCC Rules Part 90 frequencies (Private Land Mobile) as declared by the applicant.</p>	

2.4. LIST OF EUT'S PORTS


Port Number	EUT's Port Description	Number of Identical Ports	Connector Type	Cable Type/Termination
1	Antenna Connectors	2	N type	Terminated to 50Ω Load
2	External Speaker Jack	1	Mini Jack	Shielded
3	ACC	1	DB 25	Shielded
4	Microphone	1	RJ45	Non-shielded
5	DC Power Receptacle 3 Pin	1	Plug-In Jack	Non-shielded
6	LAN & BUS 1/2	3	RJ45	Non-shielded

2.5. ANCILLARY EQUIPMENT

The EUT was tested while connected to the following representative configuration of ancillary equipment necessary to exercise the ports during tests:

Ancillary Equipment # 1	
Description:	Microphone
Brand name:	ICOM
Model Name or Number:	HM-198
Connected to EUT's Port:	Microphone Port - RJ45

2.6. GENERAL TEST SETUP

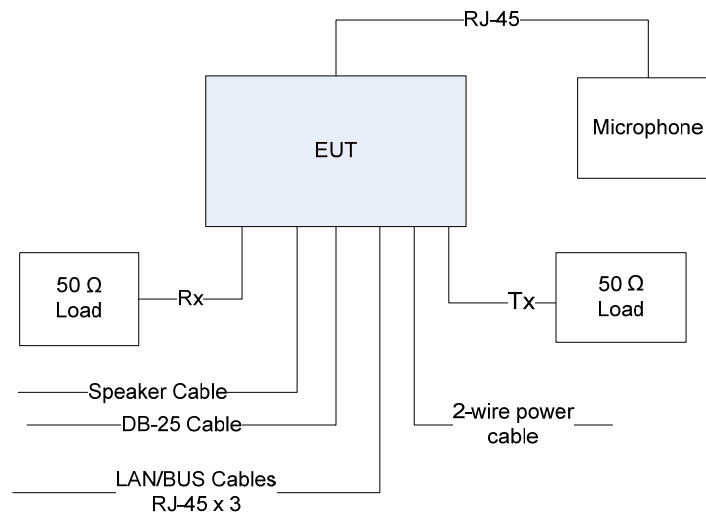

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 15ICOM396_FCC90

January 27, 2015

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 3. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS

3.1. CLIMATE TEST CONDITIONS

The climate conditions of the test environment are as follows:

Temperature:	21°C - 24°C
Humidity:	45% to 58%
Pressure:	102 kPa
Power Input Source:	13.6 VDC Nominal

3.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TEST SIGNALS

Operating Modes:	The transmitter was operated in a continuous transmission mode with the carrier modulated as specified in the Test Data.
Special Test Software:	N/A
Special Hardware Used:	N/A
Transmitter Test Antenna:	The EUT is tested with the antenna port terminated to a 50 Ohm RF Load.

Transmitter Test Signals	
Frequency Band(s):	450-512 MHz
Test Frequencies: (Near lowest, near middle & near highest frequencies in the frequency range of operation.)	450.1 MHz, 481.1 MHz, 511.9 MHz
Transmitter Wanted Output Test Signals: Transmitter Power (measured maximum output power): Normal Test Modulation: Modulating signal source:	 51.52 W High and 5.45 W Low FM Voice/Digital External

EXHIBIT 4. SUMMARY OF TEST RESULTS

4.1. LOCATION OF TESTS

All of the measurements described in this report were performed at Ultratech Group of Labs located in the city of Oakville, Province of Ontario, Canada.

Radiated Emissions were performed at the Ultratech's 3-10 TDK Semi-Anechoic Chamber situated in the Town of Oakville, province of Ontario. This test site been calibrated in accordance with ANSI C63.4, and found to be in compliance with the requirements of Sec. 2.948 of the FCC Rules. The descriptions and site measurement data of the Oakville 3-10 TDK Semi-Anechoic Chamber has been filed with FCC office (FCC File No.: 91038) and Industry Canada office (Industry Canada File No.: 2049A-3). Expiry Date: 2017-04-02.

4.2. APPLICABILITY & SUMMARY OF EMISSION TEST RESULTS

FCC Section(s)	Test Requirements	Applicability (Yes/No)
1.1307, 1.1310, 2.1091 & 2.1093	RF Exposure Limit	Yes
2.1046, 22.565, 74.461, 80.215 & 90.205	RF Power Output	Yes
2.1047(a), 80.213(e) & 90.242(b)(8)	Audio Frequency Response	Not applicable to new standard. However, tests are conducted under FCC's recommendation.
2.1047(b), 74.463, 80.213 & 90.210	Modulation Limiting	Yes
2.1049, 74.462, 80.211(f), 90.209 & 90.210	Emission Limitation & Emission Mask	Yes
2.1051, 2.1057, 80.211(f)(3), & 90.210	Emission Limits - Spurious Emissions at Antenna Terminal	Yes
2.1053, 2.1057, 22.359, 80.211(f)(3), & 90.210	Emission Limits - Field Strength of Spurious Emissions	Yes
2.1055, 22.355, 74.464 80.209 & 90.213	Frequency Stability	Yes
74.462(c) & 90.214	Transient Frequency Behavior	Yes
UHF FM Repeater, Model No.: IC-FR6200H, by ICOM Incorporated has also been tested and found to comply with FCC Part 15, Subpart B - Radio Receivers and Class B Digital Devices. The engineering test report has been documented and kept on file and is available upon request.		

4.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES

None

4.3.1. DEVIATION OF STANDARD TEST PROCEDURES

None

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 15ICOM396_FCC90

January 27, 2015

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 5. MEASUREMENTS, EXAMINATIONS & TEST DATA FOR EMC EMISSIONS

5.1. TEST PROCEDURES

This section contains test results only. Details of test methods and procedures can be found in EXHIBIT 8 of this report.

5.2. MEASUREMENT UNCERTAINTIES

The measurement uncertainties stated were calculated in accordance with the requirements of CISPR 16-4-2 @ IEC:2003 and JCGM 100:2008 (GUM 1995) – Guide to the Expression of Uncertainty in Measurement. Refer to Exhibit 7 for Measurement Uncertainties.

5.3. MEASUREMENT EQUIPMENT USED

The measurement equipment used complied with the requirements of the Standards referenced in the Methods & Procedures ANSI C63.4 and CISPR 16-1-1.

5.4. ESSENTIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER

The essential function of the EUT is to communicate to and from radios over RF link.

5.5. RF POWER OUTPUT [§§ 2.1046, 22.565, 74.461, 80.215 & 90.205]


5.5.1. Limits

Please refer to FCC 47 CFR 90.205, 74.461, 80.215 & 22.565 for specification details.

5.5.2. Method of Measurements

Refer to Section 8.1 (Conducted) and 8.2 (Radiated) of this report for measurement details

5.5.3. Test Arrangement

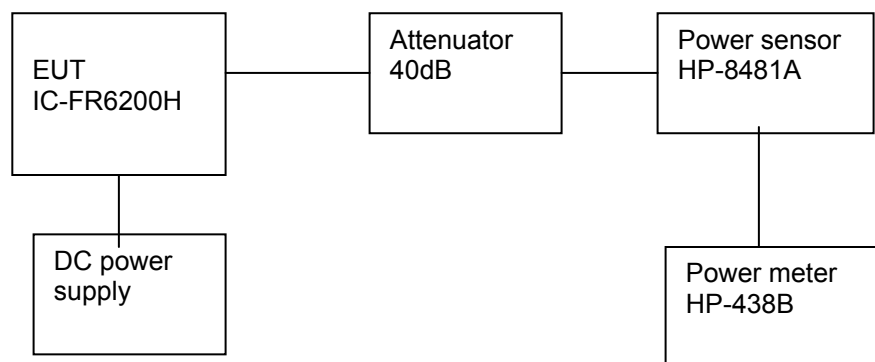

5.5.4. Test Data

Fundamental Frequency (MHz)	Measured (Average) Power (W)	Power Rating (W)
High Power Level, 50 W		
450.1	48.64	50.0
481.1	45.50	50.0
511.9	51.52	50.0
Low Power Level, 5.0 W		
450.1	5.01	5.0
481.1	4.86	5.0
511.9	5.45	5.0

5.6. AUDIO FREQUENCY RESPONSE [§ 2.1047(a), 80.213(e) & 90.242(b)(8)]

5.6.1. Limits

§ 2.1047(a): Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted. For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter or of all circuitry installed between the modulation limiter and the modulated stage shall be submitted.

§ 90.242(b)(8): Recommended audio filter attenuation characteristics are given below:


Audio band	Minimum Attenuation Rel. to 1 kHz Attenuation
3 –20 KHz	$60 \log_{10}(f/3)$ dB where f is in kHz
20 – 30 KHz	50dB

Note: Audit Freq Response and Modulation limiting tests were performed only for 12.5 & 25 kHz channel spacing. These tests were not performed for 6.25 kHz ch spacing as there is no FM voice capability for this device.

5.6.2. Method of Measurements

The rated audio input signal was applied to the input of the audio low-pass filter (or of all modulation stages) using an audio oscillator, this input signal level and its corresponding output signal were then measured and recorded using the FFT Digital Spectrum Analyzer. Tests were repeated at different audio signal frequencies from 0 to 50 KHz.

5.6.3. Test Arrangement

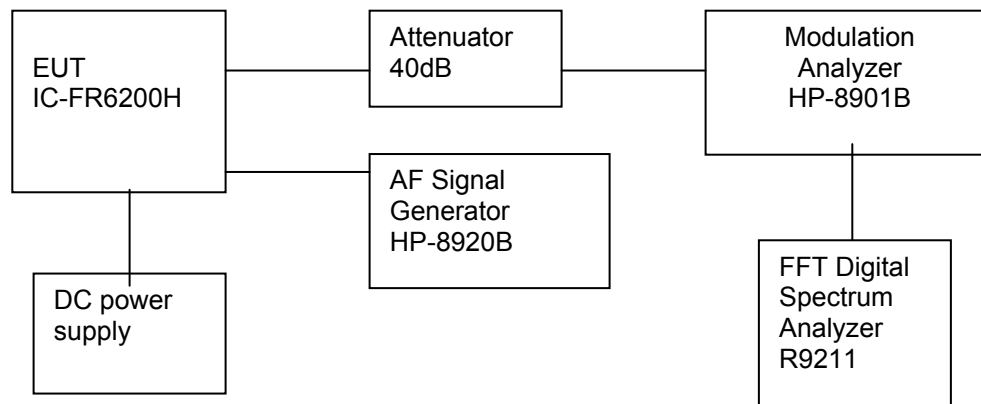

5.6.4. Test Data

5.6.4.1. 12.5 KHz Channel Spacing, F3E, Frequency of All Modulation States

Remark: Due to the difficulty of measuring the Frequency Response of the internal low-pass filter, the Frequency Response of All Modulation States is performed to show the roll-off at 3 kHz in comparison with the recommended audio filter attenuation.

Frequency (KHz)	Audio In (dBV)	Audio Out (dBV)	Attenuation (Out - In) (dB)	Attenuation Rel. to 1 KHz (dB)	Recommended Attenuation (dB)
0.1	-49.37	-30.22	19.2	-30.3	--
0.2	-49.37	-18.72	30.7	-18.8	--
0.4	-49.37	-9.04	40.3	-9.1	--
0.6	-49.37	-4.56	44.8	-4.7	--
0.8	-49.37	-1.87	47.5	-2.0	--
1.0	-49.37	0.09	49.5	0.0	--
1.5	-49.37	2.27	51.6	2.2	--
2.0	-49.37	1.91	51.3	1.8	--
2.5	-49.37	0.46	49.8	0.4	--
3.0	-49.37	-1.61	47.8	-1.7	0
3.5	-49.37	-54.57	-5.2	-54.7	-4
4.0	-49.37	-63.92	-14.6	-64.0	-7
4.5	-49.37	-70.00	-20.6	-70.1	-11
5.0	-49.37	-70.00	-20.6	-70.1	-13
6.0	-49.37	-70.00	-20.6	-70.1	-18
7.0	-49.37	-70.00	-20.6	-70.1	-22
8.0	-49.37	-70.00	-20.6	-70.1	-26
9.0	-49.37	-70.00	-20.6	-70.1	-29
10.0	-49.37	-70.00	-20.6	-70.1	-31
12.0	-49.37	-70.00	-20.6	-70.1	-36
14.0	-49.37	-70.00	-20.6	-70.1	-40
16.0	-49.37	-70.00	-20.6	-70.1	-44
18.0	-49.37	-70.00	-20.6	-70.1	-47
20.0	-49.37	-70.00	-20.6	-70.1	-50
25.0	-49.37	-70.00	-20.6	-70.1	-50
30.0	-49.37	-70.00	-20.6	-70.1	-50
35.0	-49.37	-70.00	-20.6	-70.1	-50
40.0	-49.37	-70.00	-20.6	-70.1	-50
45.0	-49.37	-70.00	-20.6	-70.1	-50
50.0	-49.37	-70.00	-20.6	-70.1	-50


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 15ICOM396_FCC90

January 27, 2015

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

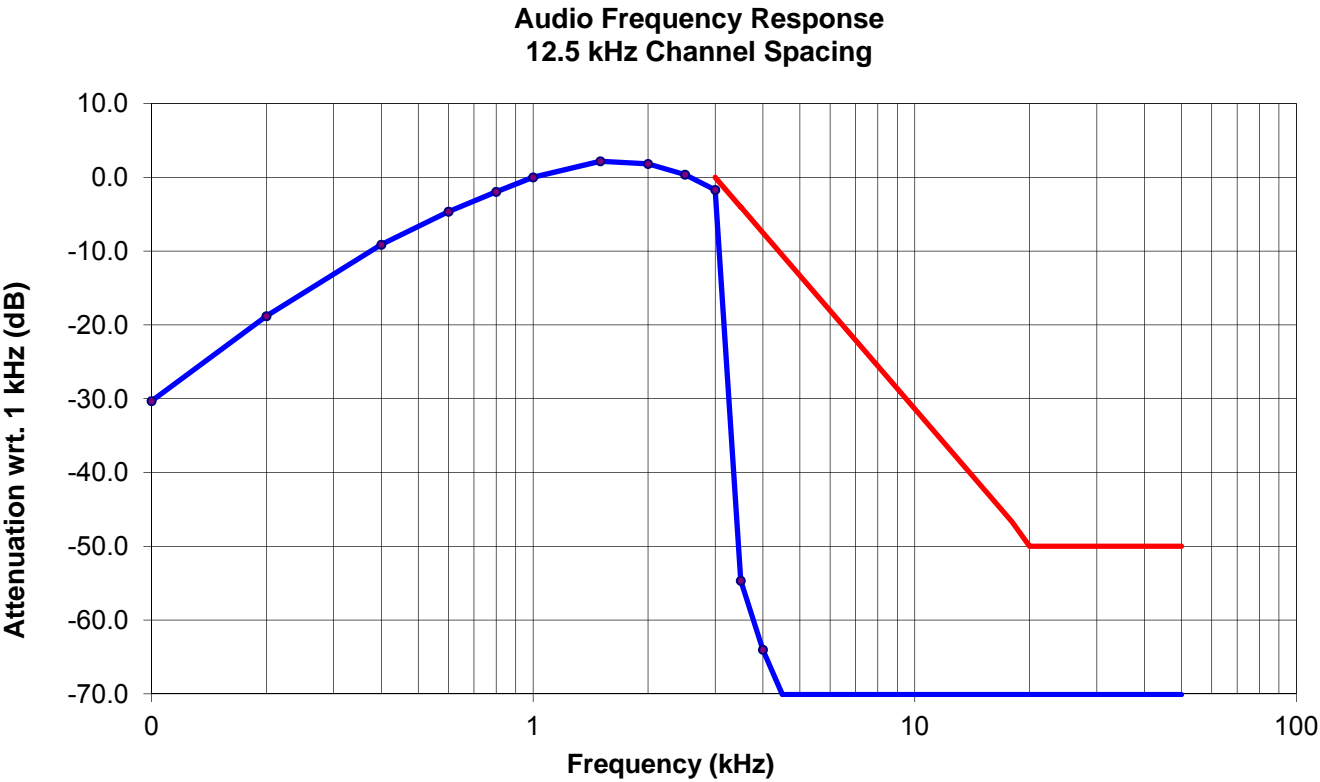

5.6.4.2. 25 KHz Channel Spacing, F3E, Frequency of All Modulation States

Note: Due to the difficulty of measuring the Frequency Response of the internal low-pass filter, the Frequency Response of All Modulation States is performed to show the roll-off at 3 KHz in comparison with the recommended audio filter attenuation.

Frequency (KHz)	Audio In (dBV)	Audio Out (dBV)	Attenuation (Out - In) (dB)	Attenuation Rel. to 1 KHz (dB)	Recommended Attenuation (dB)
0.1	-48.87	-24.51	24.4	-30.6	--
0.2	-48.87	-12.97	35.9	-19.0	--
0.4	-48.87	-3.26	45.6	-9.3	--
0.6	-48.87	1.11	50.0	-5.0	--
0.8	-48.87	4.00	52.9	-2.1	--
1.0	-48.87	6.07	54.9	0.0	--
1.5	-48.87	8.61	57.5	2.5	--
2.0	-48.87	8.77	57.6	2.7	--
2.5	-48.87	7.87	56.7	1.8	--
3.0	-48.87	7.78	56.7	1.7	0
3.5	-48.87	-47.51	1.4	-53.6	-4
4.0	-48.87	-63.44	-14.6	-69.5	-7
4.5	-48.87	-70.00	-21.1	-76.1	-11
5.0	-48.87	-70.00	-21.1	-76.1	-13
6.0	-48.87	-70.00	-21.1	-76.1	-18
7.0	-48.87	-70.00	-21.1	-76.1	-22
8.0	-48.87	-70.00	-21.1	-76.1	-26
9.0	-48.87	-70.00	-21.1	-76.1	-29
10.0	-48.87	-70.00	-21.1	-76.1	-31
12.0	-48.87	-70.00	-21.1	-76.1	-36
14.0	-48.87	-70.00	-21.1	-76.1	-40
16.0	-48.87	-70.00	-21.1	-76.1	-44
18.0	-48.87	-70.00	-21.1	-76.1	-47
20.0	-48.87	-70.00	-21.1	-76.1	-50
25.0	-48.87	-70.00	-21.1	-76.1	-50
30.0	-48.87	-70.00	-21.1	-76.1	-50
35.0	-48.87	-70.00	-21.1	-76.1	-50
40.0	-48.87	-70.00	-21.1	-76.1	-50
45.0	-48.87	-70.00	-21.1	-76.1	-50
50.0	-48.87	-70.00	-21.1	-76.1	-50


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 15ICOM396_FCC90

January 27, 2015

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

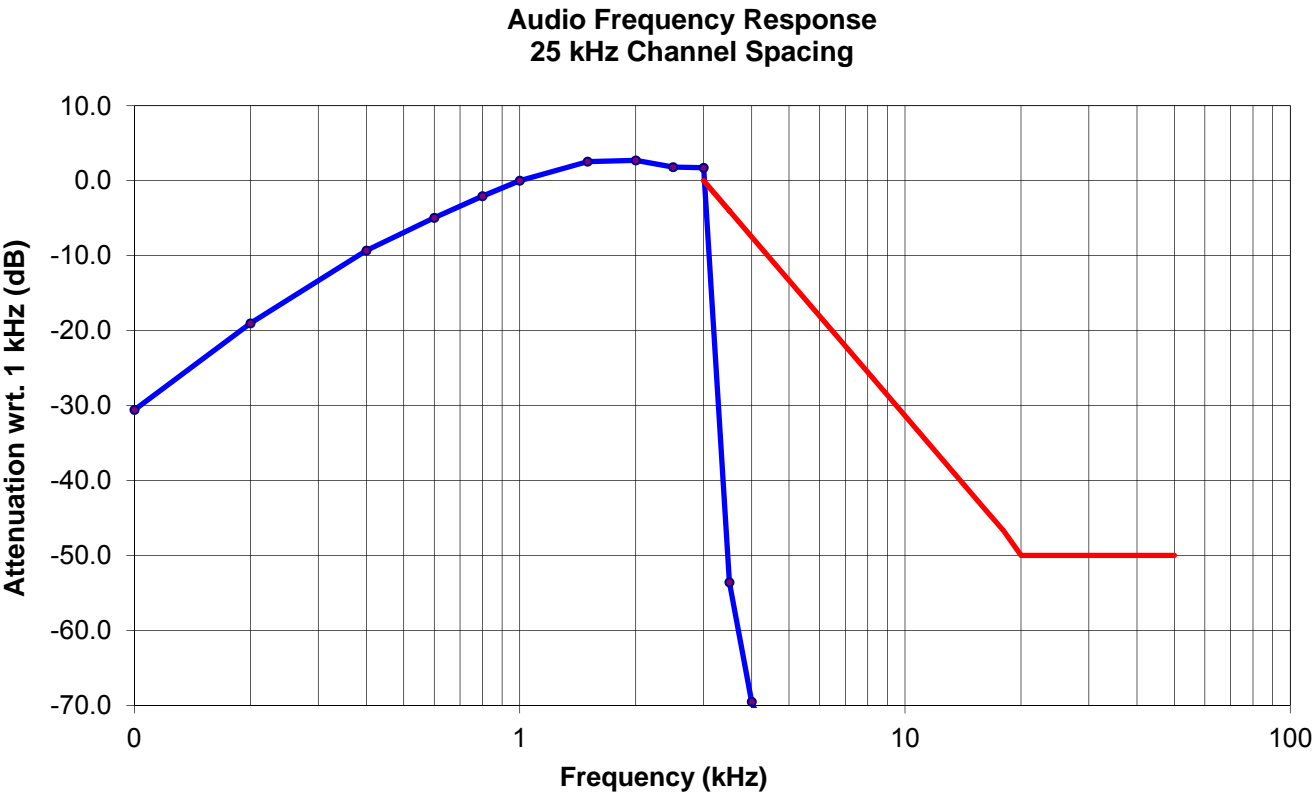

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 15ICOM396_FCC90

January 27, 2015

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.7. MODULATION LIMITING [§§ 2.1047 (b), 74.463, 80.213 & 90.210]

5.7.1. Limits

§ 2.1047(b): Equipment which employs modulation limiting. A curve or family of curves showing the percentage of modulation versus the modulation input voltage shall be supplied. The information submitted shall be sufficient to show modulation limiting capability throughout the range of modulating frequencies and input modulating signal levels employed.

Recommended frequency deviation characteristics are given below:


- 1.25 kHz for 6.25 kHz Channel Spacing System
- 2.5 KHz for 12.5 kHz Channel Spacing System

5.7.2. Method of Measurements

For Audio Transmitter: The carrier frequency deviation was measured with the tone input signal level varied from 0 Vp to audio input rating level plus 16 dB at frequencies 0.1, 0.5, 1.0, 3.0 and 5.0 kHz. The maximum deviation was recorded at each test condition.

For Data Transmitter with Maximum Frequency Deviation set by Factory: The EUT was set at maximum frequency deviation, and its peak frequency deviation was then measured using EUT's internal random data source.

5.7.3. Test Arrangement

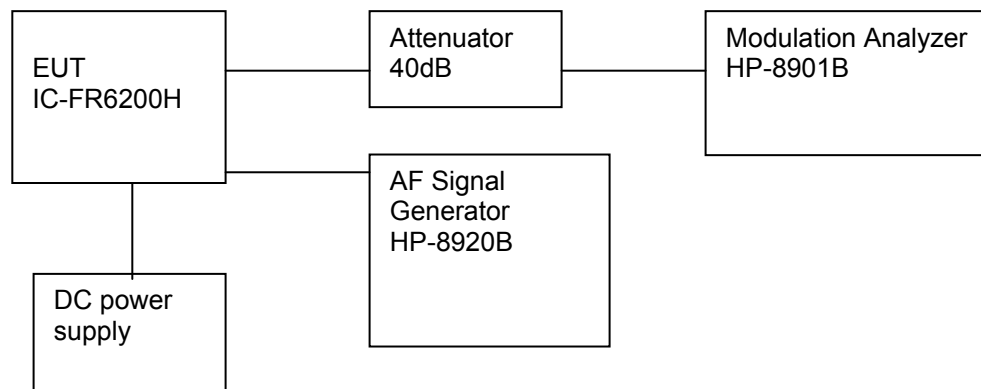

5.7.4. Test Data

5.7.4.1. Voice Modulation Limiting for 12.5 KHz Channel Spacing Operation

Modulating Signal Level (mVrms)	Peak Frequency Deviation (kHz) at the following modulating frequency:					Maximum Limit (kHz)
	0.1 kHz	0.5 kHz	1.0 kHz	3.0 kHz	5.0 kHz	
2	0.24	0.42	0.86	1.08	0.15	2.5
4	0.24	0.78	1.65	1.41	0.14	2.5
6	0.26	1.16	2.07	1.41	0.14	2.5
8	0.30	1.55	2.13	1.41	0.15	2.5
10	0.33	1.89	2.12	1.41	0.14	2.5
15	0.35	2.11	2.12	1.41	0.15	2.5
20	0.44	2.12	2.12	1.41	0.14	2.5
25	0.44	2.12	2.12	1.41	0.18	2.5
30	0.49	2.12	2.12	1.41	0.18	2.5
35	0.57	2.12	2.12	1.41	0.17	2.5
40	0.65	2.12	2.07	1.41	0.17	2.5
45	0.70	2.11	2.08	1.41	0.13	2.5
50	0.76	2.10	2.02	1.41	0.12	2.5
60	0.88	2.10	1.89	1.41	0.09	2.5
70	1.02	2.08	1.89	1.41	0.08	2.5
80	1.12	2.08	1.89	1.41	0.08	2.5
90	1.26	2.08	1.89	1.41	0.07	2.5
100	1.36	2.08	1.90	1.41	0.06	2.5
150	2.03	2.08	1.88	1.41	0.06	2.5
200	2.13	2.08	1.87	1.41	0.06	2.5
250	2.13	2.08	1.86	1.41	0.06	2.5

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 15ICOM396_FCC90

January 27, 2015

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Voice Signal Input Level = STD MOD Level + 16 dB = 10.63 dB(mVrms) + 16 dB = 26.63 dB(mVrms) = 21.45 mVrms		
Modulation Frequency (kHz)	Peak Deviation (kHz)	Maximum Limit (kHz)
0.1	0.44	2.5
0.2	1.06	2.5
0.4	2.14	2.5
0.6	2.13	2.5
0.8	2.12	2.5
1.0	2.12	2.5
1.2	2.12	2.5
1.4	2.12	2.5
1.6	2.09	2.5
1.8	2.14	2.5
2.0	2.01	2.5
2.5	2.00	2.5
3.0	1.41	2.5
3.5	0.11	2.5
4.0	0.09	2.5
4.5	0.10	2.5
5.0	0.10	2.5
6.0	0.10	2.5
7.0	0.10	2.5
8.0	0.10	2.5
9.0	0.10	2.5
10.0	0.10	2.5

5.7.4.2. Digital Modulation

Max Deviation measured for 6.25 KHz Channel Spacing F1D = 1.58 kHz

Max Deviation measured for 6.25 KHz Channel Spacing F3E = 0.67 kHz

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 15ICOM396_FCC90

January 27, 2015

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.7.4.3. Voice Modulation Limiting for 25 KHz Channel Spacing Operation

Modulating Signal Level	Peak Frequency Deviation (kHz) at the following modulating frequency:					Maximum Limit
(mVrms)	0.1 kHz	0.5 kHz	1.0 kHz	3.0 kHz	5.0 kHz	(kHz)
2	0.43	0.79	1.73	2.65	0.16	5.0
4	0.50	1.52	3.28	3.52	0.16	5.0
6	0.52	2.23	4.05	3.52	0.16	5.0
8	0.59	3.02	4.10	3.52	0.16	5.0
10	0.64	3.66	4.06	3.52	0.16	5.0
15	0.73	4.03	4.08	3.52	0.16	5.0
20	0.85	4.06	4.08	3.52	0.16	5.0
25	0.95	4.09	4.08	3.52	0.16	5.0
30	1.11	4.08	4.09	3.52	0.16	5.0
35	1.21	4.07	4.14	3.52	0.16	5.0
40	1.39	4.07	4.07	3.52	0.15	5.0
45	1.47	4.11	3.99	3.52	0.13	5.0
50	1.61	4.06	3.93	3.52	0.12	5.0
60	1.84	4.10	3.91	3.52	0.10	5.0
70	2.05	4.11	3.87	3.52	0.09	5.0
80	2.45	4.09	3.87	3.52	0.08	5.0
90	2.45	4.12	3.91	3.52	0.07	5.0
100	2.76	4.10	3.98	3.52	0.07	5.0
150	3.95	4.10	3.98	3.52	0.07	5.0
200	4.06	4.09	3.89	3.52	0.07	5.0
250	4.06	4.04	3.83	3.52	0.07	5.0

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 15ICOM396_FCC90

January 27, 2015

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Voice Signal Input Level = STD MOD Level + 16 dB
= 27.13 dB(mVrms)
= 22.71 mVrms

Modulation Frequency (KHz)	Peak Deviation (KHz)	Maximum Limit (KHz)
0.1	0.64	5.0
0.2	2.15	5.0
0.4	4.07	5.0
0.6	4.11	5.0
0.8	4.19	5.0
1.0	4.09	5.0
1.2	4.15	5.0
1.4	4.21	5.0
1.6	4.22	5.0
1.8	4.33	5.0
2.0	4.33	5.0
2.5	4.30	5.0
3.0	3.53	5.0
3.5	0.18	5.0
4.0	0.17	5.0
4.5	0.16	5.0
5.0	0.16	5.0
6.0	0.16	5.0
7.0	0.16	5.0
8.0	0.16	5.0
9.0	0.16	5.0
10.0	0.16	5.0

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 15ICOM396_FCC90

January 27, 2015

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.8. OCCUPIED BANDWIDTH & EMISSION MASK [§§ 2.1049, 74.462, 80.211(f), 90.209 & 90.210]

5.8.1. Limits

Emissions shall be attenuated below the mean output power of the transmitter as follows:

Frequency Range (MHz)	Maximum Authorized BW (KHz)	Channel Spacing (KHz)	Recommended Frequency Deviation (KHz)	FCC Applicable Mask
156-174, 421-512	11.25	12.5	2.5	Mask D – Voice & Data
150-174, 421-512	6	6.25	1.25	Mask E – Voice & Data

§80.211(f) Emission limitations


Emissions shall be attenuated below the mean output power of the transmitter as follows:

- (1) On any frequency removed from the assigned frequency by more than 50 percent up to and including 100 percent of the authorized bandwidth: At least 25 dB;
- (2) On any frequency removed from the assigned frequency by more than 100 percent up to and including 250 percent of the authorized bandwidth: At least 35 dB; and
- (3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least 43 plus $10\log_{10}$ (mean power in watts) dB.

5.8.2. Method of Measurements

Refer to Section 8.4 of this report for measurement details.

5.8.3. Test Arrangement

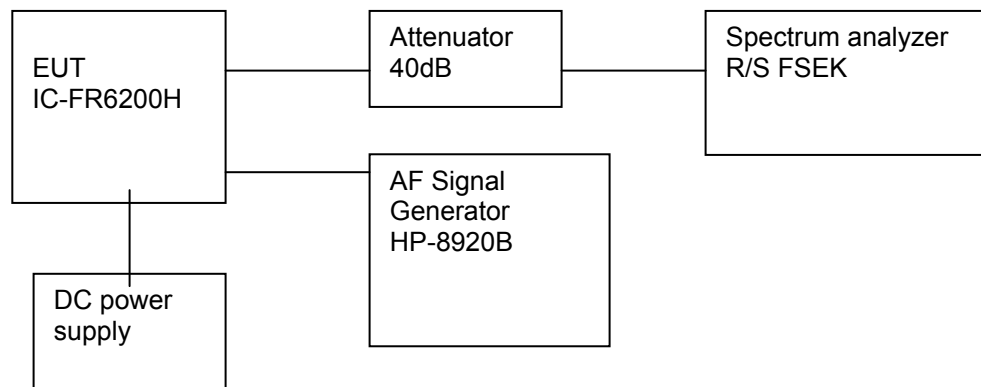

5.8.4. Test Data

5.8.4.1. 99% Occupied Bandwidth

Frequency (MHz)	Channel Spacing (kHz)	Modulation	*Measured 99% OBW at Maximum Freq. Deviation (kHz)	Maximum Authorized Bandwidth (kHz)
450.1	25.0	FM with 2.5 KHz sine wave signal	12.36	20.0
481.1	25.0	FM with 2.5 KHz sine wave signal	12.48	20.0
511.9	25.0	FM with 2.5 KHz sine wave signal	12.54	20.0
450.1	12.5	FM with 2.5 KHz sine wave signal	6.68	11.25
481.1	12.5	FM with 2.5 KHz sine wave signal	6.76	11.25
511.9	12.5	FM with 2.5 KHz sine wave signal	6.84	11.25
450.1	6.25	Digital Voice & Data	3.68	6.0
481.1	6.25	Digital Voice & Data	3.70	6.0
511.9	6.25	Digital Voice & Data	3.76	6.0
450.1	6.25	Analog Tone (F3E)*	2.24	6.0
481.1	6.25	Analog Tone (F3E)*	2.22	6.0
511.9	6.25	Analog Tone (F3E)*	2.22	6.0

*Transmit Station ID only.

Note: 99% Occupied Bandwidth measurements were done using the built-in auto function of the analyzer.

Refer to the following test data plots (1 through 12) for details.

Plot 5.8.4.1.1. Occupied Bandwidth

Test Frequency:	450.1 MHz
Channel Spacing:	25 kHz
Power:	50 W
Modulation:	FM with 2.5 kHz sine wave signal

Ref 50 dBm Att 30 dB SWT 340 ms

Marker 1 [T1] 37.59 dBm

*RBW 300 Hz *VBW 3 kHz

OBW 12.360000000 kHz

Temp 1 [T1 OBW] 25.62 dBm

450.093640000 MHz

Temp 2 [T1 OBW] 26.26 dBm

450.106000000 MHz


1 PK VIEW

Center 450.1 MHz 3 kHz/ Span 30 kHz

Date: 1.JAN.2000 00:36:27

Plot 5.8.4.1.2. Occupied Bandwidth

Test Frequency:	481.1 MHz
Channel Spacing:	25 kHz
Power:	50 W
Modulation:	FM with 2.5 KHz sine wave signal

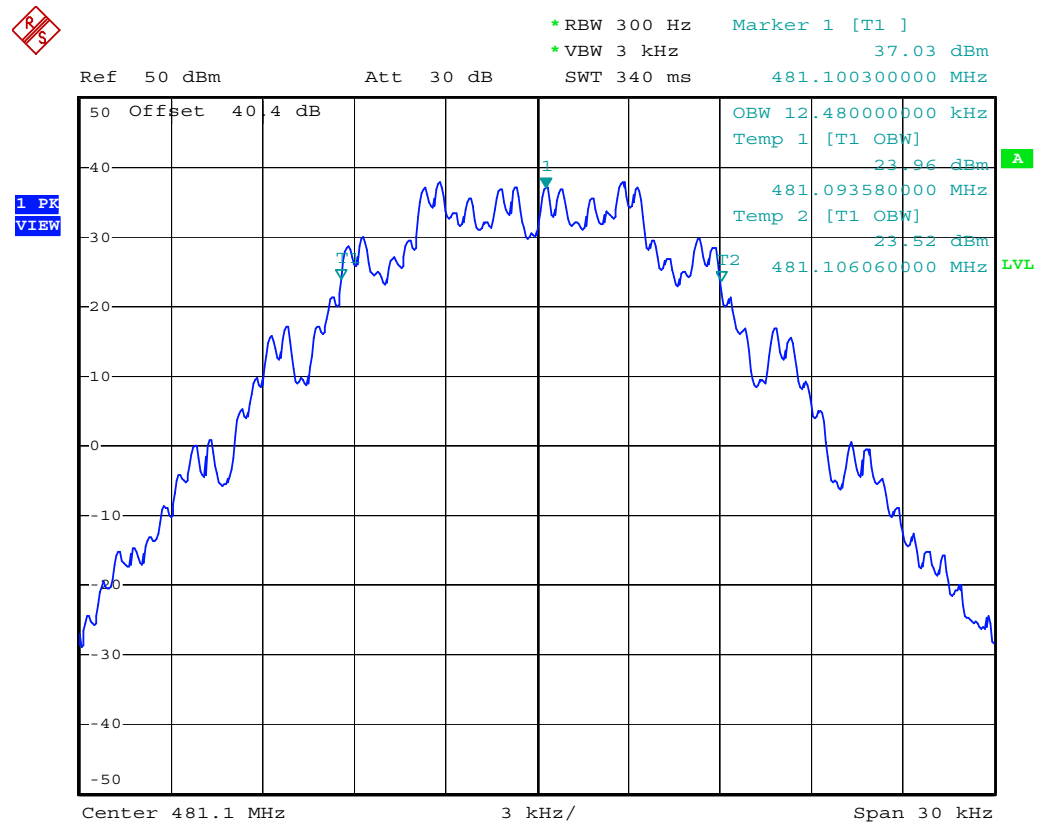

Date: 1.JAN.2000 00:38:22


Plot 5.8.4.1.3. Occupied Bandwidth

Test Frequency:	511.9 MHz
Channel Spacing:	25 kHz
Power:	50 W
Modulation:	FM with 2.5 KHz sine wave signal



Date: 1.JAN.2000 00:40:42

Plot 5.8.4.1.4. Occupied Bandwidth

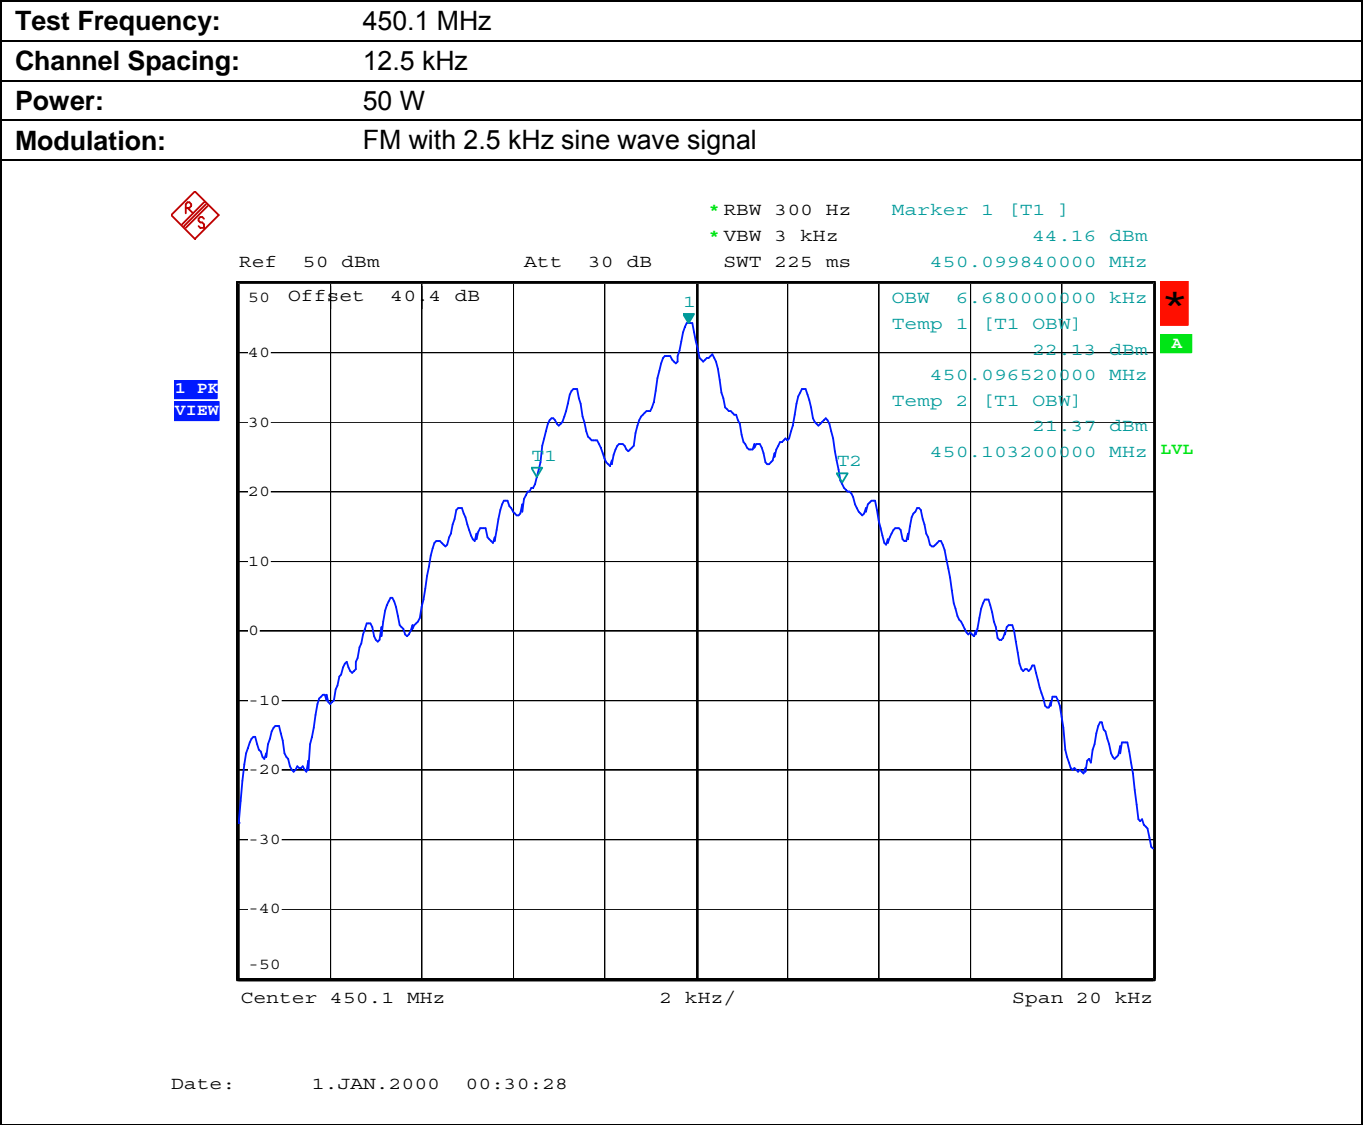

Plot 5.8.4.1.5. Occupied Bandwidth

Test Frequency:	481.1 MHz
Channel Spacing:	12.5 kHz
Power:	50 W
Modulation:	FM with 2.5 KHz sine wave signal

Ref 50 dBm Att 30 dB SWT 225 ms

*RBW 300 Hz *VBW 3 kHz

Marker 1 [T1] 43.82 dBm

OBW 6.76000000 kHz

Temp 1 [T1 OBW] 20.81 dBm

481.09644000 MHz


Temp 2 [T1 OBW] 21.23 dBm

481.10320000 MHz

Center 481.1 MHz 2 kHz/ Span 20 kHz


Date: 1.JAN.2000 00:32:35

Plot 5.8.4.1.6. Occupied Bandwidth

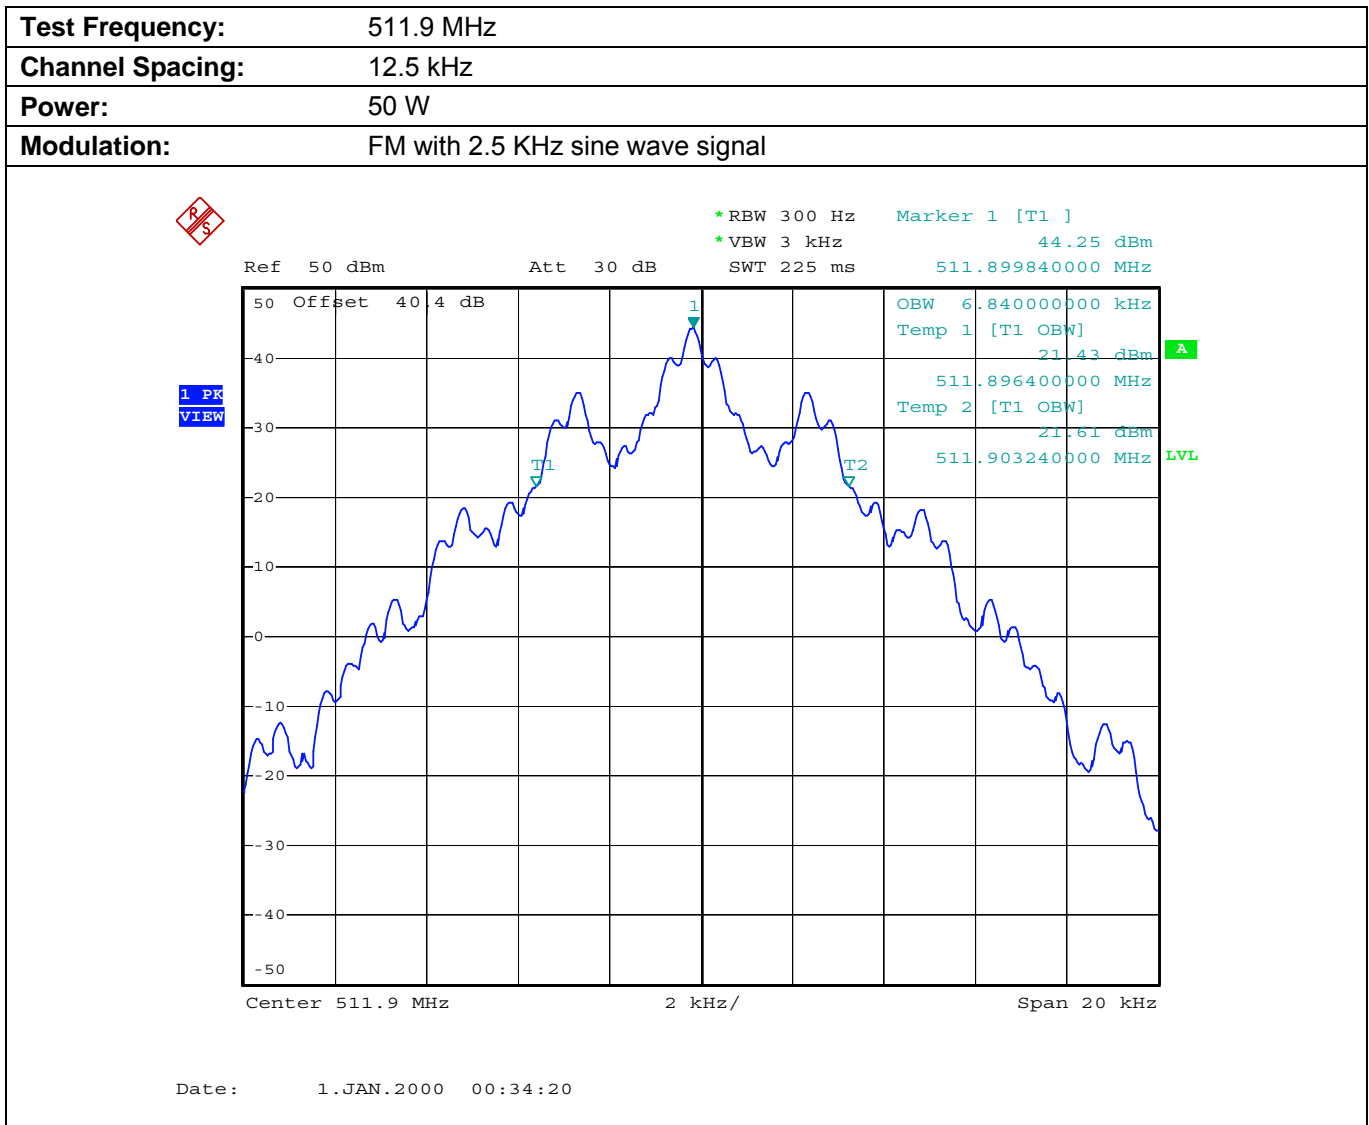

Plot 5.8.4.1.7. Occupied Bandwidth


Test Frequency:	450.1 MHz
Channel Spacing:	6.25 kHz
Power:	50 W
Modulation:	Digital Voice & Data

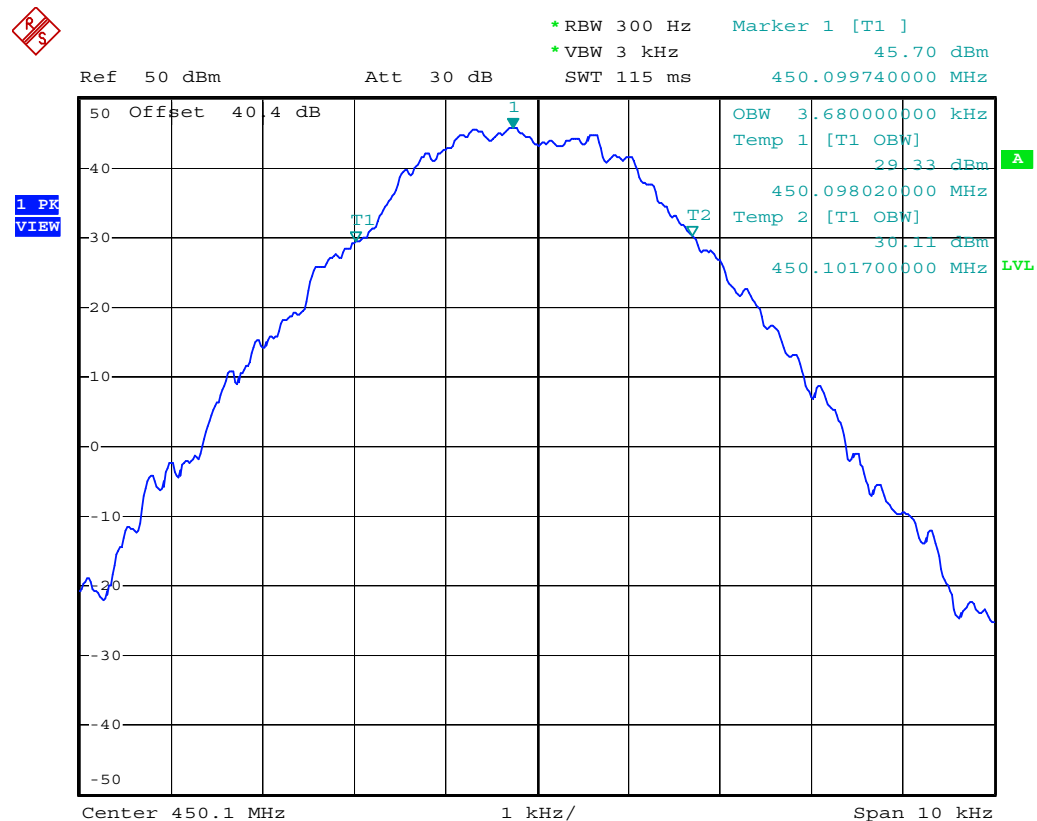

Date: 1.JAN.2000 00:50:11

Plot 5.8.4.1.8. Occupied Bandwidth

Test Frequency:	481.1 MHz
Channel Spacing:	6.25 kHz
Power:	50 W
Modulation:	Digital Voice & Data

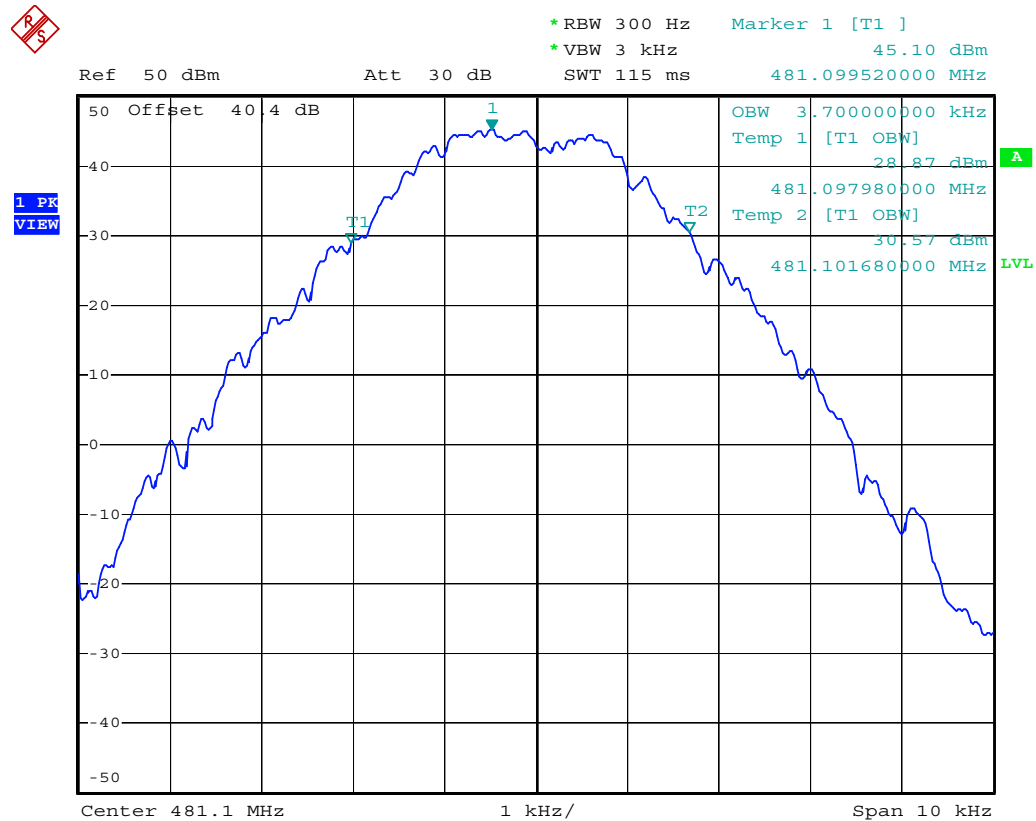

Date: 1.JAN.2000 00:51:26

Plot 5.8.4.1.9. Occupied Bandwidth

Test Frequency: 511.9 MHz
Channel Spacing: 6.25 kHz
Power: 50 W
Modulation: Digital Voice & Data

Ref 50 dBm Att 30 dB SWT 115 ms

*RBW 300 Hz *VBW 3 kHz

Marker 1 [T1] 45.57 dBm

511.899480000 MHz

OBW 3.760000000 kHz

Temp 1 [T1 OBW] 29.94 dBm

511.897940000 MHz

Temp 2 [T1 OBW] 30.41 dBm

511.901700000 MHz

1 PK VIEW

1

T1

T2


A

LVL


Center 511.9 MHz 1 kHz/ Span 10 kHz

Date: 1.JAN.2000 00:52:51


Plot 5.8.4.1.10. Occupied Bandwidth

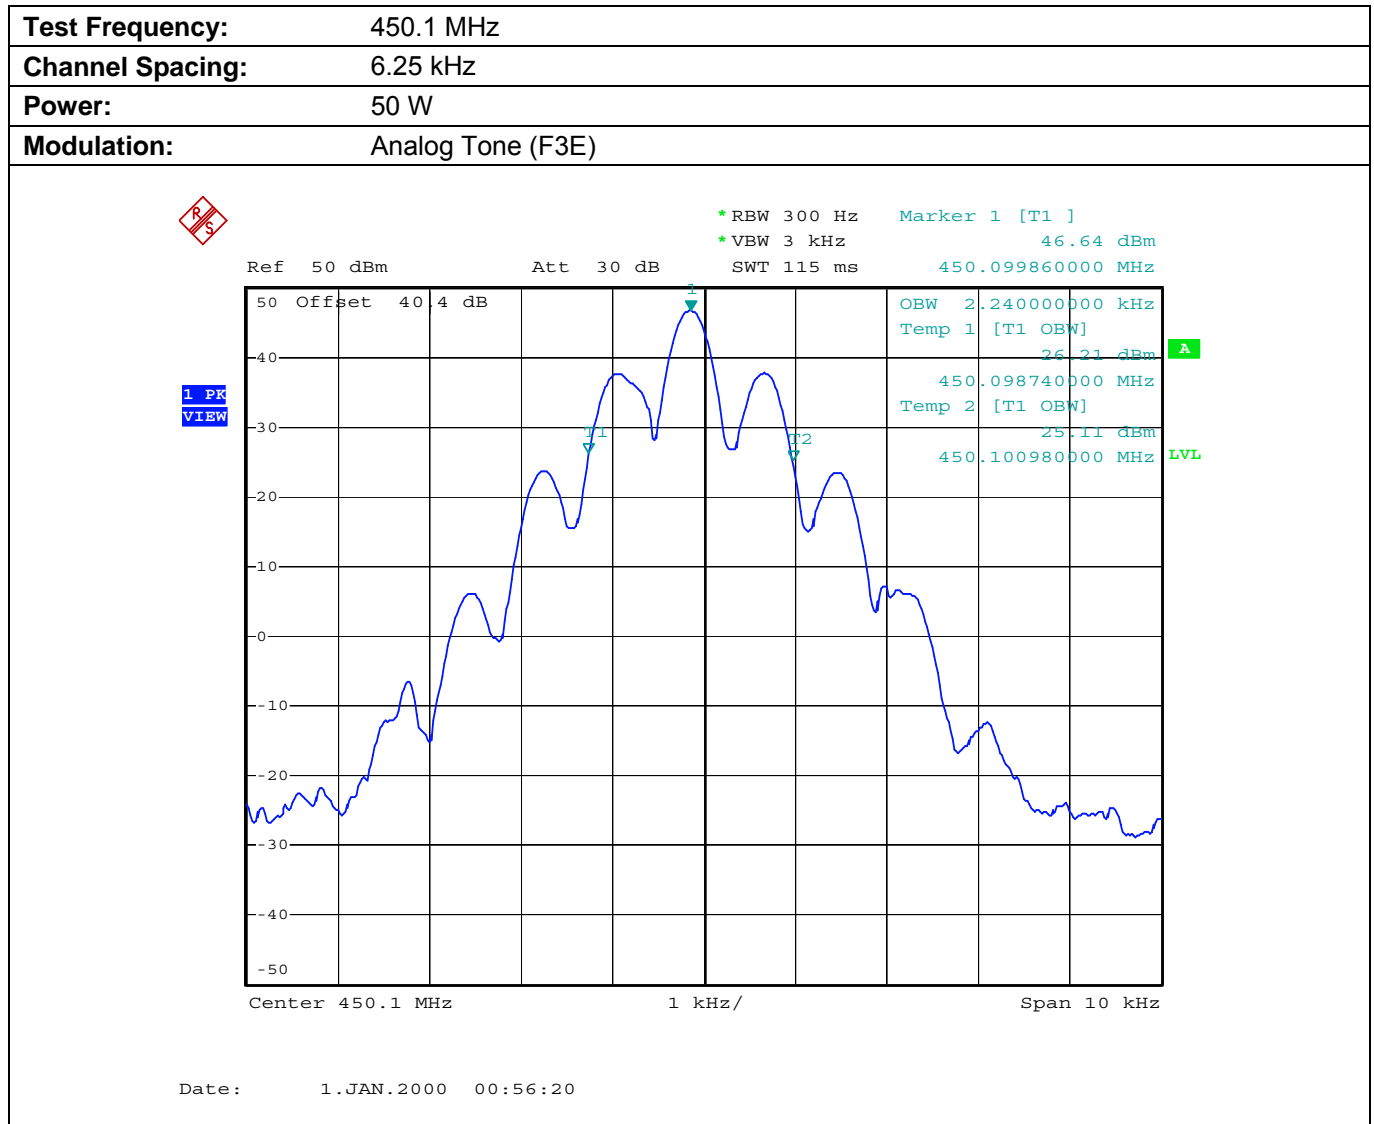

Plot 5.8.4.1.11. Occupied Bandwidth

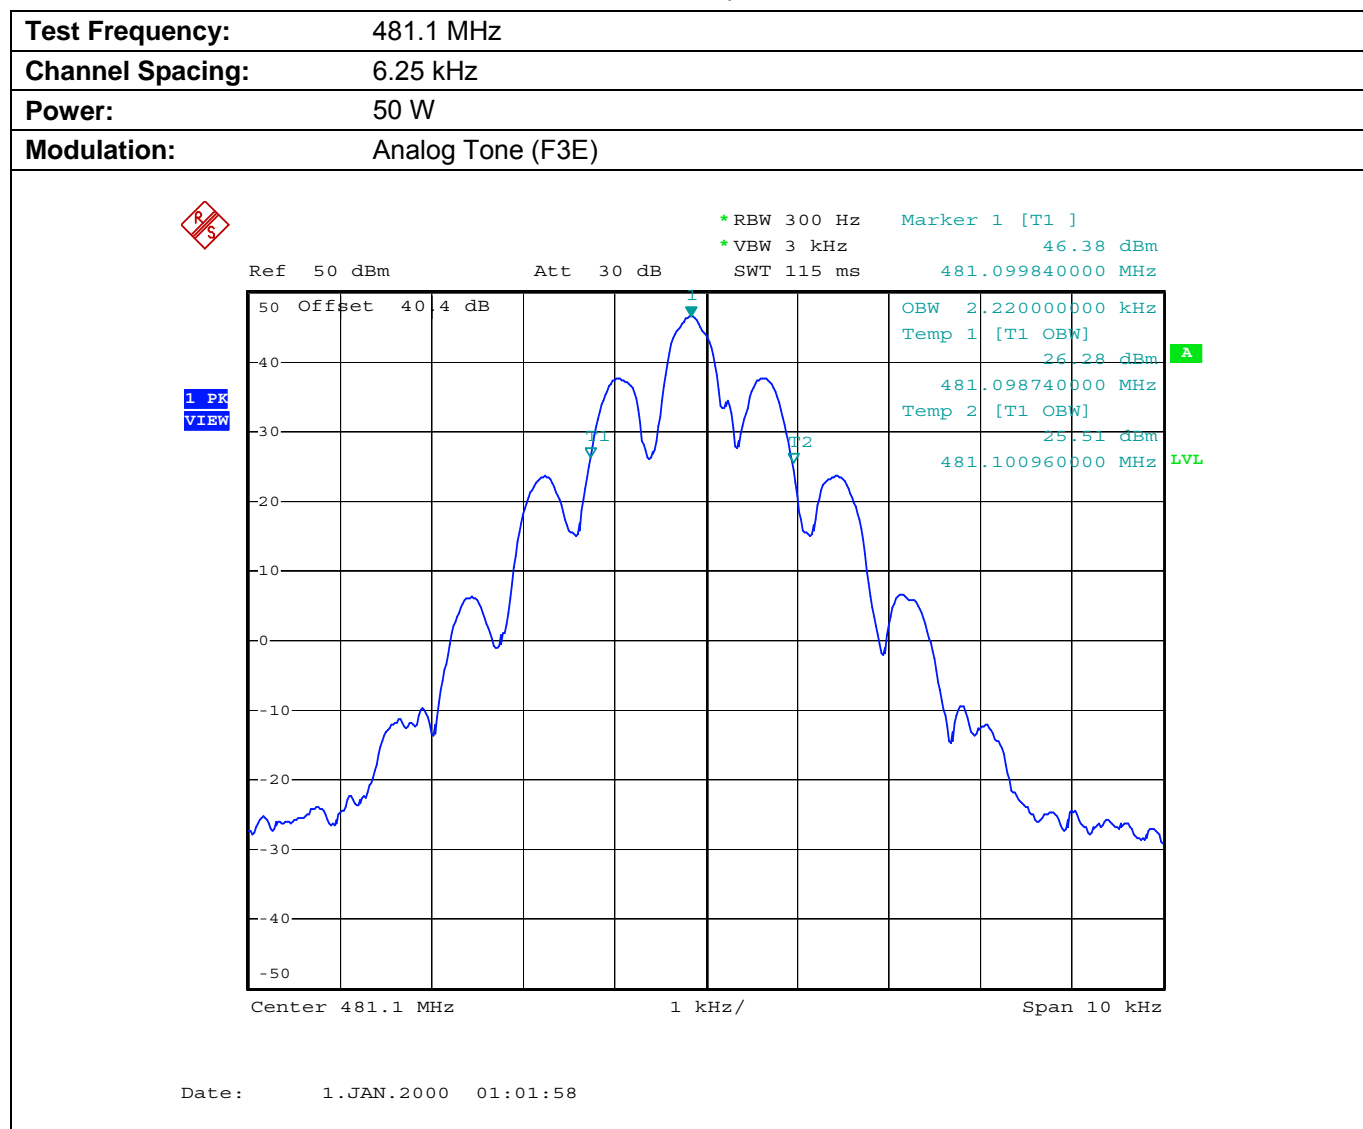


Plot 5.8.4.1.12. Occupied Bandwidth

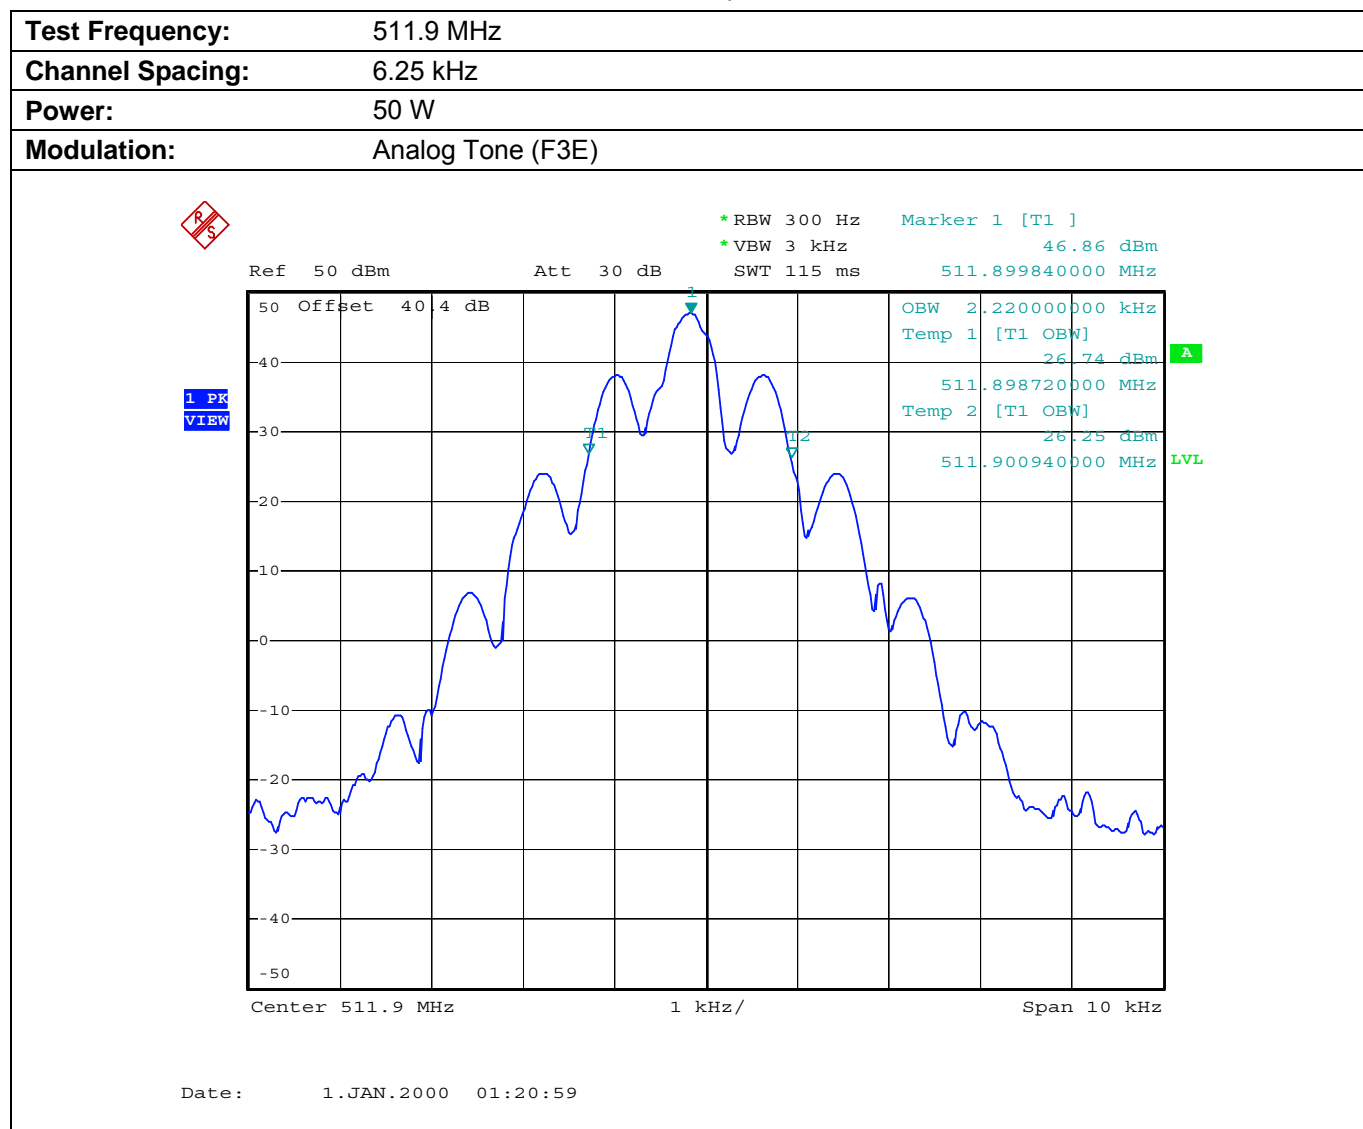


5.8.4.2. Emission Mask D


Plot 5.8.4.2.1. Emission Mask D, High Power

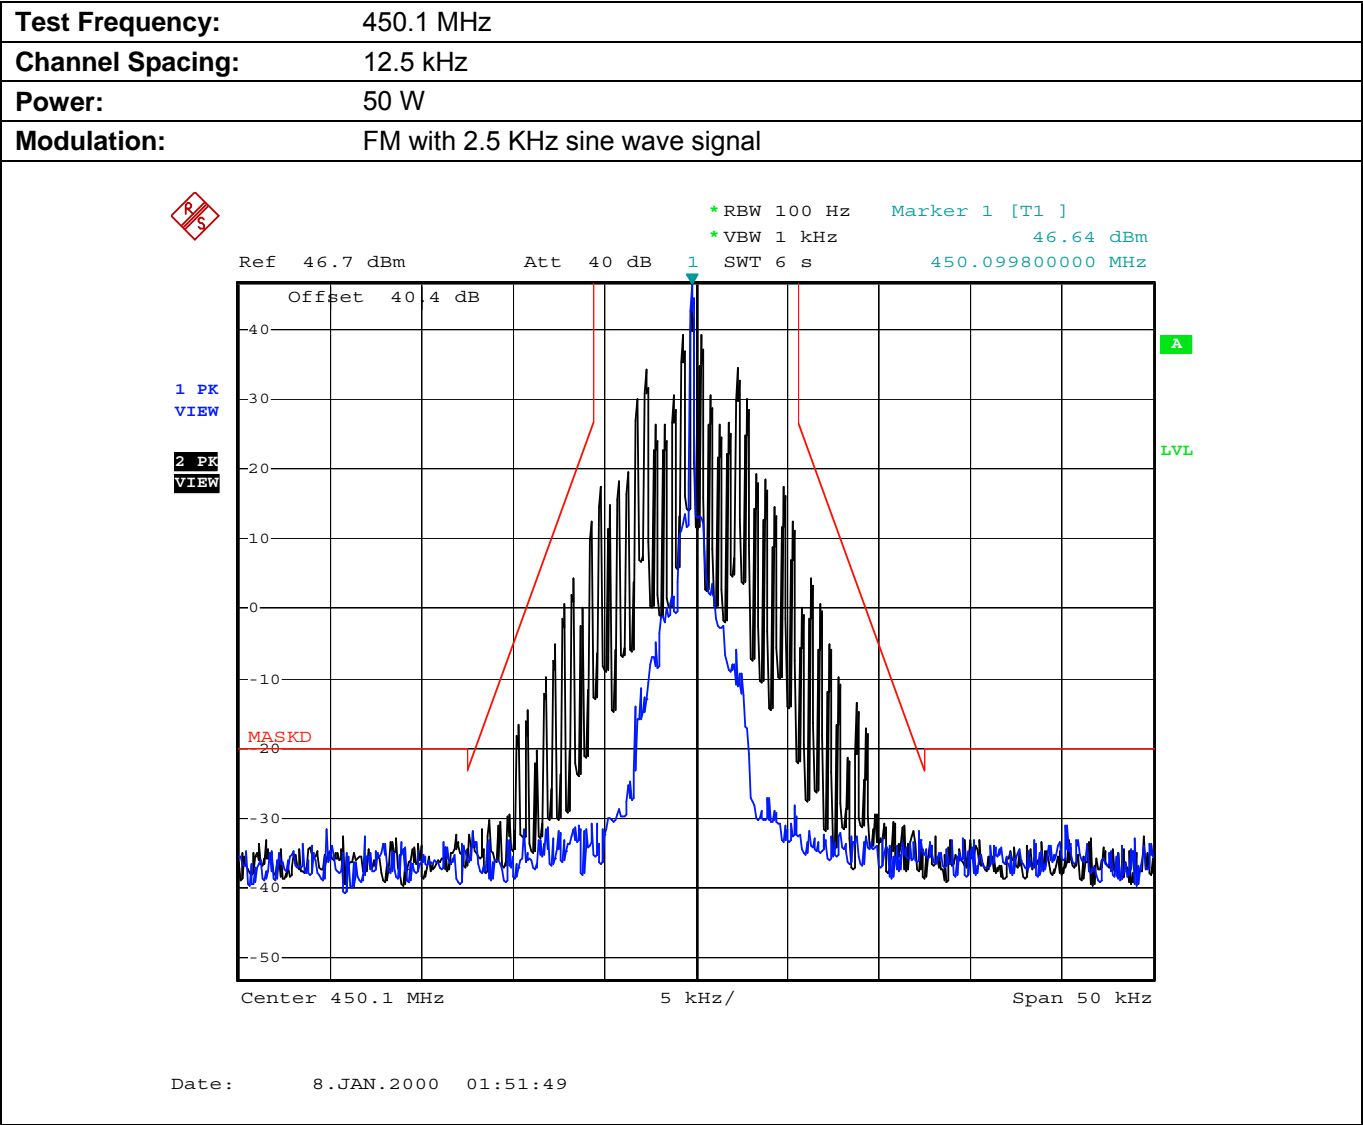


Plot 5.8.4.2.2. Emission Mask D, High Power

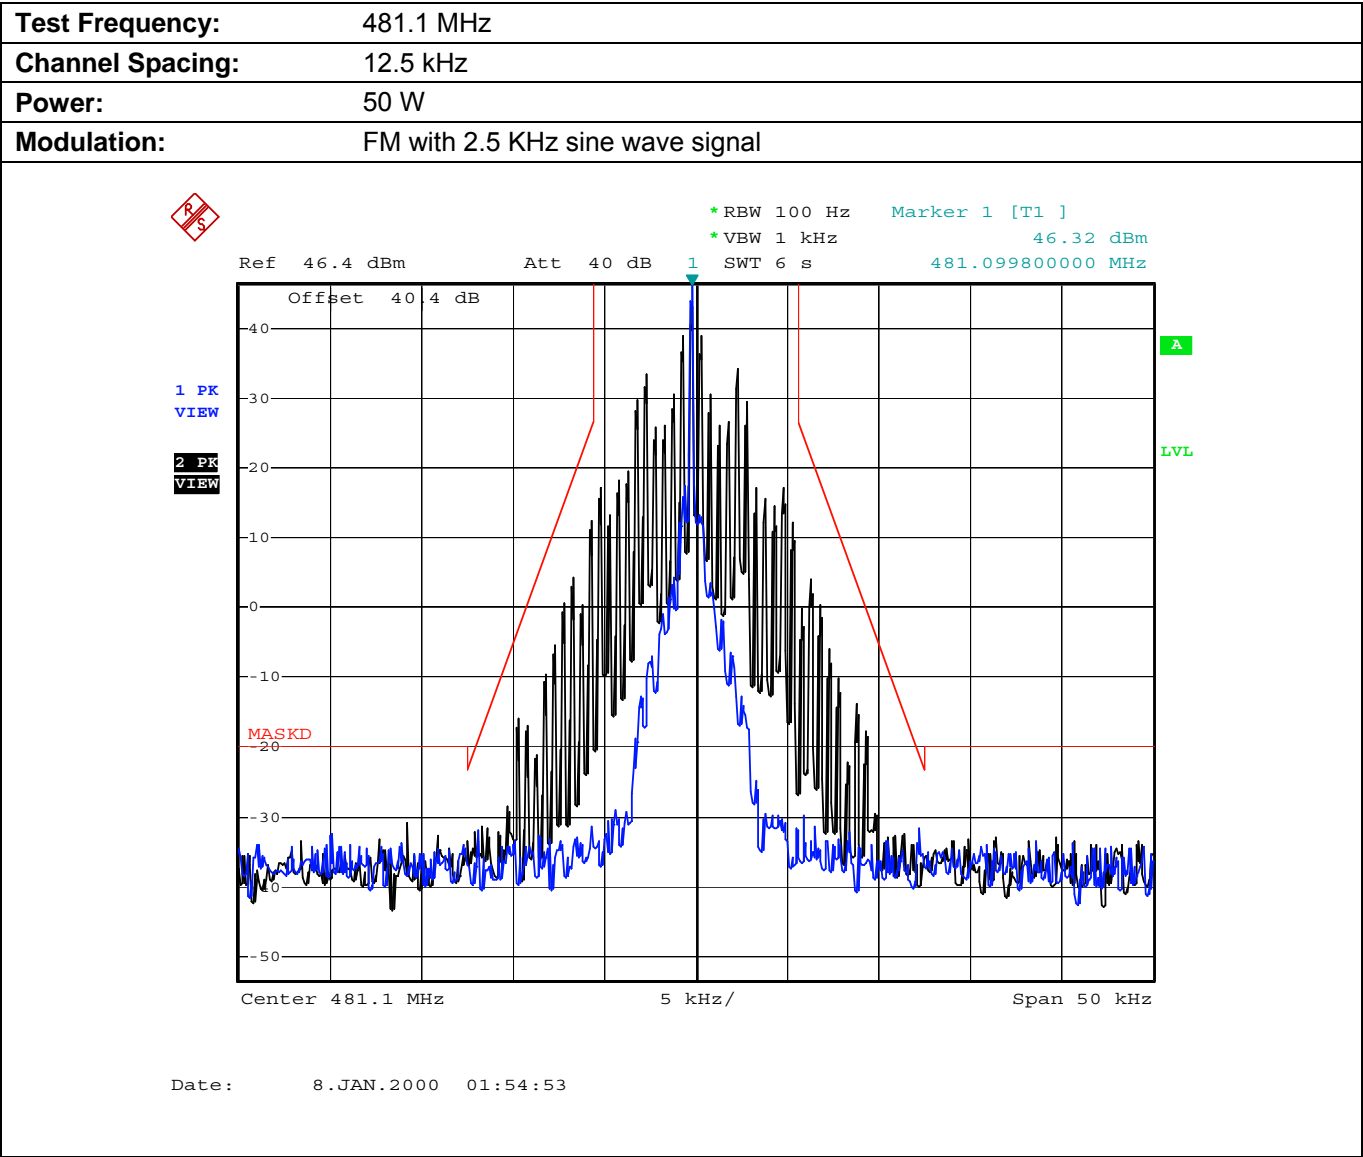


Plot 5.8.4.2.3. Emission Mask D, High Power

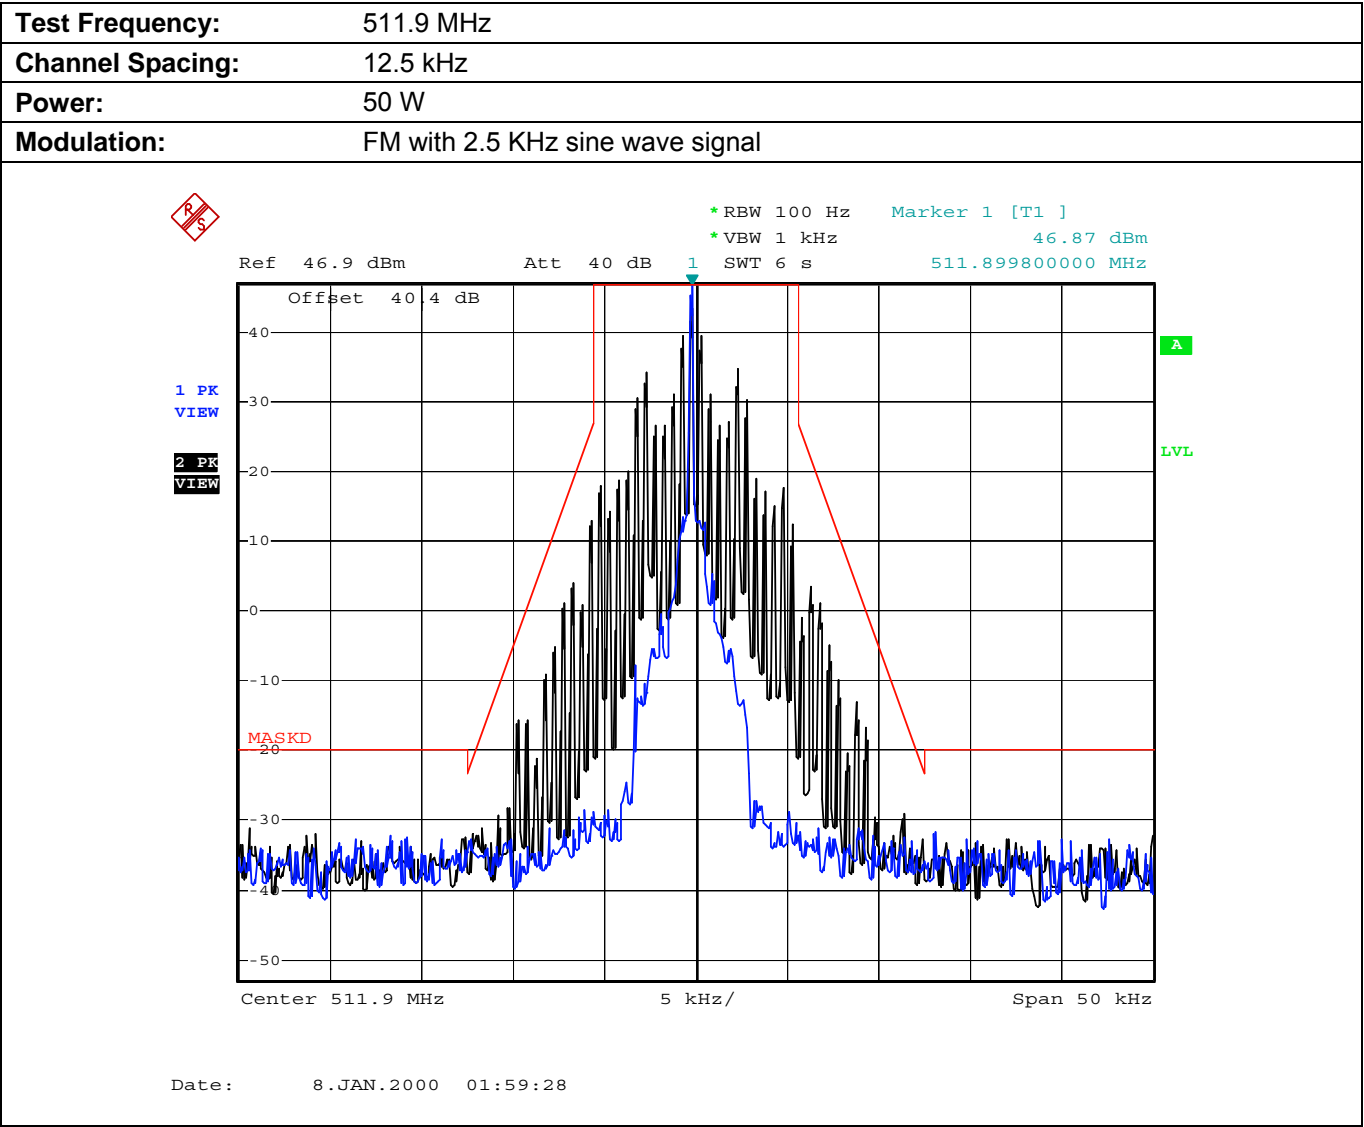


Plot 5.8.4.2.4. Emission Mask D, Low Power

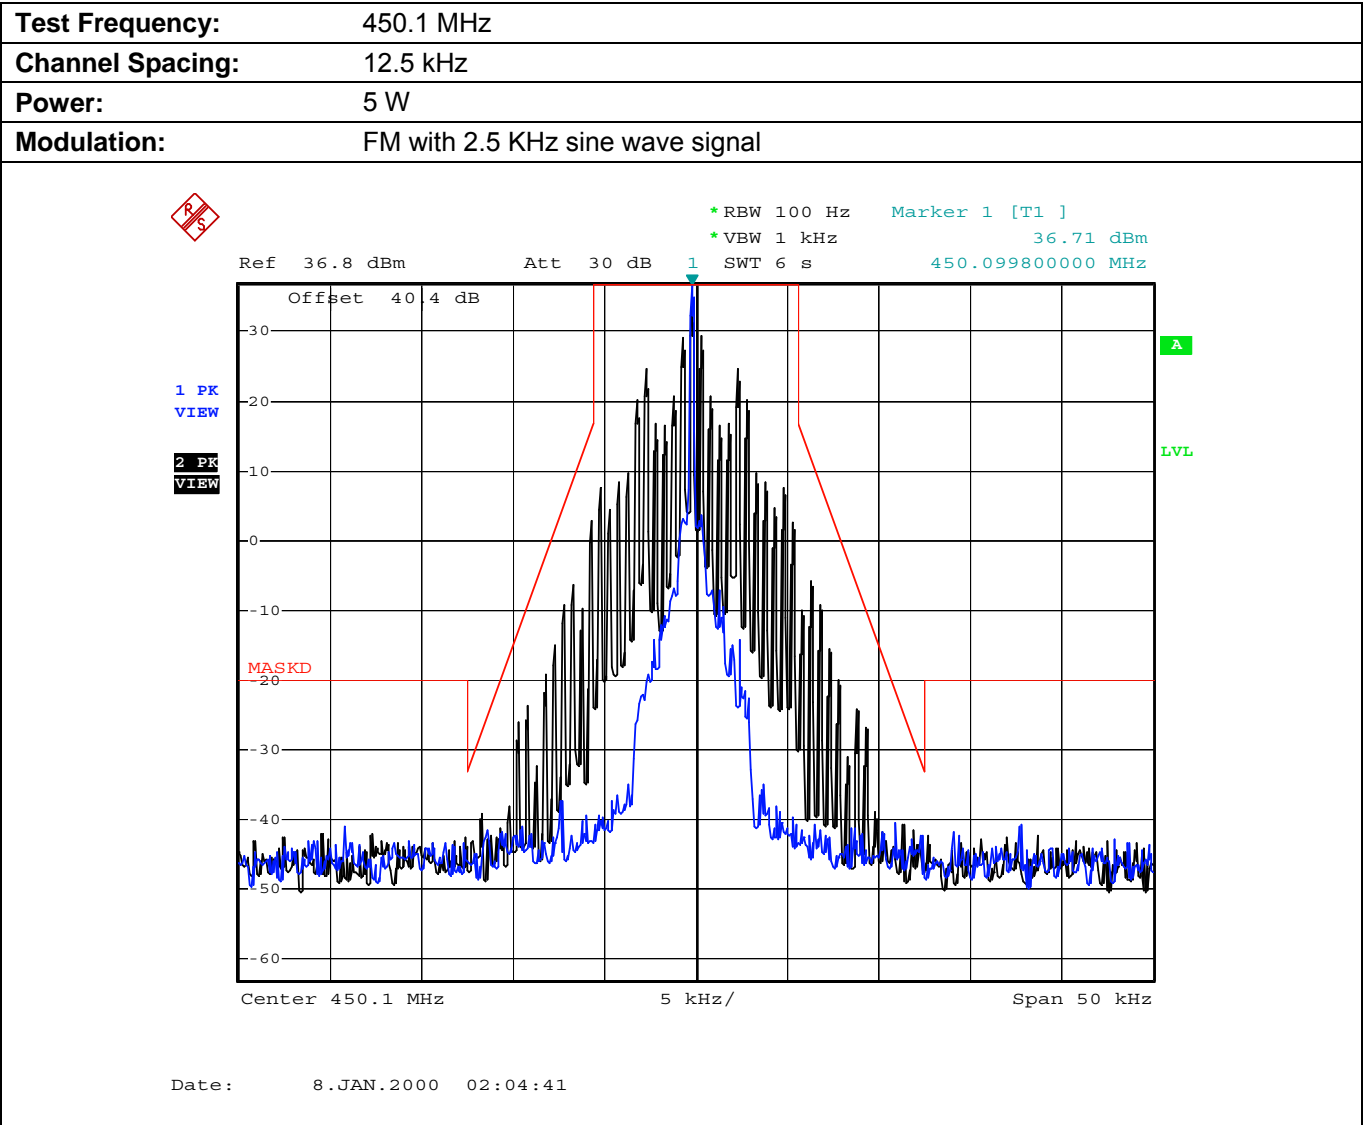


Plot 5.8.4.2.5. Emission Mask D, Low Power

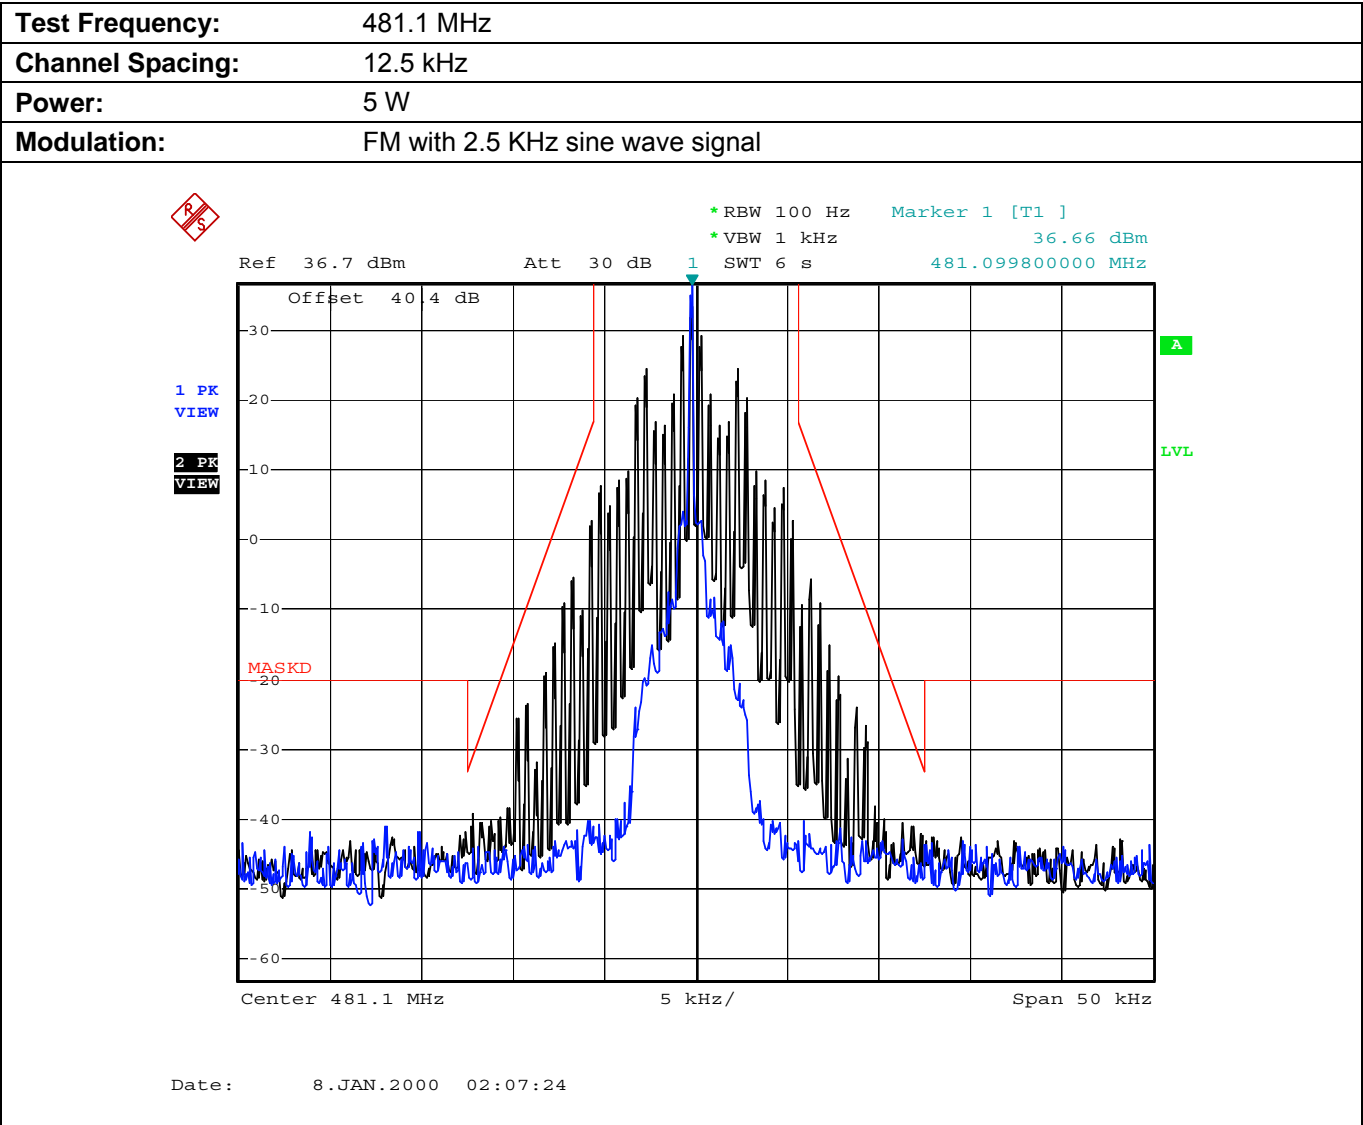


Plot 5.8.4.2.6. Emission Mask D, Low Power

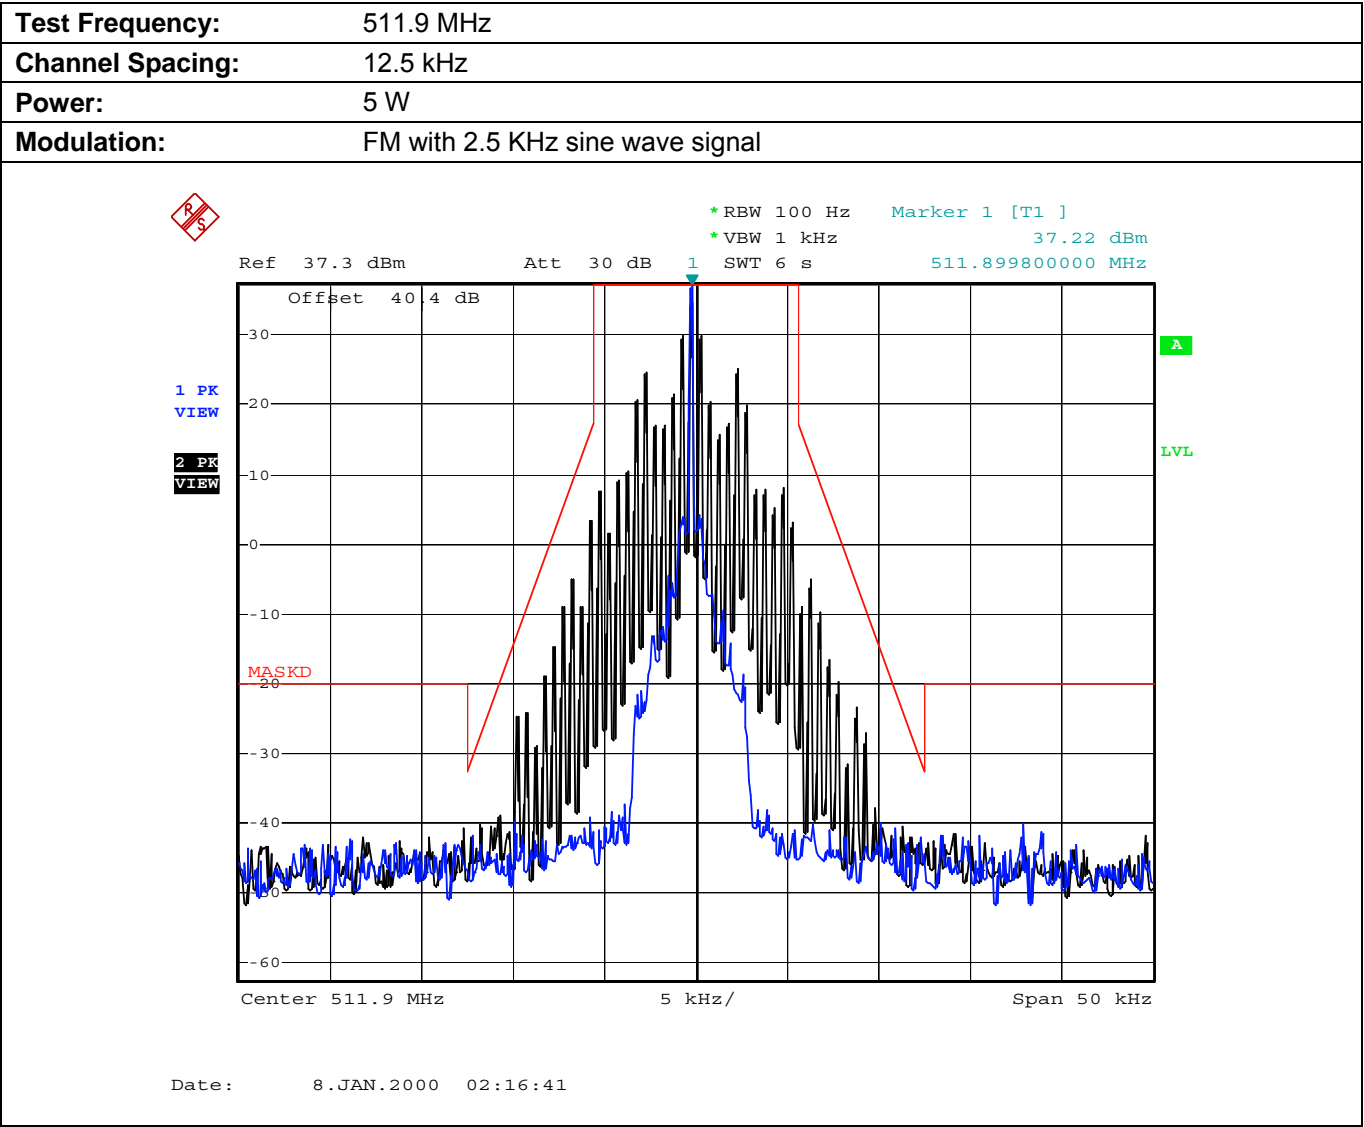


Plot 5.8.4.2.7. Emission Mask D, High Power

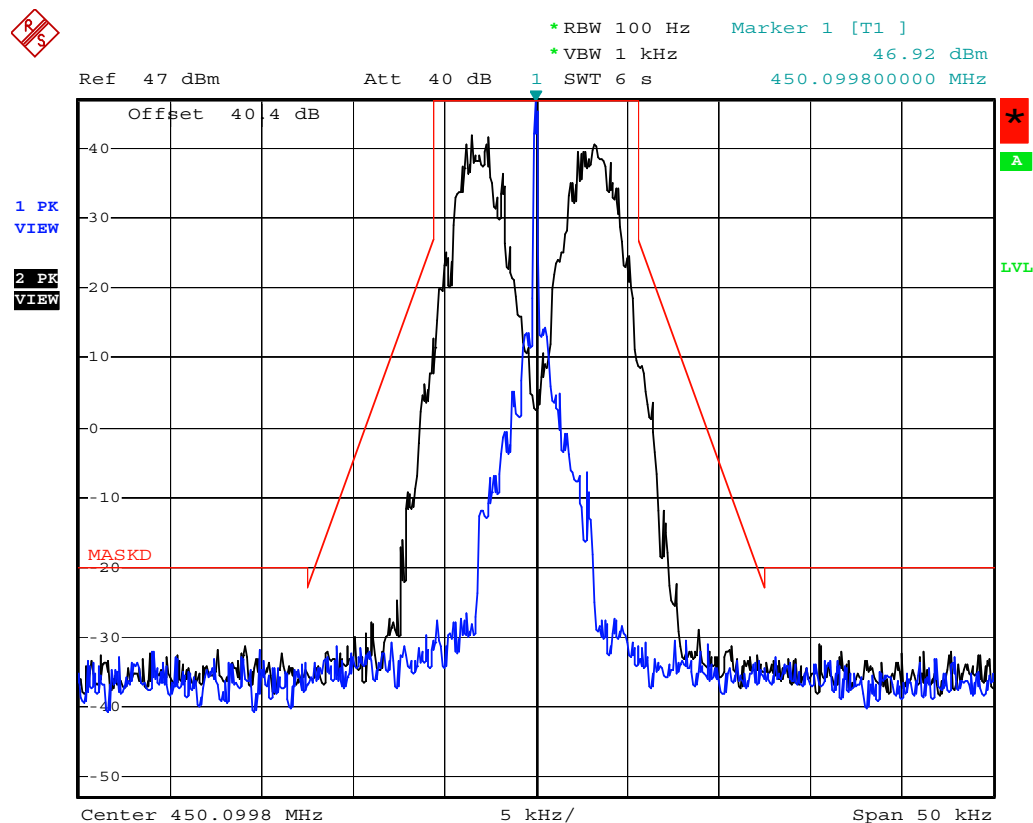


Plot 5.8.4.2.8. Emission Mask D, High Power

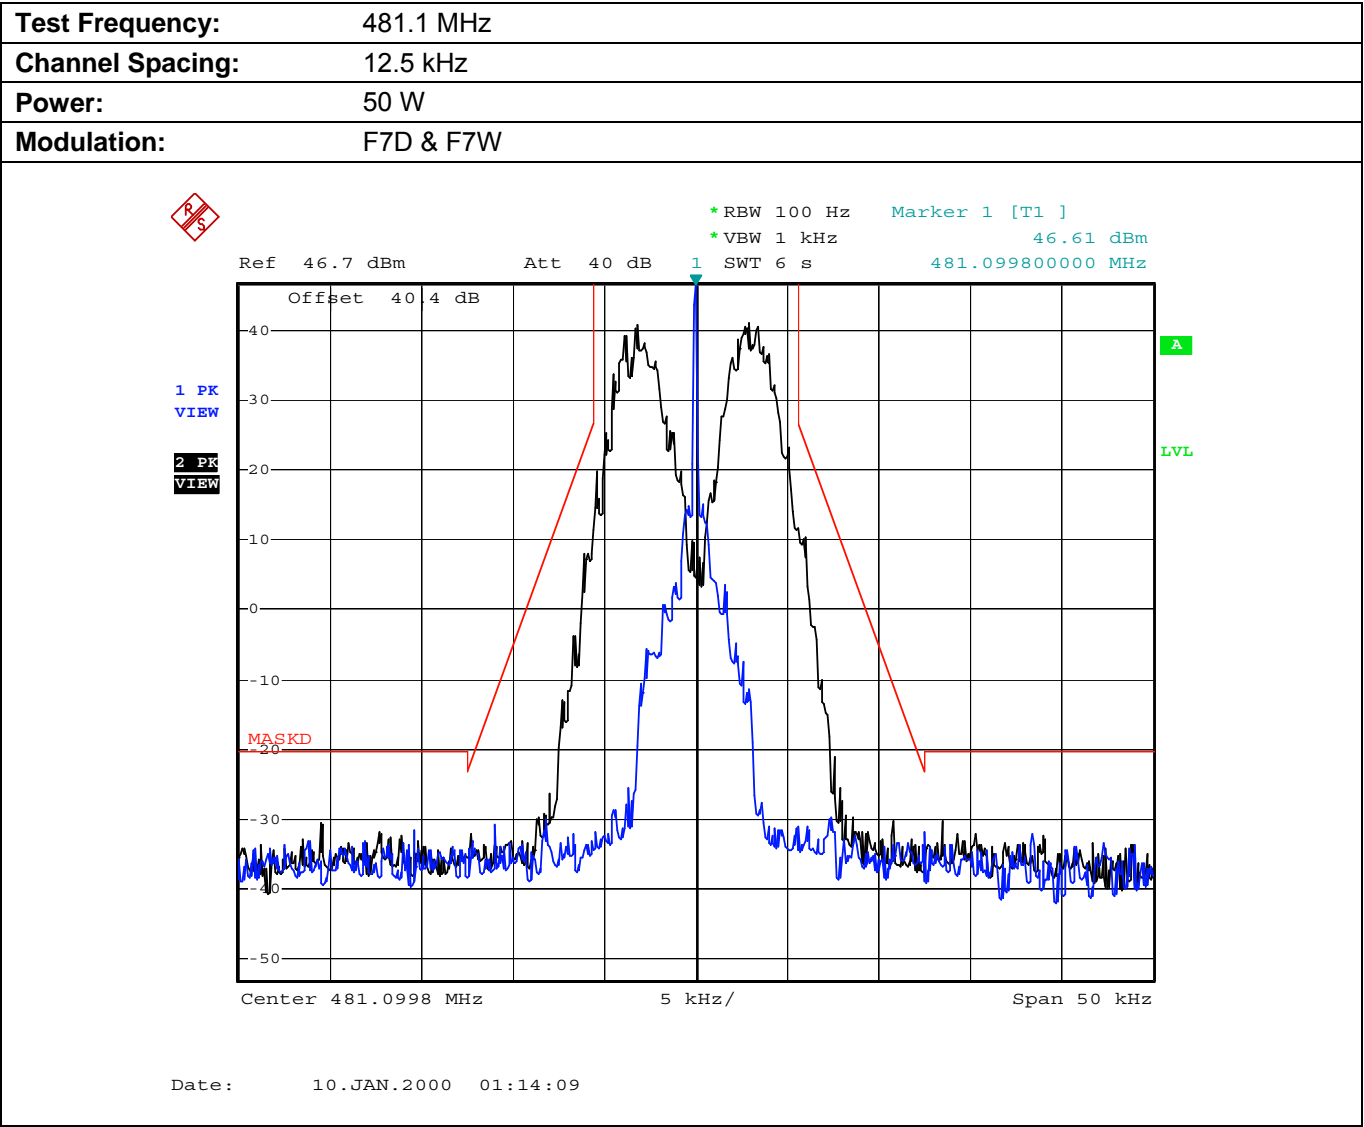


Plot 5.8.4.2.9. Emission Mask D, High Power

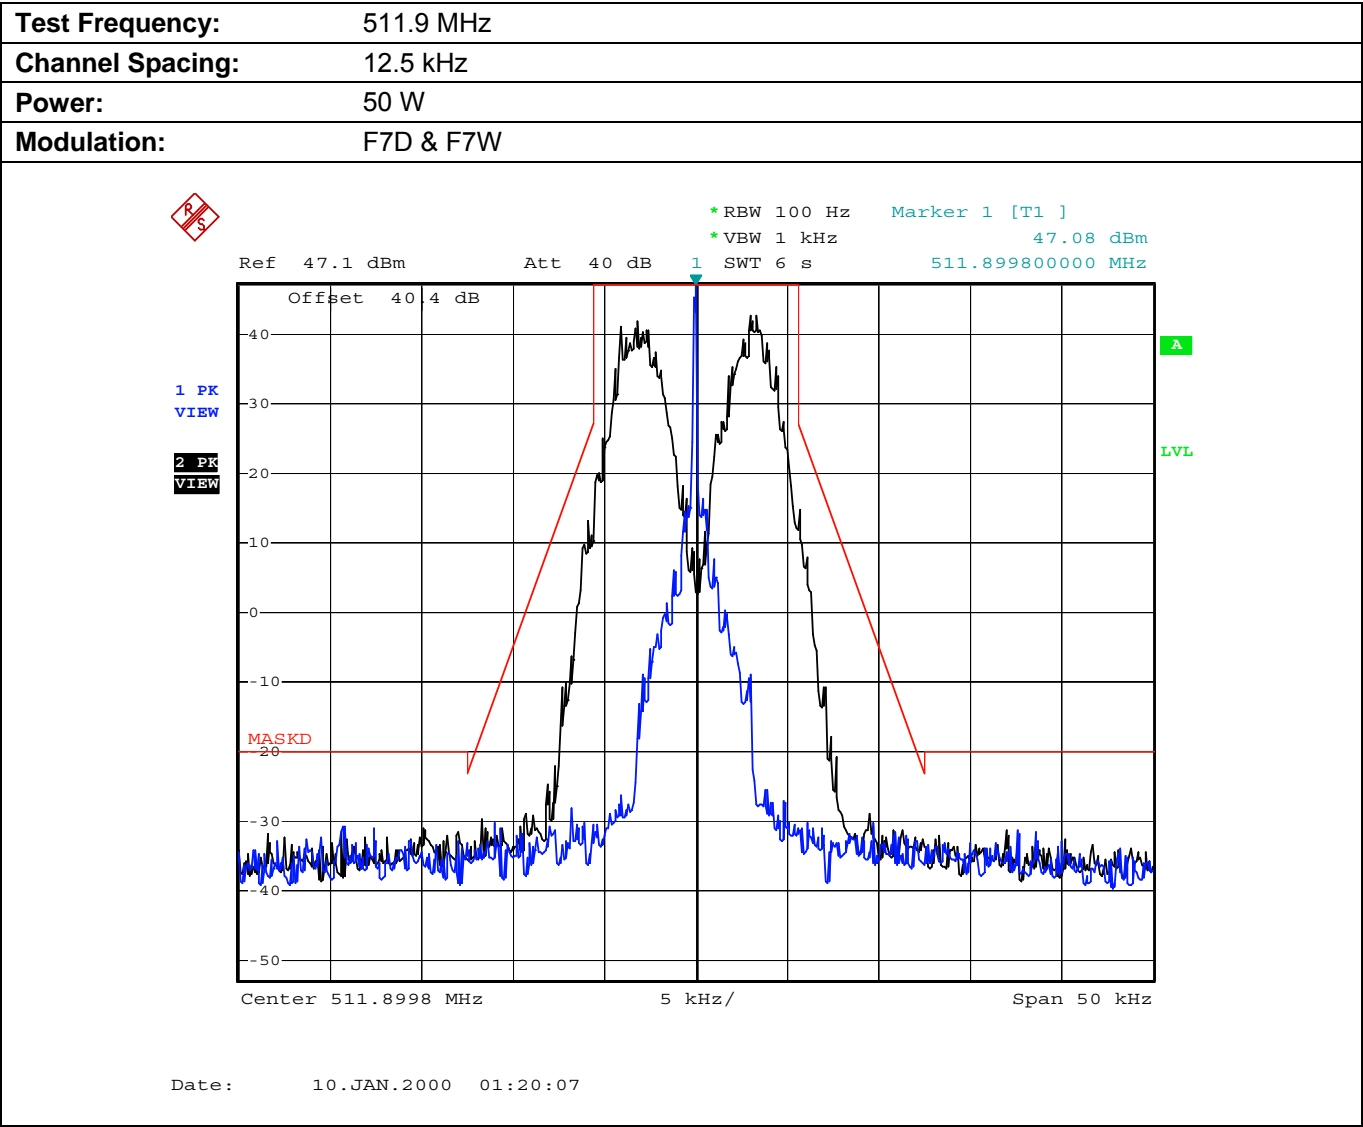


Plot 5.8.4.2.10. Emission Mask D, Low Power

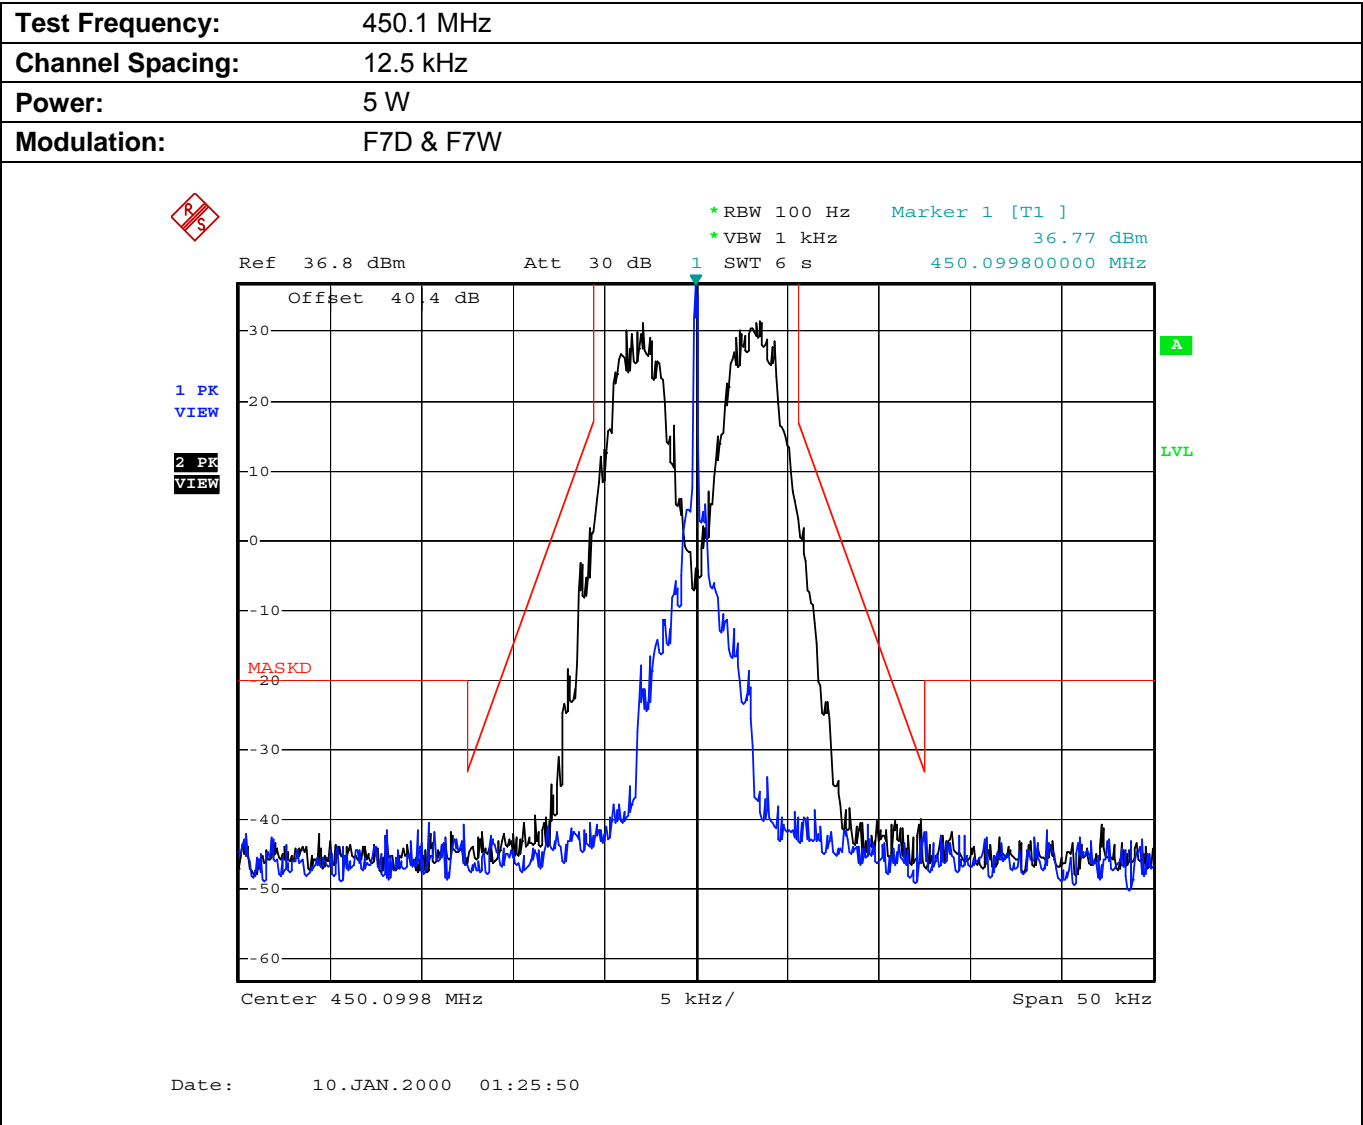

Plot 5.8.4.2.11. Emission Mask D, Low Power

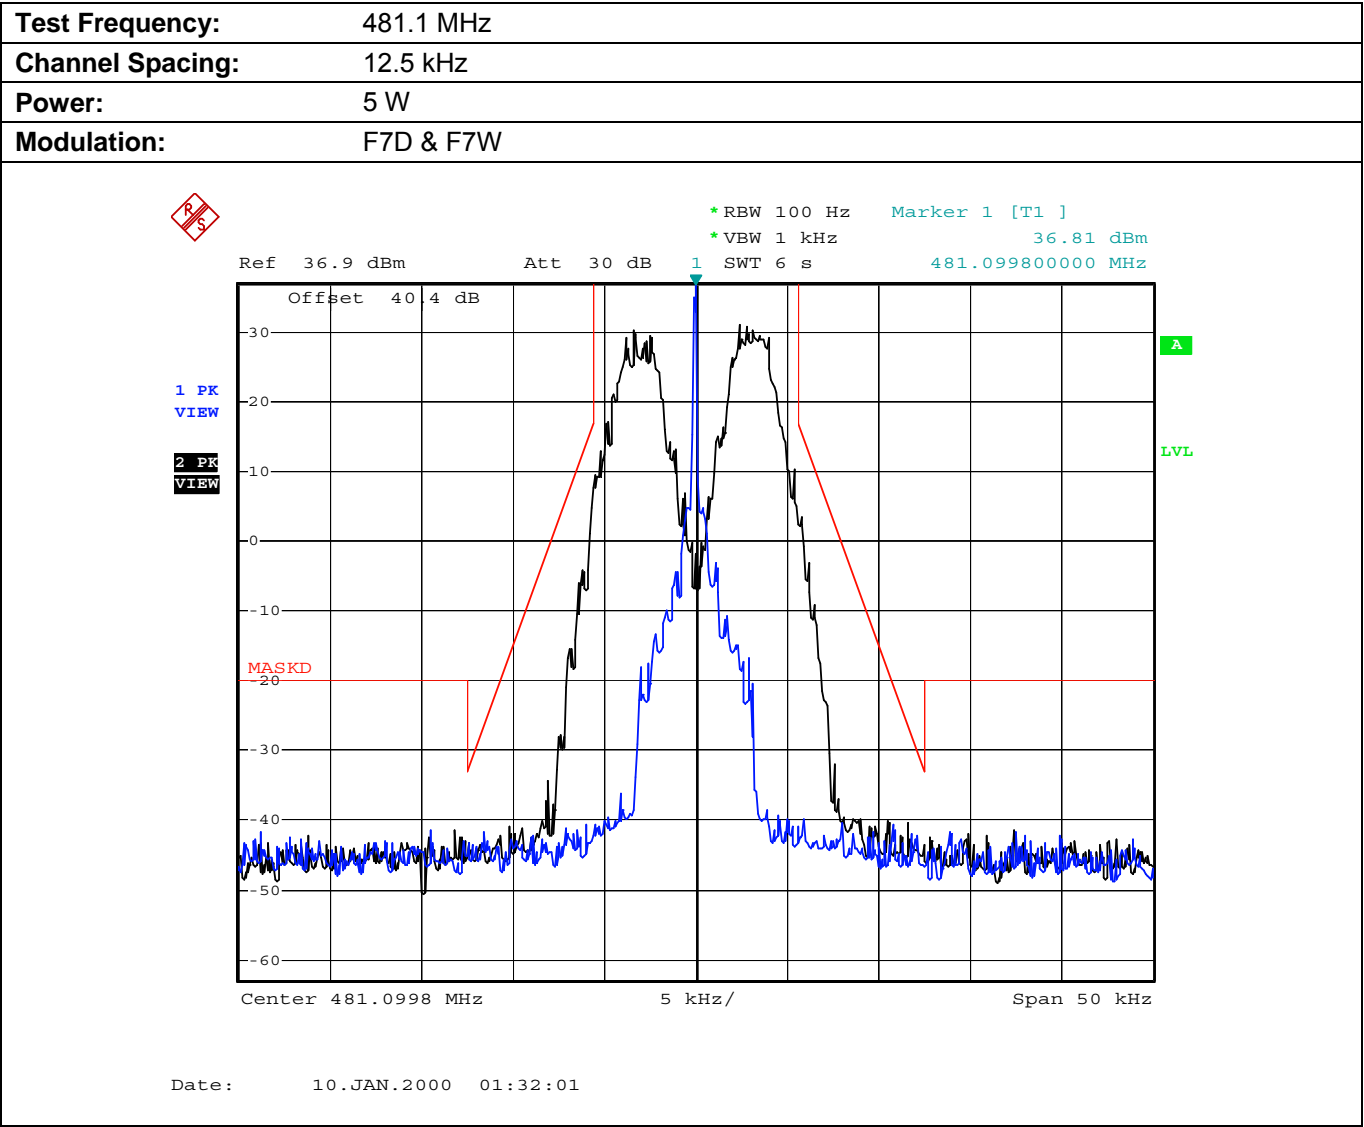


Plot 5.8.4.2.12. Emission Mask D, Low Power

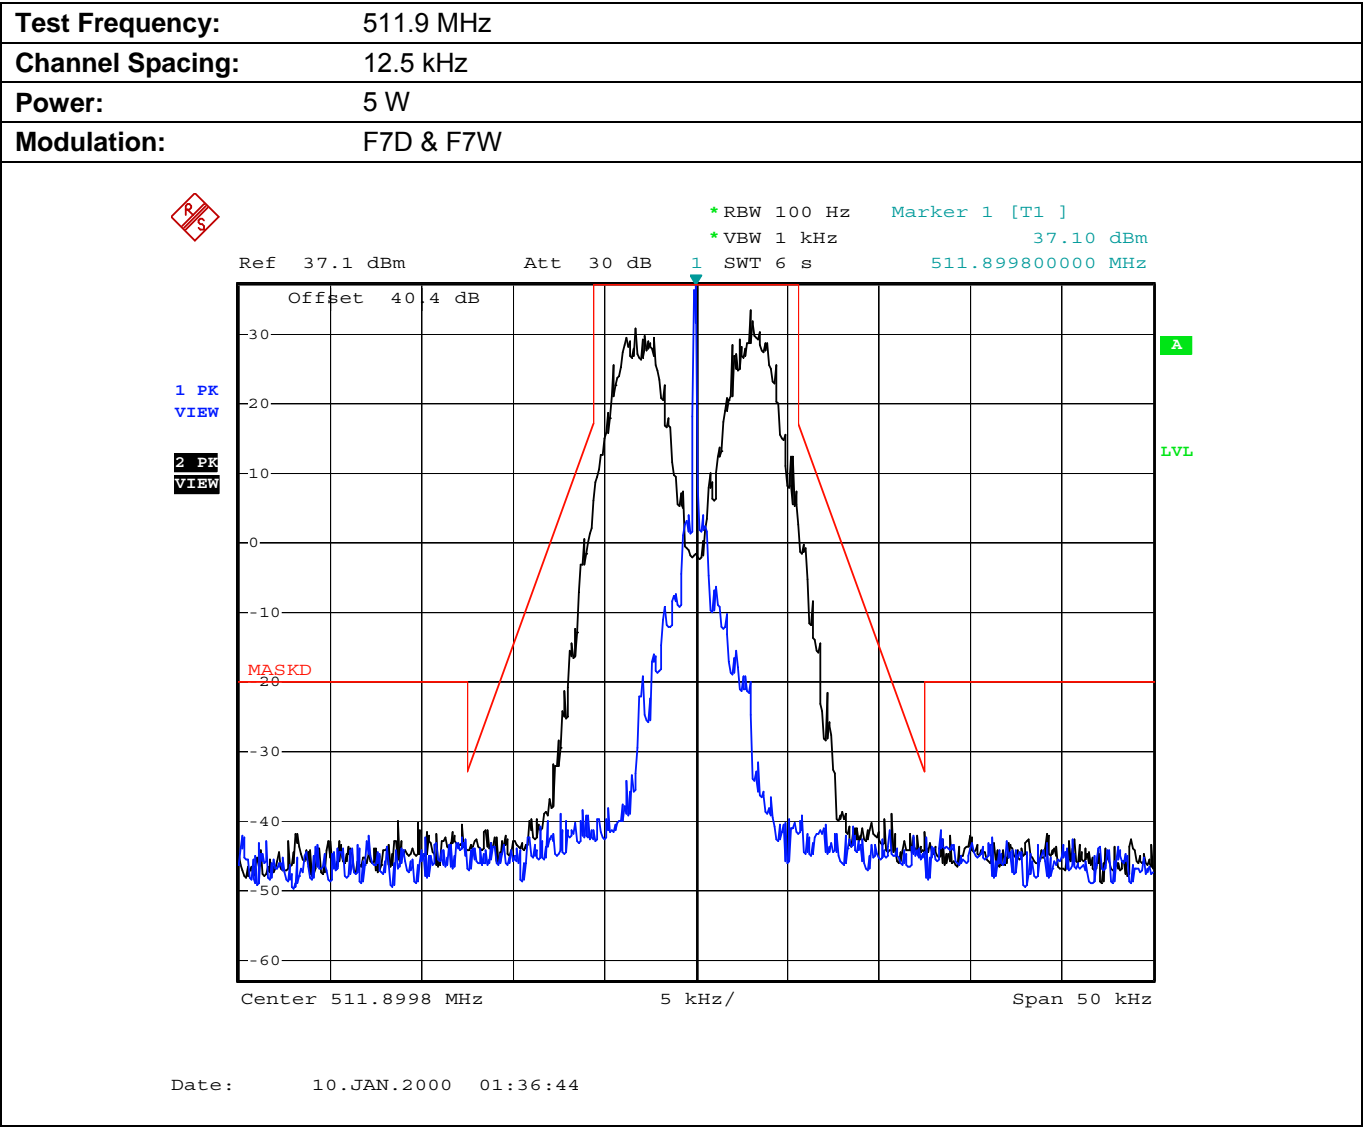


Plot 5.8.4.2.13. Emission Mask D, High Power

Test Frequency:	450.1 MHz
Channel Spacing:	12.5 kHz
Power:	50 W
Modulation:	F7E

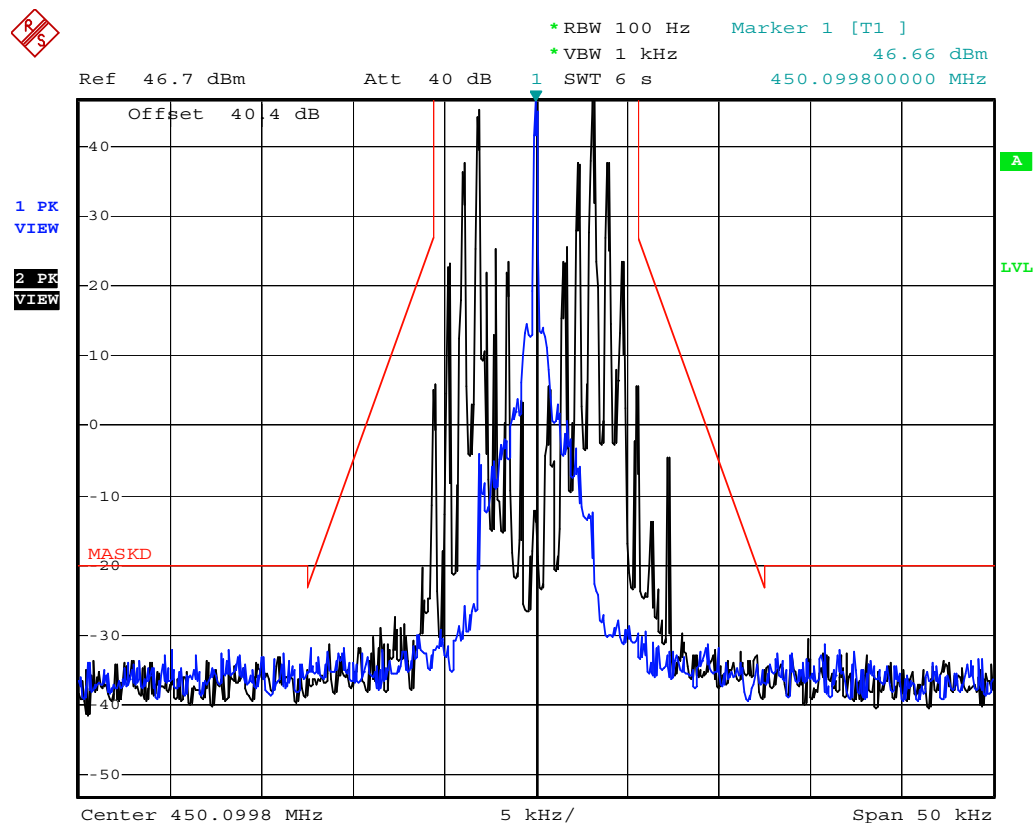


Date: 10.JAN.2000 02:13:46


Plot 5.8.4.2.14. Emission Mask D, High Power

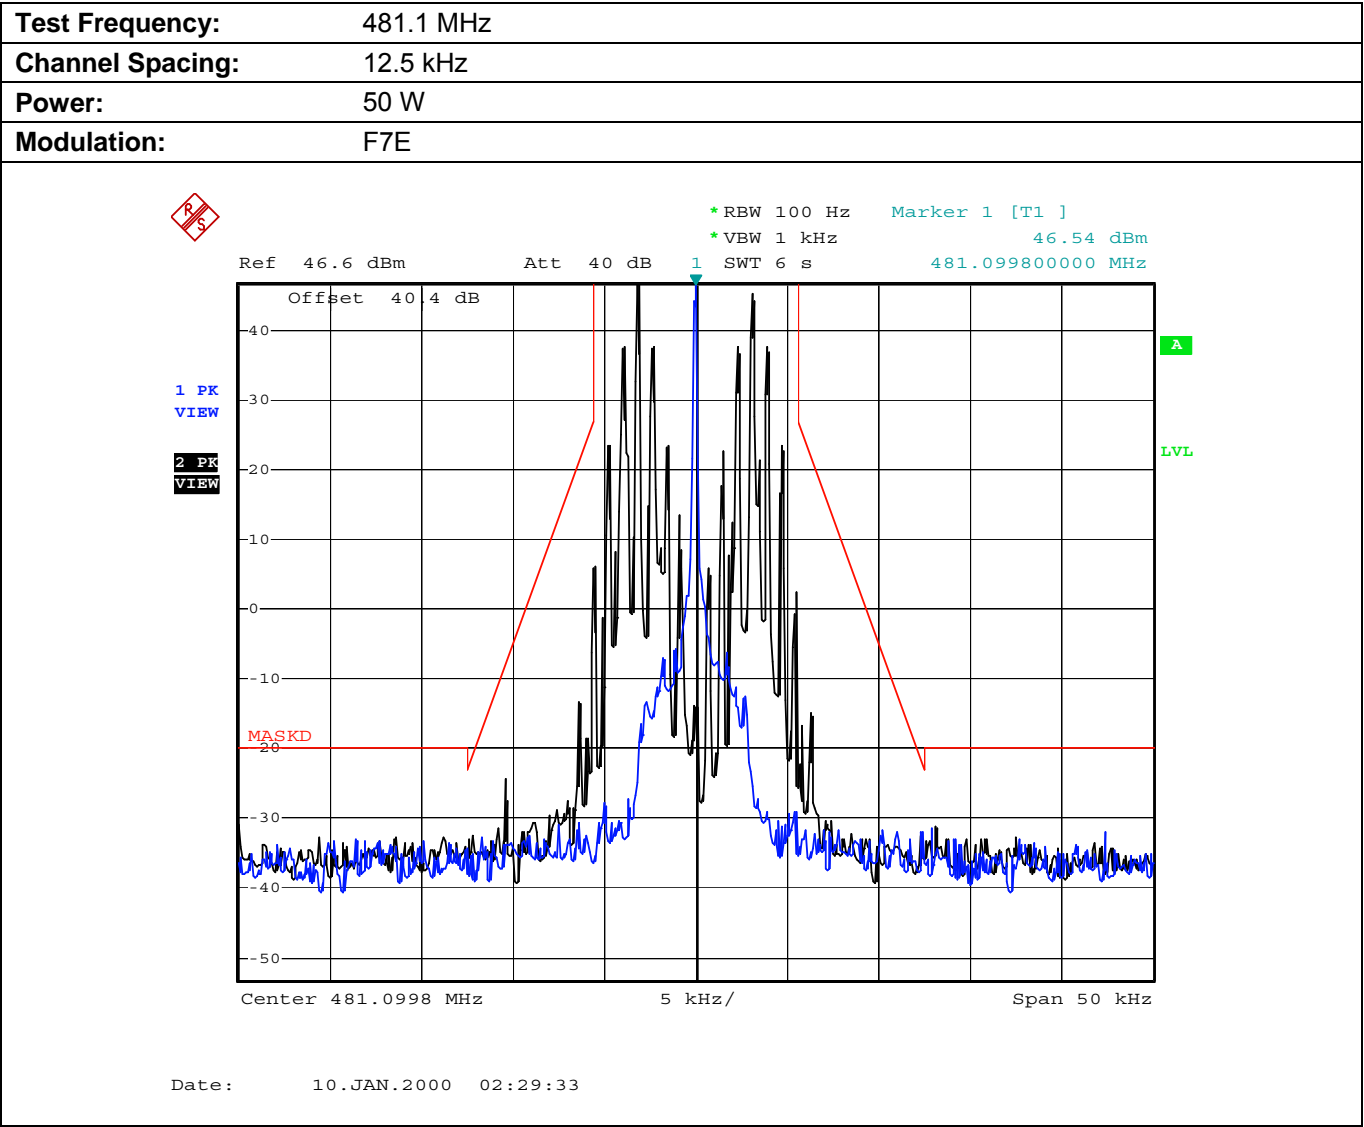


Plot 5.8.4.2.15. Emission Mask D, High Power

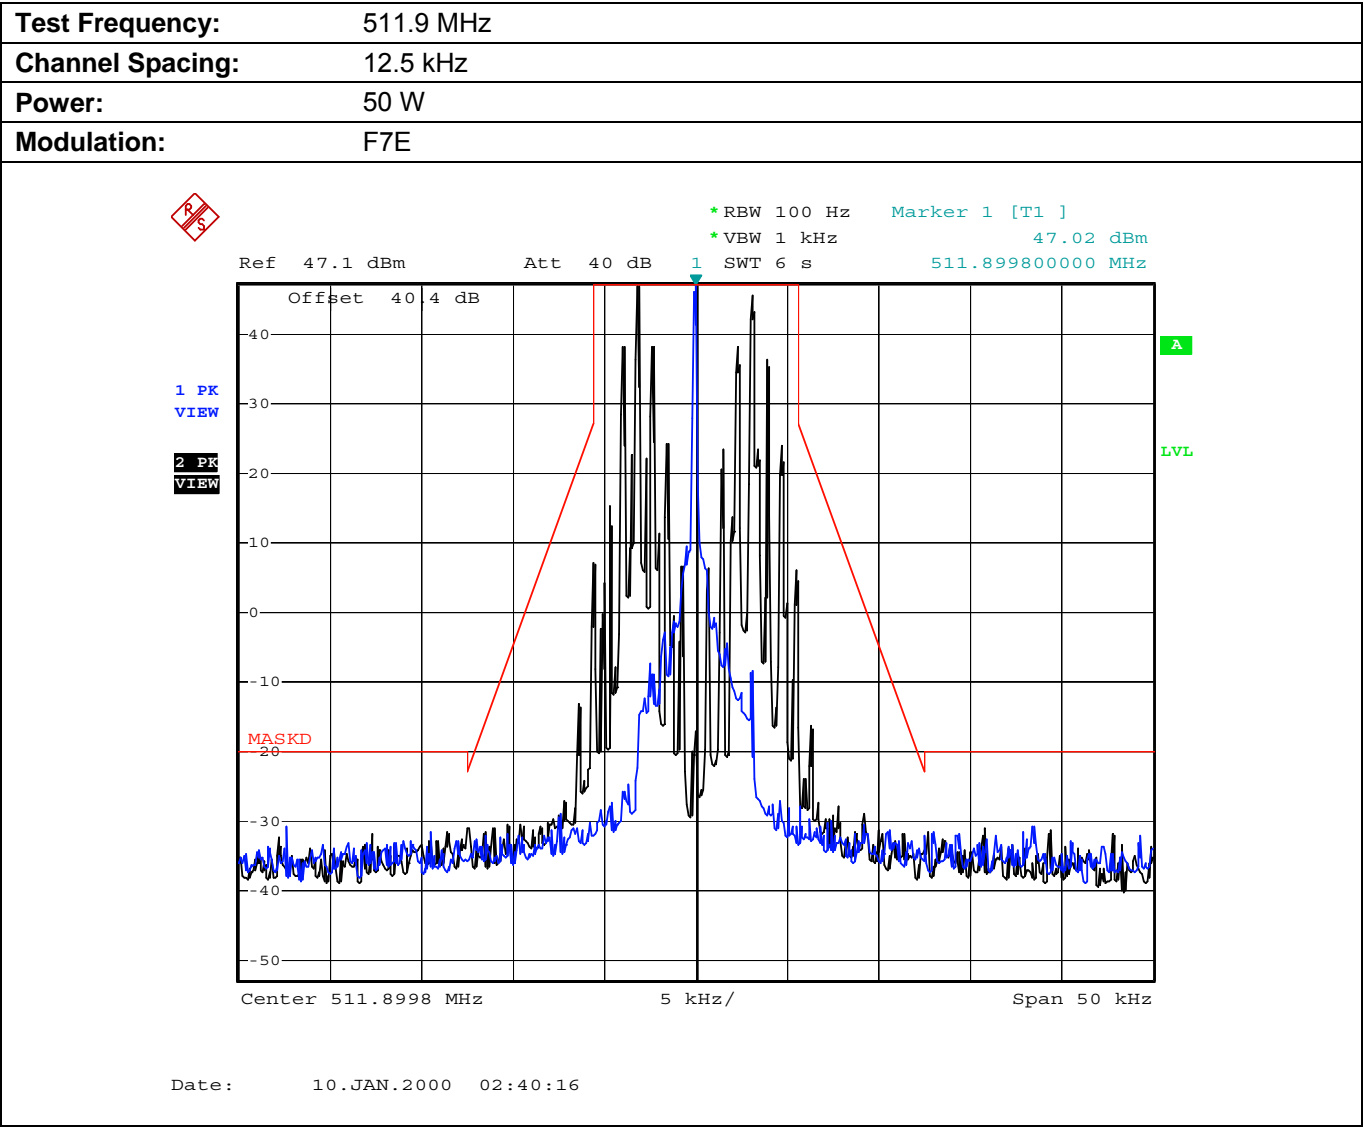


Plot 5.8.4.2.16. Emission Mask D, Low Power

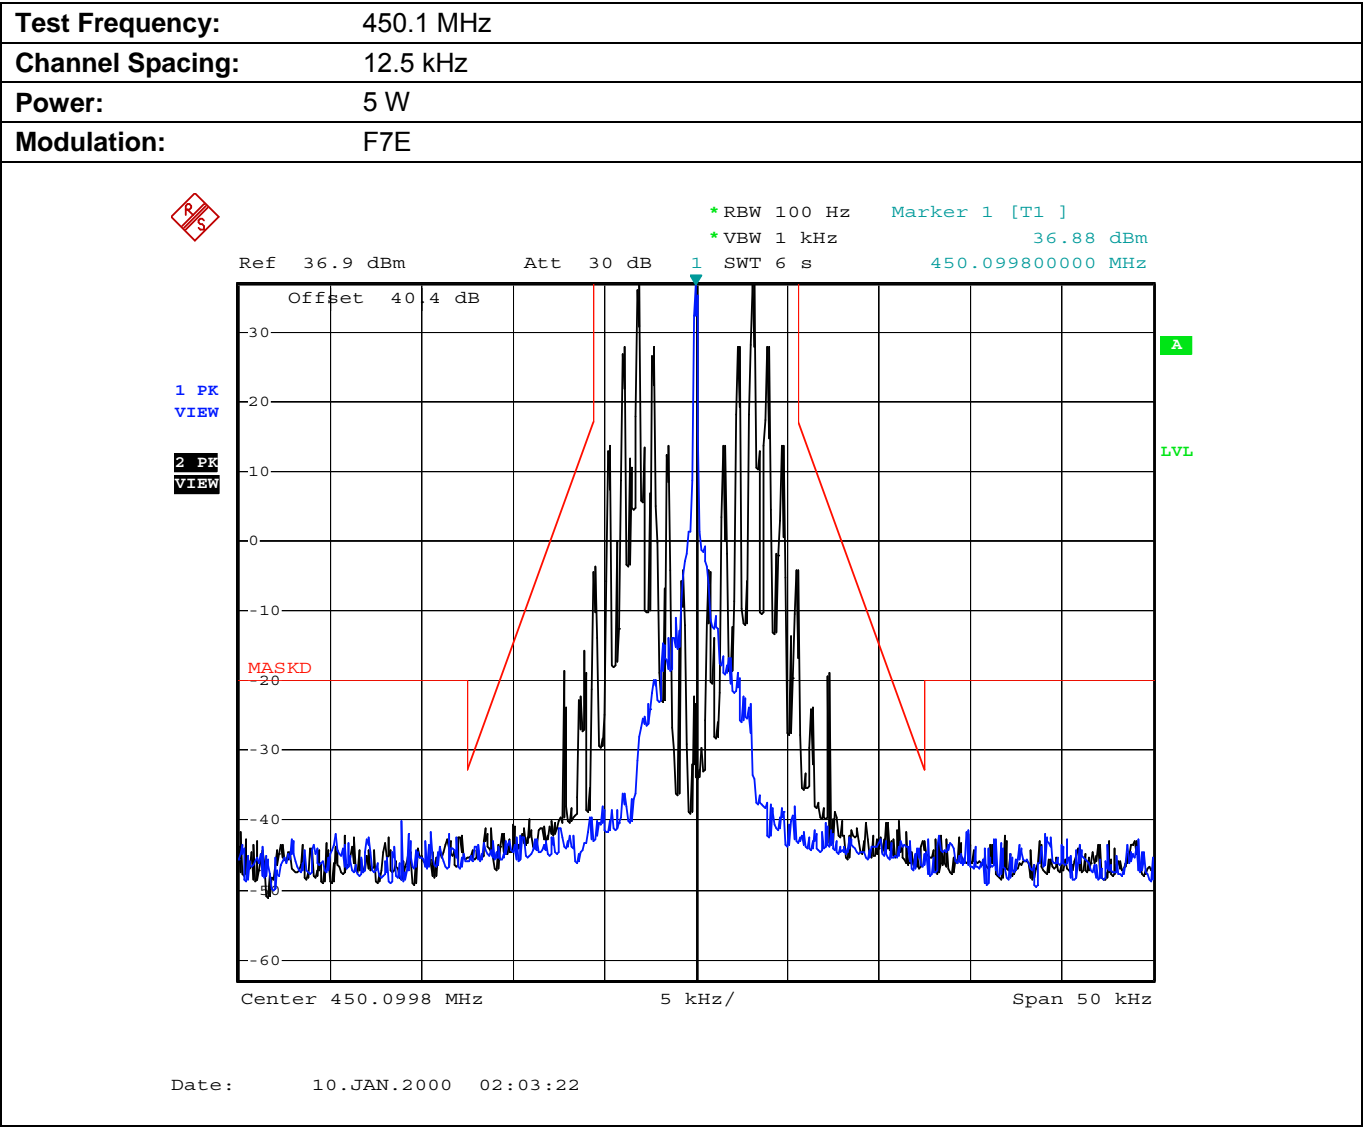


Plot 5.8.4.2.17. Emission Mask D, Low Power

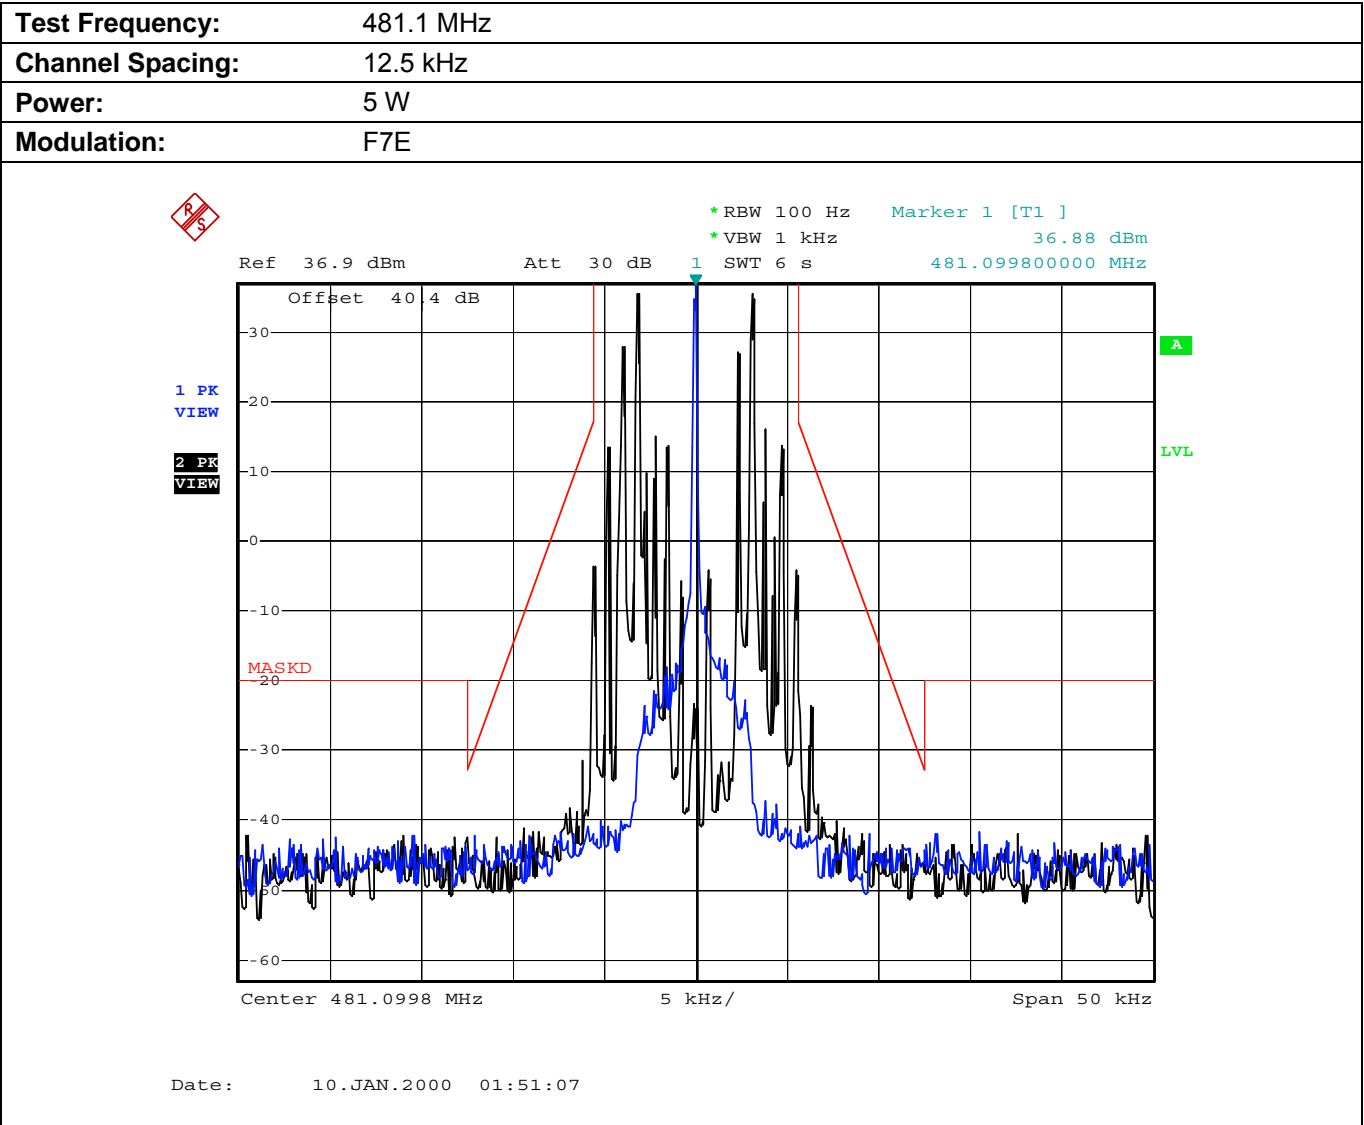


Plot 5.8.4.2.18. Emission Mask D, Low Power

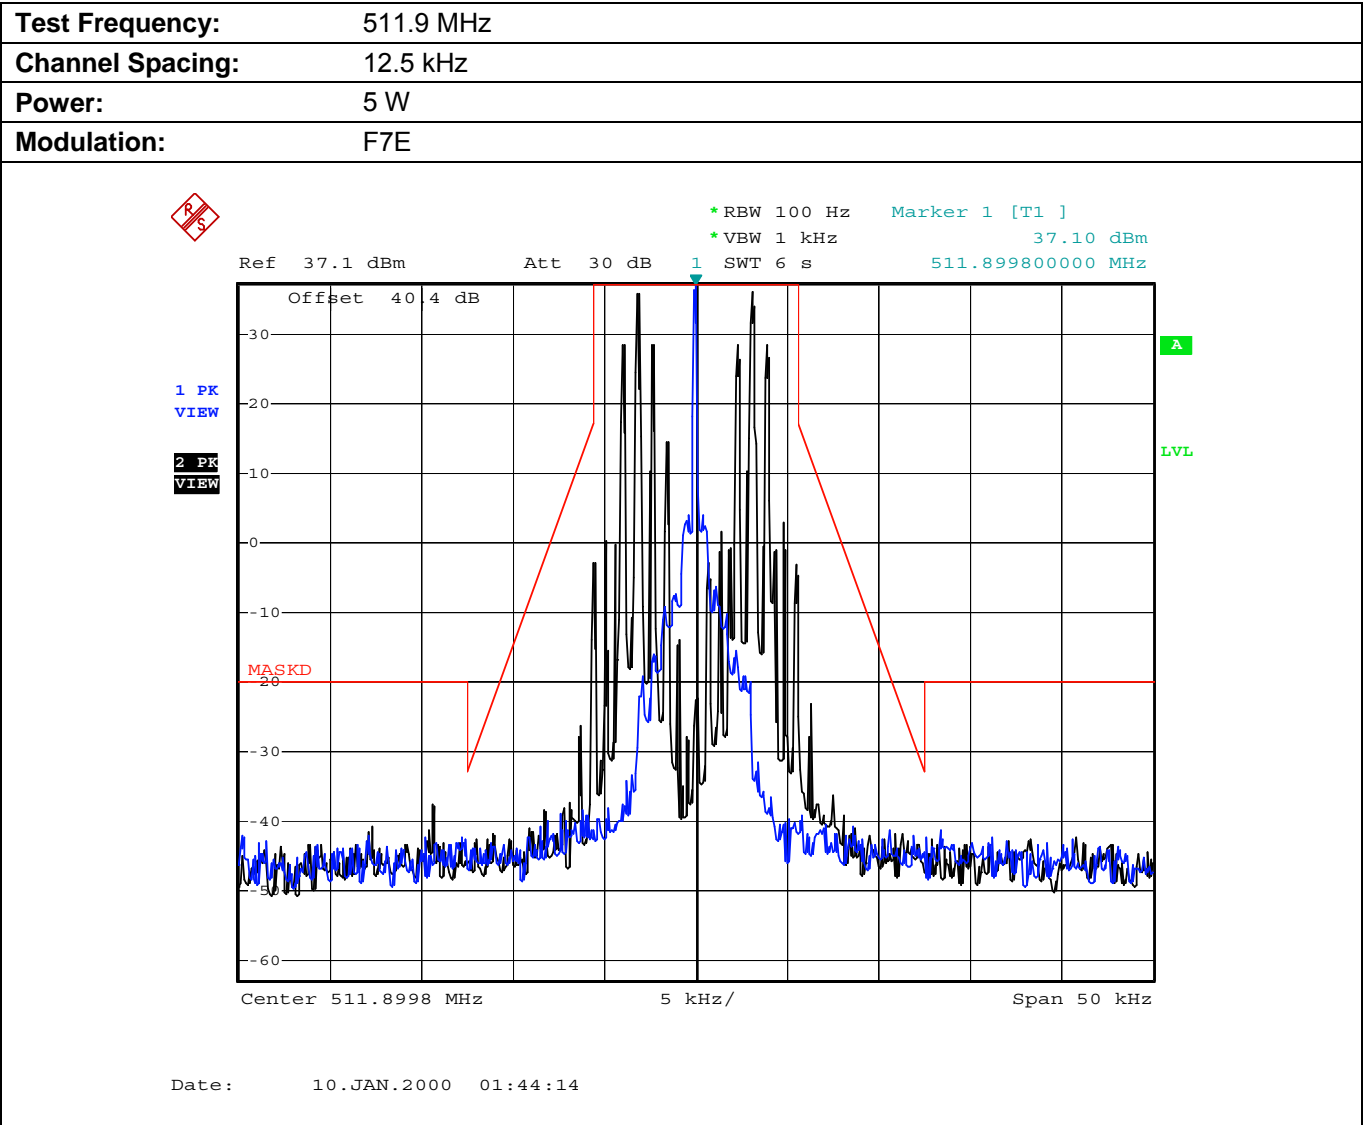


Plot 5.8.4.3.2. Emission Mask B, High Power

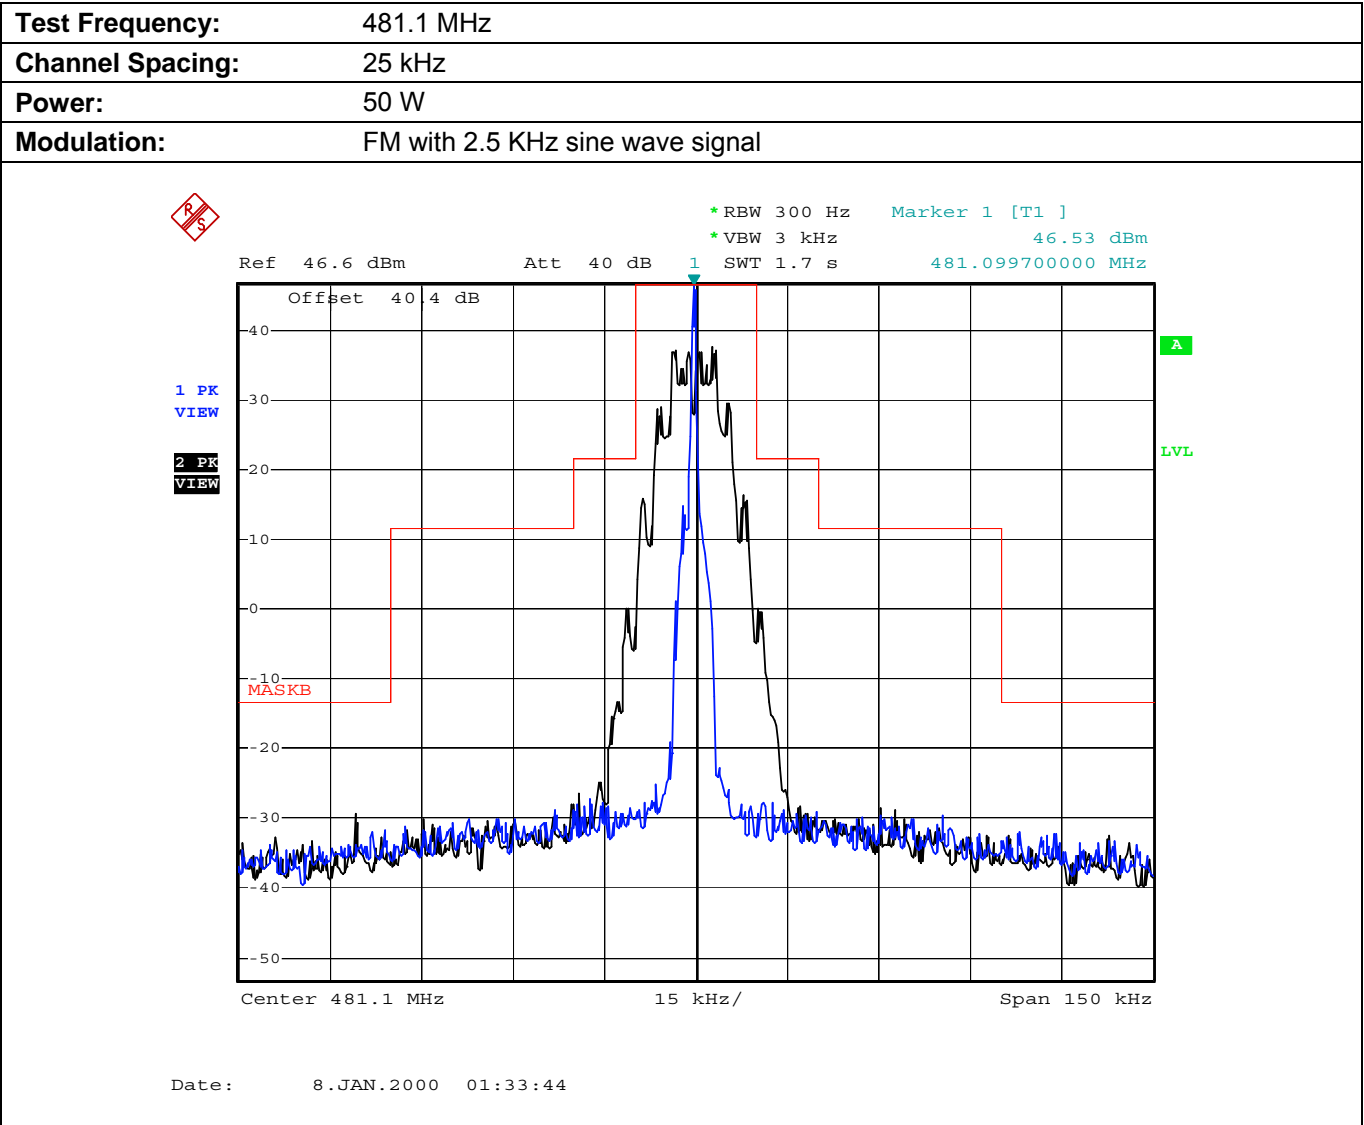


Plot 5.8.4.3.3. Emission Mask B, High Power

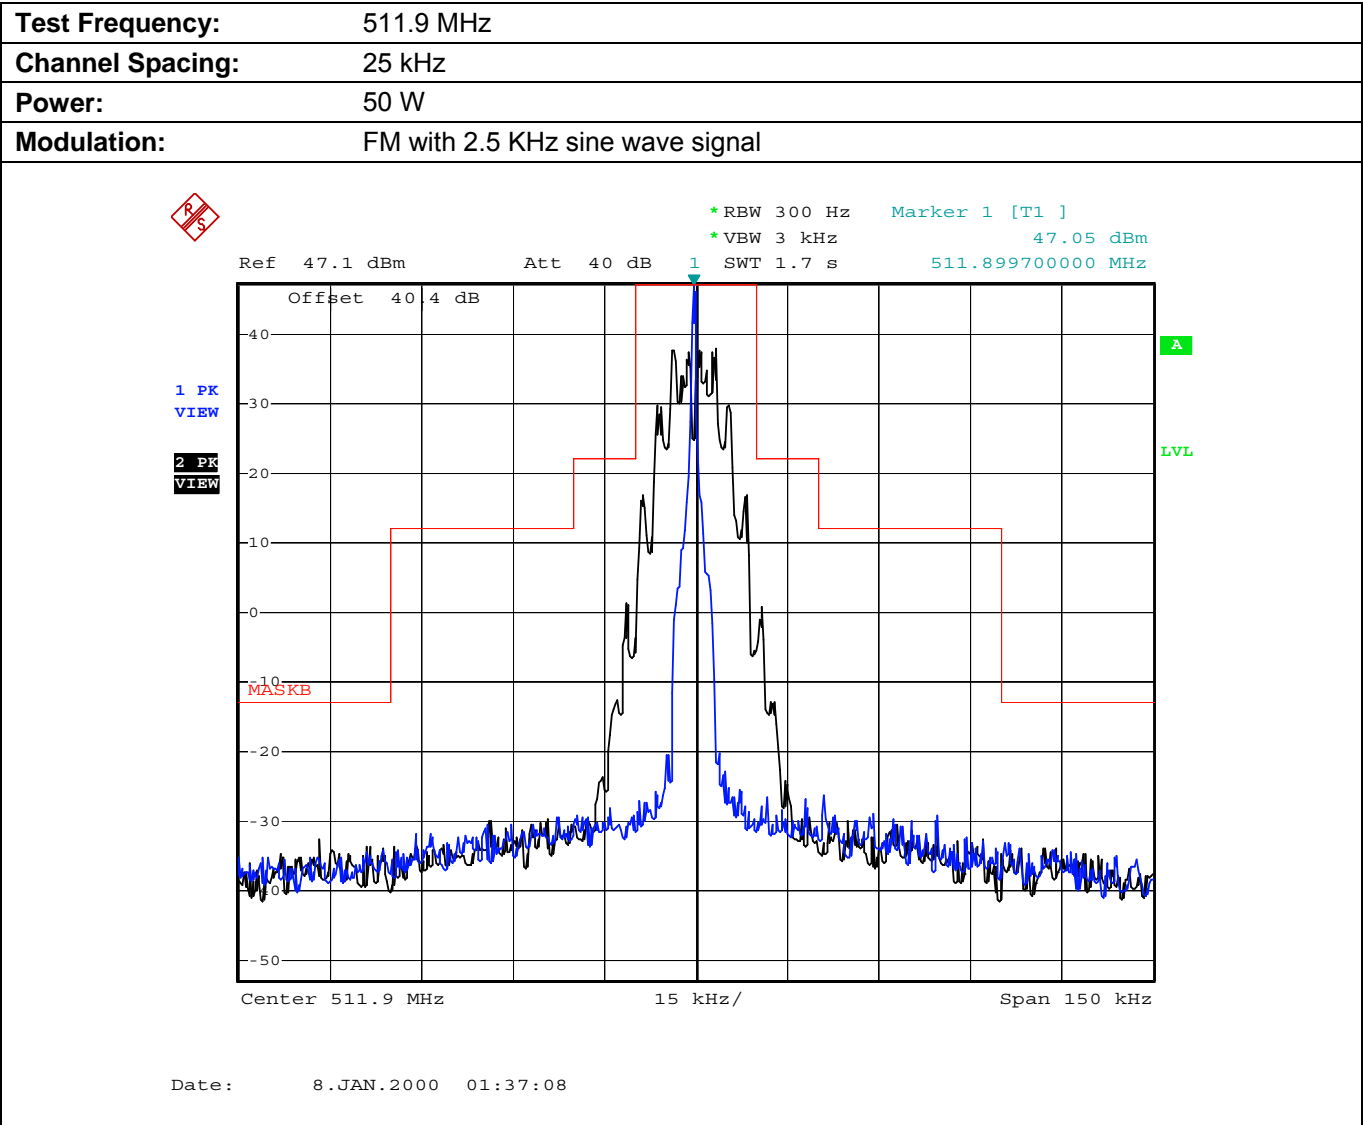


Plot 5.8.4.3.4. Emission Mask B, Low Power

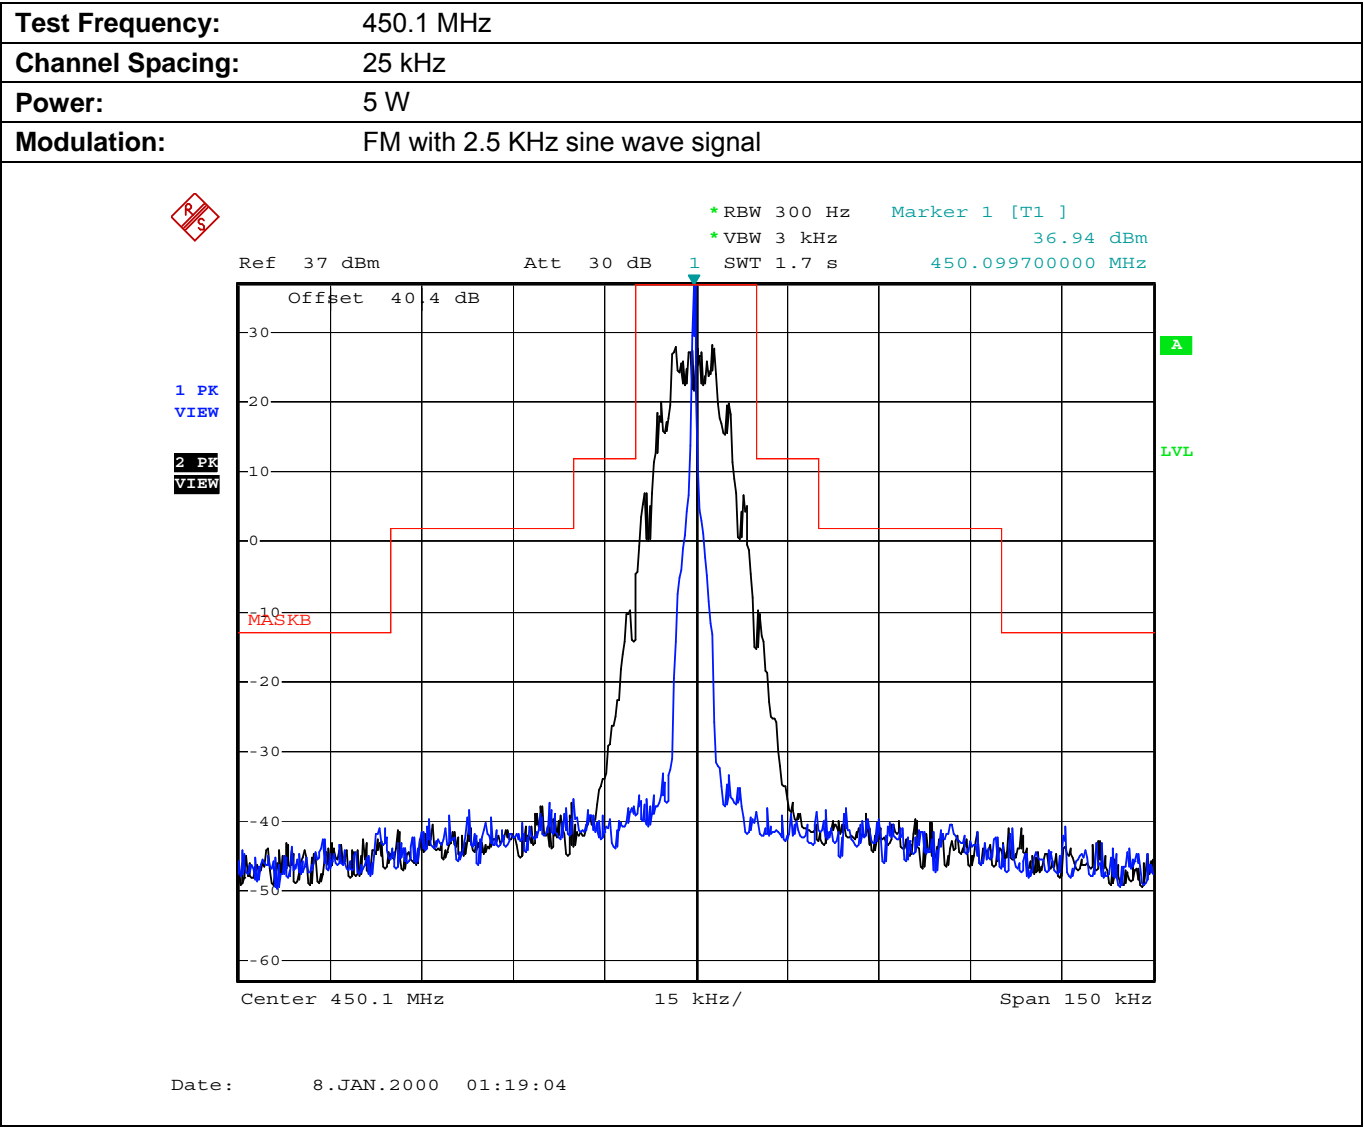

Plot 5.8.4.3.5. Emission Mask B, Low Power

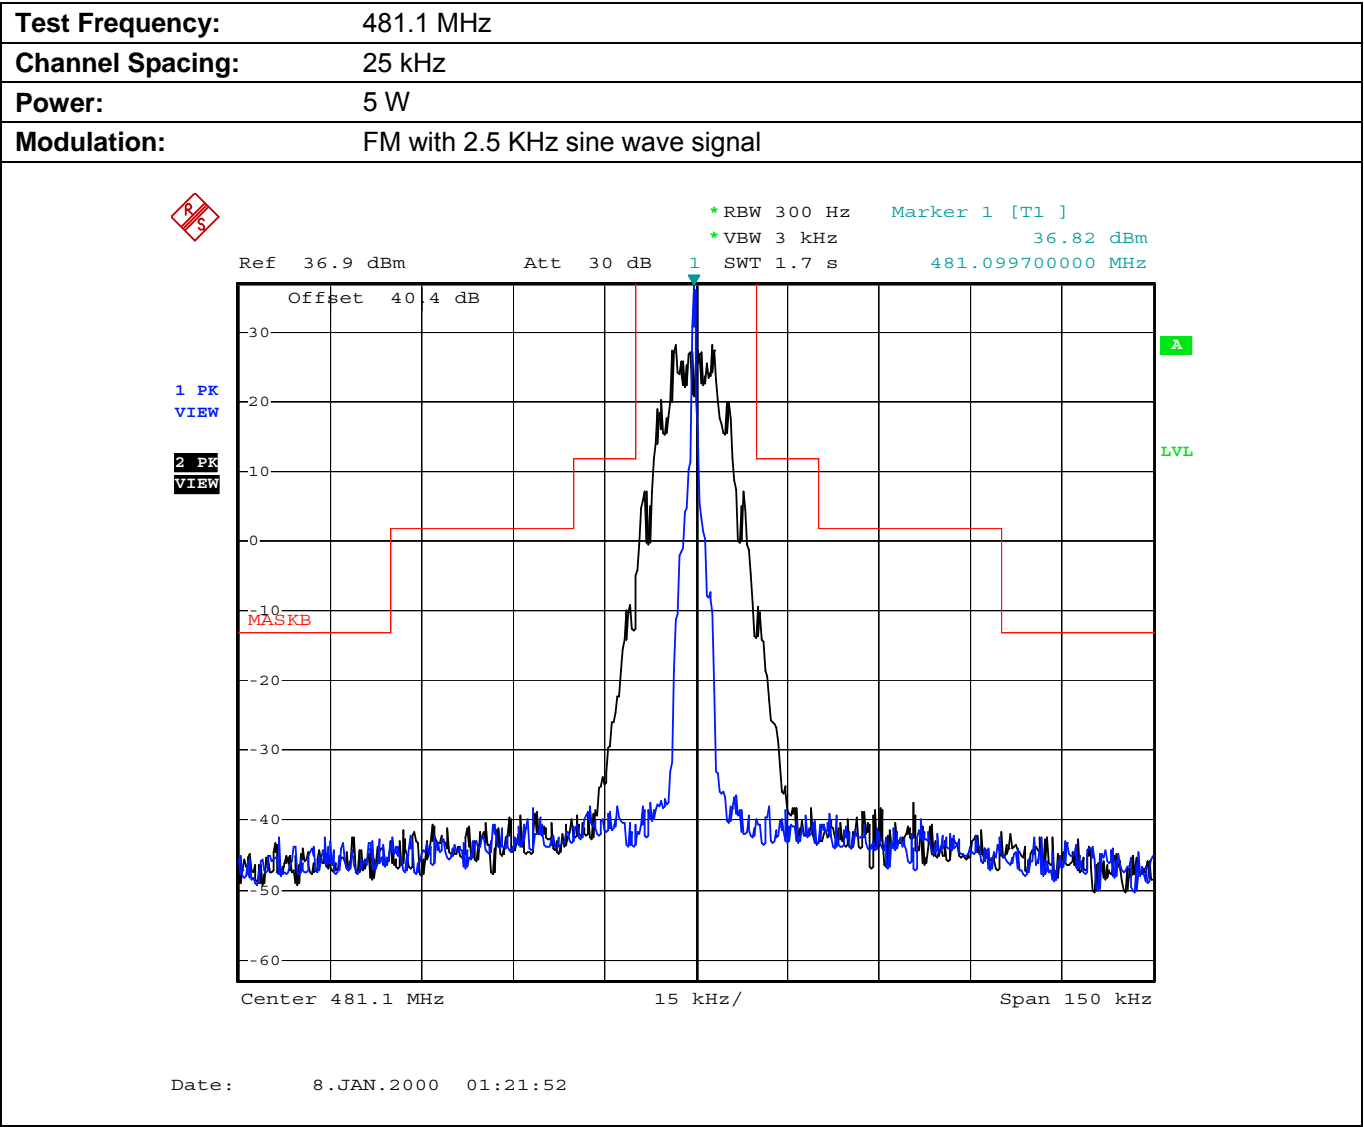


Plot 5.8.4.3.6. Emission Mask B, Low Power

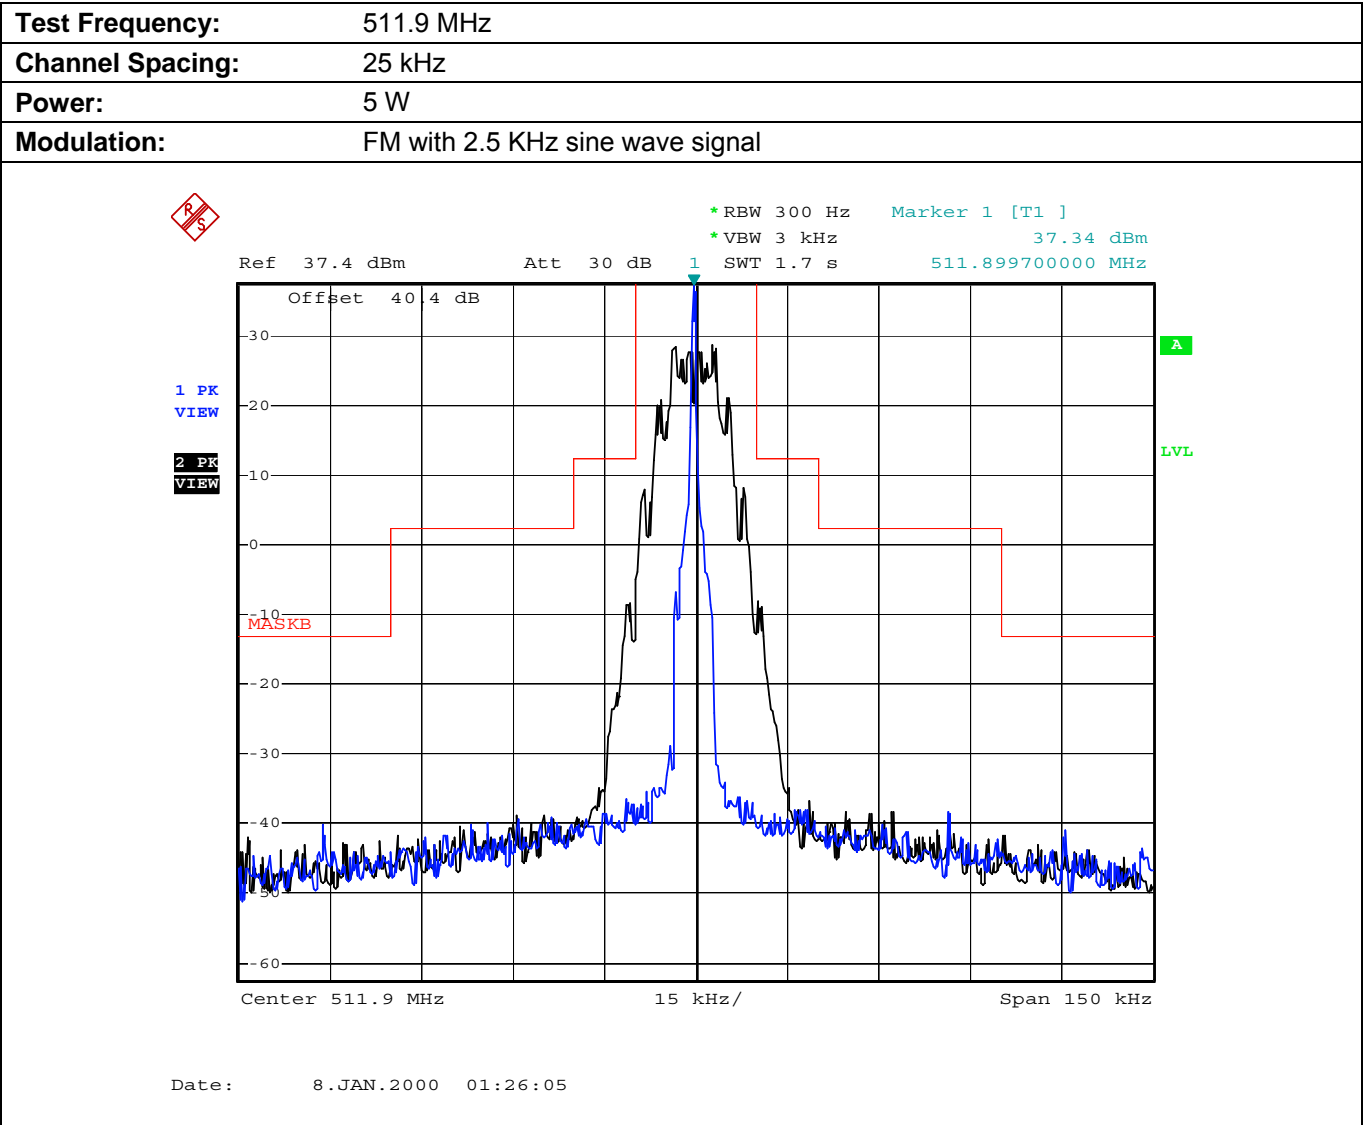


5.8.4.4. Emission Mask E


Plot 5.8.4.4.1. Emission Mask E, High Power

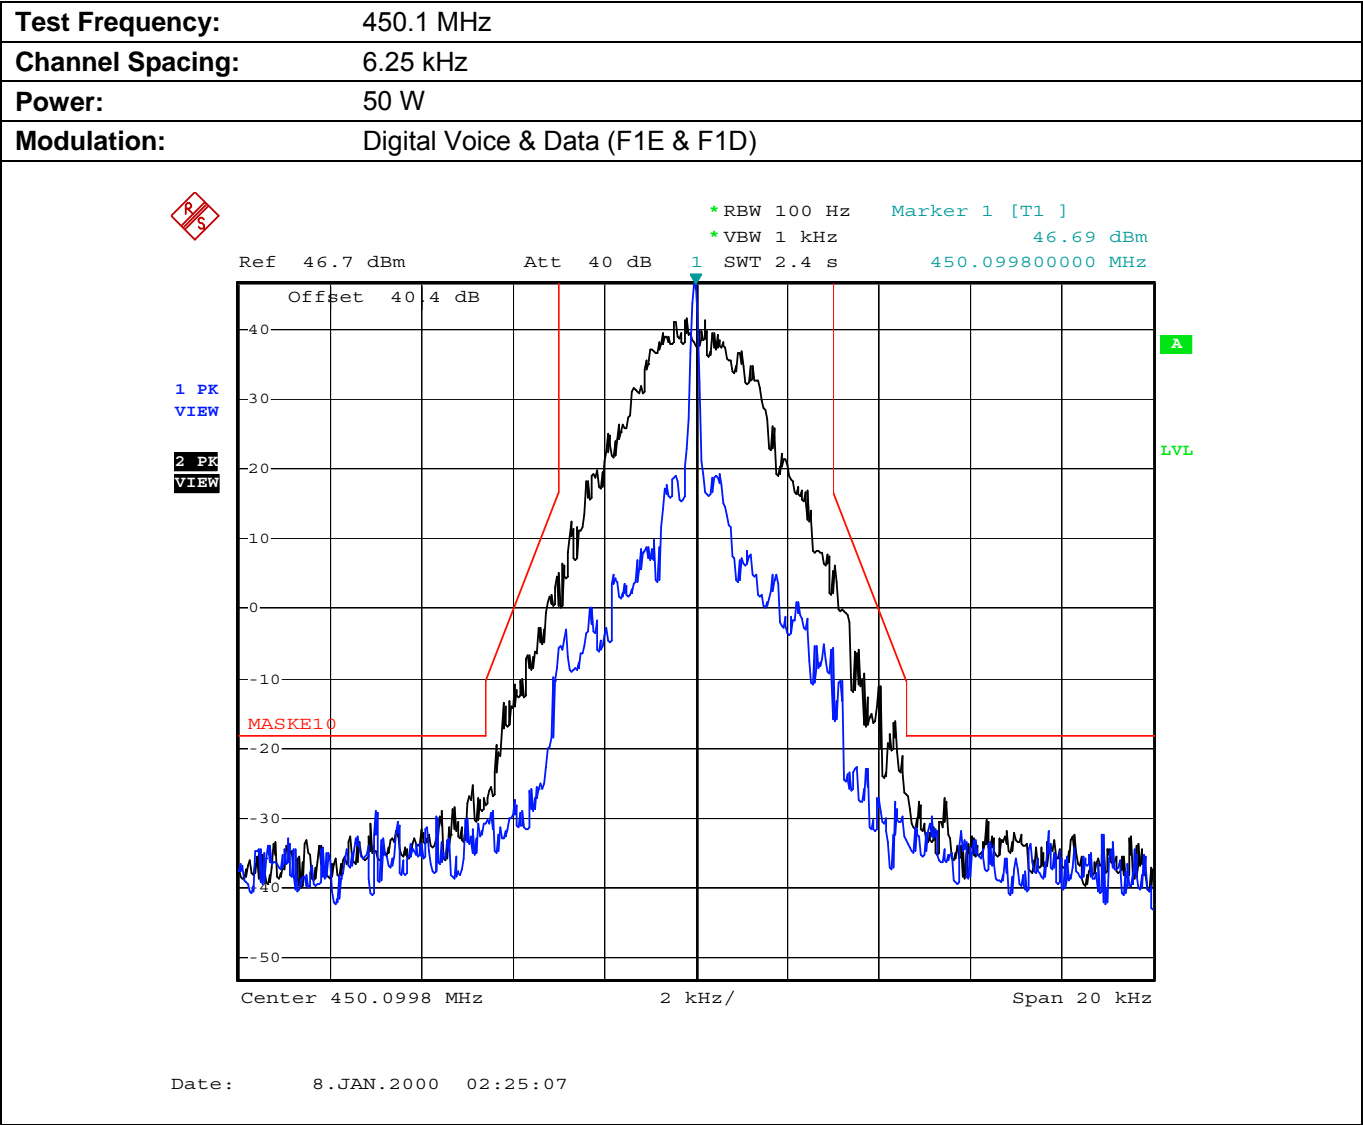


Plot 5.8.4.4.2. Emission Mask E, High Power

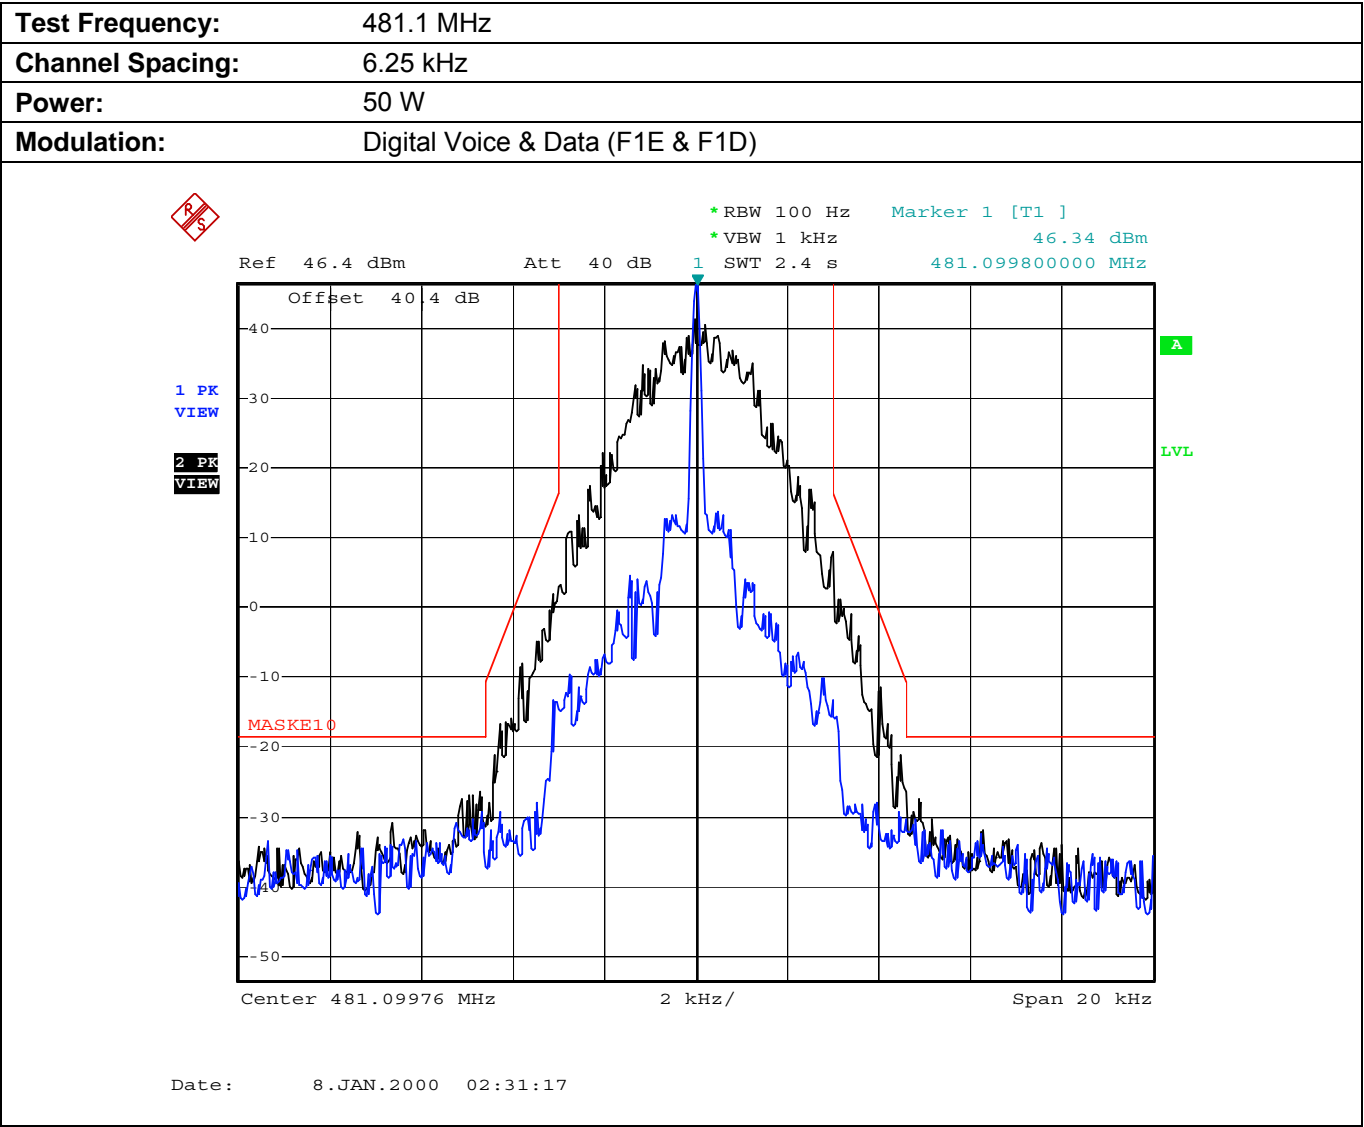


Plot 5.8.4.4.3. Emission Mask E, High Power

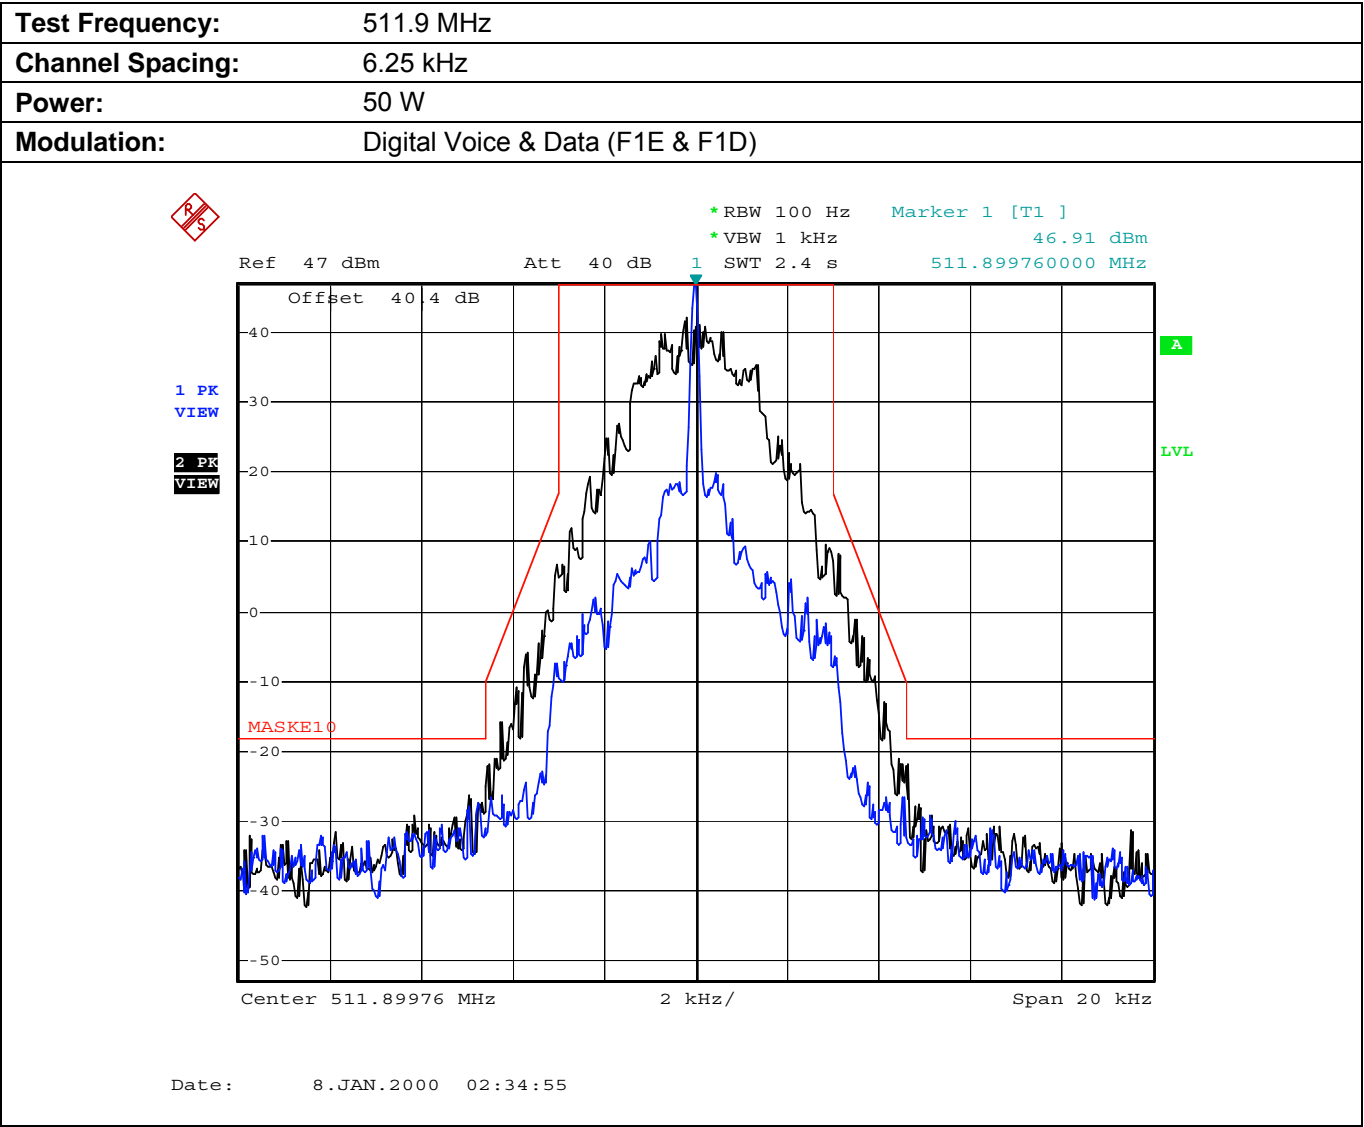


Plot 5.8.4.4.4. Emission Mask E, Low Power

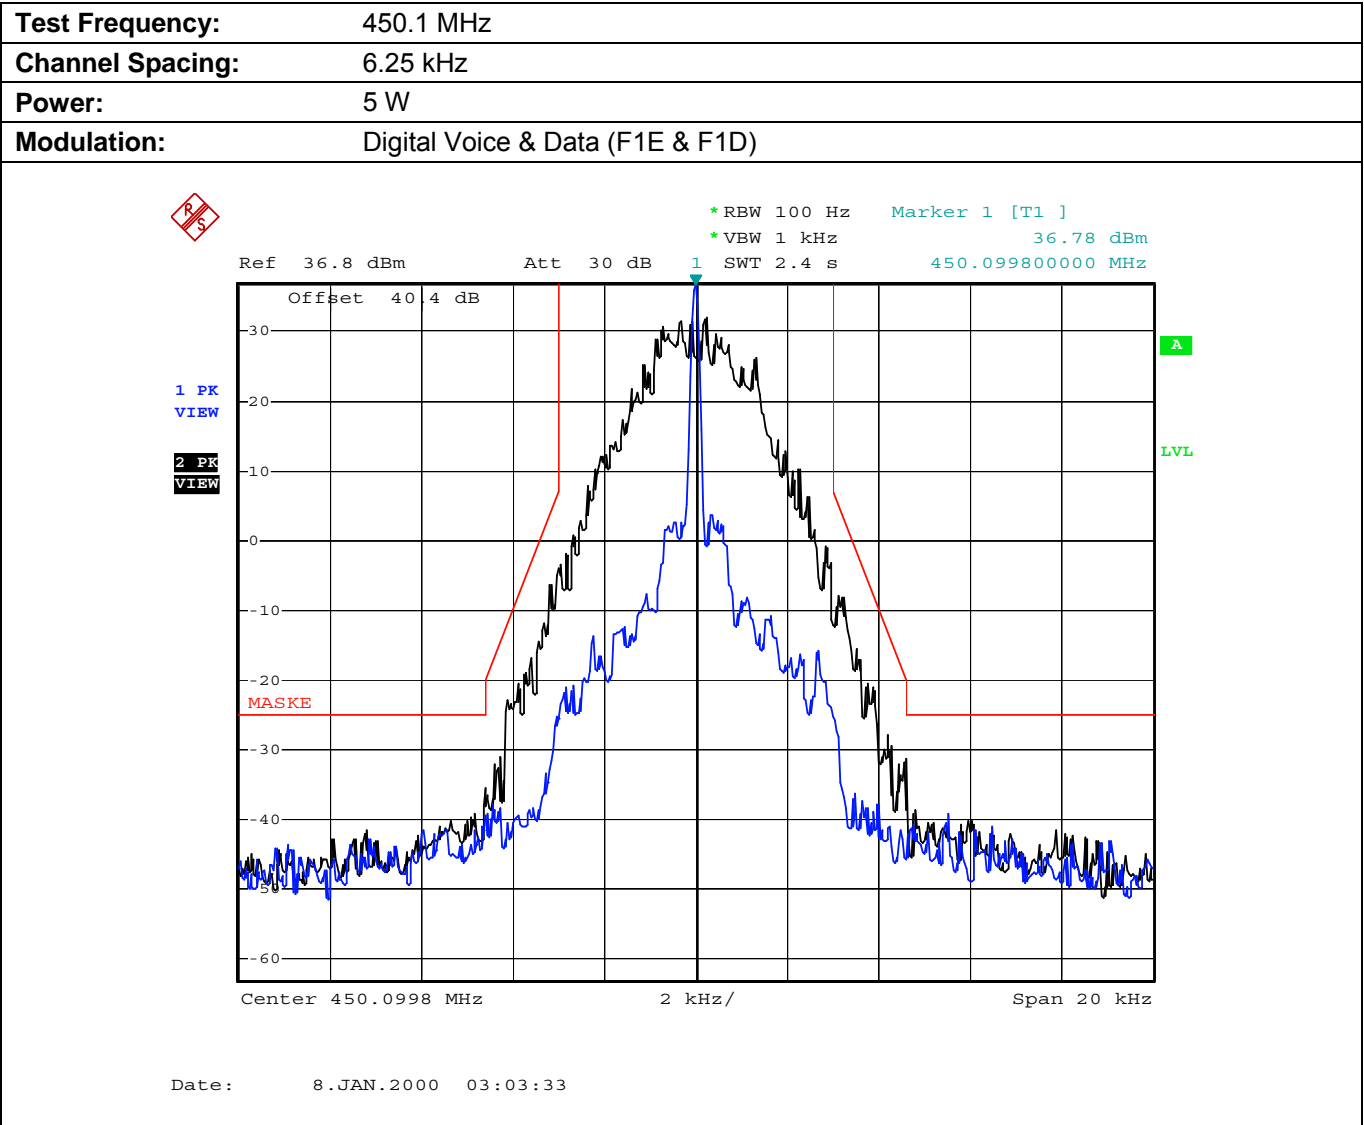


Plot 5.8.4.4.5. Emission Mask E, Low Power

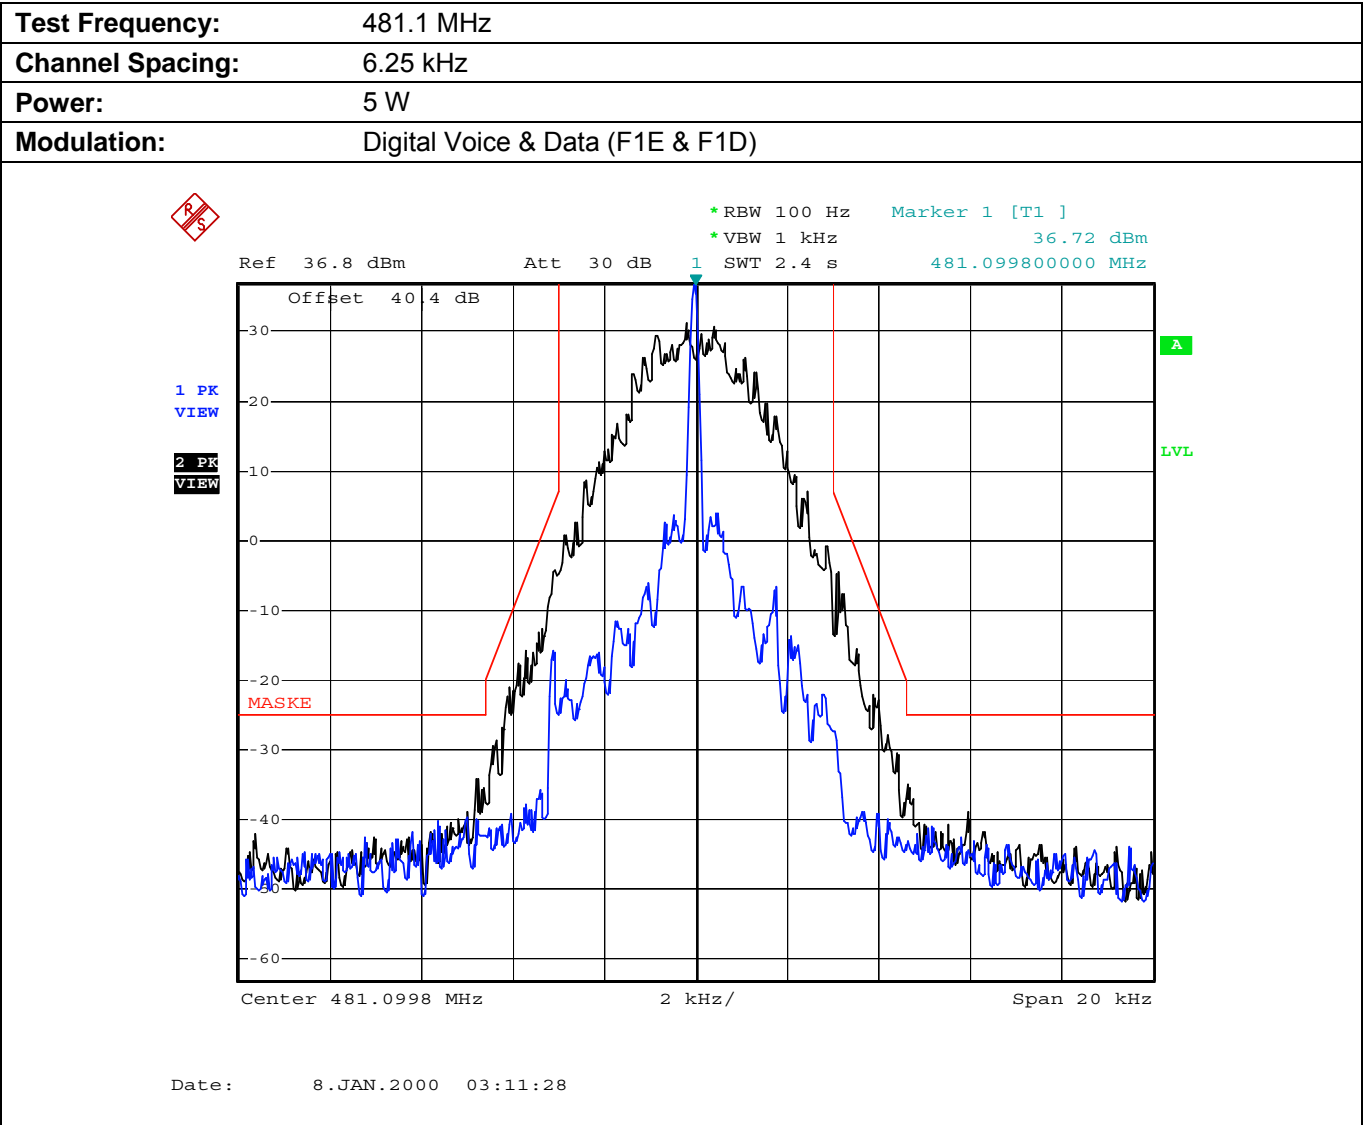


Plot 5.8.4.4.6. Emission Mask E, Low Power

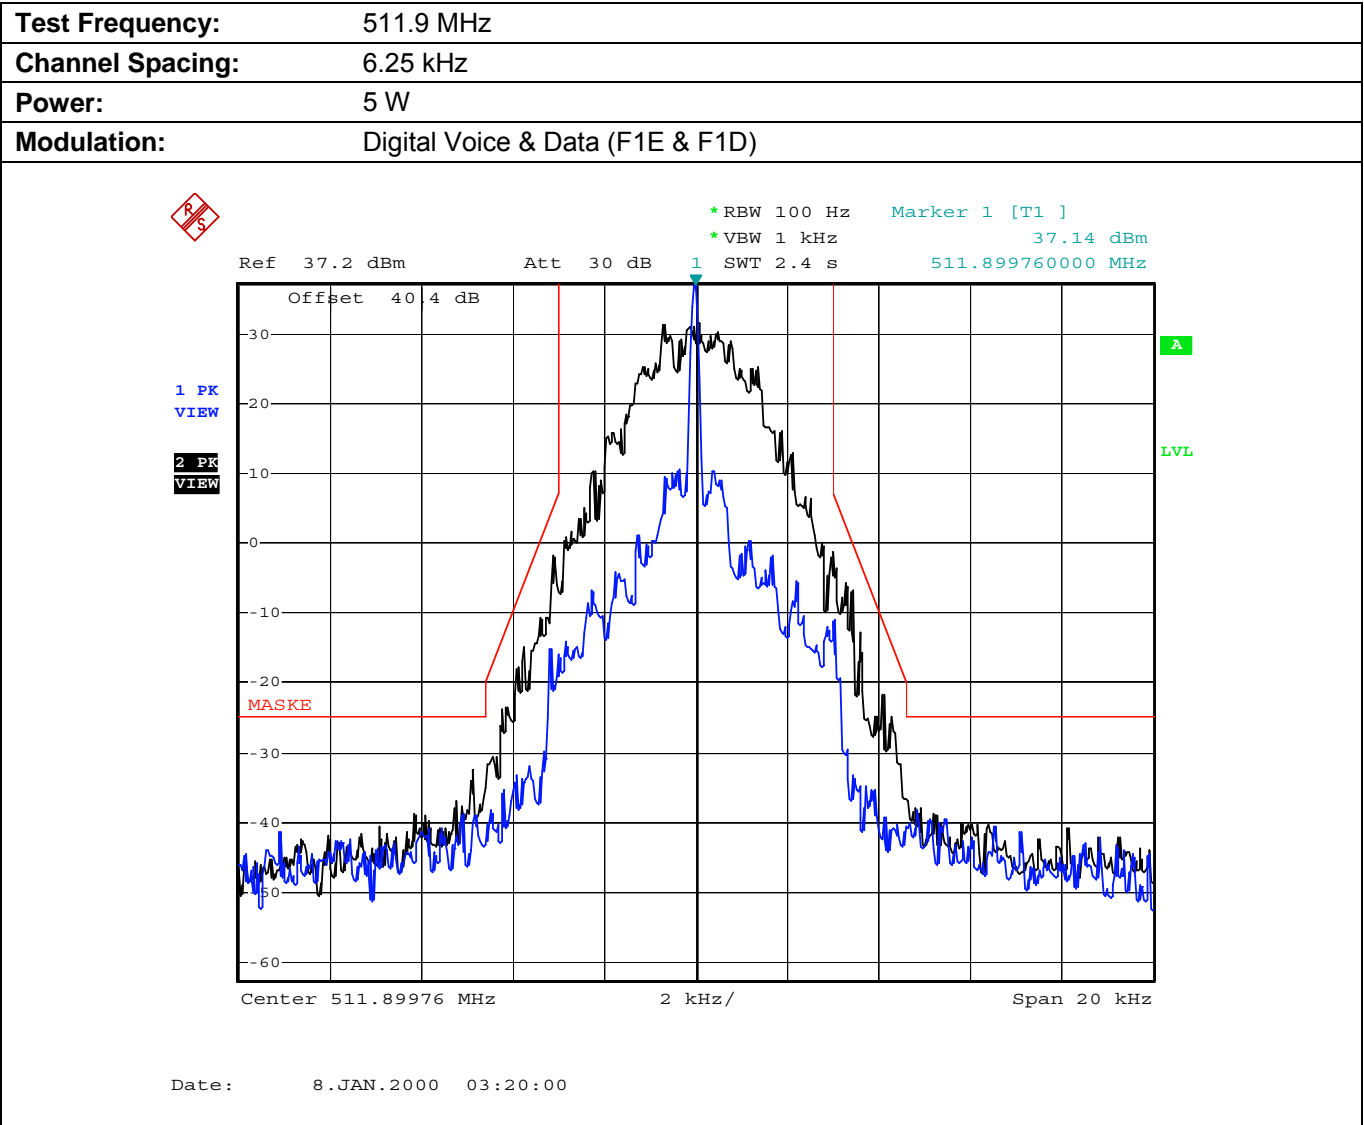


Plot 5.8.4.4.7. Emission Mask E, High Power

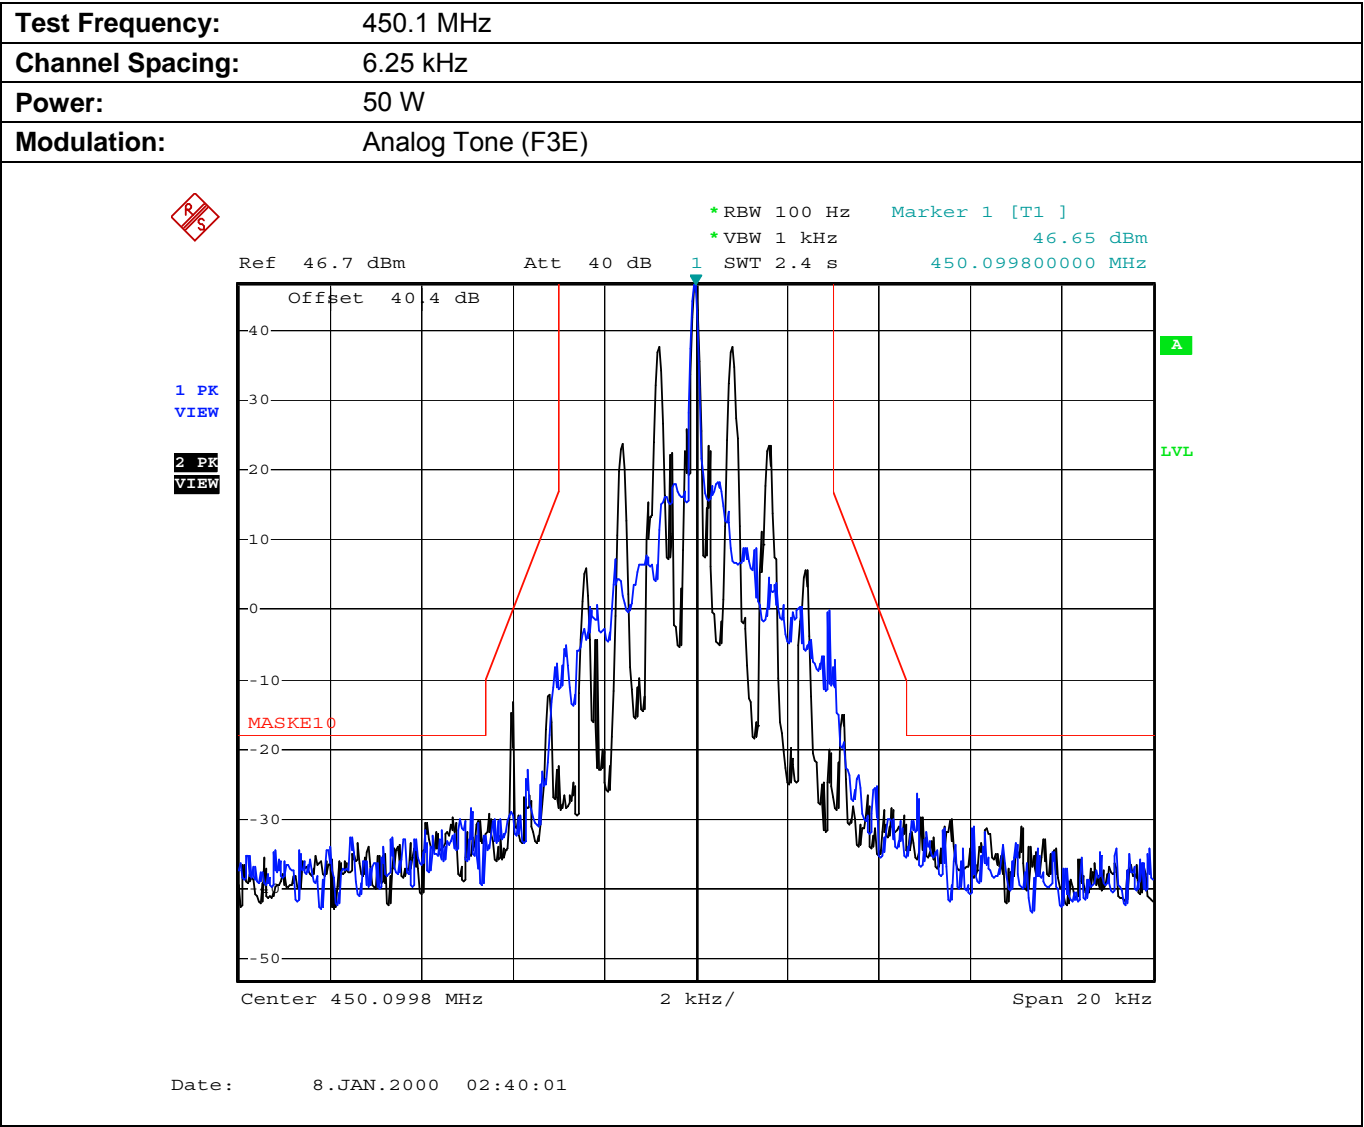


Plot 5.8.4.4.8. Emission Mask E, High Power

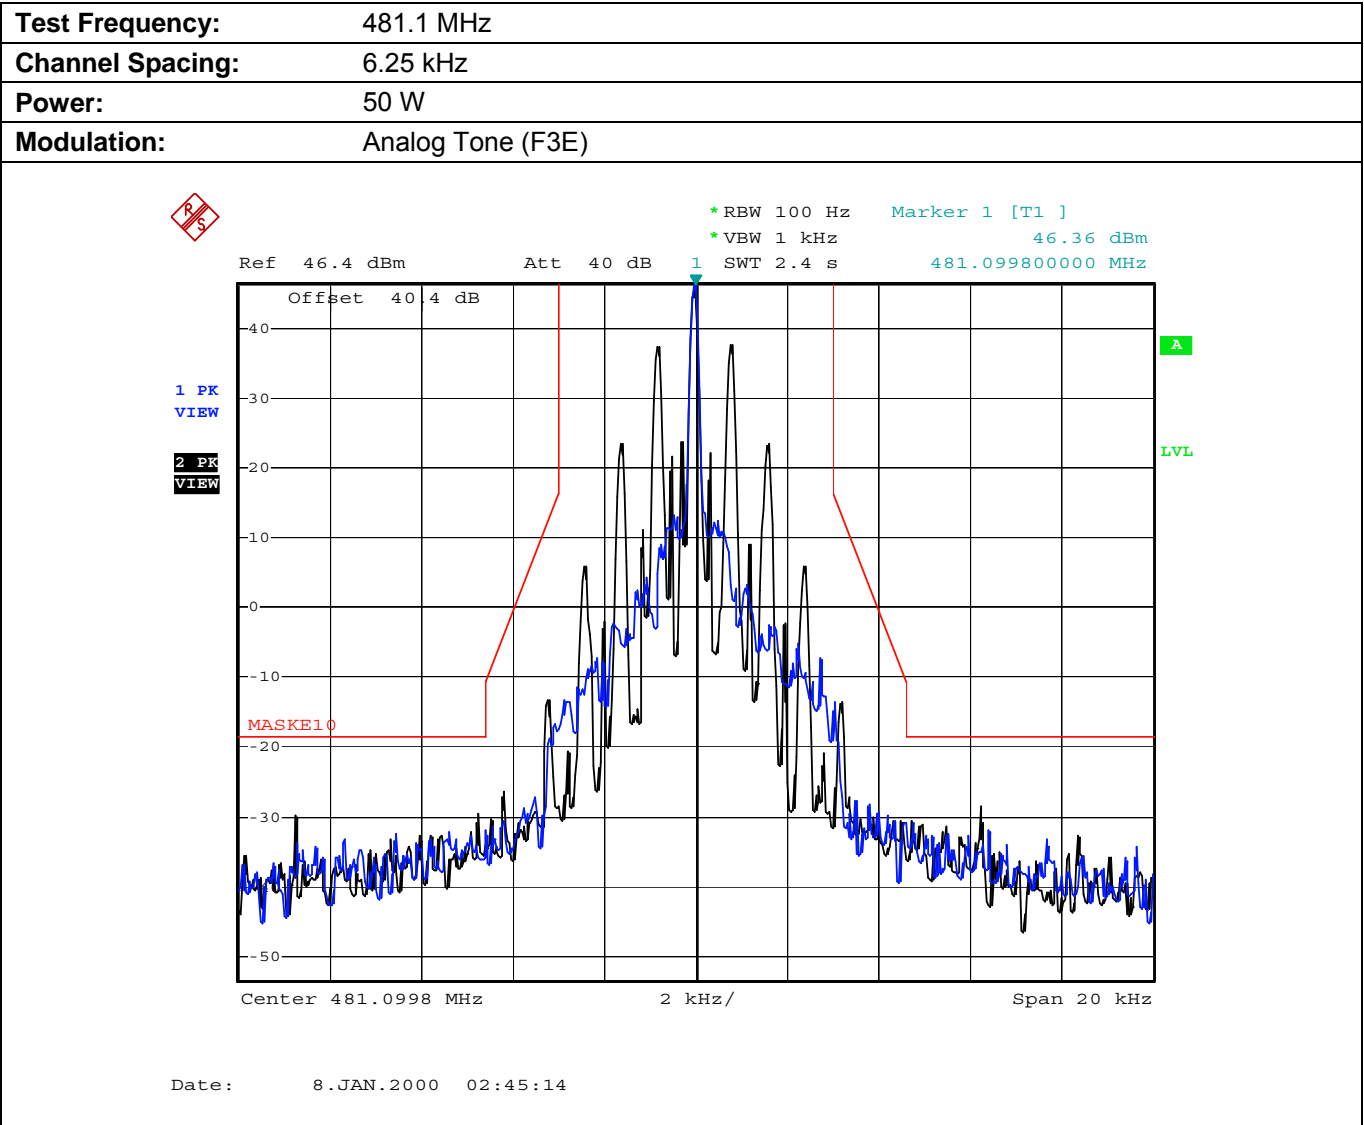


Plot 5.8.4.4.9. Emission Mask E, High Power

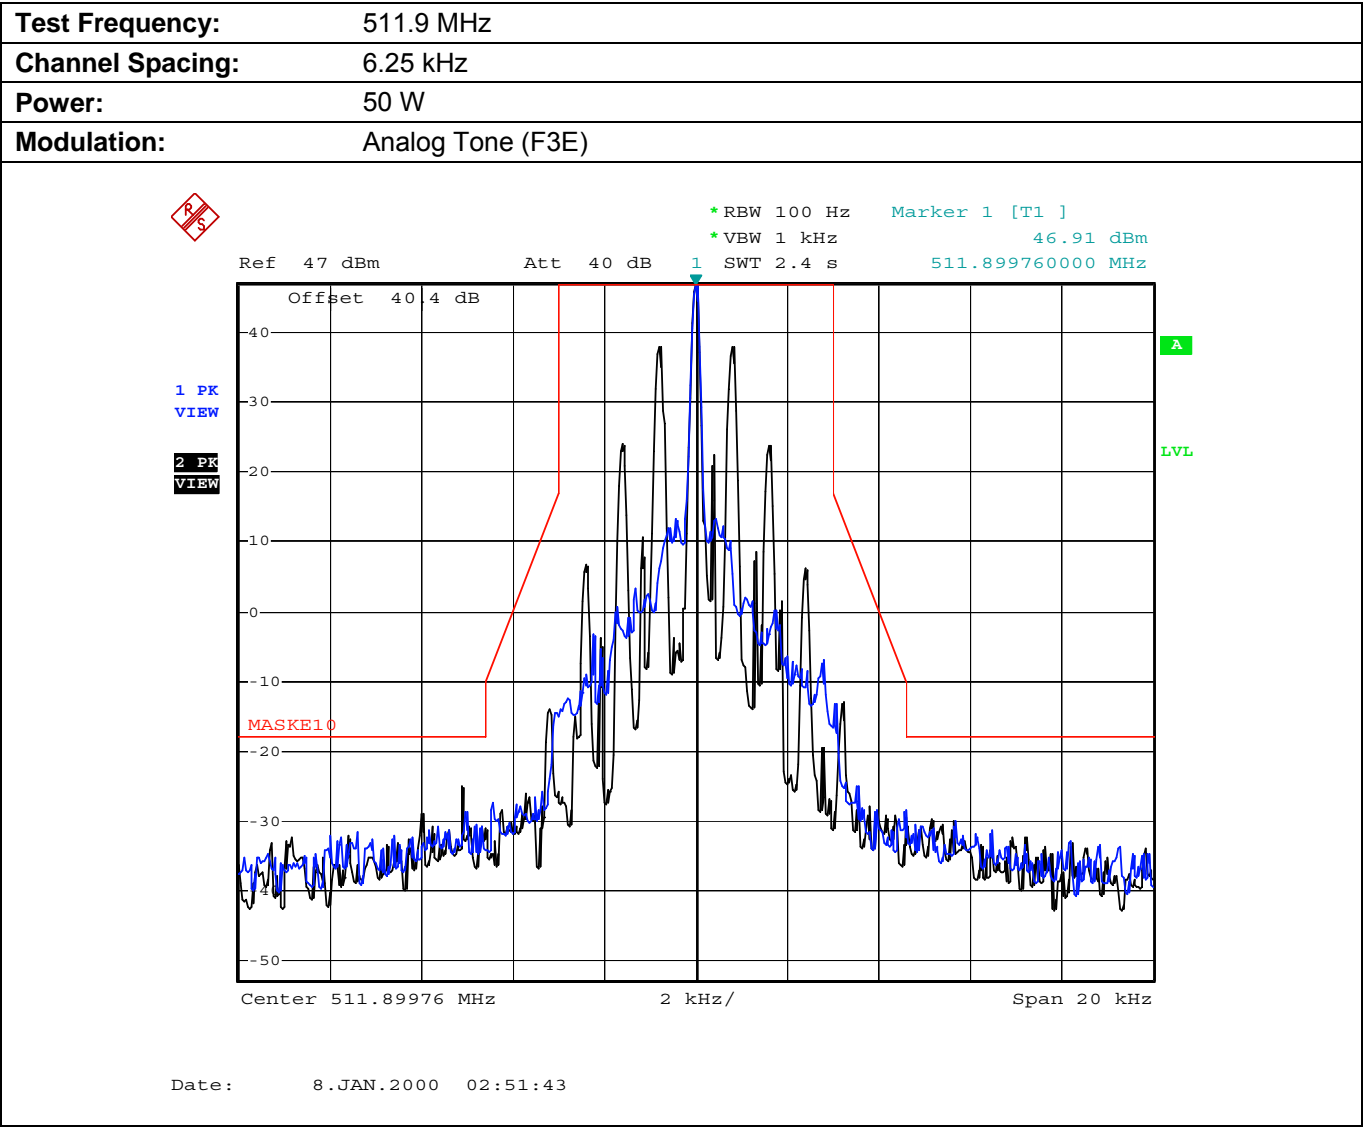


Plot 5.8.4.4.10. Emission Mask E, Low Power

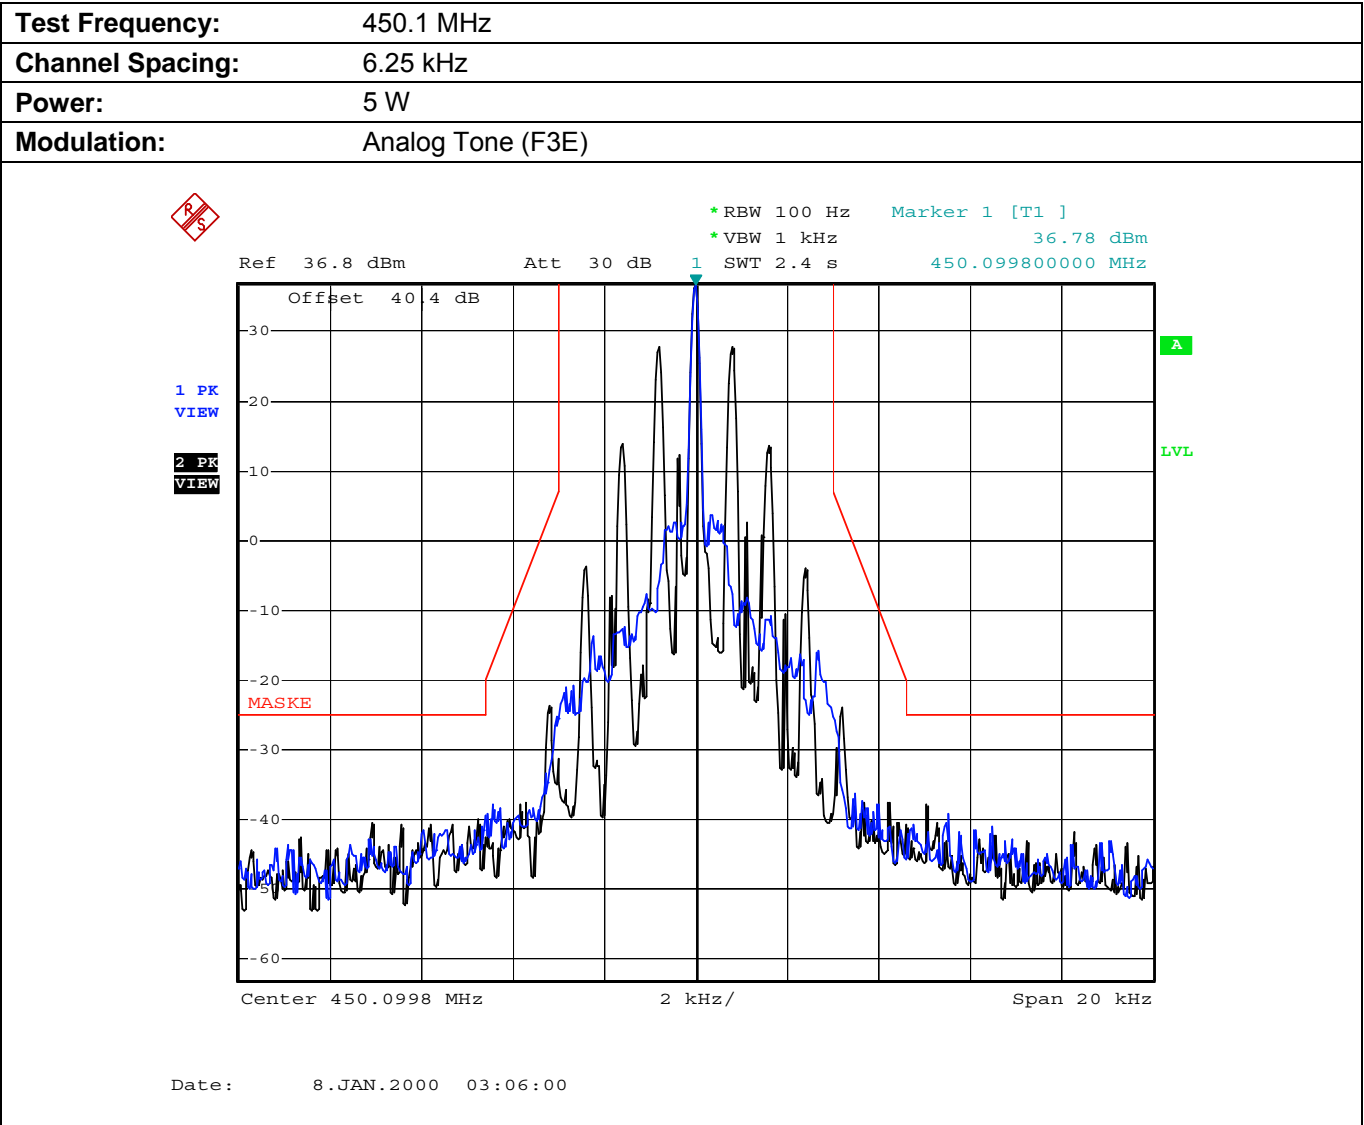

Plot 5.8.4.4.11. Emission Mask E, Low Power

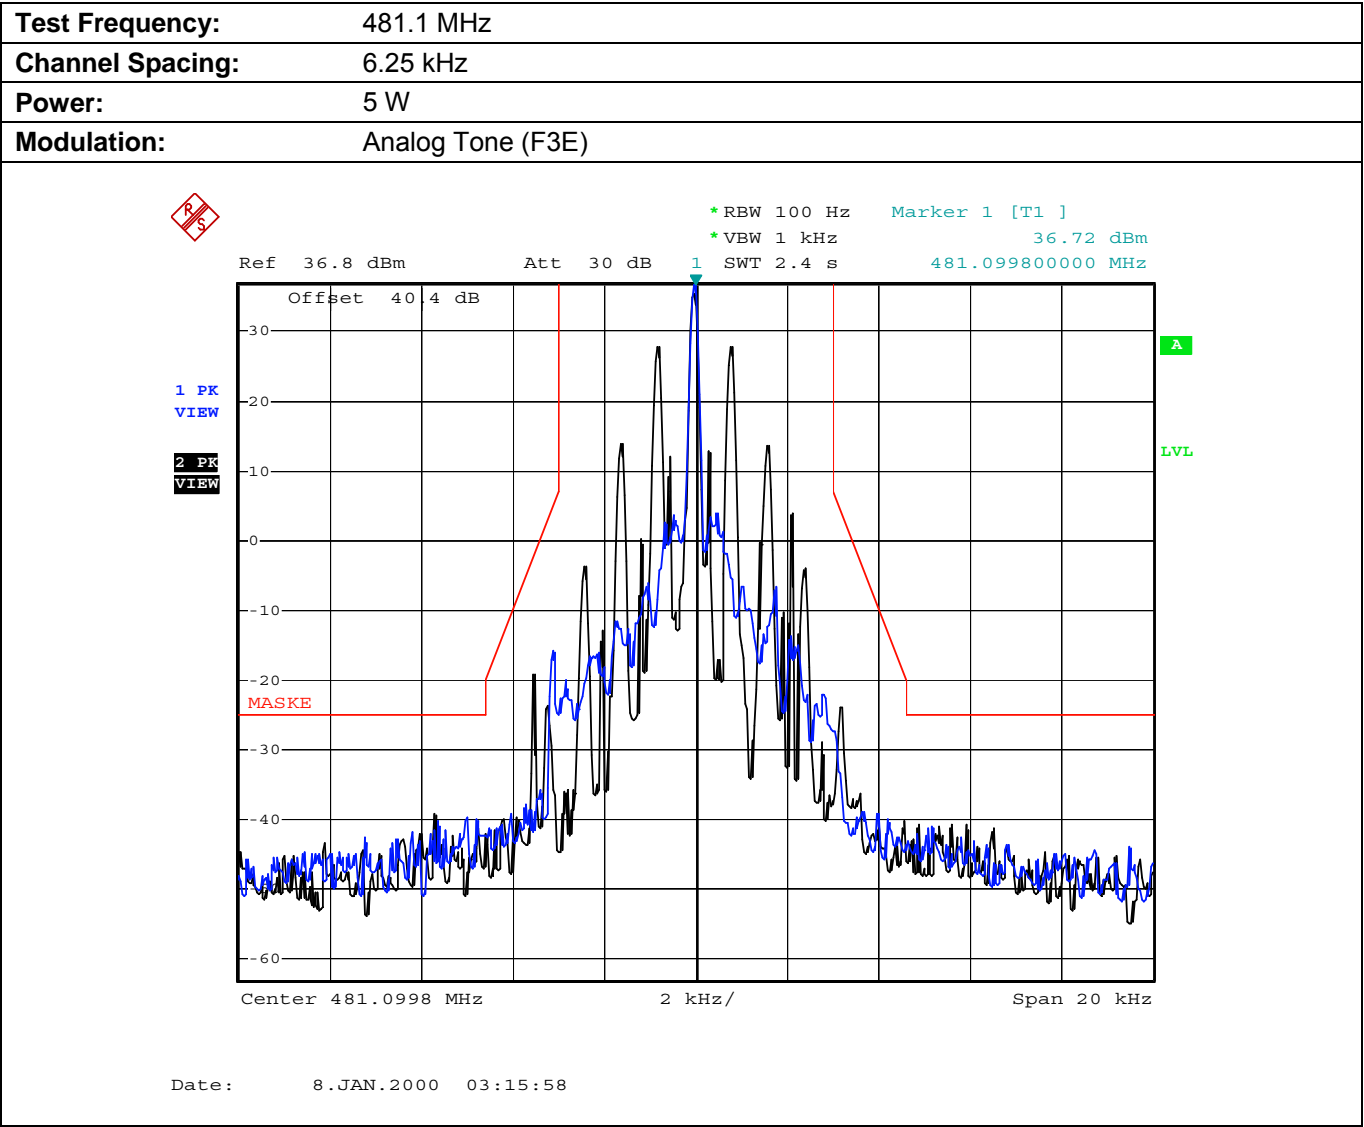

Plot 5.8.4.4.12. Emission Mask E, Low Power

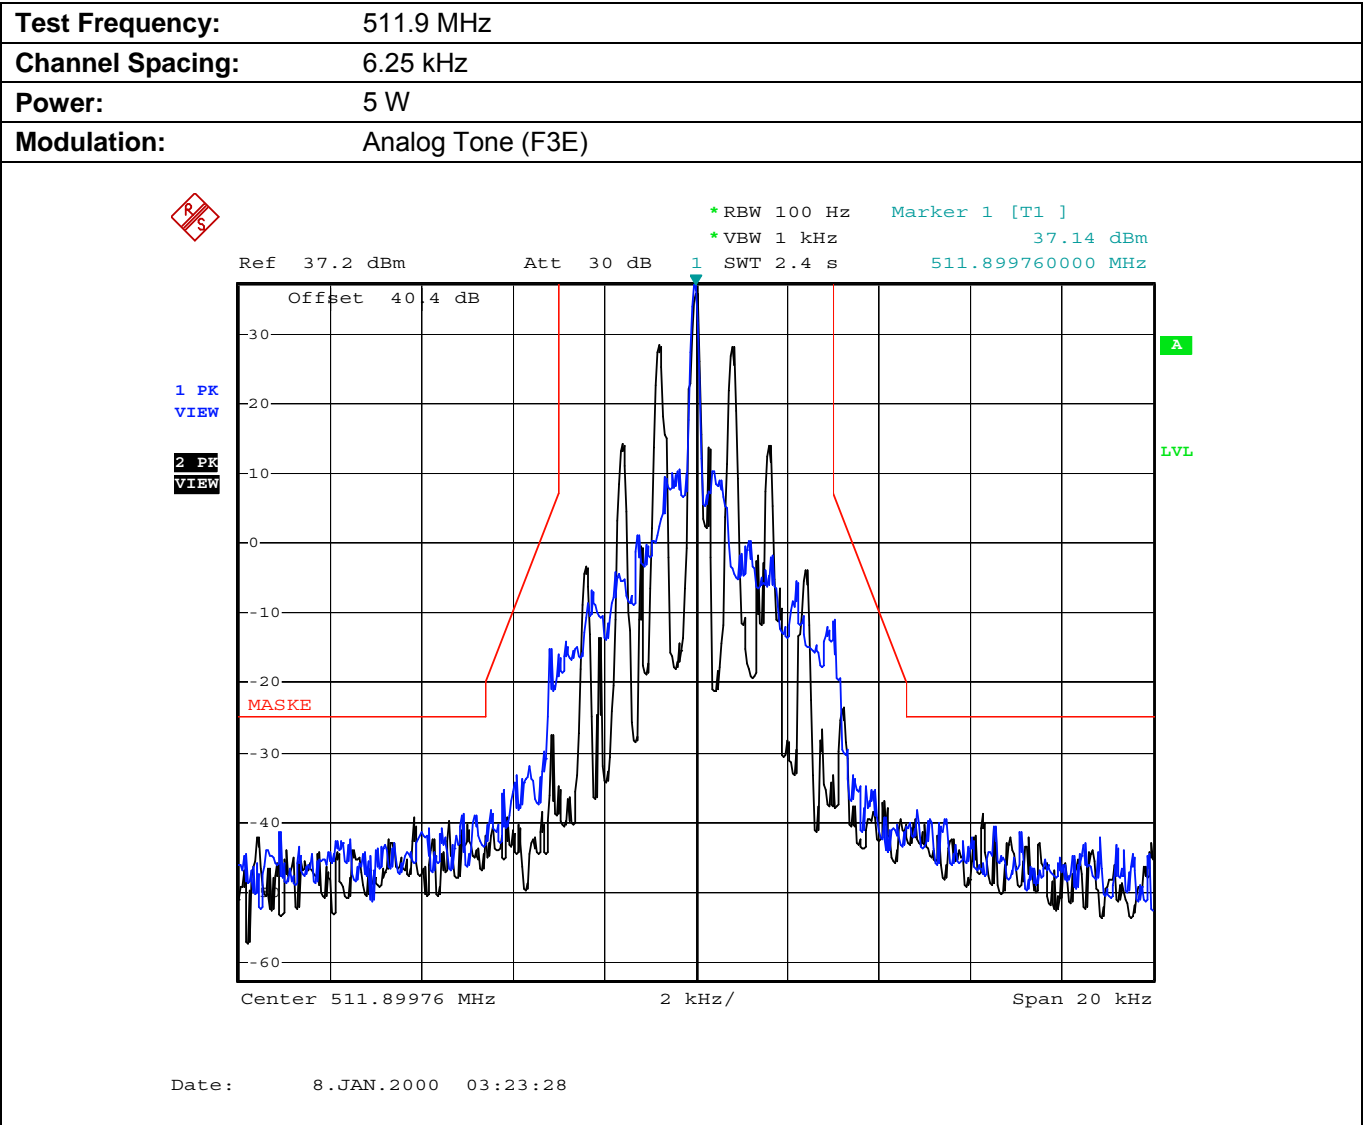

5.9. TRANSMITTER ANTENNA POWER SPURIOUS/HARMONIC CONDUCTED EMISSIONS [§ 2.1051, 2.1057, 22.359, 80.211(f)(3) & 90.210]

5.9.1. Limits


Emissions shall be attenuated below the mean output power of the transmitter as follows:

FCC Rules	Attenuation Limit (dBc)
§ 22.359	At least $43 + 10 \log (P)$ dB.
§ 80.211(f)(3),	At least $43 + 10 \log_{10}$ (mean power in watts) dB
§ 90.210(b)	At least $43 + 10 \log (P)$ dB
§ 90.210(d)	At least $50 + 10 \log (P)$ dB or 70 dB, whichever is the lesser attenuation.
§ 90.210(e)	At least $55 + 10 \log (P)$ or 65 dB, whichever is the lesser attenuation.

5.9.2. Method of Measurements

Refer to Section 8.5 of this report for measurement details

5.9.3. Test Arrangement

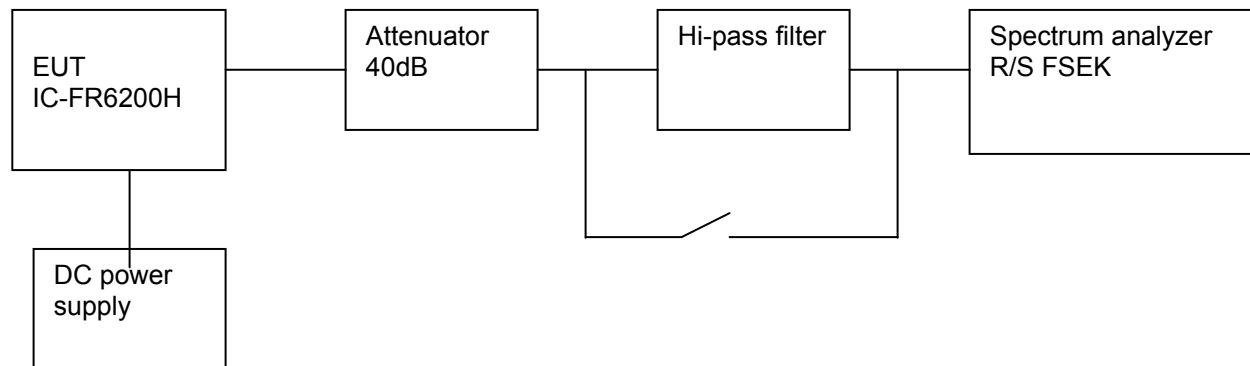

5.9.4. Test Data

Note: There was no difference in spurious/harmonic emissions on the pre-scans for different channel spacing and modulation types. Therefore, the rf spurious/harmonic emissions in this section would be performed for Digital modulation with 6.25 kHz channel spacing and the more stringent limit of $55 + 10 \log(P)$ would be applied for worst case.

Plot 5.9.4.1.1. Conducted Transmitter Spurious Emissions for 450.1 MHz, High Power, 30 MHz - 800 MHz

ULTRATECH GROUP OF LABS **File #: 15ICOM396_FCC90**
 3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4 January 27, 2015
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>
All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot 5.9.4.1.2. Conducted Transmitter Spurious Emissions for 450.1 MHz, High Power, 800 MHz - 5.5 GHz

Test Frequency: 450.1 MHz

Channel Spacing: 6.25 kHz

Power: 50 W

Modulation: Digital

Marker 1 [T1]

RBW 100 kHz
VBW 1 MHz
SWT 20 ms
-41.60 dBm
900.40000000 MHz

Ref 20 dBm Att 10 dB

20 Offset 40 4 dB

1 PK VIEW

25

Start 800 MHz 20 MHz/ Stop 1 GHz

Date: 6.JAN.2000 01:36:02

Marker 1 [T1]

RBW 1 MHz
VBW 3 MHz
SWT 60 ms
-38.29 dBm
4.915000000 GHz

Ref 10 dBm Att 0 dB

10 Offset 40 4 dB

1 PK VIEW


25

Start 1 GHz 450 MHz/ Stop 5.5 GHz

Date: 6.JAN.2000 02:24:41

The figure displays two spectral plots. The top plot shows a signal at 450.1 MHz with a level of -41.60 dBm. The bottom plot shows a signal at 4.915 GHz with a level of -38.29 dBm. Both plots include a 1 PK VIEW button and a 25 dBm reference line.

Plot 5.9.4.1.3. Conducted Transmitter Spurious Emissions for 450.1 MHz, Low Power, 30 MHz - 800 MHz

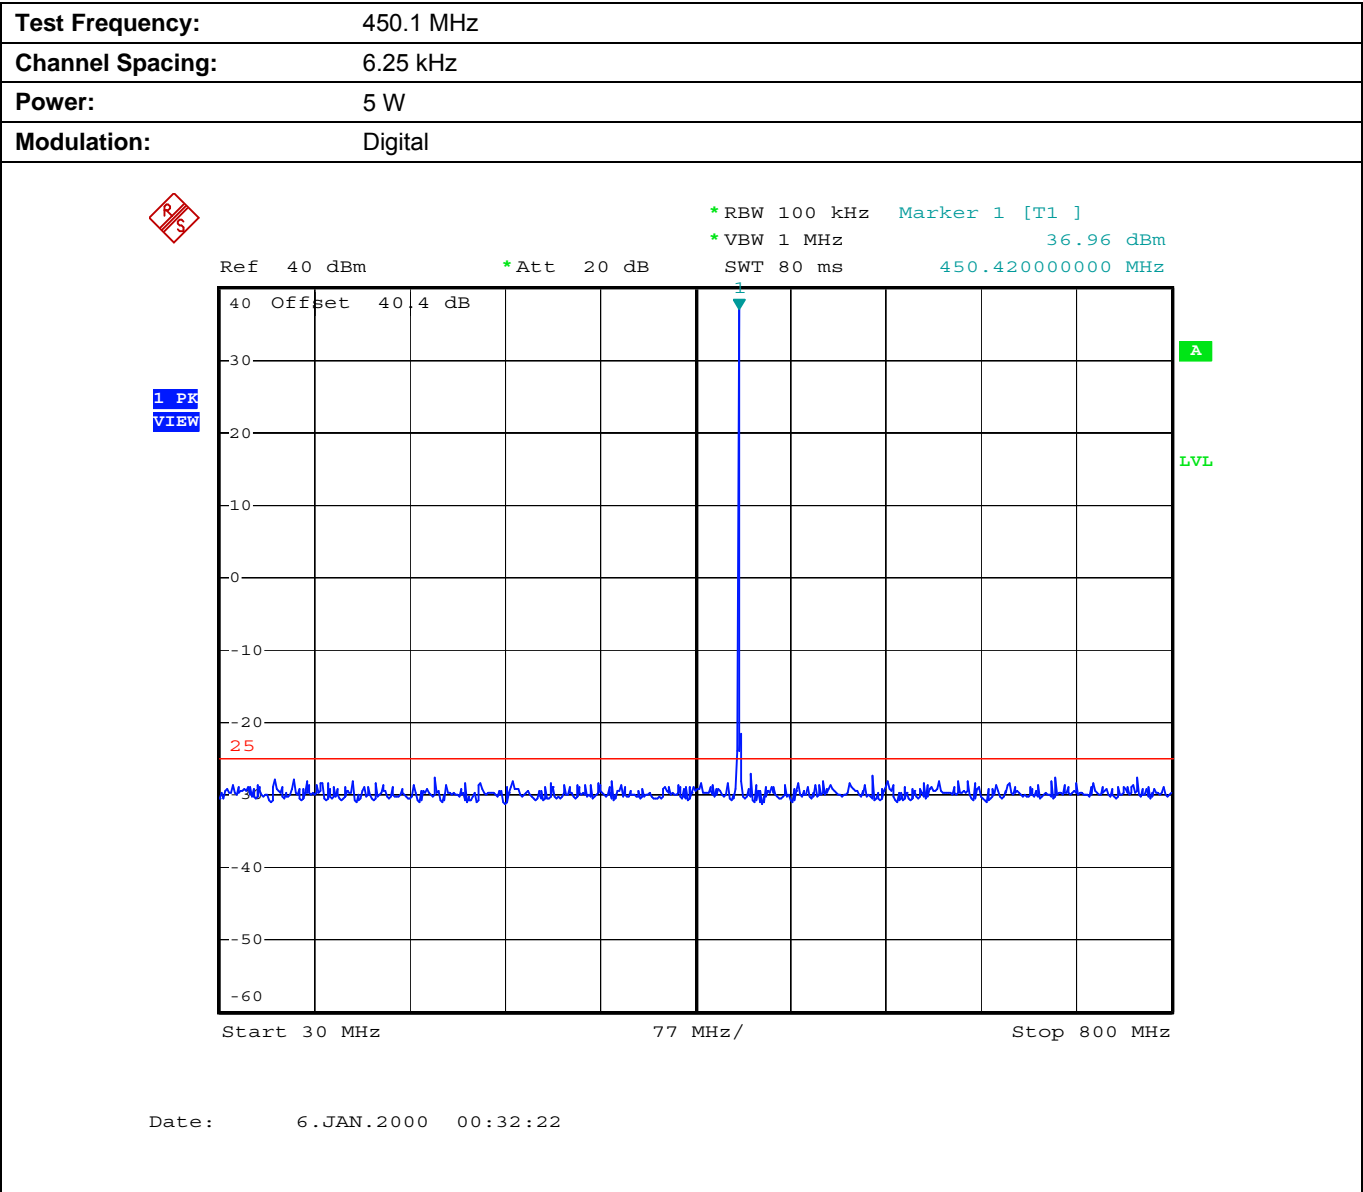

Plot 5.9.4.1.4. Conducted Transmitter Spurious Emissions for 450.1 MHz, Low Power, 800 MHz - 5.5 GHz

Test Frequency: 450.1 MHz
Channel Spacing: 6.25 kHz
Power: 5 W
Modulation: Digital

Ref 20 dBm Att 10 dB RBW 100 kHz Marker 1 [T1] -42.02 dBm
VBW 1 MHz SWT 20 ms 817.200000000 MHz

20 Offset 40 4 dB

1 PR VIEW

Start 800 MHz 20 MHz/ Stop 1 GHz

Date: 6.JAN.2000 01:40:26

Ref 10 dBm Att 0 dB RBW 1 MHz Marker 1 [T1] -38.35 dBm
VBW 3 MHz SWT 60 ms 5.239000000 GHz

10 Offset 40 4 dB

1 PR VIEW


Start 1 GHz 450 MHz/ Stop 5.5 GHz

Date: 6.JAN.2000 02:30:55

5.9.4.2. Near Middle Frequency (481.1 MHz)


Plot 5.9.4.2.1. Conducted Transmitter Spurious Emissions for 481.1 MHz, High Power, 30 MHz - 800 MHz

Test Frequency:	481.1 MHz
Channel Spacing:	6.25 kHz
Power:	50 W
Modulation:	Digital

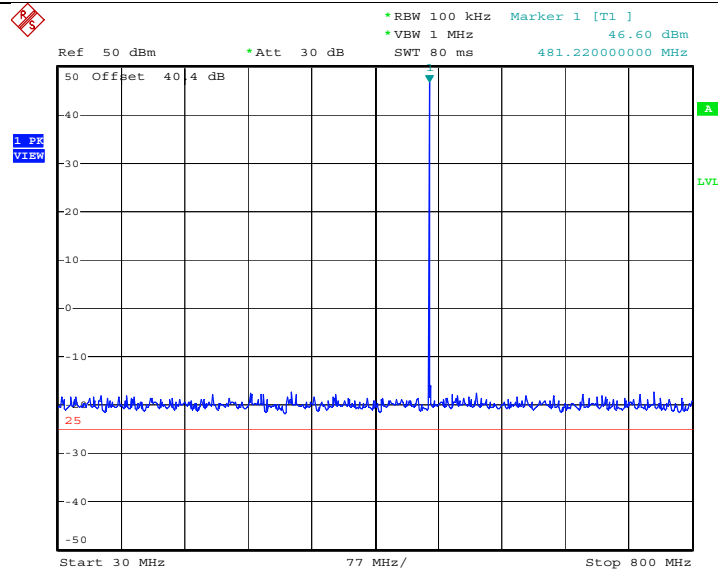

Date: 6.JAN.2000 00:28:30

Note: The above measurement was repeated with Notch Filter having 1 MHz BW suppressing the Fundamental to confirm that all spurious/harmonic emissions does comply/pass the -25dBm FCC limit as shown below.

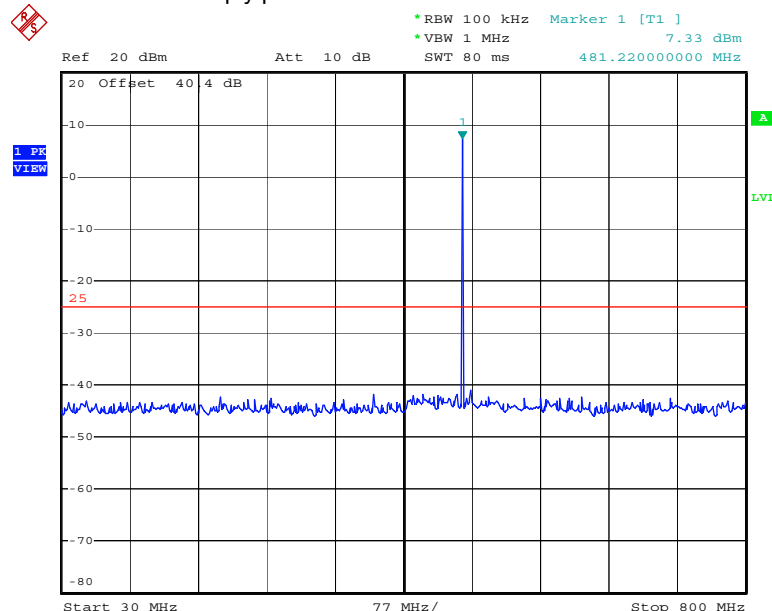

Date: 6.JAN.2000 00:50:53

Plot 5.9.4.2.2. Conducted Transmitter Spurious Emissions for 481.1 MHz, High Power, 800 MHz - 5.5 GHz

Test Frequency: 481.1 MHz
Channel Spacing: 6.25 kHz
Power: 50 W
Modulation: Digital

Ref 20 dBm Att 10 dB RBW 100 kHz Marker 1 [T1]
VBW 1 MHz -33.01 dBm
SWT 20 ms 962.40000000 MHz

20 Offset 40 4 dB

1 PK VIEW

25

Start 800 MHz 20 MHz/ Stop 1 GHz

Date: 6.JAN.2000 01:37:43

Ref 10 dBm Att 0 dB RBW 1 MHz Marker 1 [T1]
VBW 3 MHz -37.57 dBm
SWT 60 ms 3.853000000 GHz

10 Offset 40 4 dB


1 PK VIEW

25

Start 1 GHz 450 MHz/ Stop 5.5 GHz

Date: 6.JAN.2000 02:27:25

Plot 5.9.4.2.3. Conducted Transmitter Spurious Emissions for 481.1 MHz, Low Power, 30 MHz - 800 MHz

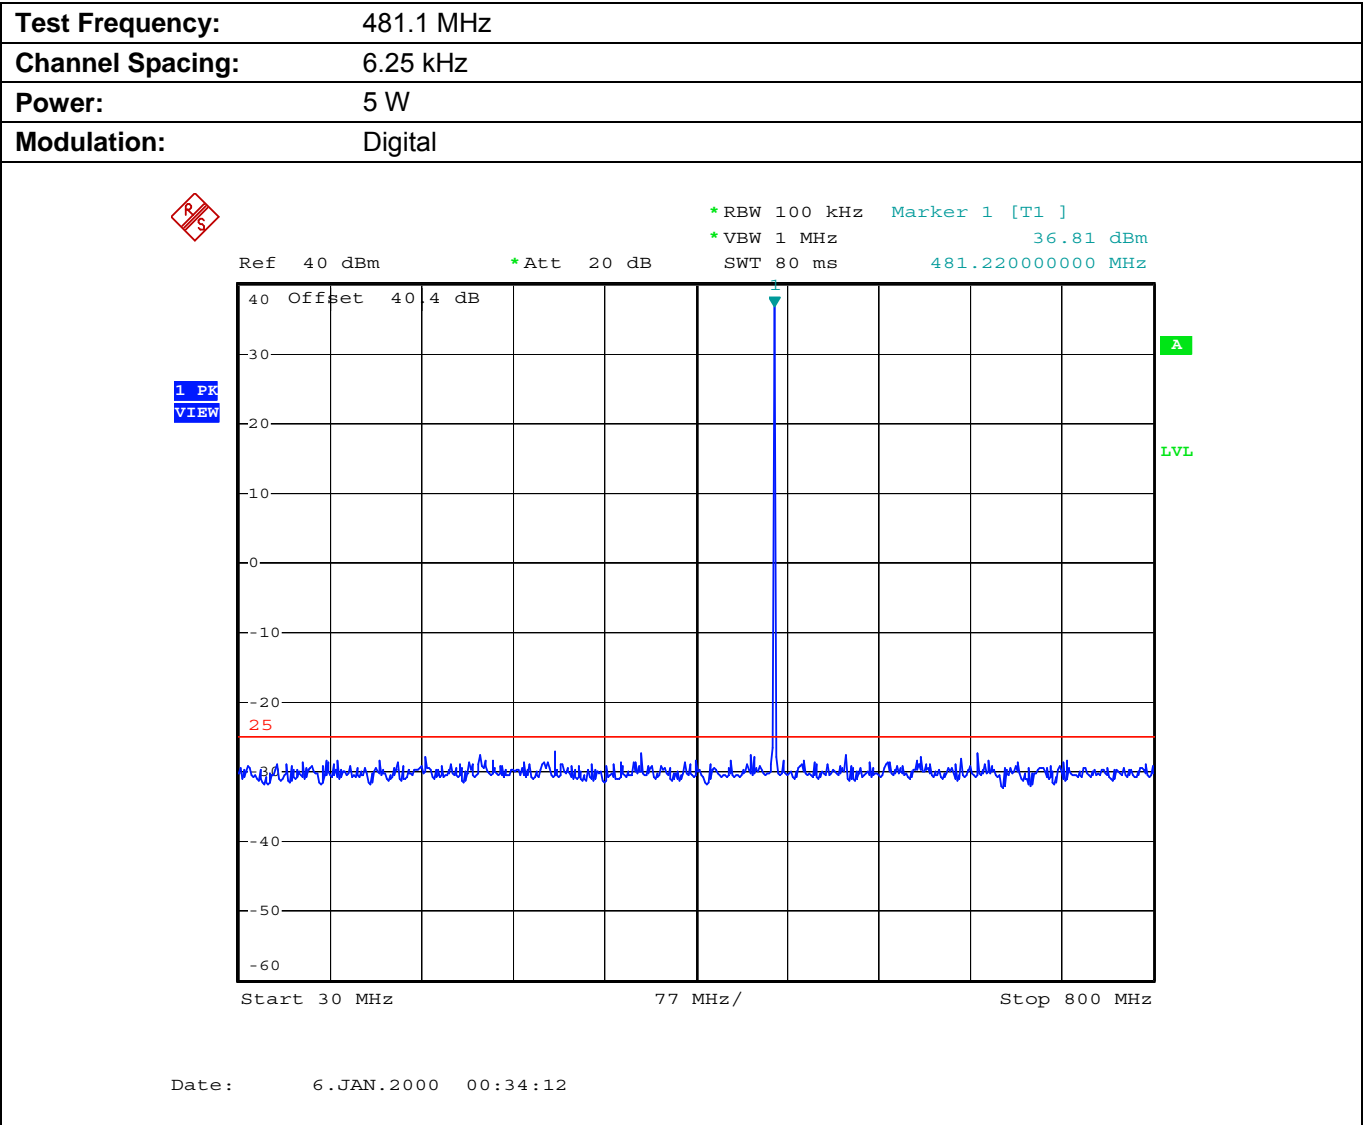

Plot 5.9.4.2.4. Conducted Transmitter Spurious Emissions for 481.1 MHz, Low Power, 800 MHz - 5.5 GHz

Test Frequency: 481.1 MHz

Channel Spacing: 6.25 kHz

Power: 5 W

Modulation: Digital

Ref 20 dBm Att 10 dB RBW 100 kHz Marker 1 [T1] -40.92 dBm
VBW 1 MHz
SWT 20 ms 962.40000000 MHz

20 Offset 40 4 dB

1 PK VIEW

25

1

Start 800 MHz 20 MHz/ Stop 1 GHz

Date: 6.JAN.2000 01:41:55

Ref 10 dBm Att 0 dB RBW 1 MHz Marker 1 [T1] -37.62 dBm
VBW 3 MHz
SWT 60 ms 3.088000000 GHz

10 Offset 40 4 dB

1 PK VIEW

25

1

Start 1 GHz 450 MHz/ Stop 5.5 GHz

Date: 6.JAN.2000 02:37:57

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Test Frequency: 511.9 MHz

Channel Spacing: 6.25 kHz

Power: 50 W

Modulation: Digital

Ref 20 dBm Att 10 dB RBW 100 kHz VEW 1 MHz SWT 20 ms Marker 1 [T1] -42.07 dBm 939.600000000 MHz

1 PK VIEW

20 Offset 40 4 dB

-10
-0
-10
-20
-30
-40
-50
-60
-70
-80

Start 800 MHz 20 MHz/ Stop 1 GHz

Date: 6.JAN.2000 01:39:06

Ref 10 dBm Att 0 dB RBW 1 MHz VEW 3 MHz SWT 60 ms Marker 1 [T1] -32.02 dBm 1.027000000 GHz

1 PK VIEW

10 Offset 40 4 dB


-10
-0
-10
-20
-30
-40
-50
-60
-70
-80
-90

Start 1 GHz 450 MHz/ Stop 5.5 GHz

Date: 6.JAN.2000 02:29:27

Plot 5.9.4.3.3. Conducted Transmitter Spurious Emissions for 511.9 MHz, Low Power, 30 MHz - 800 MHz

Test Frequency:	511.9 MHz
Channel Spacing:	6.25 kHz
Power:	5 W
Modulation:	Digital

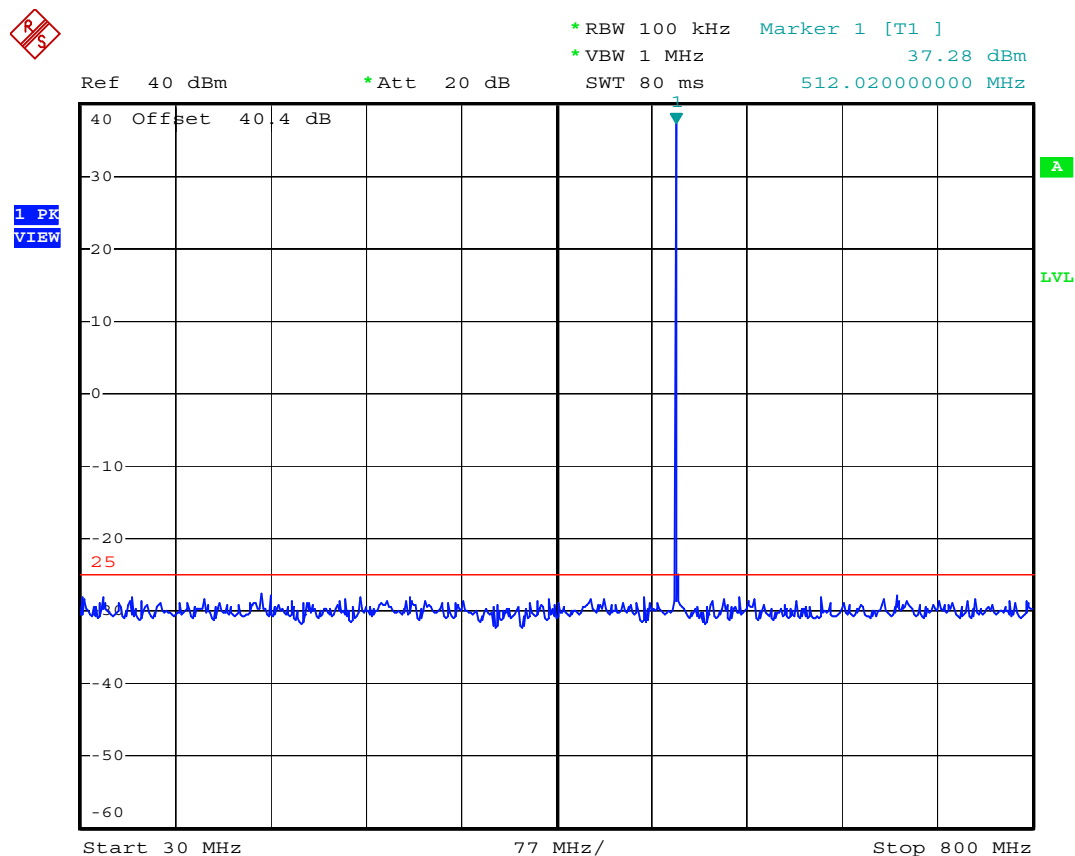

Date: 6.JAN.2000 00:35:43

Plot 5.9.4.3.4. Conducted Transmitter Spurious Emissions for 511.9 MHz, Low Power, 800 MHz - 5.5 GHz

Test Frequency: 511.9 MHz

Channel Spacing: 6.25 kHz

Power: 5 W

Modulation: Digital

Spectrum Plot 1:

- Ref: 20 dBm, Att: 10 dB, RBW: 100 kHz, VBW: 1 MHz, SWT: 20 ms
- Marker 1 [T1]: -42.13 dBm, 936.00000000 MHz
- Offset: 40.4 dB
- Start: 800 MHz, Stop: 1 GHz, Scale: 20 MHz/

Spectrum Plot 2:

- Date: 6.JAN.2000 01:43:07
- Ref: 10 dBm, Att: 0 dB, RBW: 1 MHz, VBW: 3 MHz, SWT: 60 ms
- Marker 1 [T1]: -42.09 dBm, 1.027000000 GHz
- Offset: 40.4 dB
- Start: 1 GHz, Stop: 5.5 GHz, Scale: 450 MHz/

The figure displays two spectral analysis plots. The top plot shows a noisy signal centered around 936 MHz with a level of approximately -42 dBm. A red horizontal line at -25 dBm indicates the noise floor. The bottom plot shows a similar noisy signal centered around 1.027 GHz, also at approximately -42 dBm, with a red noise floor line at -25 dBm. Both plots include various measurement parameters like resolution bandwidth (RBW), video bandwidth (VBW), and sweep time (SWT).

5.10. TRANSMITTER SPURIOUS/HARMONIC RADIATED EMISSIONS [§§ 2.1053, 2.1057, 22.359, 80.211(f)(3) & 90.210]

5.10.1. Limits


Emissions shall be attenuated below the mean output power of the transmitter as follows:

FCC Rules	Attenuation Limit (dBc)
§ 22.359	At least $43 + 10 \log (P)$ dB.
§ 80.211(f)(3),	At least $43 + 10 \log_{10}$ (mean power in watts) dB
§ 90.210(b)	At least $43 + 10 \log (P)$ dB
§ 90.210(d)	At least $50 + 10 \log (P)$ dB or 70 dB, whichever is the lesser attenuation.
§ 90.210(e)	At least $55 + 10 \log (P)$ or 65 dB, whichever is the lesser attenuation.

5.10.2. Method of Measurements

The spurious/harmonic ERP measurements are using substitution method specified in Section 8.2 of this report.

5.10.3. Test Arrangement

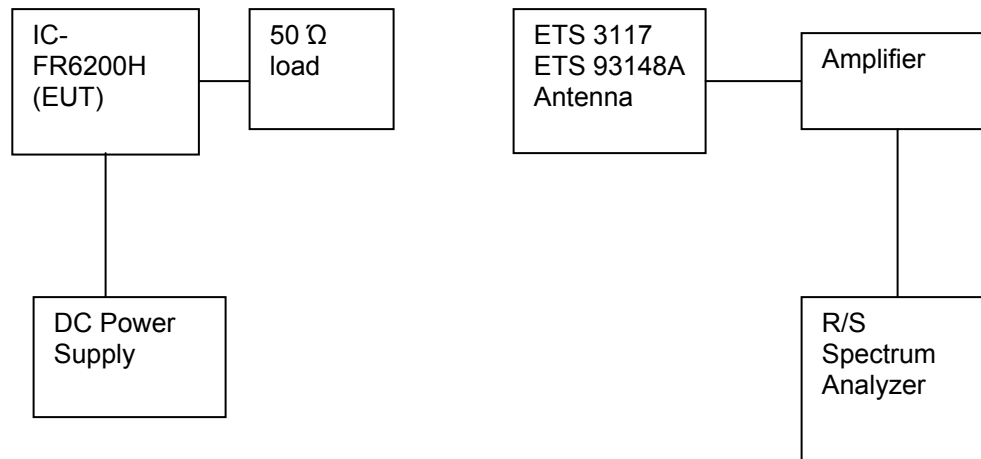

5.10.4. Test Data

Remarks:

- The RF spurious/harmonic emission characteristics for different channel spacing are indistinguishable. Therefore, the following radiated emissions were performed at 6.25 kHz channel spacing operation, and the results were compared with the more stringent limit for the worst-case.
- The radiated emissions were performed with high power setting (50 Watts) at 3 m distance to represents the worst-case test configuration.
- The emissions were scanned from 30 MHz to 10th harmonics (2 GHz); all spurious emissions that are in excess of 20dB below the specified limit shall be recorded.

5.10.4.1. Near Lowest Frequency (450.1 MHz)

Test Frequency (MHz):		450.1				
Power_{conducted} (dBm):		46.87				
Limit (dBm):		-25.0				
Frequency (MHz)	E-Field (dBμV/m)	EMI Detector (Peak/QP)	Antenna Polarization (H/V)	ERP Measured (dBm)	Limit (dBm)	Margin (dB)
3600.8	54.38	Peak	V	-44.32	-25.0	-19.3
3600.8	58.28	Peak	H	-40.42	-25.0	-15.4
4501.0	61.69	Peak	V	-36.29	-25.0	-11.3
4501.0	62.60	Peak	H	-35.38	-25.0	-10.4

5.10.4.2. Near Middle Frequency (481.1 MHz)

Test Frequency (MHz):		481.1				
Power_{conducted} (dBm):		46.58				
Limit (dBm):		-25.0				
Frequency (MHz)	E-Field (dBμV/m)	EMI Detector (Peak/QP)	Antenna Polarization (H/V)	ERP Measured (dBm)	Limit (dBm)	Margin (dB)
1443.3	54.32	Peak	H	-44.54	-25.0	-19.5
3367.7	62.29	Peak	V	-37.31	-25.0	-12.3
3367.7	63.08	Peak	H	-36.52	-25.0	-11.5
3848.8	58.94	Peak	V	-41.17	-25.0	-16.2
3848.8	56.85	Peak	H	-43.26	-25.0	-18.3
4329.9	69.48	Peak	V	-31.23	-25.0	-6.2
4329.9	70.25	Peak	H	-30.46	-25.0	-5.5
4811.0	68.03	Peak	V	-32.03	-25.0	-7.0
4811.0	64.38	Peak	H	-35.68	-25.0	-10.7

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 15ICOM396_FCC90

January 27, 2015

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.10.4.3. Near Highest Frequency (511.9 MHz)

Test Frequency (MHz):		511.9				
Power_{conducted} (dBm):		47.12				
Limit (dBm):		-25.0				
Frequency (MHz)	E-Field (dBμV/m)	EMI Detector (Peak/QP)	Antenna Polarization (H/V)	ERP Measured (dBm)	Limit (dBm)	Margin (dB)
3583.3	63.65	Peak	V	-35.22	-25.0	-10.2
4095.2	56.80	Peak	V	-42.38	-25.0	-17.4
4607.1	72.02	Peak	V	-26.65	-25.0	-1.6
4607.1	71.02	Peak	H	-27.65	-25.0	-2.6
5119.0	67.88	Peak	V	-29.75	-25.0	-4.8
5119.0	67.62	Peak	H	-30.01	-25.0	-5.0

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 15ICOM396_FCC90

January 27, 2015

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.11. FREQUENCY STABILITY [§§ 2.1055, 22.355, 74.464, 80.209 & 90.213]

5.11.1. Limits

§ 90.213 Transmitters used must have minimum frequency stability as specified in the following table.

Frequency Range (MHz)	Channel Bandwidth (KHz)	Frequency Tolerance (ppm)		
		Fixed and Base Stations	Mobile Stations	
			> 2 W	≤ 2 W
150-174 MHz	6.25	1.0	2.0	2.0
	12.5	2.5	5.0	5.0
	25	5.0	5.0	50.0*
421-512 MHz	6.25	0.5	1.0	1.0
	12.5	1.5	2.5	2.5
	25	2.5	5.0	5.0

- Stations operating in the 154.45 to 154.49 MHz or the 173.2 to 173.4 MHz bands must have a frequency stability of 5 ppm.
- Paging transmitters operating on paging-only frequencies must operate with frequency stability of 5 ppm in the 150-174 MHz band and 2.5 ppm in the 421-512 MHz band.

§ 22.355 Transmitters used must have minimum frequency stability as specified in the following table.

TABLE C-1—FREQUENCY TOLERANCE FOR TRANSMITTERS IN THE PUBLIC MOBILE SERVICES

Frequency range (MHz)	Base, fixed (ppm)	Mobile ≤3 watts (ppm)	Mobile ≤3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929	5.0	n/a	n/a
929 to 960	1.5	n/a	n/a
2110 to 2220	10.0	n/a	n/a

§ 74.464 - For operations on frequencies above 25 MHz using authorized bandwidths up to 30 kHz, the licensee of a remote pickup broadcast station or system shall maintain the operating frequency of each station in compliance with the frequency tolerance requirements of §90.213 of this chapter. For all other operations, the licensee of a remote pickup broadcast station or system shall maintain the operating frequency of each station in accordance with the following:

Frequency range	Tolerance (percent)	
	Base station	Mobile station
25 to 30 MHz:		
3 W or less002	.005
Over 3 W002	.002
30 to 300 MHz:		
3 W or less0005	.005
Over 3 W0005	.0005
300 to 500 MHz, all powers00025	.0005

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 15ICOM396_FCC90


January 27, 2015

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.11.2. Method of Measurements

Refer to Section 8.3 of this report for measurement details

5.11.3. Test Arrangement

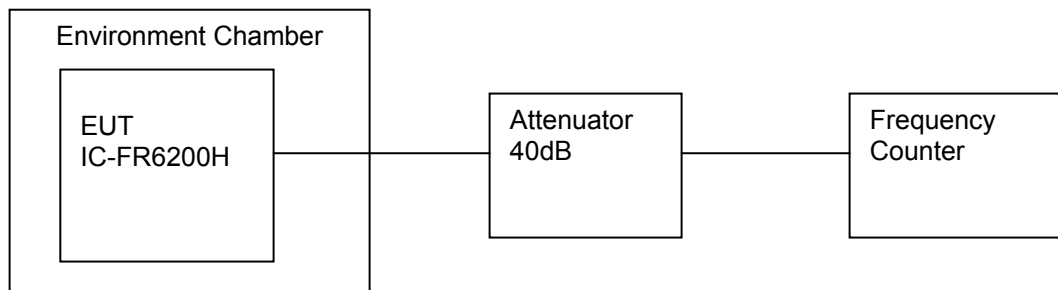

5.11.4. Test Data

Test Frequency:		450.1 MHz	
Full Power Level:		46.87 dBm	
Frequency Tolerance Limit:		± 0.5 ppm or ± 225 Hz	
Max. Frequency Tolerance Measured:		-185 Hz or -0.41 ppm	
Input Voltage Rating:		13.6 VDC (nominal)	
Ambient Temperature (°C)	Frequency Drift (Hz)		
	Supply Voltage (Nominal) 13.6 VDC	Supply Voltage (Battery End Point) 11.56 VDC	Supply Voltage (Battery Fully Charged) 15.64 VDC
-30	-164	--	--
-20	-185	--	--
-10	-185	--	--
0	-124	--	--
+10	-41	--	--
+20	9	102	10
+30	-6	--	--
+40	64	--	--
+50	126	--	--
+60	123	--	--

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 15ICOM396_FCC90

January 27, 2015

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.12. TRANSIENT FREQUENCY BEHAVIOR [§ 90.214 & 74.462(c)]

5.12.1. Limits

Transient frequencies must be within the maximum frequency difference limits during the time intervals indicated:


Time intervals ^{1, 2}	Maximum frequency difference ³	All equipment	
		150 to 174 MHz	421 to 512MHz
Transient Frequency Behavior for Equipment Designed to Operate on 25 KHz Channels			
t ₁ ⁴	± 25.0 KHz	5.0 ms	10.0 ms
t ₂	± 12.5 KHz	20.0 ms	25.0 ms
t ₃ ⁴	± 25.0 KHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 12.5 KHz Channels			
t ₁ ⁴	± 12.5 KHz	5.0 ms	10.0 ms
t ₂	± 6.25 KHz	20.0 ms	25.0 ms
t ₃ ⁴	± 12.5 KHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 6.25 KHz Channels			
t ₁ ⁴	±6.25 KHz	5.0 ms	10.0 ms
t ₂	±3.125 KHz	20.0 ms	25.0 ms
t ₃ ⁴	±6.25 KHz	5.0 ms	10.0 ms

- t_{on} is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.
 t_1 is the time period immediately following t_{on} .
 t_2 is the time period immediately following t_1 .
 t_3 is the time period from the instant when the transmitter is turned off until t_{off} .
 t_{off} is the instant when the 1 kHz test signal starts to rise.
- During the time from the end of t_2 to the beginning of t_3 , the frequency difference must not exceed the limits specified in § 90.213.
- Difference between the actual transmitter frequency and the assigned transmitter frequency.
- If the transmitter carrier output power rating is 6 Watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

5.12.2. Method of Measurements


Refer to Section 8.6 of this test report and ANSI/TIA/EIA-603-D-2010, Section 2.

5.12.3. Test Arrangement

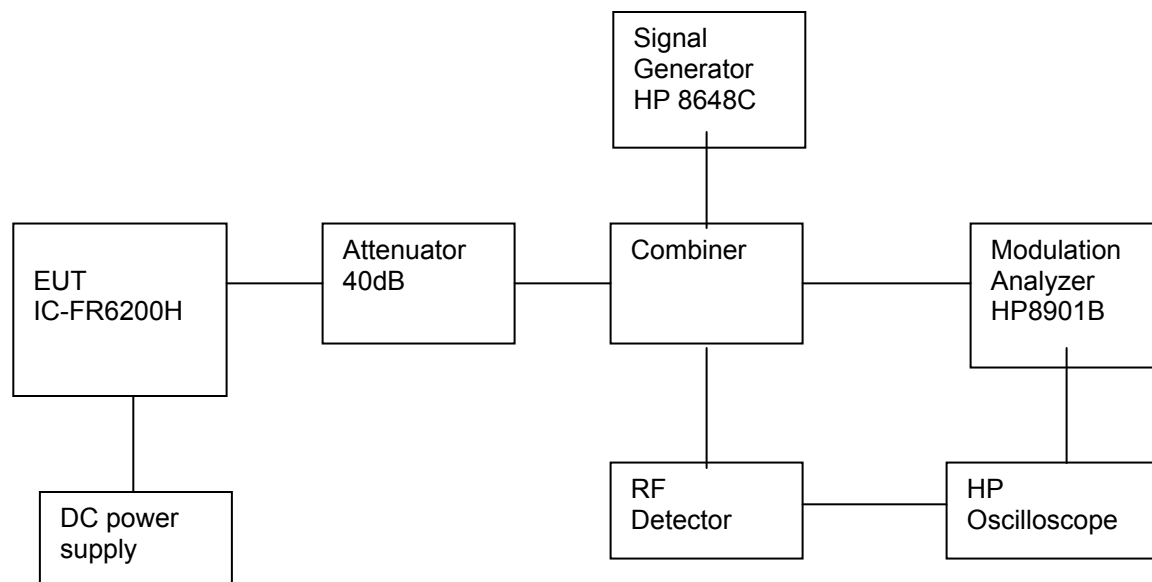


5.12.4. Test Data


Plot 5.12.4.1. Transient Frequency Behavior for 12.5 kHz Channel Spacing

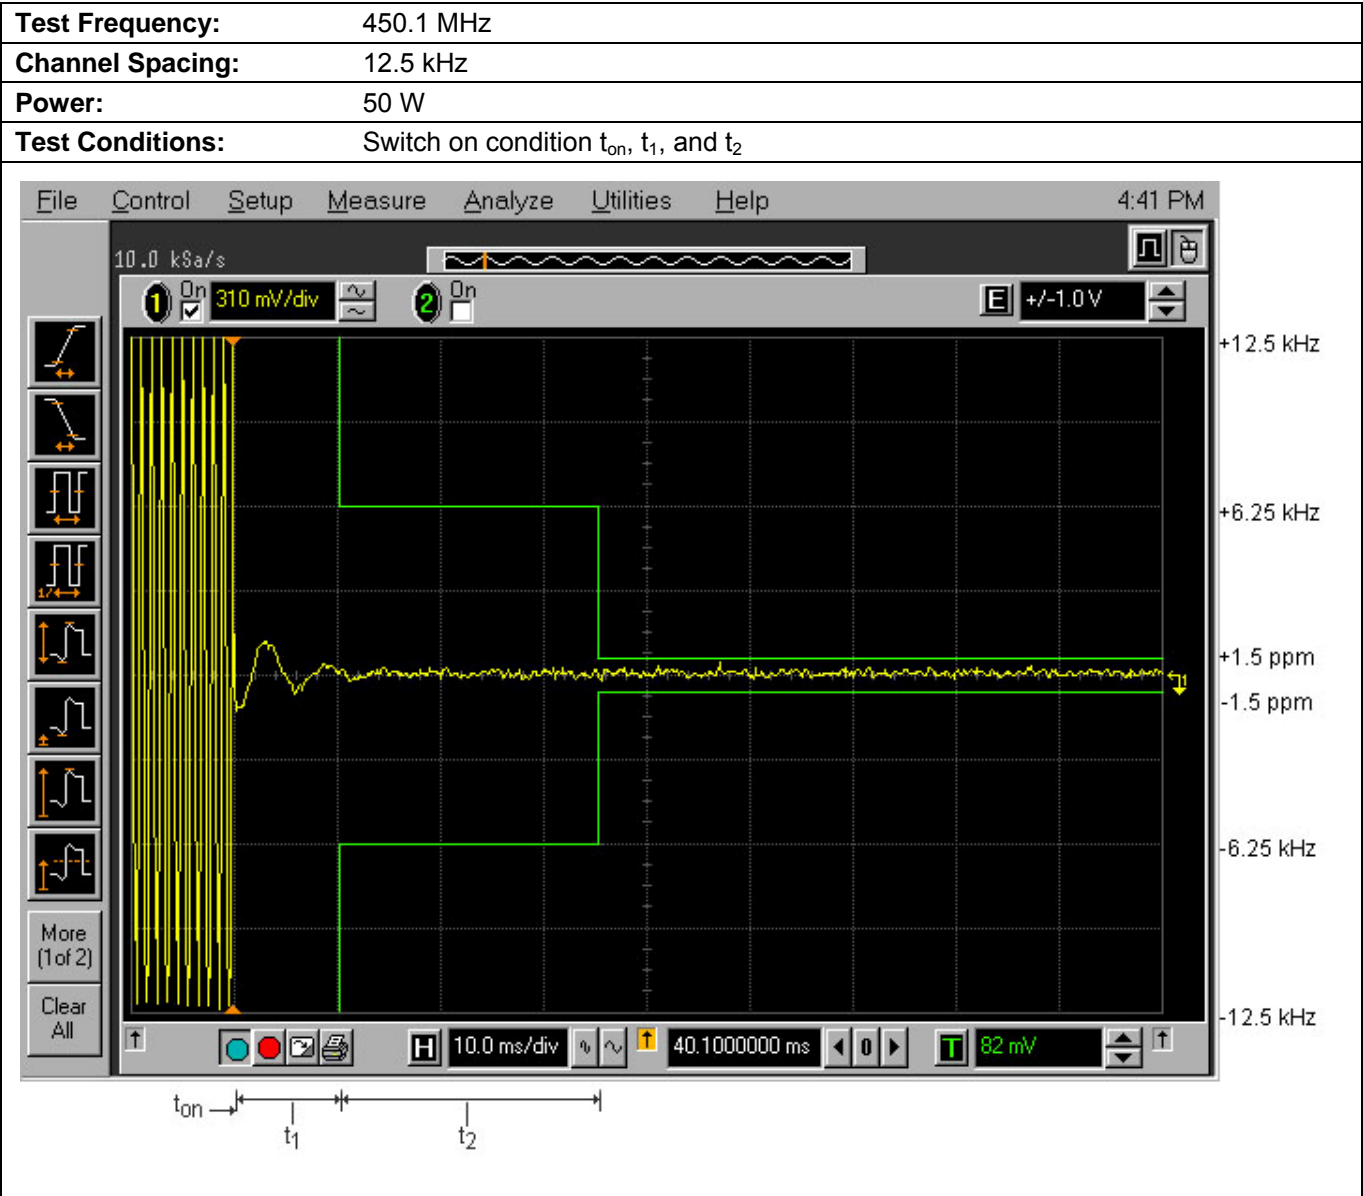


Plot 5.12.4.2. Transient Frequency Behavior for 12.5 kHz Channel Spacing

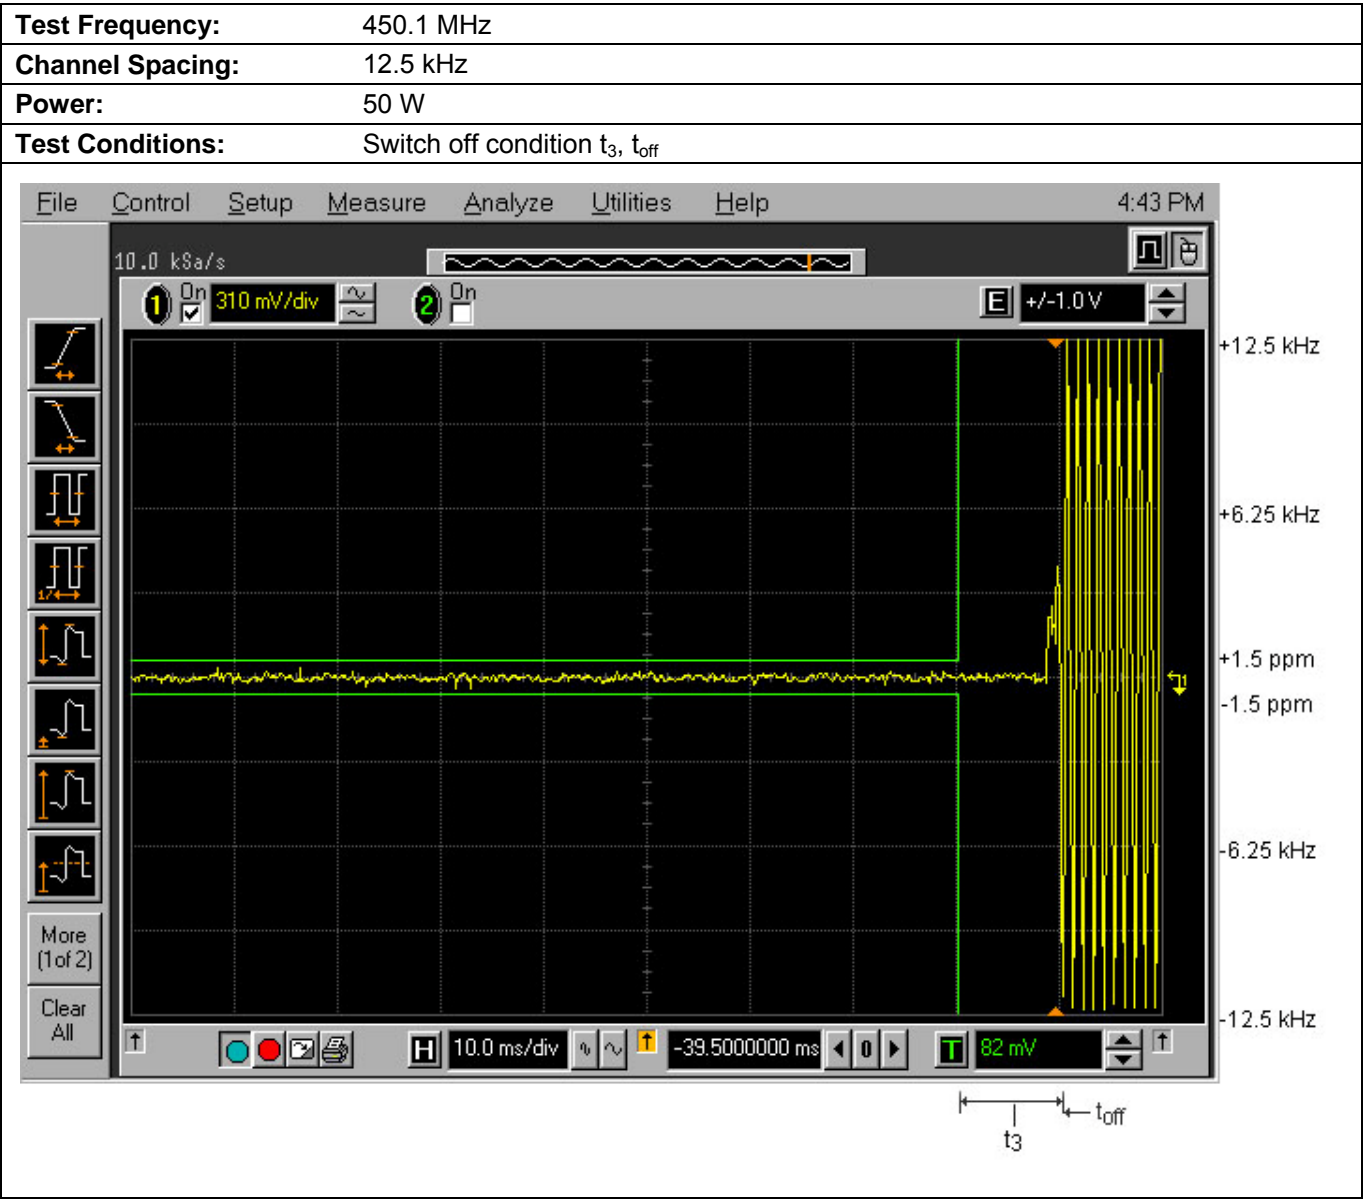


Plot 5.12.4.3. Transient Frequency Behavior for 25 kHz Channel Spacing

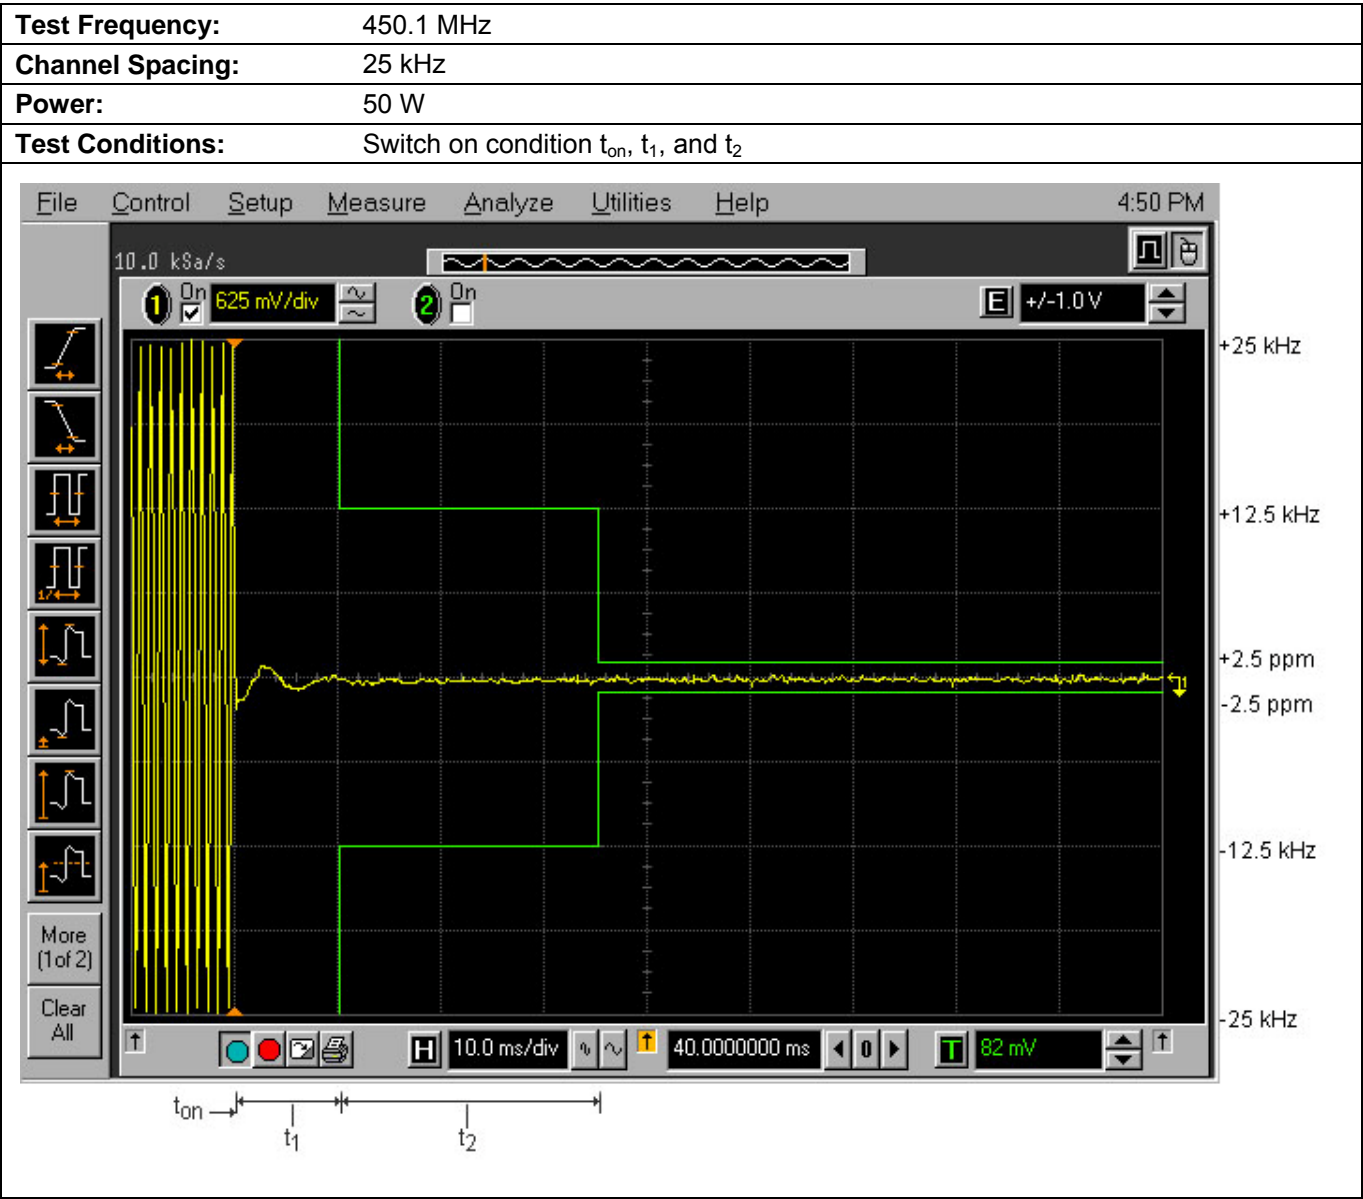


Plot 5.12.4.4. Transient Frequency Behavior for 25 kHz Channel Spacing

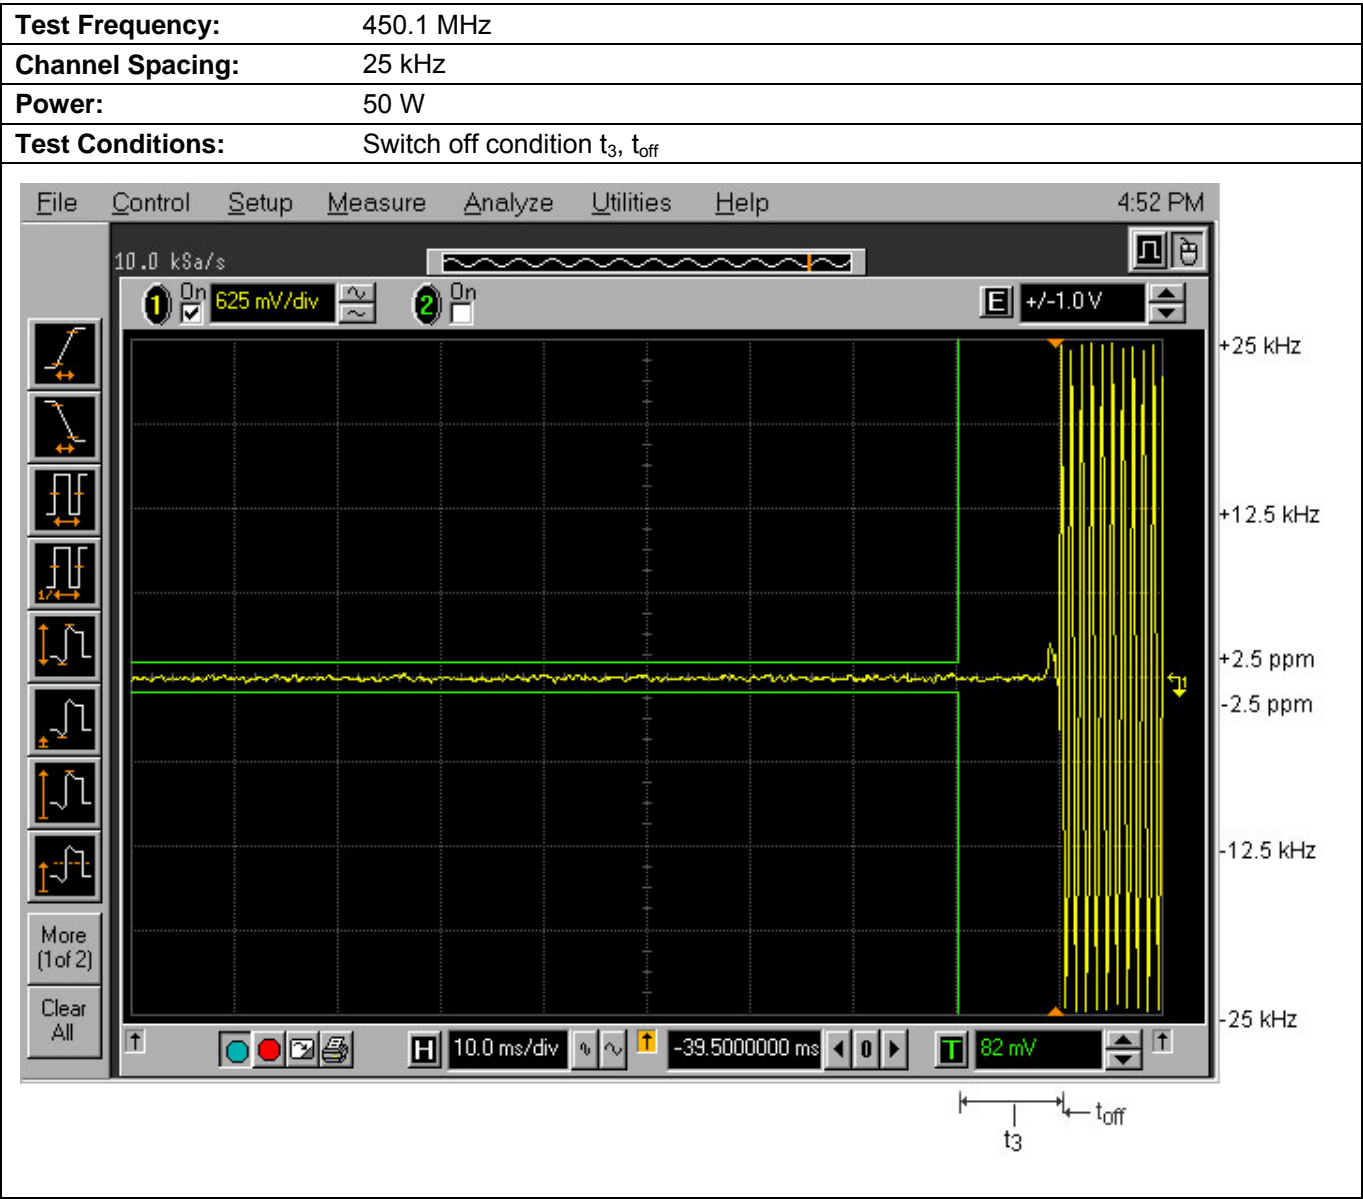

Plot 5.12.4.5. Transient Frequency Behavior for 6.25 kHz Channel Spacing

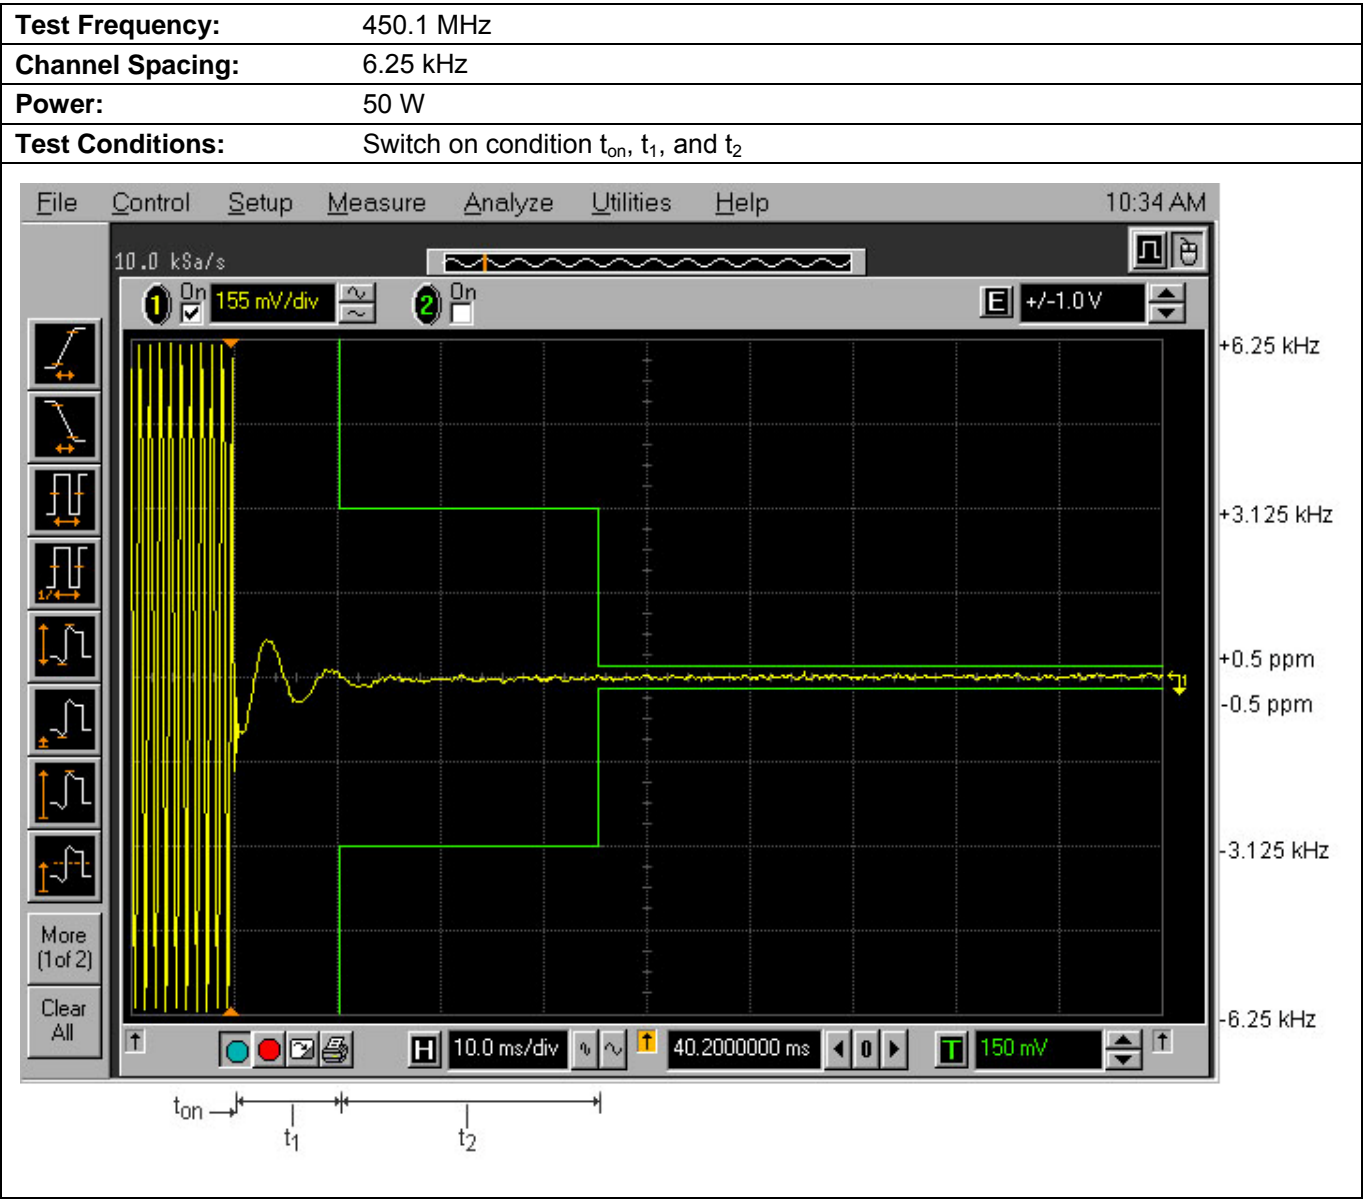

Plot 5.12.4.6. Transient Frequency Behavior for 6.25 kHz Channel Spacing

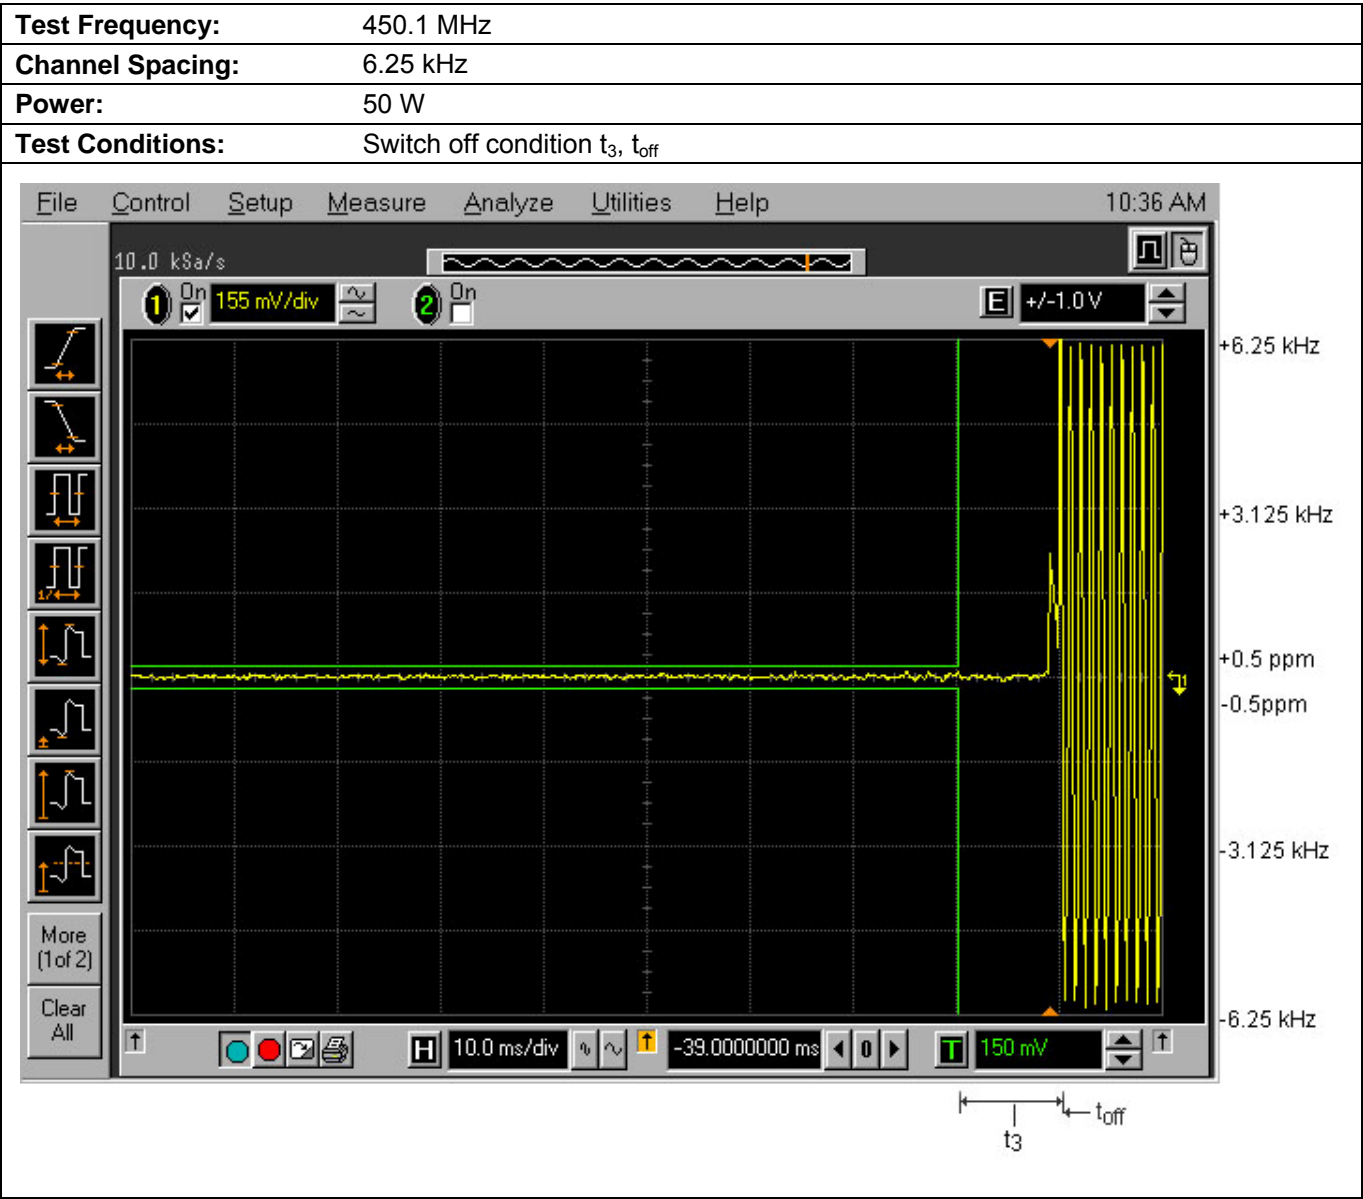

5.13. RF EXPOSURE REQUIREMENTS [§§ 1.1310 & 2.1091]

5.13.1. Limits

§ 1.1310: The criteria listed in the following table shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in 1.1307(b).

Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1500			f/300	6
1500-100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500			f/1500	30
1500-100,000			1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

Note 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

Note 2: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

5.13.2. Method of Measurements

Calculation Method of RF Safety Distance:

$$S = \frac{PG}{4\pi \cdot r^2} = \frac{EIRP}{4\pi \cdot r^2}$$

Where,
P: power input to the antenna in mW
EIRP: Equivalent (effective) isotropic radiated power.
S: power density mW/cm²
G: numeric gain of antenna relative to isotropic radiator
r: distance to centre of radiation in cm

$$r = \sqrt{\frac{PG}{4\pi \cdot S}} = \sqrt{\frac{EIRP}{4\pi \cdot S}}$$

FCC radio frequency exposure limits may be exceeded at distances closer than r cm from the antenna of this device.

5.13.3. Evaluation of RF Exposure Compliance Requirements

Maximum RF Power conducted, P_{conducted}[W]:	51.52 Measured
Maximum Antenna Gain, G[dBi]:	0
Maximum EIRP, P_{EIRP}[W]:	51.52
User-based time-average for PTT	100%
MPE Limit for Occupational/Controlled Exposure, S_{controlled}[mW/cm²]:	1.5
MPE Limit for General Population/Uncontrolled Exposure, S_{uncontrolled}[mW/cm²]	0.3
Calculated RF Safety Distance for Occupational/Controlled Exposure, r_{safety_controlled}[cm]:	53
Calculated RF Safety Distance for General Population/Uncontrolled Exposure, r_{safety_uncontrolled}[cm]	117

EXHIBIT 6. TEST EQUIPMENT LIST

Test Instruments	Manufacturer	Model No.	Serial No.	Operating Range	Calibration Due Date
Spectrum Analyzer	R/S	FSP	100646	9 KHz – 7 GHz	06-Oct-15
Attenuator (30dB)	Aeroflex/Weinschel	53-40-34	MN917	DC-1 GHz	Note 1*
High Pass Filter	Mini Circuit	SHP 250	--	Cut off 250 MHz	Note 1*
Power Meter	Hewlett Packard	436A	2016A07747	100K--50G sensor dependent	12-Feb-15
Power Sensor	Hewlett Packard	8481A	2237A33409	100KHz-4.2GHz	12-Feb-15
Modulation Analyzer	Hewlett Packard	8901B	3226A04606	150KHz-1300MHz	29-Jan-15
Frequency Counter	EIP	545A	2683	10Hz - 18 GHz	07-Apr-15
Combiner	Mini Circuit	ZFSC-3-4	15542	1MHz - 1GHz	Note 1*
RF Detector	Pasternack	PE8000-50		10M--1G Hz	Note 1*
Infinium Digital Oscilloscope	Hewlett-Packard	54801A	US38380192	DC--500M Hz 1G sampling	16-Jun-15
Environment Chamber	Envirotronics	SSH32C	11994847-S-11059	-60 to 177 degree C	01-May-15
RF Signal Generator	Marconi Instruments	2024	112255/164	9kHz-2.4GHz	02-Jul-15
Power supply	Tenma	72-7295	490300297	1-40V DC 5A	Note 1*
FFT Digital Spectrum Analyzer	Advantest	R9211E	8202336	10mHz--100KHz	03-Feb-15
RF Communication Test Set	Hewlett Packard	8920B	US39064699	30MHz-1GHz	17-Jan-15
Horn antenna	EMCO	3117	19425	1-18GHz	02-May-15
Preamplifier	Hewlett Packard	8449B	3008A00769	1-26.5GHz	06-Aug-15
High Pass Filter	Mini Circuit	SHP 250	--	Cut off 230 MHz	Note 1*
Power supply	XANTREX	XKW 60-50	26509	0-60V 0-50A DC	Note 1*
High Pass Filter	Mini Circuit	SHP 800	--	Cut off 750 MHz	Note 1*
Attenuator	Aeroflex/Weinschel	23-20-34	BH7876	DC-18 GHz	Note 1*
Antenna	ETS	93148	1101	200-2000 MHz	14-Apr-15
Antenna	EMCO	3110B	3379	20-200 MHz	11-Sep-15
EMI Receiver	R/S	ESU 40	100037	20 Hz-40 GHz	05-Apr-15
Preamplifier	AH System	PAM-0118	225	20MHz-18GHz	07-Apr-15
Tunable Band-Reject Filter	K & L	3TFNF-30/76-N-N	36	28-300 MHz	Note 1

*Note 1: Internal Verification/Calibration check

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 15ICOM396_FCC90

January 27, 2015

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 7. MEASUREMENT UNCERTAINTY

The measurement uncertainties stated were calculated in accordance with the requirements of CISPR 16-4-2 @ IEC:2003 and JCGM 100:2008 (GUM 1995) – Guide to the Expression of Uncertainty in Measurement.

7.1. RADIATED EMISSION MEASUREMENT UNCERTAINTY

	Radiated Emission Measurement Uncertainty @ 3m, Horizontal (30-1000 MHz):	Measured	Limit
u_c	Combined standard uncertainty: $u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)}$	± 2.15	± 2.6
U	Expanded uncertainty U: $U = 2u_c(y)$	± 4.30	± 5.2

	Radiated Emission Measurement Uncertainty @ 3m, Vertical (30-1000 MHz):	Measured	Limit
u_c	Combined standard uncertainty: $u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)}$	± 2.39	± 2.6
U	Expanded uncertainty U: $U = 2u_c(y)$	± 4.78	± 5.2

	Radiated Emission Measurement Uncertainty @ 3 m, Horizontal & Vertical (1 – 18 GHz):	Measured	Limit
u_c	Combined standard uncertainty: $u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)}$	± 1.87	Under consideration
U	Expanded uncertainty U: $U = 2u_c(y)$	± 3.75	Under consideration

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 15ICOM396_FCC90

January 27, 2015

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 8. MEASUREMENT METHODS

8.1. CONDUCTED POWER MEASUREMENTS

- The following shall be applied to the combination(s) of the radio device and its intended antenna(e).
- If the RF level is user adjustable, all measurements shall be made with the highest power level available to the user for that combination.
- The following method of measurement shall apply to both conducted and radiated measurements.
- The radiated measurements are performed at the Ultratech Calibrated Open Field Test Site.
- The measurement shall be performed using normal operation of the equipment with modulation.

Test procedure shall be as follows:

Step 1: Duty Cycle measurements if the transmitter's transmission is transient

- Using a EMI Receiver with the frequency span set to 0 Hz and the sweep time set at a suitable value to capture the envelope peaks and the duty cycle of the transmitter output signal;
- The duty cycle of the transmitter, $x = T_x \text{ on} / (T_x \text{ on} + T_x \text{ off})$ with $0 < x < 1$, is measure and recorded in the test report. For the purpose of testing, the equipment shall be operated with a duty cycle that is equal or more than 0.1.


Step 2: Calculation of Average EIRP. See Figure 1

- The average output power of the transmitter shall be determined using a wideband, calibrated RF average power meter with the power sensor with an integration period that exceeds the repetition period of the transmitter by a factor 5 or more. The observed value shall be recorded as "A" (in dBm);
- The e.i.r.p. shall be calculated from the above measured power output "A", the observed duty cycle x, and the applicable antenna assembly gain "G" in dBi, according to the formula:

$$\text{EIRP} = A + G + 10\log(1/x)$$

{X = 1 for continuous transmission => $10\log(1/x) = 0 \text{ dB}$ }

Figure 1.

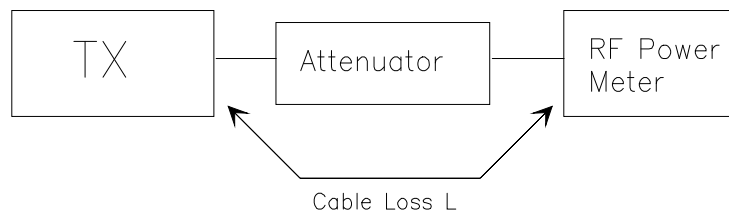

8.2. RADIATED POWER MEASUREMENTS (ERP & EIRP) USING SUBSTITUTION METHOD

8.2.1. MAXIMIZING RF EMISSION LEVEL (E-FIELD)

- (a) The measurements were performed with full rf output power and modulation.
- (b) Test was performed at listed 3m open area test site (listed with FCC, IC, ITI, NVLAP, ACA & VCCI).
- (c) The transmitter under test was placed at the specified height on a non-conducting turntable (80 cm height)
- (d) The BICONILOG antenna (20 MHz to 1 GHz) or HORN antenna (1 GHz to 18 GHz) was used for measuring.
- (e) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor
 $E \text{ (dB}\mu\text{V/m)} = \text{Reading (dB}\mu\text{V)} + \text{Total Correction Factor (dB/m)}$

- (f) Set the EMI Receiver and #2 as follows:

Center Frequency: test frequency
Resolution BW: 100 KHz
Video BW: same
Detector Mode: positive
Average: off
Span: 3 x the signal bandwidth

- (g) The test antenna was lowered or raised from 1 to 4 meters until the maximum signal level was detected.
- (h) The transmitter was rotated through 360° about a vertical axis until a higher maximum signal was received.
- (i) The test antenna was lowered or raised again from 1 to 4 meters until a maximum was obtained. This level was recorded.
- (j) The recorded reading was corrected to the true field strength level by adding the antenna factor, cable loss and subtracting the pre-amplifier gain.
- (k) The above steps were repeated with both transmitters' antenna and test receiving antenna placed in vertical and horizontal polarization. Both readings with the antennas placed in vertical and horizontal polarization shall be recorded.
- (l) Repeat for all different test signal frequencies.

8.2.2. Measuring the EIRP of Spurious/Harmonic Emissions using Substitution Method

- (a) Set the EMI Receiver (for measuring E-Field) and Receiver #2 (for measuring EIRP) as follows:

Center Frequency: equal to the signal source
Resolution BW: 100 KHz
Video BW: VBW > RBW
Detector Mode: positive
Average: off
Span: 3 x the signal bandwidth

- (b) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor
 $E \text{ (dBuV/m)} = \text{Reading (dBuV)} + \text{Total Correction Factor (dB/m)}$

- (c) Select the frequency and E-field levels obtained in the Section 8.2.1 for ERP/EIRP measurements.
(d) Substitute the EUT by a signal generator and one of the following transmitting antenna (substitution antenna):
 - ◆ DIPOLE antenna for frequency from 30-1000 MHz or
 - ◆ HORN antenna for frequency above 1 GHz }.(e) Mount the transmitting antenna at 1.5 meter high from the ground plane.
(f) Use one of the following antenna as a receiving antenna:
 - ◆ DIPOLE antenna for frequency from 30-1000 MHz or
 - ◆ HORN antenna for frequency above 1 GHz }.(g) If the DIPOLE antenna is used, tune it's elements to the frequency as specified in the calibration manual.
(h) Adjust both transmitting and receiving antenna in a VERTICAL polarization.
(i) Tune the EMI Receivers to the test frequency.
(j) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.
(k) The transmitter was rotated through 360° about a vertical axis until a higher maximum signal was received.
(l) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.
(m) Adjust input signal to the substitution antenna until an equal or a known related level to that detected from the transmitter was obtained in the test receiver.
(n) Record the power level read from the Average Power Meter and calculate the ERP/EIRP as follows:

$$P = P1 - L1 = (P2 + L2) - L1 = P3 + A + L2 - L1$$

$$\text{EIRP} = P + G1 = P3 + L2 - L1 + A + G1$$

$$\text{ERP} = \text{EIRP} - 2.15 \text{ dB}$$

$$\text{Total Correction factor in EMI Receiver \# 2} = L2 - L1 + G1$$

Where: P: Actual RF Power fed into the substitution antenna port after corrected.
P1: Power output from the signal generator
P2: Power measured at attenuator A input
P3: Power reading on the Average Power Meter
EIRP: EIRP after correction
ERP: ERP after correction

- (o) Adjust both transmitting and receiving antenna in a HORIZONTAL polarization, then repeat step (k) to (o)
(p) Repeat step (d) to (o) for different test frequency
(q) Repeat steps (c) to (j) with the substitution antenna oriented in horizontal polarization.
(r) Actual gain of the EUT's antenna is the difference of the measured EIRP and measured RF power at the RF port. Correct the antenna gain if necessary.

Figure 2


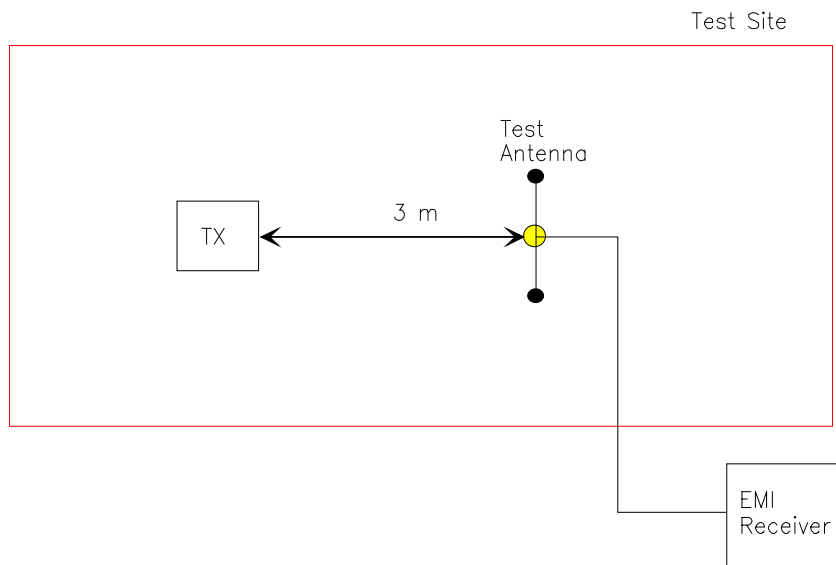


Figure 3

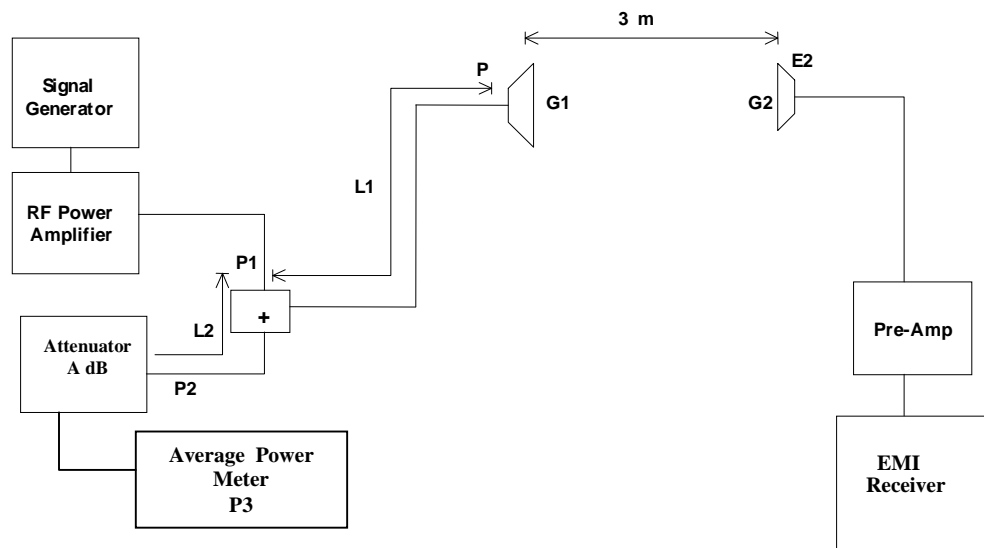

8.3. FREQUENCY STABILITY

Refer to FCC @ 2.1055.

- (a) The frequency stability shall be measured with variation of ambient temperature as follows: From -30 to +50 centigrade except that specified in subparagraph (2) & (3) of this paragraph.
- (b) Frequency measurements shall be made at extremes of the specified temperature range and at intervals of not more than 10 centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short-term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stability circuitry need be subjected to the temperature variation test.
- (d) The frequency stability supply shall be measured with variation of primary supply voltage as follows:
 - (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
 - (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.
 - (3) The supply voltage shall be measured at the input to the cable normally provide with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.
- (e) When deemed necessary, the Commission may require tests of frequency stability under conditions in addition to those specifically set out in paragraphs (a), (b), (c) and (d) of this section. (For example, measurements showing the effect of proximity to large metal objects, or of various types of antennas, may be required for portable equipment).

8.4. EMISSION MASK

Voice or Digital Modulation Through a Voice Input Port @ 2.1049(c)(i): The transmitter was modulated by a 2.5 KHz tone signal at an input level 16 dB greater than that required to produce 50% modulation (e.g.: ± 2.5 KHz peak deviation at 1 KHz modulating frequency). The input level was established at the frequency of maximum response of the audio modulating circuit.

Digital Modulation Through a Data Input Port @ 2.1049(h): Transmitters employing digital modulation techniques - when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudo-random generators or other devices required in normal service. Additionally, the Emission Masks shall be shown for operation with any devices used for modifying the spectrum when such devices are operational at the discretion of the user.

The following EMI Receiver bandwidth shall be used for measurement of Emission Mask/Out-of-Band Emission Measurements:

- (1) For 25 KHz Channel Spacing: RBW = 300 Hz
- (2) For 12.5 KHz or 6.25 KHz Channel Spacings: RBW = 100 Hz

The all cases the Video Bandwidth shall be equal or greater than the measuring bandwidth.

8.5. SPURIOUS EMISSIONS (CONDUCTED)

With transmitter modulation characteristics described in Out-of-Band Emissions measurements @ 2.1049, the transmitter spurious and harmonic emissions were scanned. The spurious and harmonic emissions were measured with the EMI Receiver controls set as RBW = 30 KHz minimum, VBW \geq RBW and SWEEP TIME = AUTO). The transmitter was operated at a full rated power output, and modulated as follows:

FCC 47 CFR 2.1057 - Frequency spectrum to be investigated: The spectrum was investigated from the lowest radio generated in the equipment up to at least the 10th harmonic of the carrier frequency or to the highest frequency practicable in the present state of the art of measuring techniques, whichever is lower. Particular attention should be paid to harmonics and subharmonics of the carrier frequency. Radiation at the frequencies of multiplier stages should be checked. The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

FCC 47 CFR 2.1051 - Spurious Emissions at Antenna Terminal: The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of the harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in 2.1049 as appropriate. The magnitude of spurious emissions, which are attenuated more than 20 dB below the permissible value, need not be specified.

8.6. TRANSIENT FREQUENCY BEHAVIOR

1. Connect the transmitter under tests as shown in the above block diagram
2. Set the signal generator to the assigned frequency and modulate with a 1 KHz tone at ± 12.5 KHz deviation and its output level to be 50 dB below the transmitter rf output at the test receiver end.
3. Set the horizontal sweep rate on the storage scope to 10 milliseconds per division and adjust the display to continuously view the 1000 Hz tone from the Demodulator Output Port (DOP) of the Test Receiver. Adjust the vertical scale amplitude control of the scope to display the 1000 Hz at ± 4 divisions vertical Center at the display.
4. Adjust the scope so it will trigger on an increasing magnitude from the RF trigger signal of the transmitter under test when the transmitter was turned on. Set the controls to store the display.
5. The output at the DOP, due to the change in the ratio of the power between the signal generator input power and transmitter output power will, because of the capture effect of the test receiver, produce a change in display: For the first part of the sweep it will show the 1 KHz test signal. Then once the receiver's demodulator has been captured by the transmitter power, the display will show the frequency difference from the assigned frequency to the actual transmitter frequency versus time. The instant when the 1 KHz test signal is completely suppressed (including any capture time due to phasing) is considered to be t_{on} . The trace should be maintained within the allowed divisions during the period t_1 and t_2 .
6. During the time from the end of t_2 to the beginning of t_3 the frequency difference should not exceed the limits set by the FCC in Part 90.214 and the outlined in the Carrier Frequency Stability sections. The allowed limit is equal to FCC frequency tolerance limits specified in FCC 90.213.
7. Repeat the above steps when the transmitter was turned off for measuring t_3 .