


Prüfbericht-Nr.: Test Report No.:	17051492 002	Auftrags-Nr.: Order No.:	164042267	Seite 1 von 155 Page 1 of 155
Kunden-Referenz-Nr.: Client Reference No.:	N/A	Auftragsdatum: Order date:	30.07.2015	
Auftraggeber: Client:	Lightcomm Technology Co., Ltd. RM1708-10, 17/F, PROSPERITY CENTRE, 25 CHONG YIP STREET, KWUN TONG, HONG KONG			
Prüfgegenstand: Test item:	7" Wi-Fi Android™ Tablet			
Bezeichnung / Typ-Nr.: Identification / Type No.:	DL718M, DL718M-B, DL-718M-G, DL718M-P, DL718M-R, MID721-L			
Auftrags-Inhalt: Order content:	FCC Certification			
Prüfgrundlage: Test specification:	CFR47 FCC Part 15: Subpart C Section 15.247 CFR47 FCC Part 15: Subpart C Section 15.207 CFR47 FCC Part 15: Subpart C Section 15.209			
Wareneingangsdatum: Date of receipt:	06.08.2015			
Prüfmuster-Nr.: Test sample No.:	A000243804-001, A000243804-002, A000243804-003			
Prüfzeitraum: Testing period:	08.08.2015 - 17.08.2015			
Ort der Prüfung: Place of testing:	Shenzhen EMTEK Co., Ltd.			
Prüflaboratorium: Testing laboratory:	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: Test result*:	Pass			
geprüft von / tested by:		kontrolliert von / reviewed by:		
 28.08.2015 Owen Tian/Senior Project Manager Datum Name / Stellung Unterschrift Date Name / Position Signature		 28.08.2015 Sam Lin/Technical Certifier Datum Name / Stellung Unterschrift Date Name / Position Signature		
Sonstiges / Other:				
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:		Prüfmuster vollständig und unbeschädigt Test item complete and undamaged		
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.				

TEST SUMMARY

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 PEAK OUTPUT POWER

RESULT: Pass

5.1.3 6dB BANDWIDTH

RESULT: Pass

5.1.4 CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100KHz BANDWIDTH

RESULT: Pass

5.1.5 POWER SPECTRAL DENSITY

RESULT: Pass

5.1.6 SPURIOUS EMISSION

RESULT: Pass

5.1.7 CONDUCTED EMISSIONS

RESULT: Pass

CONTENTS

1.	GENERAL REMARKS	4
1.1	COMPLEMENTARY MATERIALS	4
2.	TEST SITES	4
2.1	TEST FACILITIES	4
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	5
2.3	TRACEABILITY	6
2.4	CALIBRATION	6
2.5	MEASUREMENT UNCERTAINTY.....	6
2.6	LOCATION OF ORIGINAL DATA.....	6
2.7	STATUS OF FACILITY USED FOR TESTING.....	7
3.	GENERAL PRODUCT INFORMATION	8
3.1	PRODUCT FUNCTION AND INTENDED USE.....	8
3.2	RATINGS AND SYSTEM DETAILS	8
3.3	INDEPENDENT OPERATION MODES	9
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS	9
3.5	SUBMITTED DOCUMENTS	9
4.	TEST SET-UP AND OPERATION MODES	10
4.1	PRINCIPLE OF CONFIGURATION SELECTION.....	10
4.2	TEST OPERATION AND TEST SOFTWARE	10
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	10
4.4	COUNTERMEASURES TO ACHIEVE ERM COMPLIANCE	10
4.5	TEST SETUP DIAGRAM	11
5.	TEST RESULTS	13
5.1	TRANSMITTER REQUIREMENT & TEST SUITES	13
5.1.1	<i>Antenna Requirement</i>	<i>13</i>
5.1.2	<i>Peak Output Power</i>	<i>14</i>
5.1.3	<i>6dB Bandwidth</i>	<i>16</i>
5.1.4	<i>Conducted Spurious Emissions measured in 100kHz Bandwidth</i>	<i>17</i>
5.1.5	<i>Power spectral density</i>	<i>34</i>
5.1.6	<i>Spurious Emission</i>	<i>35</i>
5.1.7	<i>Conducted emissions.....</i>	<i>149</i>
6.	PHOTOGRAPHS OF THE TEST SET-UP	152
7.	LIST OF TABLES	155
8.	LIST OF PHOTOGRAPHS	155

1. General Remarks

1.1 Complementary Materials

None.

2. Test Sites

2.1 Test Facilities

Shenzhen EMTEK Co., Ltd.

(FCC Registration No.: 709623)

Bldg 69, Majialong Industry Zone, Nanshan District,
Shenzhen, Guangdong, P.R. China

The tests at the test site have been conducted under the supervision of a TÜV engineer.

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Kind of Equipment	Manufacturer	Type	S/N	Calibrated until
Transmitter spurious emissions				
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	2016-05-16
Loop Antenna	Schwarzbeck	FMZB 1519	1519-012	2016-05-16
Cable	H+B	3M SF104-26.5	295838/4	2016-05-28
Cable	H+B	6M SF104-26.5	295840/4	2016-05-28
Pre-Amplifier	HP	8447F	2944A07999	2016-05-16
Bilog Antenna	Schwarzbeck	VULB9163	142	2016-05-28
Cable	Schwarzbeck	AK9513	ACRX1	2016-05-16
Cable	Rosenberger	N/A	FP2RX2	2016-05-16
Cable	Schwarzbeck	AK9513	CRPX1	2016-05-28
Cable	Schwarzbeck	AK9513	CRRX2	2016-05-28
Pre-Amplifier	A.H.	PAM-0126	1415261	2016-05-16
Horn Antenna	Schwarzbeck	BBHA 9120	707	2016-05-28
Pre-Amplifier	A.H.	PAM-0126	1415261	2016-05-16
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA91703 99	2016-05-16
EMI Test Receiver	Rohde & Schwarz	FSV40	132.1- 3008K39- 100967-AP	2016-05-16
Pre-Amplifier	Lunar EM	LNA26G40-40	J101313102 8001	2016-05-16
Horn Antenna	AHS/USA	SAS-573	184	2016-05-16
Cable	H+B	0.5M SF104-26.5	289147/4	2016-05-16
Cable	H+B	3M SF104-26.5	295838/4	2016-05-16
Cable	H+B	6M SF104-26.5	295840/4	2016-05-16
Radio Spectrum Test				
EMI Test Receiver	Rohde & Schwarz	ESCI	101045	2016-05-16
Vector Signal Generator	Agilent	N5182B	My53050553	2016-05-28
Analog Signal Generator	Agilent	N5171B	My53050878	2016-05-28
Signal Analyzer	Agilent	N9010A	My53470879	2016-05-28
Power Meter	Agilent	PS-X10-100	N/A	2016-05-28
Temp. / Humidity Chamber	Kingson	THS-M1	242	2016-05-28
Conducted Emission				
Test Receiver	Rohde & Schwarz	ESCS30	828985/018	2016-05-16
L.I.S.N.	Schwarzbeck	NNLK8129	8129203	2016-05-16
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100006	2016-05-16
Voltage Probe	Rohde & Schwarz	TK9416	N/A	2016-05-16
I.S.N	Rohde & Schwarz	ENY22	1109.9508.02	2016-05-16
50Ω Coaxial Switch	Anritsu	MP59B	M20531	2016-05-16

2.3 Traceability

All measurement equipment calibrations are traceable to NIST or where calibration is performed outside the United States, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

Table 2: Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0\text{dB}$
Conducted Emissions Test	$\pm 2.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Power Density	$\pm 2.0\text{dB}$
Occupied Bandwidth Test	$\pm 1.0\text{dB}$
Band Edge Test	$\pm 3\text{dB}$
All emission, radiated	$\pm 3\text{dB}$
Antenna Port Emission	$\pm 3\text{dB}$
Temperature	$\pm 0.5^\circ\text{C}$
Humidity	$\pm 3\%$

2.6 Location of Original Data

The original copies of all test data taken during actual testing were retained in the TÜV Rheinland (Shenzhen) file for certification follow-up purposes.

Prüfbericht - Nr.: 17051492 002
*Test Report No.***Seite 7 von 155**
Page 7 of 155

2.7 Status of Facility Used for Testing

Shenzhen EMTEK Co., Ltd. test facility located at Bldg 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, P.R. China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3. General Product Information

3.1 Product Function and Intended Use

The EUTs are 7" tablet with Wi-Fi, Bluetooth & GPS function. These models are identical except the model name and color. For details refer to the User Manual and Circuit Diagram.

3.2 Ratings and System Details

Table 3: Technical Specification of EUT

Technical Specification	Value
Kind of Equipment	7" Wi-Fi Android™ Tablet
Type Designation	DL718M, DL718M-B, DL-718M-G, DL718M-P, DL718M-R, MID721-L
FCC ID	XMF-MID721
Operating Frequency band	2412 – 2462MHz
Extreme Temperature Range	-30~+75°C
Operation Voltage	DC 3.7V (via built in battery)
	DC 5V (via AC/DC adapter)
Antenna Gain	1.28dBi

Table 4: Technical Specification of Wi-Fi

Item	Description			
	IEEE 802.11b	IEEE 802.11g	IEEE 802.11n (HT20)	IEEE 802.11n (HT40)
Operating Frequency band (MHz)	2412 ~ 2472	2412 ~ 2472	2412 ~ 2472	2422 ~ 2452
Channel Number	13	13	13	9
Modulation	DSSS (DBPSK, DQPSK), CCK)	OFDM (DBPSK, DQPSK)	OFDM (BPSK, QPSK, 16-QAM, 64-QAM)	OFDM (BPSK, QPSK, 16-QAM, 64-QAM)
Data Rate (Mbps)	1, 2, 5, 11	6, 9, 12, 18, 24, 36, 48, 54	MCS0 ~ MCS7	MCS0 ~ MCS7
Transmitter Output Power (Typical) (dBm)	16	15.5	15.5	15
Media Access Protocol	CSMA/CA with ACK	CSMA/CA with ACK	CSMA/CA with ACK	CSMA/CA with ACK

Table 5: Carrier Frequency

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400 – 2483.5 MHz	1	2412 MHz	8	2447 MHz
	2	2417 MHz	9	2452 MHz
	3	2422 MHz	10	2457 MHz
	4	2427 MHz	11	2462 MHz
	5	2432 MHz		
	6	2437 MHz		
	7	2442 MHz		

3.3 Independent Operation Modes

The basic operation modes are:

- A. On, Wi-Fi mode (2.4GHz)
 - 1. Transmitting
 - a. Low Channel
 - b. Middle Channel
 - c. High Channel
 - 2. Receiving
- B. Standby
- C. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.5 Submitted Documents

- Bill of Material
- Constructional Drawing
- PCB Layout
- Photo Document
- Circuit Diagram
- Instruction Manual
- Rating Label

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The equipment under test (EUT) was configured to measure its maximum power level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All testing were performed according to the procedures in ANSI C63.10: 2013. According to clause 3.1, all tests were applied on model DL718M only.

4.3 Special Accessories and Auxiliary Equipment

The EUT was tested together with the following accessories:

Description	Manufacturer	Part No.	Rating
AC/DC Adapter	TEKA	TEKA012-0501500UK	Input: AC 100-240V, 50/60Hz, 0.35A Output: DC 5V, 1.5A

The EUT was tested with following cables:

Interface(s)/Port(s):	Max. cable length, shielding	Cable classification
AC Mains of adapter	2 cores, non-shielded port, 3m	AC Power Input
Micro USB port	4 cores, non-shielded port, 3m	DC Power Input

4.4 Countermeasures to Achieve ERM Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF). No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

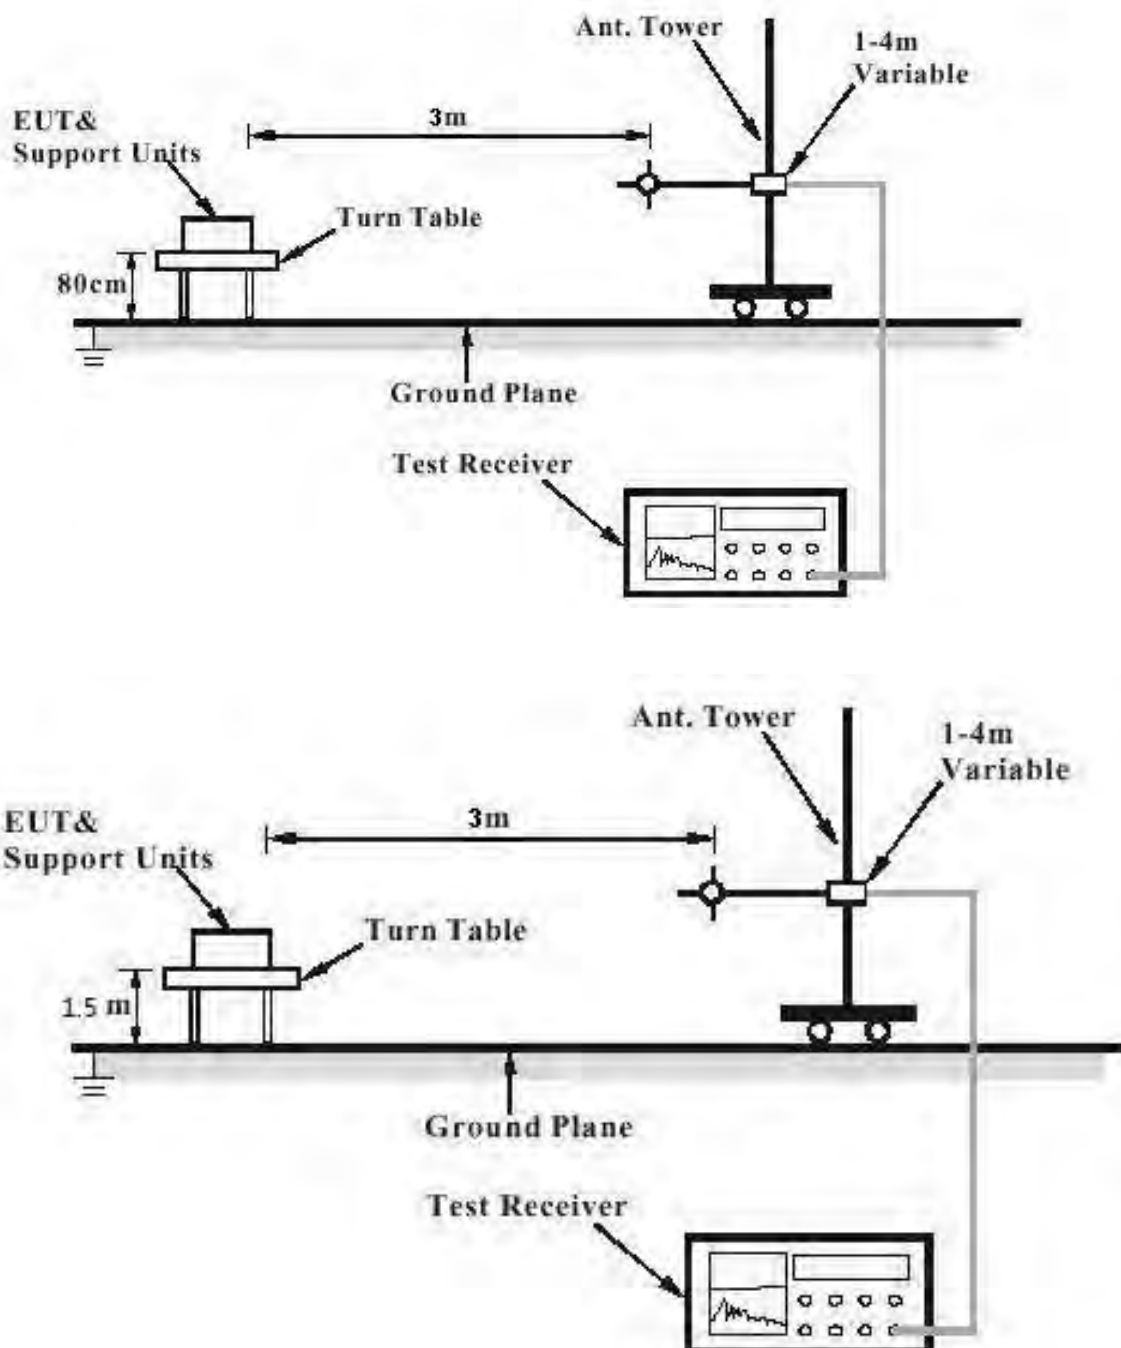


Diagram of Measurement Equipment Configuration for Conduction Measurement


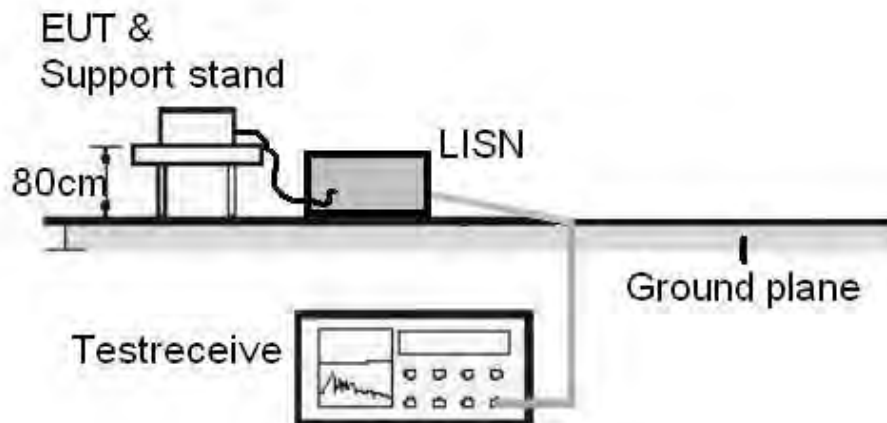


Diagram of Measurement Equipment Configuration for Transmitter Measurement

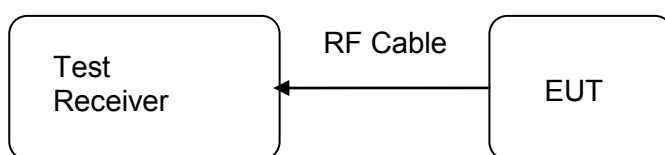

5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:**Pass**

Test standard	:	Part 15.203 RSS-Gen Clause 6.7
Limit		The use of antennas with directional gains that do not exceed 6dBi

According to the manufacturer declared, the EUT has an internal antenna, the directional gain of antenna is 1.28dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

Prüfbericht - Nr.: 17051492 002
Test Report No.
Seite 14 von 155
Page 14 of 155
5.1.2 Peak Output Power
RESULT:
Pass

Test date : 2015-08-10
 Test standard : FCC Part 15.247(b)(3)
 Basic standard : ANSI C63.10: 2013
 Clause 9.1 of KDB 558074 v03r01
 Limit : 1W
 Kind of test site : Shielded room

Test setup

Test Channel : Low/ Middle/ High
 Operation Mode : A.1
 Ambient temperature : 25°C
 Relative humidity : 50%
 Atmospheric pressure : 101kPa

Table 6: Test result of Peak Output Power of 802.11b

Channel	Channel Frequency (MHz)	Peak Output Power	Limit
		(dBm)	(dBm)
Low Channel	2412	20.16	30
Middle Channel	2437	20.11	30
High Channel	2462	20.21	30

Table 7: Test result of Peak Output Power of 802.11g

Channel	Channel Frequency (MHz)	Peak Output Power	Limit
		(dBm)	(dBm)
Low Channel	2412	21.30	30
Middle Channel	2437	23.20	30
High Channel	2462	21.45	30

Table 8: Test result of Peak Output Power of 802.11n (HT20)

Channel	Channel Frequency (MHz)	Peak Output Power	Limit
		(dBm)	(dBm)
Low Channel	2412	21.11	30
Middle Channel	2437	23.10	30
High Channel	2462	21.10	30

Prüfbericht - Nr.: 17051492 002

Test Report No.

Seite 15 von 155

Page 15 of 155

Table 9: Test result of Peak Output Power of 802.11n (HT40)

Channel	Channel Frequency (MHz)	Peak Output Power	Limit
		(dBm)	(dBm)
Low Channel	2422	19.88	30
Middle Channel	2437	23.02	30
High Channel	2452	20.26	30

Prüfbericht - Nr.: 17051492 002

Test Report No.

Seite 16 von 155

Page 16 of 155

5.1.3 6dB Bandwidth**RESULT:****Pass**

Date of testing : 2015-08-10
Test standard : FCC Part 15.247(a)(2)
Basic standard : ANSI C63.10: 2013
Clause 8 of KDB 558074 v03r01
Kind of test site : Shielded room

Test setup

Test Channel : Low/ Middle/ High
Operation Mode : A.1
Ambient temperature : 25°C
Relative humidity : 50%
Atmospheric pressure : 101kPa

Table 10: Test result of 6dB Bandwidth of 802.11b

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)
Low Channel	2412	10.06
Mid Channel	2437	10.06
High Channel	2462	10.06

Table 11: Test result of 6dB Bandwidth of 802.11g

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)
Low Channel	2412	15.18
Mid Channel	2437	15.17
High Channel	2462	15.18

Table 12: Test result of 6dB Bandwidth of 802.11n (HT20)

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)
Low Channel	2412	15.17
Mid Channel	2437	15.17
High Channel	2462	15.18

Table 13: Test result of 6dB Bandwidth of 802.11n (HT40)

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)
Low Channel	2422	35.30
Mid Channel	2437	35.30
High Channel	2452	35.30

Prüfbericht - Nr.: 17051492 002

Test Report No.

Seite 17 von 155

Page 17 of 155

5.1.4 Conducted Spurious Emissions measured in 100kHz Bandwidth**RESULT:****Pass**

Date of testing	:	2015-08-10
Test standard	:	FCC part 15.247(d)
Basic standard	:	ANSI C63.10: 2013
		Clause 13 of KDB 558074 v03r01
Limit	:	20dB (below that in the 100kHz bandwidth within the band that contains the highest level of the desired power)
Kind of test site	:	Shield room

Test setup

Test Channel	:	Low/ Middle/ High
Operation mode	:	A.1
Ambient temperature	:	25°C
Relative humidity	:	50%
Atmospheric pressure	:	101kPa


For details refer to following test plot.


Prüfbericht - Nr.: 17051492 002
 Test Report No.

 Seite 18 von 155
 Page 18 of 155


Test Plot of Conducted spurious emissions measured in 100kHz Bandwidth of 802.11b

Low Channel

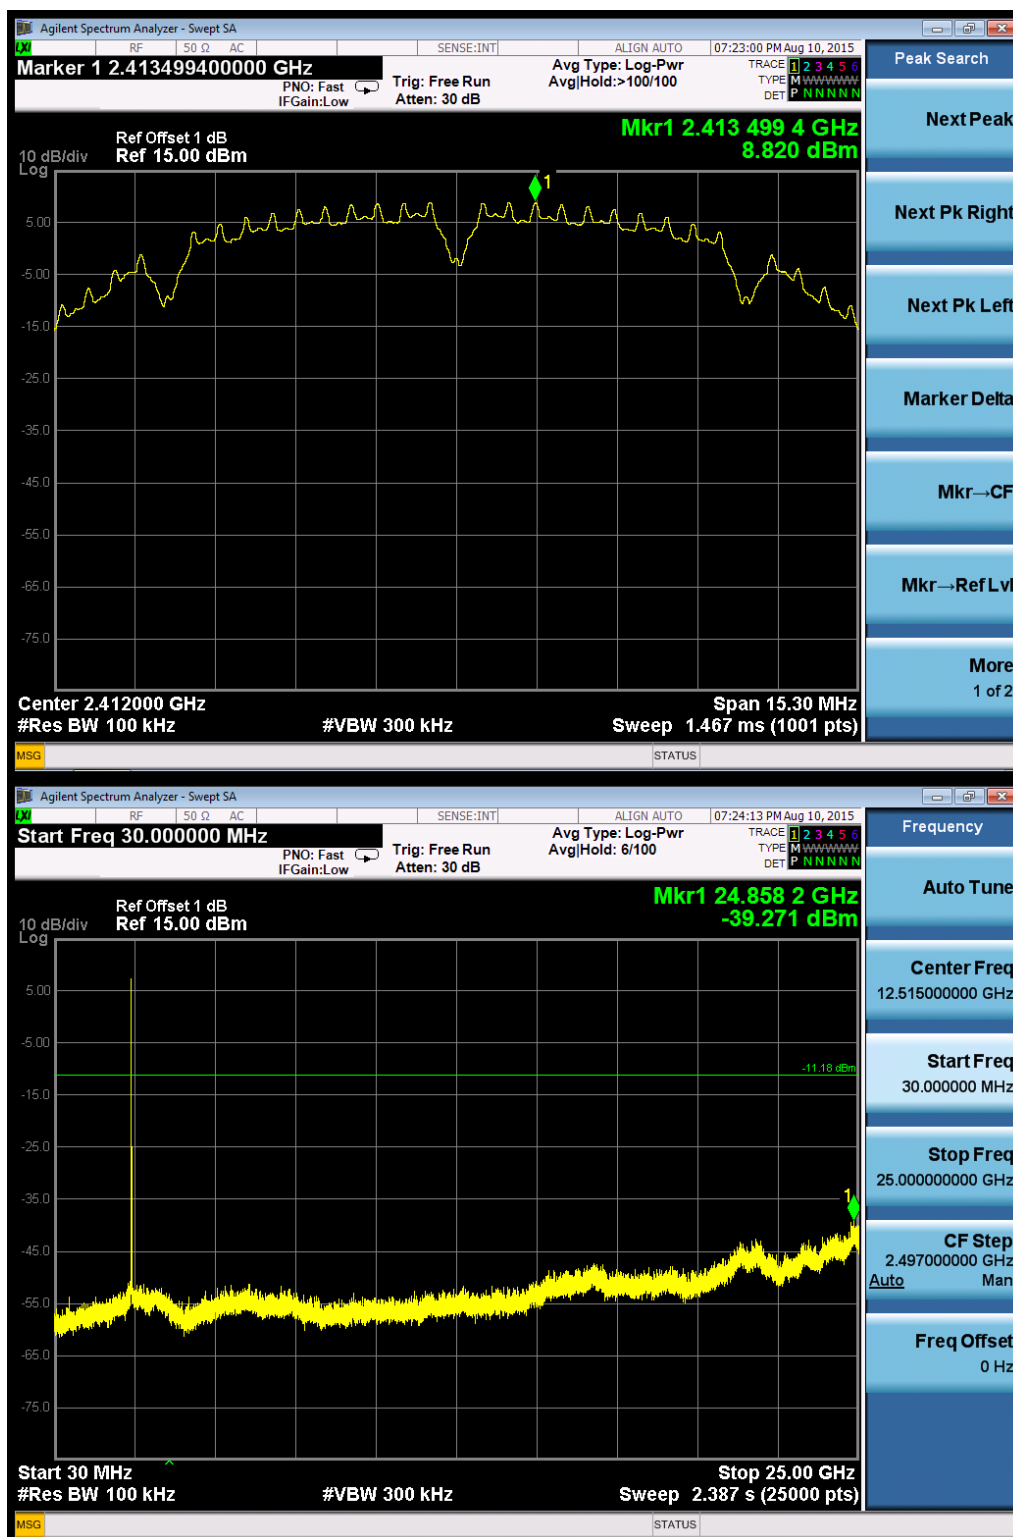

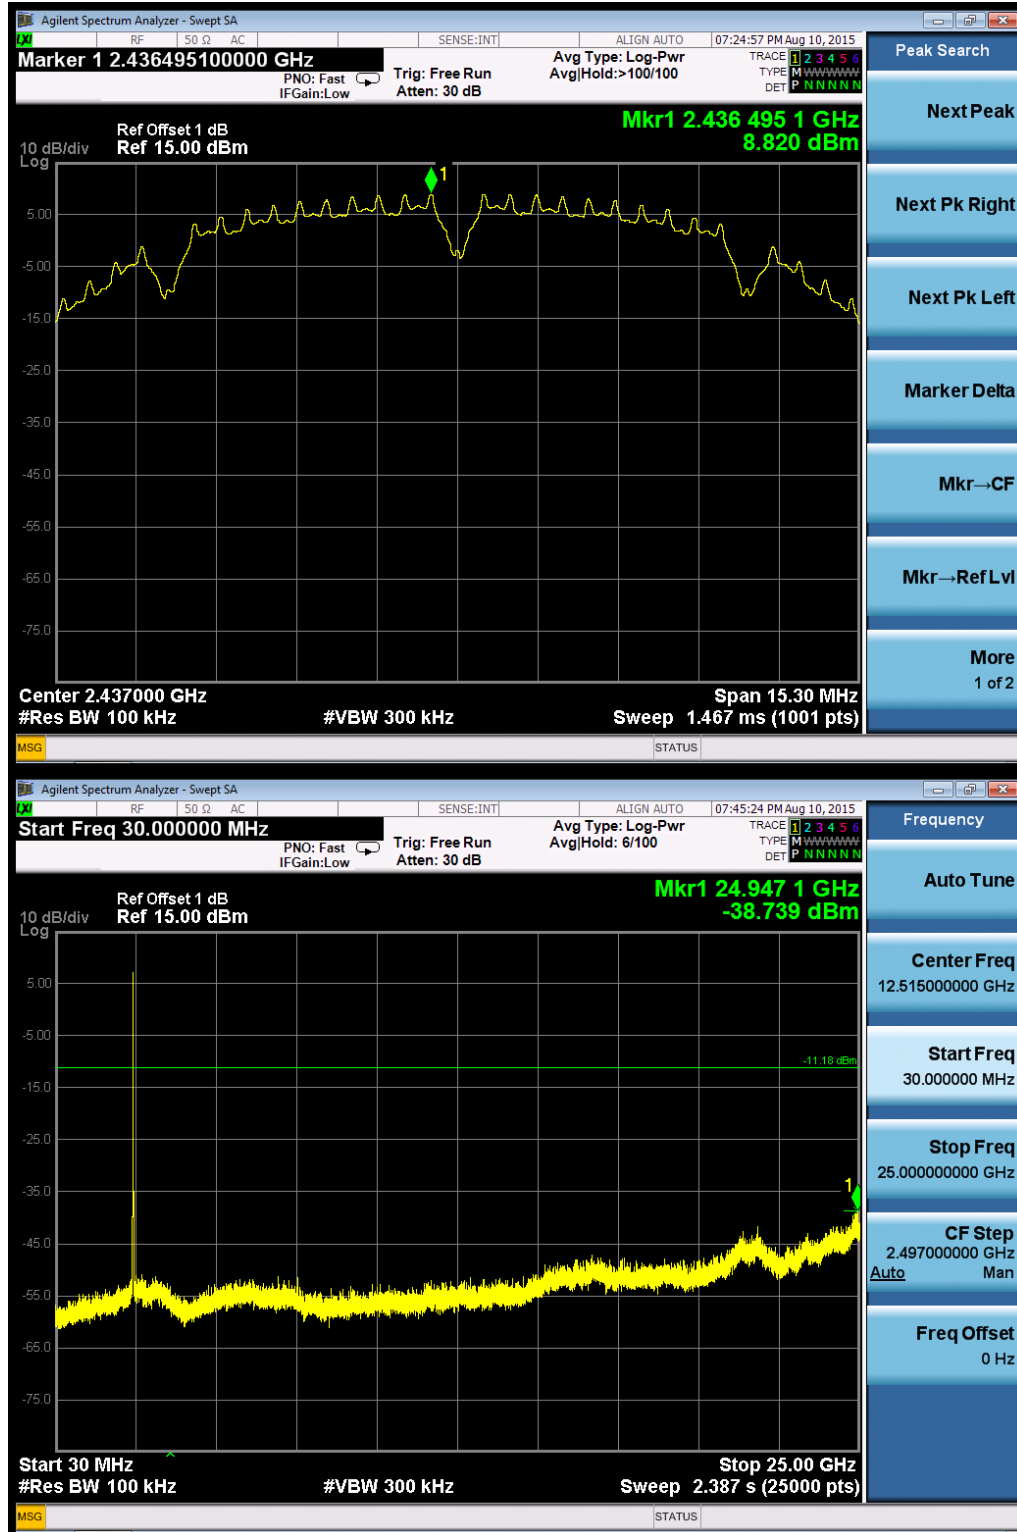Middle Channel


High Channel

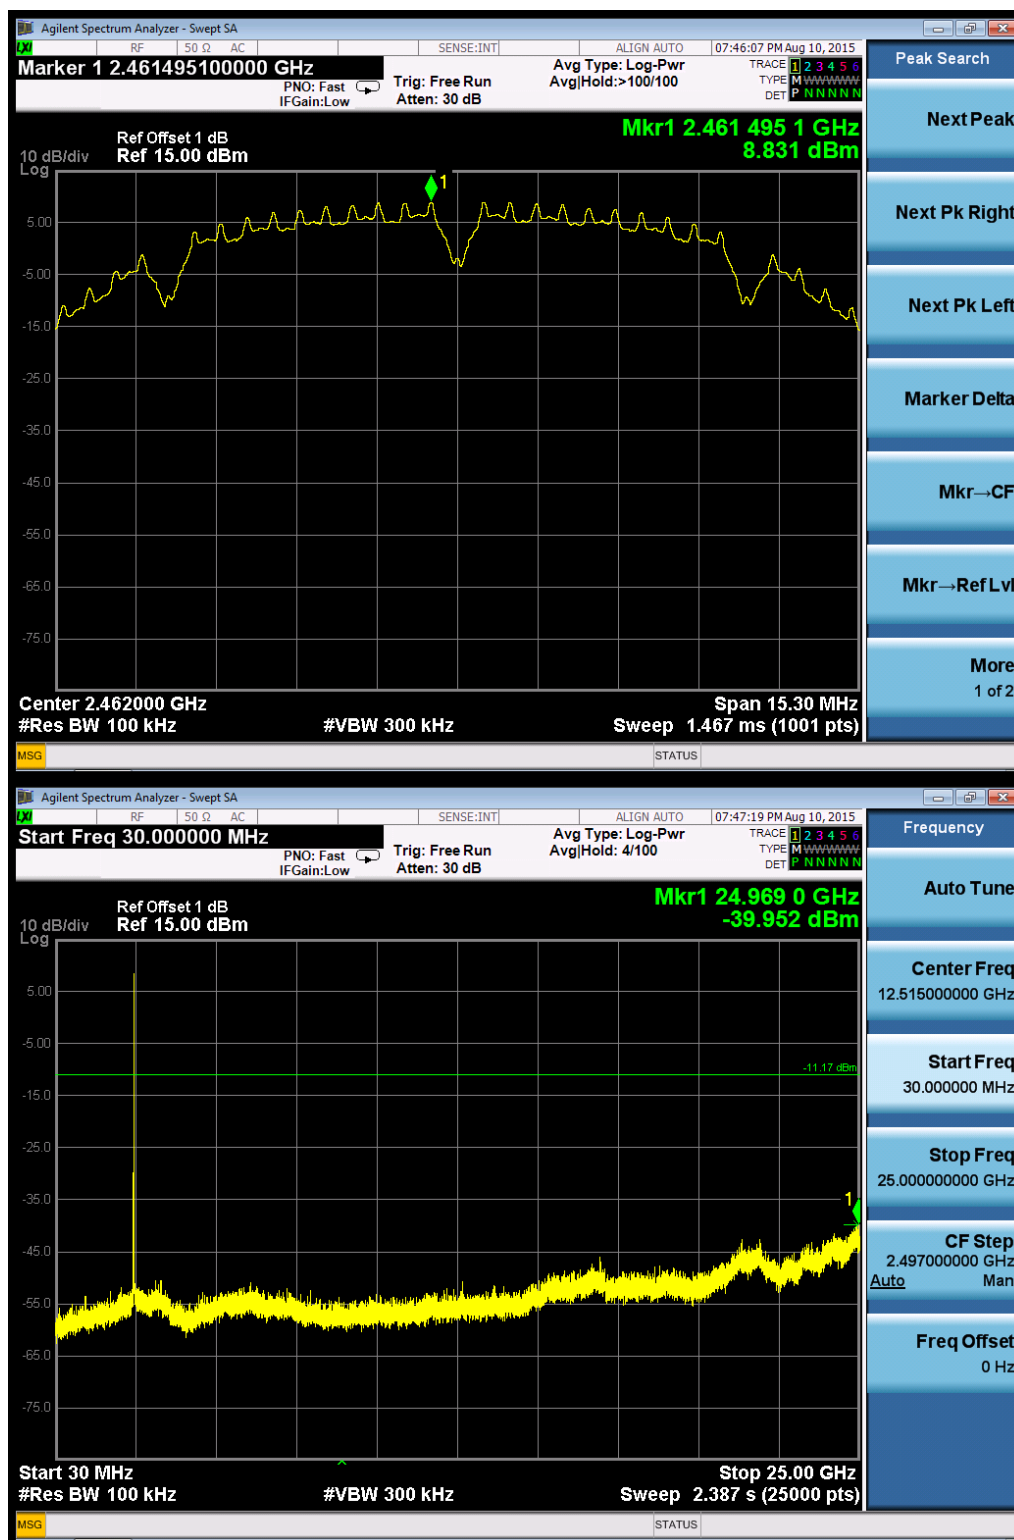



Band Edge


Prüfbericht - Nr.: 17051492 002
Test Report No.


Seite 22 von 155
Page 22 of 155


Test Plot of Conducted spurious emissions measured in 100kHz Bandwidth of 802.11g Low Channel

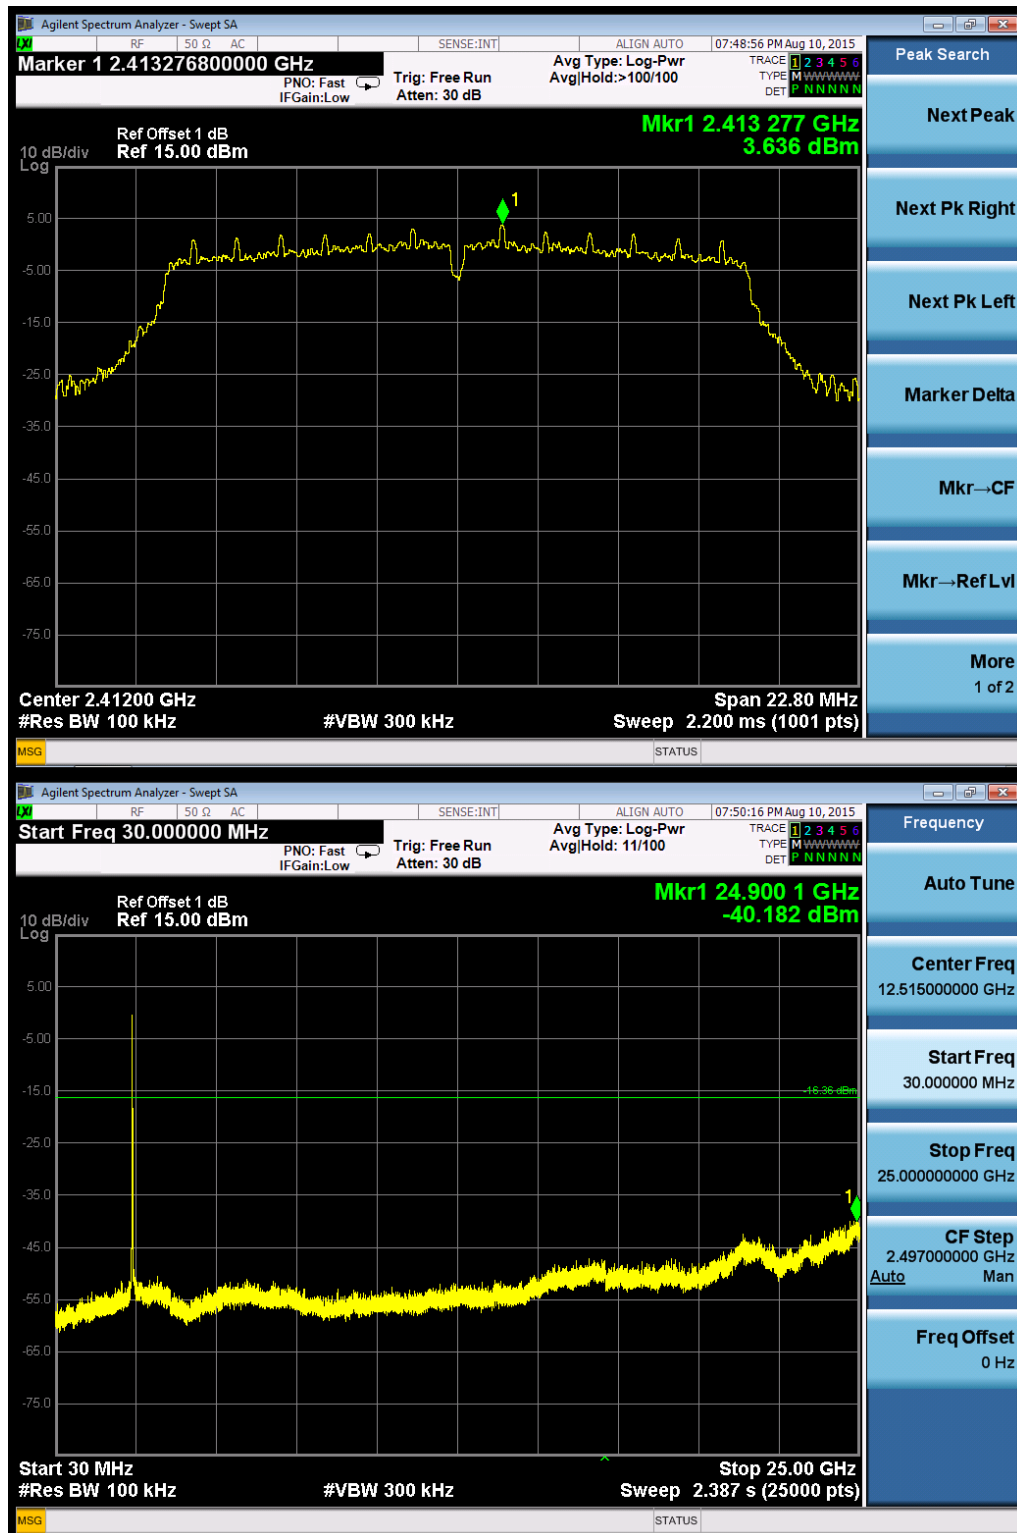

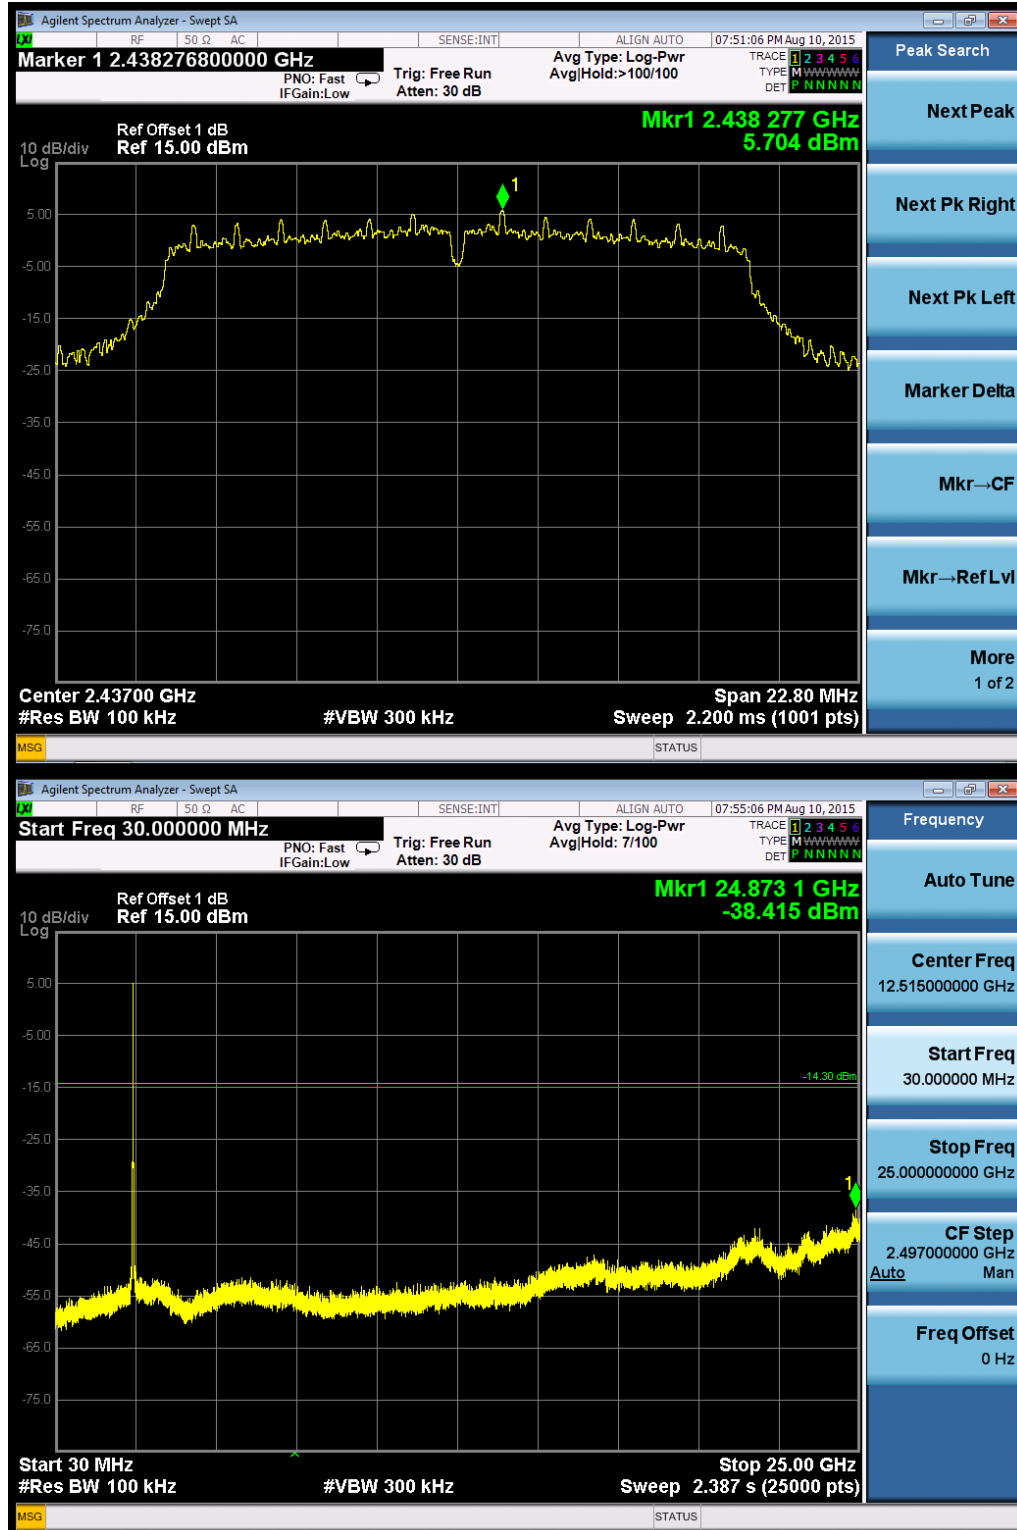Middle Channel


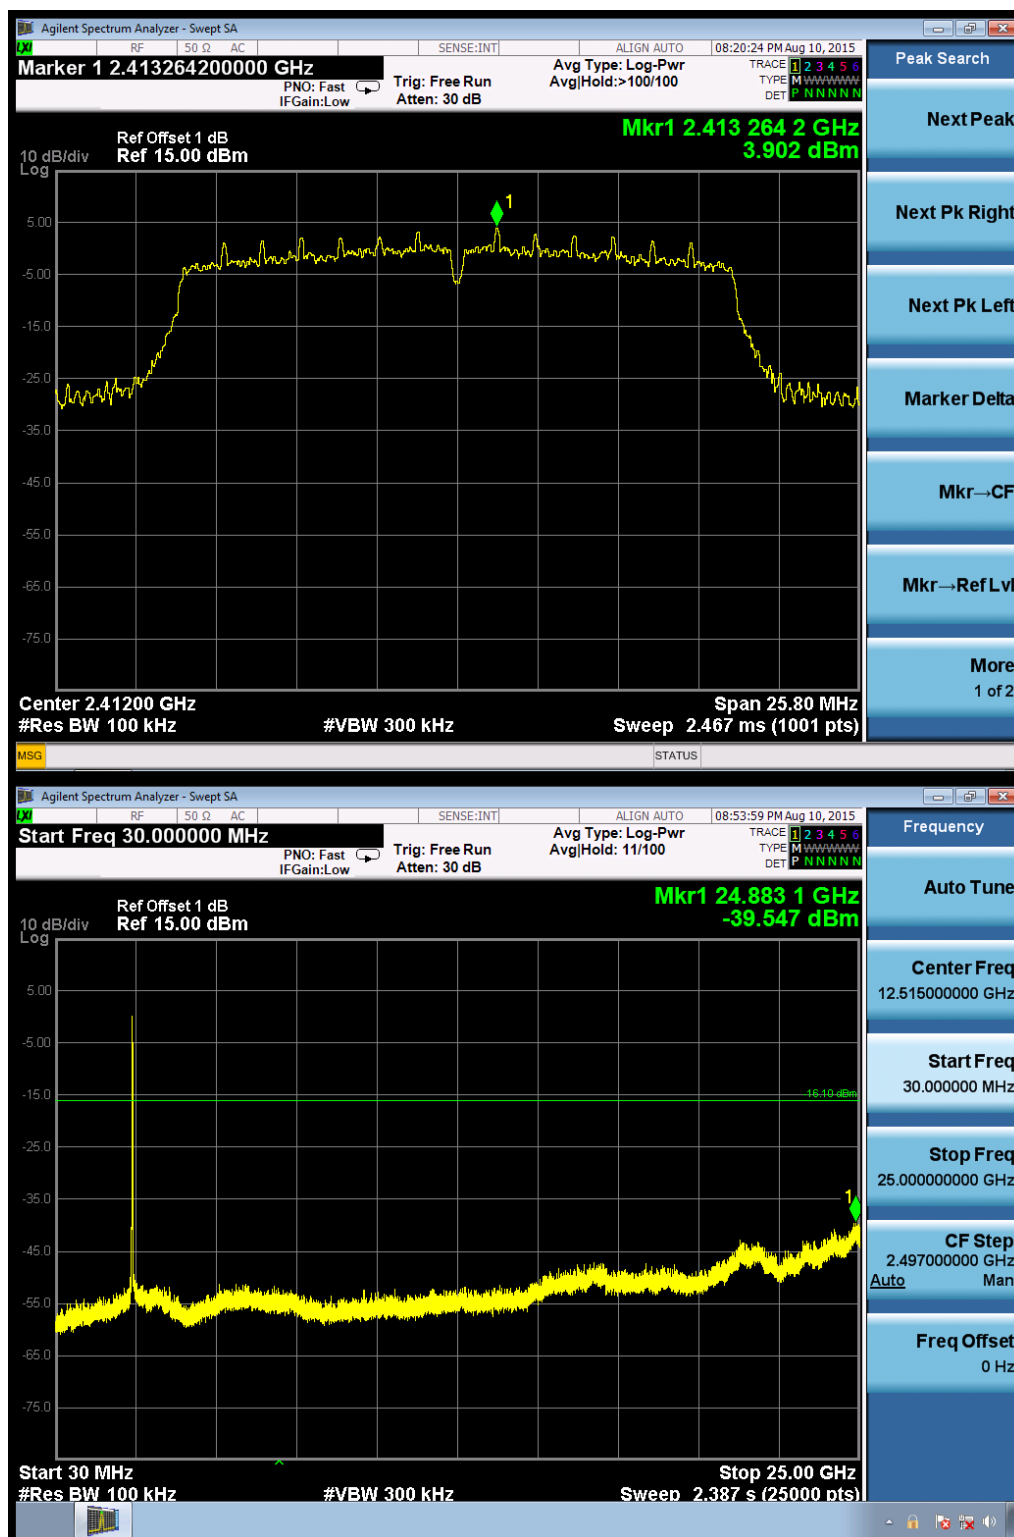
High Channel

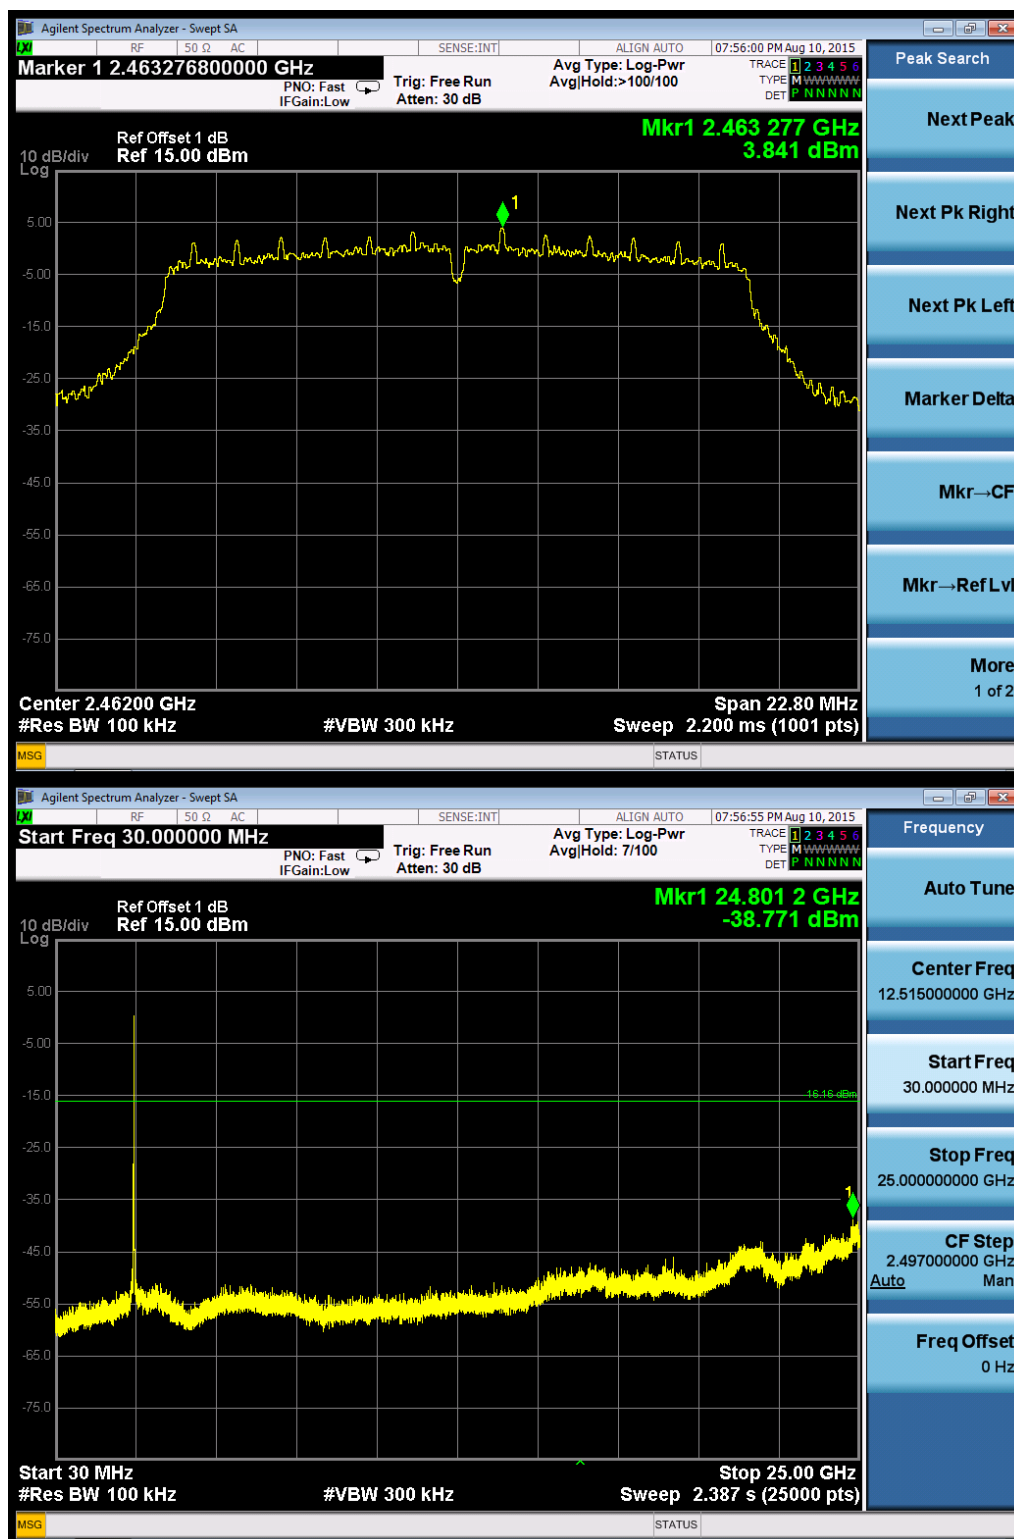


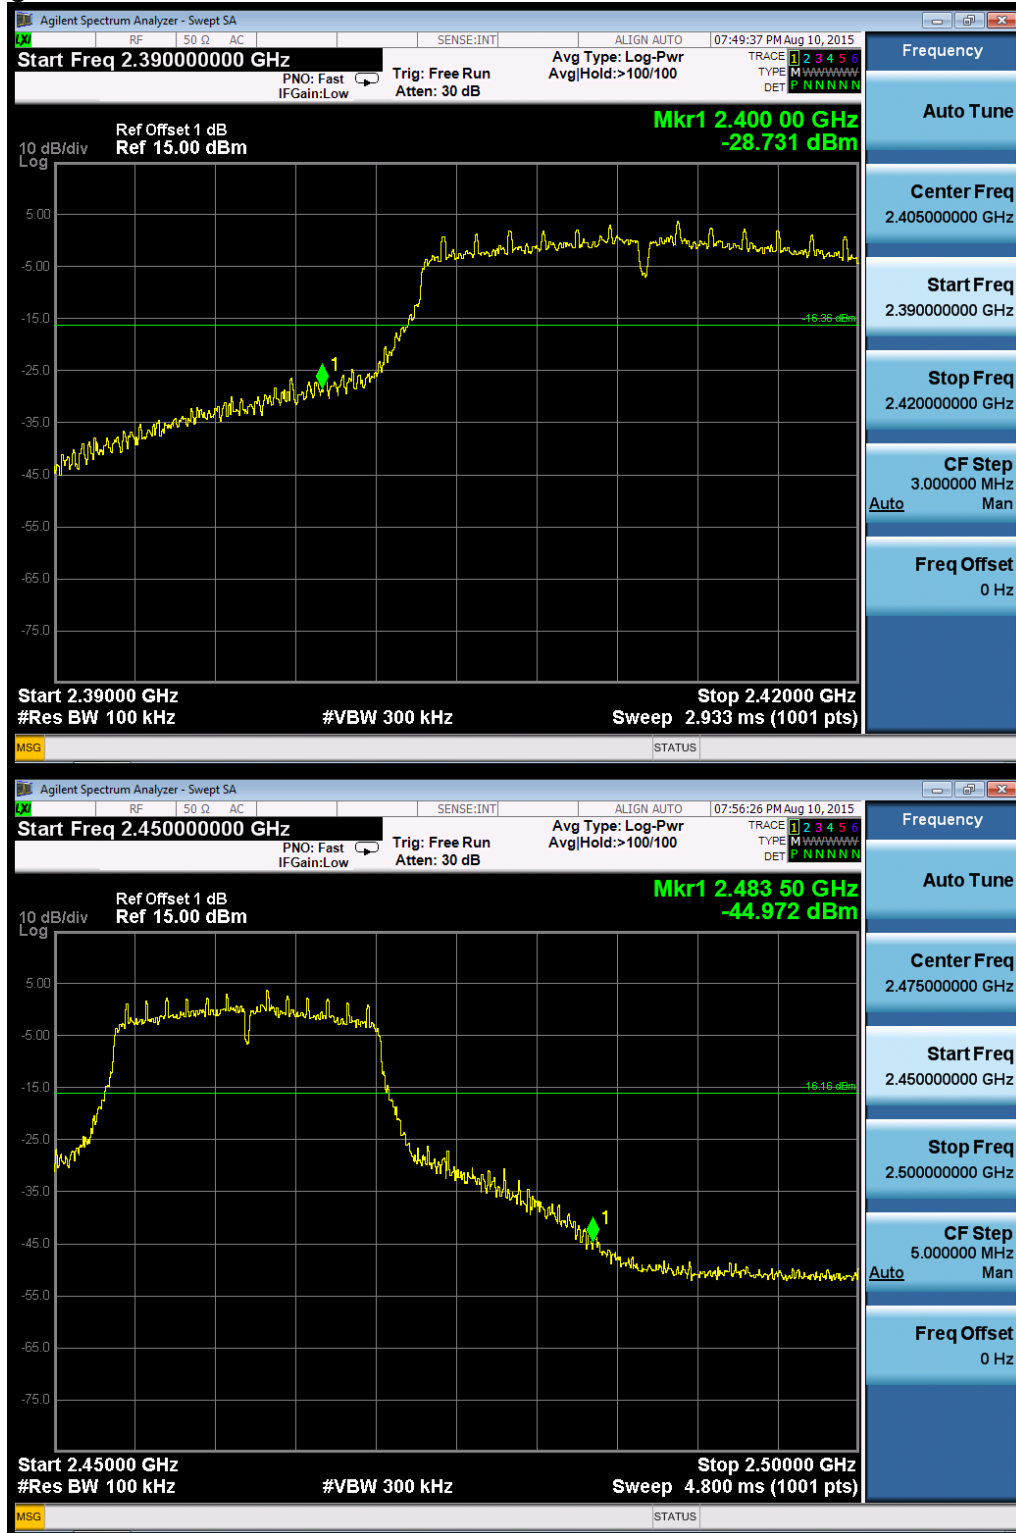Band Edge


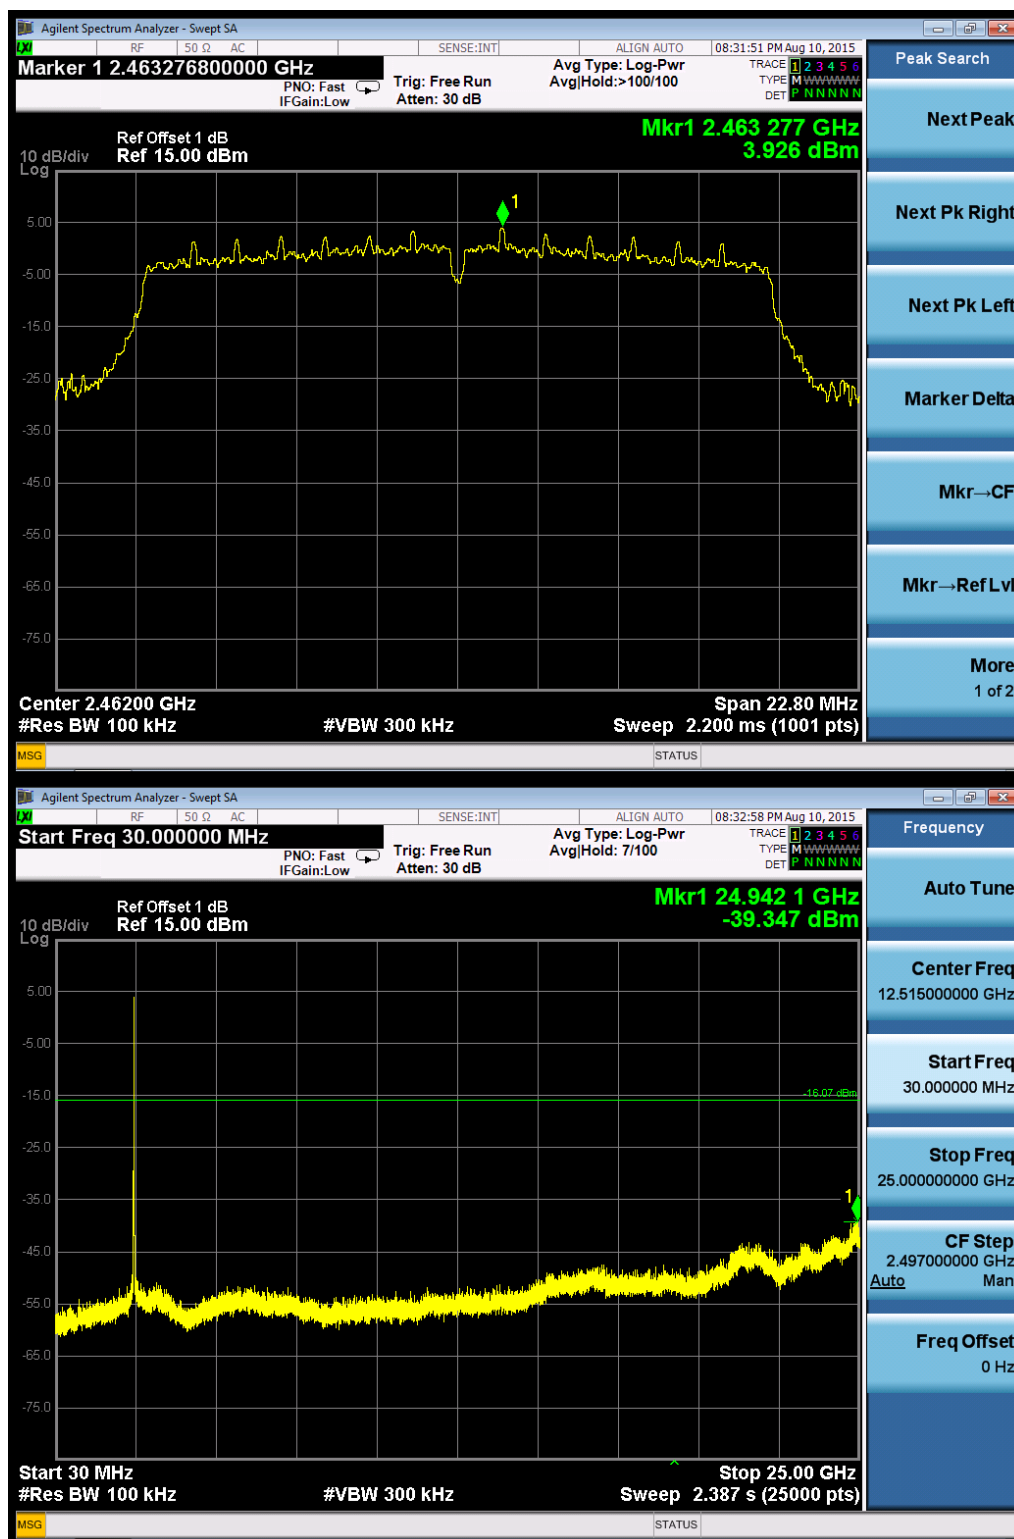
Test Plot of Conducted spurious emissions measured in 100kHz Bandwidth of 802.11n (HT20)


Low Channel

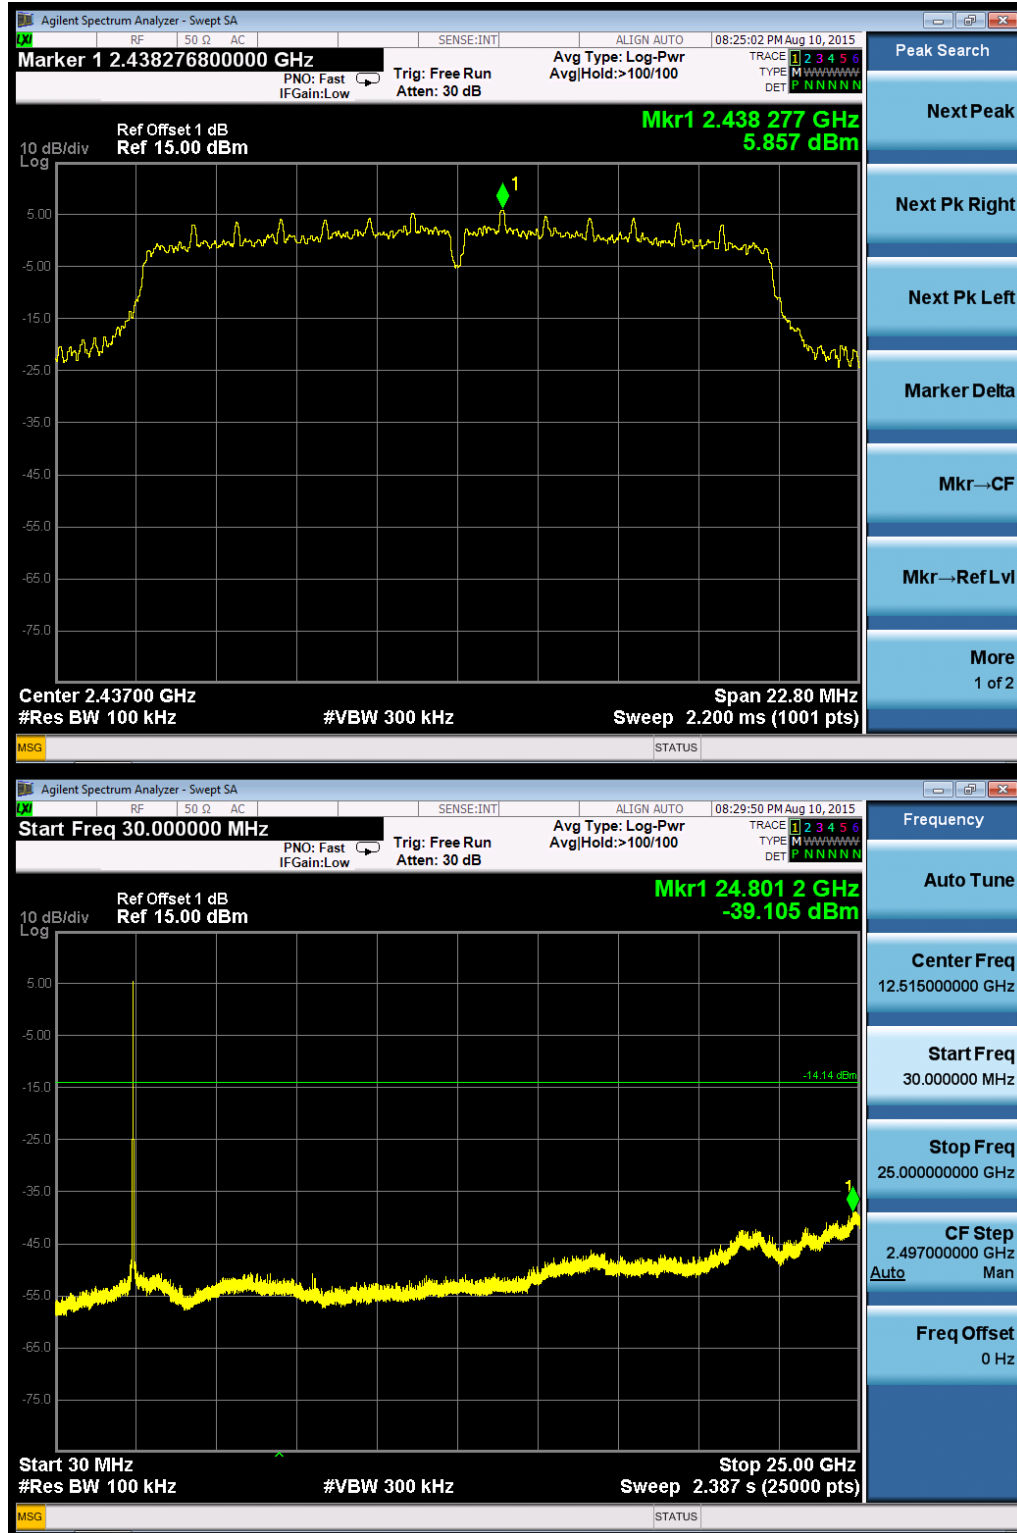


Middle Channel


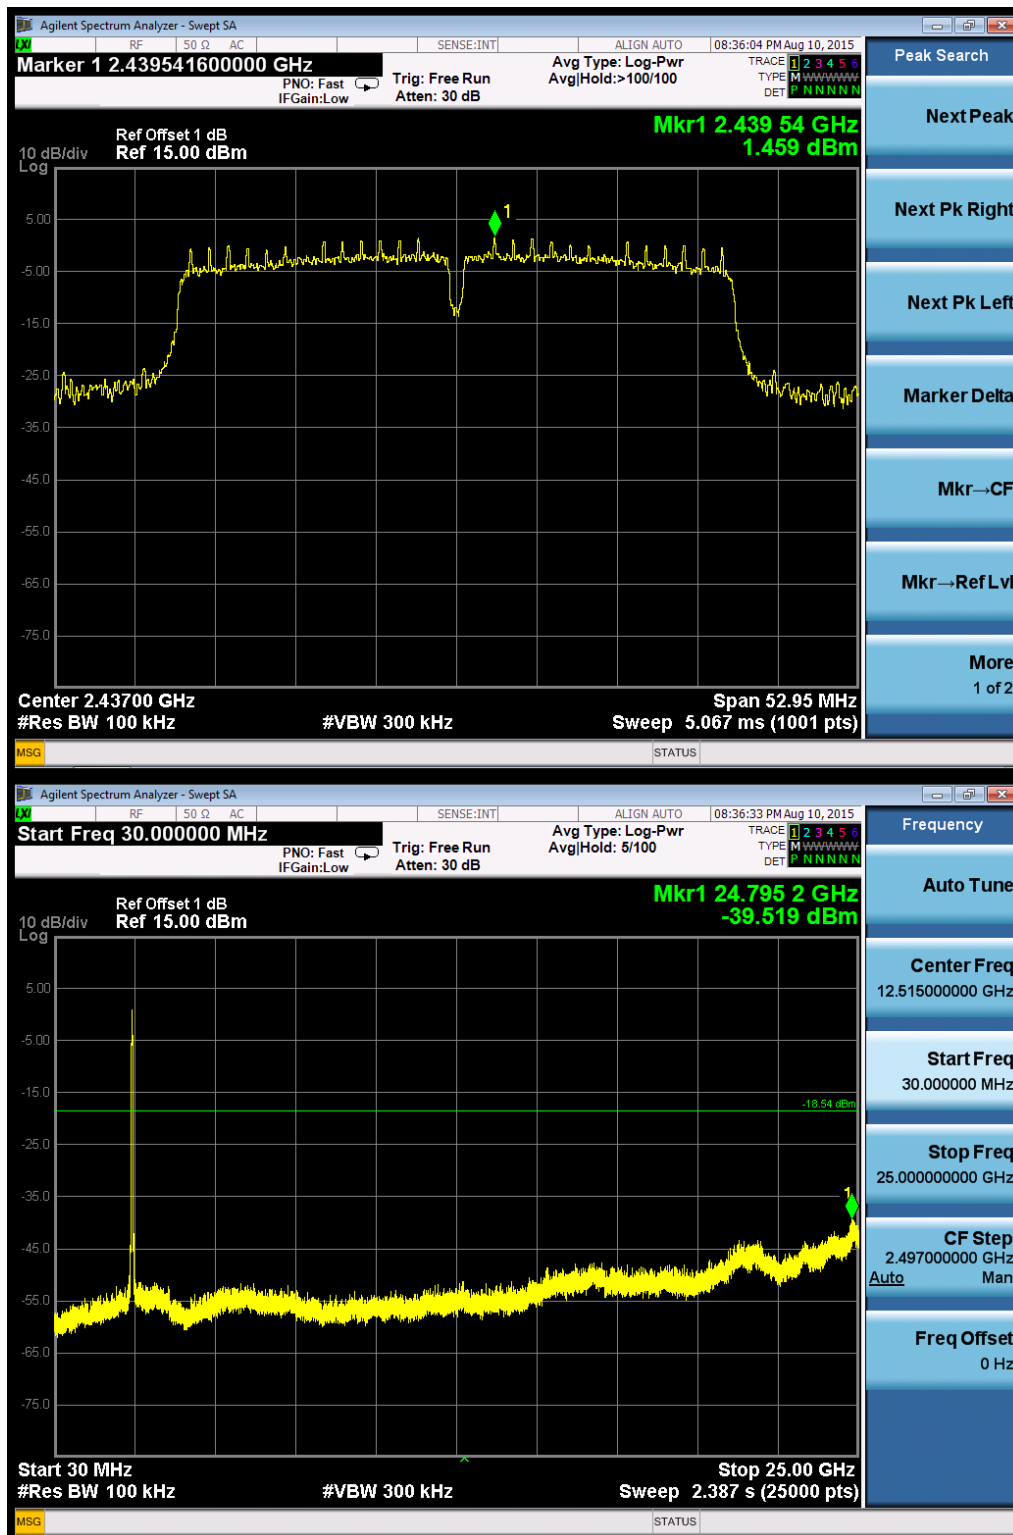
High Channel

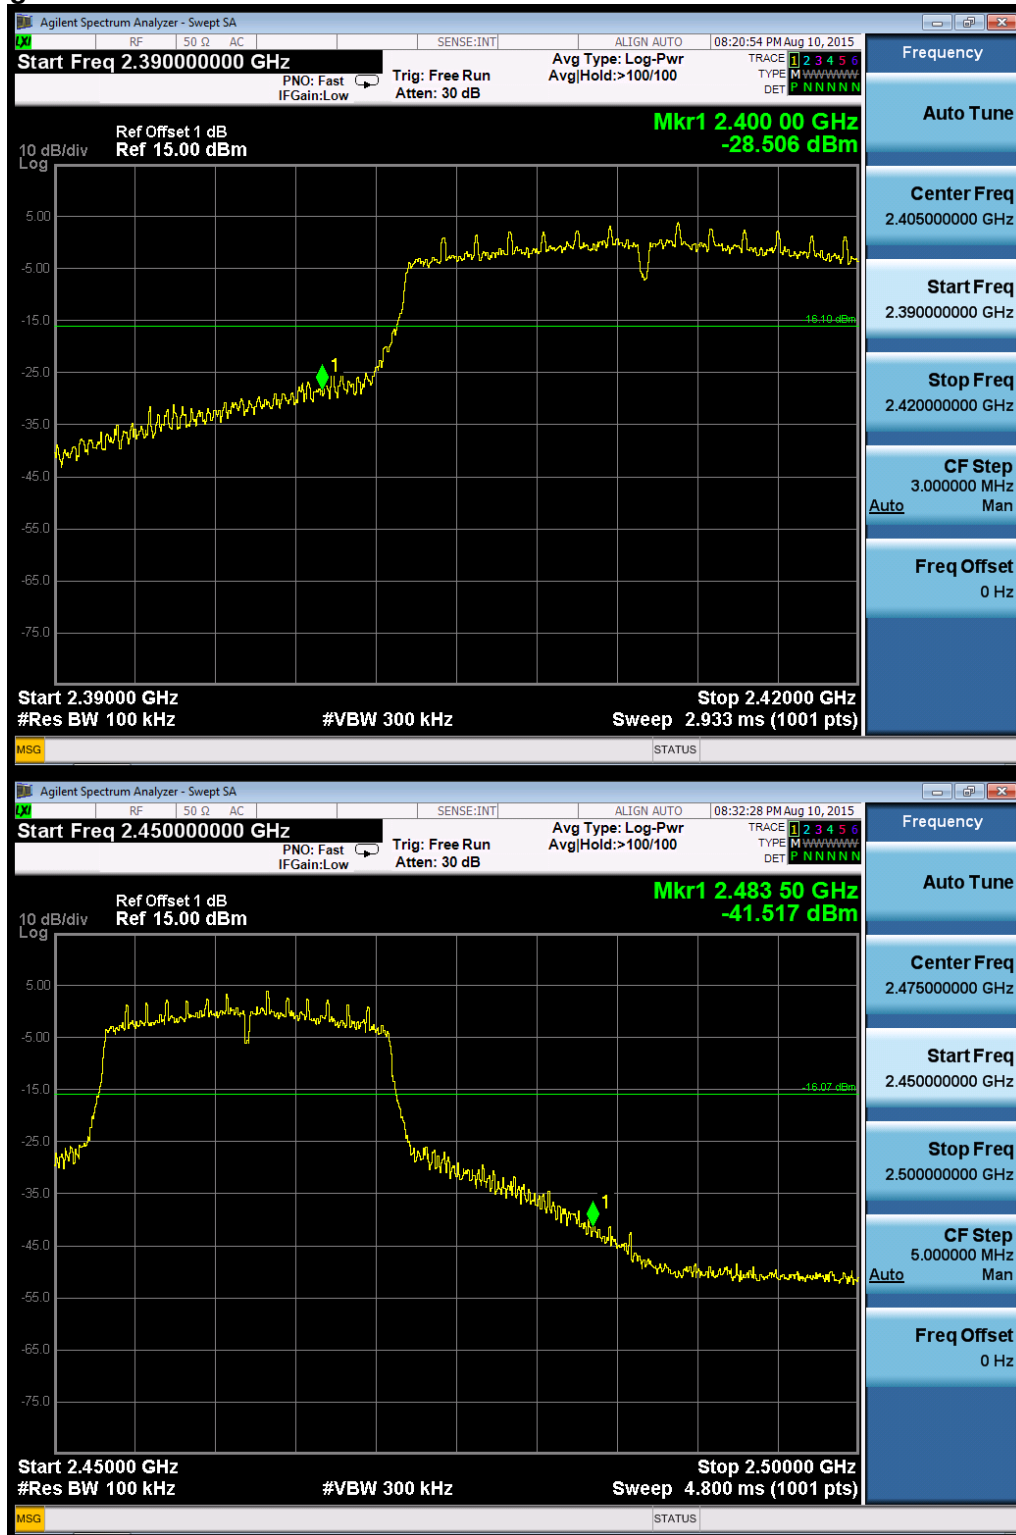


Band Edge


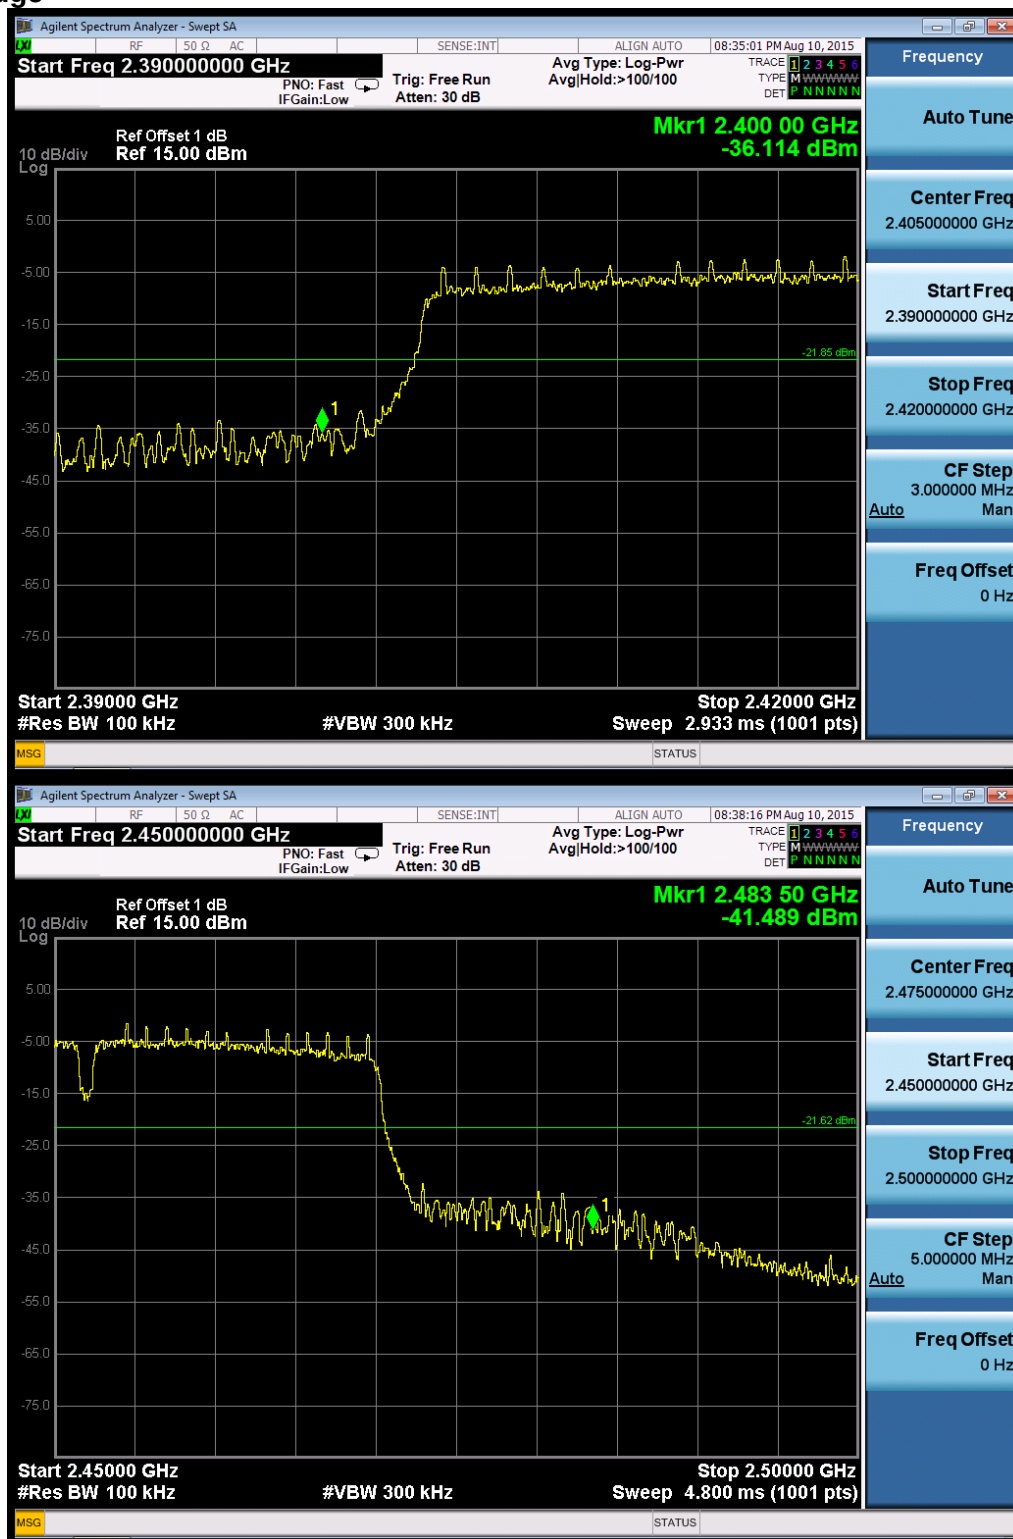
Test Plot of Conducted spurious emissions measured in 100kHz Bandwidth of 802.11n (HT40) Low Channel

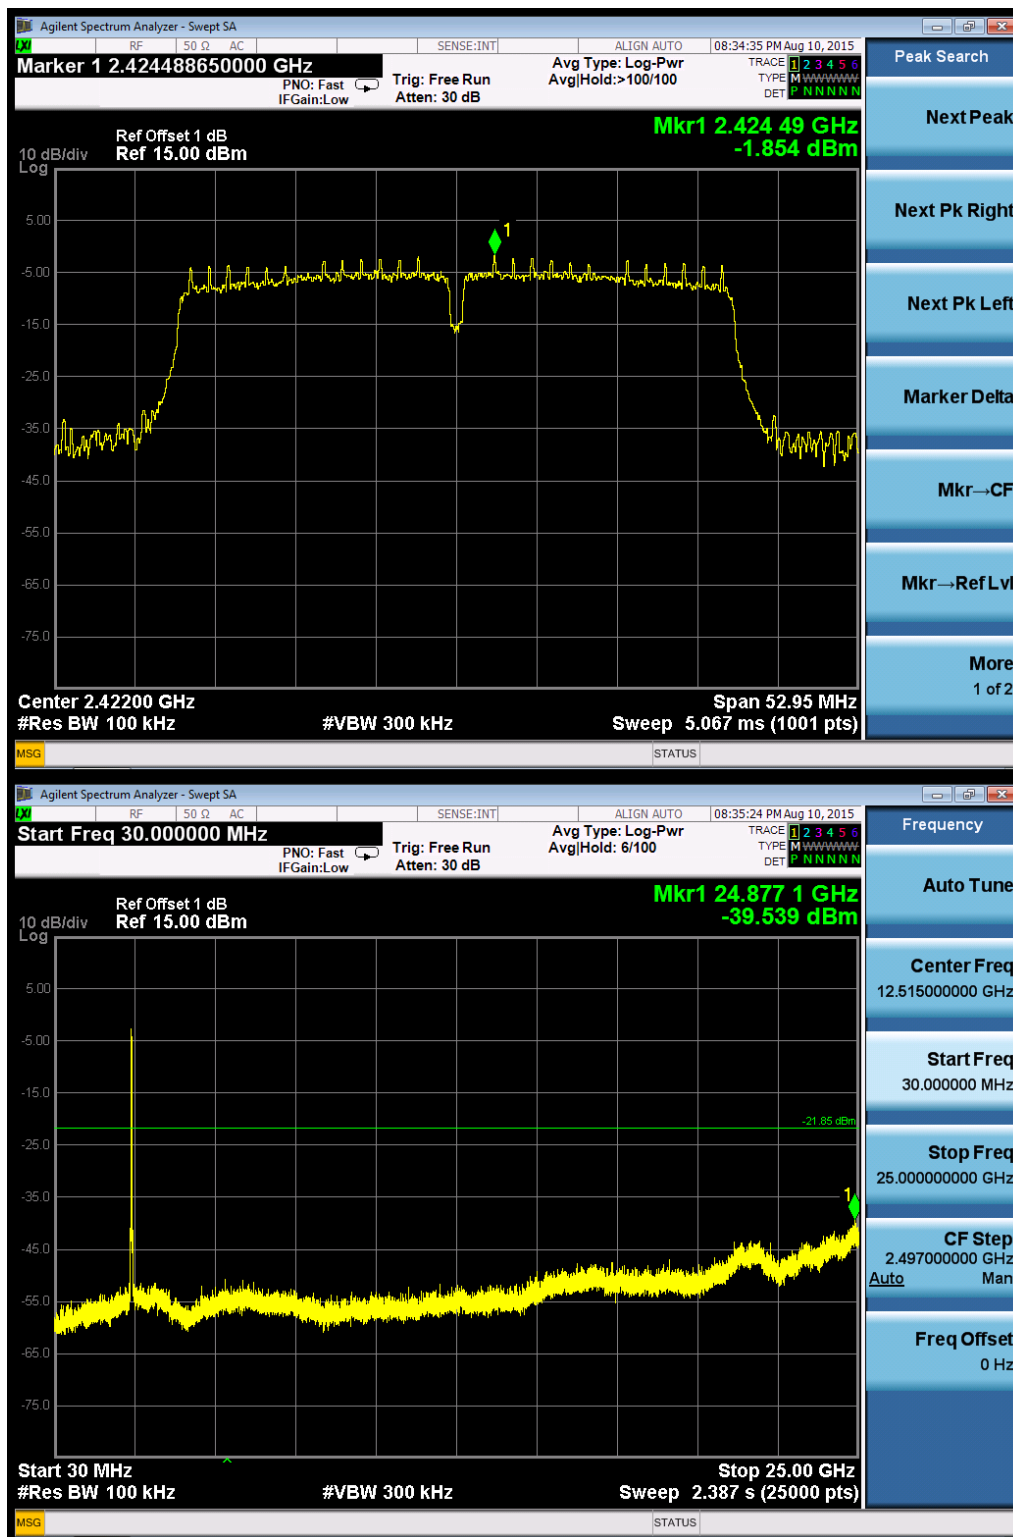

Middle Channel


High Channel

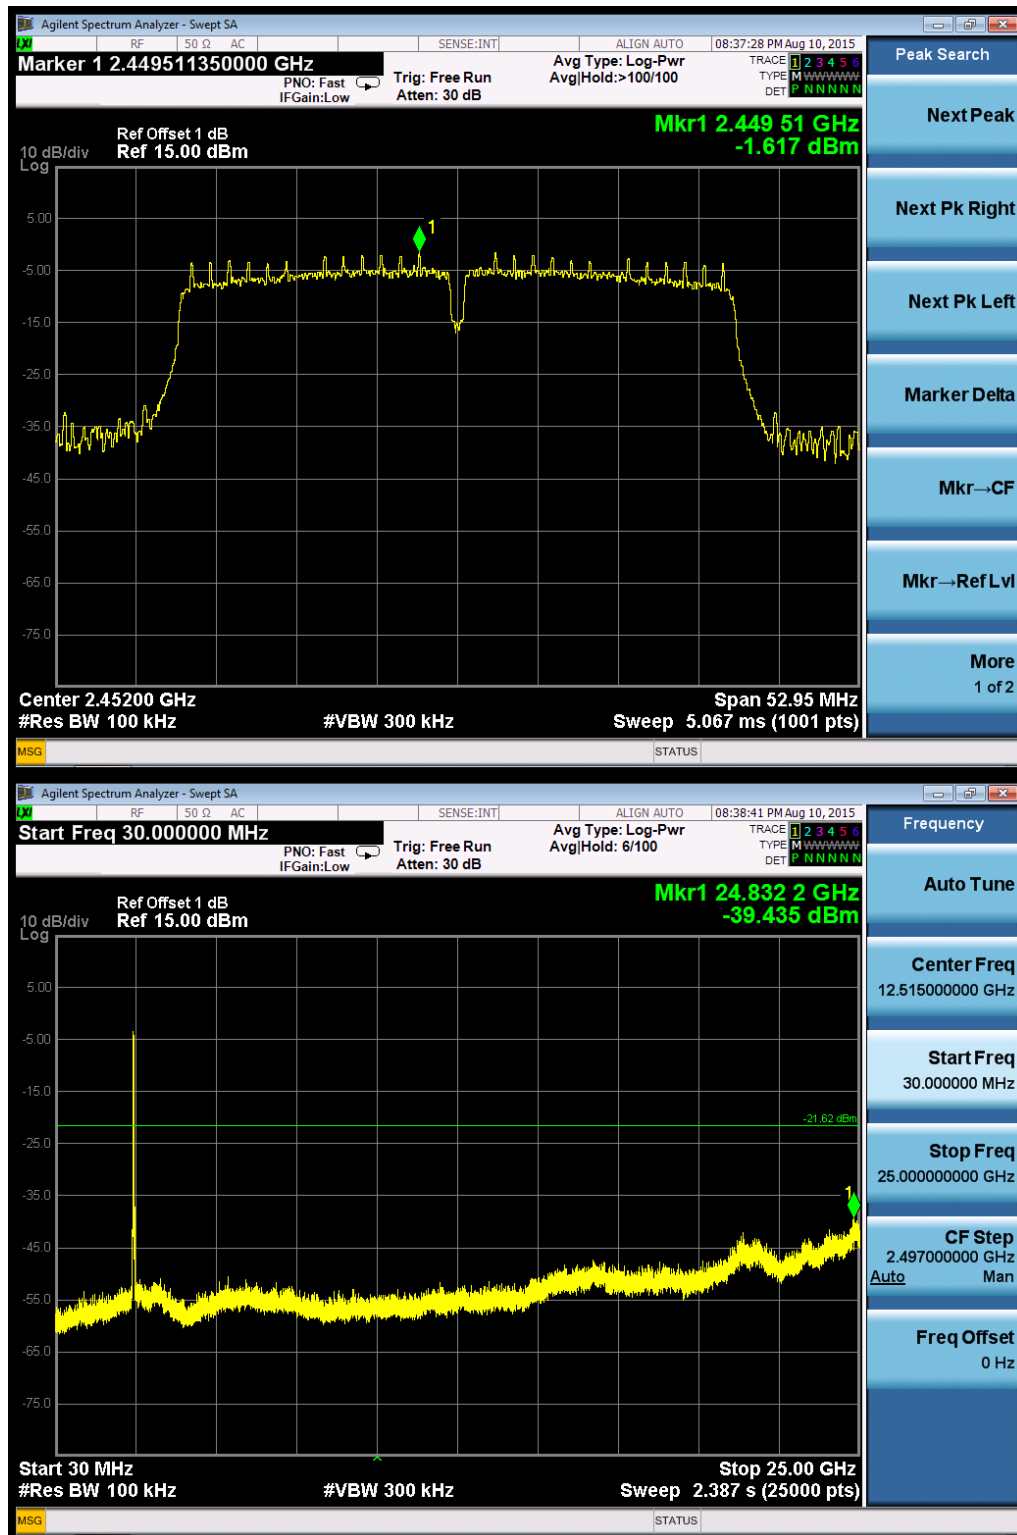

Band Edge


5.1.5 Power spectral density

RESULT:
Pass

Date of testing : 2015-08-10
 Test standard : FCC part 15.247(e)
 Basic standard : ANSI C63.10: 2013
 Clause 10 of KDB 558074 v03r01
 Limit : 8dBm/3kHz
 Kind of test site : Shield room

Test setup

Test Channel : Low/ Middle/ High
 Operation mode : A.1
 Ambient temperature : 25°C
 Relative humidity : 50%
 Atmospheric pressure : 101kPa

Table 14: Test result of power spectral density:

Mode	Rate (Mbps)	Channel (MHz)	Result (dBm/3kHz)	Limit (dBm/3kHz)	Conclusion
802.11b		2412	-5.703	8	Pass
		2437	-6.078	8	Pass
		2462	-2.946	8	Pass
802.11g		2412	-10.651	8	Pass
		2437	-8.684	8	Pass
		2462	-10.350	8	Pass
802.11n (HT20)		2412	-10.551	8	Pass
		2437	-8.990	8	Pass
		2462	-11.097	8	Pass
802.11n (HT40)		2422	-16.131	8	Pass
		2437	-12.733	8	Pass
		2452	-16.016	8	Pass

Prüfbericht - Nr.: 17051492 002

Test Report No.

Seite 35 von 155

Page 35 of 155



5.1.6 Spurious Emission**RESULT:****Pass**



Date of testing : 2015-08-09
Test standard : FCC part 15.247(d)
Basic standard : ANSI C63.10: 2013
Clause 11 of KDB 558074 v03r01
Limits : FCC part 15.209(a)
Kind of test site : 3m Semi-Anechoic Chamber & Anechoic Chamber



Test setup



Test Channel : Low/ Middle/ High
Operation mode : A.1
Ambient temperature : 24°C
Relative humidity : 53%
Atmospheric pressure : 101kPa



For details refer to following test plot.

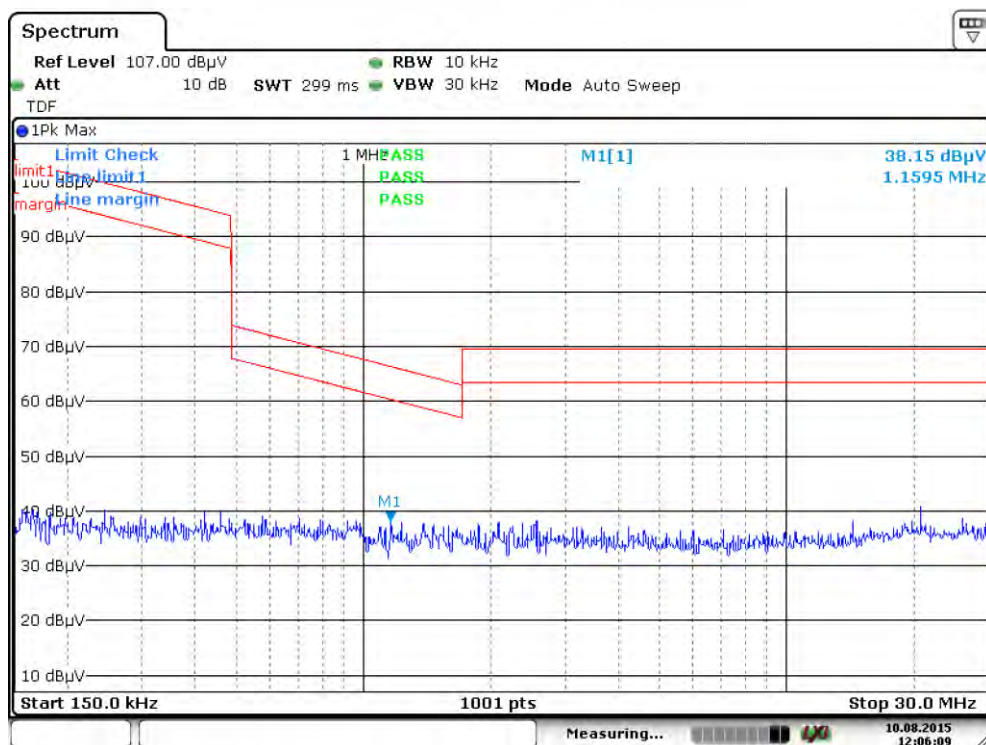
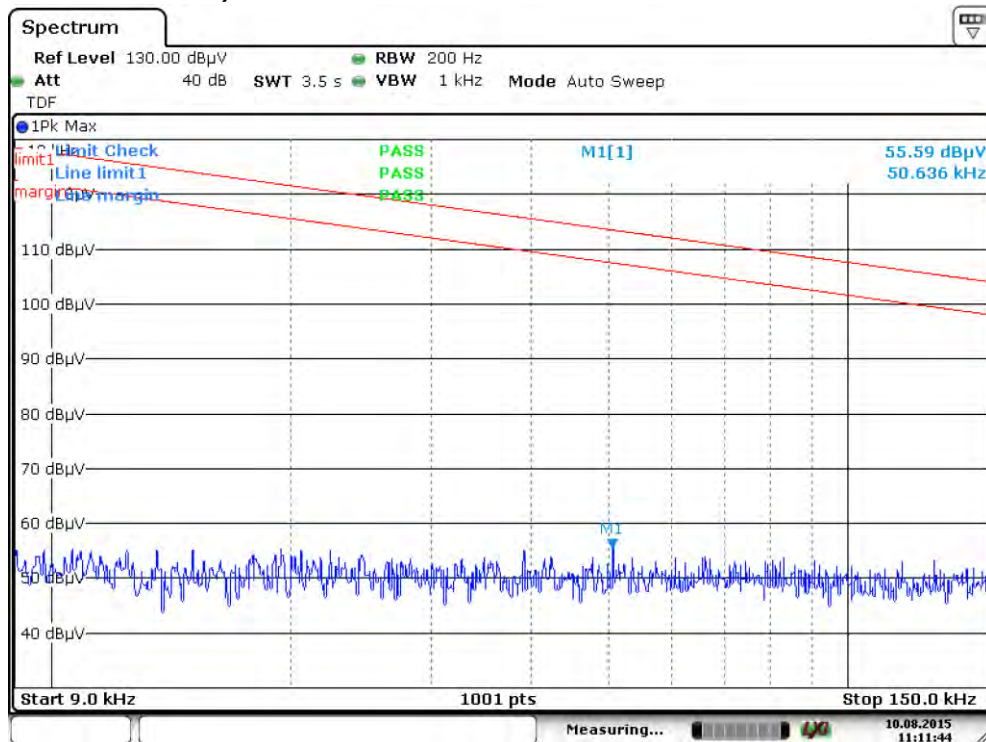
Test Plot of 802.11b, Low Channel - X

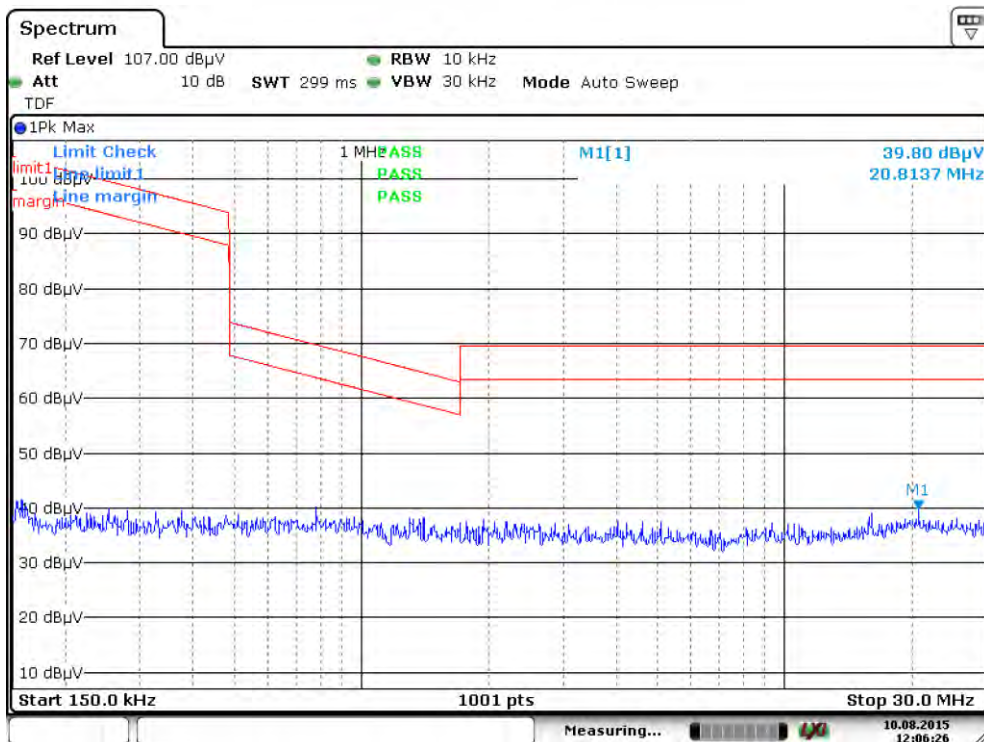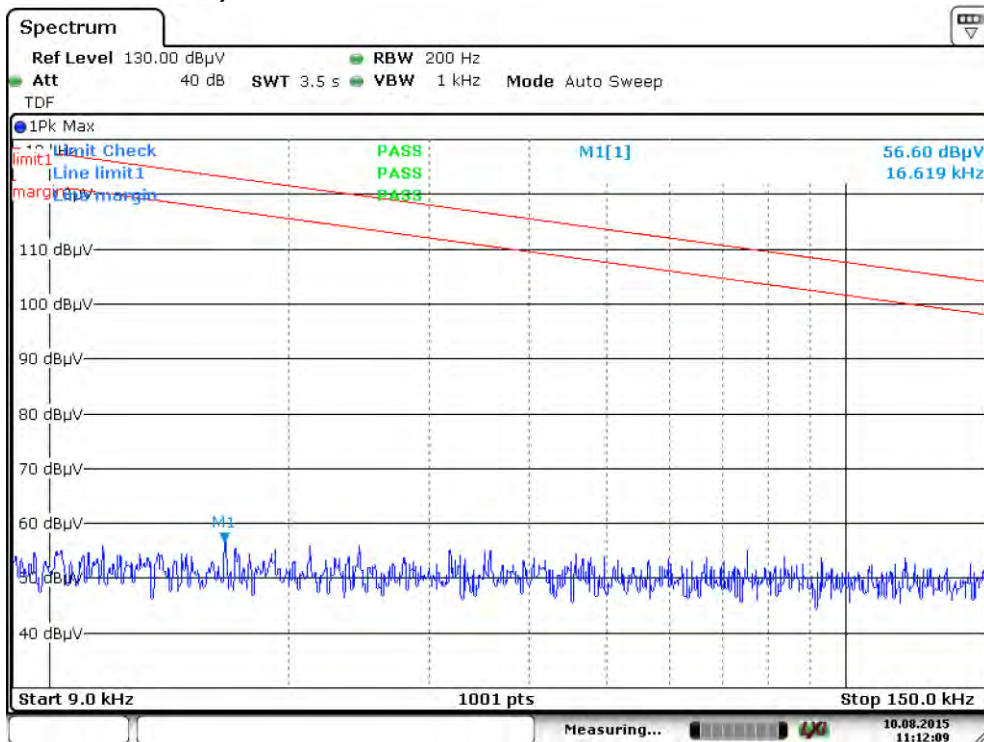
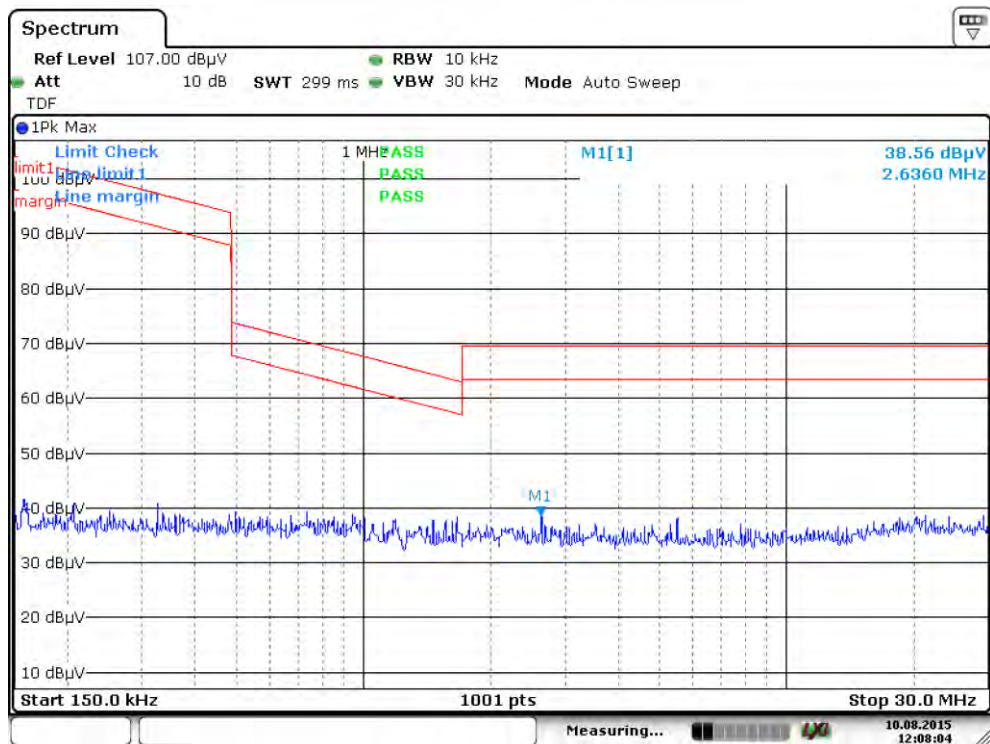
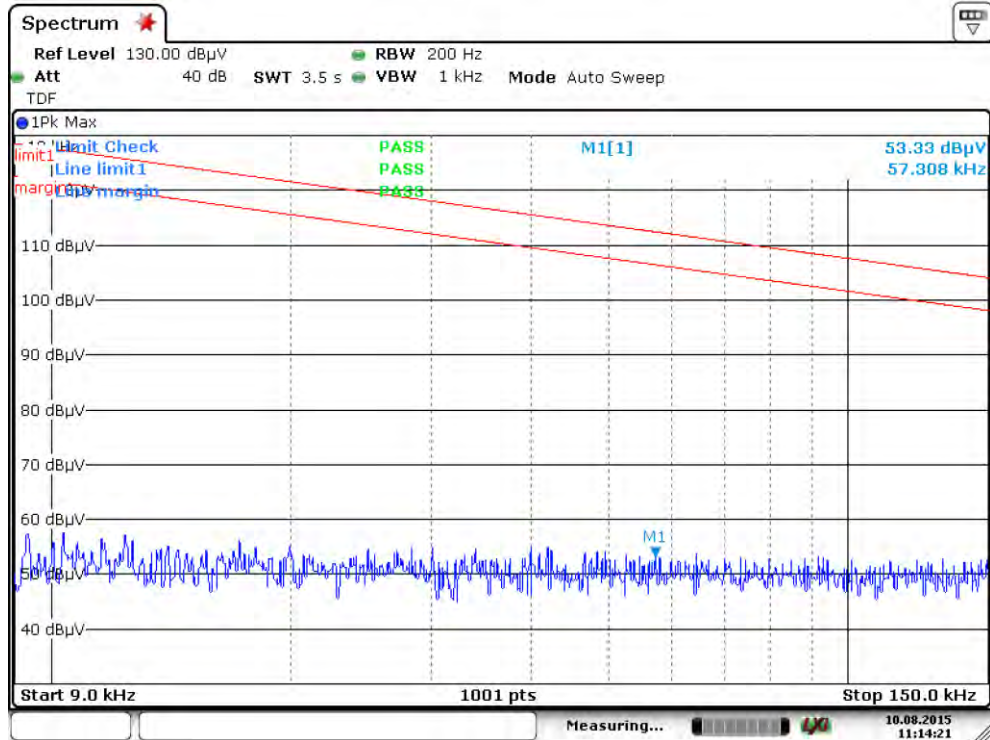
Test Plot of 802.11b, Low Channel - Y

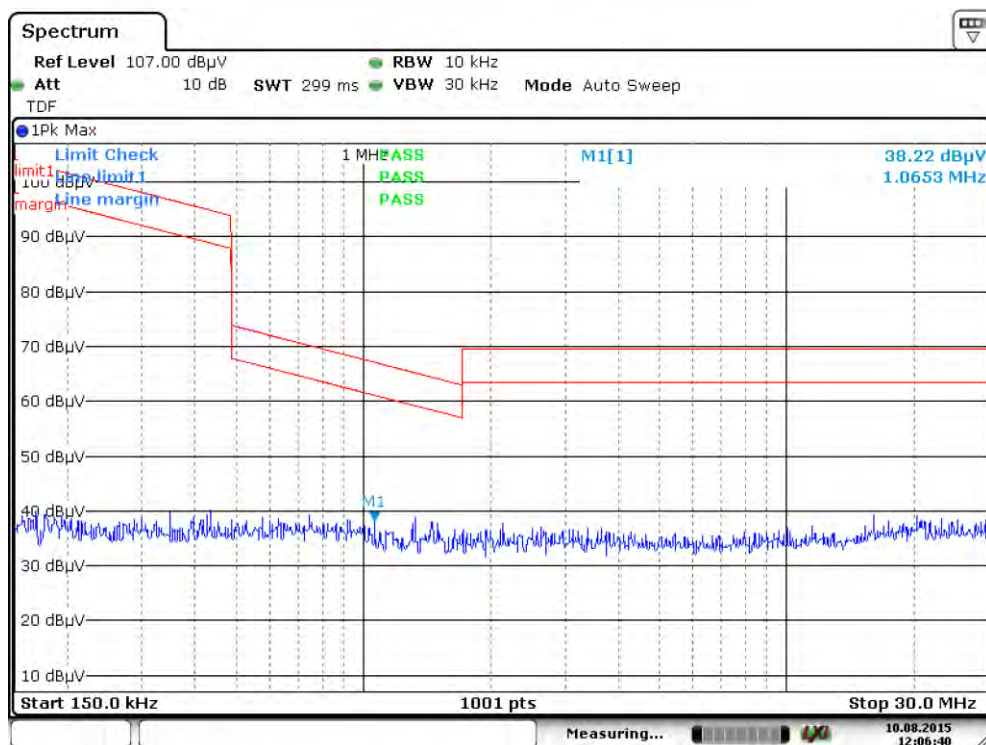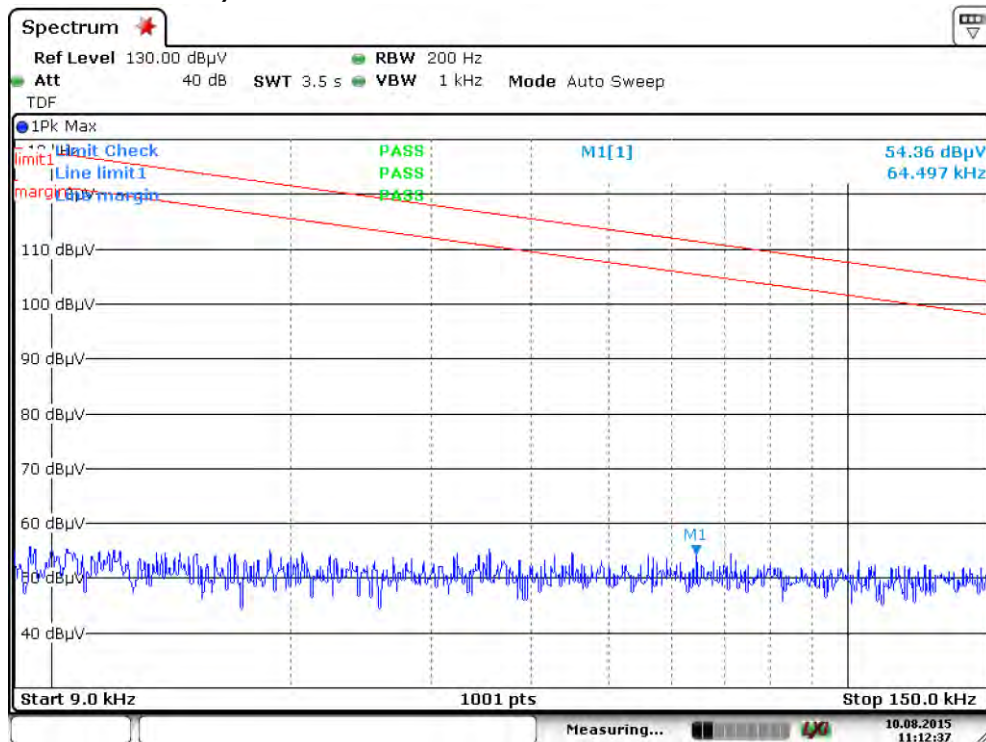
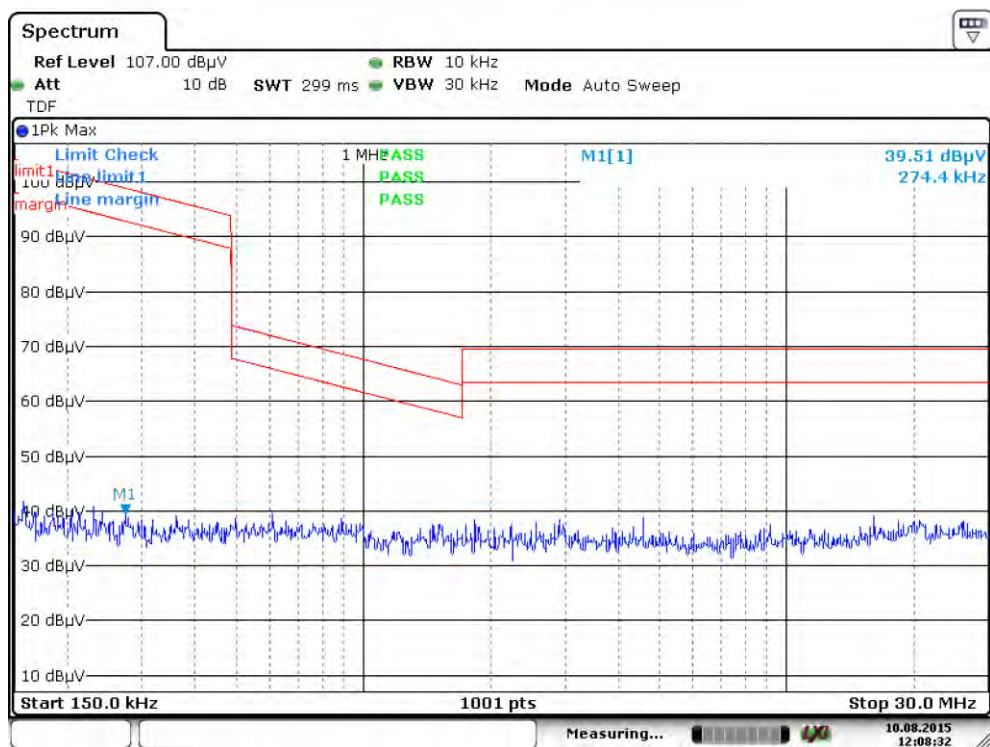
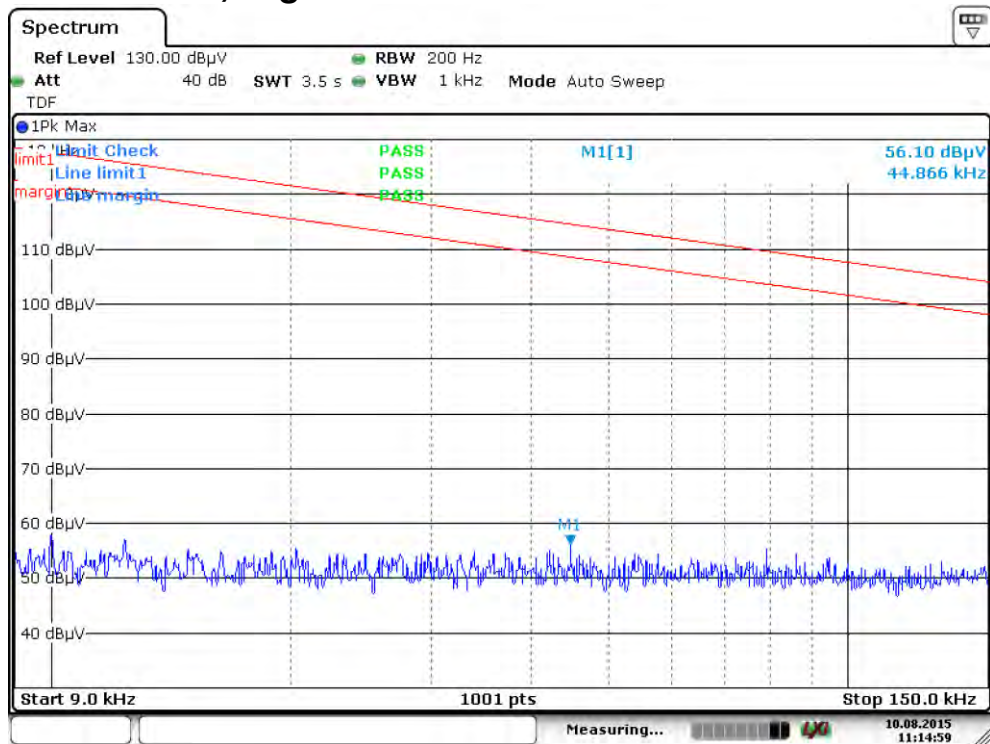
Test Plot of 802.11b, Low Channel - Z

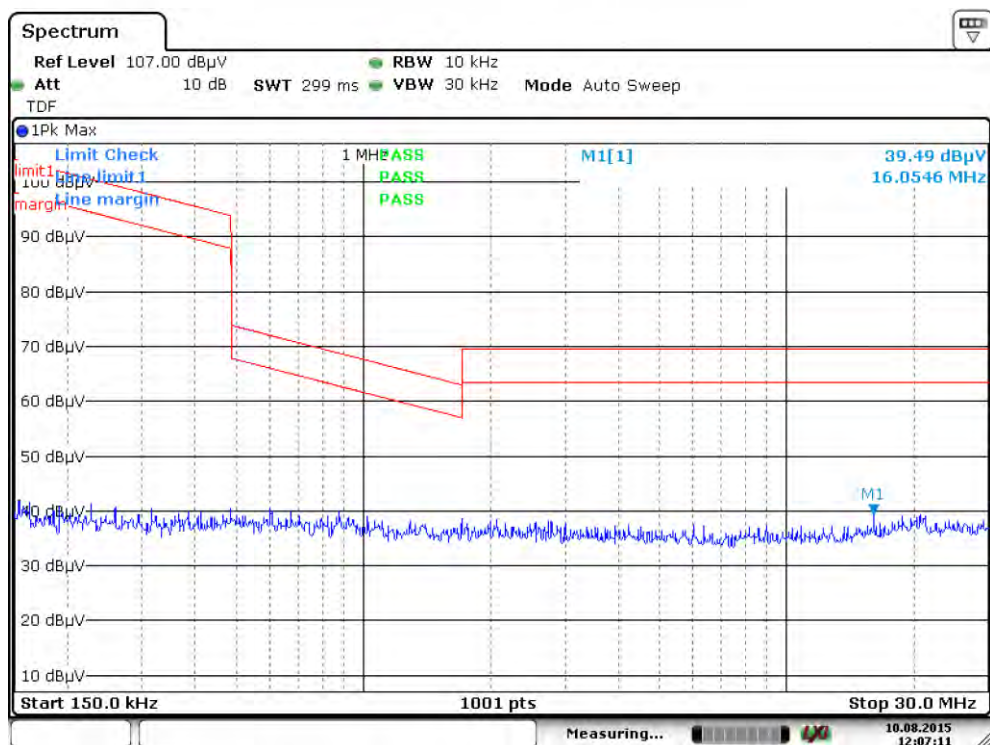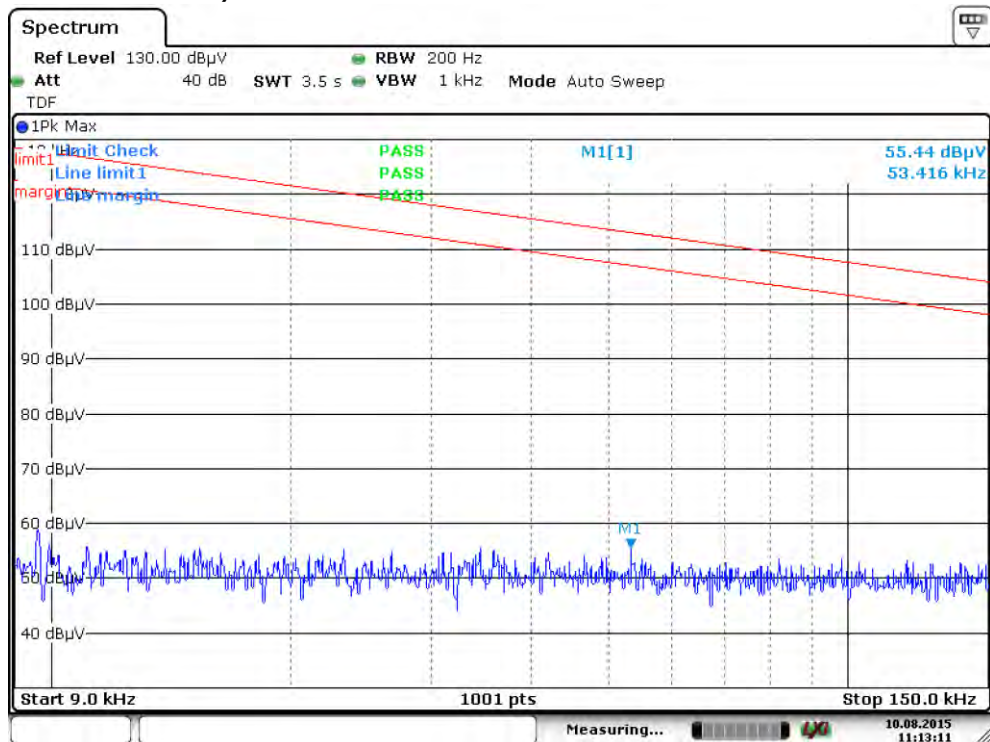
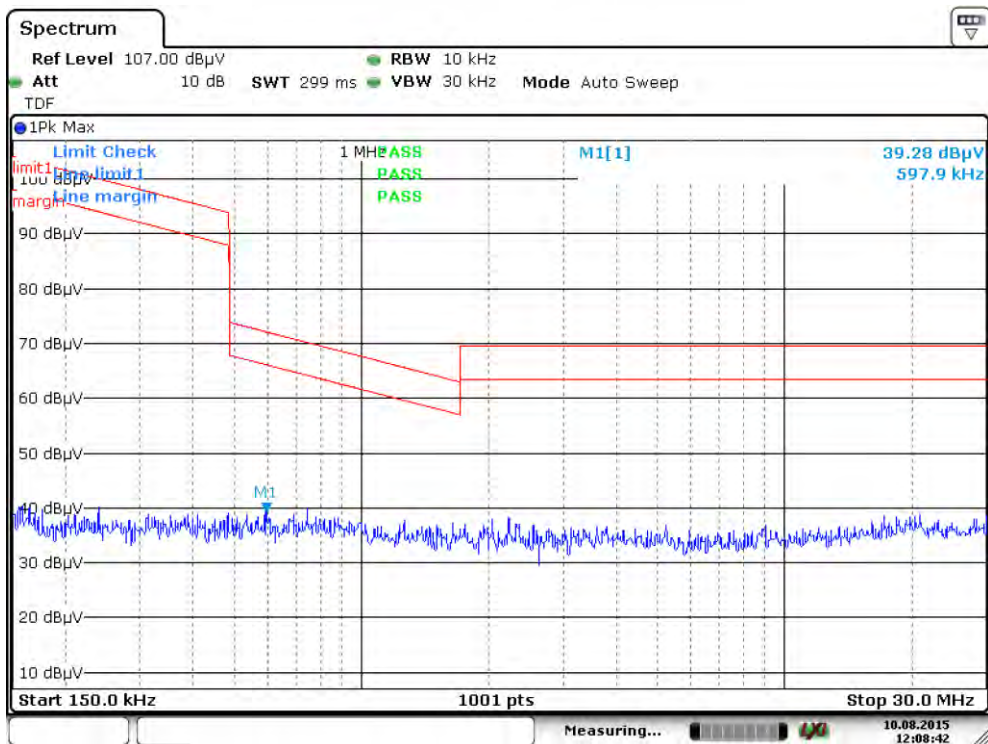
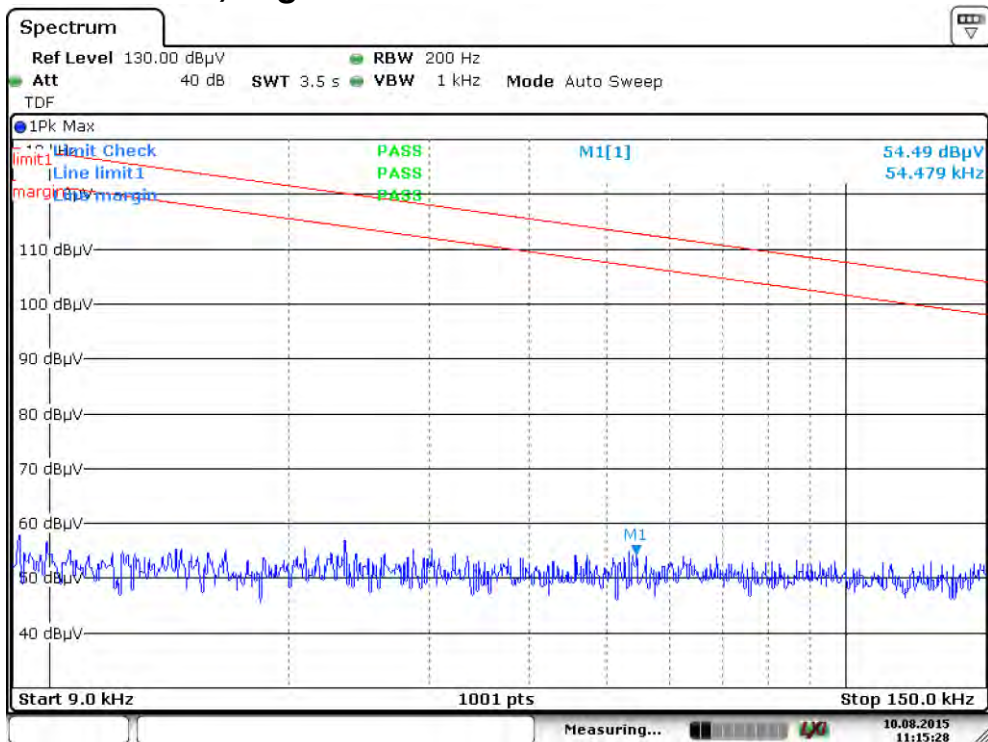
Test Plot of 802.11b, Middle Channel - X

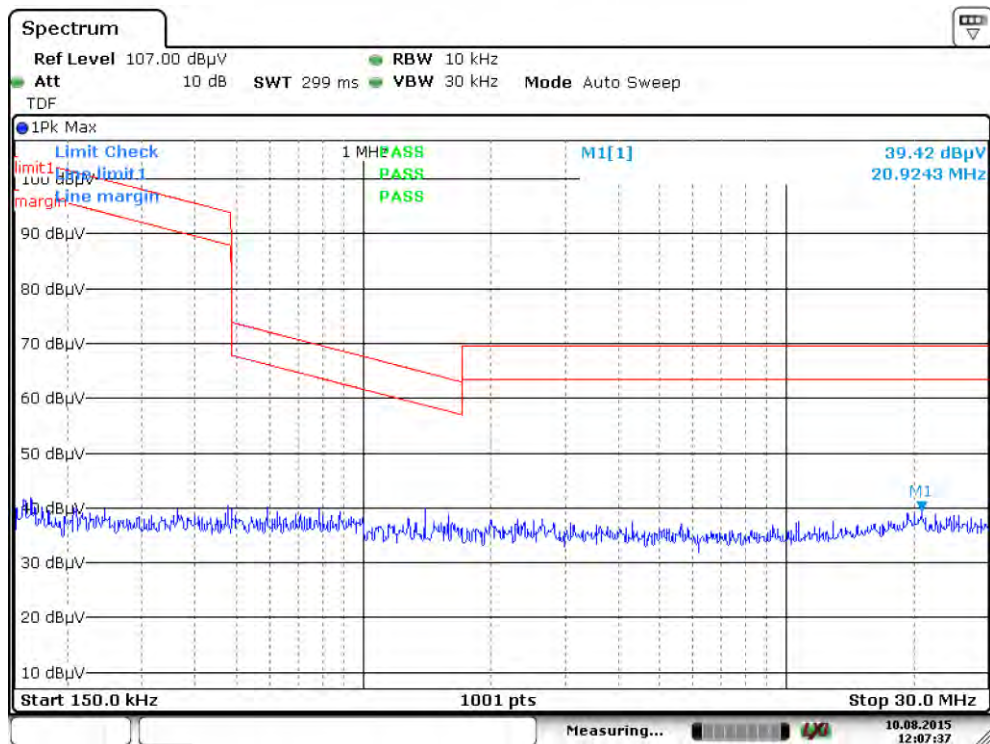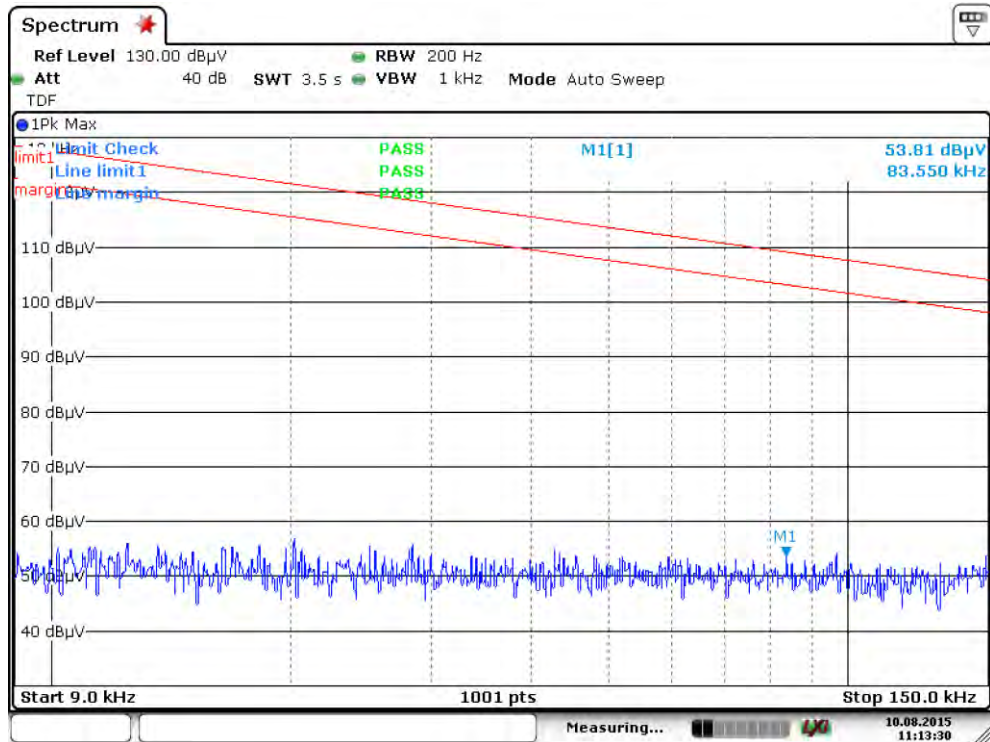
Test Plot of 802.11b, Middle Channel - Y

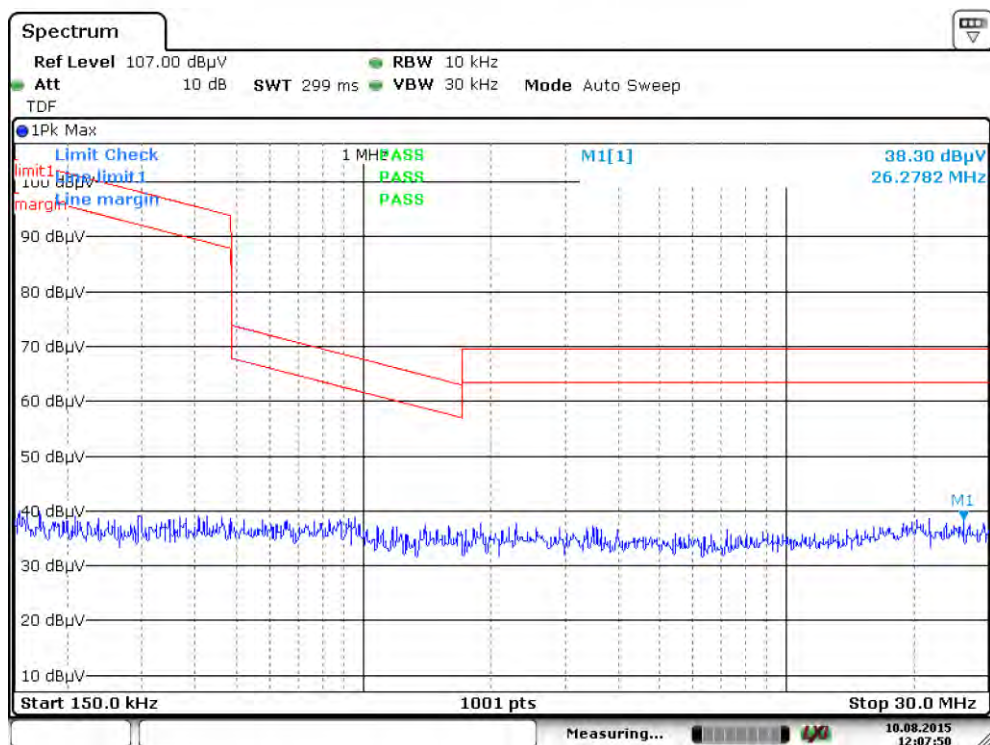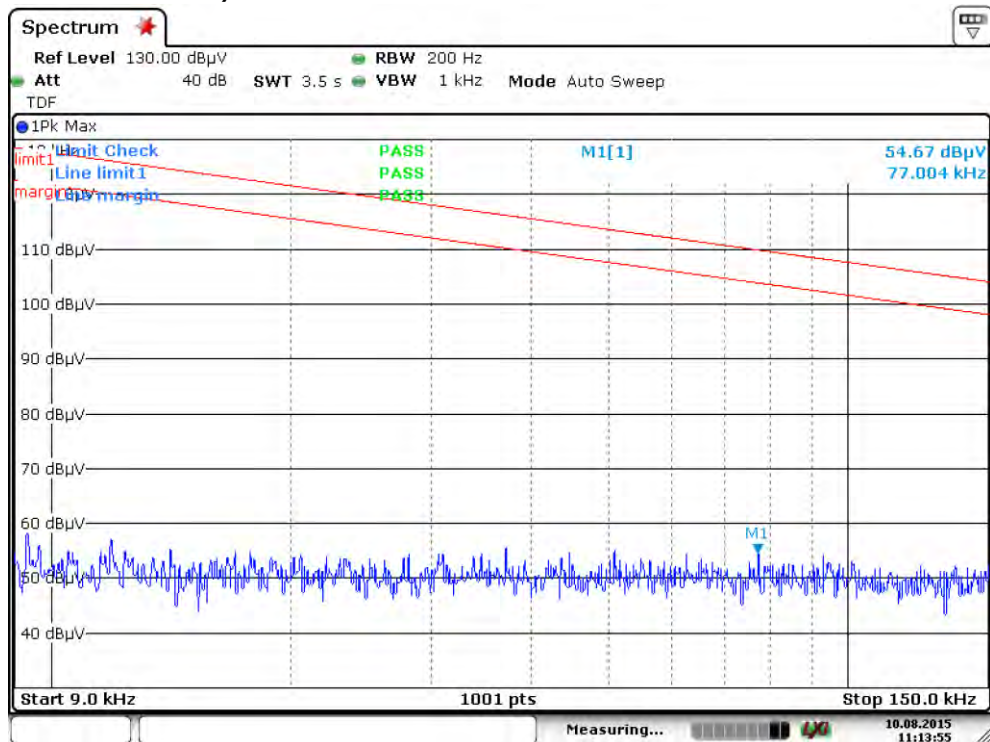
Test Plot of 802.11b, Middle Channel - Z


Test Plot of 802.11b, High Channel - X


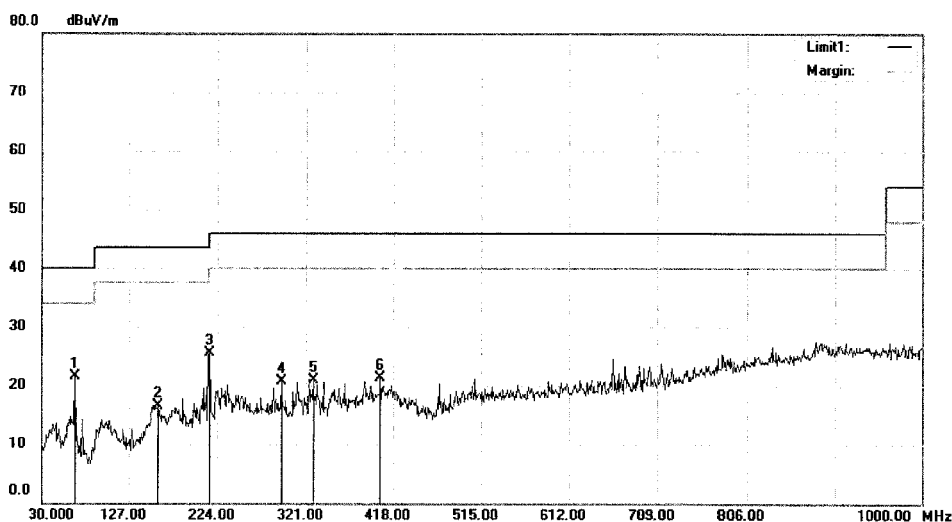
Test Plot of 802.11b, High Channel - Y


Test Plot of 802.11b, High Channel - Z


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File : TUV 8 Data : #2 Date: 2015/08/07 Time: 14:01:29



Site 3m Chamber #3

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: MID721-L DL718M

Mode: 11B 2412

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		66.8600	39.08	-17.58	21.50	40.00	-18.50	QP		
2		159.0100	35.25	-18.66	16.59	43.50	-26.91	QP		
3	*	215.2700	41.83	-16.38	25.45	43.50	-18.05	QP		
4		293.8400	34.15	-13.45	20.70	46.00	-25.30	QP		
5		328.7600	33.86	-13.04	20.82	46.00	-25.18	QP		
6		403.4500	30.36	-8.96	21.40	46.00	-24.60	QP		

*:Maximum data x:Over limit l:over margin

Operator: XLX


File : TUV 8Data : #2

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File: TUV 8 Data: #1 Date: 2015/08/07 Time: 13:58:51

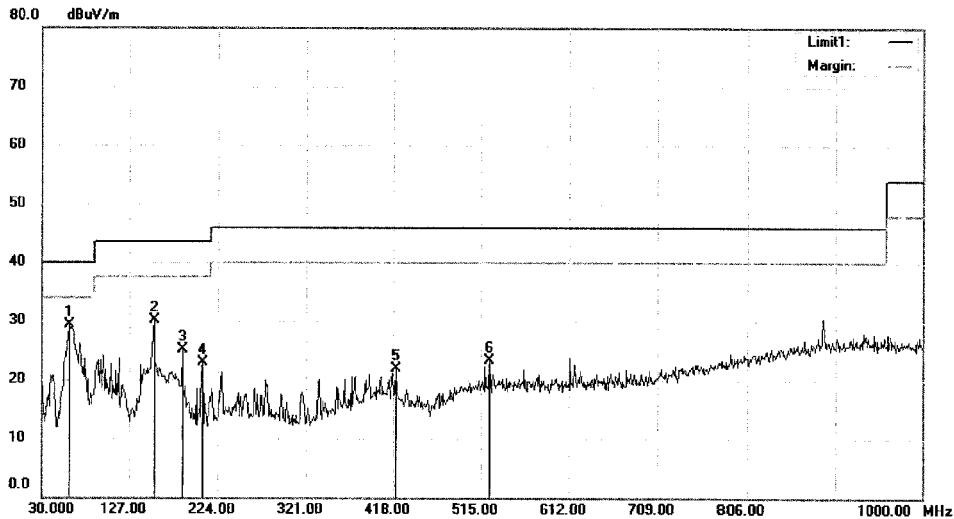

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11B 2412
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	60.0700	44.89	-15.53	29.36	40.00	-10.64	QP			
2		154.1600	48.40	-18.36	30.04	43.50	-13.46	QP			
3		185.2000	43.25	-18.09	25.16	43.50	-18.34	QP			
4		207.5100	39.31	-16.38	22.93	43.50	-20.57	QP			
5		420.9100	31.42	-9.51	21.91	46.00	-24.09	QP			
6		524.7000	30.93	-7.61	23.32	46.00	-22.68	QP			

*: Maximum data x: Over limit !: over margin

Operator: XLX


File: TUV 8 \Data: #1

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement

File : TUV 8 Data : #4 Date : 2015/08/07 Time : 14:05:39

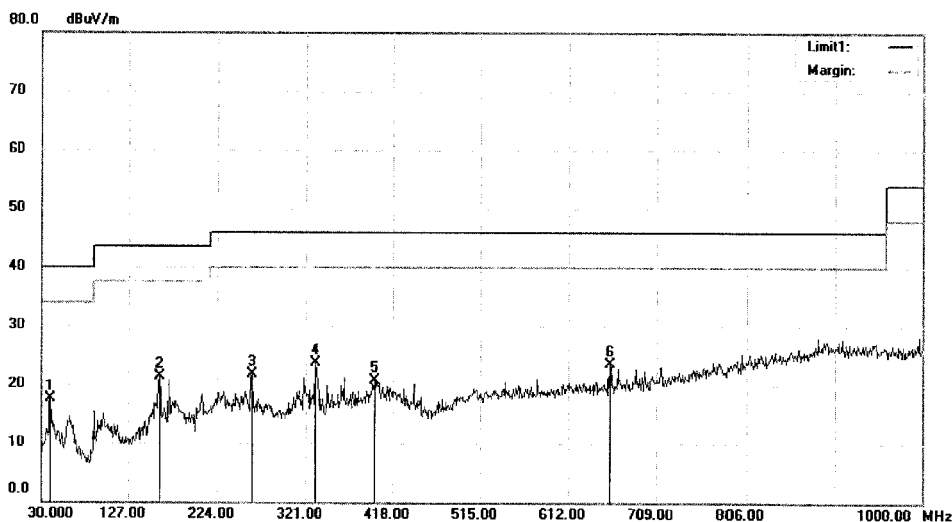
 Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11B 2437
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		39.7000	30.46	-12.95	17.51	40.00	-22.49	QP		
2	*	160.9500	40.08	-18.79	21.29	43.50	-22.21	QP		
3		261.8300	34.46	-12.77	21.69	46.00	-24.31	QP		
4		331.6700	36.62	-12.90	23.72	46.00	-22.28	QP		
5		397.6300	29.63	-9.00	20.63	46.00	-25.37	QP		
6		657.5900	29.84	-6.40	23.44	46.00	-22.56	QP		

*:Maximum data x:Over limit !:over margin

Operator: XLX


File : TUV 8 Data : #4

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File: TUV 8 Data: #3 Date: 2015/08/07 Time: 14:03:37

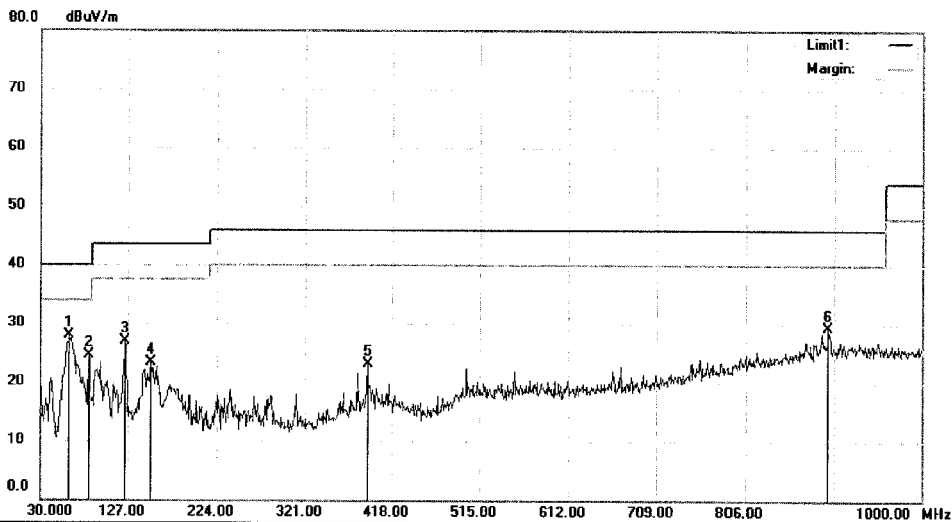

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11B 2437
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1	*	62.0100	44.08	-16.12	27.96	40.00	-12.04	QP		
2		83.3500	43.30	-18.80	24.50	40.00	-15.50	QP		
3		124.0900	43.68	-16.72	26.96	43.50	-16.54	QP		
4		152.2200	41.49	-18.24	23.25	43.50	-20.25	QP		
5		390.8400	32.45	-9.38	23.07	46.00	-22.93	QP		
6		896.2100	30.02	-0.71	29.31	46.00	-16.69	QP		

*: Maximum data x: Over limit !: over margin

Operator: XLX


File: TUV 8\Data: #3

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV 8 Data :#6 Date: 2015/08/07 Time: 17:09:46

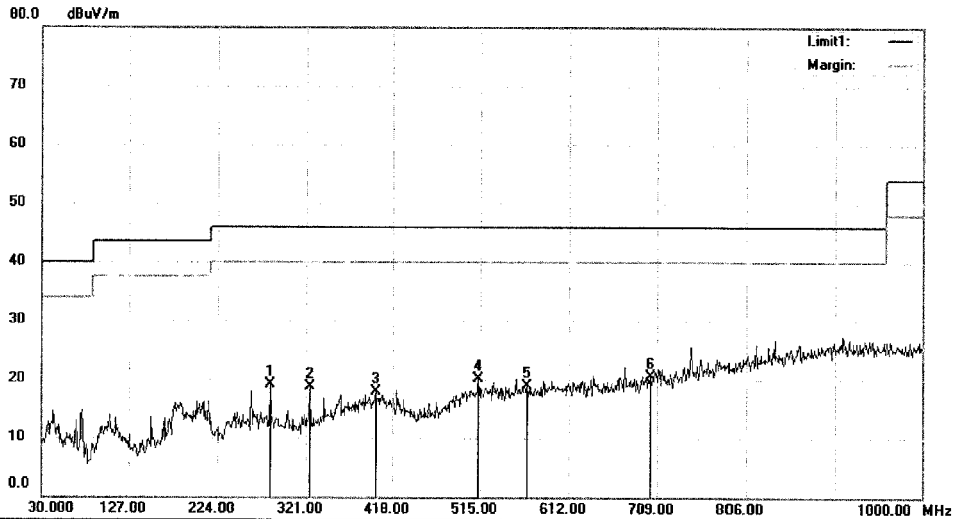

Site 3m Chamber #3

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: MID721-L DL718M

Mode:11B 2462

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		281.2300	31.84	-12.65	19.19	46.00	-26.81	QP		
2		324.8800	31.93	-13.25	18.68	46.00	-27.32	QP		
3		398.6000	26.81	-8.95	17.86	46.00	-28.14	QP		
4		513.0600	27.87	-7.70	20.17	46.00	-25.83	QP		
5		566.4100	26.15	-7.26	18.89	46.00	-27.11	QP		
6	*	702.2100	26.45	-5.91	20.54	46.00	-25.46	QP		

*:Maximum data x:Over limit l:over margin

Operator: XLX


File :TUV 8\Data :#6

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV 8 Data :#5 Date: 2015/08/07 Time: 14:10:30

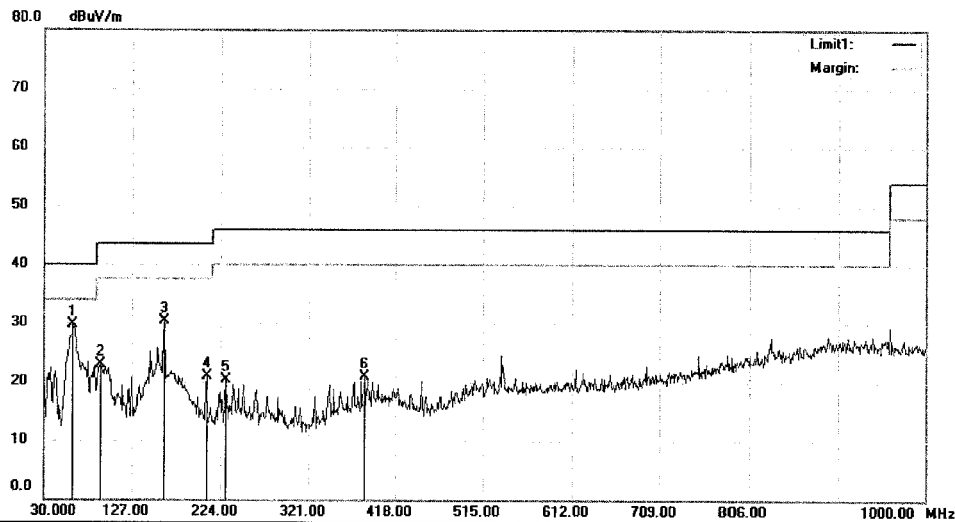

Site 3m Chamber #3

Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: MID721-L DL718M

Mode:11B 2462

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	62.0100	45.75	-16.12	29.63	40.00	-10.37	QP			
2		92.0800	39.08	-16.15	22.93	43.50	-20.57	QP			
3		162.8900	49.29	-18.92	30.37	43.50	-13.13	QP			
4		208.4800	37.21	-16.38	20.83	43.50	-22.67	QP			
5		229.8200	35.42	-15.12	20.30	46.00	-25.70	QP			
6		384.0500	30.59	-9.77	20.82	46.00	-25.18	QP			

*:Maximum data x:Over limit !:over margin

Operator: XLX


File :TUV 8Data :#5

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File : TUV 8 Data : #62 Date : 15/08/08/ Time : 9/42/59

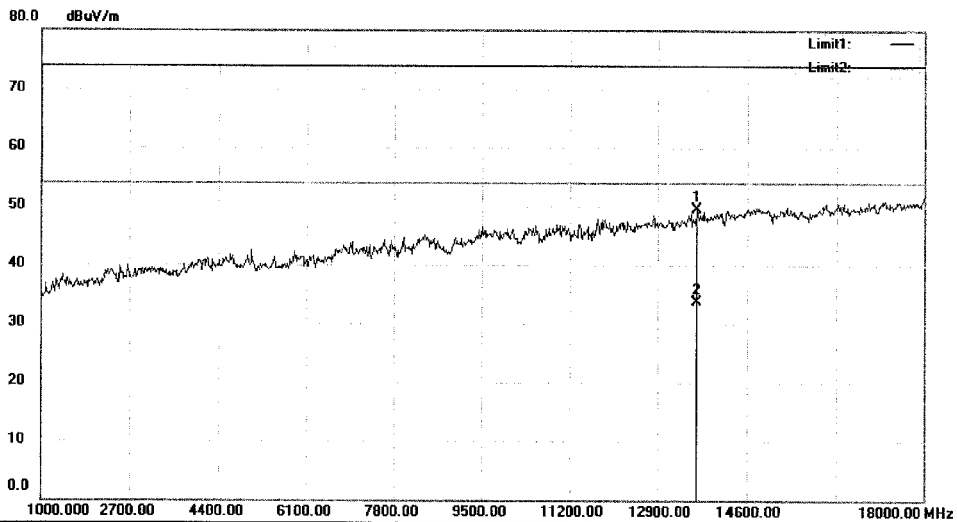

Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11B 2412
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		13665.00	45.96	3.57	49.53	74.00	-24.47	peak		
2	*	13665.00	30.12	3.57	33.69	54.00	-20.31	AVG		

*:Maximum data x:Over limit !:over margin

Operator: XLX


File : TUV 8 \Data : #62

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File : TUV 8 Data : #61 Date: 15/08/08/ Time: 9/41/47

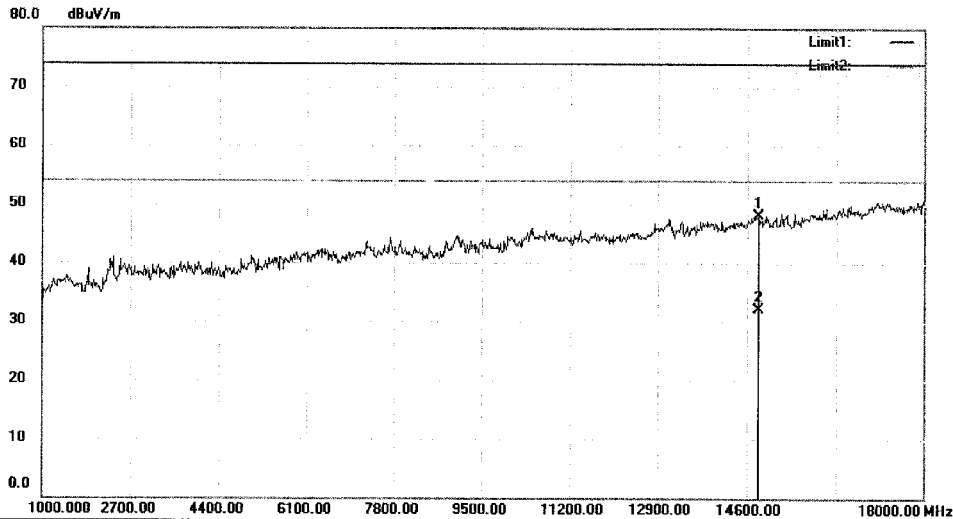

Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11B 2412
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		14821.00	44.09	3.99	48.08	74.00	-25.92	peak		
2	*	14821.00	28.19	3.99	32.18	54.00	-21.82	AVG		

*:Maximum data x:Over limit !:over margin

Operator: XLX


File : TUV 8 \Data : #61

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File : TUV 8 Data : #64 Date : 15/08/08/ Time : 9/49/49

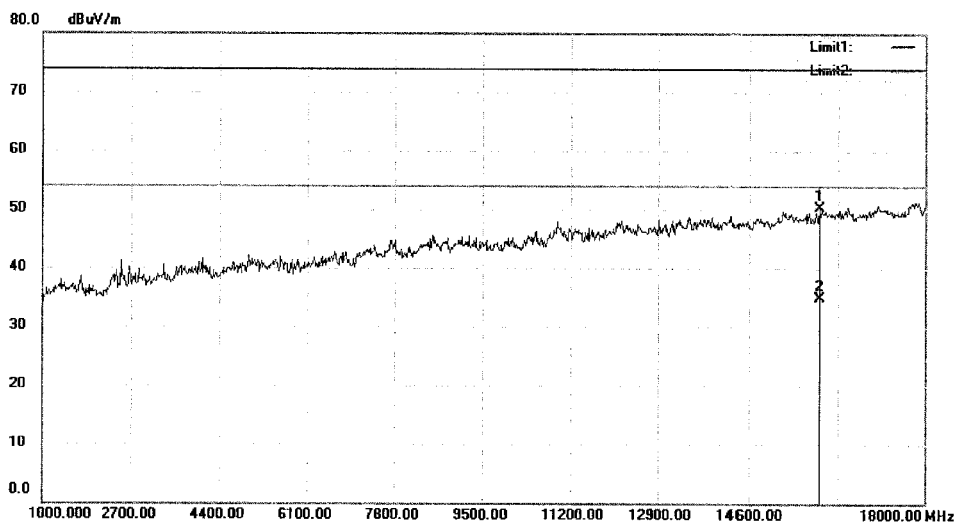

Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: MID721-L DL718M

Mode: 11B 2437

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		15943.00	49.90	0.35	50.25	74.00	-23.75	peak		
2	*	15943.00	34.47	0.35	34.82	54.00	-19.18	AVG		

*:Maximum data x:Over limit !:over margin

Operator: XLX


File : TUV 8 \Data : #64

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File: TUV 8 Data: #63 Date: 15/08/08/ Time: 9/48/36

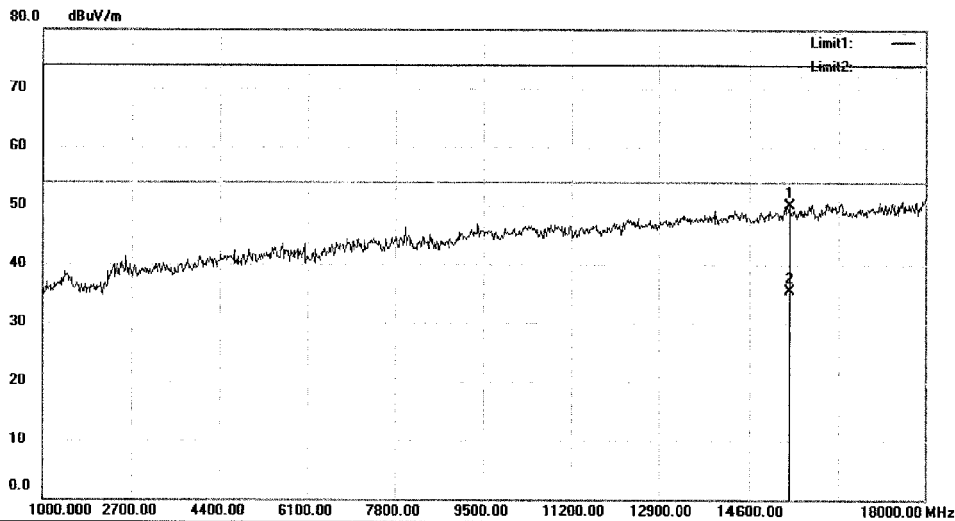

Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11B 2437
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		15348.00	47.56	2.51	50.07	74.00	-23.93	peak		
2	*	15348.00	32.90	2.51	35.41	54.00	-18.59	AVG		

*:Maximum data x:Over limit !:over margin

Operator: XLX


File: TUV 8 Data: #63

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV 8 Data :#65 Date: 15/08/ Time: 16:17:16

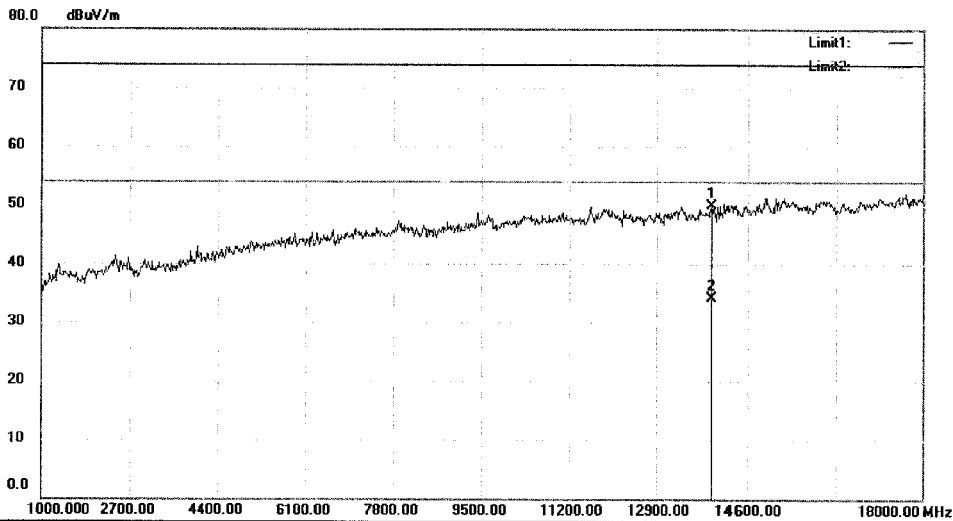

Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode:11B 2462
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		13971.00	47.54	2.34	49.88	74.00	-24.12	peak		
2	*	13971.00	31.84	2.34	34.18	54.00	-19.82	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 8\Data :#65

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV 8 Data :#66 Date: 15/08/ Time: 16:20:51

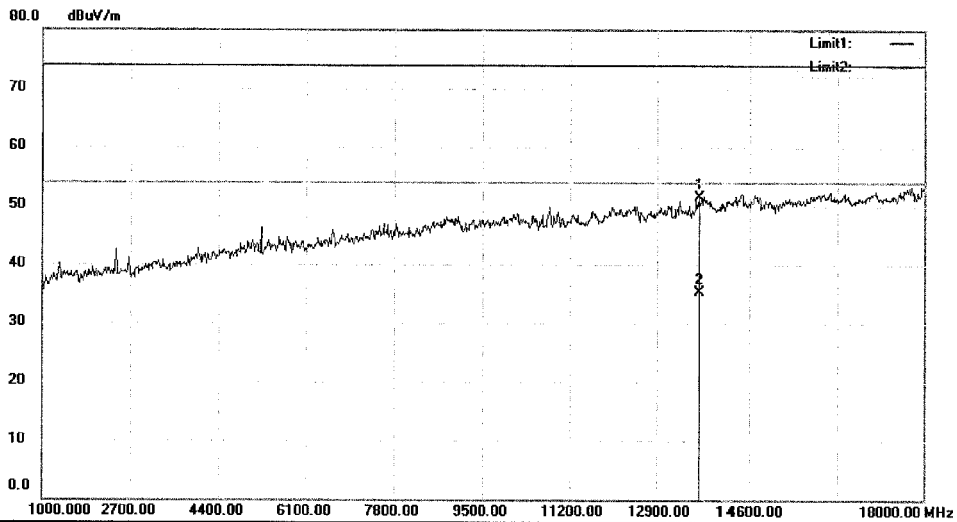

Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode:11B 2462
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		13716.00	50.29	1.27	51.56	74.00	-22.44	peak		
2	*	13716.00	34.12	1.27	35.39	54.00	-18.61	AVG		


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 8\Data :#66

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

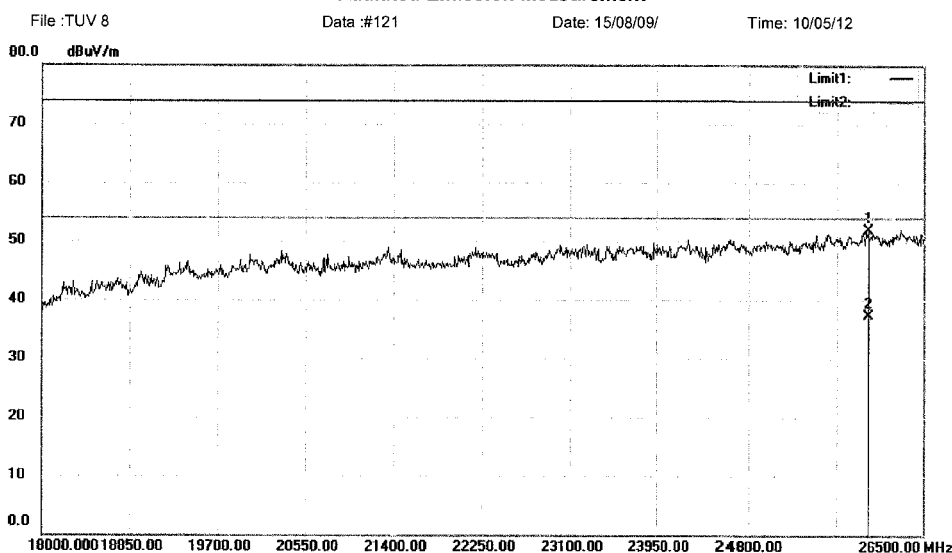
Radiated Emission Measurement


Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: MID721-L DL718M

Mode:11B 2412

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		25956.00	87.66	-35.84	51.82	74.00	-22.18	peak		
2	*	25956.00	73.09	-35.84	37.25	54.00	-16.75	AVG		


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 8\Data :#121

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

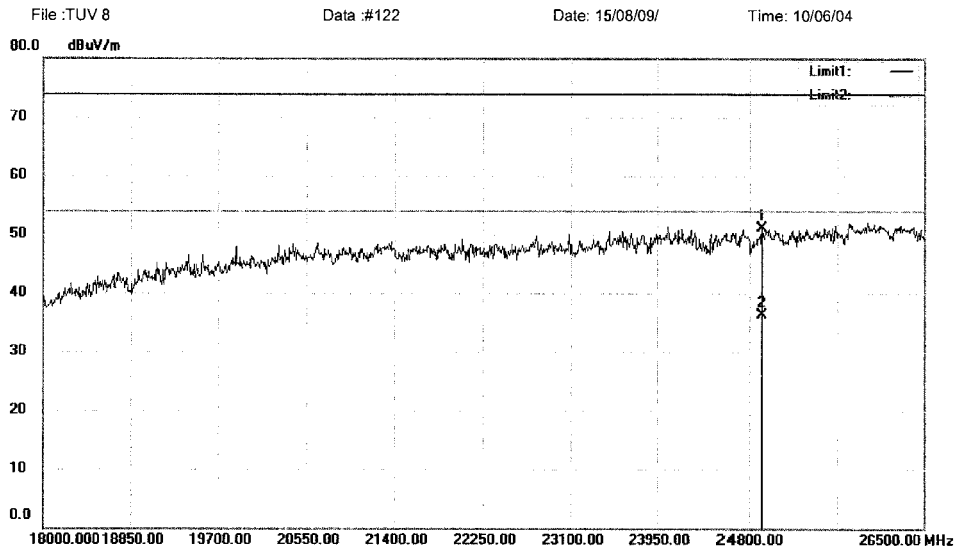
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode:11B 2412
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		24919.00	88.10	-37.02	51.08	74.00	-22.92	peak		
2	*	24919.00	73.30	-37.02	36.28	54.00	-17.72	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 8\Data :#122

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File: TUV 8 Data: #123 Date: 15/08/09/ Time: 10/06/07

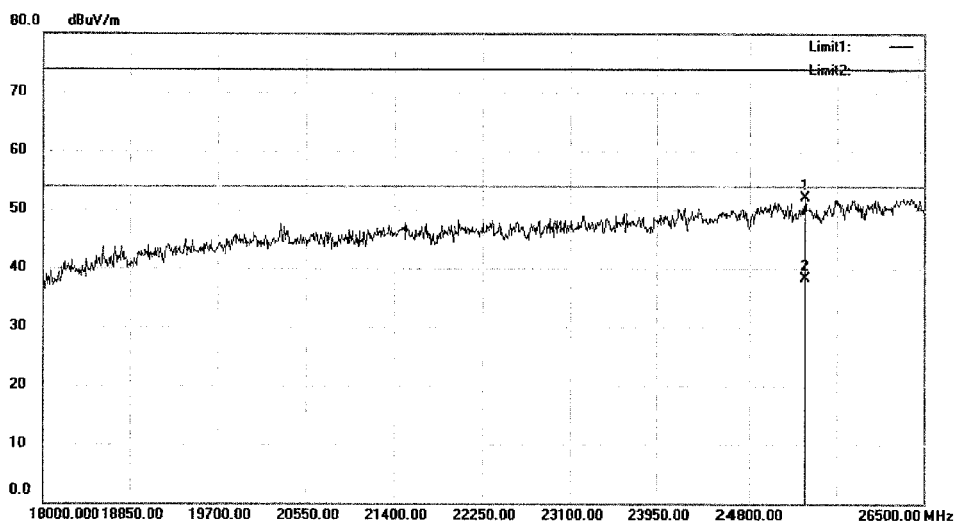

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11B 2437
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		25335.50	88.70	-36.60	52.10	74.00	-21.90	peak		
2	*	25335.50	74.86	-36.60	38.26	54.00	-15.74	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 8\Data: #123

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File: TUV 8 Data: #124 Date: 15/08/09/ Time: 10/06/15

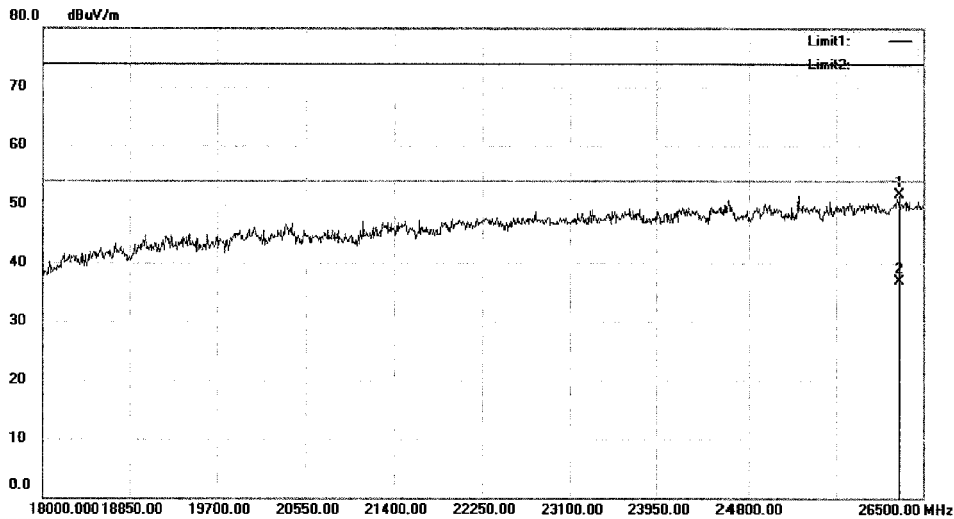

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11B 2437
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		26262.00	87.10	-35.47	51.63	74.00	-22.37	peak		
2	*	26262.00	72.28	-35.47	36.81	54.00	-17.19	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 8Data: #124

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV 8 Data :#125 Date: 15/08/09/ Time: 10/06/21

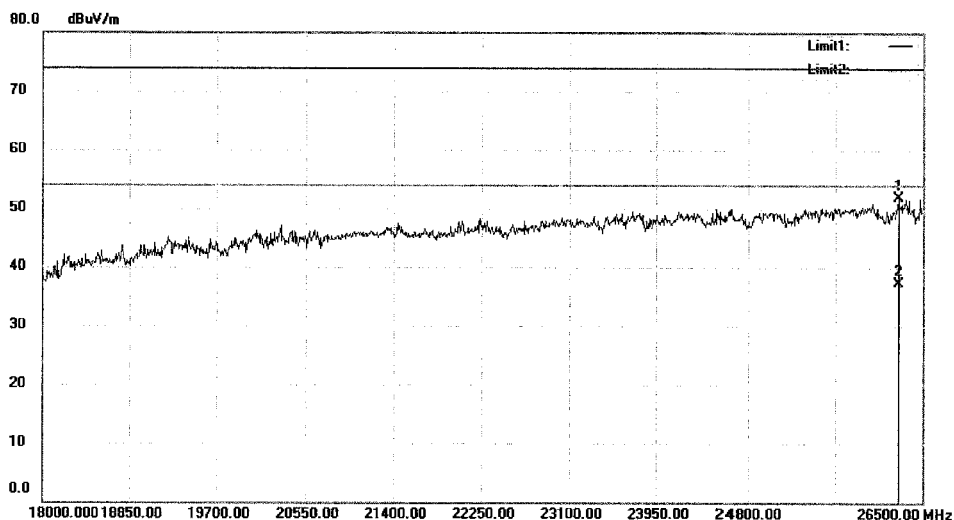

Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode:11B 2462
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		26262.00	87.34	-35.47	51.87	74.00	-22.13	peak		
2	*	26262.00	72.71	-35.47	37.24	54.00	-16.76	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 8Data :#125

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV 8 Data :#126 Date: 15/08/09/ Time: 10/06/27

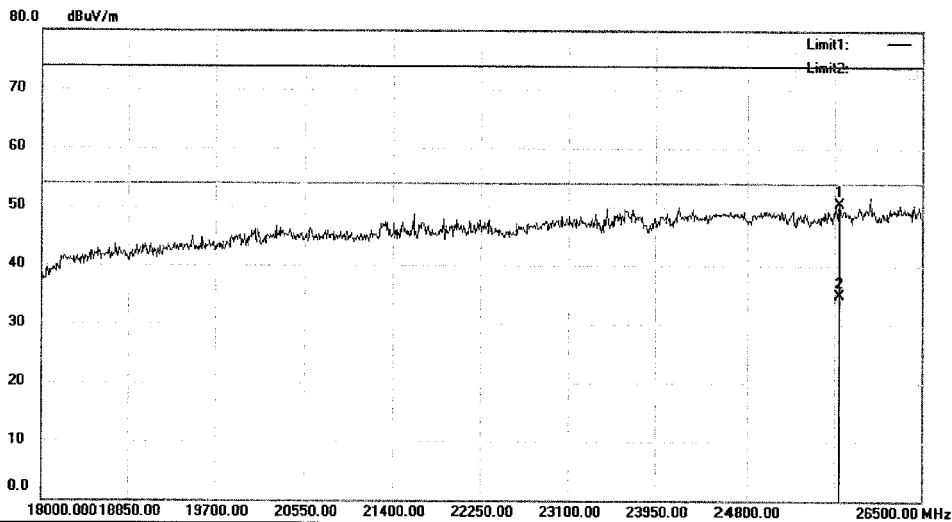

Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode:11B 2462
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		25701.00	86.75	-36.15	50.60	74.00	-23.40	peak		
2	*	25701.00	71.02	-36.15	34.87	54.00	-19.13	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 8Data :#126

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV 8 Data :#8 Date: 2015/08/07 Time: 17:15:19

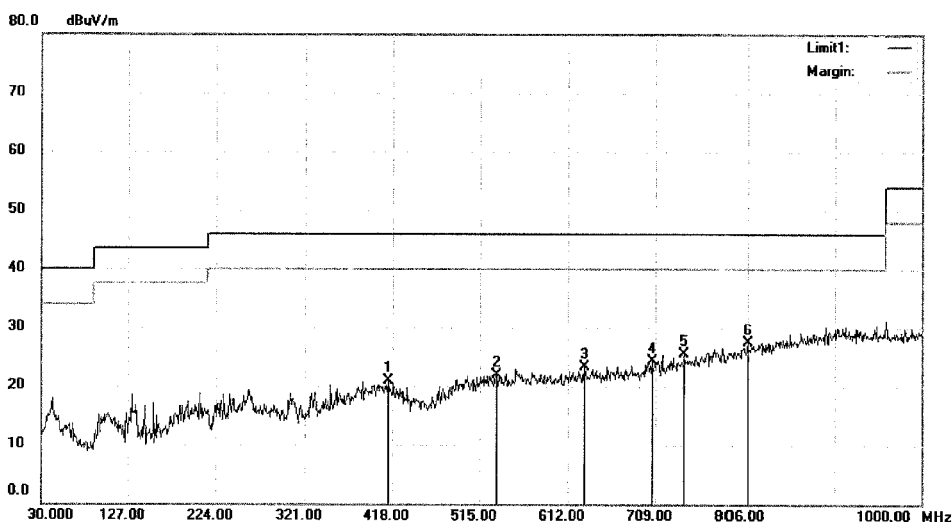

Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode:11G 2412
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		413.1500	30.15	-9.24	20.91	46.00	-25.09	QP		
2		533.4300	29.47	-7.53	21.94	46.00	-24.06	QP		
3		630.4300	30.07	-6.69	23.38	46.00	-22.62	QP		
4		705.1200	30.11	-5.83	24.28	46.00	-21.72	QP		
5		741.0100	30.23	-4.70	25.53	46.00	-20.47	QP		
6	*	806.0000	30.26	-2.73	27.53	46.00	-18.47	QP		

*:Maximum data x:Over limit l:over margin

Operator: XLX

File :TUV 8Data :#8

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

File :TUV 8

Data :#7

Date: 2015/08/07

Time: 17:11:33

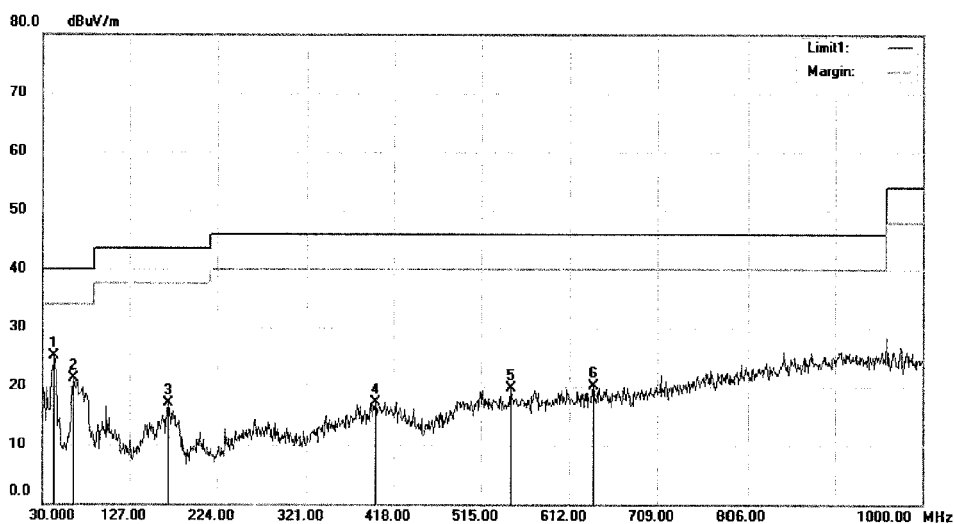

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: MID721-L DL718M

Mode:11G 2412

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	42.6100	38.14	-13.02	25.12	40.00	-14.88	QP		
2		63.9500	37.91	-16.70	21.21	40.00	-18.79	QP		
3		169.6800	36.60	-19.42	17.18	43.50	-26.32	QP		
4		397.6300	26.29	-9.00	17.29	46.00	-28.71	QP		
5		547.9800	27.13	-7.42	19.71	46.00	-26.29	QP		
6		638.1900	26.72	-6.61	20.11	46.00	-25.89	QP		

*:Maximum data x:Over limit !:over margin

Operator: XLX


File :TUV 8Data :#7

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV 8 Data :#10 Date: 15/08/08/ Time: 8/31/18

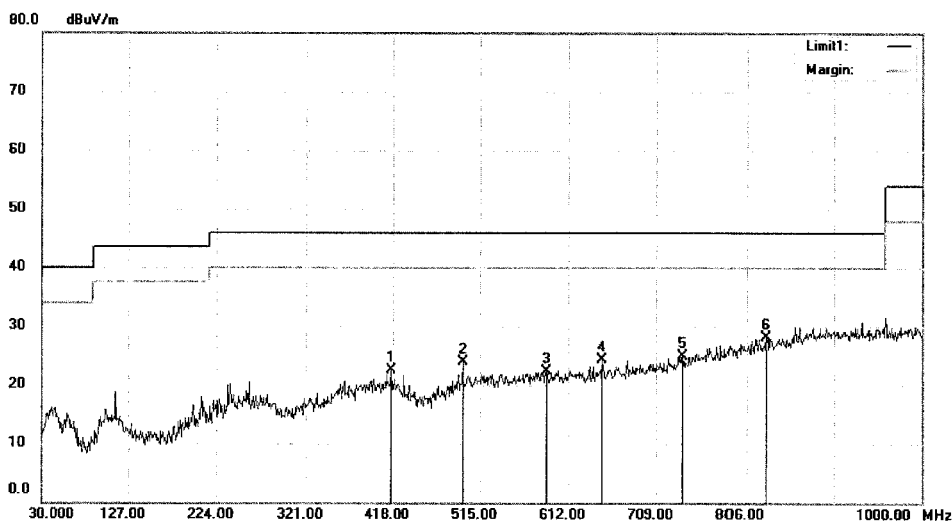

Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode:11G 2437
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		416.0600	31.75	-9.32	22.43	46.00	-23.57	QP		
2		495.6000	32.03	-8.17	23.86	46.00	-22.14	QP		
3		587.7500	29.49	-7.09	22.40	46.00	-23.60	QP		
4		648.8600	30.80	-6.50	24.30	46.00	-21.70	QP		
5		738.1000	29.62	-4.80	24.82	46.00	-21.18	QP		
6	*	827.3400	30.40	-2.26	28.14	46.00	-17.86	QP		

*:Maximum data x:Over limit !:over margin

Operator: XLX


File :TUV 8\Data :#10

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV 8 Data :#9 Date: 15/08/08/ Time: 8/30/19

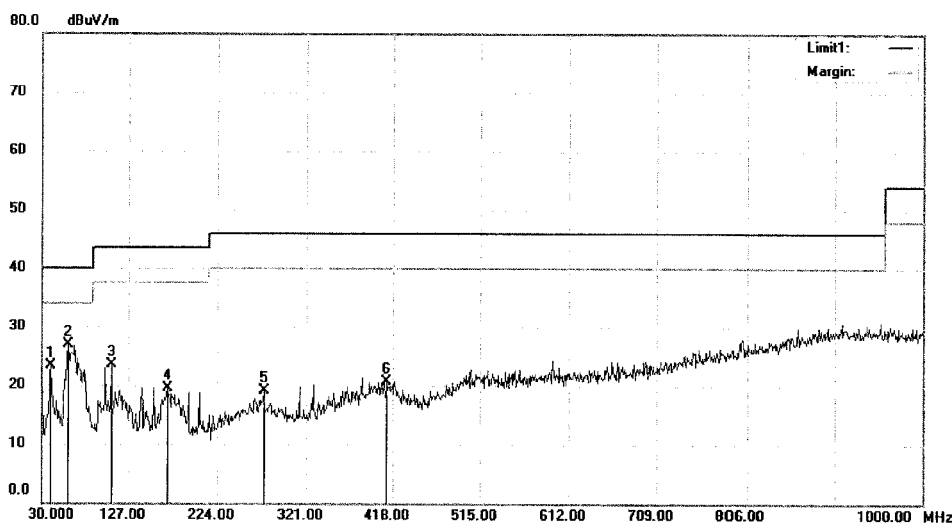

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: MID721-L DL718M

Mode:11G 2437

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		39.7000	36.32	-12.95	23.37	40.00	-16.63	QP		
2	*	59.1000	42.39	-15.55	26.84	40.00	-13.16	QP		
3		107.6000	37.63	-14.16	23.47	43.50	-20.03	QP		
4		169.6800	38.95	-19.42	19.53	43.50	-23.97	QP		
5		274.4400	31.73	-12.63	19.10	46.00	-26.90	QP		
6		411.2100	29.99	-9.19	20.80	46.00	-25.20	QP		

*:Maximum data x:Over limit !:over margin

Operator: XLX


File :TUV 8\Data :#9

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File : TUV 8 Data : #12 Date : 15/08/08/ Time : 8/32/56

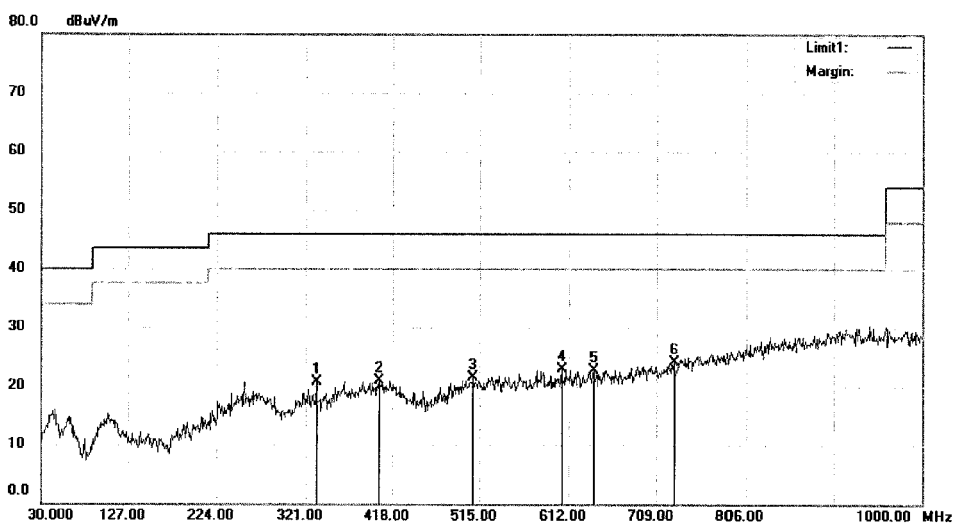

Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11G 2462
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		332.6400	33.47	-12.85	20.62	46.00	-25.38	QP		
2		402.4800	29.87	-8.93	20.94	46.00	-25.06	QP		
3		508.2100	29.25	-7.74	21.51	46.00	-24.49	QP		
4		604.2400	29.83	-6.95	22.88	46.00	-23.12	QP		
5		639.1600	29.35	-6.59	22.76	46.00	-23.24	QP		
6	*	728.4000	29.28	-5.10	24.18	46.00	-21.82	QP		


*:Maximum data x:Over limit l:over margin

Operator: XLX

File : TUV 8Data : #12

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

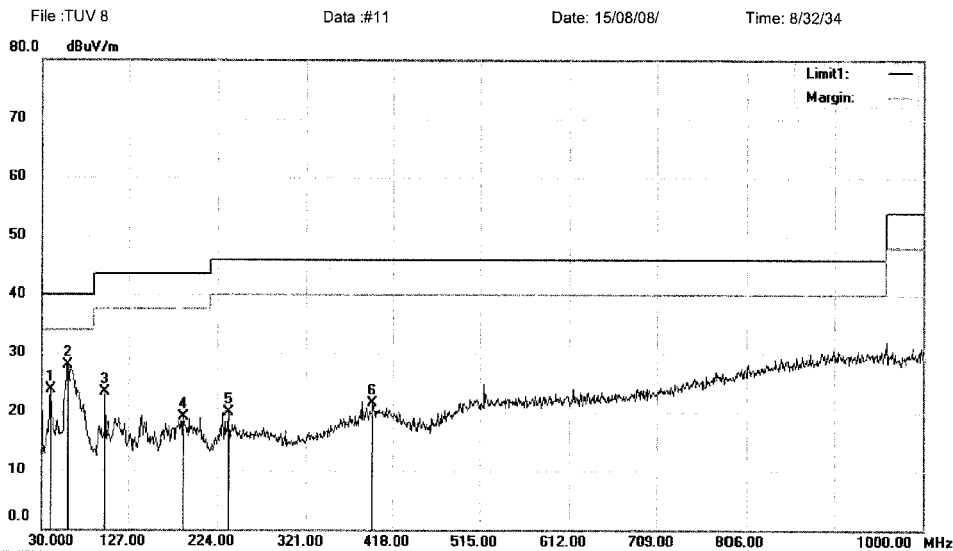
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode:11G 2462
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		39.7000	36.69	-12.95	23.74	40.00	-16.26	QP		
2	*	59.1000	43.55	-15.55	28.00	40.00	-12.00	QP		
3		100.8100	37.33	-14.02	23.31	43.50	-20.19	QP		
4		187.1400	36.94	-17.77	19.17	43.50	-24.33	QP		
5		235.6400	34.27	-14.39	19.88	46.00	-26.12	QP		
6		395.6900	30.60	-9.11	21.49	46.00	-24.51	QP		

*:Maximum data x:Over limit !:over margin

Operator: XLX


File :TUV 8\Data :#11

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File : TUV 8 Data : #67 Date : 15/08/08/ Time : 20:07:12

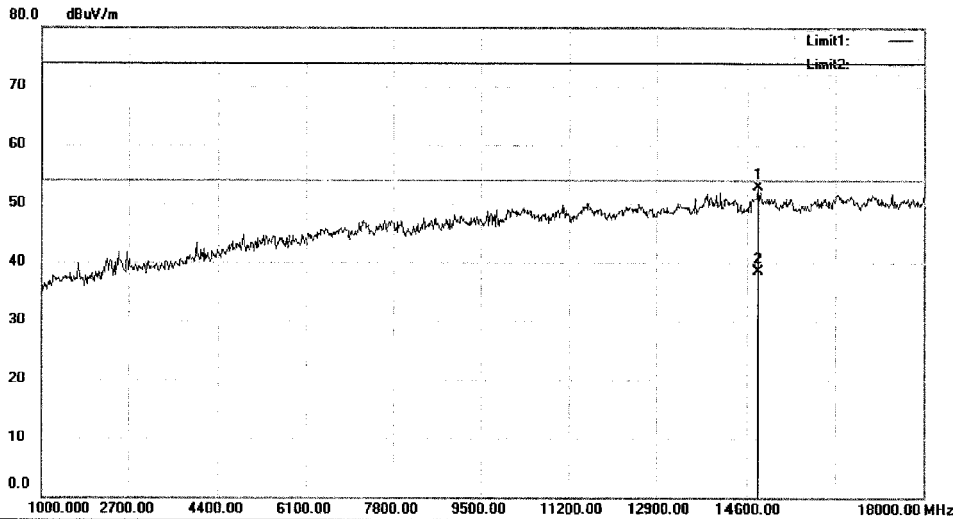

Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11G 2412
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		14804.00	51.01	1.90	52.91	74.00	-21.09	peak		
2	*	14804.00	36.64	1.90	38.54	54.00	-15.46	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File : TUV 8 \Data : #67

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement

File : TUV 8 Data : #68 Date : 15/08/08/ Time : 20:10:38

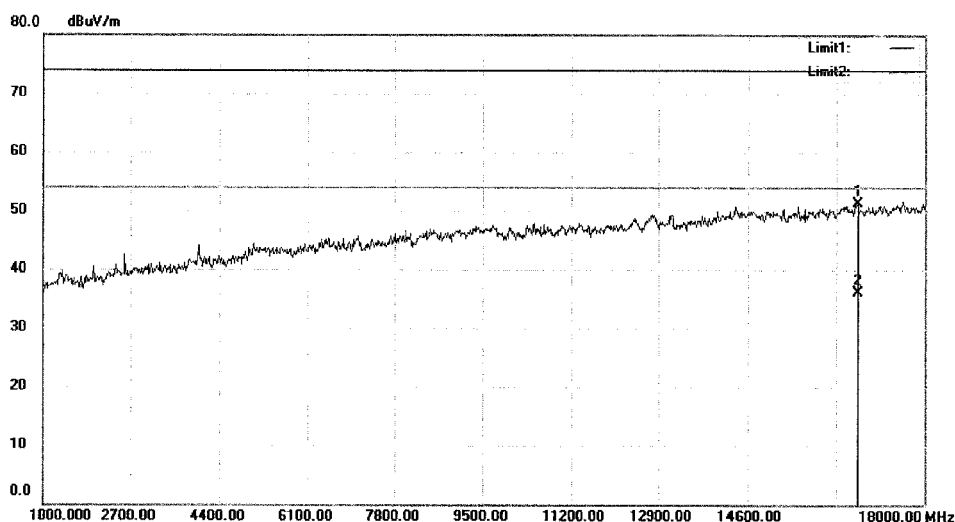
 Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11G 2412
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		16708.00	50.51	0.85	51.36	74.00	-22.64	peak		
2	*	16708.00	35.33	0.85	36.18	54.00	-17.82	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File : TUV 8 Data : #68


Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

File : TUV 8 Data : #69 Date : 15/08/08/ Time : 20:17:10

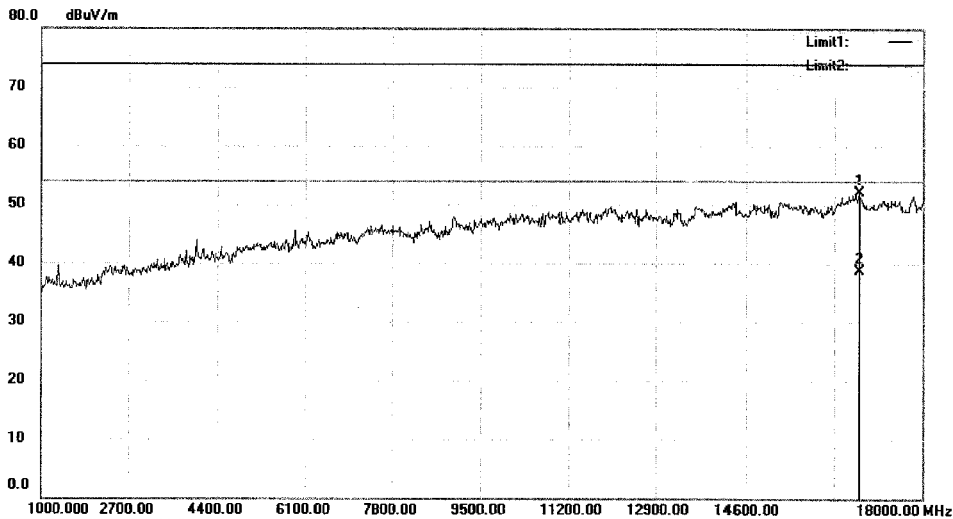

Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
EUT: MID
M/N: MID721-L DL718M
Mode: 11G 2437
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		16776.00	51.00	1.14	52.14	74.00	-21.86	peak		
2	*	16776.00	37.55	1.14	38.69	54.00	-15.31	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File : TUV 8\Data : #69

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV 8 Data :#70 Date: 15/08/08/ Time: 20:18:09

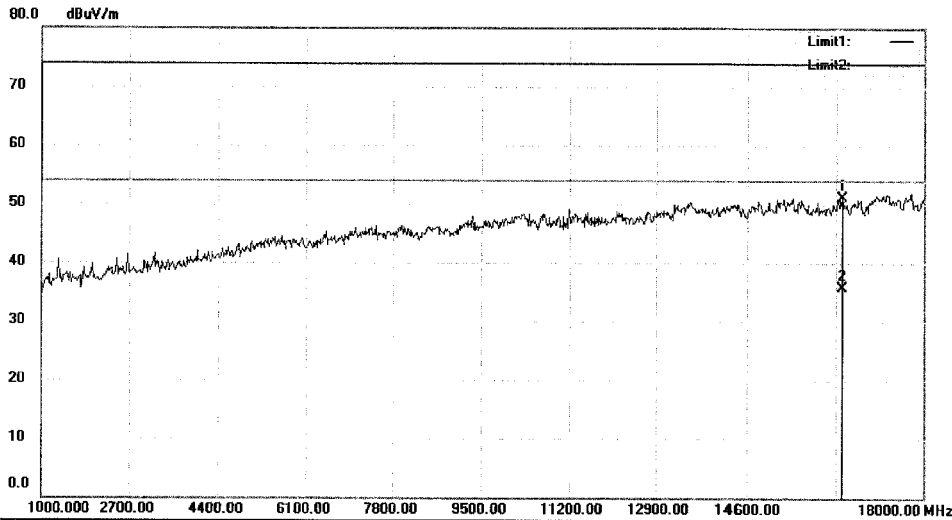

Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode:11G 2437
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		16419.00	51.56	-0.36	51.20	74.00	-22.80	peak		
2	*	16419.00	36.05	-0.36	35.69	54.00	-18.31	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 8Data :#70

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV 8 Data :#72 Date: 15/08/ Time: 20:22:36

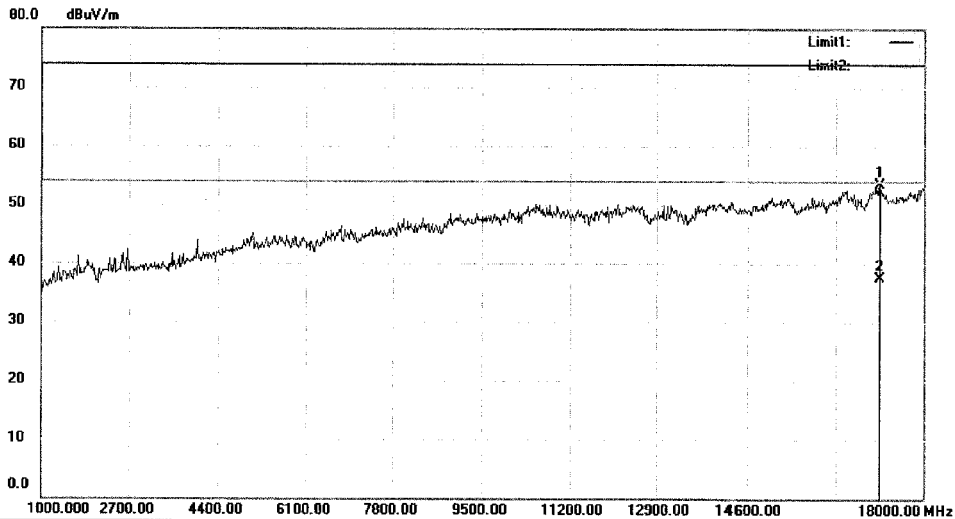

Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode:11G 2462
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		17150.00	49.45	4.04	53.49	74.00	-20.51	peak		
2	*	17150.00	33.38	4.04	37.42	54.00	-16.58	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 8Data :#72

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV 8 Data :#71 Date: 15/08/ Time: 20:21:28

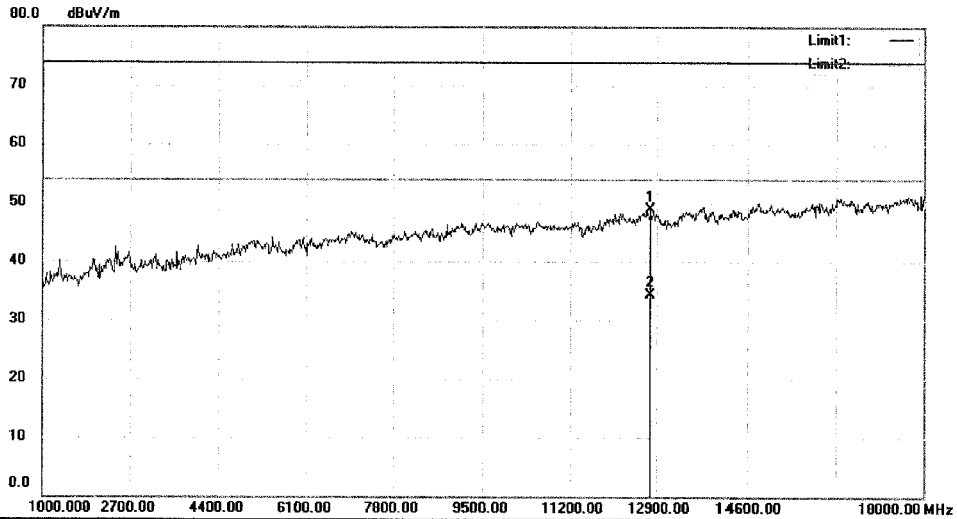

Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode:11G 2462
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		12781.00	51.07	-2.23	48.84	74.00	-25.16	peak		
2	*	12781.00	36.54	-2.23	34.31	54.00	-19.69	AVG		


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 8\Data :#71

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

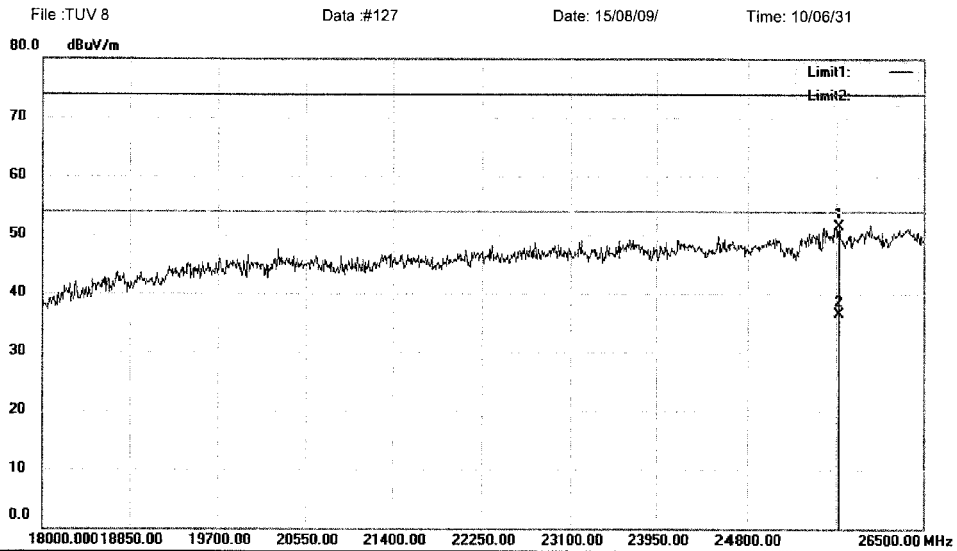
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode:11G 2412
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		25675.50	87.64	-36.19	51.45	74.00	-22.55	peak		
2	*	25675.50	72.77	-36.19	36.58	54.00	-17.42	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 8\Data :#127

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File : TUV 8 Data : #128 Date : 15/08/09/ Time : 10/06/34

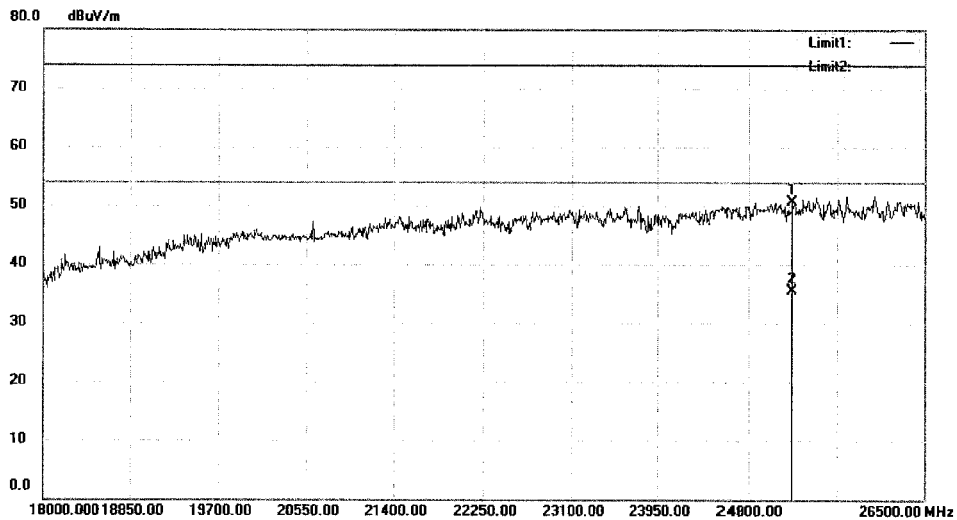

Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11G 2412
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		25216.50	87.44	-36.75	50.69	74.00	-23.31	peak		
2	*	25216.50	72.21	-36.75	35.46	54.00	-18.54	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File : TUV 8 Data : #128

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV 8 Data :#129 Date: 15/08/09/ Time: 10/06/40

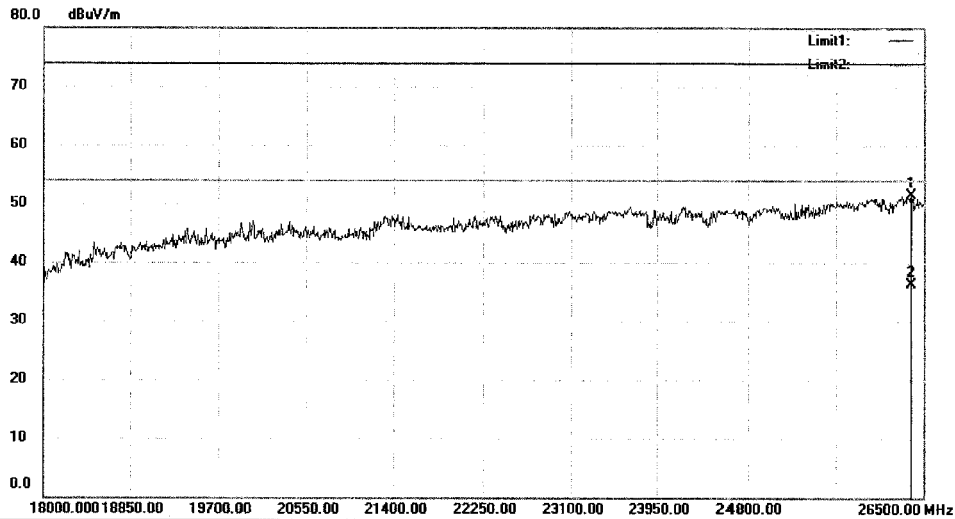

Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode:11G 2437
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		26381.00	86.78	-35.33	51.45	74.00	-22.55	peak		
2	*	26381.00	71.61	-35.33	36.28	54.00	-17.72	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 8Data :#129


Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

File :TUV 8 Data :#130 Date: 15/08/09/ Time: 10/06/48

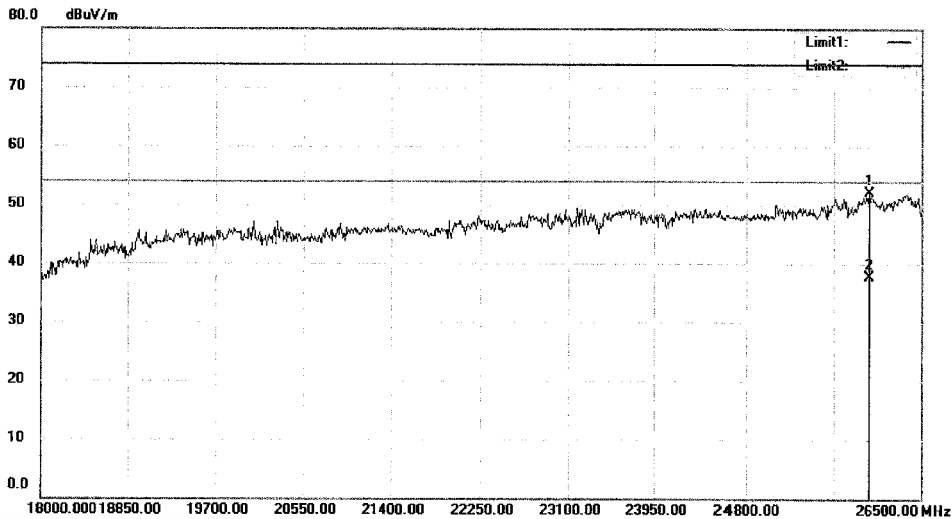

Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
EUT: MID
M/N: MID721-L DL718M
Mode:11G 2437
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		25990.00	87.88	-35.80	52.08	74.00	-21.92	peak		
2	*	25990.00	73.48	-35.80	37.68	54.00	-16.32	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 8Data :#130

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV 8 Data :#131 Date: 15/08/09/ Time: 10/06/52

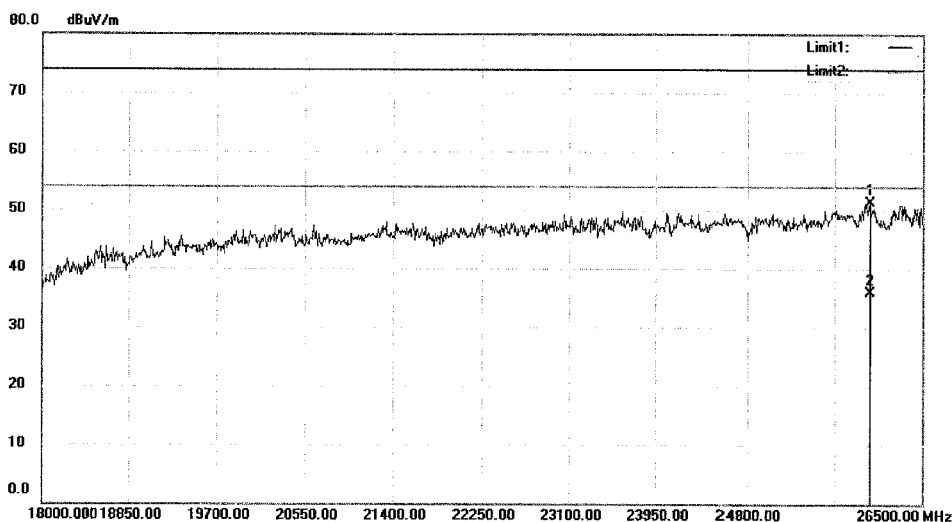

Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode:11G 2462
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		25990.00	87.20	-35.80	51.40	74.00	-22.60	peak		
2	*	25990.00	71.61	-35.80	35.81	54.00	-18.19	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 8\Data :#131

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File : TUV 8 Data : #132 Date: 15/08/09/ Time: 10/06/55

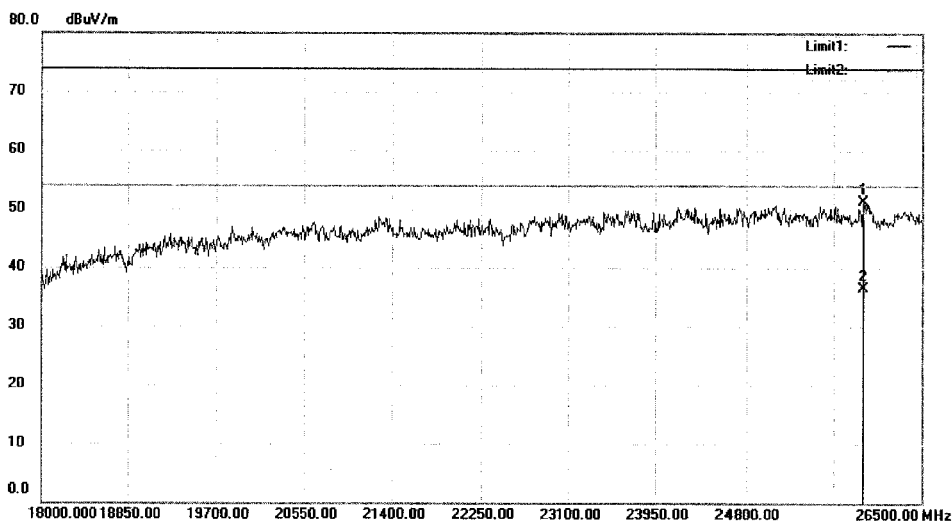

Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11G 2462
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		25939.00	87.15	-35.86	51.29	74.00	-22.71	peak		
2	*	25939.00	72.29	-35.86	36.43	54.00	-17.57	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File : TUV 8\Data : #132

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File : TUV 8 Data : #14 Date : 15/08/08/ Time : 8/34/02

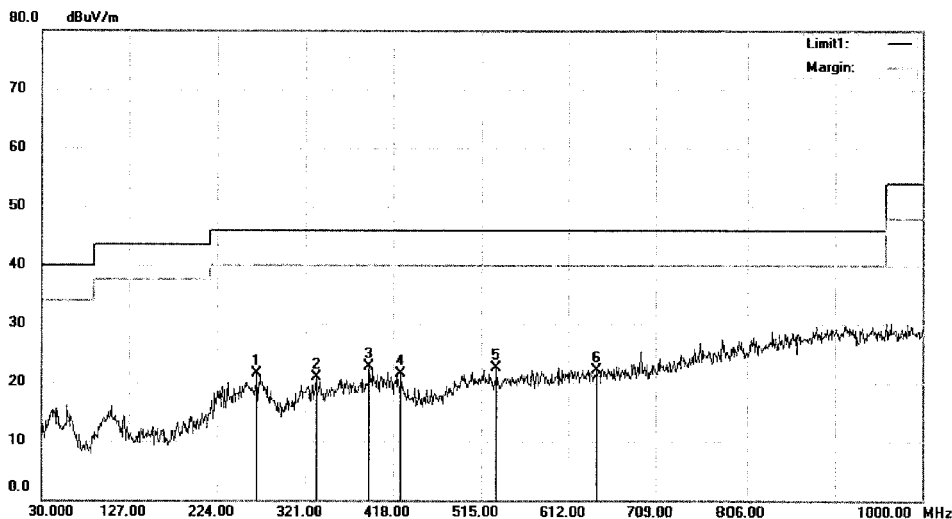

Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11N 20M 2412
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		267.6500	34.14	-12.71	21.43	46.00	-24.57	QP		
2		332.6400	33.67	-12.85	20.82	46.00	-25.18	QP		
3	*	391.8100	32.04	-9.33	22.71	46.00	-23.29	QP		
4		426.7300	31.50	-10.04	21.46	46.00	-24.54	QP		
5		531.4900	29.97	-7.55	22.42	46.00	-23.58	QP		
6		644.0100	28.62	-6.55	22.07	46.00	-23.93	QP		

*:Maximum data x:Over limit !:over margin

Operator: XLX


File : TUV 8\Data : #14

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV 8 Data :#13 Date: 15/08/08/ Time: 8/33/26

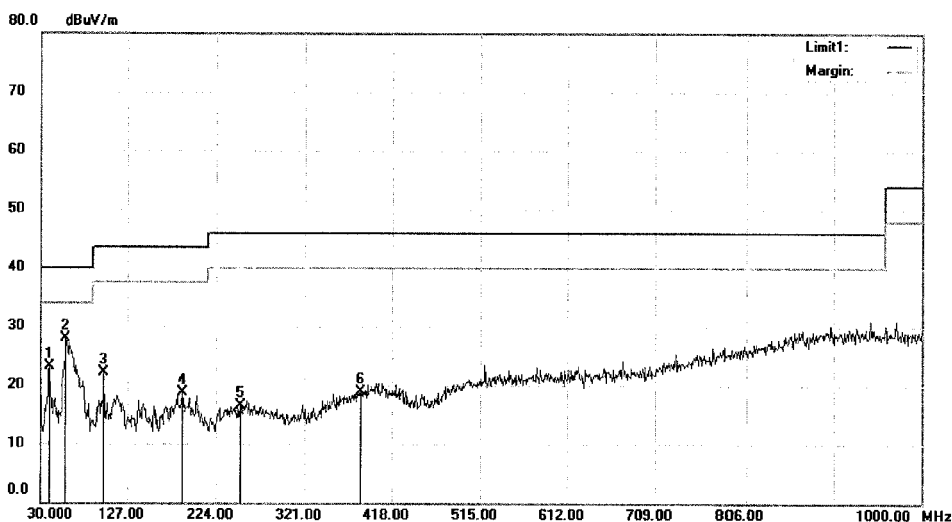

Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode:11N 20M 2412
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		39.7000	36.13	-12.95	23.18	40.00	-16.82	QP		
2	*	58.1300	43.55	-15.57	27.98	40.00	-12.02	QP		
3		100.8100	36.19	-14.02	22.17	43.50	-21.33	QP		
4		187.1400	36.51	-17.77	18.74	43.50	-24.76	QP		
5		250.1900	29.83	-13.30	16.53	46.00	-29.47	QP		
6		384.0500	28.74	-9.77	18.97	46.00	-27.03	QP		

*:Maximum data x:Over limit !:over margin

Operator: XLX


File :TUV 8\Data :#13

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File: TUV 8 Data: #16 Date: 15/08/ Time: 8/37/02

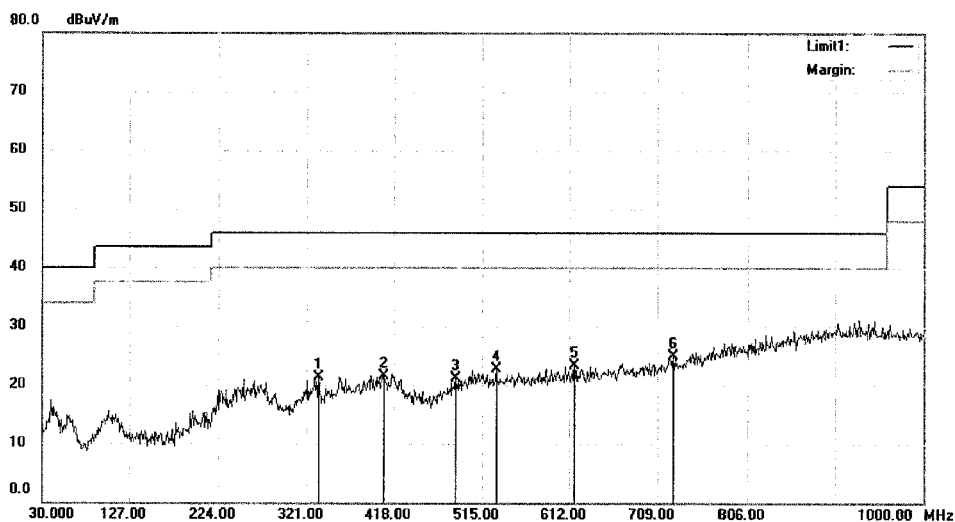

Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11N 20M 2437
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		334.5800	34.09	-12.75	21.34	46.00	-24.66	QP		
2		407.3300	30.58	-9.07	21.51	46.00	-24.49	QP		
3		485.9000	30.15	-9.02	21.13	46.00	-24.87	QP		
4		530.5200	30.27	-7.56	22.71	46.00	-23.29	QP		
5		617.8200	30.21	-6.81	23.40	46.00	-22.60	QP		
6	*	726.4600	30.06	-5.16	24.90	46.00	-21.10	QP		


*:Maximum data x:Over limit !:over margin

Operator: XLX

File: TUV 8 Data: #16

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

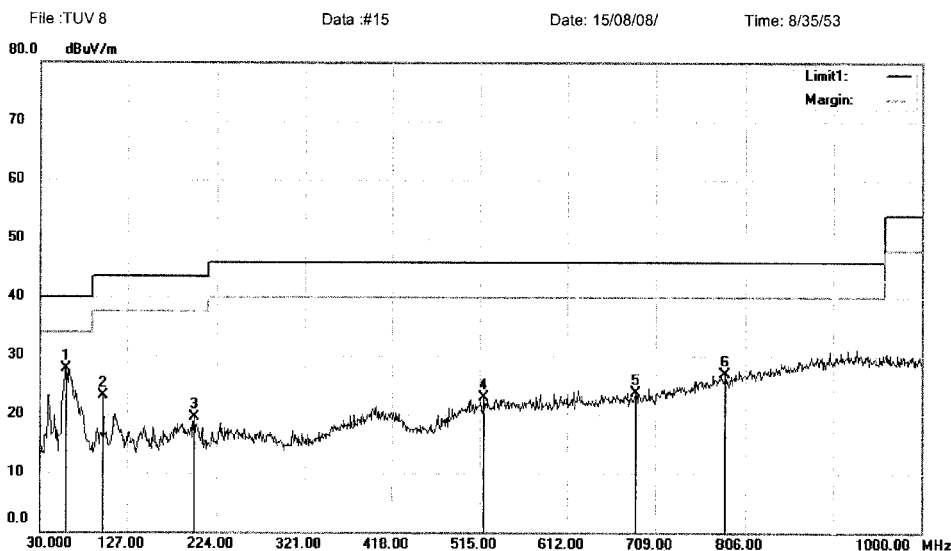
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode:11N 20M 2437
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	59.1000	43.28	-15.55	27.73	40.00	-12.27	QP		
2		100.8100	37.08	-14.02	23.06	43.50	-20.44	QP		
3		199.7500	36.01	-16.42	19.59	43.50	-23.91	QP		
4		519.8500	30.62	-7.63	22.99	46.00	-23.01	QP		
5		687.6600	29.86	-6.10	23.76	46.00	-22.24	QP		
6		783.6900	30.28	-3.37	26.91	46.00	-19.09	QP		

*:Maximum data x:Over limit !:over margin

Operator: XLX


File :TUV 8Data :#15

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV 8 Data :#18 Date: 15/08/08/ Time: 8/37/58

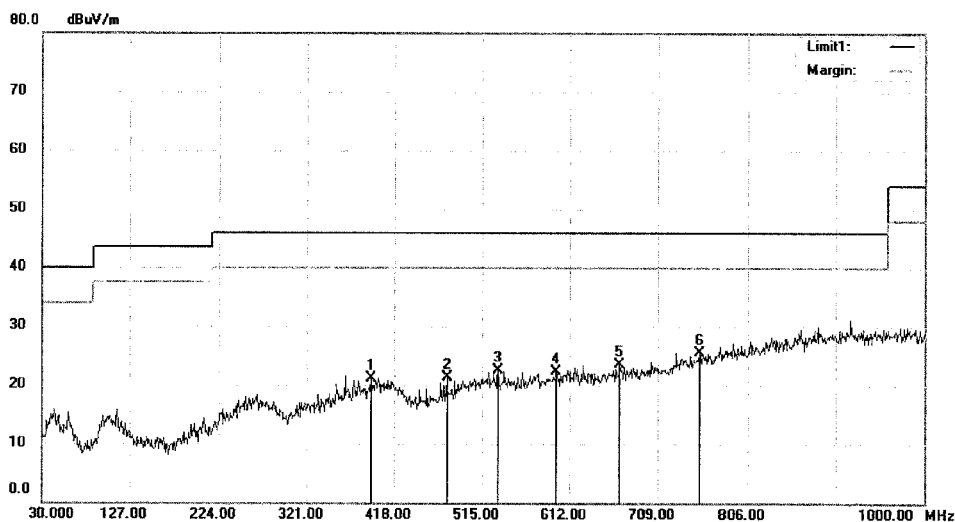

Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode:11N 20M 2462
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		392.7800	30.35	-9.28	21.07	46.00	-24.93	QP		
2		476.2000	31.23	-9.88	21.35	46.00	-24.65	QP		
3		532.4600	30.01	-7.53	22.48	46.00	-23.52	QP		
4		597.4500	29.41	-7.02	22.39	46.00	-23.61	QP		
5		667.2900	29.74	-6.30	23.44	46.00	-22.56	QP		
6	*	754.5900	29.81	-4.28	25.53	46.00	-20.47	QP		

*:Maximum data x:Over limit l:over margin

Operator: XLX


File :TUV 8Data :#18

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File : TUV 8 Data : #17 Date: 15/08/ Time: 8/37/34

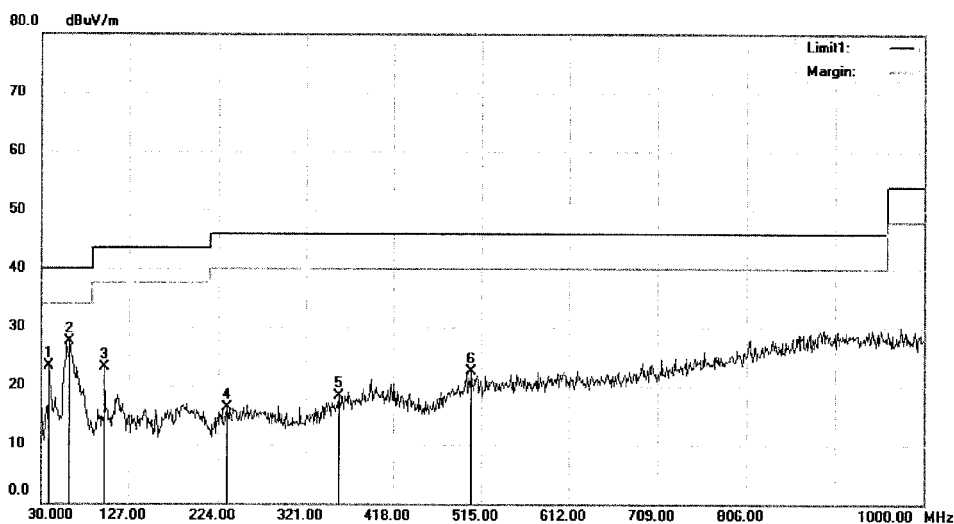

Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11N 20M 2462
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		38.7300	36.57	-13.33	23.24	40.00	-16.76	QP		
2	*	62.0100	43.65	-16.12	27.53	40.00	-12.47	QP		
3		100.8100	37.03	-14.02	23.01	43.50	-20.49	QP		
4		233.7000	30.94	-14.63	16.31	46.00	-29.69	QP		
5		357.8600	29.25	-10.92	18.33	46.00	-27.67	QP		
6		504.3300	30.21	-7.77	22.44	46.00	-23.56	QP		

*:Maximum data x:Over limit !:over margin

Operator: XLX


File : TUV 8 \Data : #17

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File : TUV 8 Data : #109 Date: 15/08/09/ Time: 9/04/55

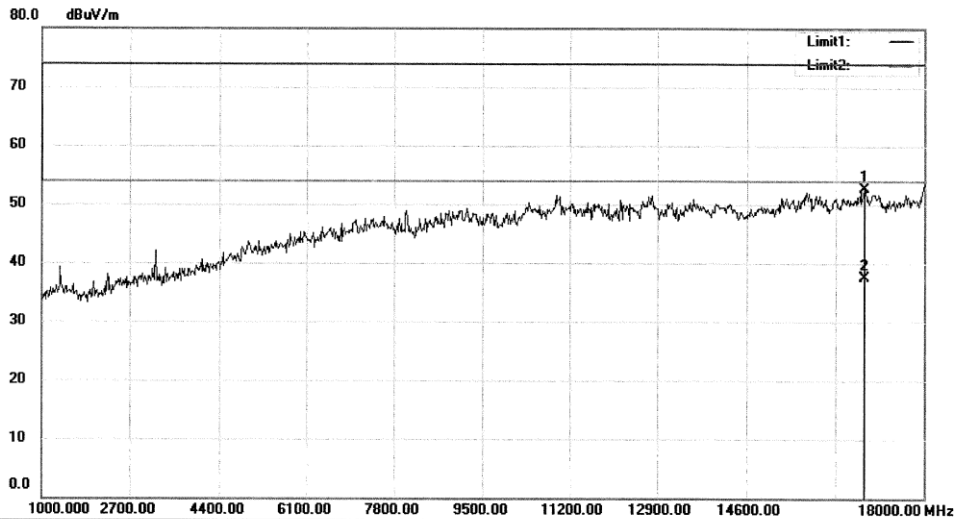

Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11N 20M 2412
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		16844.00	50.42	2.20	52.62	74.00	-21.38	peak		
2	*	16844.00	35.32	2.20	37.52	54.00	-16.48	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 8\Data :#109

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

File :TUV 8

Data :#110

Date: 15/08/09/

Time: 9/05/19

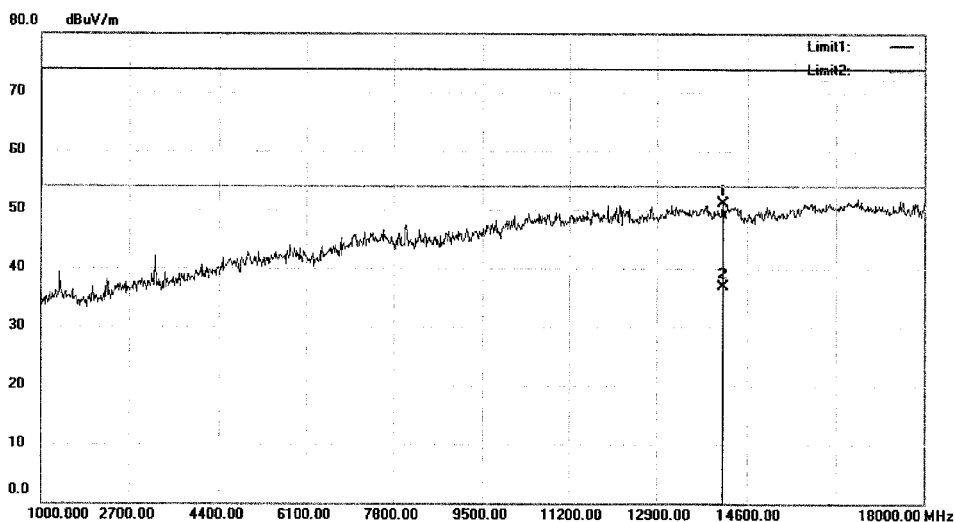

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: MID721-L DL718M

Mode:11N 20M 2412

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		14158.00	47.37	3.65	51.02	74.00	-22.98	peak		
2	*	14158.00	33.19	3.65	36.84	54.00	-17.16	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 8\Data :#110

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV 8 Data :#111 Date: 15/08/09/ Time: 9/06/28

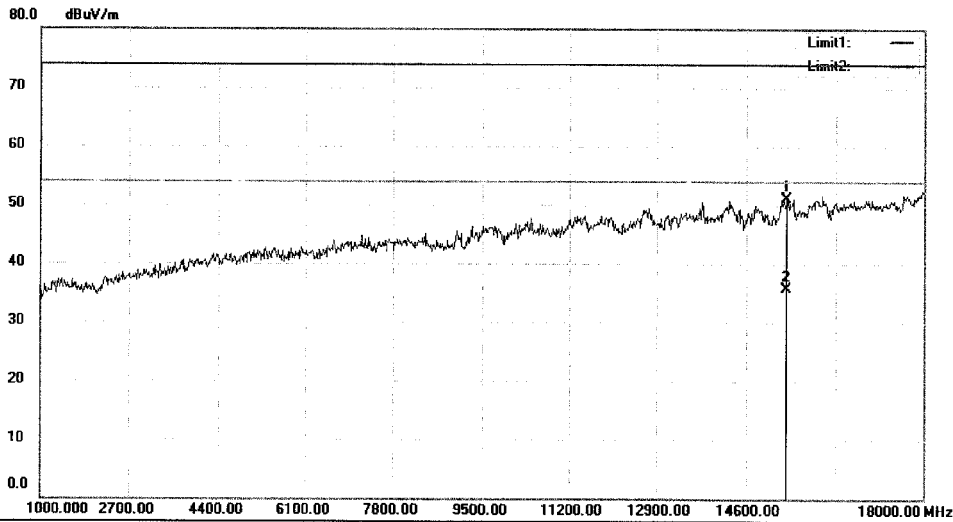

Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode:11N 20M 2437
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		15365.00	49.96	1.08	51.04	74.00	-22.96	peak		
2	*	15365.00	34.61	1.08	35.69	54.00	-18.31	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 8\Data :#111

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV 8 Data :#112 Date: 15/08/09/ Time: 9/06/45

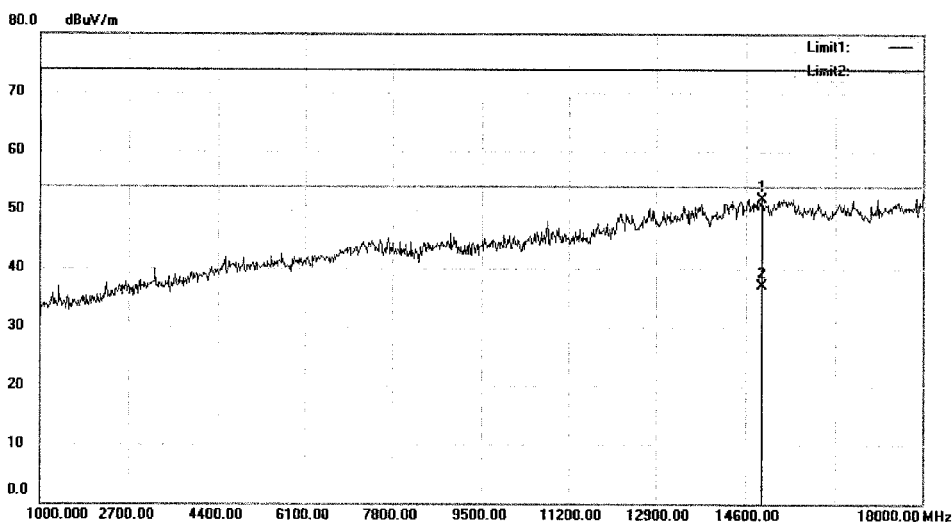

Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode:11N 20M 2437
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		14906.00	49.33	2.58	51.91	74.00	-22.09	peak		
2	*	14906.00	34.61	2.58	37.19	54.00	-16.81	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 8\Data :#112

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File: TUV 8 Data: #113 Date: 15/08/09/ Time: 9/07/29

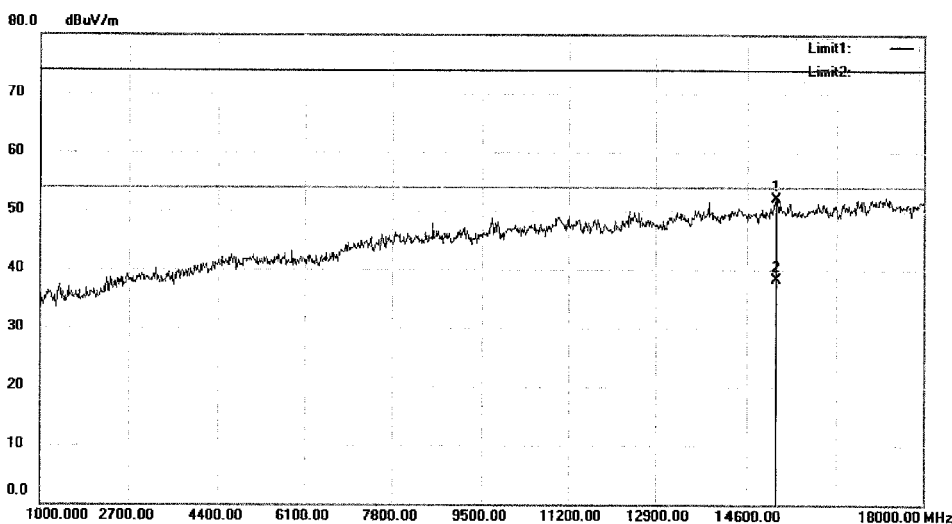

Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11N 20M 2462
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		15161.00	50.28	1.85	52.13	74.00	-21.87	peak		
2	*	15161.00	36.44	1.85	38.29	54.00	-15.71	AVG		

*:Maximum data x:Over limit l:over margin

Operator: KK

File: TUV 8Data: #113

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

File :TUV 8

Data :#114

Date: 15/08/09/

Time: 9/08/08

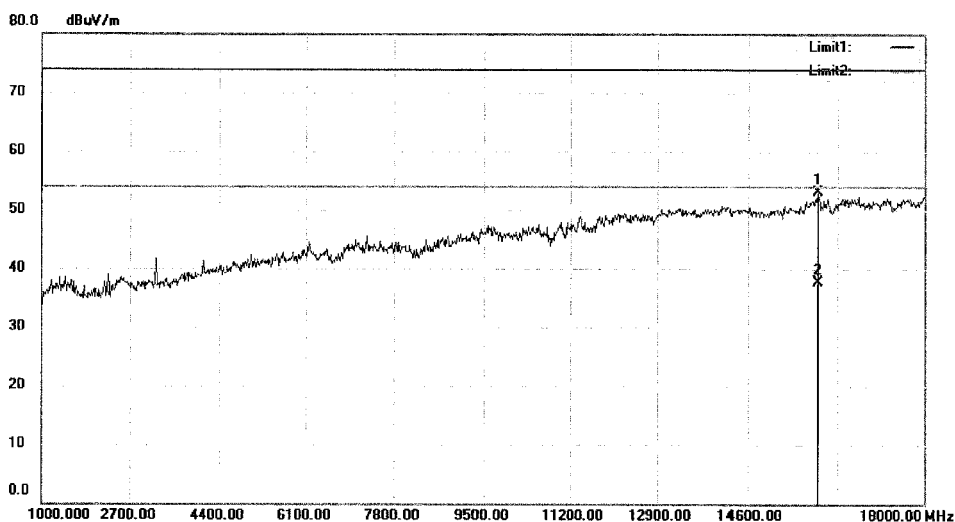

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: MID721-L DL718M

Mode:11N 20M 2462

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		15926.00	54.21	-1.03	53.18	74.00	-20.82	peak		
2	*	15926.00	38.72	-1.03	37.69	54.00	-16.31	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 8\Data :#114

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File : TUV 8 Data : #133 Date: 15/08/09/ Time: 10/06/59

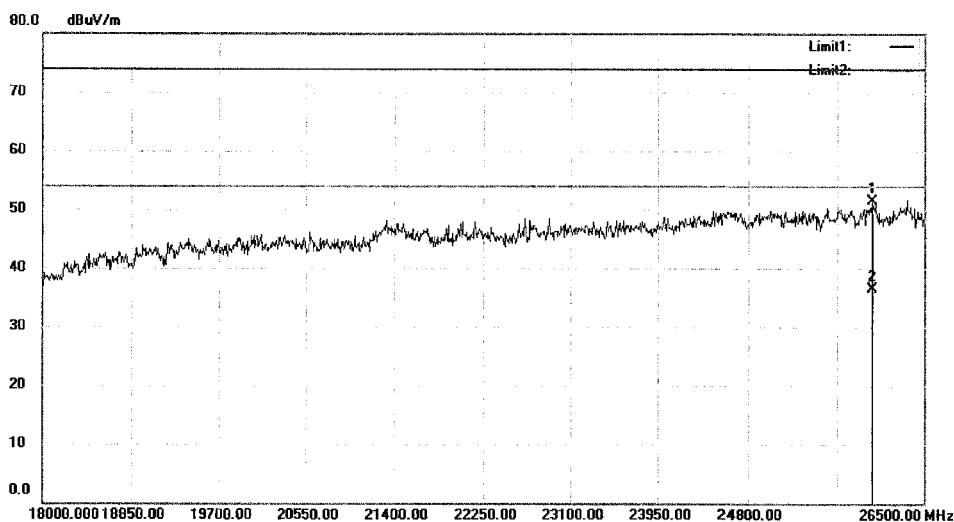

Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11N 20M 2412
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		25990.00	87.22	-35.80	51.42	74.00	-22.58	peak		
2	*	25990.00	72.26	-35.80	36.46	54.00	-17.54	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File : TUV 8\Data : #133

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement

File : TUV 8 Data : #134 Date : 15/08/09/ Time : 10/07/02

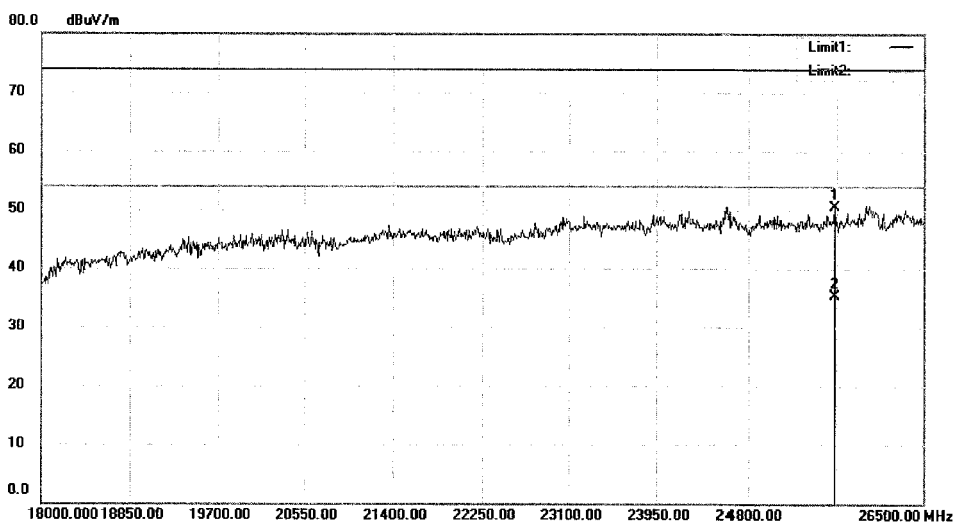
 Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11N 20M 2412
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		25633.00	86.82	-36.24	50.58	74.00	-23.42	peak		
2	*	25633.00	71.48	-36.24	35.24	54.00	-18.76	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File : TUV 8 \Data : #134

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV 8 Data :#135 Date: 15/08/09/ Time: 10/07/05

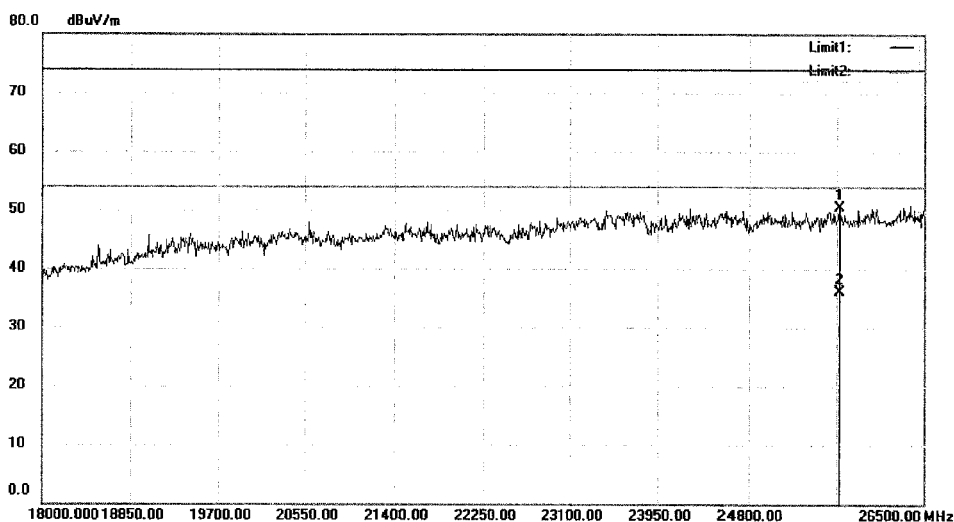

Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode:11N 20M 2437
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		25675.50	86.68	-36.19	50.49	74.00	-23.51	peak		
2	*	25675.50	72.32	-36.19	36.13	54.00	-17.87	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 8Data :#135


Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

File: TUV 8 Data: #136 Date: 15/08/09/ Time: 10/07/08

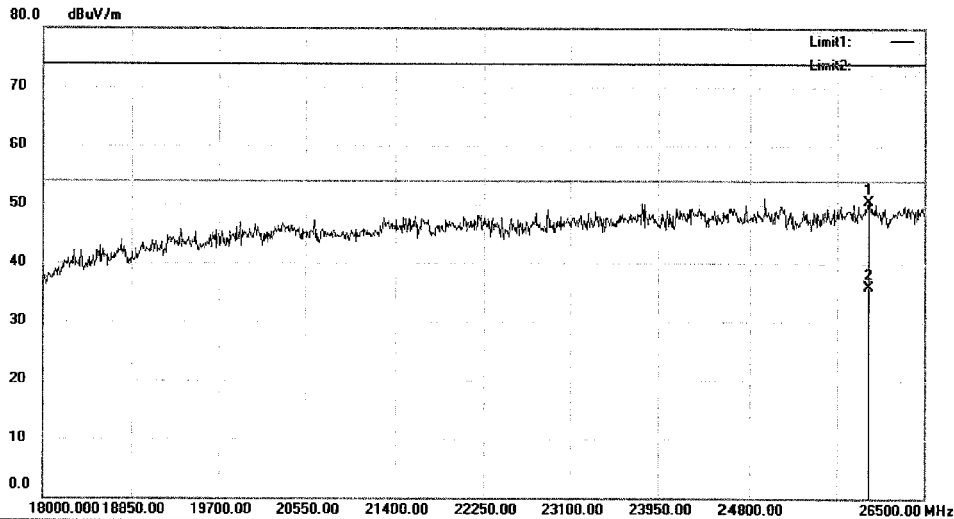

Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
EUT: MID
M/N: MID721-L DL718M
Mode: 11N 20M 2437
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		25956.00	86.32	-35.84	50.48	74.00	-23.52	peak		
2	*	25956.00	71.66	-35.84	35.82	54.00	-18.18	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 8 Data: #136

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV 8 Data :#137 Date: 15/08/09/ Time: 10/07/13

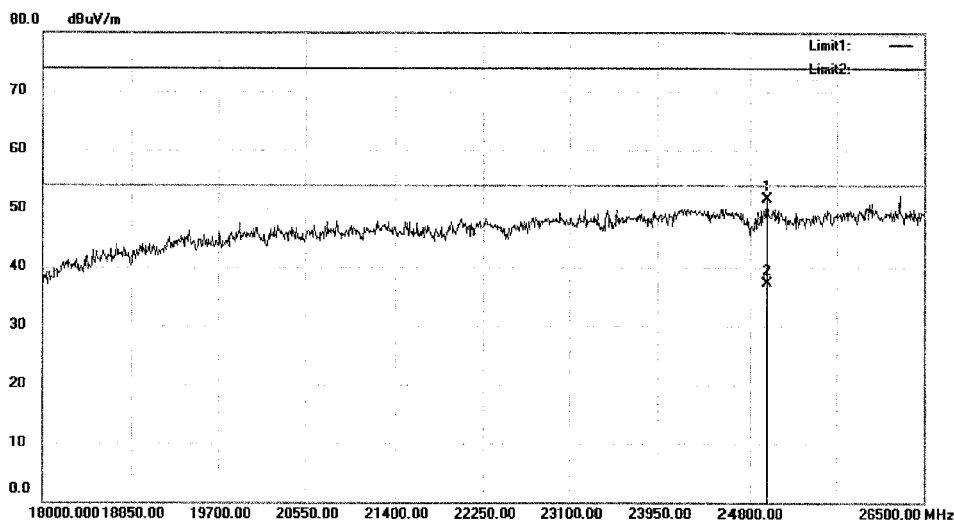

Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: MID721-L DL718M

Mode:11N 20M 2462

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		24961.50	88.74	-37.01	51.73	74.00	-22.27	peak		
2	*	24961.50	74.25	-37.01	37.24	54.00	-16.76	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 8Data :#137

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File: TUV 8 Data: #138 Date: 15/08/09/ Time: 10/10/22

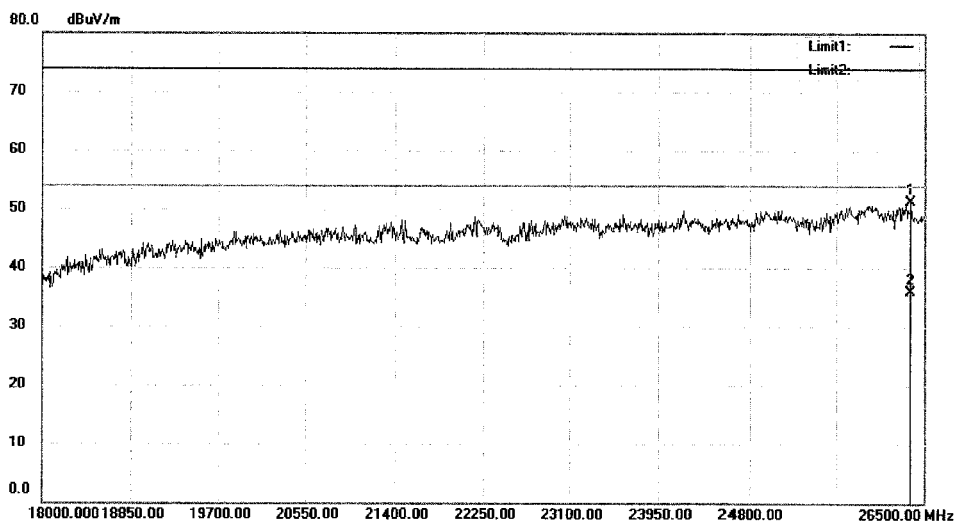

Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11N 20M 2462
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		26372.50	86.65	-35.34	51.31	74.00	-22.69	peak		
2	*	26372.50	71.32	-35.34	35.98	54.00	-18.02	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 8 \Data: #138

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File : TUV 8 Data : #20 Date : 15/08/08/ Time : 8/38/57

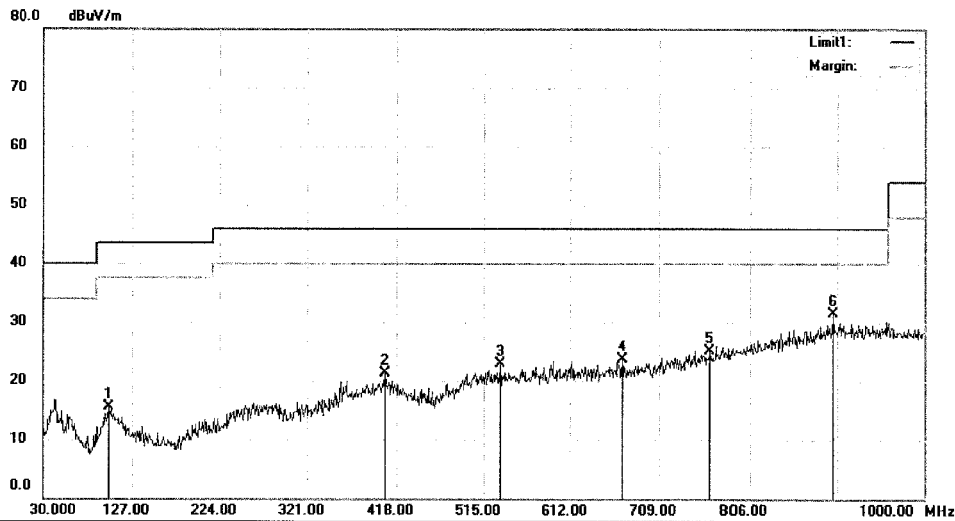

Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11N 40M 2422
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		101.7800	29.64	-14.05	15.59	43.50	-27.91	QP		
2		405.3900	30.42	-9.02	21.40	46.00	-24.60	QP		
3		533.4300	30.42	-7.53	22.89	46.00	-23.11	QP		
4		669.2300	29.94	-6.29	23.65	46.00	-22.35	QP		
5		764.2900	29.18	-3.98	25.20	46.00	-20.80	QP		
6	*	898.1500	32.16	-0.66	31.50	46.00	-14.50	QP		

*:Maximum data x:Over limit !:over margin

Operator: XLX


File : TUV 8 \Data : #20

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV 8 Data :#19 Date: 15/08/08/ Time: 8/38/36

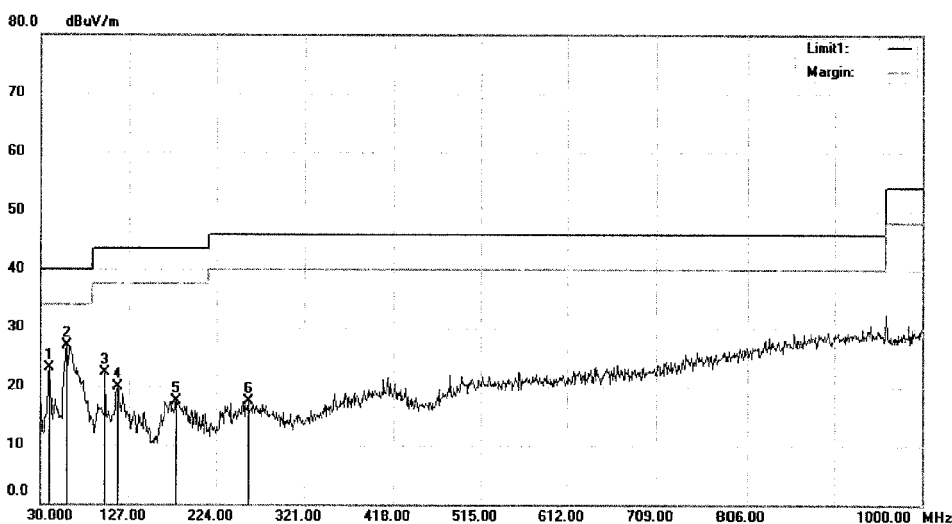

Site 3m Chamber #3

Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: MID721-L DL718M

Mode:11N 40M 2422

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		39.7000	36.14	-12.95	23.19	40.00	-16.81	QP		
2	*	59.1000	42.55	-15.55	27.00	40.00	-13.00	QP		
3		100.8100	36.36	-14.02	22.34	43.50	-21.16	QP		
4		114.3900	35.09	-15.15	19.94	43.50	-23.56	QP		
5		179.3800	36.57	-18.99	17.58	43.50	-25.92	QP		
6		258.9200	30.39	-12.85	17.54	46.00	-28.46	QP		

*:Maximum data x:Over limit !:over margin

Operator: XLX


File :TUV 8Data :#19

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File: TUV 8 Data: #22 Date: 15/08/08/ Time: 8/41/22

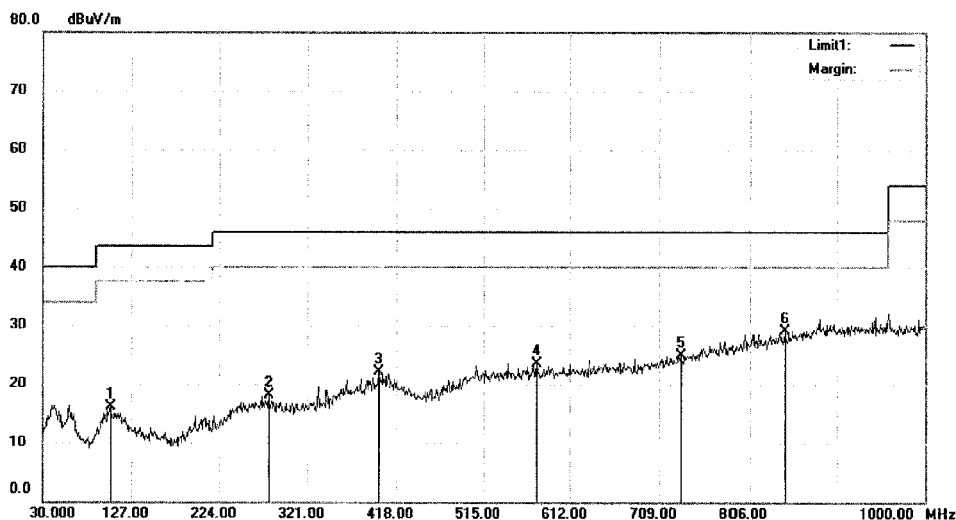

Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: MID721-L DL718M

Mode: 11N 40M 2437

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		103.7200	30.12	-14.07	16.05	43.50	-27.45	QP		
2		278.3200	30.70	-12.59	18.11	46.00	-27.89	QP		
3		398.6000	31.07	-8.95	22.12	46.00	-23.88	QP		
4		575.1400	30.78	-7.19	23.59	46.00	-22.41	QP		
5		732.2800	29.80	-4.98	24.82	46.00	-21.18	QP		
6	*	844.8000	31.01	-1.86	29.15	46.00	-16.85	QP		


*:Maximum data x:Over limit !:over margin

Operator: XLX

File: TUV 8 Data: #22

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

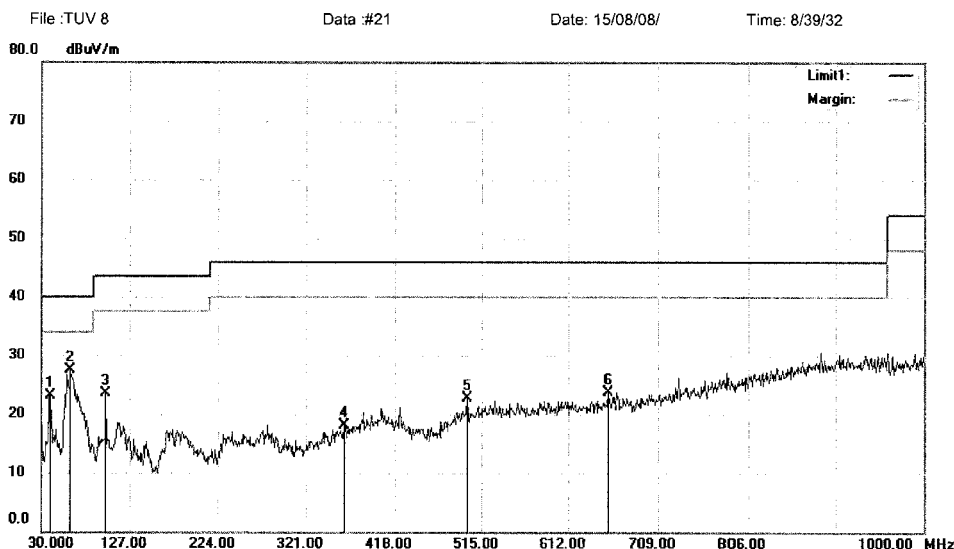
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11N 40M 2437
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		39.7000	36.10	-12.95	23.15	40.00	-16.85	QP		
2	*	62.0100	43.59	-16.12	27.47	40.00	-12.53	QP		
3		100.8100	37.47	-14.02	23.45	43.50	-20.05	QP		
4		362.7100	28.82	-10.64	18.18	46.00	-27.82	QP		
5		498.5100	30.55	-7.93	22.62	46.00	-23.38	QP		
6		654.6800	30.18	-6.44	23.74	46.00	-22.26	QP		

*:Maximum data x:Over limit !:over margin

Operator: XLX

File: TUV 8\Data: #21

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

File :TUV 8

Data :#24

Date: 15/08/08/

Time: 8/43/40

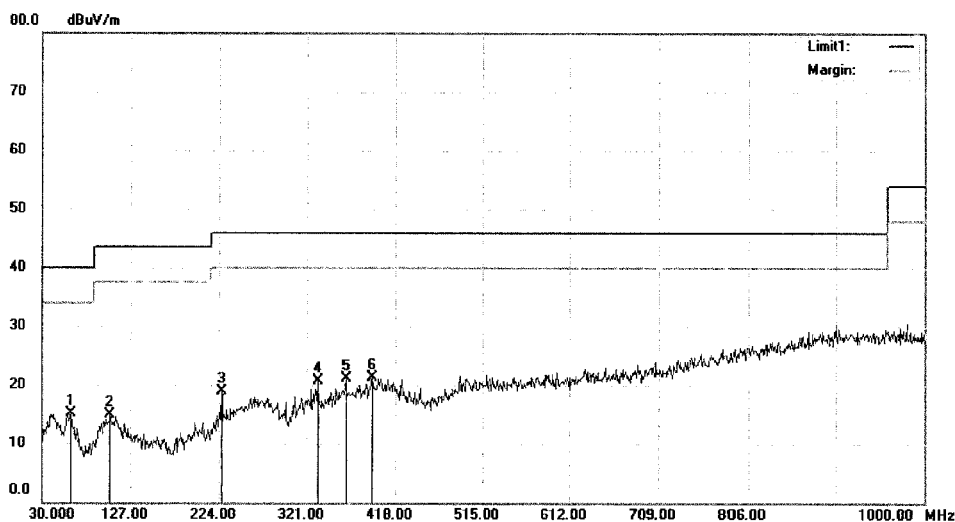

Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: MID721-L DL718M

Mode:11N 40M 2452

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		62.0100	31.32	-16.12	15.20	40.00	-24.80	QP		
2		104.6900	28.93	-14.10	14.83	43.50	-28.67	QP		
3		226.9100	34.36	-15.50	18.86	46.00	-27.14	QP		
4		333.6100	33.44	-12.80	20.64	46.00	-25.36	QP		
5		363.6800	31.79	-10.59	21.20	46.00	-24.80	QP		
6	*	392.7800	30.49	-9.28	21.21	46.00	-24.79	QP		

*:Maximum data x:Over limit !:over margin

Operator: XLX


File :TUV 8\Data :#24

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File : TUV 8 Data : #23 Date: 15/08/08/ Time: 8/42/27

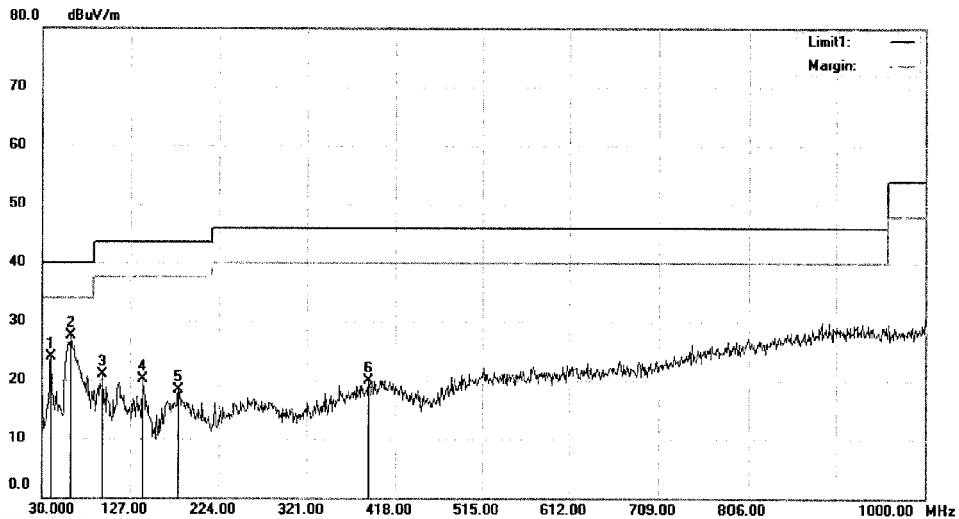

Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11N 40M 2452
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1		39.7000	36.81	-12.95	23.86	40.00	-16.14	QP			
2	*	62.0100	43.58	-16.12	27.46	40.00	-12.54	QP			
3		96.9300	35.53	-14.67	20.86	43.50	-22.64	QP			
4		140.5800	37.97	-17.80	20.17	43.50	-23.33	QP			
5		179.3800	37.24	-18.99	18.25	43.50	-25.25	QP			
6		388.9000	29.49	-9.50	19.99	46.00	-26.01	QP			

*:Maximum data x:Over limit !:over margin

Operator: XLX


File : TUV 8 \Data : #23

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File : TUV 8 Data : #115 Date : 15/08/09/ Time : 9/08/47

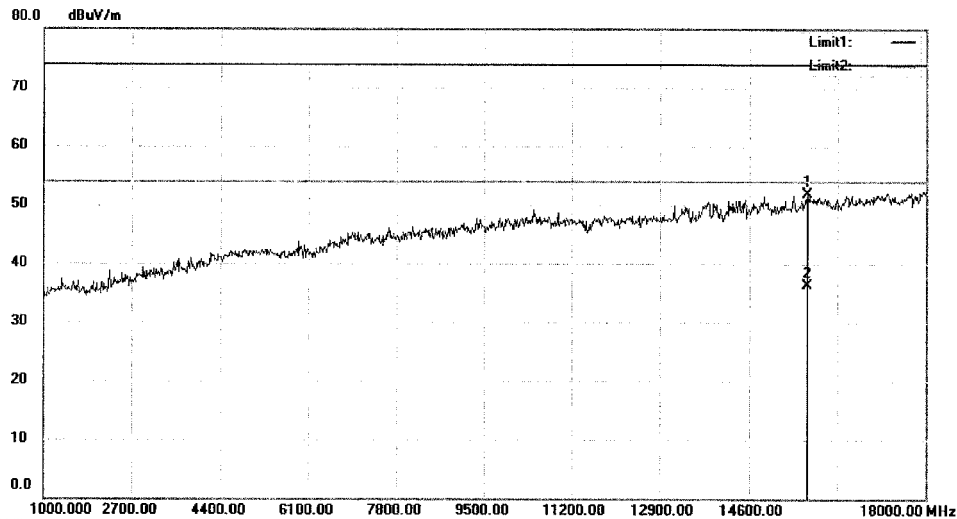

Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11N 40M 2422
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		15722.00	52.18	-0.26	51.92	74.00	-22.08	peak		
2	*	15722.00	36.49	-0.26	36.23	54.00	-17.77	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File : TUV 8\Data : #115

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

File :TUV 8

Data :#116

Date: 15/08/09/

Time: 9/09/02

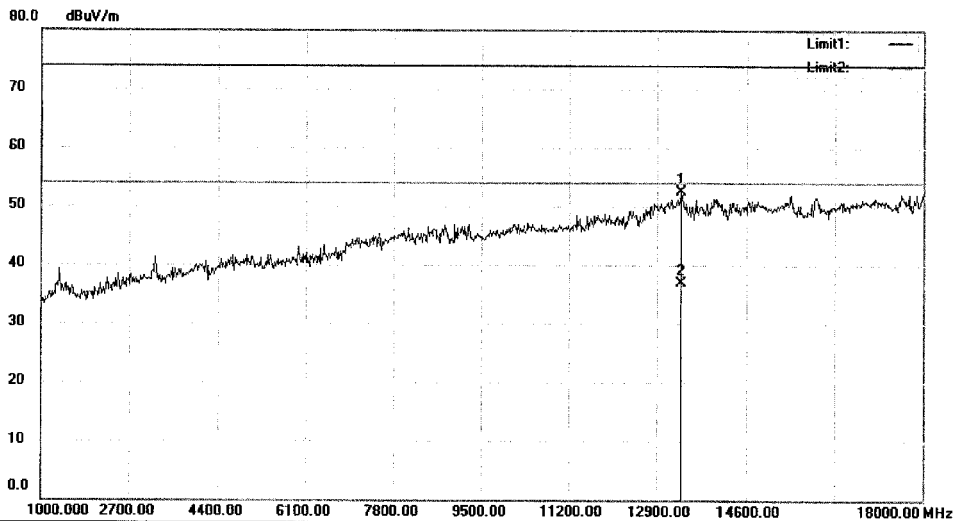

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: MID721-L DL718M

Mode:11N 40M 2422

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		13359.00	51.48	0.96	52.44	74.00	-21.56	peak		
2	*	13359.00	35.88	0.96	36.84	54.00	-17.16	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 8Data :#116

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File : TUV 8 Data : #117 Date : 15/08/09/ Time : 9/09/31

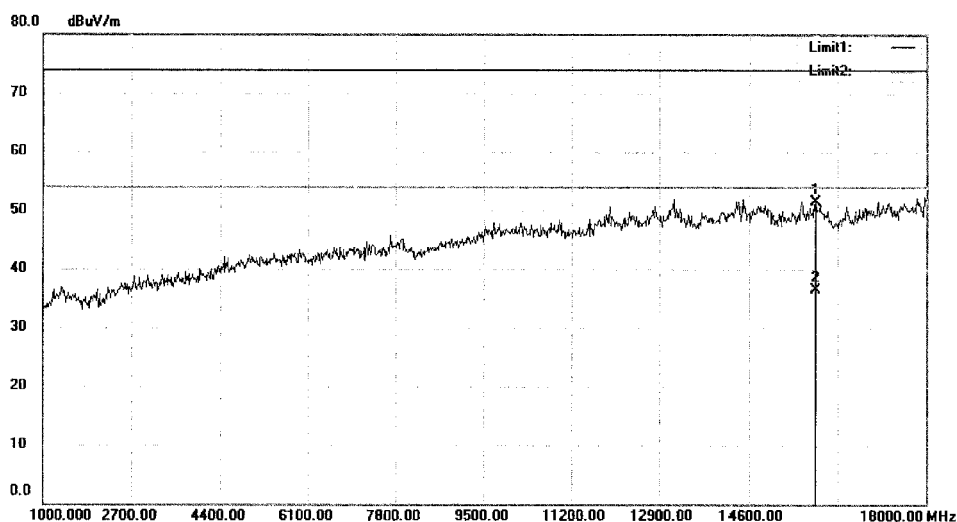

Site 3m Chamber #3

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: MID721-L DL718M

Mode: 11N 40M 2437

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		15875.00	52.34	-0.83	51.51	74.00	-22.49	peak		
2	*	15875.00	37.37	-0.83	36.54	54.00	-17.46	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File : TUV 8\Data : #117

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File : TUV 8 Data : #118 Date : 15/08/09/ Time : 9/09/44

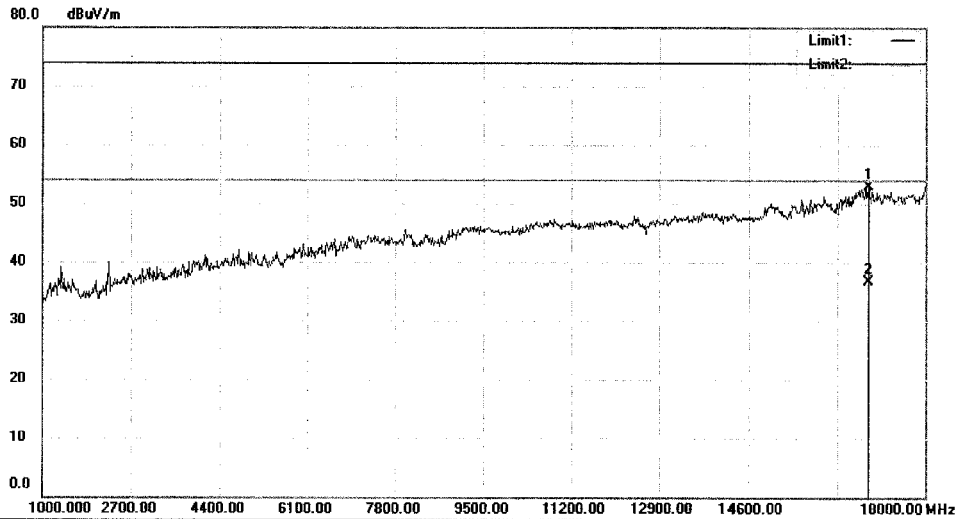

Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11N 40M 2437
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		16895.00	50.57	2.41	52.98	74.00	-21.02	peak		
2	*	16895.00	34.35	2.41	36.76	54.00	-17.24	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File : TUV 8 Data : #118

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File : TUV 8

Data : #119

Date: 15/08/09/

Time: 9/10/12

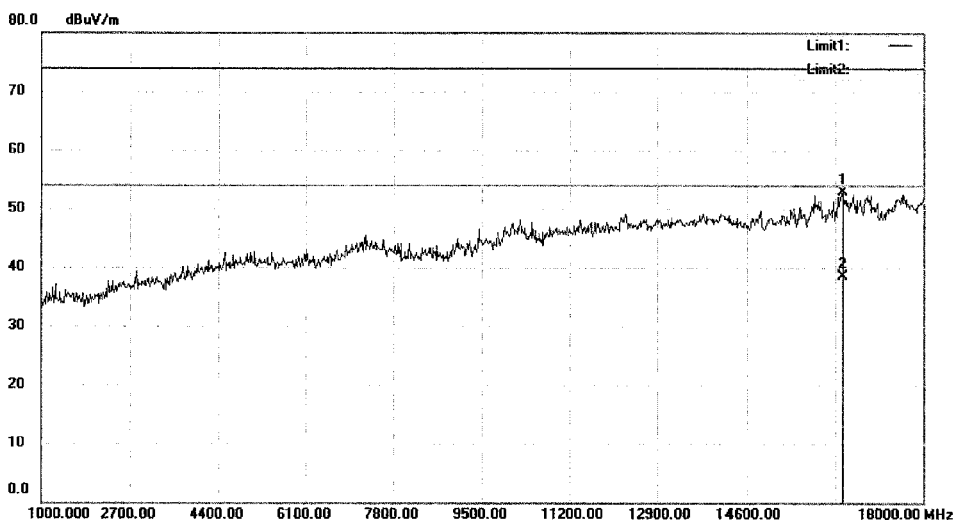

Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: MID721-L DL718M

Mode: 11N 40M 2452

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		16453.00	52.43	0.57	53.00	74.00	-21.00	peak		
2	*	16453.00	37.95	0.57	38.52	54.00	-15.48	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File : TUV 8 Data : #119


Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

File: TUV 8 Data: #120 Date: 15/08/09/ Time: 9/10/24

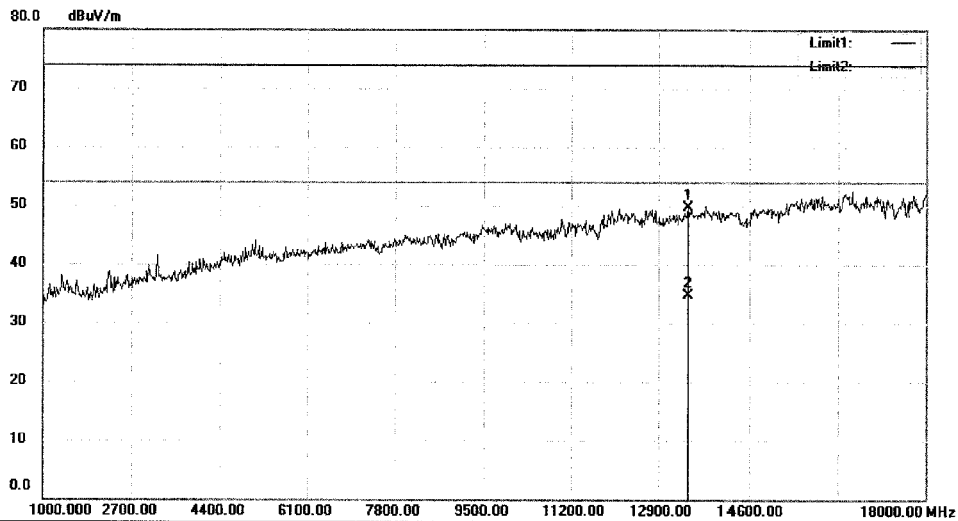

Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
EUT: MID
M/N: MID721-L DL718M
Mode: 11N 40M 2452
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		13478.00	48.19	1.50	49.69	74.00	-24.31	peak		
2	*	13478.00	33.28	1.50	34.78	54.00	-19.22	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 8 Data: #120

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File : TUV 8 Data : #139 Date : 15/08/09/ Time : 10/10/25

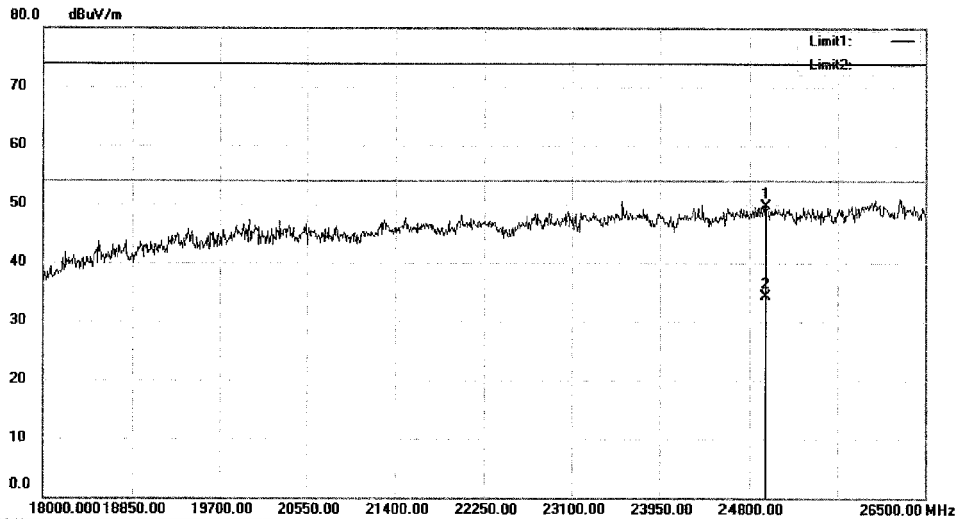

Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11N 40M 2422
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		24953.00	86.71	-37.02	49.69	74.00	-24.31	peak		
2	*	24953.00	71.31	-37.02	34.29	54.00	-19.71	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File : TUV 8 \Data : #139


Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

File :TUV 8 Data :#140 Date: 15/08/09/ Time: 10/10/28

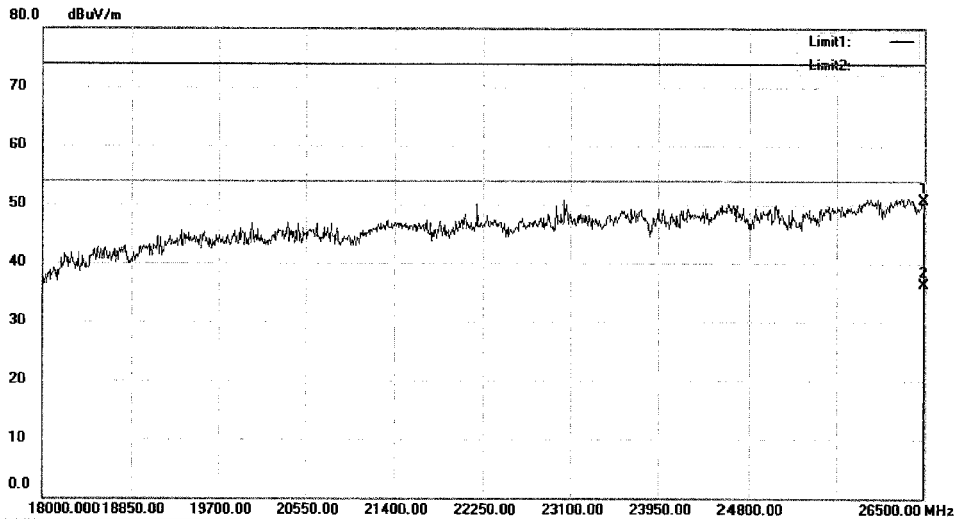

Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
EUT: MID
M/N: MID721-L DL718M
Mode:11N 40M 2422
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		26491.50	85.87	-35.19	50.68	74.00	-23.32	peak		
2	*	26491.50	71.40	-35.19	36.21	54.00	-17.79	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 8\Data :#140

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV 8 Data :#141 Date: 15/08/09/ Time: 10/10/32

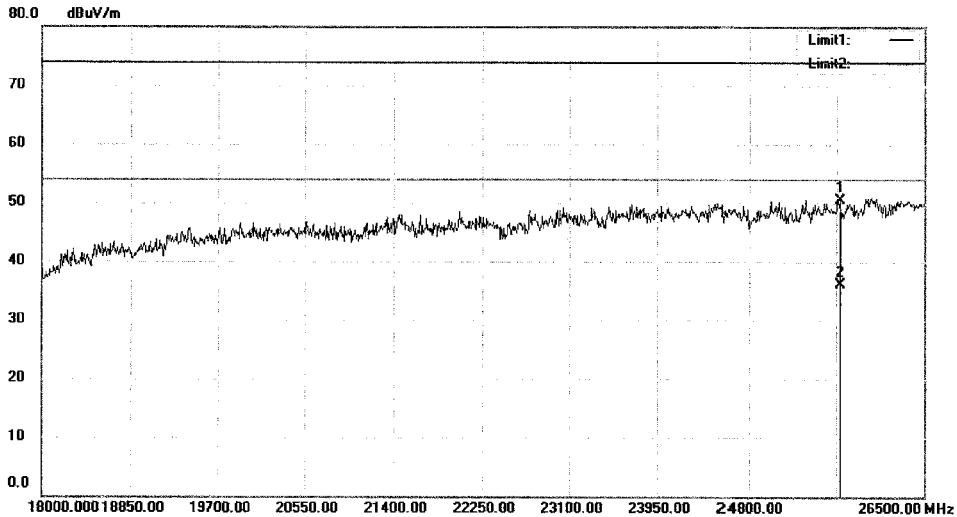

Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode:11N 40M 2437
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		25684.00	86.76	-36.18	50.58	74.00	-23.42	peak		
2	*	25684.00	72.37	-36.18	36.19	54.00	-17.81	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 8\Data :#141

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File : TUV 8 Data : #142 Date: 15/08/09/ Time: 10/10/35

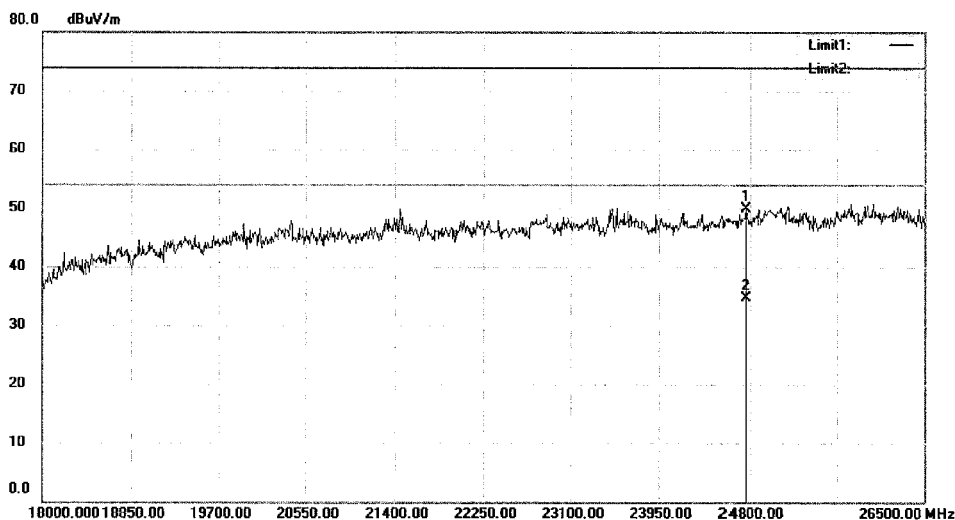

Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11N 40M 2437
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		24757.50	86.87	-37.04	49.83	74.00	-24.17	peak		
2	*	24757.50	71.72	-37.04	34.68	54.00	-19.32	AVG		


*:Maximum data x:Over limit !:over margin

Operator: KK

File : TUV 8\Data : #142

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

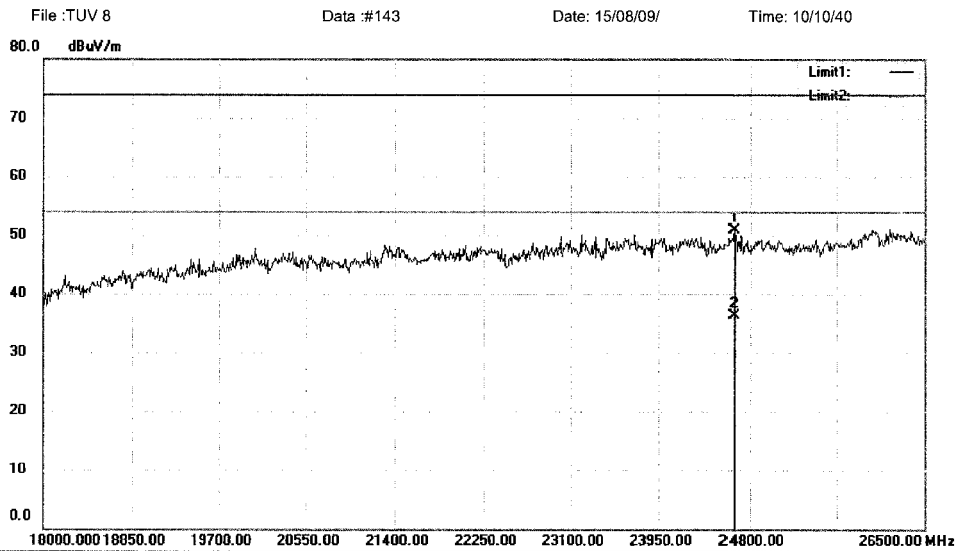
Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11N 40M 2452
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		24647.00	88.05	-37.05	51.00	74.00	-23.00	peak		
2	*	24647.00	73.28	-37.05	36.23	54.00	-17.77	AVG		


*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 8Data: #143

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

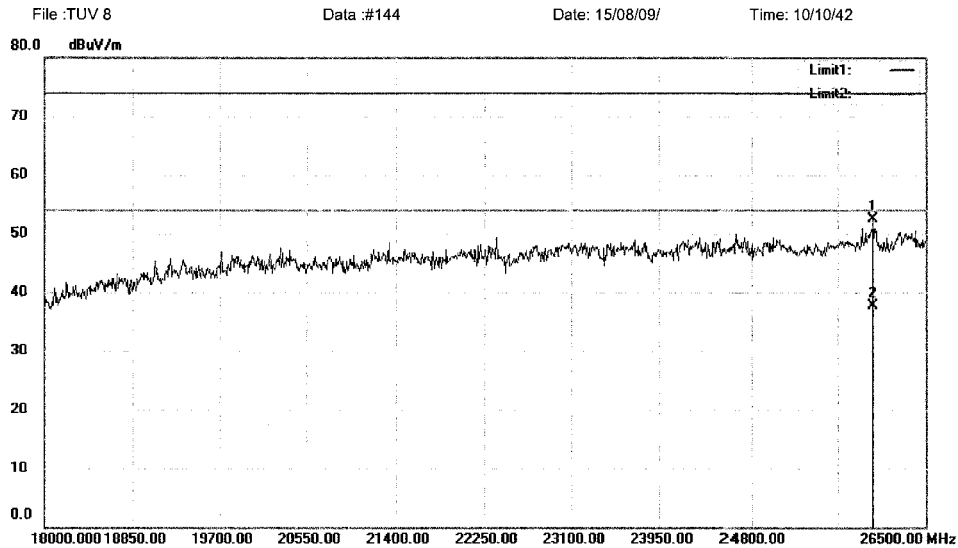
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11N 40M 2452
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		25998.50	88.37	-35.79	52.58	74.00	-21.42	peak		
2	*	25998.50	73.42	-35.79	37.63	54.00	-16.37	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File : TUV 8\Data : #144

Page: 1


Test Plot of Band Edge

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

File: TUV 8 Data: #195 Date: 15/08/08/ Time: 14/04/47

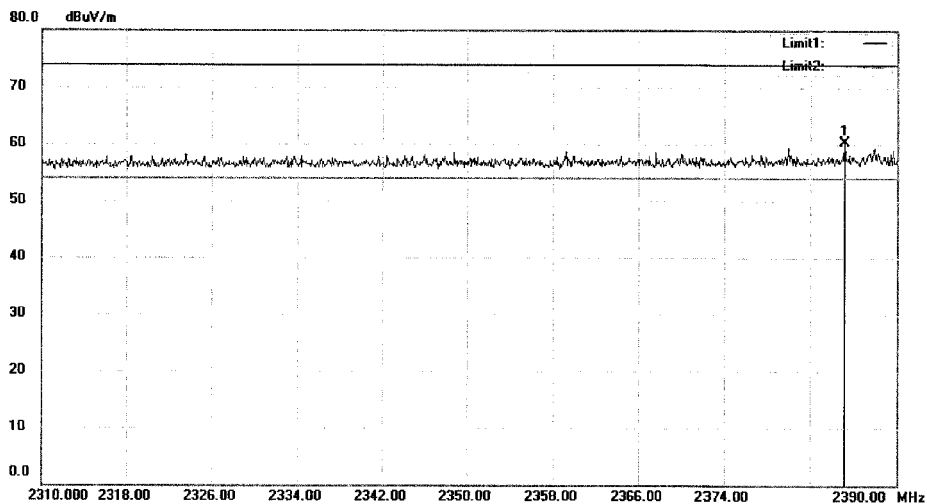

Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11B 2412
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	2385.120	30.00	30.25	60.25	74.00	-13.75	peak		

*: Maximum data x: Over limit !: over margin

Operator: KK

File: TUV 8 Data: #195

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

File :TUV 8

Data :#196

Date: 15/08/08/

Time: 14/05/21

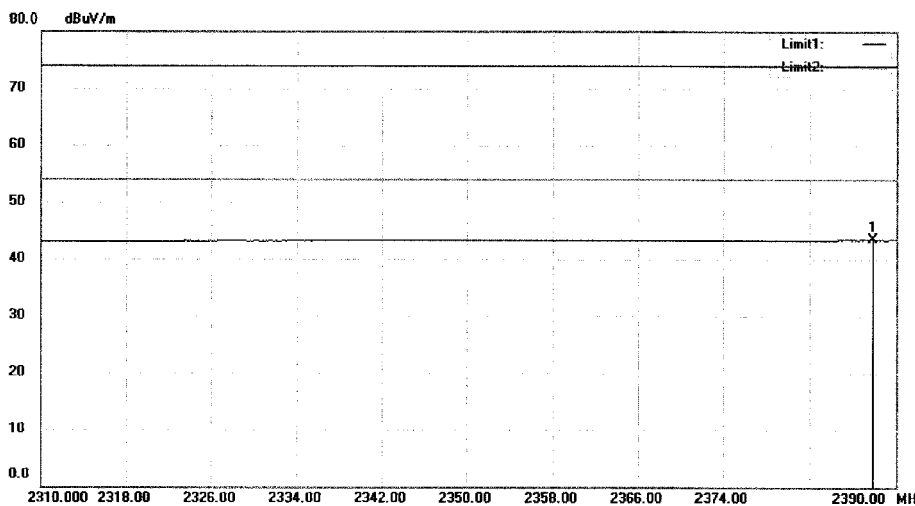

Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: MID721-L DL718M

Mode:11B 2412

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1	*	2387.840	13.28	30.27	43.55	54.00	-10.45	AVG		


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 8\Data :#196

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

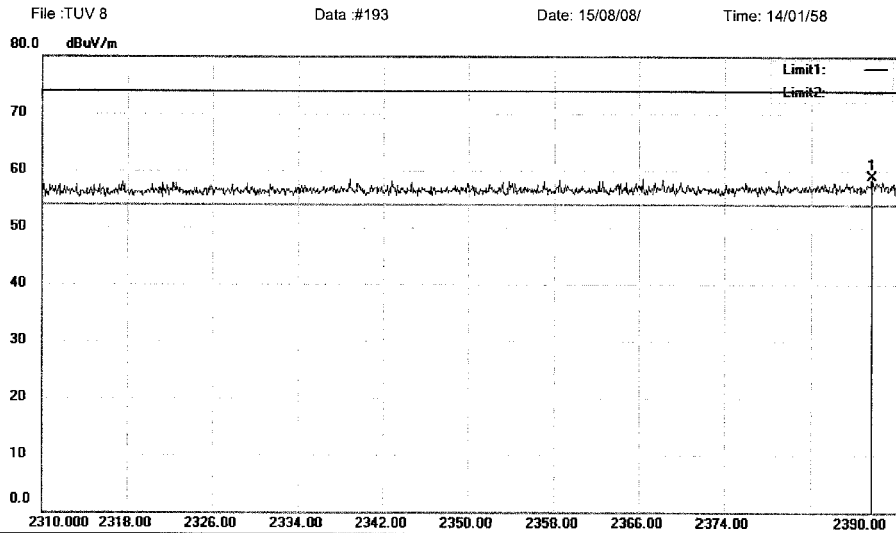
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11B 2412
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1	*	2387.600	28.60	30.27	58.87	74.00	-15.13	peak		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 8\Data: #193

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV 8 Data :#194 Date: 15/08/08/ Time: 14/02/36

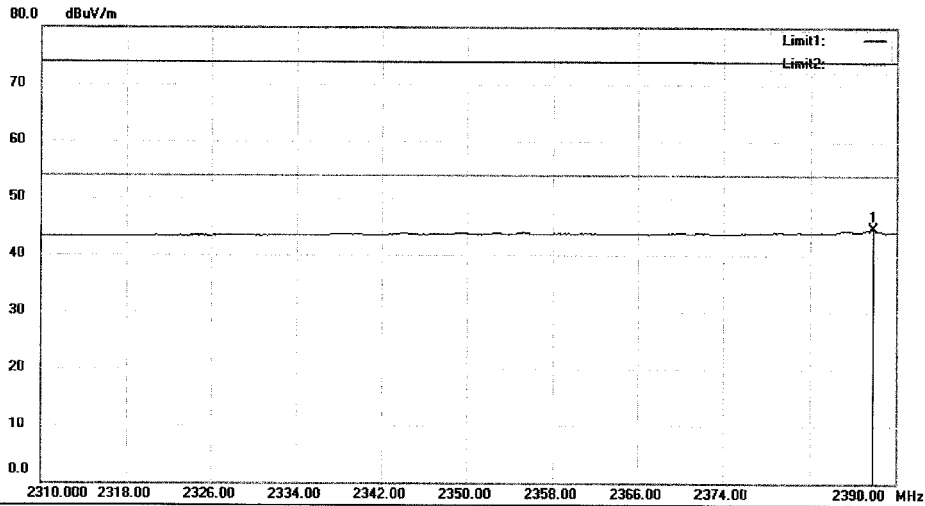

Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode:11B 2412
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2387.840	14.41	30.27	44.68	54.00	-9.32	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 8\Data :#194

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File : TUV 8 Data : #197 Date: 15/08/08/ Time: 14/08/04

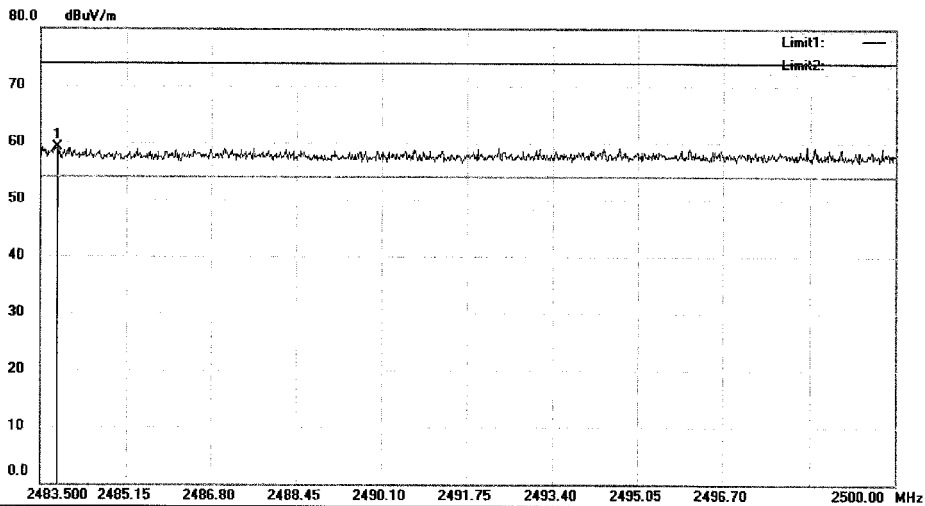

Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11B 2462
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1	*	2483.814	28.40	30.70	59.10	74.00	-14.90	peak		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 8\Data :#197

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File : TUV 8 Data : #198 Date: 15/08/08/ Time: 14/09/32

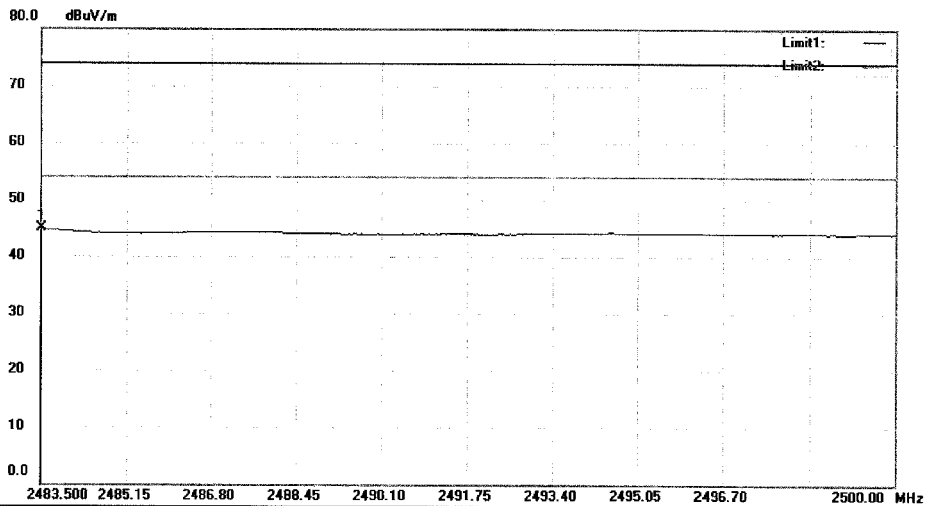

Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11B 2462
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	2483.500	14.16	30.70	44.86	54.00	-9.14	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File : TUV 8\Data : #198

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File : TUV 8 Data : #199 Date : 15/08/08/ Time : 14/10/59

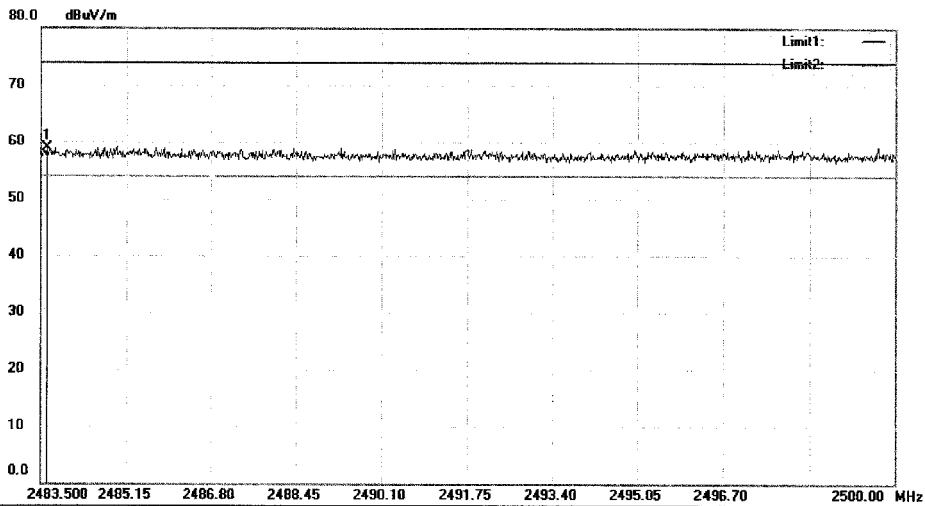

Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11B 2462
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1	*	2483.615	28.30	30.70	59.00	74.00	-15.00	peak		


*:Maximum data x:Over limit !:over margin

Operator: KK

File : TUV 8 \Data : #199

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

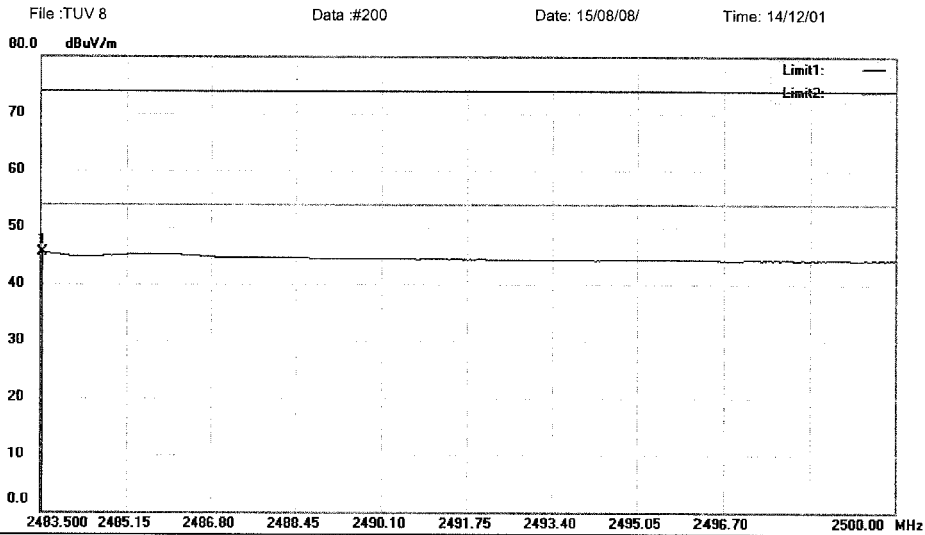
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11B 2462
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2483.533	14.79	30.70	45.49	54.00	-8.51	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File : TUV 8\Data : #200

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV 8 Data :#203 Date: 15/08/08/ Time: 14/18/49

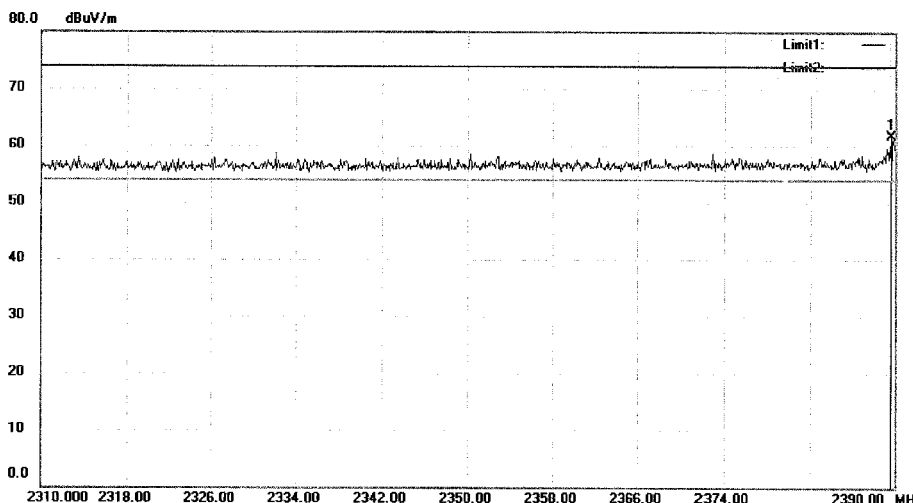

Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode:11G 2412
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	2389.600	31.45	30.27	61.72	74.00	-12.28	peak		


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 8\Data :#203

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

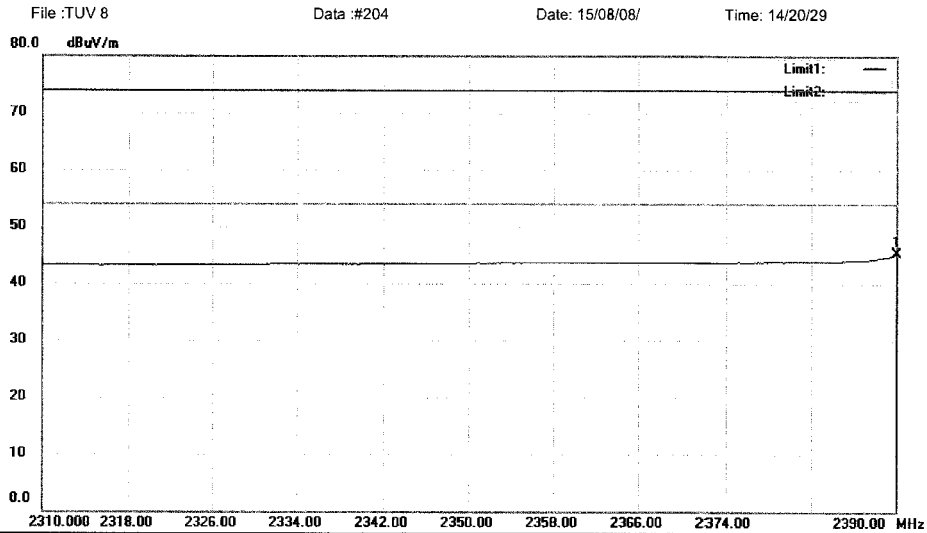
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode:11G 2412
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1	*	2390.000	15.01	30.28	45.29	54.00	-8.71	AVG		


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 8\Data :#204

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

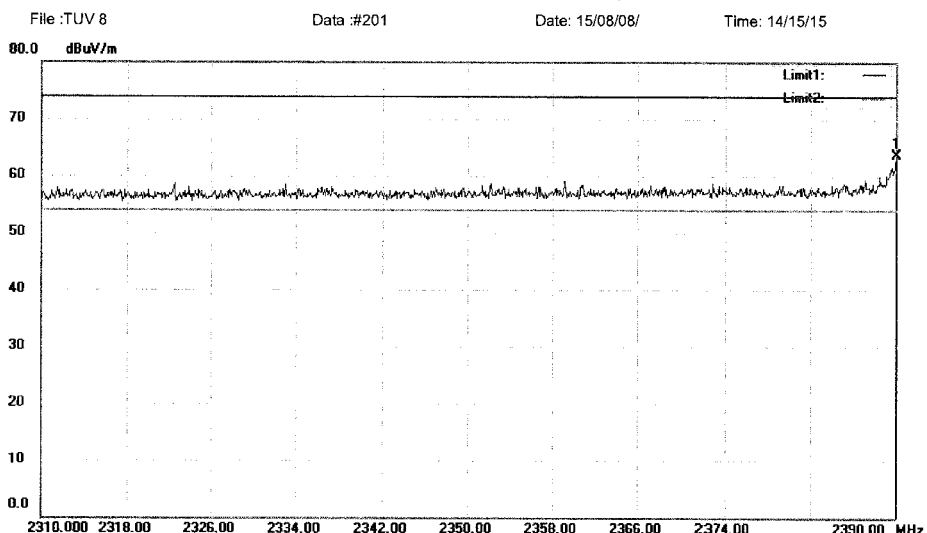
Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11G 2412
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	2390.000	33.45	30.28	63.73	74.00	-10.27	peak		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 8\Data: #201

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File : TUV 8 Data : #202 Date: 15/08/08/ Time: 14/17/23

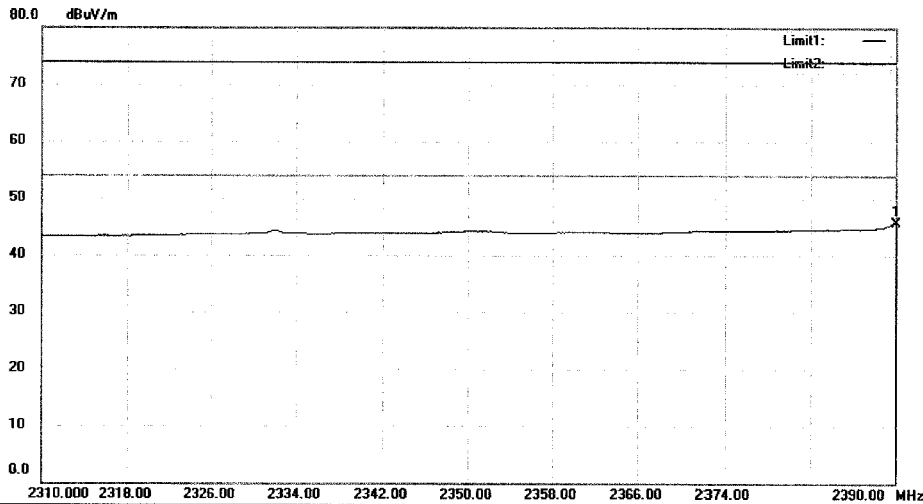

Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11G 2412
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2390.000	15.47	30.28	45.75	54.00	-8.25	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File : TUV 8\Data : #202

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File: TUV 8 Data: #205 Date: 15/08/08/ Time: 14/23/24

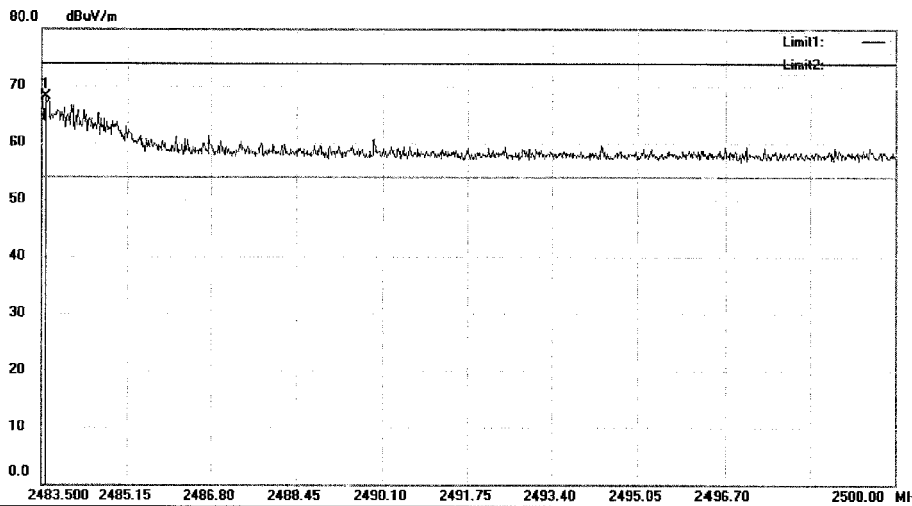

Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11G 2462
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1	*	2483.566	37.43	30.70	68.13	74.00	-5.87	peak		


*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 8\Data: #205

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

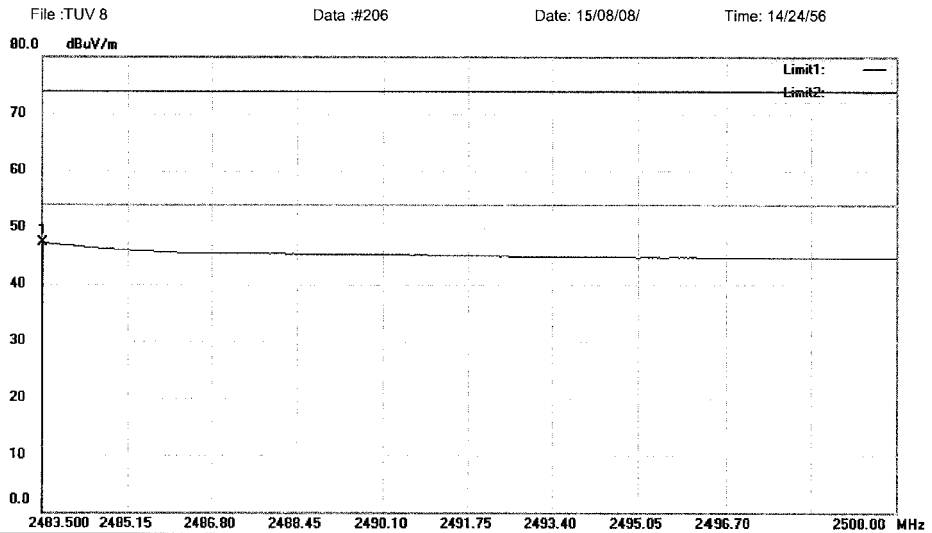
Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11G 2462
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1	*	2483.500	16.55	30.70	47.25	54.00	-6.75	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 8\Data: #206

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File: TUV 8 Data: #207 Date: 15/08/08/ Time: 14/26/29

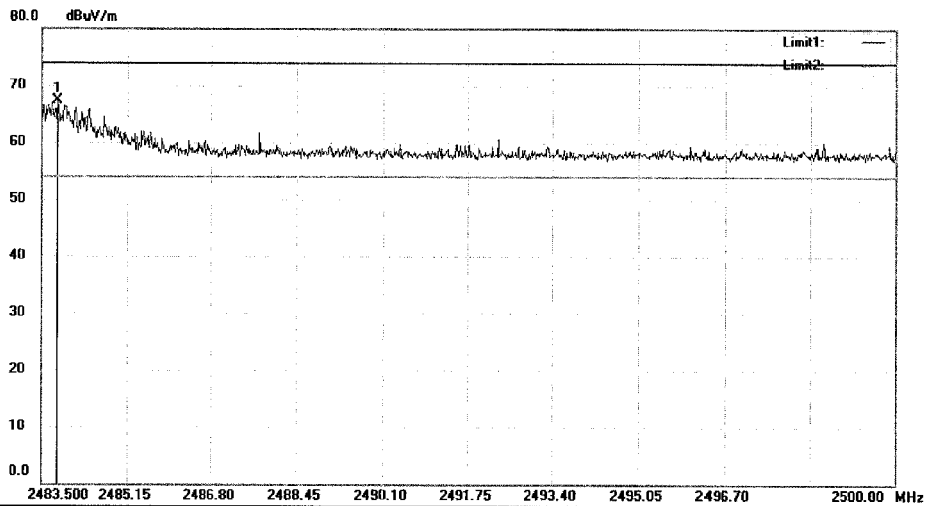

Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11G 2462
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	2483.797	36.61	30.70	67.31	74.00	-6.69	peak		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 8\Data: #207

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File: TUV 8 Data: #208 Date: 15/08/08/ Time: 14/28/05

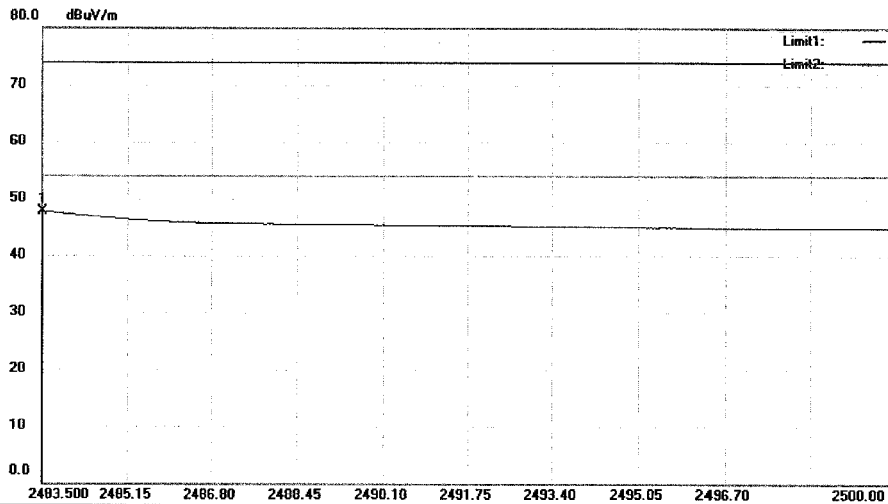

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11G 2462
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	2483.500	17.09	30.70	47.79	54.00	-6.21	AVG		


*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 8 \Data: #208

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

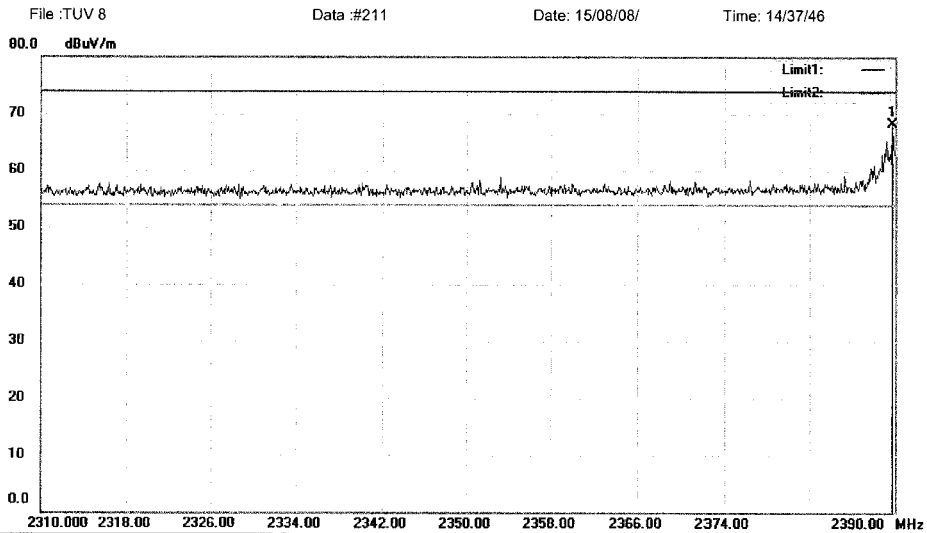
Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11N 20M 2412
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1	*	2389.680	38.07	30.27	68.34	74.00	-5.66	peak		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 8\Data :#211

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File: TUV 8 Data: #212 Date: 15/08/08/ Time: 14/40/03

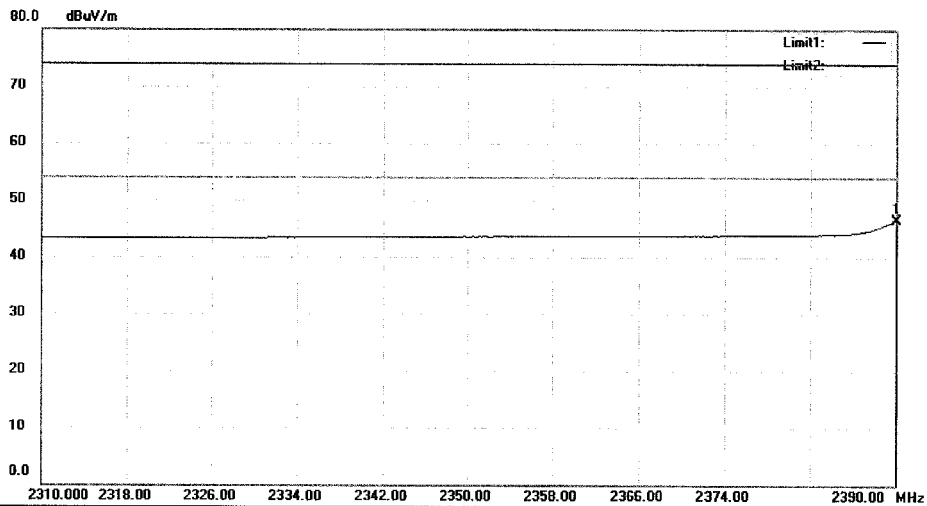

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11N 20M 2412
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2390.000	16.29	30.28	46.57	54.00	-7.43	AVG		


*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 8\Data: #212

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

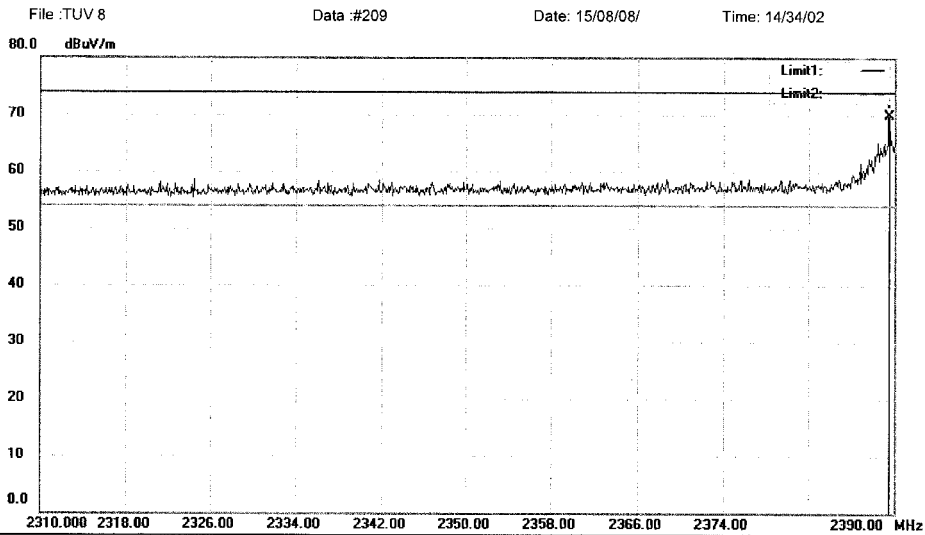
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11N 20M 2412
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1	*	2389.520	39.62	30.27	69.89	74.00	-4.11	peak		


*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 8\Data: #209

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

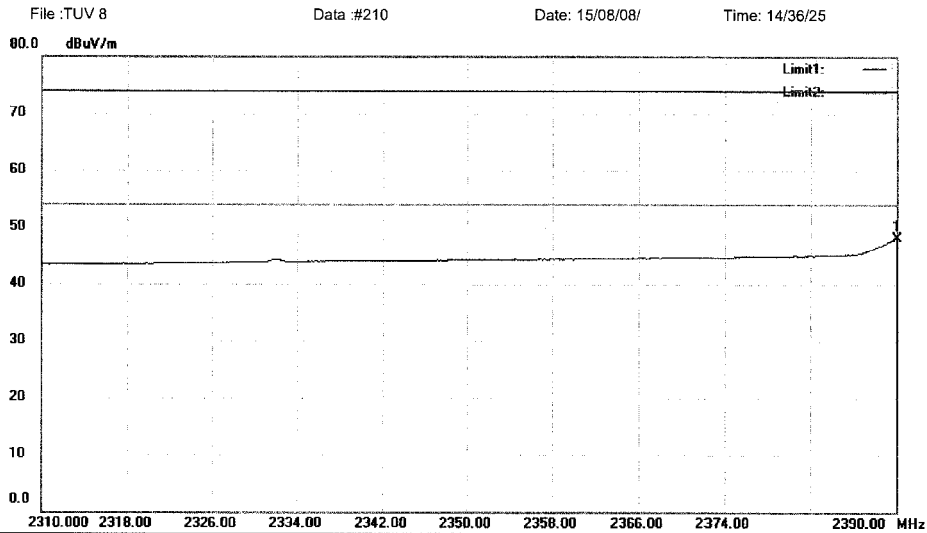
Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE) FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11N 20M 2412
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1	*	2390.000	17.91	30.28	48.19	54.00	-5.81	AVG		

*: Maximum data x: Over limit !: over margin

Operator: KK


File: TUV 8\Data: #210

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV 8 Data :#213 Date: 15/08/08/ Time: 14/42/51

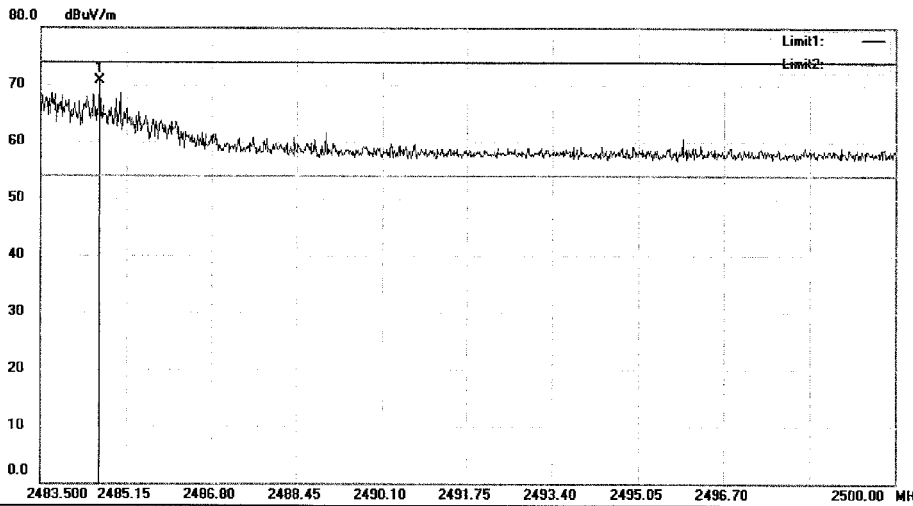

Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode:11N 20M 2462
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	2484.622	39.95	30.71	70.66	74.00	-3.34	peak		Comment


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 8\Data :#213

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

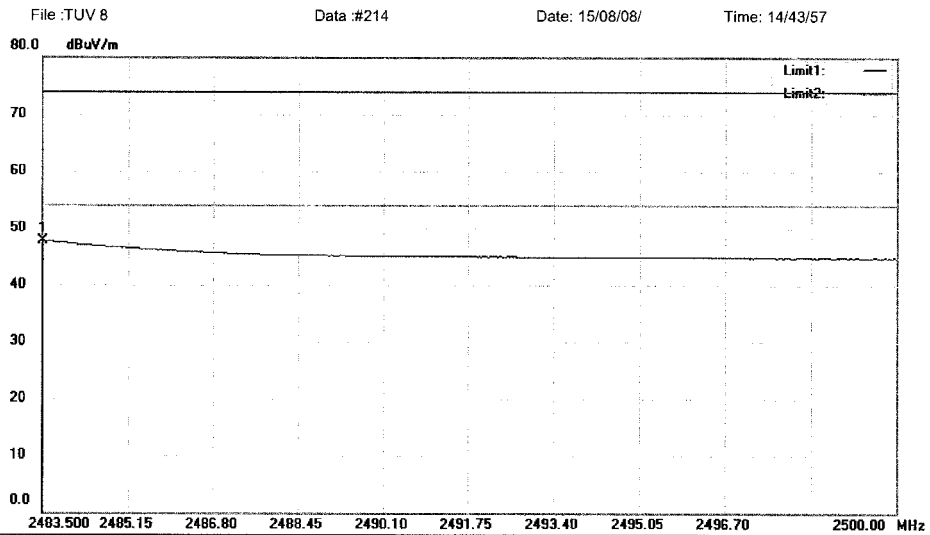
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11N 20M 2462
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2483.517	17.08	30.70	47.78	54.00	-6.22	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 8\Data :#214

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File : TUV 8 Data : #215 Date: 15/08/08/ Time: 14/45/37

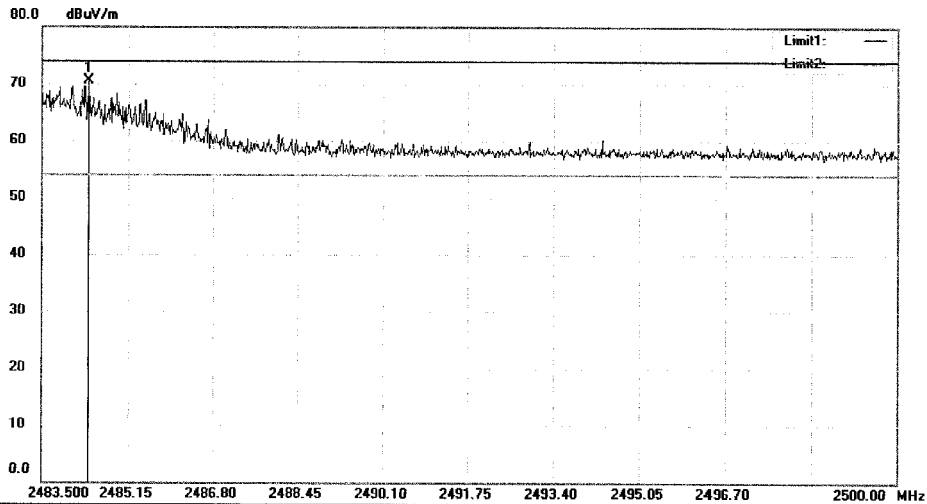

Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11N 20M 2462
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1	*	2484.391	39.72	30.71	70.43	74.00	-3.57	peak		


*:Maximum data x:Over limit !:over margin

Operator: KK

File : TUV 8\Data : #215

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

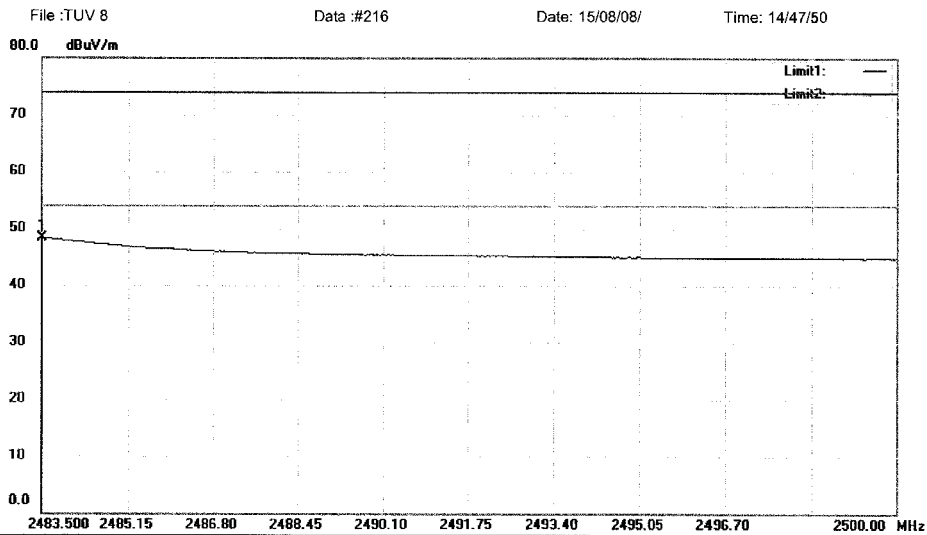
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11N 20M 2462
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1	*	2483.500	17.67	30.70	48.37	54.00	-5.63	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 8\Data: #216

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV 8 Data :#219 Date: 15/08/08 Time: 14/51/08

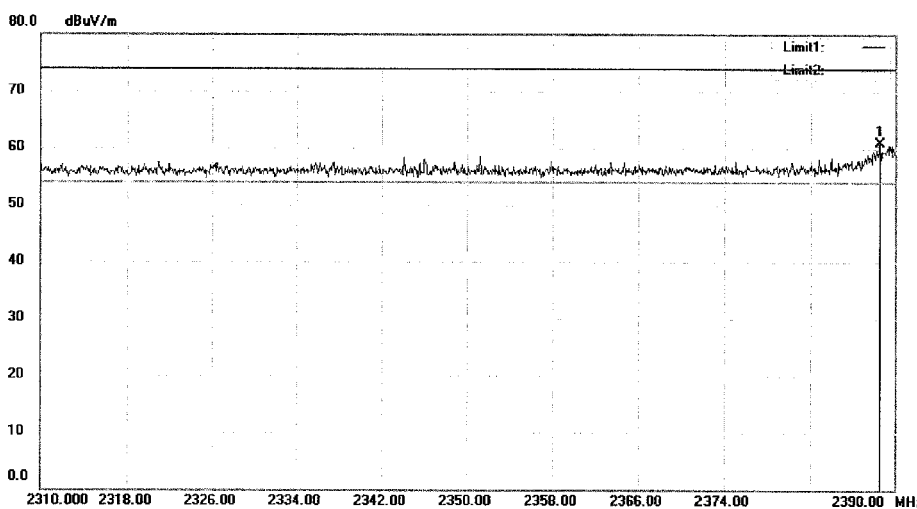

Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11N 40M 2422
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1	*	2388.560	30.71	30.27	60.98	74.00	-13.02	peak		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 8\Data :#219

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV 8 Data :#220 Date: 15/08/08/ Time: 14/52/03

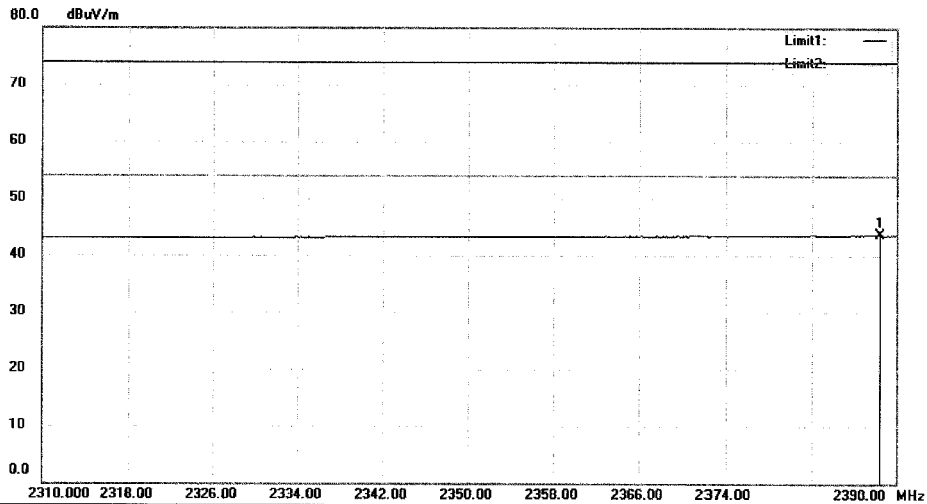

Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11N 40M 2422
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1	*	2388.400	13.40	30.27	43.67	54.00	-10.33	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 8\Data :#220

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV 8 Data :#217 Date: 15/08/08/ Time: 14/48/53

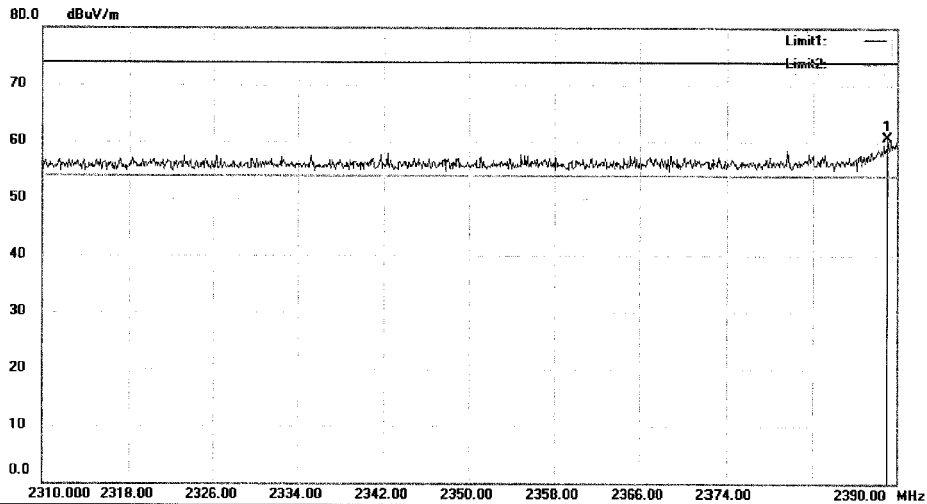

Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11N 40M 2422
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1	*	2389.120	30.36	30.27	60.63	74.00	-13.37	peak		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 8\Data :#217

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV 8 Data :#218 Date: 15/08/08/ Time: 14/49/46

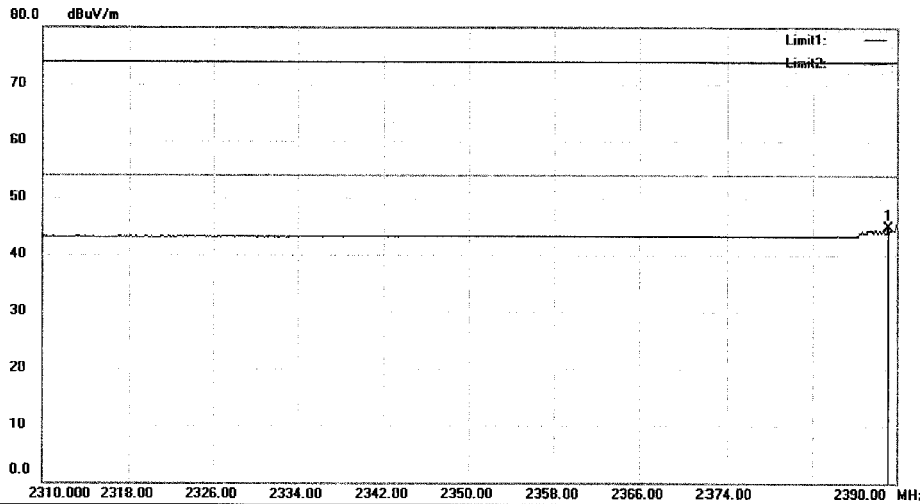

Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11N 40M 2422
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1	*	2389.200	14.63	30.27	44.90	54.00	-9.10	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 8\Data :#218

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV 8 Data :#221 Date: 15/08/08/ Time: 14/53/18

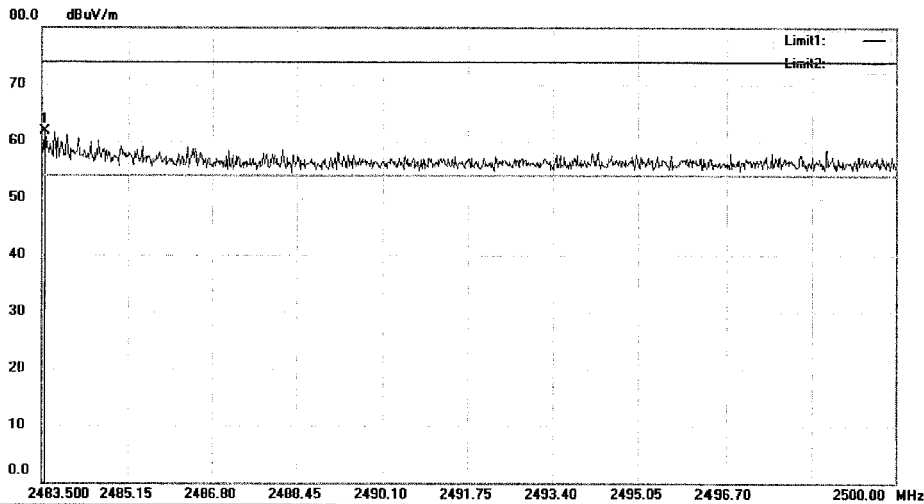

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11N 40M 2452
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1	*	2483.550	31.00	30.70	61.70	74.00	-12.30	peak		


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 8\Data :#221

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

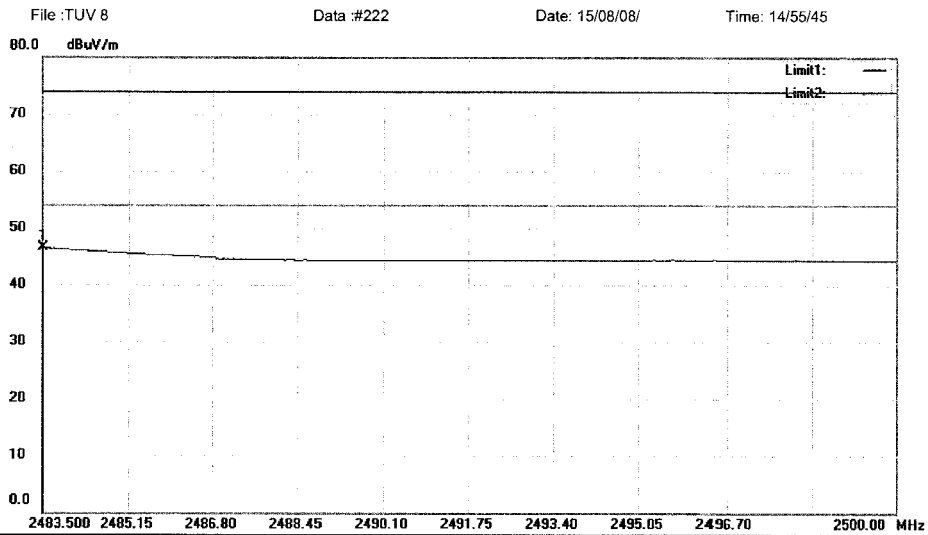
Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11N 40M 2452
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1	*	2483.500	15.84	30.70	46.54	54.00	-7.46	AVG		


*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 8\Data: #222

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

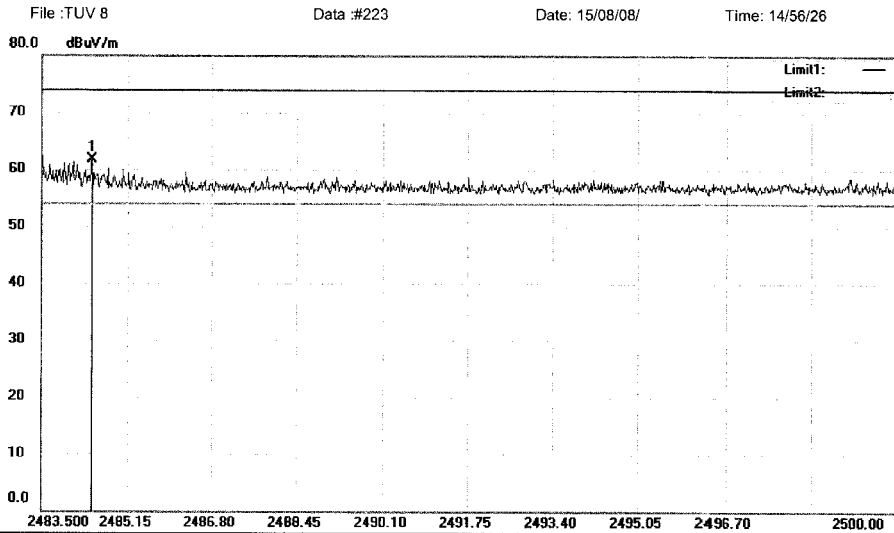
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode: 11N 40M 2452
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1	*	2484.457	30.92	30.71	61.63	74.00	-12.37	peak		

*:Maximum data x:Over limit !:over margin

Operator: KK


File : TUV 8\Data : #223

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV 8 Data :#224 Date: 15/08/08/ Time: 14/57/01

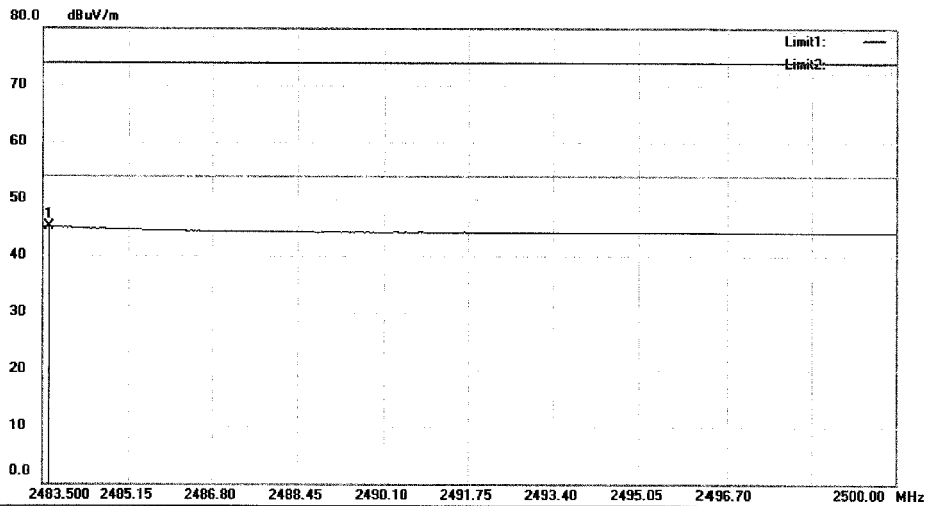

Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: MID721-L DL718M
 Mode:11N 40M 2452
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1	*	2483.615	14.44	30.70	45.14	54.00	-8.86	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 8\Data :#224

Page: 1

Prüfbericht - Nr.: 17051492 002
Test Report No.Seite 149 von 155
Page 149 of 155**5.1.7 Conducted emissions****RESULT:****Pass**

Date of testing	:	2015-08-17
Test standard	:	FCC Part 15.207
Basic standard	:	ANSI C63.10: 2013
Frequency range	:	0.15 – 30MHz
Limits	:	FCC Part 15.207
Kind of test site	:	Shield room

Test setup


Input Voltage	:	AC 120V, 60Hz
Operation Mode	:	A
Earthing	:	Not Connected
Ambient temperature	:	26°C
Relative humidity	:	55%
Atmospheric pressure	:	101kPa

For details refer to following test plot.

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Conducted Emission Measurement

File :TUV Data :#709 Date: 2015/08/17

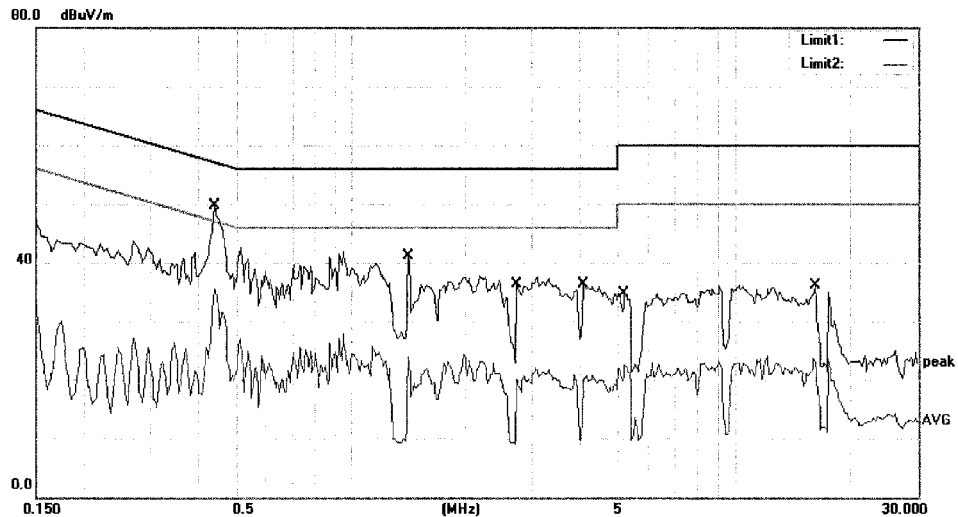

Site Conduction #2 Phase: **L1** Temperature: 26
 Limit: (CE)FCC PART 15 class C_QP Power: AC 120V/60Hz Humidity: 55 %
 EUT: MID
 M/N: MID721-L
 Mode: WIFI 2.4G MODE
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.4400	49.71	0.00	49.71	57.06	-7.35	QP	
2		0.4400	35.55	0.00	35.55	47.06	-11.51	AVG	
3		1.4050	41.13	0.00	41.13	56.00	-14.87	QP	
4		1.4050	23.81	0.00	23.81	46.00	-22.19	AVG	
5		2.7300	36.26	0.00	36.26	56.00	-19.74	QP	
6		2.7300	20.03	0.00	20.03	46.00	-25.97	AVG	
7		4.0900	36.40	0.00	36.40	56.00	-19.60	QP	
8		4.0900	20.78	0.00	20.78	46.00	-25.22	AVG	
9		5.2200	34.74	0.00	34.74	60.00	-25.26	QP	
10		5.2200	22.54	0.00	22.54	50.00	-27.46	AVG	
11		16.1500	36.02	0.00	36.02	60.00	-23.98	QP	
12		16.1500	23.65	0.00	23.65	50.00	-26.35	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: Neo


File :TUVData :#709

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Conducted Emission Measurement

File :TUV Data :#710 Date: 2015/08/17

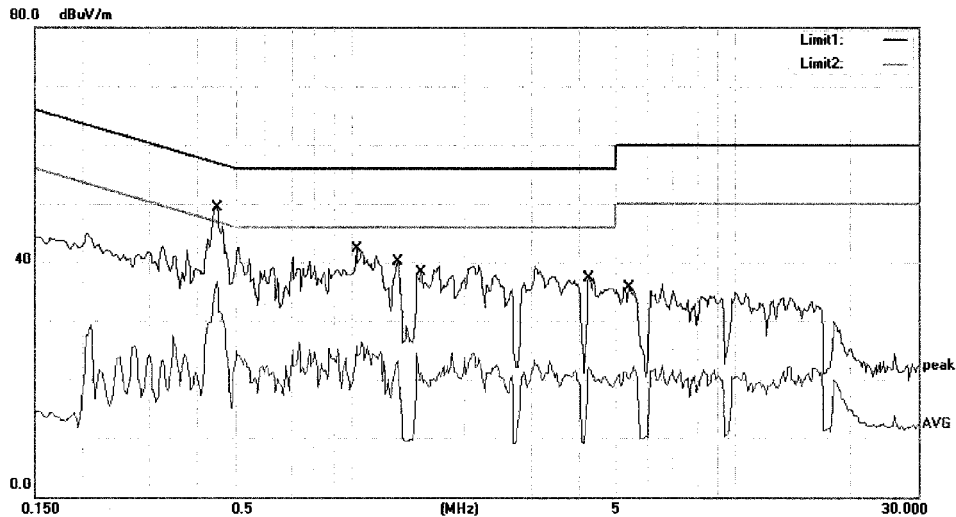
 Site Conduction #2 Phase: **N** Temperature: 26
 Limit: (CE)FCC PART 15 class C_QP Power: AC 120V/60Hz Humidity: 55 %
 EUT: MID
 M/N: MID721-L
 Mode: WIFI 2.4G MODE
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.4500	49.28	0.00	49.28	56.88	-7.60	QP	
2		0.4500	36.77	0.00	36.77	46.88	-10.11	AVG	
3		1.0350	42.24	0.00	42.24	56.00	-13.76	QP	
4		1.0350	26.37	0.00	26.37	46.00	-19.63	AVG	
5		1.3300	40.20	0.00	40.20	56.00	-15.80	QP	
6		1.3300	23.17	0.00	23.17	46.00	-22.83	AVG	
7		1.5300	38.27	0.00	38.27	56.00	-17.73	QP	
8		1.5300	24.53	0.00	24.53	46.00	-21.47	AVG	
9		4.2250	37.39	0.00	37.39	56.00	-18.61	QP	
10		4.2250	22.07	0.00	22.07	46.00	-23.93	AVG	
11		5.3700	35.77	0.00	35.77	60.00	-24.23	QP	
12		5.3700	22.25	0.00	22.25	50.00	-27.75	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: Neo

File :TUVData :#710


Page: 1

6. Photographs of the Test Set-Up

Photograph 1: Set-up for Conducted Emissions




Photograph 2: Set-up for Spurious Emissions for below 30MHz

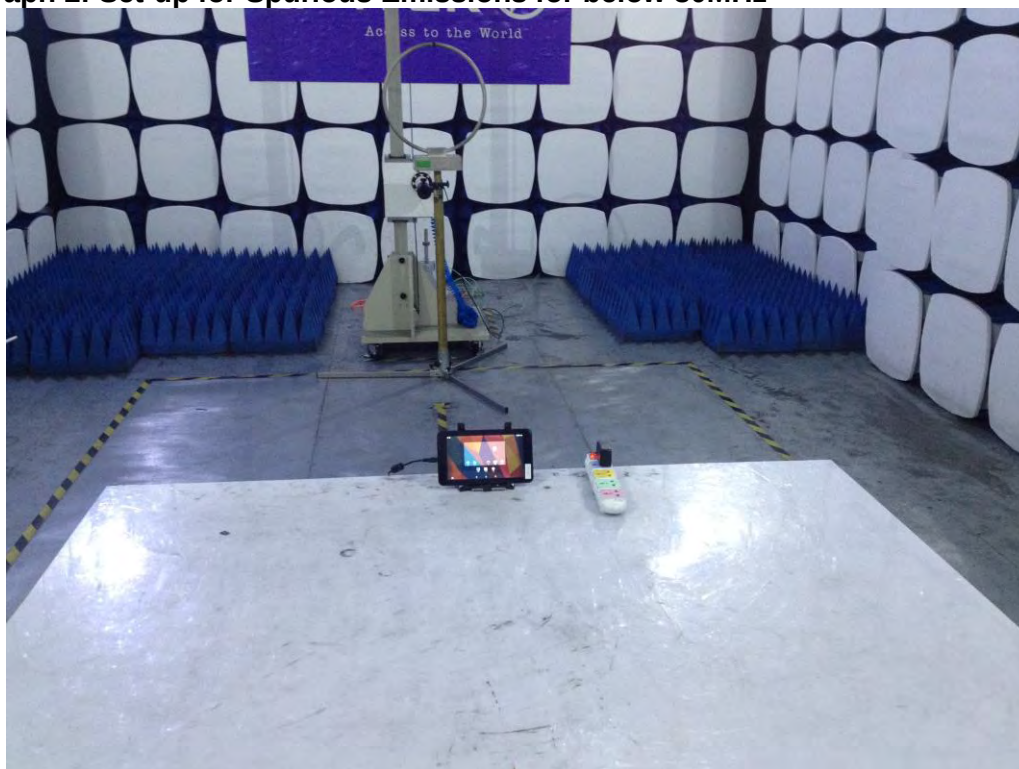

Photograph 3: Set-up for Spurious Emissions for 30 - 1000MHz



Photograph 4: Set-up for Spurious Emissions for 1 - 18GHz

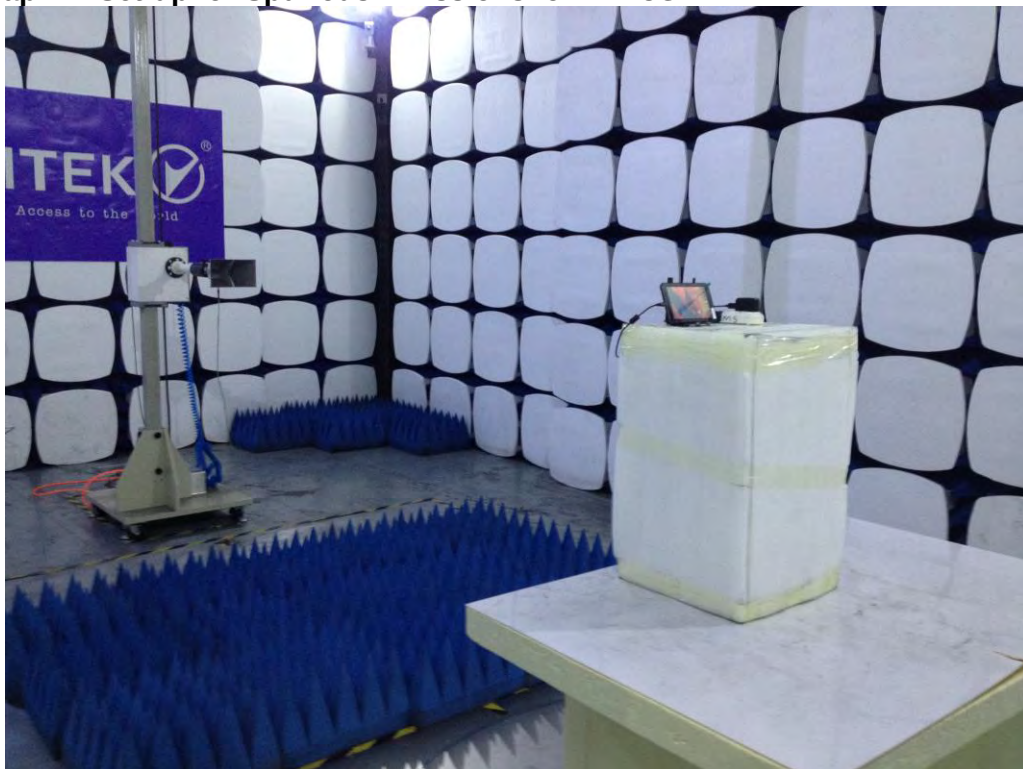

Photograph 5: Set-up for Spurious Emissions for 18 - 26.5GHz



7. List of Tables

Table 1: List of Test and Measurement Equipment.....	5
Table 2: Measurement Uncertainty	6
Table 3: Technical Specification of EUT	8
Table 4: Technical Specification of Wi-Fi	8
Table 5: Carrier Frequency	9
Table 6: Test result of Peak Output Power of 802.11b.....	14
Table 7: Test result of Peak Output Power of 802.11g.....	14
Table 8: Test result of Peak Output Power of 802.11n (HT20).....	14
Table 9: Test result of Peak Output Power of 802.11n (HT40).....	15
Table 10: Test result of 6dB Bandwidth of 802.11b.....	16
Table 11: Test result of 6dB Bandwidth of 802.11g.....	16
Table 12: Test result of 6dB Bandwidth of 802.11n (HT20).....	16
Table 13: Test result of 6dB Bandwidth of 802.11n (HT40).....	16
Table 14: Test result of power spectral density:	34

8. List of Photographs

Photograph 1: Set-up for Conducted Emissions	152
Photograph 2: Set-up for Spurious Emissions for below 30MHz	152
Photograph 3: Set-up for Spurious Emissions for 30 - 1000MHz	153
Photograph 4: Set-up for Spurious Emissions for 1 - 18GHz	153
Photograph 5: Set-up for Spurious Emissions for 18 - 26.5GHz.....	154