



TEST REPORT

REPORT NUMBER: I23W00017-eMTC-RF-FCC-Rev2

ON

Type of Equipment:	Tracker
Type of Designation:	AT Plus 4G2
Brand Name:	Prime
Manufacturer:	Micron Electronics LLC.
FCC ID:	ZKQ-ATP4GA2

ACCORDING TO


FCC CFR Part 2, FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS, e-CFR
PART 24, PERSONAL COMMUNICATIONS SERVICES, e-CFR
PART 27, MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES, e-CFR
ANSI C63.26-2015 American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

Chongqing Academy of Information and Communications Technology

Month date, year

Jun, 20, 2023

Signature



Xiang Luoyong
Director

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of Chongqing Academy of Information and Communications Technology.



Report No.: I23W00017-eMTC-RF-FCC-Rev2

Revision Version

Report Number	Revision	Date	Memo
I23W00017-eMTC-RF	00	2023-06-01	Initial creation of test report
I23W00017-eMTC-RF-FCC-Rev1	01	2023-06-16	First change of test report
I23W00017-eMTC-RF-FCC-Rev2	02	2023-06-20	Second change of test report

Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

CONTENTS

1. Test Laboratory	5
1.1. Testing Location	5
1.2. Testing Environment	5
1.3. Project data	5
1.4. Signature	5
2. Client Information	6
2.1. Applicant Information	6
2.2. Manufacturer Information	6
3. Equipment under Test (EUT) and Ancillary Equipment (AE)	7
3.1. About EUT	7
3.2. Internal Identification of EUT used during the test	7
3.3. Outline of Equipment under Test	8
3.4. Internal Identification of AE used during the test	8
4. Reference Documents	9
4.1. Documents supplied by applicant	9
4.2. Reference Documents for testing	9
5. Test Equipments Utilized	10
5.1. RF Test System	10
5.2. RSE Test System	10
5.3. Climate Chamber	11
5.4. Vibration table	11
5.5. Test software	11
6. Test Results	12
6.1. Summary of Test Results	12
6.2. Conducted RF Power Output	13
6.3. ERP and EIRP	20

Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777



Report No.: I23W00017-eMTC-RF-FCC-Rev2

6.4. Radiated Spurious Emission	27
ANNEX A Deviations from Prescribed Test Methods	35
ANNEX B Difference Statement	36

Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

1. Test Laboratory

1.1. Testing Location

Name:	Chongqing Academy of Information and Communications Technology
Designation Number:	CN1239
Address:	No.19EastRoad,Xiantao Big-data Valley,Yubei District, Chongqing,People's Republic of China Building C, Technology Innovation Center, No.8, Yuma Road, Chayuan New Area, Nan'an District, Chongqing, People's Republic of China
Postal Code:	401336
Telephone:	0086-23-88069965
Fax:	0086-23-88608777

1.2. Testing Environment

Normal Temperature:	15-35°C
Relative Humidity:	30-60%

1.3. Project data

Testing Start Date:	2023-05-22
Testing End Date:	2023-05-25

1.4. Signature



2023-06-20

Dong Junxin
(Prepared this test report)


Date



2023-06-20

Li Xu
(Reviewed this test report)

Date



2023-06-20

Xiang Luoyong
Director of the laboratory
(Approved this test report)

Date

Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

2. Client Information

2.1. Applicant Information

Company Name:	Micron Electronics LLC.
Address /Post:	1001 Yamato Road, Suite 400, Boca Raton, FL 33431, USA
City:	Boca Raton
Country:	USA
Telephone:	+1 888 538 3489
Fax:	--
Email:	pcheng@micron-electronics.com
Contact Person:	Ping Cheng

2.2. Manufacturer Information

Company Name:	Micron Electronics LLC.
Address /Post:	1001 Yamato Road, Suite 400, Boca Raton, FL 33431, USA
City:	Boca Raton
Country:	USA
Telephone:	+1 888 538 3489
Fax:	--
Email:	pcheng@micron-electronics.com
Contact Person:	Ping Cheng

Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

3. Equipment under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

EUT Description	Tracker
Model name	AT Plus 4G2
Brand name	Prime
CAT-M Frequency Band	2/4/12/13
Type of modulation	QPSK/16QAM
Extreme Temperature	-20/+55°C
Nominal Voltage	3.7
Extreme High Voltage	4.2
Extreme Low Voltage	3.6

Note: Photographs of EUT are shown in ANNEX A of this test report.

Note: High and low voltage values in extreme condition test are given by manufacturer.

3.2. Internal Identification of EUT used during the test

EUT ID	SN or IMEI	HW Version	SW Version	Date of receipt
S1	SN:U4K22102000013	A502_V1	P51AEV02.01B22.I01	2023-04-24

*EUT ID: is used to identify the test sample in the lab internally.

Chongqing Academy of Information and Communication Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

3.3. Outline of Equipment under Test

Technology	Band	UL Freq.(MHz)	DL Freq.(MHz)	Not e
CAT-M	Band2	1850 – 1910	1930 – 1990	--
	Band4	1710 – 1755	2110 – 2155	--
	Band12	699 – 716	729 – 746	--
	Band13	777 – 787	746 – 756	--

3.4. Internal Identification of AE used during the test

*AE ID: is used to identify the test sample in the lab internally.

AE ID*	Description	Manufacturer	Model	Length
--	--	--	--	--

AE info are provided customer.

4. Reference Documents

4.1. Documents supplied by applicant

PICS/PIXIT, referring to Annex B for detailed information, is supplied by the client or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC CFR Part 2	FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS, e-CFR	--
PART 24	PERSONAL COMMUNICATIONS SERVICES,e-CFR,	--
PART 27	,MISCELLANEOUS WIRELESS OMMUNICATIONS SERVICES, e-CFR,	--
ANSI C63.26	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services	2015

5. Test Equipments Utilized

5.1. RF Test System

No.	Equipment	Model	SN	HW Version	SW Version	Manufacture	Cal.Due Date
1	Universal Radio Communication Tester	CMW500	166779	--	--	R&S	2023-09-21
2	DC Power Supply	62015L-60-6	L02000001587	--	--	Chroma	2023-06-29

5.2. RSE Test System

No.	Equipment	Model	SN	HW Version	SW Version	Manufacture	Cal.Due Date
1	Test Receiver	ESU26	100367	01	4.43 SP3	R&S	2023-06-29
2	Ultra-wideband Log Periodic Antenna	VULB 9163	01392	--	--	Schwarzbeck	2024-05-04
3	Double Ridged Guide Antenna	HF907	100357	--	--	R&S	2025-03-25
4	Universal Radio Communication Tester	CMW500	128181	--	--	R&S	2023-06-29
5	Double Ridged Guide Antenna	HF907	100356	--	--	R&S	2023-07-07
6	Ultra-wideband Log Periodic Antenna	VULB 9163	00995	--	--	R&S	2024-04-03
7	Amplifier1	150A	1429	--	--	Beehive	--
8	Amplifier2	SCU 18	10141	--	--	R&S	--

Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

5.3. Climate Chamber

No.	Name	Type	SN	Manufacture	Cal.Due Date
1	Fully-Anechoic Chamber	FACT3-2	--	ETS	2023-06-25

5.4. Vibration table

No.	Name	Type	SN	Manufacture	Cal.Due Date
1	anechoic chamber	FACT3-2	--	--	--

Anechoic chamber

Fully anechoic chamber by ETS-LINDGREN.

5.5. Test software

No.	Name	version	SN	Manufacture
1	EMC32	V 8.51.00	--	R&S

6. Test Results

6.1. Summary of Test Results

A brief summary of the tests carried out is shown as following.

FCC Rules	Name of Test	Result
2.1046,24.232(c),27.50	Conducted RF Power Output	Pass ^{Note1/2}
2.1046,24.232(c),27.50	ERP and EIRP	Pass
2.1049, 24.238(b)	Occupied Bandwidth	Pass ^{Note2}
2.1051,24.238,2.1053, 27.53	Conducted spurious emissions	Pass ^{Note2}
2.1051,24.238,2.1053, 27.53	Radiated Spurious Emission	Pass
2.1051,2.1053,27.53	Band Edge	Pass ^{Note2}
2.1055, 24.235, 27.54	Frequency Stability	Pass ^{Note2}
24.232, 27.50	Peak to Average Ratio	Pass ^{Note2}
Note1: Power test selected only part of the mode, data source reference to the original report 50289118002.		
Note2: The test data comes from the module report 50289118002 that issued by TÜV Rheinland Shenzhen)Co., Ltd.		

Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

6.2. Conducted RF Power Output

Specifications:	FCC Part 2.1046,24.232(c),27.50
DUT Serial Number:	SN:U4K22102000013
Test conditions:	Ambient Temperature:15°C-35°C Relative Humidity:30%-60% Air pressure: 86-106kPa
Test Results:	Pass

Limit Level Construction:

According to Part 24.232(c), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to Part 27.50(c), portable stations (hand-held devices) in the 600 MHz uplink Band and the 698-746 MHz Band, and fixed and mobile stations in the 600 MHz uplink Band are limited to 3 watts ERP.

According to Part 27.50(d), fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz Band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz Bands are limited to 1 watt EIRP.

Measurement Uncertainty:

Item	Uncertainty
Expanded Uncertainty	0.62 dB (k=2)

Test Setup:

During the test, the EUT was controlled via the Wireless Telecommunications Test Set to ensure max power transmission and proper modulation



Test Method:

The EUT is connected to the Universal Radio Communication Tester through the RF cable, and the average power and peak power are obtained through the Universal Radio Communication Tester

Note: The full RB test result of 16QAM of CAT-M is configured as 5@0.

Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777



Report No.: I23W00017-eMTC-RF-FCC-Rev2

CAT-M B2 Conducted RF Power Output Results

Band	Bandwidth	Modulation	Channel	RB Size	RB	NBIndex	Original result(dBm)	Test result(dBm)	deviation(dB)=Ori ginal result-Test result
					Start				
Band2	1.4MHz	QPSK	18607	6	0	Low	18.61	18.08	0.53
Band2	1.4MHz	QPSK	18607	1	0	Low	20.67	20.28	0.39
Band2	1.4MHz	16QAM	18607	1	0	Low	19.73	19.14	0.59
Band2	3MHz	QPSK	18615	6	0	Low	18.44	17.89	0.55
Band2	3MHz	16QAM	18615	6	0	Low	18.45	17.90	0.55
Band2	5MHz	QPSK	18625	1	0	Low	20.54	20.00	0.54
Band2	5MHz	QPSK	18625	6	0	Low	19.5	18.96	0.54
Band2	5MHz	16QAM	18625	1	0	Low	20.35	20.13	0.22
Band2	5MHz	16QAM	18625	6	0	Low	19.5	19.02	0.48
Band2	5MHz	16QAM	18900	6	0	Low	19.94	19.45	0.49
Band2	5MHz	16QAM	18900	1	0	Low	20.79	20.42	0.37
Band2	10MHz	QPSK	18650	5	0	Low	20.39	19.90	0.49
Band2	10MHz	QPSK	18650	1	0	Low	20.5	20.09	0.41
Band2	10MHz	16QAM	18650	1	0	Low	20.3	20.13	0.17
Band2	10MHz	16QAM	18650	5	0	Low	20.41	20.09	0.32
Band2	10MHz	16QAM	18900	1	0	Low	20.91	20.41	0.50
Band2	10MHz	16QAM	18900	5	0	Low	20.9	20.37	0.53
Band2	15MHz	QPSK	18675	6	0	Low	20.49	19.93	0.56
Band2	15MHz	QPSK	18675	1	0	Low	20.5	20.03	0.47
Band2	15MHz	16QAM	18675	6	0	Low	20.49	20.21	0.28
Band2	15MHz	16QAM	18675	1	0	Low	20.3	20.16	0.14
Band2	15MHz	16QAM	18900	1	0	Low	20.88	20.29	0.59
Band2	15MHz	16QAM	18900	6	0	Low	20.97	20.38	0.59
Band2	20MHz	QPSK	18700	6	0	Low	20.44	19.94	0.50
Band2	20MHz	16QAM	18700	1	0	Low	20.3	20.02	0.28
Band2	20MHz	16QAM	18700	6	0	Low	20.45	20.07	0.38
Band2	20MHz	16QAM	18900	1	0	Low	20.8	20.35	0.45

Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

CAT-M B4 Conducted RF Power Output Results

Band	Bandwidth	Modulation	Channel	RB Size	RB	NBIndex	Original result (dBm)	Test result(dBm)	deviation(dB)= Original result-Test result
					Start				
Band4	1.4MHz	QPSK	19957	6	0	Low	18.45	18.02	0.43
Band4	1.4MHz	QPSK	20175	1	0	Low	18.63	18.37	0.26
Band4	1.4MHz	QPSK	20393	1	5	Low	20.92	20.49	0.43
Band4	1.4MHz	QPSK	20393	6	0	Low	18.71	18.42	0.29
Band4	1.4MHz	16QAM	19957	6	0	Low	18.47	17.98	0.49
Band4	1.4MHz	16QAM	20175	6	0	Low	18.65	18.27	0.38
Band4	1.4MHz	16QAM	20393	6	0	Low	20.2	20.22	0.02
Band4	3MHz	QPSK	19965	6	0	Low	18.45	18.55	0.10
Band4	3MHz	QPSK	19965	1	0	Low	20.64	20.39	0.25
Band4	3MHz	QPSK	20175	1	0	Low	18.61	18.35	0.26
Band4	3MHz	QPSK	20385	1	5	High	20.73	20.31	0.42
Band4	3MHz	QPSK	20385	6	0	High	18.64	18.34	0.30
Band4	3MHz	16QAM	20175	1	0	Low	19.95	19.55	0.40
Band4	3MHz	16QAM	20175	6	0	Low	18.64	18.44	0.20
Band4	3MHz	16QAM	20385	1	5	High	18.64	18.38	0.26
Band4	3MHz	16QAM	20385	6	0	High	19.93	19.31	0.62
Band4	5MHz	QPSK	19975	6	0	Low	19.4	19.27	0.13
Band4	5MHz	QPSK	20175	6	0	Low	20.98	20.41	0.57
Band4	5MHz	QPSK	20175	1	0	Low	19.7	19.43	0.27
Band4	5MHz	QPSK	20375	1	5	High	20.72	20.42	0.30
Band4	5MHz	QPSK	20375	3	3	High	20.78	20.61	0.17
Band4	5MHz	16QAM	19975	6	0	Low	19.4	19.33	0.07
Band4	5MHz	16QAM	20175	1	0	Low	20.62	20.24	0.38
Band4	5MHz	16QAM	20375	1	5	High	20.71	20.20	0.51
Band4	10MHz	QPSK	20175	5	0	Low	20.99	20.41	0.58
Band4	10MHz	QPSK	20350	1	5	High	20.85	20.70	0.15
Band4	10MHz	16QAM	20000	1	0	Low	20.15	20.45	0.30
Band4	10MHz	16QAM	20000	5	0	Low	20.34	20.23	0.11
Band4	10MHz	16QAM	20175	1	0	Low	20.75	20.59	0.16
Band4	10MHz	16QAM	20175	5	0	Low	20.63	20.48	0.15

Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

Report No.: I23W00017-eMTC-RF-FCC-Rev2

Band4	10MHz	16QAM	20350	5	1	High	20.43	20.68	0.25
Band4	10MHz	16QAM	20350	1	5	High	20.69	20.46	0.23
Band4	15MHz	QPSK	20025	6	0	Low	20.73	20.13	0.60
Band4	15MHz	QPSK	20025	1	0	Low	20.55	20.23	0.32
Band4	15MHz	QPSK	20175	1	0	Low	20.8	20.48	0.32
Band4	15MHz	QPSK	20325	1	5	High	20.8	20.68	0.12
Band4	15MHz	QPSK	20325	6	0	High	20.91	20.53	0.38
Band4	15MHz	16QAM	20025	6	0	Low	20.36	20.47	0.11
Band4	15MHz	16QAM	20025	1	0	Low	20.58	20.39	0.19
Band4	15MHz	16QAM	20175	1	0	Low	20.73	20.71	0.02
Band4	15MHz	16QAM	20175	6	0	Low	20.81	20.56	0.25
Band4	15MHz	16QAM	20325	6	0	High	20.8	20.31	0.49
Band4	15MHz	16QAM	20325	1	5	High	20.49	20.46	0.03
Band4	20MHz	QPSK	20050	1	0	Low	20.75	20.44	0.31
Band4	20MHz	QPSK	20050	6	0	Low	20.44	20.33	0.11
Band4	20MHz	QPSK	20175	6	0	Low	20.93	20.51	0.42
Band4	20MHz	QPSK	20175	1	0	Low	20.78	20.43	0.35
Band4	20MHz	QPSK	20300	1	5	High	20.8	20.55	0.25
Band4	20MHz	QPSK	20300	6	0	High	20.82	20.61	0.21
Band4	20MHz	16QAM	20050	1	0	Low	20.34	20.11	0.23
Band4	20MHz	16QAM	20050	6	0	Low	20.54	20.26	0.28
Band4	20MHz	16QAM	20175	1	0	Low	20.79	20.89	0.10
Band4	20MHz	16QAM	20175	6	0	Low	20.68	20.41	0.27
Band4	20MHz	16QAM	20300	1	5	High	20.8	20.68	0.12
Band4	20MHz	16QAM	20300	6	0	High	20.42	20.53	0.11

Chongqing Academy of Information and Communication Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

CAT-M B12 Conducted RF Power Output Results

Band	Bandwidth	Modulation	Channel	RB Size	RB	NBIndex	Original result (dBm)	Test result(dBm)	deviation(dB)= Original result-Test result
					Start				
Band12	1.4MHz	QPSK	23017	6	0	Low	19.36	19.17	0.19
Band12	1.4MHz	QPSK	23017	1	0	Low	21.6	21.29	0.31
Band12	1.4MHz	QPSK	23095	6	0	Low	19.35	19.00	0.35
Band12	1.4MHz	QPSK	23095	1	0	Low	21.43	20.83	0.60
Band12	1.4MHz	QPSK	23173	6	0	Low	19.28	18.87	0.41
Band12	1.4MHz	16QAM	23017	1	0	Low	20.08	19.95	0.13
Band12	1.4MHz	16QAM	23017	6	0	Low	19.37	19.36	0.01
Band12	1.4MHz	16QAM	23095	6	0	Low	19.35	19.92	0.57
Band12	1.4MHz	16QAM	23173	1	5	Low	19.85	19.74	0.11
Band12	1.4MHz	16QAM	23173	6	0	Low	19.28	18.77	0.51
Band12	3MHz	QPSK	23025	1	0	Low	21.58	21.29	0.29
Band12	3MHz	QPSK	23025	6	0	Low	19.45	19.10	0.35
Band12	3MHz	QPSK	23095	1	0	Low	21.41	21.13	0.28
Band12	3MHz	QPSK	23095	6	0	Low	19.29	18.89	0.40
Band12	3MHz	QPSK	23165	6	0	High	19.22	18.86	0.36
Band12	3MHz	QPSK	23165	1	5	High	21.38	20.8	0.58
Band12	3MHz	16QAM	23025	1	0	Low	20.75	20.09	0.66
Band12	3MHz	16QAM	23025	6	0	Low	19.45	19.14	0.31
Band12	3MHz	16QAM	23095	6	0	Low	19.28	18.93	0.35
Band12	3MHz	16QAM	23165	6	0	High	19.22	19.78	0.56
Band12	5MHz	QPSK	23035	1	0	Low	21.28	20.94	0.34
Band12	5MHz	QPSK	23095	6	0	Low	20.28	20.21	0.07
Band12	5MHz	QPSK	23155	3	3	High	21.1	20.87	0.23
Band12	5MHz	16QAM	23095	1	0	Low	20.84	20.97	0.13
Band12	5MHz	16QAM	23095	6	0	Low	20.28	20.01	0.27
Band12	5MHz	16QAM	23155	1	5	High	20.59	20.74	0.15
Band12	10MHz	QPSK	23060	5	0	Low	21.29	21.11	0.18
Band12	10MHz	QPSK	23095	5	0	Low	21.24	20.98	0.26
Band12	10MHz	QPSK	23130	1	5	High	20.99	20.84	0.15
Band12	10MHz	16QAM	23060	1	0	Low	20.91	21.12	0.21

Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

Report No.: I23W00017-eMTC-RF-FCC-Rev2

Band12	10MHz	16QAM	23060	5	0	Low	21.19	20.92	0.27
Band12	10MHz	16QAM	23095	1	0	Low	20.87	20.90	0.03
Band12	10MHz	16QAM	23095	5	0	Low	21.08	21.03	0.05
Band12	10MHz	16QAM	23130	1	5	High	20.77	20.92	0.15
Band12	10MHz	16QAM	23130	5	1	High	21.11	21.14	0.03

Chongqing Academy of Information and Communication Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

CAT-M B13 Conducted RF Power Output Results

Band	Bandwidth	Modulation	Channel	RB Size	RB	NBIndex	Original result(dBm)	Test result(dBm)	deviation(dB)= Original result-Test result
					Start				
Band13	5MHz	QPSK	23205	1	0	Low	20.98	20.89	0.09
Band13	5MHz	QPSK	23205	6	0	Low	20.3	20.19	0.11
Band13	5MHz	QPSK	23255	3	3	High	21.14	21.31	0.17
Band13	5MHz	16QAM	23205	1	0	Low	20.57	20.48	0.09
Band13	5MHz	16QAM	23230	1	0	Low	20.67	20.88	0.21
Band13	5MHz	16QAM	23230	6	0	Low	20.41	20.31	0.10
Band13	5MHz	16QAM	23255	1	5	High	20.86	21.34	0.48
Band13	5MHz	16QAM	23255	3	3	High	20.87	20.58	0.29
Band13	10MHz	QPSK	23230	5	0	Low	21.03	21.01	0.02
Band13	10MHz	QPSK	23230	1	5	High	21.35	21.01	0.34
Band13	10MHz	16QAM	23230	1	5	High	20.84	21.05	0.21
Band13	10MHz	16QAM	23230	5	1	High	21.14	21.44	0.30
Band13	10MHz	16QAM	23230	1	0	Low	20.53	21.05	0.52

Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

6.3. ERP and EIRP

According to Part 24.232(c), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to Part 27.50(c), portable stations (hand-held devices) in the 600 MHz uplink Band and the 698-746 MHz Band, and fixed and mobile stations in the 600 MHz uplink Band are limited to 3 watts ERP.

According to Part 27.50(d), fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz Band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz Bands are limited to 1 watt EIRP.

Conducted RF Power+Antenna Gain(dBi)=EIRP

Conducted RF Power+Antenna Gain(dBd)=ERP

Antenna Gain(dBd)= Antenna Gain(dBi)-2.15

Frequency Band	AntennaGain (dBi)	AntennaGain (dBd)
NB-IoT Band2/CAT-M Band2	3	N/A
NB-IoT Band4/CAT-M Band4	-0.5	N/A
NB-IoT Band12/CAT-M Band12	N/A	-9.65
NB-IoT Band13/CAT-M Band13	N/A	-4.65

Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

6.3.1 CAT-M Band 2 EIRP

Mode	Bandwidth	Channel	RB	Index	EIRP(Limits 33.0 dBm) Max EIRP: 24.40dBm	
					QPSK	16QAM
Band2	1.4MHz	18607	1#0	0	23.67	22.73
			6#0	0	21.61	21.61
		18900	1#0	0	24.40	22.98
			6#0	0	21.97	21.97
		19193	1#5	0	24.00	22.79
			6#0	0	21.82	21.82
	3MHz	18615	1#0	0	21.44	22.77
			6#0	0	23.66	21.45
		18900	1#0	0	24.03	23.37
			6#0	0	21.76	21.77
		19185	1#5	1	23.88	23.17
			6#0	1	21.67	21.67
	5MHz	18625	1#0	0	23.54	23.35
			6#0	0	22.50	22.50
		18900	1#0	0	24.08	23.79
			6#0	0	22.94	22.94
		19175	1#5	3	23.73	23.57
			3#3	3	23.88	23.75

Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

	10MHz	18650	1#0	0	23.50	23.3
			5#0	0	23.39	23.41
		18900	1#0	0	24.21	23.91
			5#0	0	23.99	23.90
		19150	1#5	7	23.75	23.57
			5#1	7	23.77	23.79
	15MHz	18675	1#0	0	23.50	23.30
			6#0	0	23.49	23.49
		18900	1#0	0	24.15	23.88
			6#0	0	23.96	23.97
		19125	1#5	0	23.75	23.58
			6#0	0	23.73	23.80
	20MHz	18700	1#0	0	23.50	23.30
			6#0	0	23.44	23.45
		18900	1#0	0	24.08	23.80
			6#0	0	23.92	23.92
		19100	1#5	0	23.78	23.61
			6#0	0	23.87	23.87

Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

6.3.2 CAT-M Band 4 EIRP

Mode	Bandwidth	Channel	RB	Index	EIRP(Limits 30.0 dBm) MAX EIRP:20.66dBm	
					QPSK	16QAM
Band4	1.4MHz	19957	1#0	0	20.39	19.76
			6#0	0	17.95	17.97
		20175	1#0	0	20.66	19.96
			6#0	0	18.13	18.15
		20393	1#5	0	20.42	19.70
			6#0	0	18.21	18.24
	3MHz	19965	1#0	0	20.14	19.26
			6#0	0	17.95	17.95
		20175	1#0	0	20.52	19.45
			6#0	0	18.11	18.14
		20385	1#5	1	20.23	19.43
			6#0	1	18.14	18.14
	5MHz	19975	1#0	0	20.26	19.76
			6#0	0	18.90	18.90
		20175	1#0	0	20.48	20.12
			6#0	0	19.20	19.20
		20375	1#5	3	20.28	19.91
			3#3	3	20.22	20.21

Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

	10MHz	20000	1#0	0	20.08	19.65
			5#0	0	19.98	19.84
		20175	1#0	0	20.49	20.25
			5#0	0	20.24	20.13
		20350	5#1	7	20.35	20.19
			1#5	7	20.33	19.93
	15MHz	20025	1#0	0	20.23	19.86
			6#0	0	20.05	20.08
		20175	1#0	0	20.61	20.23
			6#0	0	20.30	20.31
		20325	1#5	0	20.41	19.99
			6#0	0	20.30	20.30
	20MHz	20050	1#0	0	20.25	19.84
			6#0	0	19.94	20.04
		20175	1#0	0	20.43	20.18
			6#0	0	20.28	20.29
		20300	1#5	0	20.30	19.92
			6#0	0	20.32	20.30

Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

6.3.3 CAT-M Band 12 ERP

Mode	Bandwidth	Channel	RB	Index	ERP (Limits 34.8dBm) MAX ERP: 11.95 dBm	
					QPSK	16QAM
Band12	1.4MHz	23017	1#0	0	11.95	10.43
			6#0	0	9.71	9.72
		23095	1#0	0	11.78	10.34
			6#0	0	9.70	9.70
		23173	1#5	0	11.75	10.20
			6#0	0	9.63	9.63
	3MHz	23025	1#0	0	10.93	11.10
			6#0	0	9.80	9.80
		23095	1#0	0	11.76	11.04
			6#0	0	9.64	9.63
		23165	1#5	1	11.73	10.91
			6#0	1	9.57	9.57
	5MHz	23035	1#0	0	11.63	10.71
			6#0	0	10.71	11.24
		23095	1#0	0	11.68	11.19
			6#0	0	10.63	10.63
		23155	1#5	3	11.30	10.94
			3#3	3	11.45	11.31
	10MHz	23060	1#0	0	11.65	11.26
			5#0	0	11.64	11.54
		23095	1#0	0	11.61	11.22
			5#0	0	11.59	11.43
		23130	1#5	7	11.34	11.12
			5#1	7	11.66	11.46

6.3.4 CAT-M Band 13 ERP

Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

Mode	Bandwidth	Channel	RB	Index	ERP (Limits 34.8dBm) MAX ERP: 16.74dBm	
					QPSK	16QAM
Band13	5MHz	23205	1#0	0	16.33	15.92
			6#0	0	15.65	15.65
		23230	1#0	0	16.43	16.02
			6#0	3	15.76	15.76
		23255	3#3	3	16.49	16.22
			1#5	3	16.72	16.21
	10MHz	23230	5#0	0	16.38	16.16
			1#0	0	16.4	15.88
		23230	1#5	7	16.7	16.19
			5#1	7	16.74	16.49

Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

6.4. Radiated Spurious Emission

Specifications:	FCC Part 2.1051,24.238,2.1053, 27.53
DUT Serial Number:	IEMI:868070047049493
Test conditions:	Ambient Temperature:22.8-25.2°C Relative Humidity:55.0-59.0% Air pressure: 97.9-98.2kPa
Test Results:	Pass

Limit Level Construction:

According to Part 24.238 (a), i.e., Out of Band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB, so the limit level is: $P(\text{dBm}) - (43 + 10 \log(P)) \text{ dB} = -13\text{dBm}$.

According to Part 27.53(c):

On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;

According to Part 27.53(h):

Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 Bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

According to Part 27.53(g):

For operations in the 600 MHz Band and the 698-746 MHz Band, the power of any emission outside a licensee's frequency Band(s) of operation shall be attenuated below the transmitter power (P) within the licensed Band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution Bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz Bands immediately outside and adjacent to a licensee's frequency block, a resolution Bandwidth of at least 30 kHz may be employed.

Limits for Radiated spurious emissions(UE)	
Frequency range	Limit Level /Resolution Bandwidth
30 MHz to 20000 MHz	-13dBm/1MHz

Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

Measurement Uncertainty:

Item	Uncertainty
Expanded Uncertainty (30MHz-150MHz)	2.03 dB (k=2)
Expanded Uncertainty (150MHz-1GHz)	2.99dB (k=2)
Expanded Uncertainty (1GHz-3GHz)	2.92dB (k=2)
Expanded Uncertainty (3GHz-6GHz)	2.93dB (k=2)
Expanded Uncertainty (3GHz-20GHz)	2.69dB (k=2)


Test Setup:

The EUT was placed in an anechoic chamber. The Wireless Communications Test Set was used to set the TX channel and power level and modulate the TX signal with different bit patterns.


Test Method:

The measurement method is substitution method accordance with section 2.2.12 of ANSI/TIA-603-E: Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

(a) Connect the equipment as illustrated and measure the spurious emissions as the method as above. The distance from the device to the antenna is 3 m .

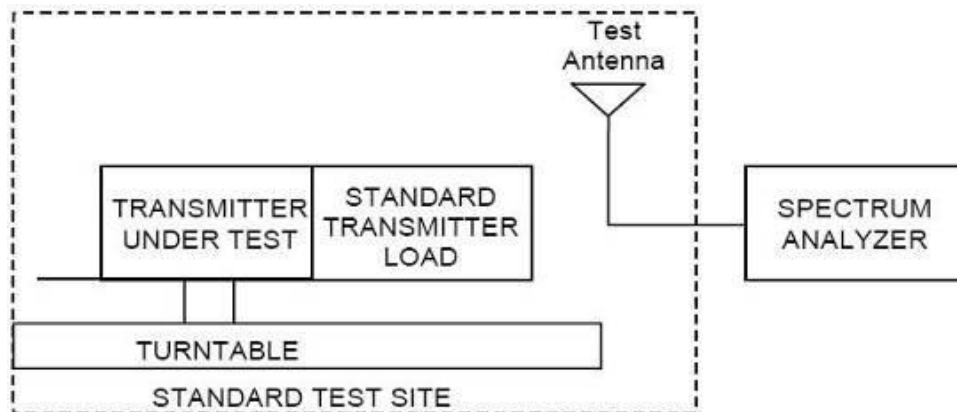

(b) Reconnect the equipment as illustrated.

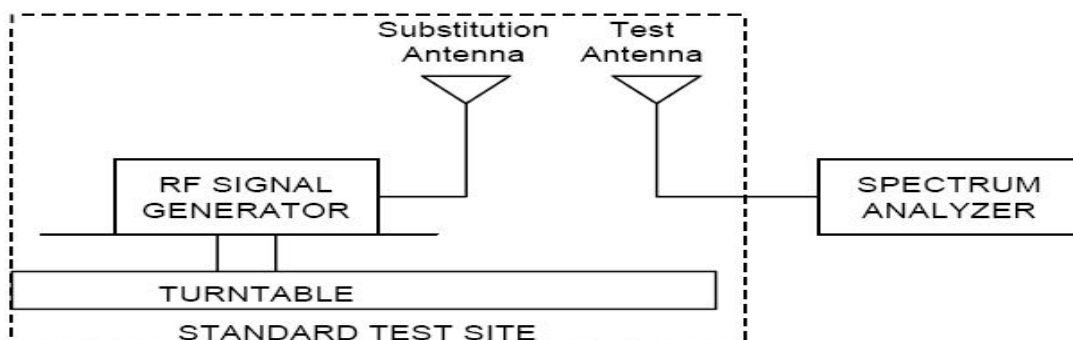

(c) Remove the transmitter and replace it with a substitution antenna. The center of the substitution antenna

Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

should be approximately at the same location as the center of the transmitter.

(d) Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a non-radiating cable. With the antennas at both ends horizontally polarized, and with the signal generator tuned to a particular spurious frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output.

(e) Repeat step d) with both antennas vertically polarized for each spurious frequency.

(f) Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps d) and e) by the power loss in the cable between the generator and the antenna, and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna by the following formula:

$$P_d(\text{dBm}) = P_g(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

where:

P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

Test frequency: 30MHz-20GHz

All modes were tested,only the worst case was reported.

CAT-M B2 Radiated Spurious Emission Results

Test Data (1.4M bandwidth QPSK Mode CH18607)

Frequency [MHz]	Generator output power(Pg) [dBm]	Cable loss [dB]	Antenna Gain [dB]	Spurious Emission Power (Pd) [dBm]	Antenna Polarization [H/V]
128.198000	-74.41	0.26	3.67	-71.0	V
209.154000	-76.53	0.34	5.77	-71.1	H
301.210000	-78.55	0.42	6.27	-72.7	H
3702.000000	-64.82	1.60	9.02	-57.4	V
7066.500000	-68.42	2.45	11.37	-59.5	V
10185.000000	-65.86	3.41	13.07	-56.2	V

CAT-M B2 Radiated Spurious Emission Results

Test Data (1.4M bandwidth QPSK Mode CH18900)

Frequency [MHz]	Generator output power(Pg) [dBm]	Cable loss [dB]	Antenna Gain [dB]	Spurious Emission Power (Pd) [dBm]	Antenna Polarization [H/V]
128.272000	-77.81	0.26	3.67	-74.4	V
206.120000	-72.33	0.34	5.77	-66.9	H
433.920000	-78.1	0.50	6.40	-72.2	H
4321.200000	-70.66	1.80	8.76	-63.7	V
7020.600000	-68.32	2.45	11.37	-59.4	V
10033.800000	-65.91	3.11	12.82	-56.2	V

CAT-M B2 Radiated Spurious Emission Results

Test Data (1.4M bandwidth QPSK Mode CH19193)

Frequency [MHz]	Generator output power(Pg) [dBm]	Cable loss [dB]	Antenna Gain [dB]	Spurious Emission Power (Pd) [dBm]	Antenna Polarization [H/V]

Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

128.198000	-78.11	0.26	3.67	-74.7	V
210.042000	-77.53	0.34	5.77	-72.1	H
289.888000	-79.17	0.41	6.08	-73.5	V
4087.800000	-71.44	1.73	9.27	-63.9	V
7063.800000	-68.02	2.45	11.37	-59.1	V
10023.000000	-66.01	3.11	12.82	-56.3	V

CAT-M B4 Radiated Spurious Emission Results
Test Data (1.4M bandwidth QPSK Mode CH19957)

Frequency [MHz]	Generator output power(Pg) [dBm]	Cable loss [dB]	Antenna Gain [dB]	Spurious Emission Power (Pd) [dBm]	Antenna Polarization [H/V]
128.272000	-76.71	0.26	3.67	-73.3	V
210.634000	-81.93	0.34	5.77	-76.5	H
291.294000	-81.07	0.41	6.08	-75.4	H
3508.200000	-60.36	1.57	9.03	-52.9	V
7043.550000	-68.22	2.45	11.37	-59.3	V
10171.500000	-65.96	3.41	13.07	-56.3	V

CAT-M B4 Radiated Spurious Emission Results
Test Data (1.4M bandwidth QPSK Mode CH20175)

Frequency [MHz]	Generator output power(Pg) [dBm]	Cable loss [dB]	Antenna Gain [dB]	Spurious Emission Power (Pd) [dBm]	Antenna Polarization [H/V]
128.272000	-77.11	0.26	3.67	-73.7	V
210.116000	-79.43	0.34	5.77	-74.0	V
287.150000	-81.27	0.41	6.08	-75.6	H
3421.200000	-57.38	1.55	9.03	-49.9	V
5602.200000	-71.43	2.34	10.57	-63.2	V
7073.250000	-68.32	2.45	11.37	-59.4	V

Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

CAT-M B4 Radiated Spurious Emission Results
Test Data (1.4M bandwidth QPSK Mode CH20393)

Frequency [MHz]	Generator output power(Pg) [dBm]	Cable loss [dB]	Antenna Gain [dB]	Spurious Emission Power (Pd) [dBm]	Antenna Polarization [H/V]
125.386000	-79.31	0.26	3.07	-76.5	V
209.080000	-82.43	0.34	5.77	-77.0	H
384.830000	-84.97	0.47	7.34	-78.1	V
3465.000000	-62.88	1.55	9.03	-55.4	V
7071.900000	-67.72	2.45	11.37	-58.8	V
11788.800000	-64.41	3.53	13.94	-54.0	V

CAT-M B12 Radiated Spurious Emission Results
Test Data (1.4M bandwidth QPSK Mode CH23017)

Frequency [MHz]	Generator output power(Pg) [dBm]	Cable loss [dB]	Antenna Gain [dB]	Spurious Emission Power (Pd) [dBm]	Antenna Polarization [H/V]
92.308000	-80.99	0.22	-0.59	-81.8	V
210.042000	-82.23	0.34	5.77	-76.8	H
440.000000	-84.19	0.51	6.60	-78.1	V
2099.200000	-54.72	1.05	7.57	-48.2	H
7062.450000	-67.72	2.45	11.37	-58.8	V
10014.900000	-66.41	3.11	12.82	-56.7	V

CAT-M B12 Radiated Spurious Emission Results
Test Data (1.4M bandwidth QPSK Mode CH23095)

Frequency [MHz]	Generator output power(Pg) [dBm]	Cable loss [dB]	Antenna Gain [dB]	Spurious Emission Power (Pd) [dBm]	Antenna Polarization [H/V]
128.346000	-80.41	0.26	3.67	-77.0	V

Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

207.304000	-81.73	0.34	5.77	-76.3	V
410.960000	-83.14	0.49	6.93	-76.7	V
2121.600000	-65.29	1.19	8.08	-58.4	V
3537.600000	-69.65	1.58	9.03	-62.2	V
8128.950000	-67.23	2.63	11.76	-58.1	V

CAT-M B12 Radiated Spurious Emission Results
Test Data (1.4M bandwidth QPSK Mode CH23173)

Frequency [MHz]	Generator output power(Pg) [dBm]	Cable loss [dB]	Antenna Gain [dB]	Spurious Emission Power (Pd) [dBm]	Antenna Polarization [H/V]
125.460000	-84.91	0.26	3.07	-82.1	V
211.966000	-84.33	0.34	5.77	-78.9	H
446.640000	-81.99	0.51	6.60	-75.9	V
3623.400000	-72.61	1.59	9.2	-65.0	V
7055.700000	-67.52	2.55	11.37	-58.7	V
10066.200000	-65.93	3.29	12.82	-56.4	V

CAT-M B13 Radiated Spurious Emission Results
Test Data (10M bandwidth QPSK Mode CH23230)

Frequency [MHz]	Generator output power(Pg) [dBm]	Cable loss [dB]	Antenna Gain [dB]	Spurious Emission Power (Pd) [dBm]	Antenna Polarization [H/V]
128.272000	-80.51	0.26	3.67	-77.1	V
205.898000	-74.43	0.34	5.77	-69.0	H
440.000000	-82.79	0.51	6.60	-76.7	V
1557.000000	-67.45	0.99	6.24	-62.2	V
2335.000000	-54.91	1.24	6.35	-49.8	H
8110.050000	-67.04	2.72	11.76	-58.0	V

Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

Frequency [MHz]	Generator output power(Pg) [dBm]	Cable loss [dB]	Antenna Gain [dB]	Spurious Emission Power (Pd) [dBm]	Antenna Polarization [H/V]
1608.600000	-70.54	1.0	6.24	-65.3	V

The max radiated power of 1559-1610 MHz is -65.3 dBm < -40dBm (-70dBW) .

There is no signal that bandwidth is less than 700 Hz bandwidth



Report No.: I23W00017-eMTC-RF-FCC-Rev2

ANNEX A Deviations from Prescribed Test Methods

No deviation from Prescribed Test Methods.

Chongqing Academy of Information and Communication Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777



Report No.: I23W00017-eMTC-RF-FCC-Rev2

ANNEX B Difference Statement

--

END OF REPORT

Chongqing Academy of Information and Communication Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777