

#01_WLAN2.4GHz_802.11b 1Mbps_Edge2_0cm_Ch11;Battery 1

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1.056

Medium: MSL_2450_141013 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.982$ S/m; $\epsilon_r = 53.803$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(7.36, 7.36, 7.36); Calibrated: 2014/5/22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2014/5/19
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1127
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Configuration/Ch11/Area Scan (51x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.394 W/kg


Configuration/Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.403 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.524 W/kg

SAR(1 g) = 0.225 W/kg; SAR(10 g) = 0.103 W/kg

Maximum value of SAR (measured) = 0.348 W/kg

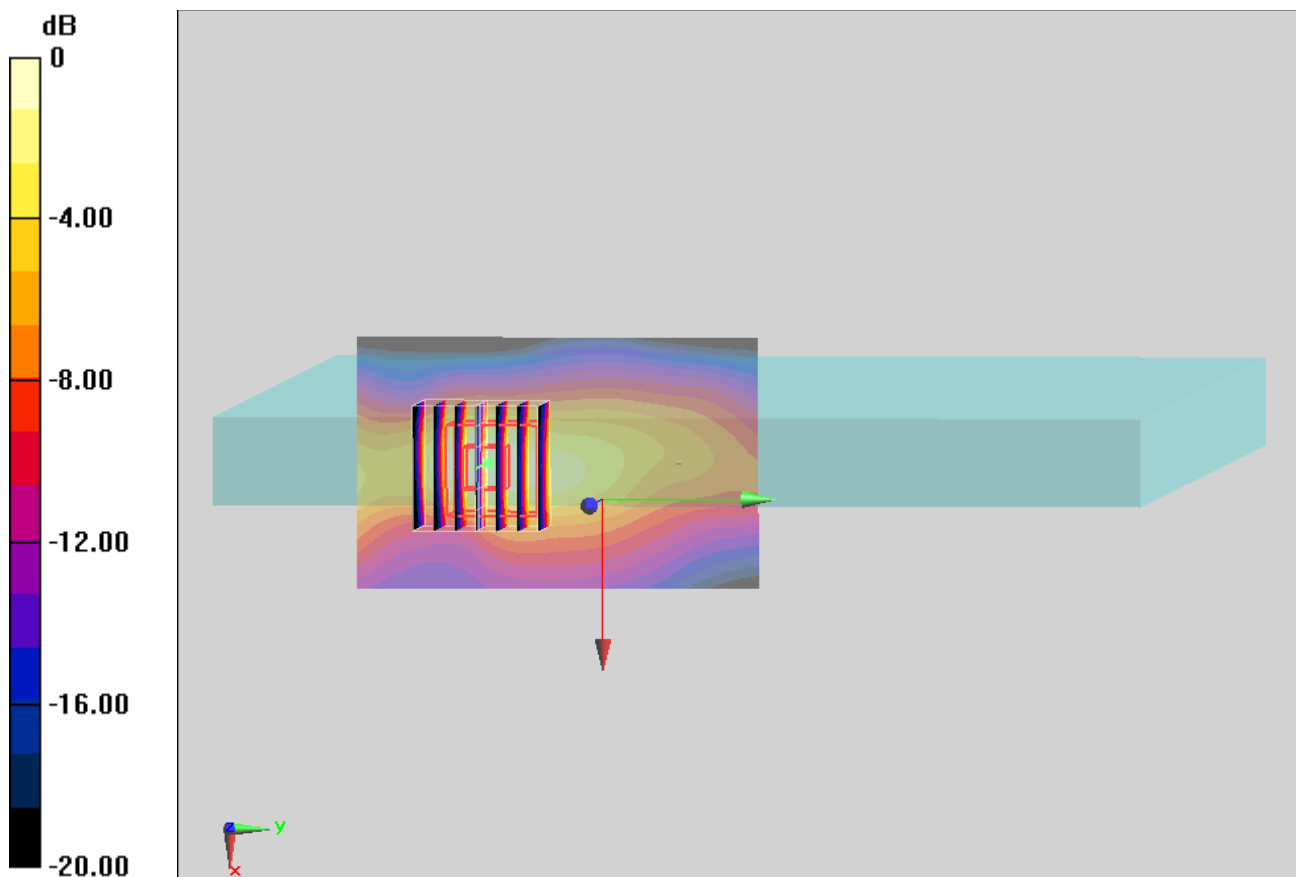

0 dB = 0.348 W/kg = -4.58 dBW/kg