

Radiated disturbance at (30 ~ 1000) MHz _Measurement data			
Test configuration mode	4	EUT Operation mode	4
Test voltage (V)	Battery	Test Frequency (Hz)	-


RADIATED EMISSION

Date 2020-09-26

Order No. DTNC2008-06866, 2008-06867
Power Supply Battery
Temp/Humi 22 °C 47 % R.H.
Test Condition Front Camera Mode

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m)
MARGIN: 3 dB

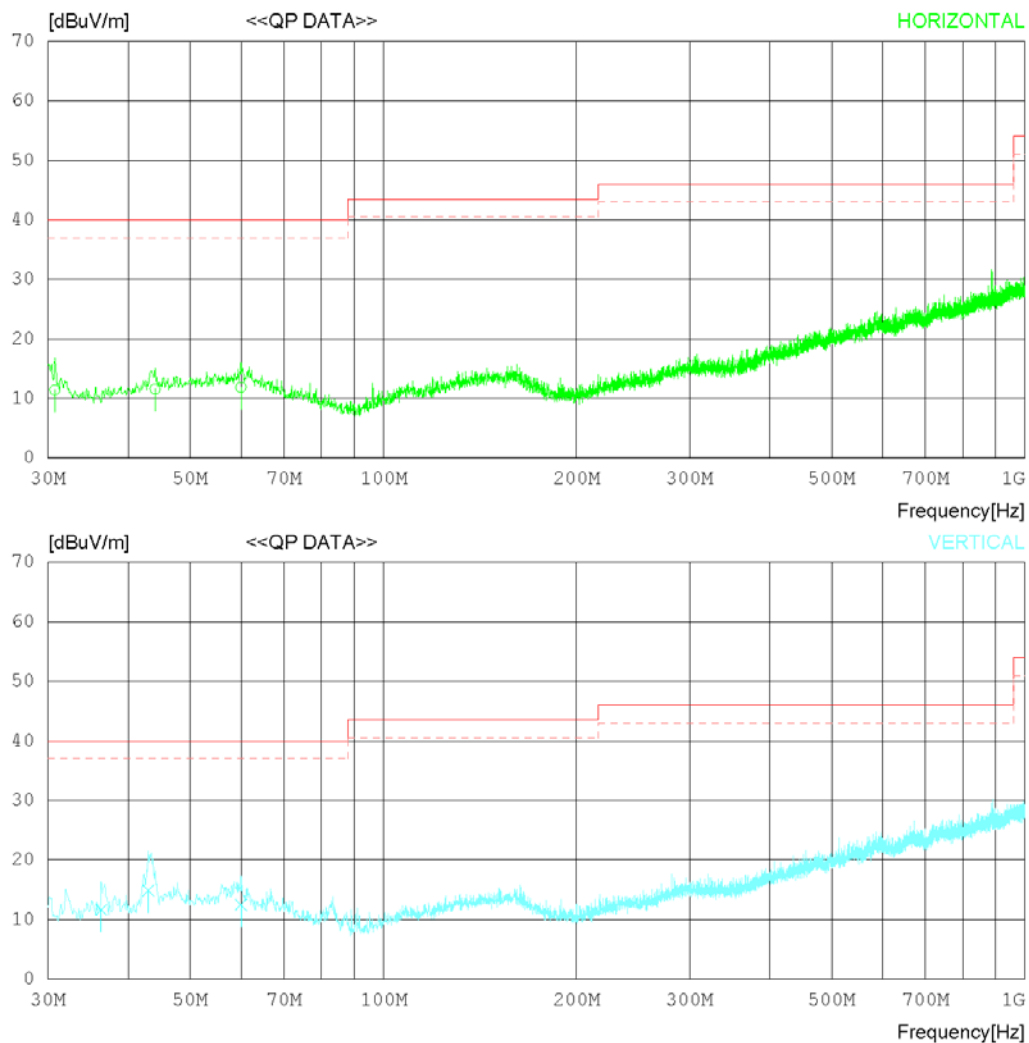

RADIATED EMISSION

Date 2020-09-26

Order No. DTNC2008-06866, 2008-06867
Power Supply Battery
Temp/Humi 22 °C 47 %R.H.
Test Condition Front Camera Mode

Memo

LIMIT : FCC Part15 Subpart B Class B (3m)
MARGIN: 3 dB

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	30.728	21.60	15.70	0.64	26.52	11.42	40.00	28.58	209	0
2	44.065	19.90	17.61	0.69	26.59	11.61	40.00	28.39	101	22
3	59.949	19.80	17.90	0.84	26.66	11.88	40.00	28.12	105	353
----- Vertical -----										
4	36.305	21.50	16.03	0.66	26.55	11.64	40.00	28.36	100	0
5	42.974	23.20	17.60	0.69	26.58	14.91	40.00	25.09	102	166
6	59.949	20.40	17.90	0.84	26.66	12.48	40.00	27.52	308	0

Radiated disturbance at (1 ~ 6) GHz _Peak Measurement data			
Test configuration mode	4	EUT Operation mode	4
Test voltage (V)	Battery	Test Frequency (Hz)	-


RADIATED EMISSION

Date 2020-09-26

Order No. DTNC2008-06866, 2008-06867
Power Supply Battery
Temp/Humi 22 °C 47 % R.H.
Test Condition Front Camera Mode

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m) - GHz(Peak)
FCC Part15 Subpart.B Class B (3m) - GHz(Average)

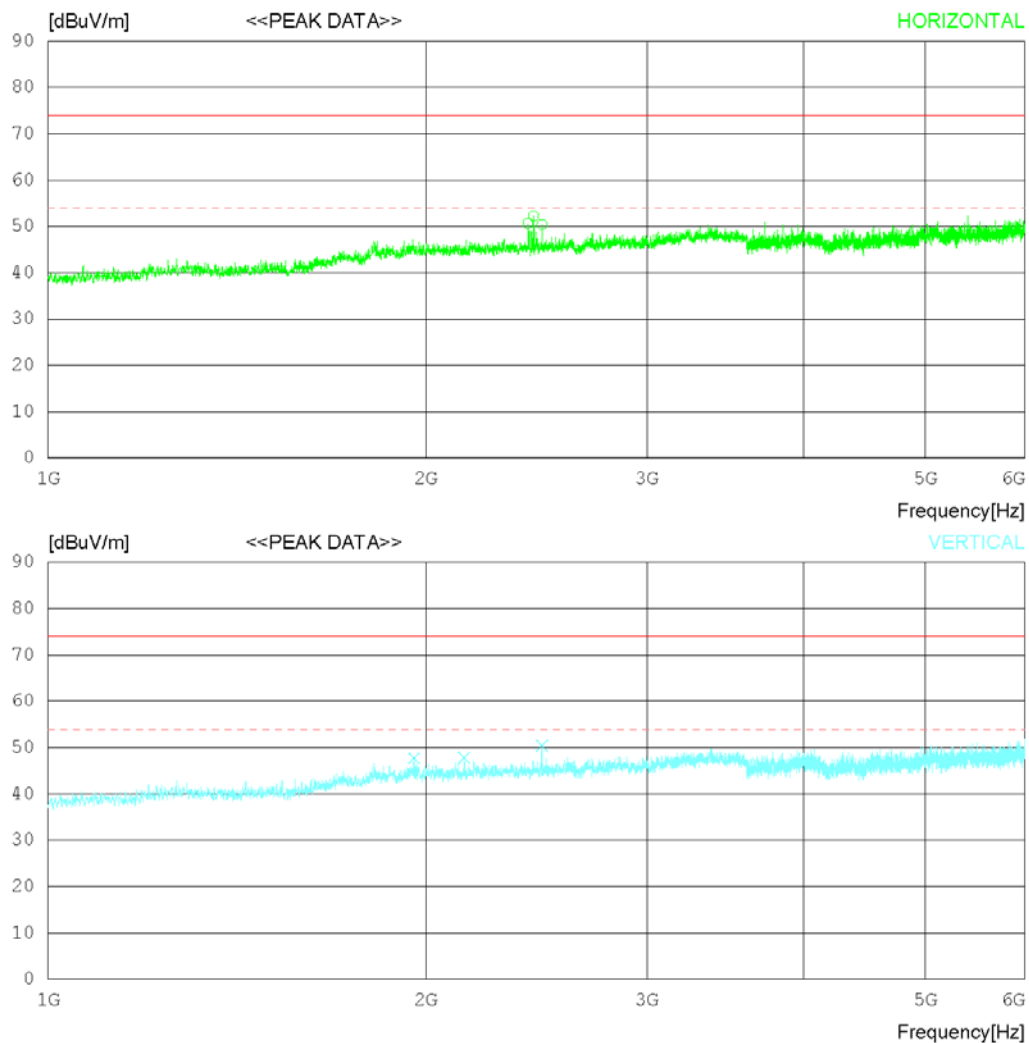

RADIATED EMISSION

Date 2020-09-26

Order No.	DTNC2008-06866, 2008-06867
Power Supply	Battery
Temp/Humi	22 °C 47 %R.H.
Test Condition	Front Camera Mode

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m) - GHz(Peak)
FCC Part15 Subpart.B Class B (3m) - GHz(Average)

No.	FREQ [MHz]	READING PEAK [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	2411.250	46.50	32.20	7.08	35.14	50.64	74.0	23.36	206	55
2	2436.875	48.10	32.20	7.12	35.14	52.28	74.0	21.72	215	1
3	2474.375	46.20	32.20	7.18	35.15	50.43	74.0	23.57	302	358
----- Vertical -----										
4	1956.250	44.40	31.70	6.76	35.15	47.71	74.0	26.29	109	143
5	2145.625	44.40	31.71	6.82	35.11	47.82	74.0	26.18	213	42
6	2473.750	46.20	32.20	7.18	35.15	50.43	74.0	23.57	102	103

Radiated disturbance at (1 ~ 6) GHz _ Average Measurement data			
Test configuration mode	4	EUT Operation mode	4
Test voltage (V)	Battery	Test Frequency (Hz)	-


RADIATED EMISSION

Date 2020-09-26

Order No. DTNC2008-06866, 2008-06867
Power Supply Battery
Temp/Humi 22 'C 47 %.R.H.
Test Condition Front Camera Mode

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m) - GHz(Peak)
FCC Part15 Subpart.B Class B (3m) - GHz(Average)

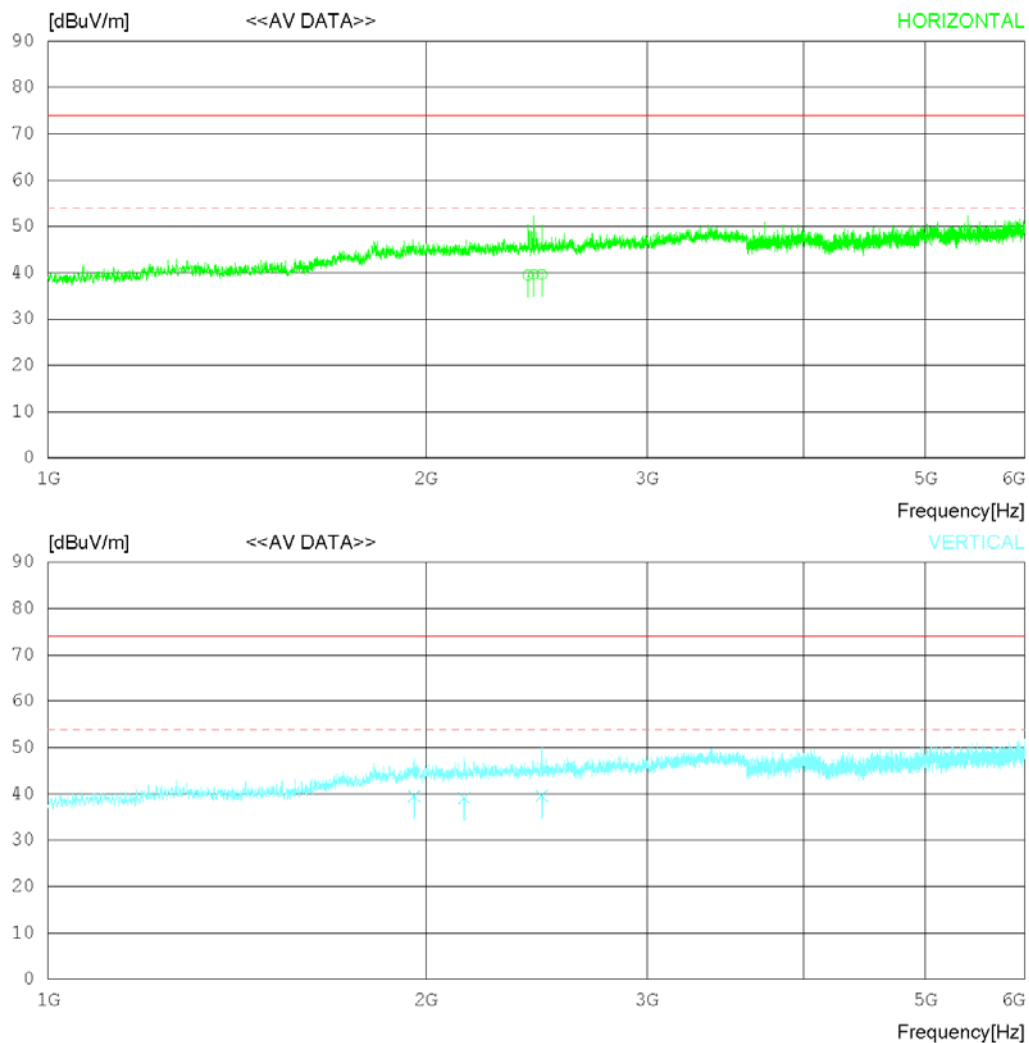

RADIATED EMISSION

Date 2020-09-26

Order No. DTNC2008-06866, 2008-06867
Power Supply Battery
Temp/Humi 22 °C 47 %R.H.
Test Condition Front Camera Mode

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m) - GHz(Peak)
FCC Part15 Subpart.B Class B (3m) - GHz(Average)

No.	FREQ [MHz]	READING CAV [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	2411.221	35.40	32.20	7.08	35.14	39.54	54.00	14.46	206	66
2	2436.884	35.50	32.20	7.12	35.14	39.68	54.00	14.32	214	0
3	2474.327	35.40	32.20	7.18	35.15	39.63	54.00	14.37	303	352
----- Vertical -----										
4	1956.212	36.20	31.70	6.76	35.15	39.51	54.00	14.49	108	141
5	2145.607	35.60	31.71	6.82	35.11	39.02	54.00	14.98	214	55
6	2473.763	35.40	32.20	7.18	35.15	39.63	54.00	14.37	103	136

Radiated disturbance at (6 ~ 18) GHz _Peak Measurement data			
Test configuration mode	4	EUT Operation mode	4
Test voltage (V)	Battery	Test Frequency (Hz)	-


RADIATED EMISSION

Date 2020-09-26

Order No. DTNC2008-06866, 2008-06867
Power Supply Battery
Temp/Humi 22 °C 47 % R.H.
Test Condition Front Camera Mode

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m) - GHz(Peak)
FCC Part15 Subpart.B Class B (3m) - GHz(Average)

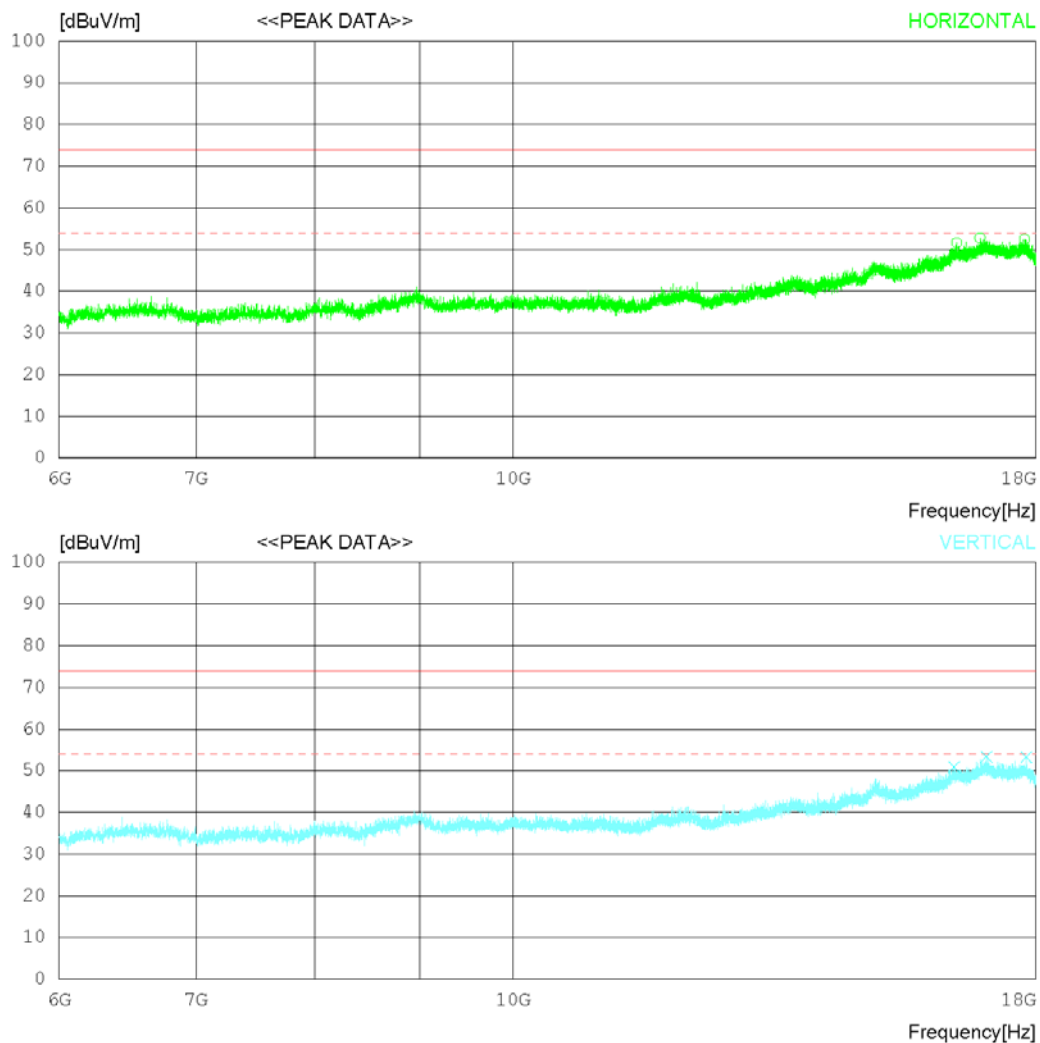

RADIATED EMISSION

Date 2020-09-26

Order No.	DTNC2008-06866, 2008-06867
Power Supply	Battery
Temp/Humi	22 °C 47 %R.H.
Test Condition	Front Camera Mode

Memo

LIMIT : FCC Part15 Subpart B Class B (3m) - GHz(Peak)
FCC Part15 Subpart B Class B (3m) - GHz(Average)

No.	FREQ [MHz]	READING PEAK [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	16464.750	28.90	36.95	21.90	36.12	51.63	74.0	22.37	203	200
2	16902.750	28.70	37.44	22.98	36.34	52.78	74.0	21.22	304	358
3	17771.250	29.00	38.14	22.77	37.43	52.48	74.0	21.52	214	273
----- Vertical -----										
4	16422.750	28.20	36.90	21.95	36.15	50.90	74.0	23.1	103	140
5	17029.500	28.60	37.57	23.58	36.44	53.31	74.0	20.69	201	196
6	17810.250	29.80	38.17	22.75	37.50	53.22	74.0	20.78	101	215

Radiated disturbance at (6 ~ 18) GHz _ Average Measurement data			
Test configuration mode	4	EUT Operation mode	4
Test voltage (V)	Battery	Test Frequency (Hz)	-


RADIATED EMISSION

Date 2020-09-26

Order No. DTNC2008-06866, 2008-06867
Power Supply Battery
Temp/Humi 22 °C 47 % R.H.
Test Condition Front Camera Mode

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m) - GHz(Peak)
FCC Part15 Subpart.B Class B (3m) - GHz(Average)

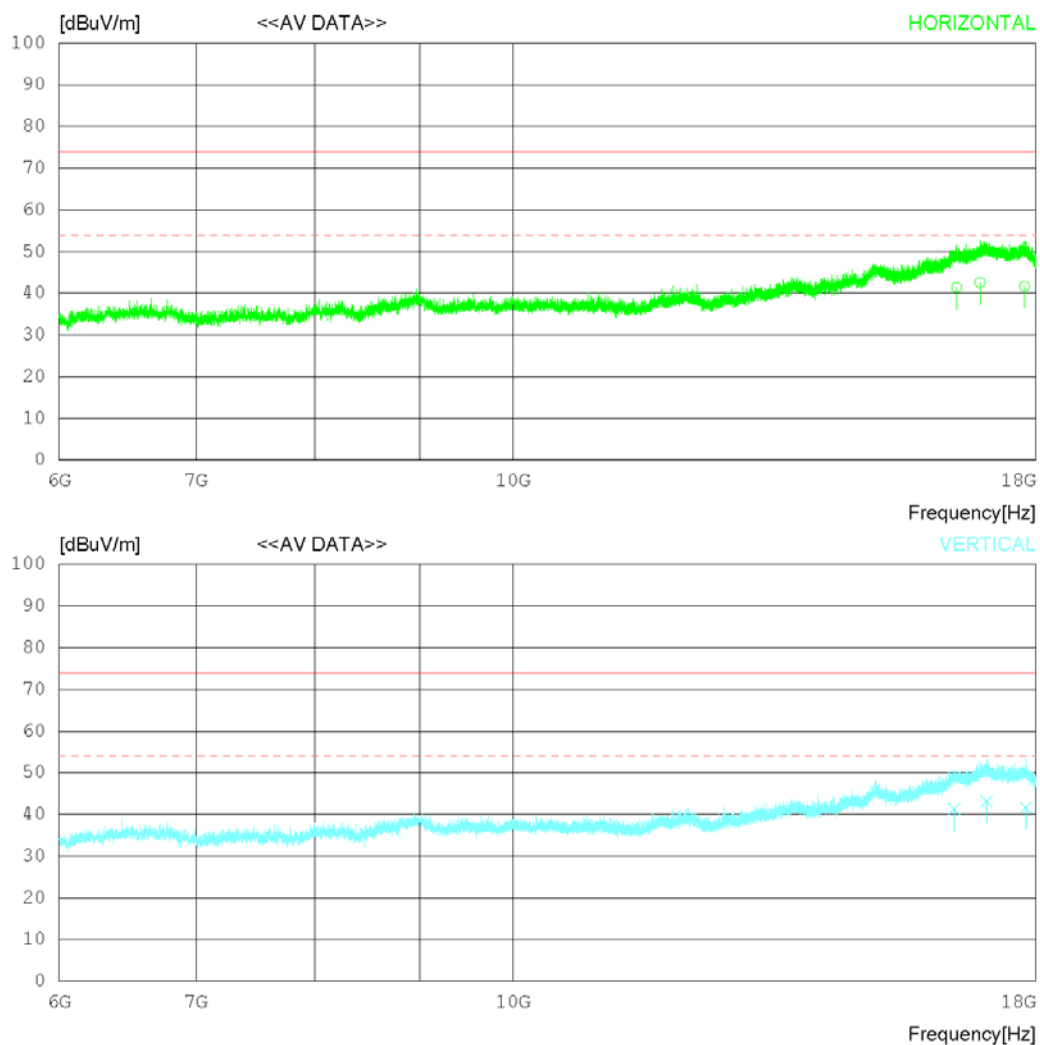

RADIATED EMISSION

Date 2020-09-26

Order No.	DTNC2008-06866, 2008-06867
Power Supply	Battery
Temp/Humi	22 °C 47 %R.H.
Test Condition	Front Camera Mode

Memo

LIMIT : FCC Part15 Subpart B Class B (3m) - GHz(Peak)
FCC Part15 Subpart B Class B (3m) - GHz(Average)

No.	FREQ [MHz]	READING CAV [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	16464.770	18.70	36.95	21.90	36.12	41.43	54.00	12.57	205	211
2	16902.790	18.50	37.44	22.98	36.34	42.58	54.00	11.42	303	354
3	17771.220	18.20	38.14	22.77	37.43	41.68	54.00	12.32	216	281
----- Vertical -----										
4	16422.770	18.60	36.90	21.95	36.15	41.30	54.00	12.70	105	155
5	17029.440	18.50	37.57	23.58	36.44	43.21	54.00	10.79	202	203
6	17810.190	18.20	38.17	22.75	37.50	41.62	54.00	12.38	100	214

Radiated disturbance at (18 ~ 40) GHz _Peak Measurement data			
Test configuration mode	4	EUT Operation mode	4
Test voltage (V)	Battery	Test Frequency (Hz)	-


RADIATED EMISSION

Date 2020-09-26

Order No. DTNC2008-06866, 2008-06867
Power Supply Battery
Temp/Humi 22 'C 47 %.R.H.
Test Condition Front Camera Mode

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m) - GHz(Peak)
FCC Part15 Subpart.B Class B (3m) - GHz(Average)

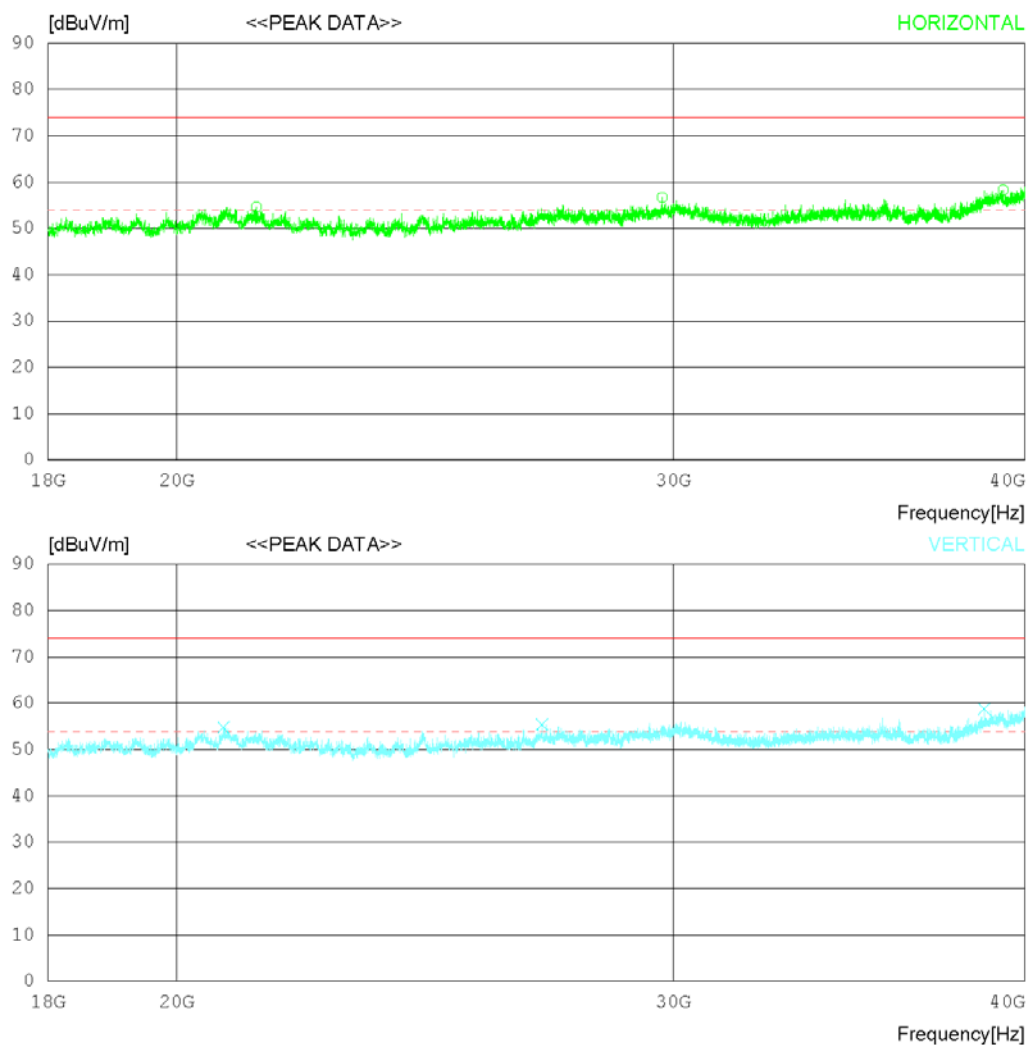

RADIATED EMISSION

Date 2020-09-26

Order No. DTNC2008-06866, 2008-06867
Power Supply Battery
Temp/Humi 22 °C 47 %R.H.
Test Condition Front Camera Mode

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m) - GHz(Peak)
FCC Part15 Subpart.B Class B (3m) - GHz(Average)

No.	FREQ [MHz]	READING PEAK [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	21344.000	42.10	45.46	20.66	53.60	54.62	74.0	19.38	106	289
2	29737.000	39.10	47.54	22.35	52.29	56.70	74.0	17.3	100	280
3	39296.000	36.80	48.00	25.73	52.24	58.29	74.0	15.71	102	1
----- Vertical -----										
4	20780.250	42.10	45.58	20.45	53.35	54.78	74.0	19.22	205	358
5	26956.750	41.20	45.90	21.51	53.19	55.42	74.0	18.58	209	358
6	38696.500	38.20	47.19	25.62	52.27	58.74	74.0	15.26	301	358

Radiated disturbance at (18 ~ 40) GHz _ Average Measurement data			
Test configuration mode	4	EUT Operation mode	4
Test voltage (V)	Battery	Test Frequency (Hz)	-


RADIATED EMISSION

Date 2020-09-26

Order No. DTNC2008-06866, 2008-06867
Power Supply Battery
Temp/Humi 22 'C 47 %.R.H.
Test Condition Front Camera Mode

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m) - GHz(Peak)
FCC Part15 Subpart.B Class B (3m) - GHz(Average)

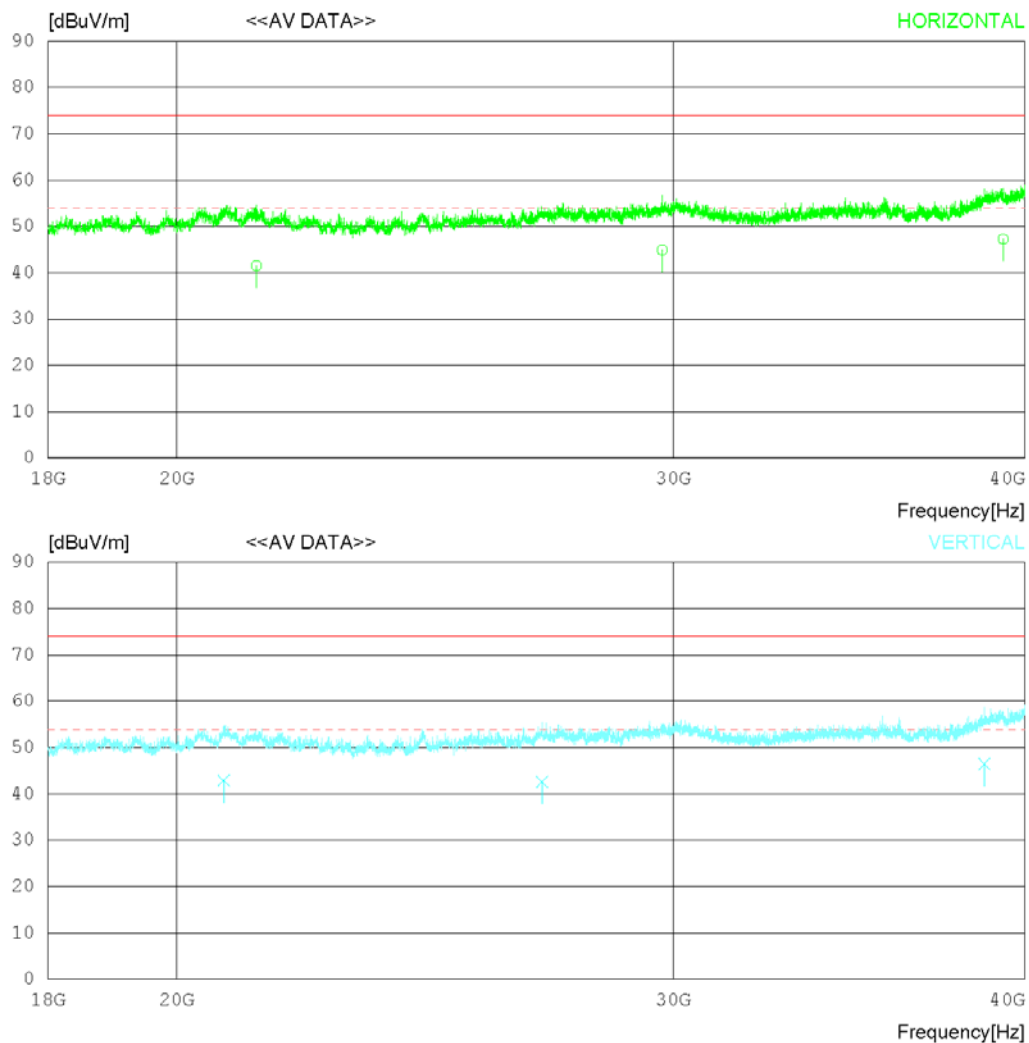

RADIATED EMISSION

Date 2020-09-26

Order No.	DTNC2008-06866, 2008-06867
Power Supply	Battery
Temp/Humi	22 °C 47 %R.H.
Test Condition	Front Camera Mode

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m) - GHz(Peak)
FCC Part15 Subpart.B Class B (3m) - GHz(Average)

No.	FREQ [MHz]	READING CAV [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	21344.160	29.00	45.46	20.66	53.60	41.52	54.00	12.48	100	293
2	29737.140	27.30	47.54	22.35	52.29	44.90	54.00	9.10	100	299
3	39296.210	25.80	48.00	25.73	52.24	47.29	54.00	6.71	100	0
----- Vertical -----										
4	20780.280	30.20	45.58	20.45	53.35	42.88	54.00	11.12	203	348
5	26956.720	28.40	45.90	21.51	53.19	42.62	54.00	11.38	211	354
6	38696.560	25.90	47.19	25.62	52.27	46.44	54.00	7.56	307	352

Radiated disturbance at (30 ~ 1000) MHz _Measurement data			
Test configuration mode	5	EUT Operation mode	5
Test voltage (V)	Battery	Test Frequency (Hz)	-


RADIATED EMISSION

Date 2020-09-26

Order No. DTNC2008-06866, 2008-06867
Power Supply Battery
Temp/Humi 22 °C 47 % R.H.
Test Condition Rear Camera Mode

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m)
MARGIN: 3 dB

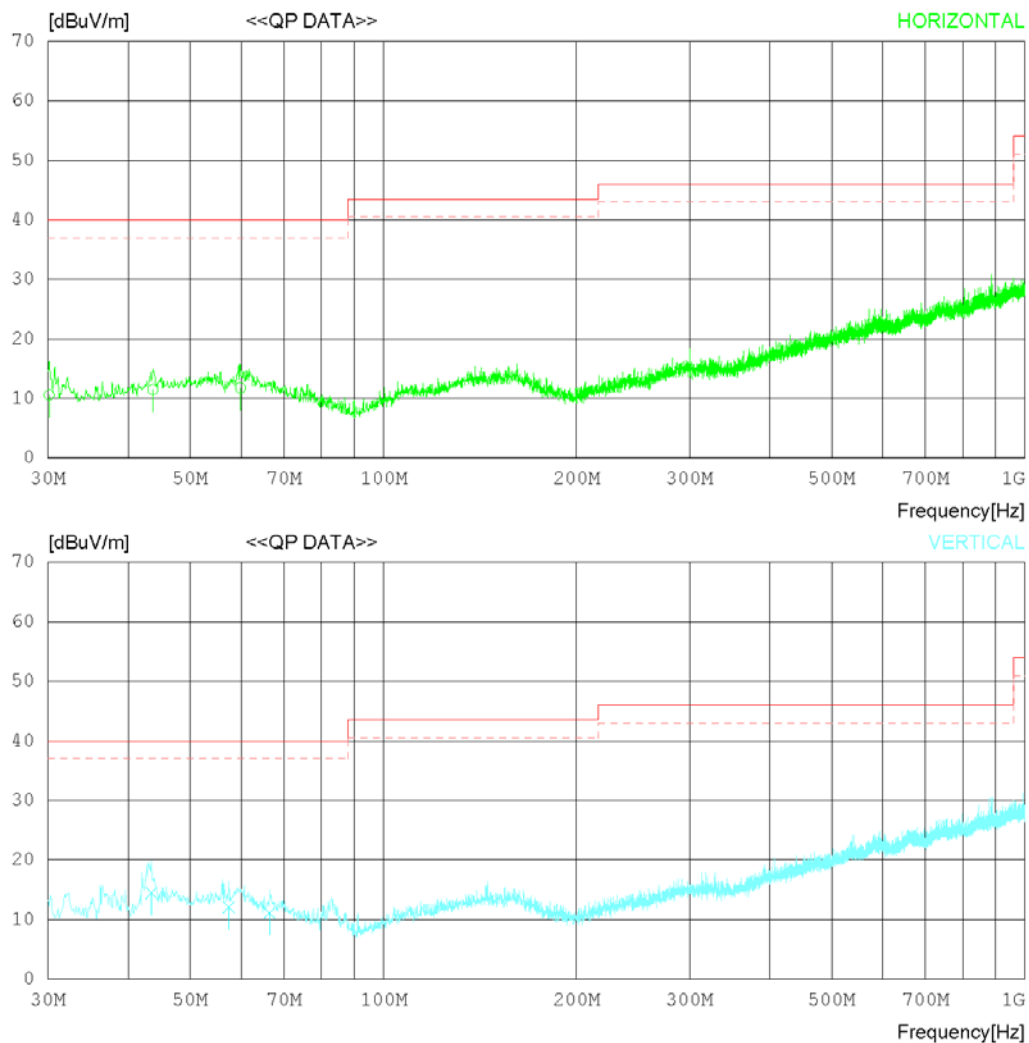

RADIATED EMISSION

Date 2020-09-26

Order No.	DTNC2008-06866, 2008-06867
Power Supply	Battery
Temp/Humi	22 °C 47 %R.H.
Test Condition	Rear Camera Mode

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m)
MARGIN: 3 dB

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	30.121	20.10	16.37	0.63	26.52	10.58	40.00	29.42	209	0
2	43.701	19.80	17.60	0.70	26.59	11.51	40.00	28.49	105	354
3	59.828	19.70	17.90	0.84	26.66	11.78	40.00	28.22	101	355
----- Vertical -----										
4	43.459	22.80	17.60	0.69	26.59	14.50	40.00	25.50	100	0
5	57.403	20.10	17.82	0.81	26.65	12.08	40.00	27.92	196	356
6	66.496	19.80	17.15	0.87	26.69	11.13	40.00	28.87	202	352

Radiated disturbance at (1 ~ 6) GHz _Peak Measurement data			
Test configuration mode	5	EUT Operation mode	5
Test voltage (V)	Battery	Test Frequency (Hz)	-


RADIATED EMISSION

Date 2020-09-26

Order No. DTNC2008-06866, 2008-06867
Power Supply Battery
Temp/Humi 22 °C 47 % R.H.
Test Condition Rear Camera Mode

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m) - GHz(Peak)
FCC Part15 Subpart.B Class B (3m) - GHz(Average)

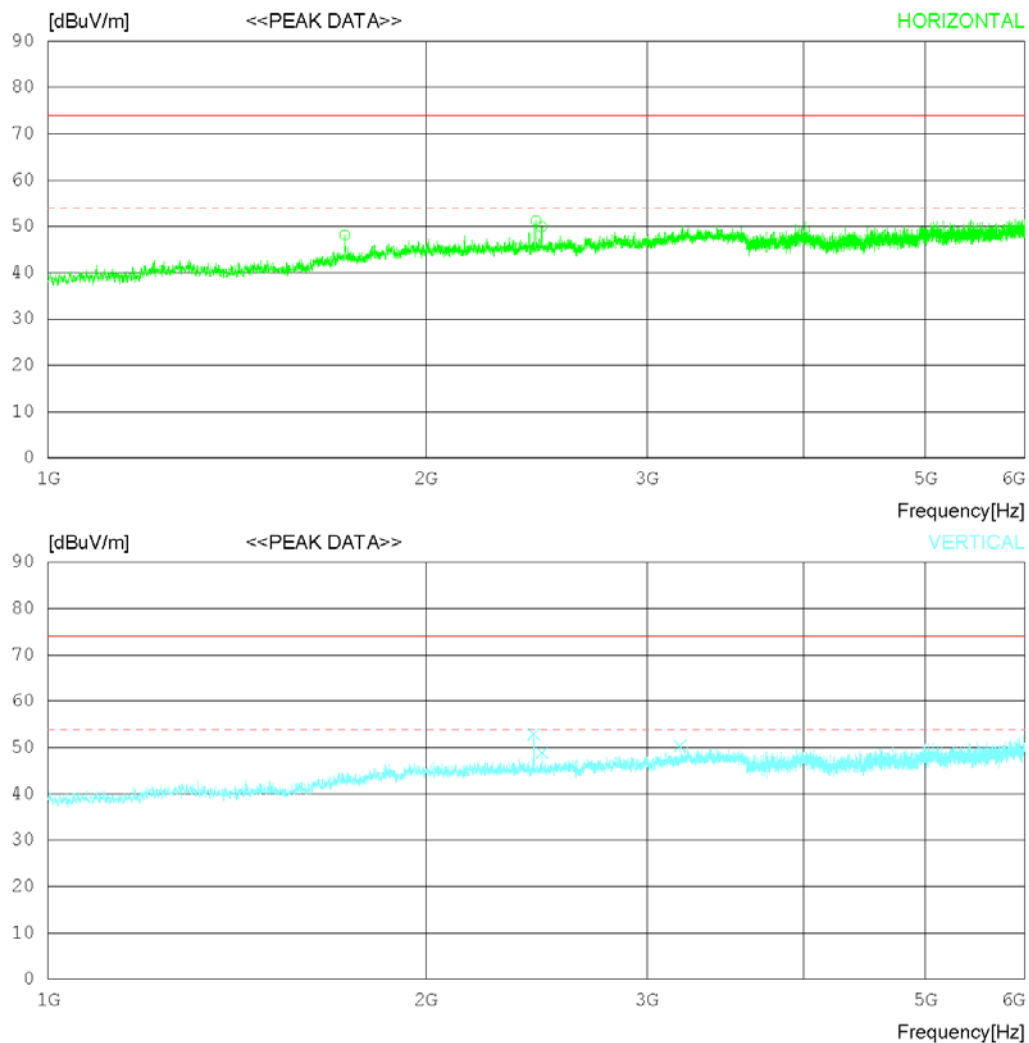

RADIATED EMISSION

Date 2020-09-26

Order No.	DTNC2008-06866, 2008-06867
Power Supply	Battery
Temp/Humi	22 °C 47 %R.H.
Test Condition	Rear Camera Mode

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m) - GHz(Peak)
FCC Part15 Subpart.B Class B (3m) - GHz(Average)

No.	FREQ [MHz]	READING PEAK [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	1723.750	46.80	29.65	7.05	35.40	48.10	74.0	25.9	104	358
2	2446.875	47.00	32.20	7.14	35.14	51.20	74.0	22.8	215	353
3	2473.125	45.70	32.20	7.18	35.15	49.93	74.0	24.07	209	358
----- Vertical -----										
4	2436.875	48.70	32.20	7.12	35.14	52.88	74.0	21.12	103	26
5	2474.375	44.70	32.20	7.18	35.15	48.93	74.0	25.07	104	225
6	3188.750	43.80	33.18	8.48	35.11	50.35	74.0	23.65	209	26

Radiated disturbance at (1 ~ 6) GHz _ Average Measurement data			
Test configuration mode	5	EUT Operation mode	5
Test voltage (V)	Battery	Test Frequency (Hz)	-


RADIATED EMISSION

Date 2020-09-26

Order No. DTNC2008-06866, 2008-06867
Power Supply Battery
Temp/Humi 22 'C 47 %.R.H.
Test Condition Rear Camera Mode

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m) - GHz(Peak)
FCC Part15 Subpart.B Class B (3m) - GHz(Average)

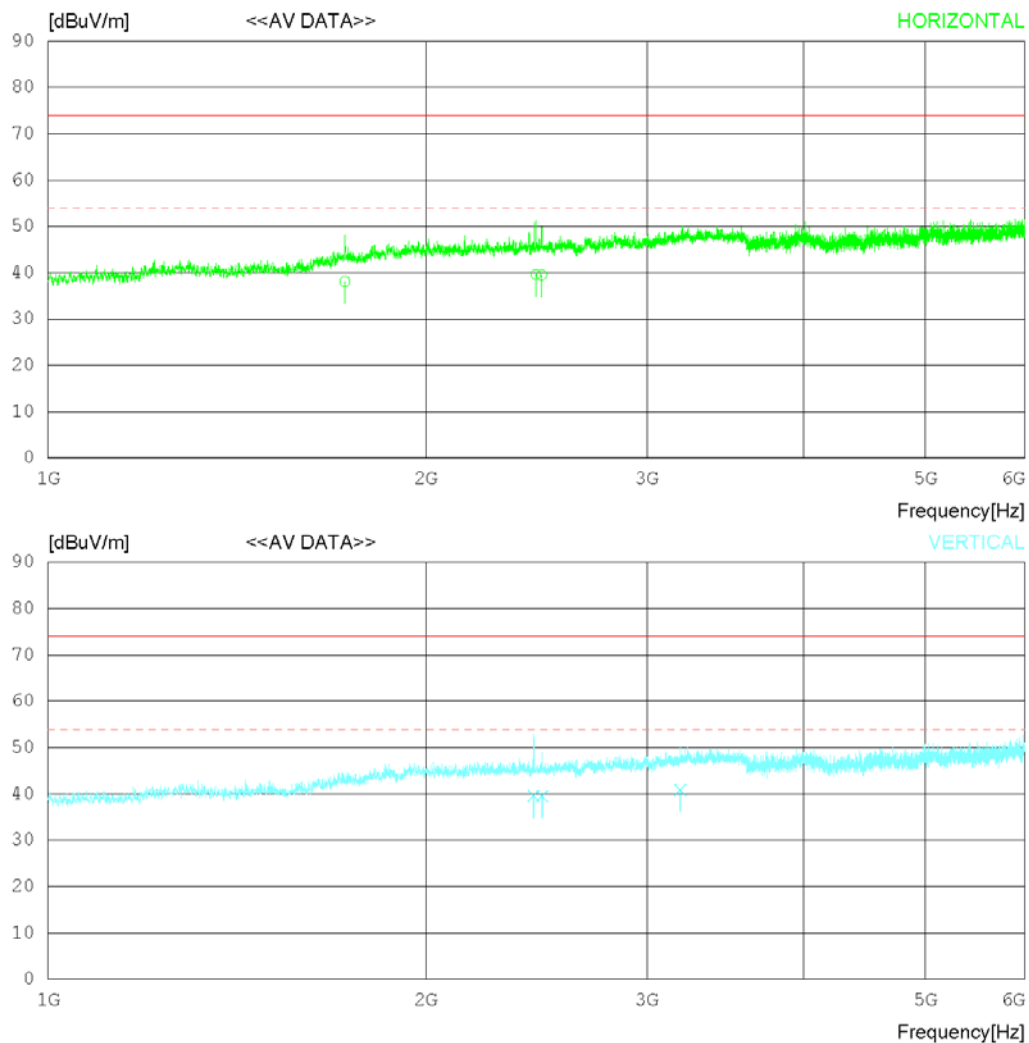

RADIATED EMISSION

Date 2020-09-26

Order No.	DTNC2008-06866, 2008-06867
Power Supply	Battery
Temp/Humi	22 °C 47 %R.H.
Test Condition	Rear Camera Mode

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m) - GHz(Peak)
FCC Part15 Subpart.B Class B (3m) - GHz(Average)

No.	FREQ [MHz]	READING CAV [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	1723.776	36.80	29.65	7.05	35.40	38.10	54.00	15.90	105	352
2	2446.884	35.40	32.20	7.14	35.14	39.60	54.00	14.40	213	351
3	2473.235	35.30	32.20	7.18	35.15	39.53	54.00	14.47	208	356
----- Vertical -----										
4	2436.884	35.40	32.20	7.12	35.14	39.58	54.00	14.42	101	17
5	2474.322	35.30	32.20	7.18	35.15	39.53	54.00	14.47	105	231
6	3188.768	34.30	33.18	8.48	35.11	40.85	54.00	13.15	206	14

Radiated disturbance at (6 ~ 18) GHz _Peak Measurement data			
Test configuration mode	5	EUT Operation mode	5
Test voltage (V)	Battery	Test Frequency (Hz)	-


RADIATED EMISSION

Date 2020-09-26

Order No. DTNC2008-06866, 2008-06867
Power Supply Battery
Temp/Humi 22 °C 47 % R.H.
Test Condition Rear Camera Mode

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m) - GHz(Peak)
FCC Part15 Subpart.B Class B (3m) - GHz(Average)

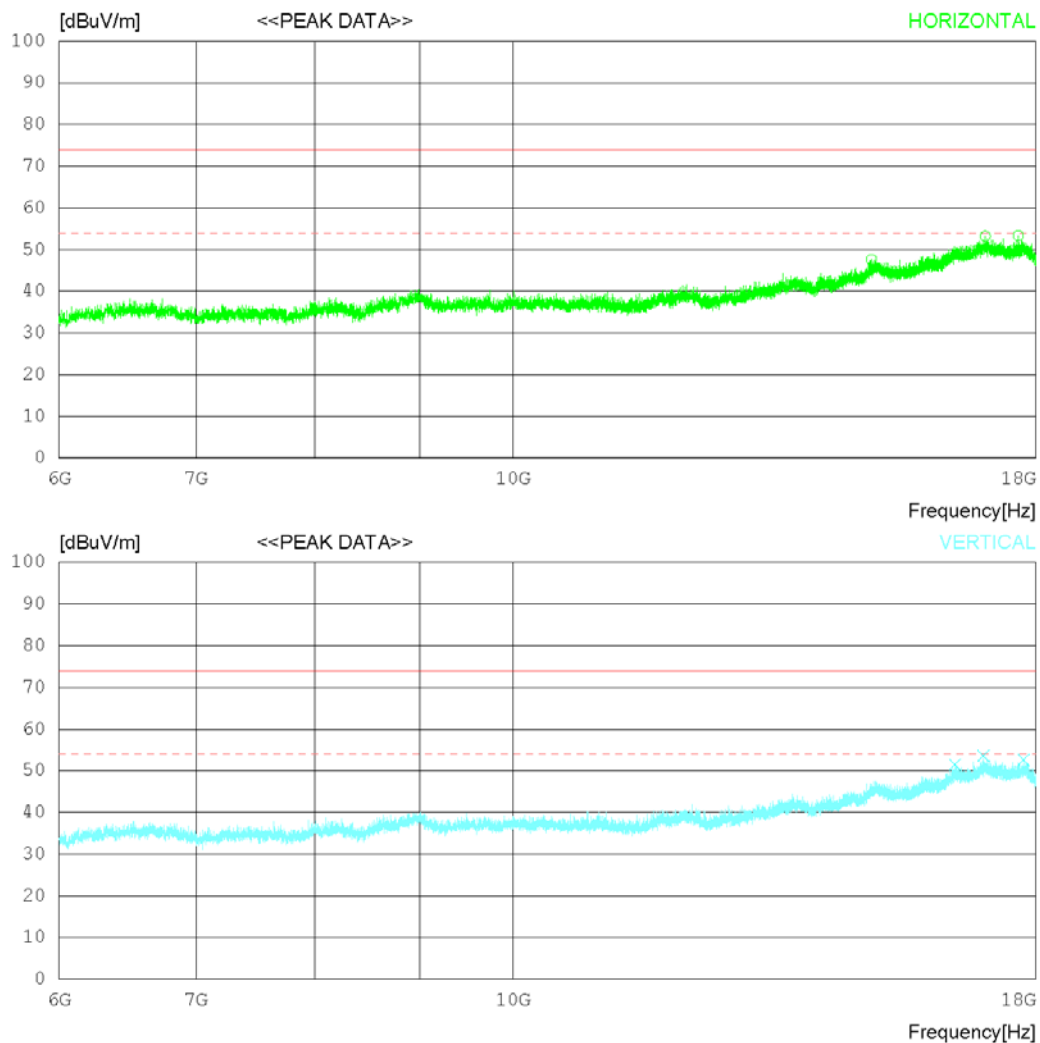

RADIATED EMISSION

Date 2020-09-26

Order No.	DTNC2008-06866, 2008-06867
Power Supply	Battery
Temp/Humi	22 °C 47 %R.H.
Test Condition	Rear Camera Mode

Memo

LIMIT : FCC Part15 Subpart B Class B (3m) - GHz(Peak)
FCC Part15 Subpart B Class B (3m) - GHz(Average)

No.	FREQ [MHz]	READING PEAK [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	14958.000	28.90	35.39	20.36	37.05	47.60	74.0	26.4	313	358
2	17004.000	28.30	37.55	23.77	36.40	53.22	74.0	20.78	206	60
3	17645.250	30.00	38.05	22.55	37.23	53.37	74.0	20.63	308	358
----- Vertical -----										
4	16431.000	28.80	36.91	21.94	36.14	51.51	74.0	22.49	201	358
5	16971.000	28.90	37.52	23.57	36.38	53.61	74.0	20.39	204	72
6	17755.500	29.10	38.13	22.73	37.41	52.55	74.0	21.45	100	0

Radiated disturbance at (6 ~ 18) GHz _ Average Measurement data			
Test configuration mode	5	EUT Operation mode	5
Test voltage (V)	Battery	Test Frequency (Hz)	-


RADIATED EMISSION

Date 2020-09-26

Order No. DTNC2008-06866, 2008-06867
Power Supply Battery
Temp/Humi 22 °C 47 % R.H.
Test Condition Rear Camera Mode

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m) - GHz(Peak)
FCC Part15 Subpart.B Class B (3m) - GHz(Average)

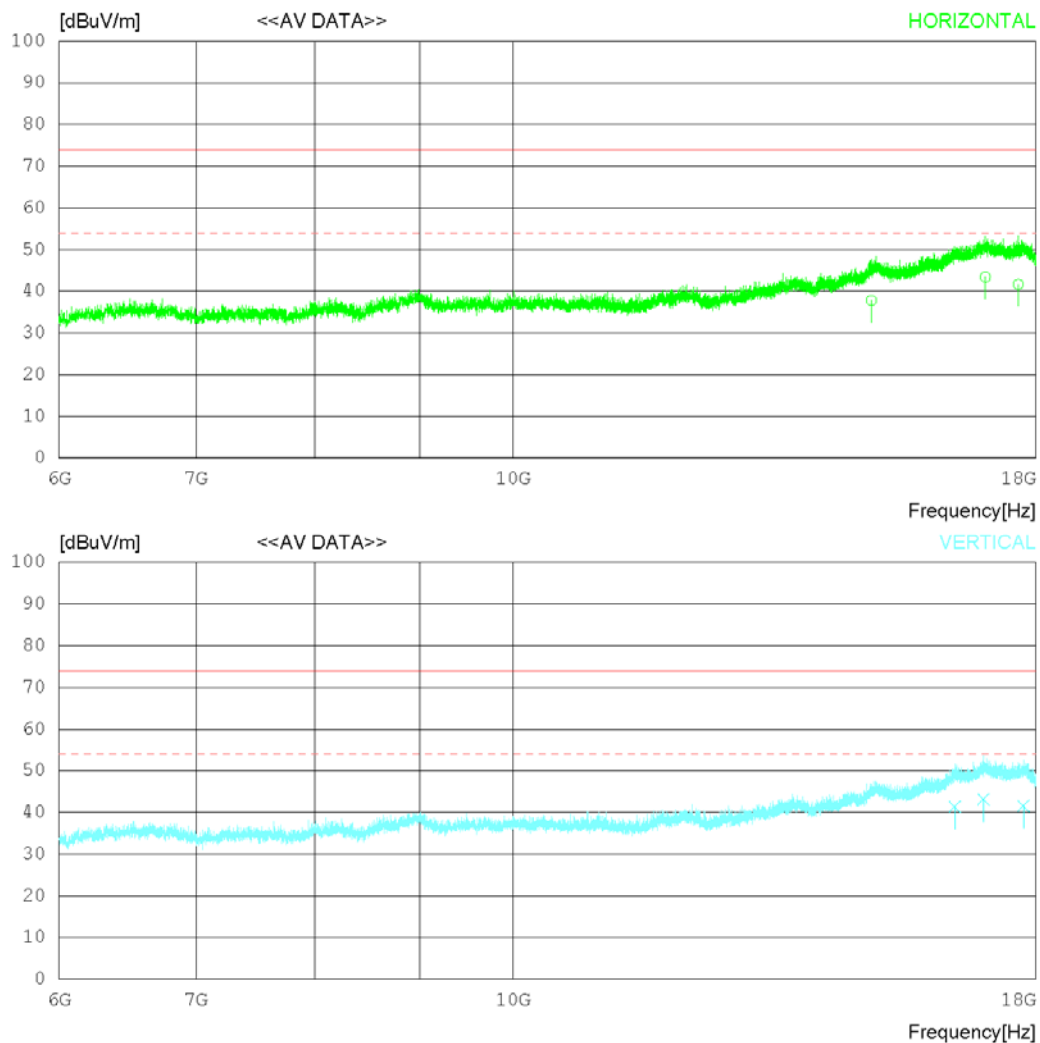

RADIATED EMISSION

Date 2020-09-26

Order No.	DTNC2008-06866, 2008-06867
Power Supply	Battery
Temp/Humi	22 °C 47 %R.H.
Test Condition	Rear Camera Mode

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m) - GHz(Peak)
FCC Part15 Subpart.B Class B (3m) - GHz(Average)

No.	FREQ [MHz]	READING CAV [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	14958.170	19.10	35.39	20.36	37.05	37.80	54.00	16.20	312	352
2	17004.160	18.50	37.55	23.77	36.40	43.42	54.00	10.58	205	77
3	17645.230	18.30	38.05	22.55	37.23	41.67	54.00	12.33	306	355
----- Vertical -----										
4	16431.140	18.60	36.91	21.94	36.14	41.31	54.00	12.69	202	351
5	16971.130	18.40	37.52	23.57	36.38	43.11	54.00	10.89	201	88
6	17755.540	18.10	38.13	22.73	37.41	41.55	54.00	12.45	101	0

Radiated disturbance at (18 ~ 40) GHz _Peak Measurement data			
Test configuration mode	5	EUT Operation mode	5
Test voltage (V)	Battery	Test Frequency (Hz)	-


RADIATED EMISSION

Date 2020-09-26

Order No. DTNC2008-06866, 2008-06867
Power Supply Battery
Temp/Humi 22 'C 47 %.R.H.
Test Condition Rear Camera Mode

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m) - GHz(Peak)
FCC Part15 Subpart.B Class B (3m) - GHz(Average)

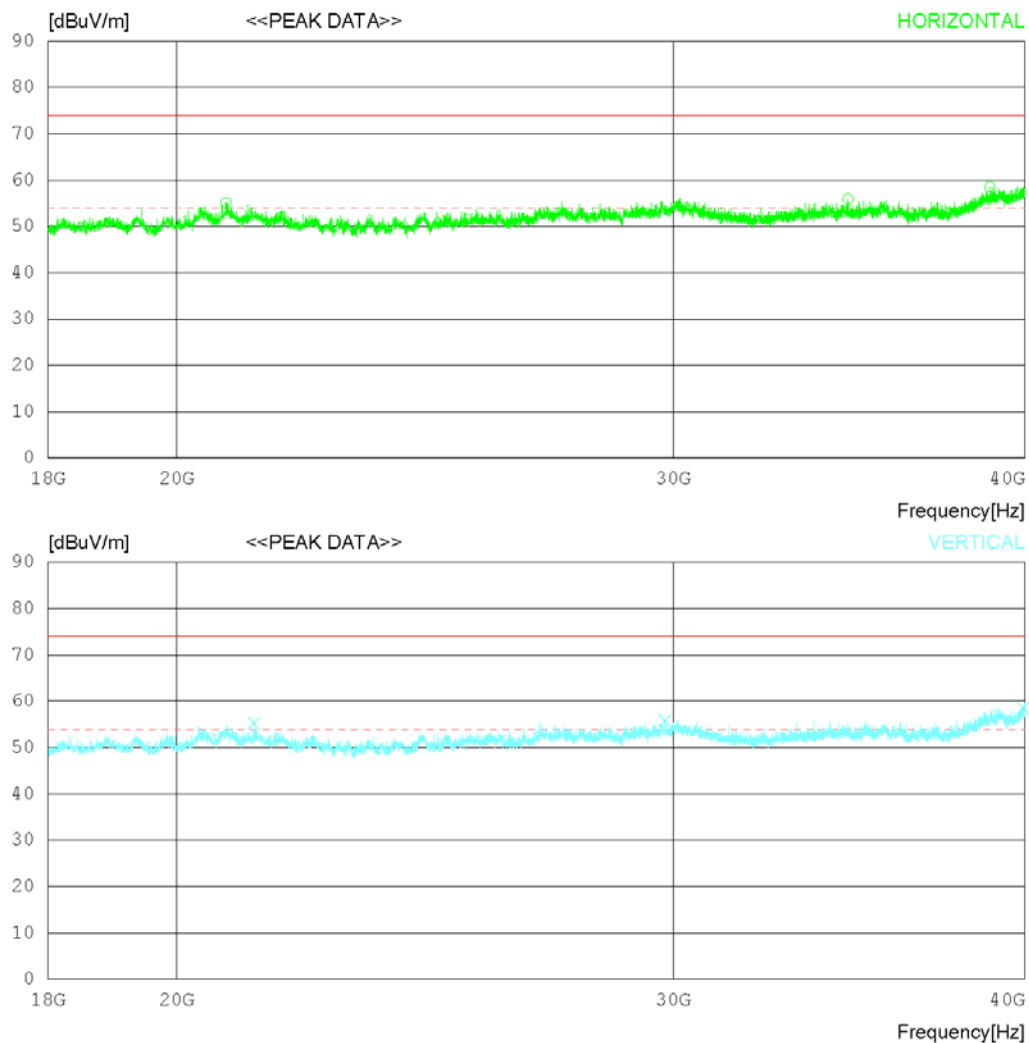

RADIATED EMISSION

Date 2020-09-26

Order No.	DTNC2008-06866, 2008-06867
Power Supply	Battery
Temp/Humi	22 °C 47 %R.H.
Test Condition	Rear Camera Mode

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m) - GHz(Peak)
FCC Part15 Subpart.B Class B (3m) - GHz(Average)

No.	FREQ [MHz]	READING PEAK [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	20816.000	42.40	45.60	20.51	53.37	55.14	74.0	18.86	205	109
2	34615.500	37.60	47.20	24.68	53.55	55.93	74.0	18.07	399	151
3	38875.250	37.50	47.45	25.89	52.26	58.58	74.0	15.42	103	0
----- Vertical -----										
4	21300.000	42.70	45.50	20.68	53.59	55.29	74.0	18.71	206	358
5	29797.500	38.10	47.60	22.34	52.27	55.77	74.0	18.23	201	310
6	39950.500	36.60	49.20	24.95	52.20	58.55	74.0	15.45	195	358

Radiated disturbance at (18 ~ 40) GHz _ Average Measurement data			
Test configuration mode	5	EUT Operation mode	5
Test voltage (V)	Battery	Test Frequency (Hz)	-


RADIATED EMISSION

Date 2020-09-26

Order No. DTNC2008-06866, 2008-06867
Power Supply Battery
Temp/Humi 22 'C 47 %.R.H.
Test Condition Rear Camera Mode

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m) - GHz(Peak)
FCC Part15 Subpart.B Class B (3m) - GHz(Average)

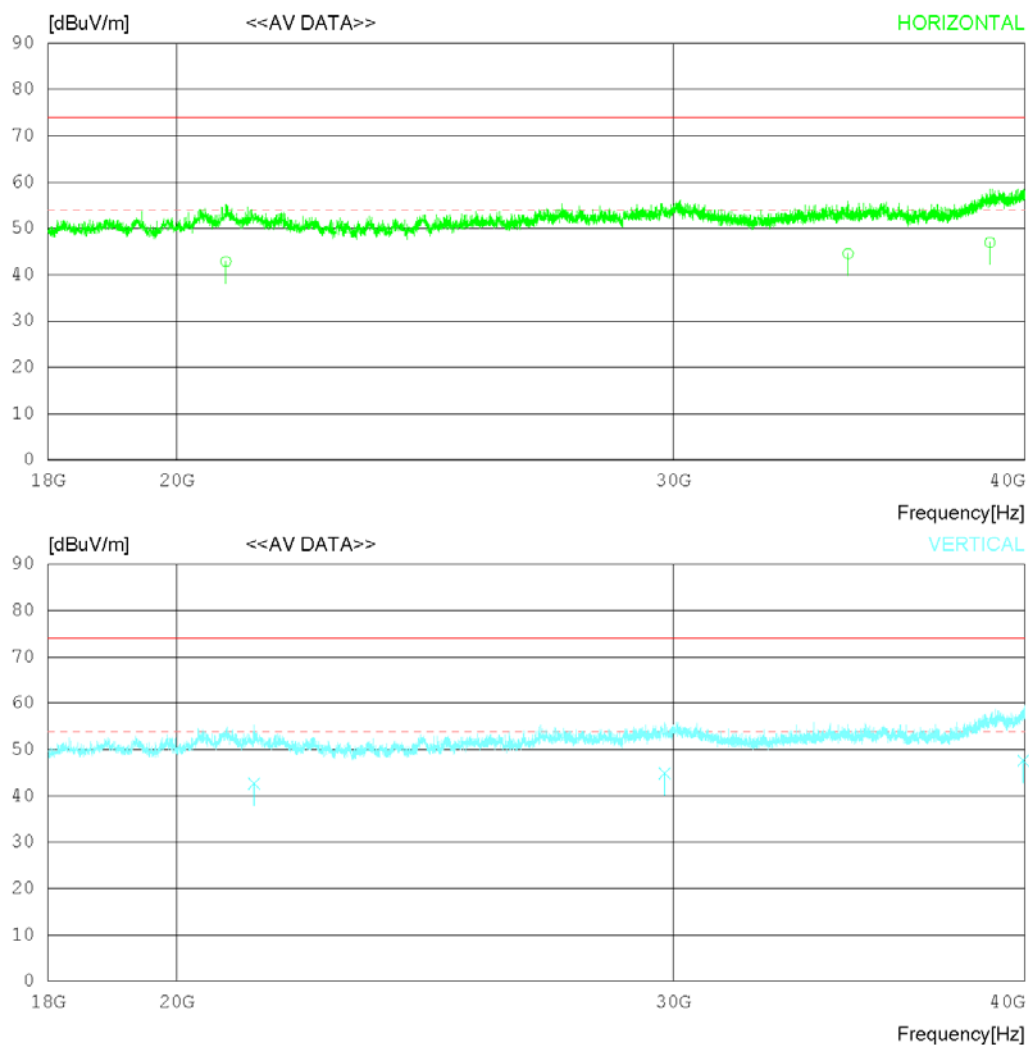

RADIATED EMISSION

Date 2020-09-26

Order No. DTNC2008-06866, 2008-06867
Power Supply Battery
Temp/Humi 22 °C 47 %R.H.
Test Condition Rear Camera Mode

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m) - GHz(Peak)
FCC Part15 Subpart.B Class B (3m) - GHz(Average)

No.	FREQ [MHz]	READING CAV [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	20816.170	30.10	45.60	20.51	53.37	42.84	54.00	11.16	203	123
2	34615.540	26.20	47.20	24.68	53.55	44.53	54.00	9.47	396	166
3	38875.260	25.90	47.45	25.89	52.26	46.98	54.00	7.02	102	0
----- Vertical -----										
4	21300.140	30.10	45.50	20.68	53.59	42.69	54.00	11.31	203	356
5	29797.590	27.20	47.60	22.34	52.27	44.87	54.00	9.13	202	311
6	39950.430	25.60	49.20	24.95	52.20	47.55	54.00	6.45	196	352

Radiated disturbance at (30 ~ 1000) MHz _Measurement data			
Test configuration mode	6	EUT Operation mode	6
Test voltage (V)	Battery	Test Frequency (Hz)	-


RADIATED EMISSION

Date 2020-09-26

Order No. DTNC2008-06866, 2008-06867
Power Supply Battery
Temp/Humi 22 °C 47 % R.H.
Test Condition Barcode Mode

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m)
MARGIN: 3 dB

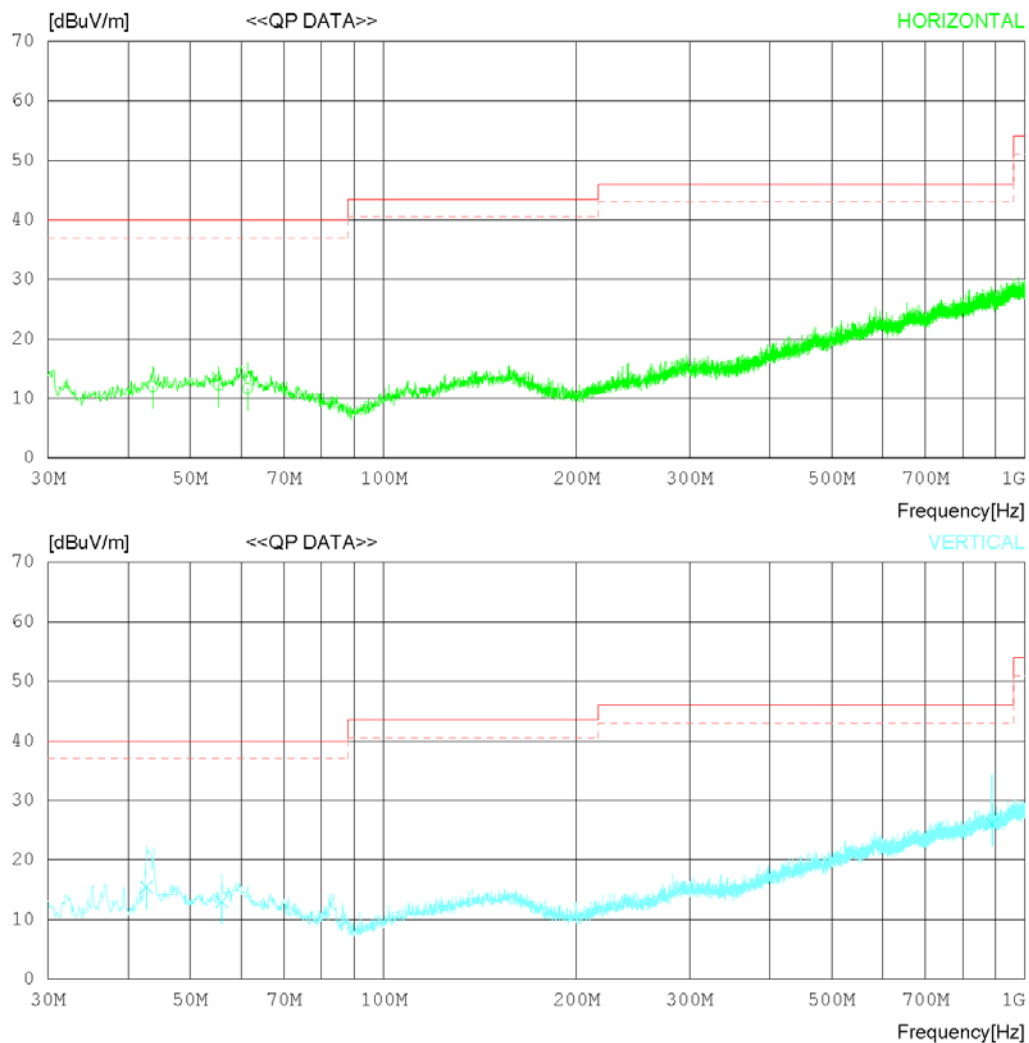

RADIATED EMISSION

Date 2020-09-26

Order No. DTNC2008-06866, 2008-06867
Power Supply Battery
Temp/Humi 22 °C 47 %R.H.
Test Condition Barcode Mode

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m)
MARGIN: 3 dB

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	43.701	20.30	17.60	0.70	26.59	12.01	40.00	27.99	100	354
2	55.341	19.50	18.56	0.79	26.64	12.21	40.00	27.79	301	63
3	61.404	19.60	17.90	0.85	26.67	11.68	40.00	28.32	308	355
----- Vertical -----										
4	42.731	23.80	17.57	0.69	26.58	15.48	40.00	24.52	100	0
5	55.948	21.10	17.77	0.79	26.65	13.01	40.00	26.99	203	352
6	888.156	19.70	29.26	3.61	26.49	26.08	46.00	19.92	101	0

Radiated disturbance at (1 ~ 6) GHz _Peak Measurement data			
Test configuration mode	6	EUT Operation mode	6
Test voltage (V)	Battery	Test Frequency (Hz)	-


RADIATED EMISSION

Date 2020-09-26

Order No. DTNC2008-06866, 2008-06867
Power Supply Battery
Temp/Humi 22 'C 47 %.R.H.
Test Condition Barcode Mode

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m) - GHz(Peak)
FCC Part15 Subpart.B Class B (3m) - GHz(Average)

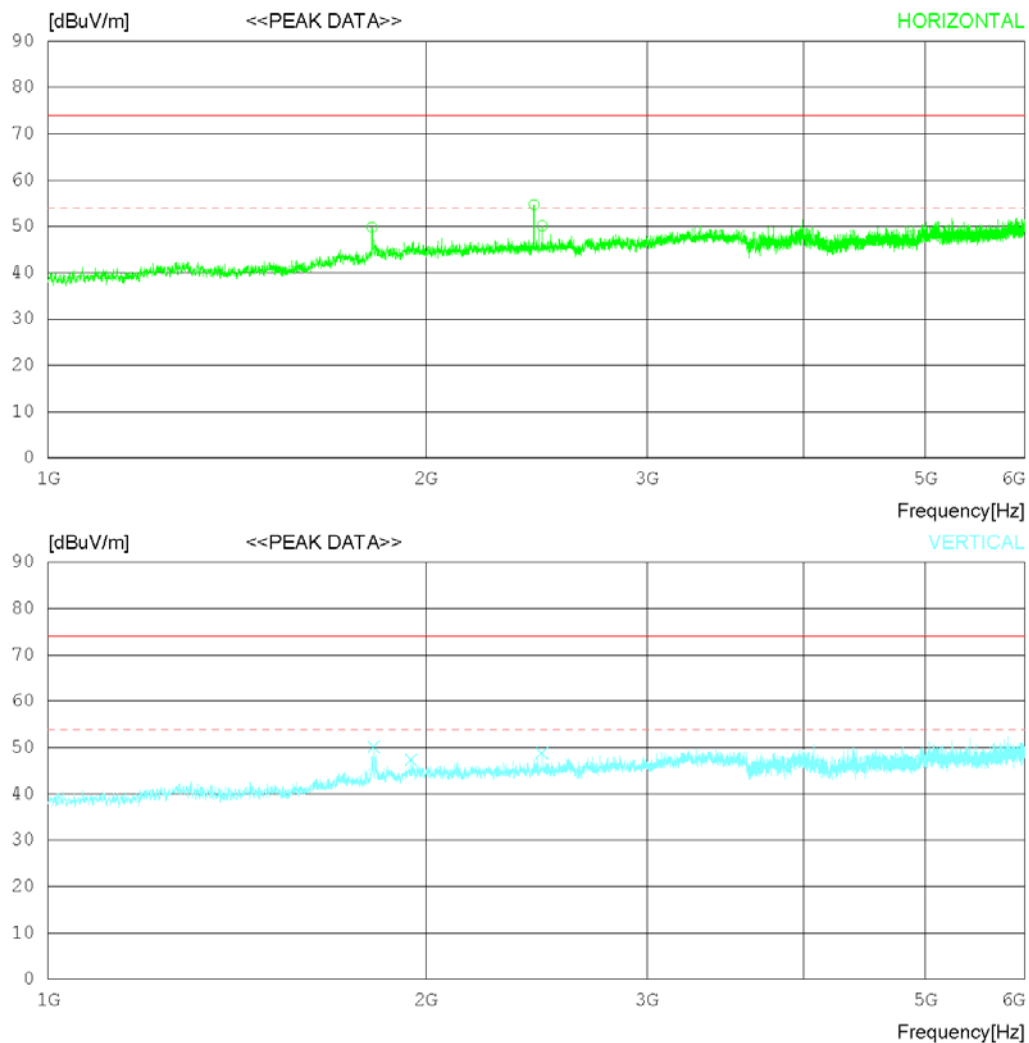

RADIATED EMISSION

Date 2020-09-26

Order No.	DTNC2008-06866, 2008-06867
Power Supply	Battery
Temp/Humi	22 °C 47 %R.H.
Test Condition	Barcode Mode

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m) - GHz(Peak)
FCC Part15 Subpart.B Class B (3m) - GHz(Average)

No.	FREQ [MHz]	READING PEAK [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	1811.250	47.70	30.38	7.04	35.31	49.81	74.0	24.19	307	358
2	2438.750	50.50	32.20	7.12	35.14	54.68	74.0	19.32	214	102
3	2475.625	45.90	32.20	7.19	35.15	50.14	74.0	23.86	206	251
----- Vertical -----										
4	1817.500	48.00	30.48	7.03	35.30	50.21	74.0	23.79	104	160
5	1946.250	44.00	31.68	6.79	35.16	47.31	74.0	26.69	103	204
6	2474.375	44.60	32.20	7.18	35.15	48.83	74.0	25.17	102	151

Radiated disturbance at (1 ~ 6) GHz _ Average Measurement data			
Test configuration mode	6	EUT Operation mode	6
Test voltage (V)	Battery	Test Frequency (Hz)	-


RADIATED EMISSION

Date 2020-09-26

Order No. DTNC2008-06866, 2008-06867
Power Supply Battery
Temp/Humi 22 'C 47 %.R.H.
Test Condition Barcode Mode

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m) - GHz(Peak)
FCC Part15 Subpart.B Class B (3m) - GHz(Average)

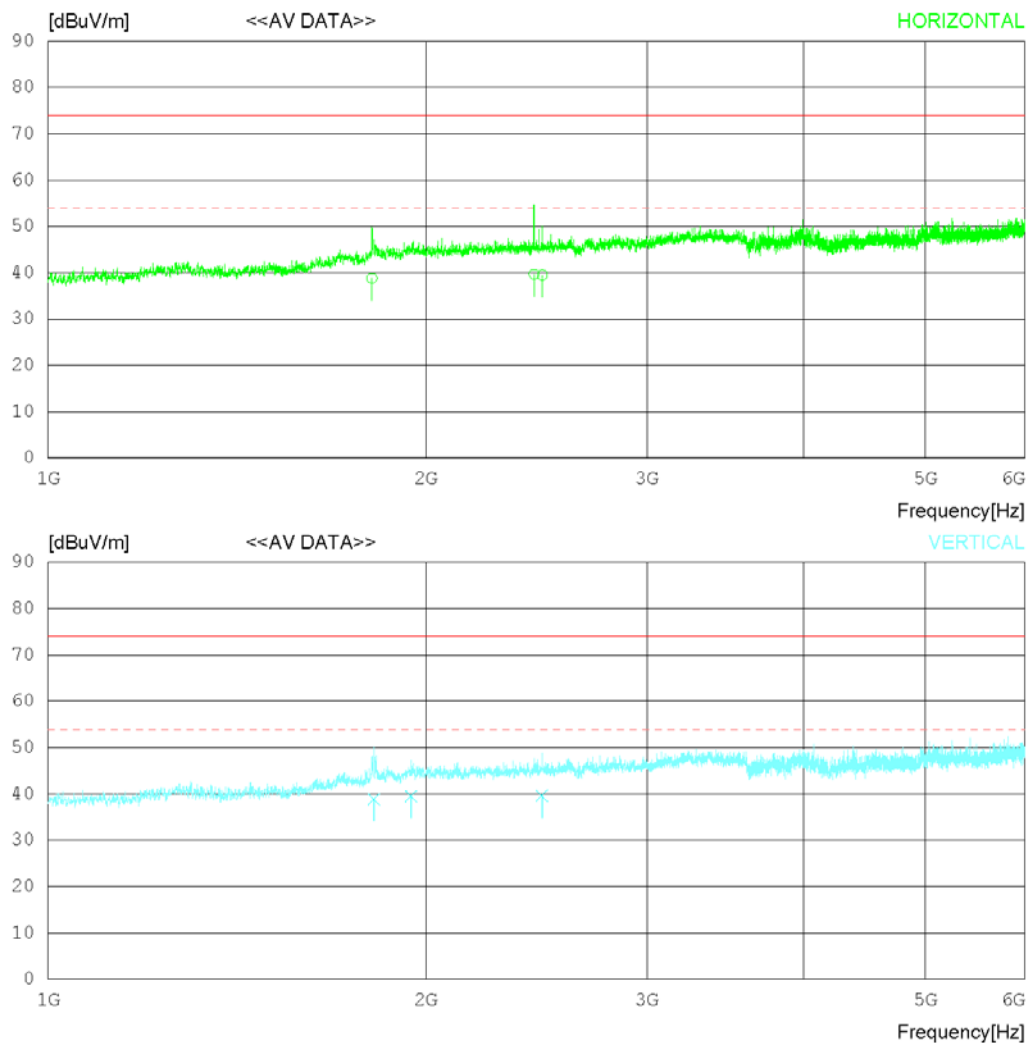

RADIATED EMISSION

Date 2020-09-26

Order No. DTNC2008-06866, 2008-06867
Power Supply Battery
Temp/Humi 22°C 47 %R.H.
Test Condition Barcode Mode

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m) - GHz(Peak)
FCC Part15 Subpart.B Class B (3m) - GHz(Average)

No.	FREQ [MHz]	READING CAV [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	1811.221	36.70	30.38	7.04	35.31	38.81	54.00	15.19	307	355
2	2438.776	35.50	32.20	7.12	35.14	39.68	54.00	14.32	213	112
3	2475.615	35.30	32.20	7.19	35.15	39.54	54.00	14.46	208	266
----- Vertical -----										
4	1817.557	36.60	30.48	7.03	35.30	38.81	54.00	15.19	105	178
5	1946.163	36.20	31.68	6.79	35.16	39.51	54.00	14.49	102	212
6	2474.336	35.40	32.20	7.18	35.15	39.63	54.00	14.37	101	166

Radiated disturbance at (6 ~ 18) GHz _Peak Measurement data			
Test configuration mode	6	EUT Operation mode	6
Test voltage (V)	Battery	Test Frequency (Hz)	-


RADIATED EMISSION

Date 2020-09-26

Order No. DTNC2008-06866, 2008-06867
Power Supply Battery
Temp/Humi 22 °C 47 % R.H.
Test Condition Barcode Mode

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m) - GHz(Peak)
FCC Part15 Subpart.B Class B (3m) - GHz(Average)

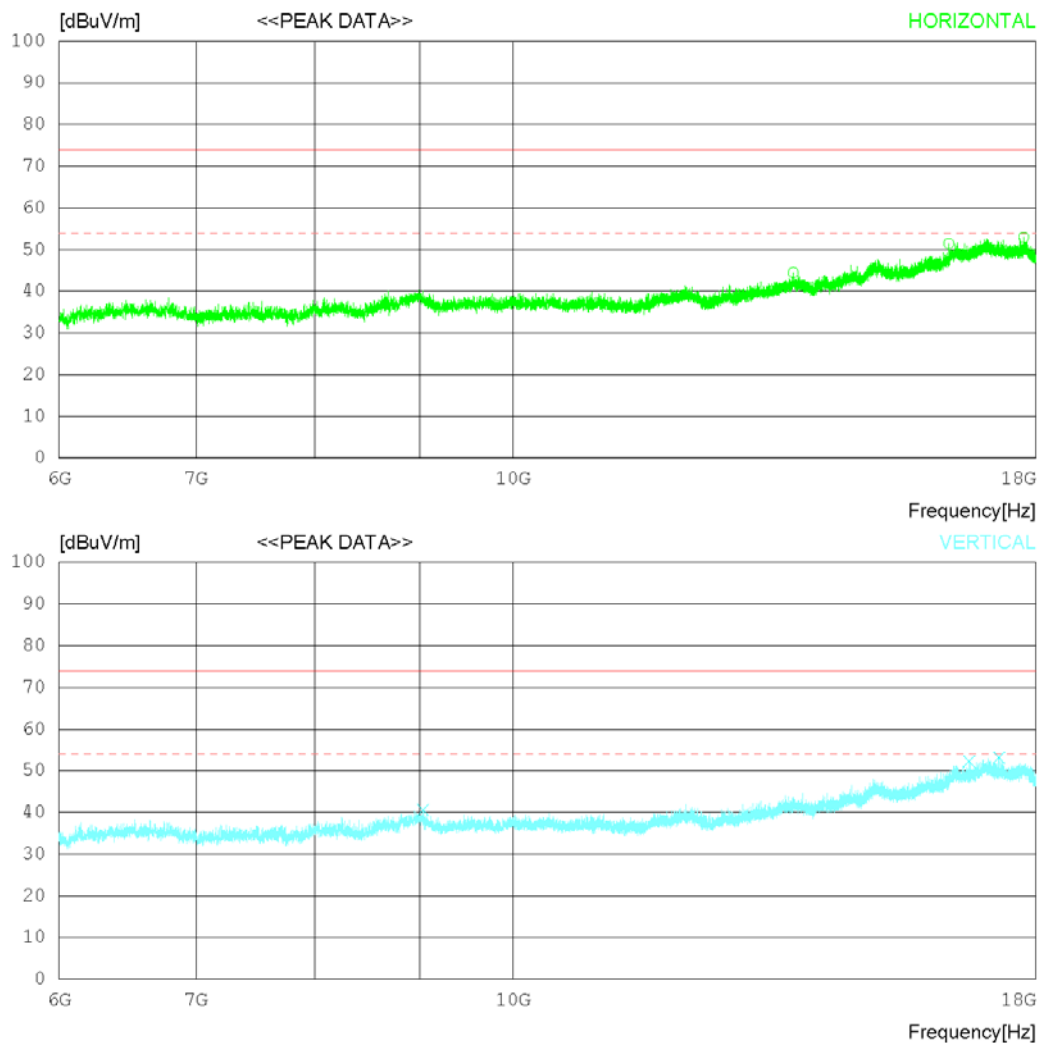

RADIATED EMISSION

Date 2020-09-26

Order No.	DTNC2008-06866, 2008-06867
Power Supply	Battery
Temp/Humi	22 °C 47 %R.H.
Test Condition	Barcode Mode

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m) - GHz(Peak)
FCC Part15 Subpart.B Class B (3m) - GHz(Average)

No.	FREQ [MHz]	READING PEAK [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	13701.000	29.30	33.80	18.85	37.44	44.51	74.0	29.49	102	356
2	16318.500	29.60	36.78	21.29	36.21	51.46	74.0	22.54	303	358
3	17753.250	29.50	38.13	22.73	37.41	52.95	74.0	21.05	207	352
----- Vertical -----										
4	9036.750	30.90	32.12	15.10	37.53	40.59	74.0	33.41	102	255
5	16705.500	29.30	37.22	21.94	36.22	52.24	74.0	21.76	104	358
6	17266.500	30.00	37.76	22.15	36.72	53.19	74.0	20.81	201	358

Radiated disturbance at (6 ~ 18) GHz _ Average Measurement data			
Test configuration mode	6	EUT Operation mode	6
Test voltage (V)	Battery	Test Frequency (Hz)	-


RADIATED EMISSION

Date 2020-09-26

Order No. DTNC2008-06866, 2008-06867
Power Supply Battery
Temp/Humi 22 °C 47 % R.H.
Test Condition Barcode Mode

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m) - GHz(Peak)
FCC Part15 Subpart.B Class B (3m) - GHz(Average)

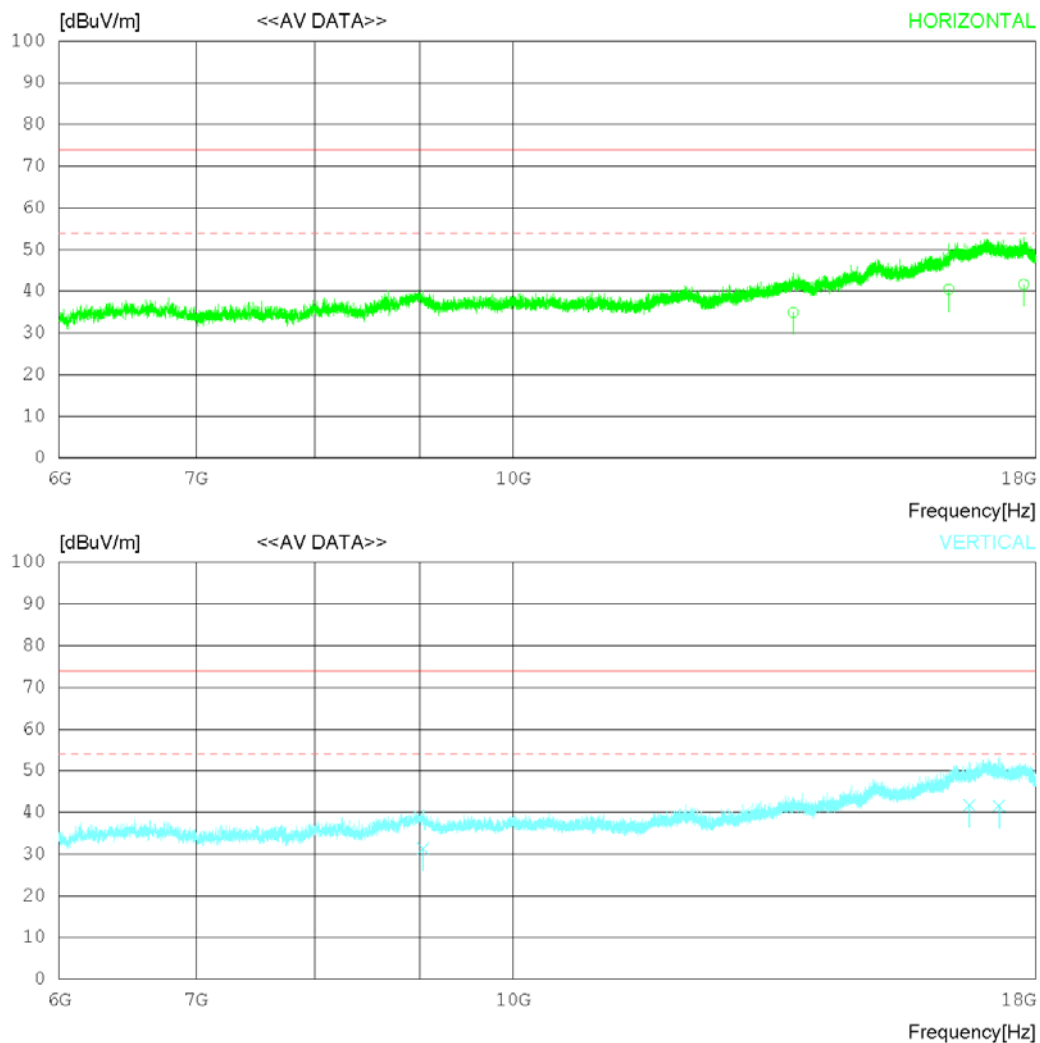

RADIATED EMISSION

Date 2020-09-26

Order No. DTNC2008-06866, 2008-06867
Power Supply Battery
Temp/Humi 22 °C 47 %R.H.
Test Condition Barcode Mode

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m) - GHz(Peak)
FCC Part15 Subpart.B Class B (3m) - GHz(Average)

No.	FREQ [MHz]	READING CAV [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	13701.140	19.70	33.80	18.86	37.44	34.92	54.00	19.08	101	347
2	16318.580	18.60	36.78	21.30	36.21	40.47	54.00	13.53	301	352
3	17753.160	18.20	38.13	22.73	37.41	41.65	54.00	12.35	203	351
----- Vertical -----										
4	9036.780	21.60	32.12	15.10	37.53	31.29	54.00	22.71	101	263
5	16705.440	18.80	37.22	21.94	36.22	41.74	54.00	12.26	103	355
6	17266.590	18.40	37.76	22.15	36.72	41.59	54.00	12.41	202	352

Radiated disturbance at (18 ~ 40) GHz _Peak Measurement data			
Test configuration mode	6	EUT Operation mode	6
Test voltage (V)	Battery	Test Frequency (Hz)	-


RADIATED EMISSION

Date 2020-09-26

Order No. DTNC2008-06866, 2008-06867
Power Supply Battery
Temp/Humi 22 'C 47 %.R.H.
Test Condition Barcode Mode

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m) - GHz(Peak)
FCC Part15 Subpart.B Class B (3m) - GHz(Average)

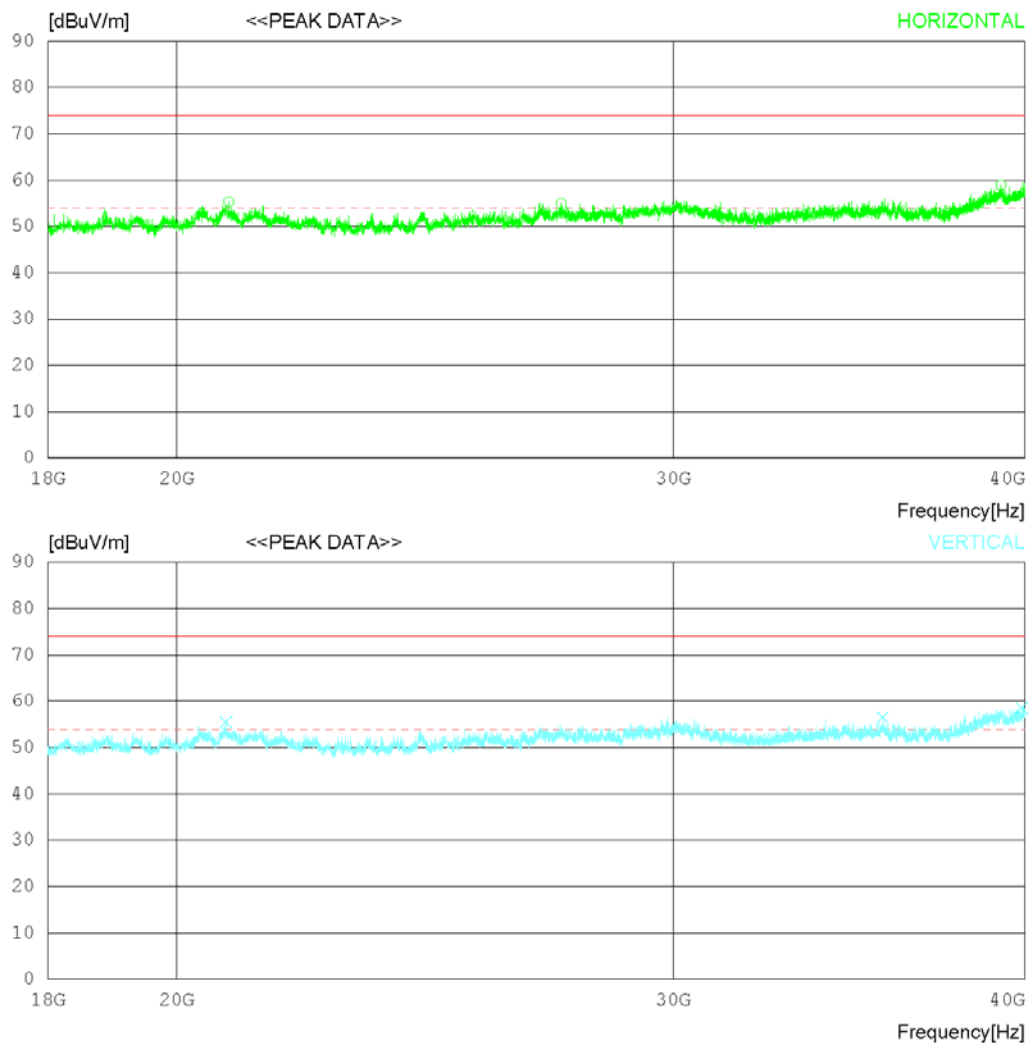

RADIATED EMISSION

Date 2020-09-26

Order No.	DTNC2008-06866, 2008-06867
Power Supply	Battery
Temp/Humi	22 °C 47 %R.H.
Test Condition	Barcode Mode

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m) - GHz(Peak)
FCC Part15 Subpart.B Class B (3m) - GHz(Average)

No.	FREQ [MHz]	READING PEAK [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	20865.500	42.50	45.60	20.60	53.39	55.31	74.0	18.69	205	1
2	27380.250	40.50	45.98	21.51	53.05	54.94	74.0	19.06	301	8
3	39221.750	37.40	47.92	25.81	52.24	58.89	74.0	15.11	312	1
----- Vertical -----										
4	20821.500	42.70	45.60	20.53	53.37	55.46	74.0	18.54	106	358
5	35616.500	38.90	46.98	24.46	53.80	56.54	74.0	17.46	202	294
6	39906.500	36.60	49.11	25.01	52.20	58.52	74.0	15.48	209	67

Radiated disturbance at (18 ~ 40) GHz _ Average Measurement data			
Test configuration mode	6	EUT Operation mode	6
Test voltage (V)	Battery	Test Frequency (Hz)	-


RADIATED EMISSION

Date 2020-09-26

Order No. DTNC2008-06866, 2008-06867
Power Supply Battery
Temp/Humi 22 'C 47 %.R.H.
Test Condition Barcode Mode

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m) - GHz(Peak)
FCC Part15 Subpart.B Class B (3m) - GHz(Average)

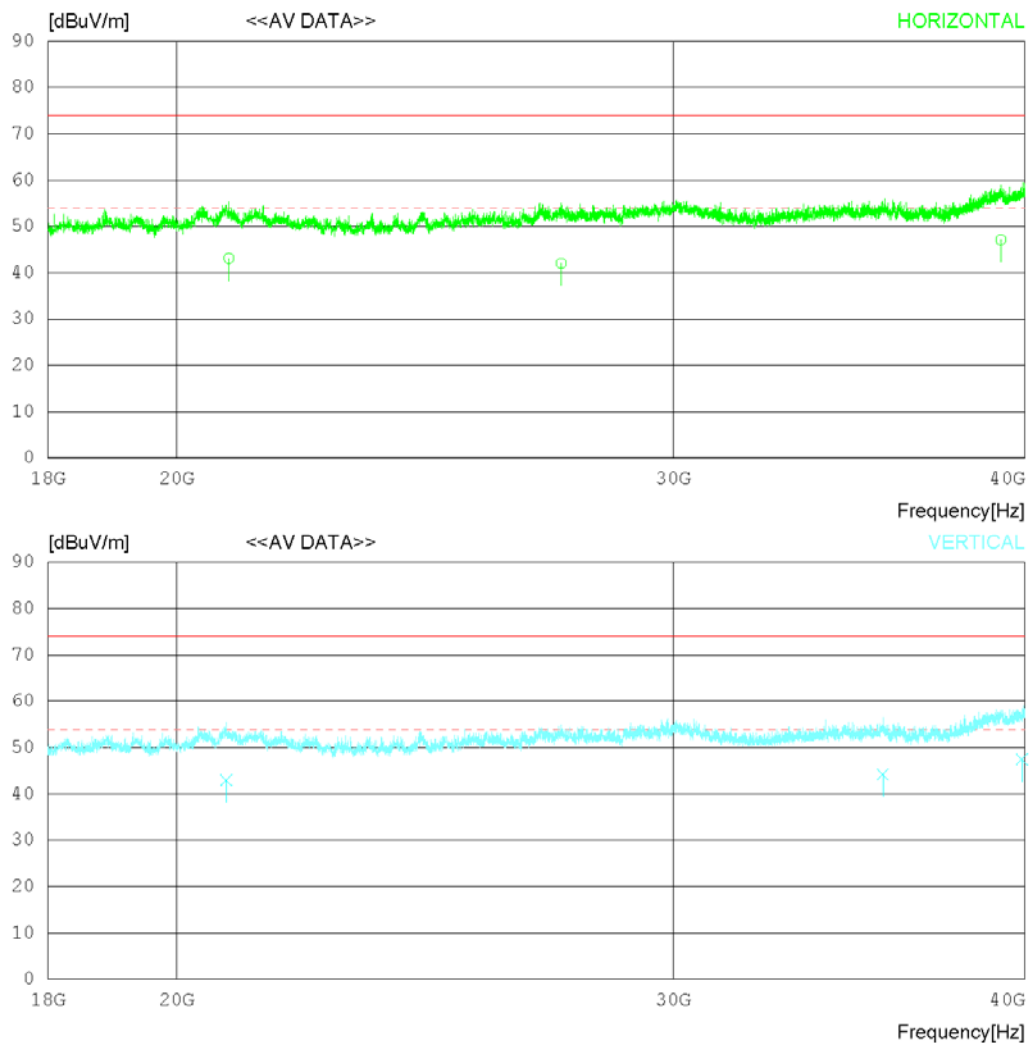

RADIATED EMISSION

Date 2020-09-26

Order No. DTNC2008-06866, 2008-06867
Power Supply Battery
Temp/Humi 22 °C 47 %R.H.
Test Condition Barcode Mode

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m) - GHz(Peak)
FCC Part15 Subpart.B Class B (3m) - GHz(Average)

No.	FREQ [MHz]	READING CAV [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	20865.590	30.30	45.60	20.60	53.39	43.11	54.00	10.89	204	0
2	27380.310	27.60	45.98	21.51	53.05	42.04	54.00	11.96	305	0
3	39221.790	25.60	47.92	25.81	52.24	47.09	54.00	6.91	311	0
----- Vertical -----										
4	20821.580	30.20	45.60	20.53	53.37	42.96	54.00	11.04	105	352
5	35616.510	26.60	46.98	24.46	53.80	44.24	54.00	9.76	203	303
6	39906.470	25.50	49.11	25.01	52.20	47.42	54.00	6.58	211	77

Radiated disturbance at (30 ~ 1000) MHz _Measurement data			
Test configuration mode	11	EUT Operation mode	11
Test voltage (V)	Battery	Test Frequency (Hz)	-


RADIATED EMISSION

Date 2020-09-26

Order No. DTNC2008-06866, 2008-06867
Power Supply Battery
Temp/Humi 22 'C 47 %.R.H.
Test Condition LTE 71 Mode

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m)
MARGIN: 3 dB

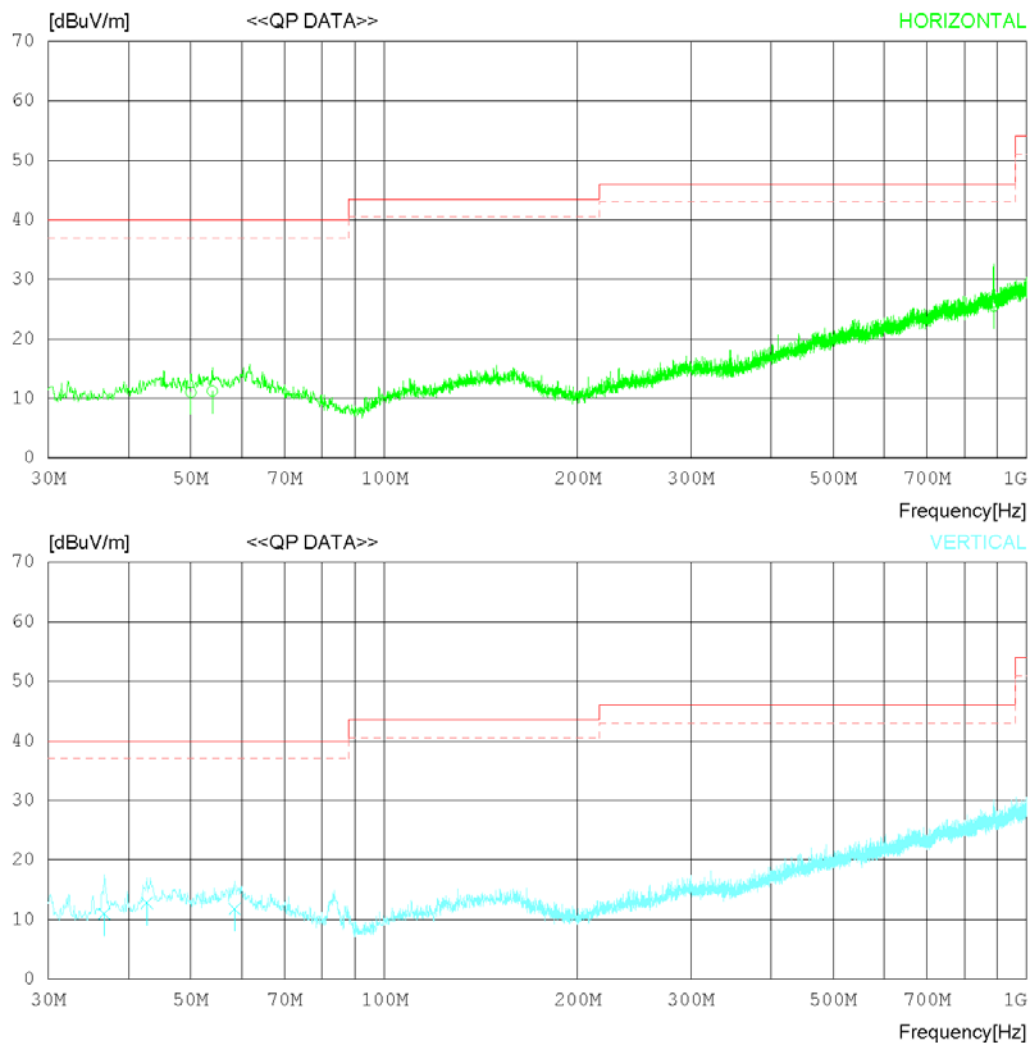

RADIATED EMISSION

Date 2020-09-26

Order No.	DTNC2008-06866, 2008-06867
Power Supply	Battery
Temp/Humi	22 °C 47 %R.H.
Test Condition	LTE 71 Mode

Memo

LIMIT : FCC Part15 Subpart B Class B (3m)
MARGIN: 3 dB

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	50.006	18.60	18.30	0.73	26.62	11.01	40.00	28.99	301	354
2	54.008	18.50	18.60	0.78	26.64	11.24	40.00	28.76	394	0
3	888.156	19.10	29.26	3.61	26.49	25.48	46.00	20.52	203	288
----- Vertical -----										
4	36.669	20.80	16.07	0.66	26.55	10.98	40.00	29.02	102	187
5	42.731	21.10	17.57	0.69	26.58	12.78	40.00	27.22	101	0
6	58.494	19.70	17.95	0.82	26.66	11.81	40.00	28.19	203	336

Radiated disturbance at (1 ~ 6) GHz _Peak Measurement data			
Test configuration mode	11	EUT Operation mode	11
Test voltage (V)	Battery	Test Frequency (Hz)	-


RADIATED EMISSION

Date 2020-09-26

Order No. DTNC2008-06866, 2008-06867
Power Supply Battery
Temp/Humi 22 'C 47 %.R.H.
Test Condition LTE 71 Mode

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m) - GHz(Peak)
FCC Part15 Subpart.B Class B (3m) - GHz(Average)

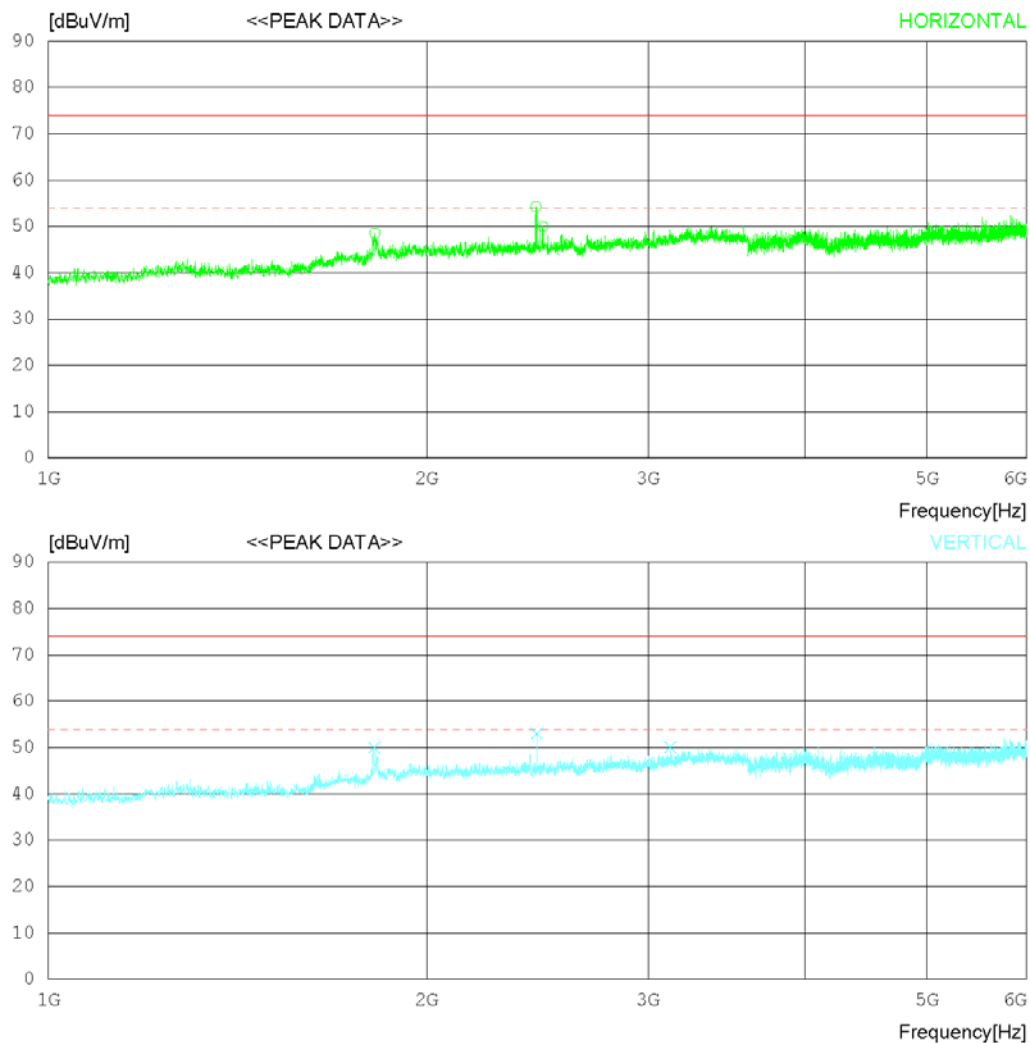

RADIATED EMISSION

Date 2020-09-26

Order No.	DTNC2008-06866, 2008-06867
Power Supply	Battery
Temp/Humi	22°C 47 %R.H.
Test Condition	LTE 71 Mode

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m) - GHz(Peak)
FCC Part15 Subpart.B Class B (3m) - GHz(Average)

No.	FREQ [MHz]	READING PEAK [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	1818.750	46.30	30.50	7.03	35.30	48.53	74.0	25.47	202	354
2	2441.875	50.10	32.20	7.13	35.14	54.29	74.0	19.71	214	313
3	2473.125	45.80	32.20	7.18	35.15	50.03	74.0	23.97	204	327
----- Vertical -----										
4	1817.500	47.80	30.48	7.03	35.30	50.01	74.0	23.99	103	1
5	2446.250	48.80	32.20	7.14	35.14	53.00	74.0	21	214	256
6	3126.250	44.00	33.10	8.13	35.14	50.09	74.0	23.91	103	198

Radiated disturbance at (1 ~ 6) GHz _ Average Measurement data			
Test configuration mode	11	EUT Operation mode	11
Test voltage (V)	Battery	Test Frequency (Hz)	-


RADIATED EMISSION

Date 2020-09-26

Order No. DTNC2008-06866, 2008-06867
Power Supply Battery
Temp/Humi 22 'C 47 %.R.H.
Test Condition LTE 71 Mode

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m) - GHz(Peak)
FCC Part15 Subpart.B Class B (3m) - GHz(Average)

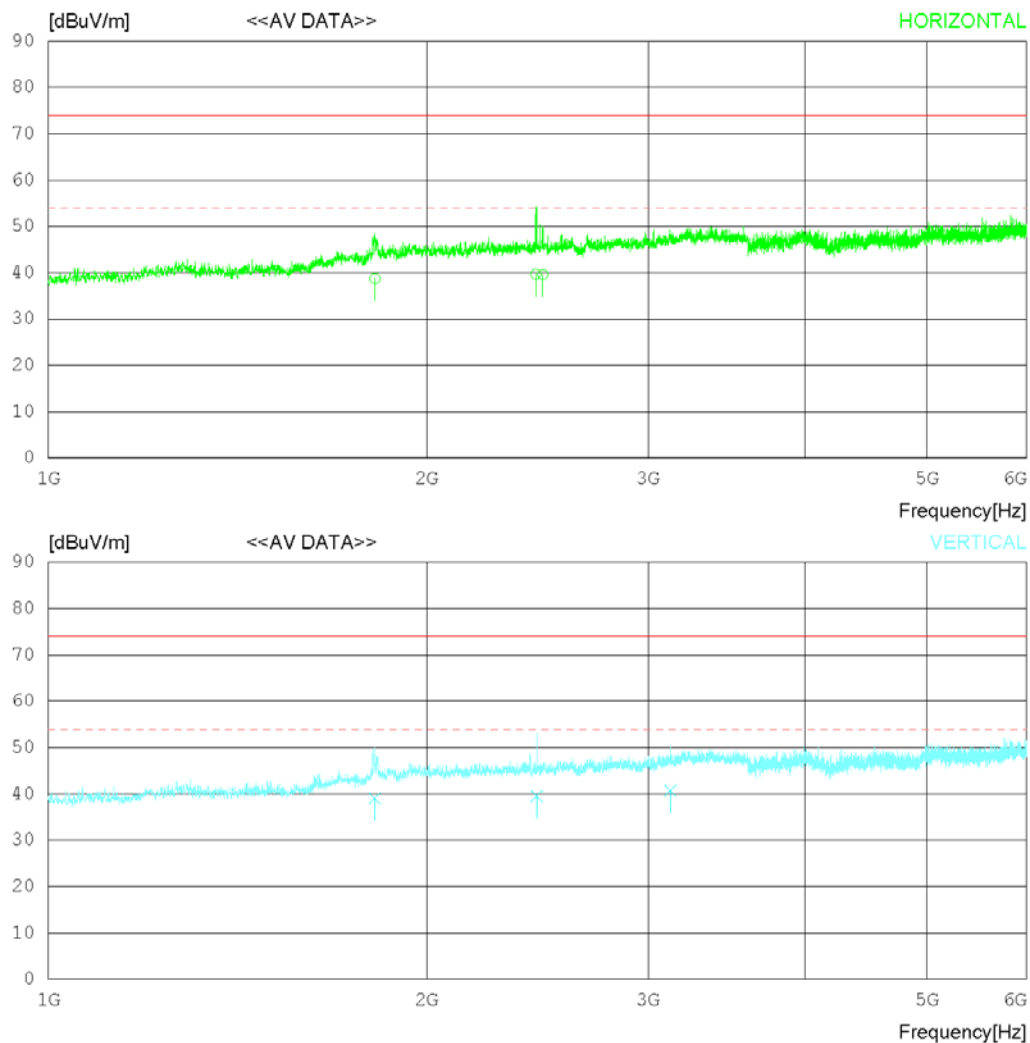

RADIATED EMISSION

Date 2020-09-26

Order No. DTNC2008-06866, 2008-06867
Power Supply Battery
Temp/Humi 22°C 47 %R.H.
Test Condition LTE 71 Mode

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m) - GHz(Peak)
FCC Part15 Subpart.B Class B (3m) - GHz(Average)

No.	FREQ [MHz]	READING CAV [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	1818.773	36.50	30.50	7.02	35.30	38.72	54.00	15.28	201	352
2	2441.853	35.50	32.20	7.13	35.14	39.69	54.00	14.31	213	317
3	2473.263	35.40	32.20	7.18	35.15	39.63	54.00	14.37	206	332
----- Vertical -----										
4	1817.557	36.80	30.48	7.03	35.30	39.01	54.00	14.99	101	0
5	2446.223	35.30	32.20	7.14	35.14	39.50	54.00	14.50	213	263
6	3126.219	34.60	33.10	8.13	35.14	40.69	54.00	13.31	105	203

Radiated disturbance at (6 ~ 18) GHz _Peak Measurement data			
Test configuration mode	11	EUT Operation mode	11
Test voltage (V)	Battery	Test Frequency (Hz)	-


RADIATED EMISSION

Date 2020-09-26

Order No. DTNC2008-06866, 2008-06867
Power Supply Battery
Temp/Humi 22 °C 47 % R.H.
Test Condition LTE 71 Mode

Memo

LIMIT : FCC Part15 Subpart B Class B (3m) - GHz(Peak)
FCC Part15 Subpart B Class B (3m) - GHz(Average)

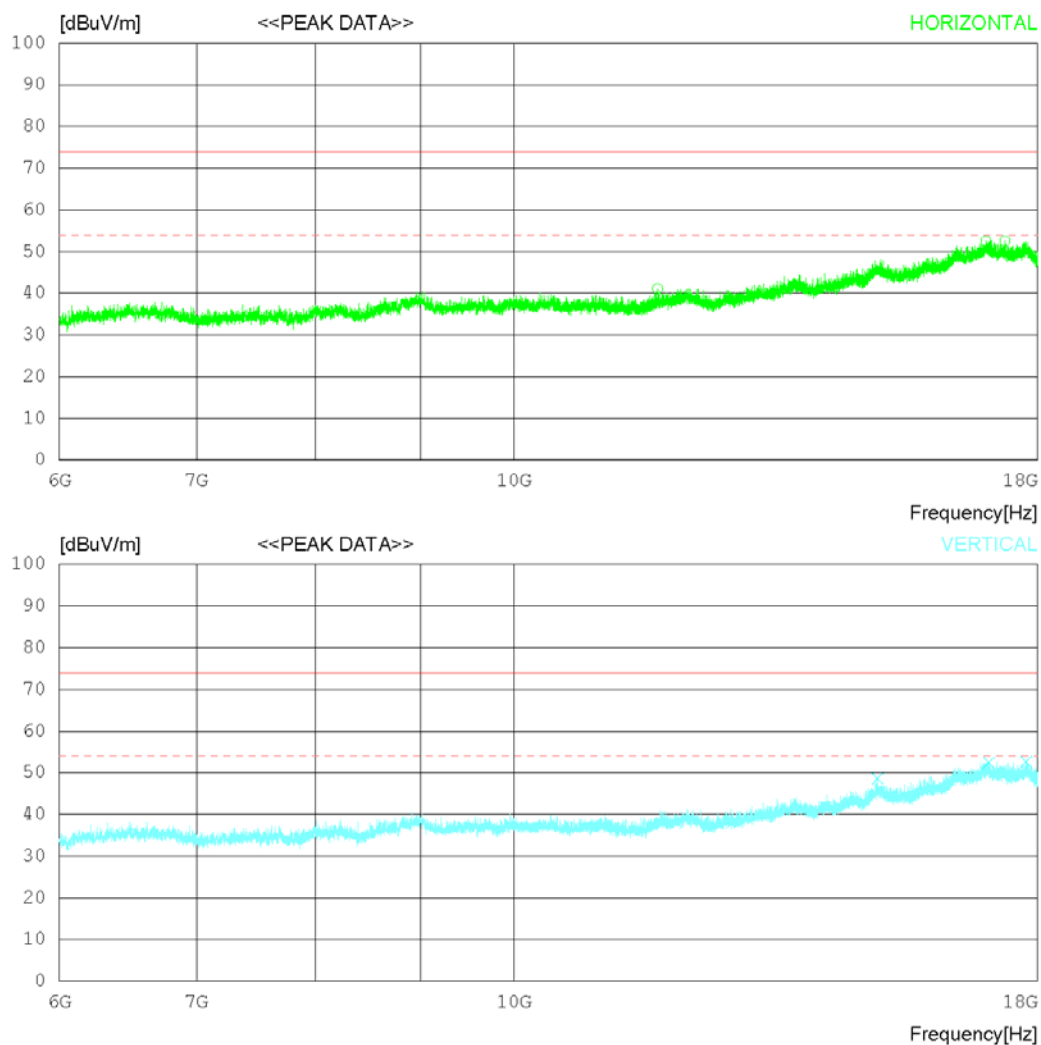

RADIATED EMISSION

Date 2020-09-26

Order No.	DTNC2008-06866, 2008-06867
Power Supply	Battery
Temp/Humi	22°C 47 %R.H.
Test Condition	LTE 71 Mode

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m) - GHz(Peak)
FCC Part15 Subpart.B Class B (3m) - GHz(Average)

No.	FREQ [MHz]	READING PEAK [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	11745.000	30.00	33.19	15.95	38.06	41.08	74.0	32.92	104	157
2	16981.500	27.70	37.53	23.65	36.39	52.49	74.0	21.51	209	326
3	17349.750	29.50	37.82	22.06	36.82	52.56	74.0	21.44	202	358
----- Vertical -----										
4	15044.250	29.50	35.49	20.60	36.96	48.63	74.0	25.37	206	247
5	17046.000	27.80	37.59	23.44	36.46	52.37	74.0	21.63	102	358
6	17769.750	29.10	38.14	22.76	37.43	52.57	74.0	21.43	105	351

Radiated disturbance at (6 ~ 18) GHz _ Average Measurement data			
Test configuration mode	11	EUT Operation mode	11
Test voltage (V)	Battery	Test Frequency (Hz)	-



RADIATED EMISSION

Date 2020-09-26

Order No. DTNC2008-06866, 2008-06867
Power Supply Battery
Temp/Humi 22 'C 47 %.R.H.
Test Condition LTE 71 Mode

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m) - GHz(Peak)
FCC Part15 Subpart.B Class B (3m) - GHz(Average)

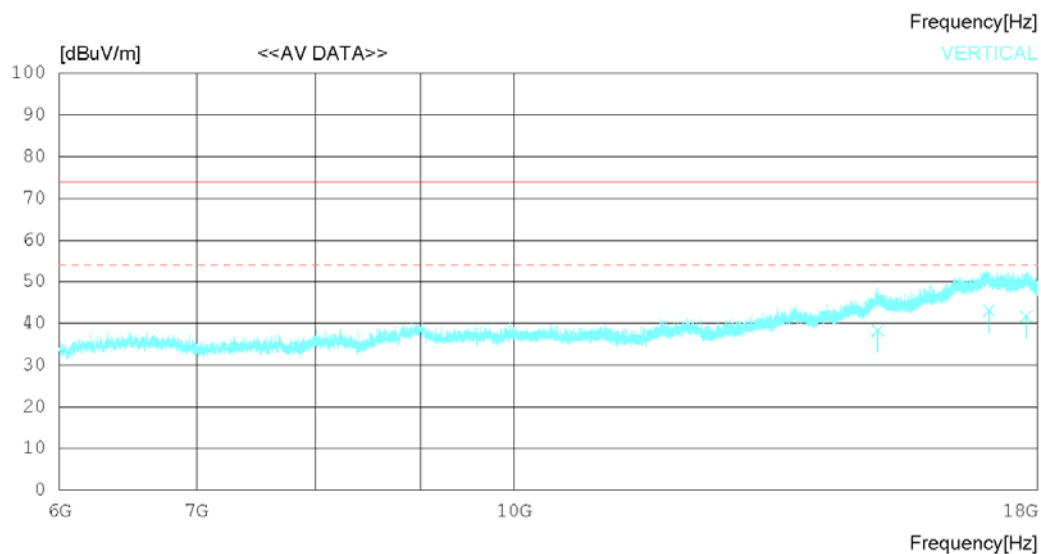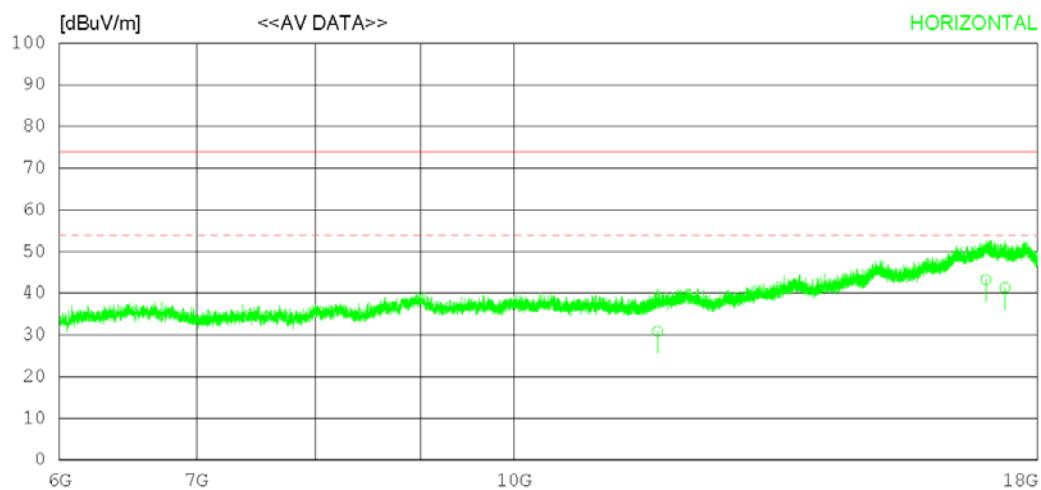

RADIATED EMISSION

Date 2020-09-26

Order No. DTNC2008-06866, 2008-06867
Power Supply Battery
Temp/Humi 22 °C 47 %R.H.
Test Condition LTE 71 Mode

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m) - GHz(Peak)
FCC Part15 Subpart.B Class B (3m) - GHz(Average)

No.	FREQ [MHz]	READING CAV [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	11745.140	19.80	33.19	15.95	38.06	30.88	54.00	23.12	103	166
2	16981.560	18.50	37.53	23.65	36.39	43.29	54.00	10.71	211	231
3	17349.640	18.30	37.82	22.06	36.82	41.36	54.00	12.64	203	352
----- Vertical -----										
4	15044.220	19.20	35.49	20.60	36.96	38.33	54.00	15.67	203	255
5	17046.140	18.50	37.59	23.44	36.46	43.07	54.00	10.93	101	354
6	17769.760	18.20	38.14	22.76	37.43	41.67	54.00	12.33	102	352

Radiated disturbance at (18 ~ 40) GHz _Peak Measurement data			
Test configuration mode	11	EUT Operation mode	11
Test voltage (V)	Battery	Test Frequency (Hz)	-


RADIATED EMISSION

Date 2020-09-26

Order No. DTNC2008-06866, 2008-06867
Power Supply Battery
Temp/Humi 22 'C 47 %.R.H.
Test Condition LTE 71 Mode

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m) - GHz(Peak)
FCC Part15 Subpart.B Class B (3m) - GHz(Average)

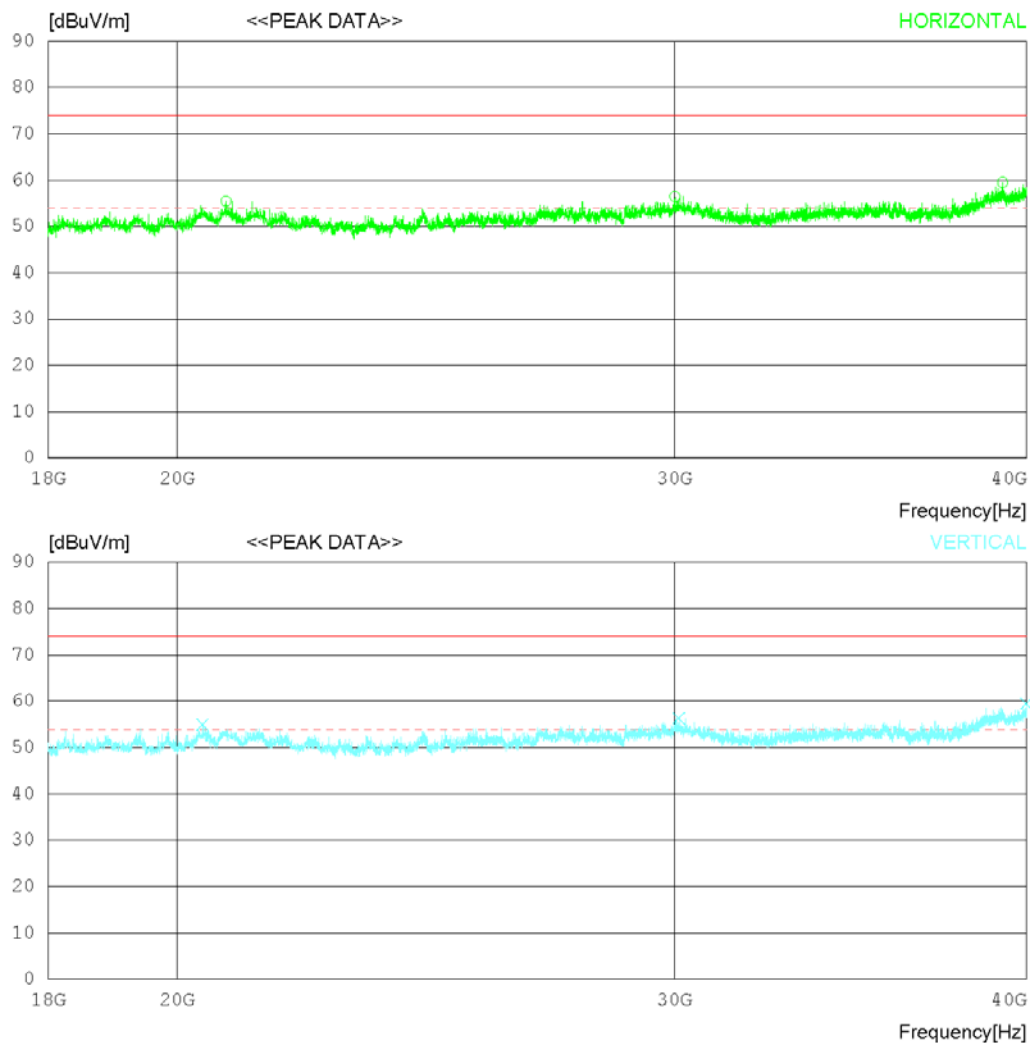

RADIATED EMISSION

Date 2020-09-26

Order No.	DTNC2008-06866, 2008-06867
Power Supply	Battery
Temp/Humi	22°C 47 %R.H.
Test Condition	LTE 71 Mode

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m) - GHz(Peak)
FCC Part15 Subpart.B Class B (3m) - GHz(Average)

No.	FREQ [MHz]	READING PEAK [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	20810.500	42.70	45.60	20.50	53.36	55.44	74.0	18.56	103	353
2	30014.750	38.80	47.50	22.33	52.20	56.43	74.0	17.57	198	214
3	39227.250	38.00	47.93	25.81	52.24	59.50	74.0	14.5	102	3
----- Vertical -----										
4	20417.250	42.90	45.40	19.79	53.19	54.90	74.0	19.1	106	358
5	30119.250	38.70	47.50	22.35	52.21	56.34	74.0	17.66	200	358
6	39991.750	37.50	49.28	24.91	52.20	59.49	74.0	14.51	100	47

Radiated disturbance at (18 ~ 40) GHz _ Average Measurement data			
Test configuration mode	11	EUT Operation mode	11
Test voltage (V)	Battery	Test Frequency (Hz)	-


RADIATED EMISSION

Date 2020-09-26

Order No. DTNC2008-06866, 2008-06867
Power Supply Battery
Temp/Humi 22 'C 47 %.R.H.
Test Condition LTE 71 Mode

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m) - GHz(Peak)
FCC Part15 Subpart.B Class B (3m) - GHz(Average)

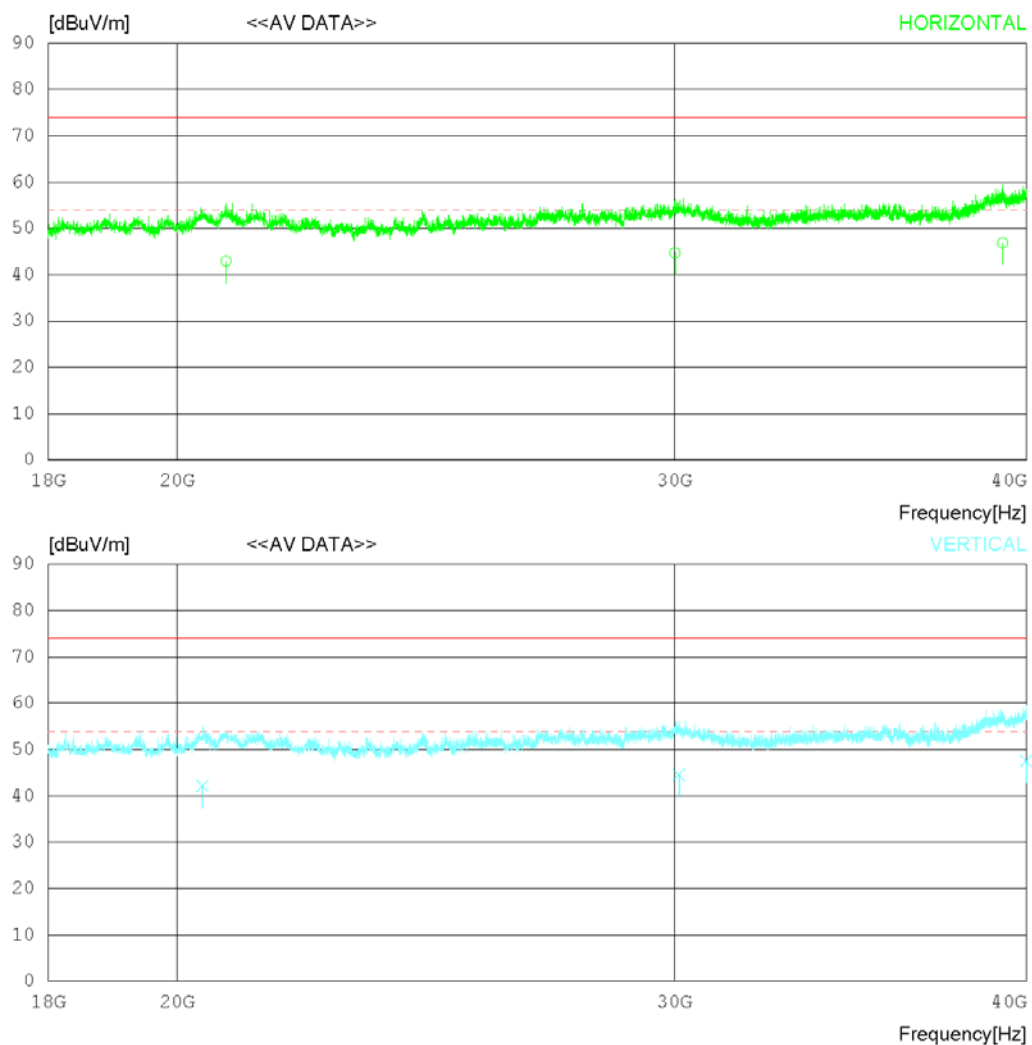

RADIATED EMISSION

Date 2020-09-26

Order No.	DTNC2008-06866, 2008-06867
Power Supply	Battery
Temp/Humi	22°C 47 %R.H.
Test Condition	LTE 71 Mode

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m) - GHz(Peak)
FCC Part15 Subpart.B Class B (3m) - GHz(Average)

No.	FREQ [MHz]	READING CAV [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	20810.580	30.20	45.60	20.50	53.36	42.94	54.00	11.06	102	246
2	30014.710	27.10	47.50	22.33	52.20	44.73	54.00	9.27	195	221
3	39227.290	25.40	47.93	25.81	52.24	46.90	54.00	7.10	100	0
----- Vertical -----										
4	20417.280	30.10	45.40	19.79	53.19	42.10	54.00	11.90	102	348
5	30119.220	26.90	47.50	22.35	52.21	44.54	54.00	9.46	203	352
6	39991.730	25.60	49.28	24.91	52.20	47.59	54.00	6.41	101	55

8. Revision History

Date	Description	Revised By	Reviewed By
Jan. 04. 2021	Initial report	ChanGeun Lee	KyoungHwan Bae
Jan. 11. 2021	Delete ICES-003 : 2016, Delete CAN/CSA CISPR 22-10	ChanGeun Lee	KyoungHwan Bae

-End of test report-