

Test Report

C9120AXP-x & C9120AXP-EWC-x (x=B)

Cisco Catalyst C9120AX Series 802.11ax Access Point

Main 5GHz Radio + 13dBi Antenna

FCC ID: LDKROFSN2177

5150-5250 MHz

Against the following Specifications:

CFR47 Part 15.407



Cisco Systems

170 West Tasman Drive

San Jose, CA 95134

	
Author: Chris Blair Tested By: Chris Blair	Approved By: Gez Thorpe Title: Radio Compliance Manager Revision: See EDCS

This report replaces any previously entered test report under EDCS – **18302100**. This test report has been electronically authorized and archived using the CISCO Engineering Document Control system. Test Report Template EDCS# 11644122.

This test report has been electronically authorized and archived using the CISCO Engineering Document Control system.

SECTION 1: OVERVIEW	3
SECTION 2: ASSESSMENT INFORMATION	4
2.1 GENERAL	4
2.2 DATE OF TESTING.....	6
2.3 REPORT ISSUE DATE	6
2.4 TESTING FACILITIES	6
2.5 EQUIPMENT ASSESSED (EUT).....	6
2.6 EUT DESCRIPTION	7
SECTION 3: RESULT SUMMARY	13
3.1 RESULTS SUMMARY TABLE	13
SECTION 4: SAMPLE DETAILS.....	17
4.1 SAMPLE DETAILS	17
4.2 SYSTEM DETAILS	17
4.3 MODE OF OPERATION DETAILS	17
APPENDIX A: EMISSION TEST RESULTS	18
CONDUCTED TEST SETUP DIAGRAM.....	18
TARGET MAXIMUM CHANNEL POWER	18
A.1 DUTY CYCLE	20
A.2 99% AND 26DB BANDWIDTH	23
A.3 MAXIMUM CONDUCTED OUTPUT POWER	27
A.4 POWER SPECTRAL DENSITY	39
A.5 CONDUCTED SPURIOUS EMISSIONS	51
A.6 CONDUCTED RECEIVER SPURIOUS EMISSIONS	74
A.7 CONDUCTED BAND EDGE	79
APPENDIX B: RADIATED & AC CONDUCTED EMISSIONS TEST RESULTS	92
APPENDIX C: LIST OF TEST EQUIPMENT USED TO PERFORM THE TEST.....	93
APPENDIX D: ABBREVIATION KEY AND DEFINITIONS	94
APPENDIX E: PHOTOGRAPHS OF TEST SETUPS	95
APPENDIX F: SOFTWARE USED TO PERFORM TESTING	96
APPENDIX G: TEST PROCEDURES	96
APPENDIX H: SCOPE OF ACCREDITATION (A2LA CERTIFICATE NUMBER 1178-01)	96
APPENDIX I: TEST ASSESSMENT PLAN	96

Section 1: Overview

The samples were assessed against the tests detailed in section 3 under the requirements of the following specifications:

Specifications:
CFR47 Part 15.407

Section 2: Assessment Information

2.1 General

This report contains an assessment of an apparatus against Electromagnetic Compatibility Standards based upon tests carried out on the samples submitted. The testing was performed by and for the use of Cisco systems Inc:

With regard to this assessment, the following points should be noted:

- a) The results contained in this report relate only to the items tested and were obtained in the period between the date of the initial assessment and the date of issue of the report. Manufactured products will not necessarily give identical results due to production and measurement tolerances.
- b) The apparatus was set up and exercised using the configuration and modes of operation defined in this report only.
- c) Where relevant, the apparatus was only assessed using the susceptibility criteria defined in this report and the Test Assessment Plan (TAP).
- d) All testing was performed under the following environmental conditions:

Temperature	15°C to 35°C (54°F to 95°F)
Atmospheric Pressure	860mbar to 1060mbar (25.4" to 31.3")
Humidity	10% to 75*%

Units of Measurement

The units of measurements defined in the appendices are reported in specific terms, which are test dependent. Where radiated measurements are concerned these are defined at a particular distance. Basic voltage measurements are defined in units of [dBuV]

As an example, the basic calculation for all measurements is as follows:

$$\text{Emission level [dBuV]} = \text{Indicated voltage level [dBuV]} + \text{Cable Loss [dB]} + \text{Other correction factors [dB]}$$

The combinations of correction factors are dependent upon the exact test configurations [see test equipment lists for further details] and may include:-

Antenna Factors, Pre Amplifier Gain, LISN Loss, Pulse Limiter Loss and Filter Insertion Loss..

Note: to convert the results from dBuV/m to uV/m use the following formula:-

$$\text{Level in uV/m} = \text{Common Antilogarithm} [(X \text{ dBuV/m})/20] = Y \text{ uV/m}$$

Measurement Uncertainty Values

voltage and power measurements	± 2 dB
conducted EIRP measurements	± 1.4 dB
radiated measurements	± 3.2 dB
frequency measurements	$\pm 2.4 \cdot 10^{-7}$
temperature measurements	$\pm 0.54^\circ$
humidity measurements	$\pm 2.3\%$
DC and low frequency measurements	$\pm 2.5\%$

Where relevant measurement uncertainty levels have been estimated for tests performed on the apparatus. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Radiated emissions (expanded uncertainty, confidence interval 95%)

30 MHz - 300 MHz	+/- 3.8 dB
300 MHz - 1000 MHz	+/- 4.3 dB
1 GHz - 10 GHz	+/- 4.0 dB
10 GHz - 18GHz	+/- 8.2 dB
18GHz - 26.5GHz	+/- 4.1 dB
26.5GHz - 40GHz	+/- 3.9 dB

Conducted emissions (expanded uncertainty, confidence interval 95%)

30 MHz – 40GHz	+/- 0.38 dB
----------------	-------------

A product is considered to comply with a requirement if the nominal measured value is below the limit line. The product is considered to not be in compliance in case the nominal measured value is above the limit line.

This report must not be reproduced except in full, without written approval of Cisco Systems.

2.2 Date of testing

15-Sep-19 - 26-Sep-19

2.3 Report Issue Date

10/2/2019

Cisco uses an electronic system to issue, store and control the revision of test reports. This system is called the Engineering Document Control System. The actual report issue date is embedded into the original file on EDCS. Any copies of this report, either electronic or paper, that are not on EDCS must be considered uncontrolled.

2.4 Testing facilities

This assessment was performed by: Chris Blair & Julian Land

Testing Laboratory

Cisco Systems, Inc.
125 West Tasman Drive (Building P)
San Jose, CA 95134
USA

Headquarters

Cisco Systems, Inc.,
170 West Tasman Drive
San Jose, CA 95134,
USA

Registration Numbers for Industry Canada

Cisco System Site	Address	Site Identifier
Building P, 10m Chamber	125 West Tasman Dr San Jose, CA 95134	Company #: 2461N-2
Building P, 5m Chamber	125 West Tasman Dr San Jose, CA 95134	Company #: 2461N-1
Building I, 5m Chamber	285 W. Tasman Drive San Jose, California 95134	Company #: 2461M-1
Building 7, 5m Chamber	425 E. Tasman Drive San Jose, California 95134	Company #: 2461N-3

Test Engineers

Chris Blair

2.5 Equipment Assessed (EUT)

C9120AXP-x

2.6 EUT Description

The radio supports the following modes of operation. The modes are further defined in the radio Theory of Operation. The modes included in this report represent the worst case data for all modes.

802.11a - Non HT20, One Antenna, 6 to 54 Mbps, 1ss
802.11a - Non HT20, Two Antennas, 6 to 54 Mbps, 1ss
802.11a - Non HT20, Three Antennas, 6 to 54 Mbps, 1ss
802.11a - Non HT20, Four Antennas, 6 to 54 Mbps, 1ss

802.11a - Non HT20 Beam Forming, Two Antennas, 6 to 54 Mbps, 1ss
802.11a - Non HT20 Beam Forming, Three Antennas, 6 to 54 Mbps, 1ss
802.11a - Non HT20 Beam Forming, Four Antennas, 6 to 54 Mbps, 1ss

802.11n/ac - HT/VHT20, One Antenna, M0 to M7, 1ss
802.11n/ac - HT/VHT20, Two Antennas, M0 to M7, 1ss
802.11n/ac - HT/VHT20, Two Antennas, M8 to M15, 2ss
802.11n/ac - HT/VHT20, Three Antennas, M0 to M7, 1ss
802.11n/ac - HT/VHT20, Three Antennas, M8 to M15, 2ss
802.11n/ac - HT/VHT20, Three Antennas, M16 to M23, 3ss
802.11n/ac - HT/VHT20, Four Antennas, M0 to M7, 1ss
802.11n/ac - HT/VHT20, Four Antennas, M8 to M15, 2ss
802.11n/ac - HT/VHT20, Four Antennas, M16 to M23, 3ss
802.11n/ac - HT/VHT20, Four Antennas, M24 to M31, 4ss

802.11n/ac - HT/VHT20 Beam Forming, Two Antennas, M0 to M7, 1ss
802.11n/ac - HT/VHT20 Beam Forming, Two Antennas, M8 to M15, 2ss
802.11n/ac - HT/VHT20 Beam Forming, Three Antennas, M0 to M7, 1ss
802.11n/ac - HT/VHT20 Beam Forming, Three Antennas, M8 to M15, 2ss
802.11n/ac - HT/VHT20 Beam Forming, Three Antennas, M16 to M23, 3ss
802.11n/ac - HT/VHT20 Beam Forming, Four Antennas, M0 to M7, 1ss
802.11n/ac - HT/VHT20 Beam Forming, Four Antennas, M8 to M15, 2ss
802.11n/ac - HT/VHT20 Beam Forming, Four Antennas, M16 to M23, 3ss
802.11n/ac - HT/VHT20 Beam Forming, Four Antennas, M24 to M31, 4ss

802.11n/ac - HT/VHT20 STBC, Two Antennas, M0 to M7, 2ss
802.11n/ac - HT/VHT20 STBC, Three Antennas, M0 to M7, 2ss
802.11n/ac - HT/VHT20 STBC, Four Antennas, M0 to M7, 2ss

802.11ax - HE20, One Antenna, M0 to M9 1ss
802.11ax - HE20, Two Antennas, M0 to M9 1ss
802.11ax - HE20, Two Antennas, M0 to M9 2ss
802.11ax - HE20, Three Antennas, M0 to M9 1ss
802.11ax - HE20, Three Antennas, M0 to M9 2ss
802.11ax - HE20, Three Antennas, M0 to M9 3ss
802.11ax - HE20, Four Antennas, M0 to M9 1ss
802.11ax - HE20, Four Antennas, M0 to M9 2ss
802.11ax - HE20, Four Antennas, M0 to M9 3ss
802.11ax - HE20, Four Antennas, M0 to M9 4ss

802.11ax - HE20 Beam Forming, Two Antennas, M0 to M9 1ss
802.11ax - HE20 Beam Forming, Two Antennas, M0 to M9 2ss
802.11ax - HE20 Beam Forming, Three Antennas, M0 to M9 1ss
802.11ax - HE20 Beam Forming, Three Antennas, M0 to M9 2ss
802.11ax - HE20 Beam Forming, Three Antennas, M0 to M9 3ss
802.11ax - HE20 Beam Forming, Four Antennas, M0 to M9 1ss
802.11ax - HE20 Beam Forming, Four Antennas, M0 to M9 2ss
802.11ax - HE20 Beam Forming, Four Antennas, M0 to M9 3ss
802.11ax - HE20 Beam Forming, Four Antennas, M0 to M9 4ss

802.11ax - HE20 STBC, Two Antennas, M0 to M9 2ss
802.11ax - HE20 STBC, Three Antennas, M0 to M9 2ss
802.11ax - HE20 STBC, Four Antennas, M0 to M9 2ss

802.11a - Non HT40, One Antenna, 6 to 54 Mbps, 1ss
802.11a - Non HT40, Two Antennas, 6 to 54 Mbps, 1ss
802.11a - Non HT40, Three Antennas, 6 to 54 Mbps, 1ss
802.11a - Non HT40, Four Antennas, 6 to 54 Mbps, 1ss

802.11n/ac - HT/VHT40, One Antenna, M0 to M7, 1ss
802.11n/ac - HT/VHT40, Two Antennas, M0 to M7, 1ss
802.11n/ac - HT/VHT40, Two Antennas, M8 to M15, 2ss
802.11n/ac - HT/VHT40, Three Antennas, M0 to M7, 1ss
802.11n/ac - HT/VHT40, Three Antennas, M8 to M15, 2ss
802.11n/ac - HT/VHT40, Three Antennas, M16 to M23, 3ss
802.11n/ac - HT/VHT40, Four Antennas, M0 to M7, 1ss
802.11n/ac - HT/VHT40, Four Antennas, M8 to M15, 2ss
802.11n/ac - HT/VHT40, Four Antennas, M16 to M23, 3ss
802.11n/ac - HT/VHT40, Four Antennas, M24 to M31, 4ss

802.11n/ac - HT/VHT40 Beam Forming, Two Antennas, M0 to M7, 1ss
802.11n/ac - HT/VHT40 Beam Forming, Two Antennas, M8 to M15, 2ss
802.11n/ac - HT/VHT40 Beam Forming, Three Antennas, M0 to M7, 1ss
802.11n/ac - HT/VHT40 Beam Forming, Three Antennas, M8 to M15, 2ss
802.11n/ac - HT/VHT40 Beam Forming, Three Antennas, M16 to M23, 3ss
802.11n/ac - HT/VHT40 Beam Forming, Four Antennas, M0 to M7, 1ss
802.11n/ac - HT/VHT40 Beam Forming, Four Antennas, M8 to M15, 2ss
802.11n/ac - HT/VHT40 Beam Forming, Four Antennas, M16 to M23, 3ss
802.11n/ac - HT/VHT40 Beam Forming, Four Antennas, M24 to M31, 4ss

802.11n/ac - HT/VHT40 STBC, Two Antennas, M0 to M7, 2ss
802.11n/ac - HT/VHT40 STBC, Three Antennas, M0 to M7, 2ss
802.11n/ac - HT/VHT40 STBC, Four Antennas, M0 to M7, 2ss

802.11ax - HE40, One Antenna, M0 to M9 1ss
802.11ax - HE40, Two Antennas, M0 to M9 1ss
802.11ax - HE40, Two Antennas, M0 to M9 2ss
802.11ax - HE40, Three Antennas, M0 to M9 1ss
802.11ax - HE40, Three Antennas, M0 to M9 2ss
802.11ax - HE40, Three Antennas, M0 to M9 3ss
802.11ax - HE40, Four Antennas, M0 to M9 1ss
802.11ax - HE40, Four Antennas, M0 to M9 2ss
802.11ax - HE40, Four Antennas, M0 to M9 3ss
802.11ax - HE40, Four Antennas, M0 to M9 4ss

802.11ax - HE40 Beam Forming, Two Antennas, M0 to M9 1ss
802.11ax - HE40 Beam Forming, Two Antennas, M0 to M9 2ss
802.11ax - HE40 Beam Forming, Three Antennas, M0 to M9 1ss
802.11ax - HE40 Beam Forming, Three Antennas, M0 to M9 2ss
802.11ax - HE40 Beam Forming, Three Antennas, M0 to M9 3ss
802.11ax - HE40 Beam Forming, Four Antennas, M0 to M9 1ss
802.11ax - HE40 Beam Forming, Four Antennas, M0 to M9 2ss
802.11ax - HE40 Beam Forming, Four Antennas, M0 to M9 3ss
802.11ax - HE40 Beam Forming, Four Antennas, M0 to M9 4ss

802.11ax - HE40 STBC, Two Antennas, M0 to M9 2ss
802.11ax - HE40 STBC, Three Antennas, M0 to M9 2ss
802.11ax - HE40 STBC, Four Antennas, M0 to M9 2ss

802.11a - Non HT80, One Antenna, 6 to 54 Mbps, 1ss
802.11a - Non HT80, Two Antennas, 6 to 54 Mbps, 1ss
802.11a - Non HT80, Three Antennas, 6 to 54 Mbps, 1ss
802.11a - Non HT80, Four Antennas, 6 to 54 Mbps, 1ss

802.11ac - VHT80, One Antenna, M0 to M9 1ss
802.11ac - VHT80, Two Antennas, M0 to M9 1ss
802.11ac - VHT80, Two Antennas, M0 to M9 2ss
802.11ac - VHT80, Three Antennas, M0 to M9 1ss
802.11ac - VHT80, Three Antennas, M0 to M9 2ss
802.11ac - VHT80, Three Antennas, M0 to M9 3ss
802.11ac - VHT80, Four Antennas, M0 to M9 1ss
802.11ac - VHT80, Four Antennas, M0 to M9 2ss
802.11ac - VHT80, Four Antennas, M0 to M9 3ss
802.11ac - VHT80, Four Antennas, M0 to M9 4ss

802.11ac - VHT80 Beam Forming, Two Antennas, M0 to M9 1ss
802.11ac - VHT80 Beam Forming, Two Antennas, M0 to M9 2ss
802.11ac - VHT80 Beam Forming, Three Antennas, M0 to M9 1ss
802.11ac - VHT80 Beam Forming, Three Antennas, M0 to M9 2ss
802.11ac - VHT80 Beam Forming, Three Antennas, M0 to M9 3ss
802.11ac - VHT80 Beam Forming, Four Antennas, M0 to M9 1ss
802.11ac - VHT80 Beam Forming, Four Antennas, M0 to M9 2ss

802.11ac - VHT80 Beam Forming, Four Antennas, M0 to M9 3ss
802.11ac - VHT80 Beam Forming, Four Antennas, M0 to M9 4ss

802.11ac - VHT80 STBC, Two Antennas, M0 to M9 2ss
802.11ac - VHT80 STBC, Three Antennas, M0 to M9 2ss
802.11ac - VHT80 STBC, Four Antennas, M0 to M9 2ss

802.11ax - HE80, One Antenna, M0 to M9 1ss
802.11ax - HE80, Two Antennas, M0 to M9 1ss
802.11ax - HE80, Two Antennas, M0 to M9 2ss
802.11ax - HE80, Three Antennas, M0 to M9 1ss
802.11ax - HE80, Three Antennas, M0 to M9 2ss
802.11ax - HE80, Three Antennas, M0 to M9 3ss
802.11ax - HE80, Four Antennas, M0 to M9 1ss
802.11ax - HE80, Four Antennas, M0 to M9 2ss
802.11ax - HE80, Four Antennas, M0 to M9 3ss
802.11ax - HE80, Four Antennas, M0 to M9 4ss

802.11ax - HE80 Beam Forming, Two Antennas, M0 to M9 1ss
802.11ax - HE80 Beam Forming, Two Antennas, M0 to M9 2ss
802.11ax - HE80 Beam Forming, Three Antennas, M0 to M9 1ss
802.11ax - HE80 Beam Forming, Three Antennas, M0 to M9 2ss
802.11ax - HE80 Beam Forming, Three Antennas, M0 to M9 3ss
802.11ax - HE80 Beam Forming, Four Antennas, M0 to M9 1ss
802.11ax - HE80 Beam Forming, Four Antennas, M0 to M9 2ss
802.11ax - HE80 Beam Forming, Four Antennas, M0 to M9 3ss
802.11ax - HE80 Beam Forming, Four Antennas, M0 to M9 4ss

802.11ax - HE80 STBC, Two Antennas, M0 to M9 2ss
802.11ax - HE80 STBC, Three Antennas, M0 to M9 2ss
802.11ax - HE80 STBC, Four Antennas, M0 to M9 2ss

802.11a - Non HT160, One Antenna, 6 to 54 Mbps, 1ss
802.11a - Non HT160, Two Antennas, 6 to 54 Mbps, 1ss
802.11a - Non HT160, Three Antennas, 6 to 54 Mbps, 1ss
802.11a - Non HT160, Four Antennas, 6 to 54 Mbps, 1ss

802.11ac - VHT160, One Antenna, M0 to M9 1ss
802.11ac - VHT160, Two Antennas, M0 to M9 1ss
802.11ac - VHT160, Two Antennas, M0 to M9 2ss
802.11ac - VHT160, Three Antennas, M0 to M9 1ss
802.11ac - VHT160, Three Antennas, M0 to M9 2ss
802.11ac - VHT160, Three Antennas, M0 to M9 3ss
802.11ac - VHT160, Four Antennas, M0 to M9 1ss
802.11ac - VHT160, Four Antennas, M0 to M9 2ss
802.11ac - VHT160, Four Antennas, M0 to M9 3ss
802.11ac - VHT160, Four Antennas, M0 to M9 4ss

802.11ac - VHT160 Beam Forming, Two Antennas, M0 to M9 1ss
 802.11ac - VHT160 Beam Forming, Two Antennas, M0 to M9 2ss
 802.11ac - VHT160 Beam Forming, Three Antennas, M0 to M9 1ss
 802.11ac - VHT160 Beam Forming, Three Antennas, M0 to M9 2ss
 802.11ac - VHT160 Beam Forming, Three Antennas, M0 to M9 3ss
 802.11ac - VHT160 Beam Forming, Four Antennas, M0 to M9 1ss
 802.11ac - VHT160 Beam Forming, Four Antennas, M0 to M9 2ss
 802.11ac - VHT160 Beam Forming, Four Antennas, M0 to M9 3ss
 802.11ac - VHT160 Beam Forming, Four Antennas, M0 to M9 4ss

802.11ac - VHT160 STBC, Two Antennas, M0 to M9 2ss
 802.11ac - VHT160 STBC, Three Antennas, M0 to M9 2ss
 802.11ac - VHT160 STBC, Four Antennas, M0 to M9 2ss

802.11ax - HE160, One Antenna, M0 to M9 1ss
 802.11ax - HE160, Two Antennas, M0 to M9 1ss
 802.11ax - HE160, Two Antennas, M0 to M9 2ss
 802.11ax - HE160, Three Antennas, M0 to M9 1ss
 802.11ax - HE160, Three Antennas, M0 to M9 2ss
 802.11ax - HE160, Three Antennas, M0 to M9 3ss
 802.11ax - HE160, Four Antennas, M0 to M9 1ss
 802.11ax - HE160, Four Antennas, M0 to M9 2ss
 802.11ax - HE160, Four Antennas, M0 to M9 3ss
 802.11ax - HE160, Four Antennas, M0 to M9 4ss

802.11ax - HE160 Beam Forming, Two Antennas, M0 to M9 1ss
 802.11ax - HE160 Beam Forming, Two Antennas, M0 to M9 2ss
 802.11ax - HE160 Beam Forming, Three Antennas, M0 to M9 1ss
 802.11ax - HE160 Beam Forming, Three Antennas, M0 to M9 2ss
 802.11ax - HE160 Beam Forming, Three Antennas, M0 to M9 3ss
 802.11ax - HE160 Beam Forming, Four Antennas, M0 to M9 1ss
 802.11ax - HE160 Beam Forming, Four Antennas, M0 to M9 2ss
 802.11ax - HE160 Beam Forming, Four Antennas, M0 to M9 3ss
 802.11ax - HE160 Beam Forming, Four Antennas, M0 to M9 4ss

802.11ax - HE160 STBC, Two Antennas, M0 to M9 2ss
 802.11ax - HE160 STBC, Three Antennas, M0 to M9 2ss
 802.11ax - HE160 STBC, Four Antennas, M0 to M9 2ss

The following antennas are supported by this product series.

The data included in this report represent the worst case data for all antennas.

Frequency	Part Number	Antenna Type	Antenna Gain (dBi)
2.4GHz&5GHz	AIR-ANT2513P4M-N=	2.4 GHz 13 dBi/5 GHz 13 dBi Patch Ant., 4-port, N Type	13dBi@2.4GHz 13dBi@5GHz

Section 3: Result Summary

3.1 Results Summary Table

Conducted emissions

Basic Standard	Technical Requirements / Details	Result
FCC 15.407	99% & 26 dB Bandwidth: The 99% occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. There is no limit for 99% OBW. The 26 dB emission is the width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.	Pass

FCC 15.407	Output Power: (1) For the band 5.15-5.25 GHz. (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. ... If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power ... shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm). (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. ... If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. ... Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations. (iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	Pass
------------	--	------

FCC 15.407	Power Spectral Density (i) For an outdoor access point operating in the band 5.15-5.25 GHz...the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm). (ii) For an indoor access point operating in the band 5.15-5.25 GHz... the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz ...the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the ... maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations. (iv) For mobile and portable client devices in the 5.15-5.25 GHz band...the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used... the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	Pass
FCC 15.407	Conducted Spurious Emissions / Band-Edge: For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.	Pass
FCC 15.407 FCC 15.209 FCC 15.205	Restricted band: Unwanted emissions falling within the restricted bands, as defined in FCC 15.205 (a) must also comply with the radiated emission limits specified in FCC 15.209 (a)	Pass

Radiated Emissions (General requirements)

Basic Standard	Technical Requirements / Details	Result
FCC 15.209 FCC 15.205	TX Spurious Emissions: Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the field strength limits table in this section.	Not Tested
FCC 15.207	AC Conducted Emissions: Except when the requirements applicable to a given device state otherwise, for any radio apparatus equipped to operate from the public utility AC power supply, either directly or indirectly (such as with a battery charger), the radio frequency voltage of emissions conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table in these sections. The more stringent limit applies at the frequency range boundaries.	Not Tested

Section 4: Sample Details

Note: Each sample was evaluated to ensure that its condition was suitable to be used as a test sample prior to the commencement of testing.

4.1 Sample Details

Sample No.	Equipment Details	Manufacturer	Hardware Rev.	Firmware Rev.	Software Rev.	Serial Number
S01	C9120AXP-B	Foxconn	P2-2	1268.14948.r 14702 14702	Cisco AP Software, (ap1g7), [cheetah-build6:/san2/ BUILD/workspace/Nig htly-Cheetah-axel-bcm -mfg-c8_10_throttle] Compiled Wed Aug 21 08:08:55 PDT 2019	FOC23302F06

4.2 System Details

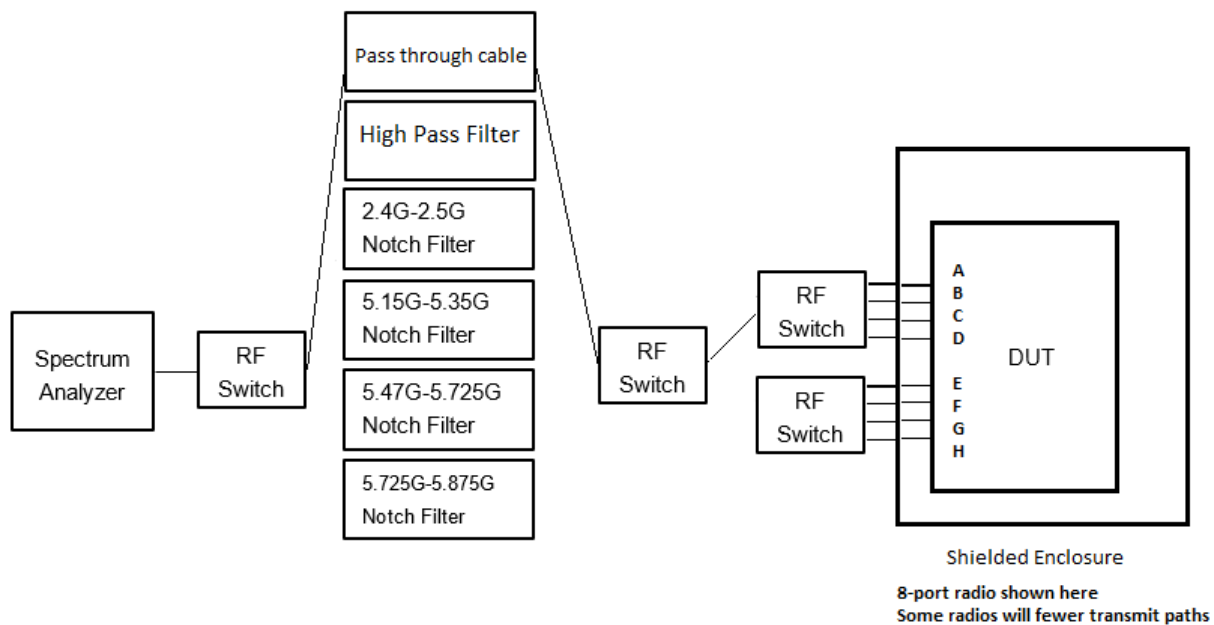
System #	Description	Samples
1	C9120AXP-B	S01

4.3 Mode of Operation Details

Mode#	Description	Comments
1	Continuously Transmitting	Constant duty cycle

Appendix A: Emission Test Results

Conducted Test Setup Diagram



Target Maximum Channel Power

The following table details the maximum supported Total Channel Power for all operating modes.

Operating Mode	Maximum Channel Power (dBm)		
	Frequency (MHz)		
	5250		
Non HT160, 6 to 54 Mbps	13		
VHT160, M0 to M9, M0 to M9 1-2ss	13		
VHT160 Beam Forming, M0 to M9, M0 to M9 1-2ss	13		
VHT160 STBC, M0 to M9 1ss	13		
HE160, M0 to M9, M0 to M9 1-2ss	14		
HE160 Beam Forming, M0 to M9, M0 to M9 1-2ss	14		
HE160 STBC, M0 to M9 1ss	14		
	5180	5220	5240
Non HT20, 6 to 54 Mbps	16	20	20
Non HT20 Beam Forming, 6 to 54 Mbps	15	20	20
HT/VHT20, M0 to M31	16	20	20
HT/VHT20 Beam Forming, M0 to M31	16	20	20
HT/VHT20 STBC, M0 to M7	16	20	20
HE20, M0 to M9, M0 to M9 1-2ss	16	21	20
HE20 Beam Forming, M0 to M9, M0 to M9 1-2ss	16	21	20

HE20 STBC, M0 to M9 2ss	16	21	20
	5190	5230	
Non HT40, 6 to 54 Mbps	13	20	
HT/VHT40, M0 to M31	14	20	
HT/VHT40 Beam Forming, M0 to M31	14	20	
HT/VHT40 STBC, M0 to M7	14	20	
HE40, M0 to M9, M0 to M9 1-2ss	14	21	
HE40 Beam Forming, M0 to M9, M0 to M9 1-2ss	14	21	
HE40 STBC, M0 to M9 2ss	14	21	
	5210		
Non HT80, 6 to 54 Mbps	13		
VHT80, M0 to M9, M0 to M9 1-2ss	14		
VHT80 Beam Forming, M0 to M9, M0 to M9 1-2ss	14		
VHT80 STBC, M0 to M9 1ss	14		
HE80, M0 to M9, M0 to M9 1-2ss	14		
HE80 Beam Forming, M0 to M9, M0 to M9 1-2ss	14		
HE80 STBC, M0 to M9 1ss	14		

A.1 Duty Cycle

Duty Cycle Test Requirement

From KDB 789033 D02 General UNII Test Procedures New Rules v02r01

B. Duty Cycle (x), Transmission Duration (T), and Maximum Power Control Level

1. All measurements are to be performed with the EUT transmitting at 100 percent duty cycle at its maximum power control level; however, if 100 percent duty cycle cannot be achieved, measurements of duty cycle, x, and maximum-power transmission duration, T, are required for each tested mode of operation.

Duty Cycle Test Method

From KDB 789033 D02 General UNII Test Procedures New Rules v02r01:

B. Duty Cycle (x), Transmission Duration (T), and Maximum Power Control Level

The zero-span mode on a spectrum analyzer or EMI receiver, if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set RBW $\geq$ EBW if possible; otherwise, set RBW to the largest available value. Set VBW $\geq$ RBW. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$, where T is defined in section II.B.1.a), and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

Duty Cycle Test Information

Tested By : Chris Blair	Date of testing: 15-Sep-19 - 26-Sep-19
Test Result : PASS	

Test Equipment

See Appendix C for list of test equipment

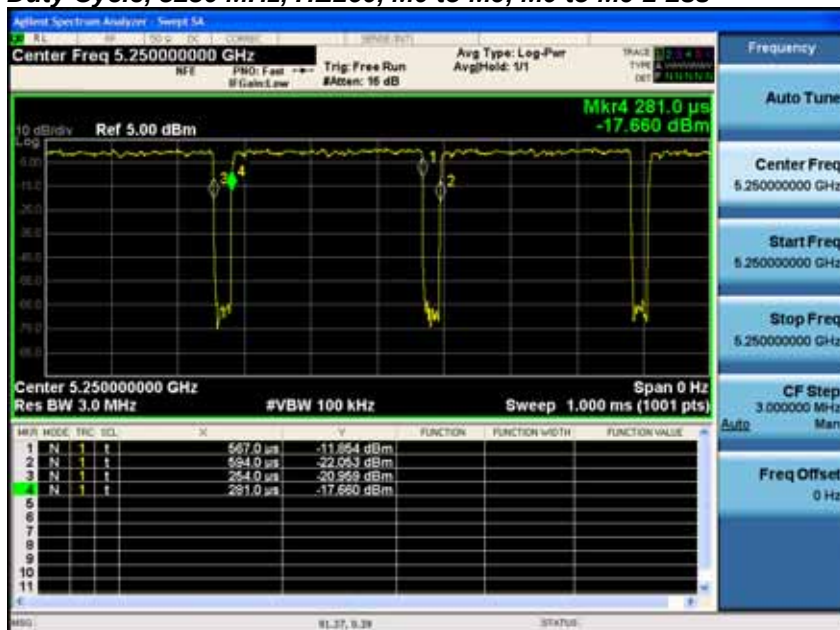
Samples, Systems, and Modes

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	☒	☐
	Support		☐	☒

Duty Cycle Data Table

Duty Cycle table and screen captures are shown below for power/psd modes.

Frequency	Mode	Data Rate	Duty Cycle correction (dB)
5180	Non HT20, 6 to 54 Mbps	6	0.1
	HT/VHT20, M0 to M31	m0	0.0
	HE20, M0 to M9, M0 to M9 1-2ss	m0h1	0.1
5190	Non HT40, 6 to 54 Mbps	6	0.0
	HT/VHT40, M0 to M31	m0	0.1
	HE40, M0 to M9, M0 to M9 1-2ss	m0h1	0.1
5210	Non HT80, 6 to 54 Mbps	6	0.1
	VHT80, M0 to M9, M0 to M9 1-2ss	m0x1	0.2
	HE80, M0 to M9, M0 to M9 1-2ss	m0h1	0.2
5220	Non HT20, 6 to 54 Mbps	6	0.1
	HT/VHT20, M0 to M31	m0	0.0
	HE20, M0 to M9, M0 to M9 1-2ss	m0h1	0.1
5230	Non HT40, 6 to 54 Mbps	6	0.1
	HT/VHT40, M0 to M31	m0	0.0
	HE40, M0 to M9, M0 to M9 1-2ss	m0h1	0.1
5240	Non HT20, 6 to 54 Mbps	6	0.1
	HT/VHT20, M0 to M31	m0	0.0
	HE20, M0 to M9, M0 to M9 1-2ss	m0h1	0.1
5250	Non HT160, 6 to 54 Mbps	6	0.0
	VHT160, M0 to M9, M0 to M9 1-2ss	m0x1	0.4
	HE160, M0 to M9, M0 to M9 1-2ss	m0h1	0.4

Duty Cycle, 5250 MHz, HE160, M0 to M9, M0 to M9 1-2ss

A.2 99% and 26dB Bandwidth

99% and 26dB Bandwidth Test Requirement

For the FCC:

There is no requirement for the value of bandwidth.

Power measurements are made using the 99% Bandwidth as the integration bandwidth.

99% and 26dB Bandwidth Test Procedure

The 99-percent occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99-percent occupied bandwidth is required only as a condition for using the optional band-edge measurement techniques described in section II.G.3.d). Measurements of 99-percent occupied bandwidth may also optionally be used in lieu of the EBW to define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in section II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a).

Ref. KDB 789033 Section D. 99 Percent Occupied Bandwidth

99% BW

Test Parameters

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).

Ref KDB 789033 in Section C. Measurement Bandwidth, Section 1

26 BW

Test parameters

X dB BW = -26dB (using the OBW function of the spectrum analyzer)

Emission Bandwidth (EBW)

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

Samples, Systems, and Modes

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	☒	☐
	Support		☐	☒



Tested By : Chris Blair	Date of testing: 15-Sep-19 - 26-Sep-19
Test Result : PASS	

Test Equipment

See Appendix C for list of test equipment

Frequency (MHz)	Mode	Data Rate (Mbps)	26dB BW (MHz)	99% BW (MHz)
5180	Non HT20, 6 to 54 Mbps	6	21.1	16.731
	HT/VHT20, M0 to M31	m0	21.8	18.006
	HE20, M0 to M9, M0 to M9 1-2ss	m0h1	21.5	19.110
5190	Non HT40, 6 to 54 Mbps	6	39.8	36.344
	HT/VHT40, M0 to M31	m0	40.1	36.437
	HE40, M0 to M9, M0 to M9 1-2ss	m0h1	39.9	37.601
5210	Non HT80, 6 to 54 Mbps	6	82.1	76.183
	VHT80, M0 to M9, M0 to M9 1-2ss	m0x1	82.4	76.088
	HE80, M0 to M9, M0 to M9 1-2ss	m0h1	82.2	77.087
5220	Non HT20, 6 to 54 Mbps	6	21.2	16.755
	HT/VHT20, M0 to M31	m0	21.8	18.014
	HE20, M0 to M9, M0 to M9 1-2ss	m0h1	21.5	19.111
5230	Non HT40, 6 to 54 Mbps	6	39.7	36.346
	HT/VHT40, M0 to M31	m0	40.1	36.444
	HE40, M0 to M9, M0 to M9 1-2ss	m0h1	40.0	37.614
5240	Non HT20, 6 to 54 Mbps	6	21.2	16.754
	HT/VHT20, M0 to M31	m0	21.8	18.026
	HE20, M0 to M9, M0 to M9 1-2ss	m0h1	21.4	19.101
5250	Non HT160, 6 to 54 Mbps	6	163.6	153.987
	VHT160, M0 to M9, M0 to M9 1-2ss	m0x1	165.1	154.674
	HE160, M0 to M9, M0 to M9 1-2ss	m0h1	164.2	154.991

26dB / 99% Bandwidth, 5180 MHz, Non HT20, 6 to 54 Mbps

A.3 Maximum Conducted Output Power

Maximum Conducted Output Power Test Requirement

15.407 General technical requirements, (a) *Power limits: (1) For the band 5.15-5.25 GHz.*

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. ...Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Maximum Conducted Output Power Test Procedure

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v02r01
ANSI C63.10: 2013

Maximum Conducted Output Power Test Procedure

- | |
|---|
| <ol style="list-style-type: none"> 1. Set the radio in the continuous transmitting mode at full power 2. Compute power by integrating the spectrum across the EBW (or alternatively entire 99% OBW) of the signal using the instrument's band power measurement function. The integration shall be performed using the spectrum analyzer band-power measurement function with band limits set equal to the EBW or the OBW band edges. 3. Capture graphs and record pertinent measurement data. |
|---|

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v02r01
2. Measurement using a Spectrum Analyzer or EMI Receiver (SA), (d) Method SA-2

Maximum Conducted Output Power**Test parameters**

Method SA-2 (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

(i) Measure the duty cycle, x , of the transmitter output signal as described in section II.B.

(ii) Set span to encompass the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(iii) Set RBW = 1 MHz.

(iv) Set VBW ≥ 3 MHz.

(v) Number of points in sweep ≥ 2 Span / RBW. (This ensures that bin-to-bin spacing is $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.)

(vi) Sweep time = auto.

(vii) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(viii) Do not use sweep triggering. Allow the sweep to “free run”.

(ix) Trace average at least 100 traces in power averaging (i.e., RMS) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter.

(x) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument’s band power measurement function with band limits set equal to the EBW (or occupied bandwidth)

The “measure-and-sum technique” is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. ANSI C63.10 section 14.3.2.2

Samples, Systems, and Modes

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	☒	☐
	Support		☐	☒

Tested By :

Chris Blair

Date of testing:

15-Sep-19 - 26-Sep-19

Test Result : PASS

Test Equipment

See Appendix C for list of test equipment

Maximum Output Power

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Max Power (dBm)	Tx 2 Max Power (dBm)	Tx 3 Max Power (dBm)	Tx 4 Max Power (dBm)	Duty Cycle Correction (dB)	Total Tx Channel Power (dBm)	Limit (dBm)	Margin (dB)
5180	Non HT20, 6 to 54 Mbps	1	13	13.0				0.1	13.1	23.0	9.95
	Non HT20, 6 to 54 Mbps	2	13	12.0	11.3			0.1	14.7	23.0	8.27
	Non HT20, 6 to 54 Mbps	3	13	10.9	10.2	10.8		0.1	15.5	23.0	7.53
	Non HT20, 6 to 54 Mbps	4	13	10.0	9.2	10.1	10.1	0.1	15.9	23.0	7.06
	Non HT20 Beam Forming, 6 to 54 Mbps	2	13	12.0	11.3			0.1	14.7	23.0	8.27
	Non HT20 Beam Forming, 6 to 54 Mbps	3	15	9.0	8.2	9.0		0.1	13.6	21.0	7.43
	Non HT20 Beam Forming, 6 to 54 Mbps	4	16	6.0	5.3	6.2	6.2	0.1	12.0	20.0	7.99
	HT/VHT20, M0 to M7	1	13	13.1				0.0	13.1	23.0	9.85
	HT/VHT20, M0 to M7	2	13	12.0	11.2			0.0	14.7	23.0	8.32
	HT/VHT20, M8 to M15	2	13	12.0	11.2			0.0	14.7	23.0	8.32
	HT/VHT20, M0 to M7	3	13	10.9	10.2	10.8		0.0	15.5	23.0	7.54
	HT/VHT20, M8 to M15	3	13	10.9	10.2	10.8		0.0	15.5	23.0	7.54
	HT/VHT20, M16 to M23	3	13	10.9	10.2	10.8		0.0	15.5	23.0	7.54
	HT/VHT20, M0 to M7	4	13	10.1	9.4	10.1	10.0	0.0	16.0	23.0	7.02
	HT/VHT20, M8 to M15	4	13	10.1	9.4	10.1	10.0	0.0	16.0	23.0	7.02
	HT/VHT20, M16 to M23	4	13	10.1	9.4	10.1	10.0	0.0	16.0	23.0	7.02
	HT/VHT20, M24 to M31	4	13	10.1	9.4	10.1	10.0	0.0	16.0	23.0	7.02
	HT/VHT20 Beam Forming, M0 to M7	2	13	12.0	11.2			0.0	14.7	23.0	8.32
	HT/VHT20 Beam Forming, M8 to M15	2	13	12.0	11.2			0.0	14.7	23.0	8.32
	HT/VHT20 Beam Forming, M0 to M7	3	15	9.1	8.2	8.8		0.0	13.5	21.0	7.47
	HT/VHT20 Beam Forming, M8 to M15	3	13	10.9	10.2	10.8		0.0	15.5	23.0	7.54
	HT/VHT20 Beam Forming, M16 to M23	3	13	10.9	10.2	10.8		0.0	15.5	23.0	7.54
	HT/VHT20 Beam Forming, M0 to M7	4	16	7.1	6.1	7.0	7.0	0.0	12.9	20.0	7.11
	HT/VHT20 Beam Forming, M8 to M15	4	13	10.1	9.4	10.1	10.0	0.0	16.0	23.0	7.02
	HT/VHT20 Beam Forming, M16 to M23	4	13	10.1	9.4	10.1	10.0	0.0	16.0	23.0	7.02
	HT/VHT20 Beam Forming, M24 to M31	4	13	10.1	9.4	10.1	10.0	0.0	16.0	23.0	7.02
	HT/VHT20 STBC, M0 to M7	2	13	12.0	11.2			0.0	14.7	23.0	8.32
	HT/VHT20 STBC, M0 to M7	3	13	10.9	10.2	10.8		0.0	15.5	23.0	7.54
	HT/VHT20 STBC, M0 to M7	4	13	10.1	9.4	10.1	10.0	0.0	16.0	23.0	7.02
	HE20, M0 to M9 1ss	1	13	13.3				0.1	13.4	23.0	9.63
	HE20, M0 to M9 1ss	2	13	12.3	11.6			0.1	15.0	23.0	7.96
	HE20, M0 to M9 2ss	2	13	12.3	11.6			0.1	15.0	23.0	7.96

	HE20, M0 to M9 1ss	3	13	11.1	10.4	11.2		0.1	15.8	23.0	7.25
	HE20, M0 to M9 2ss	3	13	11.1	10.4	11.2		0.1	15.8	23.0	7.25
	HE20, M0 to M9 3ss	3	13	11.1	10.4	11.2		0.1	15.8	23.0	7.25
	HE20, M0 to M9 1ss	4	13	10.2	9.5	10.3	10.2	0.1	16.1	23.0	6.85
	HE20, M0 to M9 2ss	4	13	10.2	9.5	10.3	10.2	0.1	16.1	23.0	6.85
	HE20, M0 to M9 3ss	4	13	10.2	9.5	10.3	10.2	0.1	16.1	23.0	6.85
	HE20, M0 to M9 4ss	4	13	10.2	9.5	10.3	10.2	0.1	16.1	23.0	6.85
	HE20 Beam Forming, M0 to M9 1ss	2	13	12.3	11.6			0.1	15.0	23.0	7.96
	HE20 Beam Forming, M0 to M9 2ss	2	13	12.3	11.6			0.1	15.0	23.0	7.96
	HE20 Beam Forming, M0 to M9 1ss	3	15	9.3	8.5	9.1		0.1	13.8	21.0	7.18
	HE20 Beam Forming, M0 to M9 2ss	3	13	11.1	10.4	11.2		0.1	15.8	23.0	7.25
	HE20 Beam Forming, M0 to M9 3ss	3	13	11.1	10.4	11.2		0.1	15.8	23.0	7.25
	HE20 Beam Forming, M0 to M9 1ss	4	16	6.2	5.6	6.4	6.3	0.1	12.2	20.0	7.78
	HE20 Beam Forming, M0 to M9 2ss	4	13	10.2	9.5	10.3	10.2	0.1	16.1	23.0	6.85
	HE20 Beam Forming, M0 to M9 3ss	4	13	10.2	9.5	10.3	10.2	0.1	16.1	23.0	6.85
	HE20 Beam Forming, M0 to M9 4ss	4	13	10.2	9.5	10.3	10.2	0.1	16.1	23.0	6.85
	HE20 STBC, M0 to M9 2ss	2	13	12.3	11.6			0.1	15.0	23.0	7.96
	HE20 STBC, M0 to M9 2ss	3	13	11.1	10.4	11.2		0.1	15.8	23.0	7.25
	HE20 STBC, M0 to M9 2ss	4	13	10.2	9.5	10.3	10.2	0.1	16.1	23.0	6.85
5190	Non HT40, 6 to 54 Mbps	1	13	10.8				0.0	10.8	23.0	12.15
	Non HT40, 6 to 54 Mbps	2	13	9.7	9.3			0.0	12.6	23.0	10.44
	Non HT40, 6 to 54 Mbps	3	13	8.8	8.4	8.6		0.0	13.4	23.0	9.58
	Non HT40, 6 to 54 Mbps	4	13	6.7	6.4	6.6	6.8	0.0	12.7	23.0	10.30
	HT/VHT40, M0 to M7	1	13	10.6				0.1	10.7	23.0	12.30
	HT/VHT40, M0 to M7	2	13	10.6	10.3			0.1	13.6	23.0	9.43
	HT/VHT40, M8 to M15	2	13	10.6	10.3			0.1	13.6	23.0	9.43
	HT/VHT40, M0 to M7	3	13	8.5	8.2	8.2		0.1	13.2	23.0	9.82
	HT/VHT40, M8 to M15	3	13	8.5	8.2	8.2		0.1	13.2	23.0	9.82
	HT/VHT40, M16 to M23	3	13	8.5	8.2	8.2		0.1	13.2	23.0	9.82
	HT/VHT40, M0 to M7	4	13	7.5	7.2	7.4	7.6	0.1	13.6	23.0	9.45
	HT/VHT40, M8 to M15	4	13	7.5	7.2	7.4	7.6	0.1	13.6	23.0	9.45
	HT/VHT40, M16 to M23	4	13	7.5	7.2	7.4	7.6	0.1	13.6	23.0	9.45
	HT/VHT40, M24 to M31	4	13	7.5	7.2	7.4	7.6	0.1	13.6	23.0	9.45
	HT/VHT40 Beam Forming, M0 to M7	2	13	10.6	10.3			0.1	13.6	23.0	9.43
	HT/VHT40 Beam Forming, M8 to M15	2	13	10.6	10.3			0.1	13.6	23.0	9.43
	HT/VHT40 Beam Forming, M0 to M7	3	15	6.8	6.0	6.6		0.1	11.4	21.0	9.65
	HT/VHT40 Beam Forming, M8 to M15	3	13	8.5	8.2	8.2		0.1	13.2	23.0	9.82
	HT/VHT40 Beam Forming, M16 to M23	3	13	8.5	8.2	8.2		0.1	13.2	23.0	9.82
	HT/VHT40 Beam Forming, M0 to M7	4	16	3.8	3.1	3.7	3.5	0.1	9.7	20.0	10.34
	HT/VHT40 Beam Forming, M8 to M15	4	13	7.5	7.2	7.4	7.6	0.1	13.6	23.0	9.45
	HT/VHT40 Beam Forming, M16 to M23	4	13	7.5	7.2	7.4	7.6	0.1	13.6	23.0	9.45
	HT/VHT40 Beam Forming, M24 to M31	4	13	7.5	7.2	7.4	7.6	0.1	13.6	23.0	9.45

	HT/VHT40 STBC, M0 to M7	2	13	10.6	10.3			0.1	13.6	23.0	9.43
	HT/VHT40 STBC, M0 to M7	3	13	8.5	8.2	8.2		0.1	13.2	23.0	9.82
	HT/VHT40 STBC, M0 to M7	4	13	7.5	7.2	7.4	7.6	0.1	13.6	23.0	9.45
	HE40, M0 to M9 1ss	1	13	10.9				0.1	11.0	23.0	11.97
	HE40, M0 to M9 1ss	2	13	9.9	9.7			0.1	12.9	23.0	10.05
	HE40, M0 to M9 2ss	2	13	9.9	9.7			0.1	12.9	23.0	10.05
	HE40, M0 to M9 1ss	3	13	9.1	8.6	8.8		0.1	13.7	23.0	9.26
	HE40, M0 to M9 2ss	3	13	9.1	8.6	8.8		0.1	13.7	23.0	9.26
	HE40, M0 to M9 3ss	3	13	9.1	8.6	8.8		0.1	13.7	23.0	9.26
	HE40, M0 to M9 1ss	4	13	7.1	6.4	6.8	6.9	0.1	13.0	23.0	10.04
	HE40, M0 to M9 2ss	4	13	7.1	6.4	6.8	6.9	0.1	13.0	23.0	10.04
	HE40, M0 to M9 3ss	4	13	7.1	6.4	6.8	6.9	0.1	13.0	23.0	10.04
	HE40, M0 to M9 4ss	4	13	7.1	6.4	6.8	6.9	0.1	13.0	23.0	10.04
	HE40 Beam Forming, M0 to M9 1ss	2	13	9.9	9.7			0.1	12.9	23.0	10.05
	HE40 Beam Forming, M0 to M9 2ss	2	13	9.9	9.7			0.1	12.9	23.0	10.05
	HE40 Beam Forming, M0 to M9 1ss	3	15	7.1	6.4	6.8		0.1	11.7	21.0	9.32
	HE40 Beam Forming, M0 to M9 2ss	3	13	9.1	8.6	8.8		0.1	13.7	23.0	9.26
	HE40 Beam Forming, M0 to M9 3ss	3	13	9.1	8.6	8.8		0.1	13.7	23.0	9.26
	HE40 Beam Forming, M0 to M9 1ss	4	16	4.2	3.5	4.0	3.9	0.1	10.1	20.0	9.94
	HE40 Beam Forming, M0 to M9 2ss	4	13	7.1	6.4	6.8	6.9	0.1	13.0	23.0	10.04
	HE40 Beam Forming, M0 to M9 3ss	4	13	7.1	6.4	6.8	6.9	0.1	13.0	23.0	10.04
	HE40 Beam Forming, M0 to M9 4ss	4	13	7.1	6.4	6.8	6.9	0.1	13.0	23.0	10.04
	HE40 STBC, M0 to M9 2ss	2	13	9.9	9.7			0.1	12.9	23.0	10.05
	HE40 STBC, M0 to M9 2ss	3	13	9.1	8.6	8.8		0.1	13.7	23.0	9.26
	HE40 STBC, M0 to M9 2ss	4	13	7.1	6.4	6.8	6.9	0.1	13.0	23.0	10.04
5210	Non HT80, 6 to 54 Mbps	1	13	10.2				0.1	10.3	23.0	12.75
	Non HT80, 6 to 54 Mbps	2	13	10.2	9.1			0.1	12.7	23.0	10.25
	Non HT80, 6 to 54 Mbps	3	13	9.0	8.3	8.3		0.1	13.4	23.0	9.63
	Non HT80, 6 to 54 Mbps	4	13	6.9	6.2	6.5	6.6	0.1	12.6	23.0	10.37
	VHT80, M0 to M9 1ss	1	13	10.9				0.2	11.1	23.0	11.88
	VHT80, M0 to M9 1ss	2	13	10.0	9.1			0.2	12.8	23.0	10.20
	VHT80, M0 to M9 2ss	2	13	10.0	9.1			0.2	12.8	23.0	10.20
	VHT80, M0 to M9 1ss	3	13	8.8	8.1	8.2		0.2	13.4	23.0	9.64
	VHT80, M0 to M9 2ss	3	13	8.8	8.1	8.2		0.2	13.4	23.0	9.64
	VHT80, M0 to M9 3ss	3	13	8.8	8.1	8.2		0.2	13.4	23.0	9.64
	VHT80, M0 to M9 1ss	4	13	7.9	7.0	7.2	7.6	0.2	13.7	23.0	9.32
	VHT80, M0 to M9 2ss	4	13	7.9	7.0	7.2	7.6	0.2	13.7	23.0	9.32
	VHT80, M0 to M9 3ss	4	13	7.9	7.0	7.2	7.6	0.2	13.7	23.0	9.32
	VHT80, M0 to M9 4ss	4	13	7.9	7.0	7.2	7.6	0.2	13.7	23.0	9.32
	VHT80 Beam Forming, M0 to M9 1ss	2	13	10.0	9.1			0.2	12.8	23.0	10.20
	VHT80 Beam Forming, M0 to M9 2ss	2	13	10.0	9.1			0.2	12.8	23.0	10.20
	VHT80 Beam Forming, M0 to M9 1ss	3	15	6.6	6.2	6.3		0.2	11.4	21.0	9.64

	VHT80 Beam Forming, M0 to M9 2ss	3	13	8.8	8.1	8.2		0.2	13.4	23.0	9.64
	VHT80 Beam Forming, M0 to M9 3ss	3	13	8.8	8.1	8.2		0.2	13.4	23.0	9.64
	VHT80 Beam Forming, M0 to M9 1ss	4	16	3.7	2.6	3.3	3.3	0.2	9.5	20.0	10.52
	VHT80 Beam Forming, M0 to M9 2ss	4	13	7.9	7.0	7.2	7.6	0.2	13.7	23.0	9.32
	VHT80 Beam Forming, M0 to M9 3ss	4	13	7.9	7.0	7.2	7.6	0.2	13.7	23.0	9.32
	VHT80 Beam Forming, M0 to M9 4ss	4	13	7.9	7.0	7.2	7.6	0.2	13.7	23.0	9.32
	VHT80 STBC, M0 to M9 1ss	2	13	10.0	9.1			0.2	12.8	23.0	10.20
	VHT80 STBC, M0 to M9 1ss	3	13	8.8	8.1	8.2		0.2	13.4	23.0	9.64
	VHT80 STBC, M0 to M9 1ss	4	13	7.9	7.0	7.2	7.6	0.2	13.7	23.0	9.32
	HE80, M0 to M9 1ss	1	13	11.0				0.2	11.2	23.0	11.75
	HE80, M0 to M9 1ss	2	13	10.1	9.0			0.2	12.8	23.0	10.16
	HE80, M0 to M9 2ss	2	13	10.1	9.0			0.2	12.8	23.0	10.16
	HE80, M0 to M9 1ss	3	13	9.0	8.3	8.4		0.2	13.6	23.0	9.40
	HE80, M0 to M9 2ss	3	13	9.0	8.3	8.4		0.2	13.6	23.0	9.40
	HE80, M0 to M9 3ss	3	13	9.0	8.3	8.4		0.2	13.6	23.0	9.40
	HE80, M0 to M9 1ss	4	13	8.1	7.2	7.4	7.6	0.2	13.9	23.0	9.14
	HE80, M0 to M9 2ss	4	13	8.1	7.2	7.4	7.6	0.2	13.9	23.0	9.14
	HE80, M0 to M9 3ss	4	13	8.1	7.2	7.4	7.6	0.2	13.9	23.0	9.14
	HE80, M0 to M9 4ss	4	13	8.1	7.2	7.4	7.6	0.2	13.9	23.0	9.14
	HE80 Beam Forming, M0 to M9 1ss	2	13	10.1	9.0			0.2	12.8	23.0	10.16
	HE80 Beam Forming, M0 to M9 2ss	2	13	10.1	9.0			0.2	12.8	23.0	10.16
	HE80 Beam Forming, M0 to M9 1ss	3	15	6.8	6.2	6.5		0.2	11.5	21.0	9.47
	HE80 Beam Forming, M0 to M9 2ss	3	13	9.0	8.3	8.4		0.2	13.6	23.0	9.40
	HE80 Beam Forming, M0 to M9 3ss	3	13	9.0	8.3	8.4		0.2	13.6	23.0	9.40
	HE80 Beam Forming, M0 to M9 1ss	4	16	4.9	4.0	4.7	4.6	0.2	10.8	20.0	9.17
	HE80 Beam Forming, M0 to M9 2ss	4	13	8.1	7.2	7.4	7.6	0.2	13.9	23.0	9.14
	HE80 Beam Forming, M0 to M9 3ss	4	13	8.1	7.2	7.4	7.6	0.2	13.9	23.0	9.14
	HE80 Beam Forming, M0 to M9 4ss	4	13	8.1	7.2	7.4	7.6	0.2	13.9	23.0	9.14
	HE80 STBC, M0 to M9 1ss	2	13	10.1	9.0			0.2	12.8	23.0	10.16
	HE80 STBC, M0 to M9 1ss	3	13	9.0	8.3	8.4		0.2	13.6	23.0	9.40
	HE80 STBC, M0 to M9 1ss	4	13	8.1	7.2	7.4	7.6	0.2	13.9	23.0	9.14
5220	Non HT20, 6 to 54 Mbps	1	13	17.1				0.1	17.2	23.0	5.85
	Non HT20, 6 to 54 Mbps	2	13	17.1	16.6			0.1	19.9	23.0	3.08
	Non HT20, 6 to 54 Mbps	3	13	15.3	14.7	15.2		0.1	19.9	23.0	3.10
	Non HT20, 6 to 54 Mbps	4	13	13.0	12.3	13.3	12.9	0.1	19.0	23.0	4.04
	Non HT20 Beam Forming, 6 to 54 Mbps	2	13	17.1	16.6			0.1	19.9	23.0	3.08
	Non HT20 Beam Forming, 6 to 54 Mbps	3	15	13.0	12.3	13.3		0.1	17.7	21.0	3.29
	Non HT20 Beam Forming, 6 to 54 Mbps	4	16	10.0	9.2	10.2	9.7	0.1	15.9	20.0	4.14
	HT/VHT20, M0 to M7	1	13	17.0				0.0	17.0	23.0	5.95
	HT/VHT20, M0 to M7	2	13	17.0	16.5			0.0	19.8	23.0	3.19
	HT/VHT20, M8 to M15	2	13	17.0	16.5			0.0	19.8	23.0	3.19
	HT/VHT20, M0 to M7	3	13	15.1	14.5	15.0		0.0	19.7	23.0	3.31

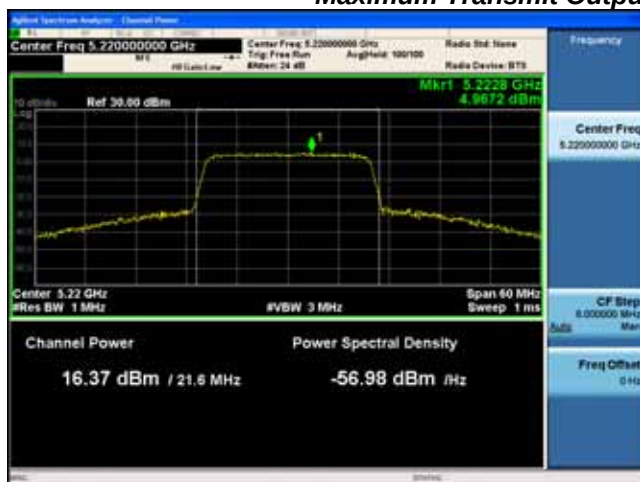
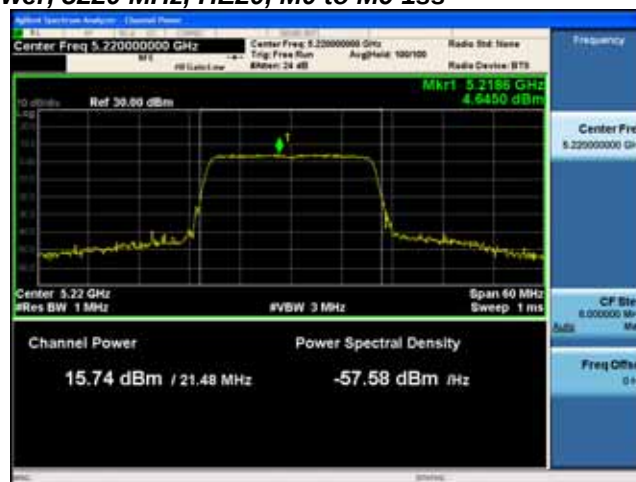
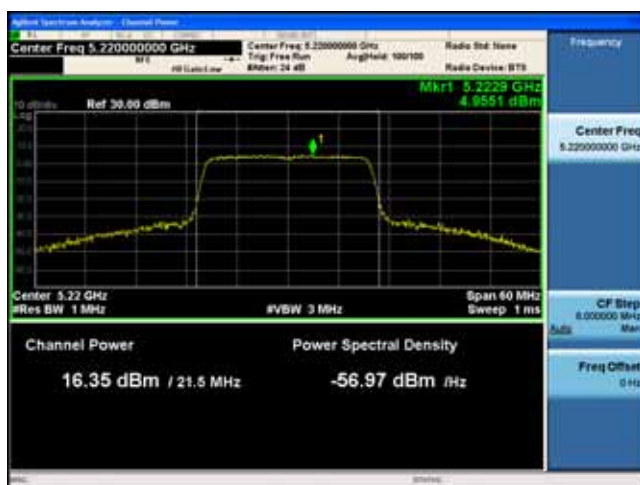
HT/VHT20, M8 to M15	3	13	15.1	14.5	15.0		0.0	19.7	23.0	3.31
HT/VHT20, M16 to M23	3	13	15.1	14.5	15.0		0.0	19.7	23.0	3.31
HT/VHT20, M0 to M7	4	13	14.0	13.4	14.0	14.0	0.0	19.9	23.0	3.08
HT/VHT20, M8 to M15	4	13	14.0	13.4	14.0	14.0	0.0	19.9	23.0	3.08
HT/VHT20, M16 to M23	4	13	14.0	13.4	14.0	14.0	0.0	19.9	23.0	3.08
HT/VHT20, M24 to M31	4	13	14.0	13.4	14.0	14.0	0.0	19.9	23.0	3.08
HT/VHT20 Beam Forming, M0 to M7	2	13	17.0	16.5			0.0	19.8	23.0	3.19
HT/VHT20 Beam Forming, M8 to M15	2	13	17.0	16.5			0.0	19.8	23.0	3.19
HT/VHT20 Beam Forming, M0 to M7	3	15	13.0	12.2	13.2		0.0	17.6	21.0	3.36
HT/VHT20 Beam Forming, M8 to M15	3	13	15.1	14.5	15.0		0.0	19.7	23.0	3.31
HT/VHT20 Beam Forming, M16 to M23	3	13	15.1	14.5	15.0		0.0	19.7	23.0	3.31
HT/VHT20 Beam Forming, M0 to M7	4	16	10.0	9.2	10.2	9.8	0.0	15.9	20.0	4.12
HT/VHT20 Beam Forming, M8 to M15	4	13	14.0	13.4	14.0	14.0	0.0	19.9	23.0	3.08
HT/VHT20 Beam Forming, M16 to M23	4	13	14.0	13.4	14.0	14.0	0.0	19.9	23.0	3.08
HT/VHT20 Beam Forming, M24 to M31	4	13	14.0	13.4	14.0	14.0	0.0	19.9	23.0	3.08
HT/VHT20 STBC, M0 to M7	2	13	17.0	16.5			0.0	19.8	23.0	3.19
HT/VHT20 STBC, M0 to M7	3	13	15.1	14.5	15.0		0.0	19.7	23.0	3.31
HT/VHT20 STBC, M0 to M7	4	13	14.0	13.4	14.0	14.0	0.0	19.9	23.0	3.08
HE20, M0 to M9 1ss	1	13	17.2				0.1	17.3	23.0	5.73
HE20, M0 to M9 1ss	2	13	17.2	16.7			0.1	20.0	23.0	2.97
HE20, M0 to M9 2ss	2	13	17.2	16.7			0.1	20.0	23.0	2.97
HE20, M0 to M9 1ss	3	13	16.4	15.7	16.3		0.1	21.0	23.0	2.02
HE20, M0 to M9 2ss	3	13	16.4	15.7	16.3		0.1	21.0	23.0	2.02
HE20, M0 to M9 3ss	3	13	16.4	15.7	16.3		0.1	21.0	23.0	2.02
HE20, M0 to M9 1ss	4	13	13.3	12.6	13.4	13.1	0.1	19.2	23.0	3.80
HE20, M0 to M9 2ss	4	13	13.3	12.6	13.4	13.1	0.1	19.2	23.0	3.80
HE20, M0 to M9 3ss	4	13	13.3	12.6	13.4	13.1	0.1	19.2	23.0	3.80
HE20, M0 to M9 4ss	4	13	13.3	12.6	13.4	13.1	0.1	19.2	23.0	3.80
HE20 Beam Forming, M0 to M9 1ss	2	13	17.2	16.7			0.1	20.0	23.0	2.97
HE20 Beam Forming, M0 to M9 2ss	2	13	17.2	16.7			0.1	20.0	23.0	2.97
HE20 Beam Forming, M0 to M9 1ss	3	15	13.3	12.6	13.4		0.1	18.0	21.0	3.05
HE20 Beam Forming, M0 to M9 2ss	3	13	16.4	15.7	16.3		0.1	21.0	23.0	2.02
HE20 Beam Forming, M0 to M9 3ss	3	13	16.4	15.7	16.3		0.1	21.0	23.0	2.02
HE20 Beam Forming, M0 to M9 1ss	4	16	10.3	9.5	10.5	10.0	0.1	16.2	20.0	3.82
HE20 Beam Forming, M0 to M9 2ss	4	13	13.3	12.6	13.4	13.1	0.1	19.2	23.0	3.80
HE20 Beam Forming, M0 to M9 3ss	4	13	13.3	12.6	13.4	13.1	0.1	19.2	23.0	3.80
HE20 Beam Forming, M0 to M9 4ss	4	13	13.3	12.6	13.4	13.1	0.1	19.2	23.0	3.80
HE20 STBC, M0 to M9 2ss	2	13	17.2	16.7			0.1	20.0	23.0	2.97
HE20 STBC, M0 to M9 2ss	3	13	16.4	15.7	16.3		0.1	21.0	23.0	2.02
HE20 STBC, M0 to M9 2ss	4	13	13.3	12.6	13.4	13.1	0.1	19.2	23.0	3.80

5230	Non HT40, 6 to 54 Mbps	1	13	16.8				0.1	16.9	23.0	6.15
	Non HT40, 6 to 54 Mbps	2	13	16.8	16.6			0.1	19.8	23.0	3.24
	Non HT40, 6 to 54 Mbps	3	13	14.7	14.7	14.7		0.1	19.5	23.0	3.48
	Non HT40, 6 to 54 Mbps	4	13	12.8	12.6	12.9	12.8	0.1	18.8	23.0	4.15
	HT/VHT40, M0 to M7	1	13	16.6				0.0	16.6	23.0	6.35
	HT/VHT40, M0 to M7	2	13	16.6	16.3			0.0	19.5	23.0	3.49
	HT/VHT40, M8 to M15	2	13	16.6	16.3			0.0	19.5	23.0	3.49
	HT/VHT40, M0 to M7	3	13	15.8	15.3	15.5		0.0	20.4	23.0	2.64
	HT/VHT40, M8 to M15	3	13	15.8	15.3	15.5		0.0	20.4	23.0	2.64
	HT/VHT40, M16 to M23	3	13	15.8	15.3	15.5		0.0	20.4	23.0	2.64
	HT/VHT40, M0 to M7	4	13	13.8	13.3	13.5	13.5	0.0	19.6	23.0	3.40
	HT/VHT40, M8 to M15	4	13	13.8	13.3	13.5	13.5	0.0	19.6	23.0	3.40
	HT/VHT40, M16 to M23	4	13	13.8	13.3	13.5	13.5	0.0	19.6	23.0	3.40
	HT/VHT40, M24 to M31	4	13	13.8	13.3	13.5	13.5	0.0	19.6	23.0	3.40
	HT/VHT40 Beam Forming, M0 to M7	2	13	16.6	16.3			0.0	19.5	23.0	3.49
	HT/VHT40 Beam Forming, M8 to M15	2	13	16.6	16.3			0.0	19.5	23.0	3.49
	HT/VHT40 Beam Forming, M0 to M7	3	15	12.6	12.3	12.7		0.0	17.4	21.0	3.65
	HT/VHT40 Beam Forming, M8 to M15	3	13	15.8	15.3	15.5		0.0	20.4	23.0	2.64
	HT/VHT40 Beam Forming, M16 to M23	3	13	15.8	15.3	15.5		0.0	20.4	23.0	2.64
	HT/VHT40 Beam Forming, M0 to M7	4	16	9.5	9.2	9.5	9.7	0.0	15.5	20.0	4.45
	HT/VHT40 Beam Forming, M8 to M15	4	13	13.8	13.3	13.5	13.5	0.0	19.6	23.0	3.40
	HT/VHT40 Beam Forming, M16 to M23	4	13	13.8	13.3	13.5	13.5	0.0	19.6	23.0	3.40
	HT/VHT40 Beam Forming, M24 to M31	4	13	13.8	13.3	13.5	13.5	0.0	19.6	23.0	3.40
	HT/VHT40 STBC, M0 to M7	2	13	16.6	16.3			0.0	19.5	23.0	3.49
	HT/VHT40 STBC, M0 to M7	3	13	15.8	15.3	15.5		0.0	20.4	23.0	2.64
	HT/VHT40 STBC, M0 to M7	4	13	13.8	13.3	13.5	13.5	0.0	19.6	23.0	3.40
	HE40, M0 to M9 1ss	1	13	16.9				0.1	17.0	23.0	6.03
	HE40, M0 to M9 1ss	2	13	16.9	16.6			0.1	19.8	23.0	3.17
	HE40, M0 to M9 2ss	2	13	16.9	16.6			0.1	19.8	23.0	3.17
	HE40, M0 to M9 1ss	3	13	16.2	15.9	15.9		0.1	20.8	23.0	2.16
	HE40, M0 to M9 2ss	3	13	16.2	15.9	15.9		0.1	20.8	23.0	2.16
	HE40, M0 to M9 3ss	3	13	16.2	15.9	15.9		0.1	20.8	23.0	2.16
	HE40, M0 to M9 1ss	4	13	12.9	12.6	12.9	12.9	0.1	18.9	23.0	4.09
	HE40, M0 to M9 2ss	4	13	12.9	12.6	12.9	12.9	0.1	18.9	23.0	4.09
	HE40, M0 to M9 3ss	4	13	12.9	12.6	12.9	12.9	0.1	18.9	23.0	4.09
	HE40, M0 to M9 4ss	4	13	12.9	12.6	12.9	12.9	0.1	18.9	23.0	4.09
	HE40 Beam Forming, M0 to M9 1ss	2	13	16.9	16.6			0.1	19.8	23.0	3.17
	HE40 Beam Forming, M0 to M9 2ss	2	13	16.9	16.6			0.1	19.8	23.0	3.17
	HE40 Beam Forming, M0 to M9 1ss	3	15	12.9	12.6	12.9		0.1	17.6	21.0	3.36
	HE40 Beam Forming, M0 to M9 2ss	3	13	16.2	15.9	15.9		0.1	20.8	23.0	2.16
	HE40 Beam Forming, M0 to M9 3ss	3	13	16.2	15.9	15.9		0.1	20.8	23.0	2.16
	HE40 Beam Forming, M0 to M9 1ss	4	16	10.0	9.4	9.8	10.0	0.1	15.9	20.0	4.11
	HE40 Beam Forming, M0 to M9 2ss	4	13	12.9	12.6	12.9	12.9	0.1	18.9	23.0	4.09

	HE40 Beam Forming, M0 to M9 3ss	4	13	12.9	12.6	12.9	12.9	0.1	18.9	23.0	4.09
	HE40 Beam Forming, M0 to M9 4ss	4	13	12.9	12.6	12.9	12.9	0.1	18.9	23.0	4.09
	HE40 STBC, M0 to M9 2ss	2	13	16.9	16.6			0.1	19.8	23.0	3.17
	HE40 STBC, M0 to M9 2ss	3	13	16.2	15.9	15.9		0.1	20.8	23.0	2.16
	HE40 STBC, M0 to M9 2ss	4	13	12.9	12.6	12.9	12.9	0.1	18.9	23.0	4.09
5240	Non HT20, 6 to 54 Mbps	1	13	17.0				0.1	17.1	23.0	5.95
	Non HT20, 6 to 54 Mbps	2	13	17.0	16.5			0.1	19.8	23.0	3.18
	Non HT20, 6 to 54 Mbps	3	13	15.2	14.3	15.0		0.1	19.7	23.0	3.33
	Non HT20, 6 to 54 Mbps	4	13	13.0	12.2	13.2	12.9	0.1	18.9	23.0	4.09
	Non HT20 Beam Forming, 6 to 54 Mbps	2	13	17.0	16.5			0.1	19.8	23.0	3.18
	Non HT20 Beam Forming, 6 to 54 Mbps	3	15	13.0	12.2	13.2		0.1	17.6	21.0	3.36
	Non HT20 Beam Forming, 6 to 54 Mbps	4	16	10.0	9.1	10.2	9.8	0.1	15.9	20.0	4.13
	HT/VHT20, M0 to M7	1	13	17.1				0.0	17.1	23.0	5.85
	HT/VHT20, M0 to M7	2	13	17.1	16.4			0.0	19.8	23.0	3.18
	HT/VHT20, M8 to M15	2	13	17.1	16.4			0.0	19.8	23.0	3.18
	HT/VHT20, M0 to M7	3	13	15.1	14.3	15.0		0.0	19.6	23.0	3.37
	HT/VHT20, M8 to M15	3	13	15.1	14.3	15.0		0.0	19.6	23.0	3.37
	HT/VHT20, M16 to M23	3	13	15.1	14.3	15.0		0.0	19.6	23.0	3.37
	HT/VHT20, M0 to M7	4	13	13.2	12.2	13.2	12.8	0.0	18.9	23.0	4.06
	HT/VHT20, M8 to M15	4	13	13.2	12.2	13.2	12.8	0.0	18.9	23.0	4.06
	HT/VHT20, M16 to M23	4	13	13.2	12.2	13.2	12.8	0.0	18.9	23.0	4.06
	HT/VHT20, M24 to M31	4	13	13.2	12.2	13.2	12.8	0.0	18.9	23.0	4.06
	HT/VHT20 Beam Forming, M0 to M7	2	13	17.1	16.4			0.0	19.8	23.0	3.18
	HT/VHT20 Beam Forming, M8 to M15	2	13	17.1	16.4			0.0	19.8	23.0	3.18
	HT/VHT20 Beam Forming, M0 to M7	3	15	13.2	12.2	13.2		0.0	17.7	21.0	3.29
	HT/VHT20 Beam Forming, M8 to M15	3	13	15.1	14.3	15.0		0.0	19.6	23.0	3.37
	HT/VHT20 Beam Forming, M16 to M23	3	13	15.1	14.3	15.0		0.0	19.6	23.0	3.37
	HT/VHT20 Beam Forming, M0 to M7	4	16	10.0	9.2	10.3	9.7	0.0	15.9	20.0	4.11
	HT/VHT20 Beam Forming, M8 to M15	4	13	13.2	12.2	13.2	12.8	0.0	18.9	23.0	4.06
	HT/VHT20 Beam Forming, M16 to M23	4	13	13.2	12.2	13.2	12.8	0.0	18.9	23.0	4.06
	HT/VHT20 Beam Forming, M24 to M31	4	13	13.2	12.2	13.2	12.8	0.0	18.9	23.0	4.06
	HT/VHT20 STBC, M0 to M7	2	13	17.1	16.4			0.0	19.8	23.0	3.18
	HT/VHT20 STBC, M0 to M7	3	13	15.1	14.3	15.0		0.0	19.6	23.0	3.37
	HT/VHT20 STBC, M0 to M7	4	13	13.2	12.2	13.2	12.8	0.0	18.9	23.0	4.06
	HE20, M0 to M9 1ss	1	13	17.0				0.1	17.1	23.0	5.93
	HE20, M0 to M9 1ss	2	13	17.0	16.7			0.1	19.9	23.0	3.07
	HE20, M0 to M9 2ss	2	13	17.0	16.7			0.1	19.9	23.0	3.07
	HE20, M0 to M9 1ss	3	13	15.4	14.5	15.3		0.1	19.9	23.0	3.08
	HE20, M0 to M9 2ss	3	13	15.4	14.5	15.3		0.1	19.9	23.0	3.08
	HE20, M0 to M9 3ss	3	13	15.4	14.5	15.3		0.1	19.9	23.0	3.08
	HE20, M0 to M9 1ss	4	13	13.2	12.4	13.4	13.2	0.1	19.2	23.0	3.85
	HE20, M0 to M9 2ss	4	13	13.2	12.4	13.4	13.2	0.1	19.2	23.0	3.85

	HE20, M0 to M9 3ss	4	13	13.2	12.4	13.4	13.2	0.1	19.2	23.0	3.85
	HE20, M0 to M9 4ss	4	13	13.2	12.4	13.4	13.2	0.1	19.2	23.0	3.85
	HE20 Beam Forming, M0 to M9 1ss	2	13	17.0	16.7			0.1	19.9	23.0	3.07
	HE20 Beam Forming, M0 to M9 2ss	2	13	17.0	16.7			0.1	19.9	23.0	3.07
	HE20 Beam Forming, M0 to M9 1ss	3	15	13.2	12.4	13.4		0.1	17.9	21.0	3.14
	HE20 Beam Forming, M0 to M9 2ss	3	13	15.4	14.5	15.3		0.1	19.9	23.0	3.08
	HE20 Beam Forming, M0 to M9 3ss	3	13	15.4	14.5	15.3		0.1	19.9	23.0	3.08
	HE20 Beam Forming, M0 to M9 1ss	4	16	10.3	9.3	10.5	10.1	0.1	16.2	20.0	3.84
	HE20 Beam Forming, M0 to M9 2ss	4	13	13.2	12.4	13.4	13.2	0.1	19.2	23.0	3.85
	HE20 Beam Forming, M0 to M9 3ss	4	13	13.2	12.4	13.4	13.2	0.1	19.2	23.0	3.85
	HE20 Beam Forming, M0 to M9 4ss	4	13	13.2	12.4	13.4	13.2	0.1	19.2	23.0	3.85
	HE20 STBC, M0 to M9 2ss	2	13	17.0	16.7			0.1	19.9	23.0	3.07
	HE20 STBC, M0 to M9 2ss	3	13	15.4	14.5	15.3		0.1	19.9	23.0	3.08
	HE20 STBC, M0 to M9 2ss	4	13	13.2	12.4	13.4	13.2	0.1	19.2	23.0	3.85
5250	Non HT160, 6 to 54 Mbps	1	13	9.0				0.0	9.0	23.0	13.95
	Non HT160, 6 to 54 Mbps	2	13	7.0	6.8			0.0	10.0	23.0	13.04
	Non HT160, 6 to 54 Mbps	3	13	7.0	6.8	6.3		0.0	11.5	23.0	11.47
	Non HT160, 6 to 54 Mbps	4	13	7.0	6.8	6.3	5.9	0.0	12.6	23.0	10.41
	VHT160, M0 to M9 1ss	1	13	10.5				0.4	10.9	23.0	12.11
	VHT160, M0 to M9 1ss	2	13	9.5	9.3			0.4	12.8	23.0	10.20
	VHT160, M0 to M9 2ss	2	13	9.5	9.3			0.4	12.8	23.0	10.20
	VHT160, M0 to M9 1ss	3	13	8.4	8.2	7.8		0.4	13.3	23.0	9.70
	VHT160, M0 to M9 2ss	3	13	8.4	8.2	7.8		0.4	13.3	23.0	9.70
	VHT160, M0 to M9 3ss	3	13	8.4	8.2	7.8		0.4	13.3	23.0	9.70
	VHT160, M0 to M9 1ss	4	13	7.6	7.3	6.6	6.5	0.4	13.4	23.0	9.56
	VHT160, M0 to M9 2ss	4	13	7.6	7.3	6.6	6.5	0.4	13.4	23.0	9.56
	VHT160, M0 to M9 3ss	4	13	7.6	7.3	6.6	6.5	0.4	13.4	23.0	9.56
	VHT160, M0 to M9 4ss	4	13	7.6	7.3	6.6	6.5	0.4	13.4	23.0	9.56
	VHT160 Beam Forming, M0 to M9 1ss	2	13	9.5	9.3			0.4	12.8	23.0	10.20
	VHT160 Beam Forming, M0 to M9 2ss	2	13	9.5	9.3			0.4	12.8	23.0	10.20
	VHT160 Beam Forming, M0 to M9 1ss	3	15	6.5	6.2	5.7		0.4	11.3	21.0	9.69
	VHT160 Beam Forming, M0 to M9 2ss	3	13	8.4	8.2	7.8		0.4	13.3	23.0	9.70
	VHT160 Beam Forming, M0 to M9 3ss	3	13	8.4	8.2	7.8		0.4	13.3	23.0	9.70
	VHT160 Beam Forming, M0 to M9 1ss	4	16	4.4	4.3	3.9	3.5	0.4	10.5	20.0	9.55
	VHT160 Beam Forming, M0 to M9 2ss	4	13	7.6	7.3	6.6	6.5	0.4	13.4	23.0	9.56
	VHT160 Beam Forming, M0 to M9 3ss	4	13	7.6	7.3	6.6	6.5	0.4	13.4	23.0	9.56
	VHT160 Beam Forming, M0 to M9 4ss	4	13	7.6	7.3	6.6	6.5	0.4	13.4	23.0	9.56
	VHT160 STBC, M0 to M9 1ss	2	13	9.5	9.3			0.4	12.8	23.0	10.20
	VHT160 STBC, M0 to M9 1ss	3	13	8.4	8.2	7.8		0.4	13.3	23.0	9.70
	VHT160 STBC, M0 to M9 1ss	4	13	7.6	7.3	6.6	6.5	0.4	13.4	23.0	9.56
	HE160, M0 to M9 1ss	1	13	10.9				0.4	11.3	23.0	11.67
	HE160, M0 to M9 1ss	2	13	9.8	9.7			0.4	13.2	23.0	9.81

HE160, M0 to M9 2ss	2	13	9.8	9.7			0.4	13.2	23.0	9.81
HE160, M0 to M9 1ss	3	13	8.7	8.6	8.1		0.4	13.7	23.0	9.32
HE160, M0 to M9 2ss	3	13	8.7	8.6	8.1		0.4	13.7	23.0	9.32
HE160, M0 to M9 3ss	3	13	8.7	8.6	8.1		0.4	13.7	23.0	9.32
HE160, M0 to M9 1ss	4	13	7.8	7.7	7.1	6.9	0.4	13.8	23.0	9.15
HE160, M0 to M9 2ss	4	13	7.8	7.7	7.1	6.9	0.4	13.8	23.0	9.15
HE160, M0 to M9 3ss	4	13	7.8	7.7	7.1	6.9	0.4	13.8	23.0	9.15
HE160, M0 to M9 4ss	4	13	7.8	7.7	7.1	6.9	0.4	13.8	23.0	9.15
HE160 Beam Forming, M0 to M9 1ss	2	13	9.8	9.7			0.4	13.2	23.0	9.81
HE160 Beam Forming, M0 to M9 2ss	2	13	9.8	9.7			0.4	13.2	23.0	9.81
HE160 Beam Forming, M0 to M9 1ss	3	15	7.8	7.7	7.1		0.4	12.7	21.0	8.25
HE160 Beam Forming, M0 to M9 2ss	3	13	8.7	8.6	8.1		0.4	13.7	23.0	9.32
HE160 Beam Forming, M0 to M9 3ss	3	13	8.7	8.6	8.1		0.4	13.7	23.0	9.32
HE160 Beam Forming, M0 to M9 1ss	4	16	5.9	5.7	5.2	4.8	0.4	11.9	20.0	8.12
HE160 Beam Forming, M0 to M9 2ss	4	13	7.8	7.7	7.1	6.9	0.4	13.8	23.0	9.15
HE160 Beam Forming, M0 to M9 3ss	4	13	7.8	7.7	7.1	6.9	0.4	13.8	23.0	9.15
HE160 Beam Forming, M0 to M9 4ss	4	13	7.8	7.7	7.1	6.9	0.4	13.8	23.0	9.15
HE160 STBC, M0 to M9 1ss	2	13	9.8	9.7			0.4	13.2	23.0	9.81
HE160 STBC, M0 to M9 1ss	3	13	8.7	8.6	8.1		0.4	13.7	23.0	9.32
HE160 STBC, M0 to M9 1ss	4	13	7.8	7.7	7.1	6.9	0.4	13.8	23.0	9.15

Maximum Transmit Output Power, 5220 MHz, HE20, M0 to M9 1ss**Antenna A****Antenna B****Antenna C**

A.4 Power Spectral Density

Power Spectral Density Test Requirement

15.407 General technical requirements, (a) *Power limits: (1) For the band 5.15-5.25 GHz.*

(i) For an outdoor access point operating in the band 5.15-5.25 GHz ... the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(ii) For an indoor access point operating in the band 5.15-5.25 GHz... the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz...the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Power Spectral Density Test Procedure

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v02r01

F. Maximum Power Spectral Density (PSD)

Power Spectral Density

Test Procedure

The rules requires “maximum power spectral density” measurements where the intent is to measure the maximum value of the time average of the power spectral density measured during a period of continuous transmission.

1. Create an average power spectrum for the EUT operating mode being tested by following the instructions in section II.E.2. for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-1, SA-2, SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, “Compute power...”. (This procedure is required even if the maximum conducted output power measurement was performed using a power meter, method PM.)

2. Use the peak search function on the instrument to find the peak of the spectrum and record its value.

3. Make the following adjustments to the peak value of the spectrum, if applicable: a) If Method SA-2 or SA-2 Alternative was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum.

b) If Method SA-3 Alternative was used and the linear mode was used in step II.E.2.g)(viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging.

4. The result is the Maximum PSD over 1 MHz reference bandwidth.

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v02r01

2. Measurement using a Spectrum Analyzer or EMI Receiver (SA), (d) Method SA-2

Power Spectral Density

Test parameters

Method SA-2 (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

(i) Measure the duty cycle, x , of the transmitter output signal as described in section II.B.

(ii) Set span to encompass the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(iii) Set RBW = 1 MHz.

(iv) Set VBW $\geq$ 3 MHz.

(v) Number of points in sweep $\geq$ 2 Span / RBW. (This ensures that bin-to-bin spacing is $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.)

(vi) Sweep time = auto.

(vii) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(viii) Do not use sweep triggering. Allow the sweep to “free run”.

(ix) Trace average at least 100 traces in power averaging (i.e., RMS) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter.

(x) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument’s band power measurement function with band limits set equal to the EBW (or occupied bandwidth)

F. Maximum Power Spectral Density (PSD)

2. Use the peak search function on the instrument to find the peak of the spectrum and record its value.

3. Make the following adjustments to the peak value of the spectrum, if applicable: a) If Method SA-2 or SA-2 Alternative was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum.

The “measure-and-sum technique” is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. ANSI C63.10 section 14.3.2.2

Samples, Systems, and Modes

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	☒	☐
	Support		☐	☒

Tested By :

Chris Blair

Date of testing:

15-Sep-19 - 26-Sep-19

Test Result : PASS

Test Equipment

See Appendix C for list of test equipment

Power Spectral Density

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 PSD (dBm/MHz)	Tx 2 PSD (dBm/MHz)	Tx 3 PSD (dBm/MHz)	Tx 4 PSD (dBm/MHz)	Duty Cycle Correction (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)
5180	Non HT20, 6 to 54 Mbps	1	13	1.9				0.1	2.0	10.0	8.05
	Non HT20, 6 to 54 Mbps	2	13	1.1	0.6			0.1	3.9	10.0	6.08
	Non HT20, 6 to 54 Mbps	3	13	-0.2	-0.6	-0.1		0.1	4.5	10.0	5.47
	Non HT20, 6 to 54 Mbps	4	13	-1.0	-1.5	-1.0	-0.9	0.1	5.0	10.0	5.02
	Non HT20 Beam Forming, 6 to 54 Mbps	2	13	1.1	0.6			0.1	3.9	10.0	6.08
	Non HT20 Beam Forming, 6 to 54 Mbps	3	15	-1.8	-2.6	-1.8		0.1	2.8	8.0	5.23
	Non HT20 Beam Forming, 6 to 54 Mbps	4	16	-4.9	-5.6	-4.7	-4.8	0.1	1.1	7.0	5.91
	HT/VHT20, M0 to M7	1	13	2.3				0.0	2.3	10.0	7.65
	HT/VHT20, M0 to M7	2	13	0.8	0.0			0.0	3.5	10.0	6.52
	HT/VHT20, M8 to M15	2	13	0.8	0.0			0.0	3.5	10.0	6.52
	HT/VHT20, M0 to M7	3	13	-0.4	-1.2	-0.4		0.0	4.2	10.0	5.83
	HT/VHT20, M8 to M15	3	13	-0.4	-1.2	-0.4		0.0	4.2	10.0	5.83
	HT/VHT20, M16 to M23	3	13	-0.4	-1.2	-0.4		0.0	4.2	10.0	5.83
	HT/VHT20, M0 to M7	4	13	-1.1	-1.8	-1.1	-1.3	0.0	4.8	10.0	5.25
	HT/VHT20, M8 to M15	4	13	-1.1	-1.8	-1.1	-1.3	0.0	4.8	10.0	5.25
	HT/VHT20, M16 to M23	4	13	-1.1	-1.8	-1.1	-1.3	0.0	4.8	10.0	5.25
	HT/VHT20, M24 to M31	4	13	-1.1	-1.8	-1.1	-1.3	0.0	4.8	10.0	5.25
	HT/VHT20 Beam Forming, M0 to M7	2	13	0.8	0.0			0.0	3.5	10.0	6.52
	HT/VHT20 Beam Forming, M8 to M15	2	13	0.8	0.0			0.0	3.5	10.0	6.52
	HT/VHT20 Beam Forming, M0 to M7	3	15	-2.2	-2.9	-2.2		0.0	2.4	8.0	5.60
	HT/VHT20 Beam Forming, M8 to M15	3	13	-0.4	-1.2	-0.4		0.0	4.2	10.0	5.83
	HT/VHT20 Beam Forming, M16 to M23	3	13	-0.4	-1.2	-0.4		0.0	4.2	10.0	5.83
	HT/VHT20 Beam Forming, M0 to M7	4	16	-4.0	-5.3	-4.3	-4.3	0.0	1.6	7.0	5.38
	HT/VHT20 Beam Forming, M8 to M15	4	13	-1.1	-1.8	-1.1	-1.3	0.0	4.8	10.0	5.25
	HT/VHT20 Beam Forming, M16 to M23	4	13	-1.1	-1.8	-1.1	-1.3	0.0	4.8	10.0	5.25
	HT/VHT20 Beam Forming, M24 to M31	4	13	-1.1	-1.8	-1.1	-1.3	0.0	4.8	10.0	5.25
	HT/VHT20 STBC, M0 to M7	2	13	0.8	0.0			0.0	3.5	10.0	6.52
	HT/VHT20 STBC, M0 to M7	3	13	-0.4	-1.2	-0.4		0.0	4.2	10.0	5.83
	HT/VHT20 STBC, M0 to M7	4	13	-1.1	-1.8	-1.1	-1.3	0.0	4.8	10.0	5.25
	HE20, M0 to M9 1ss	1	13	2.0				0.1	2.1	10.0	7.93
	HE20, M0 to M9 1ss	2	13	0.9	0.4			0.1	3.7	10.0	6.27
	HE20, M0 to M9 2ss	2	13	0.9	0.4			0.1	3.7	10.0	6.27

	HE20, M0 to M9 1ss	3	13	-0.4	-0.9	0.2		0.1	4.5	10.0	5.51
	HE20, M0 to M9 2ss	3	13	-0.4	-0.9	0.2		0.1	4.5	10.0	5.51
	HE20, M0 to M9 3ss	3	13	-0.4	-0.9	0.2		0.1	4.5	10.0	5.51
	HE20, M0 to M9 1ss	4	13	-1.1	-1.8	-0.9	-0.7	0.1	5.0	10.0	5.02
	HE20, M0 to M9 2ss	4	13	-1.1	-1.8	-0.9	-0.7	0.1	5.0	10.0	5.02
	HE20, M0 to M9 3ss	4	13	-1.1	-1.8	-0.9	-0.7	0.1	5.0	10.0	5.02
	HE20, M0 to M9 4ss	4	13	-1.1	-1.8	-0.9	-0.7	0.1	5.0	10.0	5.02
	HE20 Beam Forming, M0 to M9 1ss	2	13	0.9	0.4			0.1	3.7	10.0	6.27
	HE20 Beam Forming, M0 to M9 2ss	2	13	0.9	0.4			0.1	3.7	10.0	6.27
	HE20 Beam Forming, M0 to M9 1ss	3	15	-2.2	-2.9	-2.2		0.1	2.4	8.0	5.58
	HE20 Beam Forming, M0 to M9 2ss	3	13	-0.4	-0.9	0.2		0.1	4.5	10.0	5.51
	HE20 Beam Forming, M0 to M9 3ss	3	13	-0.4	-0.9	0.2		0.1	4.5	10.0	5.51
	HE20 Beam Forming, M0 to M9 1ss	4	16	-5.3	-5.8	-4.5	-5.2	0.1	0.9	7.0	6.09
	HE20 Beam Forming, M0 to M9 2ss	4	13	-1.1	-1.8	-0.9	-0.7	0.1	5.0	10.0	5.02
	HE20 Beam Forming, M0 to M9 3ss	4	13	-1.1	-1.8	-0.9	-0.7	0.1	5.0	10.0	5.02
	HE20 Beam Forming, M0 to M9 4ss	4	13	-1.1	-1.8	-0.9	-0.7	0.1	5.0	10.0	5.02
	HE20 STBC, M0 to M9 2ss	2	13	0.9	0.4			0.1	3.7	10.0	6.27
	HE20 STBC, M0 to M9 2ss	3	13	-0.4	-0.9	0.2		0.1	4.5	10.0	5.51
	HE20 STBC, M0 to M9 2ss	4	13	-1.1	-1.8	-0.9	-0.7	0.1	5.0	10.0	5.02
5190	Non HT40, 6 to 54 Mbps	1	13	-3.3				0.0	-3.3	10.0	13.25
	Non HT40, 6 to 54 Mbps	2	13	-4.2	-4.3			0.0	-1.2	10.0	11.19
	Non HT40, 6 to 54 Mbps	3	13	-5.0	-5.2	-5.5		0.0	-0.4	10.0	10.41
	Non HT40, 6 to 54 Mbps	4	13	-7.4	-7.0	-7.3	-7.1	0.0	-1.1	10.0	11.13
	HT/VHT40, M0 to M7	1	13	-3.4				0.1	-3.3	10.0	13.30
	HT/VHT40, M0 to M7	2	13	-3.4	-3.8			0.1	-0.5	10.0	10.48
	HT/VHT40, M8 to M15	2	13	-3.4	-3.8			0.1	-0.5	10.0	10.48
	HT/VHT40, M0 to M7	3	13	-5.6	-6.0	-5.9		0.1	-1.0	10.0	10.96
	HT/VHT40, M8 to M15	3	13	-5.6	-6.0	-5.9		0.1	-1.0	10.0	10.96
	HT/VHT40, M16 to M23	3	13	-5.6	-6.0	-5.9		0.1	-1.0	10.0	10.96
	HT/VHT40, M0 to M7	4	13	-6.3	-6.8	-7.0	-6.6	0.1	-0.5	10.0	10.54
	HT/VHT40, M8 to M15	4	13	-6.3	-6.8	-7.0	-6.6	0.1	-0.5	10.0	10.54
	HT/VHT40, M16 to M23	4	13	-6.3	-6.8	-7.0	-6.6	0.1	-0.5	10.0	10.54
	HT/VHT40, M24 to M31	4	13	-6.3	-6.8	-7.0	-6.6	0.1	-0.5	10.0	10.54
	HT/VHT40 Beam Forming, M0 to M7	2	13	-3.4	-3.8			0.1	-0.5	10.0	10.48
	HT/VHT40 Beam Forming, M8 to M15	2	13	-3.4	-3.8			0.1	-0.5	10.0	10.48
	HT/VHT40 Beam Forming, M0 to M7	3	15	-7.3	-7.9	-7.4		0.1	-2.7	8.0	10.65
	HT/VHT40 Beam Forming, M8 to M15	3	13	-5.6	-6.0	-5.9		0.1	-1.0	10.0	10.96
	HT/VHT40 Beam Forming, M16 to M23	3	13	-5.6	-6.0	-5.9		0.1	-1.0	10.0	10.96
	HT/VHT40 Beam Forming, M0 to M7	4	16	-10.3	-11.1	-10.5	-10.5	0.1	-4.5	7.0	11.47
	HT/VHT40 Beam Forming, M8 to M15	4	13	-6.3	-6.8	-7.0	-6.6	0.1	-0.5	10.0	10.54
	HT/VHT40 Beam Forming, M16 to M23	4	13	-6.3	-6.8	-7.0	-6.6	0.1	-0.5	10.0	10.54
	HT/VHT40 Beam Forming, M24 to M31	4	13	-6.3	-6.8	-7.0	-6.6	0.1	-0.5	10.0	10.54

	HT/VHT40 STBC, M0 to M7	2	13	-3.4	-3.8			0.1	-0.5	10.0	10.48
	HT/VHT40 STBC, M0 to M7	3	13	-5.6	-6.0	-5.9		0.1	-1.0	10.0	10.96
	HT/VHT40 STBC, M0 to M7	4	13	-6.3	-6.8	-7.0	-6.6	0.1	-0.5	10.0	10.54
	HE40, M0 to M9 1ss	1	13	-3.3				0.1	-3.2	10.0	13.17
	HE40, M0 to M9 1ss	2	13	-4.3	-4.4			0.1	-1.2	10.0	11.20
	HE40, M0 to M9 2ss	2	13	-4.3	-4.4			0.1	-1.2	10.0	11.20
	HE40, M0 to M9 1ss	3	13	-5.1	-5.4	-5.4		0.1	-0.4	10.0	10.39
	HE40, M0 to M9 2ss	3	13	-5.1	-5.4	-5.4		0.1	-0.4	10.0	10.39
	HE40, M0 to M9 3ss	3	13	-5.1	-5.4	-5.4		0.1	-0.4	10.0	10.39
	HE40, M0 to M9 1ss	4	13	-7.3	-7.9	-7.4	-7.4	0.1	-1.3	10.0	11.34
	HE40, M0 to M9 2ss	4	13	-7.3	-7.9	-7.4	-7.4	0.1	-1.3	10.0	11.34
	HE40, M0 to M9 3ss	4	13	-7.3	-7.9	-7.4	-7.4	0.1	-1.3	10.0	11.34
	HE40, M0 to M9 4ss	4	13	-7.3	-7.9	-7.4	-7.4	0.1	-1.3	10.0	11.34
	HE40 Beam Forming, M0 to M9 1ss	2	13	-4.3	-4.4			0.1	-1.2	10.0	11.20
	HE40 Beam Forming, M0 to M9 2ss	2	13	-4.3	-4.4			0.1	-1.2	10.0	11.20
	HE40 Beam Forming, M0 to M9 1ss	3	15	-7.3	-7.9	-7.4		0.1	-2.6	8.0	10.62
	HE40 Beam Forming, M0 to M9 2ss	3	13	-5.1	-5.4	-5.4		0.1	-0.4	10.0	10.39
	HE40 Beam Forming, M0 to M9 3ss	3	13	-5.1	-5.4	-5.4		0.1	-0.4	10.0	10.39
	HE40 Beam Forming, M0 to M9 1ss	4	16	-9.9	-10.5	-10.3	-10.5	0.1	-4.1	7.0	11.14
	HE40 Beam Forming, M0 to M9 2ss	4	13	-7.3	-7.9	-7.4	-7.4	0.1	-1.3	10.0	11.34
	HE40 Beam Forming, M0 to M9 3ss	4	13	-7.3	-7.9	-7.4	-7.4	0.1	-1.3	10.0	11.34
	HE40 Beam Forming, M0 to M9 4ss	4	13	-7.3	-7.9	-7.4	-7.4	0.1	-1.3	10.0	11.34
	HE40 STBC, M0 to M9 2ss	2	13	-4.3	-4.4			0.1	-1.2	10.0	11.20
	HE40 STBC, M0 to M9 2ss	3	13	-5.1	-5.4	-5.4		0.1	-0.4	10.0	10.39
	HE40 STBC, M0 to M9 2ss	4	13	-7.3	-7.9	-7.4	-7.4	0.1	-1.3	10.0	11.34
5210	Non HT80, 6 to 54 Mbps	1	13	-6.5				0.1	-6.4	10.0	16.45
	Non HT80, 6 to 54 Mbps	2	13	-6.5	-7.5			0.1	-3.9	10.0	13.91
	Non HT80, 6 to 54 Mbps	3	13	-7.8	-8.5	-8.4		0.1	-3.4	10.0	13.40
	Non HT80, 6 to 54 Mbps	4	13	-9.4	-10.1	-10.1	-9.8	0.1	-3.8	10.0	13.77
	VHT80, M0 to M9 1ss	1	13	-6.1				0.2	-5.9	10.0	15.88
	VHT80, M0 to M9 1ss	2	13	-7.2	-8.0			0.2	-4.4	10.0	14.36
	VHT80, M0 to M9 2ss	2	13	-7.2	-8.0			0.2	-4.4	10.0	14.36
	VHT80, M0 to M9 1ss	3	13	-8.7	-9.0	-8.7		0.2	-3.8	10.0	13.81
	VHT80, M0 to M9 2ss	3	13	-8.7	-9.0	-8.7		0.2	-3.8	10.0	13.81
	VHT80, M0 to M9 3ss	3	13	-8.7	-9.0	-8.7		0.2	-3.8	10.0	13.81
	VHT80, M0 to M9 1ss	4	13	-9.2	-10.4	-10.3	-9.7	0.2	-3.6	10.0	13.64
	VHT80, M0 to M9 2ss	4	13	-9.2	-10.4	-10.3	-9.7	0.2	-3.6	10.0	13.64
	VHT80, M0 to M9 3ss	4	13	-9.2	-10.4	-10.3	-9.7	0.2	-3.6	10.0	13.64
	VHT80, M0 to M9 4ss	4	13	-9.2	-10.4	-10.3	-9.7	0.2	-3.6	10.0	13.64
	VHT80 Beam Forming, M0 to M9 1ss	2	13	-7.2	-8.0			0.2	-4.4	10.0	14.36
	VHT80 Beam Forming, M0 to M9 2ss	2	13	-7.2	-8.0			0.2	-4.4	10.0	14.36
	VHT80 Beam Forming, M0 to M9 1ss	3	15	-10.5	-11.1	-10.7		0.2	-5.8	8.0	13.77

	VHT80 Beam Forming, M0 to M9 2ss	3	13	-8.7	-9.0	-8.7		0.2	-3.8	10.0	13.81
	VHT80 Beam Forming, M0 to M9 3ss	3	13	-8.7	-9.0	-8.7		0.2	-3.8	10.0	13.81
	VHT80 Beam Forming, M0 to M9 1ss	4	16	-13.3	-14.7	-13.9	-13.8	0.2	-7.7	7.0	14.66
	VHT80 Beam Forming, M0 to M9 2ss	4	13	-9.2	-10.4	-10.3	-9.7	0.2	-3.6	10.0	13.64
	VHT80 Beam Forming, M0 to M9 3ss	4	13	-9.2	-10.4	-10.3	-9.7	0.2	-3.6	10.0	13.64
	VHT80 Beam Forming, M0 to M9 4ss	4	13	-9.2	-10.4	-10.3	-9.7	0.2	-3.6	10.0	13.64
	VHT80 STBC, M0 to M9 1ss	2	13	-7.2	-8.0			0.2	-4.4	10.0	14.36
	VHT80 STBC, M0 to M9 1ss	3	13	-8.7	-9.0	-8.7		0.2	-3.8	10.0	13.81
	VHT80 STBC, M0 to M9 1ss	4	13	-9.2	-10.4	-10.3	-9.7	0.2	-3.6	10.0	13.64
	HE80, M0 to M9 1ss	1	13	-5.7				0.2	-5.5	10.0	15.45
	HE80, M0 to M9 1ss	2	13	-6.7	-8.1			0.2	-4.1	10.0	14.08
	HE80, M0 to M9 2ss	2	13	-6.7	-8.1			0.2	-4.1	10.0	14.08
	HE80, M0 to M9 1ss	3	13	-7.7	-8.8	-8.8		0.2	-3.4	10.0	13.38
	HE80, M0 to M9 2ss	3	13	-7.7	-8.8	-8.8		0.2	-3.4	10.0	13.38
	HE80, M0 to M9 3ss	3	13	-7.7	-8.8	-8.8		0.2	-3.4	10.0	13.38
	HE80, M0 to M9 1ss	4	13	-9.2	-10.0	-9.4	-9.8	0.2	-3.3	10.0	13.32
	HE80, M0 to M9 2ss	4	13	-9.2	-10.0	-9.4	-9.8	0.2	-3.3	10.0	13.32
	HE80, M0 to M9 3ss	4	13	-9.2	-10.0	-9.4	-9.8	0.2	-3.3	10.0	13.32
	HE80, M0 to M9 4ss	4	13	-9.2	-10.0	-9.4	-9.8	0.2	-3.3	10.0	13.32
	HE80 Beam Forming, M0 to M9 1ss	2	13	-6.7	-8.1			0.2	-4.1	10.0	14.08
	HE80 Beam Forming, M0 to M9 2ss	2	13	-6.7	-8.1			0.2	-4.1	10.0	14.08
	HE80 Beam Forming, M0 to M9 1ss	3	15	-9.4	-10.3	-10.7		0.2	-5.1	8.0	13.08
	HE80 Beam Forming, M0 to M9 2ss	3	13	-7.7	-8.8	-8.8		0.2	-3.4	10.0	13.38
	HE80 Beam Forming, M0 to M9 3ss	3	13	-7.7	-8.8	-8.8		0.2	-3.4	10.0	13.38
	HE80 Beam Forming, M0 to M9 1ss	4	16	-11.4	-13.1	-12.5	-12.7	0.2	-6.1	7.0	13.11
	HE80 Beam Forming, M0 to M9 2ss	4	13	-9.2	-10.0	-9.4	-9.8	0.2	-3.3	10.0	13.32
	HE80 Beam Forming, M0 to M9 3ss	4	13	-9.2	-10.0	-9.4	-9.8	0.2	-3.3	10.0	13.32
	HE80 Beam Forming, M0 to M9 4ss	4	13	-9.2	-10.0	-9.4	-9.8	0.2	-3.3	10.0	13.32
	HE80 STBC, M0 to M9 1ss	2	13	-6.7	-8.1			0.2	-4.1	10.0	14.08
	HE80 STBC, M0 to M9 1ss	3	13	-7.7	-8.8	-8.8		0.2	-3.4	10.0	13.38
	HE80 STBC, M0 to M9 1ss	4	13	-9.2	-10.0	-9.4	-9.8	0.2	-3.3	10.0	13.32
5220	Non HT20, 6 to 54 Mbps	1	13	6.1				0.1	6.2	10.0	3.85
	Non HT20, 6 to 54 Mbps	2	13	6.1	5.6			0.1	8.9	10.0	1.08
	Non HT20, 6 to 54 Mbps	3	13	4.2	3.8	4.2		0.1	8.9	10.0	1.11
	Non HT20, 6 to 54 Mbps	4	13	2.3	1.1	2.4	2.3	0.1	8.1	10.0	1.87
	Non HT20 Beam Forming, 6 to 54 Mbps	2	13	6.1	5.6			0.1	8.9	10.0	1.08
	Non HT20 Beam Forming, 6 to 54 Mbps	3	15	2.3	1.1	2.4		0.1	6.8	8.0	1.21
	Non HT20 Beam Forming, 6 to 54 Mbps	4	16	-0.9	-1.3	-0.8	-1.3	0.1	5.0	7.0	2.00
	HT/VHT20, M0 to M7	1	13	6.0				0.0	6.0	10.0	3.95
	HT/VHT20, M0 to M7	2	13	6.0	5.5			0.0	8.8	10.0	1.19
	HT/VHT20, M8 to M15	2	13	6.0	5.5			0.0	8.8	10.0	1.19
	HT/VHT20, M0 to M7	3	13	4.0	3.4	3.9		0.0	8.6	10.0	1.41

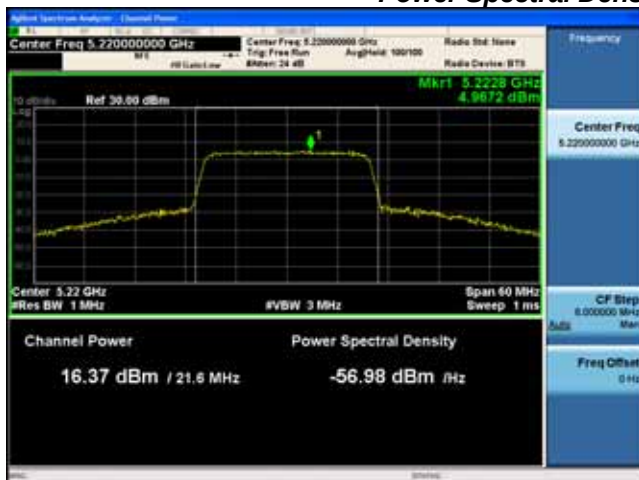
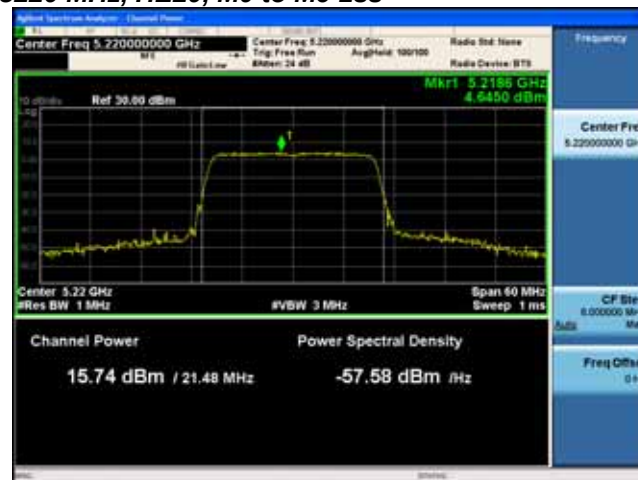
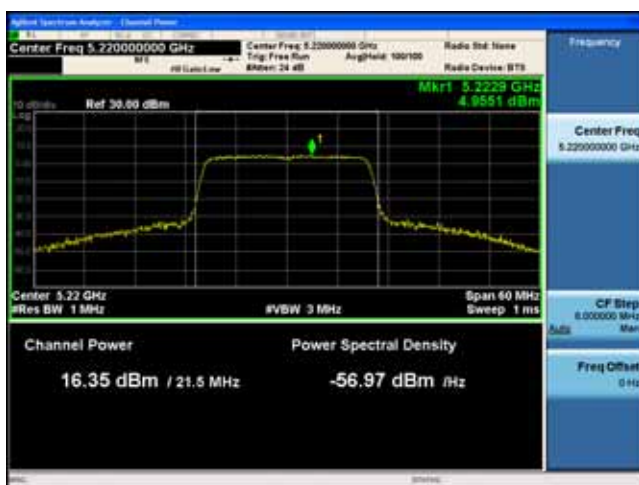
HT/VHT20, M8 to M15	3	13	4.0	3.4	3.9		0.0	8.6	10.0	1.41
HT/VHT20, M16 to M23	3	13	4.0	3.4	3.9		0.0	8.6	10.0	1.41
HT/VHT20, M0 to M7	4	13	2.7	2.2	2.8	2.7	0.0	8.7	10.0	1.33
HT/VHT20, M8 to M15	4	13	2.7	2.2	2.8	2.7	0.0	8.7	10.0	1.33
HT/VHT20, M16 to M23	4	13	2.7	2.2	2.8	2.7	0.0	8.7	10.0	1.33
HT/VHT20, M24 to M31	4	13	2.7	2.2	2.8	2.7	0.0	8.7	10.0	1.33
HT/VHT20 Beam Forming, M0 to M7	2	13	6.0	5.5			0.0	8.8	10.0	1.19
HT/VHT20 Beam Forming, M8 to M15	2	13	6.0	5.5			0.0	8.8	10.0	1.19
HT/VHT20 Beam Forming, M0 to M7	3	15	1.7	1.0	2.0		0.0	6.4	8.0	1.60
HT/VHT20 Beam Forming, M8 to M15	3	13	4.0	3.4	3.9		0.0	8.6	10.0	1.41
HT/VHT20 Beam Forming, M16 to M23	3	13	4.0	3.4	3.9		0.0	8.6	10.0	1.41
HT/VHT20 Beam Forming, M0 to M7	4	16	-1.2	-2.0	-0.9	-1.2	0.0	4.8	7.0	2.24
HT/VHT20 Beam Forming, M8 to M15	4	13	2.7	2.2	2.8	2.7	0.0	8.7	10.0	1.33
HT/VHT20 Beam Forming, M16 to M23	4	13	2.7	2.2	2.8	2.7	0.0	8.7	10.0	1.33
HT/VHT20 Beam Forming, M24 to M31	4	13	2.7	2.2	2.8	2.7	0.0	8.7	10.0	1.33
HT/VHT20 STBC, M0 to M7	2	13	6.0	5.5			0.0	8.8	10.0	1.19
HT/VHT20 STBC, M0 to M7	3	13	4.0	3.4	3.9		0.0	8.6	10.0	1.41
HT/VHT20 STBC, M0 to M7	4	13	2.7	2.2	2.8	2.7	0.0	8.7	10.0	1.33
HE20, M0 to M9 1ss	1	13	5.6				0.1	5.7	10.0	4.33
HE20, M0 to M9 1ss	2	13	5.6	5.4			0.1	8.6	10.0	1.42
HE20, M0 to M9 2ss	2	13	5.6	5.4			0.1	8.6	10.0	1.42
HE20, M0 to M9 1ss	3	13	5.0	4.6	5.0		0.1	9.7	10.0	0.29
HE20, M0 to M9 2ss	3	13	5.0	4.6	5.0		0.1	9.7	10.0	0.29
HE20, M0 to M9 3ss	3	13	5.0	4.6	5.0		0.1	9.7	10.0	0.29
HE20, M0 to M9 1ss	4	13	2.0	1.3	2.2	1.8	0.1	7.9	10.0	2.08
HE20, M0 to M9 2ss	4	13	2.0	1.3	2.2	1.8	0.1	7.9	10.0	2.08
HE20, M0 to M9 3ss	4	13	2.0	1.3	2.2	1.8	0.1	7.9	10.0	2.08
HE20, M0 to M9 4ss	4	13	2.0	1.3	2.2	1.8	0.1	7.9	10.0	2.08
HE20 Beam Forming, M0 to M9 1ss	2	13	5.6	5.4			0.1	8.6	10.0	1.42
HE20 Beam Forming, M0 to M9 2ss	2	13	5.6	5.4			0.1	8.6	10.0	1.42
HE20 Beam Forming, M0 to M9 1ss	3	15	2.0	1.3	2.2		0.1	6.7	8.0	1.31
HE20 Beam Forming, M0 to M9 2ss	3	13	5.0	4.6	5.0		0.1	9.7	10.0	0.29
HE20 Beam Forming, M0 to M9 3ss	3	13	5.0	4.6	5.0		0.1	9.7	10.0	0.29
HE20 Beam Forming, M0 to M9 1ss	4	16	-1.0	-1.5	-0.7	-1.3	0.1	5.0	7.0	2.03
HE20 Beam Forming, M0 to M9 2ss	4	13	2.0	1.3	2.2	1.8	0.1	7.9	10.0	2.08
HE20 Beam Forming, M0 to M9 3ss	4	13	2.0	1.3	2.2	1.8	0.1	7.9	10.0	2.08
HE20 Beam Forming, M0 to M9 4ss	4	13	2.0	1.3	2.2	1.8	0.1	7.9	10.0	2.08
HE20 STBC, M0 to M9 2ss	2	13	5.6	5.4			0.1	8.6	10.0	1.42
HE20 STBC, M0 to M9 2ss	3	13	5.0	4.6	5.0		0.1	9.7	10.0	0.29
HE20 STBC, M0 to M9 2ss	4	13	2.0	1.3	2.2	1.8	0.1	7.9	10.0	2.08

5230	Non HT40, 6 to 54 Mbps	1	13	3.2				0.1	3.3	10.0	6.75
	Non HT40, 6 to 54 Mbps	2	13	3.2	3.0			0.1	6.2	10.0	3.84
	Non HT40, 6 to 54 Mbps	3	13	1.0	0.9	0.9		0.1	5.8	10.0	4.24
	Non HT40, 6 to 54 Mbps	4	13	-1.1	-1.5	-0.8	-1.1	0.1	5.0	10.0	5.05
	HT/VHT40, M0 to M7	1	13	2.3				0.0	2.3	10.0	7.65
	HT/VHT40, M0 to M7	2	13	2.3	2.2			0.0	5.3	10.0	4.69
	HT/VHT40, M8 to M15	2	13	2.3	2.2			0.0	5.3	10.0	4.69
	HT/VHT40, M0 to M7	3	13	1.5	1.3	1.4		0.0	6.2	10.0	3.78
	HT/VHT40, M8 to M15	3	13	1.5	1.3	1.4		0.0	6.2	10.0	3.78
	HT/VHT40, M16 to M23	3	13	1.5	1.3	1.4		0.0	6.2	10.0	3.78
	HT/VHT40, M0 to M7	4	13	-0.6	-0.8	-0.5	-0.7	0.0	5.4	10.0	4.58
	HT/VHT40, M8 to M15	4	13	-0.6	-0.8	-0.5	-0.7	0.0	5.4	10.0	4.58
	HT/VHT40, M16 to M23	4	13	-0.6	-0.8	-0.5	-0.7	0.0	5.4	10.0	4.58
	HT/VHT40, M24 to M31	4	13	-0.6	-0.8	-0.5	-0.7	0.0	5.4	10.0	4.58
	HT/VHT40 Beam Forming, M0 to M7	2	13	2.3	2.2			0.0	5.3	10.0	4.69
	HT/VHT40 Beam Forming, M8 to M15	2	13	2.3	2.2			0.0	5.3	10.0	4.69
	HT/VHT40 Beam Forming, M0 to M7	3	15	-1.8	-1.6	-1.3		0.0	3.3	8.0	4.74
	HT/VHT40 Beam Forming, M8 to M15	3	13	1.5	1.3	1.4		0.0	6.2	10.0	3.78
	HT/VHT40 Beam Forming, M16 to M23	3	13	1.5	1.3	1.4		0.0	6.2	10.0	3.78
	HT/VHT40 Beam Forming, M0 to M7	4	16	-4.6	-4.9	-4.5	-4.4	0.0	1.5	7.0	5.53
	HT/VHT40 Beam Forming, M8 to M15	4	13	-0.6	-0.8	-0.5	-0.7	0.0	5.4	10.0	4.58
	HT/VHT40 Beam Forming, M16 to M23	4	13	-0.6	-0.8	-0.5	-0.7	0.0	5.4	10.0	4.58
	HT/VHT40 Beam Forming, M24 to M31	4	13	-0.6	-0.8	-0.5	-0.7	0.0	5.4	10.0	4.58
	HT/VHT40 STBC, M0 to M7	2	13	2.3	2.2			0.0	5.3	10.0	4.69
	HT/VHT40 STBC, M0 to M7	3	13	1.5	1.3	1.4		0.0	6.2	10.0	3.78
	HT/VHT40 STBC, M0 to M7	4	13	-0.6	-0.8	-0.5	-0.7	0.0	5.4	10.0	4.58
	HE40, M0 to M9 1ss	1	13	2.4				0.1	2.5	10.0	7.53
	HE40, M0 to M9 1ss	2	13	2.4	2.3			0.1	5.4	10.0	4.57
	HE40, M0 to M9 2ss	2	13	2.4	2.3			0.1	5.4	10.0	4.57
	HE40, M0 to M9 1ss	3	13	2.0	1.6	1.6		0.1	6.6	10.0	3.43
	HE40, M0 to M9 2ss	3	13	2.0	1.6	1.6		0.1	6.6	10.0	3.43
	HE40, M0 to M9 3ss	3	13	2.0	1.6	1.6		0.1	6.6	10.0	3.43
	HE40, M0 to M9 1ss	4	13	-1.4	-1.7	-1.5	-1.1	0.1	4.7	10.0	5.33
	HE40, M0 to M9 2ss	4	13	-1.4	-1.7	-1.5	-1.1	0.1	4.7	10.0	5.33
	HE40, M0 to M9 3ss	4	13	-1.4	-1.7	-1.5	-1.1	0.1	4.7	10.0	5.33
	HE40, M0 to M9 4ss	4	13	-1.4	-1.7	-1.5	-1.1	0.1	4.7	10.0	5.33
	HE40 Beam Forming, M0 to M9 1ss	2	13	2.4	2.3			0.1	5.4	10.0	4.57
	HE40 Beam Forming, M0 to M9 2ss	2	13	2.4	2.3			0.1	5.4	10.0	4.57
	HE40 Beam Forming, M0 to M9 1ss	3	15	-1.4	-1.7	-1.5		0.1	3.3	8.0	4.70
	HE40 Beam Forming, M0 to M9 2ss	3	13	2.0	1.6	1.6		0.1	6.6	10.0	3.43
	HE40 Beam Forming, M0 to M9 3ss	3	13	2.0	1.6	1.6		0.1	6.6	10.0	3.43
	HE40 Beam Forming, M0 to M9 1ss	4	16	-4.1	-4.7	-4.1	-4.1	0.1	1.8	7.0	5.16
	HE40 Beam Forming, M0 to M9 2ss	4	13	-1.4	-1.7	-1.5	-1.1	0.1	4.7	10.0	5.33

	HE40 Beam Forming, M0 to M9 3ss	4	13	-1.4	-1.7	-1.5	-1.1	0.1	4.7	10.0	5.33
	HE40 Beam Forming, M0 to M9 4ss	4	13	-1.4	-1.7	-1.5	-1.1	0.1	4.7	10.0	5.33
	HE40 STBC, M0 to M9 2ss	2	13	2.4	2.3			0.1	5.4	10.0	4.57
	HE40 STBC, M0 to M9 2ss	3	13	2.0	1.6	1.6		0.1	6.6	10.0	3.43
	HE40 STBC, M0 to M9 2ss	4	13	-1.4	-1.7	-1.5	-1.1	0.1	4.7	10.0	5.33
5240	Non HT20, 6 to 54 Mbps	1	13	6.0				0.1	6.1	10.0	3.95
	Non HT20, 6 to 54 Mbps	2	13	6.0	5.6			0.1	8.9	10.0	1.13
	Non HT20, 6 to 54 Mbps	3	13	4.0	3.3	4.0		0.1	8.6	10.0	1.40
	Non HT20, 6 to 54 Mbps	4	13	2.0	1.3	2.5	2.1	0.1	8.1	10.0	1.93
	Non HT20 Beam Forming, 6 to 54 Mbps	2	13	6.0	5.6			0.1	8.9	10.0	1.13
	Non HT20 Beam Forming, 6 to 54 Mbps	3	15	2.0	1.3	2.5		0.1	6.8	8.0	1.22
	Non HT20 Beam Forming, 6 to 54 Mbps	4	16	-0.9	-1.5	-0.4	-1.0	0.1	5.1	7.0	1.86
	HT/VHT20, M0 to M7	1	13	5.9				0.0	5.9	10.0	4.05
	HT/VHT20, M0 to M7	2	13	5.9	5.0			0.0	8.5	10.0	1.47
	HT/VHT20, M8 to M15	2	13	5.9	5.0			0.0	8.5	10.0	1.47
	HT/VHT20, M0 to M7	3	13	3.9	3.1	3.7		0.0	8.4	10.0	1.60
	HT/VHT20, M8 to M15	3	13	3.9	3.1	3.7		0.0	8.4	10.0	1.60
	HT/VHT20, M16 to M23	3	13	3.9	3.1	3.7		0.0	8.4	10.0	1.60
	HT/VHT20, M0 to M7	4	13	2.0	0.7	2.0	1.5	0.0	7.6	10.0	2.35
	HT/VHT20, M8 to M15	4	13	2.0	0.7	2.0	1.5	0.0	7.6	10.0	2.35
	HT/VHT20, M16 to M23	4	13	2.0	0.7	2.0	1.5	0.0	7.6	10.0	2.35
	HT/VHT20, M24 to M31	4	13	2.0	0.7	2.0	1.5	0.0	7.6	10.0	2.35
	HT/VHT20 Beam Forming, M0 to M7	2	13	5.9	5.0			0.0	8.5	10.0	1.47
	HT/VHT20 Beam Forming, M8 to M15	2	13	5.9	5.0			0.0	8.5	10.0	1.47
	HT/VHT20 Beam Forming, M0 to M7	3	15	2.0	0.7	2.0		0.0	6.4	8.0	1.57
	HT/VHT20 Beam Forming, M8 to M15	3	13	3.9	3.1	3.7		0.0	8.4	10.0	1.60
	HT/VHT20 Beam Forming, M16 to M23	3	13	3.9	3.1	3.7		0.0	8.4	10.0	1.60
	HT/VHT20 Beam Forming, M0 to M7	4	16	-0.8	-2.1	-0.9	-1.6	0.0	4.7	7.0	2.25
	HT/VHT20 Beam Forming, M8 to M15	4	13	2.0	0.7	2.0	1.5	0.0	7.6	10.0	2.35
	HT/VHT20 Beam Forming, M16 to M23	4	13	2.0	0.7	2.0	1.5	0.0	7.6	10.0	2.35
	HT/VHT20 Beam Forming, M24 to M31	4	13	2.0	0.7	2.0	1.5	0.0	7.6	10.0	2.35
	HT/VHT20 STBC, M0 to M7	2	13	5.9	5.0			0.0	8.5	10.0	1.47
	HT/VHT20 STBC, M0 to M7	3	13	3.9	3.1	3.7		0.0	8.4	10.0	1.60
	HT/VHT20 STBC, M0 to M7	4	13	2.0	0.7	2.0	1.5	0.0	7.6	10.0	2.35
	HE20, M0 to M9 1ss	1	13	5.6				0.1	5.7	10.0	4.33
	HE20, M0 to M9 1ss	2	13	5.6	5.5			0.1	8.6	10.0	1.37
	HE20, M0 to M9 2ss	2	13	5.6	5.5			0.1	8.6	10.0	1.37
	HE20, M0 to M9 1ss	3	13	4.1	3.3	4.0		0.1	8.7	10.0	1.35
	HE20, M0 to M9 2ss	3	13	4.1	3.3	4.0		0.1	8.7	10.0	1.35
	HE20, M0 to M9 3ss	3	13	4.1	3.3	4.0		0.1	8.7	10.0	1.35
	HE20, M0 to M9 1ss	4	13	1.8	0.8	1.8	1.8	0.1	7.7	10.0	2.34
	HE20, M0 to M9 2ss	4	13	1.8	0.8	1.8	1.8	0.1	7.7	10.0	2.34

	HE20, M0 to M9 3ss	4	13	1.8	0.8	1.8	1.8	0.1	7.7	10.0	2.34
	HE20, M0 to M9 4ss	4	13	1.8	0.8	1.8	1.8	0.1	7.7	10.0	2.34
	HE20 Beam Forming, M0 to M9 1ss	2	13	5.6	5.5			0.1	8.6	10.0	1.37
	HE20 Beam Forming, M0 to M9 2ss	2	13	5.6	5.5			0.1	8.6	10.0	1.37
	HE20 Beam Forming, M0 to M9 1ss	3	15	1.8	0.8	1.8		0.1	6.3	8.0	1.67
	HE20 Beam Forming, M0 to M9 2ss	3	13	4.1	3.3	4.0		0.1	8.7	10.0	1.35
	HE20 Beam Forming, M0 to M9 3ss	3	13	4.1	3.3	4.0		0.1	8.7	10.0	1.35
	HE20 Beam Forming, M0 to M9 1ss	4	16	-1.1	-2.2	-0.7	-1.4	0.1	4.8	7.0	2.23
	HE20 Beam Forming, M0 to M9 2ss	4	13	1.8	0.8	1.8	1.8	0.1	7.7	10.0	2.34
	HE20 Beam Forming, M0 to M9 3ss	4	13	1.8	0.8	1.8	1.8	0.1	7.7	10.0	2.34
	HE20 Beam Forming, M0 to M9 4ss	4	13	1.8	0.8	1.8	1.8	0.1	7.7	10.0	2.34
	HE20 STBC, M0 to M9 2ss	2	13	5.6	5.5			0.1	8.6	10.0	1.37
	HE20 STBC, M0 to M9 2ss	3	13	4.1	3.3	4.0		0.1	8.7	10.0	1.35
	HE20 STBC, M0 to M9 2ss	4	13	1.8	0.8	1.8	1.8	0.1	7.7	10.0	2.34
5250	Non HT160, 6 to 54 Mbps	1	13	-6.2				0.0	-6.2	10.0	16.15
	Non HT160, 6 to 54 Mbps	2	13	-8.3	-12.1			0.0	-6.7	10.0	16.74
	Non HT160, 6 to 54 Mbps	3	13	-8.3	-12.1	-12.8		0.0	-5.8	10.0	15.77
	Non HT160, 6 to 54 Mbps	4	13	-8.3	-12.1	-12.8	-11.8	0.0	-4.8	10.0	14.79
	VHT160, M0 to M9 1ss	1	13	-6.8				0.4	-6.4	10.0	16.41
	VHT160, M0 to M9 1ss	2	13	-7.8	-10.6			0.4	-5.6	10.0	15.58
	VHT160, M0 to M9 2ss	2	13	-7.8	-10.6			0.4	-5.6	10.0	15.58
	VHT160, M0 to M9 1ss	3	13	-9.4	-11.8	-12.3		0.4	-5.8	10.0	15.81
	VHT160, M0 to M9 2ss	3	13	-9.4	-11.8	-12.3		0.4	-5.8	10.0	15.81
	VHT160, M0 to M9 3ss	3	13	-9.4	-11.8	-12.3		0.4	-5.8	10.0	15.81
	VHT160, M0 to M9 1ss	4	13	-9.5	-12.7	-13.0	-13.3	0.4	-5.4	10.0	15.41
	VHT160, M0 to M9 2ss	4	13	-9.5	-12.7	-13.0	-13.3	0.4	-5.4	10.0	15.41
	VHT160, M0 to M9 3ss	4	13	-9.5	-12.7	-13.0	-13.3	0.4	-5.4	10.0	15.41
	VHT160, M0 to M9 4ss	4	13	-9.5	-12.7	-13.0	-13.3	0.4	-5.4	10.0	15.41
	VHT160 Beam Forming, M0 to M9 1ss	2	13	-7.8	-10.6			0.4	-5.6	10.0	15.58
	VHT160 Beam Forming, M0 to M9 2ss	2	13	-7.8	-10.6			0.4	-5.6	10.0	15.58
	VHT160 Beam Forming, M0 to M9 1ss	3	15	-11.3	-13.8	-14.0		0.4	-7.7	8.0	15.69
	VHT160 Beam Forming, M0 to M9 2ss	3	13	-9.4	-11.8	-12.3		0.4	-5.8	10.0	15.81
	VHT160 Beam Forming, M0 to M9 3ss	3	13	-9.4	-11.8	-12.3		0.4	-5.8	10.0	15.81
	VHT160 Beam Forming, M0 to M9 1ss	4	16	-12.4	-15.6	-16.0	-16.3	0.4	-8.3	7.0	15.35
	VHT160 Beam Forming, M0 to M9 2ss	4	13	-9.5	-12.7	-13.0	-13.3	0.4	-5.4	10.0	15.41
	VHT160 Beam Forming, M0 to M9 3ss	4	13	-9.5	-12.7	-13.0	-13.3	0.4	-5.4	10.0	15.41
	VHT160 Beam Forming, M0 to M9 4ss	4	13	-9.5	-12.7	-13.0	-13.3	0.4	-5.4	10.0	15.41
	VHT160 STBC, M0 to M9 1ss	2	13	-7.8	-10.6			0.4	-5.6	10.0	15.58
	VHT160 STBC, M0 to M9 1ss	3	13	-9.4	-11.8	-12.3		0.4	-5.8	10.0	15.81
	VHT160 STBC, M0 to M9 1ss	4	13	-9.5	-12.7	-13.0	-13.3	0.4	-5.4	10.0	15.41
	HE160, M0 to M9 1ss	1	13	-6.4				0.4	-6.0	10.0	15.97
	HE160, M0 to M9 1ss	2	13	-7.3	-10.3			0.4	-5.1	10.0	15.10

HE160, M0 to M9 2ss	2	13	-7.3	-10.3			0.4	-5.1	10.0	15.10
HE160, M0 to M9 1ss	3	13	-8.4	-11.3	-11.6		0.4	-5.0	10.0	14.97
HE160, M0 to M9 2ss	3	13	-8.4	-11.3	-11.6		0.4	-5.0	10.0	14.97
HE160, M0 to M9 3ss	3	13	-8.4	-11.3	-11.6		0.4	-5.0	10.0	14.97
HE160, M0 to M9 1ss	4	13	-9.4	-12.3	-12.4	-13.0	0.4	-5.1	10.0	15.07
HE160, M0 to M9 2ss	4	13	-9.4	-12.3	-12.4	-13.0	0.4	-5.1	10.0	15.07
HE160, M0 to M9 3ss	4	13	-9.4	-12.3	-12.4	-13.0	0.4	-5.1	10.0	15.07
HE160, M0 to M9 4ss	4	13	-9.4	-12.3	-12.4	-13.0	0.4	-5.1	10.0	15.07
HE160 Beam Forming, M0 to M9 1ss	2	13	-7.3	-10.3			0.4	-5.1	10.0	15.10
HE160 Beam Forming, M0 to M9 2ss	2	13	-7.3	-10.3			0.4	-5.1	10.0	15.10
HE160 Beam Forming, M0 to M9 1ss	3	15	-9.4	-12.3	-12.4		0.4	-5.9	8.0	13.93
HE160 Beam Forming, M0 to M9 2ss	3	13	-8.4	-11.3	-11.6		0.4	-5.0	10.0	14.97
HE160 Beam Forming, M0 to M9 3ss	3	13	-8.4	-11.3	-11.6		0.4	-5.0	10.0	14.97
HE160 Beam Forming, M0 to M9 1ss	4	16	-10.9	-13.9	-14.6	-14.9	0.4	-6.8	7.0	13.80
HE160 Beam Forming, M0 to M9 2ss	4	13	-9.4	-12.3	-12.4	-13.0	0.4	-5.1	10.0	15.07
HE160 Beam Forming, M0 to M9 3ss	4	13	-9.4	-12.3	-12.4	-13.0	0.4	-5.1	10.0	15.07
HE160 Beam Forming, M0 to M9 4ss	4	13	-9.4	-12.3	-12.4	-13.0	0.4	-5.1	10.0	15.07
HE160 STBC, M0 to M9 1ss	2	13	-7.3	-10.3			0.4	-5.1	10.0	15.10
HE160 STBC, M0 to M9 1ss	3	13	-8.4	-11.3	-11.6		0.4	-5.0	10.0	14.97
HE160 STBC, M0 to M9 1ss	4	13	-9.4	-12.3	-12.4	-13.0	0.4	-5.1	10.0	15.07

Power Spectral Density, 5220 MHz, HE20, M0 to M9 1ss**Antenna A****Antenna B****Antenna C**

A.5 Conducted Spurious Emissions

Conducted Spurious Emissions Test Requirement

15.407(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.
- (7) The provisions of §15.205 apply to intentional radiators operating under this section.
- (8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Use formula below to substitute conducted measurements in place of radiated measurements

$$E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] - 20 \log(d[\text{meters}]) + 104.77, \text{ where } E = \text{field strength and } d = 3 \text{ meter}$$

- 1) Average Plot, Limit= -41.25 dBm eirp
- 2) Peak plot, Limit = -21.25 dBm eirp

KDB 789033 D02 General UNII Test Procedures New Rules v02r01

2. Unwanted Emissions that fall Outside of the Restricted Bands

- a) For all measurements, follow the requirements in II.G.3. “General Requirements for Unwanted Emissions Measurements.”
- b) At frequencies below 1000 MHz, use the procedure described in II.G.4. “Procedure for Unwanted Emissions Measurements Below 1000 MHz.”
- c) At frequencies above 1000 MHz, use the procedure for maximum emissions described in II.G.5., “Procedure for Unwanted Emissions Measurements Above 1000 MHz.”
- (i) Sections 15.407(b)(1-3) specifies the unwanted emissions limit for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.³

Conducted Spurious Emissions Test Procedure

KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Ref. ANSI C63.10: 2013

Conducted Spurious Emissions

Test Procedure

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Place the radio in continuous transmit mode
3. Configure Spectrum analyzer as per test parameters below (be sure to enter all losses between the transmitter output and the spectrum analyzer).
4. Use the peak marker function to determine the maximum spurs amplitude level.
5. The “measure-and-sum technique” is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured

results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. The worst case output is recorded. (see ANSI C63.10:2013 section 14.3.2.2)

6. Capture graphs and record pertinent measurement data.

Ref. ANSI C63.10: 2013 section 12.7.6 (Peak) and 12.7.7.2 (Average)

KDB 789033 D02 General UNII Test Procedures New Rules v02r01, Sec. 5 (Peak), Sec. 6 (Average Method AD)

Conducted Spurious Emissions

Test parameters

Peak

RBW = 1 MHz

VBW $\geq$ 3 MHz

Sweep = Auto

Detector = Peak

Trace = Max Hold.

Average

RBW = 1 MHz

VBW $\geq$ 3 MHz

Sweep = Auto

Detector = RMS

Power Averaging

Add the max antenna gain + ground reflection factor (4.7 dB for frequencies between 30 MHz and 1000 MHz, and 0 dB for frequencies > 1000 MHz).

Samples, Systems, and Modes

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	☒	☐
	Support		☐	☒

Tested By :

Chris Blair

Date of testing:

15-Sep-19 - 26-Sep-19

Test Result : PASS

Test Equipment

See Appendix C for list of test equipment

Conducted Spurs Average Upper, 5180 MHz, Non HT20, 6 to 54 Mbps**Conducted Spurs Peak Upper, 5180 MHz, Non HT20, 6 to 54 Mbps**

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Tx 3 Spur Power (dBm)	Tx 4 Spur Power (dBm)	Duty Cycle Correction (dB)	Total Conducted Spur (dBm)	Limit (dBm)	Margin (dB)
5180	Non HT20, 6 to 54 Mbps	1	13	-62.8				0.1	-49.7	-41.25	8.50
	Non HT20, 6 to 54 Mbps	2	13	-63.2	-60.5			0.1	-45.6	-41.25	4.33
	Non HT20, 6 to 54 Mbps	3	13	-64.5	-61.2	-62.2		0.1	-44.6	-41.25	3.35
	Non HT20, 6 to 54 Mbps	4	13	-65.3	-61.8	-62.8	-62.7	0.1	-43.9	-41.25	2.65
	Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-63.2	-60.5			0.1	-45.6	-41.25	4.33
	Non HT20 Beam Forming, 6 to 54 Mbps	3	15	-66.1	-62.2	-63.3		0.1	-43.8	-41.25	2.51
	Non HT20 Beam Forming, 6 to 54 Mbps	4	16	-67.6	-65.5	-64.7	-66.5	0.1	-43.9	-41.25	2.62
	HT/VHT20, M0 to M7	1	13	-62.8				0.0	-49.8	-41.25	8.50
	HT/VHT20, M0 to M7	2	13	-63.4	-60.6			0.0	-45.7	-41.25	4.47
	HT/VHT20, M8 to M15	2	13	-63.4	-60.6			0.0	-45.7	-41.25	4.47
	HT/VHT20, M0 to M7	3	13	-65.0	-61.1	-62.5		0.0	-44.8	-41.25	3.52
	HT/VHT20, M8 to M15	3	13	-65.0	-61.1	-62.5		0.0	-44.8	-41.25	3.52
	HT/VHT20, M16 to M23	3	13	-65.0	-61.1	-62.5		0.0	-44.8	-41.25	3.52
	HT/VHT20, M0 to M7	4	13	-65.6	-61.6	-63.0	-62.8	0.0	-44.0	-41.25	2.71
	HT/VHT20, M8 to M15	4	13	-65.6	-61.6	-63.0	-62.8	0.0	-44.0	-41.25	2.71
	HT/VHT20, M16 to M23	4	13	-65.6	-61.6	-63.0	-62.8	0.0	-44.0	-41.25	2.71
	HT/VHT20, M24 to M31	4	13	-65.6	-61.6	-63.0	-62.8	0.0	-44.0	-41.25	2.71
	HT/VHT20 Beam Forming, M0 to M7	2	13	-63.4	-60.6			0.0	-45.7	-41.25	4.47
	HT/VHT20 Beam Forming, M8 to M15	2	13	-63.4	-60.6			0.0	-45.7	-41.25	4.47
	HT/VHT20 Beam Forming, M0 to M7	3	15	-66.1	-62.2	-63.6		0.0	-43.9	-41.25	2.62
	HT/VHT20 Beam Forming, M8 to M15	3	13	-65.0	-61.1	-62.5		0.0	-44.8	-41.25	3.52
	HT/VHT20 Beam Forming, M16 to M23	3	13	-65.0	-61.1	-62.5		0.0	-44.8	-41.25	3.52
	HT/VHT20 Beam Forming, M0 to M7	4	16	-67.1	-65.0	-64.4	-65.0	0.0	-43.2	-41.25	1.95
	HT/VHT20 Beam Forming, M8 to M15	4	13	-65.6	-61.6	-63.0	-62.8	0.0	-44.0	-41.25	2.71
	HT/VHT20 Beam Forming, M16 to M23	4	13	-65.6	-61.6	-63.0	-62.8	0.0	-44.0	-41.25	2.71
	HT/VHT20 Beam Forming, M24 to M31	4	13	-65.6	-61.6	-63.0	-62.8	0.0	-44.0	-41.25	2.71
	HT/VHT20 STBC, M0 to M7	2	13	-63.4	-60.6			0.0	-45.7	-41.25	4.47
	HT/VHT20 STBC, M0 to M7	3	13	-65.0	-61.1	-62.5		0.0	-44.8	-41.25	3.52
	HT/VHT20 STBC, M0 to M7	4	13	-65.6	-61.6	-63.0	-62.8	0.0	-44.0	-41.25	2.71
	HE20, M0 to M9 1ss	1	13	-63.0				0.1	-49.9	-41.25	8.68
	HE20, M0 to M9 1ss	2	13	-63.4	-60.8			0.1	-45.8	-41.25	4.58
	HE20, M0 to M9 2ss	2	13	-63.4	-60.8			0.1	-45.8	-41.25	4.58

	HE20, M0 to M9 1ss	3	13	-65.0	-61.3	-62.3		0.1	-44.8	-41.25	3.52
	HE20, M0 to M9 2ss	3	13	-65.0	-61.3	-62.3		0.1	-44.8	-41.25	3.52
	HE20, M0 to M9 3ss	3	13	-65.0	-61.3	-62.3		0.1	-44.8	-41.25	3.52
	HE20, M0 to M9 1ss	4	13	-65.6	-61.4	-62.9	-62.8	0.1	-43.8	-41.25	2.59
	HE20, M0 to M9 2ss	4	13	-65.6	-61.4	-62.9	-62.8	0.1	-43.8	-41.25	2.59
	HE20, M0 to M9 3ss	4	13	-65.6	-61.4	-62.9	-62.8	0.1	-43.8	-41.25	2.59
	HE20, M0 to M9 4ss	4	13	-65.6	-61.4	-62.9	-62.8	0.1	-43.8	-41.25	2.59
	HE20 Beam Forming, M0 to M9 1ss	2	13	-63.4	-60.8			0.1	-45.8	-41.25	4.58
	HE20 Beam Forming, M0 to M9 2ss	2	13	-63.4	-60.8			0.1	-45.8	-41.25	4.58
	HE20 Beam Forming, M0 to M9 1ss	3	15	-66.2	-62.2	-63.6		0.1	-43.9	-41.25	2.62
	HE20 Beam Forming, M0 to M9 2ss	3	13	-65.0	-61.3	-62.3		0.1	-44.8	-41.25	3.52
	HE20 Beam Forming, M0 to M9 3ss	3	13	-65.0	-61.3	-62.3		0.1	-44.8	-41.25	3.52
	HE20 Beam Forming, M0 to M9 1ss	4	16	-67.7	-65.2	-66.7	-66.3	0.1	-44.3	-41.25	3.05
	HE20 Beam Forming, M0 to M9 2ss	4	13	-65.6	-61.4	-62.9	-62.8	0.1	-43.8	-41.25	2.59
	HE20 Beam Forming, M0 to M9 3ss	4	13	-65.6	-61.4	-62.9	-62.8	0.1	-43.8	-41.25	2.59
	HE20 Beam Forming, M0 to M9 4ss	4	13	-65.6	-61.4	-62.9	-62.8	0.1	-43.8	-41.25	2.59
	HE20 STBC, M0 to M9 2ss	2	13	-63.4	-60.8			0.1	-45.8	-41.25	4.58
	HE20 STBC, M0 to M9 2ss	3	13	-65.0	-61.3	-62.3		0.1	-44.8	-41.25	3.52
	HE20 STBC, M0 to M9 2ss	4	13	-65.6	-61.4	-62.9	-62.8	0.1	-43.8	-41.25	2.59

5190	Non HT40, 6 to 54 Mbps	1	13	-64.3				0.0	-51.3	-41.25	10.00
	Non HT40, 6 to 54 Mbps	2	13	-65.4	-61.3			0.0	-46.8	-41.25	5.57
	Non HT40, 6 to 54 Mbps	3	13	-65.9	-61.7	-63.4		0.0	-45.5	-41.25	4.27
	Non HT40, 6 to 54 Mbps	4	13	-67.1	-64.6	-64.2	-64.0	0.0	-45.7	-41.25	4.50
	HT/VHT40, M0 to M7	1	13	-65.2				0.1	-52.1	-41.25	10.85
	HT/VHT40, M0 to M7	2	13	-65.2	-60.8			0.1	-46.4	-41.25	5.10
	HT/VHT40, M8 to M15	2	13	-65.2	-60.8			0.1	-46.4	-41.25	5.10
	HT/VHT40, M0 to M7	3	13	-66.5	-62.0	-63.6		0.1	-45.8	-41.25	4.54
	HT/VHT40, M8 to M15	3	13	-66.5	-62.0	-63.6		0.1	-45.8	-41.25	4.54
	HT/VHT40, M16 to M23	3	13	-66.5	-62.0	-63.6		0.1	-45.8	-41.25	4.54
	HT/VHT40, M0 to M7	4	13	-66.9	-62.6	-64.1	-63.8	0.1	-45.0	-41.25	3.72
	HT/VHT40, M8 to M15	4	13	-66.9	-62.6	-64.1	-63.8	0.1	-45.0	-41.25	3.72
	HT/VHT40, M16 to M23	4	13	-66.9	-62.6	-64.1	-63.8	0.1	-45.0	-41.25	3.72
	HT/VHT40, M24 to M31	4	13	-66.9	-62.6	-64.1	-63.8	0.1	-45.0	-41.25	3.72
	HT/VHT40 Beam Forming, M0 to M7	2	13	-65.2	-60.8			0.1	-46.4	-41.25	5.10
	HT/VHT40 Beam Forming, M8 to M15	2	13	-65.2	-60.8			0.1	-46.4	-41.25	5.10
	HT/VHT40 Beam Forming, M0 to M7	3	15	-67.3	-64.8	-64.5		0.1	-45.5	-41.25	4.24
	HT/VHT40 Beam Forming, M8 to M15	3	13	-66.5	-62.0	-63.6		0.1	-45.8	-41.25	4.54

	HT/VHT40 Beam Forming, M16 to M23	3	13	-66.5	-62.0	-63.6		0.1	-45.8	-41.25	4.54
	HT/VHT40 Beam Forming, M0 to M7	4	16	-70.6	-65.9	-67.8	-67.6	0.1	-45.5	-41.25	4.30
	HT/VHT40 Beam Forming, M8 to M15	4	13	-66.9	-62.6	-64.1	-63.8	0.1	-45.0	-41.25	3.72
	HT/VHT40 Beam Forming, M16 to M23	4	13	-66.9	-62.6	-64.1	-63.8	0.1	-45.0	-41.25	3.72
	HT/VHT40 Beam Forming, M24 to M31	4	13	-66.9	-62.6	-64.1	-63.8	0.1	-45.0	-41.25	3.72
	HT/VHT40 STBC, M0 to M7	2	13	-65.2	-60.8			0.1	-46.4	-41.25	5.10
	HT/VHT40 STBC, M0 to M7	3	13	-66.5	-62.0	-63.6		0.1	-45.8	-41.25	4.54
	HT/VHT40 STBC, M0 to M7	4	13	-66.9	-62.6	-64.1	-63.8	0.1	-45.0	-41.25	3.72
	HE40, M0 to M9 1ss	1	13	-65.1				0.1	-52.0	-41.25	10.72
	HE40, M0 to M9 1ss	2	13	-65.6	-61.4			0.1	-46.9	-41.25	5.62
	HE40, M0 to M9 2ss	2	13	-65.6	-61.4			0.1	-46.9	-41.25	5.62
	HE40, M0 to M9 1ss	3	13	-66.1	-61.8	-63.6		0.1	-45.6	-41.25	4.34
	HE40, M0 to M9 2ss	3	13	-66.1	-61.8	-63.6		0.1	-45.6	-41.25	4.34
	HE40, M0 to M9 3ss	3	13	-66.1	-61.8	-63.6		0.1	-45.6	-41.25	4.34
	HE40, M0 to M9 1ss	4	13	-67.3	-64.7	-64.4	-64.7	0.1	-46.0	-41.25	4.73
	HE40, M0 to M9 2ss	4	13	-67.3	-64.7	-64.4	-64.7	0.1	-46.0	-41.25	4.73
	HE40, M0 to M9 3ss	4	13	-67.3	-64.7	-64.4	-64.7	0.1	-46.0	-41.25	4.73
	HE40, M0 to M9 4ss	4	13	-67.3	-64.7	-64.4	-64.7	0.1	-46.0	-41.25	4.73
	HE40 Beam Forming, M0 to M9 1ss	2	13	-65.6	-61.4			0.1	-46.9	-41.25	5.62
	HE40 Beam Forming, M0 to M9 2ss	2	13	-65.6	-61.4			0.1	-46.9	-41.25	5.62
	HE40 Beam Forming, M0 to M9 1ss	3	15	-67.3	-64.7	-64.4		0.1	-45.4	-41.25	4.13
	HE40 Beam Forming, M0 to M9 2ss	3	13	-66.1	-61.8	-63.6		0.1	-45.6	-41.25	4.34
	HE40 Beam Forming, M0 to M9 3ss	3	13	-66.1	-61.8	-63.6		0.1	-45.6	-41.25	4.34
	HE40 Beam Forming, M0 to M9 1ss	4	16	-70.3	-65.9	-67.6	-67.3	0.1	-45.4	-41.25	4.10
	HE40 Beam Forming, M0 to M9 2ss	4	13	-67.3	-64.7	-64.4	-64.7	0.1	-46.0	-41.25	4.73
	HE40 Beam Forming, M0 to M9 3ss	4	13	-67.3	-64.7	-64.4	-64.7	0.1	-46.0	-41.25	4.73
	HE40 Beam Forming, M0 to M9 4ss	4	13	-67.3	-64.7	-64.4	-64.7	0.1	-46.0	-41.25	4.73
	HE40 STBC, M0 to M9 2ss	2	13	-65.6	-61.4			0.1	-46.9	-41.25	5.62
	HE40 STBC, M0 to M9 2ss	3	13	-66.1	-61.8	-63.6		0.1	-45.6	-41.25	4.34
	HE40 STBC, M0 to M9 2ss	4	13	-67.3	-64.7	-64.4	-64.7	0.1	-46.0	-41.25	4.73
5210	Non HT80, 6 to 54 Mbps	1	13	-64.6				0.1	-51.5	-41.25	10.30
	Non HT80, 6 to 54 Mbps	2	13	-64.6	-61.1			0.1	-46.4	-41.25	5.20
	Non HT80, 6 to 54 Mbps	3	13	-65.9	-61.5	-63.1		0.1	-45.3	-41.25	4.07
	Non HT80, 6 to 54 Mbps	4	13	-66.8	-62.2	-64.0	-63.7	0.1	-44.8	-41.25	3.56
	VHT80, M0 to M9 1ss	1	13	-63.9				0.2	-50.7	-41.25	9.43
	VHT80, M0 to M9 1ss	2	13	-65.8	-61.5			0.2	-46.9	-41.25	5.66
	VHT80, M0 to M9 2ss	2	13	-65.8	-61.5			0.2	-46.9	-41.25	5.66
	VHT80, M0 to M9 1ss	3	13	-66.1	-62.0	-63.6		0.2	-45.6	-41.25	4.35
	VHT80, M0 to M9 2ss	3	13	-66.1	-62.0	-63.6		0.2	-45.6	-41.25	4.35
	VHT80, M0 to M9 3ss	3	13	-66.1	-62.0	-63.6		0.2	-45.6	-41.25	4.35
	VHT80, M0 to M9 1ss	4	13	-66.6	-62.5	-64.1	-63.7	0.2	-44.8	-41.25	3.50
	VHT80, M0 to M9 2ss	4	13	-66.6	-62.5	-64.1	-63.7	0.2	-44.8	-41.25	3.50

	VHT80, M0 to M9 3ss	4	13	-66.6	-62.5	-64.1	-63.7	0.2	-44.8	-41.25	3.50
	VHT80, M0 to M9 4ss	4	13	-66.6	-62.5	-64.1	-63.7	0.2	-44.8	-41.25	3.50
	VHT80 Beam Forming, M0 to M9 1ss	2	13	-65.8	-61.5			0.2	-46.9	-41.25	5.66
	VHT80 Beam Forming, M0 to M9 2ss	2	13	-65.8	-61.5			0.2	-46.9	-41.25	5.66
	VHT80 Beam Forming, M0 to M9 1ss	3	15	-67.4	-64.8	-64.4		0.2	-45.4	-41.25	4.11
	VHT80 Beam Forming, M0 to M9 2ss	3	13	-66.1	-62.0	-63.6		0.2	-45.6	-41.25	4.35
	VHT80 Beam Forming, M0 to M9 3ss	3	13	-66.1	-62.0	-63.6		0.2	-45.6	-41.25	4.35
	VHT80 Beam Forming, M0 to M9 1ss	4	16	-70.4	-66.3	-67.8	-67.4	0.2	-45.5	-41.25	4.25
	VHT80 Beam Forming, M0 to M9 2ss	4	13	-66.6	-62.5	-64.1	-63.7	0.2	-44.8	-41.25	3.50
	VHT80 Beam Forming, M0 to M9 3ss	4	13	-66.6	-62.5	-64.1	-63.7	0.2	-44.8	-41.25	3.50
	VHT80 Beam Forming, M0 to M9 4ss	4	13	-66.6	-62.5	-64.1	-63.7	0.2	-44.8	-41.25	3.50
	VHT80 STBC, M0 to M9 1ss	2	13	-65.8	-61.5			0.2	-46.9	-41.25	5.66
	VHT80 STBC, M0 to M9 1ss	3	13	-66.1	-62.0	-63.6		0.2	-45.6	-41.25	4.35
	VHT80 STBC, M0 to M9 1ss	4	13	-66.6	-62.5	-64.1	-63.7	0.2	-44.8	-41.25	3.50
	HE80, M0 to M9 1ss	1	13	-64.0				0.2	-50.8	-41.25	9.50
	HE80, M0 to M9 1ss	2	13	-65.4	-61.5			0.2	-46.8	-41.25	5.52
	HE80, M0 to M9 2ss	2	13	-65.4	-61.5			0.2	-46.8	-41.25	5.52
	HE80, M0 to M9 1ss	3	13	-66.3	-61.9	-63.6		0.2	-45.6	-41.25	4.31
	HE80, M0 to M9 2ss	3	13	-66.3	-61.9	-63.6		0.2	-45.6	-41.25	4.31
	HE80, M0 to M9 3ss	3	13	-66.3	-61.9	-63.6		0.2	-45.6	-41.25	4.31
	HE80, M0 to M9 1ss	4	13	-66.7	-62.2	-64.1	-63.7	0.2	-44.6	-41.25	3.37
	HE80, M0 to M9 2ss	4	13	-66.7	-62.2	-64.1	-63.7	0.2	-44.6	-41.25	3.37
	HE80, M0 to M9 3ss	4	13	-66.7	-62.2	-64.1	-63.7	0.2	-44.6	-41.25	3.37
	HE80, M0 to M9 4ss	4	13	-66.7	-62.2	-64.1	-63.7	0.2	-44.6	-41.25	3.37
	HE80 Beam Forming, M0 to M9 1ss	2	13	-65.4	-61.5			0.2	-46.8	-41.25	5.52
	HE80 Beam Forming, M0 to M9 2ss	2	13	-65.4	-61.5			0.2	-46.8	-41.25	5.52
	HE80 Beam Forming, M0 to M9 1ss	3	15	-67.3	-64.9	-64.3		0.2	-45.3	-41.25	4.05
	HE80 Beam Forming, M0 to M9 2ss	3	13	-66.3	-61.9	-63.6		0.2	-45.6	-41.25	4.31
	HE80 Beam Forming, M0 to M9 3ss	3	13	-66.3	-61.9	-63.6		0.2	-45.6	-41.25	4.31
	HE80 Beam Forming, M0 to M9 1ss	4	16	-68.0	-65.7	-67.3	-66.8	0.2	-44.6	-41.25	3.35
	HE80 Beam Forming, M0 to M9 2ss	4	13	-66.7	-62.2	-64.1	-63.7	0.2	-44.6	-41.25	3.37
	HE80 Beam Forming, M0 to M9 3ss	4	13	-66.7	-62.2	-64.1	-63.7	0.2	-44.6	-41.25	3.37
	HE80 Beam Forming, M0 to M9 4ss	4	13	-66.7	-62.2	-64.1	-63.7	0.2	-44.6	-41.25	3.37
	HE80 STBC, M0 to M9 1ss	2	13	-65.4	-61.5			0.2	-46.8	-41.25	5.52
	HE80 STBC, M0 to M9 1ss	3	13	-66.3	-61.9	-63.6		0.2	-45.6	-41.25	4.31
	HE80 STBC, M0 to M9 1ss	4	13	-66.7	-62.2	-64.1	-63.7	0.2	-44.6	-41.25	3.37
5220	Non HT20, 6 to 54 Mbps	1	13	-60.4				0.1	-47.3	-41.25	6.10
	Non HT20, 6 to 54 Mbps	2	13	-60.4	-56.8			0.1	-42.2	-41.25	0.93
	Non HT20, 6 to 54 Mbps	3	13	-62.1	-58.1	-59.3		0.1	-41.7	-41.25	0.46
	Non HT20, 6 to 54 Mbps	4	13	-63.2	-60.3	-60.5	-60.6	0.1	-41.9	-41.25	0.68
	Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-60.4	-56.8			0.1	-42.2	-41.25	0.93
	Non HT20 Beam Forming, 6 to 54 Mbps	3	15	-63.2	-60.3	-60.5		0.1	-41.3	-41.25	0.08

Non HT20 Beam Forming, 6 to 54 Mbps	4	16	-65.9	-62.1	-63.3	-63.5	0.1	-41.4	-41.25	0.18
HT/VHT20, M0 to M7	1	13	-60.6				0.0	-47.6	-41.25	6.30
HT/VHT20, M0 to M7	2	13	-60.6	-57.2			0.0	-42.5	-41.25	1.27
HT/VHT20, M8 to M15	2	13	-60.6	-57.2			0.0	-42.5	-41.25	1.27
HT/VHT20, M0 to M7	3	13	-62.1	-58.3	-59.4		0.0	-41.8	-41.25	0.59
HT/VHT20, M8 to M15	3	13	-62.1	-58.3	-59.4		0.0	-41.8	-41.25	0.59
HT/VHT20, M16 to M23	3	13	-62.1	-58.3	-59.4		0.0	-41.8	-41.25	0.59
HT/VHT20, M0 to M7	4	13	-62.8	-59.0	-60.2	-60.3	0.0	-41.3	-41.25	0.05
HT/VHT20, M8 to M15	4	13	-62.8	-59.0	-60.2	-60.3	0.0	-41.3	-41.25	0.05
HT/VHT20, M16 to M23	4	13	-62.8	-59.0	-60.2	-60.3	0.0	-41.3	-41.25	0.05
HT/VHT20, M24 to M31	4	13	-62.8	-59.0	-60.2	-60.3	0.0	-41.3	-41.25	0.05
HT/VHT20 Beam Forming, M0 to M7	2	13	-60.6	-57.2			0.0	-42.5	-41.25	1.27
HT/VHT20 Beam Forming, M8 to M15	2	13	-60.6	-57.2			0.0	-42.5	-41.25	1.27
HT/VHT20 Beam Forming, M0 to M7	3	15	-63.4	-60.6	-60.5		0.0	-41.5	-41.25	0.24
HT/VHT20 Beam Forming, M8 to M15	3	13	-62.1	-58.3	-59.4		0.0	-41.8	-41.25	0.59
HT/VHT20 Beam Forming, M16 to M23	3	13	-62.1	-58.3	-59.4		0.0	-41.8	-41.25	0.59
HT/VHT20 Beam Forming, M0 to M7	4	16	-66.3	-62.2	-63.8	-63.6	0.0	-41.7	-41.25	0.42
HT/VHT20 Beam Forming, M8 to M15	4	13	-62.8	-59.0	-60.2	-60.3	0.0	-41.3	-41.25	0.05
HT/VHT20 Beam Forming, M16 to M23	4	13	-62.8	-59.0	-60.2	-60.3	0.0	-41.3	-41.25	0.05
HT/VHT20 Beam Forming, M24 to M31	4	13	-62.8	-59.0	-60.2	-60.3	0.0	-41.3	-41.25	0.05
HT/VHT20 STBC, M0 to M7	2	13	-60.6	-57.2			0.0	-42.5	-41.25	1.27
HT/VHT20 STBC, M0 to M7	3	13	-62.1	-58.3	-59.4		0.0	-41.8	-41.25	0.59
HT/VHT20 STBC, M0 to M7	4	13	-62.8	-59.0	-60.2	-60.3	0.0	-41.3	-41.25	0.05
HE20, M0 to M9 1ss	1	13	-60.7				0.1	-47.6	-41.25	6.38
HE20, M0 to M9 1ss	2	13	-60.7	-57.2			0.1	-42.5	-41.25	1.28
HE20, M0 to M9 2ss	2	13	-60.7	-57.2			0.1	-42.5	-41.25	1.28
HE20, M0 to M9 1ss	3	13	-61.5	-57.9	-58.7		0.1	-41.3	-41.25	0.03
HE20, M0 to M9 2ss	3	13	-61.5	-57.9	-58.7		0.1	-41.3	-41.25	0.03
HE20, M0 to M9 3ss	3	13	-61.5	-57.9	-58.7		0.1	-41.3	-41.25	0.03
HE20, M0 to M9 1ss	4	13	-63.3	-60.7	-60.7	-61.8	0.1	-42.4	-41.25	1.17
HE20, M0 to M9 2ss	4	13	-63.3	-60.7	-60.7	-61.8	0.1	-42.4	-41.25	1.17
HE20, M0 to M9 3ss	4	13	-63.3	-60.7	-60.7	-61.8	0.1	-42.4	-41.25	1.17
HE20, M0 to M9 4ss	4	13	-63.3	-60.7	-60.7	-61.8	0.1	-42.4	-41.25	1.17
HE20 Beam Forming, M0 to M9 1ss	2	13	-60.7	-57.2			0.1	-42.5	-41.25	1.28
HE20 Beam Forming, M0 to M9 2ss	2	13	-60.7	-57.2			0.1	-42.5	-41.25	1.28
HE20 Beam Forming, M0 to M9 1ss	3	15	-63.3	-60.7	-60.7		0.1	-41.6	-41.25	0.32
HE20 Beam Forming, M0 to M9 2ss	3	13	-61.5	-57.9	-58.7		0.1	-41.3	-41.25	0.03
HE20 Beam Forming, M0 to M9 3ss	3	13	-61.5	-57.9	-58.7		0.1	-41.3	-41.25	0.03
HE20 Beam Forming, M0 to M9 1ss	4	16	-66.3	-62.1	-63.6	-63.5	0.1	-41.5	-41.25	0.29
HE20 Beam Forming, M0 to M9 2ss	4	13	-63.3	-60.7	-60.7	-61.8	0.1	-42.4	-41.25	1.17
HE20 Beam Forming, M0 to M9 3ss	4	13	-63.3	-60.7	-60.7	-61.8	0.1	-42.4	-41.25	1.17
HE20 Beam Forming, M0 to M9 4ss	4	13	-63.3	-60.7	-60.7	-61.8	0.1	-42.4	-41.25	1.17
HE20 STBC, M0 to M9 2ss	2	13	-60.7	-57.2			0.1	-42.5	-41.25	1.28

	HE20 STBC, M0 to M9 2ss	3	13	-61.5	-57.9	-58.7		0.1	-41.3	-41.25	0.03
	HE20 STBC, M0 to M9 2ss	4	13	-63.3	-60.7	-60.7	-61.8	0.1	-42.4	-41.25	1.17
5230	Non HT40, 6 to 54 Mbps	1	13	-60.6				0.1	-47.5	-41.25	6.30
	Non HT40, 6 to 54 Mbps	2	13	-60.6	-56.8			0.1	-42.2	-41.25	0.99
	Non HT40, 6 to 54 Mbps	3	13	-62.4	-58.0	-59.1		0.1	-41.6	-41.25	0.40
	Non HT40, 6 to 54 Mbps	4	13	-63.7	-59.7	-60.3	-60.5	0.1	-41.7	-41.25	0.48
	HT/VHT40, M0 to M7	1	13	-61.0				0.0	-48.0	-41.25	6.70
	HT/VHT40, M0 to M7	2	13	-61.0	-57.2			0.0	-42.6	-41.25	1.39
	HT/VHT40, M8 to M15	2	13	-61.0	-57.2			0.0	-42.6	-41.25	1.39
	HT/VHT40, M0 to M7	3	13	-61.9	-57.9	-59.0		0.0	-41.5	-41.25	0.23
	HT/VHT40, M8 to M15	3	13	-61.9	-57.9	-59.0		0.0	-41.5	-41.25	0.23
	HT/VHT40, M16 to M23	3	13	-61.9	-57.9	-59.0		0.0	-41.5	-41.25	0.23
	HT/VHT40, M0 to M7	4	13	-63.0	-59.1	-60.3	-60.3	0.0	-41.4	-41.25	0.14
	HT/VHT40, M8 to M15	4	13	-63.0	-59.1	-60.3	-60.3	0.0	-41.4	-41.25	0.14
	HT/VHT40, M16 to M23	4	13	-63.0	-59.1	-60.3	-60.3	0.0	-41.4	-41.25	0.14
	HT/VHT40, M24 to M31	4	13	-63.0	-59.1	-60.3	-60.3	0.0	-41.4	-41.25	0.14
	HT/VHT40 Beam Forming, M0 to M7	2	13	-61.0	-57.2			0.0	-42.6	-41.25	1.39
	HT/VHT40 Beam Forming, M8 to M15	2	13	-61.0	-57.2			0.0	-42.6	-41.25	1.39
	HT/VHT40 Beam Forming, M0 to M7	3	15	-64.1	-60.7	-60.7		0.0	-41.7	-41.25	0.50
	HT/VHT40 Beam Forming, M8 to M15	3	13	-61.9	-57.9	-59.0		0.0	-41.5	-41.25	0.23
	HT/VHT40 Beam Forming, M16 to M23	3	13	-61.9	-57.9	-59.0		0.0	-41.5	-41.25	0.23
	HT/VHT40 Beam Forming, M0 to M7	4	16	-66.7	-62.2	-63.6	-63.5	0.0	-41.6	-41.25	0.40
	HT/VHT40 Beam Forming, M8 to M15	4	13	-63.0	-59.1	-60.3	-60.3	0.0	-41.4	-41.25	0.14
	HT/VHT40 Beam Forming, M16 to M23	4	13	-63.0	-59.1	-60.3	-60.3	0.0	-41.4	-41.25	0.14
	HT/VHT40 Beam Forming, M24 to M31	4	13	-63.0	-59.1	-60.3	-60.3	0.0	-41.4	-41.25	0.14
	HT/VHT40 STBC, M0 to M7	2	13	-61.0	-57.2			0.0	-42.6	-41.25	1.39
	HT/VHT40 STBC, M0 to M7	3	13	-61.9	-57.9	-59.0		0.0	-41.5	-41.25	0.23
	HT/VHT40 STBC, M0 to M7	4	13	-63.0	-59.1	-60.3	-60.3	0.0	-41.4	-41.25	0.14
	HE40, M0 to M9 1ss	1	13	-60.7				0.1	-47.6	-41.25	6.38
	HE40, M0 to M9 1ss	2	13	-60.7	-57.0			0.1	-42.4	-41.25	1.14
	HE40, M0 to M9 2ss	2	13	-60.7	-57.0			0.1	-42.4	-41.25	1.14
	HE40, M0 to M9 1ss	3	13	-61.8	-57.8	-58.8		0.1	-41.3	-41.25	0.08
	HE40, M0 to M9 2ss	3	13	-61.8	-57.8	-58.8		0.1	-41.3	-41.25	0.08
	HE40, M0 to M9 3ss	3	13	-61.8	-57.8	-58.8		0.1	-41.3	-41.25	0.08
	HE40, M0 to M9 1ss	4	13	-63.9	-60.5	-60.6	-60.7	0.1	-42.1	-41.25	0.88
	HE40, M0 to M9 2ss	4	13	-63.9	-60.5	-60.6	-60.7	0.1	-42.1	-41.25	0.88
	HE40, M0 to M9 3ss	4	13	-63.9	-60.5	-60.6	-60.7	0.1	-42.1	-41.25	0.88
	HE40, M0 to M9 4ss	4	13	-63.9	-60.5	-60.6	-60.7	0.1	-42.1	-41.25	0.88
	HE40 Beam Forming, M0 to M9 1ss	2	13	-60.7	-57.0			0.1	-42.4	-41.25	1.14
	HE40 Beam Forming, M0 to M9 2ss	2	13	-60.7	-57.0			0.1	-42.4	-41.25	1.14
	HE40 Beam Forming, M0 to M9 1ss	3	15	-63.9	-60.5	-60.6		0.1	-41.6	-41.25	0.32
	HE40 Beam Forming, M0 to M9 2ss	3	13	-61.8	-57.8	-58.8		0.1	-41.3	-41.25	0.08

	HE40 Beam Forming, M0 to M9 3ss	3	13	-61.8	-57.8	-58.8		0.1	-41.3	-41.25	0.08
	HE40 Beam Forming, M0 to M9 1ss	4	16	-66.5	-62.1	-63.5	-63.3	0.1	-41.5	-41.25	0.24
	HE40 Beam Forming, M0 to M9 2ss	4	13	-63.9	-60.5	-60.6	-60.7	0.1	-42.1	-41.25	0.88
	HE40 Beam Forming, M0 to M9 3ss	4	13	-63.9	-60.5	-60.6	-60.7	0.1	-42.1	-41.25	0.88
	HE40 Beam Forming, M0 to M9 4ss	4	13	-63.9	-60.5	-60.6	-60.7	0.1	-42.1	-41.25	0.88
	HE40 STBC, M0 to M9 2ss	2	13	-60.7	-57.0			0.1	-42.4	-41.25	1.14
	HE40 STBC, M0 to M9 2ss	3	13	-61.8	-57.8	-58.8		0.1	-41.3	-41.25	0.08
	HE40 STBC, M0 to M9 2ss	4	13	-63.9	-60.5	-60.6	-60.7	0.1	-42.1	-41.25	0.88
5240	Non HT20, 6 to 54 Mbps	1	13	-60.7				0.1	-47.6	-41.25	6.40
	Non HT20, 6 to 54 Mbps	2	13	-60.7	-57.3			0.1	-42.6	-41.25	1.36
	Non HT20, 6 to 54 Mbps	3	13	-62.5	-58.3	-58.9		0.1	-41.7	-41.25	0.48
	Non HT20, 6 to 54 Mbps	4	13	-63.8	-60.5	-60.2	-60.5	0.1	-42.0	-41.25	0.71
	Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-60.7	-57.3			0.1	-42.6	-41.25	1.36
	Non HT20 Beam Forming, 6 to 54 Mbps	3	15	-63.8	-60.5	-60.2		0.1	-41.4	-41.25	0.15
	Non HT20 Beam Forming, 6 to 54 Mbps	4	16	-66.6	-62.1	-63.0	-63.2	0.1	-41.4	-41.25	0.11
	HT/VHT20, M0 to M7	1	13	-60.8				0.0	-47.8	-41.25	6.50
	HT/VHT20, M0 to M7	2	13	-60.8	-57.1			0.0	-42.5	-41.25	1.26
	HT/VHT20, M8 to M15	2	13	-60.8	-57.1			0.0	-42.5	-41.25	1.26
	HT/VHT20, M0 to M7	3	13	-62.4	-58.3	-59.1		0.0	-41.8	-41.25	0.54
	HT/VHT20, M8 to M15	3	13	-62.4	-58.3	-59.1		0.0	-41.8	-41.25	0.54
	HT/VHT20, M16 to M23	3	13	-62.4	-58.3	-59.1		0.0	-41.8	-41.25	0.54
	HT/VHT20, M0 to M7	4	13	-63.8	-60.7	-60.3	-60.8	0.0	-42.1	-41.25	0.88
	HT/VHT20, M8 to M15	4	13	-63.8	-60.7	-60.3	-60.8	0.0	-42.1	-41.25	0.88
	HT/VHT20, M16 to M23	4	13	-63.8	-60.7	-60.3	-60.8	0.0	-42.1	-41.25	0.88
	HT/VHT20, M24 to M31	4	13	-63.8	-60.7	-60.3	-60.8	0.0	-42.1	-41.25	0.88
	HT/VHT20 Beam Forming, M0 to M7	2	13	-60.8	-57.1			0.0	-42.5	-41.25	1.26
	HT/VHT20 Beam Forming, M8 to M15	2	13	-60.8	-57.1			0.0	-42.5	-41.25	1.26
	HT/VHT20 Beam Forming, M0 to M7	3	15	-63.8	-60.7	-60.3		0.0	-41.5	-41.25	0.28
	HT/VHT20 Beam Forming, M8 to M15	3	13	-62.4	-58.3	-59.1		0.0	-41.8	-41.25	0.54
	HT/VHT20 Beam Forming, M16 to M23	3	13	-62.4	-58.3	-59.1		0.0	-41.8	-41.25	0.54
	HT/VHT20 Beam Forming, M0 to M7	4	16	-66.6	-62.1	-63.2	-63.2	0.0	-41.4	-41.25	0.17
	HT/VHT20 Beam Forming, M8 to M15	4	13	-63.8	-60.7	-60.3	-60.8	0.0	-42.1	-41.25	0.88
	HT/VHT20 Beam Forming, M16 to M23	4	13	-63.8	-60.7	-60.3	-60.8	0.0	-42.1	-41.25	0.88
	HT/VHT20 Beam Forming, M24 to M31	4	13	-63.8	-60.7	-60.3	-60.8	0.0	-42.1	-41.25	0.88
	HT/VHT20 STBC, M0 to M7	2	13	-60.8	-57.1			0.0	-42.5	-41.25	1.26
	HT/VHT20 STBC, M0 to M7	3	13	-62.4	-58.3	-59.1		0.0	-41.8	-41.25	0.54
	HT/VHT20 STBC, M0 to M7	4	13	-63.8	-60.7	-60.3	-60.8	0.0	-42.1	-41.25	0.88
	HE20, M0 to M9 1ss	1	13	-60.9				0.1	-47.8	-41.25	6.58
	HE20, M0 to M9 1ss	2	13	-60.9	-57.3			0.1	-42.7	-41.25	1.41
	HE20, M0 to M9 2ss	2	13	-60.9	-57.3			0.1	-42.7	-41.25	1.41
	HE20, M0 to M9 1ss	3	13	-62.7	-58.4	-59.0		0.1	-41.8	-41.25	0.58
	HE20, M0 to M9 2ss	3	13	-62.7	-58.4	-59.0		0.1	-41.8	-41.25	0.58

	HE20, M0 to M9 3ss	3	13	-62.7	-58.4	-59.0		0.1	-41.8	-41.25	0.58
	HE20, M0 to M9 1ss	4	13	-63.9	-60.8	-60.2	-60.7	0.1	-42.1	-41.25	0.85
	HE20, M0 to M9 2ss	4	13	-63.9	-60.8	-60.2	-60.7	0.1	-42.1	-41.25	0.85
	HE20, M0 to M9 3ss	4	13	-63.9	-60.8	-60.2	-60.7	0.1	-42.1	-41.25	0.85
	HE20, M0 to M9 4ss	4	13	-63.9	-60.8	-60.2	-60.7	0.1	-42.1	-41.25	0.85
	HE20 Beam Forming, M0 to M9 1ss	2	13	-60.9	-57.3			0.1	-42.7	-41.25	1.41
	HE20 Beam Forming, M0 to M9 2ss	2	13	-60.9	-57.3			0.1	-42.7	-41.25	1.41
	HE20 Beam Forming, M0 to M9 1ss	3	15	-63.9	-60.8	-60.2		0.1	-41.5	-41.25	0.27
	HE20 Beam Forming, M0 to M9 2ss	3	13	-62.7	-58.4	-59.0		0.1	-41.8	-41.25	0.58
	HE20 Beam Forming, M0 to M9 3ss	3	13	-62.7	-58.4	-59.0		0.1	-41.8	-41.25	0.58
	HE20 Beam Forming, M0 to M9 1ss	4	16	-66.5	-62.3	-63.2	-63.3	0.1	-41.5	-41.25	0.23
	HE20 Beam Forming, M0 to M9 2ss	4	13	-63.9	-60.8	-60.2	-60.7	0.1	-42.1	-41.25	0.85
	HE20 Beam Forming, M0 to M9 3ss	4	13	-63.9	-60.8	-60.2	-60.7	0.1	-42.1	-41.25	0.85
	HE20 Beam Forming, M0 to M9 4ss	4	13	-63.9	-60.8	-60.2	-60.7	0.1	-42.1	-41.25	0.85
	HE20 STBC, M0 to M9 2ss	2	13	-60.9	-57.3			0.1	-42.7	-41.25	1.41
	HE20 STBC, M0 to M9 2ss	3	13	-62.7	-58.4	-59.0		0.1	-41.8	-41.25	0.58
	HE20 STBC, M0 to M9 2ss	4	13	-63.9	-60.8	-60.2	-60.7	0.1	-42.1	-41.25	0.85
5250	Non HT160, 6 to 54 Mbps	1	13	-63.9				0.0	-50.9	-41.25	9.60
	Non HT160, 6 to 54 Mbps	2	13	-65.7	-61.4			0.0	-47.0	-41.25	5.73
	Non HT160, 6 to 54 Mbps	3	13	-65.7	-61.4	-62.0		0.0	-44.8	-41.25	3.59
	Non HT160, 6 to 54 Mbps	4	13	-65.7	-61.4	-62.0	-62.1	0.0	-43.4	-41.25	2.20
	VHT160, M0 to M9 1ss	1	13	-63.8				0.4	-50.4	-41.25	9.16
	VHT160, M0 to M9 1ss	2	13	-65.3	-61.2			0.4	-46.4	-41.25	5.13
	VHT160, M0 to M9 2ss	2	13	-65.3	-61.2			0.4	-46.4	-41.25	5.13
	VHT160, M0 to M9 1ss	3	13	-66.3	-61.9	-62.7		0.4	-45.1	-41.25	3.84
	VHT160, M0 to M9 2ss	3	13	-66.3	-61.9	-62.7		0.4	-45.1	-41.25	3.84
	VHT160, M0 to M9 3ss	3	13	-66.3	-61.9	-62.7		0.4	-45.1	-41.25	3.84
	VHT160, M0 to M9 1ss	4	13	-66.9	-62.4	-63.6	-63.1	0.4	-44.3	-41.25	3.04
	VHT160, M0 to M9 2ss	4	13	-66.9	-62.4	-63.6	-63.1	0.4	-44.3	-41.25	3.04
	VHT160, M0 to M9 3ss	4	13	-66.9	-62.4	-63.6	-63.1	0.4	-44.3	-41.25	3.04
	VHT160, M0 to M9 4ss	4	13	-66.9	-62.4	-63.6	-63.1	0.4	-44.3	-41.25	3.04
	VHT160 Beam Forming, M0 to M9 1ss	2	13	-65.3	-61.2			0.4	-46.4	-41.25	5.13
	VHT160 Beam Forming, M0 to M9 2ss	2	13	-65.3	-61.2			0.4	-46.4	-41.25	5.13
	VHT160 Beam Forming, M0 to M9 1ss	3	15	-67.7	-62.9	-64.1		0.4	-44.3	-41.25	3.06
	VHT160 Beam Forming, M0 to M9 2ss	3	13	-66.3	-61.9	-62.7		0.4	-45.1	-41.25	3.84
	VHT160 Beam Forming, M0 to M9 3ss	3	13	-66.3	-61.9	-62.7		0.4	-45.1	-41.25	3.84
	VHT160 Beam Forming, M0 to M9 1ss	4	16	-68.4	-65.3	-66.7	-66.2	0.4	-44.1	-41.25	2.85
	VHT160 Beam Forming, M0 to M9 2ss	4	13	-66.9	-62.4	-63.6	-63.1	0.4	-44.3	-41.25	3.04
	VHT160 Beam Forming, M0 to M9 3ss	4	13	-66.9	-62.4	-63.6	-63.1	0.4	-44.3	-41.25	3.04
	VHT160 Beam Forming, M0 to M9 4ss	4	13	-66.9	-62.4	-63.6	-63.1	0.4	-44.3	-41.25	3.04
	VHT160 STBC, M0 to M9 1ss	2	13	-65.3	-61.2			0.4	-46.4	-41.25	5.13
	VHT160 STBC, M0 to M9 1ss	3	13	-66.3	-61.9	-62.7		0.4	-45.1	-41.25	3.84

VHT160 STBC, M0 to M9 1ss	4	13	-66.9	-62.4	-63.6	-63.1	0.4	-44.3	-41.25	3.04
HE160, M0 to M9 1ss	1	13	-63.7				0.4	-50.3	-41.25	9.02
HE160, M0 to M9 1ss	2	13	-64.9	-61.1			0.4	-46.2	-41.25	4.90
HE160, M0 to M9 2ss	2	13	-64.9	-61.1			0.4	-46.2	-41.25	4.90
HE160, M0 to M9 1ss	3	13	-66.0	-61.6	-62.7		0.4	-44.9	-41.25	3.61
HE160, M0 to M9 2ss	3	13	-66.0	-61.6	-62.7		0.4	-44.9	-41.25	3.61
HE160, M0 to M9 3ss	3	13	-66.0	-61.6	-62.7		0.4	-44.9	-41.25	3.61
HE160, M0 to M9 1ss	4	13	-66.7	-62.1	-63.3	-63.1	0.4	-44.0	-41.25	2.79
HE160, M0 to M9 2ss	4	13	-66.7	-62.1	-63.3	-63.1	0.4	-44.0	-41.25	2.79
HE160, M0 to M9 3ss	4	13	-66.7	-62.1	-63.3	-63.1	0.4	-44.0	-41.25	2.79
HE160, M0 to M9 4ss	4	13	-66.7	-62.1	-63.3	-63.1	0.4	-44.0	-41.25	2.79
HE160 Beam Forming, M0 to M9 1ss	2	13	-64.9	-61.1			0.4	-46.2	-41.25	4.90
HE160 Beam Forming, M0 to M9 2ss	2	13	-64.9	-61.1			0.4	-46.2	-41.25	4.90
HE160 Beam Forming, M0 to M9 1ss	3	15	-66.7	-62.1	-63.3		0.4	-43.4	-41.25	2.18
HE160 Beam Forming, M0 to M9 2ss	3	13	-66.0	-61.6	-62.7		0.4	-44.9	-41.25	3.61
HE160 Beam Forming, M0 to M9 3ss	3	13	-66.0	-61.6	-62.7		0.4	-44.9	-41.25	3.61
HE160 Beam Forming, M0 to M9 1ss	4	16	-67.8	-63.2	-64.5	-64.7	0.4	-42.3	-41.25	1.05
HE160 Beam Forming, M0 to M9 2ss	4	13	-66.7	-62.1	-63.3	-63.1	0.4	-44.0	-41.25	2.79
HE160 Beam Forming, M0 to M9 3ss	4	13	-66.7	-62.1	-63.3	-63.1	0.4	-44.0	-41.25	2.79
HE160 Beam Forming, M0 to M9 4ss	4	13	-66.7	-62.1	-63.3	-63.1	0.4	-44.0	-41.25	2.79
HE160 STBC, M0 to M9 1ss	2	13	-64.9	-61.1			0.4	-46.2	-41.25	4.90
HE160 STBC, M0 to M9 1ss	3	13	-66.0	-61.6	-62.7		0.4	-44.9	-41.25	3.61
HE160 STBC, M0 to M9 1ss	4	13	-66.7	-62.1	-63.3	-63.1	0.4	-44.0	-41.25	2.79

Conducted Spurs Average, 5220 MHz, HE20, M0 to M9 1ss**Antenna A****Antenna B****Antenna C**

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Tx 3 Spur Power (dBm)	Tx 4 Spur Power (dBm)	Tx 5 Spur Power (dBm)	Total Conducted Spur (dBm)	Limit (dBm)	Margin (dB)
5180	Non HT20, 6 to 54 Mbps	1	13	-52.0				0.1	-38.9	-21.25	17.70
	Non HT20, 6 to 54 Mbps	2	13	-52.7	-50.7			0.1	-35.5	-21.25	14.27
	Non HT20, 6 to 54 Mbps	3	13	-53.7	-49.7	-50.6		0.1	-33.2	-21.25	11.95
	Non HT20, 6 to 54 Mbps	4	13	-54.3	-51.0	-50.9	-52.6	0.1	-32.9	-21.25	11.67
	Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-52.7	-50.7			0.1	-35.5	-21.25	14.27
	Non HT20 Beam Forming, 6 to 54 Mbps	3	15	-53.3	-52.2	-53.0		0.1	-33.0	-21.25	11.74
	Non HT20 Beam Forming, 6 to 54 Mbps	4	16	-57.2	-55.4	-53.8	-55.4	0.1	-33.2	-21.25	11.96
	HT/VHT20, M0 to M7	1	13	-52.2				0.0	-39.2	-21.25	17.90
	HT/VHT20, M0 to M7	2	13	-53.0	-49.9			0.0	-35.1	-21.25	13.87
	HT/VHT20, M8 to M15	2	13	-53.0	-49.9			0.0	-35.1	-21.25	13.87
	HT/VHT20, M0 to M7	3	13	-53.5	-50.7	-51.3		0.0	-33.9	-21.25	12.61
	HT/VHT20, M8 to M15	3	13	-53.5	-50.7	-51.3		0.0	-33.9	-21.25	12.61
	HT/VHT20, M16 to M23	3	13	-53.5	-50.7	-51.3		0.0	-33.9	-21.25	12.61
	HT/VHT20, M0 to M7	4	13	-54.6	-51.2	-52.0	-51.9	0.0	-33.2	-21.25	11.93
	HT/VHT20, M8 to M15	4	13	-54.6	-51.2	-52.0	-51.9	0.0	-33.2	-21.25	11.93
	HT/VHT20, M16 to M23	4	13	-54.6	-51.2	-52.0	-51.9	0.0	-33.2	-21.25	11.93
	HT/VHT20, M24 to M31	4	13	-54.6	-51.2	-52.0	-51.9	0.0	-33.2	-21.25	11.93
	HT/VHT20 Beam Forming, M0 to M7	2	13	-53.0	-49.9			0.0	-35.1	-21.25	13.87
	HT/VHT20 Beam Forming, M8 to M15	2	13	-53.0	-49.9			0.0	-35.1	-21.25	13.87
	HT/VHT20 Beam Forming, M0 to M7	3	15	-55.4	-51.8	-52.6		0.0	-33.2	-21.25	11.95
	HT/VHT20 Beam Forming, M8 to M15	3	13	-53.5	-50.7	-51.3		0.0	-33.9	-21.25	12.61
	HT/VHT20 Beam Forming, M16 to M23	3	13	-53.5	-50.7	-51.3		0.0	-33.9	-21.25	12.61
	HT/VHT20 Beam Forming, M0 to M7	4	16	-56.5	-54.7	-52.4	-52.9	0.0	-31.8	-21.25	10.53
	HT/VHT20 Beam Forming, M8 to M15	4	13	-54.6	-51.2	-52.0	-51.9	0.0	-33.2	-21.25	11.93
	HT/VHT20 Beam Forming, M16 to M23	4	13	-54.6	-51.2	-52.0	-51.9	0.0	-33.2	-21.25	11.93
	HT/VHT20 Beam Forming, M24 to M31	4	13	-54.6	-51.2	-52.0	-51.9	0.0	-33.2	-21.25	11.93
	HT/VHT20 STBC, M0 to M7	2	13	-53.0	-49.9			0.0	-35.1	-21.25	13.87
	HT/VHT20 STBC, M0 to M7	3	13	-53.5	-50.7	-51.3		0.0	-33.9	-21.25	12.61
	HT/VHT20 STBC, M0 to M7	4	13	-54.6	-51.2	-52.0	-51.9	0.0	-33.2	-21.25	11.93
	HE20, M0 to M9 1ss	1	13	-52.8				0.1	-39.7	-21.25	18.48
	HE20, M0 to M9 1ss	2	13	-52.6	-50.2			0.1	-35.2	-21.25	13.91
	HE20, M0 to M9 2ss	2	13	-52.6	-50.2			0.1	-35.2	-21.25	13.91
	HE20, M0 to M9 1ss	3	13	-54.7	-51.2	-51.8		0.1	-34.5	-21.25	13.23

	HE20, M0 to M9 2ss	3	13	-54.7	-51.2	-51.8		0.1	-34.5	-21.25	13.23
	HE20, M0 to M9 3ss	3	13	-54.7	-51.2	-51.8		0.1	-34.5	-21.25	13.23
	HE20, M0 to M9 1ss	4	13	-55.3	-50.9	-51.9	-52.4	0.1	-33.3	-21.25	12.01
	HE20, M0 to M9 2ss	4	13	-55.3	-50.9	-51.9	-52.4	0.1	-33.3	-21.25	12.01
	HE20, M0 to M9 3ss	4	13	-55.3	-50.9	-51.9	-52.4	0.1	-33.3	-21.25	12.01
	HE20, M0 to M9 4ss	4	13	-55.3	-50.9	-51.9	-52.4	0.1	-33.3	-21.25	12.01
	HE20 Beam Forming, M0 to M9 1ss	2	13	-52.6	-50.2			0.1	-35.2	-21.25	13.91
	HE20 Beam Forming, M0 to M9 2ss	2	13	-52.6	-50.2			0.1	-35.2	-21.25	13.91
	HE20 Beam Forming, M0 to M9 1ss	3	15	-56.0	-52.0	-52.5		0.1	-33.3	-21.25	12.09
	HE20 Beam Forming, M0 to M9 2ss	3	13	-54.7	-51.2	-51.8		0.1	-34.5	-21.25	13.23
	HE20 Beam Forming, M0 to M9 3ss	3	13	-54.7	-51.2	-51.8		0.1	-34.5	-21.25	13.23
	HE20 Beam Forming, M0 to M9 1ss	4	16	-56.9	-54.7	-55.8	-54.6	0.1	-33.3	-21.25	12.07
	HE20 Beam Forming, M0 to M9 2ss	4	13	-55.3	-50.9	-51.9	-52.4	0.1	-33.3	-21.25	12.01
	HE20 Beam Forming, M0 to M9 3ss	4	13	-55.3	-50.9	-51.9	-52.4	0.1	-33.3	-21.25	12.01
	HE20 Beam Forming, M0 to M9 4ss	4	13	-55.3	-50.9	-51.9	-52.4	0.1	-33.3	-21.25	12.01
	HE20 STBC, M0 to M9 2ss	2	13	-52.6	-50.2			0.1	-35.2	-21.25	13.91
	HE20 STBC, M0 to M9 2ss	3	13	-54.7	-51.2	-51.8		0.1	-34.5	-21.25	13.23
	HE20 STBC, M0 to M9 2ss	4	13	-55.3	-50.9	-51.9	-52.4	0.1	-33.3	-21.25	12.01
5190	Non HT40, 6 to 54 Mbps	1	13	-53.6				0.0	-40.6	-21.25	19.30
	Non HT40, 6 to 54 Mbps	2	13	-54.7	-51.2			0.0	-36.5	-21.25	15.30
	Non HT40, 6 to 54 Mbps	3	13	-55.5	-51.5	-53.0		0.0	-35.2	-21.25	13.97
	Non HT40, 6 to 54 Mbps	4	13	-56.2	-53.6	-53.4	-52.9	0.0	-34.8	-21.25	13.54
	HT/VHT40, M0 to M7	1	13	-55.1				0.1	-42.0	-21.25	20.75
	HT/VHT40, M0 to M7	2	13	-55.1	-50.8			0.1	-36.3	-21.25	15.08
	HT/VHT40, M8 to M15	2	13	-55.1	-50.8			0.1	-36.3	-21.25	15.08
	HT/VHT40, M0 to M7	3	13	-55.7	-51.0	-52.0		0.1	-34.6	-21.25	13.36
	HT/VHT40, M8 to M15	3	13	-55.7	-51.0	-52.0		0.1	-34.6	-21.25	13.36
	HT/VHT40, M16 to M23	3	13	-55.7	-51.0	-52.0		0.1	-34.6	-21.25	13.36
	HT/VHT40, M0 to M7	4	13	-56.0	-52.1	-53.0	-53.1	0.1	-34.2	-21.25	12.96
	HT/VHT40, M8 to M15	4	13	-56.0	-52.1	-53.0	-53.1	0.1	-34.2	-21.25	12.96
	HT/VHT40, M16 to M23	4	13	-56.0	-52.1	-53.0	-53.1	0.1	-34.2	-21.25	12.96
	HT/VHT40, M24 to M31	4	13	-56.0	-52.1	-53.0	-53.1	0.1	-34.2	-21.25	12.96
	HT/VHT40 Beam Forming, M0 to M7	2	13	-55.1	-50.8			0.1	-36.3	-21.25	15.08
	HT/VHT40 Beam Forming, M8 to M15	2	13	-55.1	-50.8			0.1	-36.3	-21.25	15.08
	HT/VHT40 Beam Forming, M0 to M7	3	15	-56.5	-53.6	-53.7		0.1	-34.5	-21.25	13.29
	HT/VHT40 Beam Forming, M8 to M15	3	13	-55.7	-51.0	-52.0		0.1	-34.6	-21.25	13.36
	HT/VHT40 Beam Forming, M16 to M23	3	13	-55.7	-51.0	-52.0		0.1	-34.6	-21.25	13.36
	HT/VHT40 Beam Forming, M0 to M7	4	16	-59.4	-54.5	-56.4	-56.5	0.1	-34.2	-21.25	13.00
	HT/VHT40 Beam Forming, M8 to M15	4	13	-56.0	-52.1	-53.0	-53.1	0.1	-34.2	-21.25	12.96
	HT/VHT40 Beam Forming, M16 to M23	4	13	-56.0	-52.1	-53.0	-53.1	0.1	-34.2	-21.25	12.96
	HT/VHT40 Beam Forming, M24 to M31	4	13	-56.0	-52.1	-53.0	-53.1	0.1	-34.2	-21.25	12.96
	HT/VHT40 STBC, M0 to M7	2	13	-55.1	-50.8			0.1	-36.3	-21.25	15.08

	HT/VHT40 STBC, M0 to M7	3	13	-55.7	-51.0	-52.0		0.1	-34.6	-21.25	13.36
	HT/VHT40 STBC, M0 to M7	4	13	-56.0	-52.1	-53.0	-53.1	0.1	-34.2	-21.25	12.96
	HE40, M0 to M9 1ss	1	13	-54.8				0.1	-41.7	-21.25	20.42
	HE40, M0 to M9 1ss	2	13	-55.2	-51.3			0.1	-36.7	-21.25	15.43
	HE40, M0 to M9 2ss	2	13	-55.2	-51.3			0.1	-36.7	-21.25	15.43
	HE40, M0 to M9 1ss	3	13	-55.7	-51.7	-52.7		0.1	-35.2	-21.25	13.91
	HE40, M0 to M9 2ss	3	13	-55.7	-51.7	-52.7		0.1	-35.2	-21.25	13.91
	HE40, M0 to M9 3ss	3	13	-55.7	-51.7	-52.7		0.1	-35.2	-21.25	13.91
	HE40, M0 to M9 1ss	4	13	-56.7	-54.8	-53.0	-53.4	0.1	-35.1	-21.25	13.84
	HE40, M0 to M9 2ss	4	13	-56.7	-54.8	-53.0	-53.4	0.1	-35.1	-21.25	13.84
	HE40, M0 to M9 3ss	4	13	-56.7	-54.8	-53.0	-53.4	0.1	-35.1	-21.25	13.84
	HE40, M0 to M9 4ss	4	13	-56.7	-54.8	-53.0	-53.4	0.1	-35.1	-21.25	13.84
	HE40 Beam Forming, M0 to M9 1ss	2	13	-55.2	-51.3			0.1	-36.7	-21.25	15.43
	HE40 Beam Forming, M0 to M9 2ss	2	13	-55.2	-51.3			0.1	-36.7	-21.25	15.43
	HE40 Beam Forming, M0 to M9 1ss	3	15	-56.7	-54.8	-53.0		0.1	-34.7	-21.25	13.42
	HE40 Beam Forming, M0 to M9 2ss	3	13	-55.7	-51.7	-52.7		0.1	-35.2	-21.25	13.91
	HE40 Beam Forming, M0 to M9 3ss	3	13	-55.7	-51.7	-52.7		0.1	-35.2	-21.25	13.91
	HE40 Beam Forming, M0 to M9 1ss	4	16	-59.2	-55.7	-56.3	-56.6	0.1	-34.6	-21.25	13.36
	HE40 Beam Forming, M0 to M9 2ss	4	13	-56.7	-54.8	-53.0	-53.4	0.1	-35.1	-21.25	13.84
	HE40 Beam Forming, M0 to M9 3ss	4	13	-56.7	-54.8	-53.0	-53.4	0.1	-35.1	-21.25	13.84
	HE40 Beam Forming, M0 to M9 4ss	4	13	-56.7	-54.8	-53.0	-53.4	0.1	-35.1	-21.25	13.84
	HE40 STBC, M0 to M9 2ss	2	13	-55.2	-51.3			0.1	-36.7	-21.25	15.43
	HE40 STBC, M0 to M9 2ss	3	13	-55.7	-51.7	-52.7		0.1	-35.2	-21.25	13.91
	HE40 STBC, M0 to M9 2ss	4	13	-56.7	-54.8	-53.0	-53.4	0.1	-35.1	-21.25	13.84
5210	Non HT80, 6 to 54 Mbps	1	13	-53.2				0.1	-40.1	-21.25	18.90
	Non HT80, 6 to 54 Mbps	2	13	-53.2	-50.2			0.1	-35.4	-21.25	14.13
	Non HT80, 6 to 54 Mbps	3	13	-55.6	-51.3	-52.7		0.1	-35.0	-21.25	13.79
	Non HT80, 6 to 54 Mbps	4	13	-55.4	-51.8	-53.4	-52.5	0.1	-34.0	-21.25	12.76
	VHT80, M0 to M9 1ss	1	13	-53.6				0.2	-40.4	-21.25	19.13
	VHT80, M0 to M9 1ss	2	13	-55.3	-49.6			0.2	-35.3	-21.25	14.10
	VHT80, M0 to M9 2ss	2	13	-55.3	-49.6			0.2	-35.3	-21.25	14.10
	VHT80, M0 to M9 1ss	3	13	-55.5	-50.7	-52.5		0.2	-34.5	-21.25	13.24
	VHT80, M0 to M9 2ss	3	13	-55.5	-50.7	-52.5		0.2	-34.5	-21.25	13.24
	VHT80, M0 to M9 3ss	3	13	-55.5	-50.7	-52.5		0.2	-34.5	-21.25	13.24
	VHT80, M0 to M9 1ss	4	13	-55.6	-52.3	-53.1	-52.6	0.2	-34.0	-21.25	12.74
	VHT80, M0 to M9 2ss	4	13	-55.6	-52.3	-53.1	-52.6	0.2	-34.0	-21.25	12.74
	VHT80, M0 to M9 3ss	4	13	-55.6	-52.3	-53.1	-52.6	0.2	-34.0	-21.25	12.74
	VHT80, M0 to M9 4ss	4	13	-55.6	-52.3	-53.1	-52.6	0.2	-34.0	-21.25	12.74
	VHT80 Beam Forming, M0 to M9 1ss	2	13	-55.3	-49.6			0.2	-35.3	-21.25	14.10
	VHT80 Beam Forming, M0 to M9 2ss	2	13	-55.3	-49.6			0.2	-35.3	-21.25	14.10
	VHT80 Beam Forming, M0 to M9 1ss	3	15	-56.1	-53.8	-53.4		0.2	-34.3	-21.25	13.04
	VHT80 Beam Forming, M0 to M9 2ss	3	13	-55.5	-50.7	-52.5		0.2	-34.5	-21.25	13.24

	VHT80 Beam Forming, M0 to M9 3ss	3	13	-55.5	-50.7	-52.5		0.2	-34.5	-21.25	13.24
	VHT80 Beam Forming, M0 to M9 1ss	4	16	-59.1	-55.7	-57.3	-56.2	0.2	-34.7	-21.25	13.41
	VHT80 Beam Forming, M0 to M9 2ss	4	13	-55.6	-52.3	-53.1	-52.6	0.2	-34.0	-21.25	12.74
	VHT80 Beam Forming, M0 to M9 3ss	4	13	-55.6	-52.3	-53.1	-52.6	0.2	-34.0	-21.25	12.74
	VHT80 Beam Forming, M0 to M9 4ss	4	13	-55.6	-52.3	-53.1	-52.6	0.2	-34.0	-21.25	12.74
	VHT80 STBC, M0 to M9 1ss	2	13	-55.3	-49.6			0.2	-35.3	-21.25	14.10
	VHT80 STBC, M0 to M9 1ss	3	13	-55.5	-50.7	-52.5		0.2	-34.5	-21.25	13.24
	VHT80 STBC, M0 to M9 1ss	4	13	-55.6	-52.3	-53.1	-52.6	0.2	-34.0	-21.25	12.74
	HE80, M0 to M9 1ss	1	13	-53.3				0.2	-40.1	-21.25	18.80
	HE80, M0 to M9 1ss	2	13	-54.6	-49.9			0.2	-35.4	-21.25	14.13
	HE80, M0 to M9 2ss	2	13	-54.6	-49.9			0.2	-35.4	-21.25	14.13
	HE80, M0 to M9 1ss	3	13	-55.4	-51.4	-52.0		0.2	-34.6	-21.25	13.34
	HE80, M0 to M9 2ss	3	13	-55.4	-51.4	-52.0		0.2	-34.6	-21.25	13.34
	HE80, M0 to M9 3ss	3	13	-55.4	-51.4	-52.0		0.2	-34.6	-21.25	13.34
	HE80, M0 to M9 1ss	4	13	-56.4	-51.2	-52.3	-51.0	0.2	-33.0	-21.25	11.75
	HE80, M0 to M9 2ss	4	13	-56.4	-51.2	-52.3	-51.0	0.2	-33.0	-21.25	11.75
	HE80, M0 to M9 3ss	4	13	-56.4	-51.2	-52.3	-51.0	0.2	-33.0	-21.25	11.75
	HE80, M0 to M9 4ss	4	13	-56.4	-51.2	-52.3	-51.0	0.2	-33.0	-21.25	11.75
	HE80 Beam Forming, M0 to M9 1ss	2	13	-54.6	-49.9			0.2	-35.4	-21.25	14.13
	HE80 Beam Forming, M0 to M9 2ss	2	13	-54.6	-49.9			0.2	-35.4	-21.25	14.13
	HE80 Beam Forming, M0 to M9 1ss	3	15	-57.2	-54.2	-53.2		0.2	-34.5	-21.25	13.29
	HE80 Beam Forming, M0 to M9 2ss	3	13	-55.4	-51.4	-52.0		0.2	-34.6	-21.25	13.34
	HE80 Beam Forming, M0 to M9 3ss	3	13	-55.4	-51.4	-52.0		0.2	-34.6	-21.25	13.34
	HE80 Beam Forming, M0 to M9 1ss	4	16	-56.8	-54.7	-56.2	-55.3	0.2	-33.4	-21.25	12.15
	HE80 Beam Forming, M0 to M9 2ss	4	13	-56.4	-51.2	-52.3	-51.0	0.2	-33.0	-21.25	11.75
	HE80 Beam Forming, M0 to M9 3ss	4	13	-56.4	-51.2	-52.3	-51.0	0.2	-33.0	-21.25	11.75
	HE80 Beam Forming, M0 to M9 4ss	4	13	-56.4	-51.2	-52.3	-51.0	0.2	-33.0	-21.25	11.75
	HE80 STBC, M0 to M9 1ss	2	13	-54.6	-49.9			0.2	-35.4	-21.25	14.13
	HE80 STBC, M0 to M9 1ss	3	13	-55.4	-51.4	-52.0		0.2	-34.6	-21.25	13.34
	HE80 STBC, M0 to M9 1ss	4	13	-56.4	-51.2	-52.3	-51.0	0.2	-33.0	-21.25	11.75
5220	Non HT20, 6 to 54 Mbps	1	13	-49.7				0.1	-36.6	-21.25	15.40
	Non HT20, 6 to 54 Mbps	2	13	-49.7	-46.6			0.1	-31.8	-21.25	10.57
	Non HT20, 6 to 54 Mbps	3	13	-52.2	-47.6	-48.7		0.1	-31.3	-21.25	10.03
	Non HT20, 6 to 54 Mbps	4	13	-53.0	-49.6	-49.1	-50.3	0.1	-31.2	-21.25	9.95
	Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-49.7	-46.6			0.1	-31.8	-21.25	10.57
	Non HT20 Beam Forming, 6 to 54 Mbps	3	15	-53.0	-49.6	-49.1		0.1	-30.4	-21.25	9.18
	Non HT20 Beam Forming, 6 to 54 Mbps	4	16	-54.9	-51.4	-52.5	-52.7	0.1	-30.6	-21.25	9.38
	HT/VHT20, M0 to M7	1	13	-49.3				0.0	-36.3	-21.25	15.00
	HT/VHT20, M0 to M7	2	13	-49.3	-46.8			0.0	-31.8	-21.25	10.57
	HT/VHT20, M8 to M15	2	13	-49.3	-46.8			0.0	-31.8	-21.25	10.57
	HT/VHT20, M0 to M7	3	13	-51.5	-48.1	-49.0		0.0	-31.5	-21.25	10.24
	HT/VHT20, M8 to M15	3	13	-51.5	-48.1	-49.0		0.0	-31.5	-21.25	10.24

HT/VHT20, M16 to M23	3	13	-51.5	-48.1	-49.0		0.0	-31.5	-21.25	10.24
HT/VHT20, M0 to M7	4	13	-51.9	-48.5	-49.7	-49.7	0.0	-30.7	-21.25	9.47
HT/VHT20, M8 to M15	4	13	-51.9	-48.5	-49.7	-49.7	0.0	-30.7	-21.25	9.47
HT/VHT20, M16 to M23	4	13	-51.9	-48.5	-49.7	-49.7	0.0	-30.7	-21.25	9.47
HT/VHT20, M24 to M31	4	13	-51.9	-48.5	-49.7	-49.7	0.0	-30.7	-21.25	9.47
HT/VHT20 Beam Forming, M0 to M7	2	13	-49.3	-46.8			0.0	-31.8	-21.25	10.57
HT/VHT20 Beam Forming, M8 to M15	2	13	-49.3	-46.8			0.0	-31.8	-21.25	10.57
HT/VHT20 Beam Forming, M0 to M7	3	15	-52.9	-50.0	-49.1		0.0	-30.6	-21.25	9.32
HT/VHT20 Beam Forming, M8 to M15	3	13	-51.5	-48.1	-49.0		0.0	-31.5	-21.25	10.24
HT/VHT20 Beam Forming, M16 to M23	3	13	-51.5	-48.1	-49.0		0.0	-31.5	-21.25	10.24
HT/VHT20 Beam Forming, M0 to M7	4	16	-53.9	-51.7	-53.3	-53.2	0.0	-30.9	-21.25	9.63
HT/VHT20 Beam Forming, M8 to M15	4	13	-51.9	-48.5	-49.7	-49.7	0.0	-30.7	-21.25	9.47
HT/VHT20 Beam Forming, M16 to M23	4	13	-51.9	-48.5	-49.7	-49.7	0.0	-30.7	-21.25	9.47
HT/VHT20 Beam Forming, M24 to M31	4	13	-51.9	-48.5	-49.7	-49.7	0.0	-30.7	-21.25	9.47
HT/VHT20 STBC, M0 to M7	2	13	-49.3	-46.8			0.0	-31.8	-21.25	10.57
HT/VHT20 STBC, M0 to M7	3	13	-51.5	-48.1	-49.0		0.0	-31.5	-21.25	10.24
HT/VHT20 STBC, M0 to M7	4	13	-51.9	-48.5	-49.7	-49.7	0.0	-30.7	-21.25	9.47
HE20, M0 to M9 1ss	1	13	-50.2				0.1	-37.1	-21.25	15.88
HE20, M0 to M9 1ss	2	13	-50.2	-45.7			0.1	-31.3	-21.25	10.07
HE20, M0 to M9 2ss	2	13	-50.2	-45.7			0.1	-31.3	-21.25	10.07
HE20, M0 to M9 1ss	3	13	-51.0	-46.4	-48.4		0.1	-30.4	-21.25	9.12
HE20, M0 to M9 2ss	3	13	-51.0	-46.4	-48.4		0.1	-30.4	-21.25	9.12
HE20, M0 to M9 3ss	3	13	-51.0	-46.4	-48.4		0.1	-30.4	-21.25	9.12
HE20, M0 to M9 1ss	4	13	-52.7	-50.0	-49.2	-50.3	0.1	-31.3	-21.25	10.04
HE20, M0 to M9 2ss	4	13	-52.7	-50.0	-49.2	-50.3	0.1	-31.3	-21.25	10.04
HE20, M0 to M9 3ss	4	13	-52.7	-50.0	-49.2	-50.3	0.1	-31.3	-21.25	10.04
HE20, M0 to M9 4ss	4	13	-52.7	-50.0	-49.2	-50.3	0.1	-31.3	-21.25	10.04
HE20 Beam Forming, M0 to M9 1ss	2	13	-50.2	-45.7			0.1	-31.3	-21.25	10.07
HE20 Beam Forming, M0 to M9 2ss	2	13	-50.2	-45.7			0.1	-31.3	-21.25	10.07
HE20 Beam Forming, M0 to M9 1ss	3	15	-52.7	-50.0	-49.2		0.1	-30.6	-21.25	9.31
HE20 Beam Forming, M0 to M9 2ss	3	13	-51.0	-46.4	-48.4		0.1	-30.4	-21.25	9.12
HE20 Beam Forming, M0 to M9 3ss	3	13	-51.0	-46.4	-48.4		0.1	-30.4	-21.25	9.12
HE20 Beam Forming, M0 to M9 1ss	4	16	-55.7	-51.6	-52.0	-52.9	0.1	-30.7	-21.25	9.45
HE20 Beam Forming, M0 to M9 2ss	4	13	-52.7	-50.0	-49.2	-50.3	0.1	-31.3	-21.25	10.04
HE20 Beam Forming, M0 to M9 3ss	4	13	-52.7	-50.0	-49.2	-50.3	0.1	-31.3	-21.25	10.04
HE20 Beam Forming, M0 to M9 4ss	4	13	-52.7	-50.0	-49.2	-50.3	0.1	-31.3	-21.25	10.04
HE20 STBC, M0 to M9 2ss	2	13	-50.2	-45.7			0.1	-31.3	-21.25	10.07
HE20 STBC, M0 to M9 2ss	3	13	-51.0	-46.4	-48.4		0.1	-30.4	-21.25	9.12
HE20 STBC, M0 to M9 2ss	4	13	-52.7	-50.0	-49.2	-50.3	0.1	-31.3	-21.25	10.04

5230	Non HT40, 6 to 54 Mbps	1	13	-50.0				0.1	-36.9	-21.25	15.70
	Non HT40, 6 to 54 Mbps	2	13	-50.0	-45.6			0.1	-31.2	-21.25	9.95
	Non HT40, 6 to 54 Mbps	3	13	-51.8	-47.3	-48.2		0.1	-30.9	-21.25	9.64
	Non HT40, 6 to 54 Mbps	4	13	-53.0	-48.9	-50.3	-50.1	0.1	-31.3	-21.25	10.02
	HT/VHT40, M0 to M7	1	13	-49.9				0.0	-36.9	-21.25	15.60
	HT/VHT40, M0 to M7	2	13	-49.9	-47.1			0.0	-32.2	-21.25	10.97
	HT/VHT40, M8 to M15	2	13	-49.9	-47.1			0.0	-32.2	-21.25	10.97
	HT/VHT40, M0 to M7	3	13	-51.7	-47.5	-48.1		0.0	-30.9	-21.25	9.68
	HT/VHT40, M8 to M15	3	13	-51.7	-47.5	-48.1		0.0	-30.9	-21.25	9.68
	HT/VHT40, M16 to M23	3	13	-51.7	-47.5	-48.1		0.0	-30.9	-21.25	9.68
	HT/VHT40, M0 to M7	4	13	-53.0	-48.8	-49.7	-49.2	0.0	-30.8	-21.25	9.58
	HT/VHT40, M8 to M15	4	13	-53.0	-48.8	-49.7	-49.2	0.0	-30.8	-21.25	9.58
	HT/VHT40, M16 to M23	4	13	-53.0	-48.8	-49.7	-49.2	0.0	-30.8	-21.25	9.58
	HT/VHT40, M24 to M31	4	13	-53.0	-48.8	-49.7	-49.2	0.0	-30.8	-21.25	9.58
	HT/VHT40 Beam Forming, M0 to M7	2	13	-49.9	-47.1			0.0	-32.2	-21.25	10.97
	HT/VHT40 Beam Forming, M8 to M15	2	13	-49.9	-47.1			0.0	-32.2	-21.25	10.97
	HT/VHT40 Beam Forming, M0 to M7	3	15	-53.3	-49.0	-50.4		0.0	-30.7	-21.25	9.49
	HT/VHT40 Beam Forming, M8 to M15	3	13	-51.7	-47.5	-48.1		0.0	-30.9	-21.25	9.68
	HT/VHT40 Beam Forming, M16 to M23	3	13	-51.7	-47.5	-48.1		0.0	-30.9	-21.25	9.68
	HT/VHT40 Beam Forming, M0 to M7	4	16	-55.7	-51.7	-53.4	-52.7	0.0	-31.1	-21.25	9.83
	HT/VHT40 Beam Forming, M8 to M15	4	13	-53.0	-48.8	-49.7	-49.2	0.0	-30.8	-21.25	9.58
	HT/VHT40 Beam Forming, M16 to M23	4	13	-53.0	-48.8	-49.7	-49.2	0.0	-30.8	-21.25	9.58
	HT/VHT40 Beam Forming, M24 to M31	4	13	-53.0	-48.8	-49.7	-49.2	0.0	-30.8	-21.25	9.58
	HT/VHT40 STBC, M0 to M7	2	13	-49.9	-47.1			0.0	-32.2	-21.25	10.97
	HT/VHT40 STBC, M0 to M7	3	13	-51.7	-47.5	-48.1		0.0	-30.9	-21.25	9.68
	HT/VHT40 STBC, M0 to M7	4	13	-53.0	-48.8	-49.7	-49.2	0.0	-30.8	-21.25	9.58
	HE40, M0 to M9 1ss	1	13	-50.3				0.1	-37.2	-21.25	15.98
	HE40, M0 to M9 1ss	2	13	-50.3	-47.0			0.1	-32.3	-21.25	11.02
	HE40, M0 to M9 2ss	2	13	-50.3	-47.0			0.1	-32.3	-21.25	11.02
	HE40, M0 to M9 1ss	3	13	-51.1	-47.2	-48.0		0.1	-30.6	-21.25	9.38
	HE40, M0 to M9 2ss	3	13	-51.1	-47.2	-48.0		0.1	-30.6	-21.25	9.38
	HE40, M0 to M9 3ss	3	13	-51.1	-47.2	-48.0		0.1	-30.6	-21.25	9.38
	HE40, M0 to M9 1ss	4	13	-52.8	-50.2	-50.1	-49.8	0.1	-31.5	-21.25	10.24
	HE40, M0 to M9 2ss	4	13	-52.8	-50.2	-50.1	-49.8	0.1	-31.5	-21.25	10.24
	HE40, M0 to M9 3ss	4	13	-52.8	-50.2	-50.1	-49.8	0.1	-31.5	-21.25	10.24
	HE40, M0 to M9 4ss	4	13	-52.8	-50.2	-50.1	-49.8	0.1	-31.5	-21.25	10.24
	HE40 Beam Forming, M0 to M9 1ss	2	13	-50.3	-47.0			0.1	-32.3	-21.25	11.02
	HE40 Beam Forming, M0 to M9 2ss	2	13	-50.3	-47.0			0.1	-32.3	-21.25	11.02
	HE40 Beam Forming, M0 to M9 1ss	3	15	-52.8	-50.2	-50.1		0.1	-31.0	-21.25	9.78
	HE40 Beam Forming, M0 to M9 2ss	3	13	-51.1	-47.2	-48.0		0.1	-30.6	-21.25	9.38
	HE40 Beam Forming, M0 to M9 3ss	3	13	-51.1	-47.2	-48.0		0.1	-30.6	-21.25	9.38
	HE40 Beam Forming, M0 to M9 1ss	4	16	-55.2	-51.3	-52.8	-52.7	0.1	-30.7	-21.25	9.45
	HE40 Beam Forming, M0 to M9 2ss	4	13	-52.8	-50.2	-50.1	-49.8	0.1	-31.5	-21.25	10.24

	HE40 Beam Forming, M0 to M9 3ss	4	13	-52.8	-50.2	-50.1	-49.8	0.1	-31.5	-21.25	10.24
	HE40 Beam Forming, M0 to M9 4ss	4	13	-52.8	-50.2	-50.1	-49.8	0.1	-31.5	-21.25	10.24
	HE40 STBC, M0 to M9 2ss	2	13	-50.3	-47.0			0.1	-32.3	-21.25	11.02
	HE40 STBC, M0 to M9 2ss	3	13	-51.1	-47.2	-48.0		0.1	-30.6	-21.25	9.38
	HE40 STBC, M0 to M9 2ss	4	13	-52.8	-50.2	-50.1	-49.8	0.1	-31.5	-21.25	10.24
5240	Non HT20, 6 to 54 Mbps	1	13	-50.1				0.1	-37.0	-21.25	15.80
	Non HT20, 6 to 54 Mbps	2	13	-50.1	-47.2			0.1	-32.4	-21.25	11.10
	Non HT20, 6 to 54 Mbps	3	13	-51.9	-45.0	-48.5		0.1	-29.8	-21.25	8.52
	Non HT20, 6 to 54 Mbps	4	13	-52.7	-50.0	-49.3	-49.8	0.1	-31.2	-21.25	9.95
	Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-50.1	-47.2			0.1	-32.4	-21.25	11.10
	Non HT20 Beam Forming, 6 to 54 Mbps	3	15	-52.7	-50.0	-49.3		0.1	-30.6	-21.25	9.37
	Non HT20 Beam Forming, 6 to 54 Mbps	4	16	-55.3	-52.4	-51.4	-52.7	0.1	-30.7	-21.25	9.41
	HT/VHT20, M0 to M7	1	13	-49.5				0.0	-36.5	-21.25	15.20
	HT/VHT20, M0 to M7	2	13	-49.5	-46.5			0.0	-31.7	-21.25	10.44
	HT/VHT20, M8 to M15	2	13	-49.5	-46.5			0.0	-31.7	-21.25	10.44
	HT/VHT20, M0 to M7	3	13	-51.2	-48.1	-47.6		0.0	-30.9	-21.25	9.63
	HT/VHT20, M8 to M15	3	13	-51.2	-48.1	-47.6		0.0	-30.9	-21.25	9.63
	HT/VHT20, M16 to M23	3	13	-51.2	-48.1	-47.6		0.0	-30.9	-21.25	9.63
	HT/VHT20, M0 to M7	4	13	-53.4	-50.7	-50.0	-50.2	0.0	-31.8	-21.25	10.57
	HT/VHT20, M8 to M15	4	13	-53.4	-50.7	-50.0	-50.2	0.0	-31.8	-21.25	10.57
	HT/VHT20, M16 to M23	4	13	-53.4	-50.7	-50.0	-50.2	0.0	-31.8	-21.25	10.57
	HT/VHT20, M24 to M31	4	13	-53.4	-50.7	-50.0	-50.2	0.0	-31.8	-21.25	10.57
	HT/VHT20 Beam Forming, M0 to M7	2	13	-49.5	-46.5			0.0	-31.7	-21.25	10.44
	HT/VHT20 Beam Forming, M8 to M15	2	13	-49.5	-46.5			0.0	-31.7	-21.25	10.44
	HT/VHT20 Beam Forming, M0 to M7	3	15	-53.4	-50.7	-50.0		0.0	-31.3	-21.25	10.07
	HT/VHT20 Beam Forming, M8 to M15	3	13	-51.2	-48.1	-47.6		0.0	-30.9	-21.25	9.63
	HT/VHT20 Beam Forming, M16 to M23	3	13	-51.2	-48.1	-47.6		0.0	-30.9	-21.25	9.63
	HT/VHT20 Beam Forming, M0 to M7	4	16	-55.8	-52.2	-52.0	-52.3	0.0	-30.8	-21.25	9.51
	HT/VHT20 Beam Forming, M8 to M15	4	13	-53.4	-50.7	-50.0	-50.2	0.0	-31.8	-21.25	10.57
	HT/VHT20 Beam Forming, M16 to M23	4	13	-53.4	-50.7	-50.0	-50.2	0.0	-31.8	-21.25	10.57
	HT/VHT20 Beam Forming, M24 to M31	4	13	-53.4	-50.7	-50.0	-50.2	0.0	-31.8	-21.25	10.57
	HT/VHT20 STBC, M0 to M7	2	13	-49.5	-46.5			0.0	-31.7	-21.25	10.44
	HT/VHT20 STBC, M0 to M7	3	13	-51.2	-48.1	-47.6		0.0	-30.9	-21.25	9.63
	HT/VHT20 STBC, M0 to M7	4	13	-53.4	-50.7	-50.0	-50.2	0.0	-31.8	-21.25	10.57
	HE20, M0 to M9 1ss	1	13	-50.1				0.1	-37.0	-21.25	15.78
	HE20, M0 to M9 1ss	2	13	-50.1	-46.1			0.1	-31.6	-21.25	10.33
	HE20, M0 to M9 2ss	2	13	-50.1	-46.1			0.1	-31.6	-21.25	10.33
	HE20, M0 to M9 1ss	3	13	-52.3	-48.3	-48.0		0.1	-31.3	-21.25	10.06
	HE20, M0 to M9 2ss	3	13	-52.3	-48.3	-48.0		0.1	-31.3	-21.25	10.06
	HE20, M0 to M9 3ss	3	13	-52.3	-48.3	-48.0		0.1	-31.3	-21.25	10.06
	HE20, M0 to M9 1ss	4	13	-53.6	-50.0	-49.5	-50.1	0.1	-31.4	-21.25	10.20
	HE20, M0 to M9 2ss	4	13	-53.6	-50.0	-49.5	-50.1	0.1	-31.4	-21.25	10.20

	HE20, M0 to M9 3ss	4	13	-53.6	-50.0	-49.5	-50.1	0.1	-31.4	-21.25	10.20
	HE20, M0 to M9 4ss	4	13	-53.6	-50.0	-49.5	-50.1	0.1	-31.4	-21.25	10.20
	HE20 Beam Forming, M0 to M9 1ss	2	13	-50.1	-46.1			0.1	-31.6	-21.25	10.33
	HE20 Beam Forming, M0 to M9 2ss	2	13	-50.1	-46.1			0.1	-31.6	-21.25	10.33
	HE20 Beam Forming, M0 to M9 1ss	3	15	-53.6	-50.0	-49.5		0.1	-30.9	-21.25	9.60
	HE20 Beam Forming, M0 to M9 2ss	3	13	-52.3	-48.3	-48.0		0.1	-31.3	-21.25	10.06
	HE20 Beam Forming, M0 to M9 3ss	3	13	-52.3	-48.3	-48.0		0.1	-31.3	-21.25	10.06
	HE20 Beam Forming, M0 to M9 1ss	4	16	-56.3	-51.8	-52.5	-52.7	0.1	-30.9	-21.25	9.69
	HE20 Beam Forming, M0 to M9 2ss	4	13	-53.6	-50.0	-49.5	-50.1	0.1	-31.4	-21.25	10.20
	HE20 Beam Forming, M0 to M9 3ss	4	13	-53.6	-50.0	-49.5	-50.1	0.1	-31.4	-21.25	10.20
	HE20 Beam Forming, M0 to M9 4ss	4	13	-53.6	-50.0	-49.5	-50.1	0.1	-31.4	-21.25	10.20
	HE20 STBC, M0 to M9 2ss	2	13	-50.1	-46.1			0.1	-31.6	-21.25	10.33
	HE20 STBC, M0 to M9 2ss	3	13	-52.3	-48.3	-48.0		0.1	-31.3	-21.25	10.06
	HE20 STBC, M0 to M9 2ss	4	13	-53.6	-50.0	-49.5	-50.1	0.1	-31.4	-21.25	10.20
5250	Non HT160, 6 to 54 Mbps	1	13	-52.4				0.0	-39.4	-21.25	18.10
	Non HT160, 6 to 54 Mbps	2	13	-55.4	-51.1			0.0	-36.7	-21.25	15.43
	Non HT160, 6 to 54 Mbps	3	13	-55.4	-51.1	-51.6		0.0	-34.5	-21.25	13.25
	Non HT160, 6 to 54 Mbps	4	13	-55.4	-51.1	-51.6	-51.0	0.0	-32.9	-21.25	11.63
	VHT160, M0 to M9 1ss	1	13	-49.0				0.4	-35.6	-21.25	14.36
	VHT160, M0 to M9 1ss	2	13	-52.7	-49.8			0.4	-34.6	-21.25	13.36
	VHT160, M0 to M9 2ss	2	13	-52.7	-49.8			0.4	-34.6	-21.25	13.36
	VHT160, M0 to M9 1ss	3	13	-53.1	-50.7	-52.2		0.4	-33.7	-21.25	12.47
	VHT160, M0 to M9 2ss	3	13	-53.1	-50.7	-52.2		0.4	-33.7	-21.25	12.47
	VHT160, M0 to M9 3ss	3	13	-53.1	-50.7	-52.2		0.4	-33.7	-21.25	12.47
	VHT160, M0 to M9 1ss	4	13	-54.9	-50.9	-52.3	-52.2	0.4	-32.9	-21.25	11.69
	VHT160, M0 to M9 2ss	4	13	-54.9	-50.9	-52.3	-52.2	0.4	-32.9	-21.25	11.69
	VHT160, M0 to M9 3ss	4	13	-54.9	-50.9	-52.3	-52.2	0.4	-32.9	-21.25	11.69
	VHT160, M0 to M9 4ss	4	13	-54.9	-50.9	-52.3	-52.2	0.4	-32.9	-21.25	11.69
	VHT160 Beam Forming, M0 to M9 1ss	2	13	-52.7	-49.8			0.4	-34.6	-21.25	13.36
	VHT160 Beam Forming, M0 to M9 2ss	2	13	-52.7	-49.8			0.4	-34.6	-21.25	13.36
	VHT160 Beam Forming, M0 to M9 1ss	3	15	-56.0	-52.4	-53.8		0.4	-33.7	-21.25	12.41
	VHT160 Beam Forming, M0 to M9 2ss	3	13	-53.1	-50.7	-52.2		0.4	-33.7	-21.25	12.47
	VHT160 Beam Forming, M0 to M9 3ss	3	13	-53.1	-50.7	-52.2		0.4	-33.7	-21.25	12.47
	VHT160 Beam Forming, M0 to M9 1ss	4	16	-57.3	-54.2	-55.8	-54.1	0.4	-32.7	-21.25	11.50
	VHT160 Beam Forming, M0 to M9 2ss	4	13	-54.9	-50.9	-52.3	-52.2	0.4	-32.9	-21.25	11.69
	VHT160 Beam Forming, M0 to M9 3ss	4	13	-54.9	-50.9	-52.3	-52.2	0.4	-32.9	-21.25	11.69
	VHT160 Beam Forming, M0 to M9 4ss	4	13	-54.9	-50.9	-52.3	-52.2	0.4	-32.9	-21.25	11.69
	VHT160 STBC, M0 to M9 1ss	2	13	-52.7	-49.8			0.4	-34.6	-21.25	13.36
	VHT160 STBC, M0 to M9 1ss	3	13	-53.1	-50.7	-52.2		0.4	-33.7	-21.25	12.47
	VHT160 STBC, M0 to M9 1ss	4	13	-54.9	-50.9	-52.3	-52.2	0.4	-32.9	-21.25	11.69
	HE160, M0 to M9 1ss	1	13	-52.5				0.4	-39.1	-21.25	17.82
	HE160, M0 to M9 1ss	2	13	-53.9	-50.1			0.4	-35.2	-21.25	13.90

HE160, M0 to M9 2ss	2	13	-53.9	-50.1			0.4	-35.2	-21.25	13.90
HE160, M0 to M9 1ss	3	13	-54.1	-50.4	-52.0		0.4	-33.7	-21.25	12.46
HE160, M0 to M9 2ss	3	13	-54.1	-50.4	-52.0		0.4	-33.7	-21.25	12.46
HE160, M0 to M9 3ss	3	13	-54.1	-50.4	-52.0		0.4	-33.7	-21.25	12.46
HE160, M0 to M9 1ss	4	13	-55.0	-51.2	-52.6	-52.6	0.4	-33.2	-21.25	11.94
HE160, M0 to M9 2ss	4	13	-55.0	-51.2	-52.6	-52.6	0.4	-33.2	-21.25	11.94
HE160, M0 to M9 3ss	4	13	-55.0	-51.2	-52.6	-52.6	0.4	-33.2	-21.25	11.94
HE160, M0 to M9 4ss	4	13	-55.0	-51.2	-52.6	-52.6	0.4	-33.2	-21.25	11.94
HE160 Beam Forming, M0 to M9 1ss	2	13	-53.9	-50.1			0.4	-35.2	-21.25	13.90
HE160 Beam Forming, M0 to M9 2ss	2	13	-53.9	-50.1			0.4	-35.2	-21.25	13.90
HE160 Beam Forming, M0 to M9 1ss	3	15	-55.0	-51.2	-52.6		0.4	-32.5	-21.25	11.21
HE160 Beam Forming, M0 to M9 2ss	3	13	-54.1	-50.4	-52.0		0.4	-33.7	-21.25	12.46
HE160 Beam Forming, M0 to M9 3ss	3	13	-54.1	-50.4	-52.0		0.4	-33.7	-21.25	12.46
HE160 Beam Forming, M0 to M9 1ss	4	16	-55.3	-51.8	-53.5	-53.4	0.4	-30.9	-21.25	9.62
HE160 Beam Forming, M0 to M9 2ss	4	13	-55.0	-51.2	-52.6	-52.6	0.4	-33.2	-21.25	11.94
HE160 Beam Forming, M0 to M9 3ss	4	13	-55.0	-51.2	-52.6	-52.6	0.4	-33.2	-21.25	11.94
HE160 Beam Forming, M0 to M9 4ss	4	13	-55.0	-51.2	-52.6	-52.6	0.4	-33.2	-21.25	11.94
HE160 STBC, M0 to M9 1ss	2	13	-53.9	-50.1			0.4	-35.2	-21.25	13.90
HE160 STBC, M0 to M9 1ss	3	13	-54.1	-50.4	-52.0		0.4	-33.7	-21.25	12.46
HE160 STBC, M0 to M9 1ss	4	13	-55.0	-51.2	-52.6	-52.6	0.4	-33.2	-21.25	11.94

Conducted Spurs Peak, 5240 MHz, Non HT20, 6 to 54 Mbps



Antenna A



Antenna B



Antenna C

A.6 Conducted Receiver Spurious Emissions

Spurious Of Receive Average Upp, 5180 MHz, Non HT20, 6 to 54 Mbps

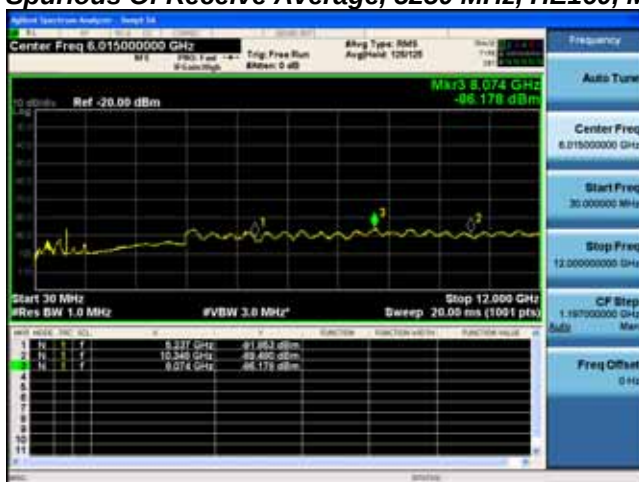


Spurious Of Receive Peak Upper, 5180 MHz, Non HT20, 6 to 54 Mbps

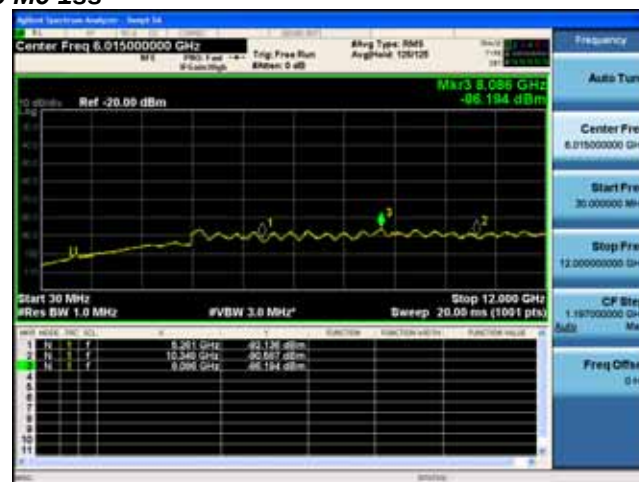


Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Rx 1 Spur Power (dBm)	Rx 2 Spur Power (dBm)	Rx 3 Spur Power (dBm)	Rx 4 Spur Power (dBm)	Duty Cycle Correction (dB)	Total Conducted Spur (dBm)	Limit (dBm)	Margin (dB)
5180	Non HT20, 6 to 54 Mbps	4	13	-86.3	-86.2	-86.7	-86.3	0.1	-67.3	-41.25	26.05
	HT/VHT20, M0 to M7	4	13	-85.8	-86.2	-86.5	-86.5	0.0	-67.2	-41.25	25.92
	HE20, M0 to M9 1ss	4	13	-86.3	-86.5	-86.8	-86.5	0.1	-67.4	-41.25	26.19
5190	Non HT40, 6 to 54 Mbps	4	13	-86.0	-86.2	-86.5	-86.6	0.0	-67.2	-41.25	26.00
	HT/VHT40, M0 to M7	4	13	-85.9	-86.1	-86.6	-86.4	0.1	-67.1	-41.25	25.87
	HE40, M0 to M9 1ss	4	13	-86.0	-86.4	-86.6	-86.5	0.1	-67.2	-41.25	25.96
5210	Non HT80, 6 to 54 Mbps	4	13	-86.3	-86.8	-86.6	-86.4	0.1	-67.4	-41.25	26.20
	VHT80, M0 to M9 1ss	4	13	-86.6	-86.5	-86.7	-86.5	0.2	-67.3	-41.25	26.09
	HE80, M0 to M9 1ss	4	13	-86.0	-86.3	-86.8	-86.2	0.2	-67.0	-41.25	25.79
5220	Non HT20, 6 to 54 Mbps	4	13	-86.0	-86.7	-86.6	-85.9	0.1	-67.2	-41.25	25.96
	HT/VHT20, M0 to M7	4	13	-86.0	-86.4	-86.7	-86.5	0.0	-67.3	-41.25	26.08
	HE20, M0 to M9 1ss	4	13	-86.2	-86.4	-86.8	-86.6	0.1	-67.4	-41.25	26.16
5230	Non HT40, 6 to 54 Mbps	4	13	-86.1	-86.3	-86.8	-86.4	0.1	-67.3	-41.25	26.07
	HT/VHT40, M0 to M7	4	13	-86.6	-86.8	-86.9	-86.8	0.0	-67.7	-41.25	26.46
	HE40, M0 to M9 1ss	4	13	-86.3	-86.5	-86.6	-86.2	0.1	-67.3	-41.25	26.06
5240	Non HT20, 6 to 54 Mbps	4	13	-86.1	-86.4	-86.8	-86.8	0.1	-67.4	-41.25	26.19
	HT/VHT20, M0 to M7	4	13	-86.1	-86.7	-86.9	-86.5	0.0	-67.5	-41.25	26.22
	HE20, M0 to M9 1ss	4	13	-86.2	-86.7	-87.0	-86.9	0.1	-67.6	-41.25	26.35
5250	Non HT160, 6 to 54 Mbps	4	13	-86.1	-86.4	-86.3	-86.4	0.0	-67.2	-41.25	25.98
	VHT160, M0 to M9 1ss	4	13	-86.3	-86.7	-87.0	-86.5	0.4	-67.2	-41.25	25.95
	HE160, M0 to M9 1ss	4	13	-86.2	-86.2	-86.6	-86.4	0.4	-66.9	-41.25	25.64

Spurious Of Receive Average, 5250 MHz, HE160, M0 to M9 1ss



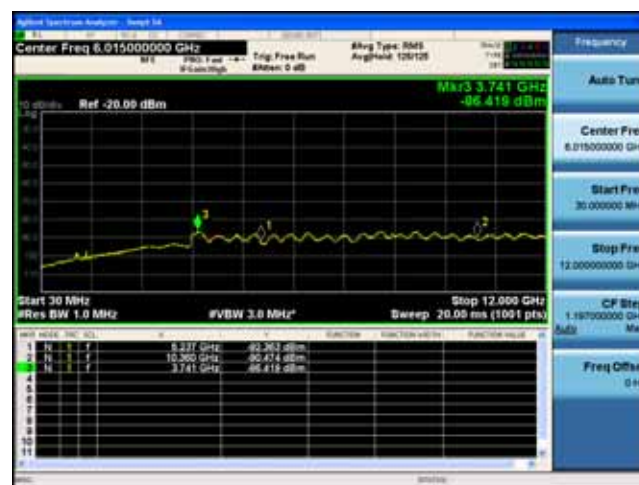
Antenna A



Antenna B



Antenna C



Antenna D

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Rx 1 Spur Power (dBm)	Rx 2 Spur Power (dBm)	Rx 3 Spur Power (dBm)	Rx 4 Spur Power (dBm)	Total Conducted Spur (dBm)	Limit (dBm)	Margin (dB)
5180	Non HT20, 6 to 54 Mbps	4	13	-69.1	-69.0	-69.5	-69.4	-50.2	-21.25	28.92
	HT/VHT20, M0 to M7	4	13	-68.5	-68.5	-68.8	-69.7	-49.8	-21.25	28.53
	HE20, M0 to M9 1ss	4	13	-68.8	-69.0	-69.5	-70.1	-50.2	-21.25	28.99
5190	Non HT40, 6 to 54 Mbps	4	13	-69.1	-69.0	-69.5	-69.1	-50.1	-21.25	28.85
	HT/VHT40, M0 to M7	4	13	-68.4	-69.0	-69.2	-69.4	-49.9	-21.25	28.61
	HE40, M0 to M9 1ss	4	13	-69.4	-70.1	-69.5	-69.9	-50.6	-21.25	29.31
5210	Non HT80, 6 to 54 Mbps	4	13	-68.2	-67.6	-69.5	-69.1	-49.5	-21.25	28.21
	VHT80, M0 to M9 1ss	4	13	-68.4	-68.5	-69.8	-69.9	-49.9	-21.25	28.61
	HE80, M0 to M9 1ss	4	13	-69.6	-68.7	-69.3	-69.2	-49.9	-21.25	28.67
5220	Non HT20, 6 to 54 Mbps	4	13	-69.5	-69.1	-69.3	-69.0	-50.1	-21.25	28.90
	HT/VHT20, M0 to M7	4	13	-68.7	-68.6	-69.6	-69.3	-50.0	-21.25	28.71
	HE20, M0 to M9 1ss	4	13	-69.8	-67.8	-69.2	-68.7	-49.7	-21.25	28.48
5230	Non HT40, 6 to 54 Mbps	4	13	-69.4	-69.9	-69.7	-69.6	-50.6	-21.25	29.32
	HT/VHT40, M0 to M7	4	13	-68.1	-69.1	-68.4	-69.9	-49.8	-21.25	28.50
	HE40, M0 to M9 1ss	4	13	-68.8	-69.5	-68.2	-69.2	-49.8	-21.25	28.56
5240	Non HT20, 6 to 54 Mbps	4	13	-69.5	-69.5	-69.3	-69.4	-50.4	-21.25	29.10
	HT/VHT20, M0 to M7	4	13	-67.5	-69.5	-68.8	-69.0	-49.6	-21.25	28.32
	HE20, M0 to M9 1ss	4	13	-68.3	-69.3	-69.4	-69.6	-50.0	-21.25	28.78
5250	Non HT160, 6 to 54 Mbps	4	13	-68.5	-69.1	-69.4	-69.2	-50.0	-21.25	28.72
	VHT160, M0 to M9 1ss	4	13	-67.2	-67.8	-69.4	-69.5	-48.9	-21.25	27.70
	HE160, M0 to M9 1ss	4	13	-68.8	-69.4	-69.8	-69.0	-49.8	-21.25	28.53

Vector Signal Analyzer - Setup 34

Center Freq: 8.015000000 GHz Avg Type: RMS

Start Freq: 8.000000000 GHz Stop Freq: 8.030000000 GHz

Start Res: 30 MHz Res BW: 1.0 MHz

IFBW: 3.0 MHz Sweep: 20.00 ms (1001 pts)

Ref: -20.00 dBm

Mkr3: 10.899 GHz -87.176 dBm

MARK	NAME	FREQ	DBM	UNIT	DESCRIPTION
1	N	9.437	-74.187	dBm	
2	N	10.260	-75.081	dBm	
3	N	10.899	-87.176	dBm	
4	N	6.330	-89.122	dBm	

The screenshot displays a Rohde & Schwarz Spectrum Analyzer interface. The main plot shows a frequency spectrum with a yellow trace. The center frequency is 8.915000000 GHz. The plot includes a reference level at -20.00 dBm and a marker at 10.630 GHz with a value of -47.006 dBm. The plot parameters are Start 30 MHz, #Res BW 1.0 MHz, #VBW 3.0 MHz, Sweep 20.05 ms (10.01 pts).

Below the plot, a table lists the measured peaks:

W	FREQ	INTC	ACL	Q	V	FUNCTION	FUNCTION VALUE	FUNCTION VALUE 2
1	N	1	F		9.337 GHz	-74.163 dBm		
2	N	1	F		10.372 GHz	-52.851 dBm		
3	N	1	F		10.636 GHz	-47.006 dBm		
4	N	1	F		9.889 GHz	-69.427 dBm		

The right sidebar shows various settings and a list of measured peaks. The 'Frequency' section shows 'Auto Tuning' and 'Center Freq 8.915000000 GHz'. The 'Start Freq' is 30.000000 MHz, 'Stop Freq' is 12.000000000 GHz, 'CF Stop' is 1.197000000 GHz, and 'Audio' is set to 'Ma'. The 'Freq Offset' is 0 Hz.

The screenshot displays a Vector Signal Analyzer (VSA) interface. The main window shows a spectrum plot with a yellow trace representing the signal. The plot is titled "Ref -20.00 dBm". The frequency range is from 8.015000000 GHz to 8.015000000 GHz. The plot shows a signal with several peaks, with the highest peak labeled "Mkr3 10.787 GHz -99.369 dBm".

Below the plot, there is a table of detected signals:

Wave	Mode	Freq	SNR	Power	Power Spectral Density	Power Spectral Density	Power Spectral Density
1	N	1	1	9.248 GHz	-73.023 dBm		
2	N	1	1	10.372 GHz	-72.001 dBm		
3	N	1	1	10.787 GHz	-99.369 dBm		
4	N	1	1	3.728 GHz	-69.778 dBm		

The table shows four detected signals, with the third signal (10.787 GHz) being the most prominent. The interface also includes various control buttons and settings, such as "Start 30 MHz", "Stop 12.000 GHz", "Sweep 20.00 ms (1001 pts)", and "CF Step 1.197000000 GHz".

Spectrum Analyzer - Setup 04

Center Freq 8.015000000 GHz

Ref -20.05 dBm

Mkr3 10.647 GHz -89.550 dBm

Start 30 MHz

Res BW 1.0 MHz

#VBW 3.0 MHz

Sweep 12.0000 GHz

Stop 20.05 ms (1001 pts)

Row	Mode	Freq (GHz)	Mag (dBm)
1	N	8.261 GHz	-72.811 dBm
2	N	10.280 GHz	-71.179 dBm
3	N	10.647 GHz	-89.550 dBm
4	N	8.350 GHz	-89.853 dBm

Right Panel:

- Frequency:** Auto Tuning
- Center Freq:** 8.015000000 GHz
- Start Freq:** 30.00000000 GHz
- Stop Freq:** 12.000000000 GHz
- CF BW:** 1.187000000 GHz
- Freq Offset:** 0.000000000 GHz

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.
Cisco Systems, Inc. Company Confidential

A.7 Conducted Band Edge

Conducted Band Edge Test Requirement

15.407(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.
- (7) The provisions of §15.205 apply to intentional radiators operating under this section.
- (8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Use formula below to substitute conducted measurements in place of radiated measurements

$$E[\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] - 20 \log(d[\text{meters}]) + 104.77, \text{ where } E = \text{field strength and } d = 3 \text{ meter}$$

- 1) Average Plot, Limit= -41.25 dBm eirp
- 2) Peak plot, Limit = -21.25 dBm eirp

KDB 789033 D02 General UNII Test Procedures New Rules v02r01

2. Unwanted Emissions that fall Outside of the Restricted Bands

- a) For all measurements, follow the requirements in II.G.3. “General Requirements for Unwanted Emissions Measurements.”
- b) At frequencies below 1000 MHz, use the procedure described in II.G.4. “Procedure for Unwanted Emissions Measurements Below 1000 MHz.”
- c) At frequencies above 1000 MHz, use the procedure for maximum emissions described in II.G.5., “Procedure for Unwanted Emissions Measurements Above 1000 MHz.”
- (i) Sections 15.407(b)(1-3) specifies the unwanted emissions limit for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.

Conducted Band Edge Test Procedure

KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Ref. ANSI C63.10: 2013

Conducted Spurious Emissions

Test Procedure

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Place the radio in continuous transmit mode
3. Configure Spectrum analyzer as per test parameters below (be sure to enter all losses between the transmitter output and the spectrum analyzer).
4. Use the peak marker function to determine the maximum spurs amplitude level.
5. The “measure-and-sum technique” is used for measuring in-band transmit power of a device. In the

measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. The worst case output is recorded. (see ANSI C63.10:2013 section 14.3.2.2)

6. Capture graphs and record pertinent measurement data.

Ref. ANSI C63.10: 2013 section 12.7.6 (Peak) and 12.7.7.2 (Average)

KDB 789033 D02 General UNII Test Procedures New Rules v02r01, Sec. 5 (Peak), Sec. 6 (Average Method AD)

Conducted Spurious Emissions

Test parameters

Peak

RBW = 1 MHz

VBW $\geq$ 3 MHz

Sweep = Auto

Detector = Peak

Trace = Max Hold.

Average

RBW = 1 MHz

VBW $\geq$ 3 MHz

Sweep = Auto

Detector = RMS

Power Averaging

Samples, Systems, and Modes

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	☒	☐
	Support		☐	☒

Tested By :

Chris Blair

Date of testing:

15-Sep-19 - 26-Sep-19

Test Result : PASS

Test Equipment

See Appendix C for list of test equipment

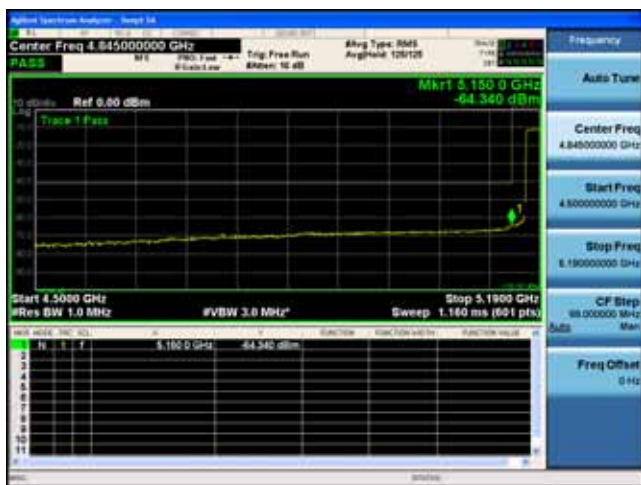
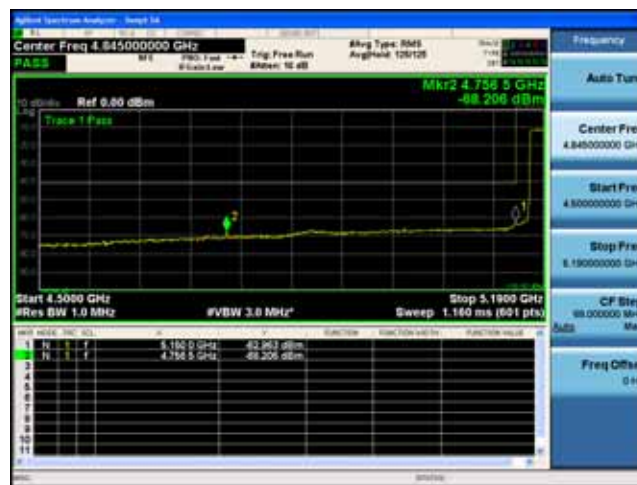
Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Bandedge Level (dBm)	Tx 2 Bandedge Level (dBm)	Tx 3 Bandedge Level (dBm)	Tx 4 Bandedge Level (dBm)	Duty Cycle Correction (dB)	Total Tx Bandedge Level (dBm)	Limit (dBm)	Margin (dB)
5180	Non HT20, 6 to 54 Mbps	1	13	-55.7				0.1	-42.6	-41.25	1.40
	Non HT20, 6 to 54 Mbps	2	13	-58.2	-59.7			0.1	-42.8	-41.25	1.57
	Non HT20, 6 to 54 Mbps	3	13	-59.9	-60.7	-59.7		0.1	-42.3	-41.25	1.01
	Non HT20, 6 to 54 Mbps	4	13	-61.2	-60.7	-60.5	-61.3	0.1	-41.8	-41.25	0.59
	Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-58.2	-59.7			0.1	-42.8	-41.25	1.57
	Non HT20 Beam Forming, 6 to 54 Mbps	3	15	-61.7	-61.9	-60.9		0.1	-41.7	-41.25	0.41
	Non HT20 Beam Forming, 6 to 54 Mbps	4	16	-64.2	-63.5	-63.7	-64.9	0.1	-42.0	-41.25	0.72
	HT/VHT20, M0 to M7	1	13	-55.6				0.0	-42.6	-41.25	1.30
	HT/VHT20, M0 to M7	2	13	-58.2	-59.8			0.0	-42.9	-41.25	1.62
	HT/VHT20, M8 to M15	2	13	-58.2	-59.8			0.0	-42.9	-41.25	1.62
	HT/VHT20, M0 to M7	3	13	-59.9	-61.0	-59.9		0.0	-42.4	-41.25	1.17
	HT/VHT20, M8 to M15	3	13	-59.9	-61.0	-59.9		0.0	-42.4	-41.25	1.17
	HT/VHT20, M16 to M23	3	13	-59.9	-61.0	-59.9		0.0	-42.4	-41.25	1.17
	HT/VHT20, M0 to M7	4	13	-60.6	-61.6	-60.6	-60.2	0.0	-41.7	-41.25	0.40
	HT/VHT20, M8 to M15	4	13	-60.6	-61.6	-60.6	-60.2	0.0	-41.7	-41.25	0.40
	HT/VHT20, M16 to M23	4	13	-60.6	-61.6	-60.6	-60.2	0.0	-41.7	-41.25	0.40
	HT/VHT20, M24 to M31	4	13	-60.6	-61.6	-60.6	-60.2	0.0	-41.7	-41.25	0.40
	HT/VHT20 Beam Forming, M0 to M7	2	13	-58.2	-59.8			0.0	-42.9	-41.25	1.62
	HT/VHT20 Beam Forming, M8 to M15	2	13	-58.2	-59.8			0.0	-42.9	-41.25	1.62
	HT/VHT20 Beam Forming, M0 to M7	3	15	-62.0	-62.7	-61.2		0.0	-42.1	-41.25	0.86
	HT/VHT20 Beam Forming, M8 to M15	3	13	-59.9	-61.0	-59.9		0.0	-42.4	-41.25	1.17
	HT/VHT20 Beam Forming, M16 to M23	3	13	-59.9	-61.0	-59.9		0.0	-42.4	-41.25	1.17
	HT/VHT20 Beam Forming, M0 to M7	4	16	-63.5	-63.3	-63.4	-63.7	0.0	-41.4	-41.25	0.16
	HT/VHT20 Beam Forming, M8 to M15	4	13	-60.6	-61.6	-60.6	-60.2	0.0	-41.7	-41.25	0.40
	HT/VHT20 Beam Forming, M16 to M23	4	13	-60.6	-61.6	-60.6	-60.2	0.0	-41.7	-41.25	0.40
	HT/VHT20 Beam Forming, M24 to M31	4	13	-60.6	-61.6	-60.6	-60.2	0.0	-41.7	-41.25	0.40
	HT/VHT20 STBC, M0 to M7	2	13	-58.2	-59.8			0.0	-42.9	-41.25	1.62
	HT/VHT20 STBC, M0 to M7	3	13	-59.9	-61.0	-59.9		0.0	-42.4	-41.25	1.17
	HT/VHT20 STBC, M0 to M7	4	13	-60.6	-61.6	-60.6	-60.2	0.0	-41.7	-41.25	0.40
	HE20, M0 to M9 1ss	1	13	-54.4				0.1	-41.3	-41.25	0.08
	HE20, M0 to M9 1ss	2	13	-57.8	-59.8			0.1	-42.6	-41.25	1.36

	HE20, M0 to M9 2ss	2	13	-57.8	-59.8			0.1	-42.6	-41.25	1.36
	HE20, M0 to M9 1ss	3	13	-59.7	-60.0	-58.9		0.1	-41.7	-41.25	0.42
	HE20, M0 to M9 2ss	3	13	-59.7	-60.0	-58.9		0.1	-41.7	-41.25	0.42
	HE20, M0 to M9 3ss	3	13	-59.7	-60.0	-58.9		0.1	-41.7	-41.25	0.42
	HE20, M0 to M9 1ss	4	13	-60.7	-61.4	-60.3	-60.0	0.1	-41.5	-41.25	0.23
	HE20, M0 to M9 2ss	4	13	-60.7	-61.4	-60.3	-60.0	0.1	-41.5	-41.25	0.23
	HE20, M0 to M9 3ss	4	13	-60.7	-61.4	-60.3	-60.0	0.1	-41.5	-41.25	0.23
	HE20, M0 to M9 4ss	4	13	-60.7	-61.4	-60.3	-60.0	0.1	-41.5	-41.25	0.23
	HE20 Beam Forming, M0 to M9 1ss	2	13	-57.8	-59.8			0.1	-42.6	-41.25	1.36
	HE20 Beam Forming, M0 to M9 2ss	2	13	-57.8	-59.8			0.1	-42.6	-41.25	1.36
	HE20 Beam Forming, M0 to M9 1ss	3	15	-61.6	-63.0	-61.3		0.1	-42.1	-41.25	0.82
	HE20 Beam Forming, M0 to M9 2ss	3	13	-59.7	-60.0	-58.9		0.1	-41.7	-41.25	0.42
	HE20 Beam Forming, M0 to M9 3ss	3	13	-59.7	-60.0	-58.9		0.1	-41.7	-41.25	0.42
	HE20 Beam Forming, M0 to M9 1ss	4	16	-64.4	-63.5	-64.5	-65.0	0.1	-42.2	-41.25	0.98
	HE20 Beam Forming, M0 to M9 2ss	4	13	-60.7	-61.4	-60.3	-60.0	0.1	-41.5	-41.25	0.23
	HE20 Beam Forming, M0 to M9 3ss	4	13	-60.7	-61.4	-60.3	-60.0	0.1	-41.5	-41.25	0.23
	HE20 Beam Forming, M0 to M9 4ss	4	13	-60.7	-61.4	-60.3	-60.0	0.1	-41.5	-41.25	0.23
	HE20 STBC, M0 to M9 2ss	2	13	-57.8	-59.8			0.1	-42.6	-41.25	1.36
	HE20 STBC, M0 to M9 2ss	3	13	-59.7	-60.0	-58.9		0.1	-41.7	-41.25	0.42
	HE20 STBC, M0 to M9 2ss	4	13	-60.7	-61.4	-60.3	-60.0	0.1	-41.5	-41.25	0.23
5190	Non HT40, 6 to 54 Mbps	1	13	-55.6				0.0	-42.6	-41.25	1.30
	Non HT40, 6 to 54 Mbps	2	13	-57.5	-58.0			0.0	-41.7	-41.25	0.43
	Non HT40, 6 to 54 Mbps	3	13	-59.2	-59.1	-59.1		0.0	-41.3	-41.25	0.06
	Non HT40, 6 to 54 Mbps	4	13	-61.4	-61.2	-60.7	-60.0	0.0	-41.7	-41.25	0.47
	HT/VHT40, M0 to M7	1	13	-57.0				0.1	-43.9	-41.25	2.65
	HT/VHT40, M0 to M7	2	13	-57.0	-58.4			0.1	-41.5	-41.25	0.28
	HT/VHT40, M8 to M15	2	13	-57.0	-58.4			0.1	-41.5	-41.25	0.28
	HT/VHT40, M0 to M7	3	13	-59.9	-60.2	-60.0		0.1	-42.2	-41.25	0.91
	HT/VHT40, M8 to M15	3	13	-59.9	-60.2	-60.0		0.1	-42.2	-41.25	0.91
	HT/VHT40, M16 to M23	3	13	-59.9	-60.2	-60.0		0.1	-42.2	-41.25	0.91
	HT/VHT40, M0 to M7	4	13	-61.1	-60.7	-60.3	-60.0	0.1	-41.4	-41.25	0.13
	HT/VHT40, M8 to M15	4	13	-61.1	-60.7	-60.3	-60.0	0.1	-41.4	-41.25	0.13
	HT/VHT40, M16 to M23	4	13	-61.1	-60.7	-60.3	-60.0	0.1	-41.4	-41.25	0.13
	HT/VHT40, M24 to M31	4	13	-61.1	-60.7	-60.3	-60.0	0.1	-41.4	-41.25	0.13
	HT/VHT40 Beam Forming, M0 to M7	2	13	-57.0	-58.4			0.1	-41.5	-41.25	0.28
	HT/VHT40 Beam Forming, M8 to M15	2	13	-57.0	-58.4			0.1	-41.5	-41.25	0.28
	HT/VHT40 Beam Forming, M0 to M7	3	15	-62.1	-61.8	-61.7		0.1	-42.0	-41.25	0.74
	HT/VHT40 Beam Forming, M8 to M15	3	13	-59.9	-60.2	-60.0		0.1	-42.2	-41.25	0.91
	HT/VHT40 Beam Forming, M16 to M23	3	13	-59.9	-60.2	-60.0		0.1	-42.2	-41.25	0.91
	HT/VHT40 Beam Forming, M0 to M7	4	16	-64.4	-62.6	-64.9	-64.3	0.1	-41.8	-41.25	0.59
	HT/VHT40 Beam Forming, M8 to M15	4	13	-61.1	-60.7	-60.3	-60.0	0.1	-41.4	-41.25	0.13
	HT/VHT40 Beam Forming, M16 to M23	4	13	-61.1	-60.7	-60.3	-60.0	0.1	-41.4	-41.25	0.13

	HT/VHT40 Beam Forming, M24 to M31	4	13	-61.1	-60.7	-60.3	-60.0	0.1	-41.4	-41.25	0.13
	HT/VHT40 STBC, M0 to M7	2	13	-57.0	-58.4			0.1	-41.5	-41.25	0.28
	HT/VHT40 STBC, M0 to M7	3	13	-59.9	-60.2	-60.0		0.1	-42.2	-41.25	0.91
	HT/VHT40 STBC, M0 to M7	4	13	-61.1	-60.7	-60.3	-60.0	0.1	-41.4	-41.25	0.13
	HE40, M0 to M9 1ss	1	13	-55.8				0.1	-42.7	-41.25	1.42
	HE40, M0 to M9 1ss	2	13	-57.7	-58.2			0.1	-41.8	-41.25	0.55
	HE40, M0 to M9 2ss	2	13	-57.7	-58.2			0.1	-41.8	-41.25	0.55
	HE40, M0 to M9 1ss	3	13	-59.5	-59.8	-58.9		0.1	-41.5	-41.25	0.23
	HE40, M0 to M9 2ss	3	13	-59.5	-59.8	-58.9		0.1	-41.5	-41.25	0.23
	HE40, M0 to M9 3ss	3	13	-59.5	-59.8	-58.9		0.1	-41.5	-41.25	0.23
	HE40, M0 to M9 1ss	4	13	-61.5	-61.6	-60.7	-60.3	0.1	-41.8	-41.25	0.59
	HE40, M0 to M9 2ss	4	13	-61.5	-61.6	-60.7	-60.3	0.1	-41.8	-41.25	0.59
	HE40, M0 to M9 3ss	4	13	-61.5	-61.6	-60.7	-60.3	0.1	-41.8	-41.25	0.59
	HE40, M0 to M9 4ss	4	13	-61.5	-61.6	-60.7	-60.3	0.1	-41.8	-41.25	0.59
	HE40 Beam Forming, M0 to M9 1ss	2	13	-57.7	-58.2			0.1	-41.8	-41.25	0.55
	HE40 Beam Forming, M0 to M9 2ss	2	13	-57.7	-58.2			0.1	-41.8	-41.25	0.55
	HE40 Beam Forming, M0 to M9 1ss	3	15	-61.5	-61.6	-60.7		0.1	-41.3	-41.25	0.09
	HE40 Beam Forming, M0 to M9 2ss	3	13	-59.5	-59.8	-58.9		0.1	-41.5	-41.25	0.23
	HE40 Beam Forming, M0 to M9 3ss	3	13	-59.5	-59.8	-58.9		0.1	-41.5	-41.25	0.23
	HE40 Beam Forming, M0 to M9 1ss	4	16	-64.3	-62.4	-64.3	-63.0	0.1	-41.3	-41.25	0.02
	HE40 Beam Forming, M0 to M9 2ss	4	13	-61.5	-61.6	-60.7	-60.3	0.1	-41.8	-41.25	0.59
	HE40 Beam Forming, M0 to M9 3ss	4	13	-61.5	-61.6	-60.7	-60.3	0.1	-41.8	-41.25	0.59
	HE40 Beam Forming, M0 to M9 4ss	4	13	-61.5	-61.6	-60.7	-60.3	0.1	-41.8	-41.25	0.59
	HE40 STBC, M0 to M9 2ss	2	13	-57.7	-58.2			0.1	-41.8	-41.25	0.55
	HE40 STBC, M0 to M9 2ss	3	13	-59.5	-59.8	-58.9		0.1	-41.5	-41.25	0.23
	HE40 STBC, M0 to M9 2ss	4	13	-61.5	-61.6	-60.7	-60.3	0.1	-41.8	-41.25	0.59
5210	Non HT80, 6 to 54 Mbps	1	13	-56.0				0.1	-42.9	-41.25	1.70
	Non HT80, 6 to 54 Mbps	2	13	-56.0	-59.7			0.1	-41.4	-41.25	0.16
	Non HT80, 6 to 54 Mbps	3	13	-58.8	-60.1	-58.8		0.1	-41.4	-41.25	0.12
	Non HT80, 6 to 54 Mbps	4	13	-61.0	-60.4	-60.2	-61.3	0.1	-41.6	-41.25	0.38
	VHT80, M0 to M9 1ss	1	13	-55.0				0.2	-41.8	-41.25	0.53
	VHT80, M0 to M9 1ss	2	13	-57.9	-59.6			0.2	-42.4	-41.25	1.19
	VHT80, M0 to M9 2ss	2	13	-57.9	-59.6			0.2	-42.4	-41.25	1.19
	VHT80, M0 to M9 1ss	3	13	-59.9	-60.6	-60.2		0.2	-42.2	-41.25	0.99
	VHT80, M0 to M9 2ss	3	13	-59.9	-60.6	-60.2		0.2	-42.2	-41.25	0.99
	VHT80, M0 to M9 3ss	3	13	-59.9	-60.6	-60.2		0.2	-42.2	-41.25	0.99
	VHT80, M0 to M9 1ss	4	13	-61.0	-60.9	-60.7	-60.5	0.2	-41.5	-41.25	0.28
	VHT80, M0 to M9 2ss	4	13	-61.0	-60.9	-60.7	-60.5	0.2	-41.5	-41.25	0.28
	VHT80, M0 to M9 3ss	4	13	-61.0	-60.9	-60.7	-60.5	0.2	-41.5	-41.25	0.28
	VHT80, M0 to M9 4ss	4	13	-61.0	-60.9	-60.7	-60.5	0.2	-41.5	-41.25	0.28
	VHT80 Beam Forming, M0 to M9 1ss	2	13	-57.9	-59.6			0.2	-42.4	-41.25	1.19
	VHT80 Beam Forming, M0 to M9 2ss	2	13	-57.9	-59.6			0.2	-42.4	-41.25	1.19

	VHT80 Beam Forming, M0 to M9 1ss	3	15	-62.9	-61.5	-62.3		0.2	-42.2	-41.25	0.96
	VHT80 Beam Forming, M0 to M9 2ss	3	13	-59.9	-60.6	-60.2		0.2	-42.2	-41.25	0.99
	VHT80 Beam Forming, M0 to M9 3ss	3	13	-59.9	-60.6	-60.2		0.2	-42.2	-41.25	0.99
	VHT80 Beam Forming, M0 to M9 1ss	4	16	-64.3	-62.1	-65.3	-65.3	0.2	-41.8	-41.25	0.55
	VHT80 Beam Forming, M0 to M9 2ss	4	13	-61.0	-60.9	-60.7	-60.5	0.2	-41.5	-41.25	0.28
	VHT80 Beam Forming, M0 to M9 3ss	4	13	-61.0	-60.9	-60.7	-60.5	0.2	-41.5	-41.25	0.28
	VHT80 Beam Forming, M0 to M9 4ss	4	13	-61.0	-60.9	-60.7	-60.5	0.2	-41.5	-41.25	0.28
	VHT80 STBC, M0 to M9 1ss	2	13	-57.9	-59.6			0.2	-42.4	-41.25	1.19
	VHT80 STBC, M0 to M9 1ss	3	13	-59.9	-60.6	-60.2		0.2	-42.2	-41.25	0.99
	VHT80 STBC, M0 to M9 1ss	4	13	-61.0	-60.9	-60.7	-60.5	0.2	-41.5	-41.25	0.28
	HE80, M0 to M9 1ss	1	13	-54.7				0.2	-41.5	-41.25	0.20
	HE80, M0 to M9 1ss	2	13	-57.1	-60.2			0.2	-42.1	-41.25	0.87
	HE80, M0 to M9 2ss	2	13	-57.1	-60.2			0.2	-42.1	-41.25	0.87
	HE80, M0 to M9 1ss	3	13	-59.5	-60.1	-60.4		0.2	-42.0	-41.25	0.71
	HE80, M0 to M9 2ss	3	13	-59.5	-60.1	-60.4		0.2	-42.0	-41.25	0.71
	HE80, M0 to M9 3ss	3	13	-59.5	-60.1	-60.4		0.2	-42.0	-41.25	0.71
	HE80, M0 to M9 1ss	4	13	-60.2	-61.0	-61.1	-60.3	0.2	-41.4	-41.25	0.11
	HE80, M0 to M9 2ss	4	13	-60.2	-61.0	-61.1	-60.3	0.2	-41.4	-41.25	0.11
	HE80, M0 to M9 3ss	4	13	-60.2	-61.0	-61.1	-60.3	0.2	-41.4	-41.25	0.11
	HE80, M0 to M9 4ss	4	13	-60.2	-61.0	-61.1	-60.3	0.2	-41.4	-41.25	0.11
	HE80 Beam Forming, M0 to M9 1ss	2	13	-57.1	-60.2			0.2	-42.1	-41.25	0.87
	HE80 Beam Forming, M0 to M9 2ss	2	13	-57.1	-60.2			0.2	-42.1	-41.25	0.87
	HE80 Beam Forming, M0 to M9 1ss	3	15	-62.6	-61.6	-62.1		0.2	-42.1	-41.25	0.81
	HE80 Beam Forming, M0 to M9 2ss	3	13	-59.5	-60.1	-60.4		0.2	-42.0	-41.25	0.71
	HE80 Beam Forming, M0 to M9 3ss	3	13	-59.5	-60.1	-60.4		0.2	-42.0	-41.25	0.71
	HE80 Beam Forming, M0 to M9 1ss	4	16	-63.9	-62.6	-63.8	-64.1	0.2	-41.3	-41.25	0.04
	HE80 Beam Forming, M0 to M9 2ss	4	13	-60.2	-61.0	-61.1	-60.3	0.2	-41.4	-41.25	0.11
	HE80 Beam Forming, M0 to M9 3ss	4	13	-60.2	-61.0	-61.1	-60.3	0.2	-41.4	-41.25	0.11
	HE80 Beam Forming, M0 to M9 4ss	4	13	-60.2	-61.0	-61.1	-60.3	0.2	-41.4	-41.25	0.11
	HE80 STBC, M0 to M9 1ss	2	13	-57.1	-60.2			0.2	-42.1	-41.25	0.87
	HE80 STBC, M0 to M9 1ss	3	13	-59.5	-60.1	-60.4		0.2	-42.0	-41.25	0.71
	HE80 STBC, M0 to M9 1ss	4	13	-60.2	-61.0	-61.1	-60.3	0.2	-41.4	-41.25	0.11
5250	Non HT160, 6 to 54 Mbps	1	13	-54.9				0.0	-41.9	-41.25	0.60
	Non HT160, 6 to 54 Mbps	2	13	-58.1	-61.7			0.0	-43.5	-41.25	2.23
	Non HT160, 6 to 54 Mbps	3	13	-58.1	-61.7	-61.8		0.0	-42.3	-41.25	1.10
	Non HT160, 6 to 54 Mbps	4	13	-58.1	-61.7	-61.8	-62.1	0.0	-41.5	-41.25	0.26
	VHT160, M0 to M9 1ss	1	13	-54.9				0.4	-41.5	-41.25	0.26
	VHT160, M0 to M9 1ss	2	13	-57.5	-58.2			0.4	-41.4	-41.25	0.18
	VHT160, M0 to M9 2ss	2	13	-57.5	-58.2			0.4	-41.4	-41.25	0.18
	VHT160, M0 to M9 1ss	3	13	-59.8	-61.1	-61.6		0.4	-42.6	-41.25	1.35
	VHT160, M0 to M9 2ss	3	13	-59.8	-61.1	-61.6		0.4	-42.6	-41.25	1.35
	VHT160, M0 to M9 3ss	3	13	-59.8	-61.1	-61.6		0.4	-42.6	-41.25	1.35

VHT160, M0 to M9 1ss	4	13	-61.4	-60.5	-60.4	-60.7	0.4	-41.3	-41.25	0.07
VHT160, M0 to M9 2ss	4	13	-61.4	-60.5	-60.4	-60.7	0.4	-41.3	-41.25	0.07
VHT160, M0 to M9 3ss	4	13	-61.4	-60.5	-60.4	-60.7	0.4	-41.3	-41.25	0.07
VHT160, M0 to M9 4ss	4	13	-61.4	-60.5	-60.4	-60.7	0.4	-41.3	-41.25	0.07
VHT160 Beam Forming, M0 to M9 1ss	2	13	-57.5	-58.2			0.4	-41.4	-41.25	0.18
VHT160 Beam Forming, M0 to M9 2ss	2	13	-57.5	-58.2			0.4	-41.4	-41.25	0.18
VHT160 Beam Forming, M0 to M9 1ss	3	15	-61.7	-63.0	-63.4		0.4	-42.5	-41.25	1.22
VHT160 Beam Forming, M0 to M9 2ss	3	13	-59.8	-61.1	-61.6		0.4	-42.6	-41.25	1.35
VHT160 Beam Forming, M0 to M9 3ss	3	13	-59.8	-61.1	-61.6		0.4	-42.6	-41.25	1.35
VHT160 Beam Forming, M0 to M9 1ss	4	16	-64.5	-63.5	-64.9	-64.7	0.4	-42.0	-41.25	0.70
VHT160 Beam Forming, M0 to M9 2ss	4	13	-61.4	-60.5	-60.4	-60.7	0.4	-41.3	-41.25	0.07
VHT160 Beam Forming, M0 to M9 3ss	4	13	-61.4	-60.5	-60.4	-60.7	0.4	-41.3	-41.25	0.07
VHT160 Beam Forming, M0 to M9 4ss	4	13	-61.4	-60.5	-60.4	-60.7	0.4	-41.3	-41.25	0.07
VHT160 STBC, M0 to M9 1ss	2	13	-57.5	-58.2			0.4	-41.4	-41.25	0.18
VHT160 STBC, M0 to M9 1ss	3	13	-59.8	-61.1	-61.6		0.4	-42.6	-41.25	1.35
VHT160 STBC, M0 to M9 1ss	4	13	-61.4	-60.5	-60.4	-60.7	0.4	-41.3	-41.25	0.07
HE160, M0 to M9 1ss	1	13	-55.2				0.4	-41.8	-41.25	0.52
HE160, M0 to M9 1ss	2	13	-57.6	-59.6			0.4	-42.0	-41.25	0.79
HE160, M0 to M9 2ss	2	13	-57.6	-59.6			0.4	-42.0	-41.25	0.79
HE160, M0 to M9 1ss	3	13	-59.3	-60.2	-61.3		0.4	-42.0	-41.25	0.74
HE160, M0 to M9 2ss	3	13	-59.3	-60.2	-61.3		0.4	-42.0	-41.25	0.74
HE160, M0 to M9 3ss	3	13	-59.3	-60.2	-61.3		0.4	-42.0	-41.25	0.74
HE160, M0 to M9 1ss	4	13	-61.2	-61.5	-62.5	-62.0	0.4	-42.3	-41.25	1.07
HE160, M0 to M9 2ss	4	13	-61.2	-61.5	-62.5	-62.0	0.4	-42.3	-41.25	1.07
HE160, M0 to M9 3ss	4	13	-61.2	-61.5	-62.5	-62.0	0.4	-42.3	-41.25	1.07
HE160, M0 to M9 4ss	4	13	-61.2	-61.5	-62.5	-62.0	0.4	-42.3	-41.25	1.07
HE160 Beam Forming, M0 to M9 1ss	2	13	-57.6	-59.6			0.4	-42.0	-41.25	0.79
HE160 Beam Forming, M0 to M9 2ss	2	13	-57.6	-59.6			0.4	-42.0	-41.25	0.79
HE160 Beam Forming, M0 to M9 1ss	3	15	-61.2	-61.5	-62.5		0.4	-41.5	-41.25	0.24
HE160 Beam Forming, M0 to M9 2ss	3	13	-59.3	-60.2	-61.3		0.4	-42.0	-41.25	0.74
HE160 Beam Forming, M0 to M9 3ss	3	13	-59.3	-60.2	-61.3		0.4	-42.0	-41.25	0.74
HE160 Beam Forming, M0 to M9 1ss	4	16	-64.0	-63.3	-64.0	-64.3	0.4	-41.4	-41.25	0.18
HE160 Beam Forming, M0 to M9 2ss	4	13	-61.2	-61.5	-62.5	-62.0	0.4	-42.3	-41.25	1.07
HE160 Beam Forming, M0 to M9 3ss	4	13	-61.2	-61.5	-62.5	-62.0	0.4	-42.3	-41.25	1.07
HE160 Beam Forming, M0 to M9 4ss	4	13	-61.2	-61.5	-62.5	-62.0	0.4	-42.3	-41.25	1.07
HE160 STBC, M0 to M9 1ss	2	13	-57.6	-59.6			0.4	-42.0	-41.25	0.79
HE160 STBC, M0 to M9 1ss	3	13	-59.3	-60.2	-61.3		0.4	-42.0	-41.25	0.74
HE160 STBC, M0 to M9 1ss	4	13	-61.2	-61.5	-62.5	-62.0	0.4	-42.3	-41.25	1.07

Conducted Bandedge Average, 5190 MHz, HE40 Beam Forming, M0 to M9 1ss**Antenna A****Antenna B****Antenna C****Antenna D**

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Bandedge Level (dBm)	Tx 2 Bandedge Level (dBm)	Tx 3 Bandedge Level (dBm)	Tx 4 Bandedge Level (dBm)	Total Tx Bandedge Level (dBm)	Limit (dBm)	Margin (dB)
5180	Non HT20, 6 to 54 Mbps	1	13	-43.3				-30.2	-21.25	9.00
	Non HT20, 6 to 54 Mbps	2	13	-44.3	-46.5			-29.2	-21.25	7.95
	Non HT20, 6 to 54 Mbps	3	13	-49.7	-48.1	-48.3		-30.8	-21.25	9.57
	Non HT20, 6 to 54 Mbps	4	13	-49.8	-49.4	-49.0	-48.7	-30.1	-21.25	8.88
	Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-44.3	-46.5			-29.2	-21.25	7.95
	Non HT20 Beam Forming, 6 to 54 Mbps	3	15	-50.8	-49.4	-50.5		-30.4	-21.25	9.12
	Non HT20 Beam Forming, 6 to 54 Mbps	4	16	-55.2	-53.7	-53.5	-53.8	-31.9	-21.25	10.68
	HT/VHT20, M0 to M7	1	13	-44.1				-31.1	-21.25	9.80
	HT/VHT20, M0 to M7	2	13	-41.7	-46.6			-27.4	-21.25	6.19
	HT/VHT20, M8 to M15	2	13	-41.7	-46.6			-27.4	-21.25	6.19
	HT/VHT20, M0 to M7	3	13	-50.5	-48.2	-48.4		-31.1	-21.25	9.85
	HT/VHT20, M8 to M15	3	13	-50.5	-48.2	-48.4		-31.1	-21.25	9.85
	HT/VHT20, M16 to M23	3	13	-50.5	-48.2	-48.4		-31.1	-21.25	9.85
	HT/VHT20, M0 to M7	4	13	-50.9	-47.9	-50.0	-49.7	-30.4	-21.25	9.17
	HT/VHT20, M8 to M15	4	13	-50.9	-47.9	-50.0	-49.7	-30.4	-21.25	9.17
	HT/VHT20, M16 to M23	4	13	-50.9	-47.9	-50.0	-49.7	-30.4	-21.25	9.17
	HT/VHT20, M24 to M31	4	13	-50.9	-47.9	-50.0	-49.7	-30.4	-21.25	9.17
	HT/VHT20 Beam Forming, M0 to M7	2	13	-41.7	-46.6			-27.4	-21.25	6.19
	HT/VHT20 Beam Forming, M8 to M15	2	13	-41.7	-46.6			-27.4	-21.25	6.19
	HT/VHT20 Beam Forming, M0 to M7	3	15	-50.8	-51.4	-51.2		-31.3	-21.25	10.06
	HT/VHT20 Beam Forming, M8 to M15	3	13	-50.5	-48.2	-48.4		-31.1	-21.25	9.85
	HT/VHT20 Beam Forming, M16 to M23	3	13	-50.5	-48.2	-48.4		-31.1	-21.25	9.85
	HT/VHT20 Beam Forming, M0 to M7	4	16	-54.2	-53.2	-52.8	-52.1	-30.9	-21.25	9.69
	HT/VHT20 Beam Forming, M8 to M15	4	13	-50.9	-47.9	-50.0	-49.7	-30.4	-21.25	9.17
	HT/VHT20 Beam Forming, M16 to M23	4	13	-50.9	-47.9	-50.0	-49.7	-30.4	-21.25	9.17
	HT/VHT20 Beam Forming, M24 to M31	4	13	-50.9	-47.9	-50.0	-49.7	-30.4	-21.25	9.17
	HT/VHT20 STBC, M0 to M7	2	13	-41.7	-46.6			-27.4	-21.25	6.19
	HT/VHT20 STBC, M0 to M7	3	13	-50.5	-48.2	-48.4		-31.1	-21.25	9.85
	HT/VHT20 STBC, M0 to M7	4	13	-50.9	-47.9	-50.0	-49.7	-30.4	-21.25	9.17
	HE20, M0 to M9 1ss	1	13	-41.3				-28.2	-21.25	6.98
	HE20, M0 to M9 1ss	2	13	-43.8	-47.9			-29.3	-21.25	8.06

	HE20, M0 to M9 2ss	2	13	-43.8	-47.9			-29.3	-21.25	8.06
	HE20, M0 to M9 1ss	3	13	-48.7	-48.9	-48.2		-30.8	-21.25	9.50
	HE20, M0 to M9 2ss	3	13	-48.7	-48.9	-48.2		-30.8	-21.25	9.50
	HE20, M0 to M9 3ss	3	13	-48.7	-48.9	-48.2		-30.8	-21.25	9.50
	HE20, M0 to M9 1ss	4	13	-49.4	-49.4	-46.5	-48.4	-29.2	-21.25	7.92
	HE20, M0 to M9 2ss	4	13	-49.4	-49.4	-46.5	-48.4	-29.2	-21.25	7.92
	HE20, M0 to M9 3ss	4	13	-49.4	-49.4	-46.5	-48.4	-29.2	-21.25	7.92
	HE20, M0 to M9 4ss	4	13	-49.4	-49.4	-46.5	-48.4	-29.2	-21.25	7.92
	HE20 Beam Forming, M0 to M9 1ss	2	13	-43.8	-47.9			-29.3	-21.25	8.06
	HE20 Beam Forming, M0 to M9 2ss	2	13	-43.8	-47.9			-29.3	-21.25	8.06
	HE20 Beam Forming, M0 to M9 1ss	3	15	-50.1	-50.7	-50.9		-30.7	-21.25	9.47
	HE20 Beam Forming, M0 to M9 2ss	3	13	-48.7	-48.9	-48.2		-30.8	-21.25	9.50
	HE20 Beam Forming, M0 to M9 3ss	3	13	-48.7	-48.9	-48.2		-30.8	-21.25	9.50
	HE20 Beam Forming, M0 to M9 1ss	4	16	-52.2	-54.1	-52.1	-54.0	-30.9	-21.25	9.66
	HE20 Beam Forming, M0 to M9 2ss	4	13	-49.4	-49.4	-46.5	-48.4	-29.2	-21.25	7.92
	HE20 Beam Forming, M0 to M9 3ss	4	13	-49.4	-49.4	-46.5	-48.4	-29.2	-21.25	7.92
	HE20 Beam Forming, M0 to M9 4ss	4	13	-49.4	-49.4	-46.5	-48.4	-29.2	-21.25	7.92
	HE20 STBC, M0 to M9 2ss	2	13	-43.8	-47.9			-29.3	-21.25	8.06
	HE20 STBC, M0 to M9 2ss	3	13	-48.7	-48.9	-48.2		-30.8	-21.25	9.50
	HE20 STBC, M0 to M9 2ss	4	13	-49.4	-49.4	-46.5	-48.4	-29.2	-21.25	7.92
5190	Non HT40, 6 to 54 Mbps	1	13	-41.8				-28.8	-21.25	7.50
	Non HT40, 6 to 54 Mbps	2	13	-48.5	-49.3			-32.8	-21.25	11.57
	Non HT40, 6 to 54 Mbps	3	13	-48.8	-48.5	-50.0		-31.2	-21.25	9.98
	Non HT40, 6 to 54 Mbps	4	13	-53.1	-51.5	-52.2	-51.6	-33.0	-21.25	11.74
	HT/VHT40, M0 to M7	1	13	-47.5				-34.4	-21.25	13.15
	HT/VHT40, M0 to M7	2	13	-47.5	-49.8			-32.4	-21.25	11.14
	HT/VHT40, M8 to M15	2	13	-47.5	-49.8			-32.4	-21.25	11.14
	HT/VHT40, M0 to M7	3	13	-51.4	-51.1	-50.1		-33.0	-21.25	11.71
	HT/VHT40, M8 to M15	3	13	-51.4	-51.1	-50.1		-33.0	-21.25	11.71
	HT/VHT40, M16 to M23	3	13	-51.4	-51.1	-50.1		-33.0	-21.25	11.71
	HT/VHT40, M0 to M7	4	13	-51.9	-51.3	-50.3	-51.5	-32.1	-21.25	10.84
	HT/VHT40, M8 to M15	4	13	-51.9	-51.3	-50.3	-51.5	-32.1	-21.25	10.84
	HT/VHT40, M16 to M23	4	13	-51.9	-51.3	-50.3	-51.5	-32.1	-21.25	10.84
	HT/VHT40, M24 to M31	4	13	-51.9	-51.3	-50.3	-51.5	-32.1	-21.25	10.84
	HT/VHT40 Beam Forming, M0 to M7	2	13	-47.5	-49.8			-32.4	-21.25	11.14
	HT/VHT40 Beam Forming, M8 to M15	2	13	-47.5	-49.8			-32.4	-21.25	11.14
	HT/VHT40 Beam Forming, M0 to M7	3	15	-52.7	-52.7	-52.0		-32.6	-21.25	11.33
	HT/VHT40 Beam Forming, M8 to M15	3	13	-51.4	-51.1	-50.1		-33.0	-21.25	11.71
	HT/VHT40 Beam Forming, M16 to M23	3	13	-51.4	-51.1	-50.1		-33.0	-21.25	11.71
	HT/VHT40 Beam Forming, M0 to M7	4	16	-55.1	-54.9	-55.0	-53.9	-32.6	-21.25	11.32
	HT/VHT40 Beam Forming, M8 to M15	4	13	-51.9	-51.3	-50.3	-51.5	-32.1	-21.25	10.84
	HT/VHT40 Beam Forming, M16 to M23	4	13	-51.9	-51.3	-50.3	-51.5	-32.1	-21.25	10.84

	HT/VHT40 Beam Forming, M24 to M31	4	13	-51.9	-51.3	-50.3	-51.5	-32.1	-21.25	10.84
	HT/VHT40 STBC, M0 to M7	2	13	-47.5	-49.8			-32.4	-21.25	11.14
	HT/VHT40 STBC, M0 to M7	3	13	-51.4	-51.1	-50.1		-33.0	-21.25	11.71
	HT/VHT40 STBC, M0 to M7	4	13	-51.9	-51.3	-50.3	-51.5	-32.1	-21.25	10.84
	HE40, M0 to M9 1ss	1	13	-38.6				-25.5	-21.25	4.22
	HE40, M0 to M9 1ss	2	13	-47.2	-49.3			-32.0	-21.25	10.73
	HE40, M0 to M9 2ss	2	13	-47.2	-49.3			-32.0	-21.25	10.73
	HE40, M0 to M9 1ss	3	13	-50.1	-49.2	-48.8		-31.4	-21.25	10.18
	HE40, M0 to M9 2ss	3	13	-50.1	-49.2	-48.8		-31.4	-21.25	10.18
	HE40, M0 to M9 3ss	3	13	-50.1	-49.2	-48.8		-31.4	-21.25	10.18
	HE40, M0 to M9 1ss	4	13	-52.9	-51.6	-52.2	-51.4	-32.8	-21.25	11.58
	HE40, M0 to M9 2ss	4	13	-52.9	-51.6	-52.2	-51.4	-32.8	-21.25	11.58
	HE40, M0 to M9 3ss	4	13	-52.9	-51.6	-52.2	-51.4	-32.8	-21.25	11.58
	HE40, M0 to M9 4ss	4	13	-52.9	-51.6	-52.2	-51.4	-32.8	-21.25	11.58
	HE40 Beam Forming, M0 to M9 1ss	2	13	-47.2	-49.3			-32.0	-21.25	10.73
	HE40 Beam Forming, M0 to M9 2ss	2	13	-47.2	-49.3			-32.0	-21.25	10.73
	HE40 Beam Forming, M0 to M9 1ss	3	15	-52.9	-51.6	-52.2		-32.3	-21.25	11.04
	HE40 Beam Forming, M0 to M9 2ss	3	13	-50.1	-49.2	-48.8		-31.4	-21.25	10.18
	HE40 Beam Forming, M0 to M9 3ss	3	13	-50.1	-49.2	-48.8		-31.4	-21.25	10.18
	HE40 Beam Forming, M0 to M9 1ss	4	16	-55.1	-54.9	-54.4	-53.7	-32.3	-21.25	11.09
	HE40 Beam Forming, M0 to M9 2ss	4	13	-52.9	-51.6	-52.2	-51.4	-32.8	-21.25	11.58
	HE40 Beam Forming, M0 to M9 3ss	4	13	-52.9	-51.6	-52.2	-51.4	-32.8	-21.25	11.58
	HE40 Beam Forming, M0 to M9 4ss	4	13	-52.9	-51.6	-52.2	-51.4	-32.8	-21.25	11.58
	HE40 STBC, M0 to M9 2ss	2	13	-47.2	-49.3			-32.0	-21.25	10.73
	HE40 STBC, M0 to M9 2ss	3	13	-50.1	-49.2	-48.8		-31.4	-21.25	10.18
	HE40 STBC, M0 to M9 2ss	4	13	-52.9	-51.6	-52.2	-51.4	-32.8	-21.25	11.58
5210	Non HT80, 6 to 54 Mbps	1	13	-44.5				-31.4	-21.25	10.20
	Non HT80, 6 to 54 Mbps	2	13	-44.5	-50.3			-30.4	-21.25	9.19
	Non HT80, 6 to 54 Mbps	3	13	-47.1	-43.4	-49.3		-28.1	-21.25	6.84
	Non HT80, 6 to 54 Mbps	4	13	-48.1	-50.3	-51.2	-45.5	-29.1	-21.25	7.88
	VHT80, M0 to M9 1ss	1	13	-40.3				-27.1	-21.25	5.83
	VHT80, M0 to M9 1ss	2	13	-45.0	-49.5			-30.5	-21.25	9.22
	VHT80, M0 to M9 2ss	2	13	-45.0	-49.5			-30.5	-21.25	9.22
	VHT80, M0 to M9 1ss	3	13	-49.5	-50.3	-50.5		-32.1	-21.25	10.84
	VHT80, M0 to M9 2ss	3	13	-49.5	-50.3	-50.5		-32.1	-21.25	10.84
	VHT80, M0 to M9 3ss	3	13	-49.5	-50.3	-50.5		-32.1	-21.25	10.84
	VHT80, M0 to M9 1ss	4	13	-50.2	-50.6	-51.1	-50.3	-31.3	-21.25	10.05
	VHT80, M0 to M9 2ss	4	13	-50.2	-50.6	-51.1	-50.3	-31.3	-21.25	10.05
	VHT80, M0 to M9 3ss	4	13	-50.2	-50.6	-51.1	-50.3	-31.3	-21.25	10.05
	VHT80, M0 to M9 4ss	4	13	-50.2	-50.6	-51.1	-50.3	-31.3	-21.25	10.05
	VHT80 Beam Forming, M0 to M9 1ss	2	13	-45.0	-49.5			-30.5	-21.25	9.22
	VHT80 Beam Forming, M0 to M9 2ss	2	13	-45.0	-49.5			-30.5	-21.25	9.22

	VHT80 Beam Forming, M0 to M9 1ss	3	15	-53.6	-52.4	-51.4		-32.4	-21.25	11.14
	VHT80 Beam Forming, M0 to M9 2ss	3	13	-49.5	-50.3	-50.5		-32.1	-21.25	10.84
	VHT80 Beam Forming, M0 to M9 3ss	3	13	-49.5	-50.3	-50.5		-32.1	-21.25	10.84
	VHT80 Beam Forming, M0 to M9 1ss	4	16	-55.1	-53.7	-54.7	-53.2	-31.9	-21.25	10.62
	VHT80 Beam Forming, M0 to M9 2ss	4	13	-50.2	-50.6	-51.1	-50.3	-31.3	-21.25	10.05
	VHT80 Beam Forming, M0 to M9 3ss	4	13	-50.2	-50.6	-51.1	-50.3	-31.3	-21.25	10.05
	VHT80 Beam Forming, M0 to M9 4ss	4	13	-50.2	-50.6	-51.1	-50.3	-31.3	-21.25	10.05
	VHT80 STBC, M0 to M9 1ss	2	13	-45.0	-49.5			-30.5	-21.25	9.22
	VHT80 STBC, M0 to M9 1ss	3	13	-49.5	-50.3	-50.5		-32.1	-21.25	10.84
	VHT80 STBC, M0 to M9 1ss	4	13	-50.2	-50.6	-51.1	-50.3	-31.3	-21.25	10.05
	HE80, M0 to M9 1ss	1	13	-45.4				-32.2	-21.25	10.90
	HE80, M0 to M9 1ss	2	13	-47.7	-49.4			-32.2	-21.25	10.96
	HE80, M0 to M9 2ss	2	13	-47.7	-49.4			-32.2	-21.25	10.96
	HE80, M0 to M9 1ss	3	13	-48.9	-50.0	-49.3		-31.4	-21.25	10.11
	HE80, M0 to M9 2ss	3	13	-48.9	-50.0	-49.3		-31.4	-21.25	10.11
	HE80, M0 to M9 3ss	3	13	-48.9	-50.0	-49.3		-31.4	-21.25	10.11
	HE80, M0 to M9 1ss	4	13	-48.9	-51.4	-50.5	-50.0	-30.8	-21.25	9.59
	HE80, M0 to M9 2ss	4	13	-48.9	-51.4	-50.5	-50.0	-30.8	-21.25	9.59
	HE80, M0 to M9 3ss	4	13	-48.9	-51.4	-50.5	-50.0	-30.8	-21.25	9.59
	HE80, M0 to M9 4ss	4	13	-48.9	-51.4	-50.5	-50.0	-30.8	-21.25	9.59
	HE80 Beam Forming, M0 to M9 1ss	2	13	-47.7	-49.4			-32.2	-21.25	10.96
	HE80 Beam Forming, M0 to M9 2ss	2	13	-47.7	-49.4			-32.2	-21.25	10.96
	HE80 Beam Forming, M0 to M9 1ss	3	15	-52.0	-51.8	-51.4		-31.7	-21.25	10.46
	HE80 Beam Forming, M0 to M9 2ss	3	13	-48.9	-50.0	-49.3		-31.4	-21.25	10.11
	HE80 Beam Forming, M0 to M9 3ss	3	13	-48.9	-50.0	-49.3		-31.4	-21.25	10.11
	HE80 Beam Forming, M0 to M9 1ss	4	16	-52.9	-54.0	-53.7	-53.1	-31.1	-21.25	9.88
	HE80 Beam Forming, M0 to M9 2ss	4	13	-48.9	-51.4	-50.5	-50.0	-30.8	-21.25	9.59
	HE80 Beam Forming, M0 to M9 3ss	4	13	-48.9	-51.4	-50.5	-50.0	-30.8	-21.25	9.59
	HE80 Beam Forming, M0 to M9 4ss	4	13	-48.9	-51.4	-50.5	-50.0	-30.8	-21.25	9.59
	HE80 STBC, M0 to M9 1ss	2	13	-47.7	-49.4			-32.2	-21.25	10.96
	HE80 STBC, M0 to M9 1ss	3	13	-48.9	-50.0	-49.3		-31.4	-21.25	10.11
	HE80 STBC, M0 to M9 1ss	4	13	-48.9	-51.4	-50.5	-50.0	-30.8	-21.25	9.59
5250	Non HT160, 6 to 54 Mbps	1	13	-43.1				-30.1	-21.25	8.80
	Non HT160, 6 to 54 Mbps	2	13	-48.6	-49.1			-32.8	-21.25	11.53
	Non HT160, 6 to 54 Mbps	3	13	-48.6	-49.1	-50.5		-31.5	-21.25	10.26
	Non HT160, 6 to 54 Mbps	4	13	-48.6	-49.1	-50.5	-49.7	-30.3	-21.25	9.10
	VHT160, M0 to M9 1ss	1	13	-34.8				-21.4	-21.25	0.16
	VHT160, M0 to M9 1ss	2	13	-38.6	-38.0			-21.9	-21.25	0.64
	VHT160, M0 to M9 2ss	2	13	-38.6	-38.0			-21.9	-21.25	0.64
	VHT160, M0 to M9 1ss	3	13	-40.1	-39.4	-41.4		-22.1	-21.25	0.81
	VHT160, M0 to M9 2ss	3	13	-40.1	-39.4	-41.4		-22.1	-21.25	0.81
	VHT160, M0 to M9 3ss	3	13	-40.1	-39.4	-41.4		-22.1	-21.25	0.81

VHT160, M0 to M9 1ss	4	13	-44.0	-41.0	-41.6	-41.4	-22.4	-21.25	1.19
VHT160, M0 to M9 2ss	4	13	-44.0	-41.0	-41.6	-41.4	-22.4	-21.25	1.19
VHT160, M0 to M9 3ss	4	13	-44.0	-41.0	-41.6	-41.4	-22.4	-21.25	1.19
VHT160, M0 to M9 4ss	4	13	-44.0	-41.0	-41.6	-41.4	-22.4	-21.25	1.19
VHT160 Beam Forming, M0 to M9 1ss	2	13	-38.6	-38.0			-21.9	-21.25	0.64
VHT160 Beam Forming, M0 to M9 2ss	2	13	-38.6	-38.0			-21.9	-21.25	0.64
VHT160 Beam Forming, M0 to M9 1ss	3	15	-46.1	-47.5	-46.1		-26.4	-21.25	5.11
VHT160 Beam Forming, M0 to M9 2ss	3	13	-40.1	-39.4	-41.4		-22.1	-21.25	0.81
VHT160 Beam Forming, M0 to M9 3ss	3	13	-40.1	-39.4	-41.4		-22.1	-21.25	0.81
VHT160 Beam Forming, M0 to M9 1ss	4	16	-46.8	-45.7	-43.3	-46.8	-23.0	-21.25	1.73
VHT160 Beam Forming, M0 to M9 2ss	4	13	-44.0	-41.0	-41.6	-41.4	-22.4	-21.25	1.19
VHT160 Beam Forming, M0 to M9 3ss	4	13	-44.0	-41.0	-41.6	-41.4	-22.4	-21.25	1.19
VHT160 Beam Forming, M0 to M9 4ss	4	13	-44.0	-41.0	-41.6	-41.4	-22.4	-21.25	1.19
VHT160 STBC, M0 to M9 1ss	2	13	-38.6	-38.0			-21.9	-21.25	0.64
VHT160 STBC, M0 to M9 1ss	3	13	-40.1	-39.4	-41.4		-22.1	-21.25	0.81
VHT160 STBC, M0 to M9 1ss	4	13	-44.0	-41.0	-41.6	-41.4	-22.4	-21.25	1.19
HE160, M0 to M9 1ss	1	13	-44.0				-30.6	-21.25	9.32
HE160, M0 to M9 1ss	2	13	-44.9	-48.4			-29.9	-21.25	8.61
HE160, M0 to M9 2ss	2	13	-44.9	-48.4			-29.9	-21.25	8.61
HE160, M0 to M9 1ss	3	13	-48.0	-49.0	-50.4		-30.8	-21.25	9.57
HE160, M0 to M9 2ss	3	13	-48.0	-49.0	-50.4		-30.8	-21.25	9.57
HE160, M0 to M9 3ss	3	13	-48.0	-49.0	-50.4		-30.8	-21.25	9.57
HE160, M0 to M9 1ss	4	13	-50.0	-50.3	-51.1	-50.0	-30.9	-21.25	9.62
HE160, M0 to M9 2ss	4	13	-50.0	-50.3	-51.1	-50.0	-30.9	-21.25	9.62
HE160, M0 to M9 3ss	4	13	-50.0	-50.3	-51.1	-50.0	-30.9	-21.25	9.62
HE160, M0 to M9 4ss	4	13	-50.0	-50.3	-51.1	-50.0	-30.9	-21.25	9.62
HE160 Beam Forming, M0 to M9 1ss	2	13	-44.9	-48.4			-29.9	-21.25	8.61
HE160 Beam Forming, M0 to M9 2ss	2	13	-44.9	-48.4			-29.9	-21.25	8.61
HE160 Beam Forming, M0 to M9 1ss	3	15	-50.0	-50.3	-51.1		-30.2	-21.25	8.99
HE160 Beam Forming, M0 to M9 2ss	3	13	-48.0	-49.0	-50.4		-30.8	-21.25	9.57
HE160 Beam Forming, M0 to M9 3ss	3	13	-48.0	-49.0	-50.4		-30.8	-21.25	9.57
HE160 Beam Forming, M0 to M9 1ss	4	16	-52.4	-51.2	-52.7	-52.0	-29.6	-21.25	8.33
HE160 Beam Forming, M0 to M9 2ss	4	13	-50.0	-50.3	-51.1	-50.0	-30.9	-21.25	9.62
HE160 Beam Forming, M0 to M9 3ss	4	13	-50.0	-50.3	-51.1	-50.0	-30.9	-21.25	9.62
HE160 Beam Forming, M0 to M9 4ss	4	13	-50.0	-50.3	-51.1	-50.0	-30.9	-21.25	9.62
HE160 STBC, M0 to M9 1ss	2	13	-44.9	-48.4			-29.9	-21.25	8.61
HE160 STBC, M0 to M9 1ss	3	13	-48.0	-49.0	-50.4		-30.8	-21.25	9.57
HE160 STBC, M0 to M9 1ss	4	13	-50.0	-50.3	-51.1	-50.0	-30.9	-21.25	9.62

Conducted Bandedge Peak, 5250 MHz, VHT160, M0 to M9 1ss**Antenna A****Appendix B: Radiated & AC Conducted Emissions Test Results**

Testing done by outside laboratory.

Appendix C: List of Test Equipment Used to perform the test

Equip#	Manufacturer/ Model	Description	Last Cal	Next Cal	Test Item
57476	Cisco	Automation Test Insertion Loss	NA	NA	A1-A7
50721	Keysight N9030A-550	PXA Signal Analyzer, 3Hz to 50GHz	15 Mar 2019	15 Mar 2020	A1-A7
55094	NI PXI-1042	CHASSIS, PXI	NA	NA	A1-A7
57237	NI PXI-8115	Embedded Controller	NA	NA	A1-A7
54686	NI PXI-2796	40 GHz Dual 6x1 Multiplexer (SP6T)	NA	NA	A1-A7
57245	NI PXI-2799	Switch 1x1	NA	NA	A1-A7
56091	NI PXI-2796	40 GHz Dual 6x1 Multiplexer (SP6T)	NA	NA	A1-A7
7329	Omega CT485B	Chart recorder	18 Feb 2019	18 Feb 2020	A1-A7
56328	Pasternack PE5019-1	Torque wrench	14 Feb 2019	14 Feb 2020	A1-A7
56329	Pasternack PE5019-1	Torque wrench	28 Feb 2019	28 Feb 2020	A1-A7
56330	Pasternack PE5019-1	Torque wrench	28 Feb 2019	28 Feb 2020	A1-A7

Appendix D: Abbreviation Key and Definitions

The following table defines abbreviations used within this test report.

Abbreviation	Description	Abbreviation	Description
EMC	Electro Magnetic Compatibility	°F	Degrees Fahrenheit
EMI	Electro Magnetic Interference	°C	Degrees Celsius
EUT	Equipment Under Test	Temp	Temperature
ITE	Information Technology Equipment	S/N	Serial Number
TAP	Test Assessment Schedule	Qty	Quantity
ESD	Electro Static Discharge	emf	Electromotive force
EFT	Electric Fast Transient	RMS	Root mean square
EDCS	Engineering Document Control System	Qp	Quasi Peak
Config	Configuration	Av	Average
CIS#	Cisco Number (unique identification number for Cisco test equipment)	Pk	Peak
Cal	Calibration	kHz	Kilohertz (1×10^3)
EN	European Norm	MHz	MegaHertz (1×10^6)
IEC	International Electro technical Commission	GHz	Gigahertz (1×10^9)
CISPR	International Special Committee on Radio Interference	H	Horizontal
CDN	Coupling/Decoupling Network	V	Vertical
LISN	Line Impedance Stabilization Network	dB	decibel
PE	Protective Earth	V	Volt
GND	Ground	kV	Kilovolt (1×10^3)
L1	Line 1	μ V	Microvolt (1×10^{-6})
L2	Line2	A	Amp
L3	Line 3	μ A	Micro Amp (1×10^{-6})
DC	Direct Current	mS	Milli Second (1×10^{-3})
RAW	Uncorrected measurement value, as indicated by the measuring device	μ S	Micro Second (1×10^{-6})
RF	Radio Frequency	μ S	Micro Second (1×10^{-6})
SLCE	Signal Line Conducted Emissions	m	Meter
Meas dist	Measurement distance	Spec dist	Specification distance
N/A or NA	Not Applicable	SL	Signal Line (or Telecom Line)
P	Power Line	L	Live Line
N	Neutral Line	R	Return
S	Supply	AC	Alternating Current

Appendix E: Photographs of Test Setups

Please refer to attachment

Appendix F: Software Used to Perform Testing

Cisco Internal LabView Radio Test Automation Software rev57

Appendix G: Test Procedures

Measurements were made in accordance with

- KDB 789033 - D02 General UNII Test Procedures New Rules v02r01
- KDB 662911 - MIMO
- ANSI C63.4 2014 Unintentional Radiators
- ANSI C63.10 2013 Intentional Radiators

Test procedures are summarized below:

FCC 5GHz Test Procedures	EDCS # 1445048
FCC 5GHz RSE Test Procedures	EDCS # 1511600

Appendix H: Scope of Accreditation (A2LA certificate number 1178-01)

The scope of accreditation of Cisco Systems, Inc. can be found on the A2LA web page at:

<http://www.a2la.org/scopepdf/1178-01.pdf>

Appendix I: Test Assessment Plan

Target Power Tables EDCS# 16415403

End