

6	7	8	
REV.	Description	By	ECN No.
1	初版发行	Necole.Dang	2019.07.17
2			
3			
4			

SB2PMMYY1001

流水号从1001~9999 (每月从1001开始往下流)
生产月/年(例如:2019年7月, 表示为0719)
机种号码

69.85mm+/-0.2

Powered Subwoofer

Model: SB-2000 Pro

SN: SB2PMMYY1001





FCC ID: 2AGJ42KP IC: 20885-2KP

CAN ICES-3(B)/NMB-3(B)


Design and Engineering by SVS, Ohio USA

Made in China Exclusively for SVS

25.4mm+/-0.2

图纸条码仅作参考, 生产时需重新输入数据
条码格式: CODE 39
一式四份

- Note:
1. Parts shall be approved by Tymphany Engineering prior to mass production.
所有零部件都需超声工程师确定后方可生产。
2. ■ indicates design-critical dimension, and ◆ indicates customer-controlled dimension. Supplier must establish quality control plan for these dimensions. Customer-controlled dimension cannot be changed without prior customer approval.
有■标识的尺寸为重要管控尺寸(IQC必检), 有◆标识的尺寸为客户重要管控尺寸(IQC必检)。
3. Comply with Tymphany QSI057-1031 "Green Product Chemical Substances Specification".
符合QSI057-1031绿色产品化学物质限用规格;
4. Follow customer's specification as required.符合客户要求。
5. Follow Halogen- Free requirement : Br<900 ppm, Cl<900 ppm, Br+Cl< 1500 ppm if required.
有要求时需符合无卤要求 : Br<900 ppm, Cl<900 ppm, Br+Cl< 1500 ppm 。
6. All dimensions and tolerances indicated on the drawing indicate delivered part dimensions;
All dimensions not indicated on the drawing are per 3D model.
来料部件或产品的尺寸及公差需符合图纸标识, 未标识的尺寸请参考3D
7. Material(材质): 铜版纸 Fasson-aw5209/Art paper Fasson-aw5209 Weight(重量 0.3±5%g)
8. Finishing(表面处理): 黑色印刷/Black color Printing



TYMPHANY			This drawing is the property of Tymphony corporation. It contains material that is confidential and/or legally privileged for the sole use of the intended recipient. Any review or distribution by others is strictly prohibited and punishable to the full extent of the law.				Tolerance					Cus. Model No.					
							Angular ±0.25°				SVS SB-2000 Pro						
Quotation	Version NO.:						Scale : 1:1		Unit : MM		Dimension					Tymphany Model No.	
	1						Sheet : 1/1		Size : A4		0-8	±0.05	±0.1	±0.1	±0.2	T02-417013701	
Sample	Drawn By		Checked By		Approved By		>8-25	±0.06	±0.15	±0.15	±0.3	Part No.					
							>25-80	±0.12	±0.2	±0.25	±0.4	T304003157000					
							>80-250	±0.25	±0.3	±0.4	±0.6	DWG No.					
Tooling							>250-800	±0.5	±0.6	±0.8	±1.0	T304003157000					
							>800-2500	±1.0	±1.0	±1.5	±1.7	Part Name.					
							>2500-	±2.0	±2.0	±3.0	±3.0	Serial Label(USA 110V)					
Official Issue																	

6	7	8	
REV.	Description	By	ECN No.
	初版发行	Necole.Dang	2019.07.17

PB2PMMYY1001

69.85mm+/-0.2

Powered Subwoofer

Model: PB-2000 Pro

SN: PB2PMMYY1001






FCC ID: 2AGJ42KP IC: 20885-2KP
CAN ICES-3(B)/NMB-3(B)
Design and Engineering by SVS, Ohio USA
Made in China Exclusively for SVS

25.4mm+/-0.2

流水号从1001~9999 (每月从1001开始往下流)
生产月/年(例如:2019年7月, 表示为0719)
机种号码

图纸条码仅作参考, 生产时需重新输入数据
条码格式: CODE 39
一式四份

- Note:
- Parts shall be approved by Tympany Engineering prior to mass production.
所有零部件都需超声工程师确定后才可生产。
 - indicates design-critical dimension, and ◆ indicates customer-controlled dimension. Supplier must establish quality control plan for these dimensions. Customer-controlled dimension cannot be changed without prior customer approval.
有■标识的尺寸为重要管控尺寸(IQC必检), 有◆标识的尺寸为客户重要管控尺寸(IQC必检)。
 - Comply with Tympany QSI057-1031 "Green Product Chemical Substances Specification".
符合QSI057-1031绿色产品化学物质限用规格;
 - Follow customer's specification as required.符合客户要求。
All dimensions and tolerances indicated on the drawing indicate delivered part dimensions;
All dimensions not indicated on the drawing are per 3D model.
来料部件或产品的尺寸及公差需符合图纸标识, 未标识的尺寸请参考3D
 - Material(材质): 铜版纸 Fasson-aw5209/Art paper Fasson-aw5209 Weight(重量 0.3±5%g)
7. Material(材质): 铜版纸 Fasson-aw5209/Art paper Fasson-aw5209 Weight(重量 0.3±5%g)
8. Finishing(表面处理): 黑色印刷/Black color Printing



TYMPHANY			This drawing is the property of Tymphony corporation. It contains material that is confidential and/or legally privileged for the sole use of the intended recipient. Any review or distribution by others is strictly prohibited and punishable to the full extent of the law.				Tolerance					Cus. Model No.	
							Angular ±0.25°					SVS PB-2000 Pro	
Quotation	Version NO.:		Scale : 1:1		Unit : MM		Dimension	F	G	H	J	Tymphony Model No.	
	1		Sheet : 1/1		Size : A4		0~8	±0.05	±0.1	±0.1	±0.2	T02-424013701	
Sample	Drawn By		Checked By		Approved By		>8~25	±0.06	±0.15	±0.15	±0.3	Part No.	
							>25~80	±0.12	±0.2	±0.25	±0.4	T304003159000	
Tooling	Necole.Dang						>80~250	±0.25	±0.3	±0.4	±0.6	DWG No.	
							>250~800	±0.5	±0.6	±0.8	±1.0	T304003159000	
Official Issue							>800~2500	±1.0	±1.0	±1.5	±1.7	Part Name.	
							>2500~	±2.0	±2.0	±3.0	±3.0	Serial label(USA 110V)	

6	7	8	
REV.	Description	By	ECN No.
①	初版发行	Necole.Dang	2019.07.17
②			
③			

PC2PMMYY1001

- 流水号从1001~9999 (每月从1001开始往下流)
- 生产月/年(例如:2019年7月，表示为0719)
- 机种号码

69.85mm+/-0.2

Powered Subwoofer

Model: PC-2000 Pro

SN: PC2PMMYY1001





FCC ID: 2AGJ42KP IC: 20885-2KP
CAN ICES-3(B)/NMB-3(B)

Design and Engineering by SVS, Ohio USA
Made in China Exclusively for SVS

25.4mm+/-0.2

图纸条码仅作参考，生产时需重新输入数据
条码格式：CODE 39
一式四份

- Note:
- Parts shall be approved by Tymphany Engineering prior to mass production.
所有零部件都需超声工程师确定后方可生产。
 - indicates design-critical dimension, and ◆ indicates customer-controlled dimension. Supplier must establish quality control plan for these dimensions. Customer-controlled dimension cannot be changed without prior customer approval.
有■标识的尺寸为重要管控尺寸(IQC必检)，有◆标识的尺寸为客户重要管控尺寸(IQC必检)。
 - Comply with Tymphany QSI057-1031 "Green Product Chemical Substances Specification".
符合QSI057-1031绿色产品化学物质限用规格;
 - Follow customer's specification as required.符合客户要求。
 - Follow Halogen- Free requirement : Br<900 ppm, Cl<900 ppm, Br+Cl< 1500 ppm if required.
有要求时需符合无卤要求：Br<900 ppm, Cl<900 ppm, Br+Cl< 1500 ppm。
 - All dimensions and tolerances indicated on the drawing indicate delivered part dimensions;
All dimensions not indicated on the drawing are per 3D model.
来料部件或产品的尺寸及公差需符合图纸标识，未标识的尺寸请参照3D
 - Material(材质): 铜版纸 Fasson-aw5209/Art paper Fasson-aw5209 Weight(重量 0.3±5%g)
 - Finishing(表面处理): 黑色印刷/Black color Printing

TYMPHANY

This drawing is the property of Tymphany corporation. It contains material that is confidential and/or legally privileged for the sole use of the intended recipient. Any review or distribution by others is strictly prohibited and punishable to the full extent of the law.

Quotation

Version NO.: 1

Scale : 1:1

Unit : MM

Sample

Drawn By

Checked By

Approved By


Tooling

Necole.Dang



Official Issue

Tolerance					Cus. Model No.
Angular ±0.25°					SVS PC-2000 Pro
Dimension	F	G	H	J	Tymphany Model No.
0~8	±0.05	±0.1	±0.1	±0.2	T02-425013701
>8~25	±0.08	±0.15	±0.15	±0.3	Part No.
>25~80	±0.12	±0.2	±0.25	±0.4	T304003161000
>80~250	±0.25	±0.3	±0.4	±0.6	DWG No.
>250~800	±0.5	±0.6	±0.8	±1.0	T304003161000
>800~2500	±1.0	±1.0	±1.5	±1.7	Part Name.
>2500~	±2.0	±2.0	±3.0	±3.0	Serial Label(USA 110V)

Third Angle Projection



F176-0705G

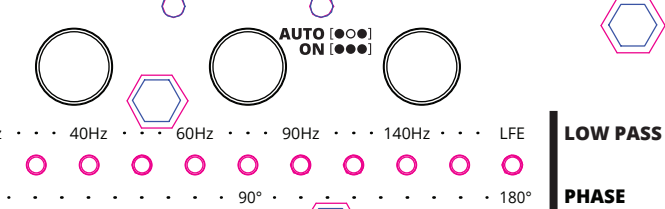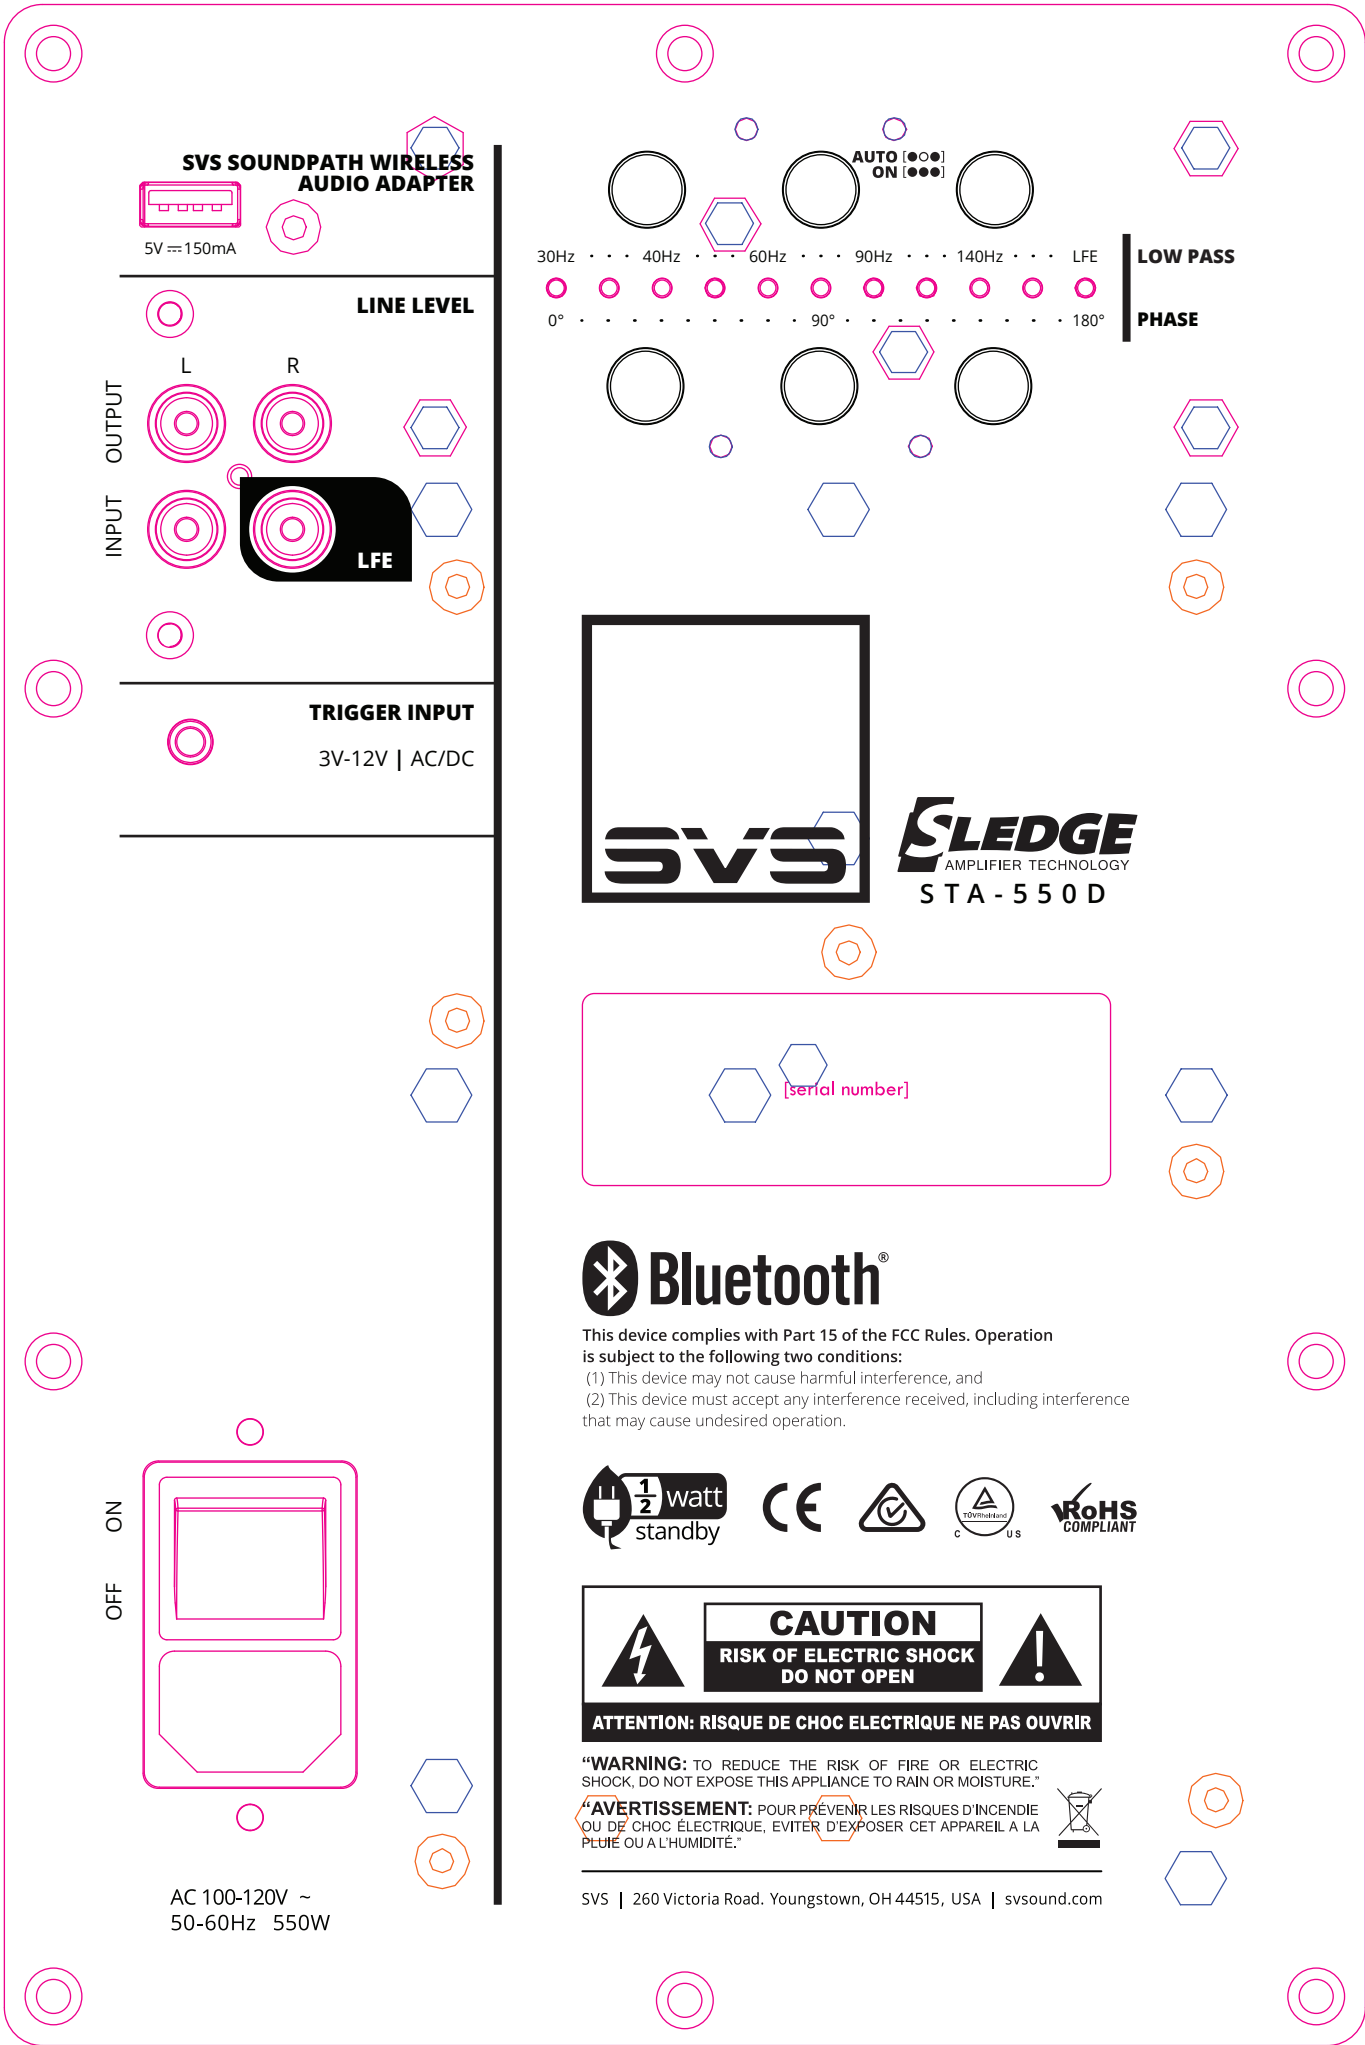

[serial number]

Bluetooth®

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and

(2) This device must accept any interference received, including interference that may cause undesired operation.



CAUTION
RISK OF ELECTRIC SHOCK
DO NOT OPEN

ATTENTION: RISQUE DE CHOC ELECTRIQUE NE PAS OUVRIR

“WARNING: TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS APPLIANCE TO RAIN OR MOISTURE.”

“AVERTISSEMENT: POUR PREVENIR LES RISQUES D'INCENDIE OU DE CHOC ELECTRIQUE, EVITER D'EXPOSER CET APPAREIL A LA PLUIE OU A L'HUMIDITE.”

SVS | 260 Victoria Road. Youngstown, OH 44515, USA | svsound.com

T130198400200 V1 ART
svs 2100 amp 120V